

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accreditation No.: **SCS 0108**

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

#### Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Additional Documentation:

- DASY System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |  |                                  |
|------------------------------|--|----------------------------------|
| DASY Version                 | DASY52   | V52.10.4                         |
| Extrapolation                | Advanced Extrapolation                                   |                                  |
| Phantom                      | Modular Flat Phantom V5.0                                |                                  |
| Distance Dipole Center - TSL | 10 mm  | with Spacer                      |
| Zoom Scan Resolution         | dx, dy = 4.0 mm, dz = 1.4 mm                             | Graded Ratio = 1.4 (Z direction) |
| Frequency                    | 3900 MHz ± 1 MHz<br>4000 MHz ± 1 MHz<br>4100 MHz ± 1 MHz |                                  |

### Head TSL parameters at 3900 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 37.5         | 3.32 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 37.4 ± 6 %   | 3.25 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 3900 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 6.97 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>69.9 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.42 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>24.2 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 4000 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 37.4         | 3.43 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 37.3 ± 6 %   | 3.33 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 4000 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 6.84 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>68.7 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.38 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.8 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 4100 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 37.2         | 3.53 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 37.1 ± 6 %   | 3.42 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ---          | ---              |

### SAR result with Head TSL at 4100 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 6.83 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>68.6 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.38 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.8 W/kg ± 19.5 % (k=2)</b> |

**Appendix (Additional assessments outside the scope of SCS 0108)**

**Antenna Parameters with Head TSL at 3900 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.3 $\Omega$ - 5.4 j $\Omega$ |
| Return Loss                          | - 23.4 dB                      |

**Antenna Parameters with Head TSL at 4000 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.8 $\Omega$ - 2.7 j $\Omega$ |
| Return Loss                          | - 29.8 dB                      |

**Antenna Parameters with Head TSL at 4100 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 59.2 $\Omega$ - 0.8 j $\Omega$ |
| Return Loss                          | - 21.5 dB                      |

**General Antenna Parameters and Design**

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.107 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

## DASY5 Validation Report for Head TSL

Date: 21.06.2023

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 3900 MHz; Type: D3900V2; Serial: D3900V2 - SN:1024**

Communication System: UID 0 - CW; Frequency: 3900 MHz, Frequency: 4000 MHz, Frequency: 4100 MHz

Medium parameters used:  $f = 3900$  MHz;  $\sigma = 3.25$  S/m;  $\epsilon_r = 37.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 4000$  MHz;  $\sigma = 3.33$  S/m;  $\epsilon_r = 37.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 4100$  MHz;  $\sigma = 3.42$  S/m;  $\epsilon_r = 37.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.39, 7.39, 7.39) @ 3900 MHz, ConvF(7.39, 7.39, 7.39) @ 4000 MHz, ConvF(7.26, 7.26, 7.26) @ 4100 MHz; Calibrated: 07.03.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 19.12.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

### **Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=3900MHz/Zoom Scan,**

**dist=1.4mm (8x8x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.68 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 19.7 W/kg

**SAR(1 g) = 6.97 W/kg; SAR(10 g) = 2.42 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 14.0 W/kg

### **Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=4000MHz/Zoom Scan,**

**dist=1.4mm (8x8x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.34 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 19.6 W/kg


**SAR(1 g) = 6.84 W/kg; SAR(10 g) = 2.38 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm


Ratio of SAR at M2 to SAR at M1 = 73.7%

Maximum value of SAR (measured) = 13.9 W/kg

**Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm, f=4100MHz/Zoom Scan,  
dist=1.4mm (8x8x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 69.41 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 19.2 W/kg  
**SAR(1 g) = 6.83 W/kg; SAR(10 g) = 2.38 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8 mm  
Ratio of SAR at M2 to SAR at M1 = 74.2%  
Maximum value of SAR (measured) = 13.9 W/kg

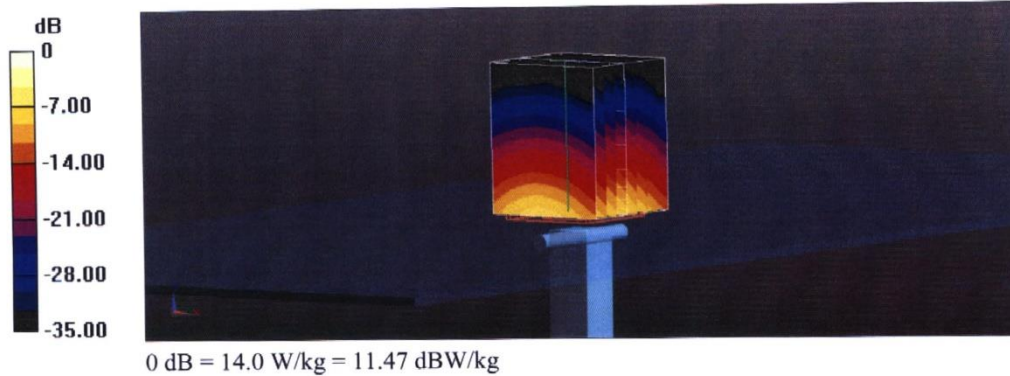

### Impedance Measurement Plot for Head TSL

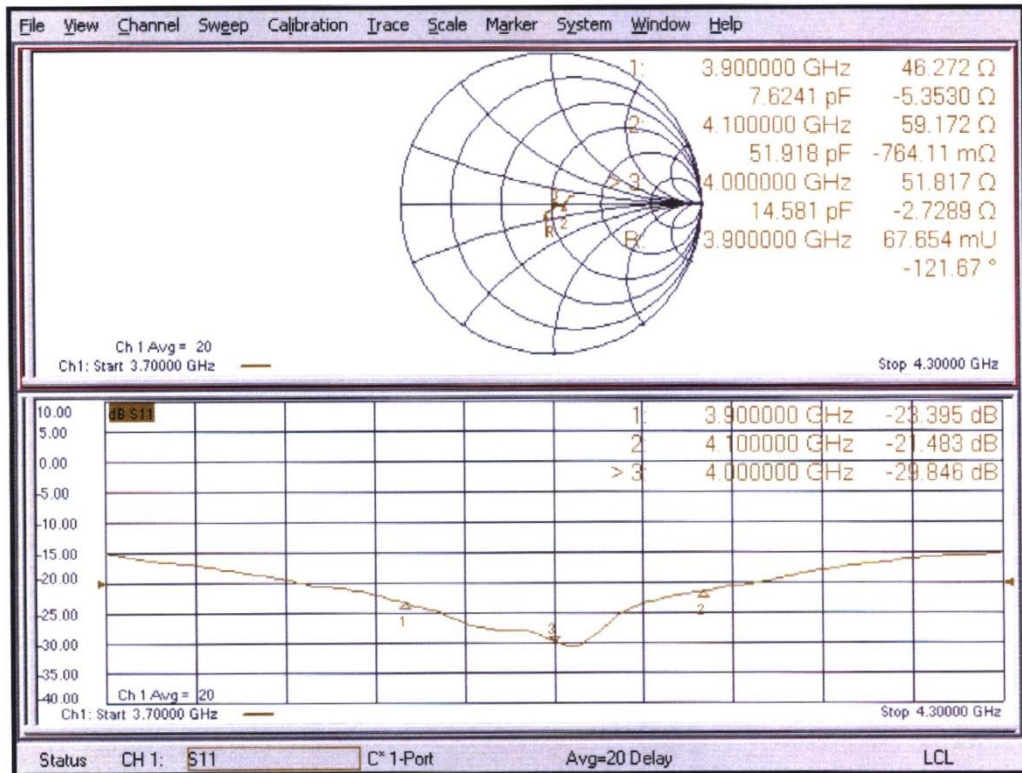

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **CTTL**  
**Beijing**

Certificate No. **D5GHzV2-1060\_Jun23**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1060**

Calibration procedure(s) **QA CAL-22.v7  
Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date: **June 19, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards               | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|---------------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP2                | SN: 104778         | 30-Mar-23 (No. 217-03804/03805)   | Mar-24                 |
| Power sensor NRP-Z91            | SN: 103244         | 30-Mar-23 (No. 217-03804)         | Mar-24                 |
| Power sensor NRP-Z91            | SN: 103245         | 30-Mar-23 (No. 217-03805)         | Mar-24                 |
| Reference 20 dB Attenuator      | SN: BH9394 (20k)   | 30-Mar-23 (No. 217-03809)         | Mar-24                 |
| Type-N mismatch combination     | SN: 310982 / 06327 | 30-Mar-23 (No. 217-03810)         | Mar-24                 |
| Reference Probe EX3DV4          | SN: 3503           | 07-Mar-23 (No. EX3-3503_Mar23)    | Mar-24                 |
| DAE4                            | SN: 601            | 19-Dec-22 (No. DAE4-601_Dec22)    | Dec-23                 |
| Secondary Standards             | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B              | SN: GB39512475     | 30-Oct-14 (in house check Oct-22) | In house check: Oct-24 |
| Power sensor HP 8481A           | SN: US37292783     | 07-Oct-15 (in house check Oct-22) | In house check: Oct-24 |
| Power sensor HP 8481A           | SN: MY41093315     | 07-Oct-15 (in house check Oct-22) | In house check: Oct-24 |
| RF generator R&S SMT-06         | SN: 100972         | 15-Jun-15 (in house check Oct-22) | In house check: Oct-24 |
| Network Analyzer Agilent E8358A | SN: US41080477     | 31-Mar-14 (in house check Oct-22) | In house check: Oct-24 |

|                |                 |                       |           |
|----------------|-----------------|-----------------------|-----------|
|                | Name            | Function              | Signature |
| Calibrated by: | Jeffrey Katzman | Laboratory Technician |           |
| Approved by:   | Sven Kühn       | Technical Manager     |           |

Issued: June 20, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |  |                                  |
|-------------------------------------|--|----------------------------------|
| <b>DASY Version</b>                 | DASY52   | V52.10.4                         |
| <b>Extrapolation</b>                | Advanced Extrapolation   |                                  |
| <b>Phantom</b>                      | Modular Flat Phantom V5.0  |                                  |
| <b>Distance Dipole Center - TSL</b> | 10 mm  | with Spacer                      |
| <b>Zoom Scan Resolution</b>         | dx, dy = 4.0 mm, dz = 1.4 mm   | Graded Ratio = 1.4 (Z direction) |
| <b>Frequency</b>                    | 5200 MHz ± 1 MHz<br>5250 MHz ± 1 MHz<br>5300 MHz ± 1 MHz<br>5500 MHz ± 1 MHz<br>5600 MHz ± 1 MHz<br>5750 MHz ± 1 MHz<br>5800 MHz ± 1 MHz |                                  |

### Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|  | <b>Temperature</b> | <b>Permittivity</b> | <b>Conductivity</b> |
|--|--------------------|---------------------|---------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C            | 36.0                | 4.66 mho/m          |
| <b>Measured Head TSL parameters</b>            | (22.0 ± 0.2) °C    | 35.5 ± 6 %          | 4.53 mho/m ± 6 %    |
| <b>Head TSL temperature change during test</b> | < 0.5 °C           | ----                | ----                |

### SAR result with Head TSL at 5200 MHz

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 7.92 W/kg                       |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>78.9 W/kg ± 19.9 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.27 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>22.6 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.71 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.5 ± 6 %   | 4.60 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5250 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 7.98 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>79.6 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.29 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>22.8 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.5 ± 6 %   | 4.67 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5300 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.24 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>82.1 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.35 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.4 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.6         | 4.96 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.4 ± 6 %   | 4.89 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5500 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.56 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>85.5 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.42 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>24.1 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.3 ± 6 %   | 4.97 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5600 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.38 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>83.6 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.38 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.8 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.4         | 5.22 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.1 ± 6 %   | 5.08 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5750 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.07 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>80.5 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.28 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>22.7 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.0 ± 6 %   | 5.11 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5800 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.22 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>81.9 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.32 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.1 W/kg ± 19.5 % (k=2)</b> |

**Appendix (Additional assessments outside the scope of SCS 0108)**

**Antenna Parameters with Head TSL at 5200 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.6 $\Omega$ - 5.3 j $\Omega$ |
| Return Loss                          | - 25.1 dB                      |

**Antenna Parameters with Head TSL at 5250 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.7 $\Omega$ - 4.1 j $\Omega$ |
| Return Loss                          | - 26.2 dB                      |

**Antenna Parameters with Head TSL at 5300 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.9 $\Omega$ - 2.2 j $\Omega$ |
| Return Loss                          | - 28.0 dB                      |

**Antenna Parameters with Head TSL at 5500 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.6 $\Omega$ - 4.0 j $\Omega$ |
| Return Loss                          | - 28.0 dB                      |

**Antenna Parameters with Head TSL at 5600 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.6 $\Omega$ + 1.2 j $\Omega$ |
| Return Loss                          | - 28.6 dB                      |

**Antenna Parameters with Head TSL at 5750 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.4 $\Omega$ - 0.3 j $\Omega$ |
| Return Loss                          | - 37.3 dB                      |

**Antenna Parameters with Head TSL at 5800 MHz**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.2 $\Omega$ - 2.2 j $\Omega$ |
| Return Loss                          | - 32.0 dB                      |

**General Antenna Parameters and Design**

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.201 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

## DASY5 Validation Report for Head TSL

Date: 19.06.2023

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1060**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5250 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz, Frequency: 5800 MHz  
Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.53$  S/m;  $\epsilon_r = 35.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.60$  S/m;  $\epsilon_r = 35.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.67$  S/m;  $\epsilon_r = 35.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.89$  S/m;  $\epsilon_r = 35.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.97$  S/m;  $\epsilon_r = 35.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.08$  S/m;  $\epsilon_r = 35.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.11$  S/m;  $\epsilon_r = 35.0$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.8, 5.8, 5.8) @ 5200 MHz, ConvF(5.5, 5.5, 5.5) @ 5250 MHz, ConvF(5.49, 5.49, 5.49) @ 5300 MHz, ConvF(5.25, 5.25, 5.25) @ 5500 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.08, 5.08, 5.08) @ 5750 MHz, ConvF(5.01, 5.01, 5.01) @ 5800 MHz; Calibrated: 07.03.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 19.12.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 76.08 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 27.3 W/kg  
**SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.27 W/kg**  
Smallest distance from peaks to all points 3 dB below = 6.9 mm  
Ratio of SAR at M2 to SAR at M1 = 70.9%  
Maximum value of SAR (measured) = 18.0 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 75.90 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 26.7 W/kg  
**SAR(1 g) = 7.98 W/kg; SAR(10 g) = 2.29 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.2 mm  
Ratio of SAR at M2 to SAR at M1 = 71.8%  
Maximum value of SAR (measured) = 18.0 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 76.02 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 28.5 W/kg  
**SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.35 W/kg**  
Smallest distance from peaks to all points 3 dB below = 6.8 mm  
Ratio of SAR at M2 to SAR at M1 = 70.8%  
Maximum value of SAR (measured) = 18.8 W/kg


**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 75.86 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 32.2 W/kg  
**SAR(1 g) = 8.56 W/kg; SAR(10 g) = 2.42 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.2 mm  
Ratio of SAR at M2 to SAR at M1 = 67.3%  
Maximum value of SAR (measured) = 20.1 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 76.37 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 30.3 W/kg  
**SAR(1 g) = 8.38 W/kg; SAR(10 g) = 2.38 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.2 mm  
Ratio of SAR at M2 to SAR at M1 = 68.5%  
Maximum value of SAR (measured) = 19.6 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 73.46 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 30.9 W/kg  
**SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.28 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.2 mm  
Ratio of SAR at M2 to SAR at M1 = 66.6%  
Maximum value of SAR (measured) = 19.3 W/kg


**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 74.09 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 31.5 W/kg  
**SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.32 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.2 mm  
Ratio of SAR at M2 to SAR at M1 = 66.5%  
Maximum value of SAR (measured) = 19.6 W/kg



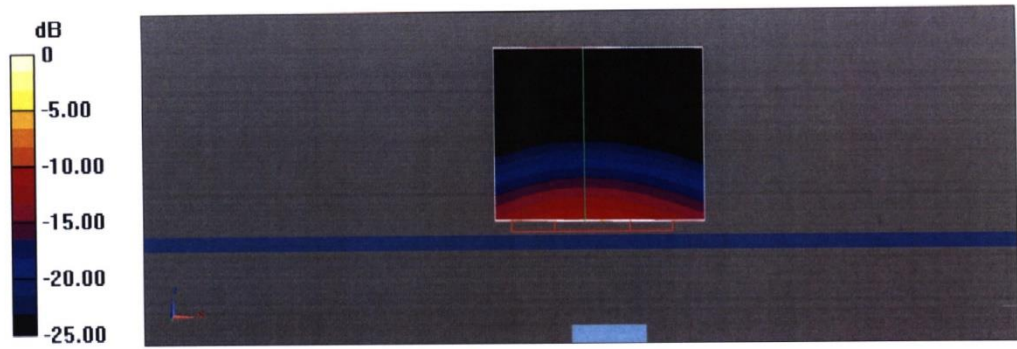


0 dB = 20.1 W/kg = 13.03 dBW/kg

### Impedance Measurement Plot for Head TSL (5200, 5300, 5500, 5800 MHz)

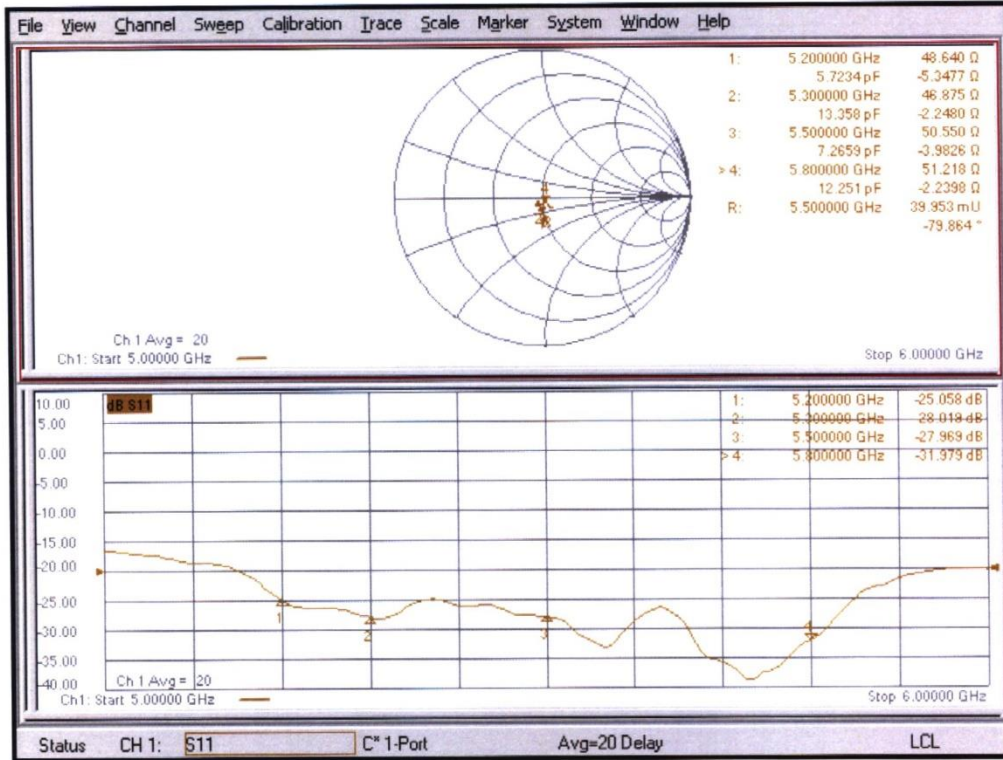


### Impedance Measurement Plot for Head TSL (5250, 5600, 5750 MHz)

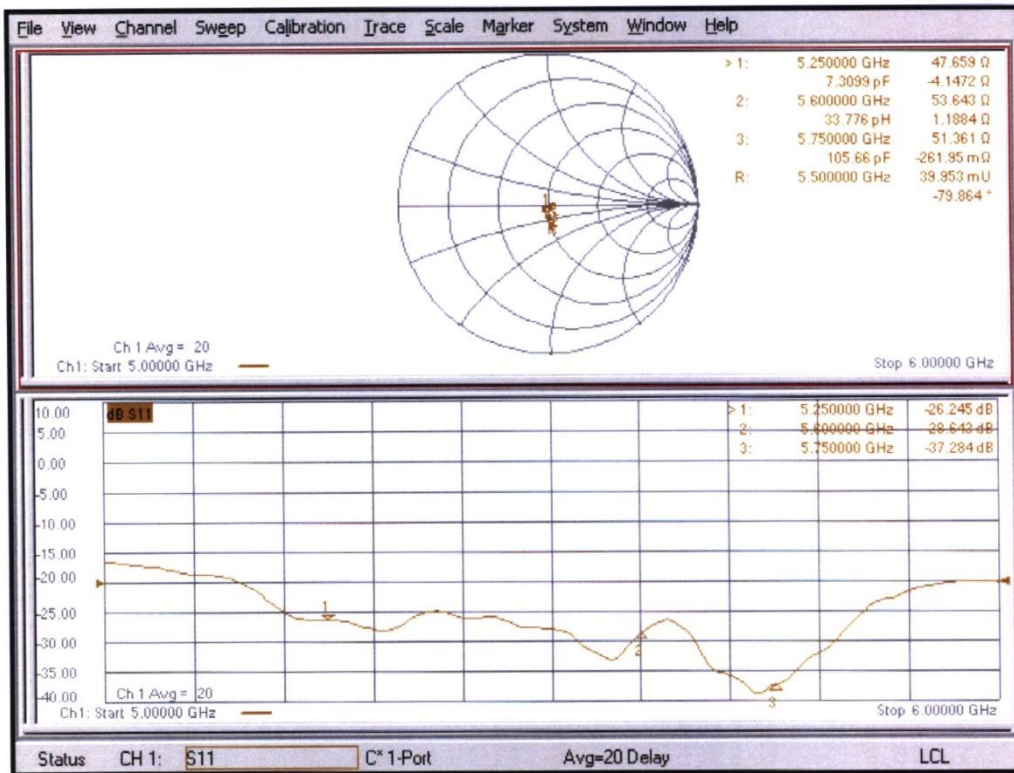

## ANNEX I SAR Sensor Triggering Data Summary

### SAR sensor trigger distance

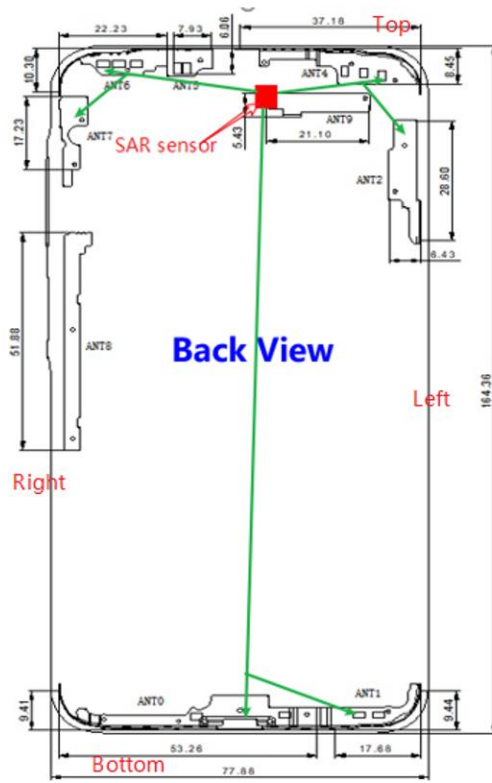

|             | ANT0 | ANT1 | ANT4 | ANT5 | ANT6 |
|-------------|------|------|------|------|------|
| Front Side  | 15   | 13   | 14   | 19   | 19   |
| Back Side   | 19   | 19   | 20   | 25   | 25   |
| Left Side   | /    | 5    | 8    | /    | /    |
| Right Side  | /    | /    | /    | 15   | 15   |
| Top Side    | /    | /    | 19   | 25   | 25   |
| Bottom Side | 19   | 13   | /    | /    | /    |

Per FCC KDB Publication 616217 D04v01r02, this device was tested by the manufacturer to determine the proximity sensor triggering distances for some positions. The measured output power within  $\pm 5\text{mm}$  of the triggering points (or until touching the phantom) is included for front, rear and each applicable edge.

To ensure all production units are compliant it is necessary to test SAR at a distance 1mm less than the smallest distance from the device and SAR phantom (determined from these triggering tests according to the KDB 616217 D04v01r02) with the device at maximum output power without power reduction. These SAR tests are included in addition to the SAR tests for the device touching the SAR phantom, with reduced power.

**ANT0:**

**Front**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 20  | 19  | 18  | 17  | 16  | 15   | 14   | 13   | 12   | 11   | 10   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |     |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| Distance [mm]                        | 10   | 11   | 12   | 13   | 14   | 15   | 16  | 17  | 18  | 19  | 20  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far | Far |

**Rear**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 24  | 23  | 22  | 21  | 20  | 19   | 18   | 17   | 16   | 15   | 14   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |     |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| Distance [mm]                        | 14   | 15   | 16   | 17   | 18   | 19   | 20  | 21  | 22  | 23  | 24  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far | Far |

**Bottom Edge**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 24  | 23  | 22  | 21  | 20  | 19   | 18   | 17   | 16   | 15   | 14   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |     |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| Distance [mm]                        | 14   | 15   | 16   | 17   | 18   | 19   | 20  | 21  | 22  | 23  | 24  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far | Far |

**ANT1:**

**Front**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 18  | 17  | 16  | 15  | 14  | 13   | 12   | 11   | 10   | 9    | 8    |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |     |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| Distance [mm]                        | 8    | 9    | 10   | 11   | 12   | 13   | 14  | 15  | 16  | 17  | 18  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far | Far |

**Rear**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 24  | 23  | 22  | 21  | 20  | 19   | 18   | 17   | 16   | 15   | 14   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |     |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| Distance [mm]                        | 14   | 15   | 16   | 17   | 18   | 19   | 20  | 21  | 22  | 23  | 24  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far | Far |

**Left Edge**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 10  | 9   | 8   | 7   | 6   | 5    | 4    | 3    | 2    | 1    | 0    |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |     |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| Distance [mm]                        | 0    | 1    | 2    | 3    | 4    | 5    | 6   | 7   | 8   | 9   | 10  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far | Far |

**Bottom Edge**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 18  | 17  | 16  | 15  | 14  | 13   | 12   | 11   | 10   | 9    | 8    |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |     |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|-----|-----|-----|-----|-----|
| Distance [mm]                        | 8    | 9    | 10   | 11   | 12   | 13   | 14  | 15  | 16  | 17  | 18  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far | Far |

**ANT4:**

**Front**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 19  | 18  | 17  | 16  | 15  | 14   | 13   | 12   | 11   | 10   | 9    |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |      |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| Distance [mm]                        | 9    | 10   | 11   | 12   | 13   | 14   | 15   | 16  | 17  | 18  | 19  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far |

**Rear**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 25  | 24  | 23  | 22  | 21  | 20   | 19   | 18   | 17   | 16   | 15   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |      |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| Distance [mm]                        | 15   | 16   | 17   | 18   | 19   | 20   | 21   | 22  | 23  | 24  | 25  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far |

**Left Edge**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 13  | 12  | 11  | 10  | 9   | 8    | 7    | 6    | 5    | 4    | 3    |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |      |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| Distance [mm]                        | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10  | 11  | 12  | 13  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far |

**Top Edge**

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 24  | 23  | 22  | 21  | 20  | 19   | 18   | 17   | 16   | 15   | 14   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |      |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| Distance [mm]                        | 14   | 15   | 16   | 17   | 18   | 19   | 20   | 21  | 22  | 23  | 24  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far |

## ANT5/ANT6:

### Front

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 24  | 23  | 22  | 21  | 20  | 19   | 18   | 17   | 16   | 15   | 14   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |      |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| Distance [mm]                        | 14   | 15   | 16   | 17   | 18   | 19   | 20   | 21  | 22  | 23  | 24  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far |

### Rear

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 30  | 29  | 28  | 27  | 26  | 25   | 24   | 23   | 22   | 21   | 20   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |      |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| Distance [mm]                        | 20   | 21   | 22   | 23   | 24   | 25   | 26   | 27  | 28  | 29  | 30  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far |

### Right Edge

Moving device toward the phantom:

| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 20  | 19  | 18  | 17  | 16  | 15   | 14   | 13   | 12   | 11   | 10   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:

| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |      |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| Distance [mm]                        | 10   | 11   | 12   | 13   | 14   | 15   | 16   | 17  | 18  | 19  | 20  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far |

### Top Edge

Moving device toward the phantom:


| sensor near or far(KDB 616217 6.2.6) |     |     |     |     |     |      |      |      |      |      |      |
|--------------------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|------|
| Distance [mm]                        | 30  | 29  | 28  | 27  | 26  | 25   | 24   | 23   | 22   | 21   | 20   |
| Main antenna                         | Far | Far | Far | Far | Far | Near | Near | Near | Near | Near | Near |

Moving device away from the phantom:


| sensor near or far(KDB 616217 6.2.6) |      |      |      |      |      |      |      |     |     |     |     |
|--------------------------------------|------|------|------|------|------|------|------|-----|-----|-----|-----|
| Distance [mm]                        | 20   | 21   | 22   | 23   | 24   | 25   | 26   | 27  | 28  | 29  | 30  |
| Main antenna                         | Near | Near | Near | Near | Near | Near | Near | Far | Far | Far | Far |




Per FCC KDB Publication 616217 D04v01r02, the influence of table tilt angles to proximity sensor triggering is determined by positioning each edge that contains a transmitting antenna, perpendicular to the flat phantom, at the smallest sensor triggering test distance by rotating the device around the edge next to the phantom in  $\leq 10^\circ$  increments until the tablet is  $\pm 45^\circ$  or more from the vertical position at  $0^\circ$ .

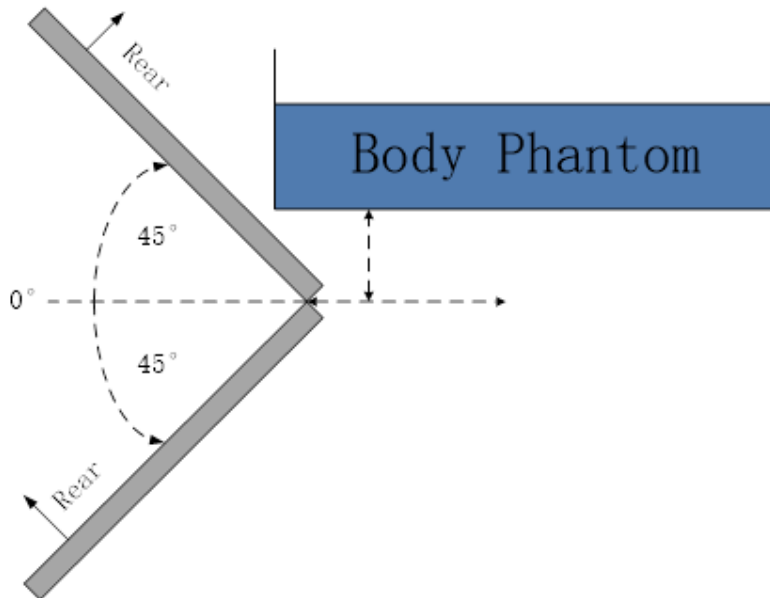

**The front/rear edge evaluation**

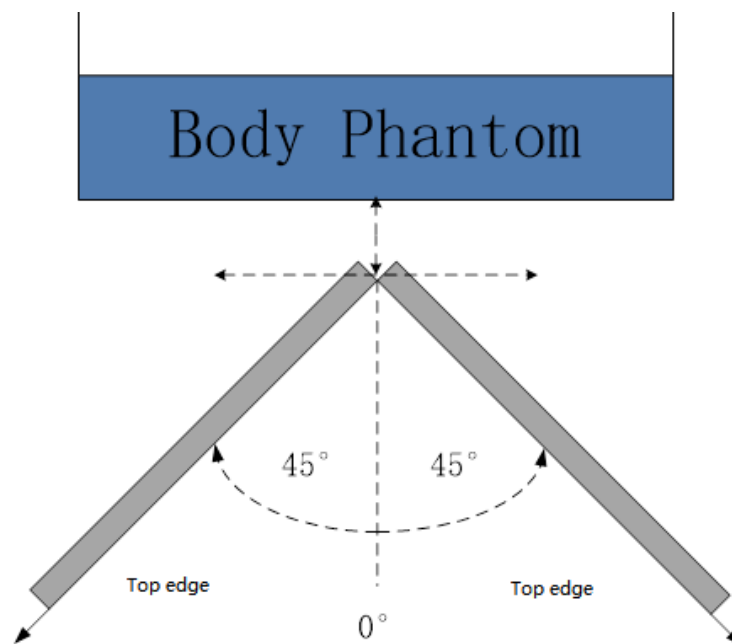

**The bottom/top edge evaluation**

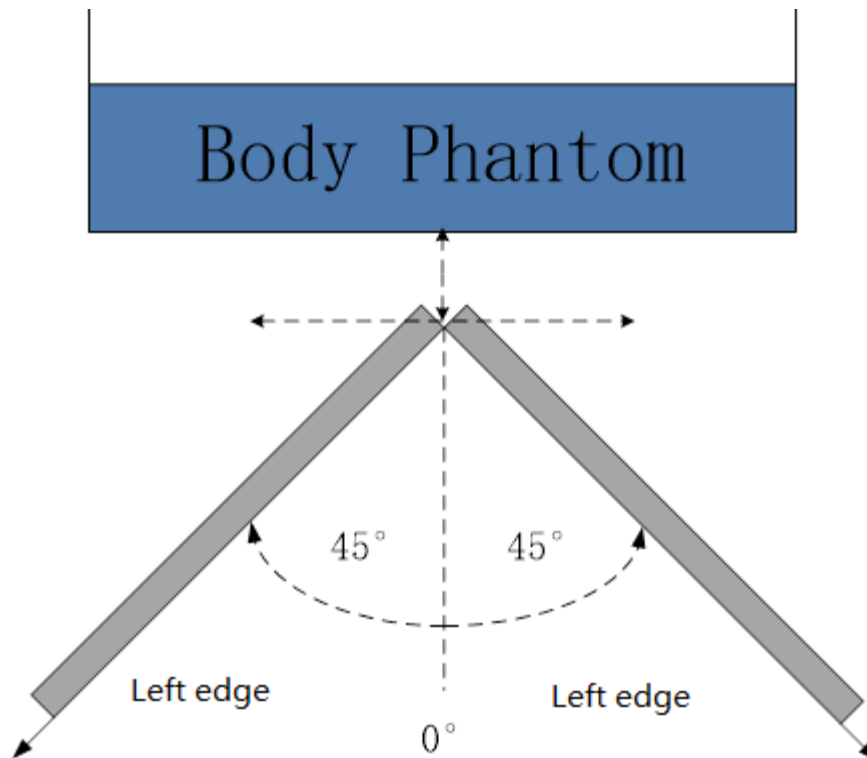

#### **The left/right edge evaluation**

Based on the above evaluation, we come to the conclusion that the sensor triggering is not released and normal maximum output power is not restored within the  $\pm 45^\circ$  range at the smallest sensor triggering test distance declared by manufacturer.

## ANNEX J Accreditation Certificate



### Accredited Laboratory

A2LA has accredited

## TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23<sup>rd</sup> day of July 2024.

Mr. Trace McInturf, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 7049.01  
Valid to July 31, 2026

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*