


Bluetooth Keyboard Manual

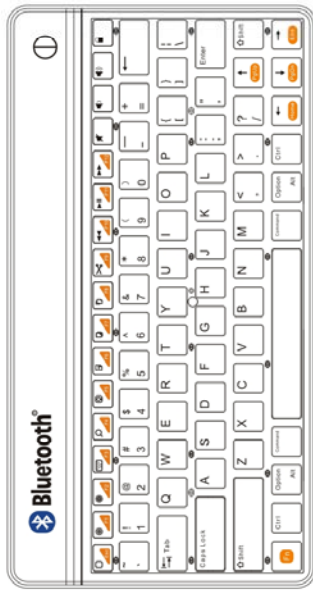

1

charging interface
Power switch
ON/OFF
connect

17. Key strength: 62±20G
18. Key life: >1000million
19. Work temperature: -12-55°C; humidity: 20%-80%
20. Storage temperature: -12-70°C

Product Features:
1. 84 Key ultra-thin, fanless design
2. Rubber spring material, innovation type scissor structure
3. Streamline design
4. Specifically designed for the iPad, more portable than the iPad packs using
5. Static sound design from the effects of noise other people
6. For the iPhone and iPad Tablet PC, make work easier
7. Work temperature: -12-55°C; humidity: 20%-80%
8. Built-in lithium battery without frequent battery replacement

Specifications:
2. Executive standard: Bluetooth V3.0
3. Model number: BT001
4. Transmitter power: class 2
5. Work voltage: 2.9V-3.8V
6. Work current: 2mA (Average)
7. Standby current: <0.5mA
8. Charging current: <50mA
9. Standby time: >250 days
10. Theory of work time: >150H
11. Charging time: 2 Hours
13. Li-ion battery Capacity: 300mAh
14. Lithium battery life: 3-year
15. Keyboard weight: 180±5G
16. Size: 248.3*127.6*7mm ±2mm

2

Note: 1. Power/Bluetooth/low tention. All indicator lights are red charging indicator is orange light
2. When you switch on the keyboard, Bluetooth light will be Continuous lighting in three seconds. At this time the keyboard do not connect with any device. Next it be connected right now. The keyboard can connect when you switch on after your first successfully use the bluetooth light will be off after it successfully connect to device.

Install Bluetooth Keyboard
1. How to install bluetooth keyboard into iPad. Step 1. Find (1) has shown Turn on the toggle switch Bluetooth light will be flashing in 3 seconds. But after keep lighting for 3 seconds it will be off. At this time the keyboard is in working situation.
(2) Press the connect button the bluetooth light will be on so the keyboard is in connecting situation.

charging interface
Power switch
ON/OFF
connect

(3) Click setting of the iPad. iPad will in setting area, then choose Bluetooth, open the bluetooth... iPad is in searching Bluetooth keyboard working situation.

Click setting in Lpad

Click to open the Bluetooth

2. Every time you turn off the keyboard power and after turn on it or reboot the computer shuts down, if it no response
(1) After the keyboard and the computer power, re-install back the keyboard and the computer needs to re-invent code, which may take 23 seconds of your time. If you shut down and then boot or keyboard disconnect the power re-opened, please you press any key on the keyboard, and then wait three seconds, your keyboard can be properly used.
TIPS: When your battery is low, indicator lights on the keyboard will blink, and you should give your keyboard charging so as not to affect your work.

Federal Communication Commission Interference Statement
This equipment has been tested and found to comply with the limits for a Class B digital device. Pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on. The user is encouraged to try to correct the interference by one of the following measures:
Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
Consult the dealer or an experienced radio/TV technician for help.
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

FCC Caution/Any change or modifications no expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IMPORTANT NOTE:
FCC Radiation Exposure Statement:
1. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance.
2. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Important tip: After your keyboard connected with computer or iPad, if you have 15 minutes not use it, then it will enter into dormant state; you just press any key and wait 3 seconds, your keyboard will put right.

3

Step 2: Enter the password and connect

lead is in searching situation, it can search bluetooth keyboard and remind to enter password in the bluetooth keyboard

Note: There will not have any prompt, just click enter after you enter password in the iPad screen. It will be connected successfully.

Step 3: Connect successfully. The keyboard is in working situation

4

Step 3: Connect successfully

charging interface
Power switch
ON/OFF
connect

The keyboard is in working situation
The low tension indicator light keep flashing in your working, the keyboard is short of power. It is time to charge the keyboard.
Charging procedure as follows
(1) Use the exclusive charger/usb charging cable plug into outlet, put one end of the plug into keyboard USB charging cable as follows.
(2) The orange indicator will be continuous lighting when it's charging. After finishing, indicator off.

5

Storage
(1) When you are finished using your keyboard or you will be required after the keyboard to carry, so don't forget to set aside the keyboard to switch the source OFF, turn off the keyboard's power to extend battery life.
(2) When you need a long time storage your keyboard, please don't forget to pack the battery power about half of the filling the store your keyboard, so can made your keyboard lithium life longer.
Note: When you normally using the keyboard, or if you are not using the keyboard and didn't turn off the power switch, please don't fold or curl, so you will have been working at the keyboard, it will greatly decrease you using the keyboard.

Attentions:
1. Keep away from sharp objects.
2. Do not put heavy object on keyboard too long.
3. Do not heating it in microwave oven.
4. Do not force ten side or distortion
5. Keep away from oil or any other organic liquid.

FAQ.
1. If unable to connect the Bluetooth Keyboard to the computer or the keyboard work unconventionally, please try the steps below:
(1) Before you install your Bluetooth Keyboard, please make sure you have done the Bluetooth Dongle installation
(2) Press and release the connect button on the Bluetooth Keyboard. The red led light will change into a flashing mode.
(3) Make sure that the keyboard is within the effective range—10M
(4) Make sure that there's no change of the Bluetooth facility if anything changed, please kindly rematch.
(5) If your Bluetooth facility is connected to other Bluetooth products, please kindly confirm that the speed of the Bluetooth facility is enough
(6) Please kindly check the batteries if they are short of power, replace them for new ones.
(7) Please make sure that your Bluetooth Dongle is damaged or not.

CE **RoHS** **MADE IN CHINA**

6