

# FCC Part 15E Measurement and Test Report

For

**ShenZhen Foscam Intelligent Technology Co., Ltd.**

**9/F, Block F5, TCL International E City, No.1001 ZhongShanyuan Rd.,**

**NanShan District, Shenzhen, China**

**FCC ID: ZDER4S**

<b>FCC Rule(s):</b>	<u>FCC Part 15.407</u>
<b>Product Description:</b>	<u>UHD 4.0MP Wi-Fi Camera</u>
<b>Tested Model:</b>	<u>R4S</u>
<b>Report No.:</b>	<u>STRD1812018I-1</u>
<b>Sample Receipt Date:</b>	<u>2018-12-11</u>
<b>Tested Date:</b>	<u>2018-12-12 to 2018-12-24</u>
<b>Issued Date:</b>	<u>2018-12-25</u>
<b>Tested By:</b>	<u>Ray Yang / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>
<b>Prepared By:</b>	



**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	4
1.5 EUT OPERATING DURING TEST	5
1.6 TEST FACILITY	5
1.7 EUT SETUP AND TEST MODE	6
1.8 MEASUREMENT UNCERTAINTY	7
1.9 TEST EQUIPMENT LIST AND DETAILS	8
<b>2. SUMMARY OF TEST RESULTS</b>	<b>9</b>
<b>3. RF EXPOSURE</b>	<b>10</b>
3.1 STANDARD APPLICABLE	10
3.2 TEST RESULT	10
<b>4. ANTENNA REQUIREMENT</b>	<b>11</b>
4.1 STANDARD APPLICABLE	11
4.2 EVALUATION INFORMATION	11
<b>5. CONDUCTED EMISSIONS</b>	<b>12</b>
5.1 TEST PROCEDURE	12
5.2 BASIC TEST SETUP BLOCK DIAGRAM	12
5.3 TEST RECEIVER SETUP	12
5.4 SUMMARY OF TEST RESULTS/PLOTS	12
<b>6. POWER SPECTRAL DENSITY</b>	<b>15</b>
6.1 STANDARD APPLICABLE	15
6.2 TEST PROCEDURE	15
6.3 SUMMARY OF TEST RESULTS/PLOTS	16
<b>7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH</b>	<b>25</b>
7.1 STANDARD APPLICABLE	25
7.2 TEST PROCEDURE	25
7.3 SUMMARY OF TEST RESULTS/PLOTS	27
<b>8. MAXIMUM CONDUCTED OUTPUT POWER</b>	<b>36</b>
8.1 STANDARD APPLICABLE	36
8.2 TEST PROCEDURE	36
8.3 SUMMARY OF TEST RESULTS/PLOTS	37
<b>9. RADIATED SPURIOUS EMISSIONS</b>	<b>46</b>
9.1 STANDARD APPLICABLE	46
9.2 TEST PROCEDURE	46
9.3 TEST RECEIVER SETUP	48
9.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	48
9.5 SUMMARY OF TEST RESULTS/PLOTS	48
<b>10. FREQUENCY STABILITY</b>	<b>80</b>
10.1 STANDARD APPLICABLE	80
10.2 TEST PROCEDURE	80
10.3 SUMMARY OF TEST RESULTS/PLOTS	80

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: ShenZhen Foscam Intelligent Technology Co., Limited  
 Address of applicant: 9/F, Block F5, TCL International E City, No.1001  
 ZhongShanyuan Rd., NanShan District, Shenzhen, China

Manufacturer: ShenZhen Foscam Intelligent Technology Co., Limited  
 Address of manufacturer: 9/F, Block F5, TCL International E City, No.1001  
 ZhongShanyuan Rd., NanShan District, Shenzhen, China

General Description of EUT	
Product Name:	UHD 4.0MP Wi-Fi Camera
Brand Name:	FOSCAM
Model No.:	R4S
Adding Model(s):	R4M, PT4, R4M VX, PT4 VX, R4S, R2 V(X), R2C V(X), R2E V(X), R2S V(X), R2 Lite V(X), R2 Pro V(X), R4 V(X), R4S V(X), R4C V(X), R4E V(X), R4 Lite V(X), R4 Pro V(X), FI9225P V(X), FI9235P V(X), MPS4010, MPS2010, MPS401(X), MPS201(X) (“VX”represent the software version, which “X”can be from 0 which “X”can be from 0)
Rated Voltage:	DC 5V Adapter
Battery Capacity:	/
Power Adapter:	Model:SAW12F-050-2000U INPUT:AC100/240V 50/60Hz 0.5A OUTPUT:DC5V/2000mA
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model R4S, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VH80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	13.33dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM
Data Rate:	6-54Mbps, up to 433.3Mbps
Type of Antenna:	SMA Reverse threads antenna
Antenna Gain:	2dBi

### 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.407:** General technical requirements.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**KDB789033 D02 v02r01:** GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

### 1.4 Table for parameters of Test Software setting

Install the test firmware “00002065-MP\_Kit\_RTL11ac\_8811AU\_USB\_v41\_20130606” which is provided by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	10	10	10	/	/	/	/	/	/	/	10	10	10
802.11n-HT20 MCS0	10	10	10	/	/	/	/	/	/	/	10	10	10
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	10	10	/	/	/	/	/	/	10	10			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	10		/		/		/		/		10		

### **1.5 EUT Operating during test**

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Windows were executed.

### **1.6 Test Facility**

#### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

#### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz, 5775 MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18



## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.405	Antenna Requirement	Compliant
§ 15.207; § 15.407(b)(6)	Conducted Emission	Compliant
§ 15.407(a)(1),(2)	Power Spectral Density	Compliant
§ 15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§ 15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§ 15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§ 15.205; § 15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§ 15.407(g)	Frequency Stability	Compliant
§ 15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the MPE Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has a SMA Reverse threads antenna, fulfill the requirement of this section.


## 5. Conducted Emissions

### 5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 5.2 Basic Test Setup Block Diagram

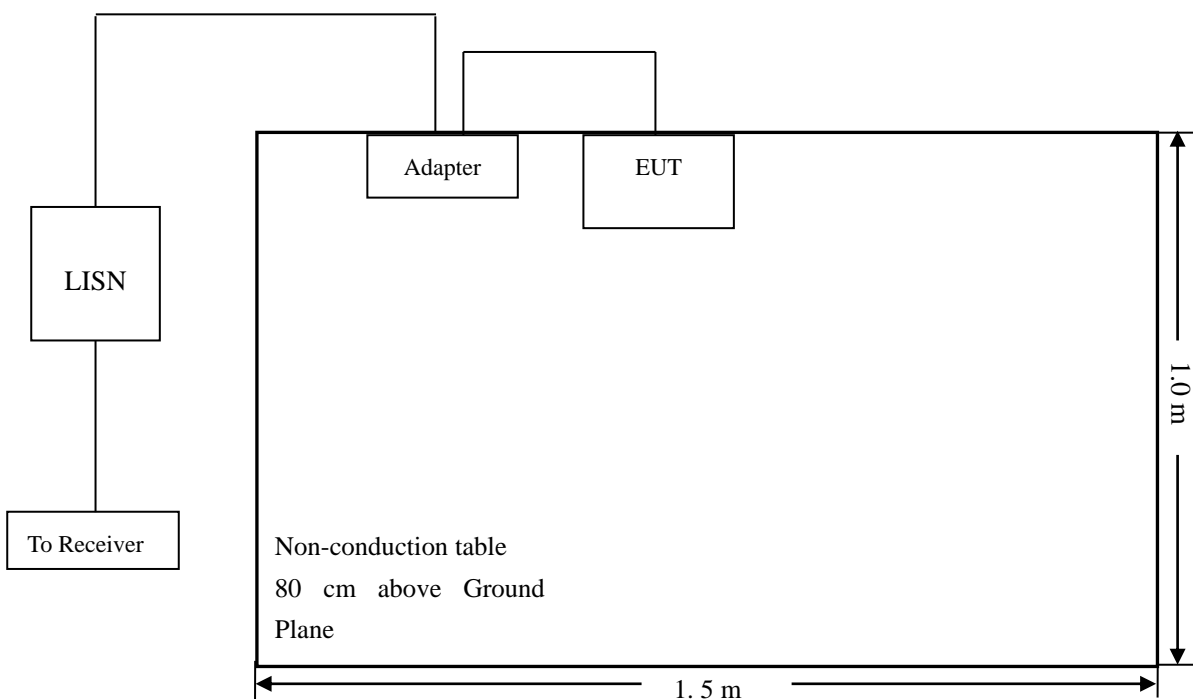


### 5.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal


### 5.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

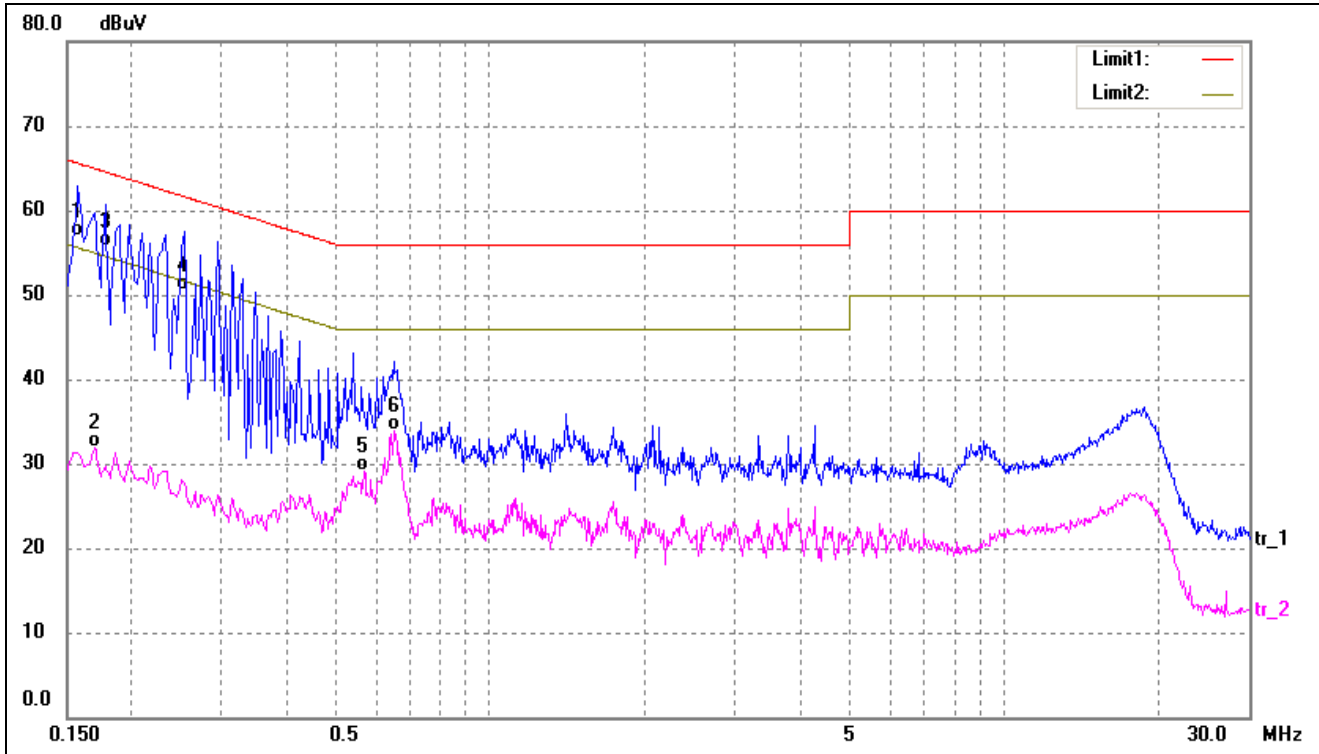

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	46.83	10.10	56.93	65.57	-8.64	QP
2	0.1700	21.82	10.11	31.93	54.96	-23.03	AVG
3	0.1780	45.58	10.11	55.69	64.58	-8.89	QP
4	0.2540	40.37	10.16	50.53	61.63	-11.10	QP
5	0.5700	18.69	10.32	29.01	46.00	-16.99	AVG
6	0.6500	23.45	10.36	33.81	46.00	-12.19	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

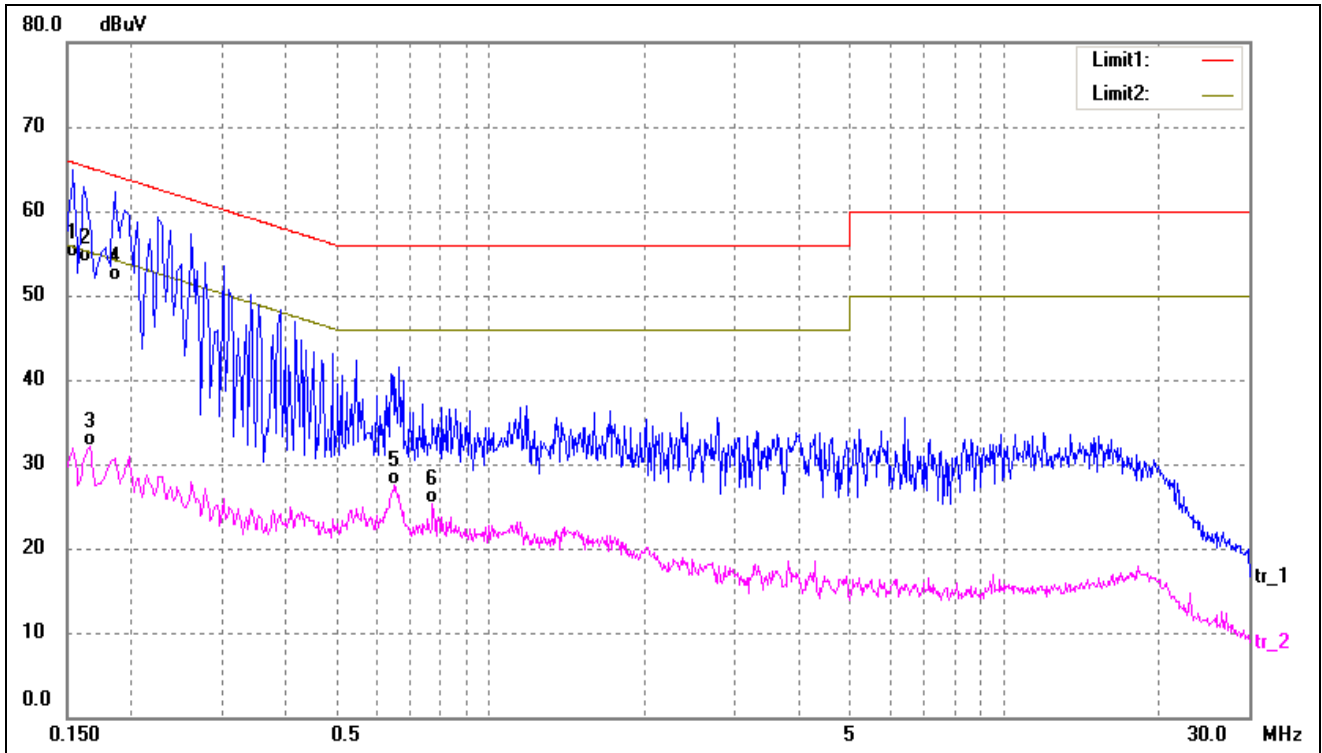

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	44.44	10.10	54.54	65.78	-11.24	QP
2	0.1620	43.74	10.10	53.84	65.36	-11.52	QP
3	0.1660	22.04	10.11	32.15	55.16	-23.01	AVG
4	0.1860	41.51	10.11	51.62	64.21	-12.59	QP
5	0.6540	17.12	10.36	27.48	46.00	-18.52	AVG
6	0.7740	14.95	10.41	25.36	46.00	-20.64	AVG

## 6. Power Spectral Density

---

### 6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 6.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.1.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ kHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ kHz}$  is available on nearly all spectrum analyzers.

### 6.3 Summary of Test Results/Plots




U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	8.533	11
	5200	8.400	11
	5240	9.093	11
802.11n-HT20	5180	10.530	11
	5200	10.700	11
	5240	10.680	11
802.11n-HT40	5190	4.614	11
	5230	4.795	11
802.11ac-HT80	5210	1.332	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	5.106	2.22	7.326	30
	5785	4.683	2.22	6.903	30
	5825	5.404	2.22	7.624	30
802.11n-HT20	5745	4.809	2.22	7.029	30
	5785	4.349	2.22	6.569	30
	5825	4.053	2.22	6.273	30
802.11n HT40	5755	1.068	2.22	3.288	30
	5795	1.295	2.22	3.515	30
802.11ac VH80	5775	-2.637	2.22	-0.417	30

\*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22




➤ 5150-5250MHz

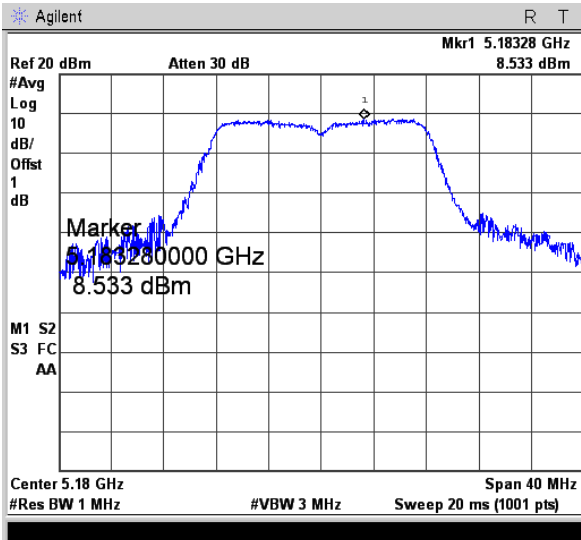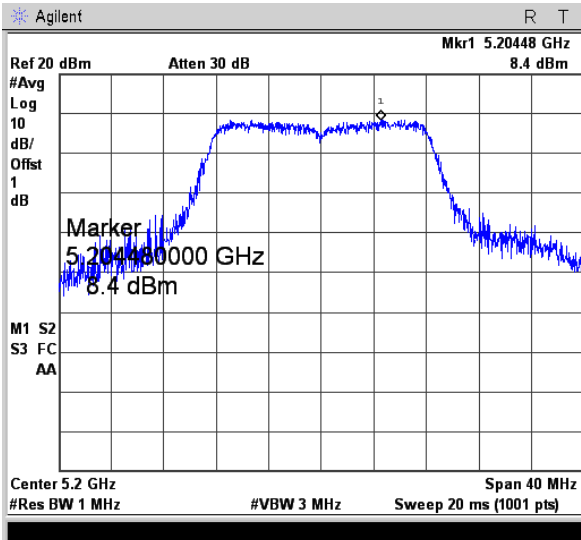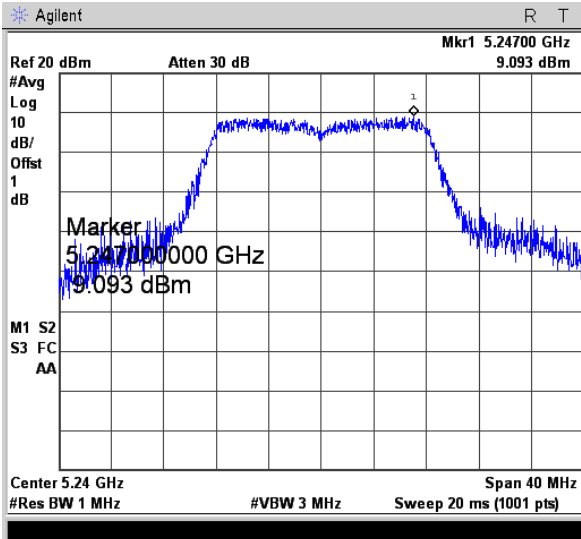
Mode:		802.11a
5180MHz		
5200MHz		
5240MHz		

**Mode:** 802.11n-HT20


5180MHz


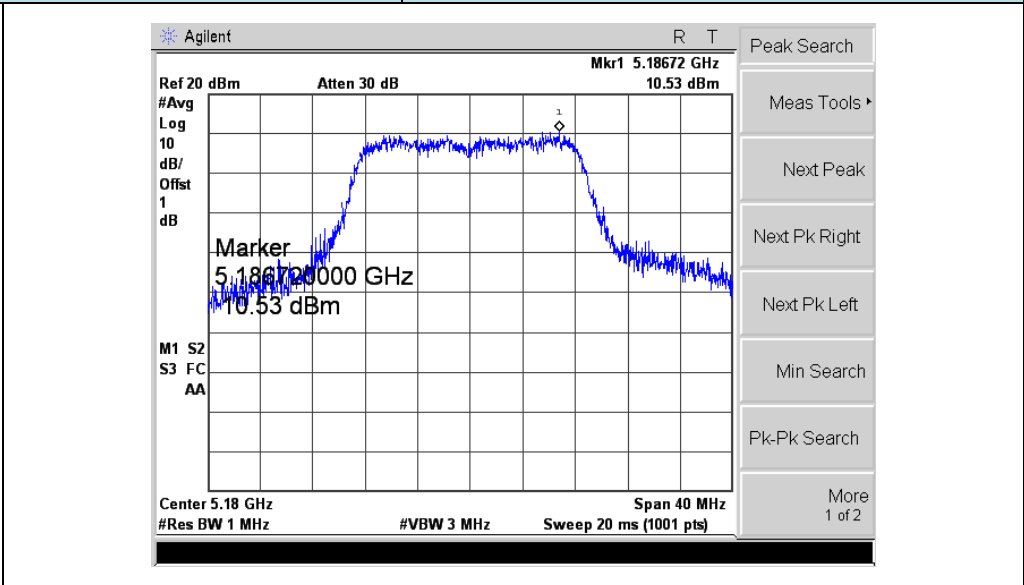



5200MHz

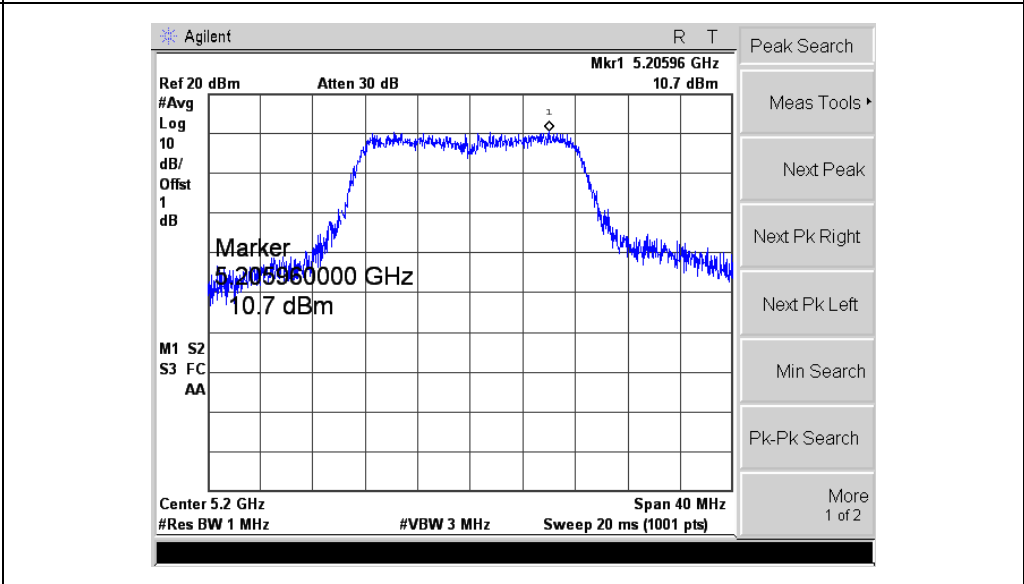

5240MHz



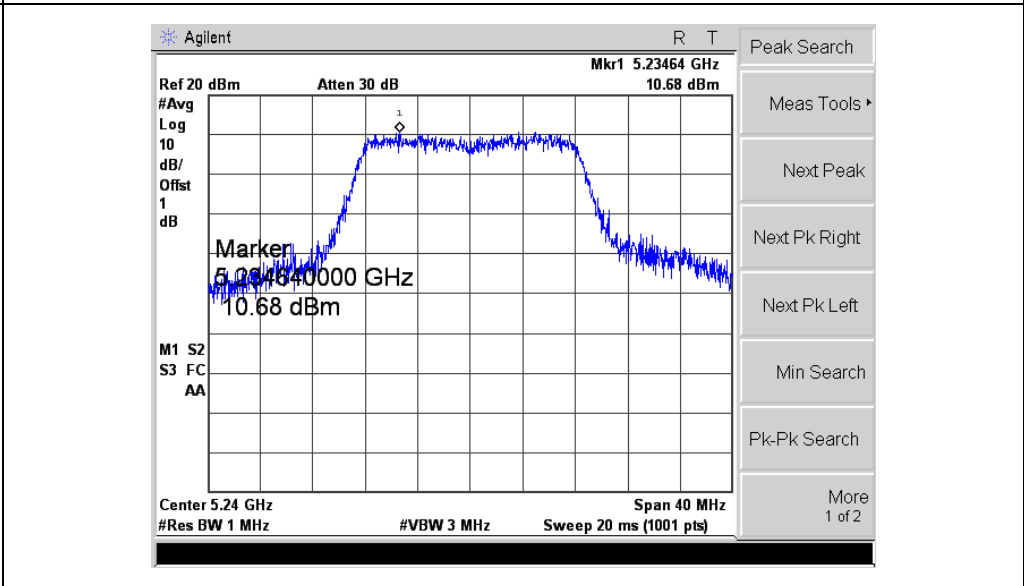


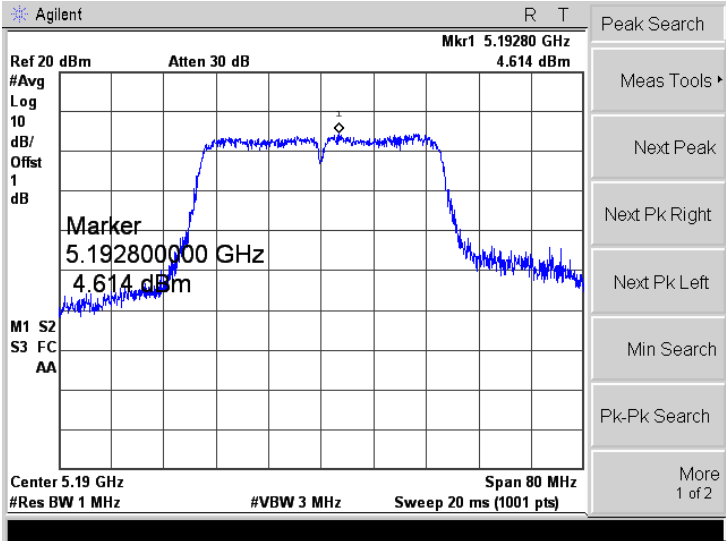
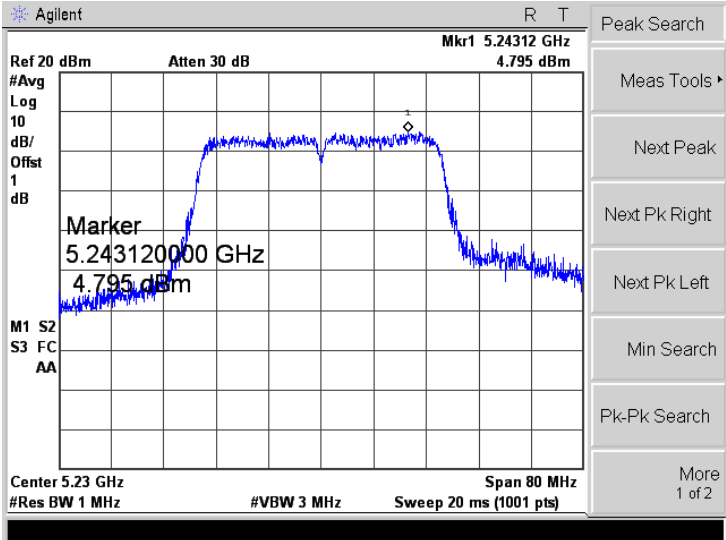
<p>Mode:</p>	<p>802.11n-HT40</p>
<p>5190 MHz</p>	
<p>5230 MHz</p>	

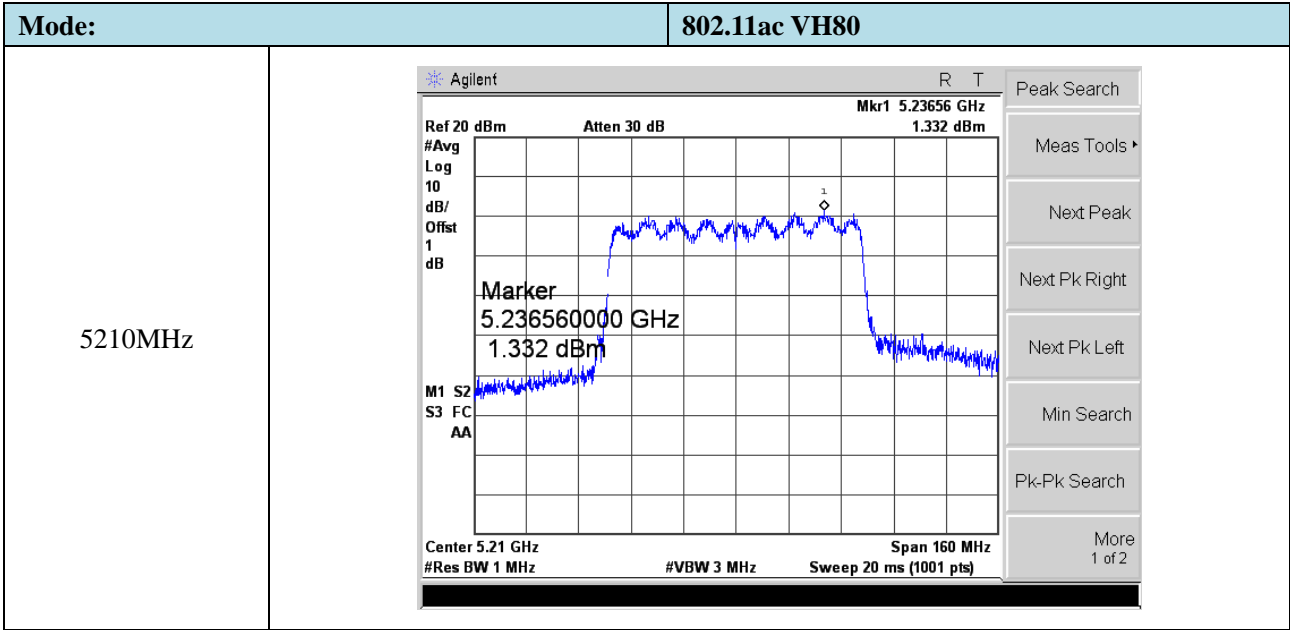


➤ 5725-5850MHz

Mode:		802.11a
5745MHz		
5785MHz		
5825MHz		

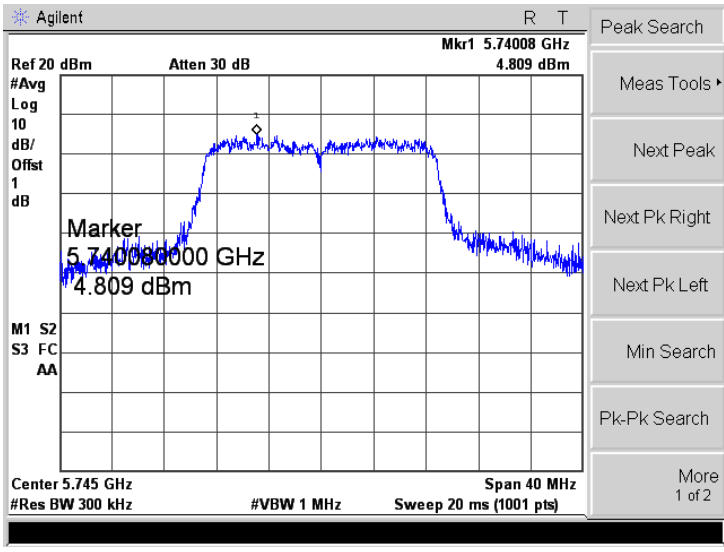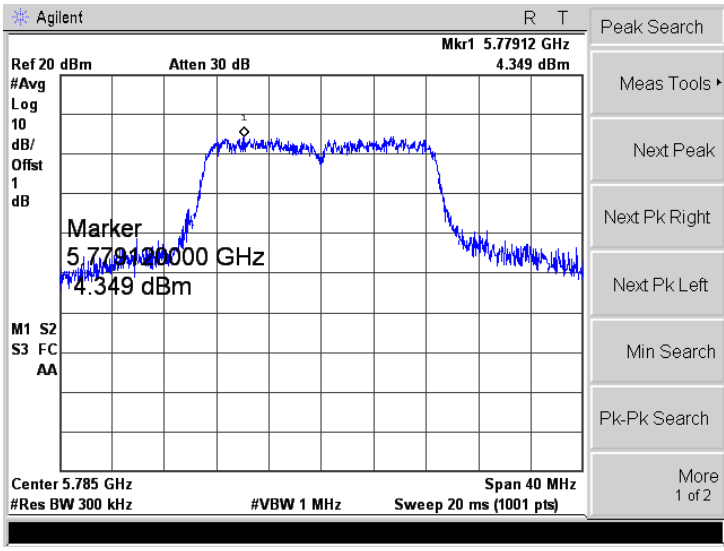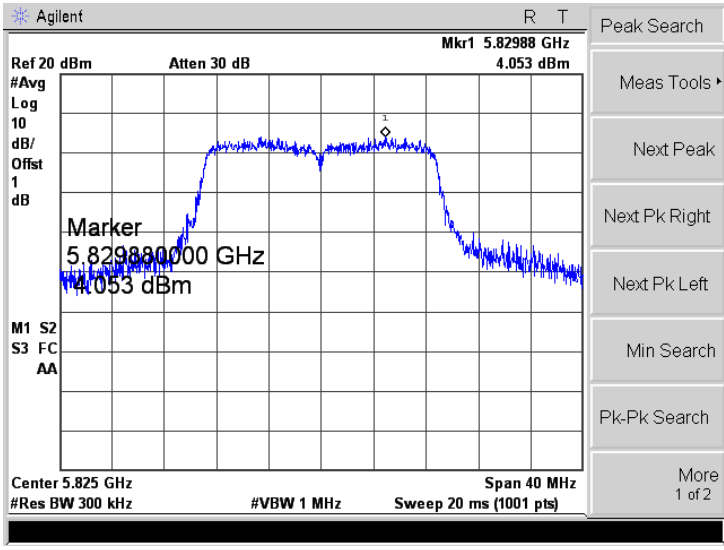Mode:		802.11n-HT20
5745MHz		
5785MHz		
5825MHz		

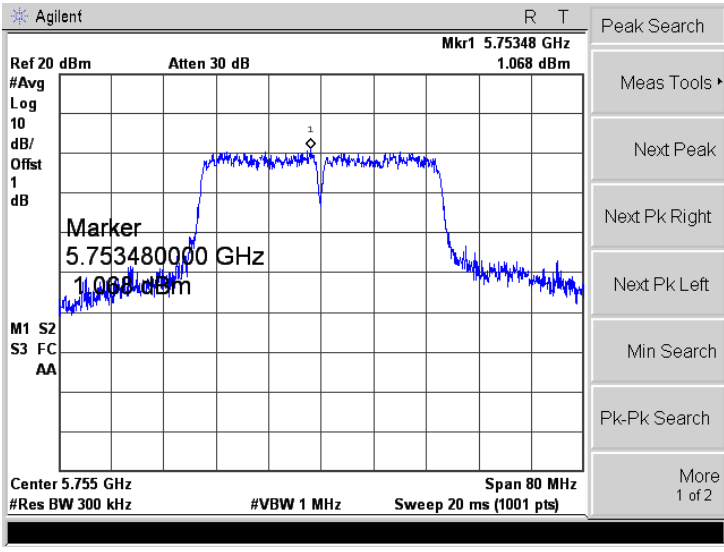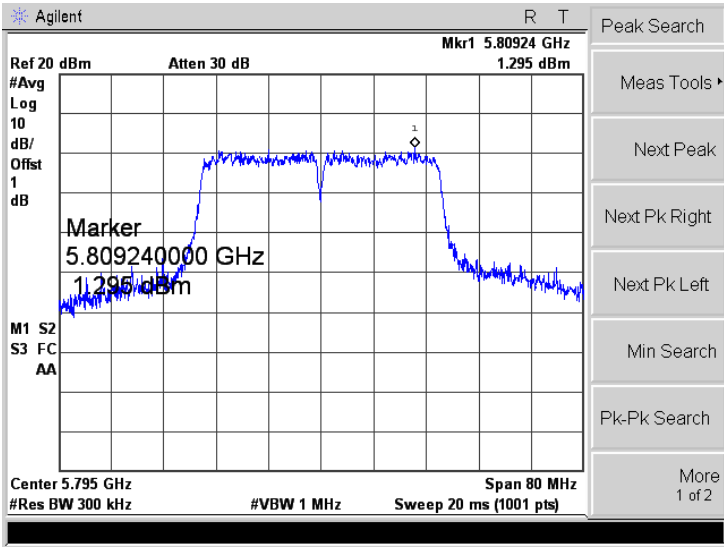Mode:		802.11n-HT40
5755 MHz		
5795 MHz		

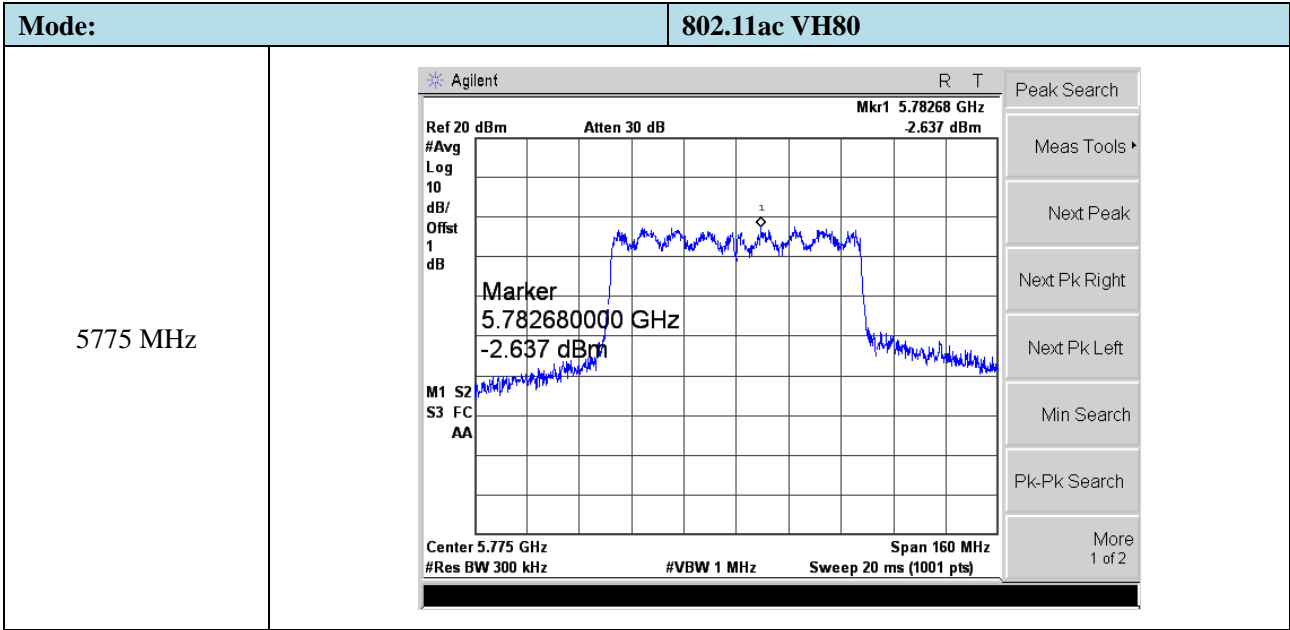



---

## 7. Emission Bandwidth and Occupied Bandwidth

---

### 7.1 Standard Applicable

According to 15.407 (a) and (e)

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 7.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare

this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

## D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:




1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

### 7.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	25.570	16.8052	Pass
	5200	25.844	16.8631	Pass
	5240	25.770	16.9258	Pass
802.11n-HT20	5180	23.429	17.8306	Pass
	5200	24.604	17.8641	Pass
	5240	25.841	17.8562	Pass
802.11n-HT40	5190	44.101	36.7418	Pass
	5230	47.846	36.7039	Pass
802.11ac-HT80	5210	82.321	75.5014	Pass


U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.473	17.1336	≥500
	5785	16.439	16.9203	≥500
	5825	16.389	16.9387	≥500
802.11n-HT20	5745	17.653	18.0129	≥500
	5785	17.674	17.9232	≥500
	5825	17.596	17.8714	≥500
802.11n-HT40	5755	36.325	37.0176	≥500
	5795	36.358	36.9020	≥500
802.11ac VH80	5775	77.882	75.6931	≥500

➤ 5150-5250MHz

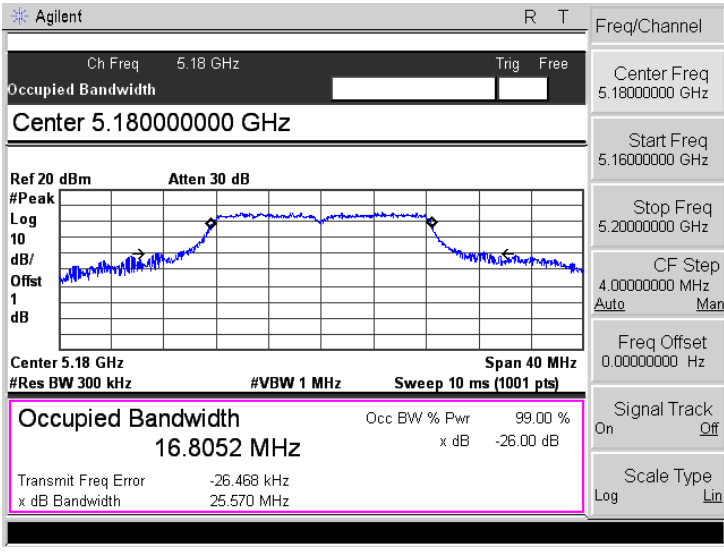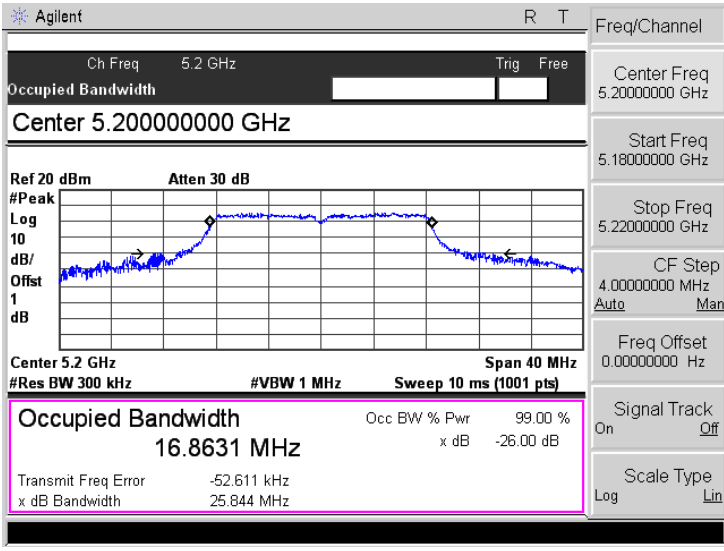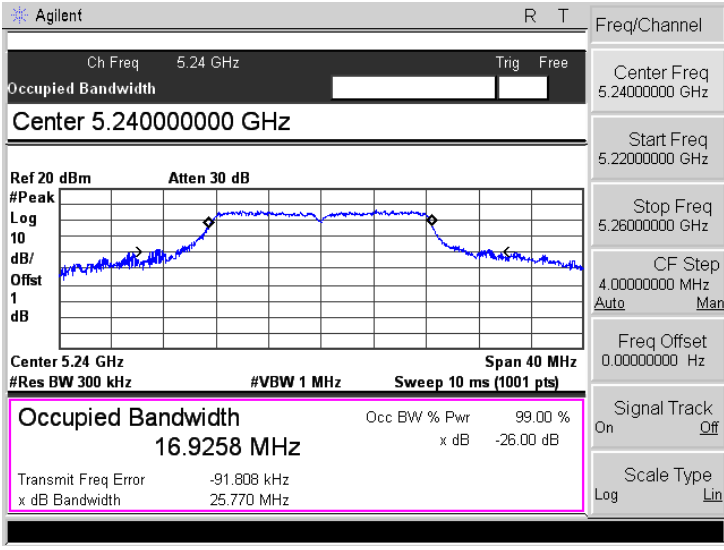
Mode:		802.11a
5180MHz		
5200MHz		
5240MHz		

**Mode:** 802.11n-HT20


5180MHz


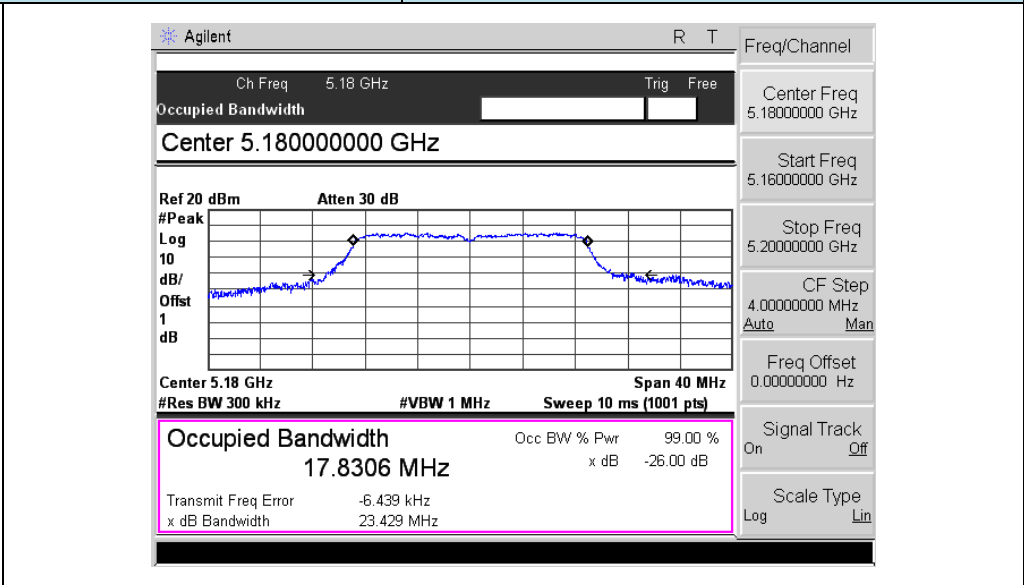



5200MHz

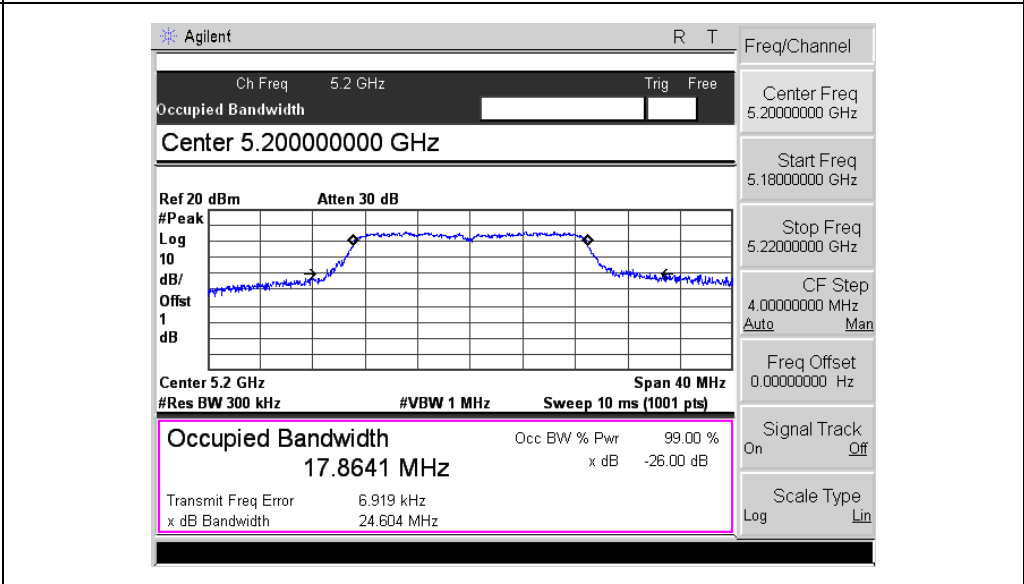




5240MHz

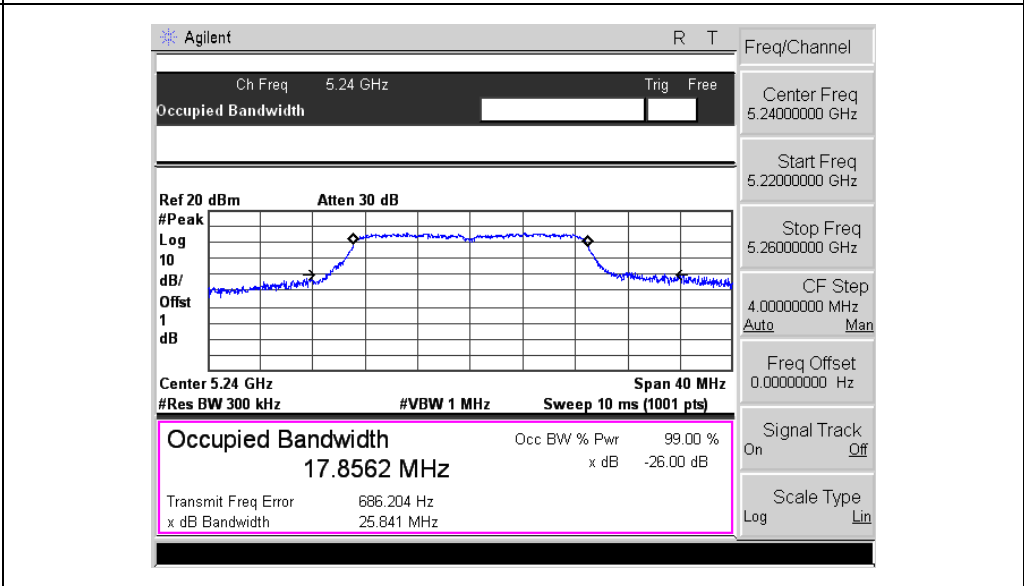
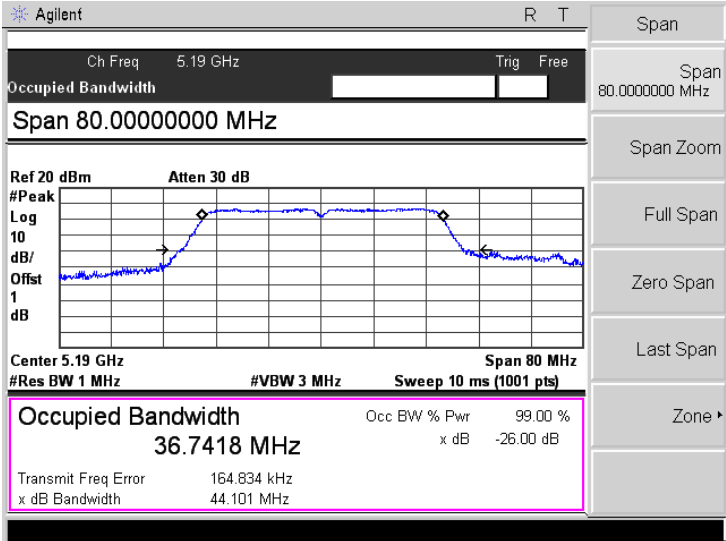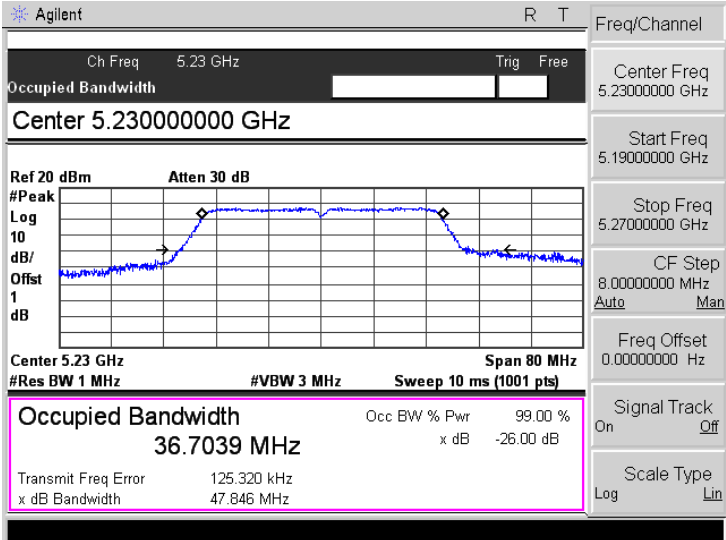
<p>Mode:</p>	<p>802.11n-HT40</p>
<p>5190 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Span 80.0000000 MHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/</p> <p>Offst</p> <p>dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>36.7418 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 164.834 kHz</p> <p>x dB Bandwidth 44.101 MHz</p> <p>Span</p> <p>Span 80.0000000 MHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone</p>
<p>5230 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.230000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>dB/</p> <p>Offst</p> <p>dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>36.7039 MHz</b> x dB -26.00 dB</p> <p>Transmit Freq Error 125.320 kHz</p> <p>x dB Bandwidth 47.846 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
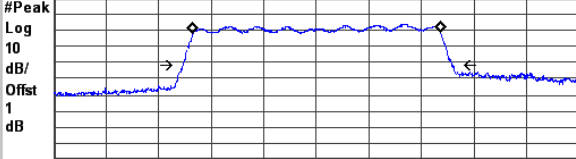
<b>Mode:</b>	<b>802.11ac VH80</b>
5210MHz	<div style="border: 1px solid #ccc; padding: 5px;"> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid #ccc;"> <span>Agilent</span> <span>R T</span> </div> <div style="border-bottom: 1px solid #ccc; padding: 2px;"> <p style="font-size: small;">Ch Freq 5.21 GHz Trig Free</p> <p style="font-size: small;">Occupied Bandwidth</p> <p style="font-size: small;">Center 5.21000000 GHz</p> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div style="width: 45%;"> <p>Ref 20 dBm      Atten 30 dB</p>  <p style="font-size: x-small;">#Peak Log dB/ Offst 1 dB</p> </div> <div style="width: 50%;"> <p style="font-size: x-small;">Center 5.21 GHz      Span 160 MHz</p> <p style="font-size: x-small;">#Res BW 1 MHz      #VBW 3 MHz      Sweep 10 ms (1001 pts)</p> </div> </div> <div style="border: 2px solid #ff00ff; padding: 2px; margin-top: 5px;"> <p style="font-weight: bold; font-size: small;">Occupied Bandwidth</p> <p style="font-size: small;">75.5014 MHz</p> <p style="font-size: x-small; margin-top: 5px;">Occ BW % Pwr      99.00 % x dB      -26.00 dB</p> <p style="font-size: x-small; margin-top: 5px;">Transmit Freq Error      184.583 kHz x dB Bandwidth      82.321 MHz</p> </div> <div style="border-left: 1px solid #ccc; border-right: 1px solid #ccc; padding: 2px; font-size: x-small;"> <p style="font-size: x-small;">Freq/Channel</p> <p style="font-size: x-small;">Center Freq 5.21000000 GHz</p> <p style="font-size: x-small;">Start Freq 5.13000000 GHz</p> <p style="font-size: x-small;">Stop Freq 5.29000000 GHz</p> <p style="font-size: x-small;">CF Step 16.00000000 MHz Auto Man</p> <p style="font-size: x-small;">Freq Offset 0.00000000 Hz</p> <p style="font-size: x-small;">Signal Track On Off</p> <p style="font-size: x-small;">Scale Type Log Lin</p> </div> </div>


➤ 5725-5850MHz

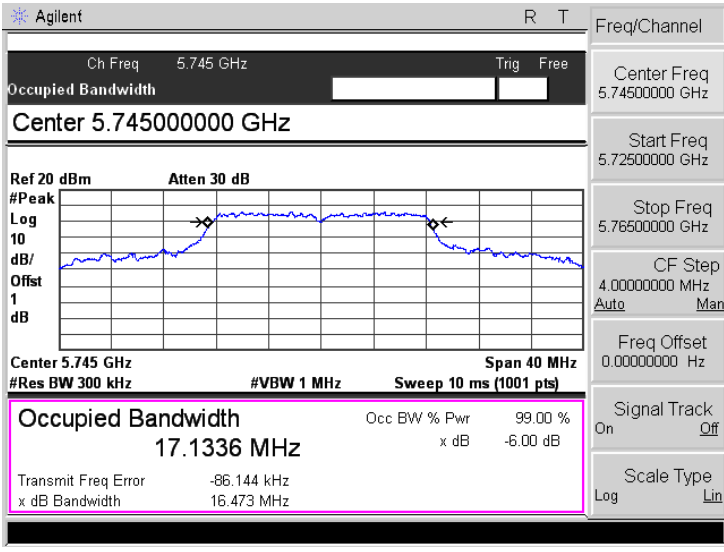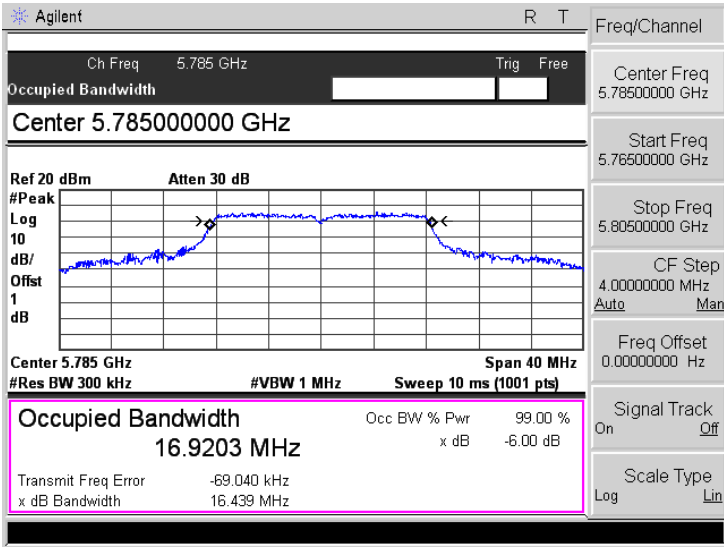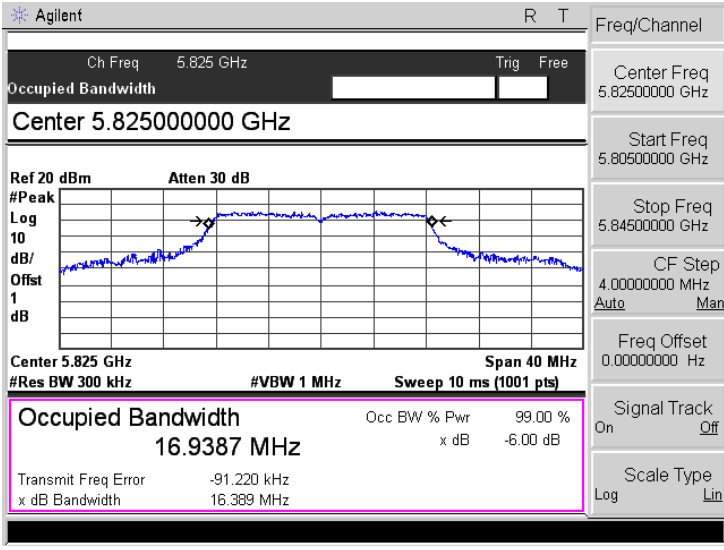Mode:		802.11a
5745MHz		
5785MHz		
5825MHz		




**Mode:** 802.11n-HT20


5745MHz


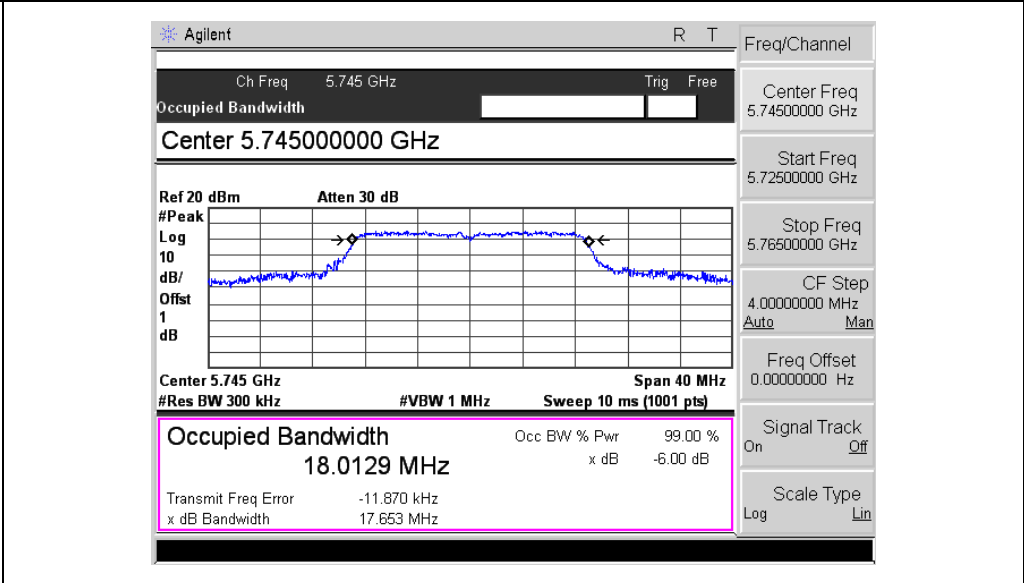



5785MHz

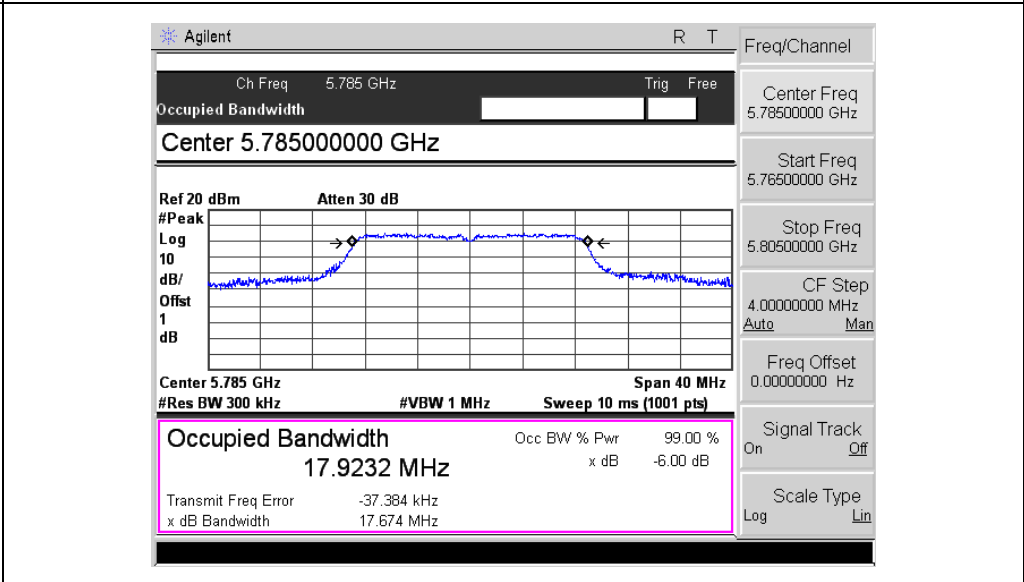

5825MHz

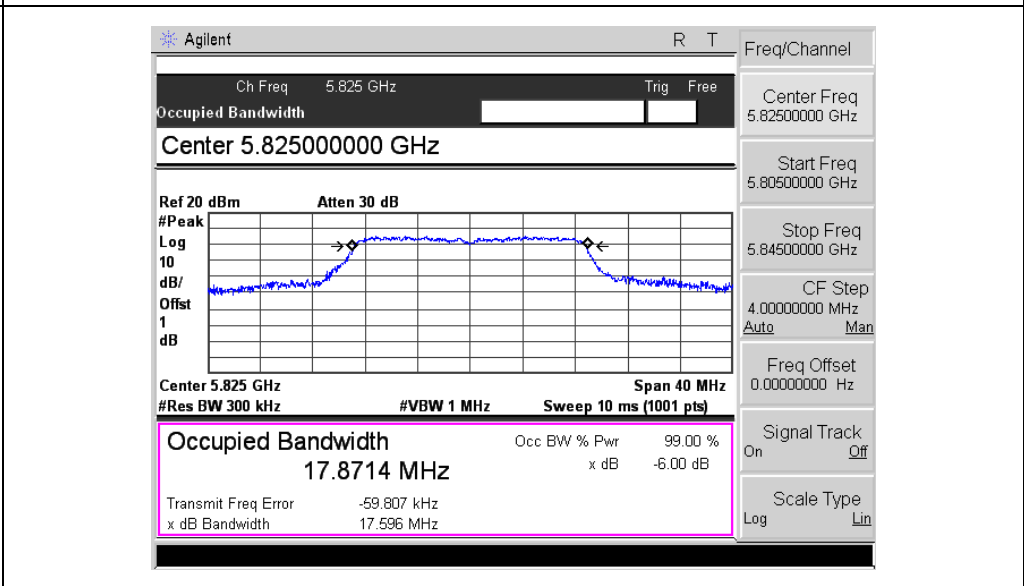

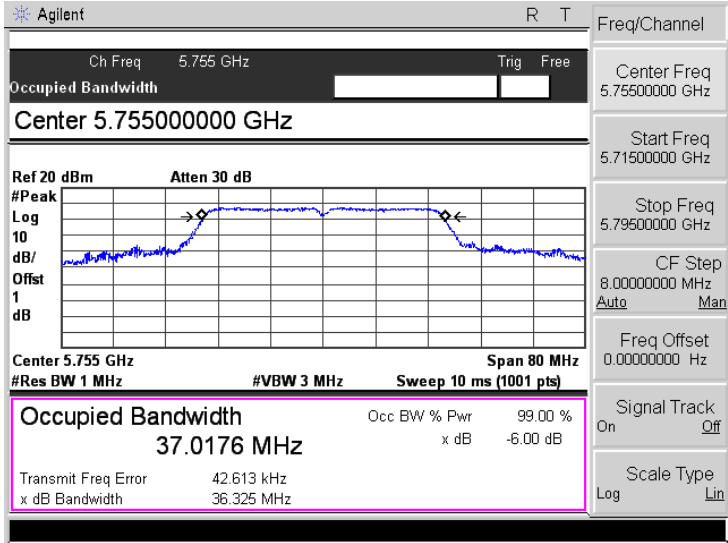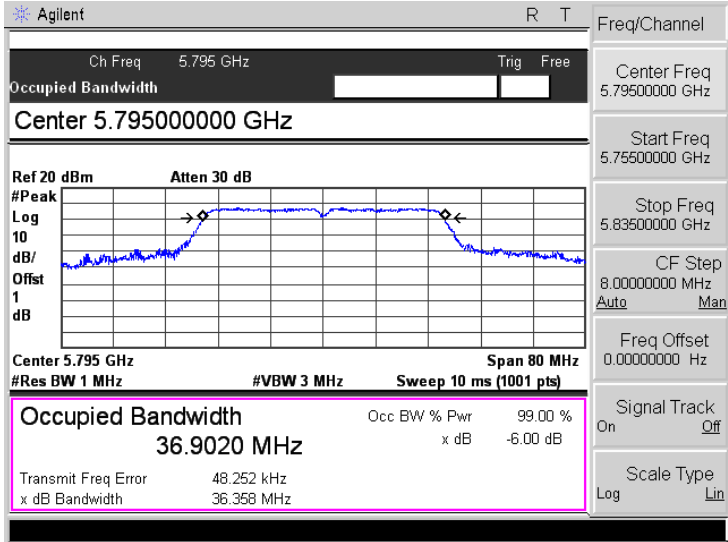Mode:		802.11n-HT40
5755 MHz	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Center 5.75500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 37.0176 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 42.613 kHz</p> <p>x dB Bandwidth 36.325 MHz</p> <p>Center Freq 5.75500000 GHz</p> <p>Start Freq 5.71500000 GHz</p> <p>Stop Freq 5.79500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
5795 MHz	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Center 5.79500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 36.9020 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 48.252 kHz</p> <p>x dB Bandwidth 36.358 MHz</p> <p>Center Freq 5.79500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.83500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	
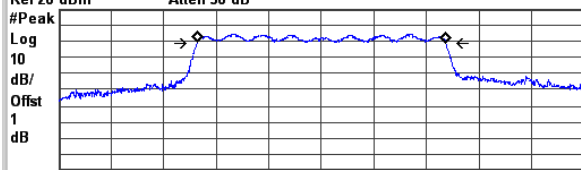
<b>Mode:</b>	<b>802.11ac VH80</b>
5775 MHz	<div style="border: 1px solid gray; padding: 5px;"> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid gray;"> <span>Agilent</span> <span>R T</span> </div> <div style="border-bottom: 1px solid gray; padding: 2px;"> <p style="font-size: small; margin: 0;">Ch Freq 5.775 GHz Trig Free</p> <p style="margin: 0;">Occupied Bandwidth</p> <p style="font-size: large; margin: 0;">Center 5.77500000 GHz</p> </div> <div style="display: flex; justify-content: space-between; padding: 2px;"> <div style="font-size: x-small;"> <p>Ref 20 dBm</p> <p>#Peak</p> <p>Log</p> <p>dB/</p> <p>Offst</p> <p>dB</p> </div> <div style="text-align: center;"> <p>Atten 30 dB</p>  </div> <div style="font-size: x-small;"> <p>Center 5.775 GHz</p> <p>#Res BW 1 MHz</p> </div> <div style="font-size: x-small;"> <p>Span 160 MHz</p> <p>#VBW 3 MHz</p> <p>Sweep 10 ms (1001 pts)</p> </div> </div> <div style="border: 2px solid magenta; padding: 2px; margin-top: 5px;"> <p style="font-weight: bold; font-size: large;">Occupied Bandwidth</p> <p style="font-size: x-large; text-align: center;">75.6931 MHz</p> </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 5px;"> <div> <p>Transmit Freq Error 44.611 kHz</p> <p>x dB Bandwidth 75.882 MHz</p> </div> <div> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> </div> </div> </div>

---

## 8. Maximum Conducted Output Power

---

### 8.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 8.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW  $\geq$  3 MHz.
- (iv) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.




- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq$  98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.




### 8.3 Summary of Test Results/Plots



<b>U-NII-1:5150-5250MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5180	12.98	19.861	250
	5200	13.12	20.512	250
	5240	13.33	21.528	250
802.11n-HT20	5180	13.22	20.989	250
	5200	13.12	20.512	250
	5240	13.32	21.478	250
802.11n-HT40	5190	12.16	16.444	250
	5230	12.32	17.061	250
802.11ac VH80	5210	10.92	12.359	250

<b>U-NII-3: 5725-5850MHz</b>				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5745	13.13	20.559	1000
	5785	13.09	20.370	1000
	5825	12.91	19.543	1000
802.11n-HT20	5745	13.07	20.277	1000
	5785	13.17	20.749	1000
	5825	13.18	20.797	1000
802.11n-HT40	5755	12.25	16.788	1000
	5795	12.17	16.482	1000
802.11ac VH80	5775	11.09	12.853	1000


➤ 5150-5250MHz

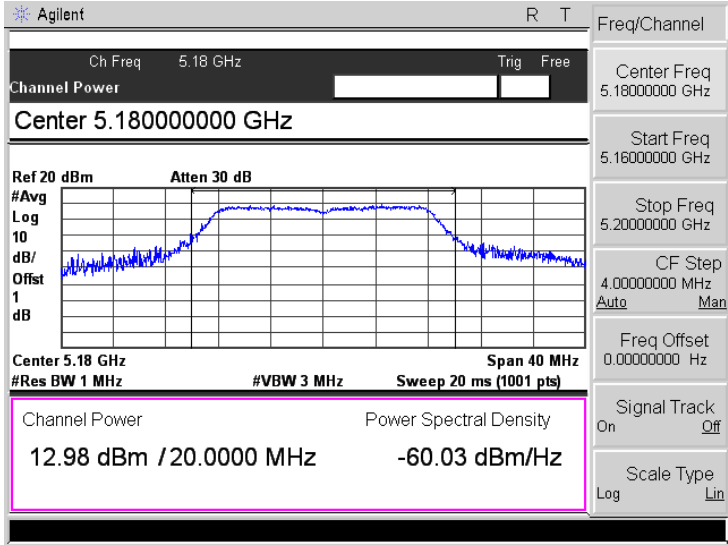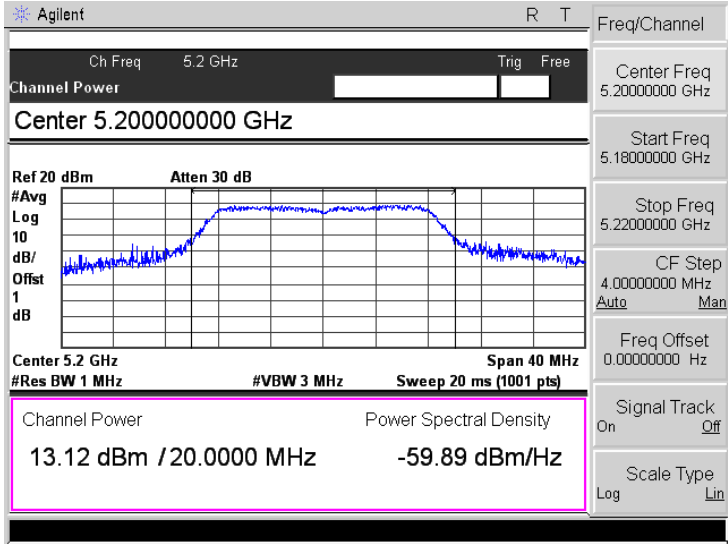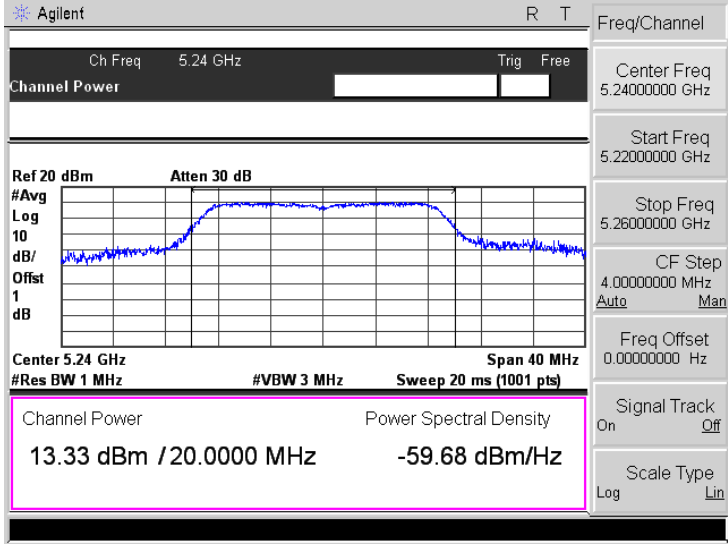Mode:		802.11a
5180MHz		
5200MHz		
5240MHz		

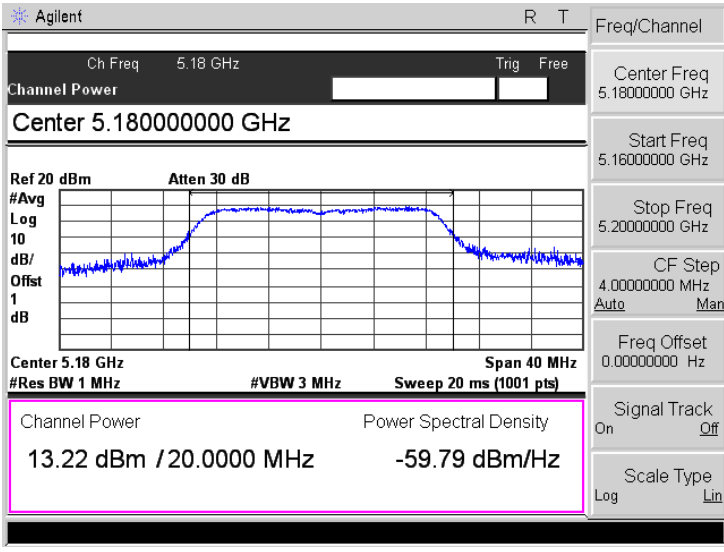
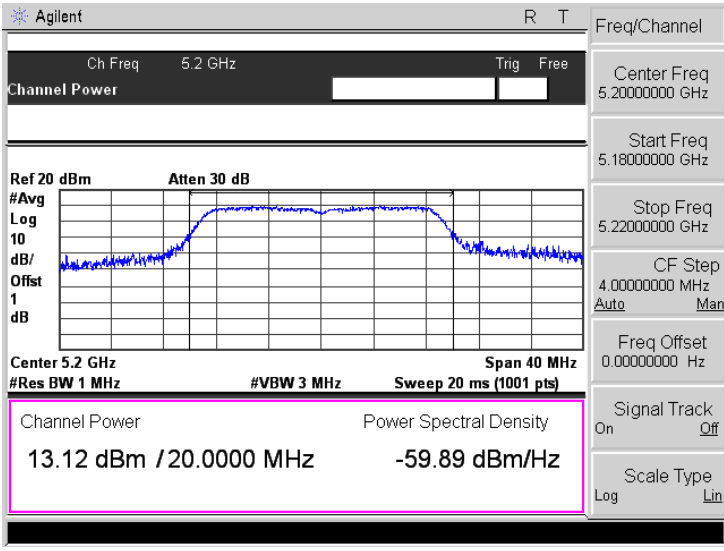
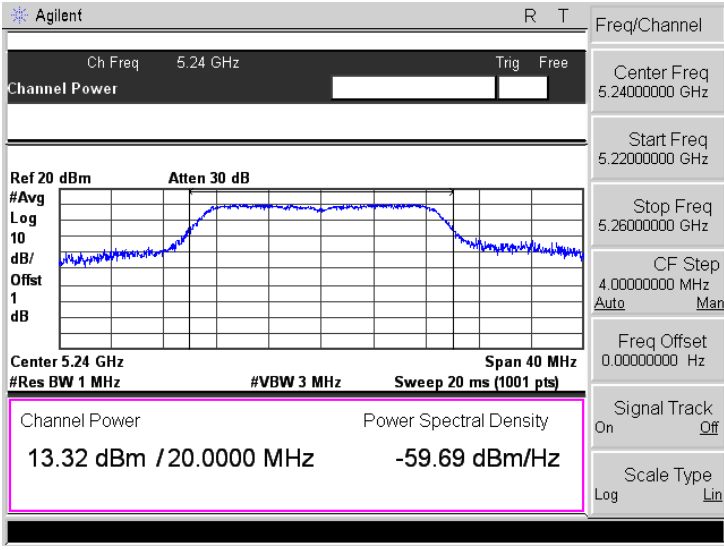
Mode:		802.11n-HT20
5180MHz		
5200MHz		
5240MHz		
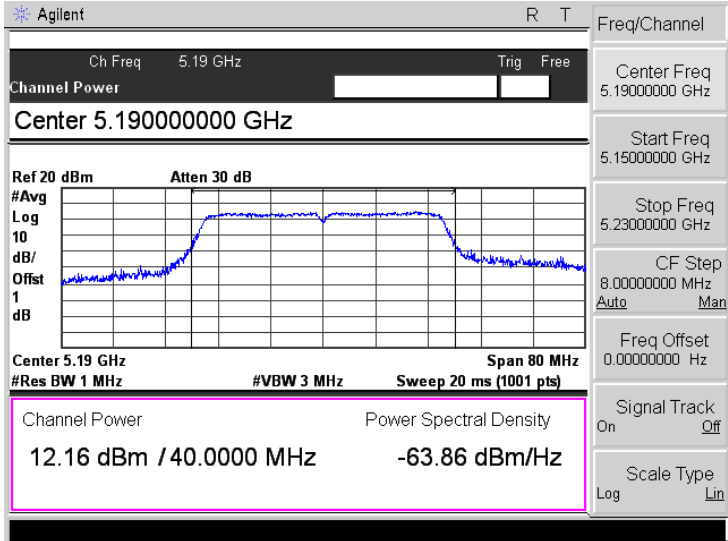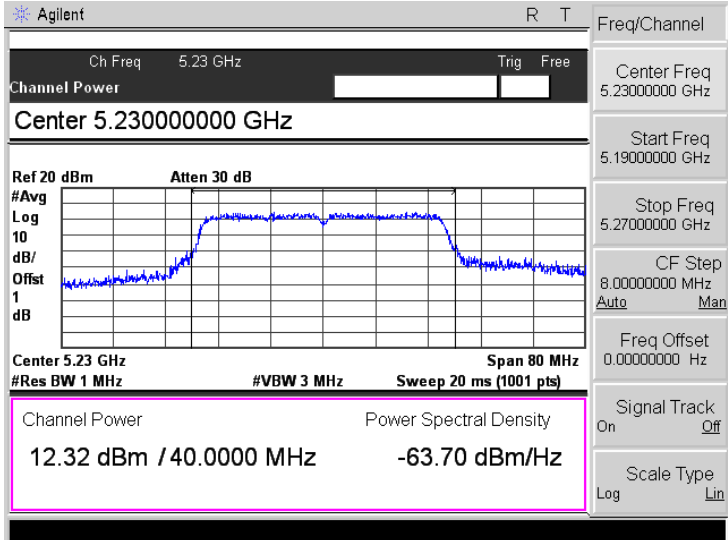
<p>Mode:</p>	<p>802.11n-HT40</p>
<p>5190 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.19000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.16 dBm / 40.0000 MHz -63.86 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.19000000 GHz</p> <p>Start Freq 5.15000000 GHz</p> <p>Stop Freq 5.23000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>5230 MHz</p>	 <p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.23000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.32 dBm / 40.0000 MHz -63.70 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

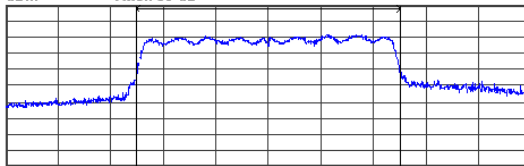


<b>Mode:</b>	<b>802.11ac VH80</b>				
5210MHz	<div style="border: 1px solid gray; padding: 5px;"> <div style="display: flex; justify-content: space-between; border-bottom: 1px solid gray;"> <span>Agilent</span> <span>R T</span> </div> <div style="border-bottom: 1px solid gray; padding: 2px;"> <p style="font-size: small;">Ch Freq 5.21 GHz Trig Free</p> <p style="font-size: small;">Channel Power <span style="border: 1px solid gray; display: inline-block; width: 50px; height: 15px;"></span></p> <p style="font-size: small;">Center 5.21000000 GHz</p> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div style="width: 45%;"> <p>Ref 20 dBm      Atten 30 dB</p> <p>#Avg</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>1</p> <p>dB</p> </div> <div style="width: 50%; text-align: center;">  </div> </div> <div style="border-bottom: 1px solid gray; padding: 2px; font-size: x-small;"> <p>Center 5.21 GHz      Span 160 MHz</p> <p>#Res BW 1 MHz      #VBW 3 MHz      Sweep 20 ms (1001 pts)</p> </div> <div style="border: 2px solid magenta; padding: 2px; font-size: x-small;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Channel Power</td> <td style="width: 50%;">Power Spectral Density</td> </tr> <tr> <td style="text-align: center;">10.92 dBm / 80.0000 MHz</td> <td style="text-align: center;">-68.11 dBm/Hz</td> </tr> </table> </div> </div>	Channel Power	Power Spectral Density	10.92 dBm / 80.0000 MHz	-68.11 dBm/Hz
Channel Power	Power Spectral Density				
10.92 dBm / 80.0000 MHz	-68.11 dBm/Hz				

➤ 5725-5850MHz

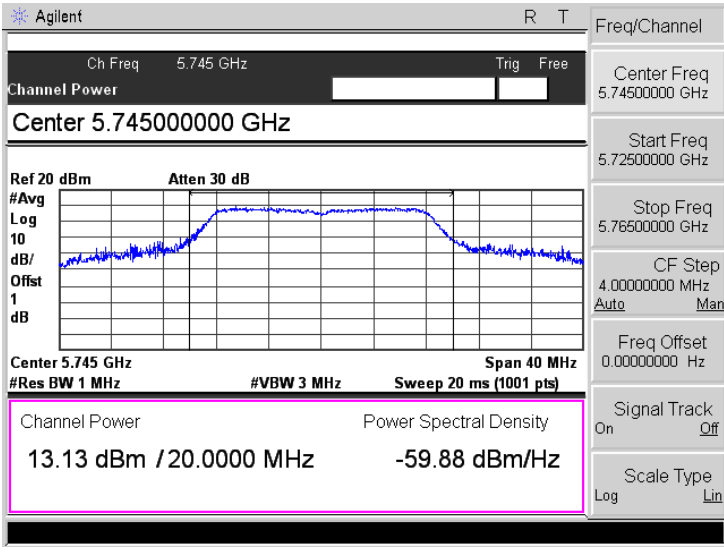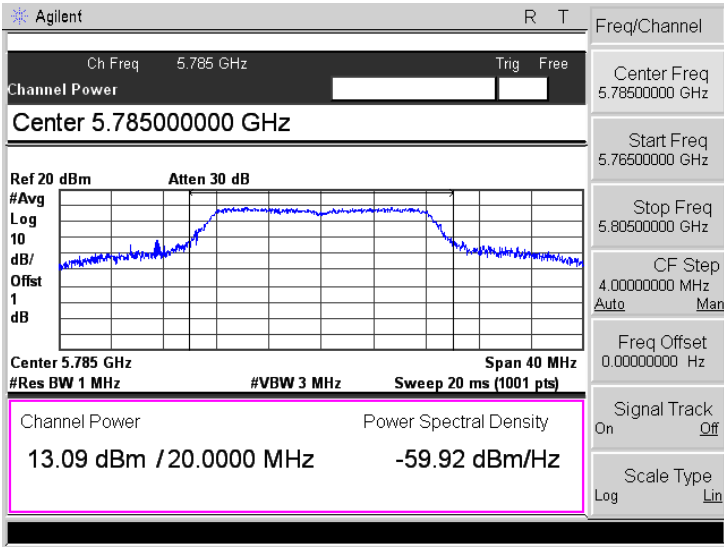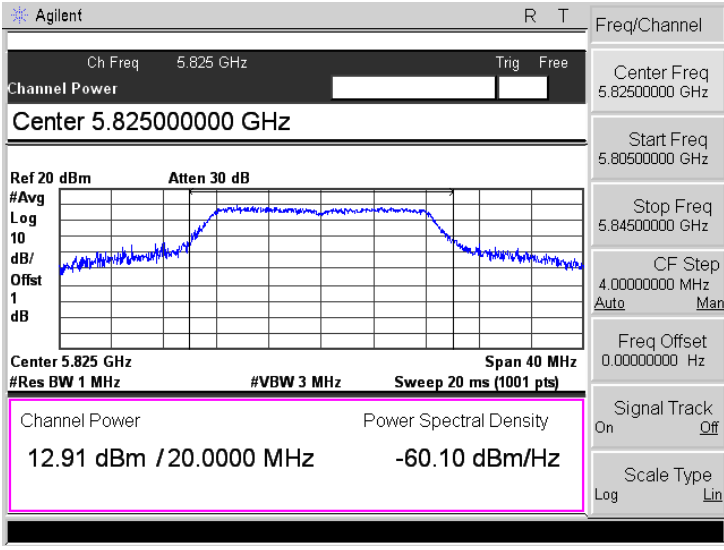
Mode:		802.11a
5745MHz		
5785MHz		
5825MHz		

**Mode:** 802.11n-HT20


5745MHz


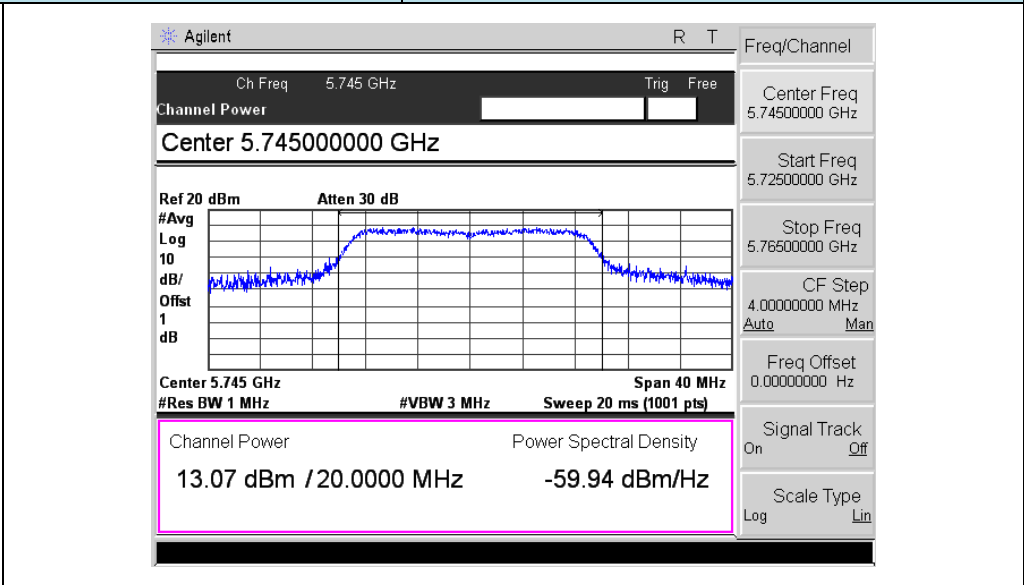



5785MHz

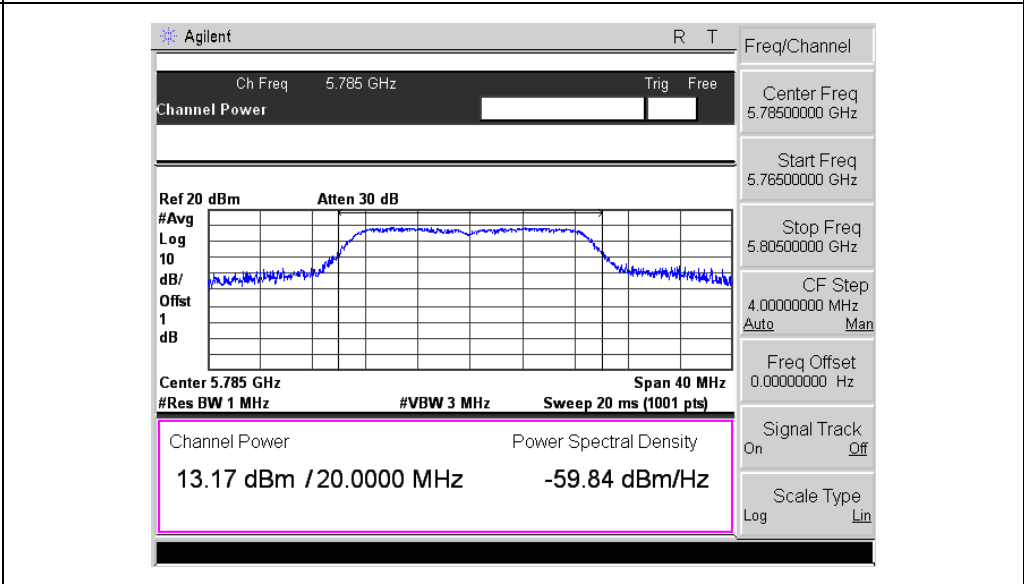

5825MHz

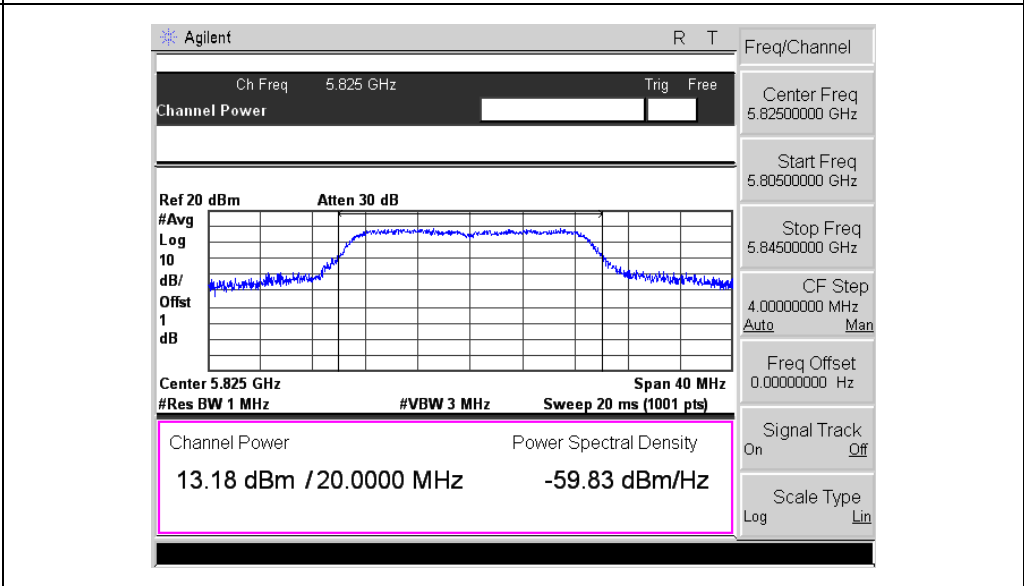

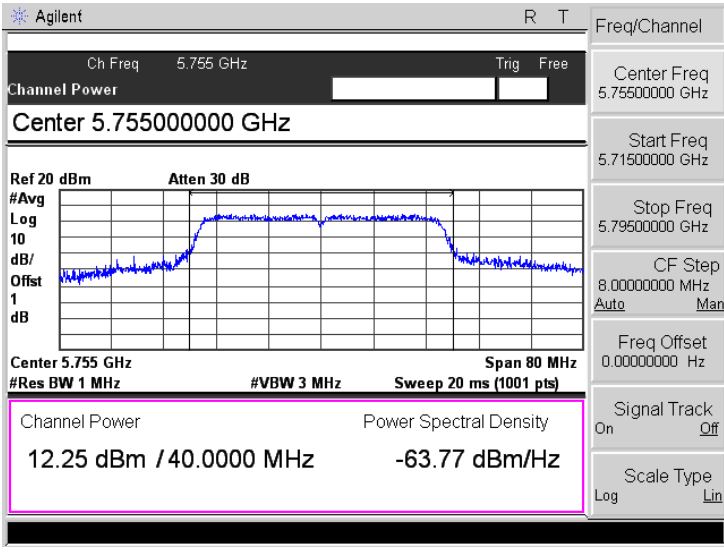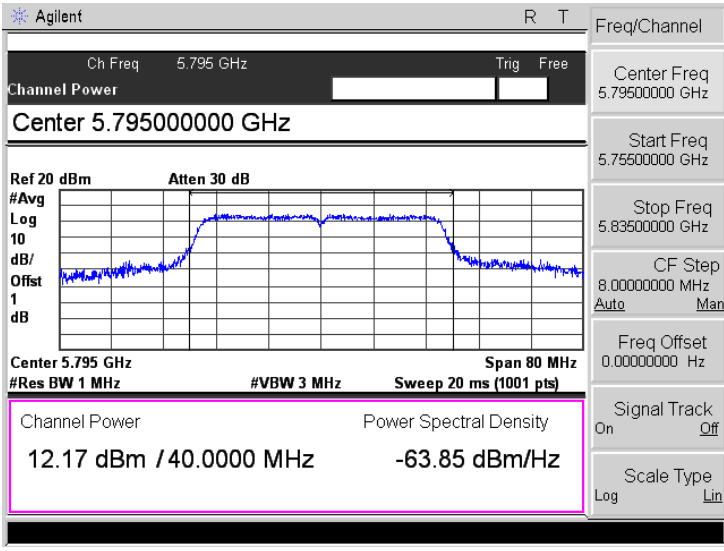Mode:		802.11n-HT40
5755 MHz		
5795 MHz		
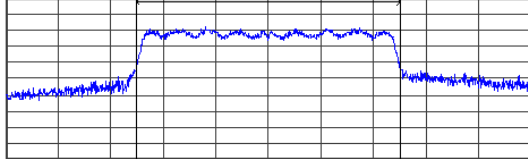
<b>Mode:</b>	<b>802.11ac VH80</b>
5775 MHz	<div style="border: 1px solid gray; padding: 5px;"> <p style="font-size: small; margin: 0;">Agilent <span style="float: right;">R T</span></p> <hr/> <p style="font-size: x-small; margin: 0;">Ch Freq 5.775 GHz <span style="float: right;">Trig Free</span></p> <p style="font-size: x-small; margin: 0;">Channel Power <span style="float: right;">[ ] [ ]</span></p> <p style="font-size: x-small; margin: 0; border-top: 1px solid black; border-bottom: 1px solid black;">Center 5.77500000 GHz</p> <hr/> <p style="font-size: x-small; margin: 0;">Ref 20 dBm <span style="float: right;">Atten 30 dB</span></p> <div style="font-size: x-small; margin: 0;"> <p>#Avg</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>1</p> <p>dB</p> </div>  <div style="font-size: x-small; margin: 0; border-top: 1px solid black; border-bottom: 1px solid black;"> <p style="display: flex; justify-content: space-between;"> <span>Center 5.775 GHz</span> <span>Span 160 MHz</span> </p> <p style="display: flex; justify-content: space-between;"> <span>#Res BW 1 MHz</span> <span>#VBW 3 MHz</span> <span>Sweep 20 ms (1001 pts)</span> </p> </div> <div style="border: 2px solid magenta; padding: 5px; margin: 5px 0;"> <p style="font-size: x-small; margin: 0; display: flex; justify-content: space-between;"> <span>Channel Power</span> <span>Power Spectral Density</span> </p> <p style="font-size: x-small; margin: 0; display: flex; justify-content: space-between;"> <span>11.09 dBm / 80.0000 MHz</span> <span>-67.94 dBm/Hz</span> </p> </div> </div> <div style="font-size: x-small; margin: 0; border-top: 1px solid gray; border-bottom: 1px solid gray;"> <p style="display: flex; justify-content: space-between;"> <span>Freq/Channel</span> <span>Center Freq 5.77500000 GHz</span> </p> <p style="display: flex; justify-content: space-between;"> <span>Start Freq 5.69500000 GHz</span> <span>Stop Freq 5.85500000 GHz</span> </p> <p style="display: flex; justify-content: space-between;"> <span>CF Step 16.00000000 MHz</span> <span>Auto Man</span> </p> <p style="display: flex; justify-content: space-between;"> <span>Freq Offset 0.00000000 Hz</span> </p> <p style="display: flex; justify-content: space-between;"> <span>Signal Track On Off</span> </p> <p style="display: flex; justify-content: space-between;"> <span>Scale Type Log Lin</span> </p> </div>

## 9. Radiated Spurious Emissions

---

### 9.1 Standard Applicable

According to §15.407(b), Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.  
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:



- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

### 9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

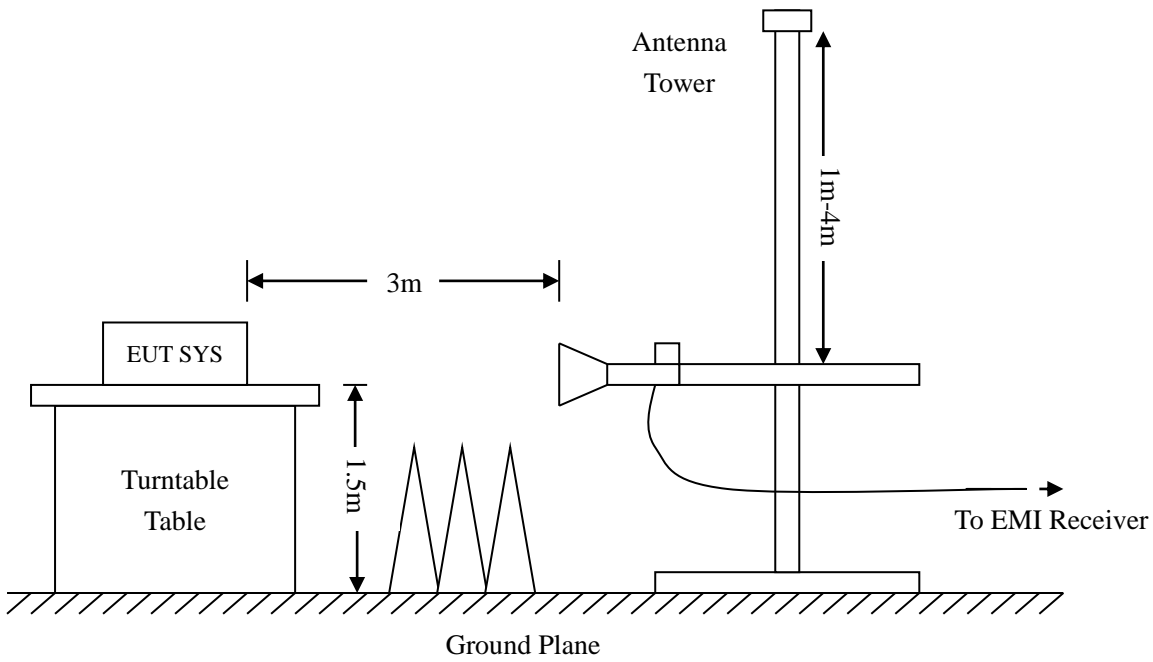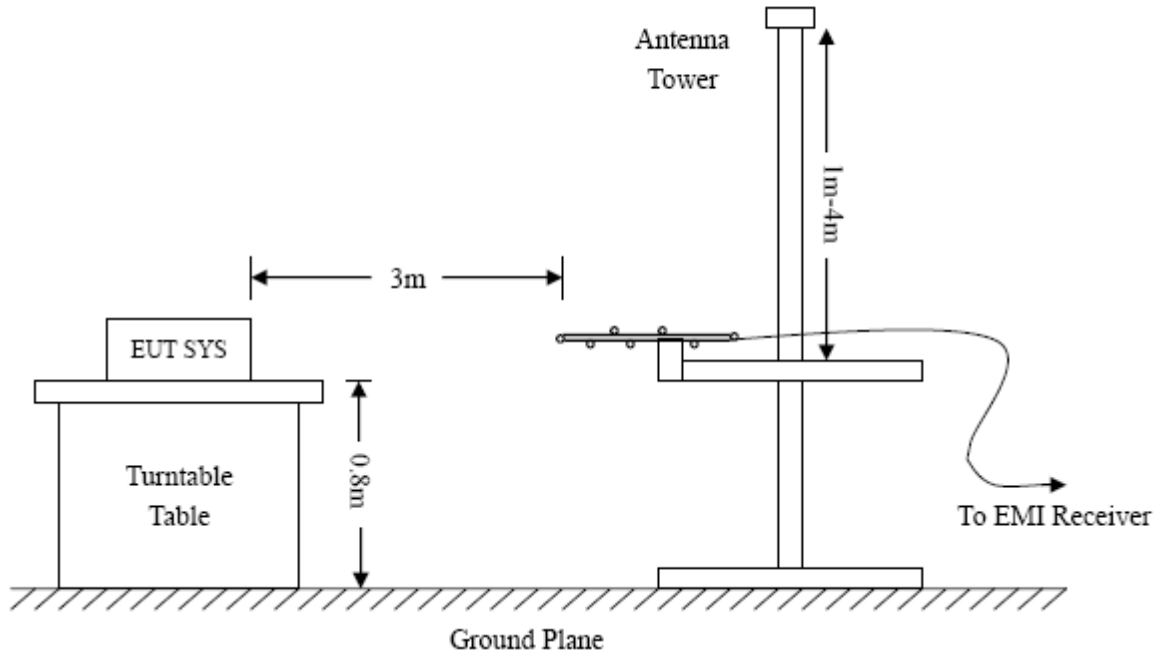

### 9.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

### 9.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


### 9.5 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*




- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal

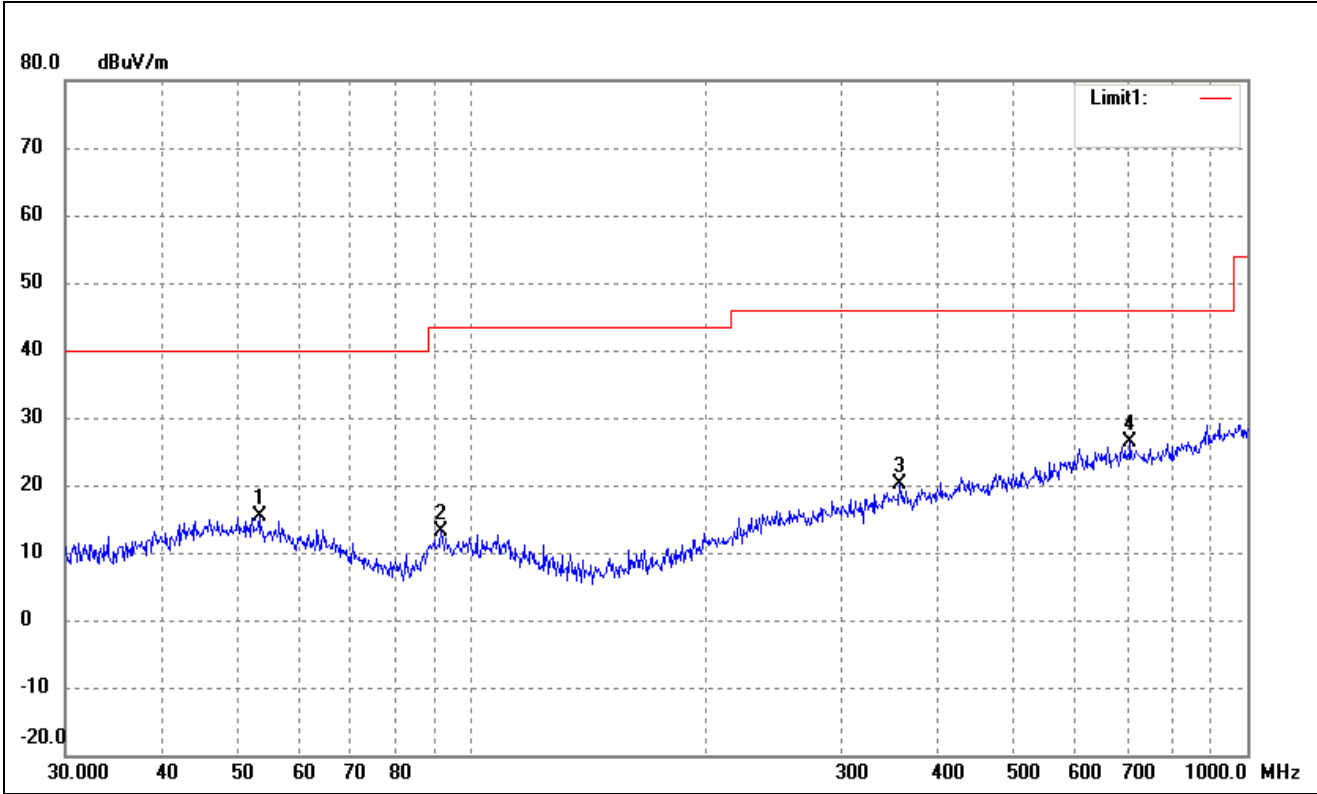


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	53.3179	27.19	-11.78	15.41	40.00	-24.59	318	100	peak
2	91.4949	26.83	-13.70	13.13	43.50	-30.37	99	100	peak
3	356.6758	27.08	-7.06	20.02	46.00	-25.98	132	100	peak
4	706.6999	28.14	-1.81	26.33	46.00	-19.67	108	100	peak

802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

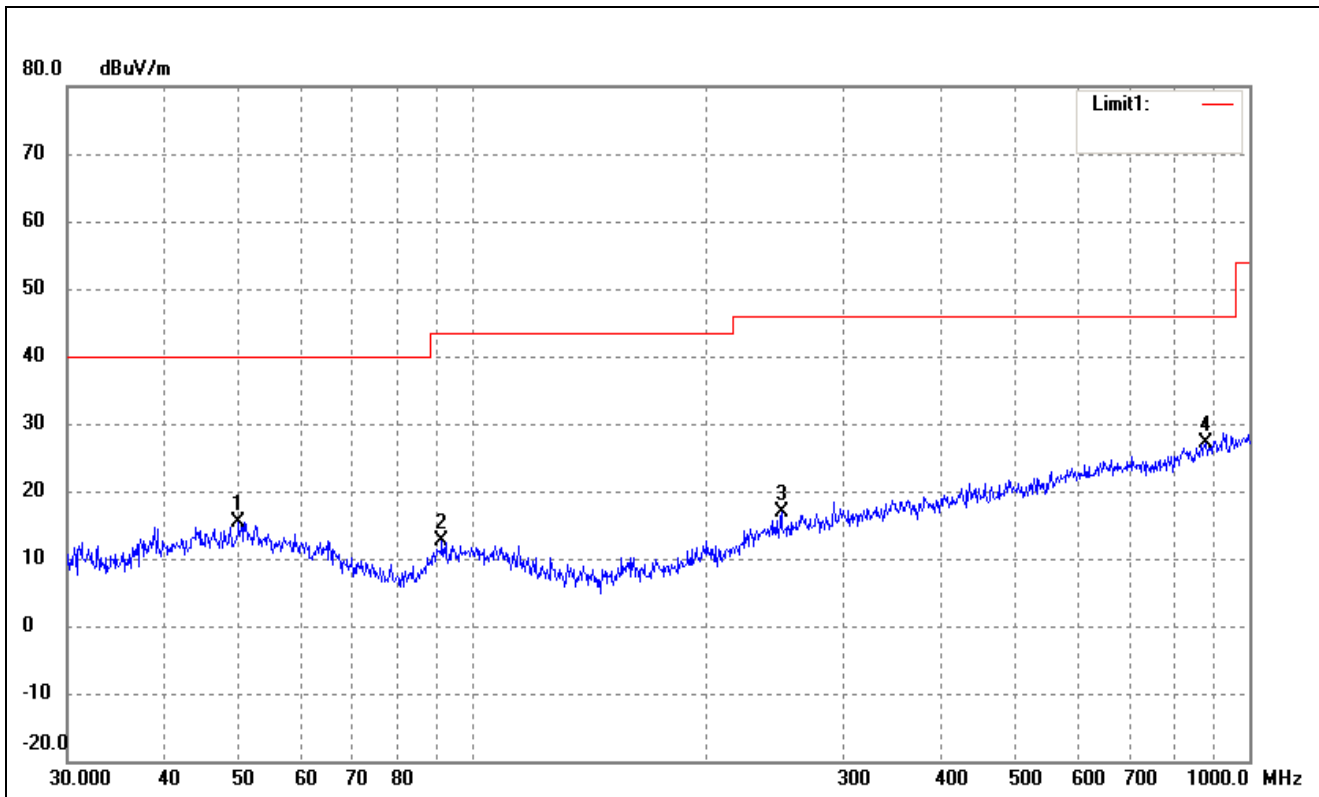


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.8814	27.03	-11.60	15.43	40.00	-24.57	155	100	peak
2	91.1746	26.16	-13.63	12.53	43.50	-30.97	325	100	peak
3	249.4250	26.71	-9.84	16.87	46.00	-29.13	78	100	peak
4	878.3214	26.42	0.59	27.01	46.00	-18.99	277	100	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

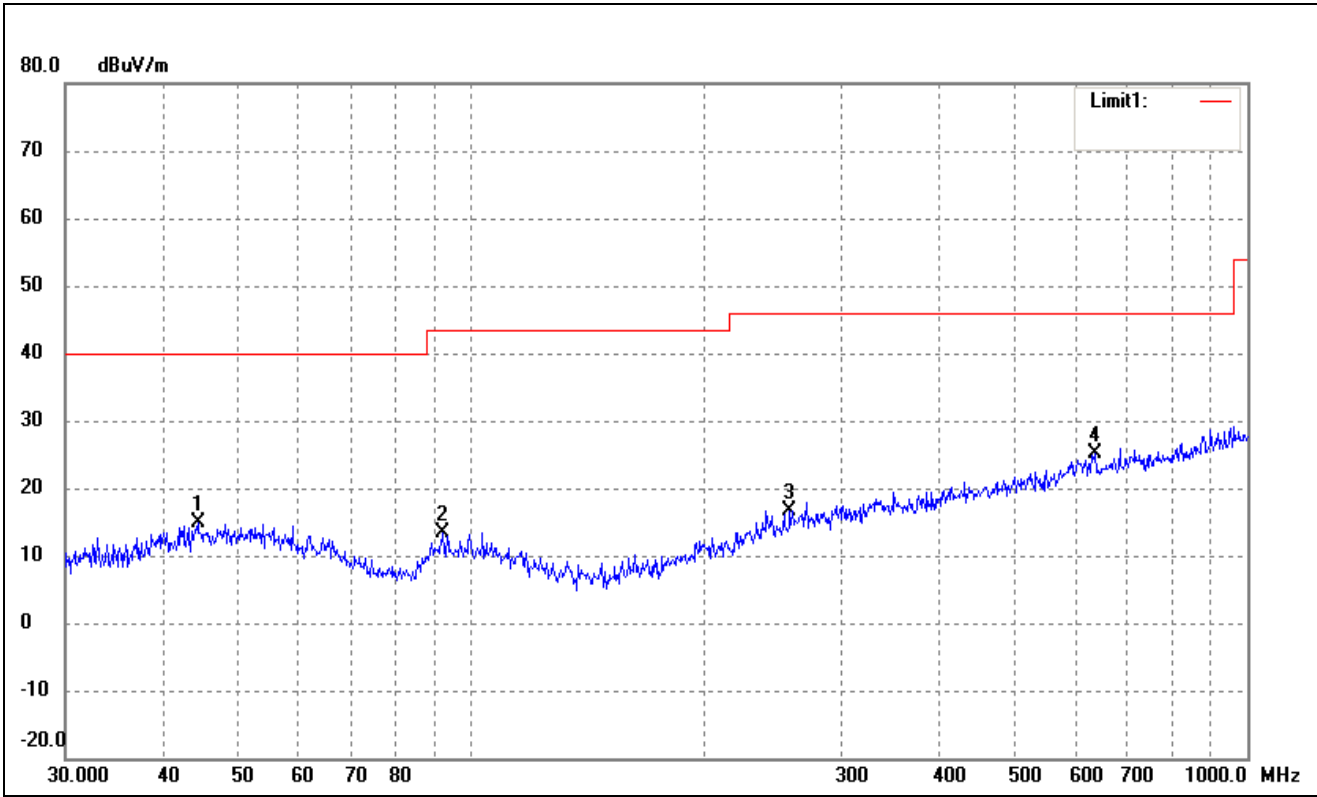


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.4308	26.86	-12.00	14.86	40.00	-25.14	198	100	peak
2	91.8163	27.14	-13.76	13.38	43.50	-30.12	197	100	peak
3	257.4222	26.15	-9.46	16.69	46.00	-29.31	127	100	peak
4	636.1340	27.95	-2.70	25.25	46.00	-20.75	111	100	peak

802.11n-HT20			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

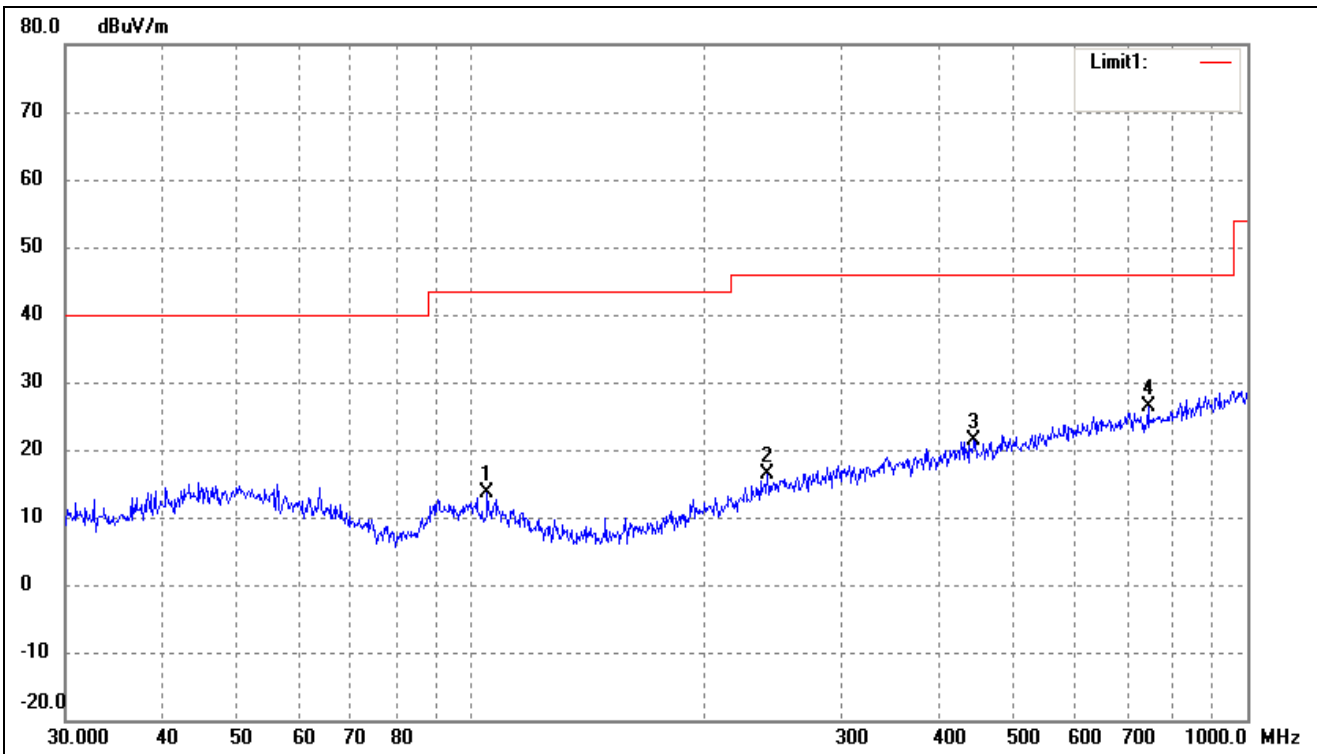


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	104.9033	26.99	-13.39	13.60	43.50	-29.90	318	100	peak
2	240.8304	26.27	-10.01	16.26	46.00	-29.74	99	100	peak
3	444.8514	27.48	-6.16	21.32	46.00	-24.68	172	100	peak
4	744.8661	28.36	-1.95	26.41	46.00	-19.59	112	100	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Horizontal

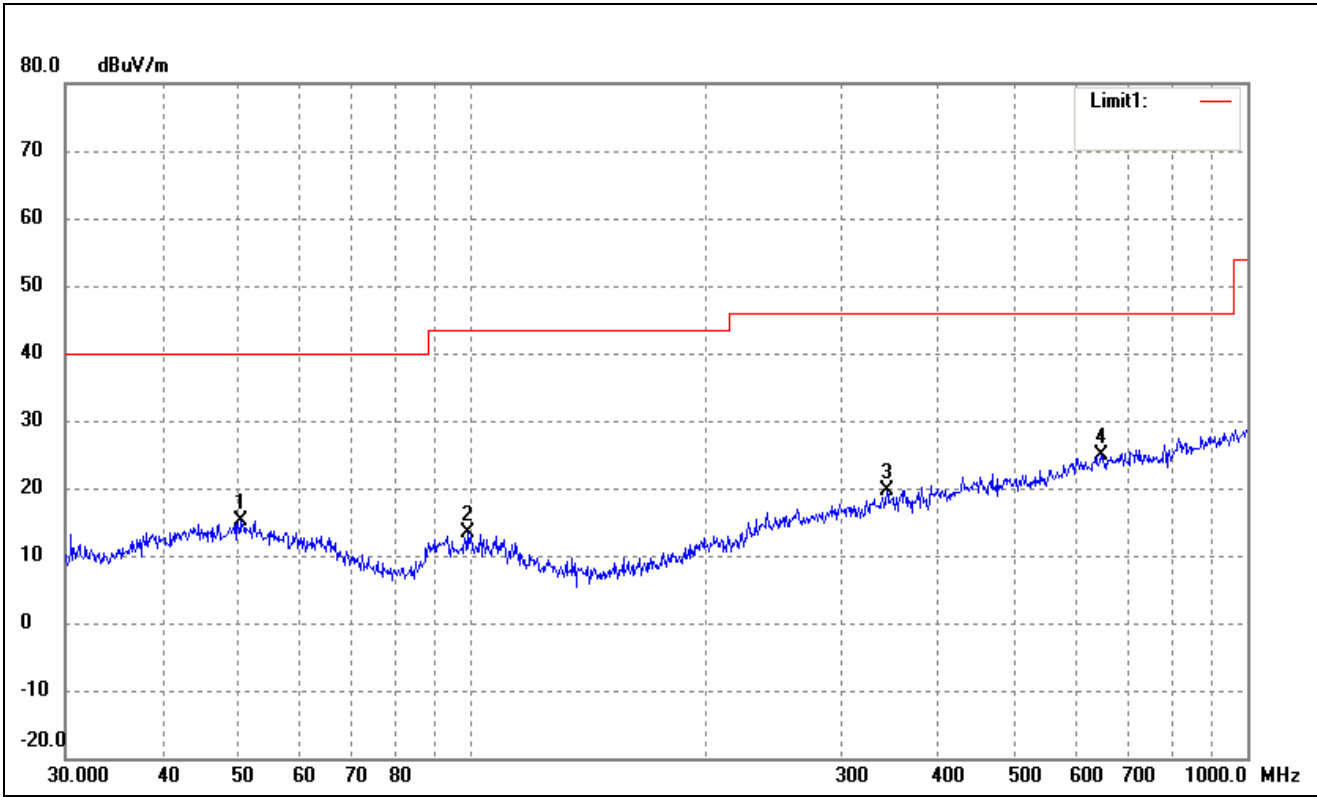


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.4089	26.79	-11.60	15.19	40.00	-24.81	337	100	peak
2	98.8326	27.28	-13.94	13.34	43.50	-30.16	117	100	peak
3	343.1800	26.81	-7.17	19.64	46.00	-26.36	67	100	peak
4	647.3856	27.46	-2.51	24.95	46.00	-21.05	202	100	peak

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical

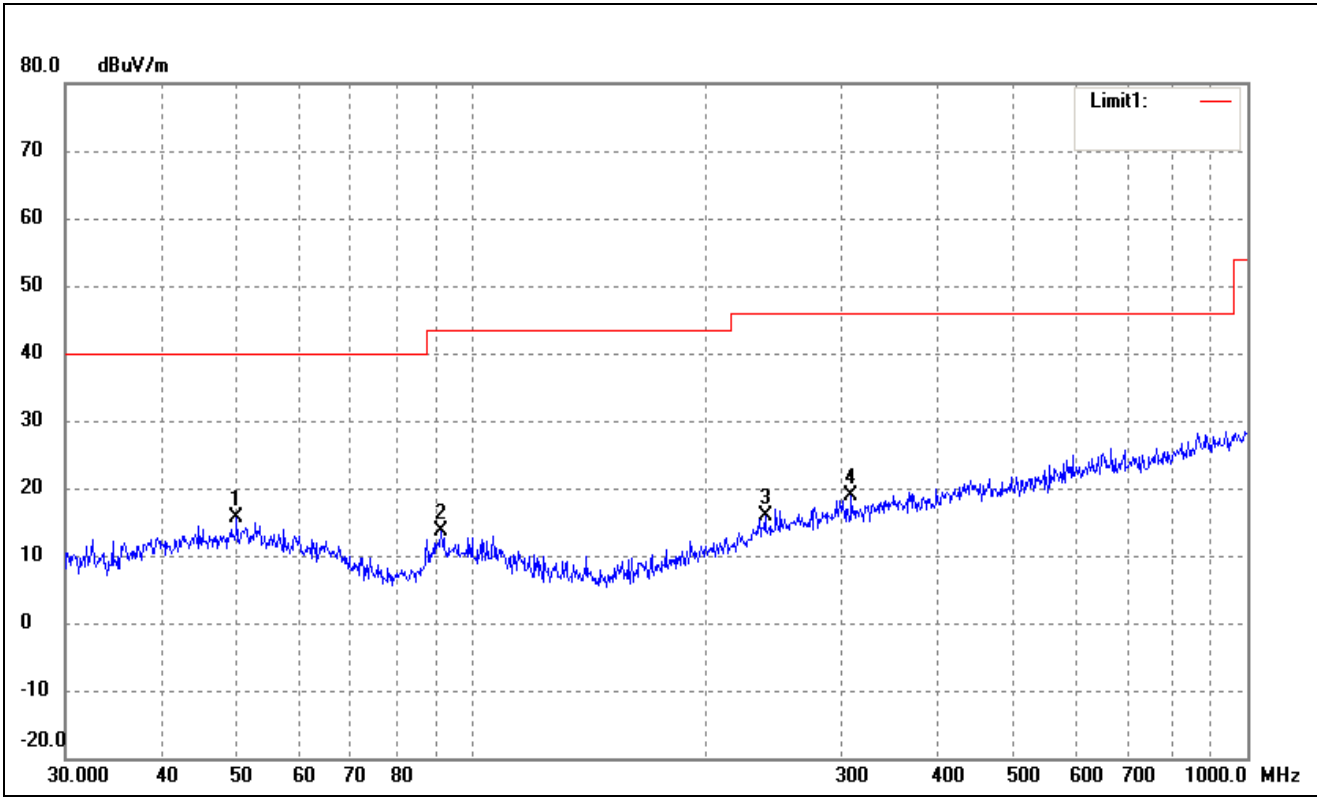


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.8814	27.13	-11.60	15.53	40.00	-24.47	52	100	peak
2	91.4949	27.26	-13.70	13.56	43.50	-29.94	197	100	peak
3	239.1473	26.04	-10.11	15.93	46.00	-30.07	106	100	peak
4	308.9126	27.29	-8.30	18.99	46.00	-27.01	108	100	peak

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal

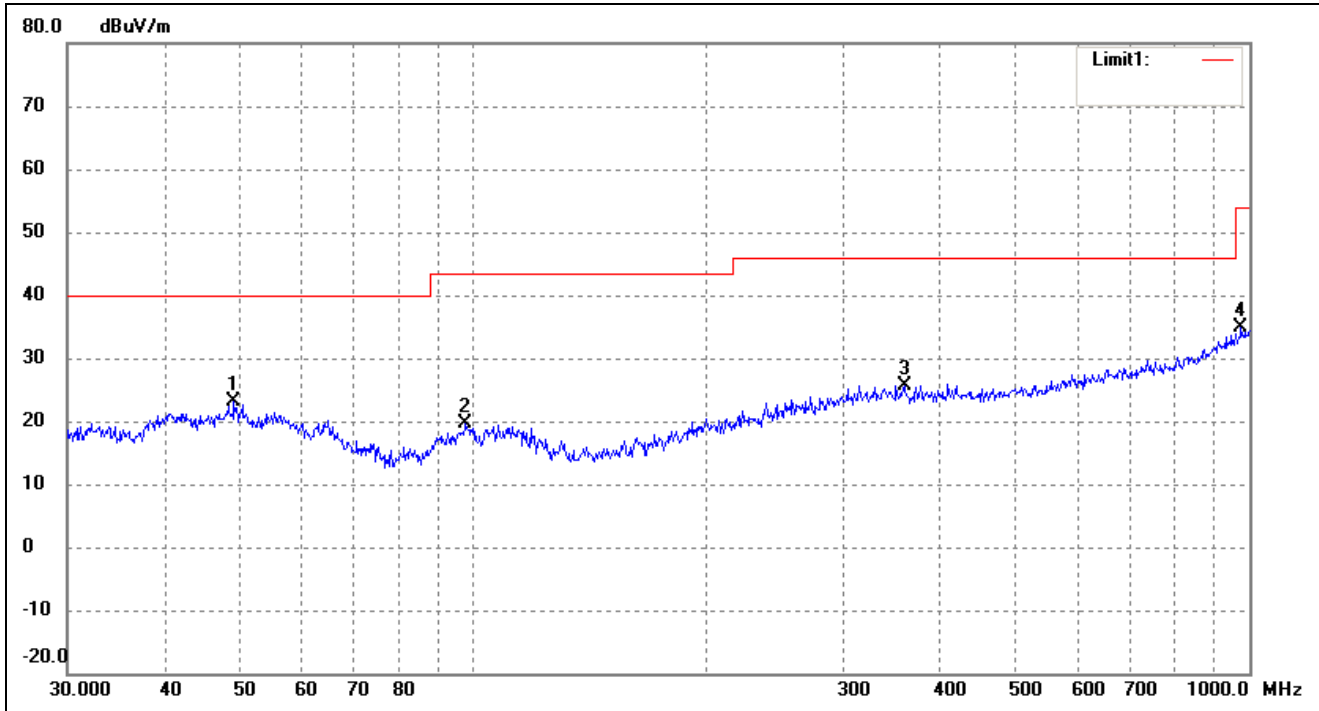

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.1866	35.98	-12.86	23.12	40.00	-16.88	95	100	peak
2	97.7983	34.47	-14.78	19.69	43.50	-23.81	195	100	peak
3	359.1860	32.51	-6.78	25.73	46.00	-20.27	55	100	peak
4	975.7529	31.38	3.53	34.91	54.00	-19.09	138	100	peak

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

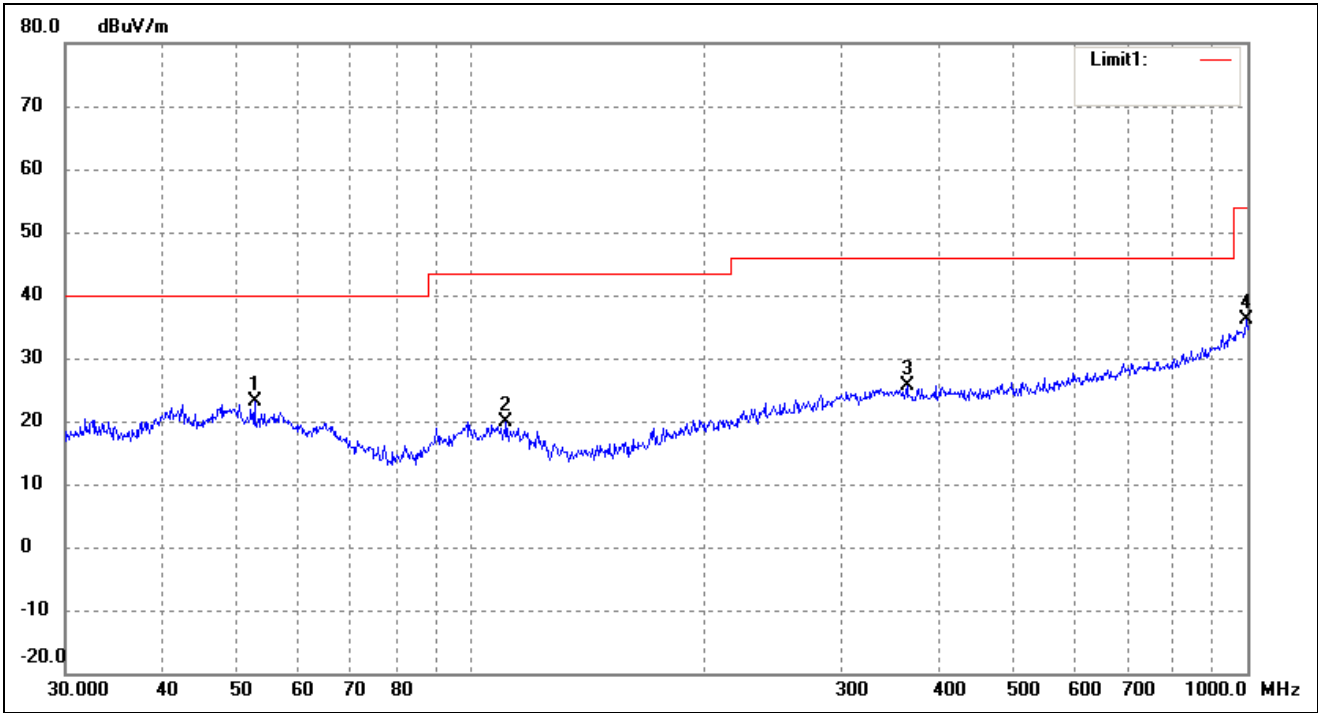


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.5753	36.09	-12.85	23.24	40.00	-16.76	349	100	peak
2	110.9571	34.01	-14.08	19.93	43.50	-23.57	115	100	peak
3	364.2595	32.64	-6.90	25.74	46.00	-20.26	139	100	peak
4	996.4996	32.20	3.98	36.18	54.00	-17.82	105	100	peak




➤ 5725-5850MHz

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

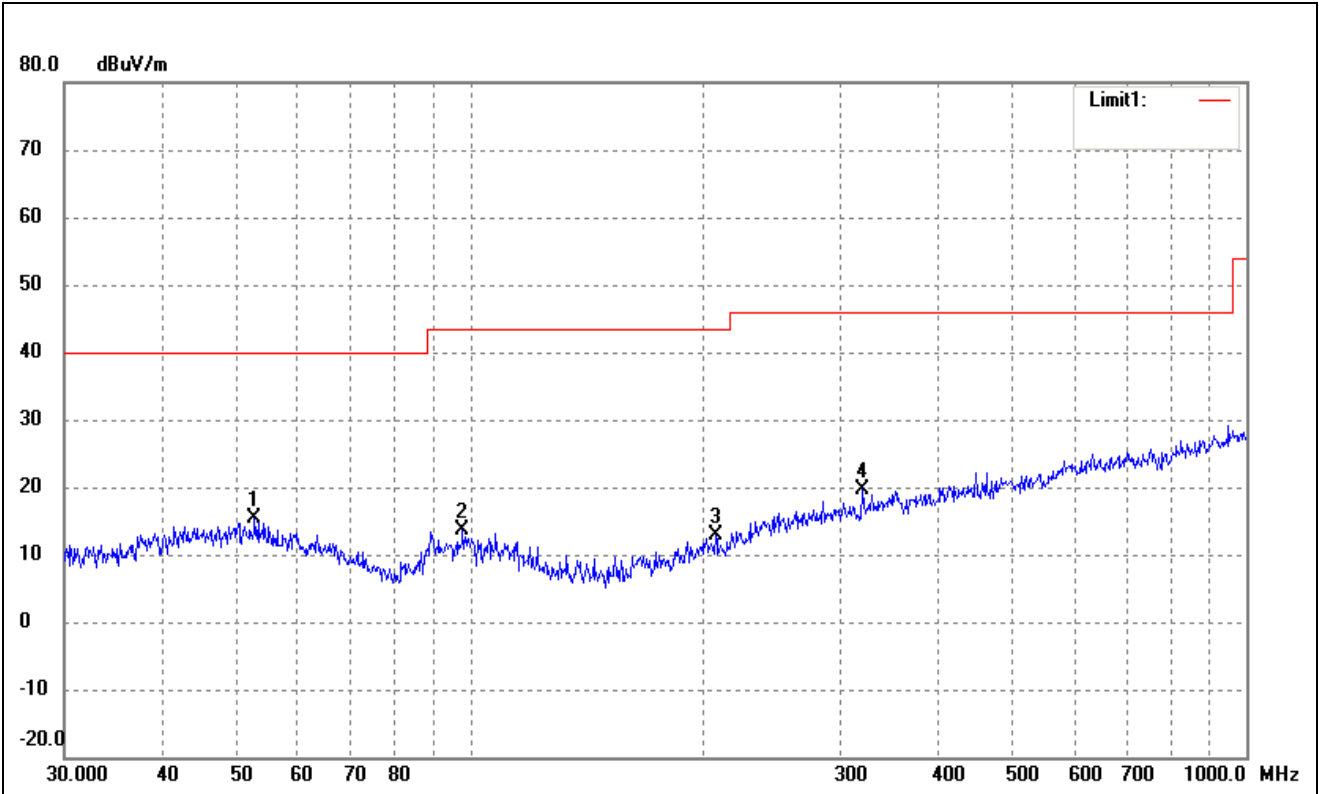


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.7600	27.12	-11.69	15.43	40.00	-24.57	89	100	peak
2	97.7983	27.76	-14.06	13.70	43.50	-29.80	126	100	peak
3	207.1226	25.97	-13.09	12.88	43.50	-30.62	88	100	peak
4	319.9370	27.72	-8.18	19.54	46.00	-26.46	117	100	peak

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

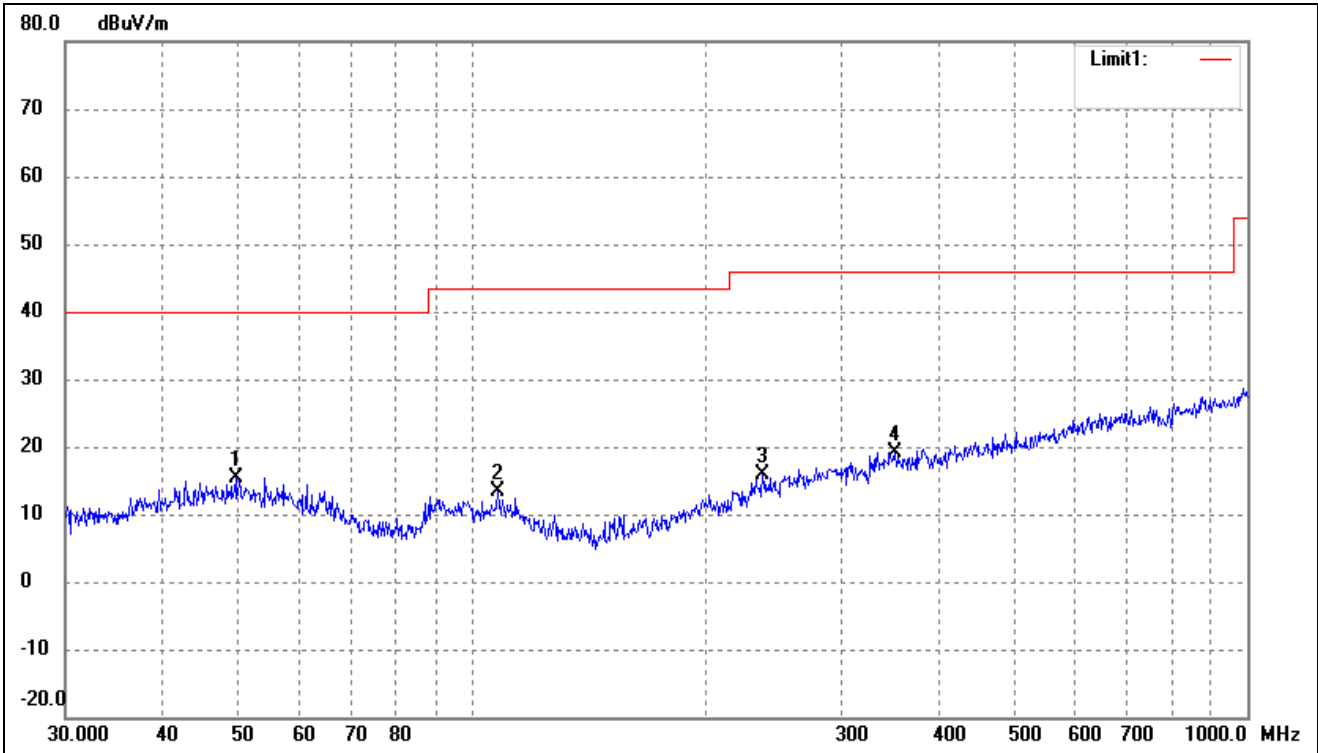


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.7068	26.90	-11.61	15.29	40.00	-24.71	115	100	peak
2	108.2667	27.14	-13.70	13.44	43.50	-30.06	220	100	peak
3	237.4760	26.19	-10.35	15.84	46.00	-30.16	80	100	peak
4	351.7079	26.14	-6.92	19.22	46.00	-26.78	152	100	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal

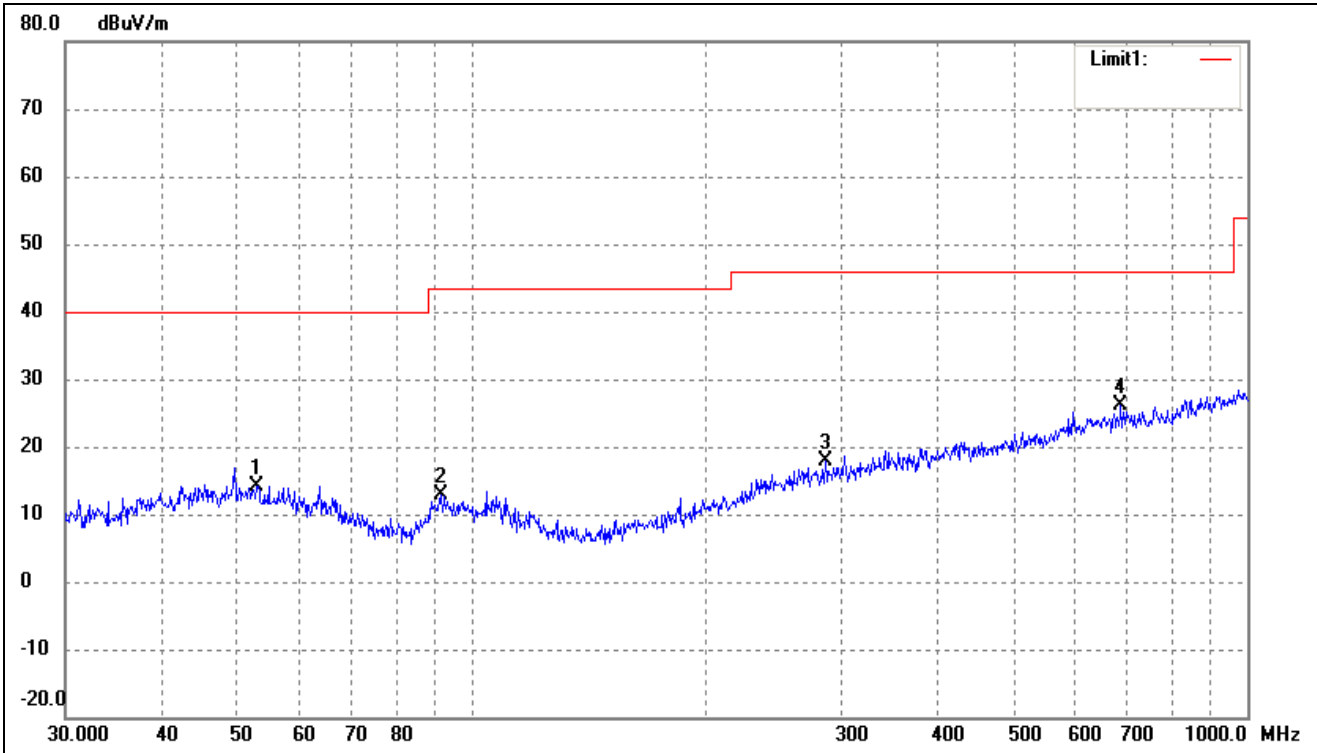


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.9453	25.97	-11.72	14.25	40.00	-25.75	197	100	peak
2	91.4949	26.62	-13.70	12.92	43.50	-30.58	51	100	peak
3	285.9778	26.58	-8.76	17.82	46.00	-28.18	137	100	peak
4	687.1507	28.23	-2.08	26.15	46.00	-19.85	358	100	peak

802.11n-HT20			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

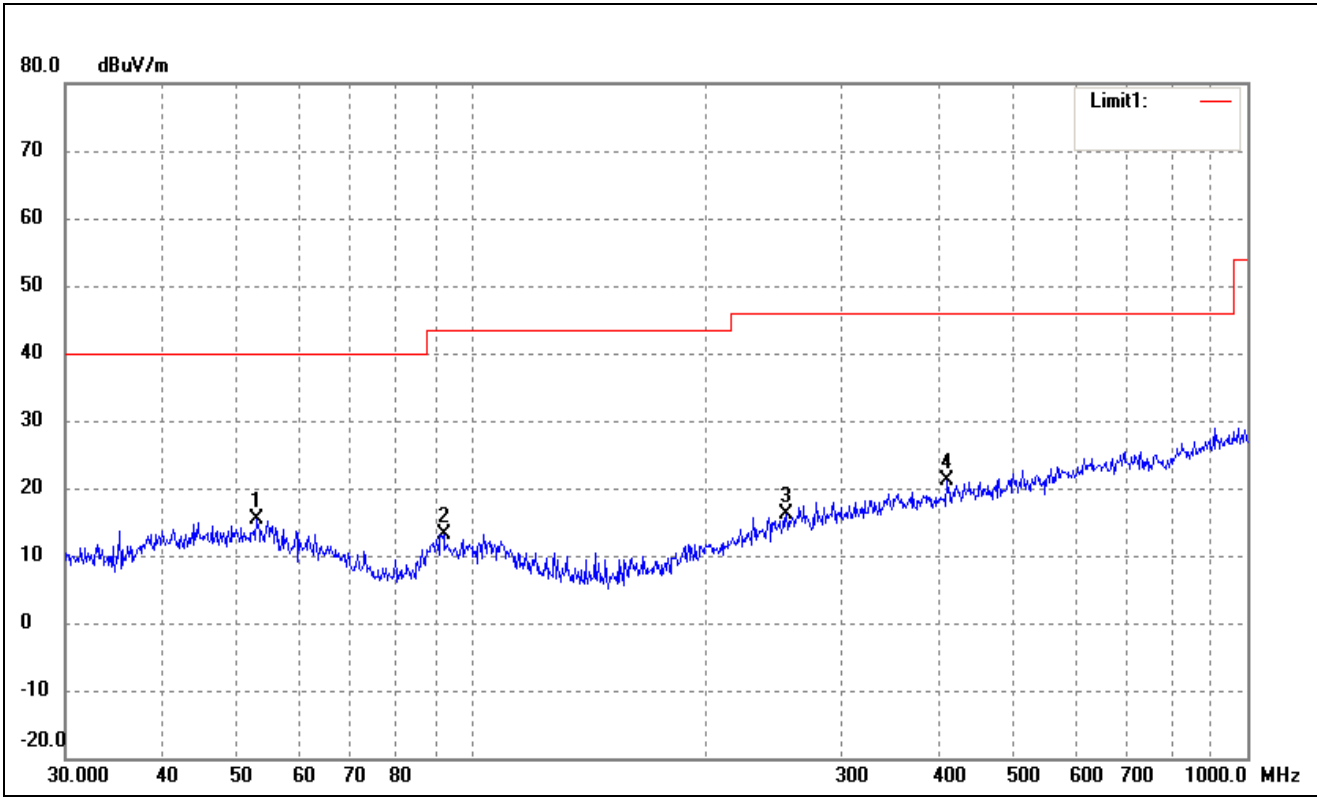


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.9453	27.10	-11.72	15.38	40.00	-24.62	96	100	peak
2	92.1388	27.04	-13.83	13.21	43.50	-30.29	185	100	peak
3	254.7284	25.77	-9.59	16.18	46.00	-29.82	51	100	peak
4	410.3825	27.55	-6.48	21.07	46.00	-24.93	134	100	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Horizontal

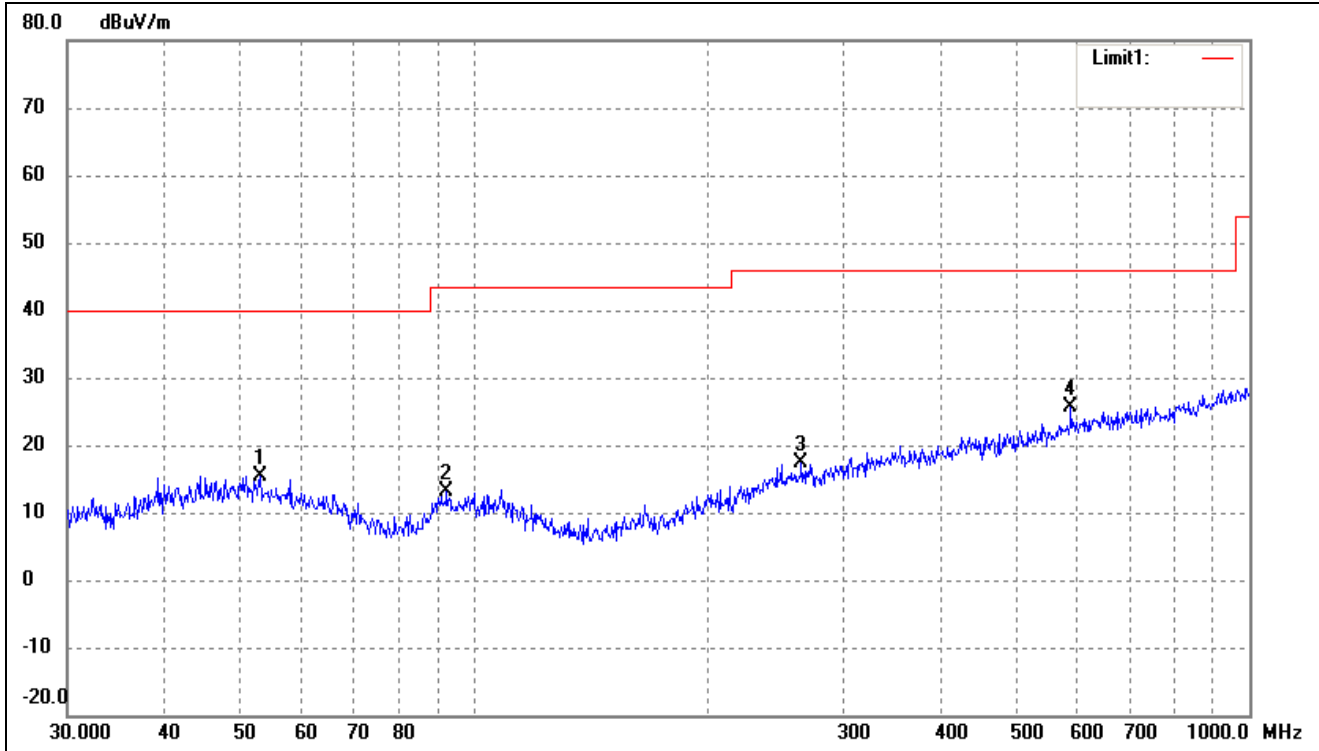


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	53.1313	27.24	-11.75	15.49	40.00	-24.51	340	100	peak
2	92.4624	26.94	-13.89	13.05	43.50	-30.45	98	100	peak
3	264.7457	26.45	-8.95	17.50	46.00	-28.50	191	100	peak
4	588.9051	28.99	-3.40	25.59	46.00	-20.41	95	100	peak

802.11n-HT40			
Test Channel	5755MHz(worst case)	Polarity:	Vertical

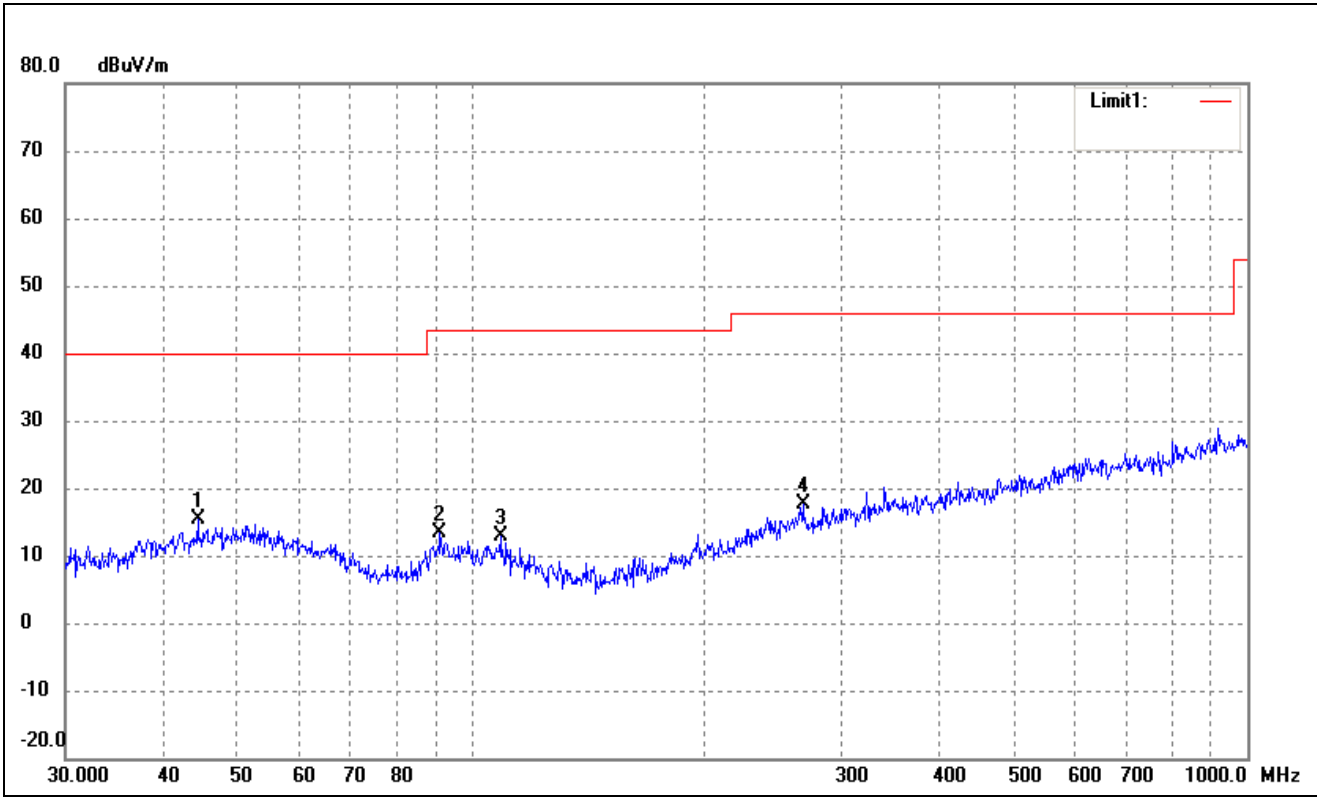


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.4308	27.32	-12.00	15.32	40.00	-24.68	293	100	peak
2	91.1746	27.08	-13.63	13.45	43.50	-30.05	273	100	peak
3	109.0286	26.58	-13.76	12.82	43.50	-30.68	80	100	peak
4	267.5455	26.72	-9.01	17.71	46.00	-28.29	179	100	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal

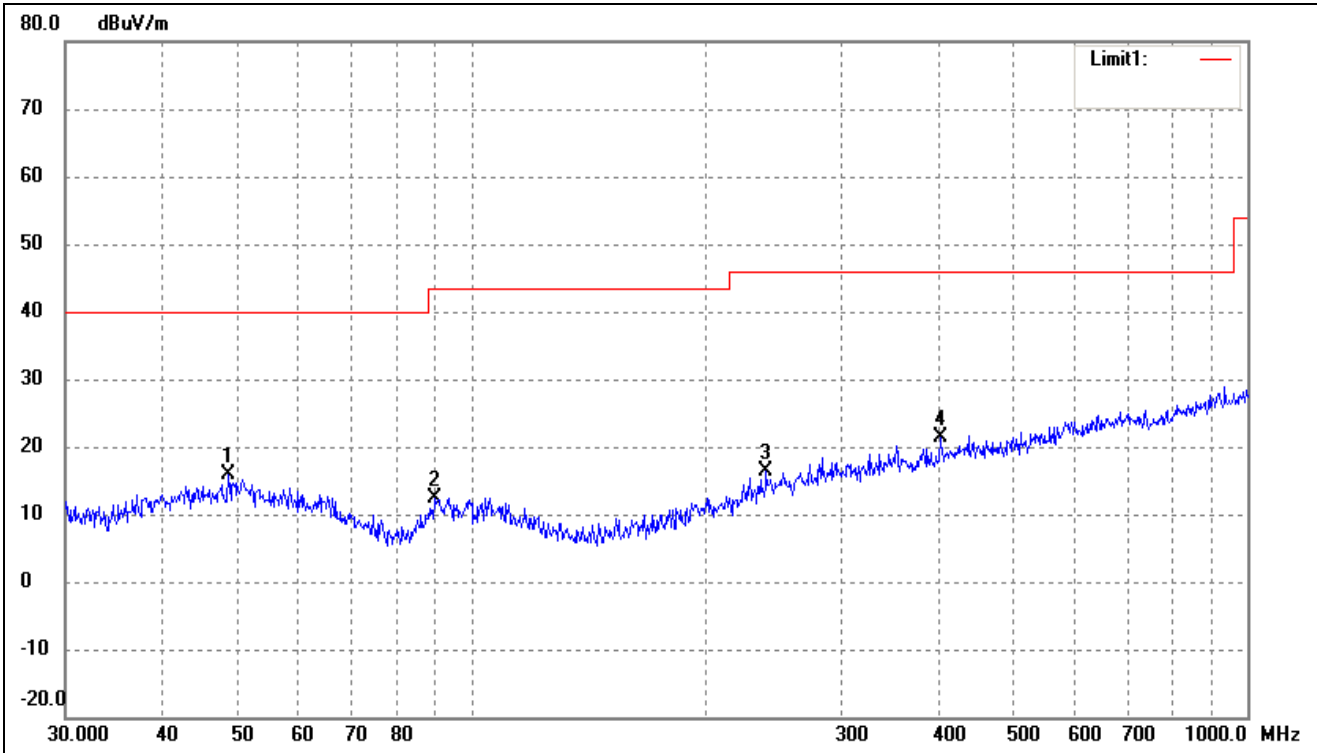

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.6719	27.52	-11.64	15.88	40.00	-24.12	230	100	peak
2	89.9047	25.91	-13.47	12.44	43.50	-31.06	115	100	peak
3	239.9874	26.36	-9.98	16.38	46.00	-29.62	57	100	peak
4	401.8385	28.01	-6.69	21.32	46.00	-24.68	120	100	peak

802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Vertical

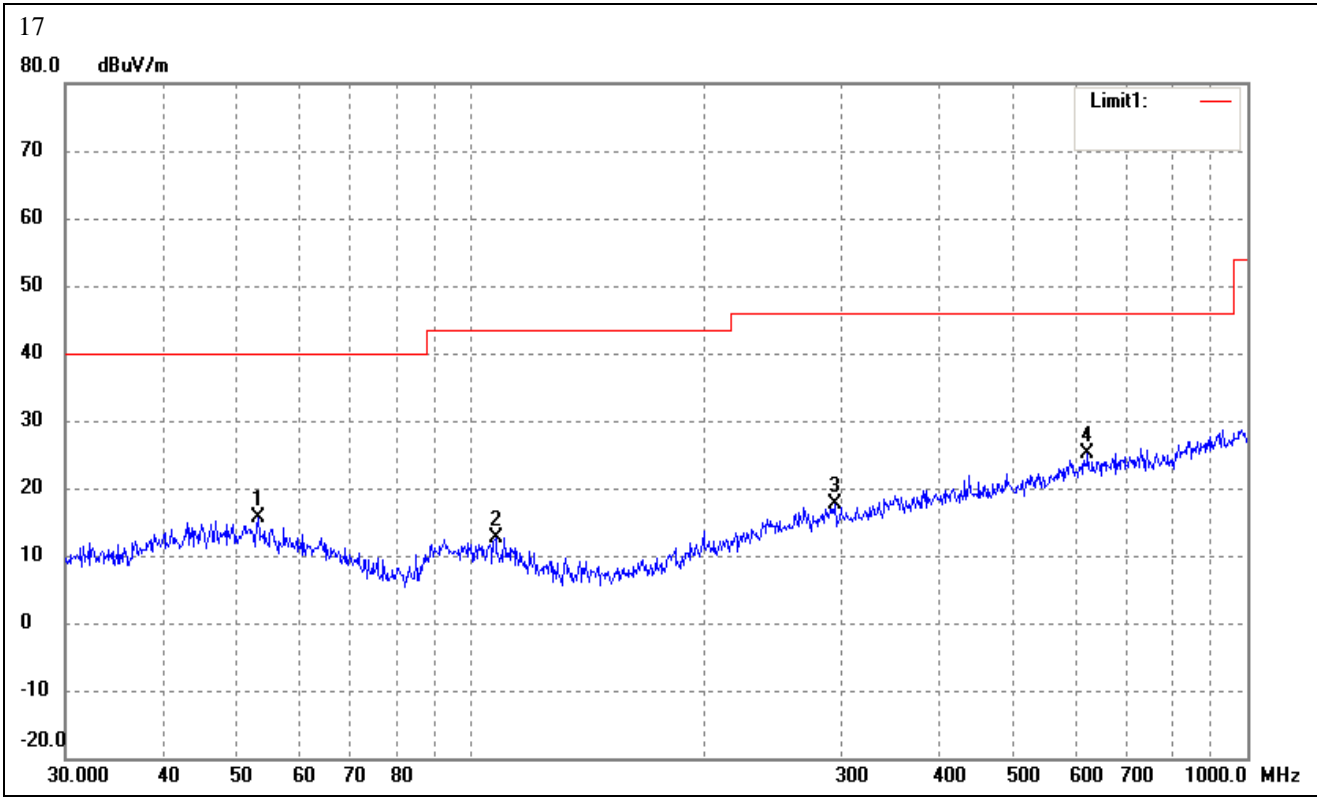


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	53.1313	27.41	-11.75	15.66	40.00	-24.34	91	100	peak
2	107.5101	26.36	-13.62	12.74	43.50	-30.76	106	100	peak
3	294.1137	25.80	-8.23	17.57	46.00	-28.43	148	100	peak
4	622.8900	28.14	-2.96	25.18	46.00	-20.82	102	100	peak




➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

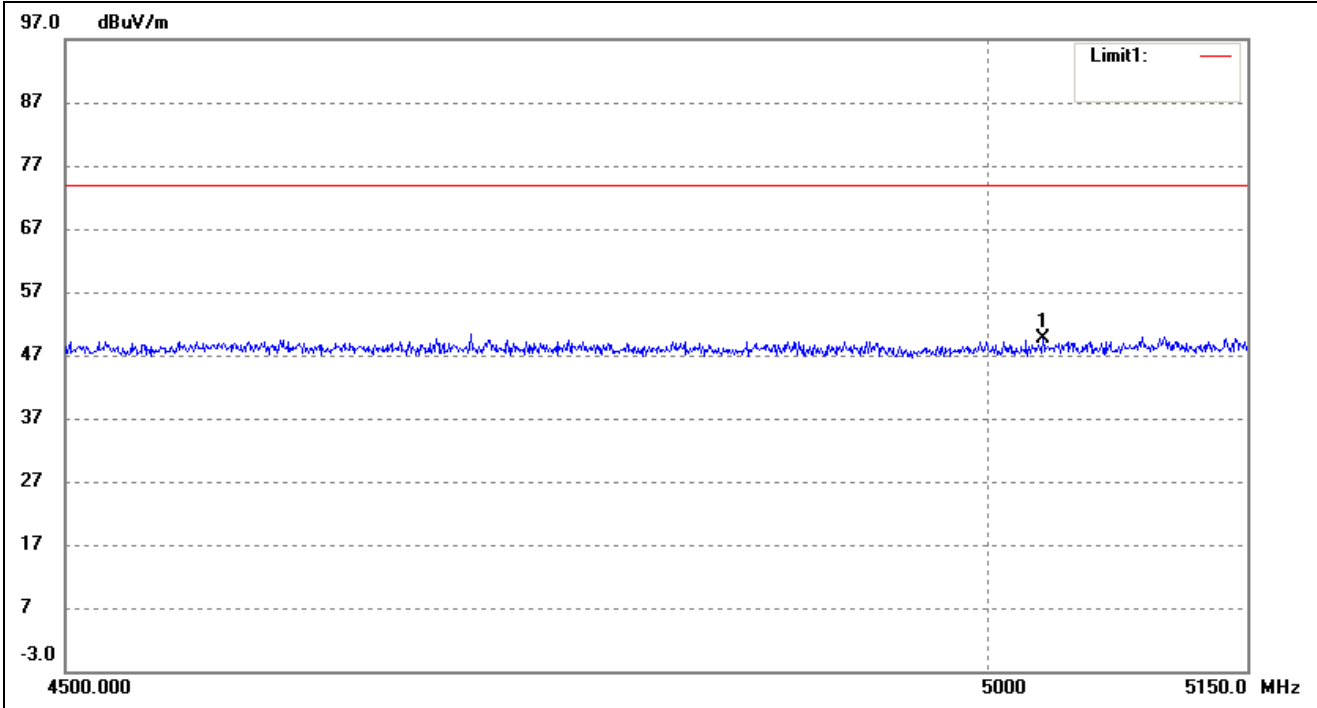


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5031.186	52.91	-3.29	49.62	74.00	-24.38	160	100	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

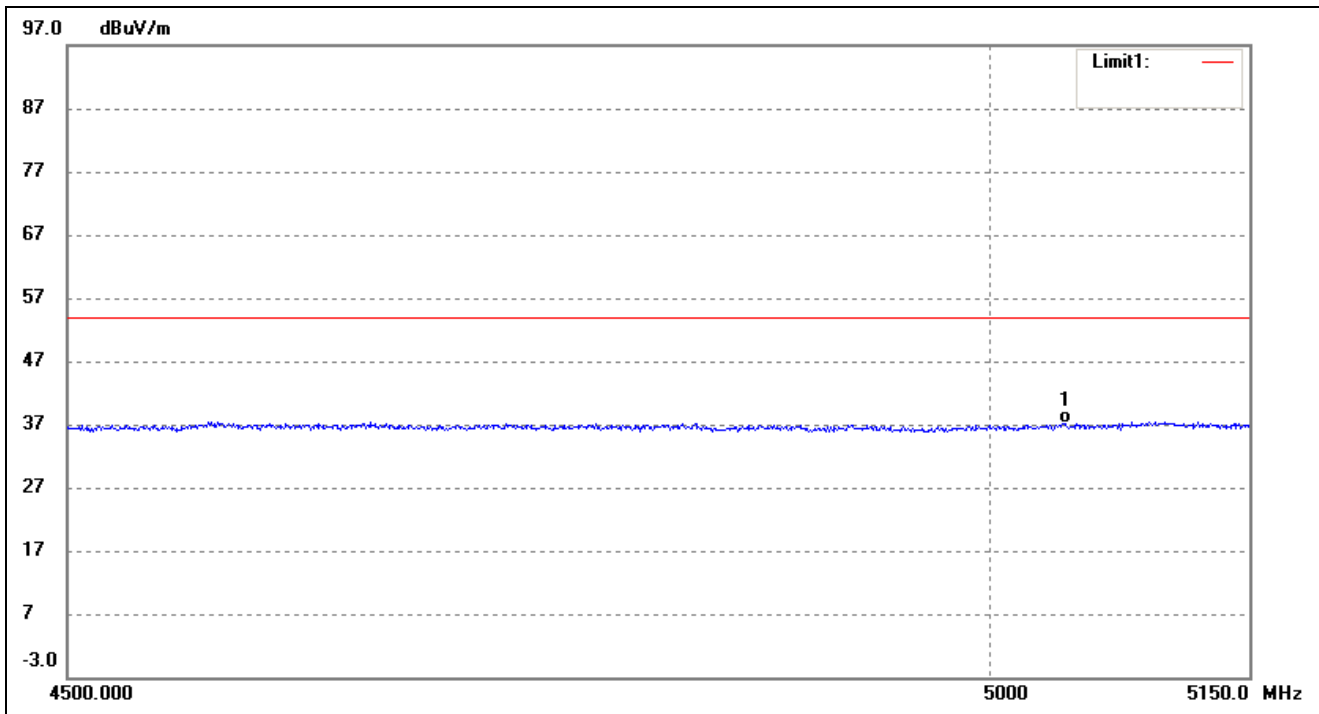


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5042.739	40.46	-3.26	37.20	54.00	-16.80	145	100	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

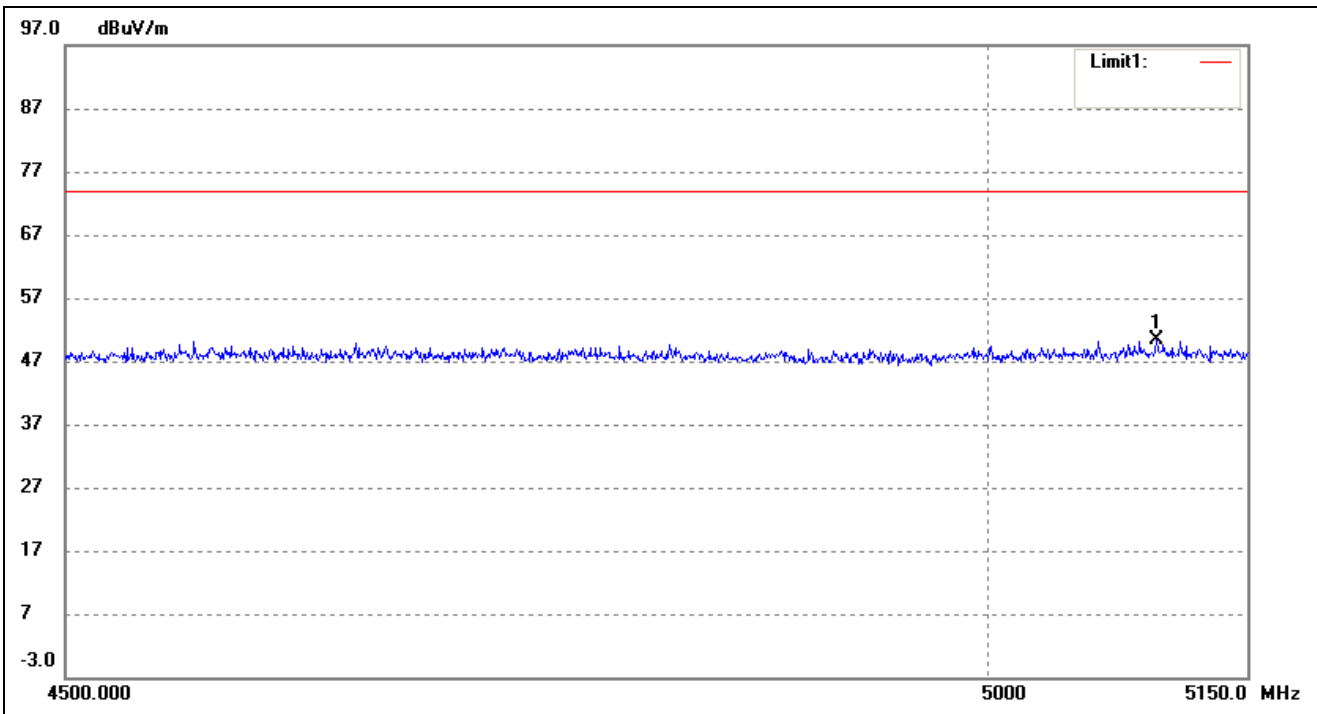


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5096.775	53.51	-3.12	50.39	74.00	-23.61	150	100	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

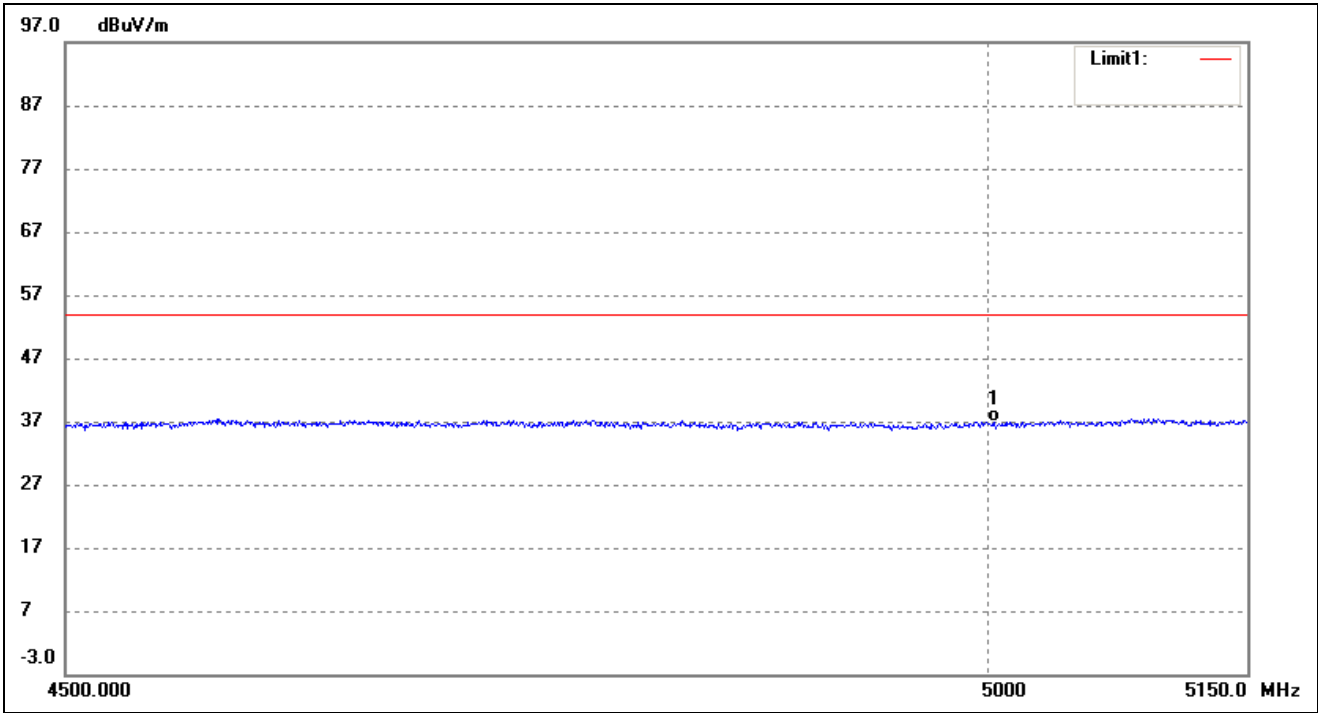


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5003.431	40.24	-3.36	36.88	54.00	-17.12	98	100	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

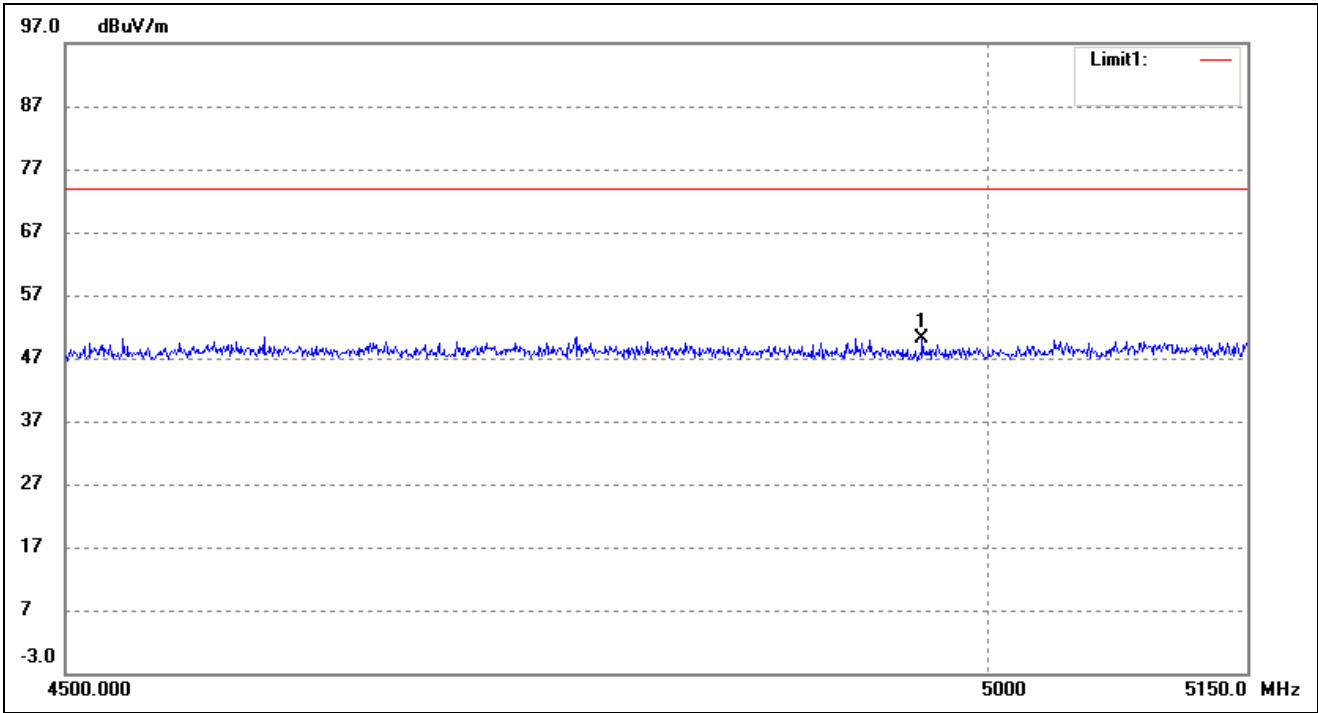


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4962.422	53.46	-3.40	50.06	74.00	-23.94	116	100	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

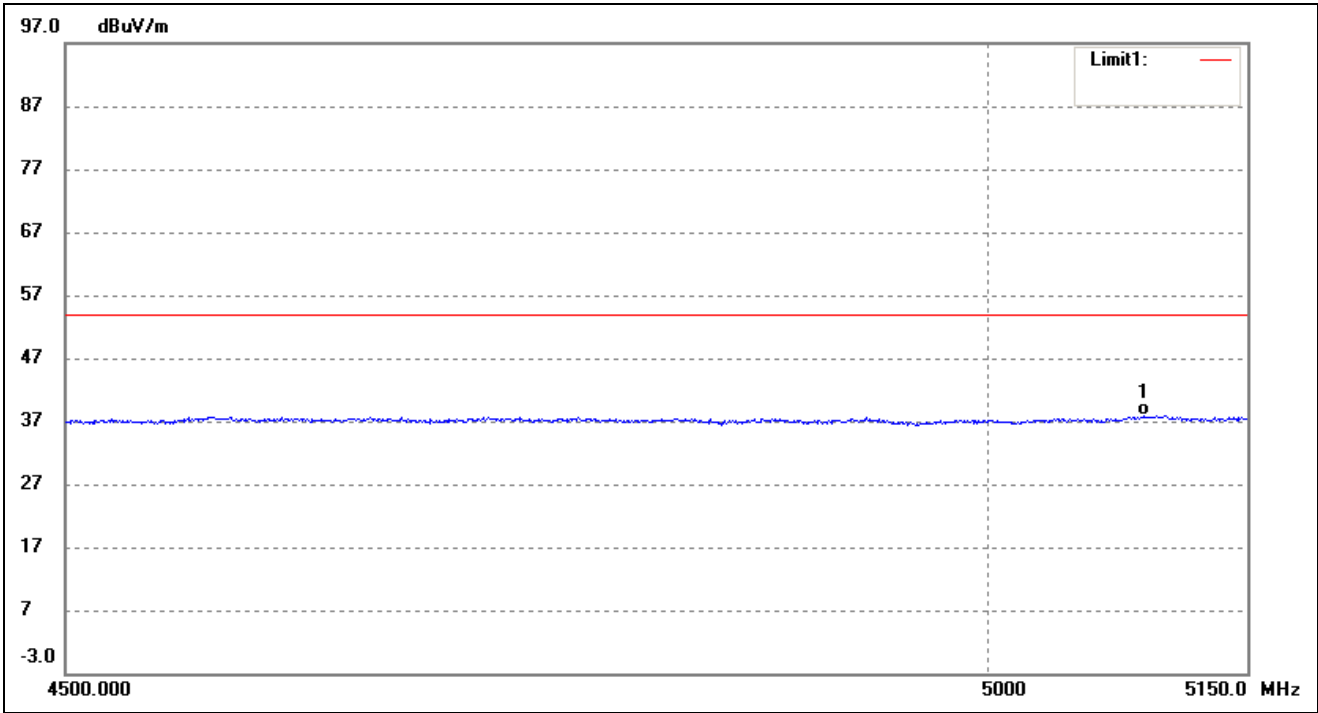


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5089.903	40.96	-3.15	37.81	54.00	-16.19	179	100	AVG

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

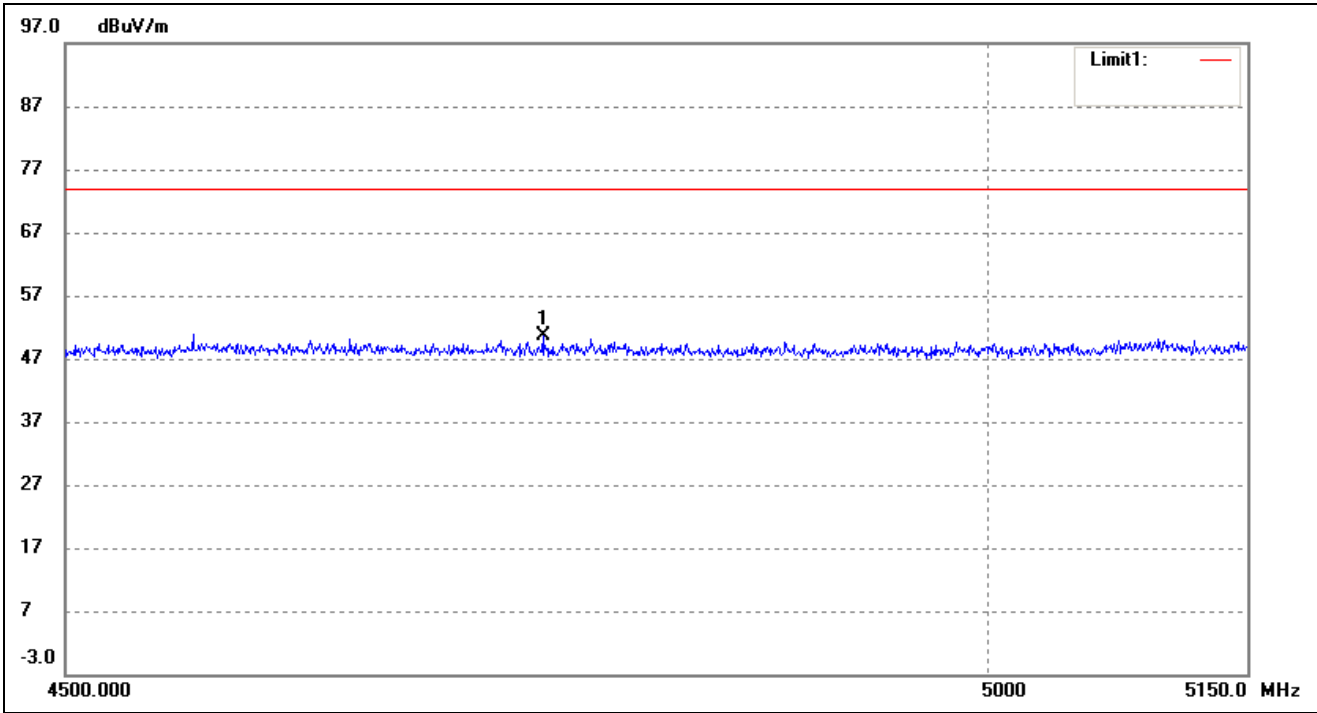

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	4752.091	54.17	-3.57	50.60	74.00	-23.40	32	100	peak

802.11ac-HT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

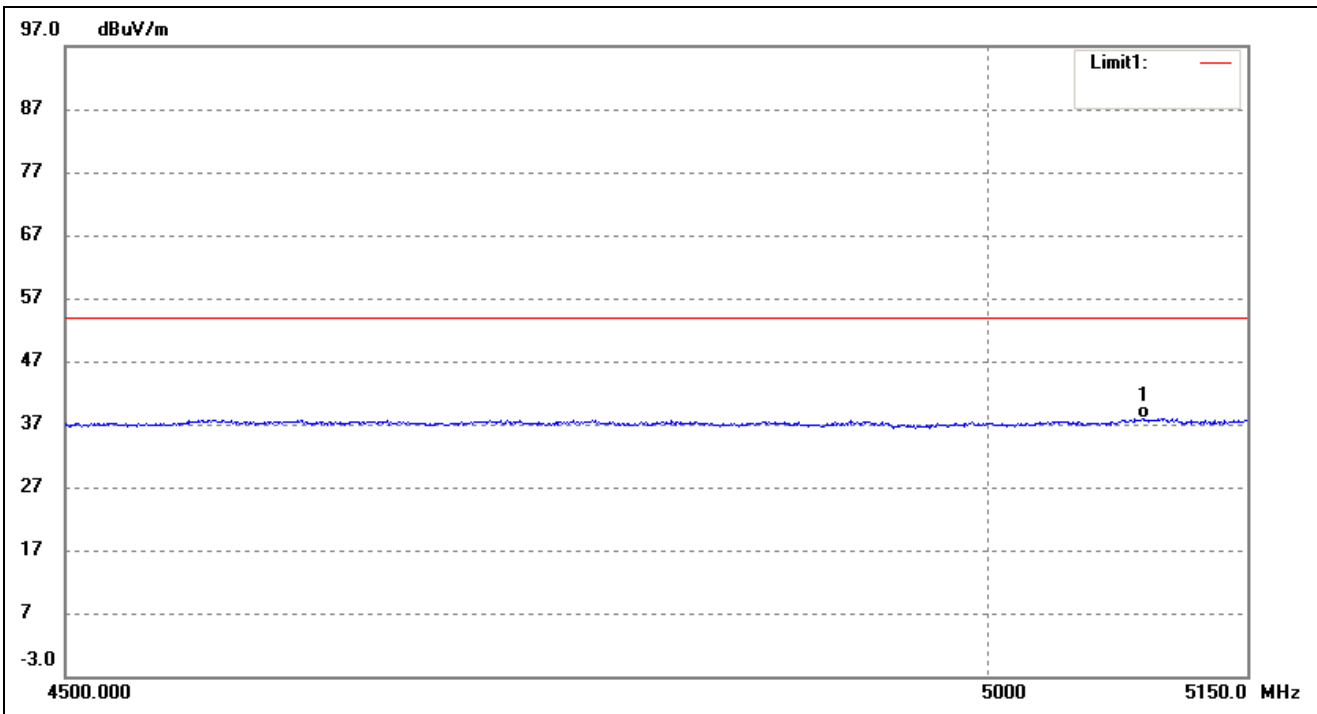

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	5089.216	41.09	-3.15	37.94	54.00	-16.06	69	100	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.



- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	-50.67	7.92	-42.75	-30.00	-12.75	H	PK
10360	-58.00	13.64	-44.36	-30.00	-14.36	H	AV
10360	-49.62	7.92	-41.70	-30.00	-11.70	H	PK
10360	-56.28	13.97	-42.31	-30.00	-12.31	H	AV
High Channel (5240MHz)							
10480	-51.13	8.27	-42.86	-30.00	-12.86	H	PK
10480	-58.44	13.73	-44.71	-30.00	-14.71	H	AV
10480	-49.69	8.27	-41.42	-30.00	-11.42	H	PK
10480	-54.69	13.73	-40.96	-30.00	-10.96	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	-51.46	7.92	-43.54	-30.00	-13.54	H	PK
11490	-55.70	13.64	-42.06	-30.00	-12.06	H	AV
11490	-50.63	7.92	-42.71	-30.00	-12.71	H	PK
11490	-54.20	13.97	-40.23	-30.00	-10.23	H	AV
High Channel (5825MHz)							
11610	-24.21	8.27	-15.94	-30.00	14.06	H	PK
11610	-56.50	13.73	-42.77	-30.00	-12.77	H	AV
11610	-52.34	8.27	-44.07	-30.00	-14.07	H	PK
11610	-55.76	13.73	-42.03	-30.00	-12.03	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-57.61	-27
Highest	Above 5350	-55.48	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-54.88	-27
	5715 to 5725	-55.51	-17
Highest	5850 to 5860	-54.51	-17
	Above 5860	-55.04	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	-53.76	7.92	-45.84	-30.00	-15.84	H	PK
10360	-56.03	13.64	-42.39	-30.00	-12.39	H	AV
10360	-49.44	7.92	-41.52	-30.00	-11.52	H	PK
10360	-58.14	13.97	-44.17	-30.00	-14.17	H	AV
High Channel (5240MHz)							
10480	-51.35	8.27	-43.08	-30.00	-13.08	H	PK
10480	-56.47	13.73	-42.74	-30.00	-12.74	H	AV
10480	-51.88	8.27	-43.61	-30.00	-13.61	H	PK
10480	-54.59	13.73	-40.86	-30.00	-10.86	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	-52.13	7.92	-44.21	-30.00	-14.21	H	PK
11490	-55.43	13.64	-41.79	-30.00	-11.79	H	AV
11490	-51.46	7.92	-43.54	-30.00	-13.54	H	PK
11490	-56.58	13.97	-42.61	-30.00	-12.61	H	AV
High Channel (5825MHz)							
11610	-51.04	8.27	-42.77	-30.00	-12.77	H	PK
11610	-55.14	13.73	-41.41	-30.00	-11.41	H	AV
11610	-53.33	8.27	-45.06	-30.00	-15.06	H	PK
11610	-56.03	13.73	-42.30	-30.00	-12.30	H	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-56.47	-27
Highest	Above 5350	-55.71	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-54.94	-27
	5715 to 5725	-54.69	-17
Highest	5850 to 5860	-54.60	-17
	Above 5860	-54.39	-27

Note: the data just list the worst cases

*Note: this EUT was tested in the low, high channel and the worst case position data was reported.*

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5190MHz)							
10380	-50.29	7.92	-42.37	-30.00	-12.37	H	PK
10380	-57.80	13.64	-44.16	-30.00	-14.16	H	AV
10380	-49.45	7.92	-41.53	-30.00	-11.53	H	PK
10380	-58.25	13.97	-44.28	-30.00	-14.28	H	AV
High Channel (5230MHz)							
10460	-51.06	8.27	-42.79	-30.00	-12.79	H	PK
10460	-55.15	13.73	-41.42	-30.00	-11.42	H	AV
10460	-51.79	8.27	-43.52	-30.00	-13.52	H	PK
10460	-58.52	13.73	-44.79	-30.00	-14.79	H	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5755MHz)							
11510	-49.44	7.92	-41.52	-30.00	-11.52	H	PK
11510	-58.43	13.64	-44.79	-30.00	-14.79	H	AV
11510	-51.23	7.92	-43.31	-30.00	-13.31	H	PK
11510	-56.81	13.97	-42.84	-30.00	-12.84	H	AV
High Channel (5795MHz)							
11590	-51.81	8.27	-43.54	-30.00	-13.54	H	PK
11590	-55.82	13.73	-42.09	-30.00	-12.09	H	AV
11590	-50.09	8.27	-41.82	-30.00	-11.82	H	PK
11590	-59.10	13.73	-45.37	-30.00	-15.37	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-56.94	-27
Highest	Above 5350	-55.76	-27

Note: the data just list the worst cases

## ➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-55.36	-27
	5715 to 5725	-55.49	-17
Highest	5850 to 5860	-54.62	-17
	Above 5860	-54.40	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	-49.27	7.92	-41.35	-30.00	-11.35	H	PK
10420	-56.43	13.64	-42.79	-30.00	-12.79	H	AV
10420	-48.76	7.92	-40.84	-30.00	-10.84	H	PK
10420	-54.73	13.97	-40.76	-30.00	-10.76	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	-51.06	8.27	-42.79	-30.00	-12.79	H	PK
11550	-56.82	13.73	-43.09	-30.00	-13.09	H	AV
11550	-49.84	8.27	-41.57	-30.00	-11.57	H	PK
11550	-56.19	13.73	-42.46	-30.00	-12.46	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-56.13	-27
Highest	Above 5350	-56.14	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-55.21	-27
	5715 to 5725	-54.63	-17
Highest	5850 to 5860	-54.40	-17
	Above 5860	-54.97	-27

Note: the data just list the worst cases

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 10. Frequency Stability

### 10.1 Standard Applicable

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

### 10.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

### 10.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	136	0.026154
100%		-20	135	0.025962
100%		-10	129	0.024808
100%		0	134	0.025769
100%		+10	129	0.024808
100%		+20	135	0.025962
100%		+30	134	0.025769
100%		+40	136	0.026154
100%		+50	132	0.025385
Low Battery power		5.50	+20	134
High Battery power	4.50	+20	132	0.025385



<b>U-NII-1:5725-5850MHz worst case at 802.11a middle channel</b>				
Voltage(%)	Power(VDC)	TEMP( °C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	135	0.02334
100%		-20	133	0.02299
100%		-10	130	0.02247
100%		0	129	0.02230
100%		+10	135	0.02334
100%		+20	134	0.02316
100%		+30	133	0.02299
100%		+40	135	0.02334
100%		+50	129	0.02230
Low Battery power		5.50	+20	132
High Battery power	4.50	+20	135	0.02334

\*\*\*\*\* END OF REPORT \*\*\*\*\*