



Buddi Technical and User Publications
Device Installation Guide

Mini ID

Publication release date 11/12/2023 version 2.0_0.1



Mini ID



Introduction

Use this Guide to assist with set-up and operation of Mini ID. The Mini ID is a non-fitted device which is intended to be used as a remote monitor providing a configurable 'check in' verification method and flexibility of schedule and location of check in.

Mini ID can also provide alerts and reporting for location tracking.

Device verification scheduling and wearer profile reporting is set up remotely, refer to the Eagle User Guide.



Equipment



1 Mini ID

2 Mini ID cover*



3 USB charger cable

4 USB power adapter**



* The device cover is provided as an option

** The USB power adapter has attachments suitable for regional applications




Set-up Mini ID

Make sure Mini ID is ready for operation; charged and tested for communication response before instalment.

!Info Refer to the Eagle User Guides for remote alert and wearer profile actions

Active Mini ID - Enrolment

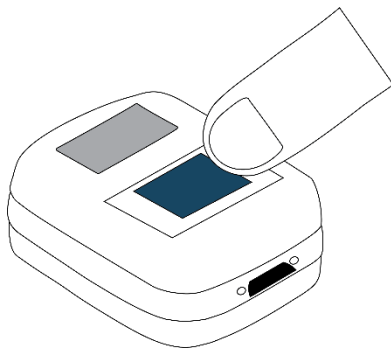

A Enrol a biometric profile to Mini ID

!Info SMS notification is sent as an enrolment reminder

!Info Device vibration alerts and notifications are set-up in the wearer profile and are not active by default – refer to the Eagle User Guides



- When the Mini ID device is started or woken from stand-by it will display the **buddi** symbol

- The Mini ID device will prompt for fingerprint enrolment



- The **Erase all** symbol will display to confirm that there are no stored biometrics for the device

- Mini ID will vibrate



- Mini ID will display a **biometric prompt** symbol to enrol the first fingerprint

- Place a finger on the touch sensor under the display to enrol



- The Mini ID will display the **retry** prompt symbol

- Replace the finger on the touch sensor when prompted – the Mini ID will display the retry prompt to obtain a full representation of the fingerprint

!Info It will take a few retries (typically 4 to 6 times) to fully scan the finger image



- If the enrolment prompt is not responded to within a short period or if the verification is about to time out the Mini ID device will display the **timed out** symbol



- The Mini ID will display a **success** symbol when the fingerprint is enrolled




- A biometric profile is expected for each finger individually one after another – depending on the number of fingerprints chosen for enrolment
- Mini ID can be set-up to enrol each fingerprint two times



- Mini ID will display a biometric **orientation** symbol
- Place the first finger enrolled on the fingerprint sensor but in the opposite direction – repeat the enrolment for the first successfully enrolled finger

!Info Rotate the Mini ID so it is upside down

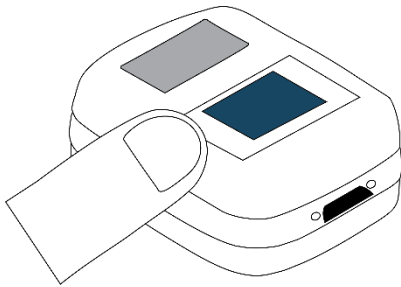


- Place each enrolled finger on the fingerprint sensor in the opposite direction and repeat the enrolment when prompted



- Mini ID will display a **success** symbol when the fingerprint is enrolled



Active Mini ID - Verification

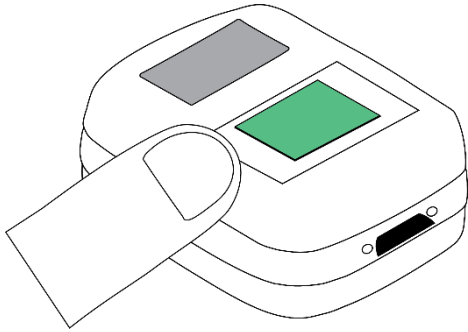


B Mini ID on-device fingerprint verification

- Verification is required as soon as the device has been successfully enrolled
- Mini ID will alert when a fingerprint verification is required
 - Audible two-tone sound
 - Device vibration
 - The verification symbol will display
- Mini ID will prompt for fingerprint verification at random intervals
- Place a finger on the Mini ID fingerprint sensor and follow the verification symbol prompts for each fingerprint
 - If the verification prompt is not responded to within a short period or if the verification is about to time out the Mini ID device will display the **timed out** symbol
 - The Mini ID will display a **success** symbol when the fingerprint has passed the biometric scan
- A simple text message or other device alert can be sent to notify of an incoming verification - verification alerts are set-up in the wearer profile
- **!Info** Refer to the Eagle User Guides for remote alert and wearer profile actions



Charge Mini ID

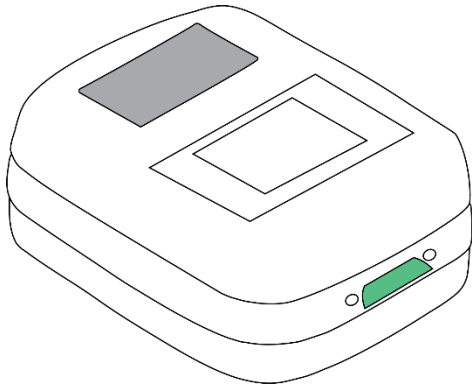

Charge Mini ID

- Connect the USB charger cable between the Mini ID charging port and the USB power adapter and plug into a mains socket
 - LED orange – Mini ID battery is low
 - LED green flashing – Mini ID is charging
 - LED green solid – Mini ID is fully charged
 - LED red solid – Mini ID is trying to find a network signal

!Info 2 hours (approximately) is the time required to fully charge the Mini ID

!Info Charge the Mini ID every 24 hours



Regulatory Information

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

ISED Statement

This device complies with ISED's licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment for portable use. End users must follow the specific operating instructions for satisfying RF exposure compliance. No changes shall be made to the equipment without the manufacturer's permission as this may void the user's authority to operate the equipment.

Ce dispositif est conforme à la norme RSS exemptée de licence de l'ISED. L'opération est soumise aux deux conditions suivantes : (1) ce dispositif peut ne pas causer d'interférence, et (2) ce dispositif doit accepter toute interférence, y compris les interférences qui peuvent causer le fonctionnement indésirable de l'appareil.

Cet équipement est conforme aux limites d'exposition au rayonnement d'ISDE établies pour un environnement non contrôlé à usage portable. Les utilisateurs finaux doivent suivre les instructions d'utilisation spécifiques pour satisfaire à la conformité à l'exposition aux RF. Aucune modification ne doit être apportée à l'équipement sans l'autorisation du fabricant, car cela pourrait annuler l'autorisation de l'utilisateur d'utiliser l'équipement.