




BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



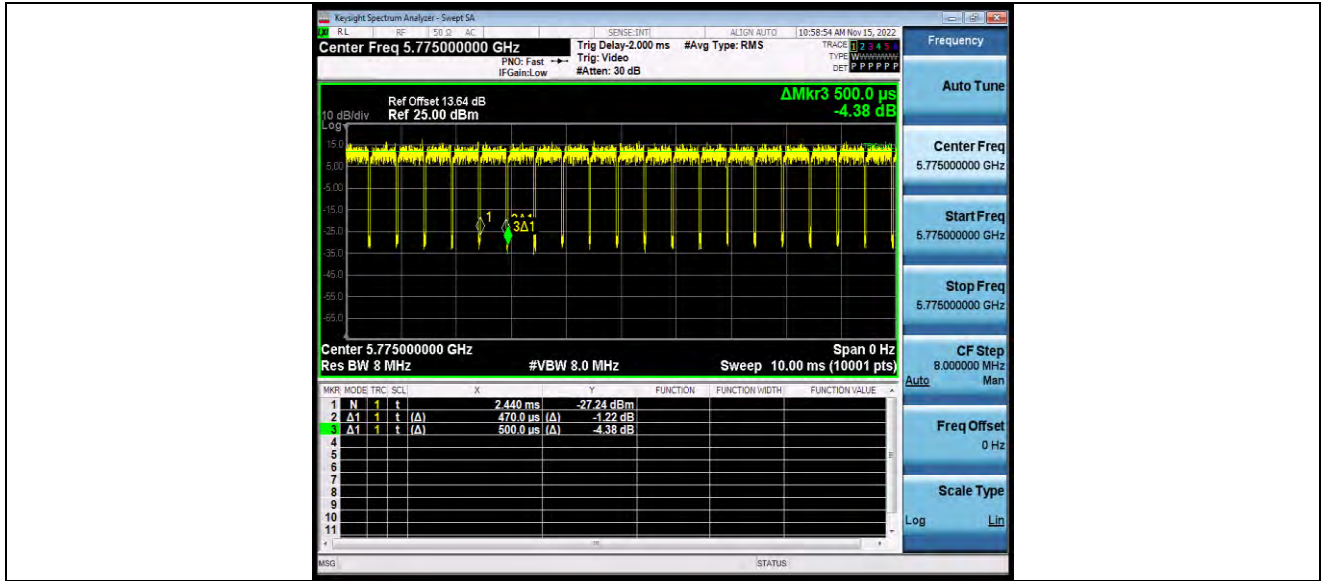

### MAXIMUM CONDUCTED OUTPUT POWER TEST RESULT

Mode	TX Type	Freq. (MHz)	Maximum Conducted Power (dBm)	FCC Limit (dBm)	IC Limit (dBm)	EIRP Limit (dBm)	FCC EIRP Limit (dBm)	IC EIRP Limit (dBm)	Verdict	Power setting
802.11a	SISO	5180	15.88	≤24.00	/	14.48	≤36	≤22.25	Pass	18
		5200	15.77	≤24.00	/	14.37	≤36	≤22.26	Pass	18
		5240	15.78	≤24.00	/	14.38	≤36	≤22.26	Pass	18
		5260	15.93	≤24.00	≤23.26	14.53	≤30	≤29.26	Pass	18
		5300	16.61	≤24.00	≤23.26	15.21	≤30	≤29.26	Pass	17
		5320	16.00	≤24.00	≤23.24	14.60	≤30	≤29.24	Pass	18
		5500	14.08	≤24.00	≤24.00	12.68	≤30	≤29.26	Pass	16
		5580	14.55	≤24.00	≤24.00	13.15	≤30	≤29.25	Pass	16
		5700	14.13	≤24.00	≤24.00	12.73	≤30	≤29.26	Pass	16
		5720_ UNII-2C	14.04	≤24.00	≤24.00	12.64	≤30	≤22.26	Pass	16
		5720_ UNII-3	15.57	≤30.00	≤30.00	14.17	≤36	/	Pass	18.5
		5745	15.13	≤30.00	≤30.00	13.73	≤36	/	Pass	18.5
		5785	15.06	≤30.00	≤30.00	13.66	≤36	/	Pass	18.5
		5825	15.66	≤30.00	≤30.00	14.26	≤36	/	Pass	18
802.11n (HT20)	SISO	5180	14.77	≤24.00	/	13.37	≤36	≤22.54	Pass	17
		5200	14.69	≤24.00	/	13.29	≤36	≤22.56	Pass	17
		5240	14.63	≤24.00	/	13.23	≤36	≤22.56	Pass	17
		5260	14.87	≤24.00	≤23.55	13.47	≤30	≤24.00	Pass	17
		5300	14.57	≤24.00	≤23.55	13.17	≤30	≤29.55	Pass	16.5
		5320	14.88	≤24.00	≤23.53	13.48	≤30	≤29.53	Pass	16
		5500	13.55	≤24.00	≤23.55	12.15	≤30	≤29.55	Pass	15.5
		5580	13.96	≤24.00	≤23.53	12.56	≤30	≤29.53	Pass	15.5
		5700	13.38	≤24.00	≤23.55	11.98	≤30	≤29.55	Pass	16



		5720_ UNII-2C	13.93	≤24.00	≤22.44	12.53	≤30	≤22.44	Pass	16.5
		5720_ UNII-3	14.63	≤30.00	≤30.00	13.23	≤36	/	Pass	17
		5745	14.08	≤30.00	≤30.00	12.68	≤36	/	Pass	18
		5785	13.96	≤30.00	≤30.00	12.56	≤36	/	Pass	18
		5825	14.48	≤30.00	≤30.00	13.08	≤36	/	Pass	17.5
802.11n (HT40)	SISO	5190	13.23	≤24.00	/	11.83	≤36	≤23.01	Pass	14.5
		5230	14.53	≤24.00	/	13.13	≤36	≤23.01	Pass	16
		5270	14.82	≤24.00	≤24.00	13.42	≤30	≤30	Pass	16
		5310	14.56	≤24.00	≤24.00	13.16	≤30	≤30	Pass	15
		5510	13.66	≤24.00	≤24.00	12.26	≤30	≤30	Pass	15
		5550	13.88	≤24.00	≤24.00	12.48	≤30	≤30	Pass	15
		5670	13.76	≤24.00	≤24.00	12.36	≤30	≤30	Pass	15
		5710_ UNII-2C	13.49	≤24.00	≤24.00	12.09	≤30	≤30	Pass	15
		5710_ UNII-3	14.66	≤30.00	≤30.00	13.26	≤36	≤36	Pass	16
		5755	13.74	≤30.00	≤30.00	12.34	≤36	/	Pass	17
5795	13.95	≤30.00	≤30.00	12.55	≤36	/	Pass	17		
802.11a c (VHT20)	SISO	5180	13.93	≤24.00	/	12.53	≤36	≤22.54	Pass	16
		5200	13.88	≤24.00	/	12.48	≤36	≤22.55	Pass	16
		5240	13.77	≤24.00	/	12.37	≤36	≤22.56	Pass	16
		5260	13.98	≤24.00	≤23.55	12.58	≤30	≤24.00	Pass	16
		5300	13.67	≤24.00	≤23.55	12.27	≤30	≤29.55	Pass	15.5
		5320	14.06	≤24.00	≤23.55	12.66	≤30	≤29.55	Pass	15
		5500	13.42	≤24.00	≤23.55	12.02	≤30	≤29.55	Pass	15.5
		5580	13.78	≤24.00	≤23.55	12.38	≤30	≤29.55	Pass	15
		5700	13.27	≤24.00	≤23.54	11.87	≤30	≤29.54	Pass	16
		5720_ UNII-2C	13.01	≤24.00	≤22.44	11.61	≤30	≤21.44	Pass	16
		5720_ UNII-3	13.02	≤30.00	≤30.00	11.62	≤36	/	Pass	16
		5745	13.04	≤30.00	≤30.00	11.64	≤36	/	Pass	16.5



		5785	12.88	≤30.00	≤30.00	11.48	≤36	/	Pass	17
		5825	13.52	≤30.00	≤30.00	12.12	≤36	/	Pass	16.5
802.11a c (VHT40)	SISO	5190	12.27	≤24.00	/	10.87	≤36	≤23.01	Pass	13.5
		5230	13.47	≤24.00	/	12.07	≤36	≤23.01	Pass	15.5
		5270	13.87	≤24.00	≤24.00	12.47	≤30	≤30	Pass	15
		5310	14.50	≤24.00	≤24.00	13.10	≤30	≤30	Pass	15
		5510	13.77	≤24.00	≤24.00	12.37	≤30	≤30	Pass	15
		5550	13.66	≤24.00	≤24.00	12.26	≤30	≤30	Pass	14.5
		5670	13.89	≤24.00	≤24.00	12.49	≤30	≤30	Pass	15
		5710_ UNII-2C	13.82	≤24.00	≤24.00	12.42	≤30	≤30	Pass	15
		5710_ UNII-3	13.82	≤30.00	≤30.00	12.42	≤36	/	Pass	15
		5755	13.16	≤30.00	≤30.00	11.76	≤36	/	Pass	16
		5795	13.51	≤30.00	≤30.00	12.11	≤36	/	Pass	16
		802.11a c (VHT80)	SISO	5210	11.14	≤24.00	/	9.74	≤36	≤23.01
5290	13.80			≤24.00	≤24.00	12.40	≤30	≤30.00	Pass	15
5530	13.47			≤24.00	≤24.00	12.07	≤30	≤30.00	Pass	15.5
5610	13.97			≤24.00	≤24.00	12.57	≤30	≤30.00	Pass	15
5690_ UNII-2C	13.45			≤24.00	≤24.00	12.05	≤30	≤30.00	Pass	15
5690_ UNII-3	13.45			≤30.00	≤30.00	12.05	≤36	/	Pass	15.5
5775	13.26			≤30.00	≤30.00	11.86	≤36	/	Pass	16.5

**Note: The Duty Cycle Factor is compensated in Maximum Conducted Power**



### MAXIMUM POWER SPECTRAL DENSITY TEST RESULT

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	EIRP PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	5.78	≤11.00	4.38	≤10.00	PASS
		5200	5.81	≤11.00	4.41	≤10.00	PASS
		5240	6.21	≤11.00	4.81	≤10.00	PASS
		5260	6.59	≤11.00	/	/	PASS
		5300	5.87	≤11.00	/	/	PASS
		5320	7.48	≤11.00	/	/	PASS
		5500	5.4	≤11.00	/	/	PASS
		5580	6.81	≤11.00	/	/	PASS
		5700	6.96	≤11.00	/	/	PASS
		5745	5.08	≤30.00	/	/	PASS
		5785	3.91	≤30.00	/	/	PASS
		5825	4.22	≤30.00	/	/	PASS
11N20SISO	Ant1	5180	4.82	≤11.00	3.42	≤10.00	PASS
		5200	4.25	≤11.00	2.85	≤10.00	PASS
		5240	4.87	≤11.00	3.47	≤10.00	PASS
		5260	5.52	≤11.00	/	/	PASS
		5300	4.82	≤11.00	/	/	PASS
		5320	4.87	≤11.00	/	/	PASS
		5500	3.75	≤11.00	/	/	PASS
		5580	4.65	≤11.00	/	/	PASS
		5700	6.28	≤11.00	/	/	PASS
		5745	3.85	≤30.00	/	/	PASS
		5785	3.47	≤30.00	/	/	PASS
		5825	3.3	≤30.00	/	/	PASS
11N40SISO	Ant1	5190	1.83	≤11.00	0.43	≤10.00	PASS
		5230	1.96	≤11.00	0.56	≤10.00	PASS
		5270	2.39	≤11.00	/	/	PASS
		5310	1.65	≤11.00	/	/	PASS
		5510	0.32	≤11.00	/	/	PASS



		5550	0.81	≤11.00	/	/	PASS
		5670	-0.4	≤11.00	/	/	PASS
		5755	-1.43	≤30.00	/	/	PASS
		5795	-1.96	≤30.00	/	/	PASS
11AC20SISO	Ant1	5180	3.12	≤11.00	1.72	≤10.00	PASS
		5200	3.04	≤11.00	1.64	≤10.00	PASS
		5240	3.7	≤11.00	2.30	/	PASS
		5260	3.42	≤11.00	/	/	PASS
		5300	3.55	≤11.00	/	/	PASS
		5320	3.9	≤11.00	/	/	PASS
		5500	2.07	≤11.00	/	/	PASS
		5580	2.57	≤11.00	/	/	PASS
		5700	2.41	≤11.00	/	/	PASS
		5745	-0.02	≤30.00	/	/	PASS
		5785	0.7	≤30.00	/	/	PASS
		5825	-0.28	≤30.00	/	/	PASS
11AC40SISO	Ant1	5190	1.08	≤11.00	-0.32	≤10.00	PASS
		5230	0.85	≤11.00	-0.55	≤10.00	PASS
		5270	1.17	≤11.00	/	/	PASS
		5310	1.57	≤11.00	/	/	PASS
		5510	-0.58	≤11.00	/	/	PASS
		5550	0.2	≤11.00	/	/	PASS
		5670	-1	≤11.00	/	/	PASS
		5755	-2.78	≤30.00	/	/	PASS
		5795	-2.42	≤30.00	/	/	PASS
11AC80SISO	Ant1	5210	-1.99	≤11.00	-3.39	≤10.00	PASS
		5290	-1.25	≤11.00	/	/	PASS
		5530	-2.32	≤11.00	/	/	PASS
		5610	-2.31	≤11.00	/	/	PASS
		5775	-4.94	≤30.00	/	/	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the graph.



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

### TEST GRAPHS

11A\_Ant1\_5180



11A\_Ant1\_5200



11A\_Ant1\_5240





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11A\_Ant1\_5260




11A\_Ant1\_5300





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

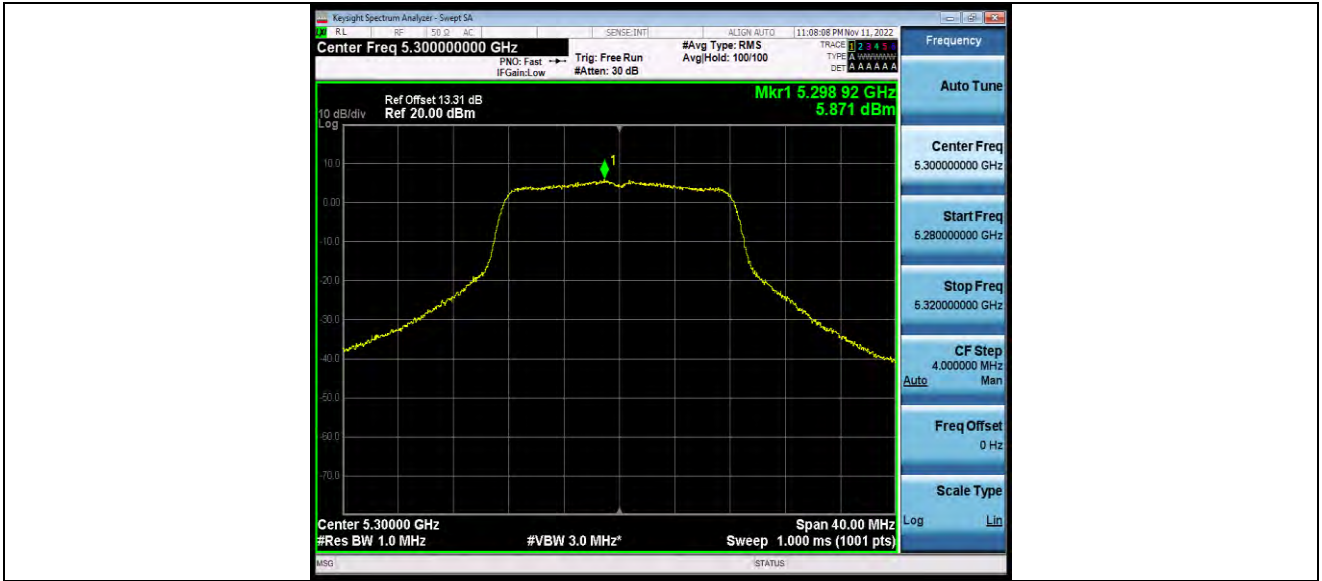

11A\_Ant1\_5320




11A\_Ant1\_5500



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

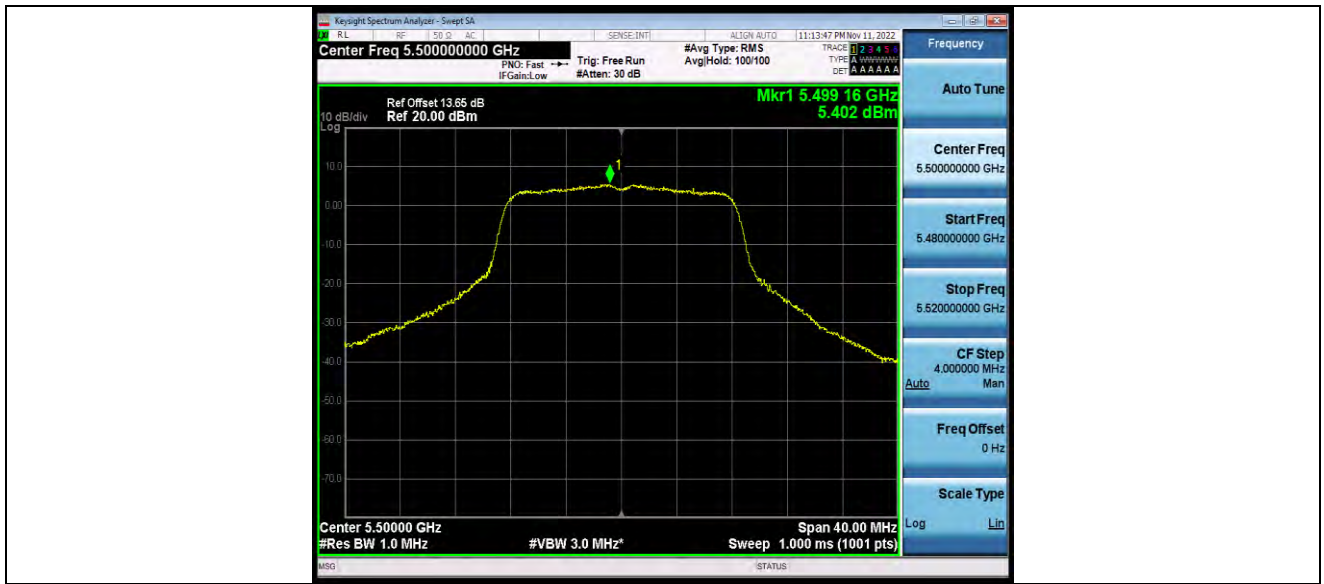

11A\_Ant1\_5580




11A\_Ant1\_5700



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

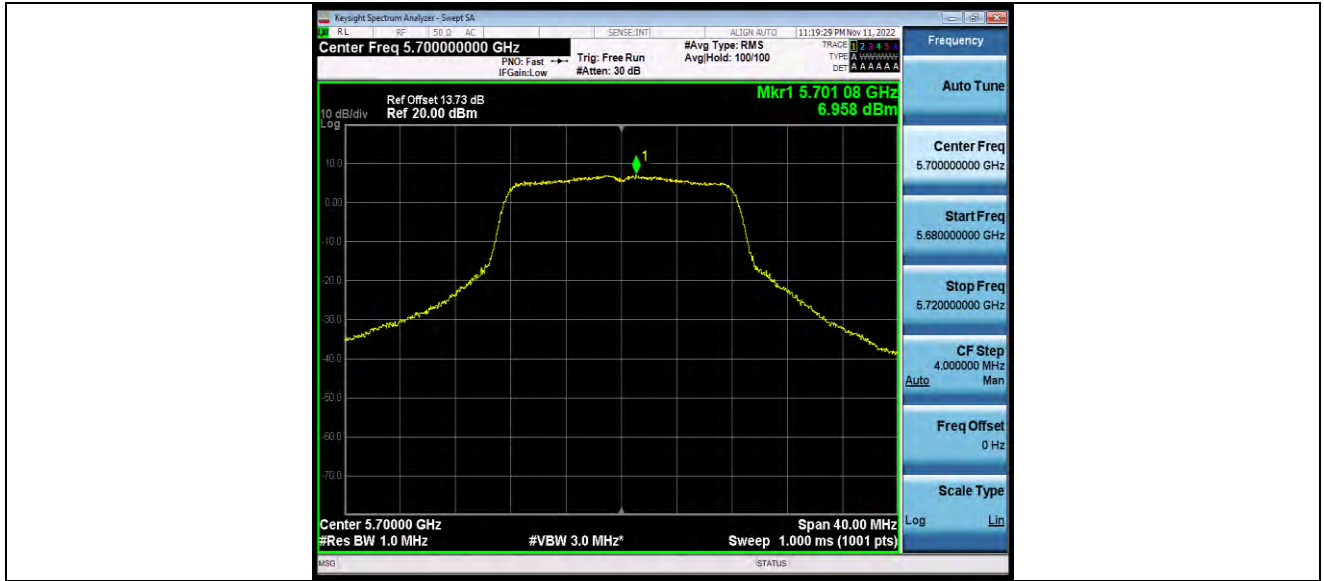

11A\_Ant1\_5745



11A\_Ant1\_5785



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11A\_Ant1\_5825




11N20SISO\_Ant1\_5180





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

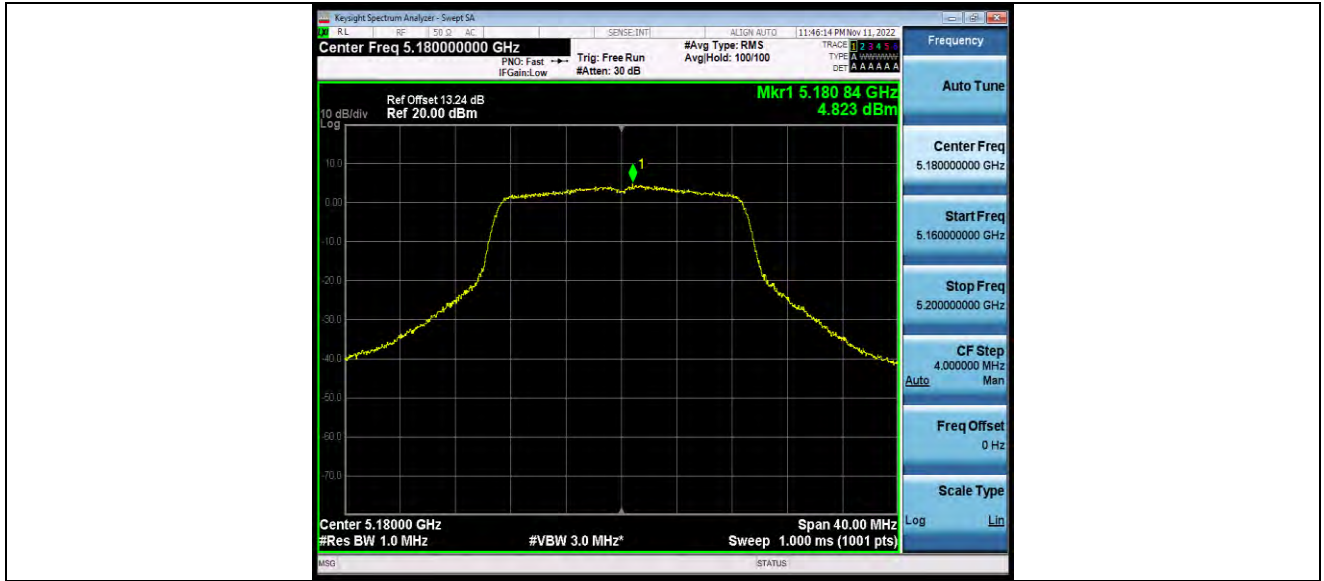

11N20SISO\_Ant1\_5200




11N20SISO\_Ant1\_5240



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

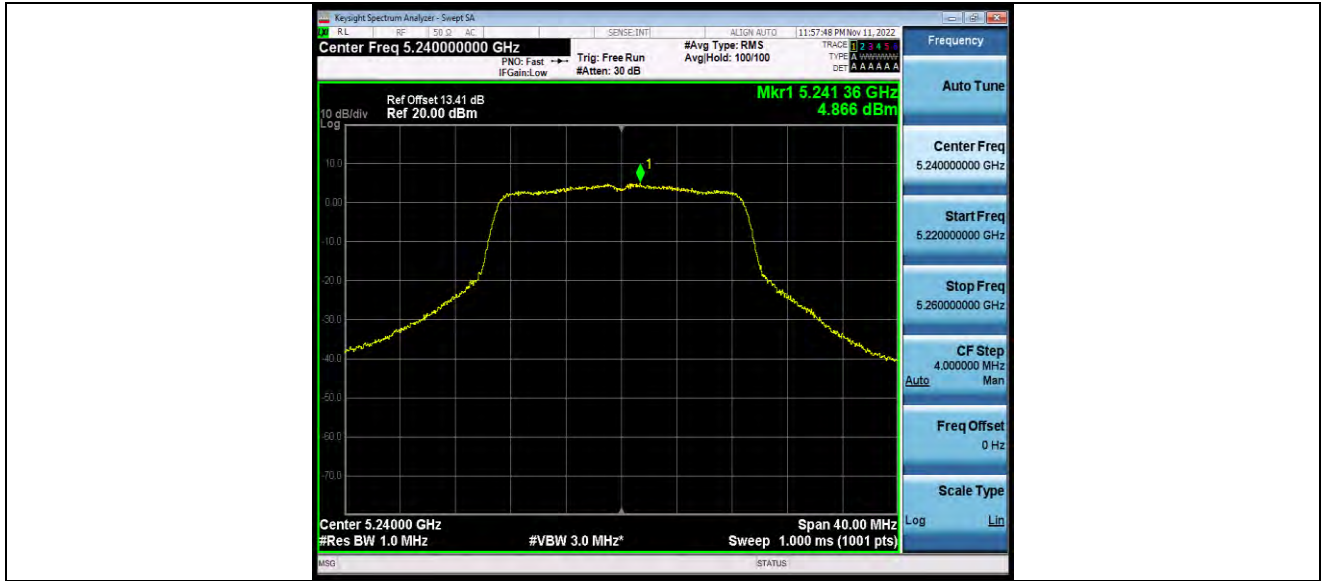

11N20SISO\_Ant1\_5260



11N20SISO\_Ant1\_5300



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11N20SISO\_Ant1\_5320




11N20SISO\_Ant1\_5500





BUREAU VERITAS


Test Report No.: W7L-P22110001RF03

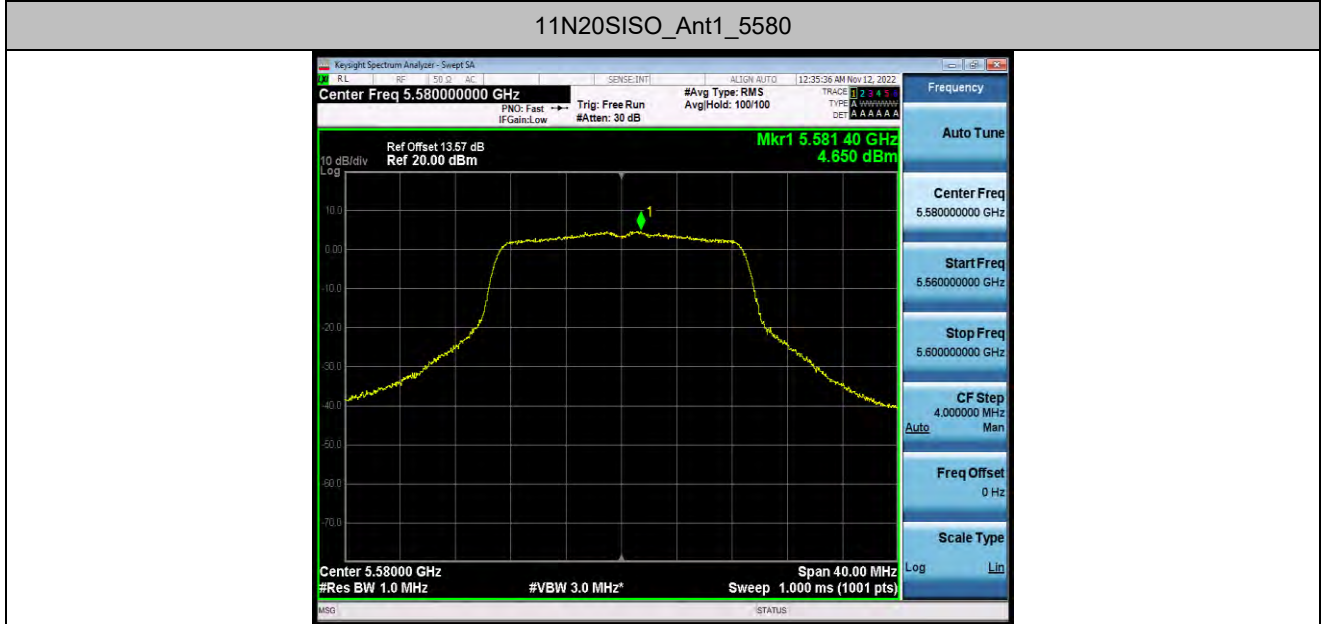



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

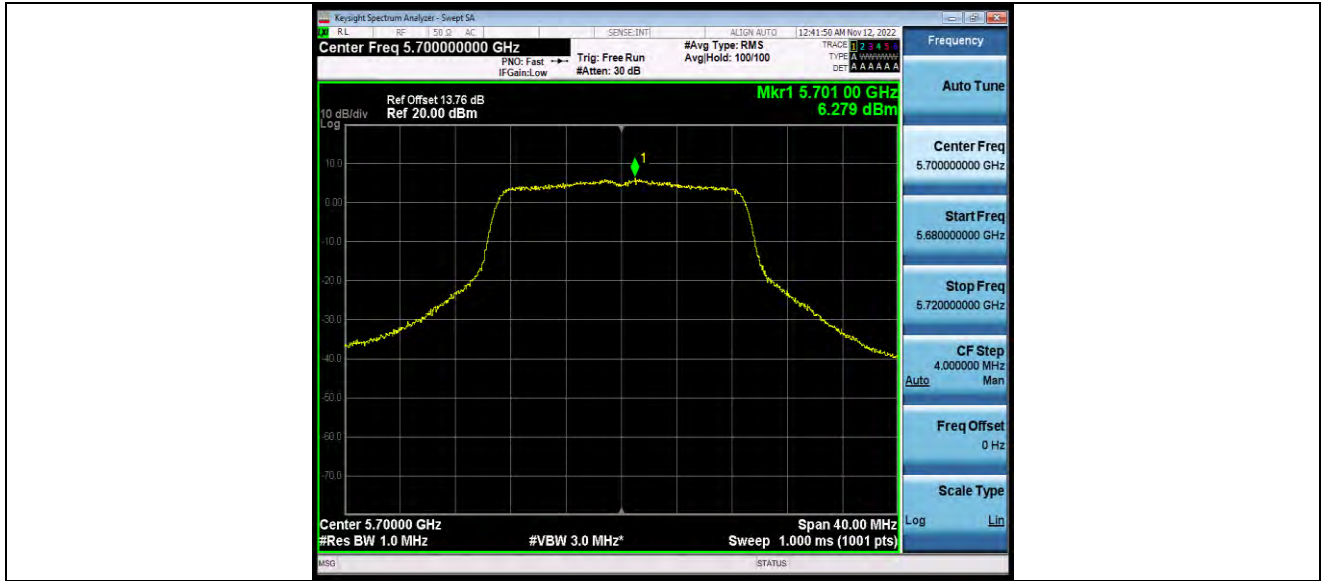

11N20SISO\_Ant1\_5745



11N20SISO\_Ant1\_5785



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11N20SISO\_Ant1\_5825



11N40SISO\_Ant1\_5190



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11N40SISO\_Ant1\_5230



11N40SISO\_Ant1\_5270





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11N40SISO\_Ant1\_5550



11N40SISO\_Ant1\_5670



BUREAU  
VERITAS

Test Report No.: W7L-P22110001RF03



11N40SISO\_Ant1\_5755



11N40SISO\_Ant1\_5795





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC20SISO\_Ant1\_5180




11AC20SISO\_Ant1\_5200



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

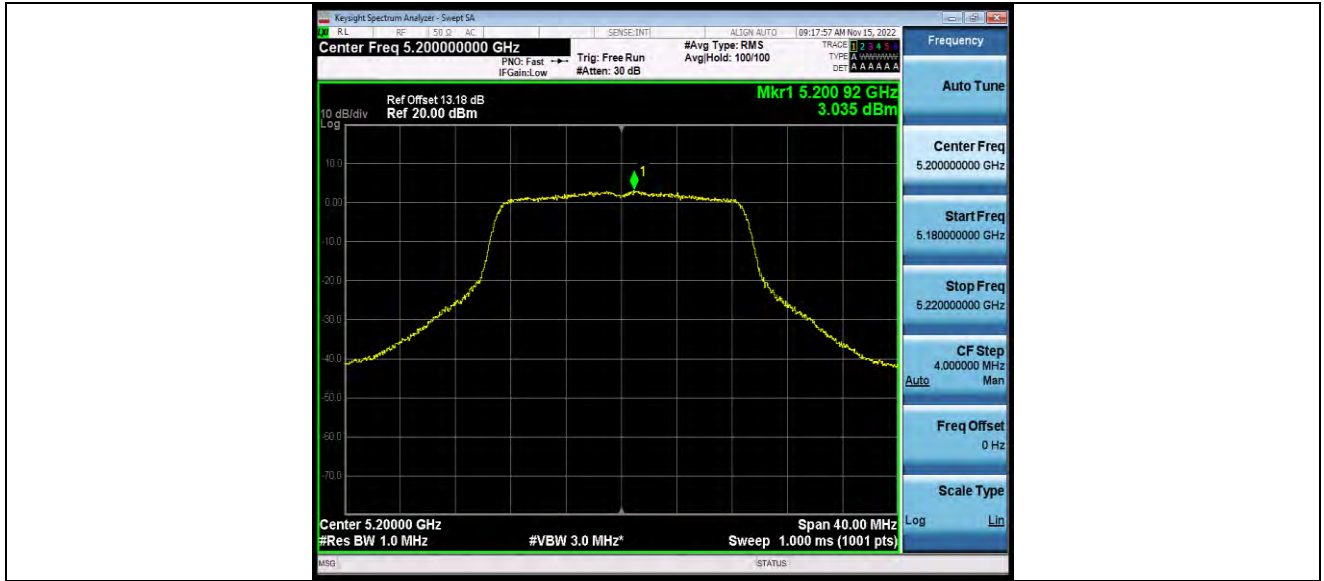

11AC20SISO\_Ant1\_5240



11AC20SISO\_Ant1\_5260



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC20SISO\_Ant1\_5300




11AC20SISO\_Ant1\_5320



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

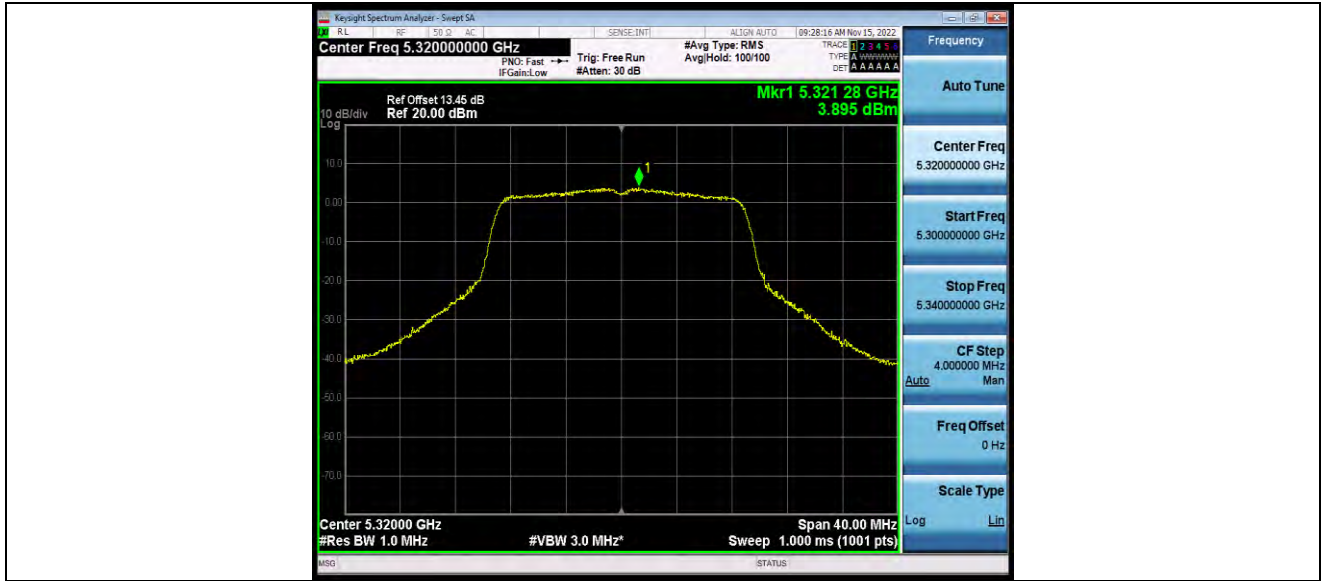






BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

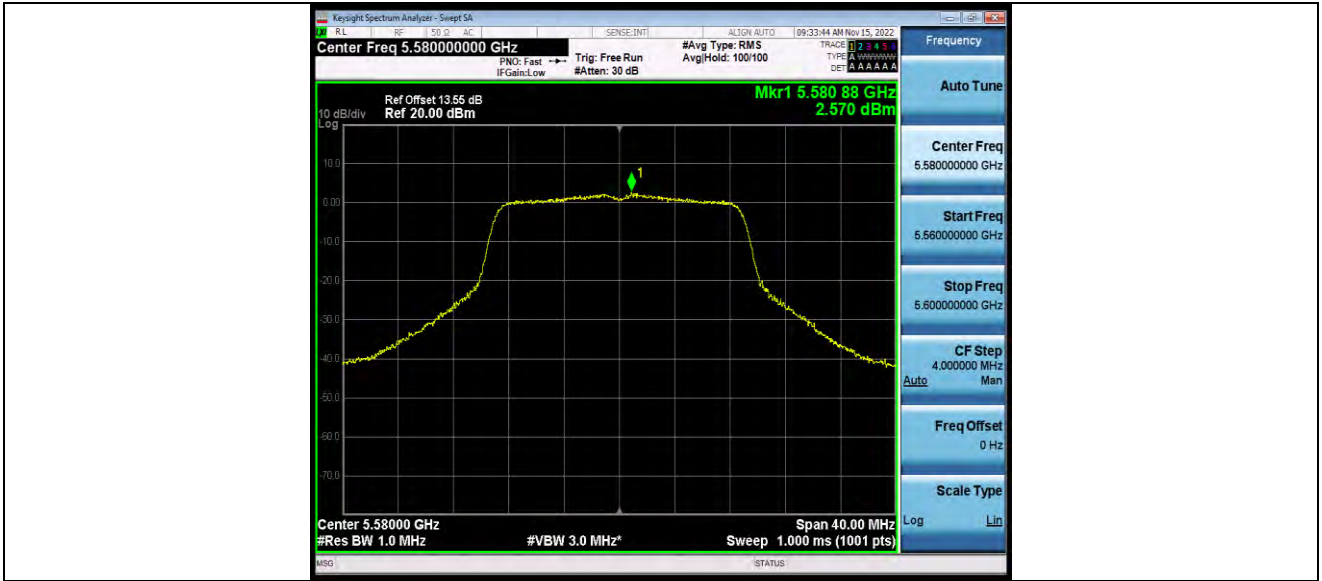

11AC20SISO\_Ant1\_5700




11AC20SISO\_Ant1\_5745



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

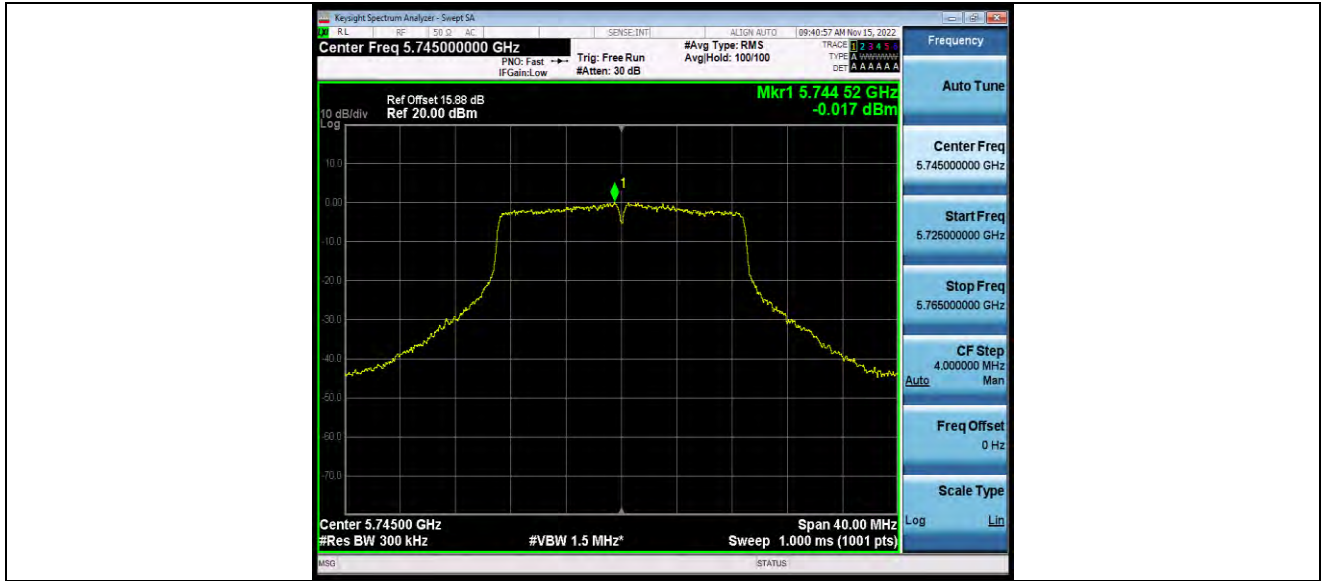

11AC20SISO\_Ant1\_5785




11AC20SISO\_Ant1\_5825



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

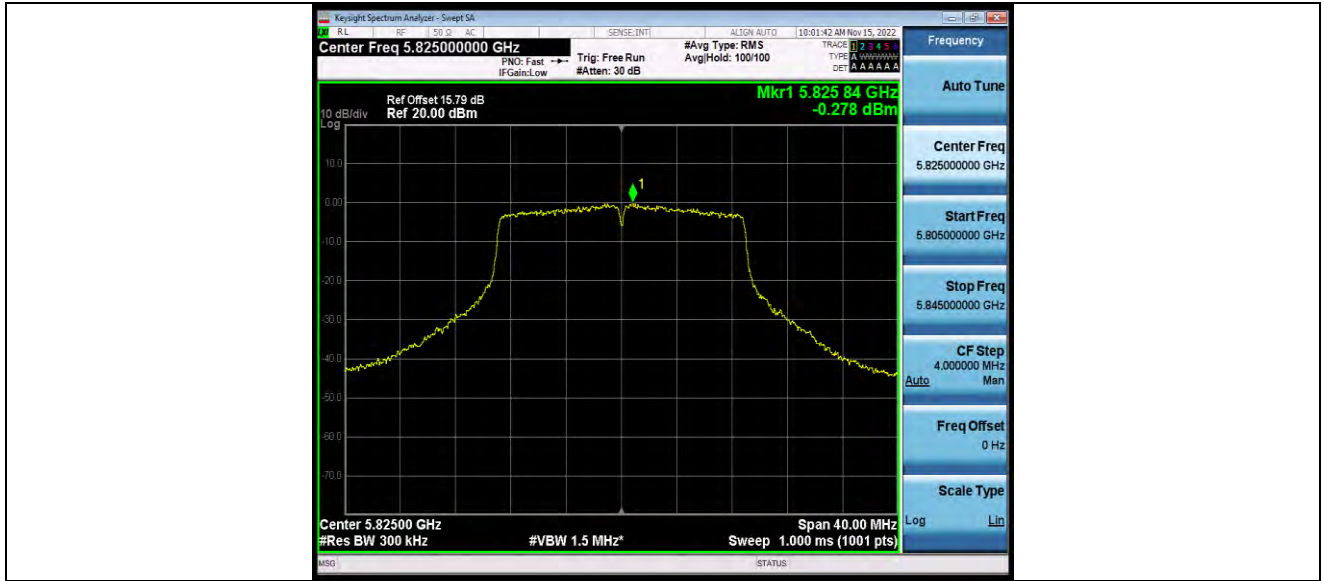

11AC40SISO\_Ant1\_5190



11AC40SISO\_Ant1\_5230





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC40SISO\_Ant1\_5270



11AC40SISO\_Ant1\_5310



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC40SISO\_Ant1\_5510



11AC40SISO\_Ant1\_5550



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC40SISO\_Ant1\_5670



11AC40SISO\_Ant1\_5755



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC40SISO\_Ant1\_5795



11AC80SISO\_Ant1\_5210





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC80SISO\_Ant1\_5290



11AC80SISO\_Ant1\_5530



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC80SISO\_Ant1\_5610



11AC80SISO\_Ant1\_5775







## 7 APPENDIX B

### STRADDLE BAND

#### EMISSION BANDWIDTH

#### TEST RESULT

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	22.240	5709.320	5731.560	---	---
		5720_UNII-2C	15.68	5709.320	5725	---	---
		5720_UNII-3	6.56	5725	5731.560	---	---
11N20SISO	Ant1	5720	21.320	5709.400	5730.720	---	---
		5720_UNII-2C	15.6	5709.400	5725	---	---
		5720_UNII-3	5.72	5725	5730.720	---	---
11N40SISO	Ant1	5710	40.800	5689.840	5730.640	---	---
		5710_UNII-2C	35.16	5689.840	5725	---	---
		5710_UNII-3	5.64	5725	5730.640	---	---
11AC20SISO	Ant1	5720	22.760	5708.760	5731.520	---	---
		5720_UNII-2C	16.24	5708.760	5725	---	---
		5720_UNII-3	6.52	5725	5731.520	---	---
11AC40SISO	Ant1	5710	40.560	5689.920	5730.480	---	---
		5710_UNII-2C	35.08	5689.920	5725	---	---
		5710_UNII-3	5.48	5725	5730.480	---	---
11AC80SISO	Ant1	5690	80.320	5650.000	5730.320	---	---
		5690_UNII-2C	75	5650.000	5725	---	---
		5690_UNII-3	5.32	5725	5730.320	---	---



BUREAU VERITAS


Test Report No.: W7L-P22110001RF03

### TEST GRAPHS

11A\_Ant1\_5720



11N20SISO\_Ant1\_5720

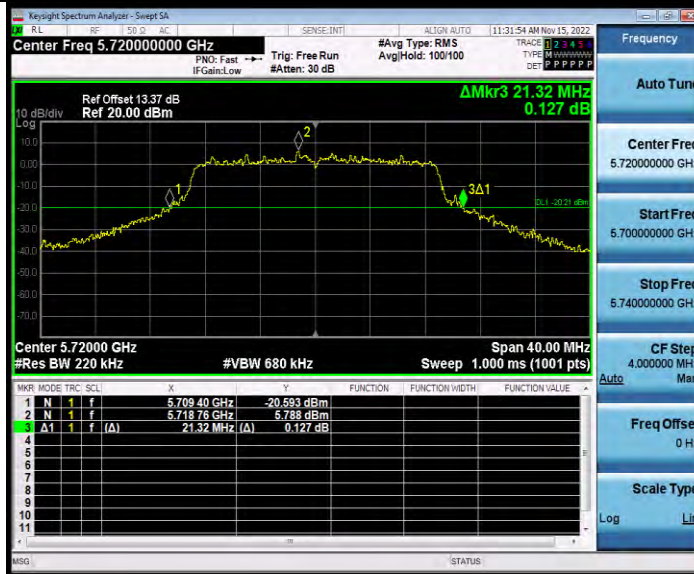


11N40SISO\_Ant1\_5710



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

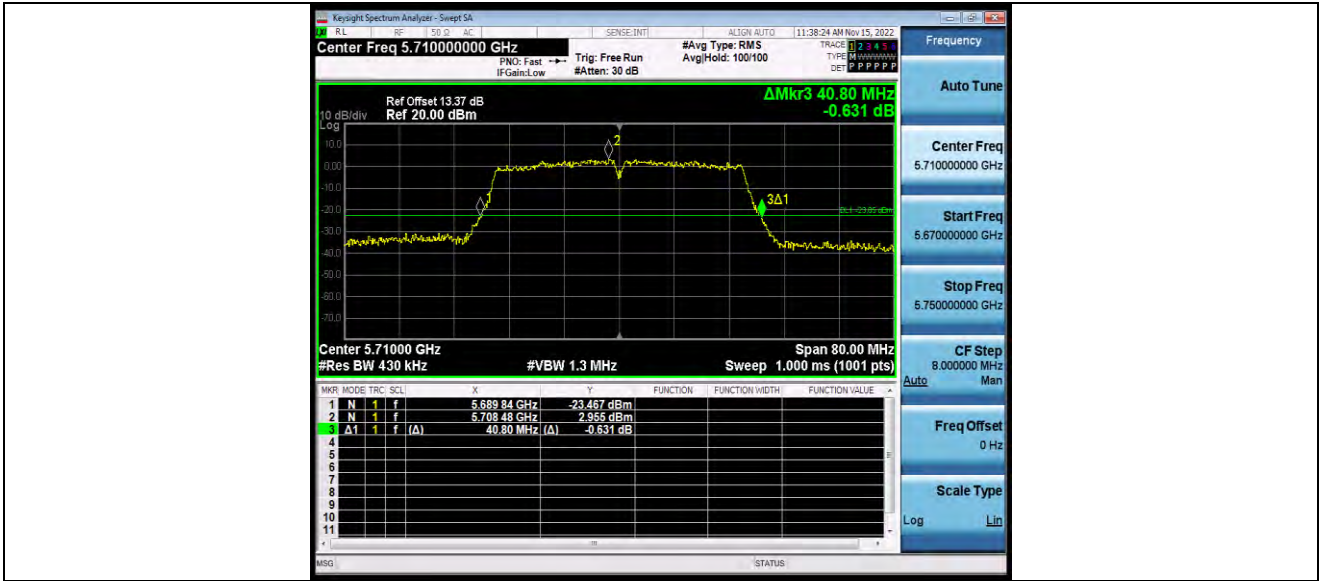

11AC20SISO\_Ant1\_5720




11AC40SISO\_Ant1\_5710




BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

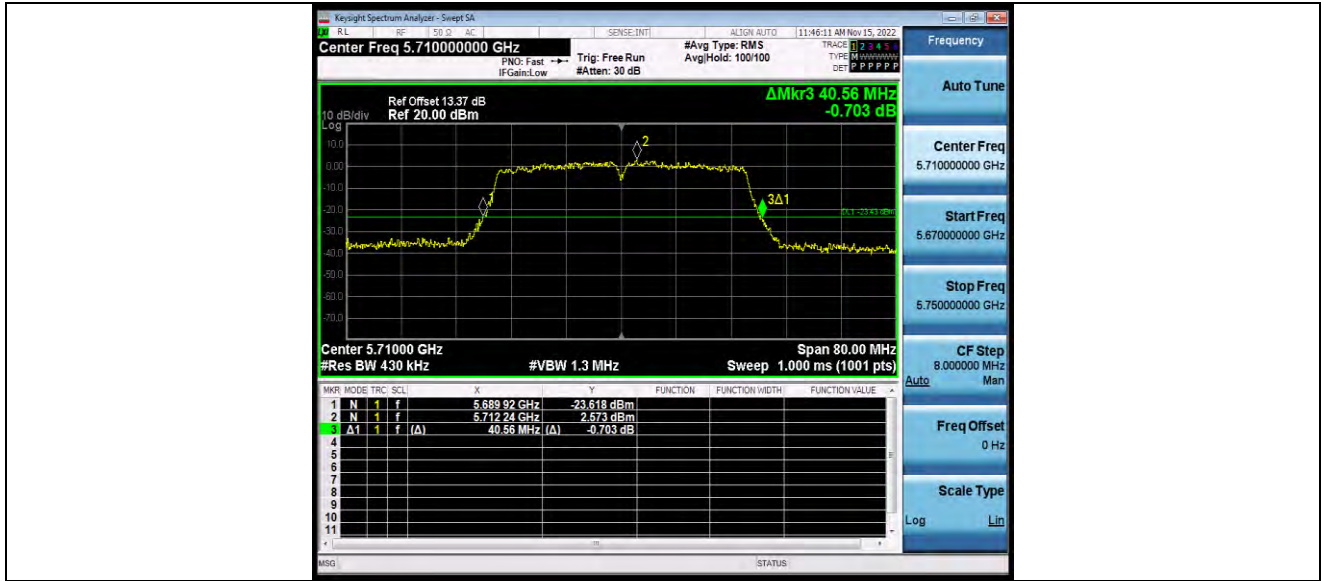

11AC80SISO\_Ant1\_5690

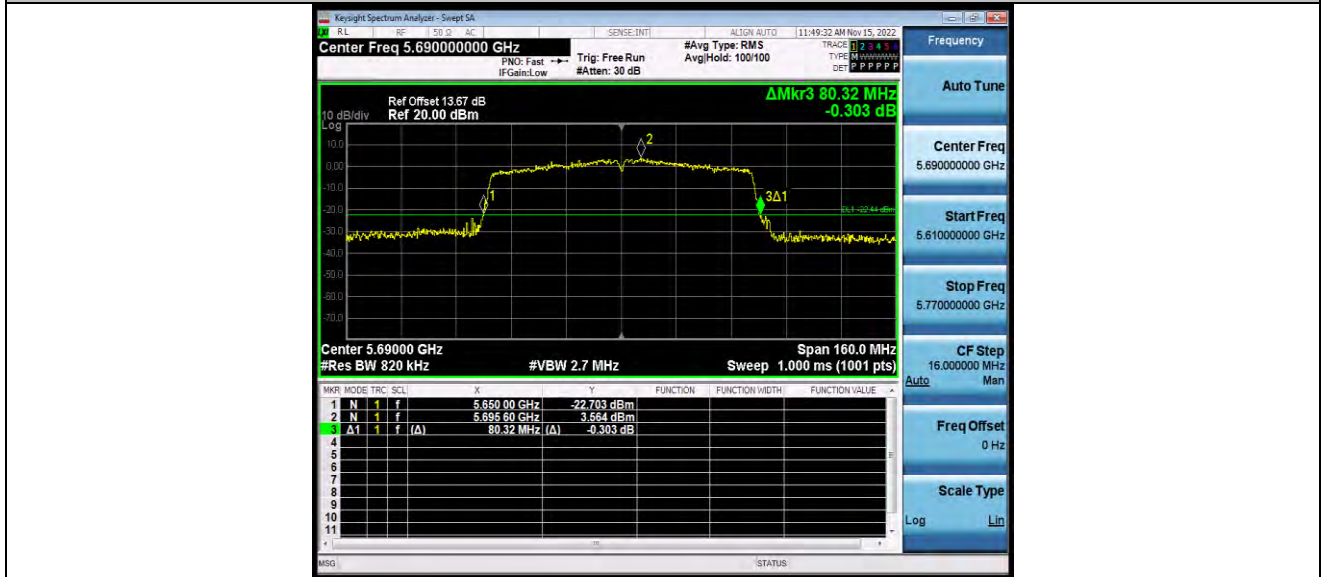



### OCCUPIED CHANNEL BANDWIDTH TEST RESULT

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	16.803	5711.6445	5728.4475	---	---
		5720_UNII-2C	13.355	5711.6445	5725	---	---
		5720_UNII-3	3.448	5725	5728.4475	---	---
11N20SISO	Ant1	5720	17.985	5711.0803	5729.0653	---	---
		5720_UNII-2C	13.92	5711.0803	5725	---	---
		5720_UNII-3	4.065	5725	5729.0653	---	---
11N40SISO	Ant1	5710	36.283	5691.9932	5728.2762	---	---
		5710_UNII-2C	33.007	5691.9932	5725	---	---
		5710_UNII-3	3.276	5725	5728.2762	---	---
11AC20SISO	Ant1	5720	18.003	5711.0687	5729.0717	---	---
		5720_UNII-2C	13.931	5711.0687	5725	---	---
		5720_UNII-3	4.072	5725	5729.0717	---	---
11AC40SISO	Ant1	5710	36.180	5692.0216	5728.2016	---	---
		5710_UNII-2C	32.978	5692.0216	5725	---	---
		5710_UNII-3	3.202	5725	5728.2016	---	---
11AC80SISO	Ant1	5690	74.898	5652.7524	5727.6504	---	---
		5690_UNII-2C	72.248	5652.7524	5725	---	---
		5690_UNII-3	2.65	5725	5727.6504	---	---





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03


### TEST GRAPHS





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

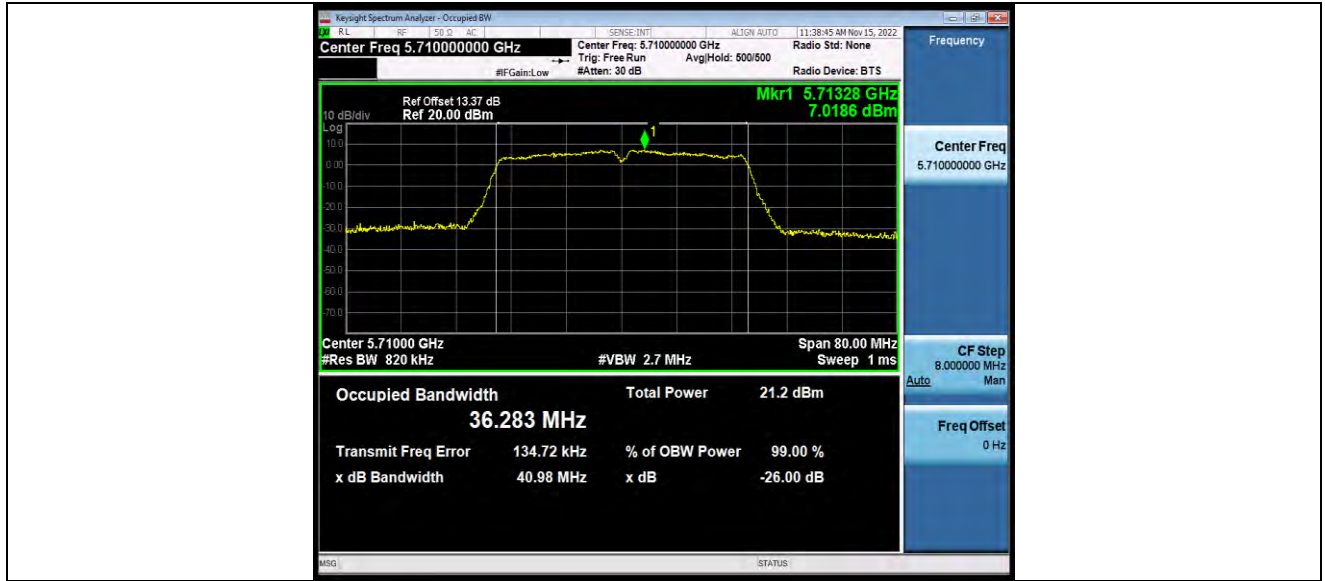

11AC20SISO\_Ant1\_5720




11AC40SISO\_Ant1\_5710



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

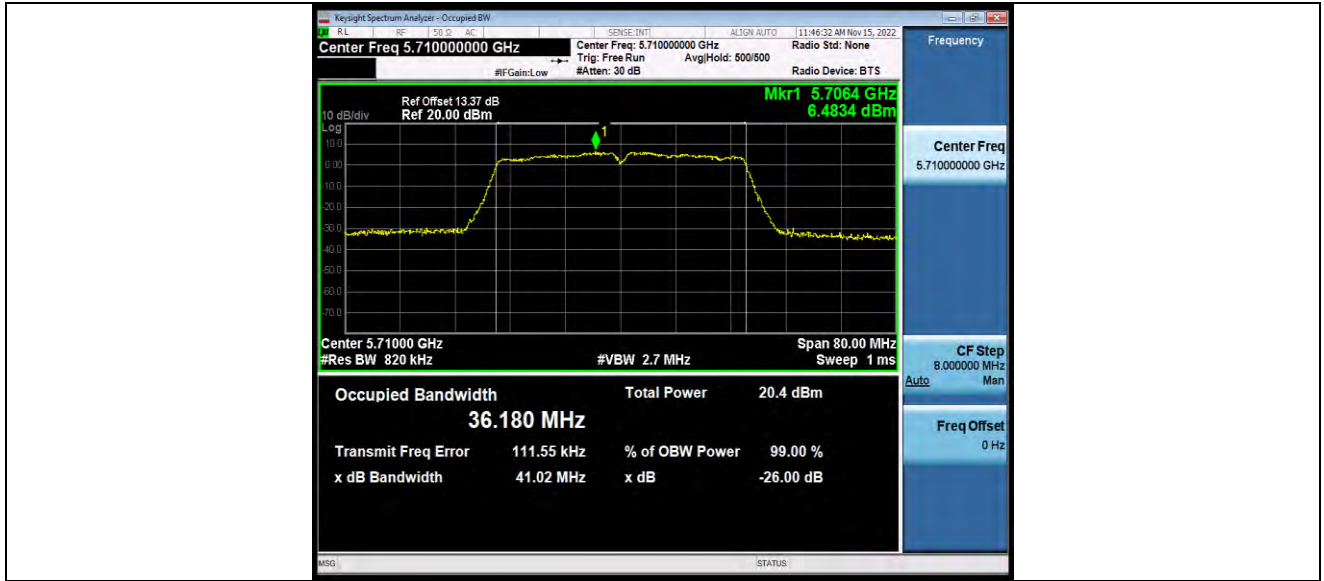

11AC80SISO\_Ant1\_5690





## MIN EMISSION BANDWIDTH TEST RESULT B4

TestMode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	15.080	5712.480	5727.560	0.5	PASS
		5720_UNII-3	2.56	5725	5727.560	0.5	PASS
11N20SISO	Ant1	5720	14.960	5712.560	5727.520	0.5	PASS
		5720_UNII-3	2.52	5725	5727.520	0.5	PASS
11N40SISO	Ant1	5710	35.040	5692.480	5727.520	0.5	PASS
		5710_UNII-3	2.52	5725	5727.520	0.5	PASS
11AC20SISO	Ant1	5720	14.080	5712.440	5726.520	0.5	PASS
		5720_UNII-3	1.52	5725	5726.520	0.5	PASS
11AC40SISO	Ant1	5710	35.040	5692.480	5727.520	0.5	PASS
		5710_UNII-3	2.52	5725	5727.520	0.5	PASS
11AC80SISO	Ant1	5690	73.920	5653.680	5727.600	0.5	PASS
		5690_UNII-3	2.6	5725	5727.600	0.5	PASS




BUREAU VERITAS


Test Report No.: W7L-P22110001RF03

### TEST GRAPHS B4

11A\_Ant1\_5720

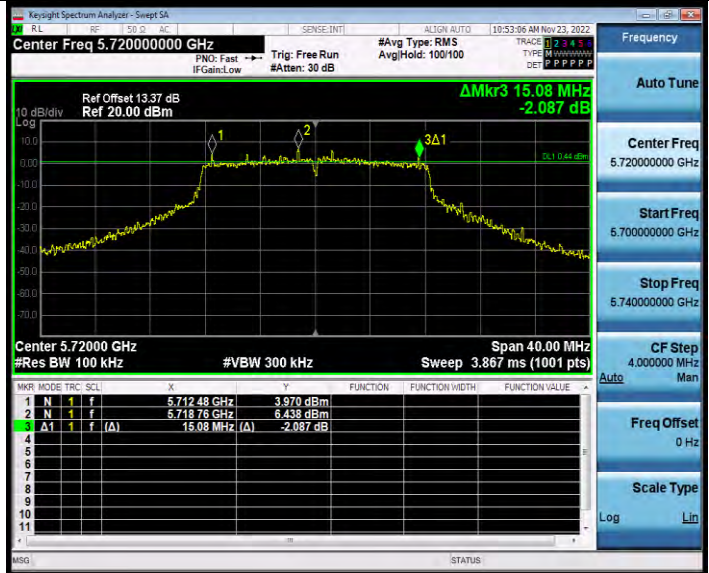

11N20SISO\_Ant1\_5720

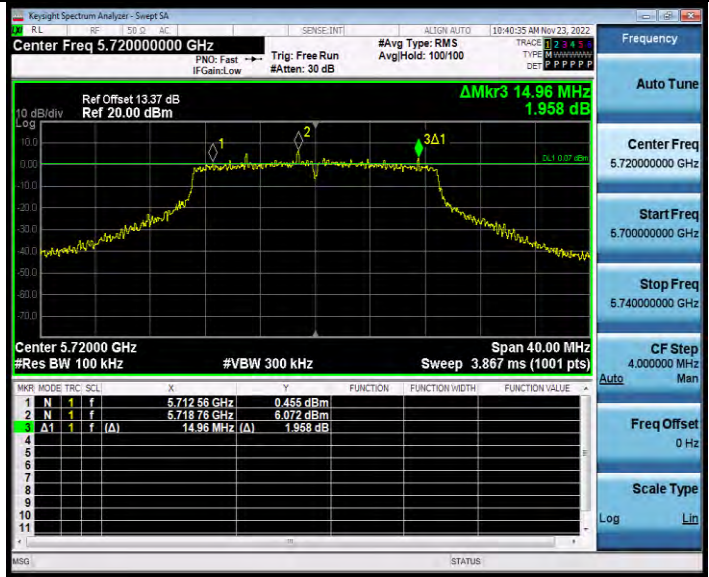


11N40SISO\_Ant1\_5710






BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

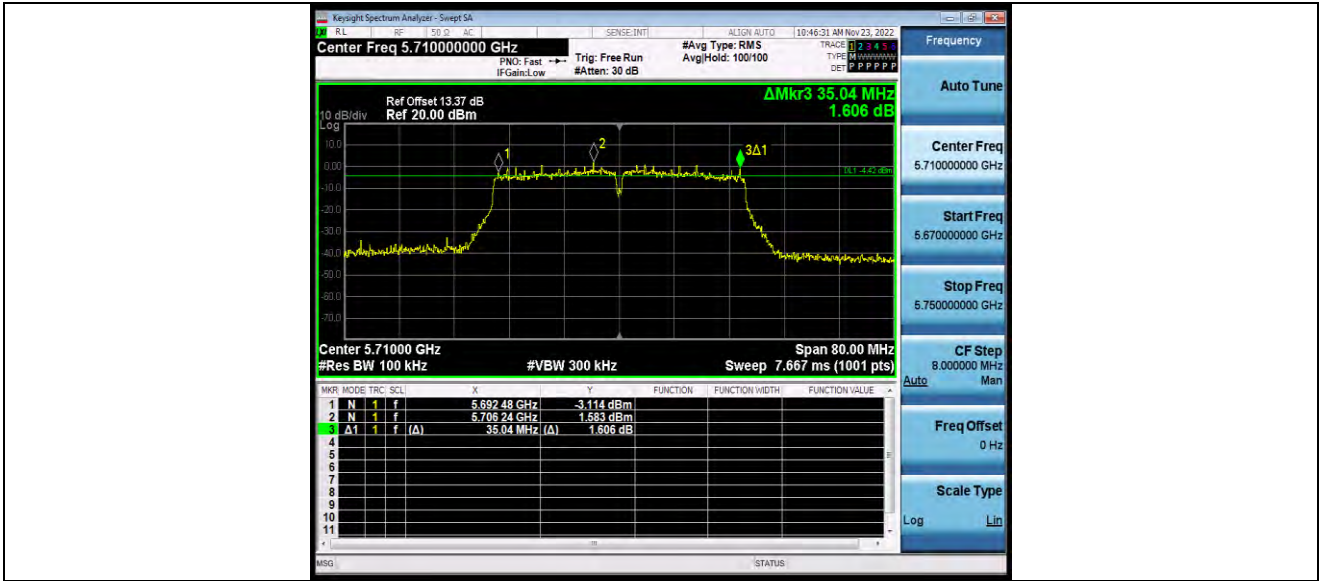

11AC20SISO\_Ant1\_5720

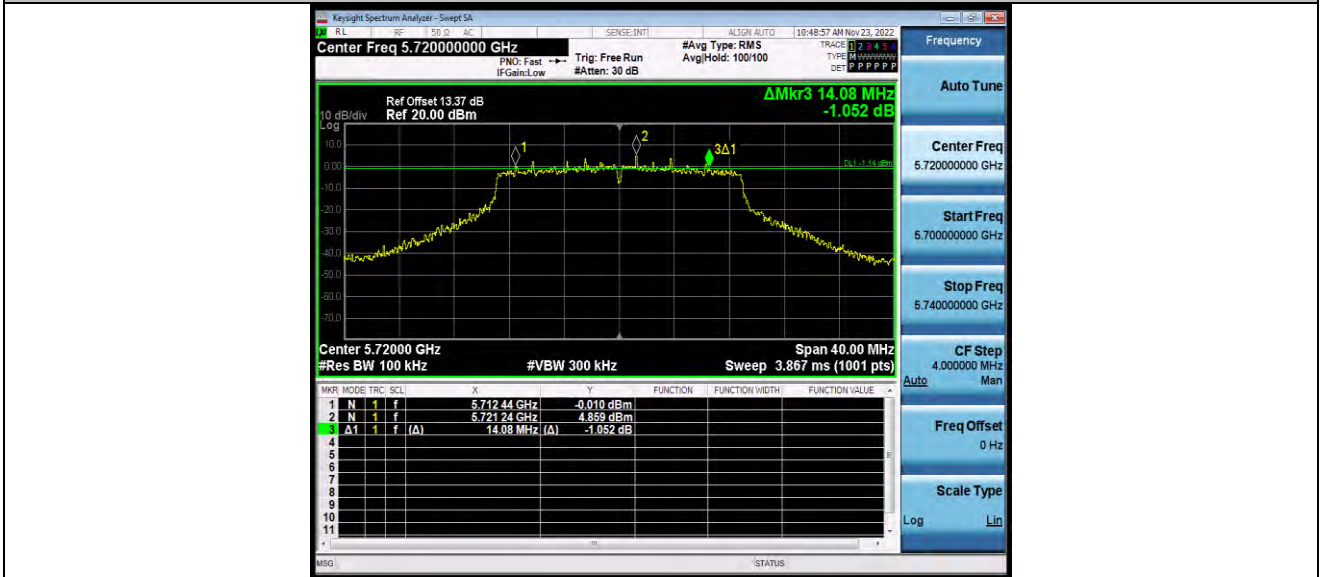


11AC40SISO\_Ant1\_5710




BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

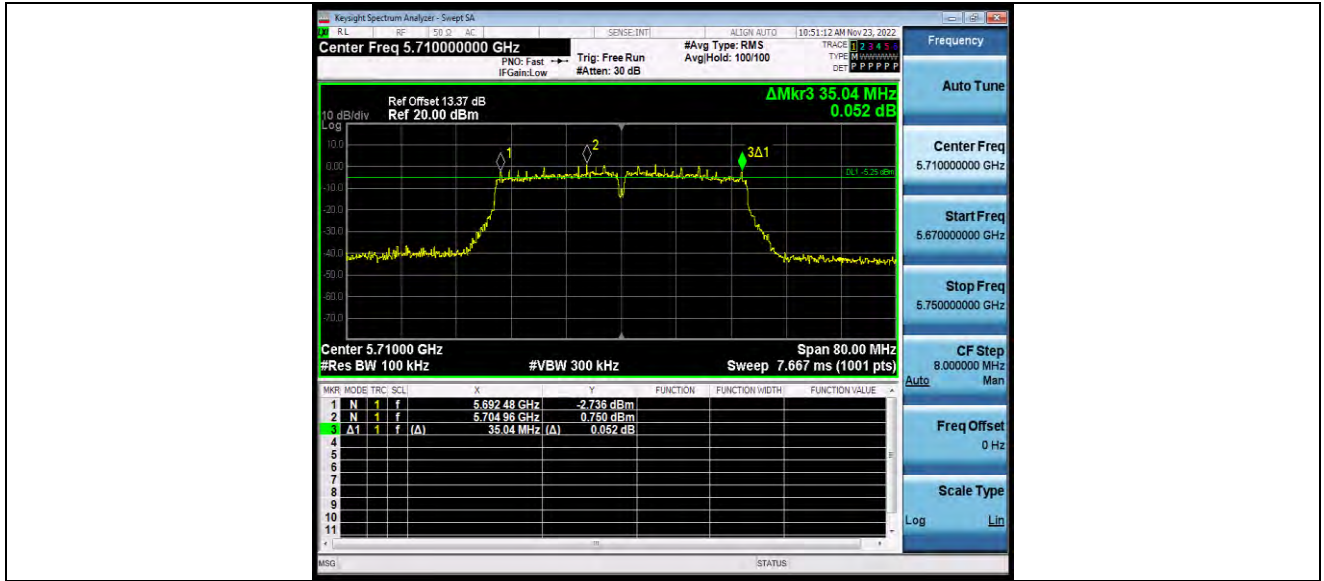

11AC80SISO\_Ant1\_5690

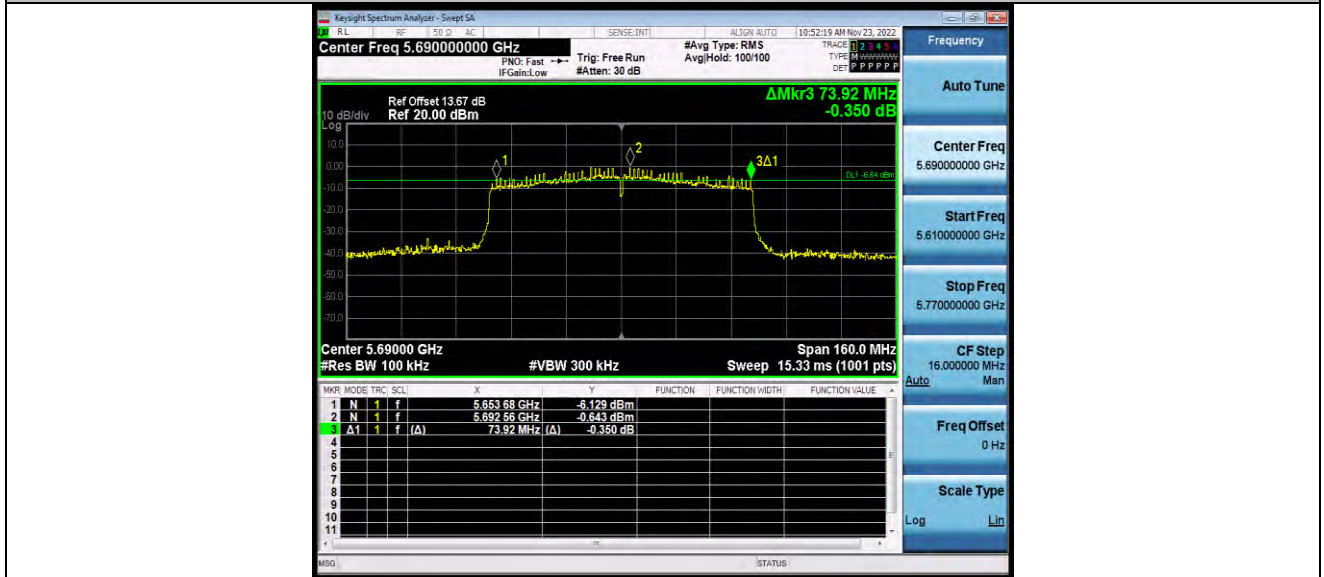



## DUTY CYCLE TEST RESULT


TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5720	2.06	2.10	98.10
11N20SISO	Ant1	5720	1.93	1.96	98.47
11N40SISO	Ant1	5710	0.95	0.98	96.94
11AC20SISO	Ant1	5720	1.93	1.97	97.97
11AC40SISO	Ant1	5710	0.95	0.99	95.96
11AC80SISO	Ant1	5690	0.46	0.50	92.00



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03


### TEST GRAPHS

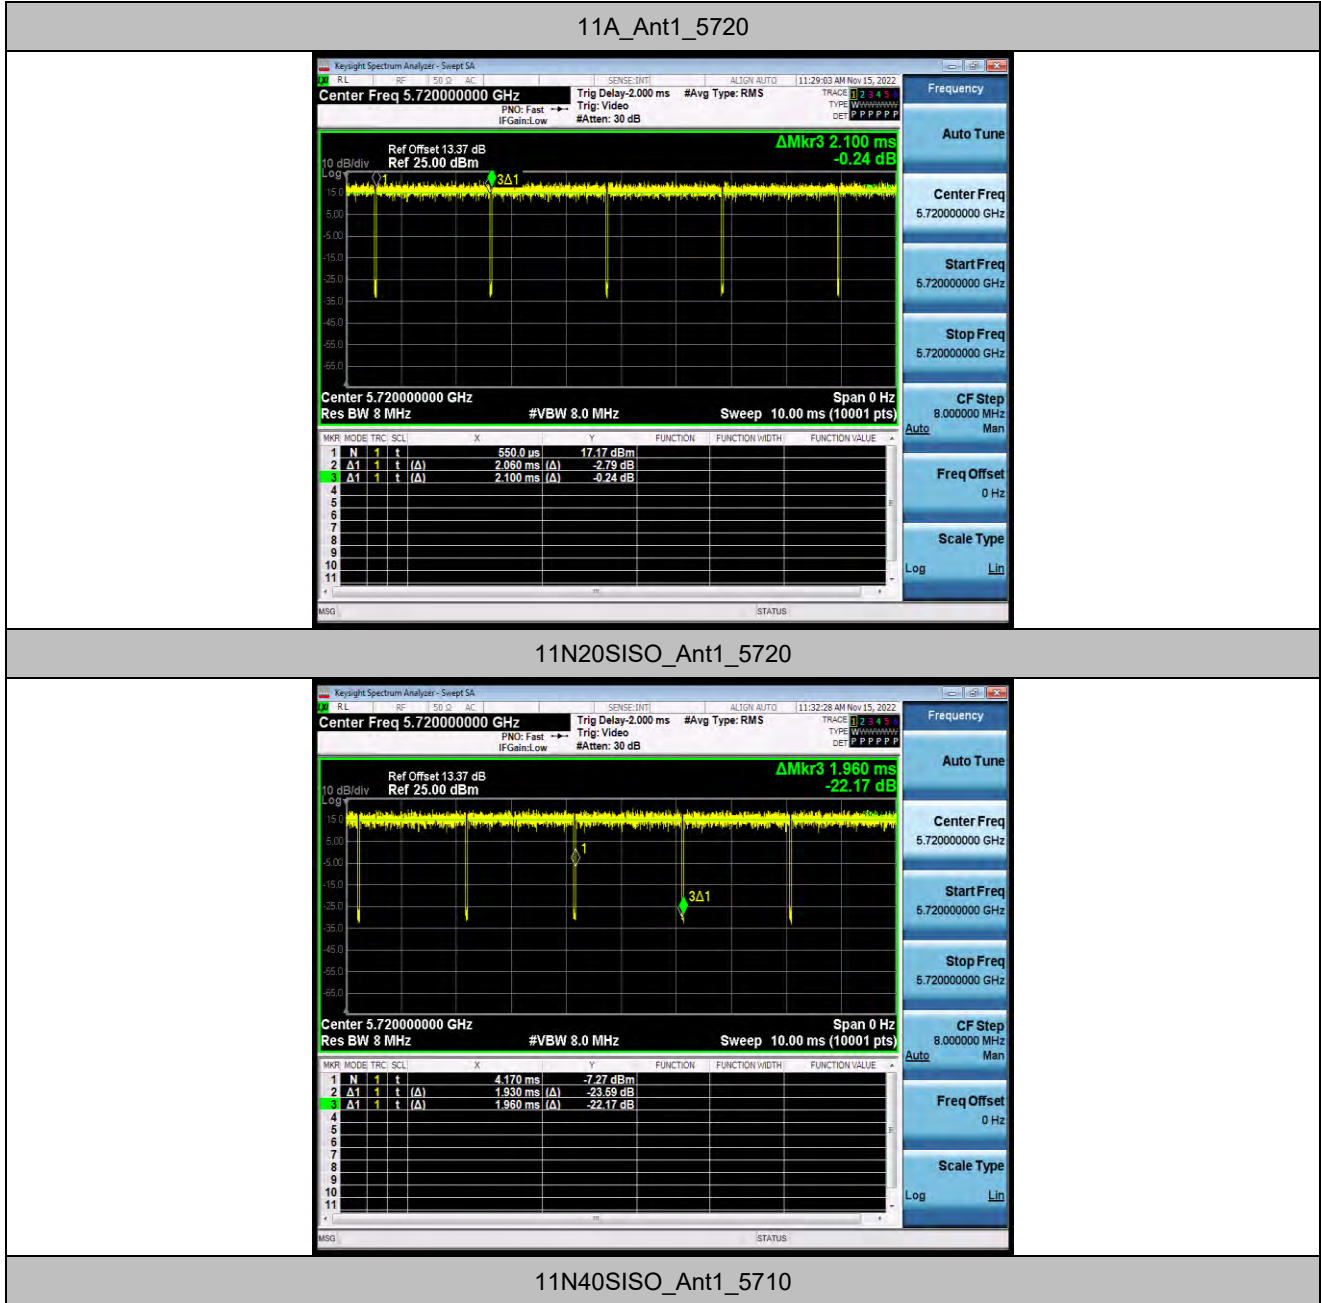




BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

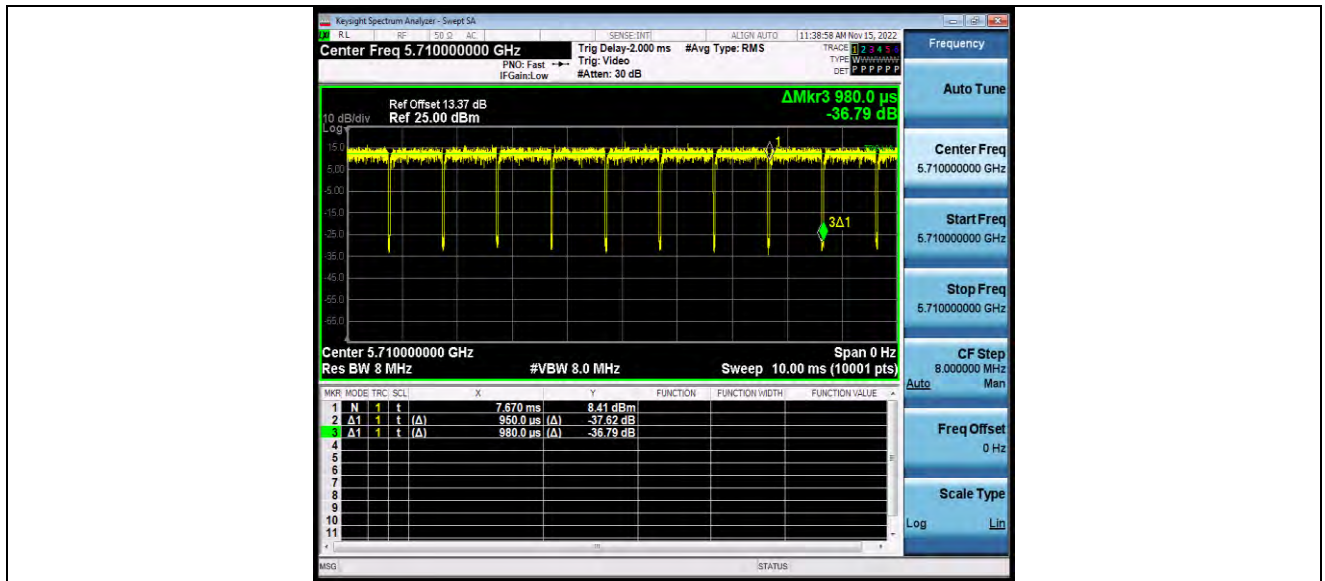

11AC20SISO\_Ant1\_5720

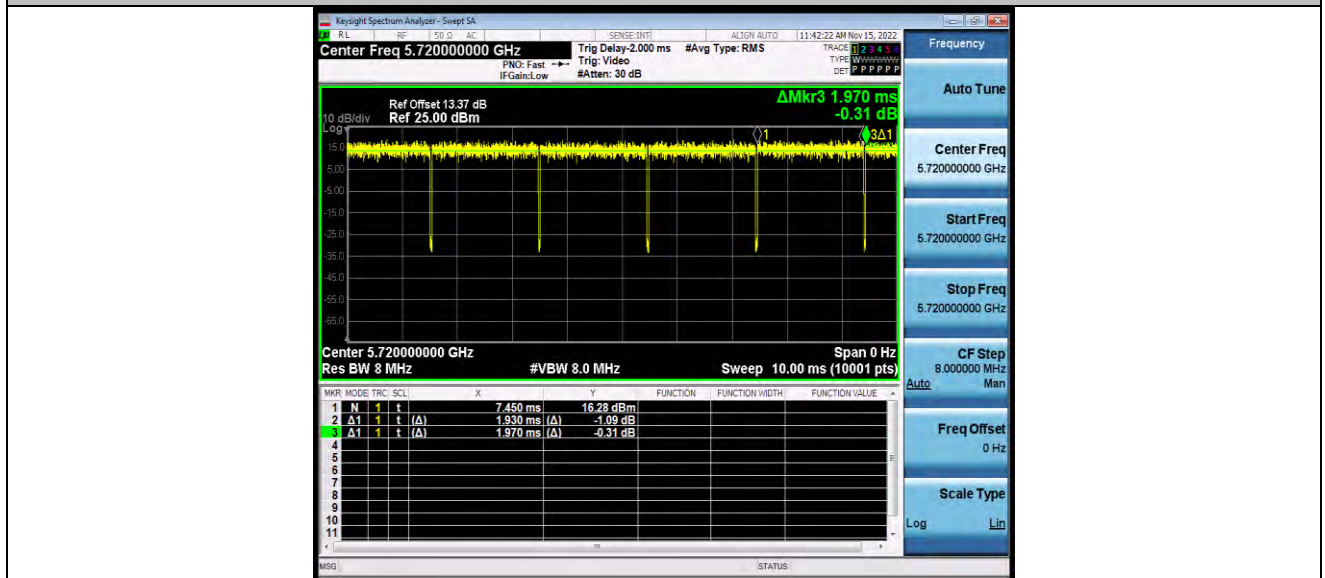


11AC40SISO\_Ant1\_5710






**BUREAU  
VERITAS**

Test Report No.: W7L-P22110001RF03

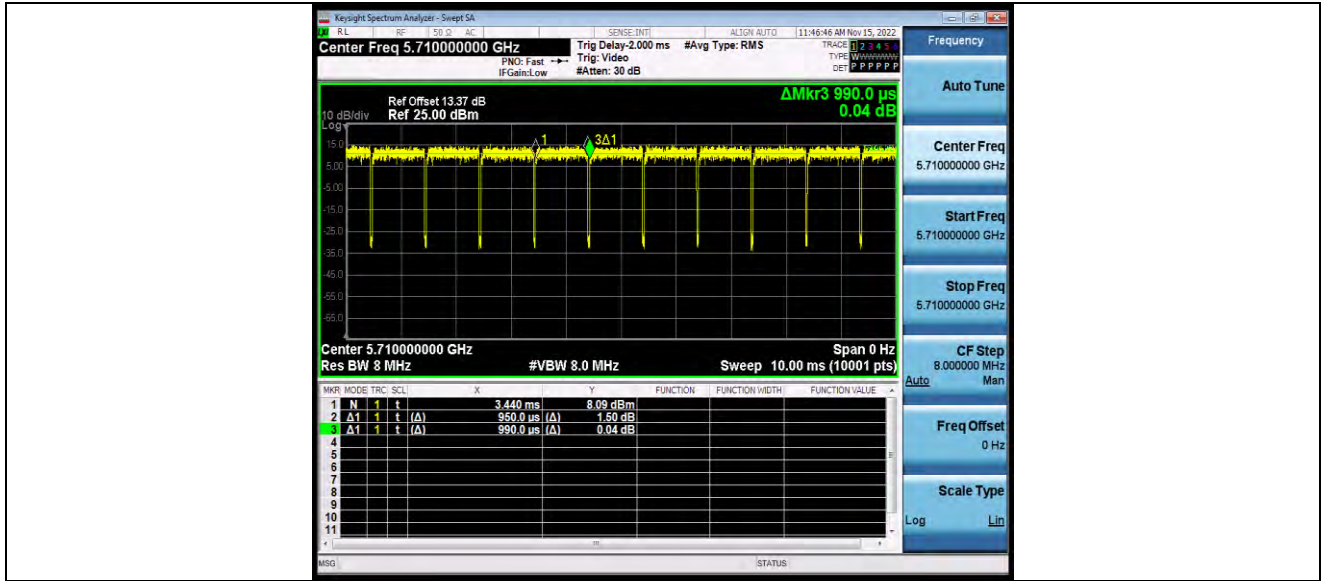

11AC80SISO\_Ant1\_5690

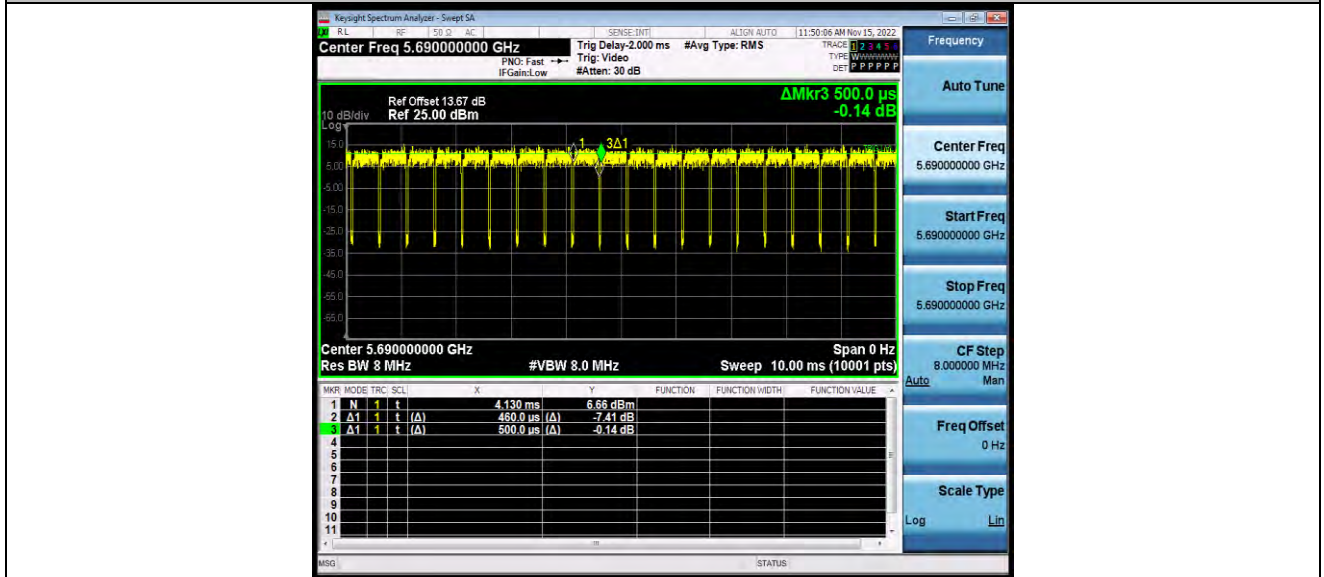



## MAXIMUM POWER SPECTRAL DENSITY TEST RESULT

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5720_UNII-2C	4.55	≤11.00	PASS
		5720_UNII-3	0.32	≤30.00	PASS
11N20SISO	Ant1	5720_UNII-2C	3.77	≤11.00	PASS
		5720_UNII-3	-0.54	≤30.00	PASS
11N40SISO	Ant1	5710_UNII-2C	0.12	≤11.00	PASS
		5710_UNII-3	-4.92	≤30.00	PASS
11AC20SISO	Ant1	5720_UNII-2C	2.56	≤11.00	PASS
		5720_UNII-3	-1.96	≤30.00	PASS
11AC40SISO	Ant1	5710_UNII-2C	-0.72	≤11.00	PASS
		5710_UNII-3	-5.89	≤30.00	PASS
11AC80SISO	Ant1	5690_UNII-2C	-2.94	≤11.00	PASS
		5690_UNII-3	-10.11	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.  
2.The Duty Cycle Factor and RBW Factor is compensated in the graph.



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

### TEST GRAPHS

11A\_Ant1\_5720\_UNII-2C



11A\_Ant1\_5720\_UNII-3



11N20SISO\_Ant1\_5720\_UNII-2C



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11N40SISO\_Ant1\_5710\_UNII-3




11AC20SISO\_Ant1\_5720\_UNII-2C





BUREAU VERITAS

Test Report No.: W7L-P22110001RF03

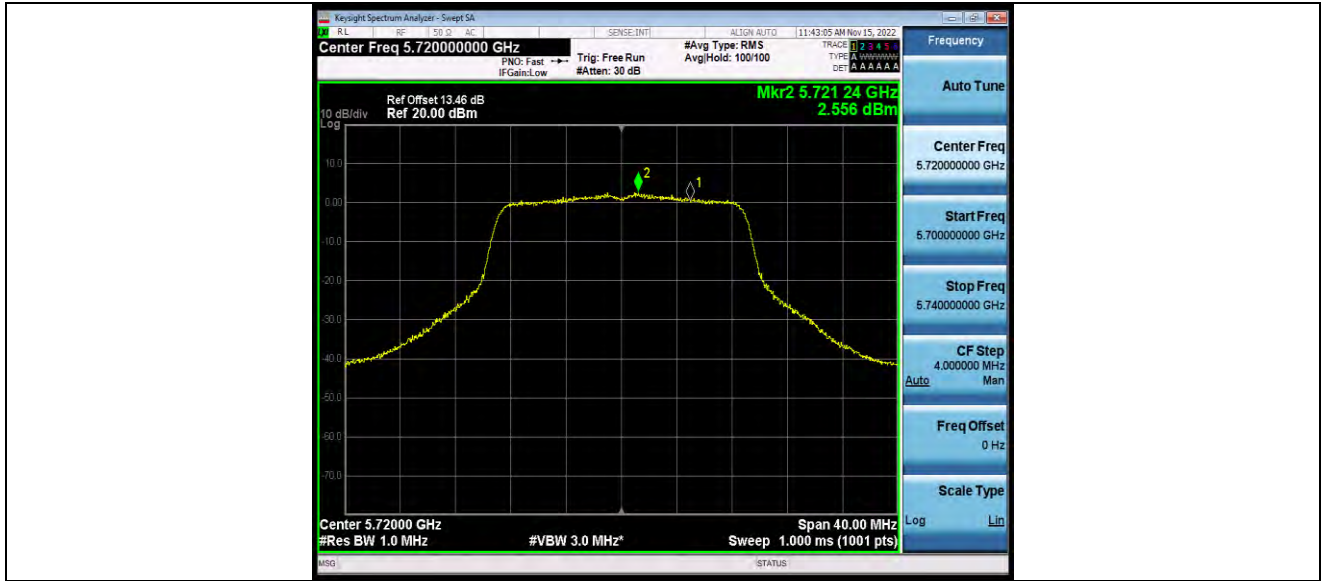



BUREAU VERITAS

Test Report No.: W7L-P22110001RF03



11AC40SISO\_Ant1\_5710\_UNII-3



11AC80SISO\_Ant1\_5690\_UNII-2C