



No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM181000924402
Page: 1 of 1452

TEST REPORT

Application No.: SZEM1810009244CR
Applicant: Shenzhen Mindray Bio-Medical Electronics Co., Ltd.
Address of Applicant: Mindray Building, Keji 12th Road South, High-tech Ind, Nanshan, Shenzhen, China.
Manufacturer: Shenzhen Mindray Bio-Medical Electronics Co., Ltd.
Address of Manufacturer: Mindray Building, Keji 12th Road South, High-tech Industrial Park, Nanshan, Shenzhen
Factory: Shenzhen Mindray Bio-Medical Electronics Co., Ltd.
Address of Factory: Mindray Building, Keji 12th Road South, High-tech Industrial Park, Nanshan, Shenzhen
Equipment Under Test (EUT):
EUT Name: Embedded wireless module
Model No.: SX-SDMAC-2832S+
Trade mark: Mindray
FCC ID: ZLZ-PMACS
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2018-10-25
Date of Test: 2018-10-31 to 2018-11-21
Date of Issue: 2018-11-22

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-11-22		Original

Authorized for issue by:			
		 Edison Li /Project Engineer	
		 Eric Fu /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.407 (c)	Pass

N/A: Not applicable

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Duty Cycle	47 CFR Part 15, Subpart E 15.407	KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)	Pass
99% Bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 II D	N/A	Pass
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 2	47 CFR Part 15, Subpart C 15.407 (e)	Pass
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
DFS: Non-occupancy period	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
DFS: Channel Move Time	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
DFS: Channel Closing Transmission Time	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Radiated Emissions	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Frequency Stability	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart C 15.407 (g)	Pass

N/A: Not applicable



Remark:

Model No.: SX-SDMAC-2832S+

There are five antennas of the above model, with only difference as below:

Antenna Type	Supplier	Antenna Part No.	Freq.	Peak Antenna Gain(dBi)	Remark
Dipole	AMPHENOL	MG7018-41-000-R	2.4G 5G	1.87dBi Peak @2.4G 0.94dBi Peak @5G	Antenna1
PCB Dipole	Laird	MAF95310	2.4G 5G	2.79dBi Peak @2.4G 3.38dBi Peak @5G	Antenna2
Dipole	AMPHENOL	MG7324-41-000-R	2.4G 5G	1.32dBi Peak @2.4G 2.75dBi Peak @5G	Antenna3
PCB Dipole	Laird	EMF2449A2-8UFL	2.4G 5G	2.79dBi Peak @2.4G 3.38dBi Peak @5G	Antenna4
PCB Dipole	Yichuang	AZM24510-1A	2.4G 5G	1dBi Peak @2.4G 1dBi Peak @5G	Antenna5

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	5
4 GENERAL INFORMATION	7
4.1 DETAILS OF E.U.T	7
4.2 DESCRIPTION OF SUPPORT UNITS	7
4.3 MEASUREMENT UNCERTAINTY	8
4.4 TEST LOCATION	9
4.5 TEST FACILITY	9
4.6 DEVIATION FROM STANDARDS	9
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	13
6.1 ANTENNA REQUIREMENT	13
6.1.1 Test Requirement:	13
6.1.2 Conclusion	13
6.2 TRANSMISSION IN THE ABSENCE OF DATA	14
6.2.1 Test Requirement:	14
6.2.2 Conclusion	14
7 RADIO SPECTRUM MATTER TEST RESULTS	15
7.1 99% BANDWIDTH	19
7.1.1 E.U.T. Operation	19
7.1.2 Test Setup Diagram	20
7.1.3 Measurement Procedure and Data	20
7.2 26dB EMISSION BANDWIDTH	21
7.2.1 E.U.T. Operation	21
7.2.2 Test Setup Diagram	22
7.2.3 Measurement Procedure and Data	22
7.3 MINIMUM 6 dB BANDWIDTH (5.725-5.85 GHz BAND)	23
7.3.1 E.U.T. Operation	23
7.3.2 Test Setup Diagram	23
7.3.3 Measurement Procedure and Data	23
7.4 MAXIMUM CONDUCTED OUTPUT POWER	24
7.4.1 E.U.T. Operation	25
7.4.2 Test Setup Diagram	26
7.4.3 Measurement Procedure and Data	26
7.5 PEAK POWER SPECTRUM DENSITY	27
7.5.1 E.U.T. Operation	27
7.5.2 Test Setup Diagram	28
7.5.3 Measurement Procedure and Data	28
7.6 DFS: NON-OCCUPANCY PERIOD	29
7.6.1 E.U.T. Operation	29
7.6.2 Test Setup Diagram	30
7.6.3 Measurement Procedure and Data	31

7.7	DFS: CHANNEL MOVE TIME	32
7.7.1	<i>E.U.T. Operation</i>	32
7.7.2	<i>Test Setup Diagram</i>	33
7.7.3	<i>Measurement Procedure and Data</i>	34
7.8	DFS: CHANNEL CLOSING TRANSMISSION TIME	35
7.8.1	<i>E.U.T. Operation</i>	35
7.8.2	<i>Test Setup Diagram</i>	36
7.8.3	<i>Measurement Procedure and Data</i>	37
7.9	RADIATED EMISSIONS	38
7.9.1	<i>E.U.T. Operation</i>	38
7.9.2	<i>Test Setup Diagram</i>	39
7.9.3	<i>Measurement Procedure and Data</i>	40
7.10	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	633
7.10.1	<i>E.U.T. Operation</i>	634
7.10.2	<i>Test Setup Diagram</i>	635
7.10.3	<i>Measurement Procedure and Data</i>	636
7.11	FREQUENCY STABILITY	1317
7.11.1	<i>E.U.T. Operation</i>	1317
7.11.2	<i>Test Setup Diagram</i>	1318
7.11.3	<i>Measurement Procedure and Data</i>	1318
8	PHOTOGRAPHS	1319
8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	1319
9	APPENDIX	1320
9.1	APPENDIX 15.407	1320-1447

4 General Information

4.1 Details of E.U.T.

Power supply:	3.3V DC from mainboard			
Operation Frequency	Band	Mode	Frequency Range(MHz)	Number of channels
	UNII Band I	802.11a/n(HT20)/ac(HT20)	5180-5240	4
		802.11n(HT40)/ac(HT40)	5190-5230	2
		802.11ac(HT80)	5210	1
	UNII Band II-A	802.11a/n(HT20)/ac(HT20)	5260-5320	4
		802.11n(HT40)/ac(HT40)	5270-5310	2
		802.11ac(HT80)	5290	1
	UNII Band II-C	802.11a/n(HT20)/ac(HT20)	5500-5700	11
		802.11n(HT40)/ac(HT40)	5510-5670	5
		802.11ac(HT80)	5530, 5610	2
	UNII Band III	802.11a/n(HT20)/ac(HT20)	5745-5825	5
		802.11n(HT40)/ac(HT40)	5755-5795	2
		802.11ac(HT80)	5775	1
* The 5600-5650MHz cannot be used in Canada market.				
Modulation Type:	802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)			
DFS Function:	Slave without radar detection			
TPC Function:	Not support			
Sample Type:	Fixed device			
Antenna Type:	Please refer to section 2 of this report			
Antenna Gain:	Please refer to section 2 of this report			

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	Apple	A1357 W010A051	REF. No.SEA0500
Laptop	Lenovo	T430u	REF. No.SEA1800
Network Cable	SGS	N/A	REF. No.SEA1100
USB Cable	PHILIPS	SWR2101	REF. No.SEA0700
mainboard	Provided by client	N/A	N/A

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 2.84\text{dB}$
6	Conducted Spurious emissions	$\pm 0.75\text{dB}$
7	RF Radiated power	$\pm 4.5\text{dB}$ (below 1GHz) $\pm 4.8\text{dB}$ (above 1GHz)
8	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (Below 1GHz) $\pm 4.8\text{dB}$ (Above 1GHz)
9	Temperature test	$\pm 1\text{ }^{\circ}\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017-05-10	2020-05-09
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2018-07-12	2019-07-11
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018-09-25	2019-09-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2018-04-02	2019-04-01
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018-04-02	2019-04-01

RF Conducted Test					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24
Power Sensor	KEYSIGHT	U2021XA	SEM009-13	2018-04-13	2019-04-12

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2018-09-25	2019-09-24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2018-09-27	2019-09-26
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000924402
Page: 11 of 1452

Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

RE in Chamber					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2018-09-27	2019-09-26
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26
Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2018-04-02	2019-04-01
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2018-07-12	2019-07-11

DFS Test					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Spectrum Analyzer	KEYSIGHT	N9010A	SEM004-12	2018-04-13	2019-04-12
Measurement Software	KEYSIGHT	N7607C Signal Studio	N/A	N/A	N/A
Measurement Software	Agilent	ISMonitor10	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2018-07-12	2019-07-11
MXG Vector Signal Generator	KEYSIGHT	N5182A	SEM006-14	2018-04-13	2019-04-12
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2018-04-13	2019-04-12
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2018-04-13	2019-04-12
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2018-04-13	2019-04-12
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2018-04-13	2019-04-12
Splitter	Minicircuits	ZFC-2-10G	SEM043-12	N/A	N/A
Splitter	Minicircuits	ZFC-2-10G	SEM043-12	N/A	N/A



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000924402
Page: 12 of 1452

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2018-09-25	2019-09-24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2018-09-27	2019-09-26
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2018-09-27	2019-09-26
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2018-09-27	2019-09-26
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2018-09-27	2019-09-26
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2018-04-08	2019-04-07

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement.

Antenna location: Refer to external photos.

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip (QCA9377-3) support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)
Test Method: ANSI C63.10 (2013) Section 6.2
Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Pretest these modes to find the worst case: b:TX mode (Band 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.


d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

e:TX mode (Band 3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

The worst case for final test:

b:TX mode (Band 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.1.2 Test Setup Diagram

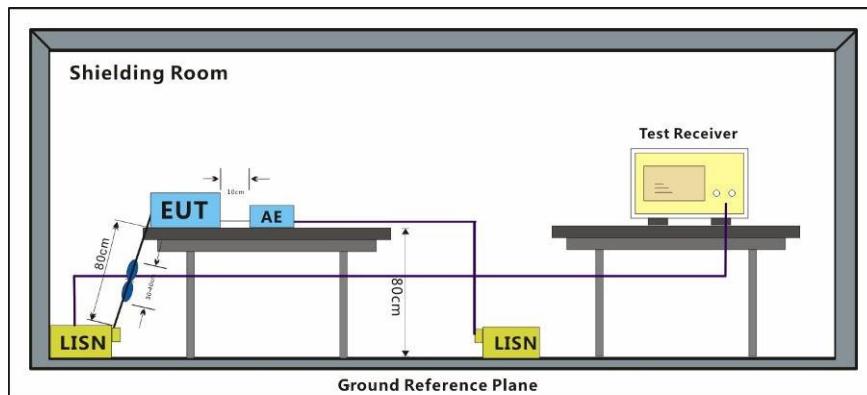


7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 μ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:b; Line:Live Line

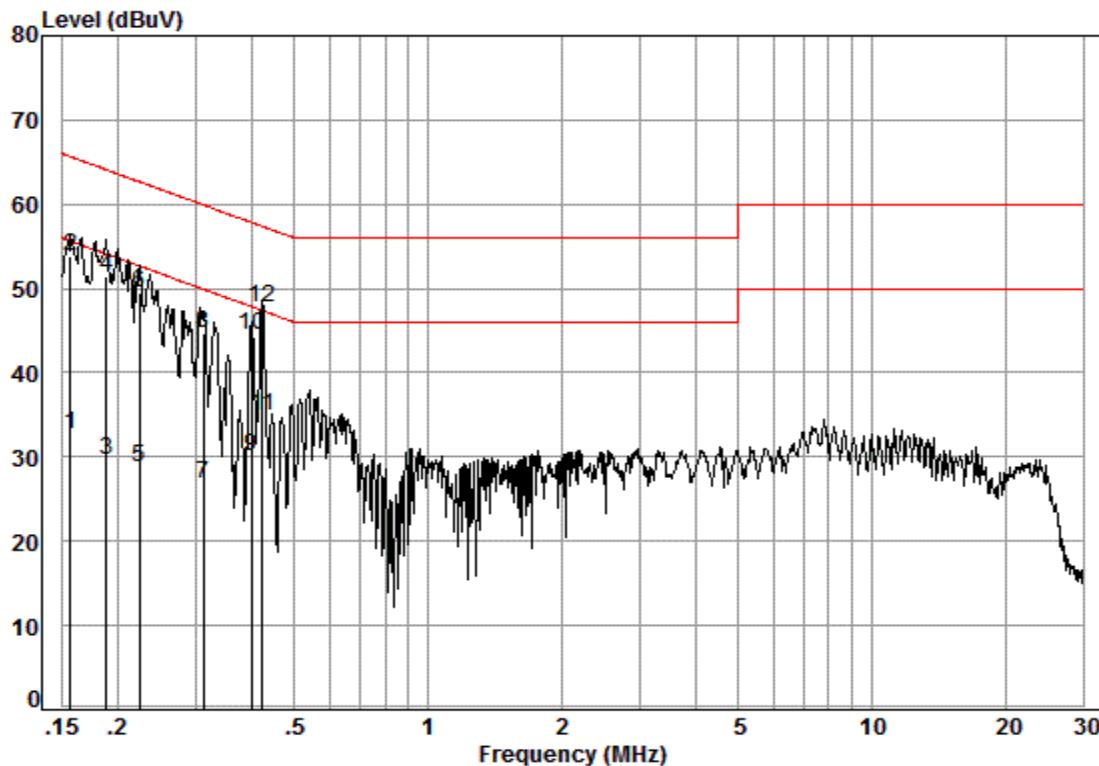

Site : Shielding Room


Condition: Line

Job No. : 09244CR

Test mode: b

Freq	Cable	LISN	Read	Limit	Over	Remark		
	Loss	Factor	Level					
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16	0.02	9.51	23.17	32.70	55.65	-22.95	Average
2	0.16	0.02	9.51	44.38	53.91	65.65	-11.74	QP
3	0.19	0.03	9.51	20.14	29.68	54.11	-24.43	Average
4	0.19	0.03	9.51	41.92	51.46	64.11	-12.65	QP
5	0.22	0.03	9.50	19.23	28.76	52.70	-23.94	Average
6	0.22	0.03	9.50	40.04	49.57	62.70	-13.13	QP
7	0.31	0.03	9.51	17.32	26.86	49.93	-23.07	Average
8	0.31	0.03	9.51	35.12	44.66	59.93	-15.27	QP
9	0.40	0.04	9.49	20.61	30.14	47.86	-17.72	Average
10	0.40	0.04	9.49	34.83	44.36	57.86	-13.50	QP
11	0.42	0.04	9.49	25.27	34.80	47.37	-12.57	Average
12	0.42	0.04	9.49	38.11	47.64	57.37	-9.73	QP

Mode:b; Line:Neutral Line

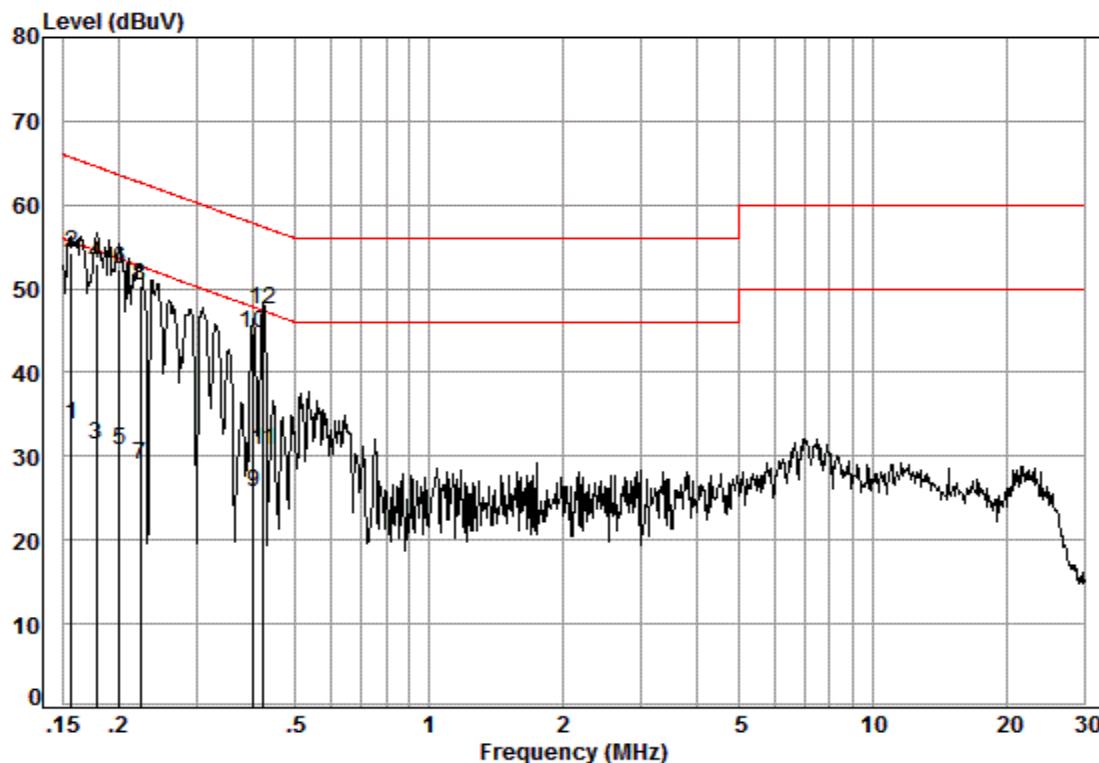

Site : Shielding Room

Condition: Neutral

Job No. : 09244CR

Test mode: b

Freq	Cable	LISN	Read	Limit	Over	Remark	
	Loss	Factor	Level	Level	Line		
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.16	0.02	9.58	24.21	33.81	55.65	-21.84 Average
2	0.16	0.02	9.58	44.77	54.37	65.65	-11.28 QP
3	0.18	0.03	9.58	21.76	31.37	54.59	-23.22 Average
4	0.18	0.03	9.58	43.33	52.94	64.59	-11.65 QP
5	0.20	0.03	9.57	21.21	30.81	53.58	-22.77 Average
6	0.20	0.03	9.57	42.64	52.24	63.58	-11.34 QP
7	0.22	0.03	9.57	19.35	28.95	52.70	-23.75 Average
8	0.22	0.03	9.57	40.70	50.30	62.70	-12.40 QP
9	0.40	0.04	9.59	16.02	25.65	47.81	-22.16 Average
10	0.40	0.04	9.59	35.11	44.74	57.81	-13.07 QP
11	0.42	0.04	9.59	21.06	30.69	47.37	-16.68 Average
12	0.42	0.04	9.59	37.96	47.59	57.37	-9.78 QP

7.2 99% Bandwidth

Test Requirement N/A

Test Method: KDB 789033 II D

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: b:TX mode (Band 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

e:TX mode (Band 3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

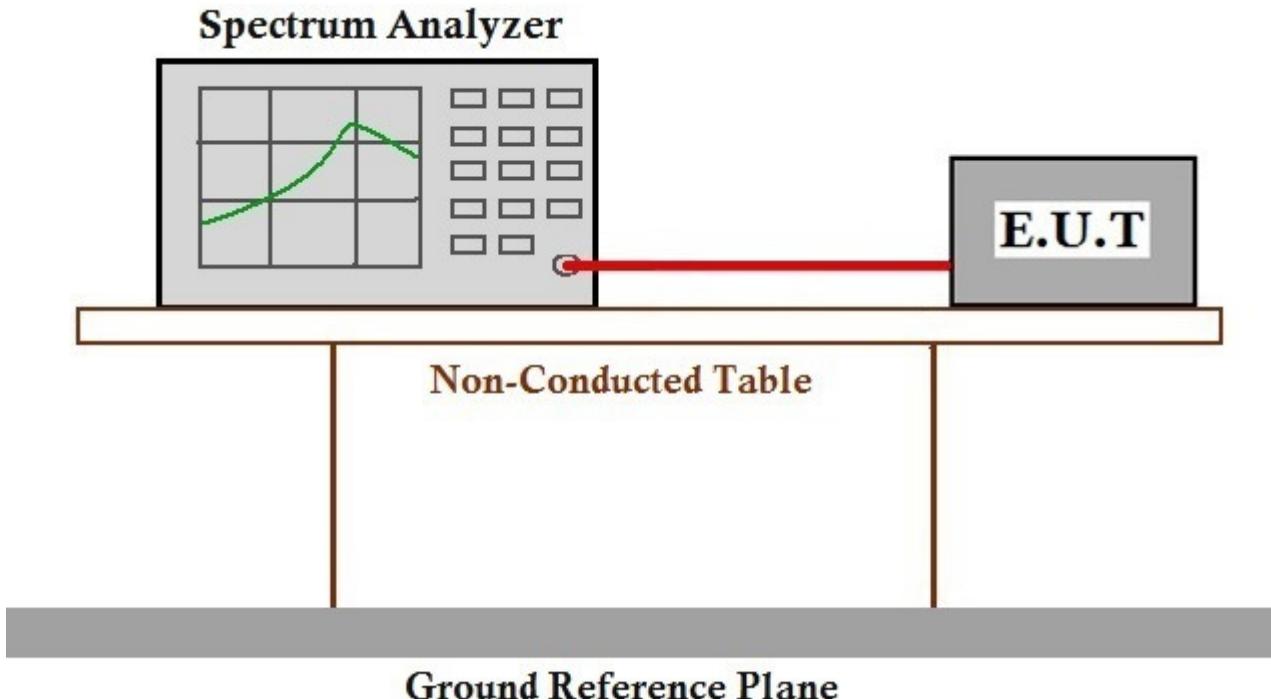7.2.2 Test Setup Diagram**7.2.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407

7.3 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II C 1

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

e:TX mode (Band 3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

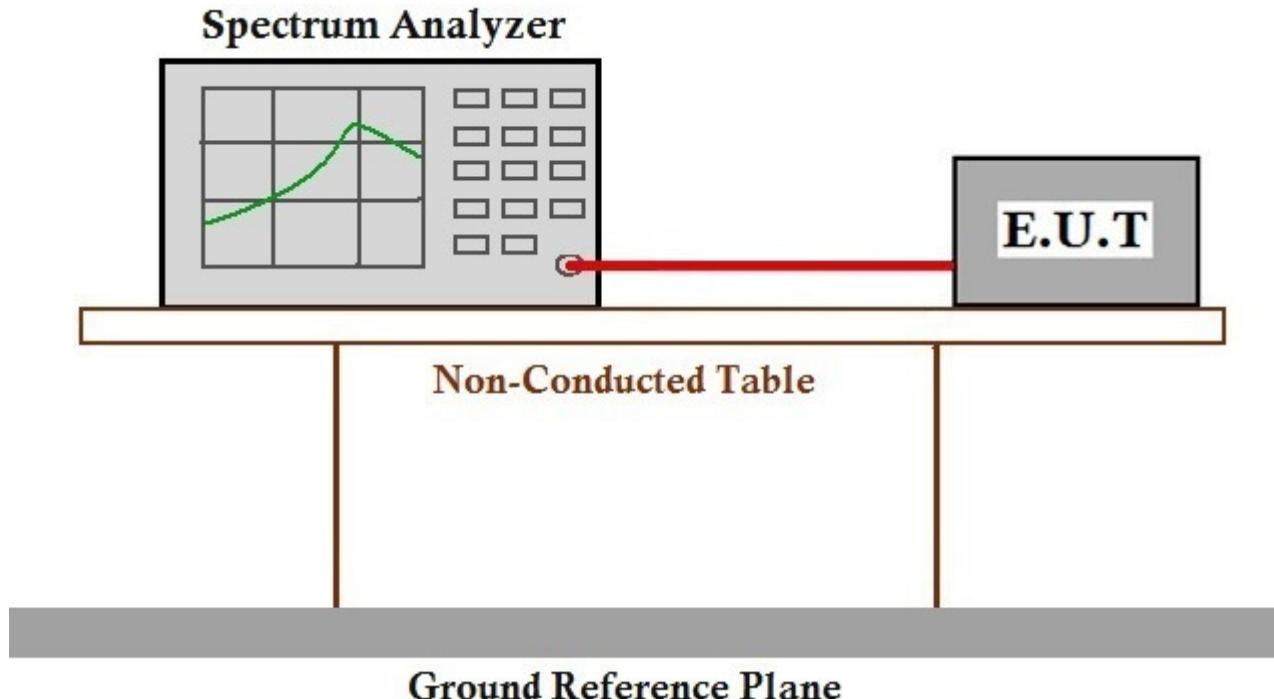7.3.2 Test Setup Diagram**7.3.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407

7.4 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)
Test Method: KDB 789033 D02 II C 2
Limit: ≥ 500 kHz


7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: e.TX mode (Band 3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.4.2 Test Setup Diagram

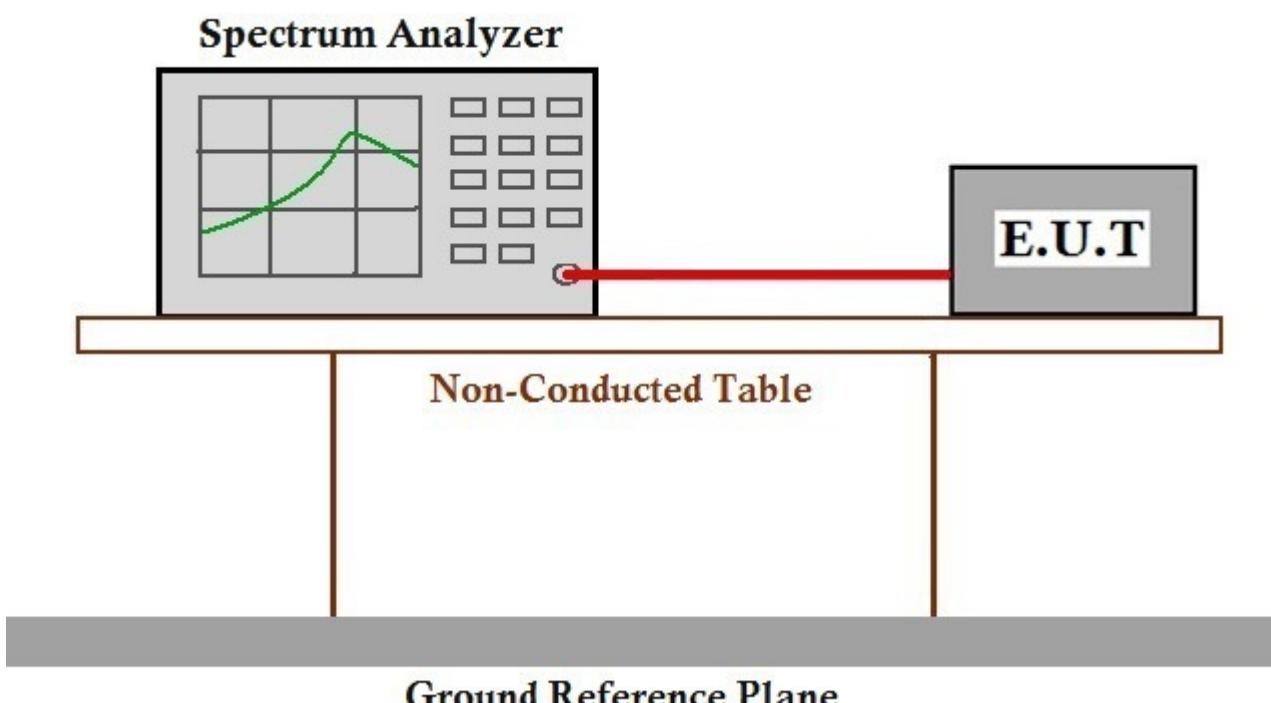

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.407

7.5 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) for client device or $11\text{dBm} + 10\log B^*$
5470-5725	≤250mW(24dBm) for client device or $11\text{dBm} + 10\log B^*$
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: b:TX mode (Band 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

e:TX mode (Band 3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

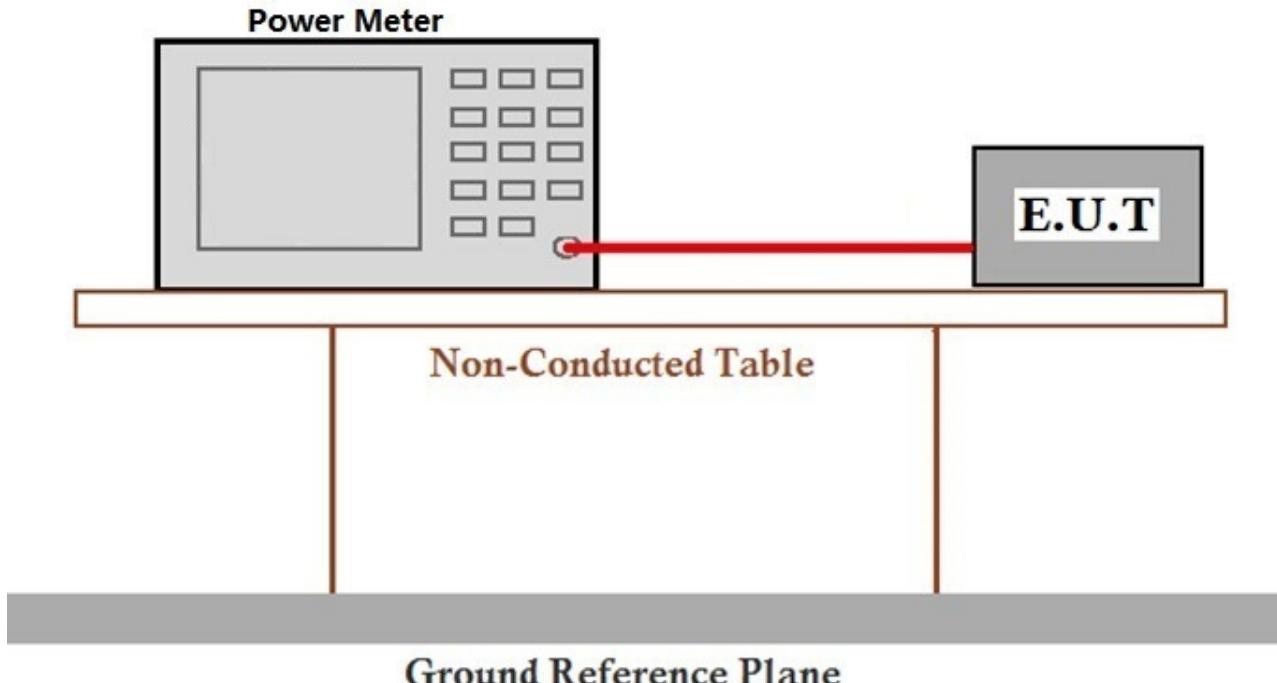7.5.2 Test Setup Diagram**7.5.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407

7.6 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: b:TX mode (Band 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

e:TX mode (Band 3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

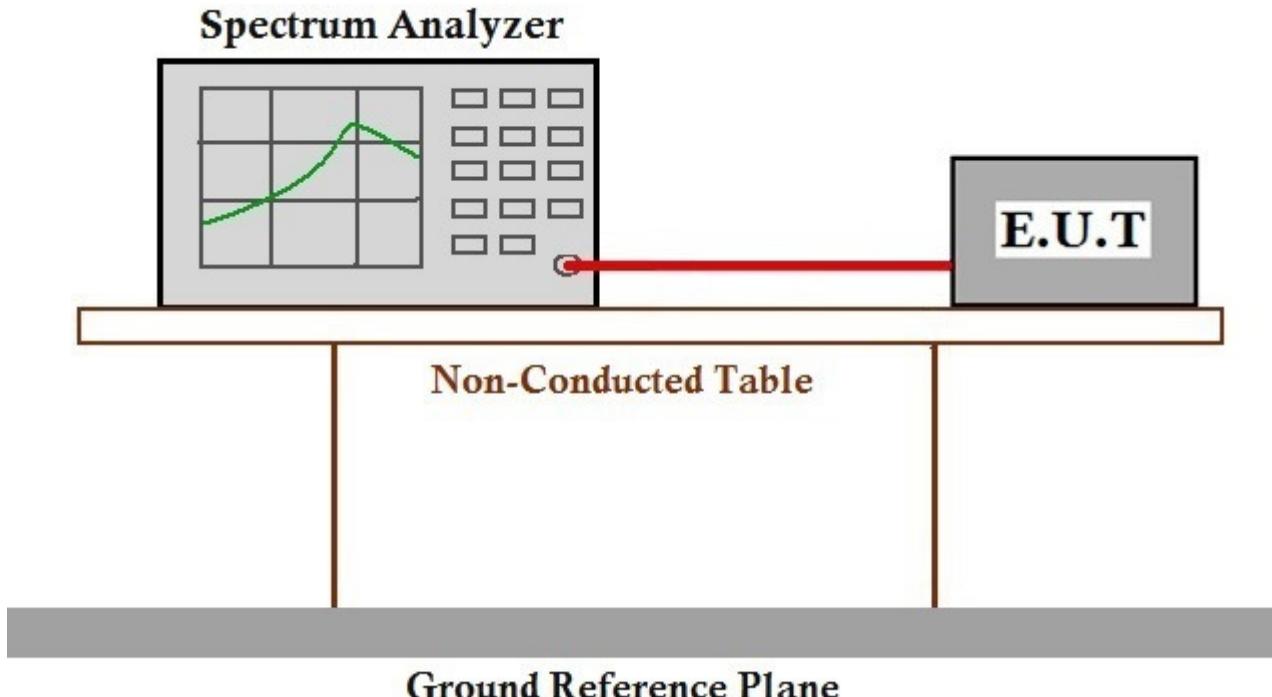7.6.2 Test Setup Diagram**7.6.3 Measurement Procedure and Data**

The detailed test data see: Appendix 15.407

7.7 DFS: Non-occupancy period


Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3
Limit: Minimum 30 minutes

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 21.1 °C Humidity: 42.6 % RH Atmospheric Pressure: 1015 mbar
Test mode: c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.


7.7.2 Test Setup Diagram

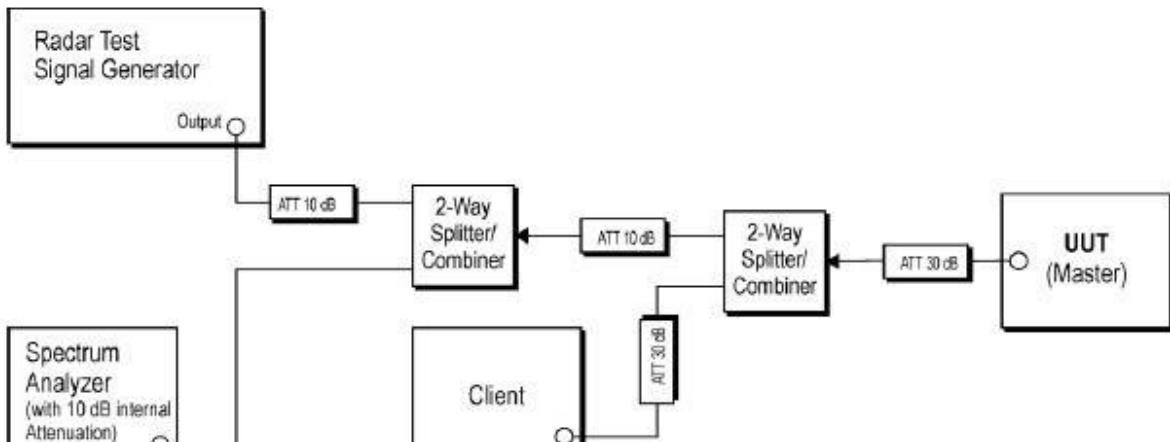

DFS master

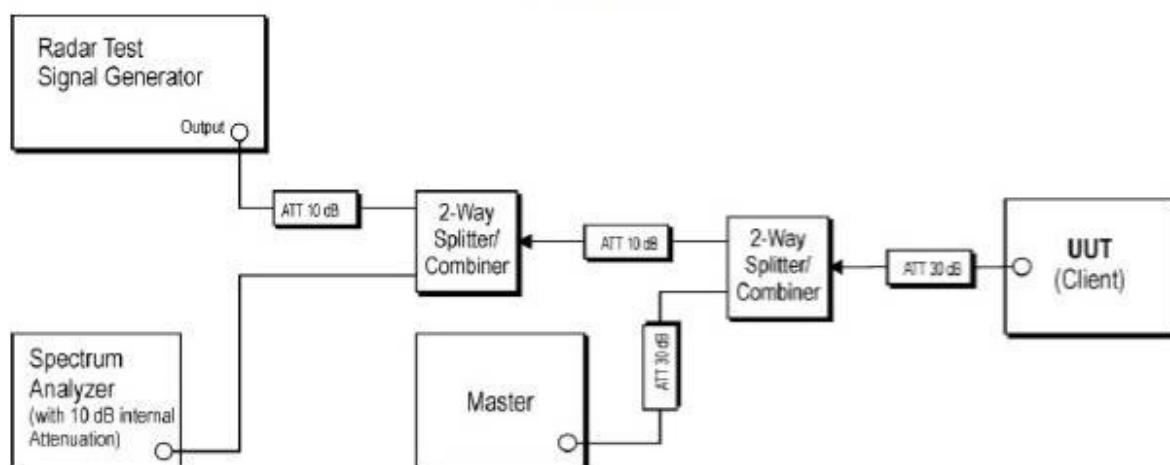

DFS slave with radar detection

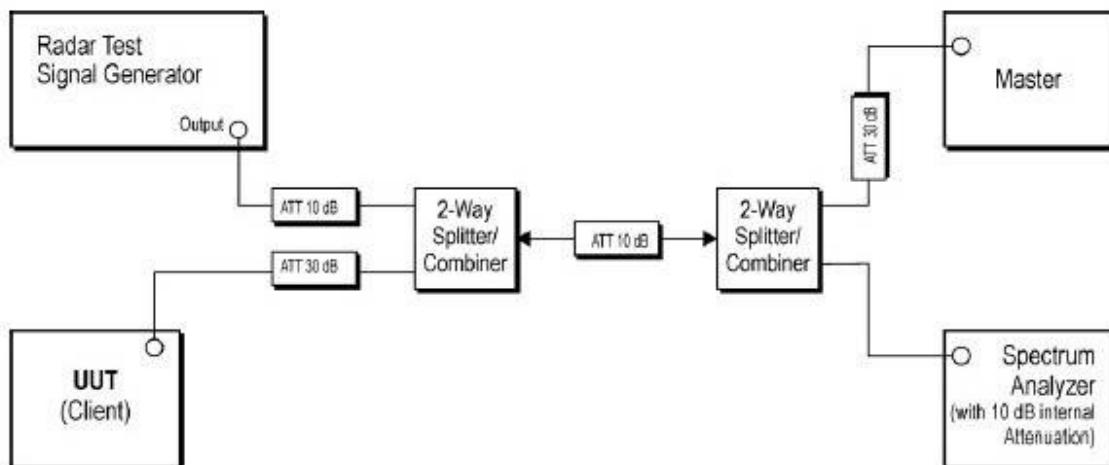

DFS slave without radar detection

7.7.3 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: Dwell (0.3ms) = S (12000ms) / B (4000); where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: C (ms) = N X Dwell (0.3ms); where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

The detailed test data see: Appendix 15.407

7.8 DFS: Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3
Limit: 10 seconds(should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst)

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 21.1 °C Humidity: 42.6 % RH Atmospheric Pressure: 1015 mbar

Test mode: c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

7.8.2 Test Setup Diagram

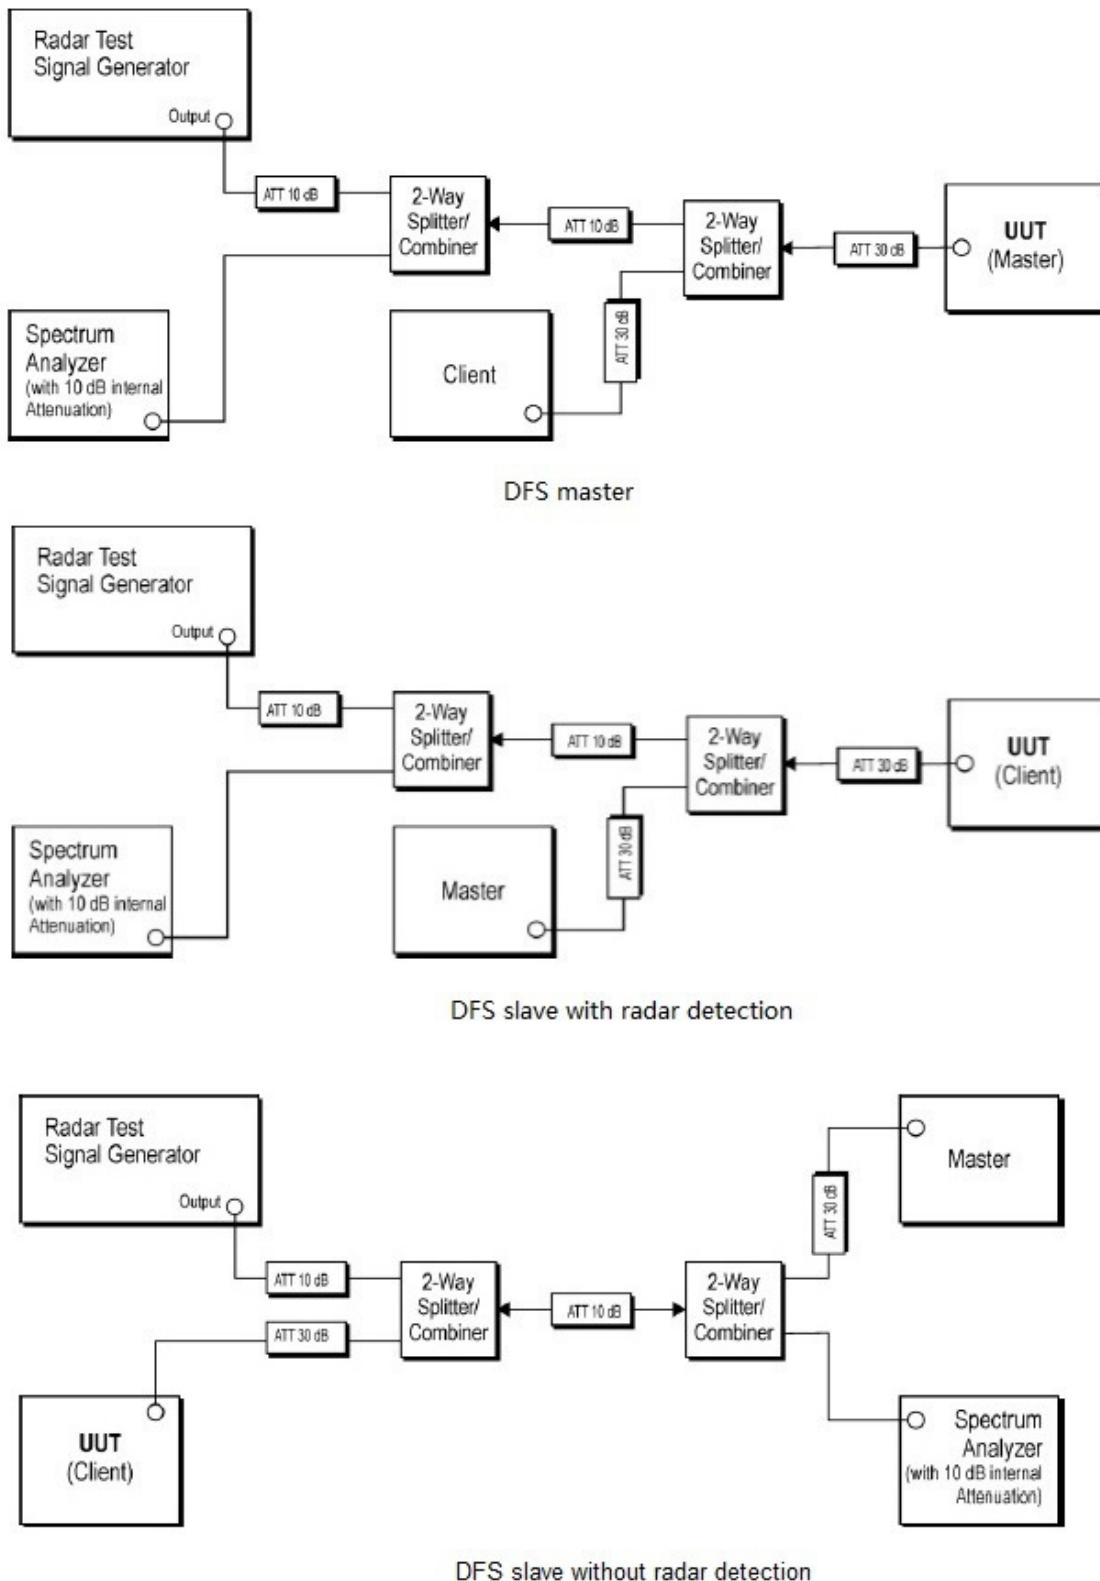

7.8.3 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file “iperf.exe” specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: Dwell (0.3ms) = S (12000ms) / B (4000); where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: C (ms) = N X Dwell (0.3ms); where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

The detailed test data see: Appendix 15.407

7.9 DFS: Channel Closing Transmission Time


Test Requirement	KDB 905462 D02 Section 5.1
Test Method:	KDB 905462 D02 Section 7.8.3
Limit:	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period(should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. It is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions)

7.9.1 E.U.T. Operation


Operating Environment:

Temperature:	21.1 °C	Humidity:	42.6 % RH	Atmospheric Pressure:	1015 mbar
Test mode:	c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.				
	d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.				


7.9.2 Test Setup Diagram

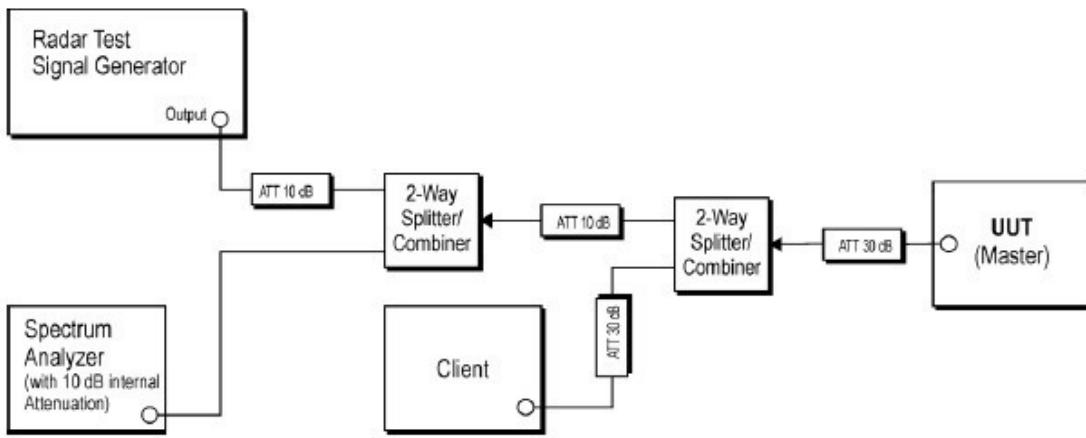

DFS master

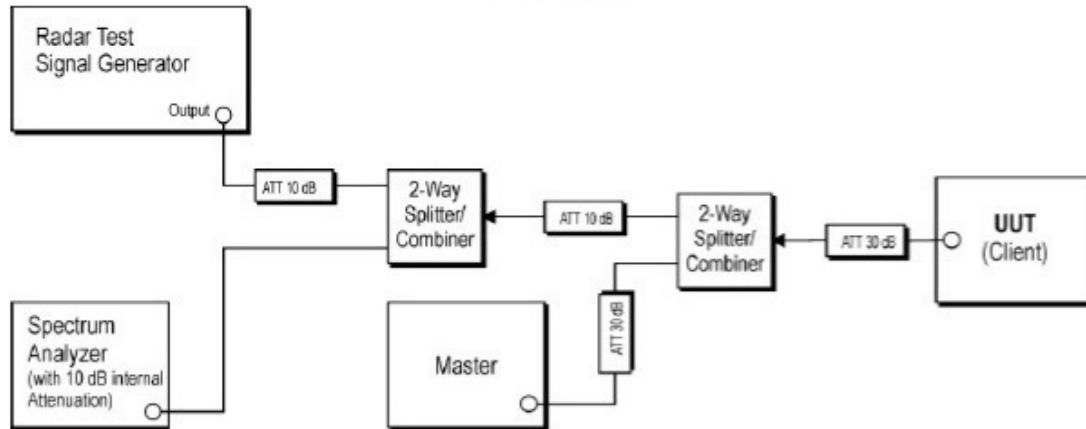

DFS slave with radar detection

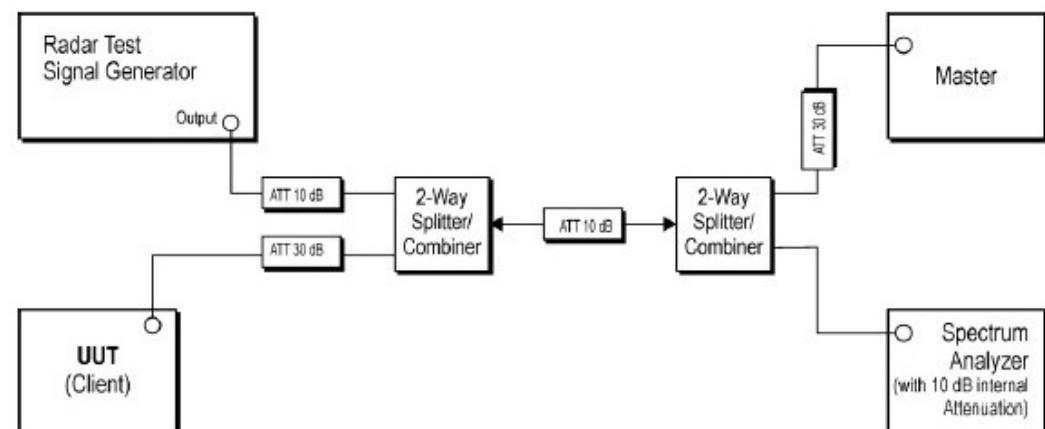

DFS slave without radar detection

7.9.3 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file “iperf.exe” specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: Dwell (0.3ms) = S (12000ms) / B (4000); where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: C (ms) = N X Dwell (0.3ms); where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

The detailed test data see: Appendix 15.407

7.10 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

7.10.1 E.U.T. Operation

Operating Environment:


Temperature: 25.5 °C Humidity: 65.2 % RH Atmospheric Pressure: 1020 mbar

Test mode: b:TX mode (Band 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

c:TX mode (Band 2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

d:TX mode (Band 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

e:TX mode (Band 3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.

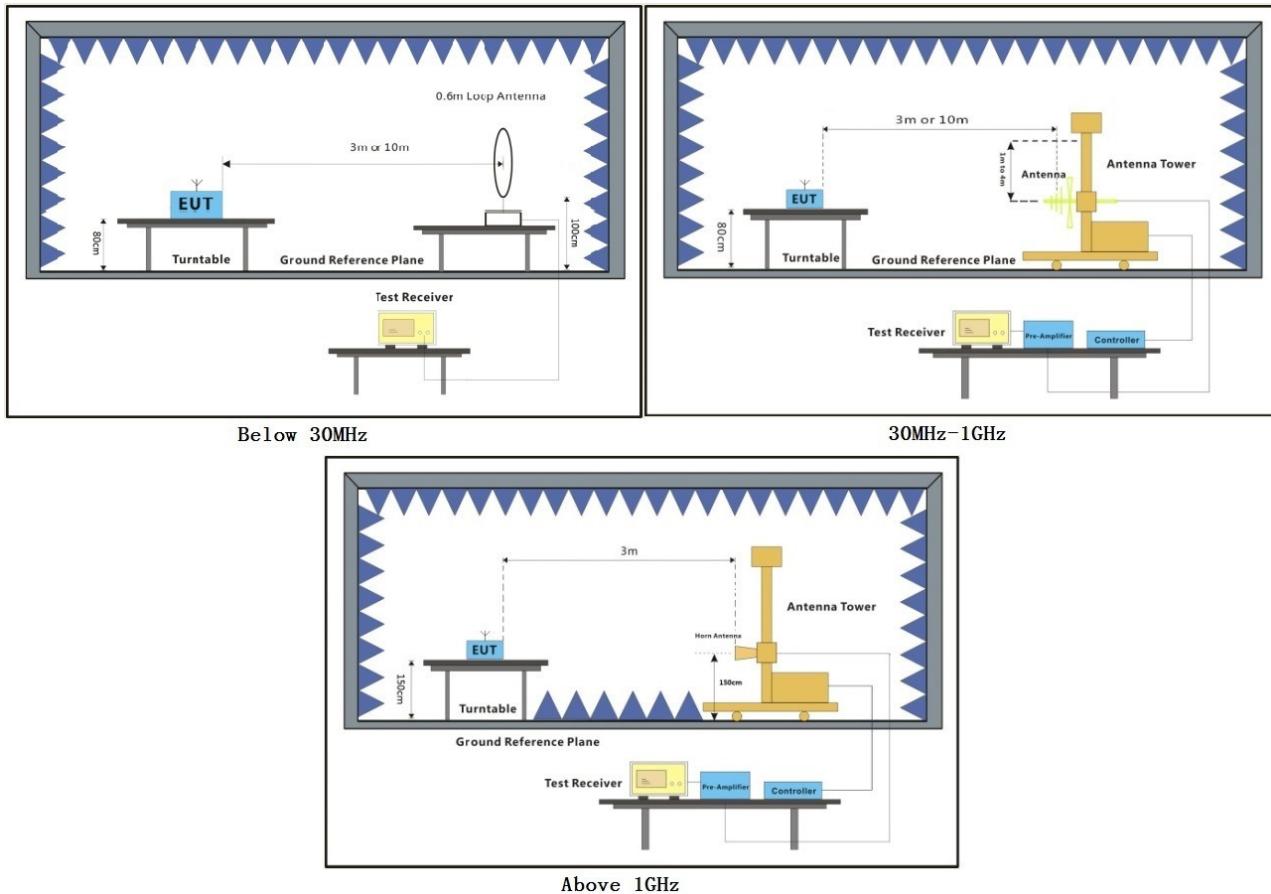7.10.2 Test Setup Diagram


7.10.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Mode:b; Polarization:Horizontal;

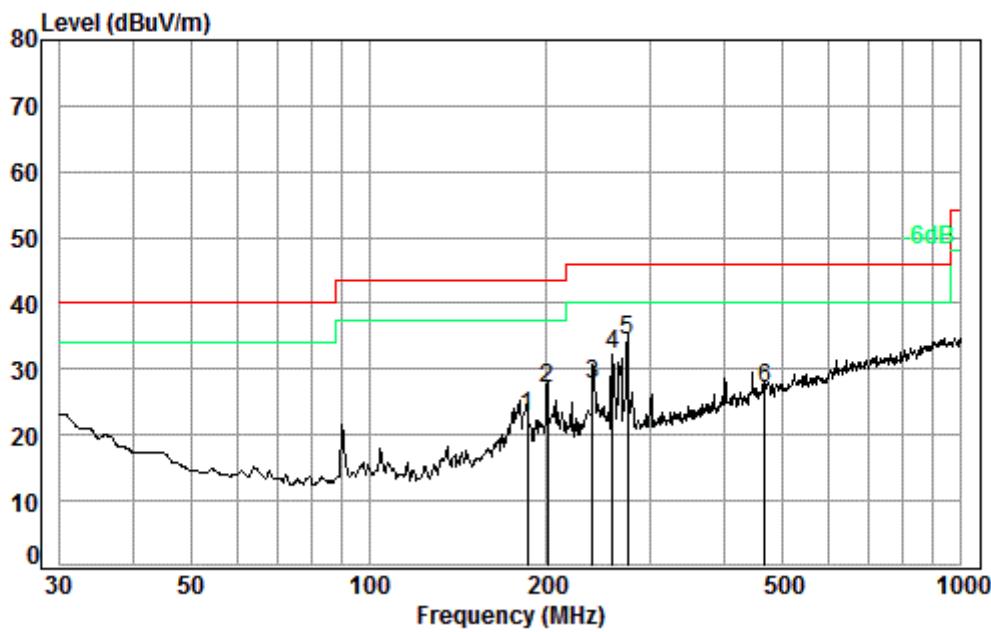


Condition: 3m HORIZONTAL

Job No. : 09244CR

Test Mode: b

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	185.14	1.38	16.06	26.95	32.39	22.88	43.50	-20.62
2	200.69	1.40	16.53	26.90	36.04	27.07	43.50	-16.43
3	239.15	1.62	18.73	26.79	34.11	27.67	46.00	-18.33
4	258.33	1.71	19.08	26.74	38.29	32.34	46.00	-13.66
5 pp	273.23	1.78	18.90	26.70	40.25	34.23	46.00	-11.77
6	467.24	2.48	23.93	27.48	28.22	27.15	46.00	-18.85

Mode:b; Polarization:Vertical;

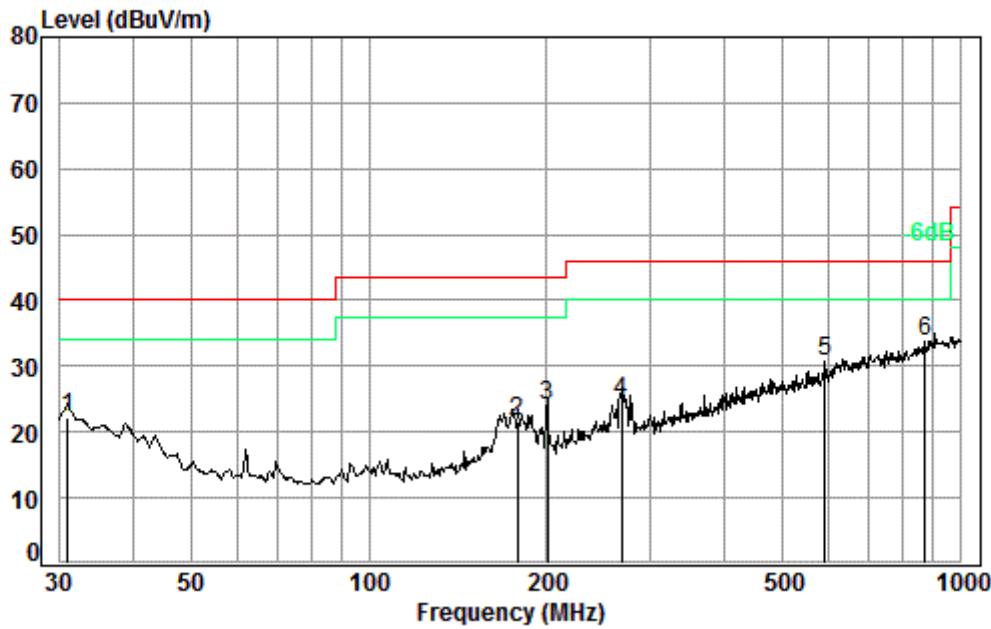

Condition: 3m VERTICAL


Job No. : 09244CR

Test Mode: b

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level			Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.96	0.60	21.95	27.45	27.20	22.30	40.00	-17.70
2	178.13	1.37	15.86	26.98	31.32	21.57	43.50	-21.93
3	200.69	1.40	16.53	26.90	32.94	23.97	43.50	-19.53
4	267.55	1.76	18.98	26.71	30.66	24.69	46.00	-21.31
5	588.91	2.69	26.40	27.91	29.43	30.61	46.00	-15.39
6 pp	872.18	3.49	29.45	27.21	28.13	33.86	46.00	-12.14

Test data for Antenna1/ Band 1:


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

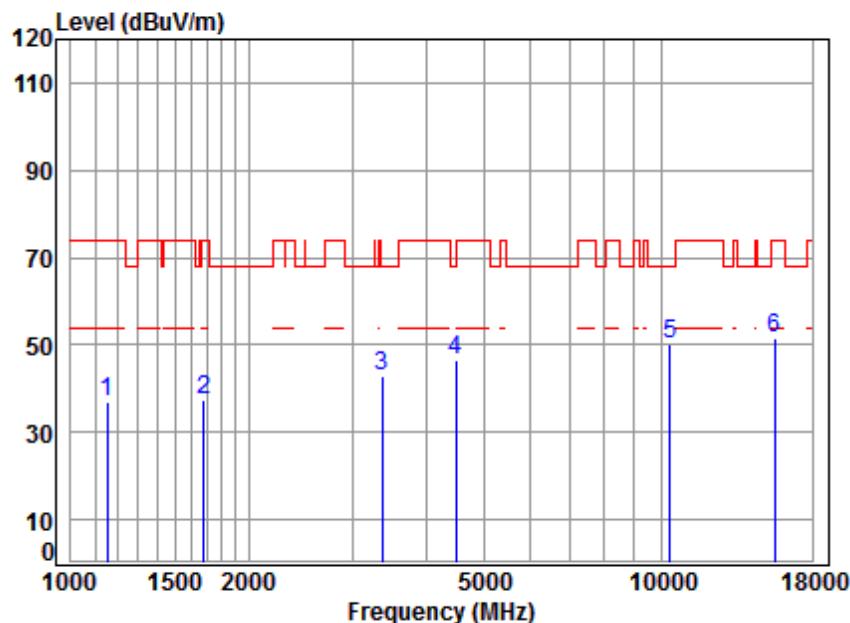

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	49.28	36.73	74.00	-37.27	peak
2	1677.621	5.25	26.58	41.52	47.25	37.56	74.00	-36.44	peak
3	3366.778	6.34	31.50	42.19	47.40	43.05	68.20	-25.15	peak
4	4495.125	7.55	33.59	42.42	47.73	46.45	68.20	-21.75	peak
5	10360.000	11.19	37.76	37.45	38.56	50.06	68.20	-18.14	peak
6	15540.000	14.30	40.72	39.00	35.39	51.41	74.00	-22.59	peak


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

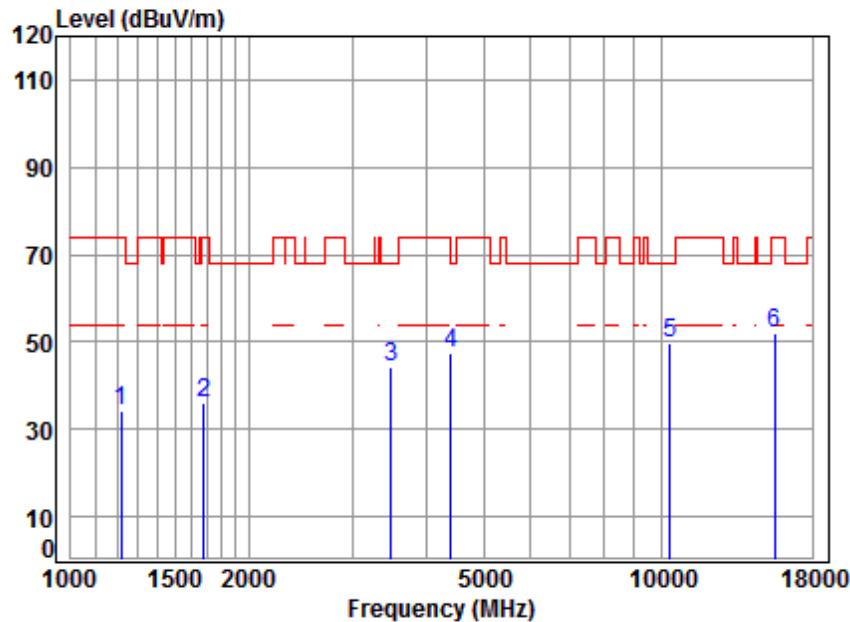

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1217.190	4.49	24.67	41.20	46.07	34.03	74.00	-39.97 peak
2	1677.621	5.25	26.58	41.52	45.95	36.26	74.00	-37.74 peak
3	3485.601	6.45	31.68	42.22	48.29	44.20	68.20	-24.00 peak
4	4405.090	7.46	33.44	42.40	48.78	47.28	68.20	-20.92 peak
5	10360.000	11.19	37.76	37.45	38.35	49.85	68.20	-18.35 peak
6	15540.000	14.30	40.72	39.00	36.21	52.23	74.00	-21.77 peak


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

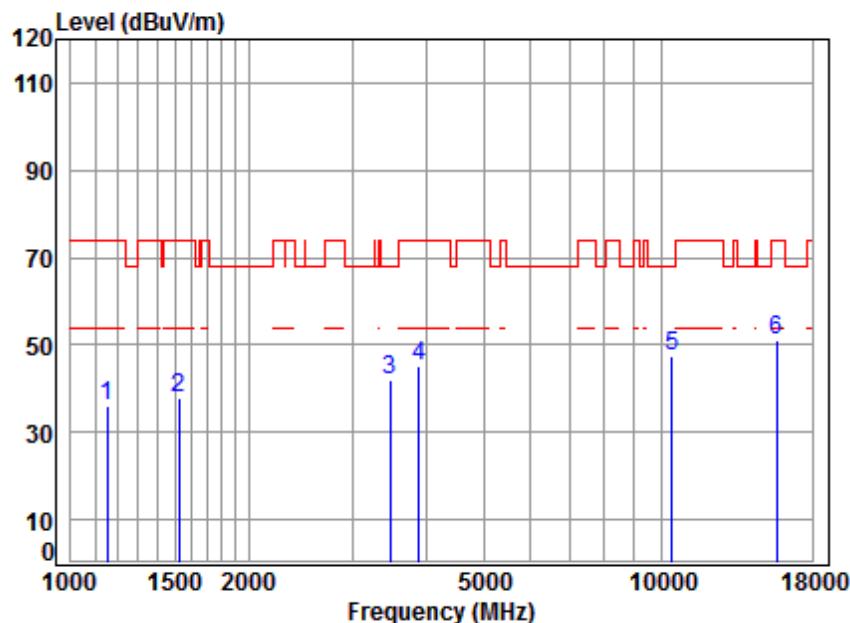

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1152.148	4.22	24.37	41.14	48.58	36.03	74.00	-37.97	peak
2	1525.000	5.45	25.91	41.42	47.75	37.69	74.00	-36.31	peak
3	3475.541	6.44	31.66	42.22	45.96	41.84	68.20	-26.36	peak
4	3890.255	6.87	32.49	42.30	48.18	45.24	74.00	-28.76	peak
5	10440.000	11.25	37.72	37.51	35.78	47.24	68.20	-20.96	peak
6	15660.000	14.48	40.80	39.11	34.71	50.88	74.00	-23.12	peak


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

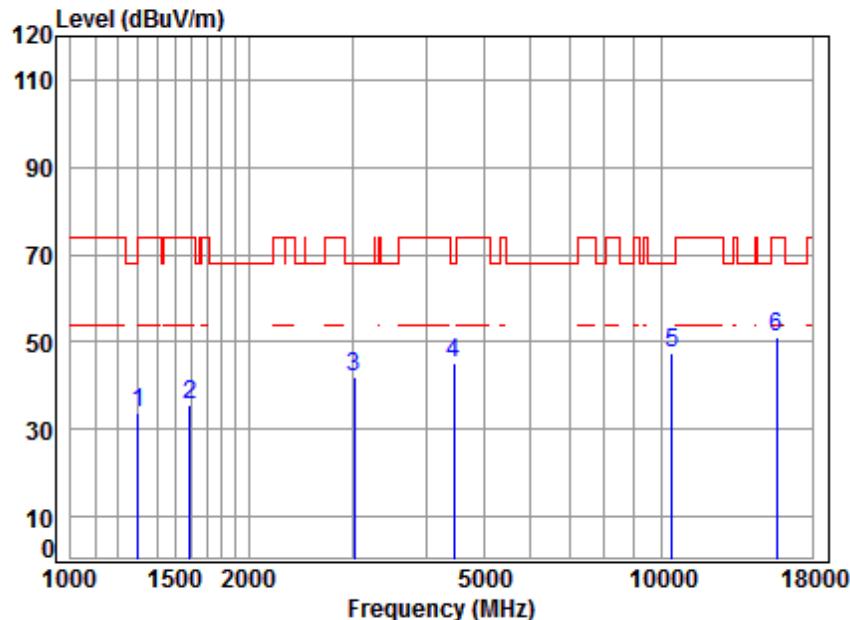

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	45.04	33.61	74.00	-40.39	peak
2	1592.571	5.36	26.22	41.47	45.30	35.41	74.00	-38.59	peak
3	3025.306	6.01	30.94	42.11	46.94	41.78	68.20	-26.42	peak
4	4456.315	7.51	33.53	42.41	46.43	45.06	68.20	-23.14	peak
5	10440.000	11.25	37.72	37.51	36.12	47.58	68.20	-20.62	peak
6	15660.000	14.48	40.80	39.11	34.96	51.13	74.00	-22.87	peak


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

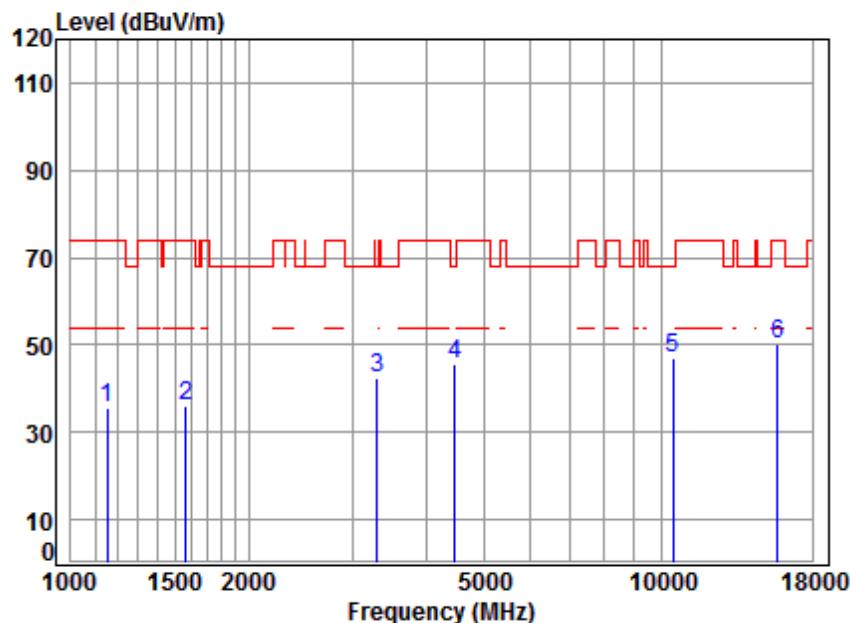

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m			
1	1152.148	4.22	24.37	41.14	48.36	35.81	74.00	-38.19	peak		
2	1565.191	5.39	26.10	41.45	46.09	36.13	74.00	-37.87	peak		
3	3299.344	6.28	31.39	42.17	46.89	42.39	68.20	-25.81	peak		
4	4469.214	7.53	33.55	42.41	47.06	45.73	68.20	-22.47	peak		
5	10480.000	11.28	37.71	37.53	35.70	47.16	68.20	-21.04	peak		
6	15720.000	14.57	40.83	39.17	33.89	50.12	74.00	-23.88	peak		


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

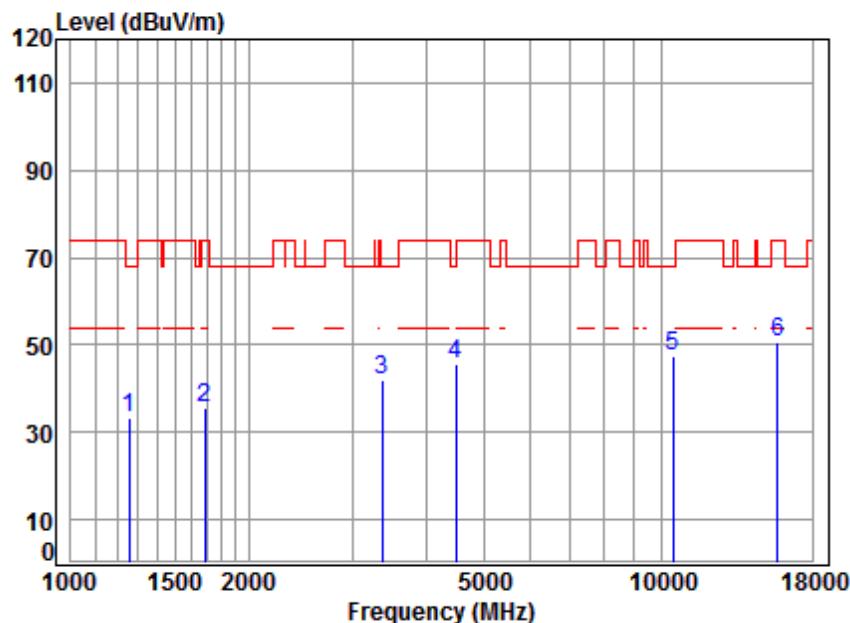

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.84	41.23	45.26	33.51	68.20	-34.69	peak
2	1687.347	5.24	26.62	41.52	45.03	35.37	74.00	-38.63	peak
3	3366.778	6.34	31.50	42.19	46.39	42.04	68.20	-26.16	peak
4	4495.125	7.55	33.59	42.42	46.86	45.58	68.20	-22.62	peak
5	10480.000	11.28	37.71	37.53	36.07	47.53	68.20	-20.67	peak
6	15720.000	14.57	40.83	39.17	34.25	50.48	74.00	-23.52	peak


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

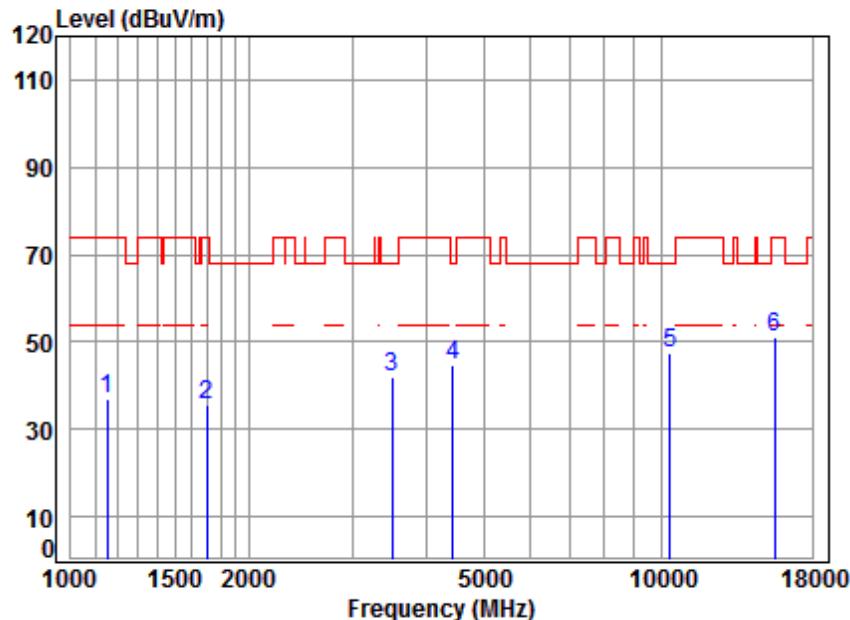

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	49.44	36.89	74.00	-37.11	peak	
2	1702.042	5.23	26.68	41.53	45.06	35.44	74.00	-38.56	peak	
3	3495.691	6.46	31.69	42.22	46.27	42.20	68.20	-26.00	peak	
4	4430.628	7.48	33.48	42.41	46.32	44.87	68.20	-23.33	peak	
5	10360.000	11.19	37.76	37.45	35.93	47.43	68.20	-20.77	peak	
6	15540.000	14.30	40.72	39.00	34.87	50.89	74.00	-23.11	peak	


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

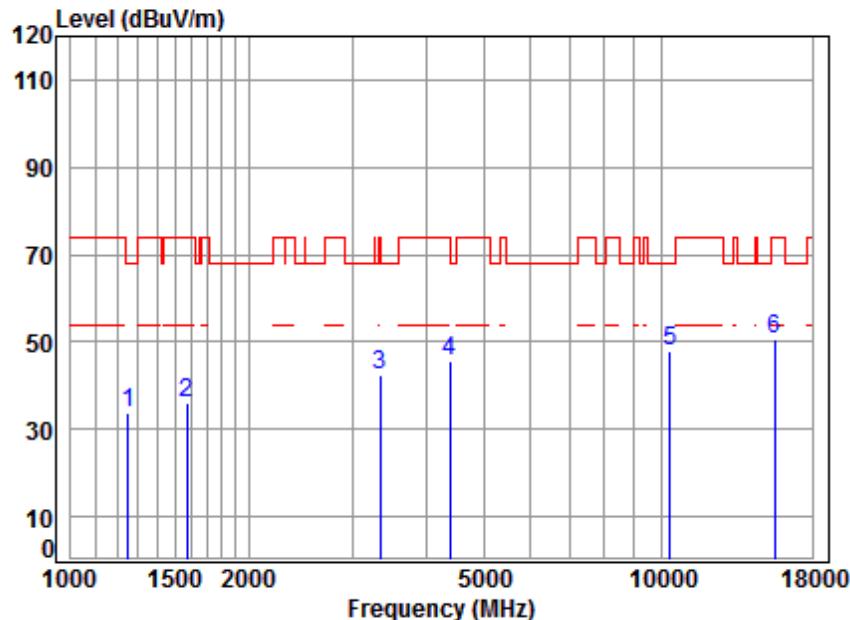

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	4.62	24.82	41.23	45.39	33.60	68.20	-34.60	peak	
2	1574.265	5.38	26.14	41.45	45.80	35.87	74.00	-38.13	peak	
3	3337.710	6.31	31.45	42.18	46.92	42.50	74.00	-31.50	peak	
4	4392.376	7.44	33.42	42.40	47.13	45.59	74.00	-28.41	peak	
5	10360.000	11.19	37.76	37.45	36.59	48.09	68.20	-20.11	peak	
6	15540.000	14.30	40.72	39.00	34.79	50.81	74.00	-23.19	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

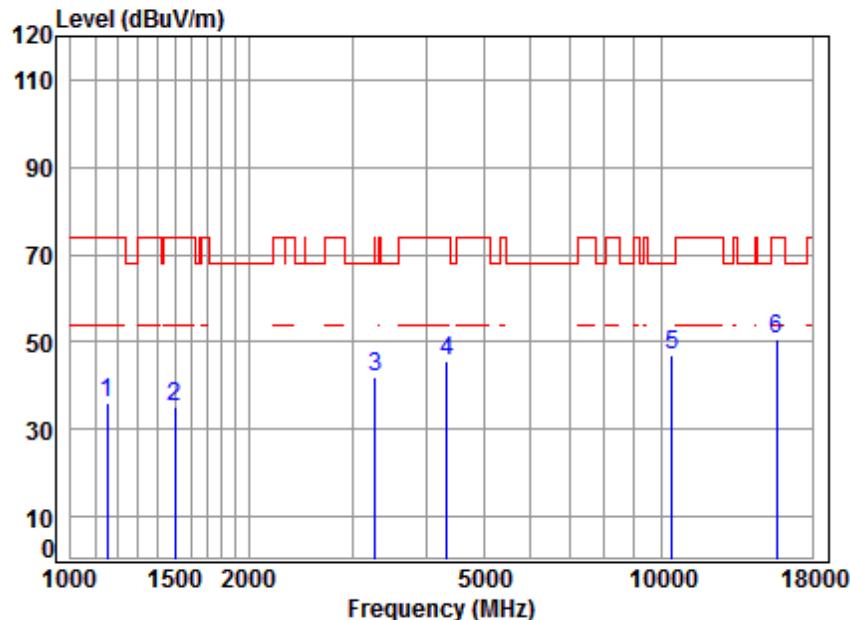

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.74	36.19	74.00	-37.81	peak	
2	1498.781	5.48	25.80	41.41	45.46	35.33	74.00	-38.67	peak	
3	3280.326	6.26	31.36	42.17	46.53	41.98	68.20	-26.22	peak	
4	4329.354	7.37	33.30	42.39	47.50	45.78	74.00	-28.22	peak	
5	10440.000	11.25	37.72	37.51	35.66	47.12	68.20	-21.08	peak	
6	15660.000	14.48	40.80	39.11	34.46	50.63	74.00	-23.37	peak	


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

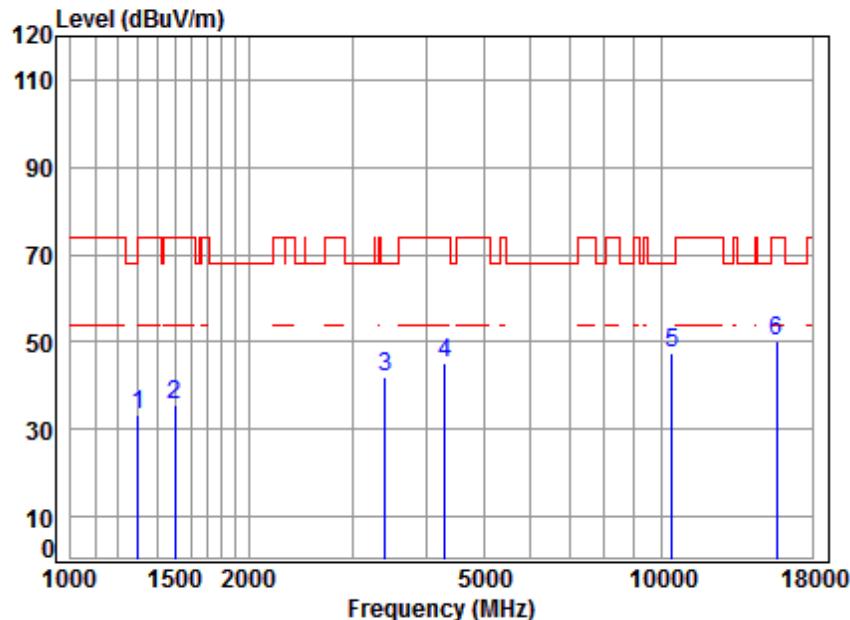

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1300.858	4.80	25.03	41.26	44.93	33.50	74.00	-40.50	peak
2	1503.119	5.48	25.81	41.41	45.73	35.61	74.00	-38.39	peak
3	3405.929	6.38	31.56	42.20	46.18	41.92	68.20	-26.28	peak
4	4304.400	7.34	33.26	42.38	46.81	45.03	74.00	-28.97	peak
5	10440.000	11.25	37.72	37.51	35.91	47.37	68.20	-20.83	peak
6	15660.000	14.48	40.80	39.11	33.88	50.05	74.00	-23.95	peak


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

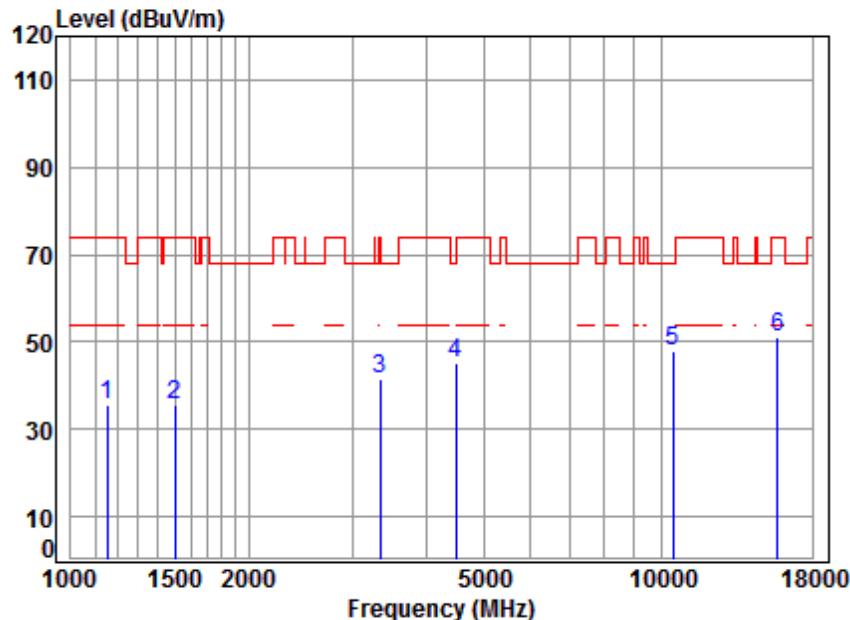

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1152.148	4.22	24.37	41.14	48.21	35.66	74.00	-38.34 peak
2	1503.119	5.48	25.81	41.41	45.57	35.45	74.00	-38.55 peak
3	3337.710	6.31	31.45	42.18	45.96	41.54	74.00	-32.46 peak
4	4495.125	7.55	33.59	42.42	46.50	45.22	68.20	-22.98 peak
5	10480.000	11.28	37.71	37.53	36.64	48.10	68.20	-20.10 peak
6	15720.000	14.57	40.83	39.17	35.02	51.25	74.00	-22.75 peak


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

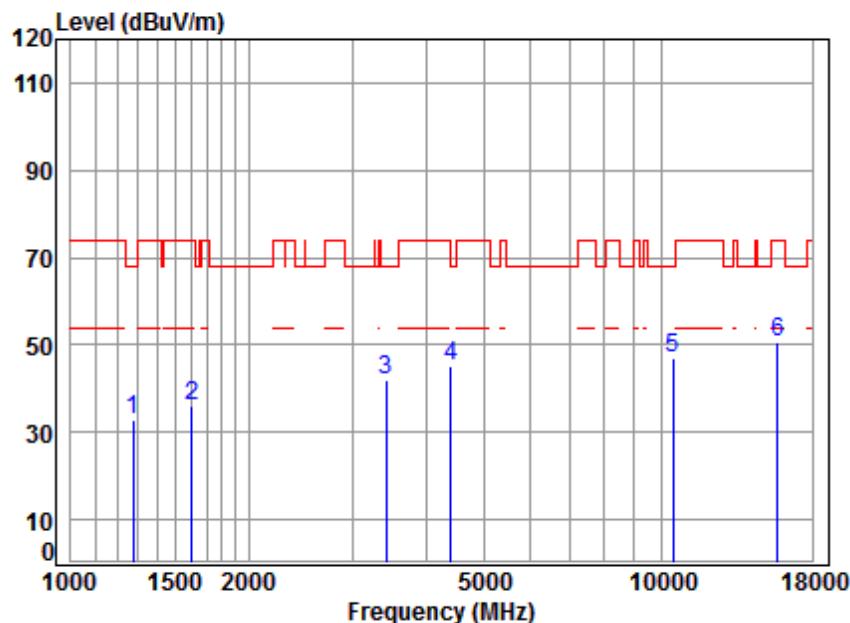

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	4.71	24.92	41.24	44.29	32.68	68.20	-35.52	peak	
2	1606.441	5.34	26.28	41.47	45.86	36.01	74.00	-37.99	peak	
3	3415.787	6.38	31.57	42.20	46.24	41.99	68.20	-26.21	peak	
4	4405.090	7.46	33.44	42.40	46.52	45.02	68.20	-23.18	peak	
5	10480.000	11.28	37.71	37.53	35.76	47.22	68.20	-20.98	peak	
6	15720.000	14.57	40.83	39.17	34.45	50.68	74.00	-23.32	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

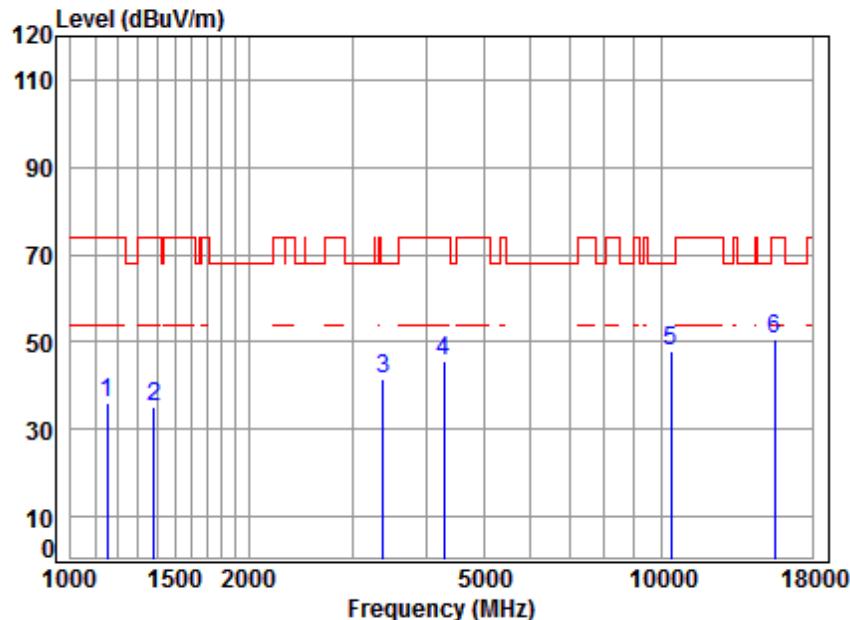

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.81	36.26	74.00	-37.74	peak	
2	1386.264	5.10	25.37	41.33	46.04	35.18	74.00	-38.82	peak	
3	3376.523	6.35	31.51	42.19	46.06	41.73	68.20	-26.47	peak	
4	4279.589	7.31	33.22	42.38	47.37	45.52	74.00	-28.48	peak	
5	10380.000	11.21	37.75	37.47	36.45	47.94	68.20	-20.26	peak	
6	15570.000	14.35	40.74	39.03	34.74	50.80	74.00	-23.20	peak	


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

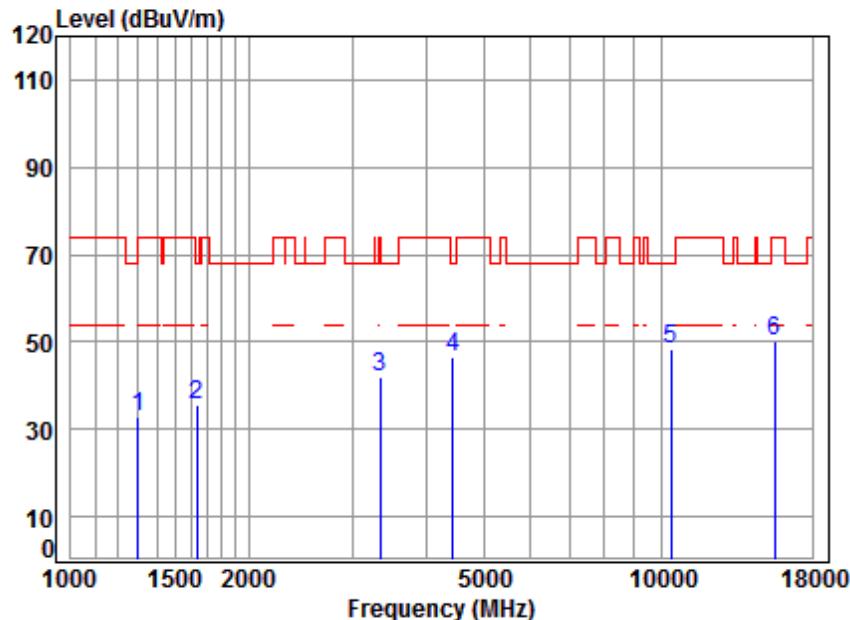

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.26	32.83	74.00	-41.17	peak
2	1634.543	5.31	26.40	41.49	45.14	35.36	68.20	-32.84	peak
3	3337.710	6.31	31.45	42.18	46.51	42.09	74.00	-31.91	peak
4	4443.453	7.50	33.50	42.41	47.78	46.37	68.20	-21.83	peak
5	10380.000	11.21	37.75	37.47	37.05	48.54	68.20	-19.66	peak
6	15570.000	14.35	40.74	39.03	34.09	50.15	74.00	-23.85	peak


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

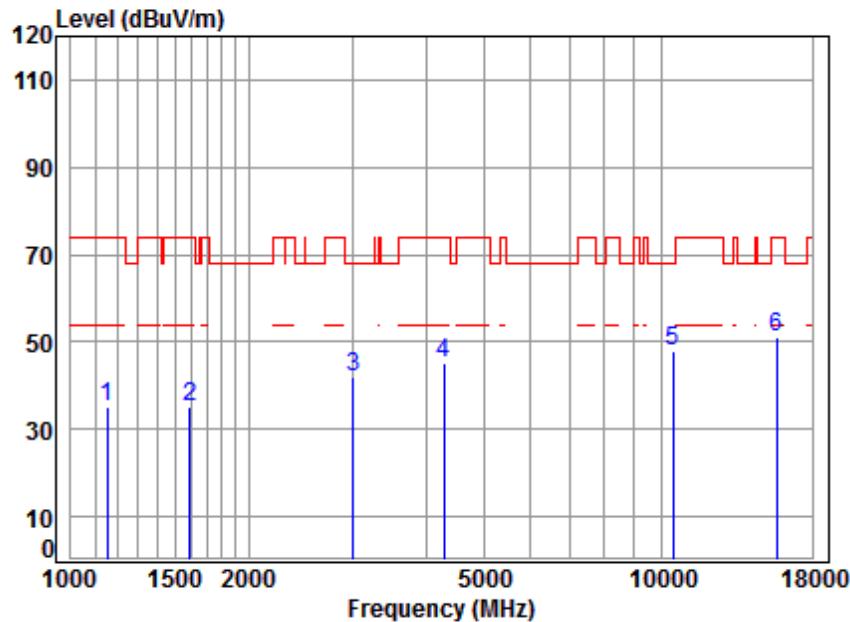

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.73	35.18	74.00	-38.82	peak	
2	1592.571	5.36	26.22	41.47	45.19	35.30	74.00	-38.70	peak	
3	3007.868	5.99	30.91	42.10	46.96	41.76	68.20	-26.44	peak	
4	4279.589	7.31	33.22	42.38	47.11	45.26	74.00	-28.74	peak	
5	10460.000	11.26	37.72	37.52	36.29	47.75	68.20	-20.45	peak	
6	15690.000	14.53	40.82	39.14	34.67	50.88	74.00	-23.12	peak	


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

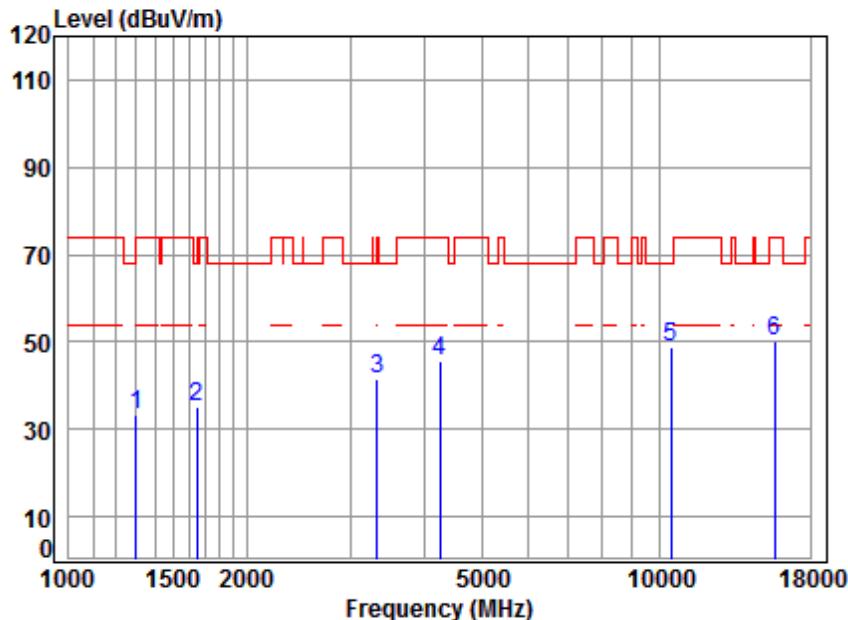

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.70	33.27	74.00	-40.73	peak	
2	1648.778	5.29	26.46	41.50	44.89	35.14	68.20	-33.06	peak	
3	3328.077	6.30	31.44	42.18	46.15	41.71	68.20	-26.49	peak	
4	4254.921	7.28	33.17	42.37	47.47	45.55	74.00	-28.45	peak	
5	10460.000	11.26	37.72	37.52	37.57	49.03	68.20	-19.17	peak	
6	15690.000	14.53	40.82	39.14	33.76	49.97	74.00	-24.03	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

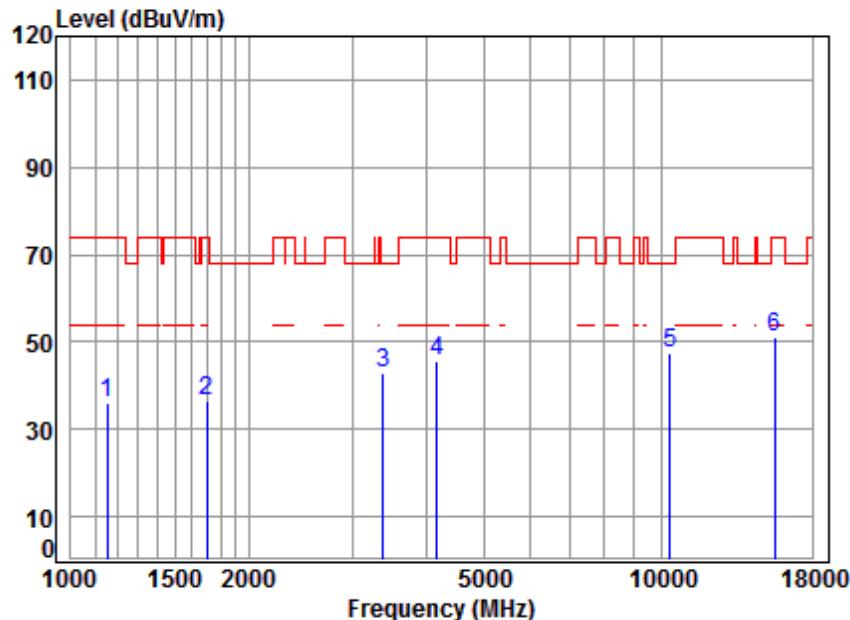

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.67	36.12	74.00	-37.88	peak	
2	1702.042	5.23	26.68	41.53	45.91	36.29	74.00	-37.71	peak	
3	3376.523	6.35	31.51	42.19	46.99	42.66	68.20	-25.54	peak	
4	4169.698	7.18	33.02	42.36	47.65	45.49	74.00	-28.51	peak	
5	10360.000	11.19	37.76	37.45	36.05	47.55	68.20	-20.65	peak	
6	15540.000	14.30	40.72	39.00	34.93	50.95	74.00	-23.05	peak	


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

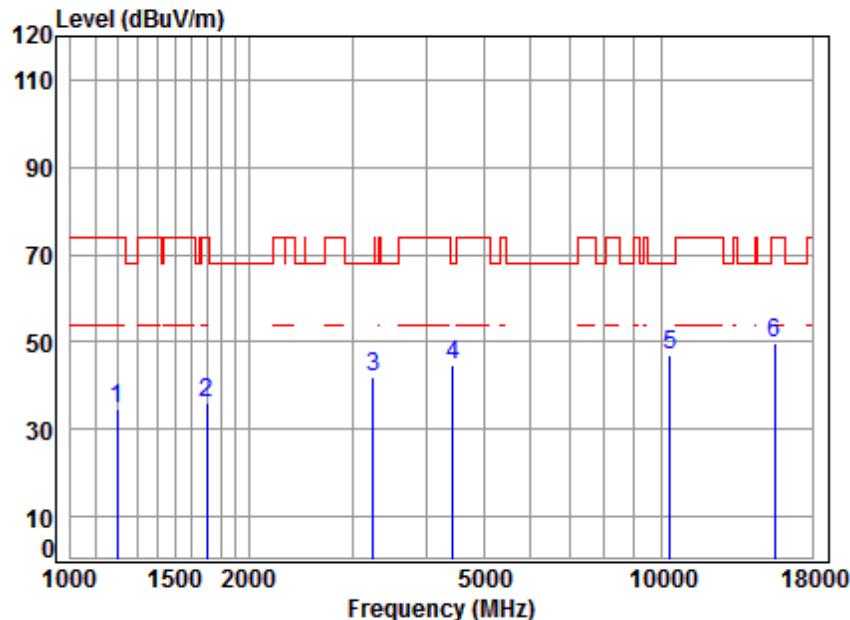

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1199.726	4.42	24.59	41.18	46.86	34.69	74.00	-39.31	peak
2	1697.129	5.23	26.66	41.53	45.59	35.95	74.00	-38.05	peak
3	3252.005	6.23	31.32	42.16	46.54	41.93	68.20	-26.27	peak
4	4443.453	7.50	33.50	42.41	46.24	44.83	68.20	-23.37	peak
5	10360.000	11.19	37.76	37.45	35.56	47.06	68.20	-21.14	peak
6	15540.000	14.30	40.72	39.00	33.92	49.94	74.00	-24.06	peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

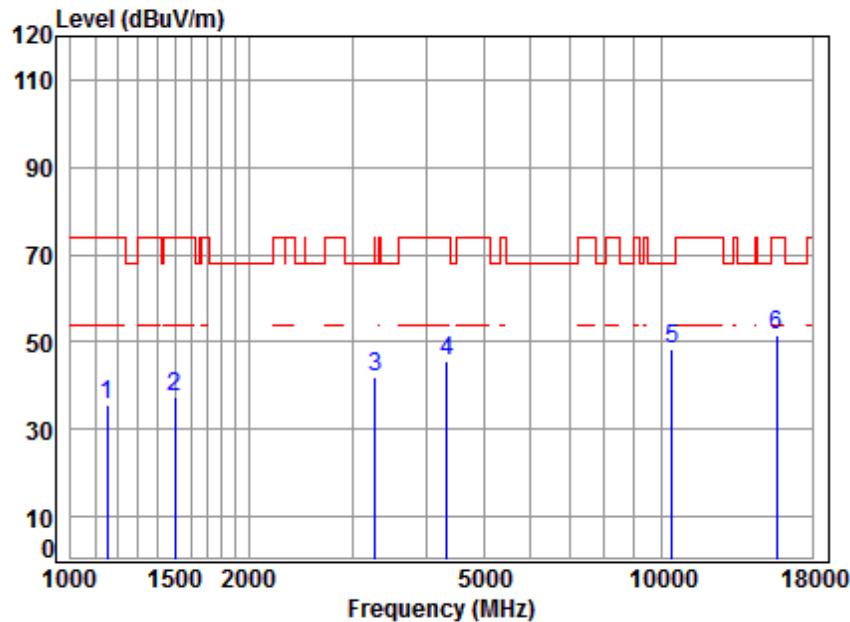

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.30	35.75	74.00	-38.25	peak	
2	1503.119	5.48	25.81	41.41	47.38	37.26	74.00	-36.74	peak	
3	3280.326	6.26	31.36	42.17	46.53	41.98	68.20	-26.22	peak	
4	4329.354	7.37	33.30	42.39	47.17	45.45	74.00	-28.55	peak	
5	10440.000	11.25	37.72	37.51	37.12	48.58	68.20	-19.62	peak	
6	15660.000	14.48	40.80	39.11	35.56	51.73	74.00	-22.27	peak	


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

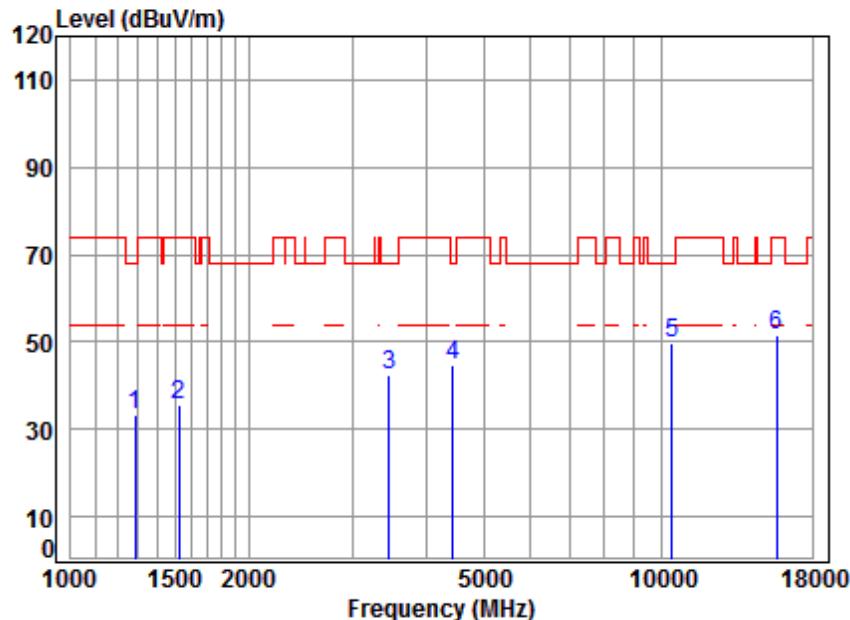

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1285.904	4.75	24.96	41.25	44.82	33.28	68.20 -34.92 peak
2	1525.000	5.45	25.91	41.42	45.87	35.81	74.00 -38.19 peak
3	3465.510	6.43	31.65	42.21	46.76	42.63	68.20 -25.57 peak
4	4443.453	7.50	33.50	42.41	46.23	44.82	68.20 -23.38 peak
5	10440.000	11.25	37.72	37.51	38.23	49.69	68.20 -18.51 peak
6	15660.000	14.48	40.80	39.11	35.39	51.56	74.00 -22.44 peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

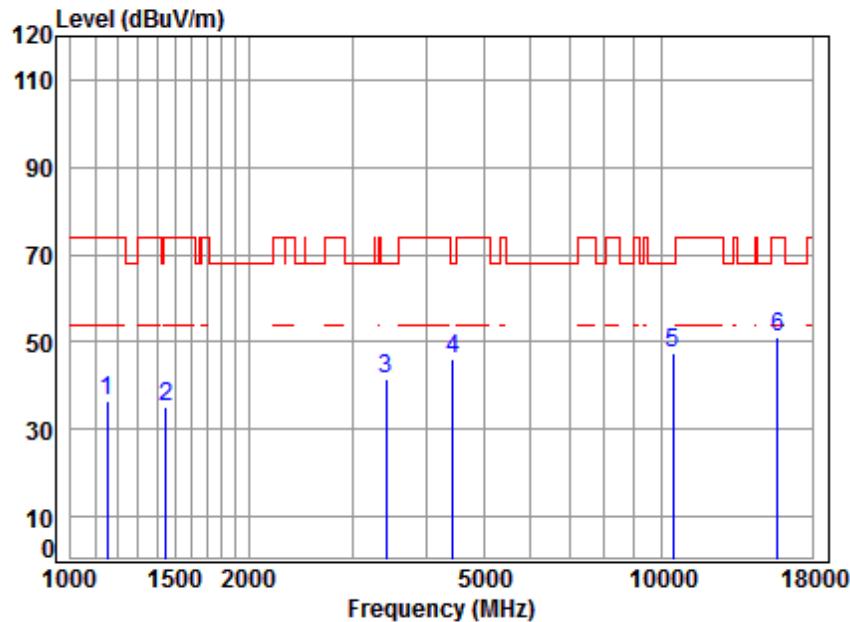

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	41.14	48.93	36.38	74.00	-37.62	peak	
2	1451.878	5.32	25.62	41.37	41.37	45.75	35.32	74.00	-38.68	peak	
3	3415.787	6.38	31.57	42.20	42.20	45.78	41.53	68.20	-26.67	peak	
4	4443.453	7.50	33.50	42.41	42.41	47.50	46.09	68.20	-22.11	peak	
5	10480.000	11.28	37.71	37.53	37.53	36.03	47.49	68.20	-20.71	peak	
6	15720.000	14.57	40.83	39.17	39.17	34.97	51.20	74.00	-22.80	peak	


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

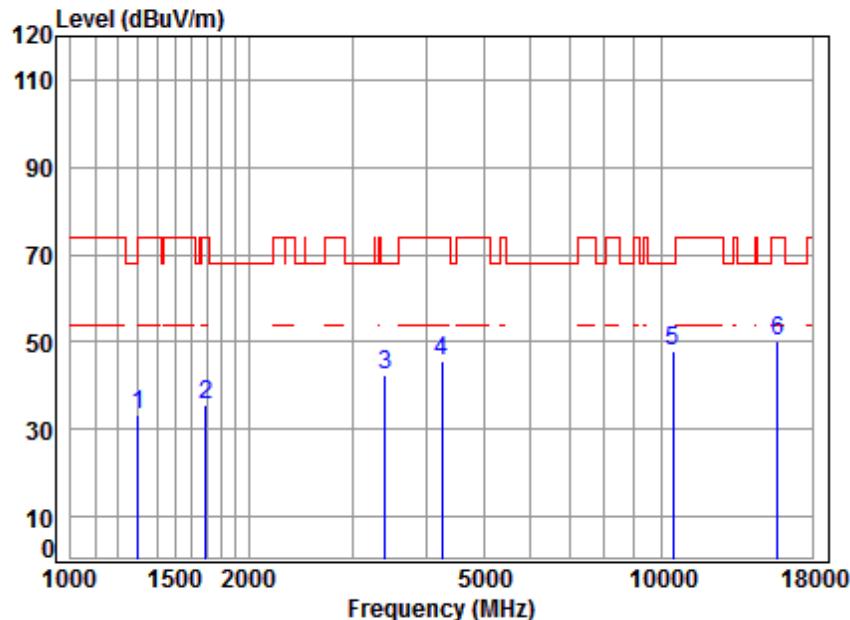

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	44.63	33.20	74.00 -40.80 peak
2	1692.231	5.24	26.64	41.53	45.38	35.73	74.00 -38.27 peak
3	3405.929	6.38	31.56	42.20	46.82	42.56	68.20 -25.64 peak
4	4242.641	7.27	33.15	42.37	47.51	45.56	74.00 -28.44 peak
5	10480.000	11.28	37.71	37.53	36.26	47.72	68.20 -20.48 peak
6	15720.000	14.57	40.83	39.17	34.03	50.26	74.00 -23.74 peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

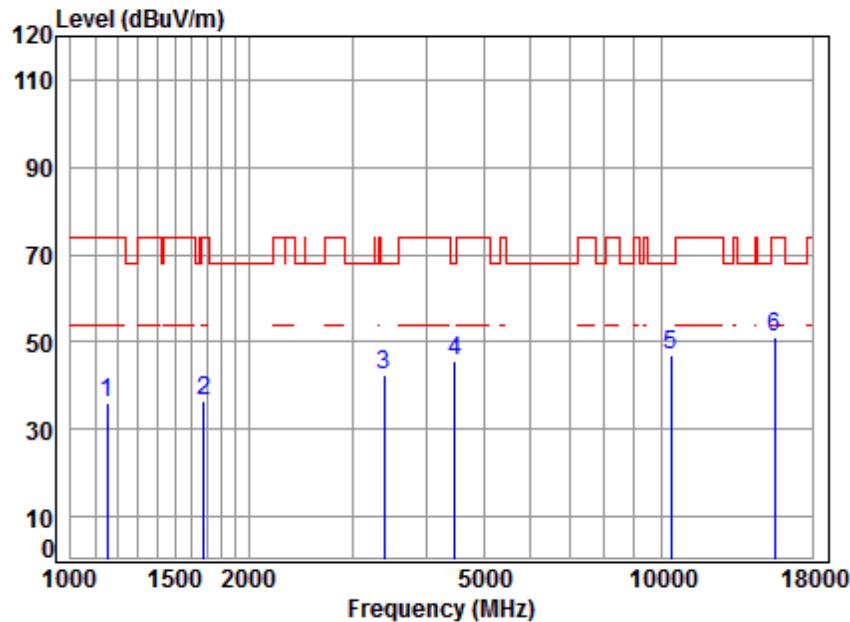

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.79	36.24	74.00	-37.76	peak
2	1682.477	5.25	26.60	41.52	46.24	36.57	74.00	-37.43	peak
3	3396.098	6.37	31.54	42.20	46.67	42.38	68.20	-25.82	peak
4	4469.214	7.53	33.55	42.41	46.73	45.40	68.20	-22.80	peak
5	10380.000	11.21	37.75	37.47	35.37	46.86	68.20	-21.34	peak
6	15570.000	14.35	40.74	39.03	34.92	50.98	74.00	-23.02	peak


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

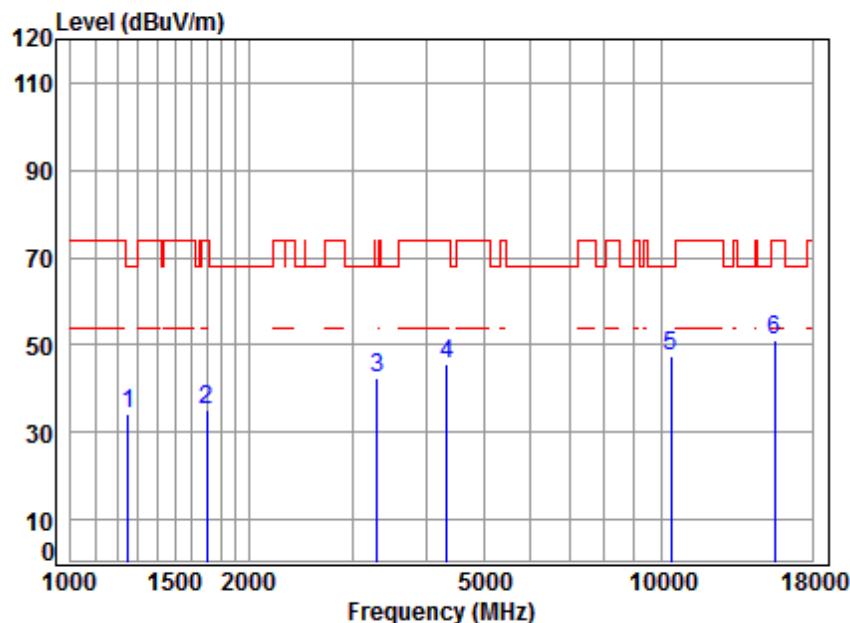

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1249.269	4.61	24.81	41.22	45.95	34.15	68.20	-34.05	peak
2	1702.042	5.23	26.68	41.53	44.82	35.20	74.00	-38.80	peak
3	3299.344	6.28	31.39	42.17	46.99	42.49	68.20	-25.71	peak
4	4341.886	7.38	33.33	42.39	47.28	45.60	74.00	-28.40	peak
5	10380.000	11.21	37.75	37.47	36.06	47.55	68.20	-20.65	peak
6	15570.000	14.35	40.74	39.03	35.00	51.06	74.00	-22.94	peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

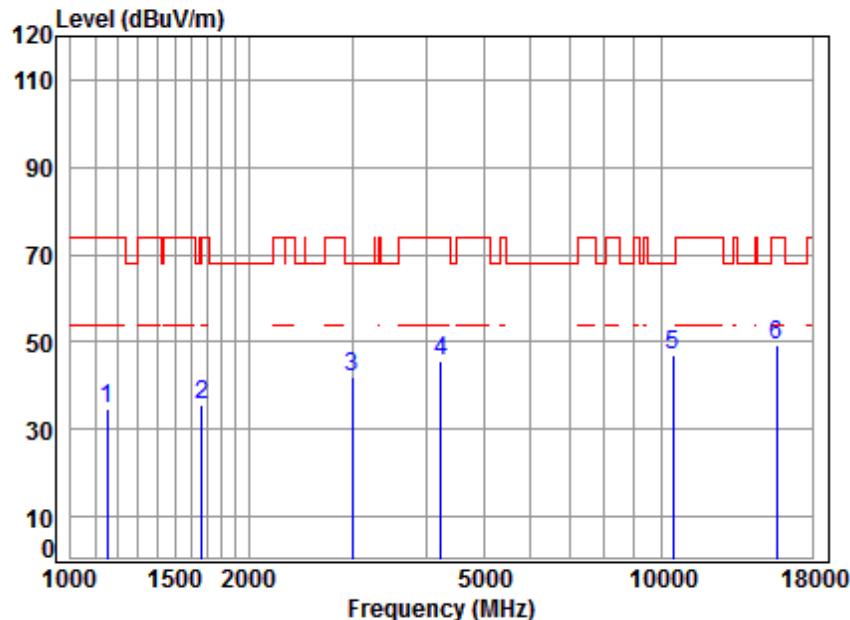

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m		
1	1152.148	4.22	24.37	41.14	47.40	34.85	74.00	-39.15	peak		
2	1667.951	5.27	26.54	41.51	45.08	35.38	74.00	-38.62	peak		
3	2999.187	5.98	30.90	42.10	46.99	41.77	68.20	-26.43	peak		
4	4230.396	7.26	33.13	42.37	47.58	45.60	74.00	-28.40	peak		
5	10460.000	11.26	37.72	37.52	35.74	47.20	68.20	-21.00	peak		
6	15690.000	14.53	40.82	39.14	33.15	49.36	74.00	-24.64	peak		


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

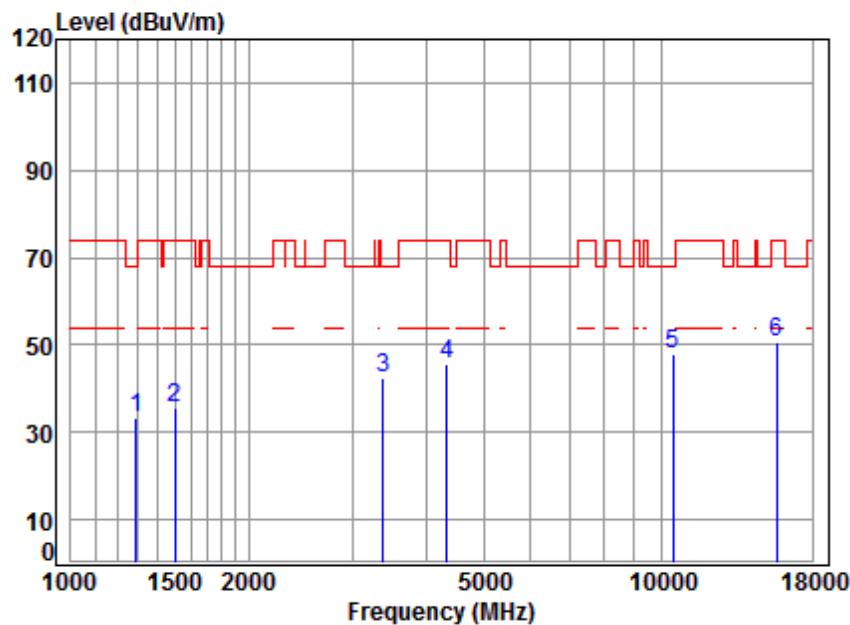

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	4.76	24.98	41.25	44.69	33.18	68.20	-35.02	peak
2	1503.119	5.48	25.81	41.41	45.54	35.42	74.00	-38.58	peak
3	3376.523	6.35	31.51	42.19	46.79	42.46	68.20	-25.74	peak
4	4341.886	7.38	33.33	42.39	47.32	45.64	74.00	-28.36	peak
5	10460.000	11.26	37.72	37.52	36.52	47.98	68.20	-20.22	peak
6	15690.000	14.53	40.82	39.14	34.40	50.61	74.00	-23.39	peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

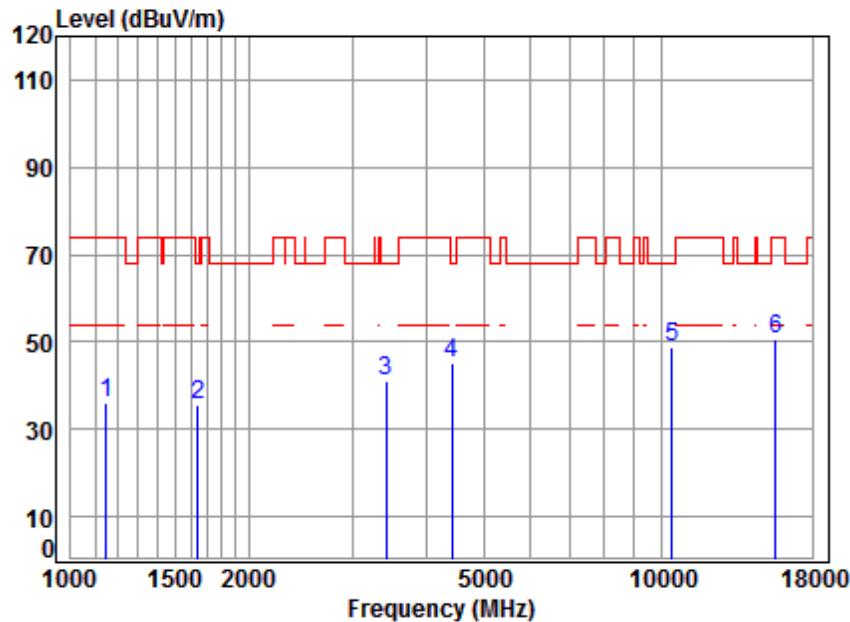

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5210 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1148.823	4.21	24.35	41.14	48.74	36.16	74.00	-37.84	peak		
2	1644.019	5.30	26.44	41.50	45.33	35.57	68.20	-32.63	peak		
3	3425.675	6.39	31.59	42.20	45.37	41.15	68.20	-27.05	peak		
4	4417.841	7.47	33.46	42.40	46.53	45.06	68.20	-23.14	peak		
5	10420.000	11.24	37.73	37.49	37.30	48.78	68.20	-19.42	peak		
6	15630.000	14.44	40.78	39.09	34.71	50.84	74.00	-23.16	peak		

Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

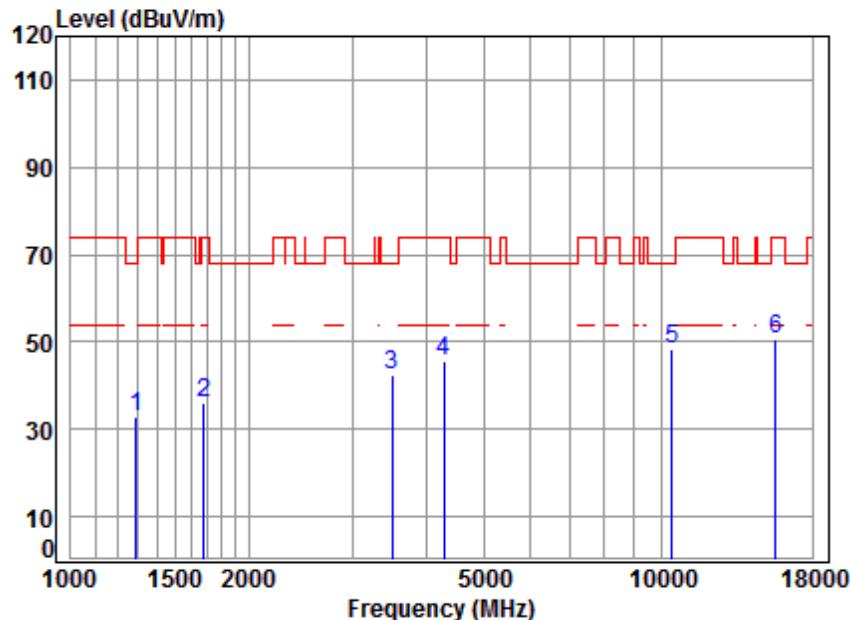


Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5210 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1289.627	4.76	24.98	41.25	44.32	32.81	68.20	-35.39 peak
2 1682.477	5.25	26.60	41.52	45.61	35.94	74.00	-38.06 peak
3 3495.691	6.46	31.69	42.22	46.47	42.40	68.20	-25.80 peak
4 4279.589	7.31	33.22	42.38	47.52	45.67	74.00	-28.33 peak
5 10420.000	11.24	37.73	37.49	37.01	48.49	68.20	-19.71 peak
6 15630.000	14.44	40.78	39.09	34.45	50.58	74.00	-23.42 peak

Test data for Antenna1/ Band 2A:


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

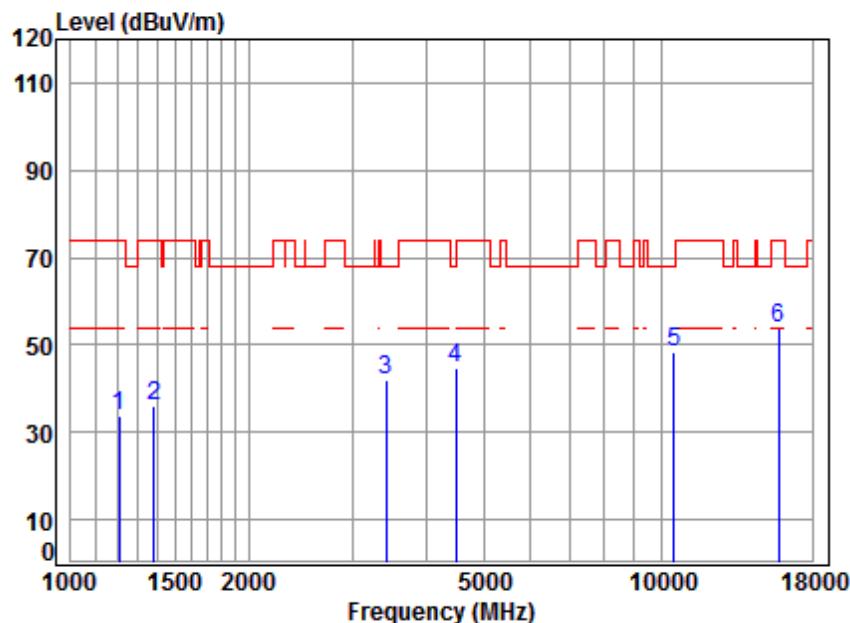

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1206.682	4.44	24.62	41.19	45.72	33.59	74.00	-40.41	peak
2	1386.264	5.10	25.37	41.33	46.72	35.86	74.00	-38.14	peak
3	3425.675	6.39	31.59	42.20	46.36	42.14	68.20	-26.06	peak
4	4495.125	7.55	33.59	42.42	45.85	44.57	68.20	-23.63	peak
5	10520.000	11.30	37.70	37.56	36.74	48.18	68.20	-20.02	peak
6	15780.000	14.66	40.87	39.22	37.48	53.79	74.00	-20.21	peak


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

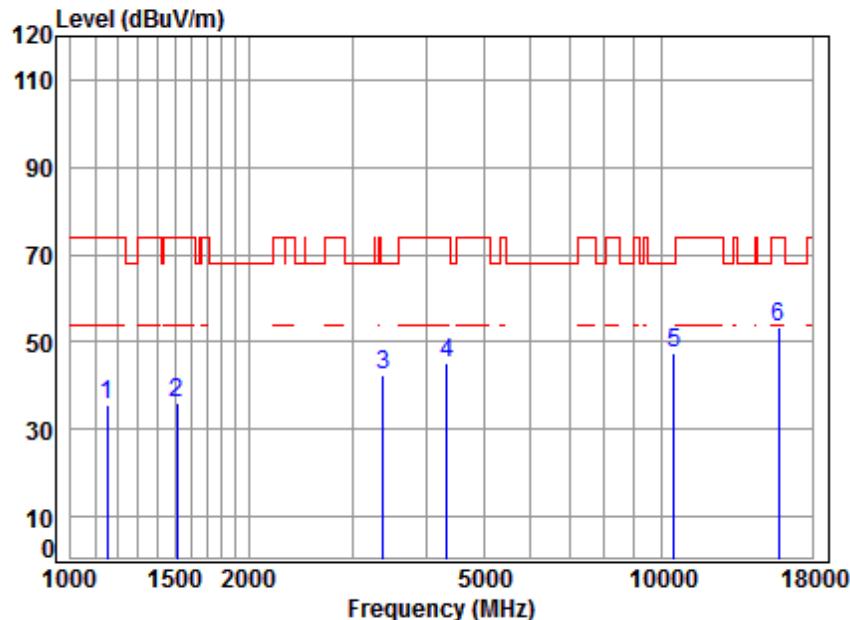

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.27	35.72	74.00	-38.28	peak	
2	1511.833	5.46	25.85	41.41	46.10	36.00	74.00	-38.00	peak	
3	3386.297	6.36	31.53	42.19	46.53	42.23	68.20	-25.97	peak	
4	4329.354	7.37	33.30	42.39	46.85	45.13	74.00	-28.87	peak	
5	10520.000	11.30	37.70	37.56	36.02	47.46	68.20	-20.74	peak	
6	15780.000	14.66	40.87	39.22	37.02	53.33	74.00	-20.67	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

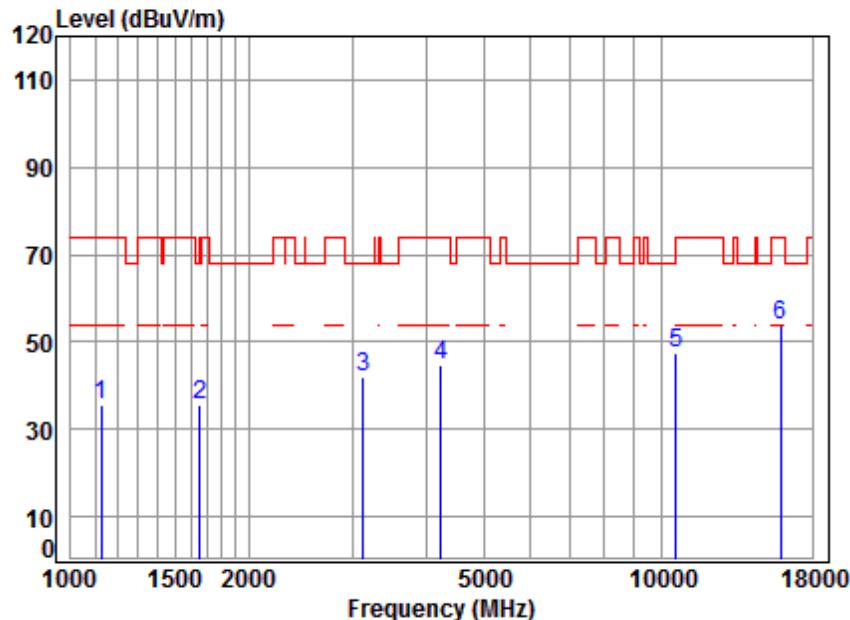

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1125.813	4.11	24.24	41.12	41.12	48.29	35.52	74.00	-38.48	peak
2	1653.550	5.28	26.48	41.50	41.50	45.32	35.58	68.20	-32.62	peak
3	3123.039	6.11	31.11	42.13	42.13	46.89	41.98	68.20	-26.22	peak
4	4230.396	7.26	33.13	42.37	42.37	46.73	44.75	74.00	-29.25	peak
5	10600.000	11.36	37.72	37.62	37.62	36.16	47.62	68.20	-20.58	peak
6	15900.000	14.84	40.94	39.33	39.33	37.24	53.69	74.00	-20.31	peak


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

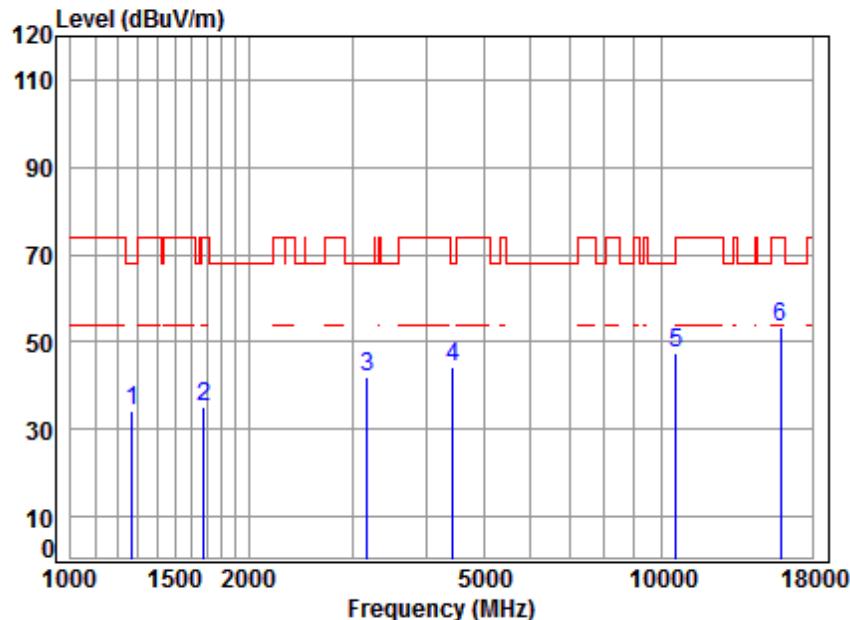

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.90	41.24	45.85	34.20	68.20	-34.00	peak	
2	1682.477	5.25	26.60	41.52	44.84	35.17	74.00	-38.83	peak	
3	3177.672	6.16	31.20	42.15	46.89	42.10	68.20	-26.10	peak	
4	4443.453	7.50	33.50	42.41	45.85	44.44	68.20	-23.76	peak	
5	10600.000	11.36	37.72	37.62	36.00	47.46	68.20	-20.74	peak	
6	15900.000	14.84	40.94	39.33	37.13	53.58	74.00	-20.42	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

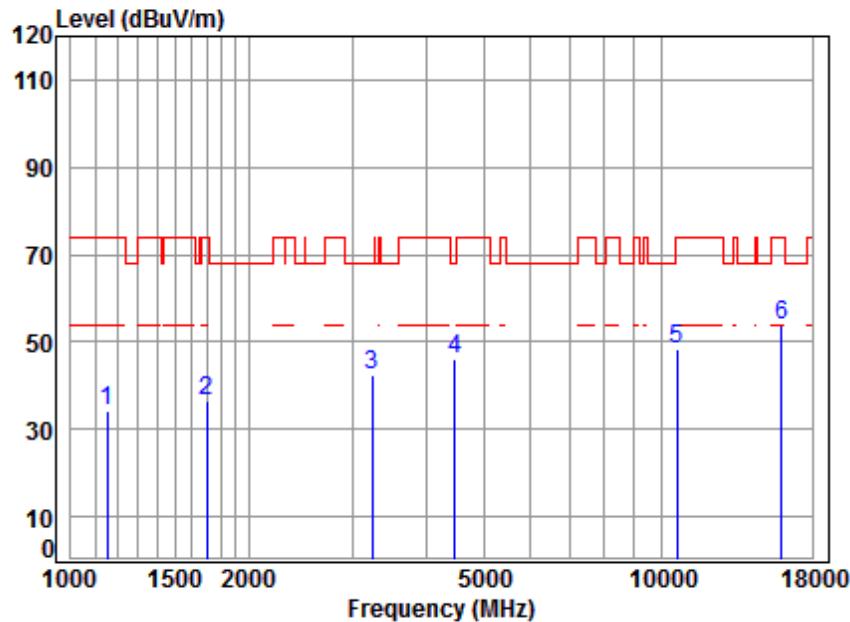

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	46.73	34.18	74.00	-39.82	peak	
2	1702.042	5.23	26.68	41.53	46.33	36.71	74.00	-37.29	peak	
3	3242.619	6.22	31.30	42.16	47.28	42.64	68.20	-25.56	peak	
4	4469.214	7.53	33.55	42.41	47.27	45.94	68.20	-22.26	peak	
5	10640.000	11.39	37.73	37.64	36.98	48.46	74.00	-25.54	peak	
6	15960.000	14.93	40.98	39.38	37.39	53.92	74.00	-20.08	peak	


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

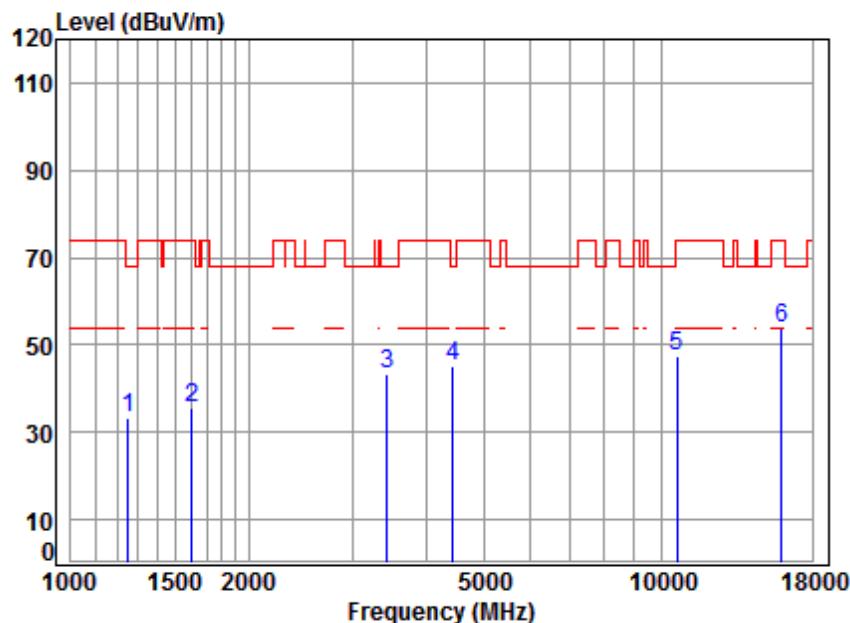

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	45.03	33.23	68.20	-34.97	peak	
2	1606.441	5.34	26.28	41.47	45.40	35.55	74.00	-38.45	peak	
3	3435.590	6.40	31.60	42.21	47.59	43.38	68.20	-24.82	peak	
4	4430.628	7.48	33.48	42.41	46.75	45.30	68.20	-22.90	peak	
5	10640.000	11.39	37.73	37.64	36.12	47.60	74.00	-26.40	peak	
6	15960.000	14.93	40.98	39.38	37.41	53.94	74.00	-20.06	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

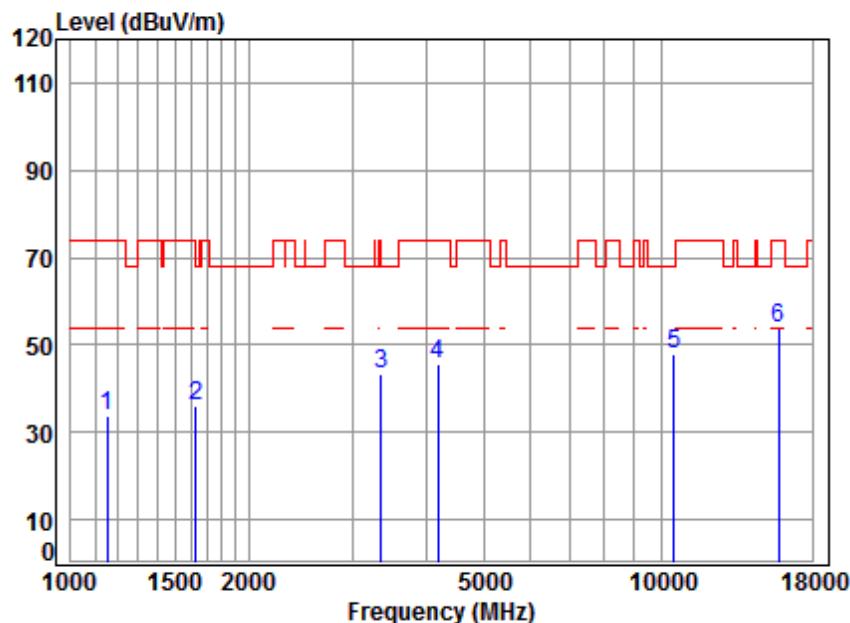

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					Level	Line		
1 1152.148	4.22	24.37	41.14	46.39	33.84	74.00	-40.16	peak
2 1629.825	5.31	26.38	41.49	45.86	36.06	68.20	-32.14	peak
3 3357.061	6.33	31.48	42.19	47.56	43.18	74.00	-30.82	peak
4 4181.768	7.20	33.04	42.36	47.52	45.40	74.00	-28.60	peak
5 10520.000	11.30	37.70	37.56	36.56	48.00	68.20	-20.20	peak
6 15780.000	14.66	40.87	39.22	37.64	53.95	74.00	-20.05	peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

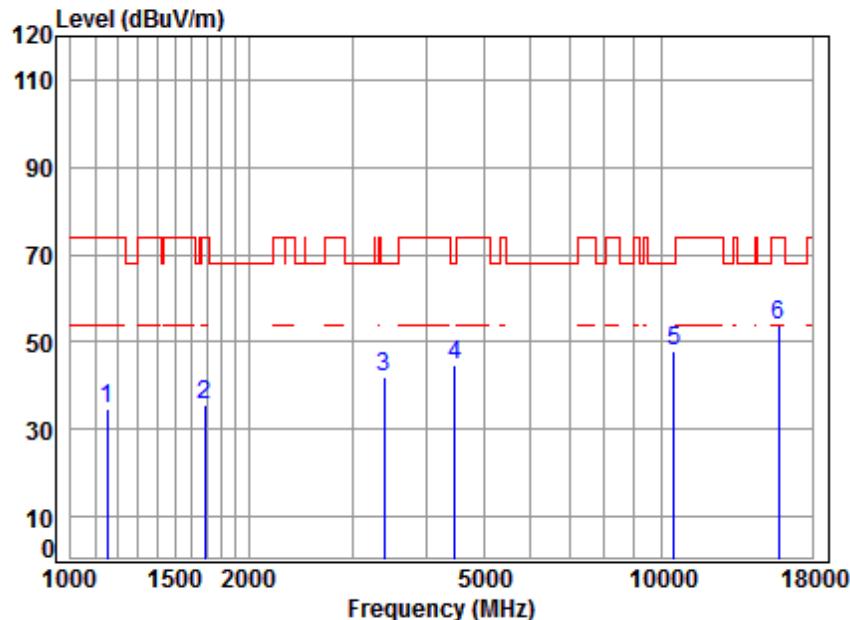

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.43	34.88	74.00	-39.12	peak	
2	1687.347	5.24	26.62	41.52	45.09	35.43	74.00	-38.57	peak	
3	3396.098	6.37	31.54	42.20	46.32	42.03	68.20	-26.17	peak	
4	4469.214	7.53	33.55	42.41	46.09	44.76	68.20	-23.44	peak	
5	10520.000	11.30	37.70	37.56	36.41	47.85	68.20	-20.35	peak	
6	15780.000	14.66	40.87	39.22	37.48	53.79	74.00	-20.21	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

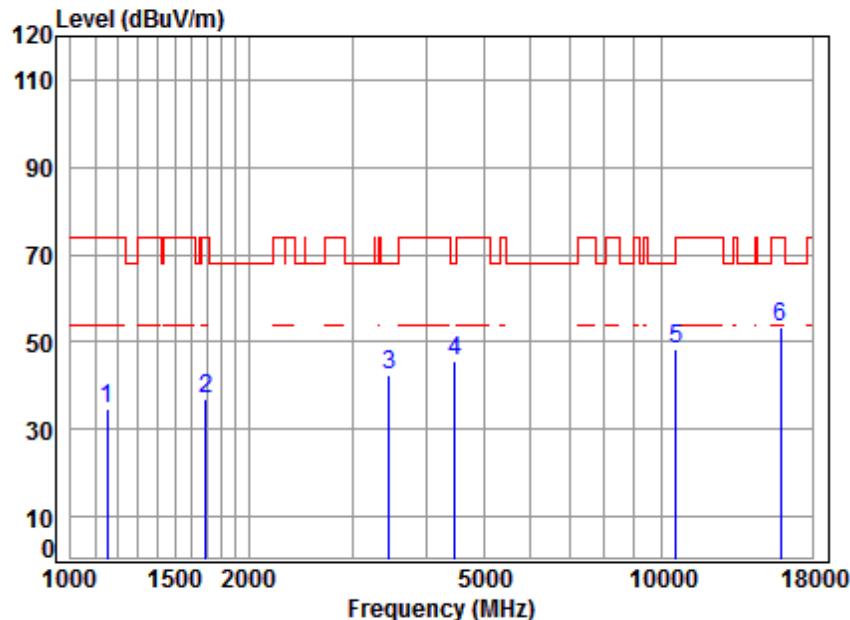

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.08	34.53	74.00	-39.47	peak	
2	1692.231	5.24	26.64	41.53	46.52	36.87	74.00	-37.13	peak	
3	3465.510	6.43	31.65	42.21	46.73	42.60	68.20	-25.60	peak	
4	4469.214	7.53	33.55	42.41	47.09	45.76	68.20	-22.44	peak	
5	10600.000	11.36	37.72	37.62	36.68	48.14	68.20	-20.06	peak	
6	15900.000	14.84	40.94	39.33	37.16	53.61	74.00	-20.39	peak	


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

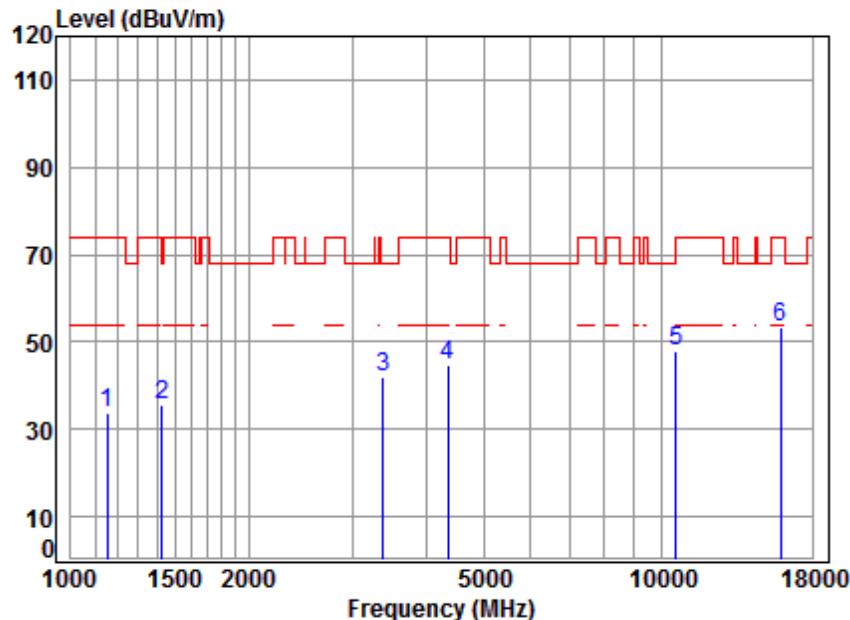

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

Freq	Cable		Ant	Preamp	Read	Limit	Line	Over	Remark
	Loss	Factor	Factor	Level	Level				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 1152.148	4.22	24.37	41.14	46.29	33.74	74.00	-40.26	peak	
2 1426.916	5.24	25.53	41.36	46.21	35.62	74.00	-38.38	peak	
3 3376.523	6.35	31.51	42.19	46.34	42.01	68.20	-26.19	peak	
4 4354.454	7.40	33.35	42.39	46.50	44.86	74.00	-29.14	peak	
5 10600.000	11.36	37.72	37.62	36.38	47.84	68.20	-20.36	peak	
6 15900.000	14.84	40.94	39.33	37.14	53.59	74.00	-20.41	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

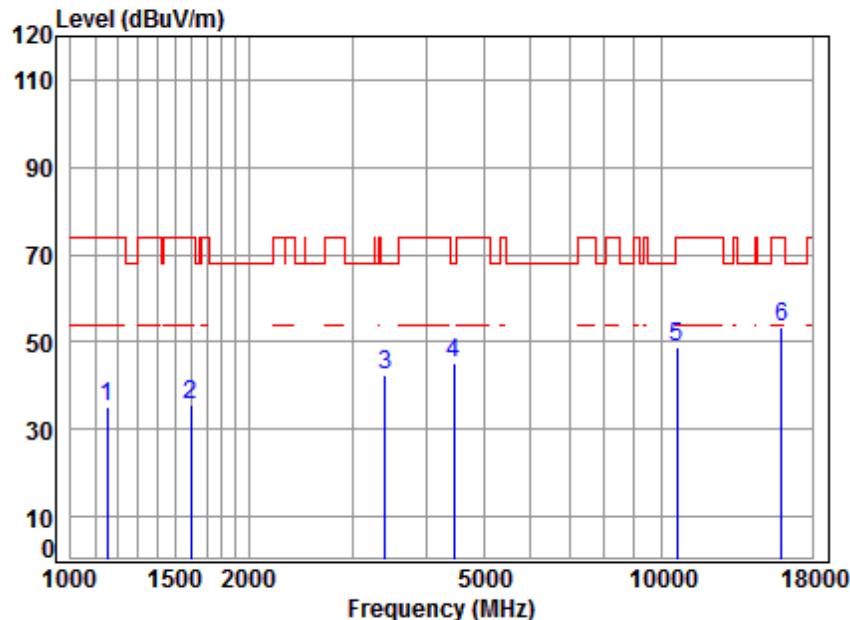

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1152.148	4.22	24.37	41.14	47.73	35.18	74.00	-38.82	peak
2	1597.181	5.35	26.24	41.47	45.64	35.76	74.00	-38.24	peak
3	3405.929	6.38	31.56	42.20	46.66	42.40	68.20	-25.80	peak
4	4456.315	7.51	33.53	42.41	46.71	45.34	68.20	-22.86	peak
5	10640.000	11.39	37.73	37.64	37.23	48.71	74.00	-25.29	peak
6	15960.000	14.93	40.98	39.38	36.97	53.50	74.00	-20.50	peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

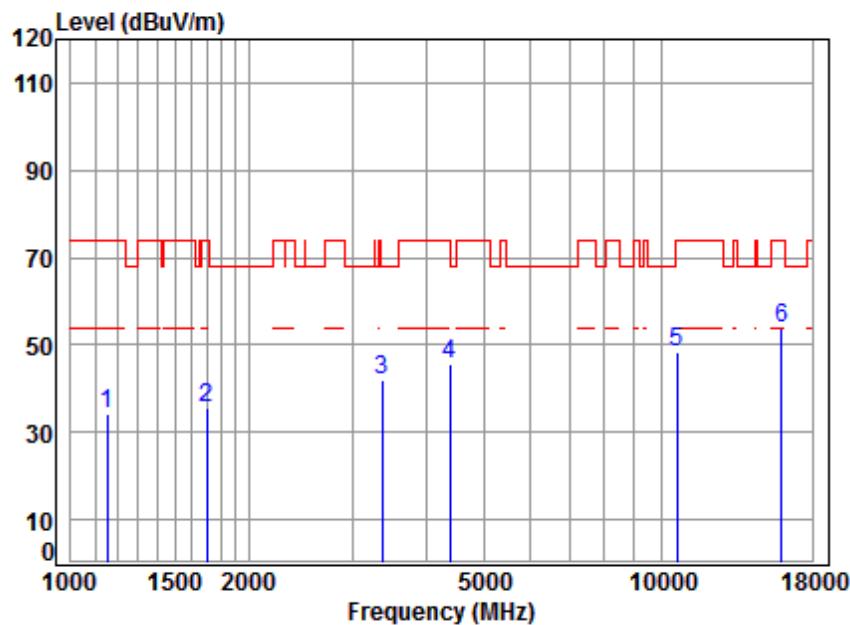

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1152.148	4.22	24.37	41.14	46.57	34.02	74.00	-39.98	peak
2	1697.129	5.23	26.66	41.53	45.28	35.64	74.00	-38.36	peak
3	3366.778	6.34	31.50	42.19	46.35	42.00	68.20	-26.20	peak
4	4392.376	7.44	33.42	42.40	46.99	45.45	74.00	-28.55	peak
5	10640.000	11.39	37.73	37.64	37.01	48.49	74.00	-25.51	peak
6	15960.000	14.93	40.98	39.38	37.09	53.62	74.00	-20.38	peak


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

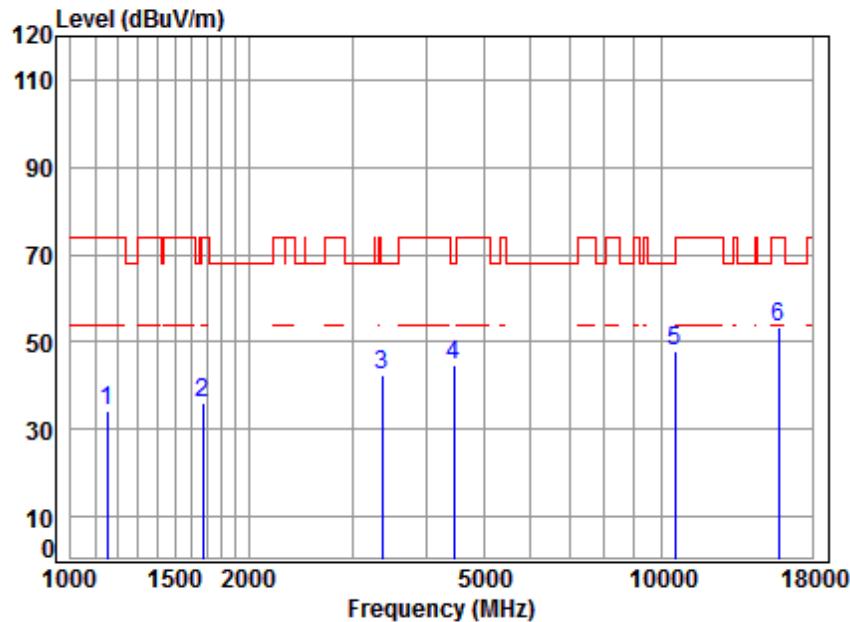

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1152.148	4.22	24.37	41.14	46.67	34.12	74.00 -39.88 peak
2	1672.779	5.26	26.56	41.52	45.82	36.12	74.00 -37.88 peak
3	3366.778	6.34	31.50	42.19	46.69	42.34	68.20 -25.86 peak
4	4456.315	7.51	33.53	42.41	45.97	44.60	68.20 -23.60 peak
5	10540.000	11.32	37.71	37.57	36.33	47.79	68.20 -20.41 peak
6	15810.000	14.71	40.89	39.25	36.85	53.20	74.00 -20.80 peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

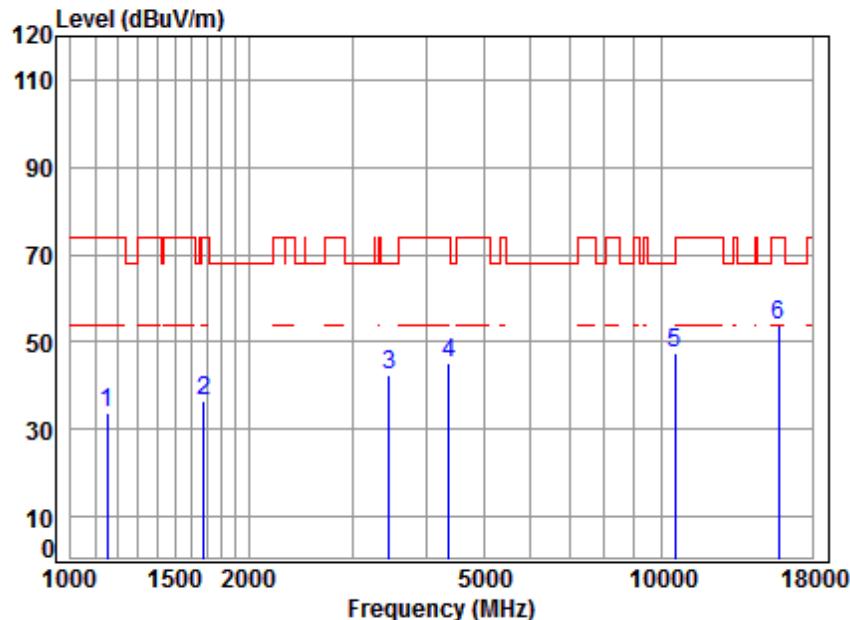

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	46.34	33.79	74.00	-40.21	peak	
2	1677.621	5.25	26.58	41.52	46.03	36.34	74.00	-37.66	peak	
3	3465.510	6.43	31.65	42.21	46.74	42.61	68.20	-25.59	peak	
4	4367.058	7.41	33.37	42.39	46.86	45.25	74.00	-28.75	peak	
5	10540.000	11.32	37.71	37.57	35.93	47.39	68.20	-20.81	peak	
6	15810.000	14.71	40.89	39.25	37.51	53.86	74.00	-20.14	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

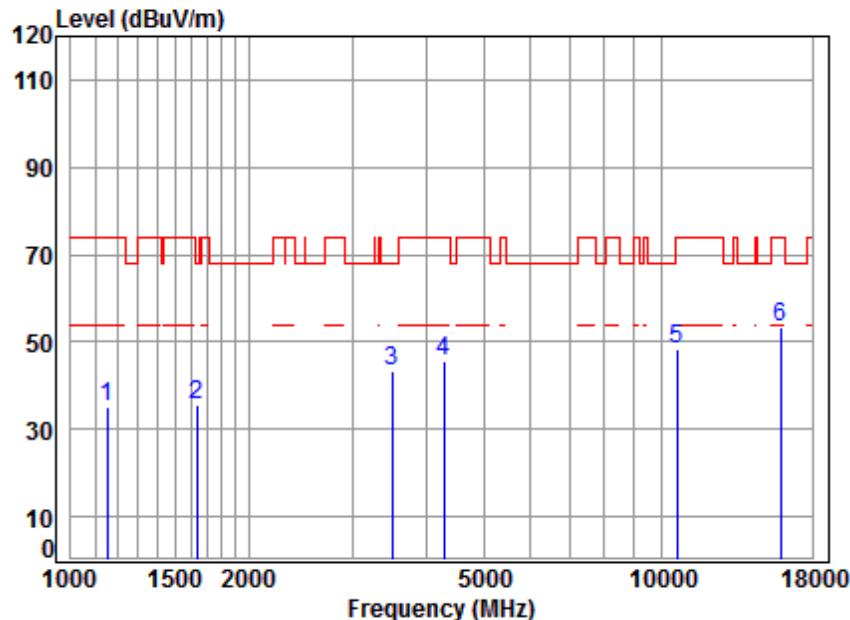

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.51	34.96	74.00	-39.04	peak	
2	1634.543	5.31	26.40	41.49	45.37	35.59	68.20	-32.61	peak	
3	3495.691	6.46	31.69	42.22	47.20	43.13	68.20	-25.07	peak	
4	4291.977	7.33	33.24	42.38	47.22	45.41	74.00	-28.59	peak	
5	10620.000	11.37	37.72	37.63	36.85	48.31	74.00	-25.69	peak	
6	15930.000	14.89	40.96	39.36	36.91	53.40	74.00	-20.60	peak	


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

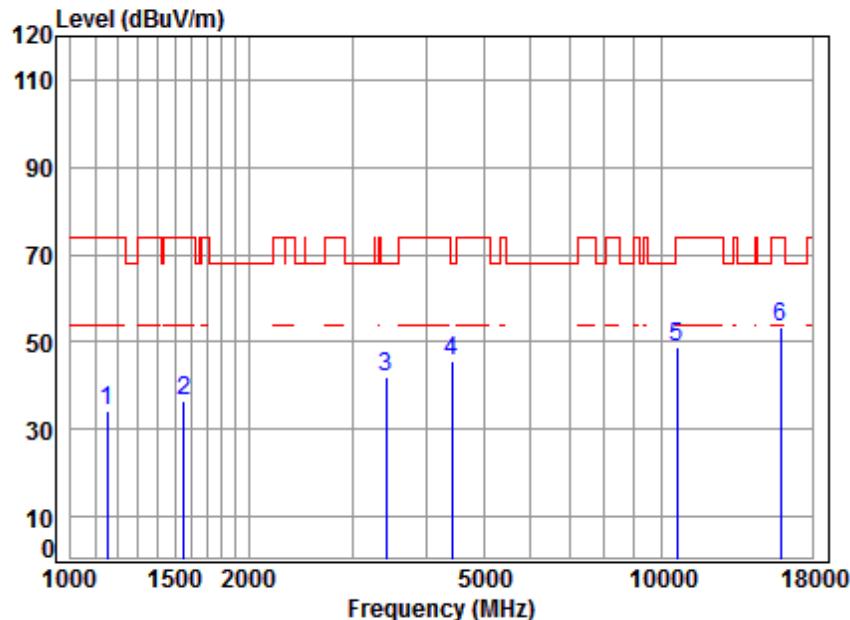

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	46.72	34.17	74.00	-39.83	peak	
2	1551.677	5.41	26.04	41.44	46.63	36.64	74.00	-37.36	peak	
3	3415.787	6.38	31.57	42.20	46.37	42.12	68.20	-26.08	peak	
4	4417.841	7.47	33.46	42.40	47.09	45.62	68.20	-22.58	peak	
5	10620.000	11.37	37.72	37.63	37.24	48.70	74.00	-25.30	peak	
6	15930.000	14.89	40.96	39.36	37.12	53.61	74.00	-20.39	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

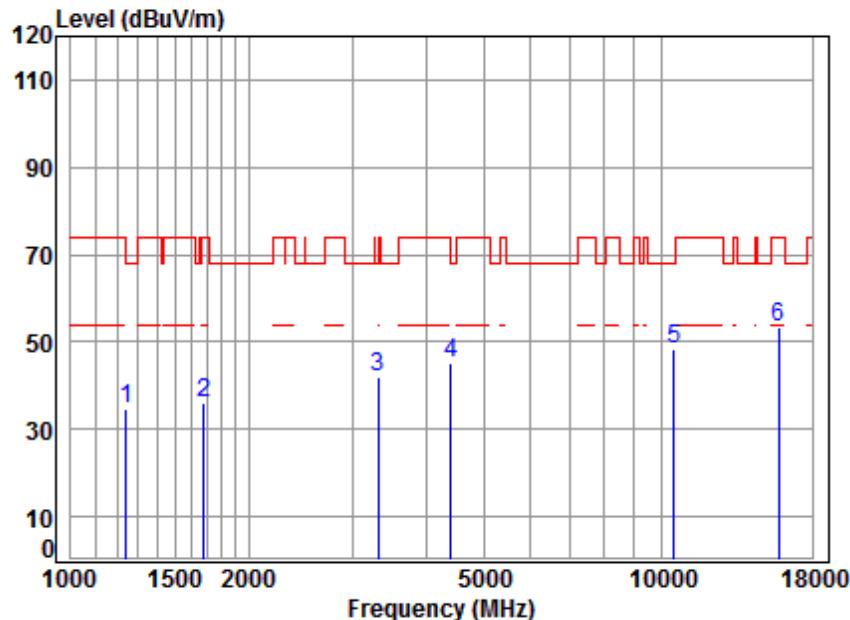

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1242.068	4.58	24.78	41.22	46.53	34.67	68.20	-33.53	peak	
2	1682.477	5.25	26.60	41.52	45.58	35.91	74.00	-38.09	peak	
3	3318.471	6.29	31.42	42.18	46.46	41.99	68.20	-26.21	peak	
4	4405.090	7.46	33.44	42.40	46.46	44.96	68.20	-23.24	peak	
5	10520.000	11.30	37.70	37.56	36.73	48.17	68.20	-20.03	peak	
6	15780.000	14.66	40.87	39.22	37.04	53.35	74.00	-20.65	peak	


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

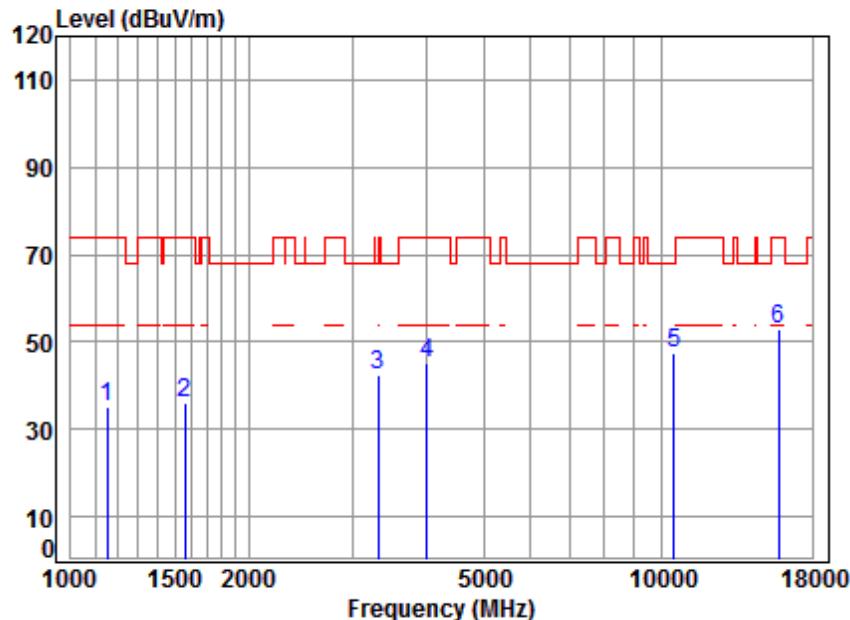

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1152.148	4.22	24.37	41.14	47.56	35.01	74.00	-38.99	peak
2	1560.673	5.40	26.08	41.45	46.03	36.06	74.00	-37.94	peak
3	3318.471	6.29	31.42	42.18	46.95	42.48	68.20	-25.72	peak
4	4015.929	7.00	32.73	42.33	47.81	45.21	74.00	-28.79	peak
5	10520.000	11.30	37.70	37.56	35.92	47.36	68.20	-20.84	peak
6	15780.000	14.66	40.87	39.22	36.70	53.01	74.00	-20.99	peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

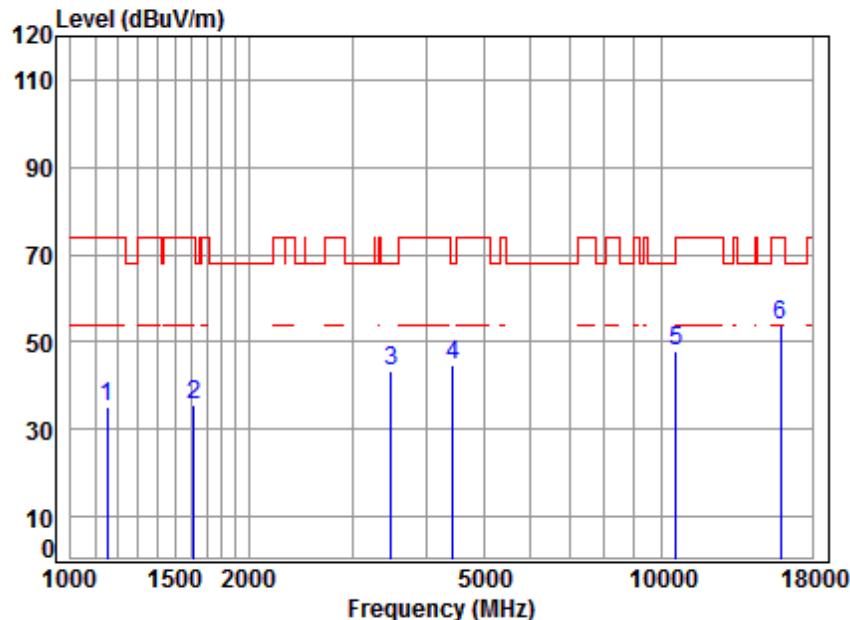

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.63	35.08	74.00	-38.92	peak	
2	1615.754	5.33	26.32	41.48	45.39	35.56	74.00	-38.44	peak	
3	3485.601	6.45	31.68	42.22	47.58	43.49	68.20	-24.71	peak	
4	4430.628	7.48	33.48	42.41	46.14	44.69	68.20	-23.51	peak	
5	10600.000	11.36	37.72	37.62	36.51	47.97	68.20	-20.23	peak	
6	15900.000	14.84	40.94	39.33	37.33	53.78	74.00	-20.22	peak	


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

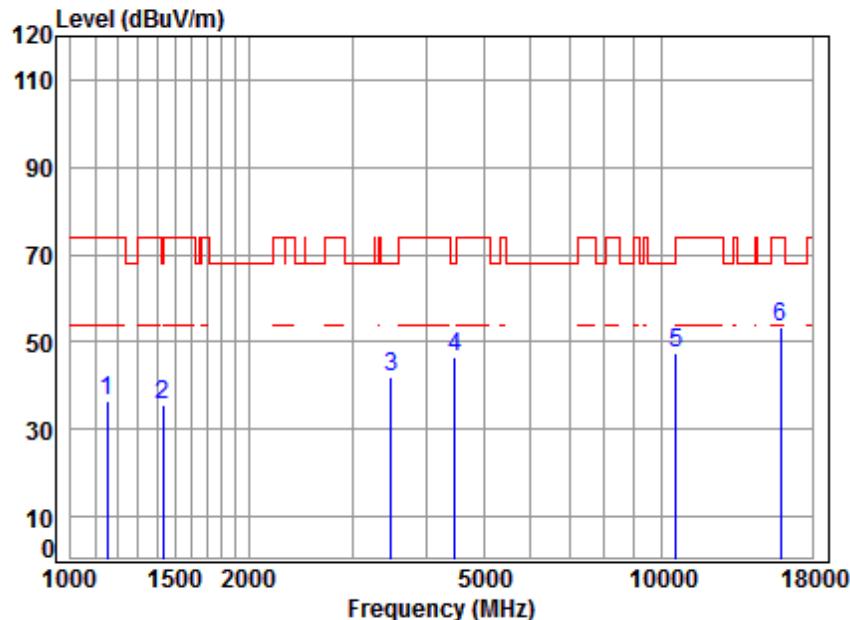

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	49.12	36.57	74.00	-37.43	peak		
2	1431.047	5.26	25.54	41.36	46.35	35.79	68.20	-32.41	peak		
3	3485.601	6.45	31.68	42.22	46.05	41.96	68.20	-26.24	peak		
4	4469.214	7.53	33.55	42.41	47.95	46.62	68.20	-21.58	peak		
5	10600.000	11.36	37.72	37.62	36.10	47.56	68.20	-20.64	peak		
6	15900.000	14.84	40.94	39.33	36.99	53.44	74.00	-20.56	peak		


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

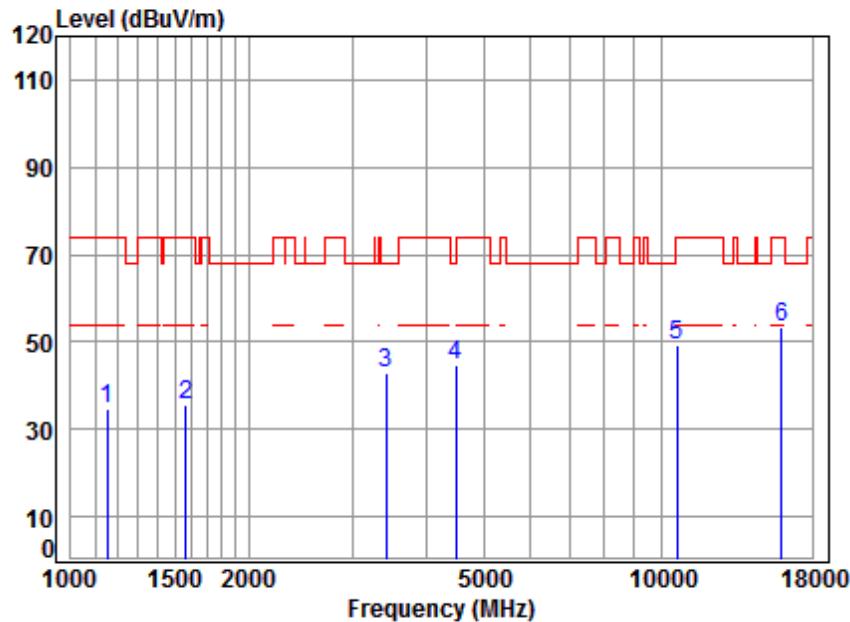

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.15	34.60	74.00	-39.40	peak	
2	1565.191	5.39	26.10	41.45	45.51	35.55	74.00	-38.45	peak	
3	3415.787	6.38	31.57	42.20	47.25	43.00	68.20	-25.20	peak	
4	4482.150	7.54	33.57	42.41	46.24	44.94	68.20	-23.26	peak	
5	10640.000	11.39	37.73	37.64	37.87	49.35	74.00	-24.65	peak	
6	15960.000	14.93	40.98	39.38	36.75	53.28	74.00	-20.72	peak	


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

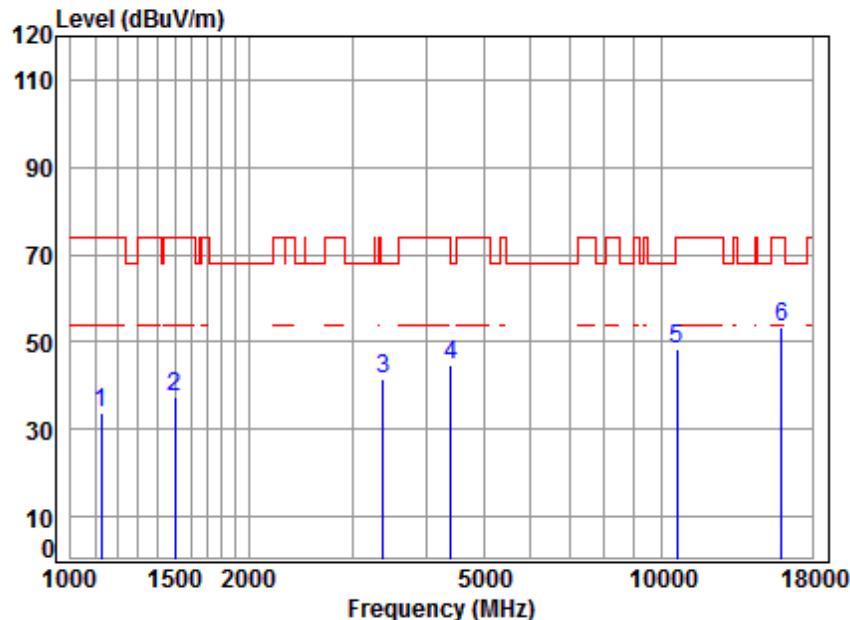

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1125.813	4.11	24.24	41.12	46.75	33.98	74.00	-40.02	peak
2	1503.119	5.48	25.81	41.41	47.31	37.19	74.00	-36.81	peak
3	3386.297	6.36	31.53	42.19	45.98	41.68	68.20	-26.52	peak
4	4405.090	7.46	33.44	42.40	46.19	44.69	68.20	-23.51	peak
5	10640.000	11.39	37.73	37.64	37.08	48.56	74.00	-25.44	peak
6	15960.000	14.93	40.98	39.38	36.95	53.48	74.00	-20.52	peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

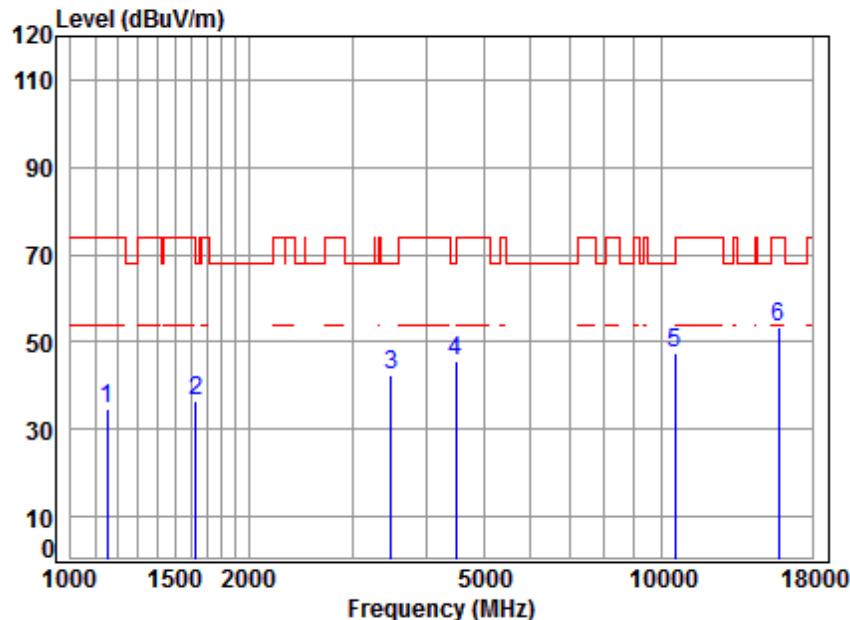

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.38	34.83	74.00	-39.17	peak	
2	1629.825	5.31	26.38	41.49	46.08	36.28	68.20	-31.92	peak	
3	3485.601	6.45	31.68	42.22	46.43	42.34	68.20	-25.86	peak	
4	4495.125	7.55	33.59	42.42	47.08	45.80	68.20	-22.40	peak	
5	10540.000	11.32	37.71	37.57	35.92	47.38	68.20	-20.82	peak	
6	15810.000	14.71	40.89	39.25	36.90	53.25	74.00	-20.75	peak	


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

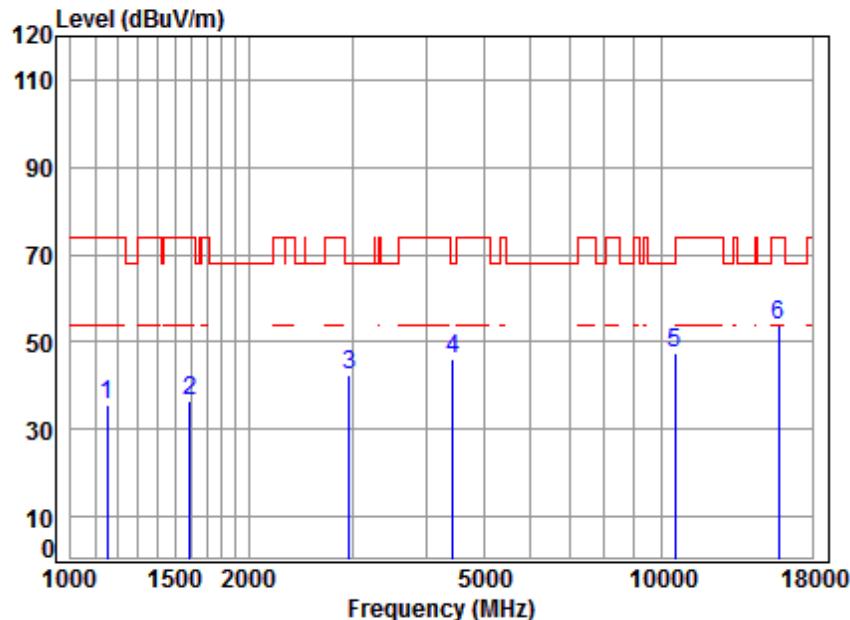

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1152.148	4.22	24.37	41.14	48.16	35.61	74.00	-38.39 peak
2 1592.571	5.36	26.22	41.47	46.30	36.41	74.00	-37.59 peak
3 2964.712	5.96	30.76	42.09	48.03	42.66	68.20	-25.54 peak
4 4430.628	7.48	33.48	42.41	47.56	46.11	68.20	-22.09 peak
5 10540.000	11.32	37.71	37.57	35.94	47.40	68.20	-20.80 peak
6 15810.000	14.71	40.89	39.25	37.52	53.87	74.00	-20.13 peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

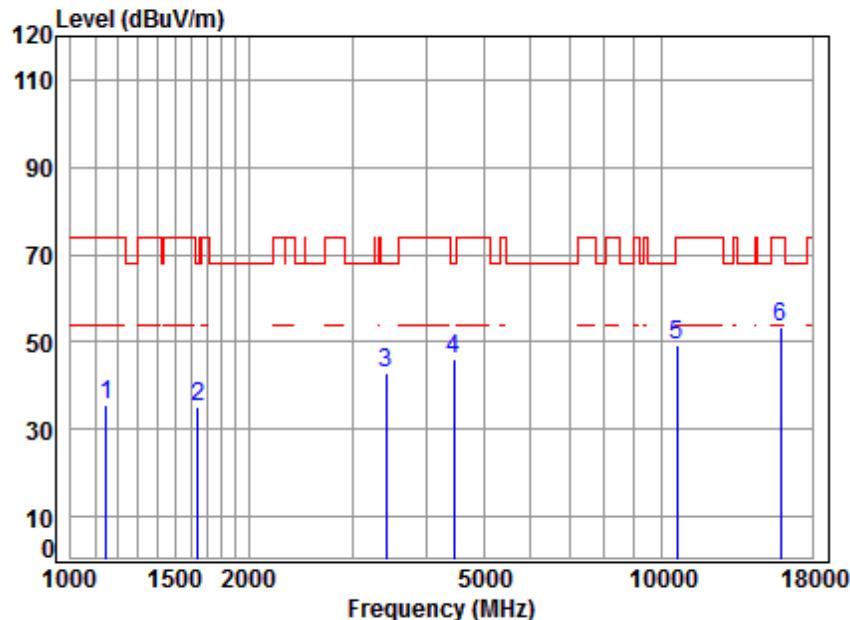

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1148.823	4.21	24.35	41.14	48.08	35.50	74.00	-38.50	peak
2	1639.274	5.30	26.42	41.49	44.97	35.20	68.20	-33.00	peak
3	3425.675	6.39	31.59	42.20	47.30	43.08	68.20	-25.12	peak
4	4456.315	7.51	33.53	42.41	47.50	46.13	68.20	-22.07	peak
5	10620.000	11.37	37.72	37.63	37.83	49.29	74.00	-24.71	peak
6	15930.000	14.89	40.96	39.36	37.02	53.51	74.00	-20.49	peak


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

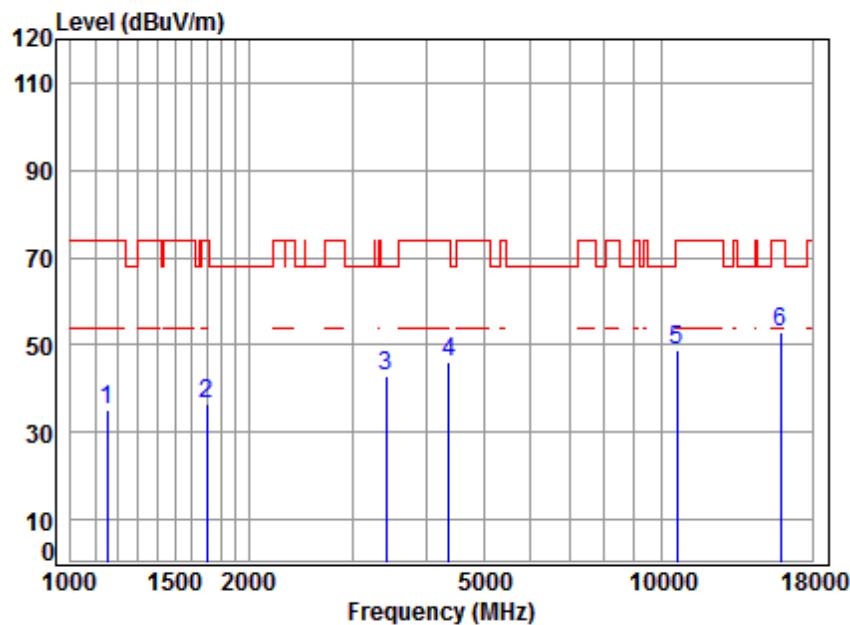

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1152.148	4.22	24.37	41.14	47.57	35.02	74.00	-38.98 peak
2	1697.129	5.23	26.66	41.53	46.03	36.39	74.00	-37.61 peak
3	3425.675	6.39	31.59	42.20	46.89	42.67	68.20	-25.53 peak
4	4367.058	7.41	33.37	42.39	47.47	45.86	74.00	-28.14 peak
5	10620.000	11.37	37.72	37.63	37.37	48.83	74.00	-25.17 peak
6	15930.000	14.89	40.96	39.36	36.64	53.13	74.00	-20.87 peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

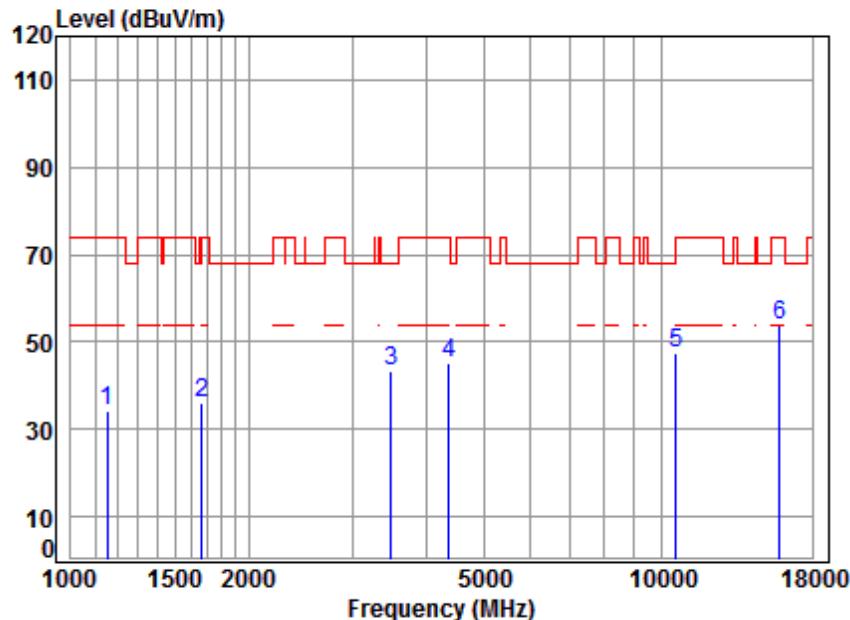

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5290 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m		
1	1152.148	4.22	24.37	41.14	46.62	34.07	74.00	74.00	-39.93	peak	
2	1667.951	5.27	26.54	41.51	45.66	35.96	74.00	74.00	-38.04	peak	
3	3485.601	6.45	31.68	42.22	47.30	43.21	68.20	68.20	-24.99	peak	
4	4367.058	7.41	33.37	42.39	46.67	45.06	74.00	74.00	-28.94	peak	
5	10580.000	11.35	37.72	37.60	35.97	47.44	68.20	68.20	-20.76	peak	
6	15870.000	14.80	40.92	39.30	37.35	53.77	74.00	74.00	-20.23	peak	

Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

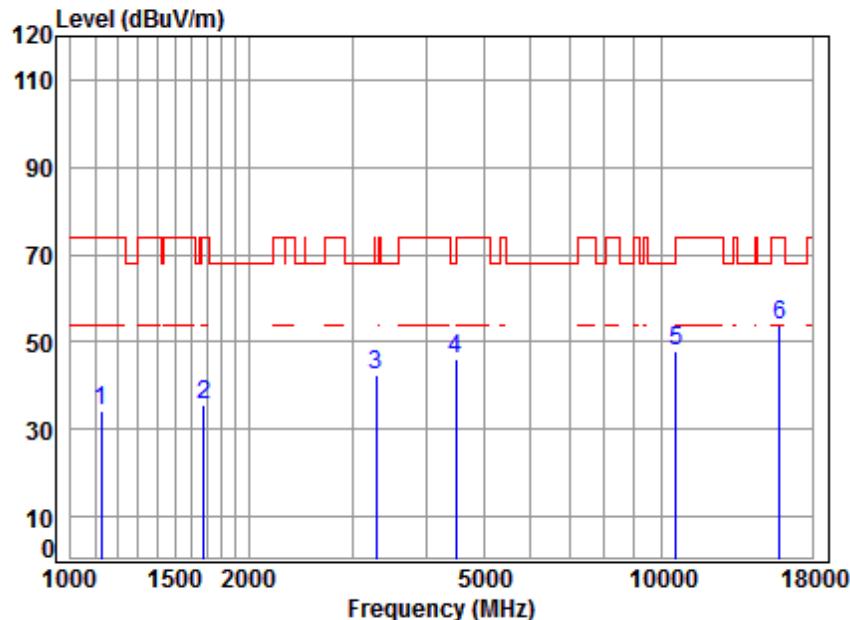


Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5290 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1125.813	4.11	24.24	41.12	46.87	34.10	74.00	-39.90	peak
2	1677.621	5.25	26.58	41.52	45.45	35.76	74.00	-38.24	peak
3	3289.821	6.27	31.38	42.17	46.85	42.33	68.20	-25.87	peak
4	4482.150	7.54	33.57	42.41	47.34	46.04	68.20	-22.16	peak
5	10580.000	11.35	37.72	37.60	36.64	48.11	68.20	-20.09	peak
6	15870.000	14.80	40.92	39.30	37.25	53.67	74.00	-20.33	peak

Test data for Antenna1/ Band 2C:


Mode:d; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

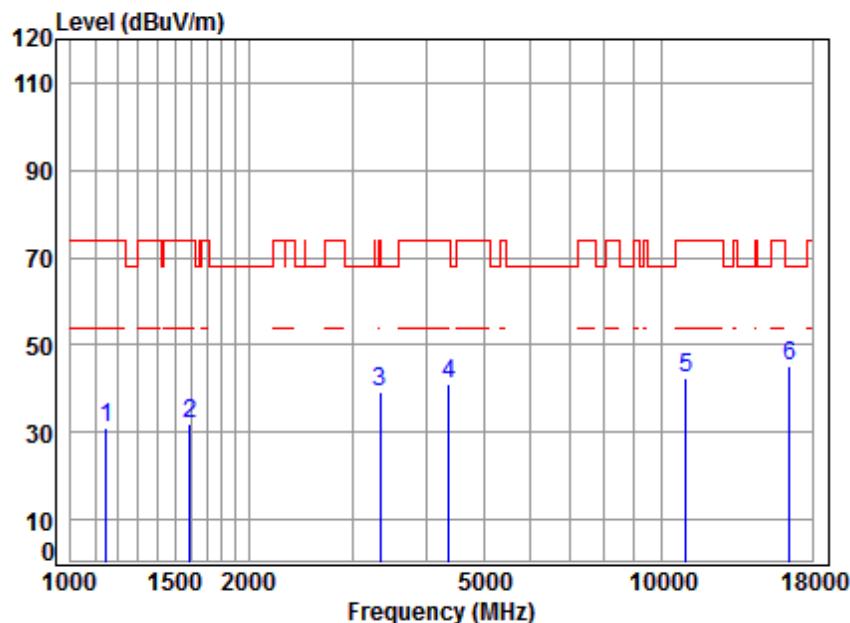

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1148.823	4.21	24.35	41.14	43.76	31.18	74.00	-42.82 peak
2	1592.571	5.36	26.22	41.47	41.74	31.85	74.00	-42.15 peak
3	3347.371	6.32	31.47	42.19	43.62	39.22	74.00	-34.78 peak
4	4367.058	7.41	33.37	42.39	42.64	41.03	74.00	-32.97 peak
5	11000.000	11.63	37.80	37.88	31.06	42.61	74.00	-31.39 peak
6	16500.000	14.50	42.20	39.86	28.53	45.37	68.20	-22.83 peak


Mode:d; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

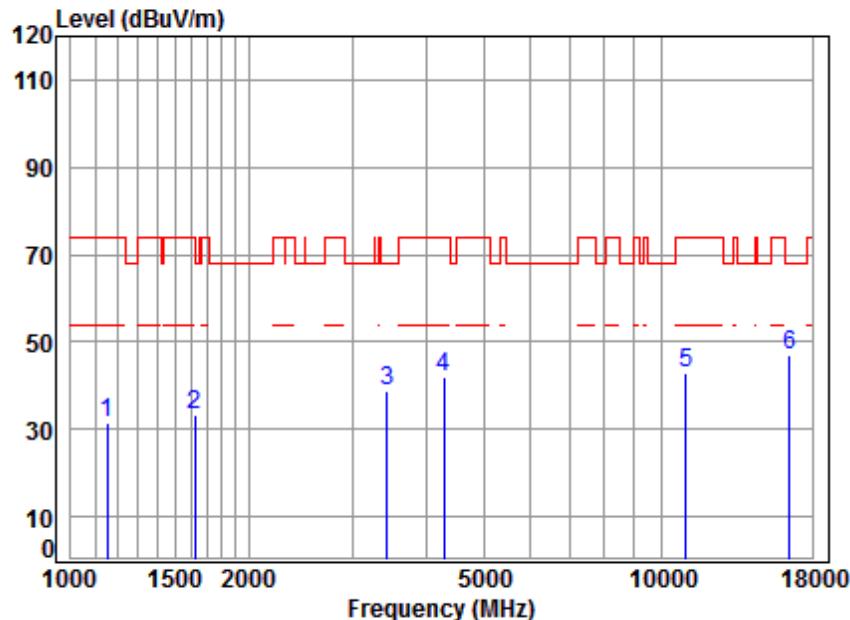

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	44.03	31.48	74.00	-42.52	peak	
2	1625.121	5.32	26.36	41.49	42.89	33.08	74.00	-40.92	peak	
3	3435.590	6.40	31.60	42.21	42.99	38.78	68.20	-29.42	peak	
4	4279.589	7.31	33.22	42.38	43.82	41.97	74.00	-32.03	peak	
5	11000.000	11.63	37.80	37.88	31.36	42.91	74.00	-31.09	peak	
6	16500.000	14.50	42.20	39.86	30.35	47.19	68.20	-21.01	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

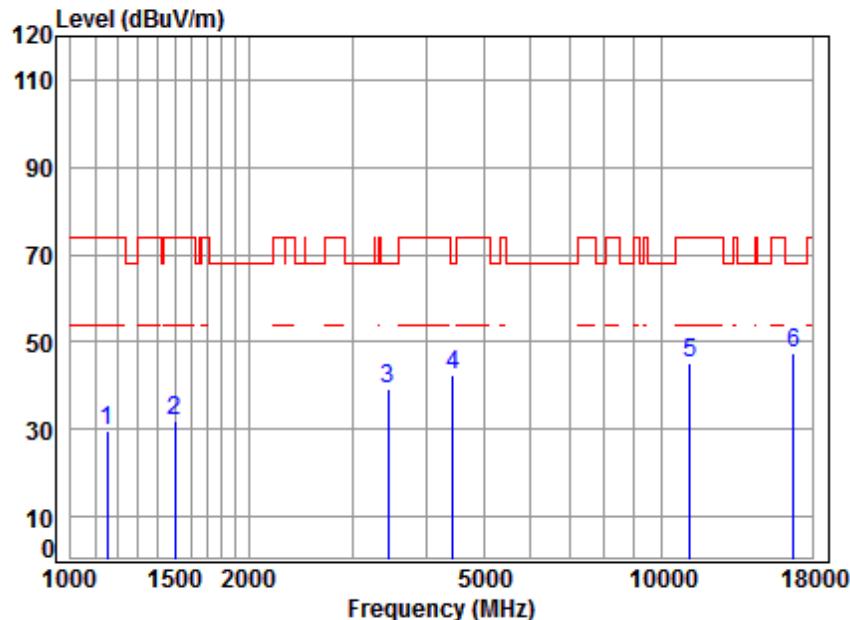

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	42.43	29.88	74.00	-44.12	peak	
2	1498.781	5.48	25.80	41.41	41.98	31.85	74.00	-42.15	peak	
3	3445.535	6.41	31.62	42.21	43.23	39.05	68.20	-29.15	peak	
4	4430.628	7.48	33.48	42.41	43.69	42.24	68.20	-25.96	peak	
5	11160.000	11.80	37.83	37.98	33.54	45.19	74.00	-28.81	peak	
6	16740.000	15.57	42.39	40.07	29.44	47.33	68.20	-20.87	peak	


Mode:d; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

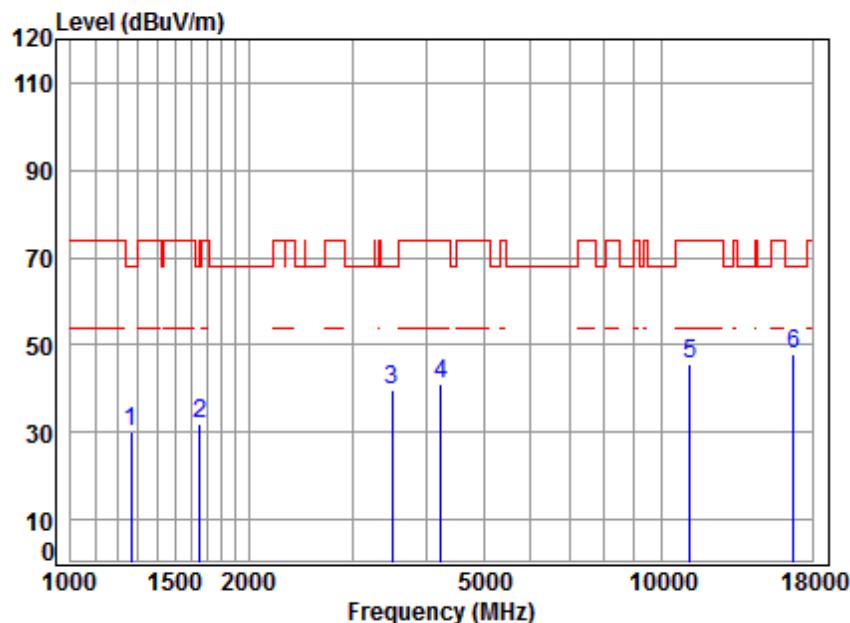

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1263.796	4.66	24.87	41.23	41.84	30.14	68.20	-38.06	peak
2	1653.550	5.28	26.48	41.50	41.86	32.12	68.20	-36.08	peak
3	3495.691	6.46	31.69	42.22	43.82	39.75	68.20	-28.45	peak
4	4230.396	7.26	33.13	42.37	43.01	41.03	74.00	-32.97	peak
5	11160.000	11.80	37.83	37.98	34.13	45.78	74.00	-28.22	peak
6	16740.000	15.57	42.39	40.07	30.07	47.96	68.20	-20.24	peak


Mode:d; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

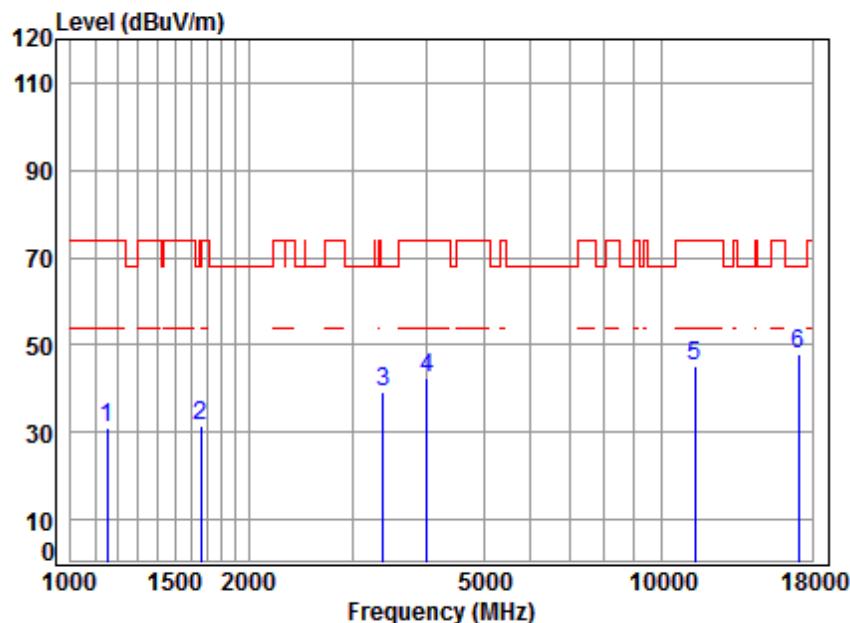

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.68	31.13	74.00	-42.87	peak	
2	1663.137	5.27	26.52	41.51	41.23	31.51	74.00	-42.49	peak	
3	3386.297	6.36	31.53	42.19	43.37	39.07	68.20	-29.13	peak	
4	4004.339	6.99	32.71	42.33	45.01	42.38	74.00	-31.62	peak	
5	11400.000	12.04	37.88	38.13	33.43	45.22	74.00	-28.78	peak	
6	17100.000	16.49	42.66	40.37	29.02	47.80	68.20	-20.40	peak	


Mode:d; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

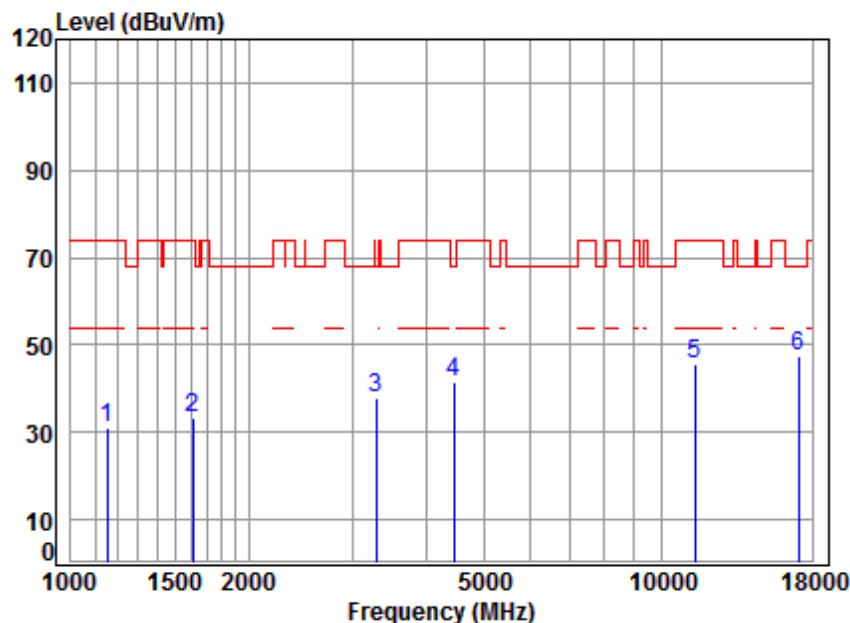

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.44	30.89	74.00	-43.11	peak	
2	1611.091	5.34	26.30	41.48	43.27	33.43	74.00	-40.57	peak	
3	3289.821	6.27	31.38	42.17	42.59	38.07	68.20	-30.13	peak	
4	4456.315	7.51	33.53	42.41	42.68	41.31	68.20	-26.89	peak	
5	11400.000	12.04	37.88	38.13	33.62	45.41	74.00	-28.59	peak	
6	17100.000	16.49	42.66	40.37	28.52	47.30	68.20	-20.90	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

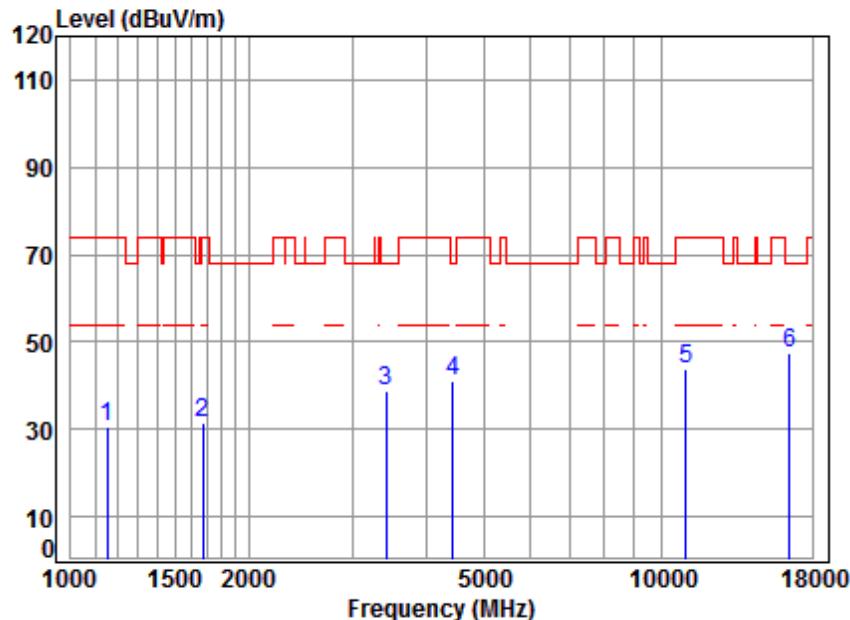

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	41.07	30.52	74.00	-43.48	peak	
2	1672.779	5.26	26.56	41.52	41.30	31.60	74.00	-42.40	peak	
3	3415.787	6.38	31.57	42.20	42.91	38.66	68.20	-29.54	peak	
4	4443.453	7.50	33.50	42.41	42.36	40.95	68.20	-27.25	peak	
5	11000.000	11.63	37.80	37.88	32.41	43.96	74.00	-30.04	peak	
6	16500.000	14.50	42.20	39.86	30.63	47.47	68.20	-20.73	peak	


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

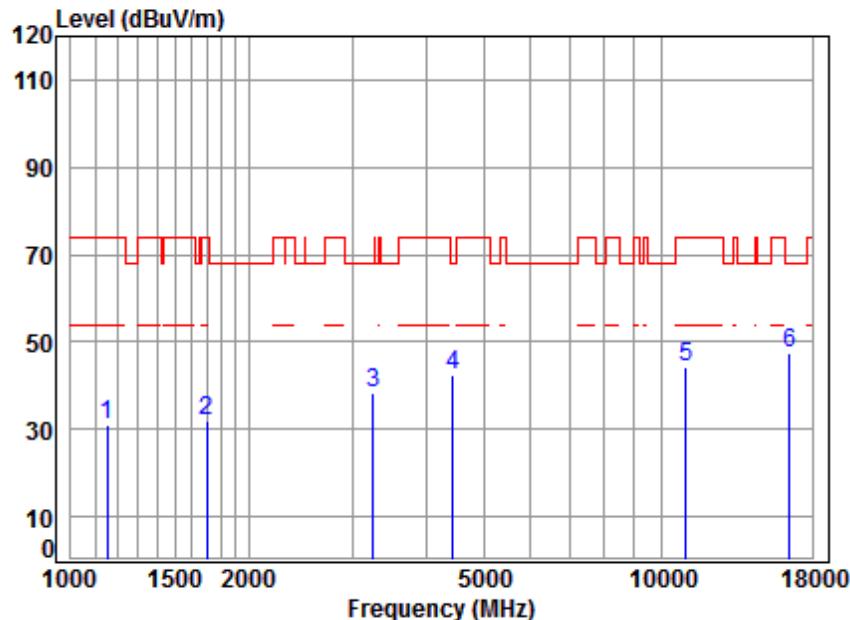

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.37	30.82	74.00	-43.18	peak	
2	1702.042	5.23	26.68	41.53	41.49	31.87	74.00	-42.13	peak	
3	3252.005	6.23	31.32	42.16	42.98	38.37	68.20	-29.83	peak	
4	4430.628	7.48	33.48	42.41	43.77	42.32	68.20	-25.88	peak	
5	11000.000	11.63	37.80	37.88	32.90	44.45	74.00	-29.55	peak	
6	16500.000	14.50	42.20	39.86	30.60	47.44	68.20	-20.76	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

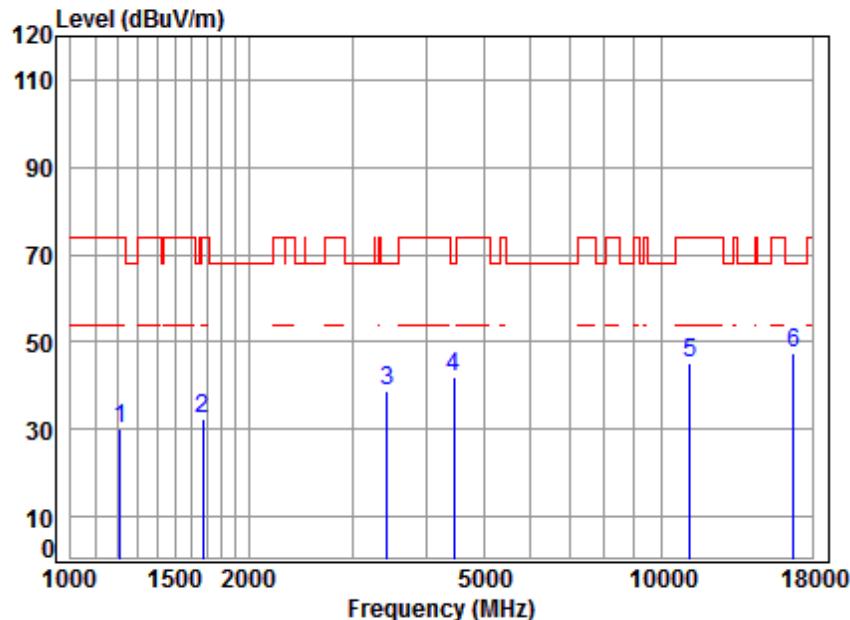

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	4.47	24.65	41.19	42.37	30.30	74.00	-43.70	peak	
2	1672.779	5.26	26.56	41.52	42.02	32.32	74.00	-41.68	peak	
3	3435.590	6.40	31.60	42.21	42.78	38.57	68.20	-29.63	peak	
4	4456.315	7.51	33.53	42.41	43.44	42.07	68.20	-26.13	peak	
5	11160.000	11.80	37.83	37.98	33.68	45.33	74.00	-28.67	peak	
6	16740.000	15.57	42.39	40.07	29.53	47.42	68.20	-20.78	peak	


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

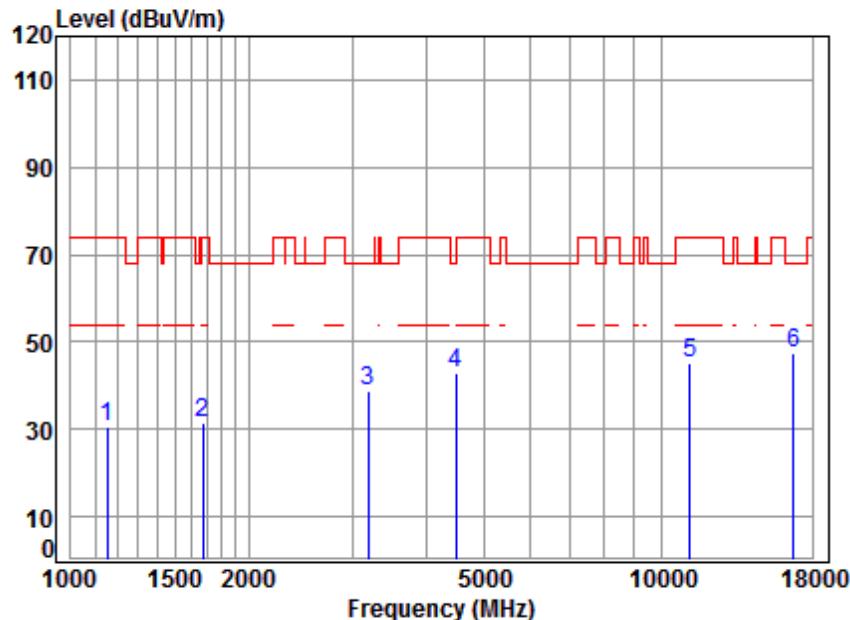

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.31	30.76	74.00	-43.24	peak		
2	1672.779	5.26	26.56	41.52	41.25	31.55	74.00	-42.45	peak		
3	3186.869	6.17	31.21	42.15	43.74	38.97	68.20	-29.23	peak		
4	4495.125	7.55	33.59	42.42	44.24	42.96	68.20	-25.24	peak		
5	11160.000	11.80	37.83	37.98	33.67	45.32	74.00	-28.68	peak		
6	16740.000	15.57	42.39	40.07	29.48	47.37	68.20	-20.83	peak		


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

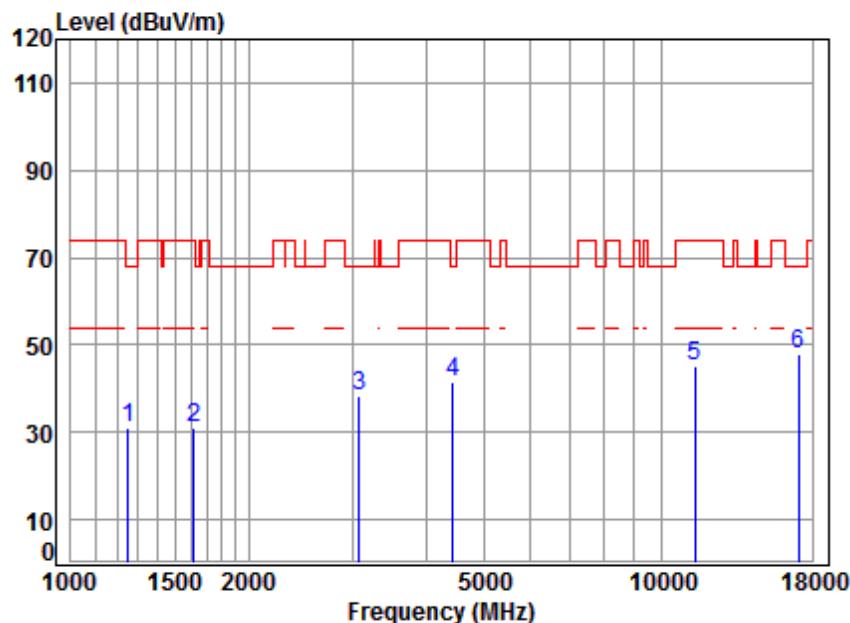

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	42.92	31.12	68.20	-37.08	peak	
2	1615.754	5.33	26.32	41.48	41.03	31.20	74.00	-42.80	peak	
3	3078.229	6.06	31.03	42.12	43.57	38.54	68.20	-29.66	peak	
4	4443.453	7.50	33.50	42.41	42.97	41.56	68.20	-26.64	peak	
5	11400.000	12.04	37.88	38.13	33.32	45.11	74.00	-28.89	peak	
6	17100.000	16.49	42.66	40.37	29.27	48.05	68.20	-20.15	peak	


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

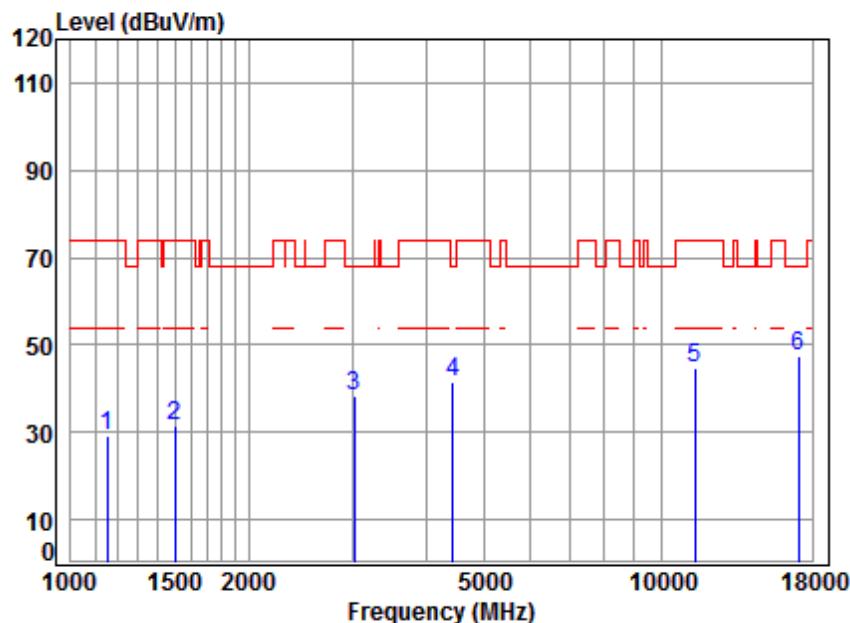

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	41.88	29.33	74.00	-44.67	peak	
2	1498.781	5.48	25.80	41.41	41.45	31.32	74.00	-42.68	peak	
3	3016.575	6.00	30.93	42.10	43.56	38.39	68.20	-29.81	peak	
4	4430.628	7.48	33.48	42.41	43.09	41.64	68.20	-26.56	peak	
5	11400.000	12.04	37.88	38.13	33.00	44.79	74.00	-29.21	peak	
6	17100.000	16.49	42.66	40.37	28.69	47.47	68.20	-20.73	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

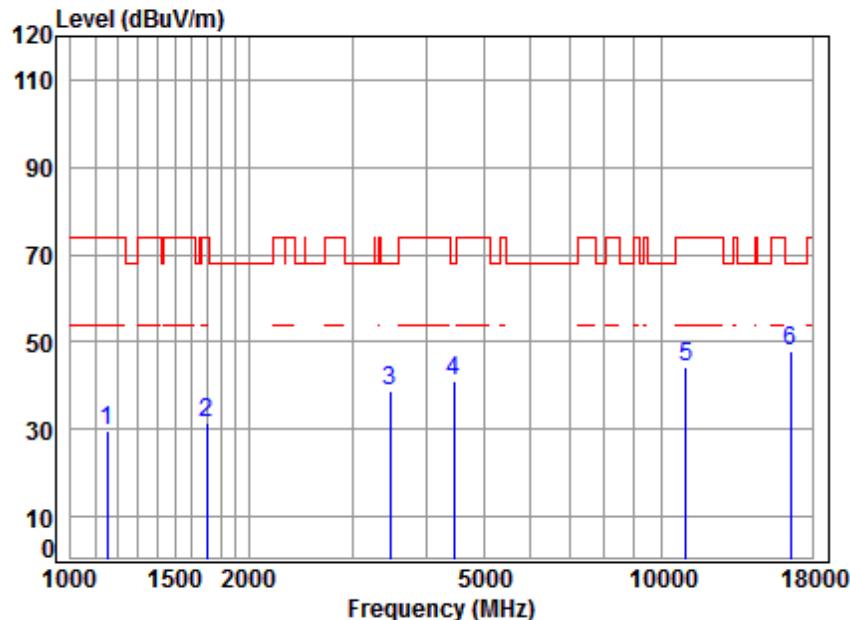

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5510 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	42.10	29.55	74.00	-44.45	peak	
2	1702.042	5.23	26.68	41.53	41.18	31.56	74.00	-42.44	peak	
3	3475.541	6.44	31.66	42.22	42.94	38.82	68.20	-29.38	peak	
4	4456.315	7.51	33.53	42.41	42.45	41.08	68.20	-27.12	peak	
5	11020.000	11.65	37.80	37.89	32.81	44.37	74.00	-29.63	peak	
6	16530.000	14.63	42.22	39.89	31.02	47.98	68.20	-20.22	peak	


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

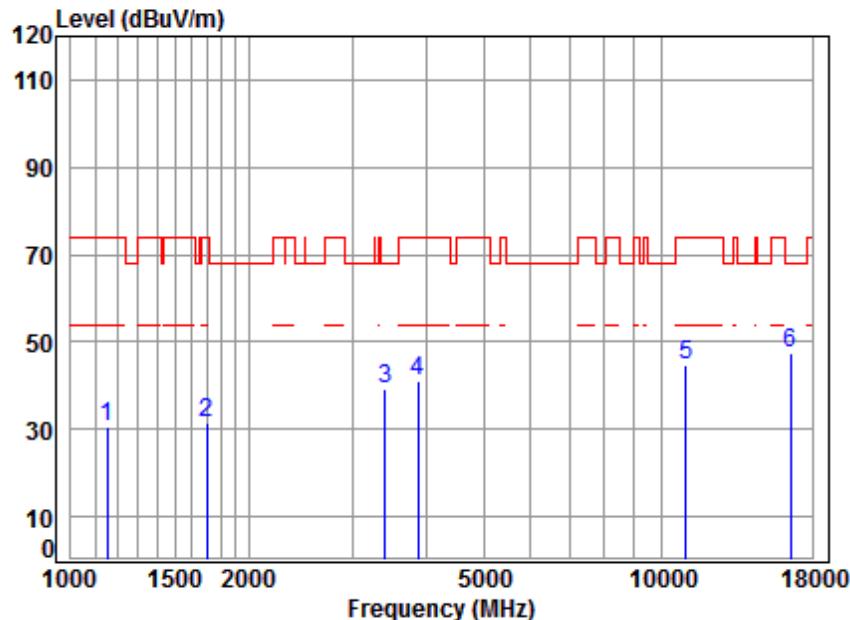

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5510 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.33	30.78	74.00	-43.22	peak	
2	1697.129	5.23	26.66	41.53	41.29	31.65	74.00	-42.35	peak	
3	3405.929	6.38	31.56	42.20	43.27	39.01	68.20	-29.19	peak	
4	3867.831	6.85	32.45	42.30	44.27	41.27	74.00	-32.73	peak	
5	11020.000	11.65	37.80	37.89	32.98	44.54	74.00	-29.46	peak	
6	16530.000	14.63	42.22	39.89	30.36	47.32	68.20	-20.88	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:middle

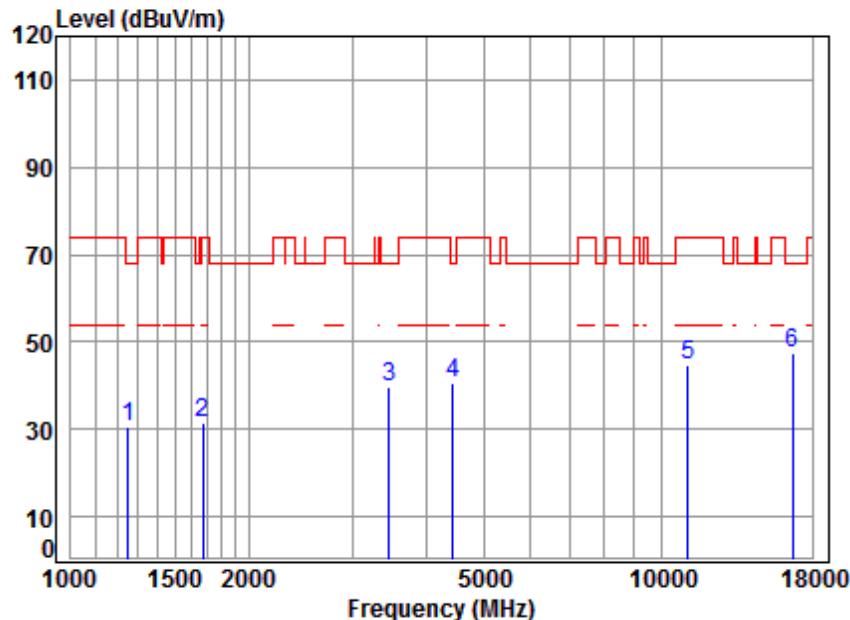

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					Level	Line		
1 1249.269	4.61	24.81	41.22	42.15	30.35	68.20	-37.85	peak
2 1672.779	5.26	26.56	41.52	41.16	31.46	74.00	-42.54	peak
3 3465.510	6.43	31.65	42.21	43.65	39.52	68.20	-28.68	peak
4 4443.453	7.50	33.50	42.41	41.96	40.55	68.20	-27.65	peak
5 11100.000	11.73	37.82	37.94	33.09	44.70	74.00	-29.30	peak
6 16650.000	15.17	42.32	39.99	29.82	47.32	68.20	-20.88	peak


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:middle

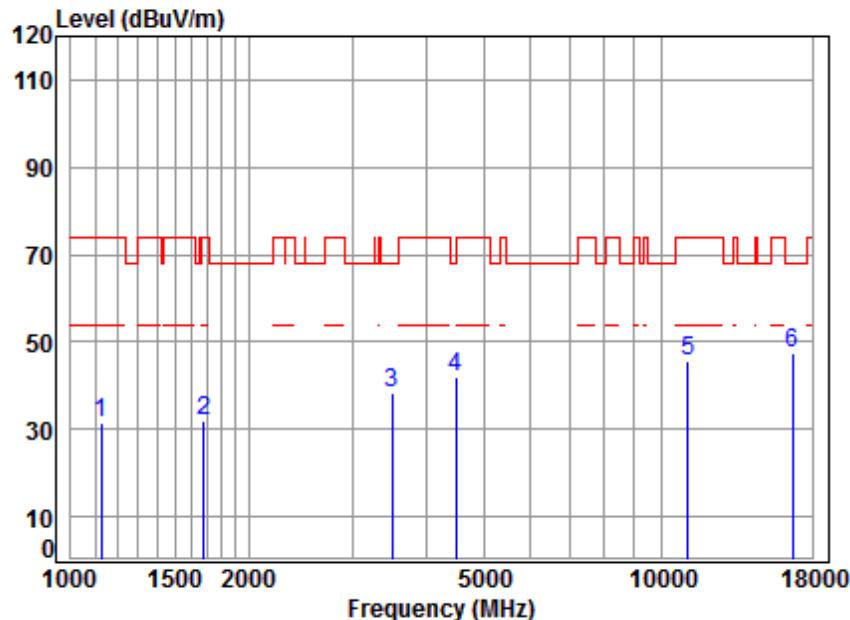

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1125.813	4.11	24.24	41.12	44.21	31.44	74.00 -42.56 peak
2	1677.621	5.25	26.58	41.52	41.82	32.13	74.00 -41.87 peak
3	3495.691	6.46	31.69	42.22	42.28	38.21	68.20 -29.99 peak
4	4482.150	7.54	33.57	42.41	43.40	42.10	68.20 -26.10 peak
5	11100.000	11.73	37.82	37.94	33.82	45.43	74.00 -28.57 peak
6	16650.000	15.17	42.32	39.99	30.01	47.51	68.20 -20.69 peak


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

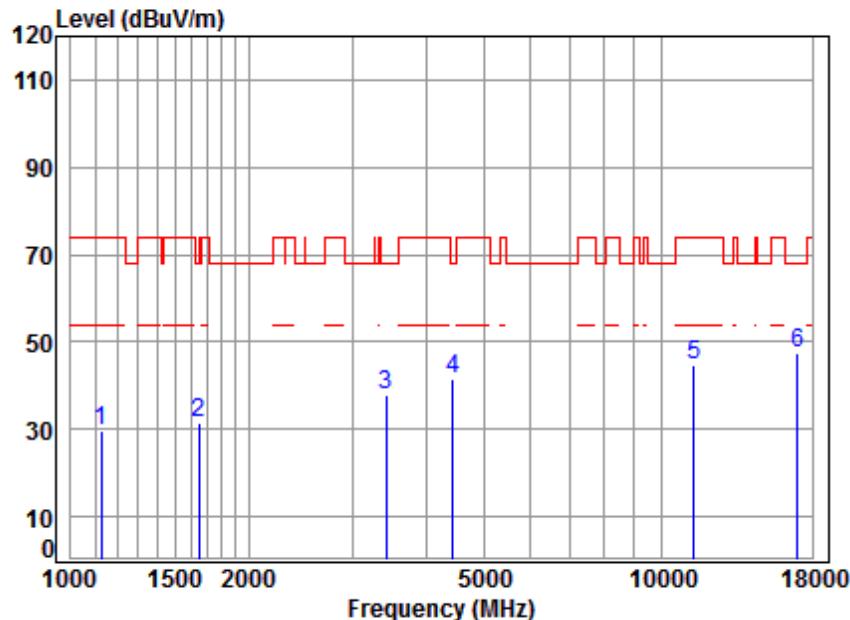

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1125.813	4.11	24.24	41.12	42.51	29.74	74.00	-44.26	peak	
2	1648.778	5.29	26.46	41.50	41.35	31.60	68.20	-36.60	peak	
3	3415.787	6.38	31.57	42.20	42.30	38.05	68.20	-30.15	peak	
4	4443.453	7.50	33.50	42.41	42.85	41.44	68.20	-26.76	peak	
5	11340.000	11.98	37.87	38.10	32.89	44.64	74.00	-29.36	peak	
6	17010.000	16.69	42.61	40.29	28.33	47.34	68.20	-20.86	peak	


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

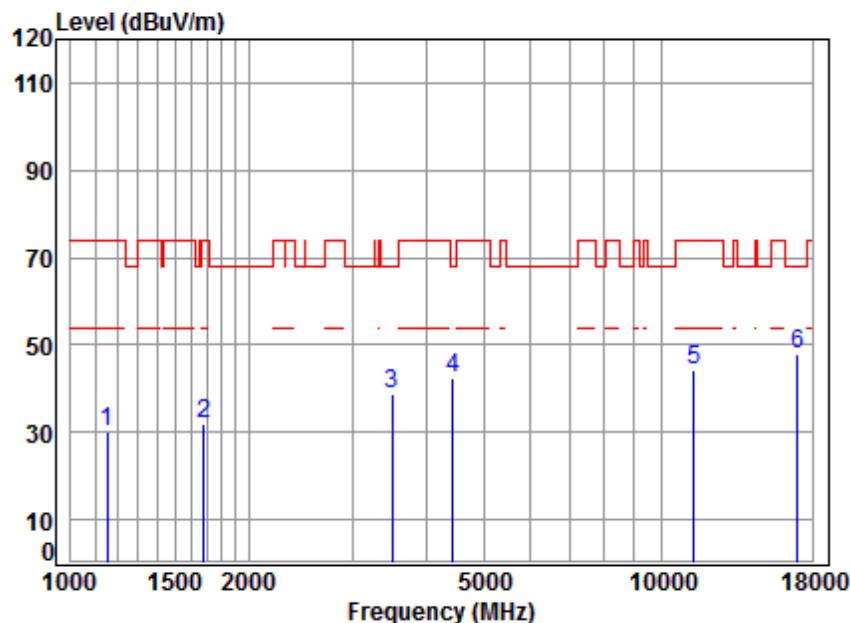

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	42.50	29.95	74.00	-44.05	peak	
2	1677.621	5.25	26.58	41.52	41.73	32.04	74.00	-41.96	peak	
3	3495.691	6.46	31.69	42.22	42.84	38.77	68.20	-29.43	peak	
4	4430.628	7.48	33.48	42.41	43.68	42.23	68.20	-25.97	peak	
5	11340.000	11.98	37.87	38.10	32.55	44.30	74.00	-29.70	peak	
6	17010.000	16.69	42.61	40.29	29.08	48.09	68.20	-20.11	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

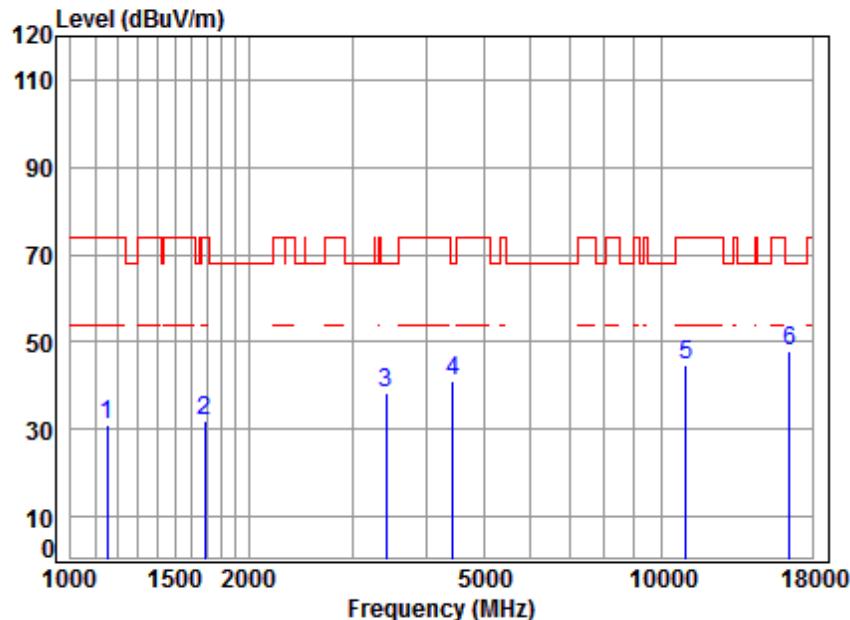

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					dB	dBuV	dBuV/m	dBuV/m
1 1152.148	4.22	24.37	41.14	43.44	30.89	74.00	-43.11	peak
2 1687.347	5.24	26.62	41.52	41.55	31.89	74.00	-42.11	peak
3 3425.675	6.39	31.59	42.20	42.48	38.26	68.20	-29.94	peak
4 4443.453	7.50	33.50	42.41	42.57	41.16	68.20	-27.04	peak
5 11000.000	11.63	37.80	37.88	33.14	44.69	74.00	-29.31	peak
6 16500.000	14.50	42.20	39.86	31.28	48.12	68.20	-20.08	peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

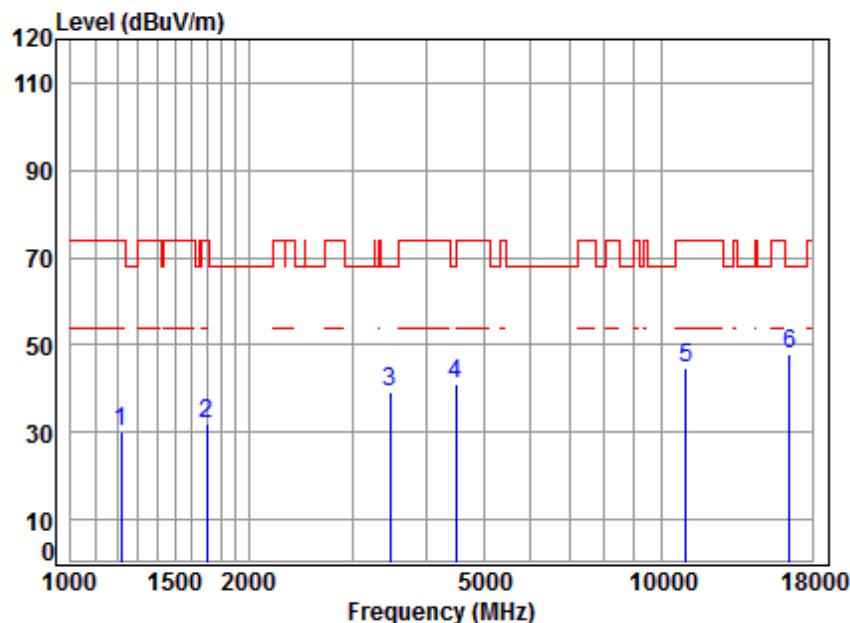

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	4.49	24.67	41.20	42.24	30.20	74.00	-43.80	peak	
2	1702.042	5.23	26.68	41.53	41.60	31.98	74.00	-42.02	peak	
3	3475.541	6.44	31.66	42.22	43.55	39.43	68.20	-28.77	peak	
4	4482.150	7.54	33.57	42.41	42.58	41.28	68.20	-26.92	peak	
5	11000.000	11.63	37.80	37.88	33.26	44.81	74.00	-29.19	peak	
6	16500.000	14.50	42.20	39.86	30.93	47.77	68.20	-20.43	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

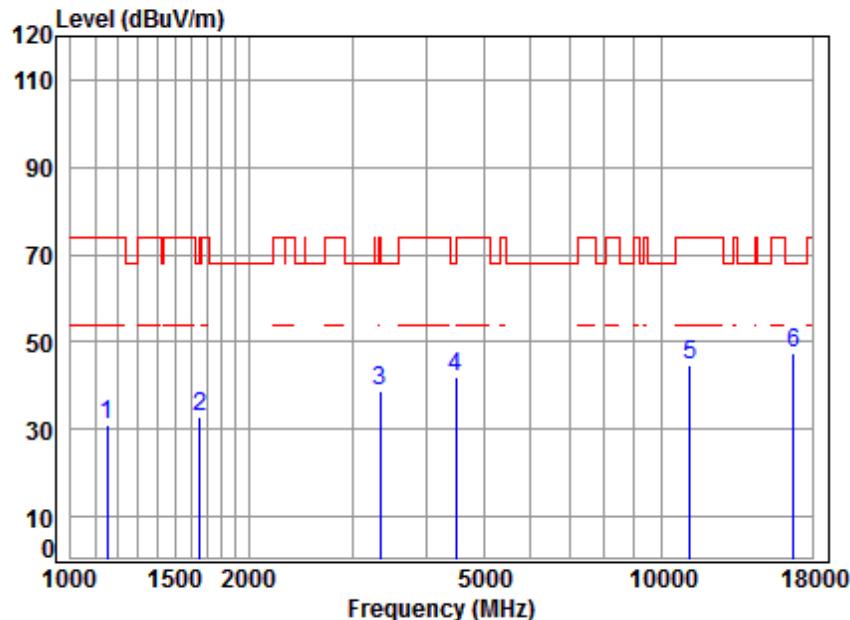

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.74	31.19	74.00	-42.81	peak	
2	1653.550	5.28	26.48	41.50	42.58	32.84	68.20	-35.36	peak	
3	3337.710	6.31	31.45	42.18	43.22	38.80	74.00	-35.20	peak	
4	4482.150	7.54	33.57	42.41	43.15	41.85	68.20	-26.35	peak	
5	11160.000	11.80	37.83	37.98	33.15	44.80	74.00	-29.20	peak	
6	16740.000	15.57	42.39	40.07	29.77	47.66	68.20	-20.54	peak	


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

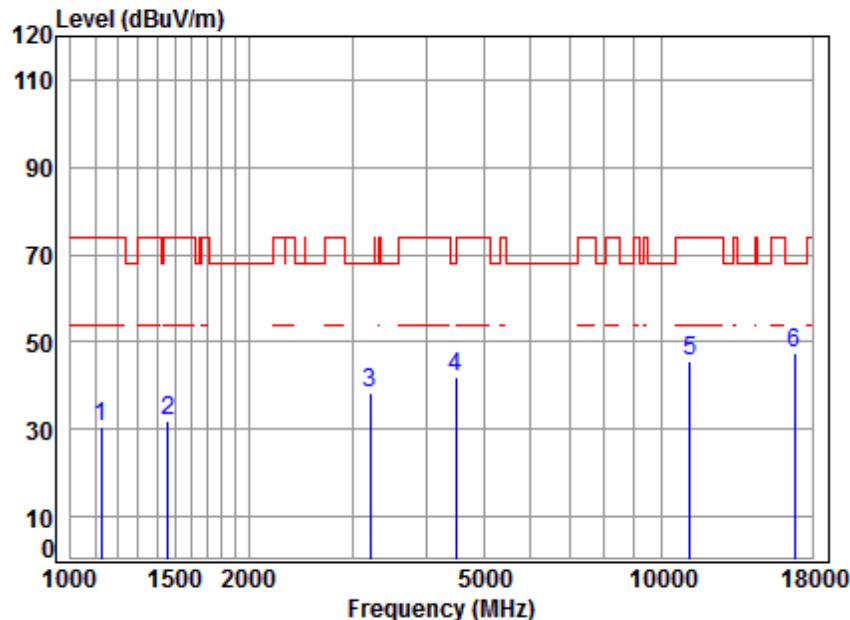

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1125.813	4.11	24.24	41.12	43.32	30.55	74.00 -43.45 peak
2	1460.295	5.35	25.65	41.38	42.50	32.12	74.00 -41.88 peak
3	3214.623	6.20	31.26	42.15	43.17	38.48	68.20 -29.72 peak
4	4482.150	7.54	33.57	42.41	43.23	41.93	68.20 -26.27 peak
5	11160.000	11.80	37.83	37.98	33.83	45.48	74.00 -28.52 peak
6	16793.680	15.81	42.44	40.11	29.17	47.31	68.20 -20.89 Peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

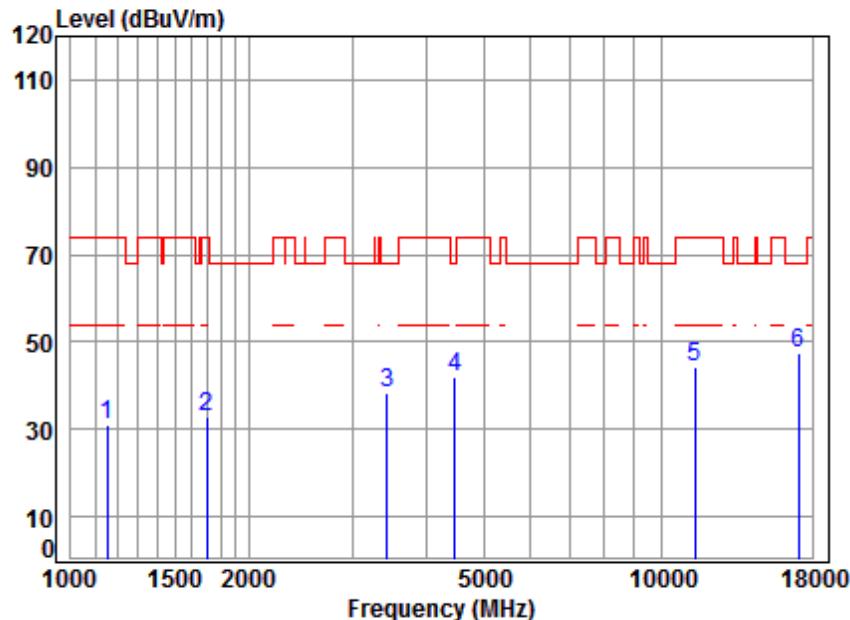

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable		Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1152.148	4.22	24.37	41.14	43.74	31.19	74.00	-42.81 peak
2	1697.129	5.23	26.66	41.53	42.70	33.06	74.00	-40.94 peak
3	3435.590	6.40	31.60	42.21	42.63	38.42	68.20	-29.78 peak
4	4469.214	7.53	33.55	42.41	43.24	41.91	68.20	-26.29 peak
5	11400.000	12.04	37.88	38.13	32.55	44.34	74.00	-29.66 peak
6	17100.000	16.49	42.66	40.37	28.49	47.27	68.20	-20.93 peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

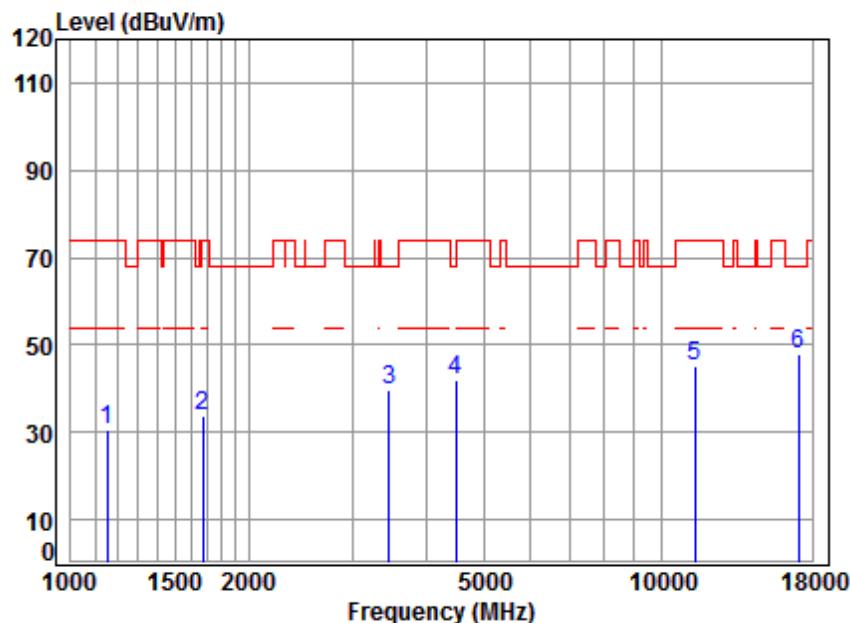

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1152.148	4.22	24.37	41.14	43.22	30.67	74.00 -43.33 peak
2	1672.779	5.26	26.56	41.52	43.30	33.60	74.00 -40.40 peak
3	3465.510	6.43	31.65	42.21	43.88	39.75	68.20 -28.45 peak
4	4482.150	7.54	33.57	42.41	43.31	42.01	68.20 -26.19 peak
5	11400.000	12.04	37.88	38.13	33.54	45.33	74.00 -28.67 peak
6	17100.000	16.49	42.66	40.37	29.31	48.09	68.20 -20.11 peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

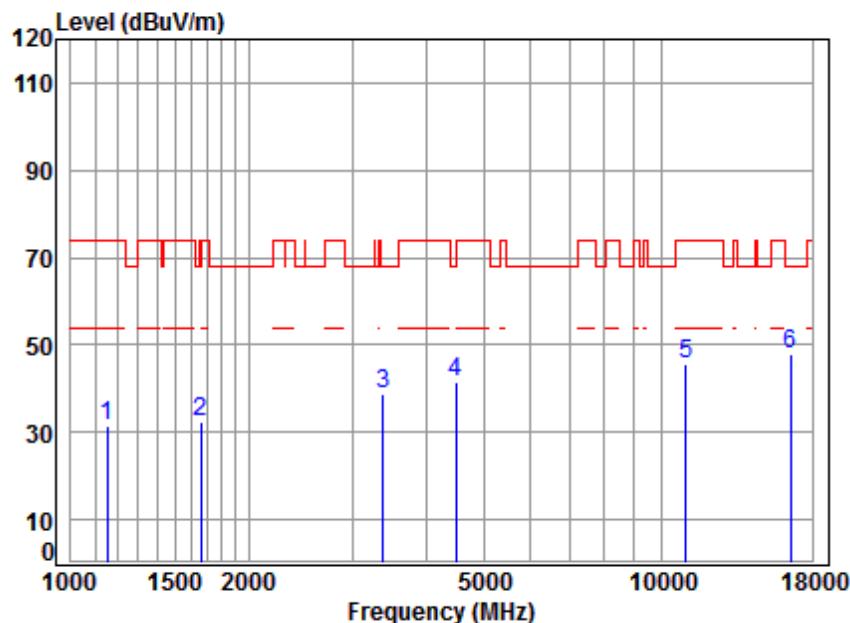

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5510 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1152.148	4.22	24.37	41.14	43.93	31.38	74.00 -42.62 peak
2	1663.137	5.27	26.52	41.51	42.32	32.60	74.00 -41.40 peak
3	3386.297	6.36	31.53	42.19	42.99	38.69	68.20 -29.51 peak
4	4482.150	7.54	33.57	42.41	42.81	41.51	68.20 -26.69 peak
5	11020.000	11.65	37.80	37.89	34.20	45.76	74.00 -28.24 peak
6	16530.000	14.63	42.22	39.89	31.11	48.07	68.20 -20.13 peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

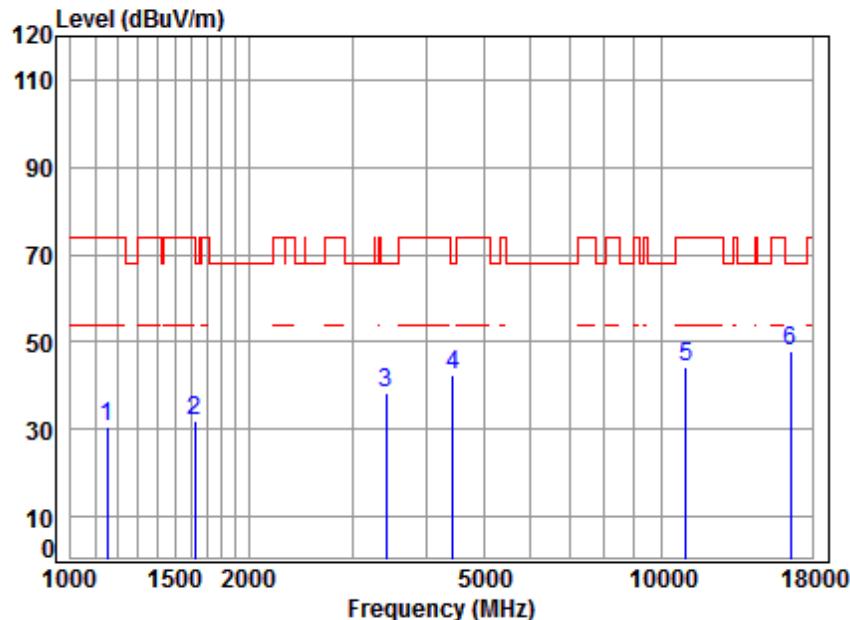

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5510 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.05	30.50	74.00	-43.50	peak	
2	1625.121	5.32	26.36	41.49	41.78	31.97	74.00	-42.03	peak	
3	3425.675	6.39	31.59	42.20	42.68	38.46	68.20	-29.74	peak	
4	4430.628	7.48	33.48	42.41	43.70	42.25	68.20	-25.95	peak	
5	11020.000	11.65	37.80	37.89	32.52	44.08	74.00	-29.92	peak	
6	16530.000	14.63	42.22	39.89	30.75	47.71	68.20	-20.49	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:middle

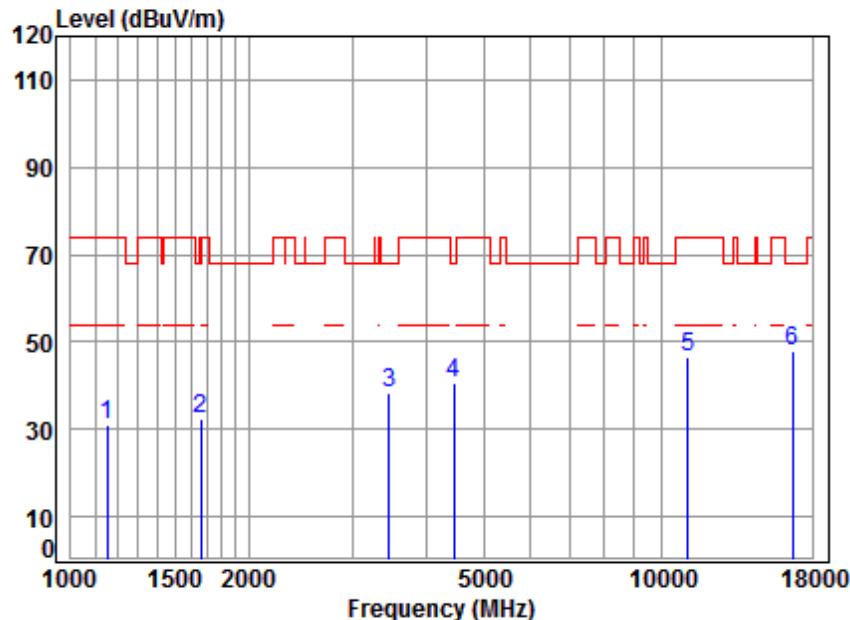

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5550 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.37	30.82	74.00	-43.18	peak	
2	1663.137	5.27	26.52	41.51	41.91	32.19	74.00	-41.81	peak	
3	3465.510	6.43	31.65	42.21	42.50	38.37	68.20	-29.83	peak	
4	4456.315	7.51	33.53	42.41	42.17	40.80	68.20	-27.40	peak	
5	11100.000	11.73	37.82	37.94	34.79	46.40	74.00	-27.60	peak	
6	16650.000	15.17	42.32	39.99	30.29	47.79	68.20	-20.41	peak	


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:middle

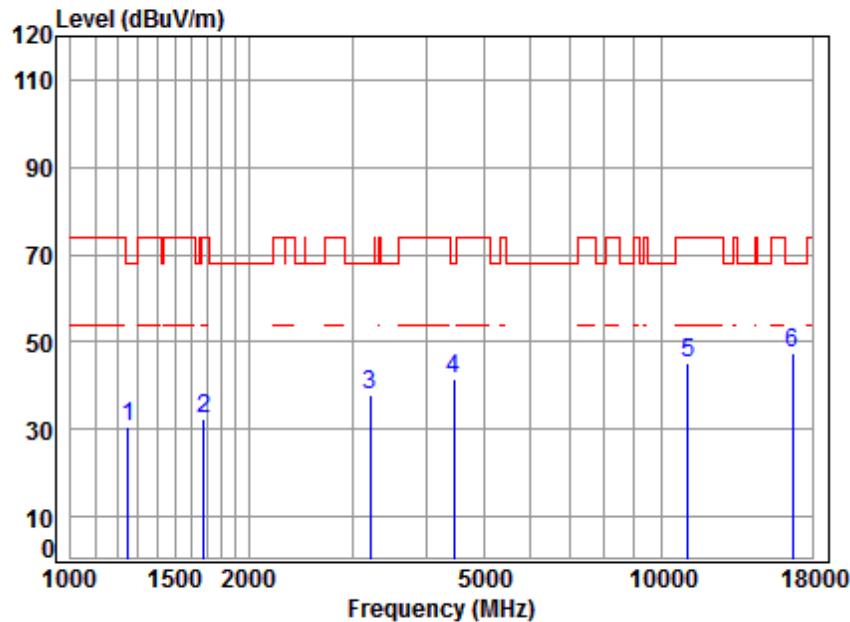

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5550 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	42.59	30.79	68.20	-37.41 peak
2 1677.621	5.25	26.58	41.52	42.26	32.57	74.00	-41.43 peak
3 3214.623	6.20	31.26	42.15	42.77	38.08	68.20	-30.12 peak
4 4456.315	7.51	33.53	42.41	42.89	41.52	68.20	-26.68 peak
5 11100.000	11.73	37.82	37.94	33.51	45.12	74.00	-28.88 peak
6 16650.000	15.17	42.32	39.99	29.75	47.25	68.20	-20.95 peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

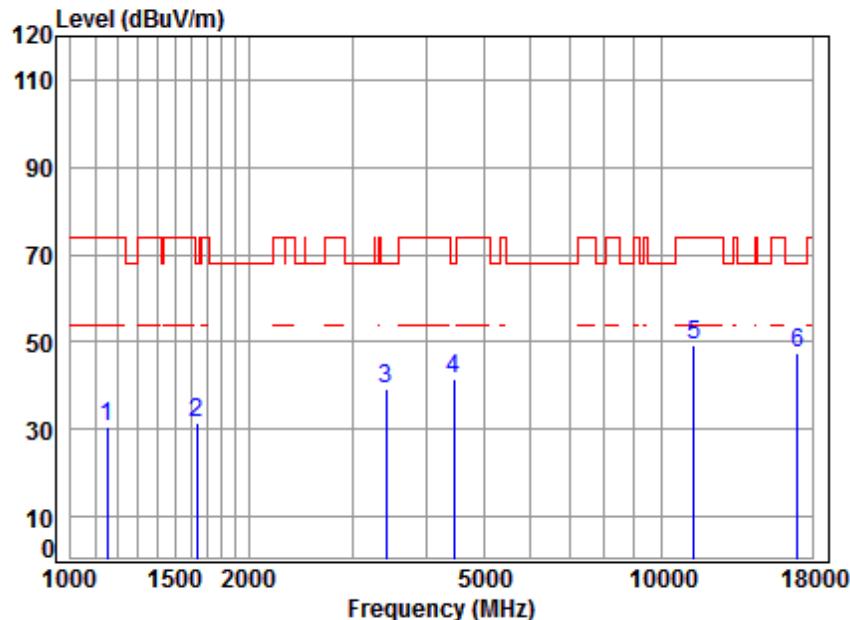

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5670 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.23	30.68	74.00	-43.32	peak	
2	1634.543	5.31	26.40	41.49	41.25	31.47	68.20	-36.73	peak	
3	3415.787	6.38	31.57	42.20	43.61	39.36	68.20	-28.84	peak	
4	4456.315	7.51	33.53	42.41	42.97	41.60	68.20	-26.60	peak	
5	11340.000	11.98	37.87	38.10	37.61	49.36	74.00	-24.64	peak	
6	17010.000	16.69	42.61	40.29	28.36	47.37	68.20	-20.83	peak	


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

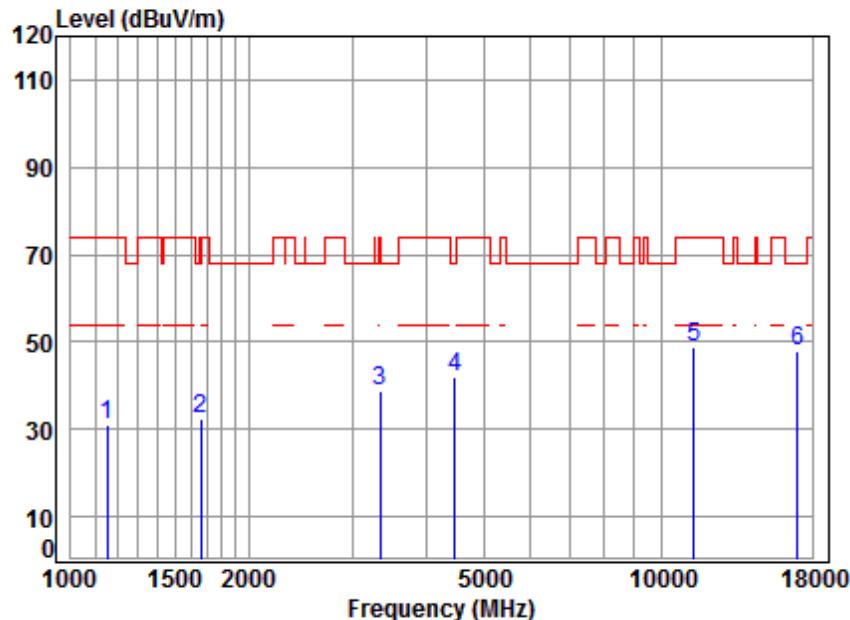

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5670 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	43.48	30.93	74.00	-43.07	peak	
2	1658.337	5.28	26.50	41.51	42.30	32.57	68.20	-35.63	peak	
3	3337.710	6.31	31.45	42.18	43.16	38.74	74.00	-35.26	peak	
4	4469.214	7.53	33.55	42.41	43.15	41.82	68.20	-26.38	peak	
5	11340.000	11.98	37.87	38.10	37.17	48.92	74.00	-25.08	peak	
6	17010.000	16.69	42.61	40.29	28.93	47.94	68.20	-20.26	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:Low

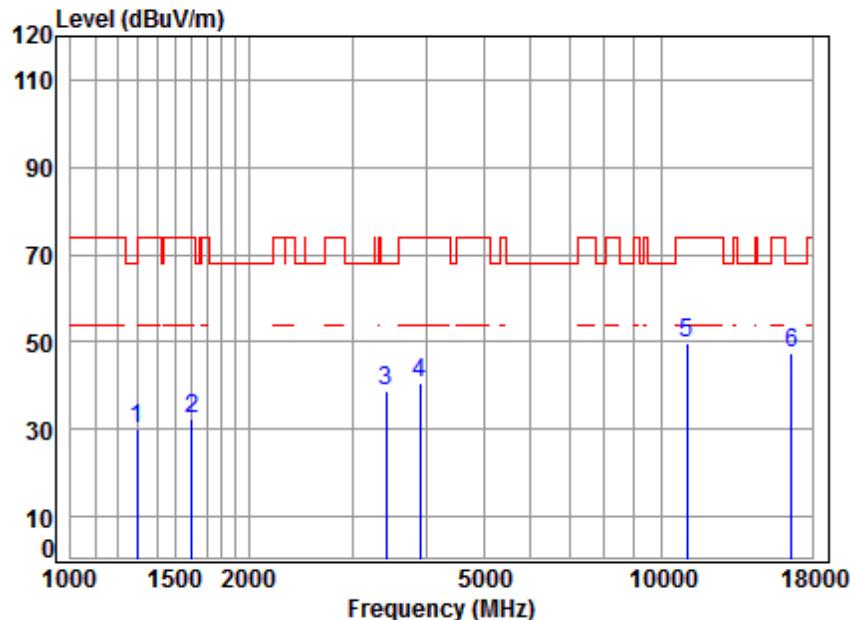

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5530 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	4.79	25.01	41.26	41.57	30.11	68.20	-38.09	peak
2	1601.804	5.35	26.26	41.47	42.14	32.28	74.00	-41.72	peak
3	3415.787	6.38	31.57	42.20	43.00	38.75	68.20	-29.45	peak
4	3901.516	6.88	32.51	42.31	43.65	40.73	74.00	-33.27	peak
5	11060.000	11.69	37.81	37.92	38.28	49.86	74.00	-24.14	peak
6	16590.000	14.90	42.27	39.94	30.14	47.37	68.20	-20.83	peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:Low

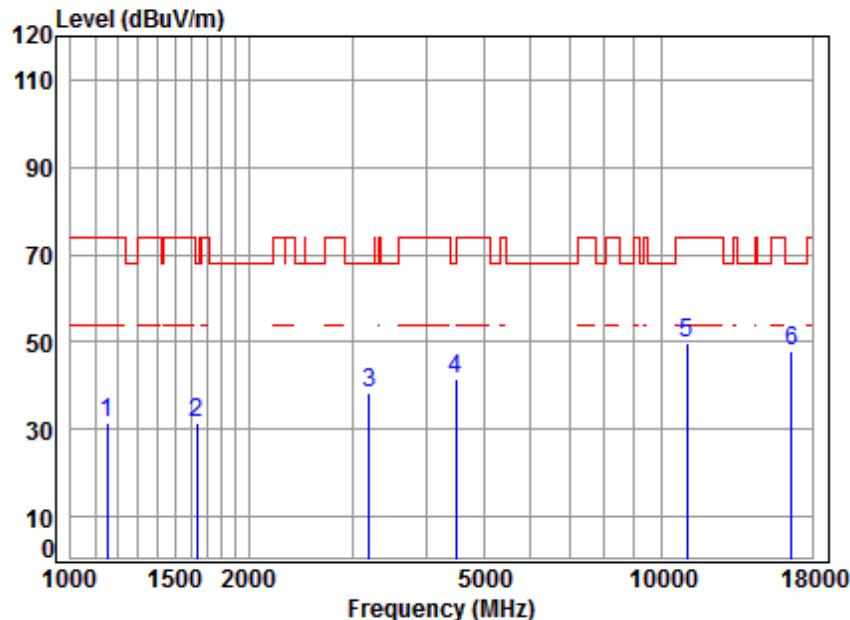

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5530 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	41.98	31.43	74.00	-42.57	peak	
2	1634.543	5.31	26.40	41.49	41.42	31.64	68.20	-36.56	peak	
3	3205.345	6.19	31.24	42.15	43.01	38.29	68.20	-29.91	peak	
4	4482.150	7.54	33.57	42.41	42.91	41.61	68.20	-26.59	peak	
5	11060.000	11.69	37.81	37.92	38.34	49.92	74.00	-24.08	peak	
6	16590.000	14.90	42.27	39.94	30.83	48.06	68.20	-20.14	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:High

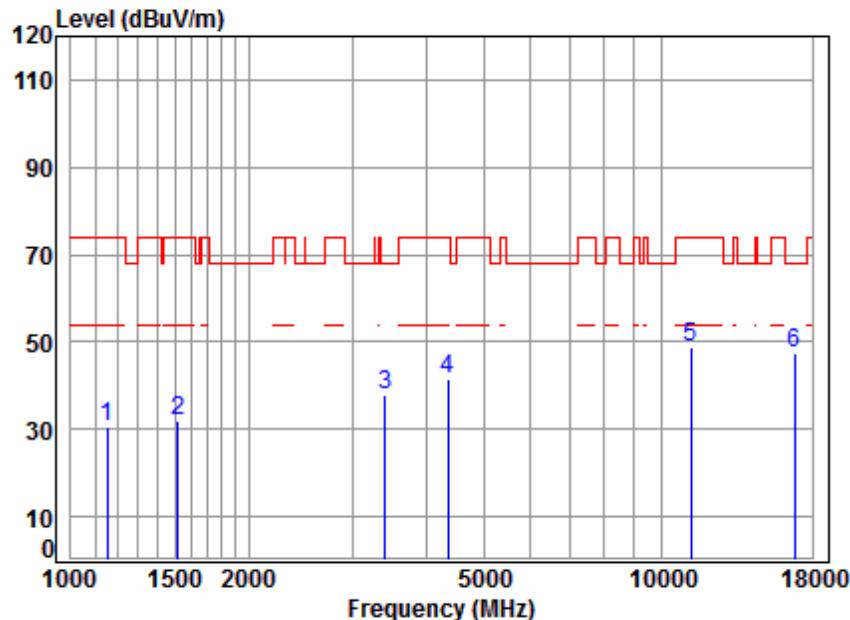

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5610 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1152.148	4.22	24.37	41.14	43.14	30.59	74.00	-43.41 peak
2	1516.210	5.46	25.87	41.42	41.90	31.81	74.00	-42.19 peak
3	3405.929	6.38	31.56	42.20	42.20	37.94	68.20	-30.26 peak
4	4354.454	7.40	33.35	42.39	43.36	41.72	74.00	-32.28 peak
5	11220.000	11.86	37.84	38.02	37.13	48.81	74.00	-25.19 peak
6	16830.000	15.97	42.47	40.14	29.30	47.60	68.20	-20.60 peak

Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:High

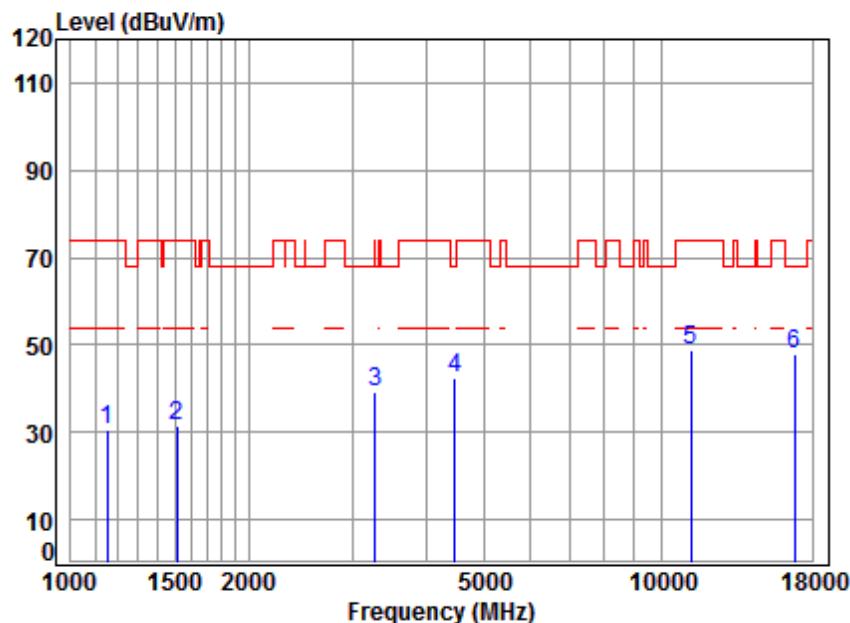


Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5610 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	42.94	30.39	74.00	-43.61	peak	
2	1511.833	5.46	25.85	41.41	41.80	31.70	74.00	-42.30	peak	
3	3280.326	6.26	31.36	42.17	43.97	39.42	68.20	-28.78	peak	
4	4469.214	7.53	33.55	42.41	43.98	42.65	68.20	-25.55	peak	
5	11220.000	11.86	37.84	38.02	37.34	49.02	74.00	-24.98	peak	
6	16830.000	15.97	42.47	40.14	29.59	47.89	68.20	-20.31	peak	

Test data for Antenna1/ Band 3:


Mode:e; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

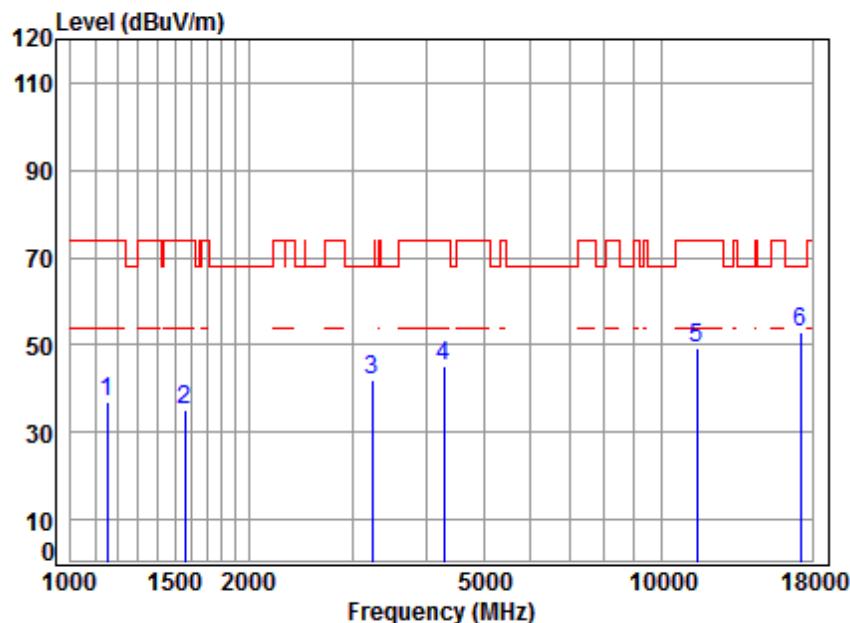

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	49.70	37.15	74.00	-36.85	peak	
2	1560.673	5.40	26.08	41.45	45.14	35.17	74.00	-38.83	peak	
3	3242.619	6.22	31.30	42.16	46.72	42.08	68.20	-26.12	peak	
4	4279.589	7.31	33.22	42.38	46.91	45.06	74.00	-28.94	peak	
5	11490.000	12.13	37.90	38.19	37.26	49.10	74.00	-24.90	peak	
6	17235.000	16.18	42.74	40.48	34.30	52.74	68.20	-15.46	peak	


Mode:e; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

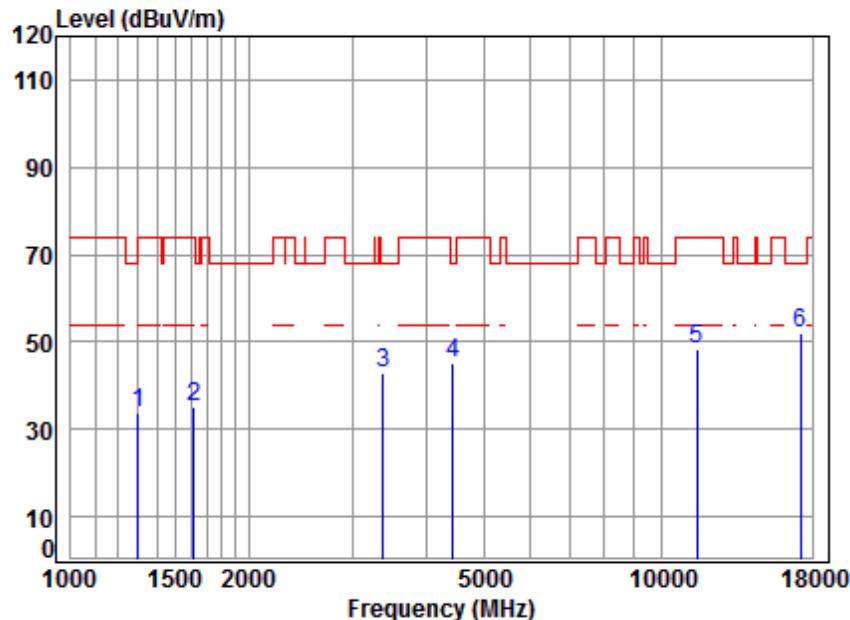

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1300.858	4.80	25.03	41.26	45.07	33.64	74.00	-40.36 peak
2	1615.754	5.33	26.32	41.48	44.94	35.11	74.00	-38.89 peak
3	3386.297	6.36	31.53	42.19	47.08	42.78	68.20	-25.42 peak
4	4443.453	7.50	33.50	42.41	46.51	45.10	68.20	-23.10 peak
5	11490.000	12.13	37.90	38.19	36.65	48.49	74.00	-25.51 peak
6	17235.000	16.18	42.74	40.48	33.72	52.16	68.20	-16.04 peak


Mode:e; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

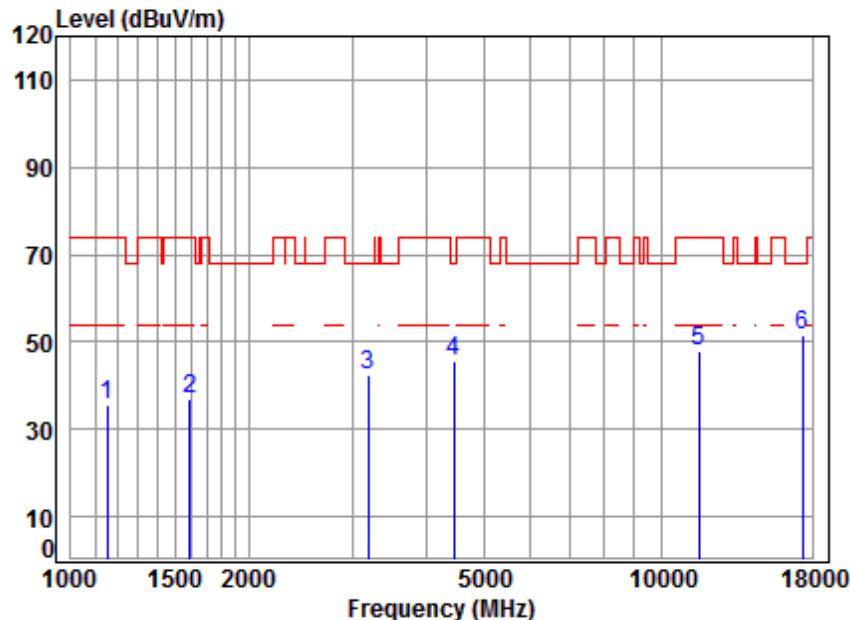

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	41.14	48.27	35.72	74.00	-38.28	peak
2	1592.571	5.36	26.22	41.47	41.47	46.66	36.77	74.00	-37.23	peak
3	3186.869	6.17	31.21	42.15	42.15	47.27	42.50	68.20	-25.70	peak
4	4456.315	7.51	33.53	42.41	42.41	46.79	45.42	68.20	-22.78	peak
5	11570.000	12.17	37.87	38.24	38.24	36.12	47.92	74.00	-26.08	peak
6	17355.000	15.92	42.81	40.58	40.58	33.45	51.60	68.20	-16.60	peak


Mode:e; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

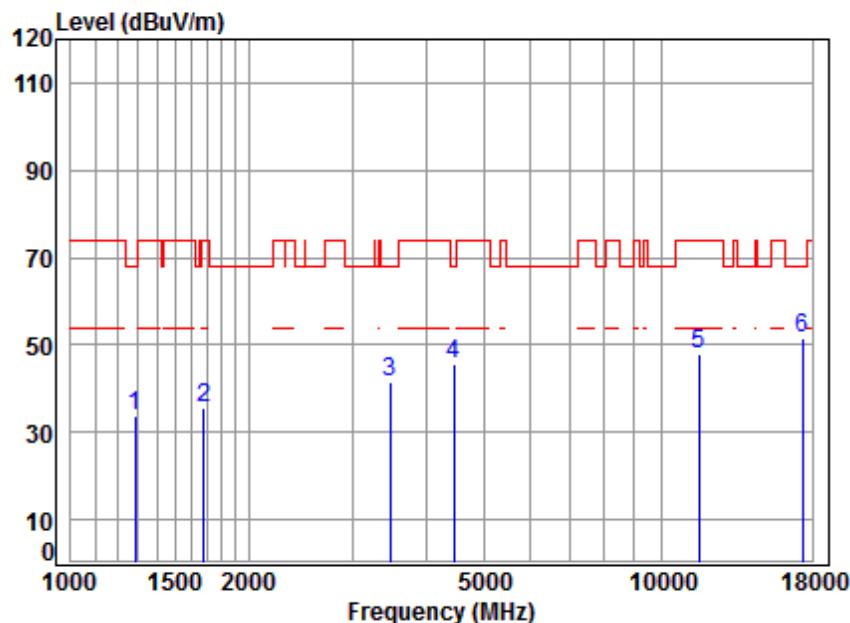

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	4.75	24.96	41.25	45.10	33.56	68.20	-34.64	peak	
2	1677.621	5.25	26.58	41.52	45.09	35.40	74.00	-38.60	peak	
3	3475.541	6.44	31.66	42.22	45.75	41.63	68.20	-26.57	peak	
4	4456.315	7.51	33.53	42.41	46.78	45.41	68.20	-22.79	peak	
5	11570.000	12.17	37.87	38.24	36.05	47.85	74.00	-26.15	peak	
6	17355.000	15.92	42.81	40.58	33.57	51.72	68.20	-16.48	peak	


Mode:e; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

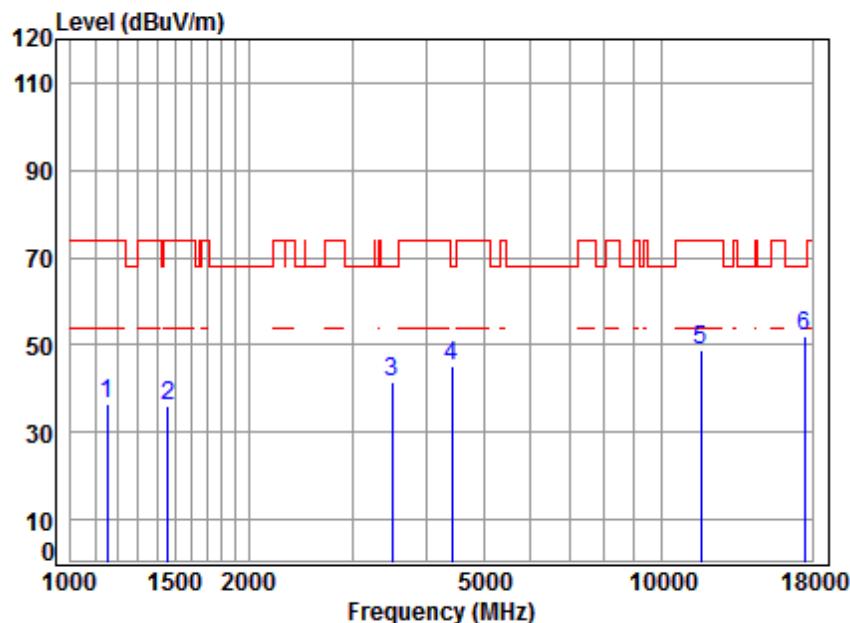

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1152.148	4.22	24.37	41.14	49.03	36.48	74.00	-37.52 peak
2	1460.295	5.35	25.65	41.38	46.39	36.01	74.00	-37.99 peak
3	3495.691	6.46	31.69	42.22	45.67	41.60	68.20	-26.60 peak
4	4417.841	7.47	33.46	42.40	46.64	45.17	68.20	-23.03 peak
5	11650.000	12.20	37.84	38.29	37.07	48.82	74.00	-25.18 peak
6	17475.000	15.65	42.89	40.68	33.99	51.85	68.20	-16.35 peak


Mode:e; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

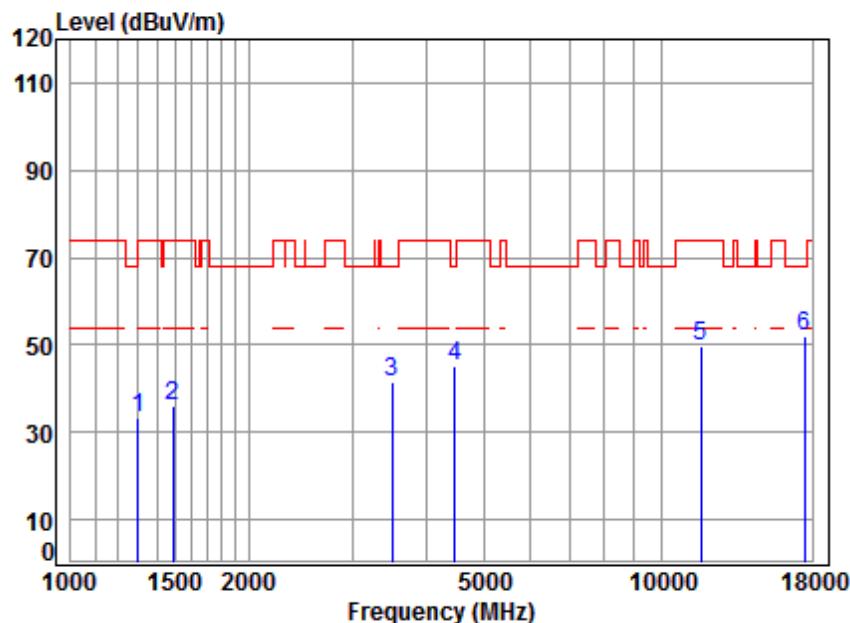

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.84	33.41	74.00	-40.59	peak	
2	1490.142	5.45	25.76	41.40	46.14	35.95	74.00	-38.05	peak	
3	3495.691	6.46	31.69	42.22	45.76	41.69	68.20	-26.51	peak	
4	4469.214	7.53	33.55	42.41	46.32	44.99	68.20	-23.21	peak	
5	11650.000	12.20	37.84	38.29	38.17	49.92	74.00	-24.08	peak	
6	17475.000	15.65	42.89	40.68	34.33	52.19	68.20	-16.01	peak	


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

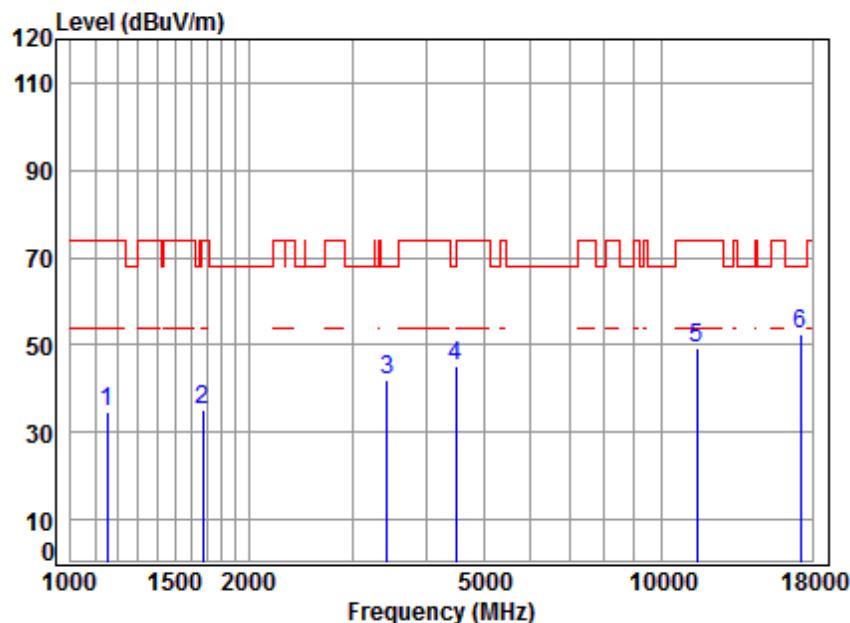

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.08	34.53	74.00	-39.47	peak		
2	1672.779	5.26	26.56	41.52	44.96	35.26	74.00	-38.74	peak		
3	3435.590	6.40	31.60	42.21	46.04	41.83	68.20	-26.37	peak		
4	4482.150	7.54	33.57	42.41	46.65	45.35	68.20	-22.85	peak		
5	11490.000	12.13	37.90	38.19	37.28	49.12	74.00	-24.88	peak		
6	17235.000	16.18	42.74	40.48	33.98	52.42	68.20	-15.78	peak		


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

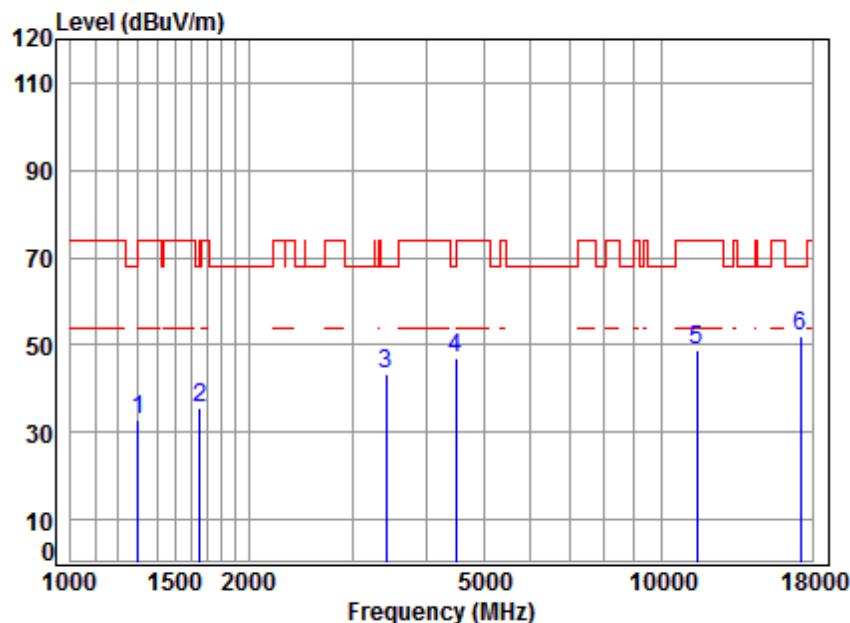

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

Freq	Cable Loss		Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.39	32.96	74.00	-41.04	peak
2	1653.550	5.28	26.48	41.50	45.36	35.62	68.20	-32.58	peak
3	3415.787	6.38	31.57	42.20	47.47	43.22	68.20	-24.98	peak
4	4495.125	7.55	33.59	42.42	48.47	47.19	68.20	-21.01	peak
5	11490.000	12.13	37.90	38.19	37.14	48.98	74.00	-25.02	peak
6	17235.000	16.18	42.74	40.48	33.36	51.80	68.20	-16.40	peak


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

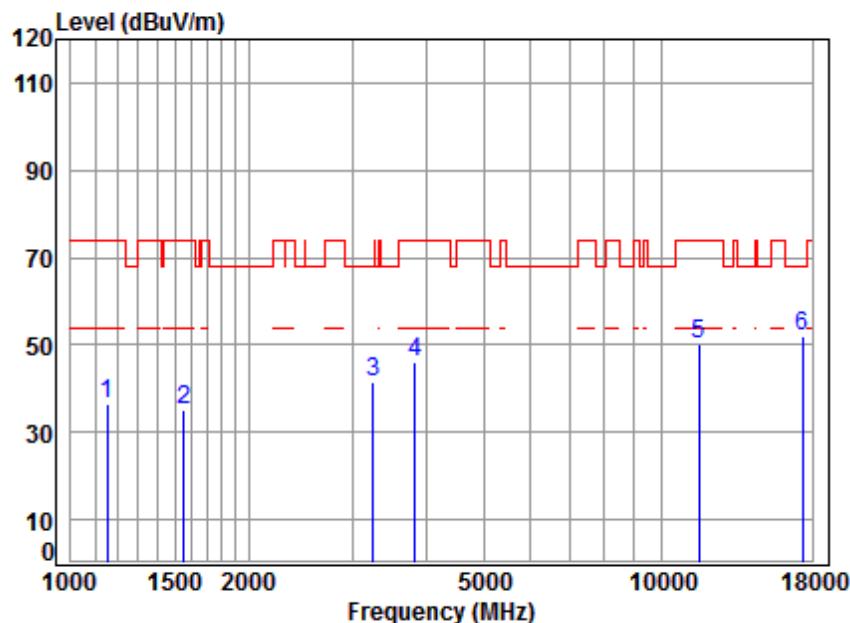

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	49.18	36.63	74.00	-37.37	peak	
2	1551.677	5.41	26.04	41.44	45.18	35.19	74.00	-38.81	peak	
3	3252.005	6.23	31.32	42.16	46.13	41.52	68.20	-26.68	peak	
4	3834.438	6.82	32.38	42.29	49.17	46.08	74.00	-27.92	peak	
5	11570.000	12.17	37.87	38.24	38.36	50.16	74.00	-23.84	peak	
6	17355.000	15.92	42.81	40.58	33.84	51.99	68.20	-16.21	peak	


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

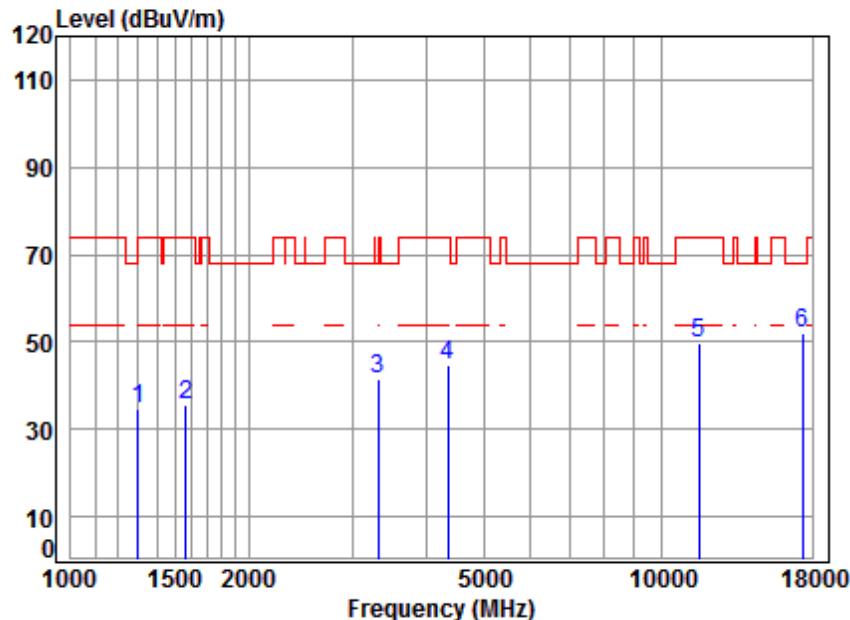

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1300.858	4.80	25.03	41.26	46.19	34.76	74.00	-39.24 peak
2	1569.721	5.39	26.12	41.45	45.40	35.46	74.00	-38.54 peak
3	3318.471	6.29	31.42	42.18	45.81	41.34	68.20	-26.86 peak
4	4354.454	7.40	33.35	42.39	46.18	44.54	74.00	-29.46 peak
5	11570.000	12.17	37.87	38.24	37.86	49.66	74.00	-24.34 peak
6	17355.000	15.92	42.81	40.58	33.72	51.87	68.20	-16.33 peak


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

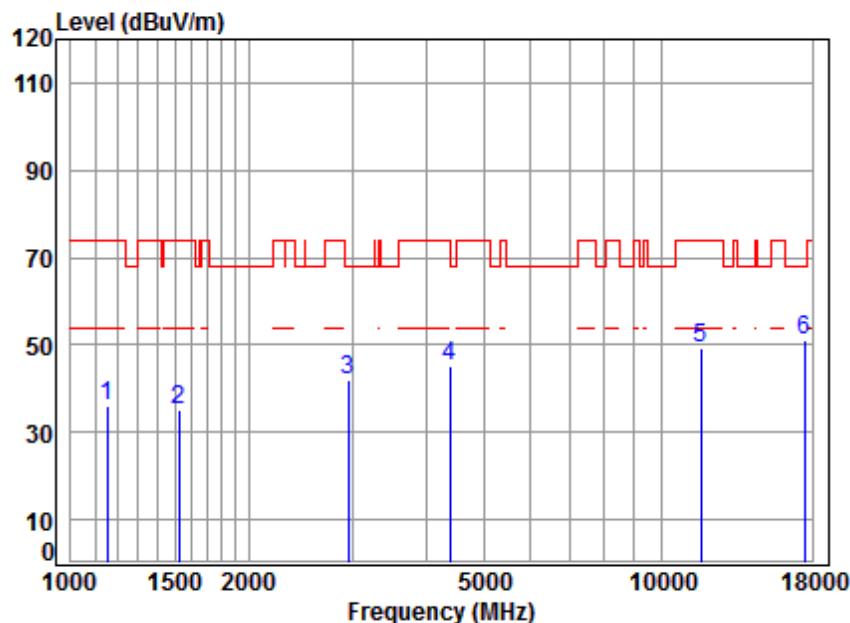

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.40	35.85	74.00	-38.15	peak	
2	1525.000	5.45	25.91	41.42	45.27	35.21	74.00	-38.79	peak	
3	2956.155	5.95	30.72	42.09	47.55	42.13	68.20	-26.07	peak	
4	4392.376	7.44	33.42	42.40	46.77	45.23	74.00	-28.77	peak	
5	11650.000	12.20	37.84	38.29	37.32	49.07	74.00	-24.93	peak	
6	17475.000	15.65	42.89	40.68	33.35	51.21	68.20	-16.99	peak	


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

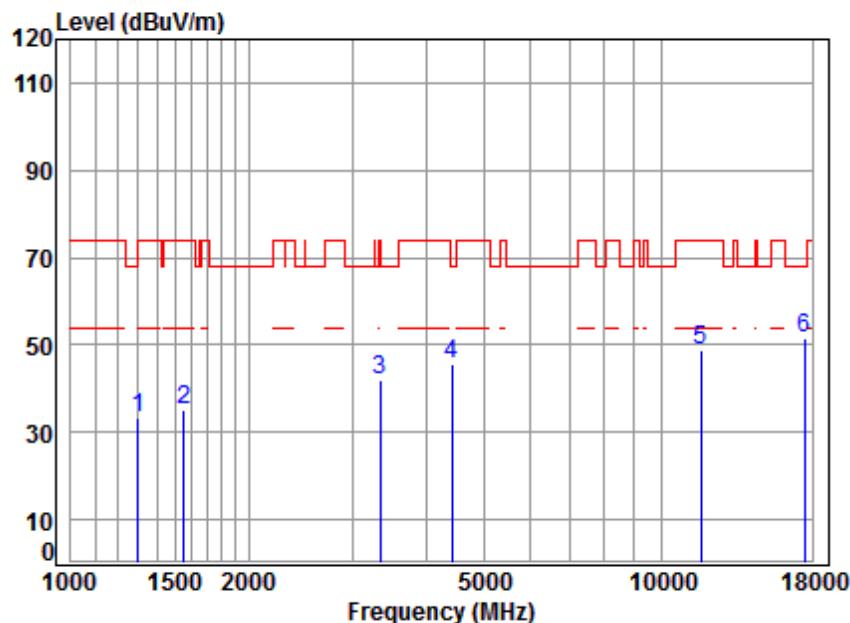

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	44.90	33.47	74.00 -40.53 peak
2	1551.677	5.41	26.04	41.44	44.97	34.98	74.00 -39.02 peak
3	3347.371	6.32	31.47	42.19	46.22	41.82	74.00 -32.18 peak
4	4417.841	7.47	33.46	42.40	47.21	45.74	68.20 -22.46 peak
5	11650.000	12.20	37.84	38.29	37.17	48.92	74.00 -25.08 peak
6	17475.000	15.65	42.89	40.68	33.79	51.65	68.20 -16.55 peak


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

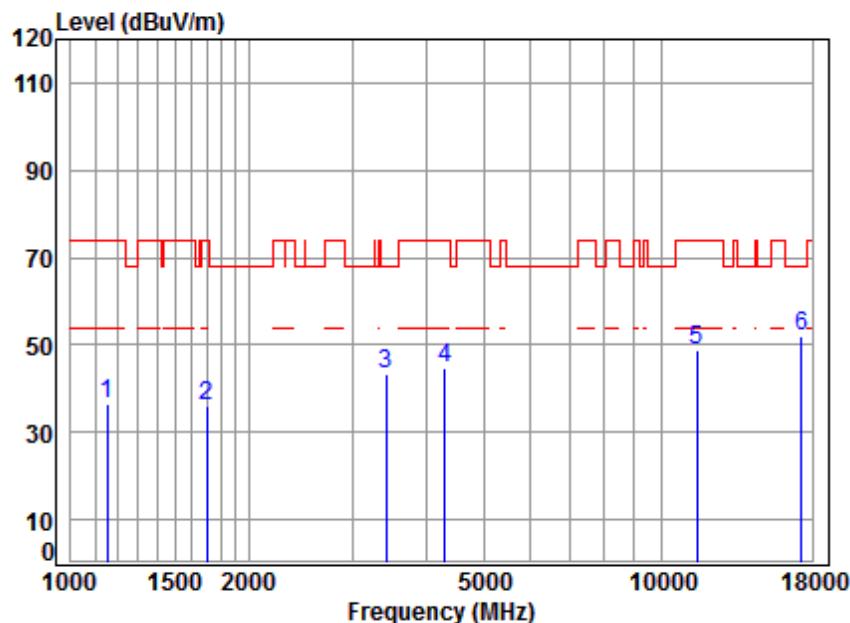

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5755 TX RSE
Note : 5G WIFI 11N40

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					Level	Line		
1 1152.148	4.22	24.37	41.14	49.03	36.48	74.00	-37.52	peak
2 1702.042	5.23	26.68	41.53	45.83	36.21	74.00	-37.79	peak
3 3415.787	6.38	31.57	42.20	47.82	43.57	68.20	-24.63	peak
4 4304.400	7.34	33.26	42.38	46.65	44.87	74.00	-29.13	peak
5 11510.000	12.14	37.90	38.20	37.16	49.00	74.00	-25.00	peak
6 17265.000	16.12	42.76	40.51	33.47	51.84	68.20	-16.36	peak


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

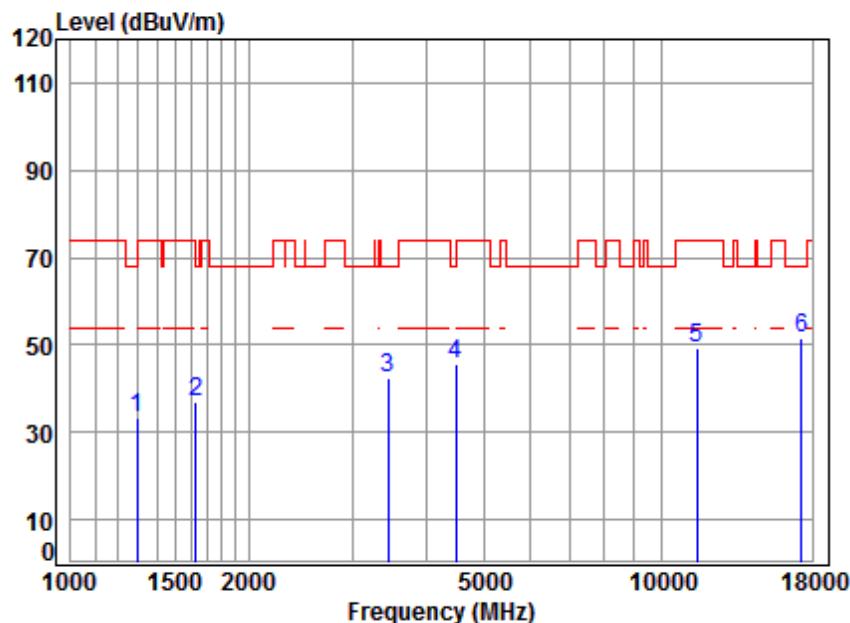

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5755 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1297.103	4.79	25.01	41.26	44.63	33.17	68.20	-35.03	peak
2	1629.825	5.31	26.38	41.49	46.89	37.09	68.20	-31.11	peak
3	3445.535	6.41	31.62	42.21	46.47	42.29	68.20	-25.91	peak
4	4495.125	7.55	33.59	42.42	46.84	45.56	68.20	-22.64	peak
5	11510.000	12.14	37.90	38.20	37.37	49.21	74.00	-24.79	peak
6	17265.000	16.12	42.76	40.51	33.35	51.72	68.20	-16.48	peak


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

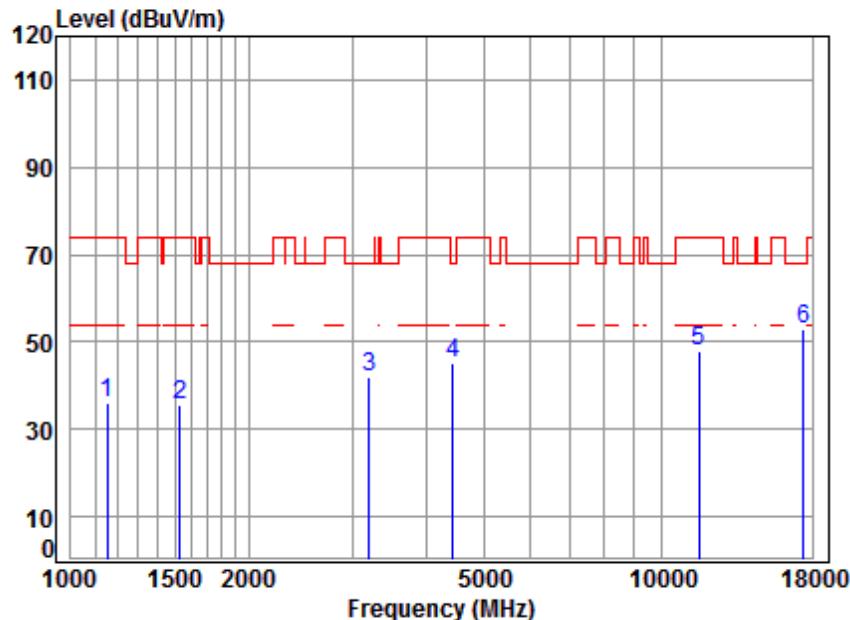

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.51	35.96	74.00	-38.04	peak	
2	1529.414	5.44	25.94	41.43	45.76	35.71	74.00	-38.29	peak	
3	3205.345	6.19	31.24	42.15	46.67	41.95	68.20	-26.25	peak	
4	4430.628	7.48	33.48	42.41	46.41	44.96	68.20	-23.24	peak	
5	11590.000	12.17	37.86	38.25	35.93	47.71	74.00	-26.29	peak	
6	17385.000	15.85	42.83	40.60	34.66	52.74	68.20	-15.46	peak	


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

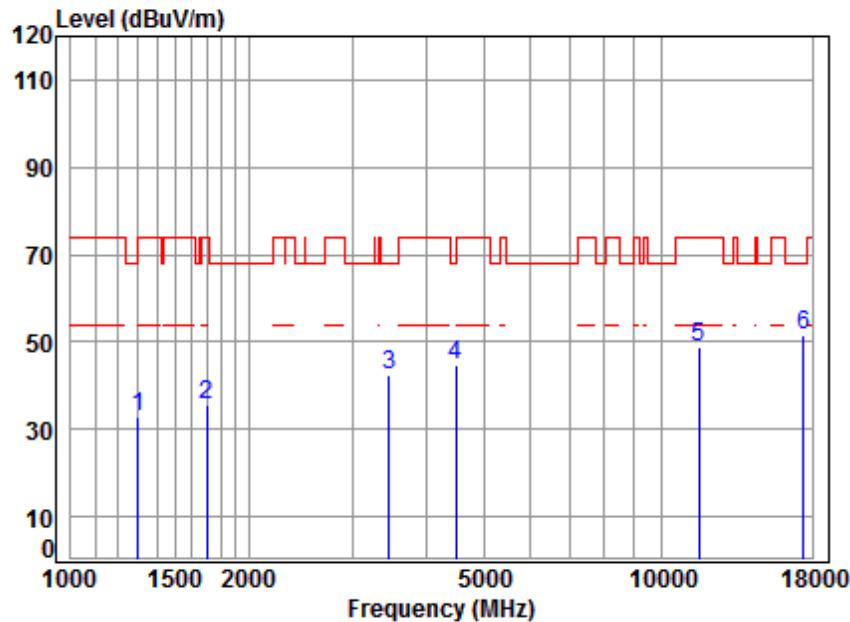

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

Freq	Cable Loss		Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.12	32.69	74.00	-41.31	peak
2	1702.042	5.23	26.68	41.53	45.06	35.44	74.00	-38.56	peak
3	3465.510	6.43	31.65	42.21	46.74	42.61	68.20	-25.59	peak
4	4495.125	7.55	33.59	42.42	45.78	44.50	68.20	-23.70	peak
5	11590.000	12.17	37.86	38.25	37.18	48.96	74.00	-25.04	peak
6	17385.000	15.85	42.83	40.60	33.33	51.41	68.20	-16.79	peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

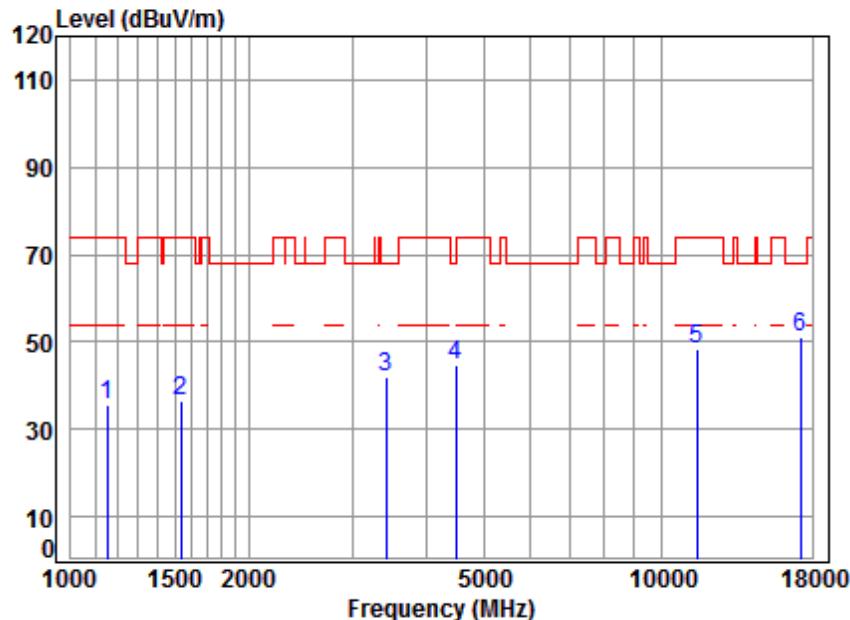

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.36	35.81	74.00	-38.19	peak	
2	1538.281	5.43	25.98	41.43	46.70	36.68	74.00	-37.32	peak	
3	3415.787	6.38	31.57	42.20	46.19	41.94	68.20	-26.26	peak	
4	4495.125	7.55	33.59	42.42	46.21	44.93	68.20	-23.27	peak	
5	11490.000	12.13	37.90	38.19	36.69	48.53	74.00	-25.47	peak	
6	17235.000	16.18	42.74	40.48	32.80	51.24	68.20	-16.96	peak	


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

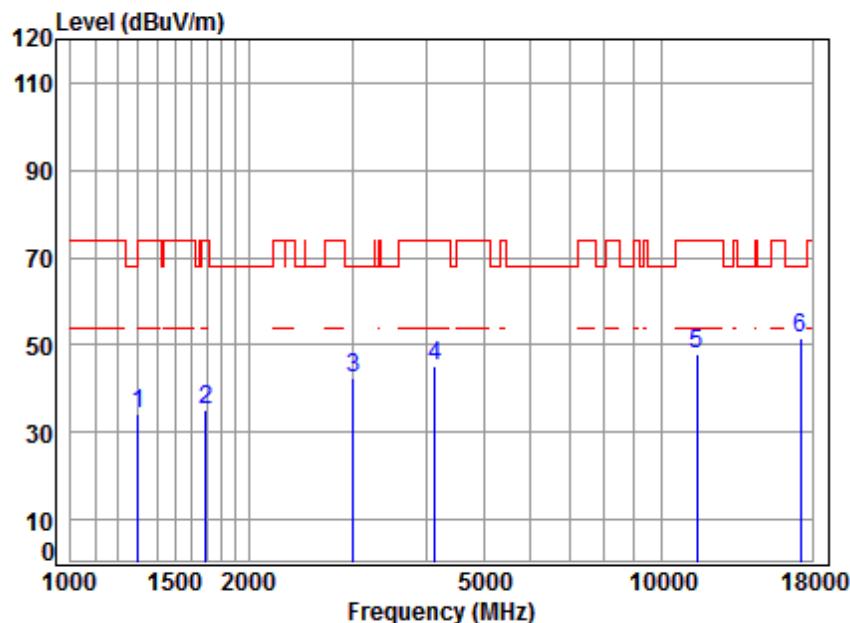

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	25.03	41.26	45.76	34.33	74.00	-39.67 peak
2	1692.231	5.24	26.64	41.53	44.71	35.06	74.00	-38.94 peak
3	3007.868	5.99	30.91	42.10	47.50	42.30	68.20	-25.90 peak
4	4133.699	7.14	32.95	42.35	47.33	45.07	74.00	-28.93 peak
5	11490.000	12.13	37.90	38.19	36.03	47.87	74.00	-26.13 peak
6	17235.000	16.18	42.74	40.48	32.98	51.42	68.20	-16.78 peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

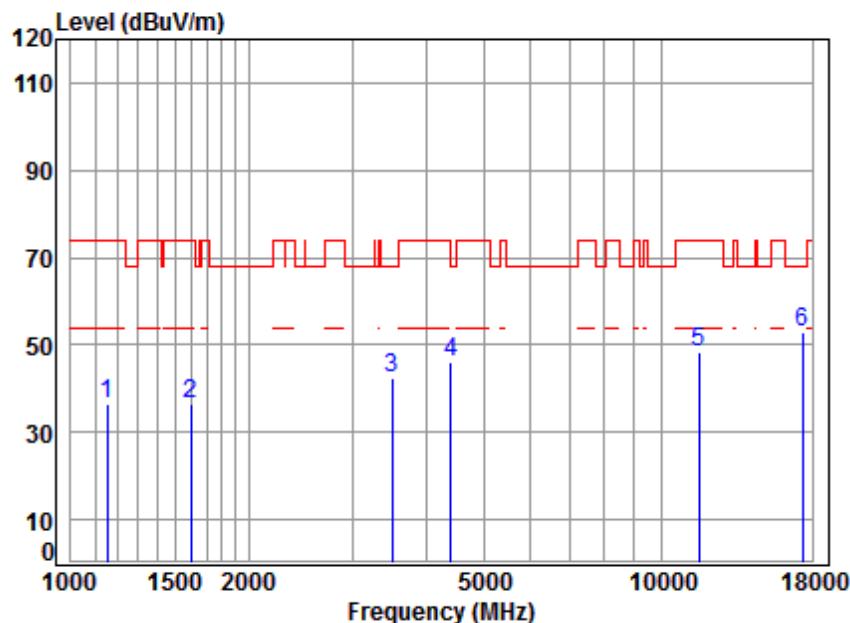

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	49.07	36.52	74.00	-37.48	peak		
2	1597.181	5.35	26.24	41.47	46.19	36.31	74.00	-37.69	peak		
3	3495.691	6.46	31.69	42.22	46.53	42.46	68.20	-25.74	peak		
4	4405.090	7.46	33.44	42.40	47.55	46.05	68.20	-22.15	peak		
5	11570.000	12.17	37.87	38.24	36.36	48.16	74.00	-25.84	peak		
6	17355.000	15.92	42.81	40.58	34.74	52.89	68.20	-15.31	peak		


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

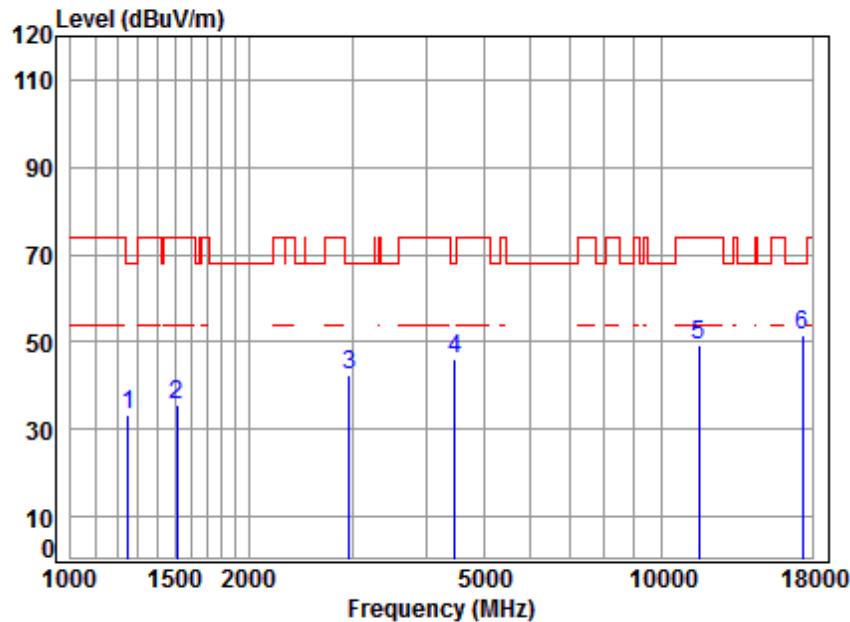

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	4.62	24.82	41.23	44.87	33.08	68.20	-35.12	peak
2	1511.833	5.46	25.85	41.41	45.73	35.63	74.00	-38.37	peak
3	2964.712	5.96	30.76	42.09	47.84	42.47	68.20	-25.73	peak
4	4469.214	7.53	33.55	42.41	47.40	46.07	68.20	-22.13	peak
5	11570.000	12.17	37.87	38.24	37.45	49.25	74.00	-24.75	peak
6	17355.000	15.92	42.81	40.58	33.36	51.51	68.20	-16.69	peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

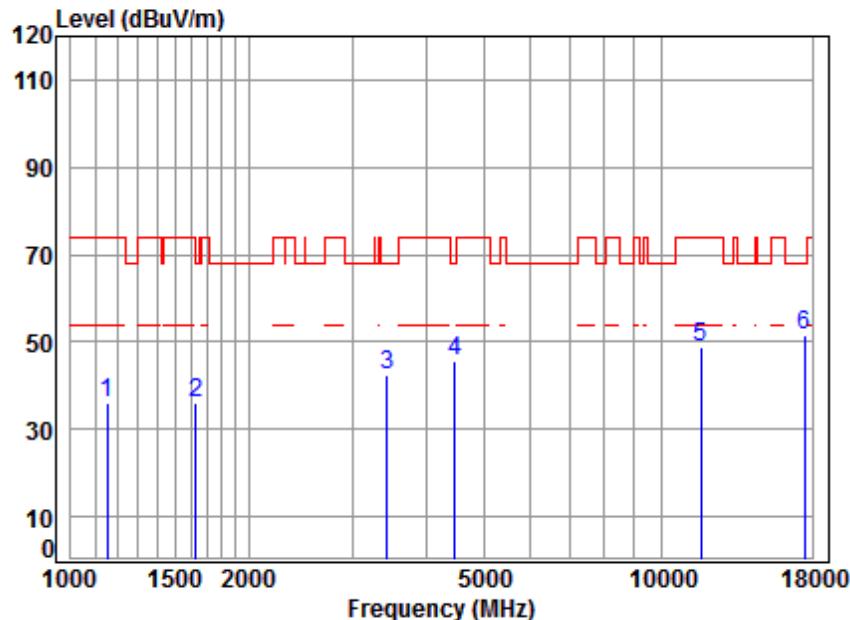

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	48.37	35.82	74.00	-38.18	peak	
2	1629.825	5.31	26.38	41.49	45.80	36.00	68.20	-32.20	peak	
3	3435.590	6.40	31.60	42.21	46.47	42.26	68.20	-25.94	peak	
4	4469.214	7.53	33.55	42.41	46.94	45.61	68.20	-22.59	peak	
5	11650.000	12.20	37.84	38.29	37.17	48.92	74.00	-25.08	peak	
6	17475.000	15.65	42.89	40.68	33.70	51.56	68.20	-16.64	peak	


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

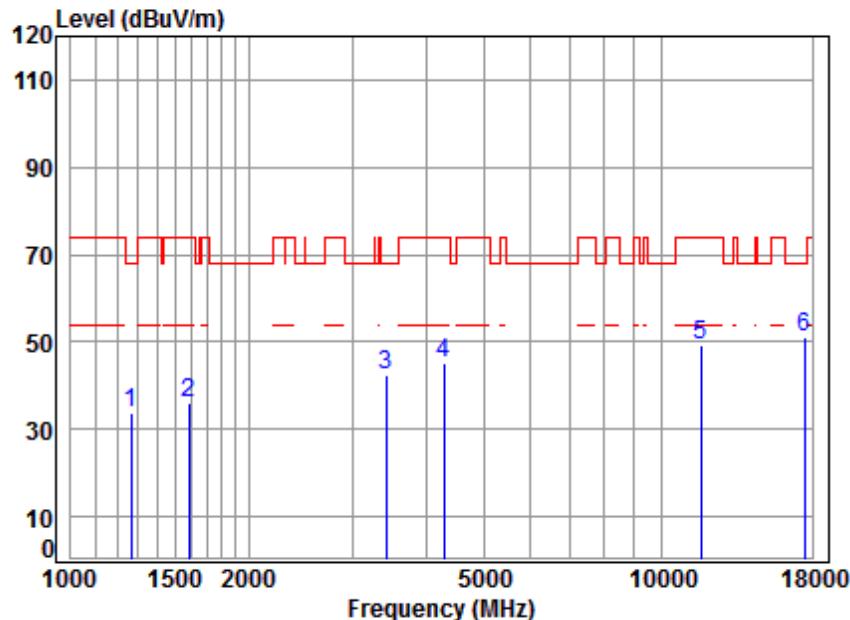

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1267.454	4.68	24.89	41.24	45.38	33.71	68.20 -34.49 peak
2	1583.392	5.37	26.18	41.46	46.09	36.18	74.00 -37.82 peak
3	3425.675	6.39	31.59	42.20	46.57	42.35	68.20 -25.85 peak
4	4291.977	7.33	33.24	42.38	46.82	45.01	74.00 -28.99 peak
5	11650.000	12.20	37.84	38.29	37.53	49.28	74.00 -24.72 peak
6	17475.000	15.65	42.89	40.68	33.37	51.23	68.20 -16.97 peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

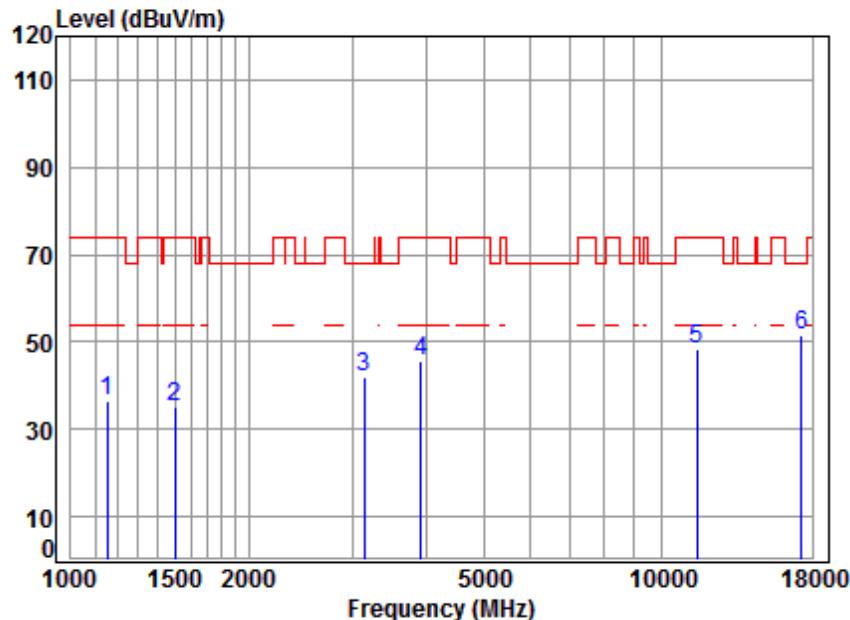

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5755 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					Level	Line		
1 1152.148	4.22	24.37	41.14	48.90	36.35	74.00	-37.65	peak
2 1498.781	5.48	25.80	41.41	45.47	35.34	74.00	-38.66	peak
3 3141.145	6.12	31.14	42.14	46.97	42.09	68.20	-26.11	peak
4 3912.809	6.89	32.53	42.31	48.36	45.47	74.00	-28.53	peak
5 11510.000	12.14	37.90	38.20	36.61	48.45	74.00	-25.55	peak
6 17265.000	16.12	42.76	40.51	33.14	51.51	68.20	-16.69	peak


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

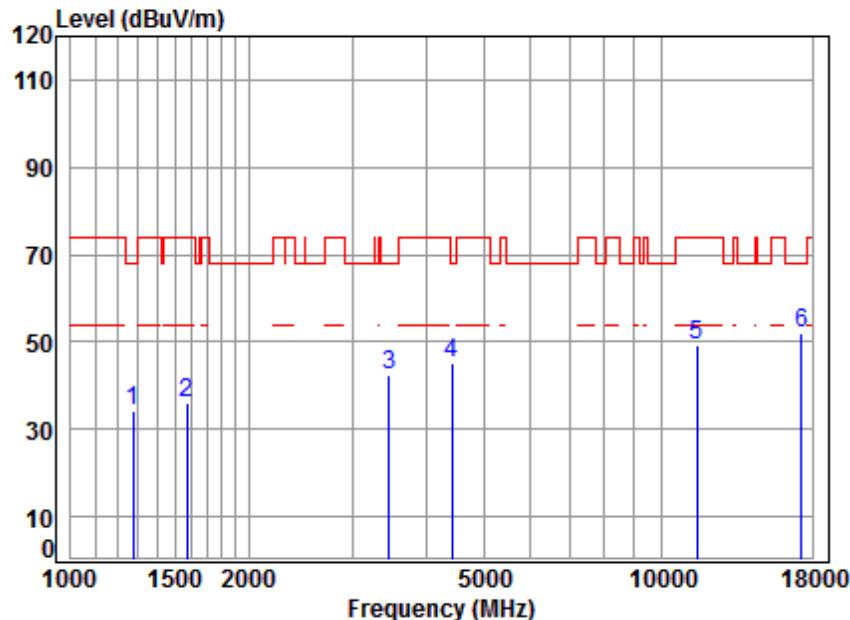

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5755 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					dB	dBuV	dBuV/m	dBuV/m
1 1274.802	4.71	24.92	41.24	46.04	34.43	68.20	-33.77	peak
2 1574.265	5.38	26.14	41.45	46.19	36.26	74.00	-37.74	peak
3 3455.508	6.42	31.63	42.21	46.71	42.55	68.20	-25.65	peak
4 4417.841	7.47	33.46	42.40	46.78	45.31	68.20	-22.89	peak
5 11510.000	12.14	37.90	38.20	37.65	49.49	74.00	-24.51	peak
6 17265.000	16.12	42.76	40.51	33.79	52.16	68.20	-16.04	peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

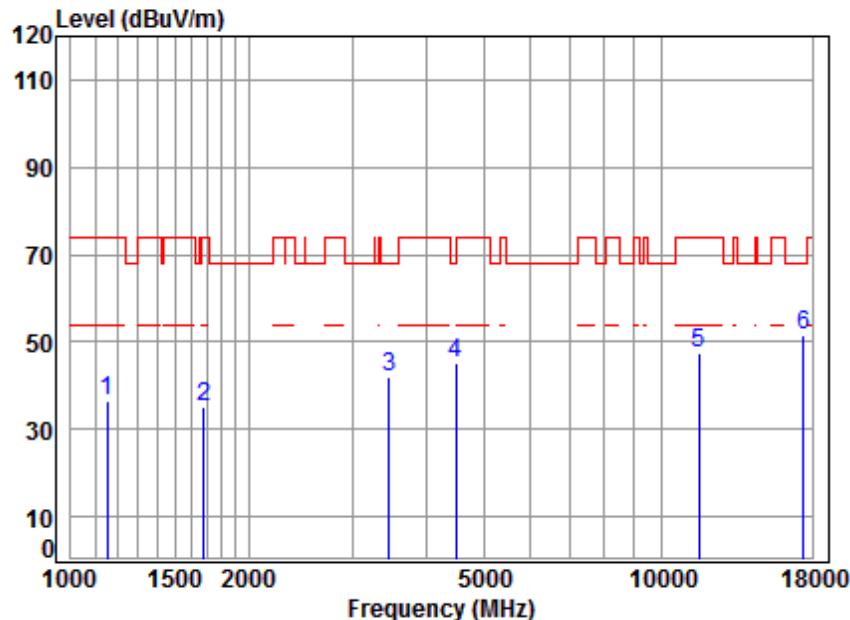

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5795 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1152.148	4.22	24.37	41.14	48.95	36.40	74.00	-37.60	peak
2	1677.621	5.25	26.58	41.52	44.96	35.27	74.00	-38.73	peak
3	3465.510	6.43	31.65	42.21	46.31	42.18	68.20	-26.02	peak
4	4495.125	7.55	33.59	42.42	46.28	45.00	68.20	-23.20	peak
5	11590.000	12.17	37.86	38.25	35.77	47.55	74.00	-26.45	peak
6	17385.000	15.85	42.83	40.60	33.36	51.44	68.20	-16.76	peak


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

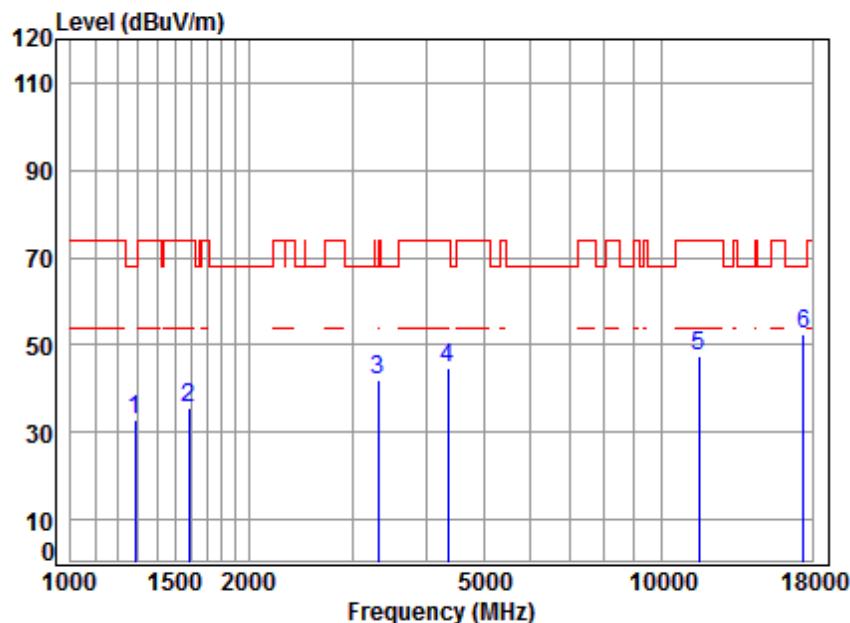

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5795 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1285.904	4.75	24.96	41.25	44.62	33.08	68.20	-35.12 peak
2	1587.975	5.37	26.20	41.46	45.44	35.55	74.00	-38.45 peak
3	3318.471	6.29	31.42	42.18	46.58	42.11	68.20	-26.09 peak
4	4354.454	7.40	33.35	42.39	46.53	44.89	74.00	-29.11 peak
5	11590.000	12.17	37.86	38.25	35.67	47.45	74.00	-26.55 peak
6	17385.000	15.85	42.83	40.60	34.62	52.70	68.20	-15.50 peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

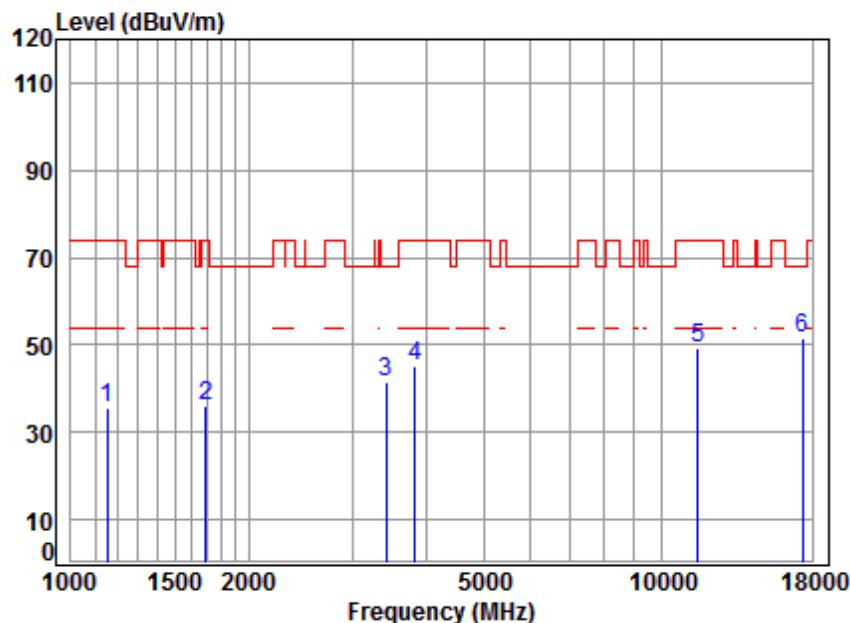

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5775 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1152.148	4.22	24.37	41.14	48.36	35.81	74.00	-38.19	peak
2	1692.231	5.24	26.64	41.53	45.56	35.91	74.00	-38.09	peak
3	3425.675	6.39	31.59	42.20	45.94	41.72	68.20	-26.48	peak
4	3823.371	6.80	32.36	42.29	48.18	45.05	74.00	-28.95	peak
5	11550.000	12.16	37.88	38.23	37.58	49.39	74.00	-24.61	peak
6	17325.000	15.98	42.80	40.55	33.21	51.44	68.20	-16.76	peak

Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

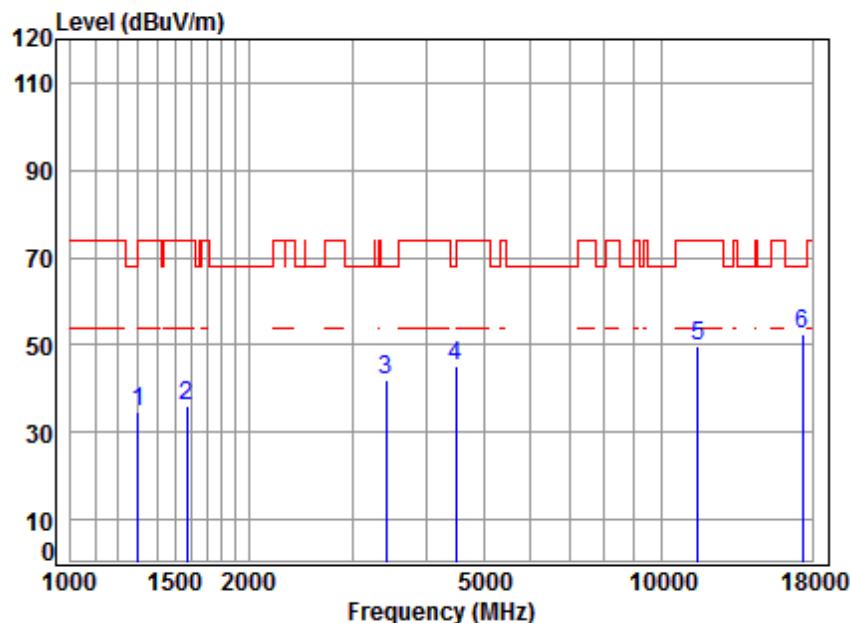


Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5775 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1300.858	4.80	25.03	41.26	45.92	34.49	74.00	-39.51	peak
2	1574.265	5.38	26.14	41.45	46.18	36.25	74.00	-37.75	peak
3	3415.787	6.38	31.57	42.20	46.08	41.83	68.20	-26.37	peak
4	4482.150	7.54	33.57	42.41	46.25	44.95	68.20	-23.25	peak
5	11550.000	12.16	37.88	38.23	37.74	49.55	74.00	-24.45	peak
6	17325.000	15.98	42.80	40.55	34.16	52.39	68.20	-15.81	peak

Test data for Antenna2/ Band 1:


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

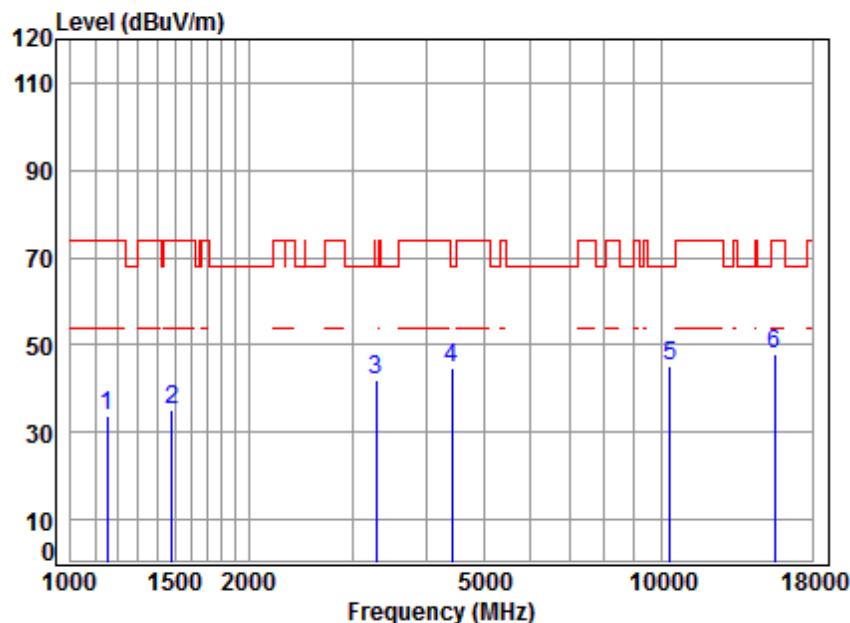

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	46.28	33.73	74.00	-40.27	peak		
2	1485.841	5.43	25.75	41.40	45.17	34.95	74.00	-39.05	peak		
3	3289.821	6.27	31.38	42.17	46.50	41.98	68.20	-26.22	peak		
4	4417.841	7.47	33.46	42.40	46.33	44.86	68.20	-23.34	peak		
5	10360.000	11.19	37.76	37.45	33.47	44.97	68.20	-23.23	peak		
6	15540.000	14.30	40.72	39.00	31.74	47.76	74.00	-26.24	peak		


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

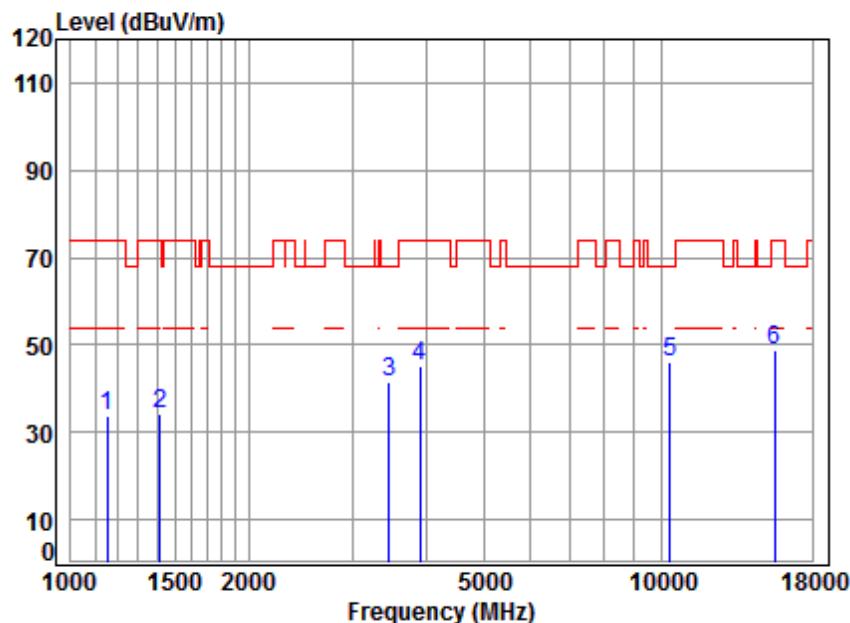

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1152.148	4.22	24.37	41.14	46.49	33.94	74.00	-40.06 peak
2 1414.597	5.20	25.48	41.35	44.87	34.20	74.00	-39.80 peak
3 3465.510	6.43	31.65	42.21	45.72	41.59	68.20	-26.61 peak
4 3901.516	6.88	32.51	42.31	47.92	45.00	74.00	-29.00 peak
5 10360.000	11.19	37.76	37.45	34.44	45.94	68.20	-22.26 peak
6 15540.000	14.30	40.72	39.00	32.71	48.73	74.00	-25.27 peak


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

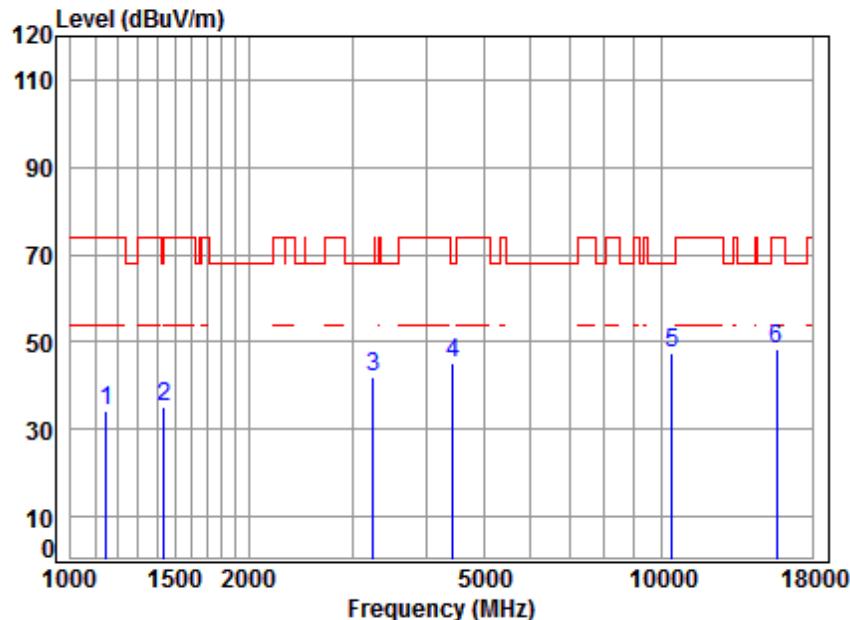

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1148.823	4.21	24.35	41.14	47.03	34.45	74.00	-39.55 peak
2	1439.343	5.28	25.58	41.36	45.86	35.36	74.00	-38.64 peak
3	3252.005	6.23	31.32	42.16	46.56	41.95	68.20	-26.25 peak
4	4430.628	7.48	33.48	42.41	46.80	45.35	68.20	-22.85 peak
5	10440.000	11.25	37.72	37.51	35.77	47.23	68.20	-20.97 peak
6	15660.000	14.48	40.80	39.11	32.26	48.43	74.00	-25.57 peak


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

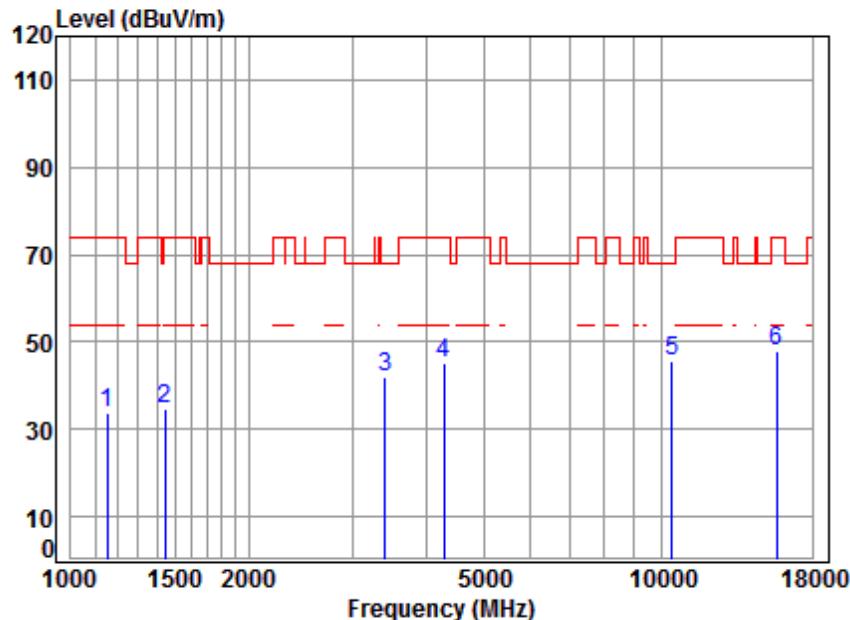

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	46.23	33.68	74.00	-40.32	peak	
2	1443.509	5.30	25.59	41.37	44.94	34.46	74.00	-39.54	peak	
3	3405.929	6.38	31.56	42.20	46.23	41.97	68.20	-26.23	peak	
4	4291.977	7.33	33.24	42.38	46.89	45.08	74.00	-28.92	peak	
5	10440.000	11.25	37.72	37.51	34.23	45.69	68.20	-22.51	peak	
6	15660.000	14.48	40.80	39.11	31.60	47.77	74.00	-26.23	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

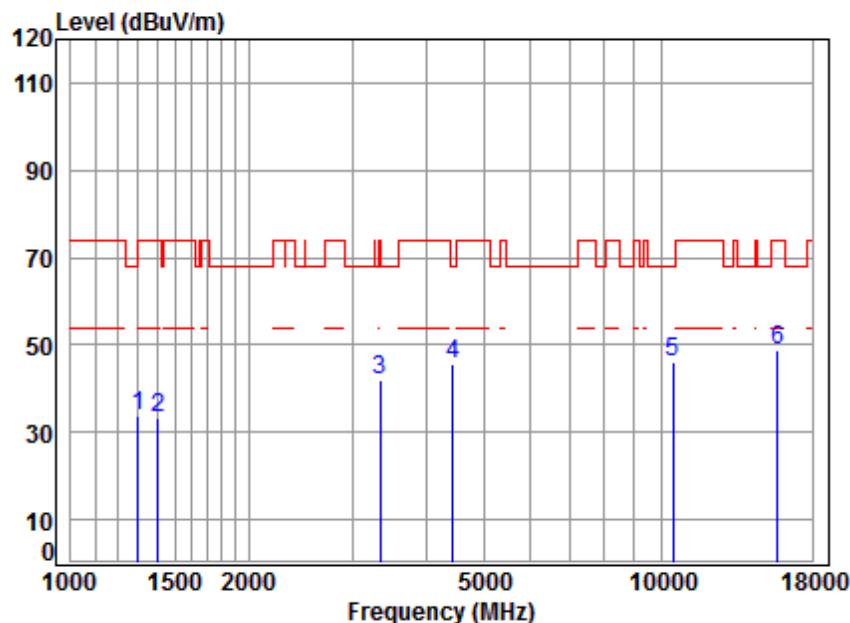

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	45.04	33.61	74.00	-40.39	peak
2	1406.443	5.17	25.45	41.34	44.09	33.37	74.00	-40.63	peak
3	3337.710	6.31	31.45	42.18	46.23	41.81	74.00	-32.19	peak
4	4430.628	7.48	33.48	42.41	46.97	45.52	68.20	-22.68	peak
5	10480.000	11.28	37.71	37.53	34.82	46.28	68.20	-21.92	peak
6	15720.000	14.57	40.83	39.17	32.48	48.71	74.00	-25.29	peak


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

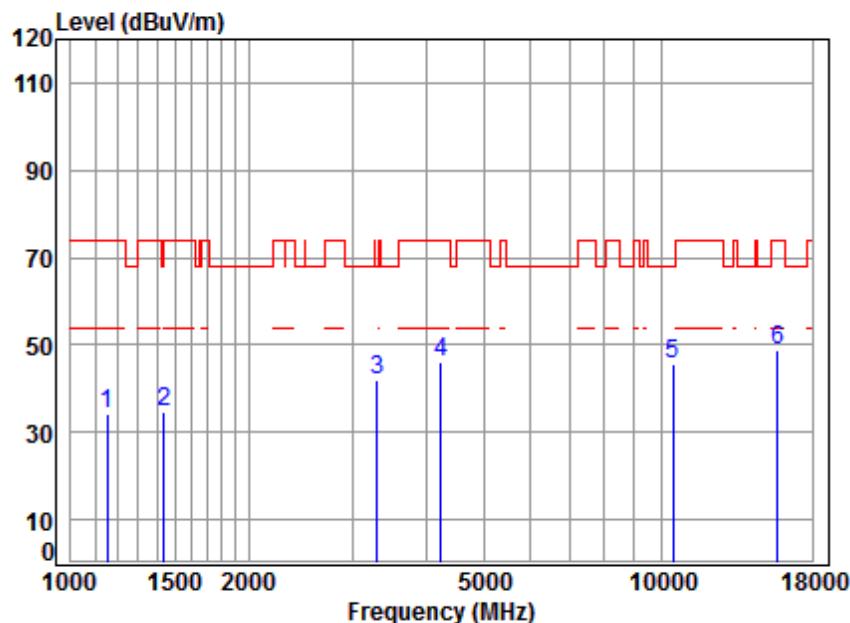

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	46.73	34.18	74.00	-39.82	peak	
2	1439.343	5.28	25.58	41.36	45.12	34.62	74.00	-39.38	peak	
3	3299.344	6.28	31.39	42.17	46.56	42.06	68.20	-26.14	peak	
4	4230.396	7.26	33.13	42.37	48.12	46.14	74.00	-27.86	peak	
5	10480.000	11.28	37.71	37.53	34.34	45.80	68.20	-22.40	peak	
6	15720.000	14.57	40.83	39.17	32.60	48.83	74.00	-25.17	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

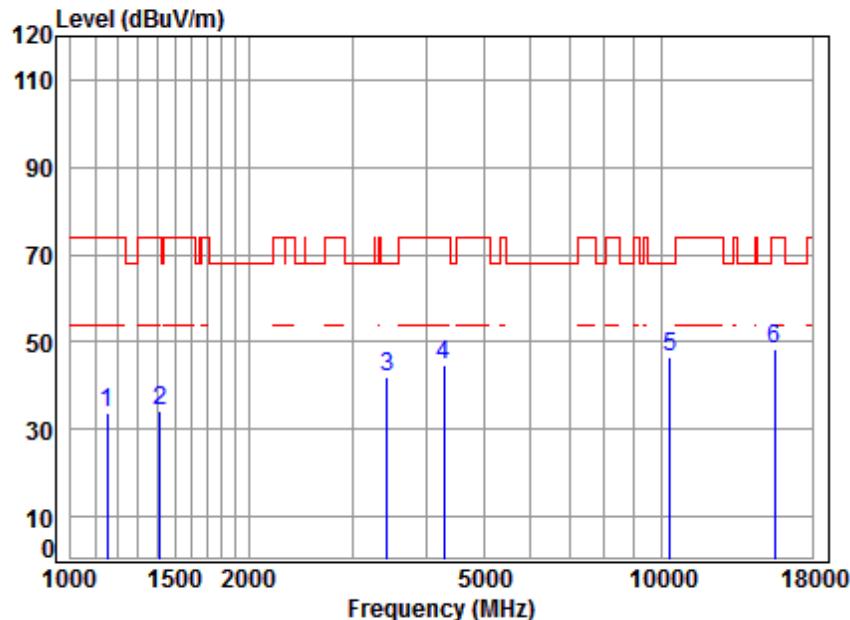

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	46.30	33.75	74.00	-40.25	peak	
2	1414.597	5.20	25.48	41.35	44.93	34.26	74.00	-39.74	peak	
3	3435.590	6.40	31.60	42.21	46.33	42.12	68.20	-26.08	peak	
4	4291.977	7.33	33.24	42.38	46.61	44.80	74.00	-29.20	peak	
5	10360.000	11.19	37.76	37.45	34.93	46.43	68.20	-21.77	peak	
6	15540.000	14.30	40.72	39.00	32.47	48.49	74.00	-25.51	peak	


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

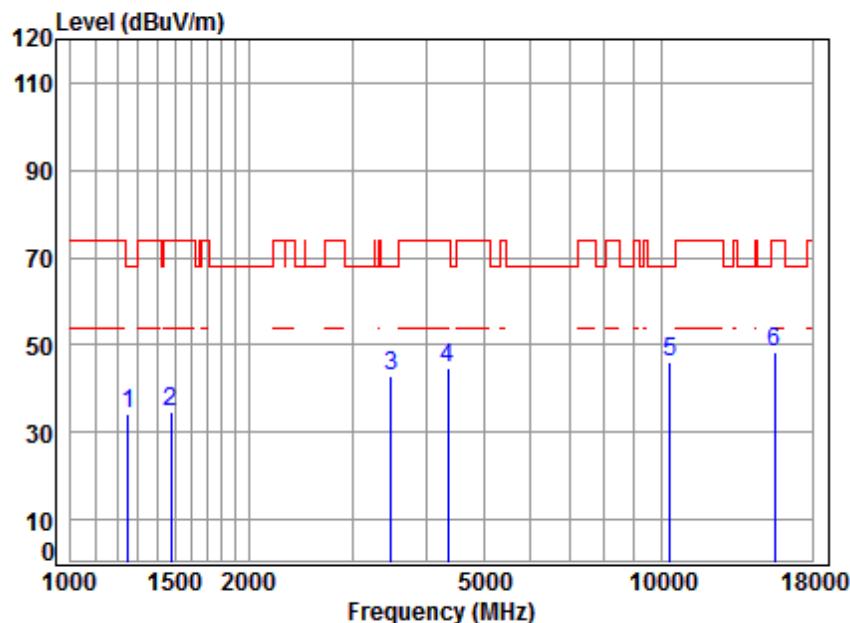

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	46.17	34.37	68.20	-33.83 peak
2 1477.276	5.41	25.72	41.39	44.91	34.65	74.00	-39.35 peak
3 3485.601	6.45	31.68	42.22	47.13	43.04	68.20	-25.16 peak
4 4354.454	7.40	33.35	42.39	46.45	44.81	74.00	-29.19 peak
5 10360.000	11.19	37.76	37.45	34.73	46.23	68.20	-21.97 peak
6 15540.000	14.30	40.72	39.00	32.48	48.50	74.00	-25.50 peak


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

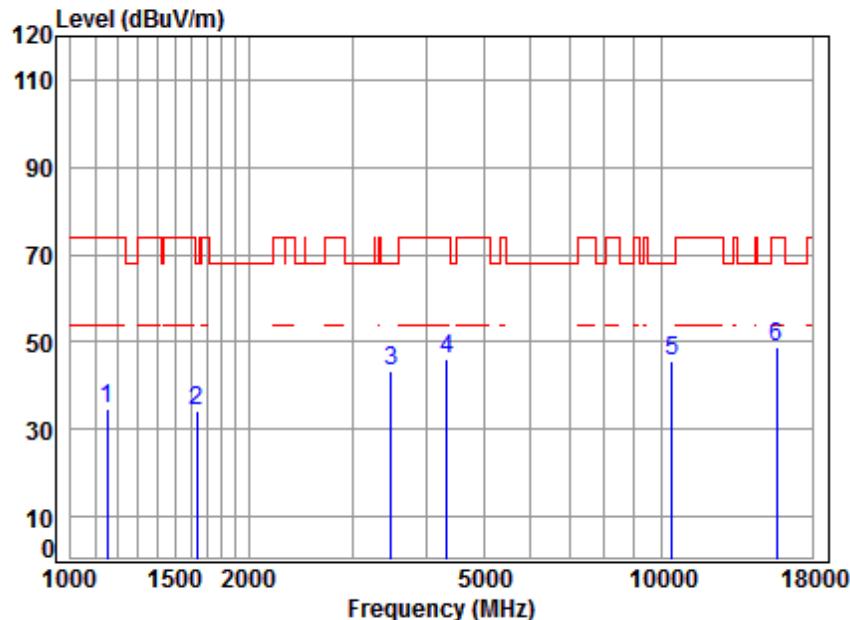

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.07	34.52	74.00	-39.48	peak	
2	1634.543	5.31	26.40	41.49	44.02	34.24	68.20	-33.96	peak	
3	3485.601	6.45	31.68	42.22	47.54	43.45	68.20	-24.75	peak	
4	4329.354	7.37	33.30	42.39	47.68	45.96	74.00	-28.04	peak	
5	10440.000	11.25	37.72	37.51	34.12	45.58	68.20	-22.62	peak	
6	15660.000	14.48	40.80	39.11	32.73	48.90	74.00	-25.10	peak	


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

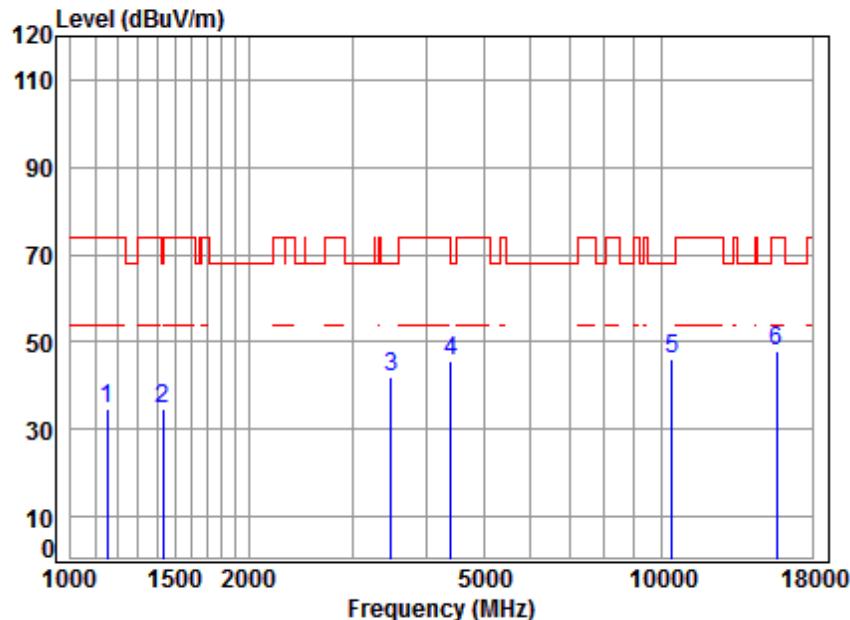

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	47.22	34.67	74.00	-39.33	peak	
2	1435.189	5.27	25.56	41.36	45.08	34.55	74.00	-39.45	peak	
3	3485.601	6.45	31.68	42.22	46.01	41.92	68.20	-26.28	peak	
4	4405.090	7.46	33.44	42.40	46.94	45.44	68.20	-22.76	peak	
5	10440.000	11.25	37.72	37.51	34.58	46.04	68.20	-22.16	peak	
6	15660.000	14.48	40.80	39.11	31.59	47.76	74.00	-26.24	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

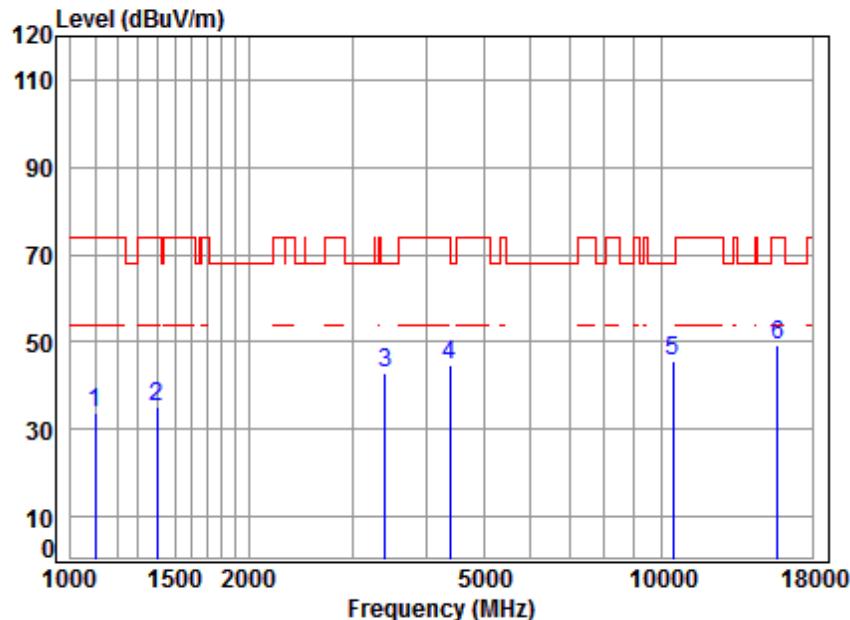

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1100.079	4.00	24.12	41.10	46.61	33.63	74.00	-40.37 peak
2	1398.336	5.15	25.42	41.34	45.90	35.13	74.00	-38.87 peak
3	3405.929	6.38	31.56	42.20	47.14	42.88	68.20	-25.32 peak
4	4379.699	7.43	33.39	42.40	46.23	44.65	74.00	-29.35 peak
5	10480.000	11.28	37.71	37.53	34.21	45.67	68.20	-22.53 peak
6	15720.000	14.57	40.83	39.17	33.04	49.27	74.00	-24.73 peak


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

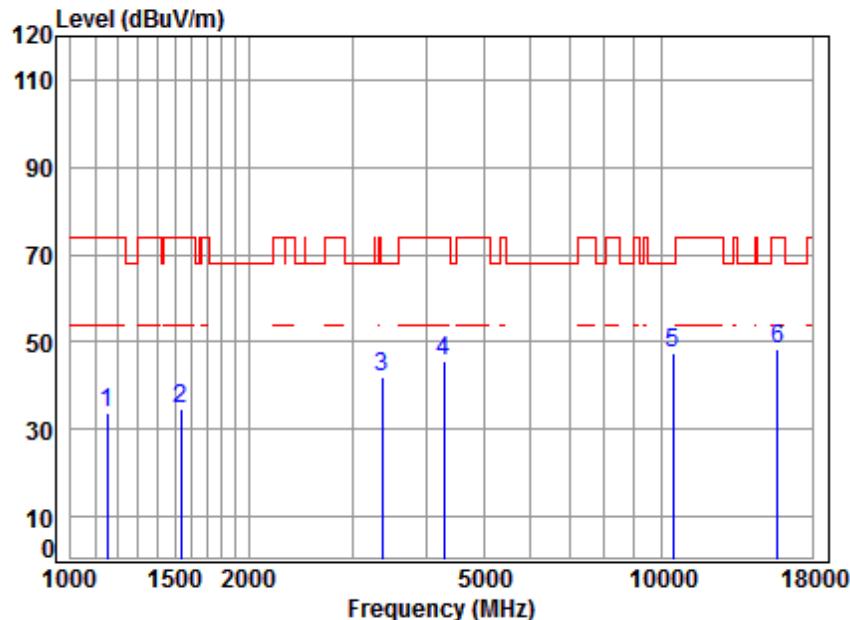

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1152.148	4.22	24.37	41.14	46.27	33.72	74.00	-40.28	peak
2	1538.281	5.43	25.98	41.43	44.66	34.64	74.00	-39.36	peak
3	3366.778	6.34	31.50	42.19	46.11	41.76	68.20	-26.44	peak
4	4291.977	7.33	33.24	42.38	47.55	45.74	74.00	-28.26	peak
5	10480.000	11.28	37.71	37.53	35.86	47.32	68.20	-20.88	peak
6	15720.000	14.57	40.83	39.17	32.36	48.59	74.00	-25.41	peak


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

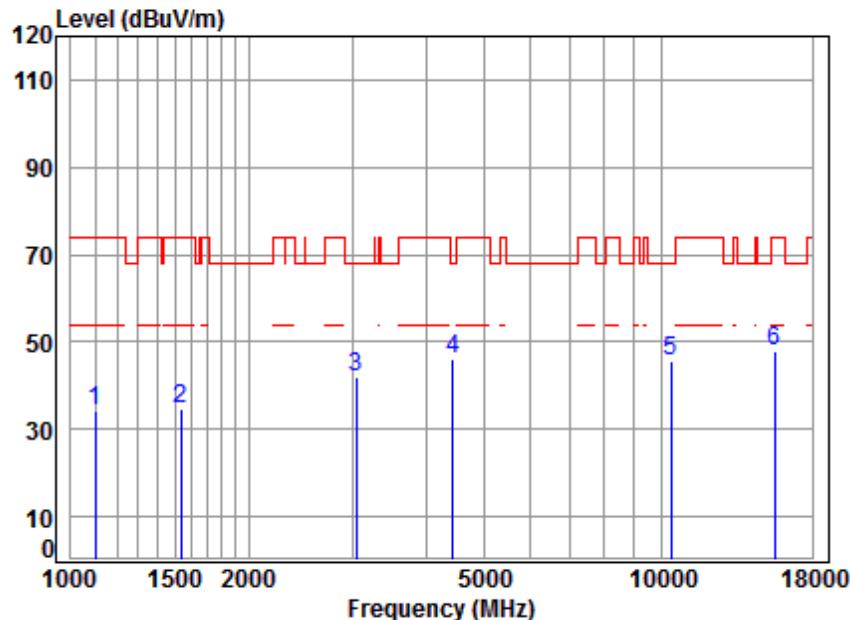

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					Level	Line		
1 1100.079	4.00	24.12	41.10	47.24	34.26	74.00	-39.74	peak
2 1538.281	5.43	25.98	41.43	44.70	34.68	74.00	-39.32	peak
3 3042.846	6.02	30.97	42.11	47.06	41.94	68.20	-26.26	peak
4 4430.628	7.48	33.48	42.41	47.69	46.24	68.20	-21.96	peak
5 10380.000	11.21	37.75	37.47	33.93	45.42	68.20	-22.78	peak
6 15570.000	14.35	40.74	39.03	31.75	47.81	74.00	-26.19	peak


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

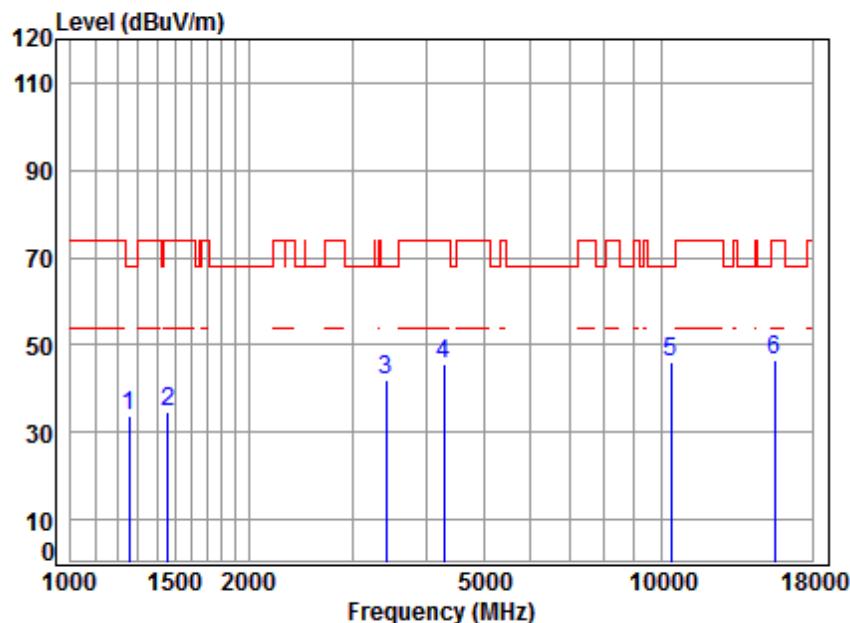

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.84	41.23	45.60	33.85	68.20	-34.35	peak	
2	1460.295	5.35	25.65	41.38	44.92	34.54	74.00	-39.46	peak	
3	3425.675	6.39	31.59	42.20	46.28	42.06	68.20	-26.14	peak	
4	4279.589	7.31	33.22	42.38	47.29	45.44	74.00	-28.56	peak	
5	10380.000	11.21	37.75	37.47	34.44	45.93	68.20	-22.27	peak	
6	15570.000	14.35	40.74	39.03	30.64	46.70	74.00	-27.30	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

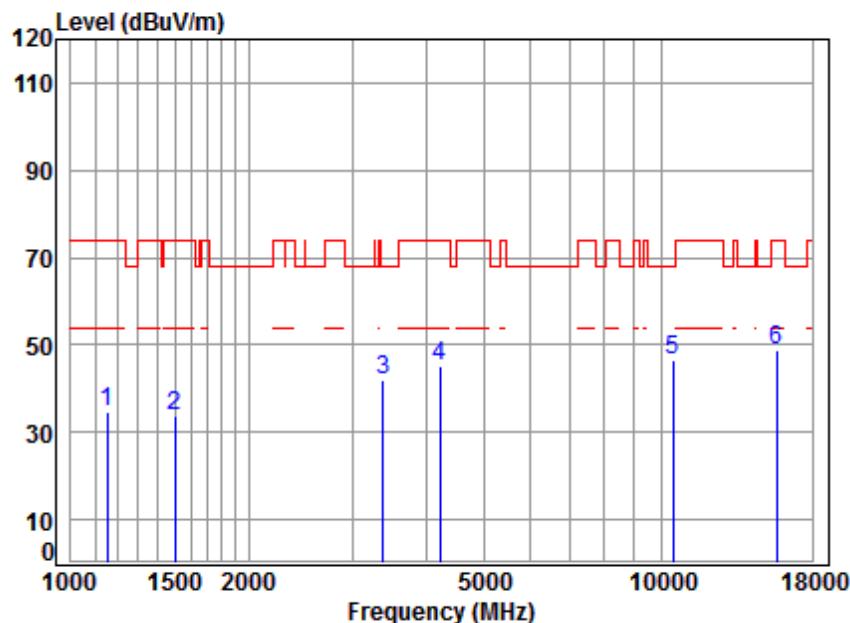

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1152.148	4.22	24.37	41.14	47.21	34.66	74.00	-39.34 peak
2 1498.781	5.48	25.80	41.41	43.91	33.78	74.00	-40.22 peak
3 3386.297	6.36	31.53	42.19	46.16	41.86	68.20	-26.34 peak
4 4218.186	7.24	33.11	42.37	47.41	45.39	74.00	-28.61 peak
5 10460.000	11.26	37.72	37.52	35.00	46.46	68.20	-21.74 peak
6 15690.000	14.53	40.82	39.14	32.73	48.94	74.00	-25.06 peak


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

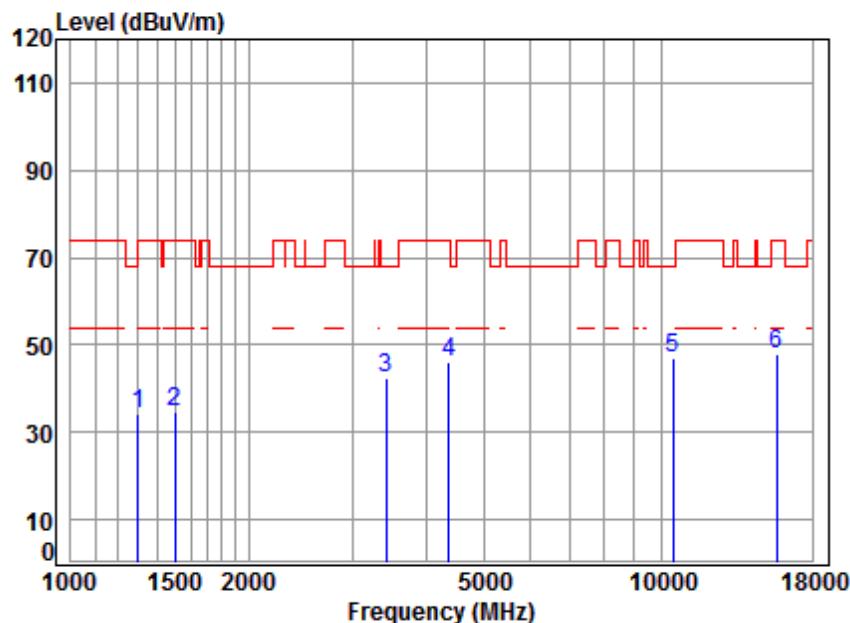

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	45.80	34.37	74.00	-39.63	peak
2	1498.781	5.48	25.80	41.41	44.84	34.71	74.00	-39.29	peak
3	3415.787	6.38	31.57	42.20	46.82	42.57	68.20	-25.63	peak
4	4367.058	7.41	33.37	42.39	47.68	46.07	74.00	-27.93	peak
5	10460.000	11.26	37.72	37.52	35.40	46.86	68.20	-21.34	peak
6	15690.000	14.53	40.82	39.14	31.51	47.72	74.00	-26.28	peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

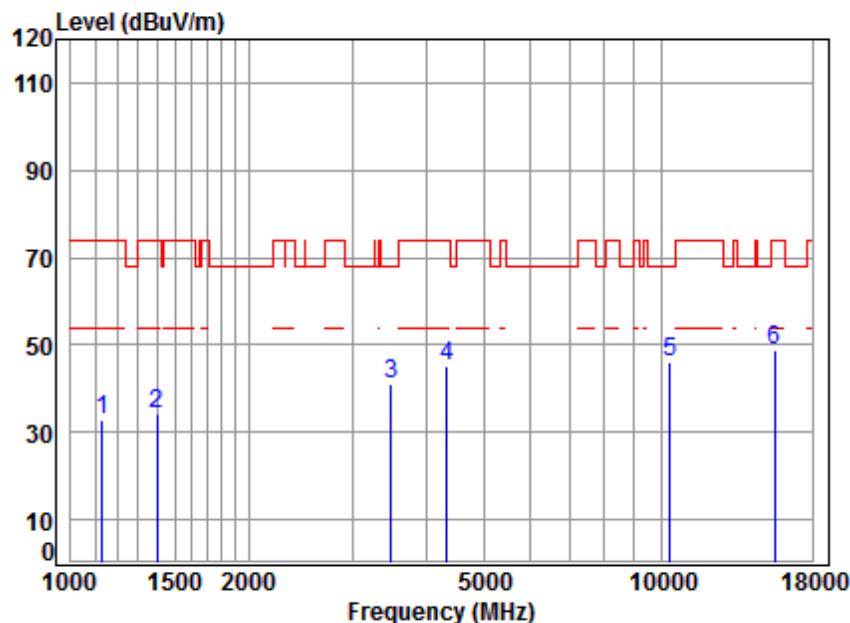

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1129.072	4.13	24.26	41.12	45.65	32.92	74.00	-41.08	peak	
2	1398.336	5.15	25.42	41.34	45.02	34.25	74.00	-39.75	peak	
3	3485.601	6.45	31.68	42.22	45.28	41.19	68.20	-27.01	peak	
4	4329.354	7.37	33.30	42.39	46.89	45.17	74.00	-28.83	peak	
5	10360.000	11.19	37.76	37.45	34.48	45.98	68.20	-22.22	peak	
6	15540.000	14.30	40.72	39.00	32.89	48.91	74.00	-25.09	peak	


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

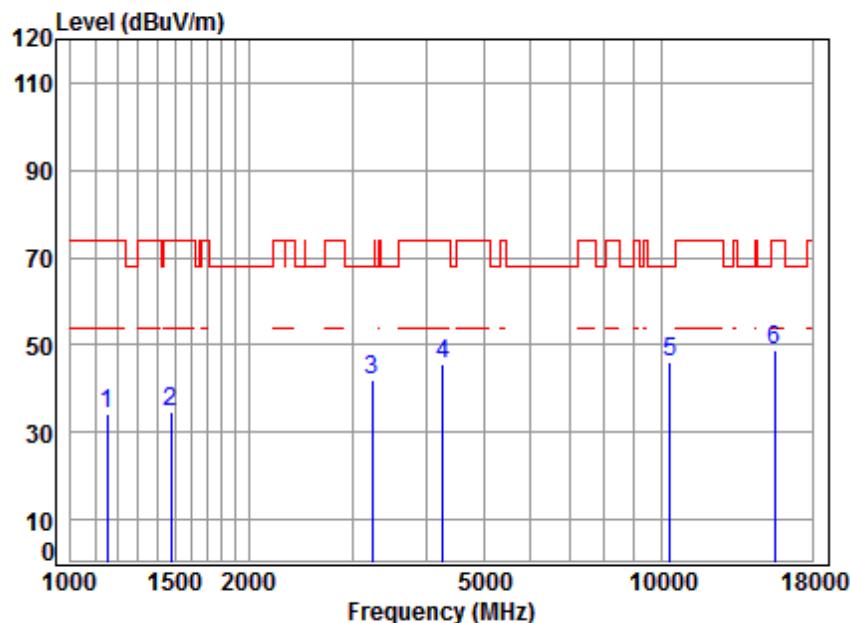

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	41.14	46.92	34.37	74.00	-39.63	peak
2	1477.276	5.41	25.72	41.39	41.39	45.07	34.81	74.00	-39.19	peak
3	3233.260	6.21	31.29	42.16	42.16	46.67	42.01	68.20	-26.19	peak
4	4267.237	7.30	33.19	42.38	42.38	47.32	45.43	74.00	-28.57	peak
5	10360.000	11.19	37.76	37.45	37.45	34.69	46.19	68.20	-22.01	peak
6	15540.000	14.30	40.72	39.00	39.00	32.63	48.65	74.00	-25.35	peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

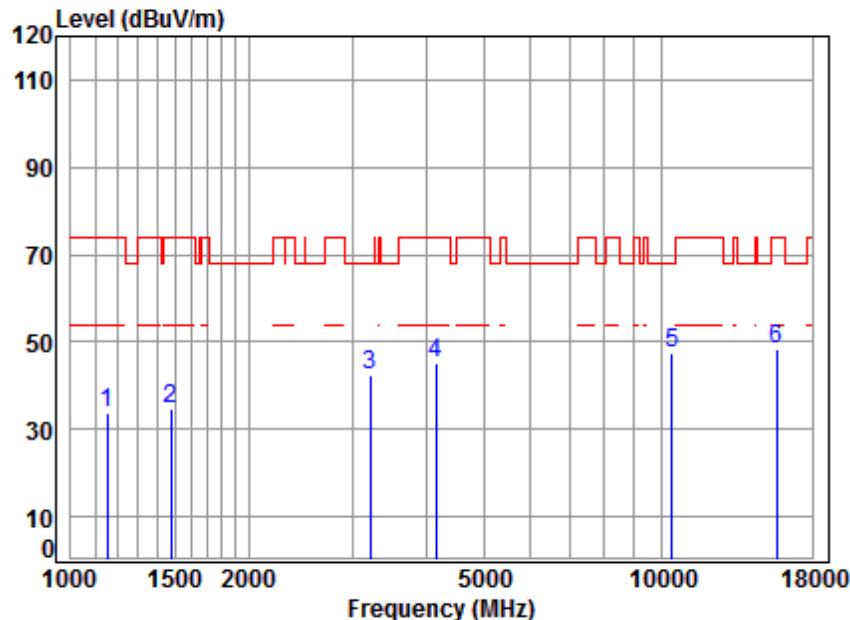

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable		Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level			
MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB	
1 1152.148	4.22	24.37	41.14	46.42	33.87	74.00	-40.13	peak
2 1477.276	5.41	25.72	41.39	44.91	34.65	74.00	-39.35	peak
3 3214.623	6.20	31.26	42.15	46.93	42.24	68.20	-25.96	peak
4 4157.664	7.17	33.00	42.36	47.43	45.24	74.00	-28.76	peak
5 10440.000	11.25	37.72	37.51	35.85	47.31	68.20	-20.89	peak
6 15660.000	14.48	40.80	39.11	32.05	48.22	74.00	-25.78	peak


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

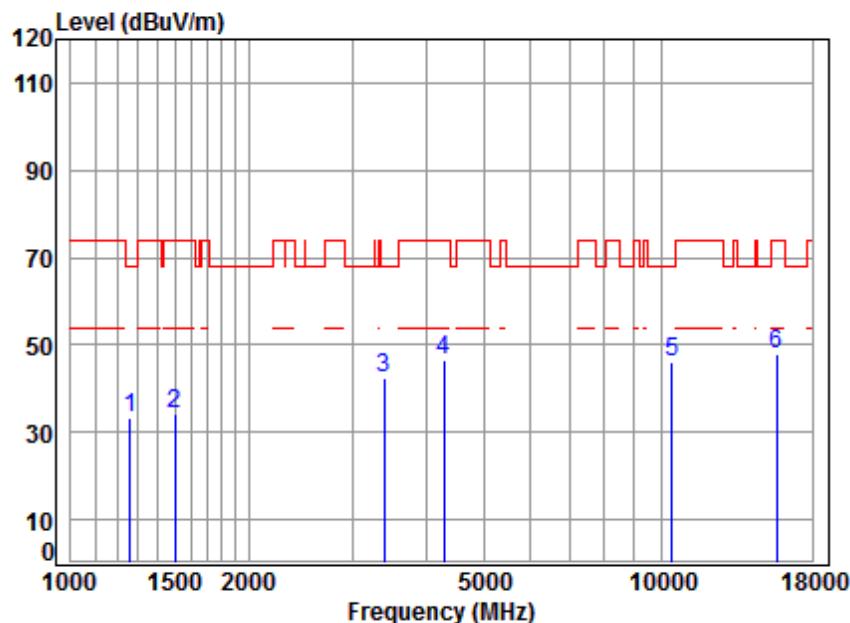

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	4.65	24.85	41.23	45.24	33.51	68.20	-34.69	peak	
2	1503.119	5.48	25.81	41.41	44.46	34.34	74.00	-39.66	peak	
3	3396.098	6.37	31.54	42.20	46.74	42.45	68.20	-25.75	peak	
4	4279.589	7.31	33.22	42.38	48.18	46.33	74.00	-27.67	peak	
5	10440.000	11.25	37.72	37.51	34.54	46.00	68.20	-22.20	peak	
6	15660.000	14.48	40.80	39.11	31.70	47.87	74.00	-26.13	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

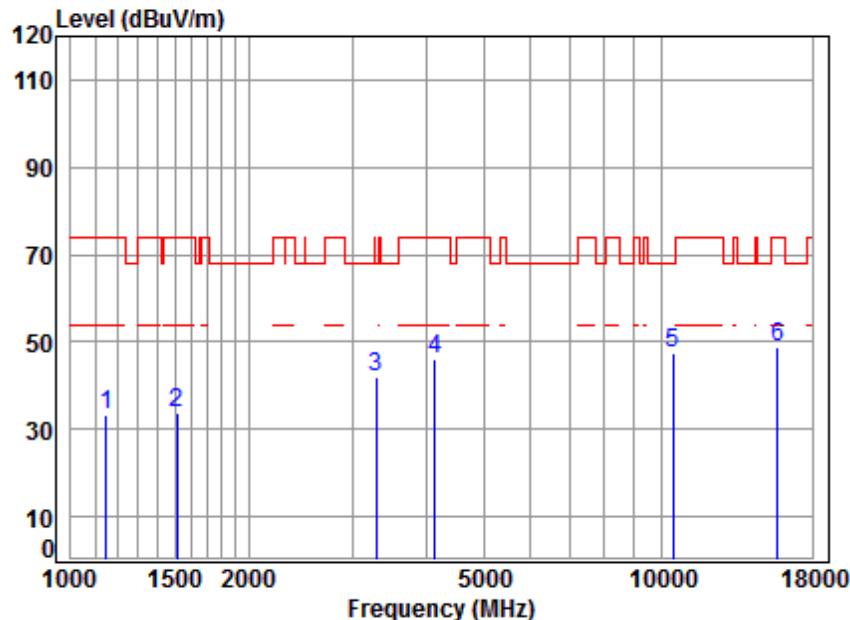

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1148.823	4.21	24.35	41.14	45.70	33.12	74.00	-40.88	peak	
2	1511.833	5.46	25.85	41.41	43.90	33.80	74.00	-40.20	peak	
3	3289.821	6.27	31.38	42.17	46.53	42.01	68.20	-26.19	peak	
4	4133.699	7.14	32.95	42.35	48.46	46.20	74.00	-27.80	peak	
5	10480.000	11.28	37.71	37.53	36.13	47.59	68.20	-20.61	peak	
6	15720.000	14.57	40.83	39.17	32.76	48.99	74.00	-25.01	peak	


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

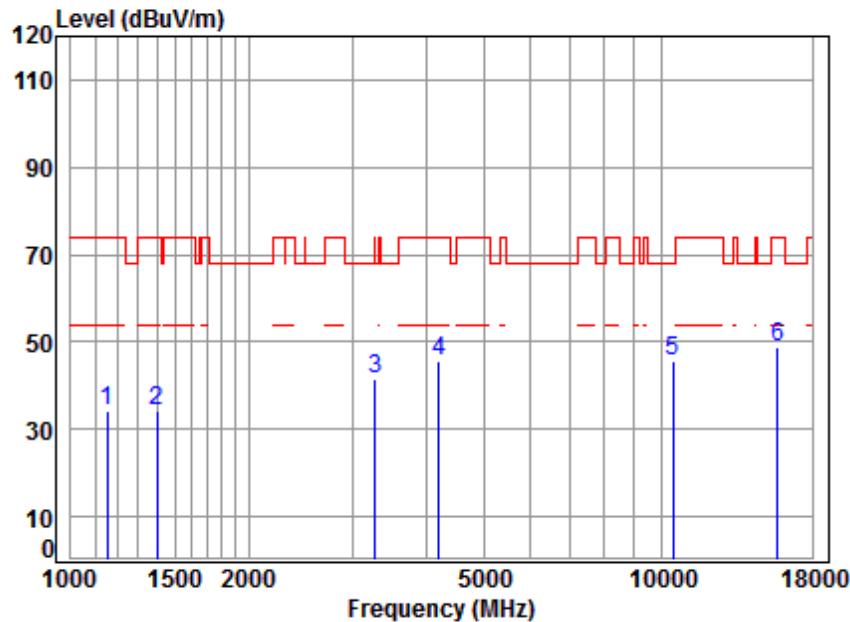

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1 1152.148	4.22	24.37	41.14	46.96	34.41	74.00	-39.59	peak
2 1398.336	5.15	25.42	41.34	45.14	34.37	74.00	-39.63	peak
3 3270.858	6.25	31.35	42.17	46.02	41.45	68.20	-26.75	peak
4 4206.011	7.23	33.08	42.36	47.76	45.71	74.00	-28.29	peak
5 10480.000	11.28	37.71	37.53	34.36	45.82	68.20	-22.38	peak
6 15720.000	14.57	40.83	39.17	32.57	48.80	74.00	-25.20	peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

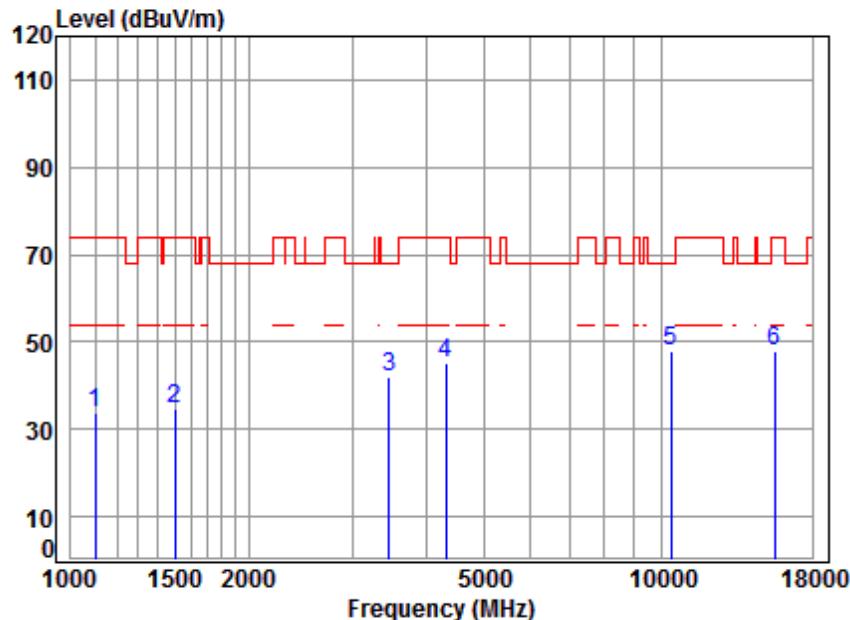

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1100.079	4.00	24.12	41.10	46.57	33.59	74.00	-40.41	peak	
2	1503.119	5.48	25.81	41.41	44.73	34.61	74.00	-39.39	peak	
3	3465.510	6.43	31.65	42.21	45.98	41.85	68.20	-26.35	peak	
4	4316.859	7.36	33.28	42.38	46.76	45.02	74.00	-28.98	peak	
5	10380.000	11.21	37.75	37.47	36.63	48.12	68.20	-20.08	peak	
6	15570.000	14.35	40.74	39.03	31.69	47.75	74.00	-26.25	peak	


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

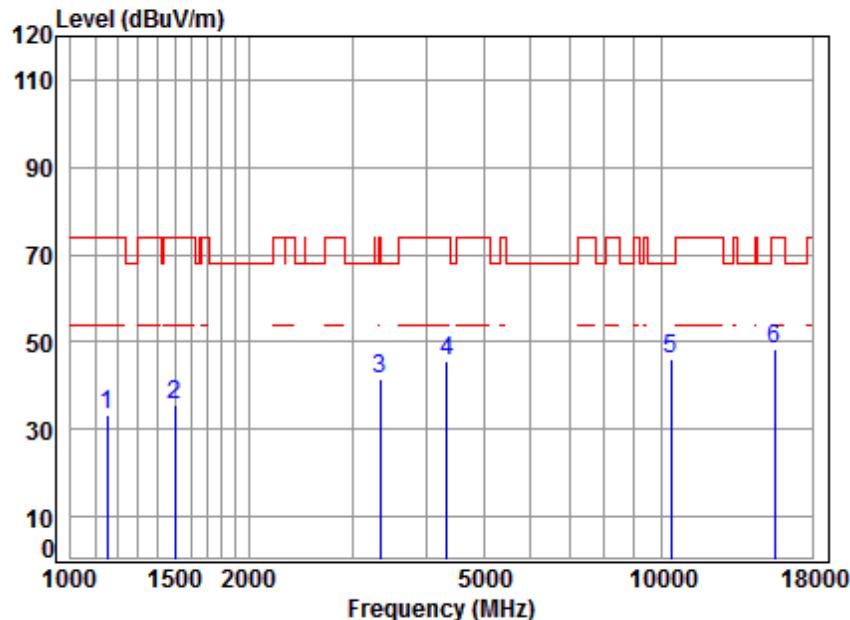

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	45.73	33.18	74.00	74.00	-40.82	peak	
2	1498.781	5.48	25.80	41.41	45.58	35.45	74.00	74.00	-38.55	peak	
3	3347.371	6.32	31.47	42.19	46.01	41.61	74.00	74.00	-32.39	peak	
4	4329.354	7.37	33.30	42.39	47.32	45.60	74.00	74.00	-28.40	peak	
5	10380.000	11.21	37.75	37.47	34.69	46.18	68.20	68.20	-22.02	peak	
6	15570.000	14.35	40.74	39.03	32.41	48.47	74.00	74.00	-25.53	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

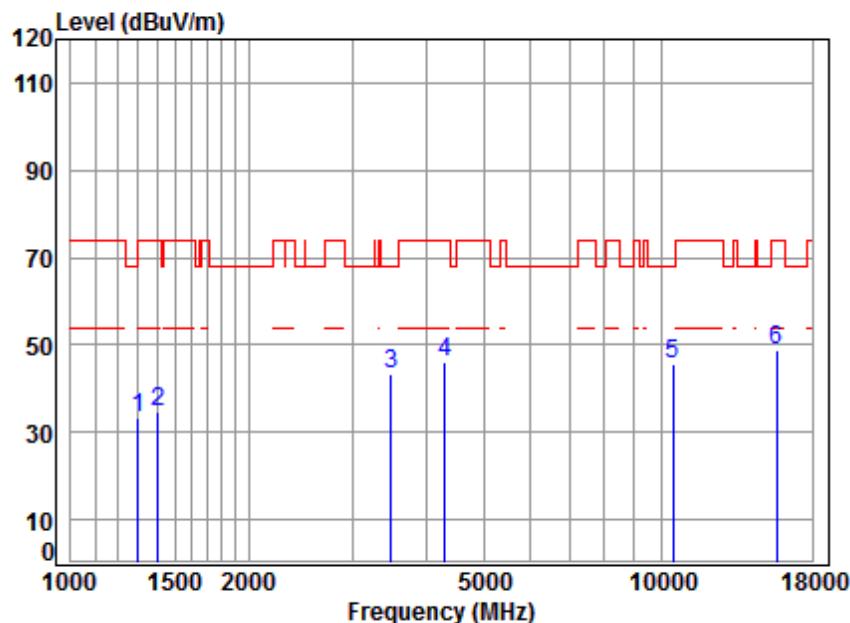

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	25.03	41.26	44.87	33.44	74.00	-40.56 peak
2	1406.443	5.17	25.45	41.34	45.62	34.90	74.00	-39.10 peak
3	3485.601	6.45	31.68	42.22	47.30	43.21	68.20	-24.99 peak
4	4304.400	7.34	33.26	42.38	47.97	46.19	74.00	-27.81 peak
5	10460.000	11.26	37.72	37.52	34.16	45.62	68.20	-22.58 peak
6	15690.000	14.53	40.82	39.14	32.45	48.66	74.00	-25.34 peak


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

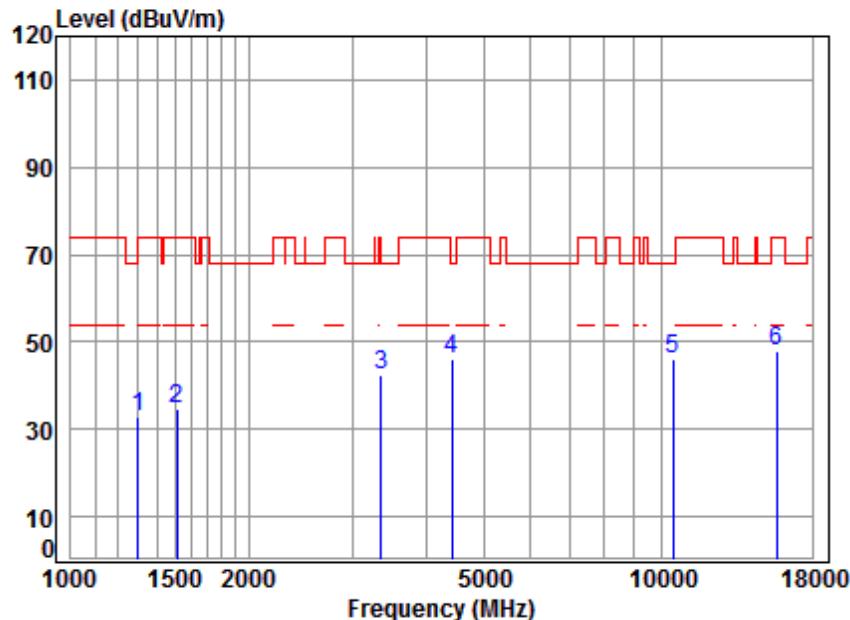

Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	25.03	41.26	44.23	32.80	74.00	-41.20 peak
2	1511.833	5.46	25.85	41.41	44.57	34.47	74.00	-39.53 peak
3	3357.061	6.33	31.48	42.19	46.71	42.33	74.00	-31.67 peak
4	4417.841	7.47	33.46	42.40	47.42	45.95	68.20	-22.25 peak
5	10460.000	11.26	37.72	37.52	34.53	45.99	68.20	-22.21 peak
6	15690.000	14.53	40.82	39.14	31.74	47.95	74.00	-26.05 peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

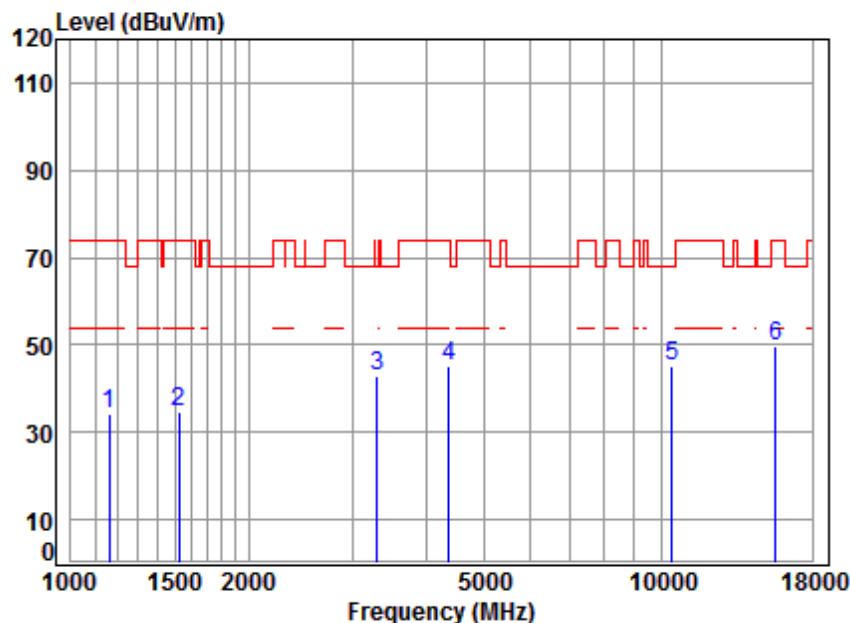

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09224CR/09245CR
Mode : 5210 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1162.182	4.27	24.42	41.15	46.57	34.11	74.00	-39.89 peak
2 1525.000	5.45	25.91	41.42	44.74	34.68	74.00	-39.32 peak
3 3308.894	6.29	31.41	42.18	47.35	42.87	68.20	-25.33 peak
4 4367.058	7.41	33.37	42.39	46.77	45.16	74.00	-28.84 peak
5 10420.000	11.24	37.73	37.49	33.74	45.22	68.20	-22.98 peak
6 15630.000	14.44	40.78	39.09	33.38	49.51	74.00	-24.49 peak

Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

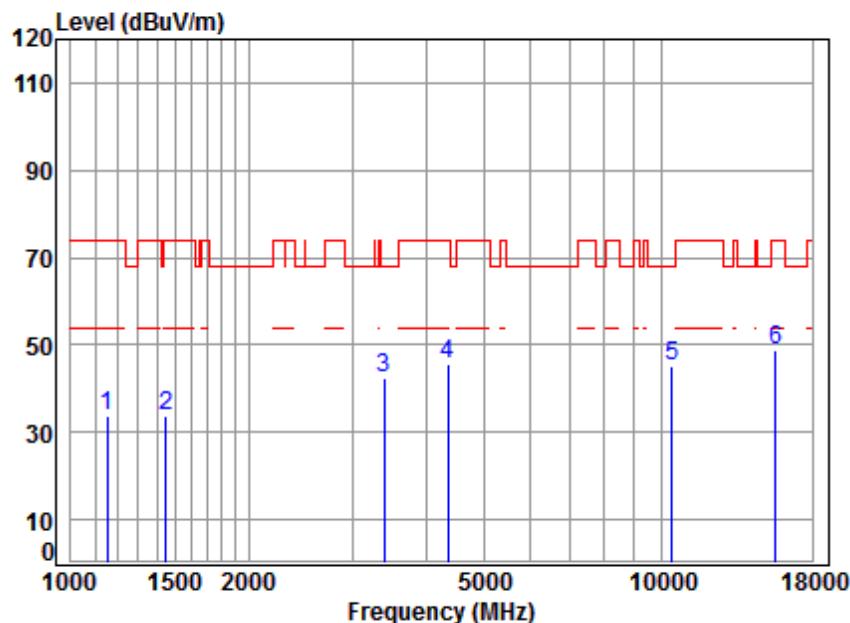


Site : chamber
Condition: 3m VERTICAL
Job No : 09224CR/09245CR
Mode : 5210 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					dB	dBuV	dBuV/m	dBuV/m
1 1152.148	4.22	24.37	41.14	46.14	33.59	74.00	-40.41	peak
2 1451.878	5.32	25.62	41.37	43.98	33.55	74.00	-40.45	peak
3 3396.098	6.37	31.54	42.20	46.68	42.39	68.20	-25.81	peak
4 4354.454	7.40	33.35	42.39	47.42	45.78	74.00	-28.22	peak
5 10420.000	11.24	37.73	37.49	33.50	44.98	68.20	-23.22	peak
6 15630.000	14.44	40.78	39.09	32.69	48.82	74.00	-25.18	peak

Test data for Antenna2/ Band 2A:


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

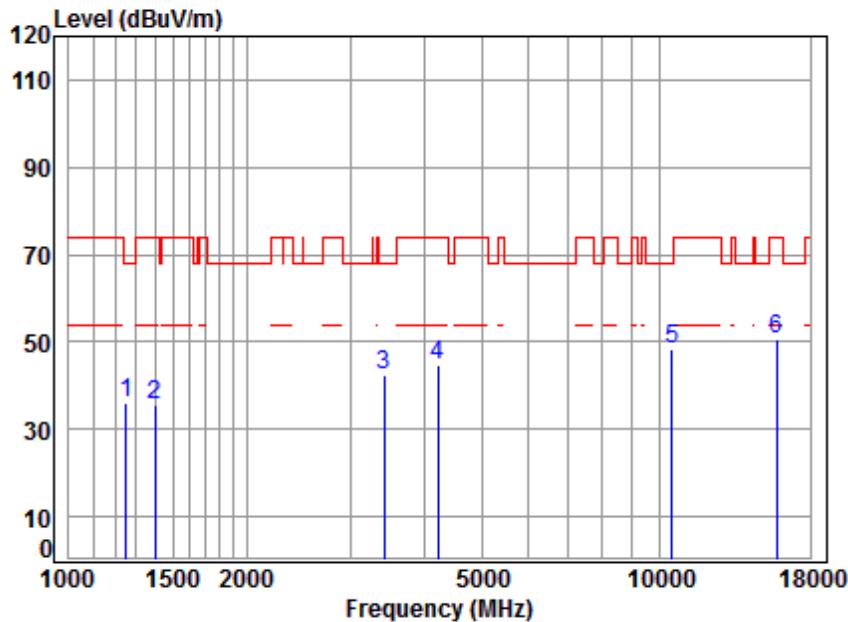

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	47.71	35.91	68.20	-32.29	peak	
2	1398.336	5.15	25.42	41.34	46.28	35.51	74.00	-38.49	peak	
3	3415.787	6.38	31.57	42.20	46.55	42.30	68.20	-25.90	peak	
4	4218.186	7.24	33.11	42.37	46.89	44.87	74.00	-29.13	peak	
5	10520.000	11.30	37.70	37.56	36.85	48.29	68.20	-19.91	peak	
6	15780.000	14.66	40.87	39.22	34.47	50.78	74.00	-23.22	peak	


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

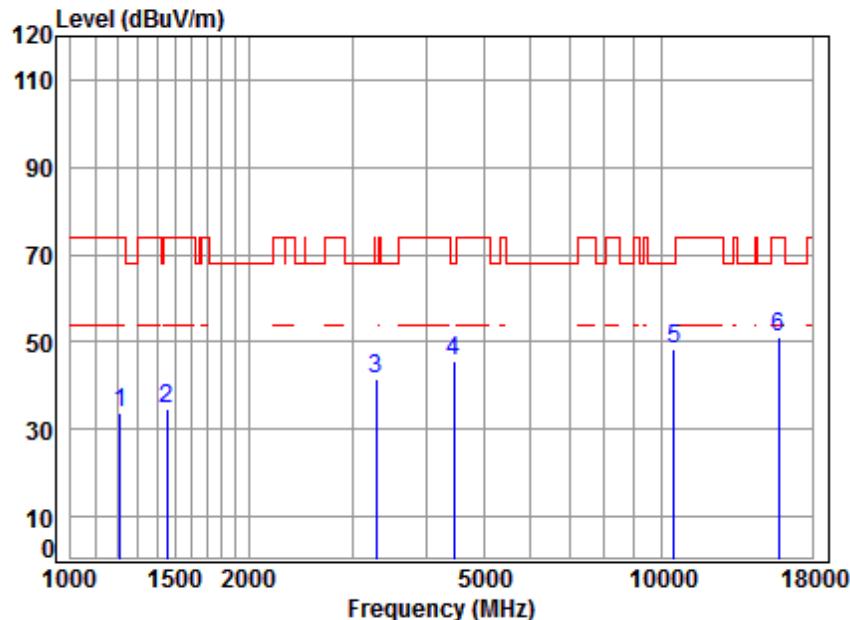

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	4.47	24.65	41.19	45.62	33.55	74.00	-40.45	peak	
2	1456.081	5.34	25.64	41.38	45.01	34.61	74.00	-39.39	peak	
3	3289.821	6.27	31.38	42.17	46.19	41.67	68.20	-26.53	peak	
4	4456.315	7.51	33.53	42.41	47.08	45.71	68.20	-22.49	peak	
5	10520.000	11.30	37.70	37.56	36.84	48.28	68.20	-19.92	peak	
6	15780.000	14.66	40.87	39.22	35.02	51.33	74.00	-22.67	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

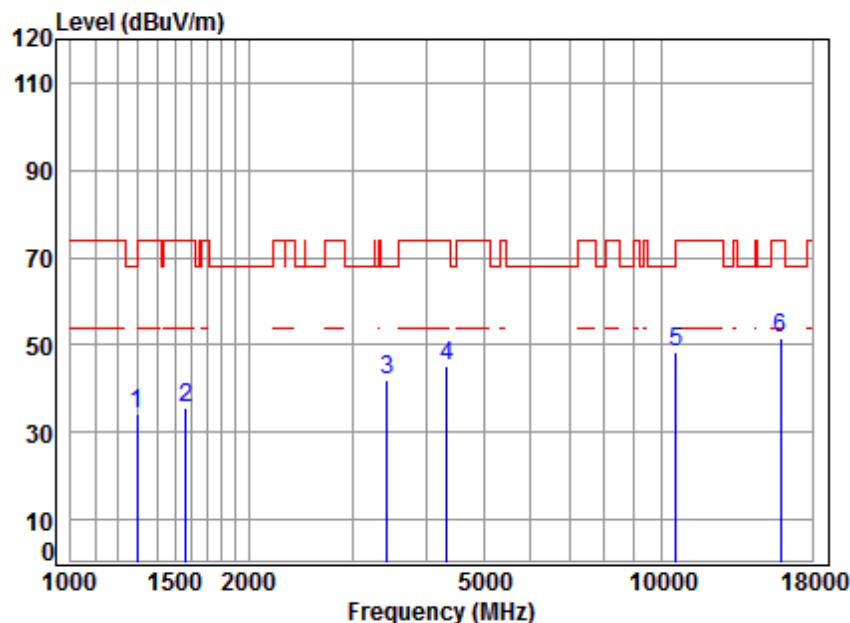

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	25.01	41.26	45.84	34.38	68.20	-33.82	peak		
2	1569.721	5.39	26.12	41.45	45.59	35.65	74.00	-38.35	peak		
3	3435.590	6.40	31.60	42.21	46.39	42.18	68.20	-26.02	peak		
4	4329.354	7.37	33.30	42.39	46.85	45.13	74.00	-28.87	peak		
5	10600.000	11.36	37.72	37.62	36.74	48.20	68.20	-20.00	peak		
6	15900.000	14.84	40.94	39.33	35.00	51.45	74.00	-22.55	peak		


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

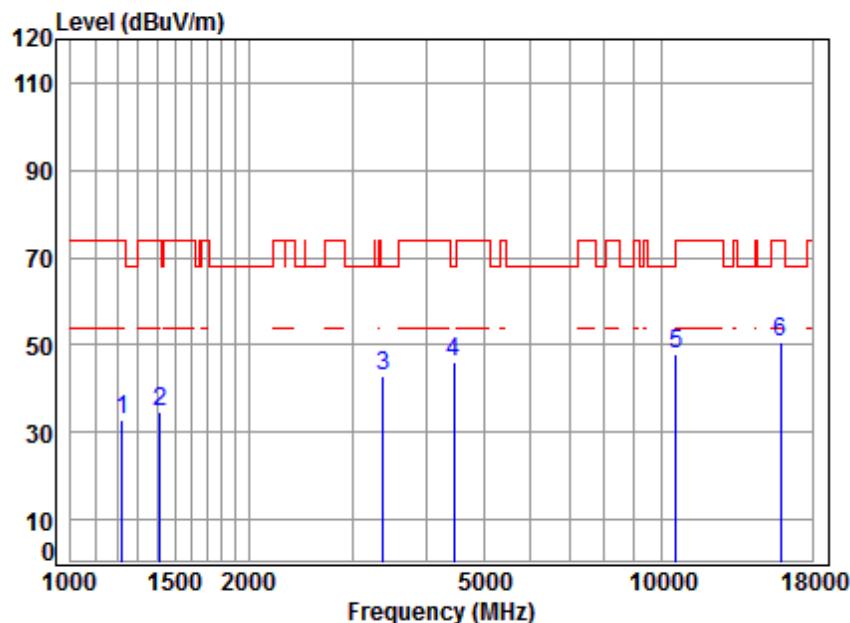

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1224.247	4.51	24.70	41.20	44.64	32.65	74.00	-41.35 peak
2 1414.597	5.20	25.48	41.35	45.25	34.58	74.00	-39.42 peak
3 3386.297	6.36	31.53	42.19	46.96	42.66	68.20	-25.54 peak
4 4456.315	7.51	33.53	42.41	47.51	46.14	68.20	-22.06 peak
5 10600.000	11.36	37.72	37.62	36.34	47.80	68.20	-20.40 peak
6 15900.000	14.84	40.94	39.33	34.17	50.62	74.00	-23.38 peak


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

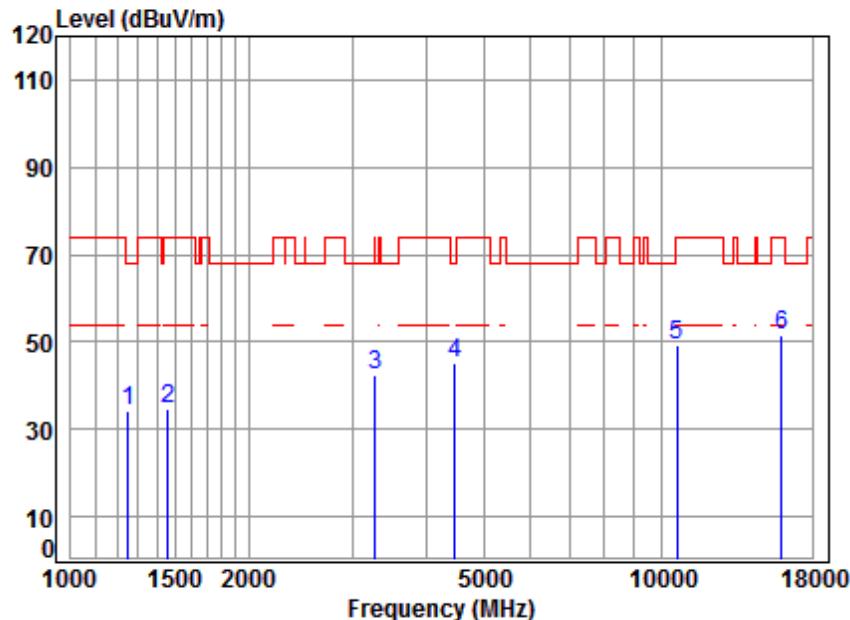

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1249.269	4.61	24.81	41.22	45.89	34.09	68.20	-34.11 peak
2	1460.295	5.35	25.65	41.38	44.85	34.47	74.00	-39.53 peak
3	3280.326	6.26	31.36	42.17	47.19	42.64	68.20	-25.56 peak
4	4469.214	7.53	33.55	42.41	46.57	45.24	68.20	-22.96 peak
5	10640.000	11.39	37.73	37.64	37.61	49.09	74.00	-24.91 peak
6	15960.000	14.93	40.98	39.38	34.92	51.45	74.00	-22.55 peak


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

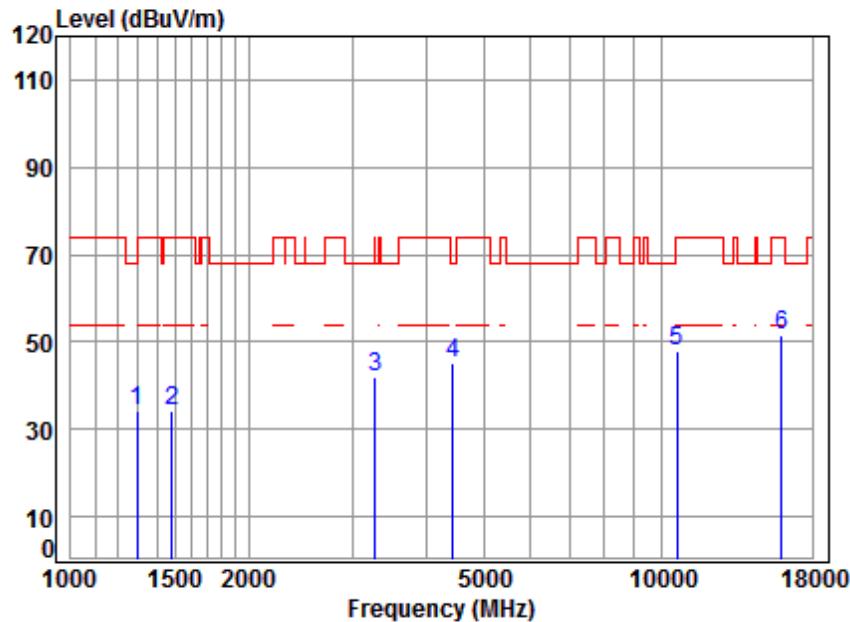

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	25.00	41.26	45.62	34.13	68.20	-34.07	peak	
2	1485.841	5.43	25.75	41.40	44.51	34.29	74.00	-39.71	peak	
3	3280.326	6.26	31.36	42.17	46.58	42.03	68.20	-26.17	peak	
4	4443.453	7.50	33.50	42.41	46.65	45.24	68.20	-22.96	peak	
5	10640.000	11.39	37.73	37.64	36.27	47.75	74.00	-26.25	peak	
6	15960.000	14.93	40.98	39.38	35.01	51.54	74.00	-22.46	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

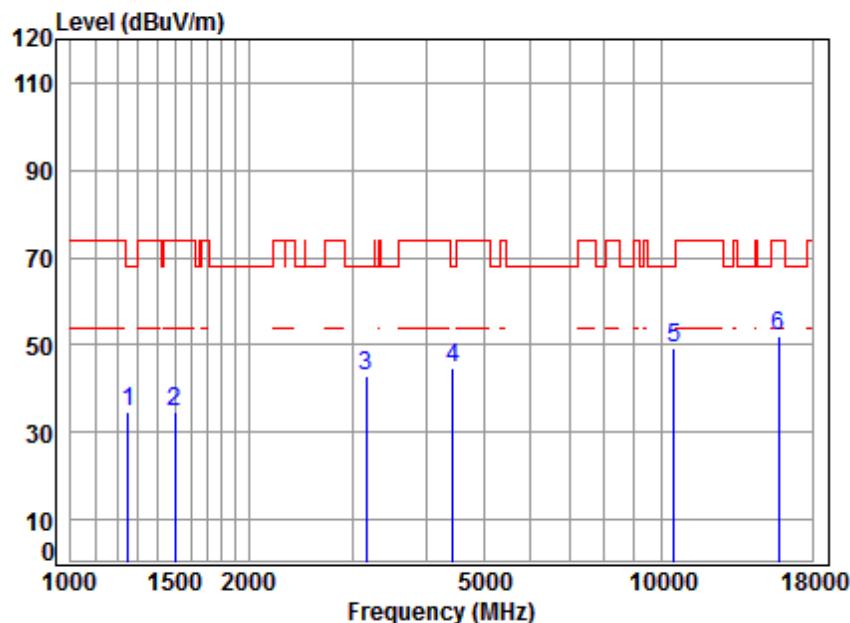

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1249.269	4.61	24.81	41.22	46.45	34.65	68.20	-33.55	peak
2	1503.119	5.48	25.81	41.41	44.60	34.48	74.00	-39.52	peak
3	3159.355	6.14	31.17	42.14	47.94	43.11	68.20	-25.09	peak
4	4443.453	7.50	33.50	42.41	45.96	44.55	68.20	-23.65	peak
5	10520.000	11.30	37.70	37.56	37.92	49.36	68.20	-18.84	peak
6	15780.000	14.66	40.87	39.22	35.69	52.00	74.00	-22.00	peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

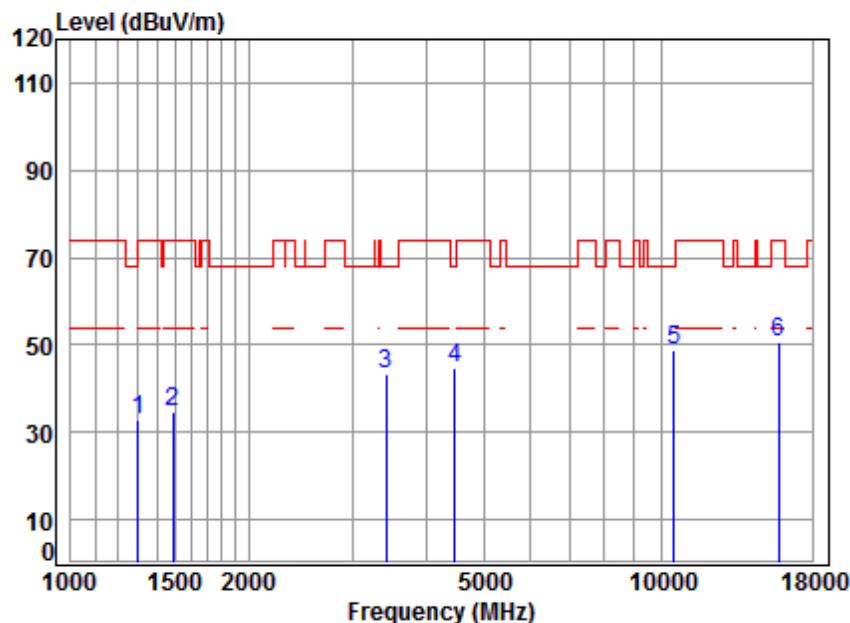

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.23	32.80	74.00	-41.20	peak	
2	1490.142	5.45	25.76	41.40	44.70	34.51	74.00	-39.49	peak	
3	3415.787	6.38	31.57	42.20	47.48	43.23	68.20	-24.97	peak	
4	4469.214	7.53	33.55	42.41	45.86	44.53	68.20	-23.67	peak	
5	10520.000	11.30	37.70	37.56	37.34	48.78	68.20	-19.42	peak	
6	15780.000	14.66	40.87	39.22	34.16	50.47	74.00	-23.53	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

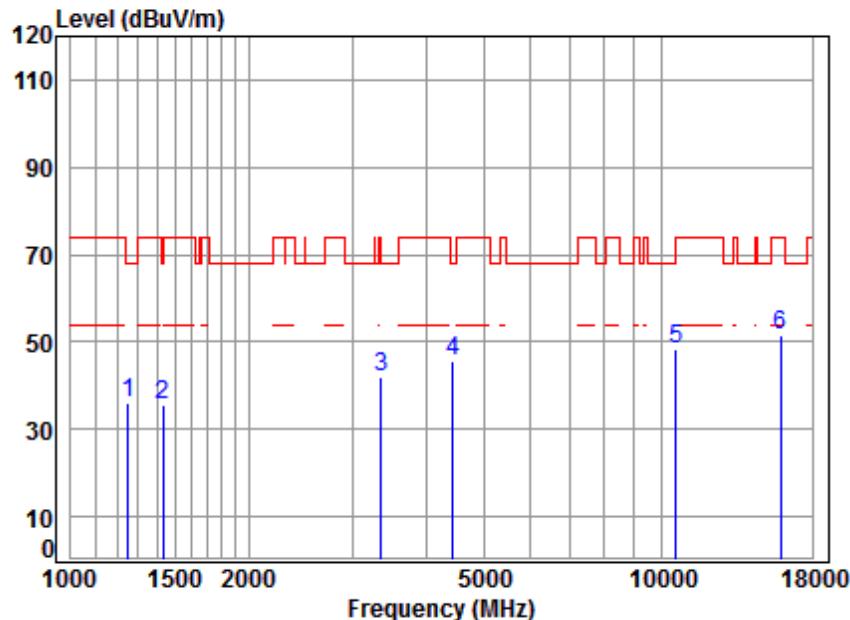

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	47.74	35.94	68.20	-32.26	peak	
2	1431.047	5.26	25.54	41.36	46.26	35.70	68.20	-32.50	peak	
3	3357.061	6.33	31.48	42.19	46.51	42.13	74.00	-31.87	peak	
4	4430.628	7.48	33.48	42.41	47.08	45.63	68.20	-22.57	peak	
5	10600.000	11.36	37.72	37.62	36.93	48.39	68.20	-19.81	peak	
6	15900.000	14.84	40.94	39.33	35.02	51.47	74.00	-22.53	peak	


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

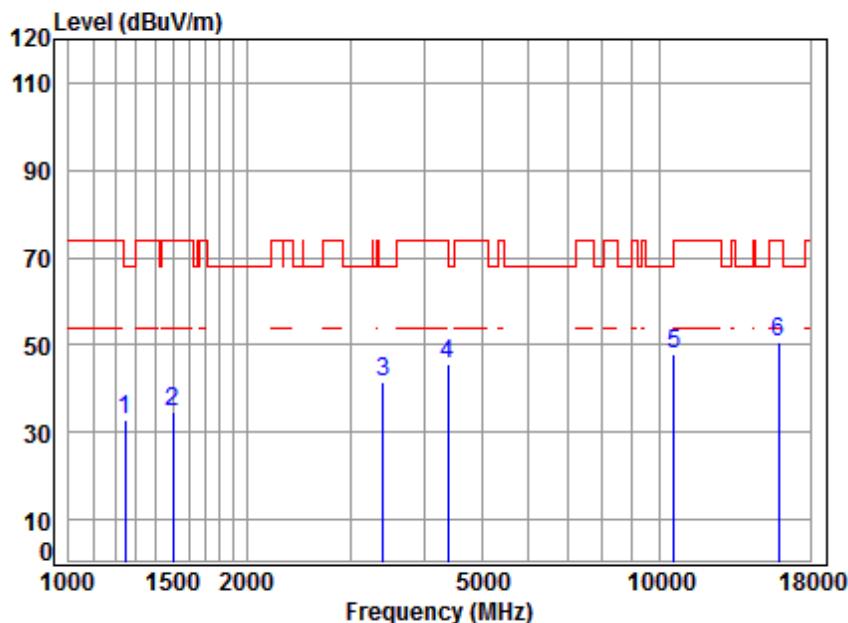

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1245.663	4.60	24.79	41.22	44.68	32.85	68.20	-35.35 peak
2 1498.781	5.48	25.80	41.41	44.99	34.86	74.00	-39.14 peak
3 3405.929	6.38	31.56	42.20	45.68	41.42	68.20	-26.78 peak
4 4392.376	7.44	33.42	42.40	47.05	45.51	74.00	-28.49 peak
5 10600.000	11.36	37.72	37.62	36.24	47.70	68.20	-20.50 peak
6 15900.000	14.84	40.94	39.33	34.26	50.71	74.00	-23.29 peak


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

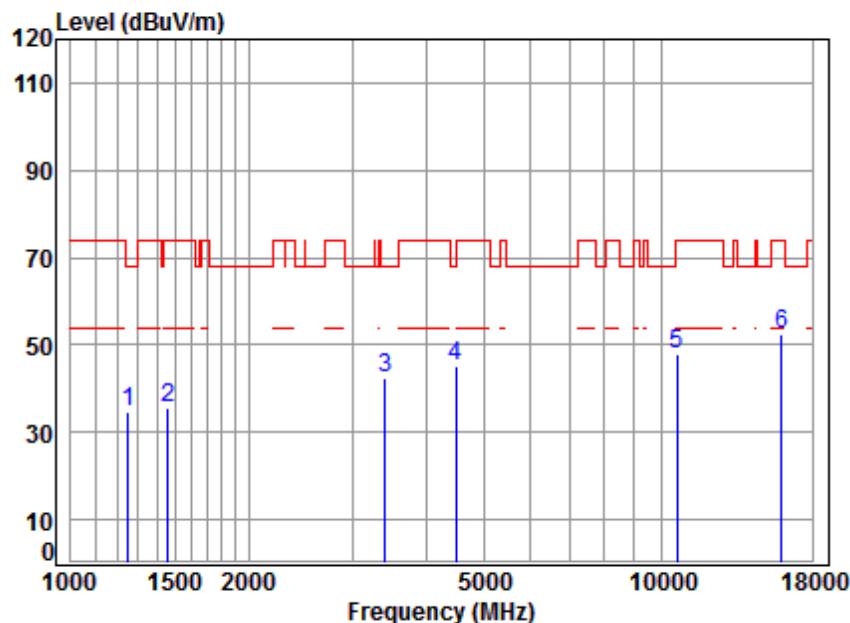

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	46.52	34.72	68.20	-33.48	peak	
2	1460.295	5.35	25.65	41.38	45.98	35.60	74.00	-38.40	peak	
3	3405.929	6.38	31.56	42.20	46.81	42.55	68.20	-25.65	peak	
4	4495.125	7.55	33.59	42.42	46.64	45.36	68.20	-22.84	peak	
5	10640.000	11.39	37.73	37.64	36.42	47.90	74.00	-26.10	peak	
6	15960.000	14.93	40.98	39.38	35.82	52.35	74.00	-21.65	peak	


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

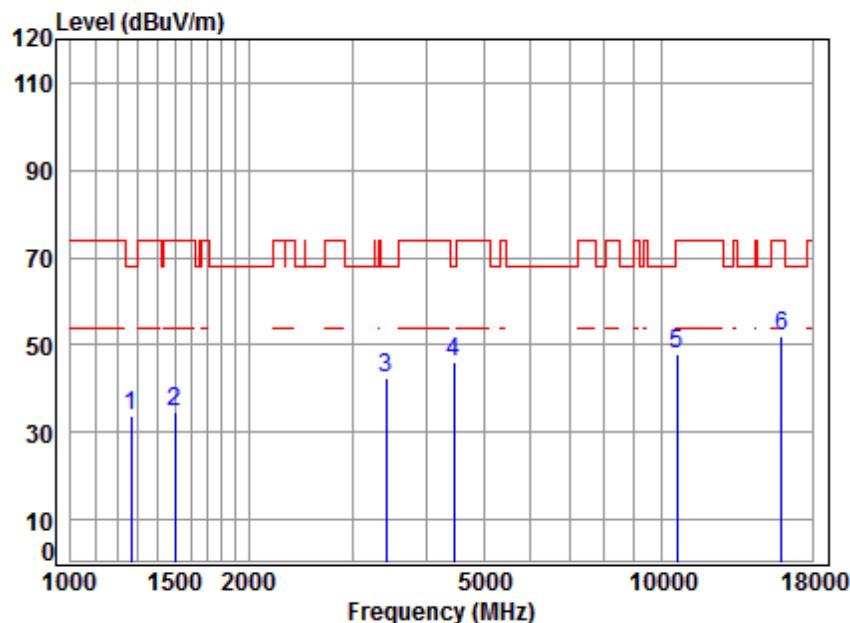

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1267.454	4.68	24.89	41.24	45.61	33.94	68.20	-34.26 peak
2	1503.119	5.48	25.81	41.41	44.62	34.50	74.00	-39.50 peak
3	3415.787	6.38	31.57	42.20	46.75	42.50	68.20	-25.70 peak
4	4456.315	7.51	33.53	42.41	47.23	45.86	68.20	-22.34 peak
5	10640.000	11.39	37.73	37.64	36.25	47.73	74.00	-26.27 peak
6	15960.000	14.93	40.98	39.38	35.31	51.84	74.00	-22.16 peak


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

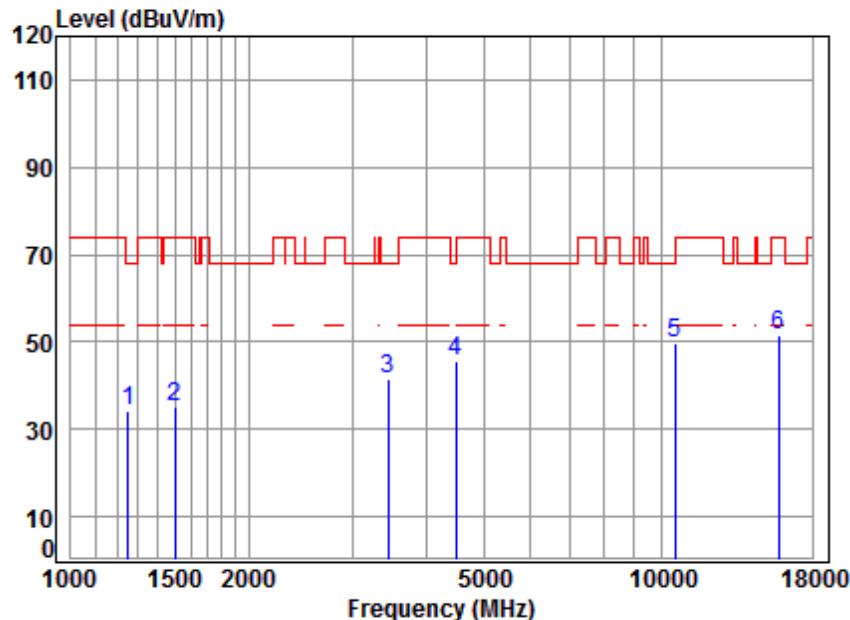

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	46.24	34.44	68.20	-33.76 peak
2 1503.119	5.48	25.81	41.41	45.38	35.26	74.00	-38.74 peak
3 3445.535	6.41	31.62	42.21	45.89	41.71	68.20	-26.49 peak
4 4495.125	7.55	33.59	42.42	47.01	45.73	68.20	-22.47 peak
5 10540.000	11.32	37.71	37.57	38.18	49.64	68.20	-18.56 peak
6 15810.000	14.71	40.89	39.25	35.01	51.36	74.00	-22.64 peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

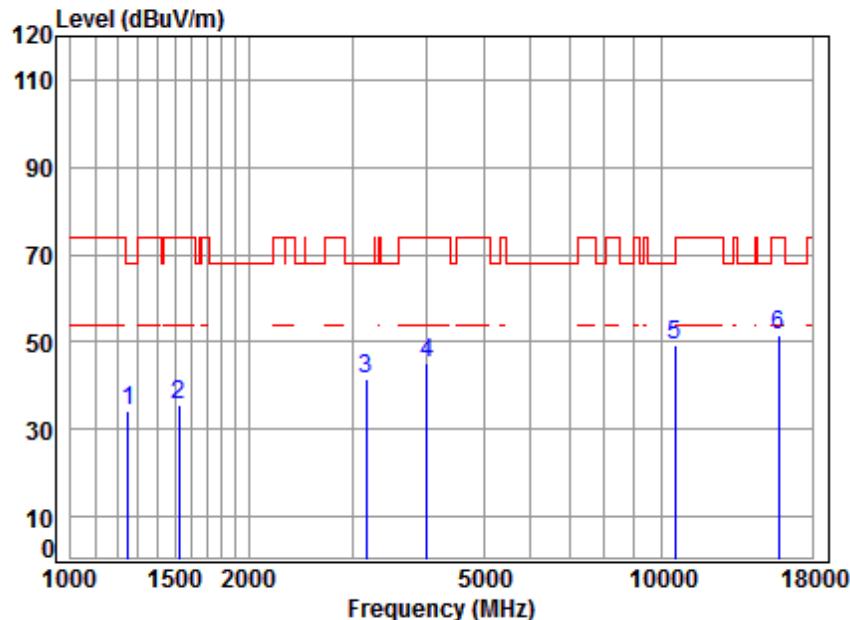

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1252.885	4.62	24.82	41.23	46.21	34.42	68.20	-33.78	peak
2	1525.000	5.45	25.91	41.42	45.64	35.58	74.00	-38.42	peak
3	3168.500	6.15	31.18	42.14	46.13	41.32	68.20	-26.88	peak
4	4004.339	6.99	32.71	42.33	48.01	45.38	74.00	-28.62	peak
5	10540.000	11.32	37.71	37.57	37.86	49.32	68.20	-18.88	peak
6	15810.000	14.71	40.89	39.25	35.05	51.40	74.00	-22.60	peak


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

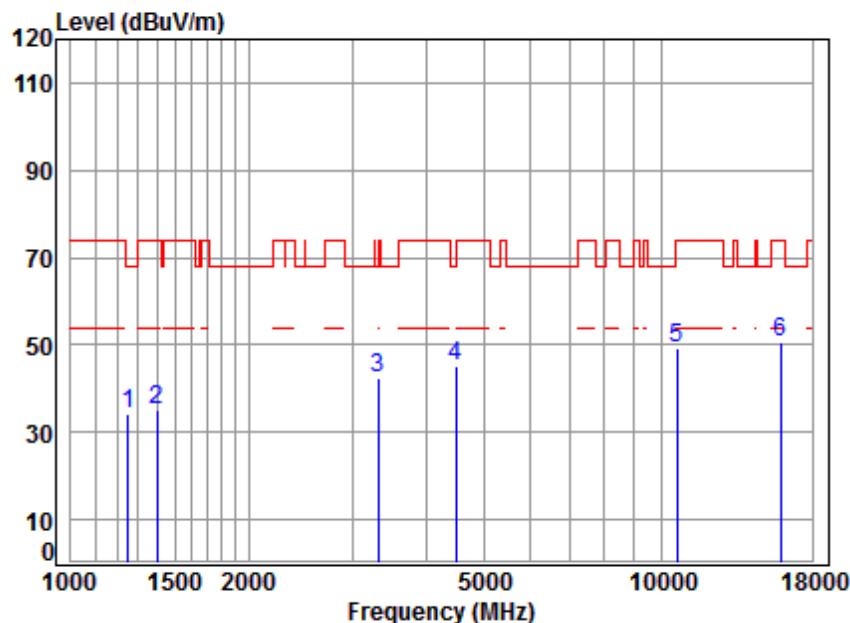

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1249.269	4.61	24.81	41.22	46.19	34.39	68.20	-33.81 peak
2	1402.384	5.16	25.43	41.34	46.01	35.26	74.00	-38.74 peak
3	3318.471	6.29	31.42	42.18	47.03	42.56	68.20	-25.64 peak
4	4495.125	7.55	33.59	42.42	46.60	45.32	68.20	-22.88 peak
5	10620.000	11.37	37.72	37.63	37.84	49.30	74.00	-24.70 peak
6	15930.000	14.89	40.96	39.36	34.25	50.74	74.00	-23.26 peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

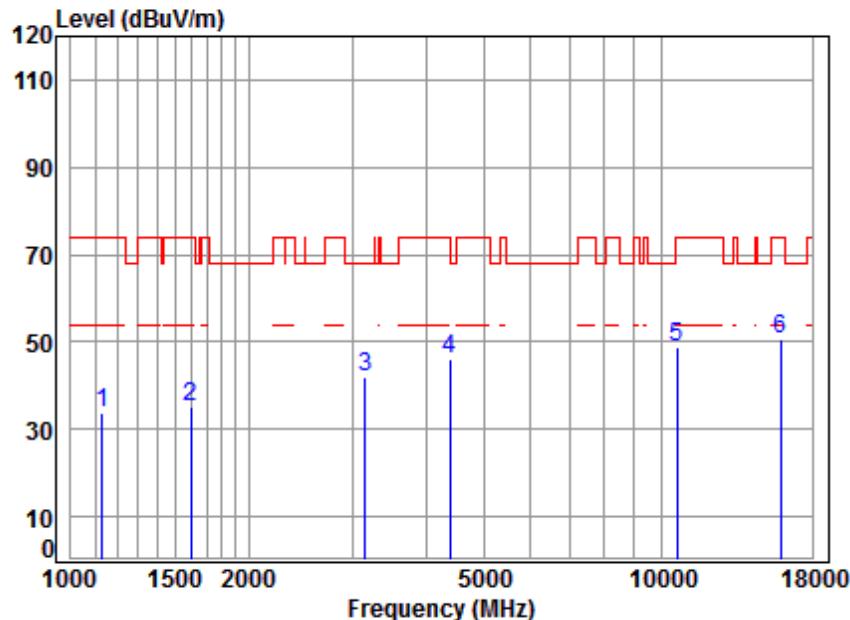

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1129.072	4.13	24.26	41.12	46.64	33.91	74.00	-40.09	peak	
2	1597.181	5.35	26.24	41.47	44.79	34.91	74.00	-39.09	peak	
3	3150.237	6.13	31.15	42.14	47.06	42.20	68.20	-26.00	peak	
4	4392.376	7.44	33.42	42.40	47.44	45.90	74.00	-28.10	peak	
5	10620.000	11.37	37.72	37.63	37.45	48.91	74.00	-25.09	peak	
6	15930.000	14.89	40.96	39.36	34.09	50.58	74.00	-23.42	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

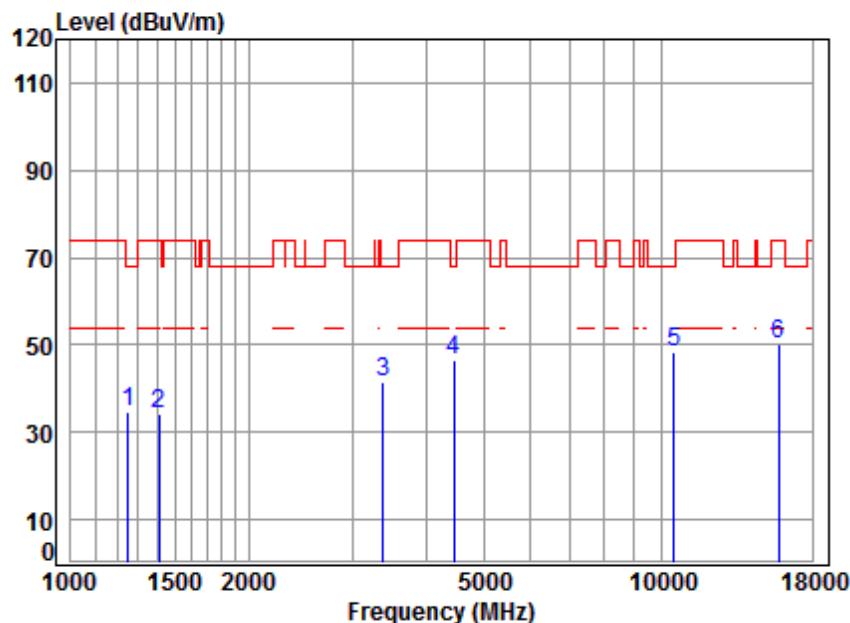

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	46.50	34.70	68.20	-33.50	peak	
2	1410.514	5.19	25.47	41.34	44.87	34.19	74.00	-39.81	peak	
3	3376.523	6.35	31.51	42.19	45.95	41.62	68.20	-26.58	peak	
4	4456.315	7.51	33.53	42.41	47.75	46.38	68.20	-21.82	peak	
5	10520.000	11.30	37.70	37.56	36.84	48.28	68.20	-19.92	peak	
6	15780.000	14.66	40.87	39.22	34.00	50.31	74.00	-23.69	peak	


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

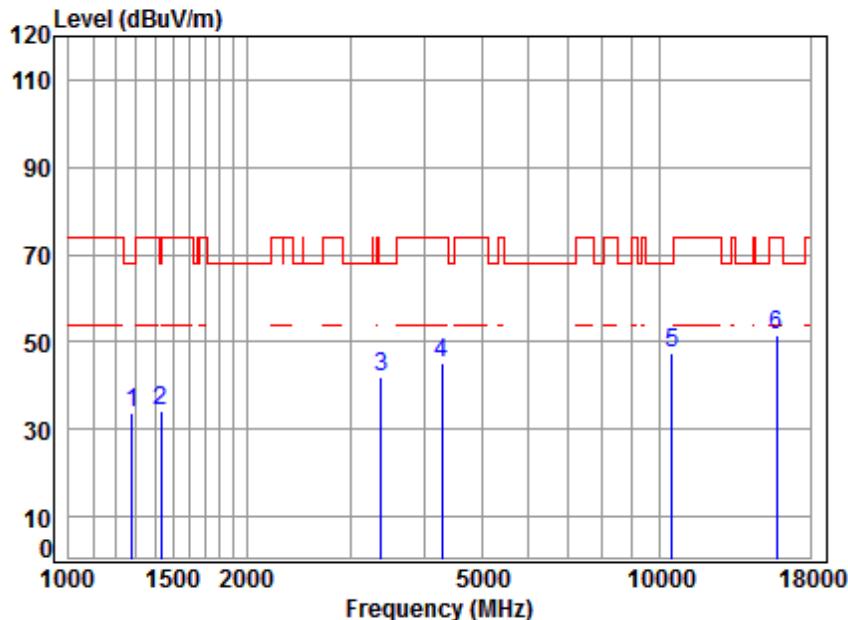

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1282.193	4.73	24.95	41.25	45.11	33.54	68.20 -34.66 peak
2	1431.047	5.26	25.54	41.36	44.96	34.40	68.20 -33.80 peak
3	3386.297	6.36	31.53	42.19	46.33	42.03	68.20 -26.17 peak
4	4291.977	7.33	33.24	42.38	47.12	45.31	74.00 -28.69 peak
5	10520.000	11.30	37.70	37.56	36.03	47.47	68.20 -20.73 peak
6	15780.000	14.66	40.87	39.22	35.03	51.34	74.00 -22.66 peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

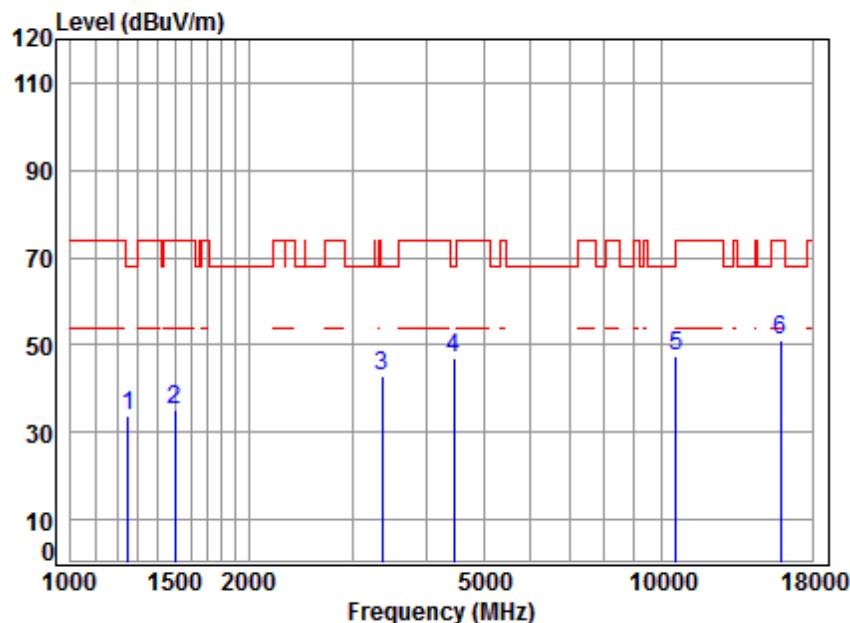

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	45.68	33.88	68.20	-34.32	peak	
2	1503.119	5.48	25.81	41.41	45.43	35.31	74.00	-38.69	peak	
3	3366.778	6.34	31.50	42.19	47.05	42.70	68.20	-25.50	peak	
4	4456.315	7.51	33.53	42.41	48.35	46.98	68.20	-21.22	peak	
5	10600.000	11.36	37.72	37.62	36.17	47.63	68.20	-20.57	peak	
6	15900.000	14.84	40.94	39.33	34.72	51.17	74.00	-22.83	peak	


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

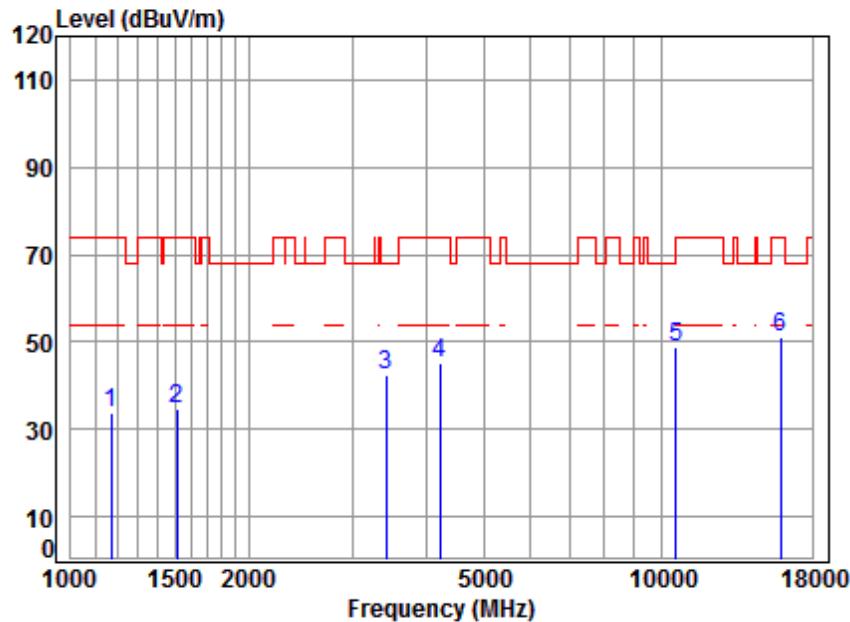

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					Level	Line		
1172.303	4.31	24.46	41.16	46.09	33.70	74.00	-40.30	peak
1511.833	5.46	25.85	41.41	44.70	34.60	74.00	-39.40	peak
3415.787	6.38	31.57	42.20	46.51	42.26	68.20	-25.94	peak
4218.186	7.24	33.11	42.37	47.14	45.12	74.00	-28.88	peak
10600.000	11.36	37.72	37.62	37.14	48.60	68.20	-19.60	peak
15900.000	14.84	40.94	39.33	34.56	51.01	74.00	-22.99	peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

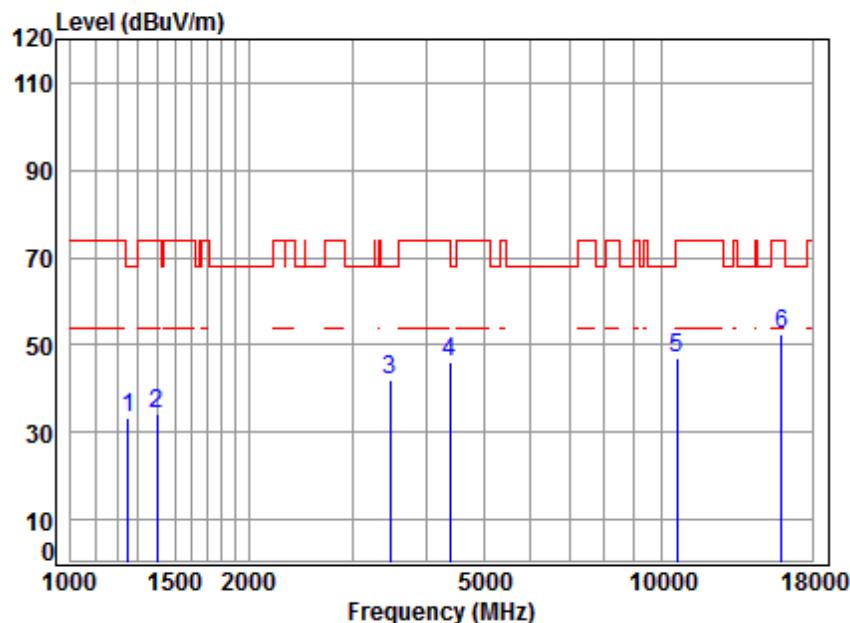

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	45.11	33.31	68.20	-34.89 peak
2 1398.336	5.15	25.42	41.34	44.83	34.06	74.00	-39.94 peak
3 3475.541	6.44	31.66	42.22	46.28	42.16	68.20	-26.04 peak
4 4379.699	7.43	33.39	42.40	47.49	45.91	74.00	-28.09 peak
5 10640.000	11.39	37.73	37.64	35.68	47.16	74.00	-26.84 peak
6 15960.000	14.93	40.98	39.38	36.01	52.54	74.00	-21.46 peak


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

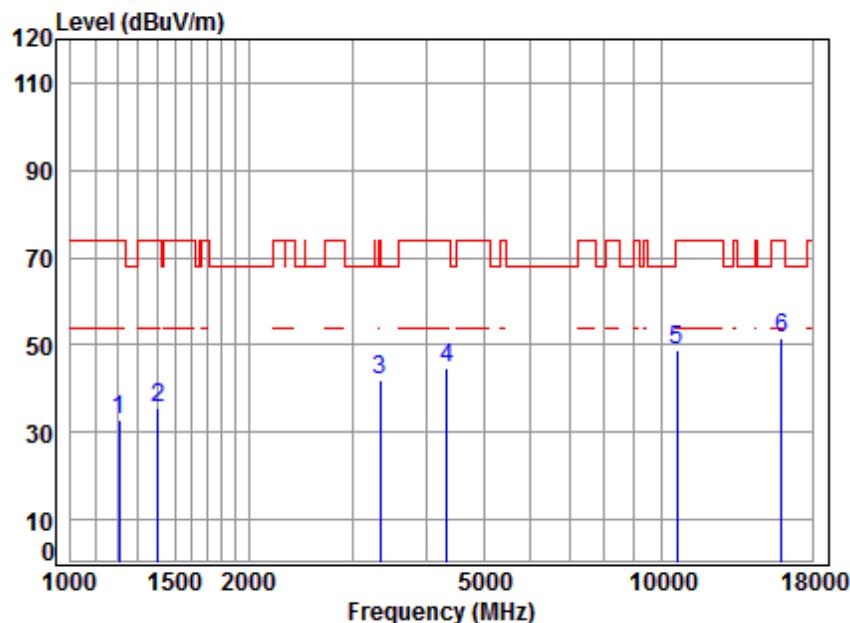

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1206.682	4.44	24.62	41.19	45.13	33.00	74.00	-41.00 peak
2 1406.443	5.17	25.45	41.34	46.34	35.62	74.00	-38.38 peak
3 3337.710	6.31	31.45	42.18	46.26	41.84	74.00	-32.16 peak
4 4341.886	7.38	33.33	42.39	46.62	44.94	74.00	-29.06 peak
5 10640.000	11.39	37.73	37.64	37.44	48.92	74.00	-25.08 peak
6 15960.000	14.93	40.98	39.38	34.81	51.34	74.00	-22.66 peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

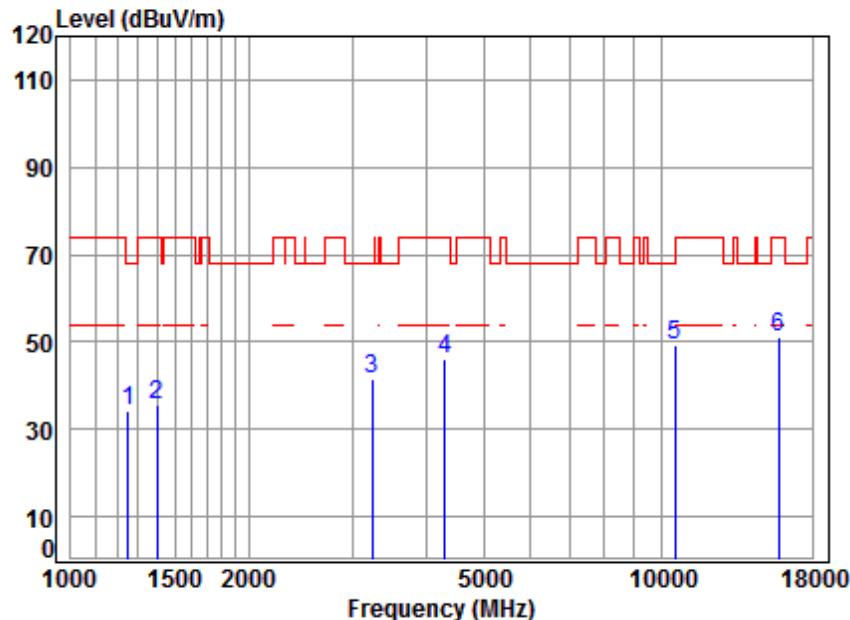

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	45.81	34.01	68.20	-34.19	peak	
2	1398.336	5.15	25.42	41.34	46.27	35.50	74.00	-38.50	peak	
3	3233.260	6.21	31.29	42.16	46.36	41.70	68.20	-26.50	peak	
4	4304.400	7.34	33.26	42.38	47.98	46.20	74.00	-27.80	peak	
5	10540.000	11.32	37.71	37.57	37.73	49.19	68.20	-19.01	peak	
6	15810.000	14.71	40.89	39.25	34.87	51.22	74.00	-22.78	peak	


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

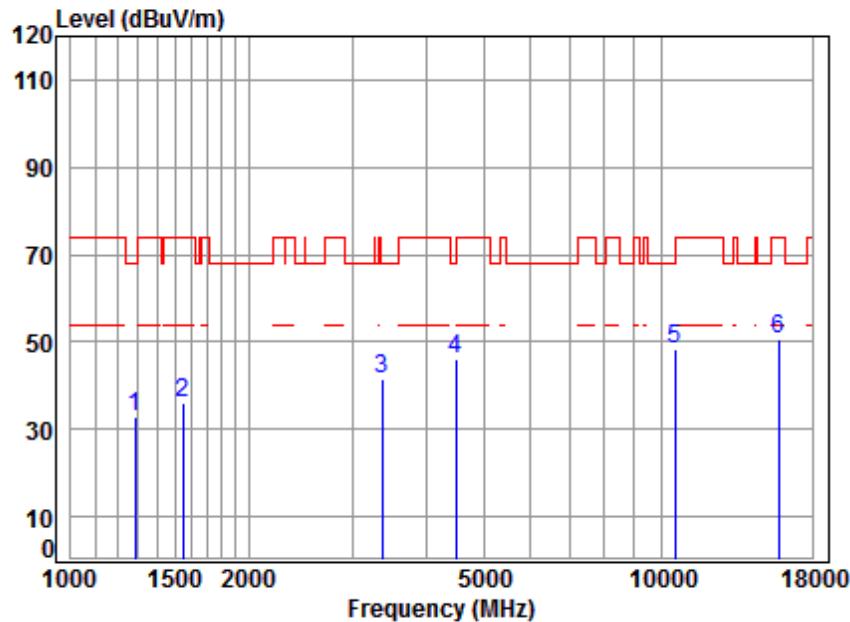

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1285.904	4.75	24.96	41.25	44.53	32.99	68.20 -35.21 peak
2	1547.199	5.42	26.02	41.44	46.01	36.01	74.00 -37.99 peak
3	3366.778	6.34	31.50	42.19	45.87	41.52	68.20 -26.68 peak
4	4482.150	7.54	33.57	42.41	47.38	46.08	68.20 -22.12 peak
5	10540.000	11.32	37.71	37.57	37.07	48.53	68.20 -19.67 peak
6	15810.000	14.71	40.89	39.25	34.24	50.59	74.00 -23.41 peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

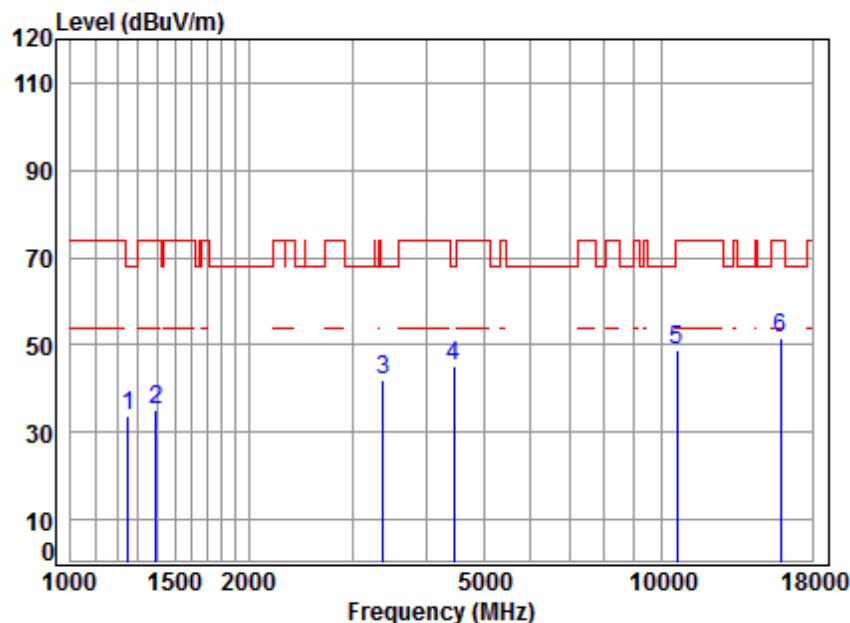

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	45.58	33.78	68.20	-34.42	peak	
2	1394.300	5.13	25.40	41.33	46.03	35.23	74.00	-38.77	peak	
3	3386.297	6.36	31.53	42.19	46.47	42.17	68.20	-26.03	peak	
4	4456.315	7.51	33.53	42.41	46.44	45.07	68.20	-23.13	peak	
5	10620.000	11.37	37.72	37.63	37.23	48.69	74.00	-25.31	peak	
6	15930.000	14.89	40.96	39.36	35.21	51.70	74.00	-22.30	peak	


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

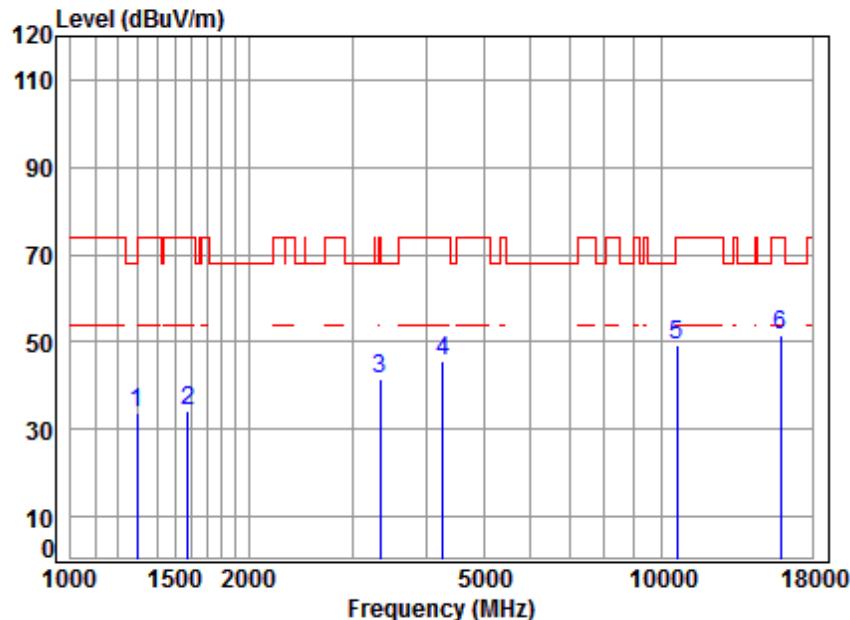

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	4.79	25.01	41.26	45.25	33.79	68.20	-34.41 peak
2 1578.822	5.38	26.16	41.46	44.03	34.11	74.00	-39.89 peak
3 3347.371	6.32	31.47	42.19	45.75	41.35	74.00	-32.65 peak
4 4267.237	7.30	33.19	42.38	47.64	45.75	74.00	-28.25 peak
5 10620.000	11.37	37.72	37.63	37.75	49.21	74.00	-24.79 peak
6 15930.000	14.89	40.96	39.36	34.90	51.39	74.00	-22.61 peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

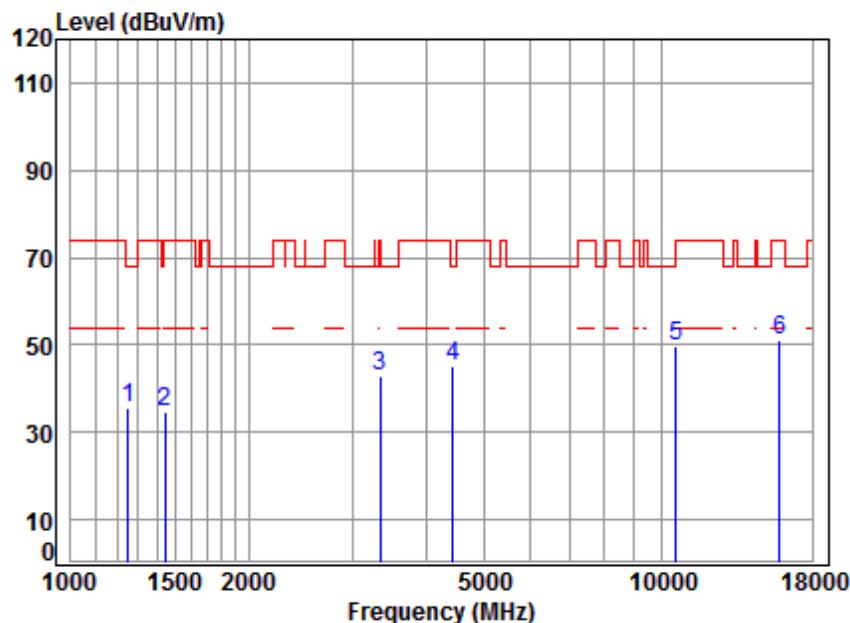

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5290 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	47.46	35.66	68.20	-32.54	peak	
2	1443.509	5.30	25.59	41.37	45.16	34.68	74.00	-39.32	peak	
3	3337.710	6.31	31.45	42.18	47.13	42.71	74.00	-31.29	peak	
4	4443.453	7.50	33.50	42.41	46.71	45.30	68.20	-22.90	peak	
5	10580.000	11.35	37.72	37.60	38.19	49.66	68.20	-18.54	peak	
6	15870.000	14.80	40.92	39.30	34.54	50.96	74.00	-23.04	peak	

Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

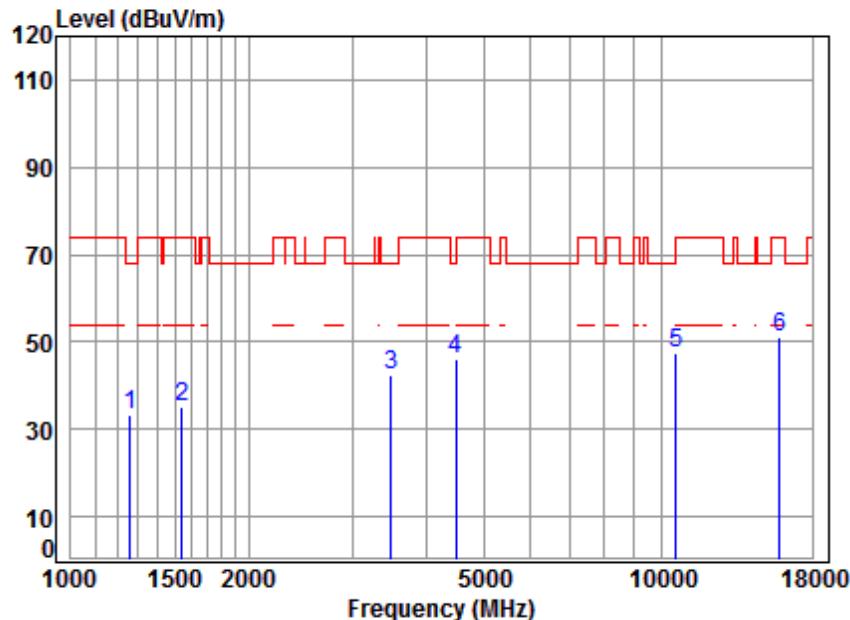


Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5290 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1260.149	4.65	24.85	41.23	44.89	33.16	68.20	-35.04 peak
2	1542.733	5.42	26.00	41.43	45.28	35.27	74.00	-38.73 peak
3	3485.601	6.45	31.68	42.22	46.74	42.65	68.20	-25.55 peak
4	4495.125	7.55	33.59	42.42	47.18	45.90	68.20	-22.30 peak
5	10580.000	11.35	37.72	37.60	35.97	47.44	68.20	-20.76 peak
6	15870.000	14.80	40.92	39.30	34.70	51.12	74.00	-22.88 peak

Test data for Antenna2/ Band 2C:


Mode:d; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

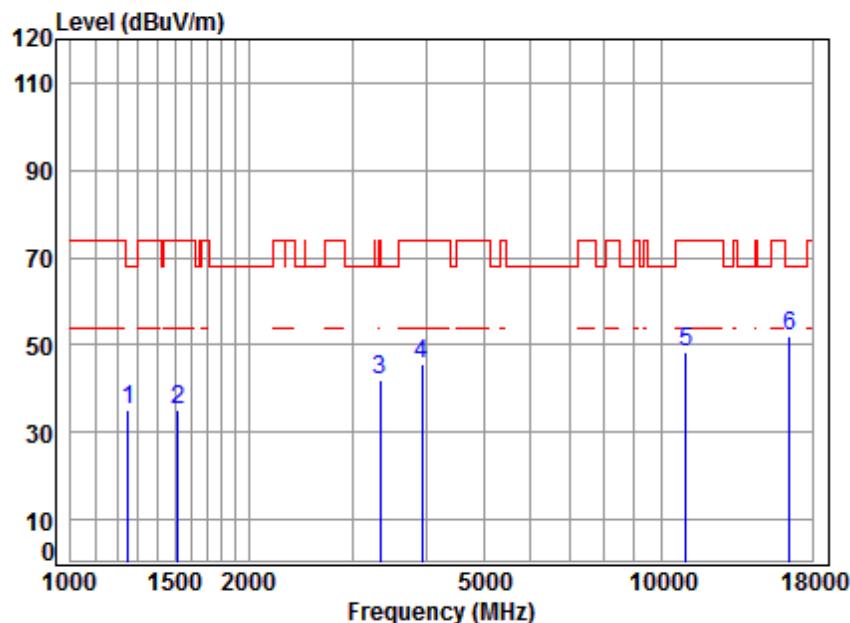

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	46.84	35.04	68.20	-33.16 peak
2 1516.210	5.46	25.87	41.42	45.32	35.23	74.00	-38.77 peak
3 3337.710	6.31	31.45	42.18	46.46	42.04	74.00	-31.96 peak
4 3935.493	6.92	32.58	42.31	48.27	45.46	74.00	-28.54 peak
5 11000.000	11.63	37.80	37.88	36.78	48.33	74.00	-25.67 peak
6 16500.000	14.50	42.20	39.86	35.02	51.86	68.20	-16.34 peak


Mode:d; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

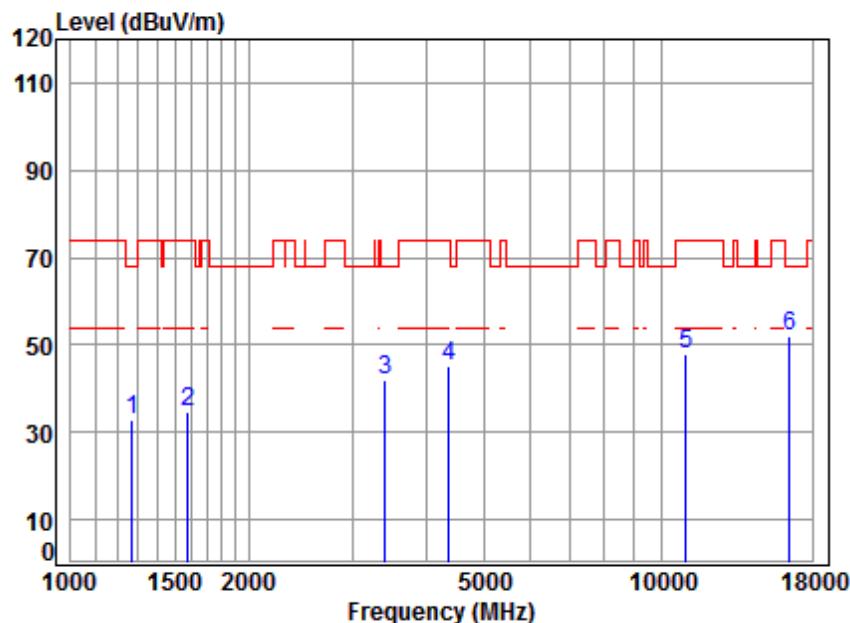

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1271.123	4.69	24.90	41.24	44.61	32.96	68.20 -35.24 peak
2	1578.822	5.38	26.16	41.46	44.69	34.77	74.00 -39.23 peak
3	3405.929	6.38	31.56	42.20	46.38	42.12	68.20 -26.08 peak
4	4367.058	7.41	33.37	42.39	46.93	45.32	74.00 -28.68 peak
5	11000.000	11.63	37.80	37.88	36.42	47.97	74.00 -26.03 peak
6	16500.000	14.50	42.20	39.86	35.26	52.10	68.20 -16.10 peak


Mode:d; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

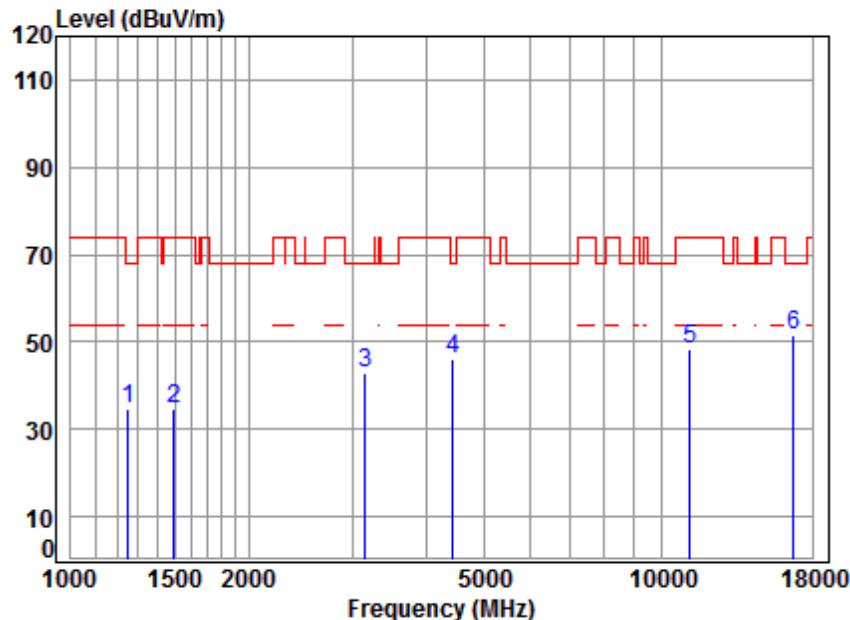

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	46.48	34.68	68.20	-33.52	peak	
2	1494.455	5.46	25.78	41.40	44.91	34.75	74.00	-39.25	peak	
3	3150.237	6.13	31.15	42.14	47.74	42.88	68.20	-25.32	peak	
4	4443.453	7.50	33.50	42.41	47.36	45.95	68.20	-22.25	peak	
5	11160.000	11.80	37.83	37.98	36.70	48.35	74.00	-25.65	peak	
6	16740.000	15.57	42.39	40.07	33.59	51.48	68.20	-16.72	peak	


Mode:d; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

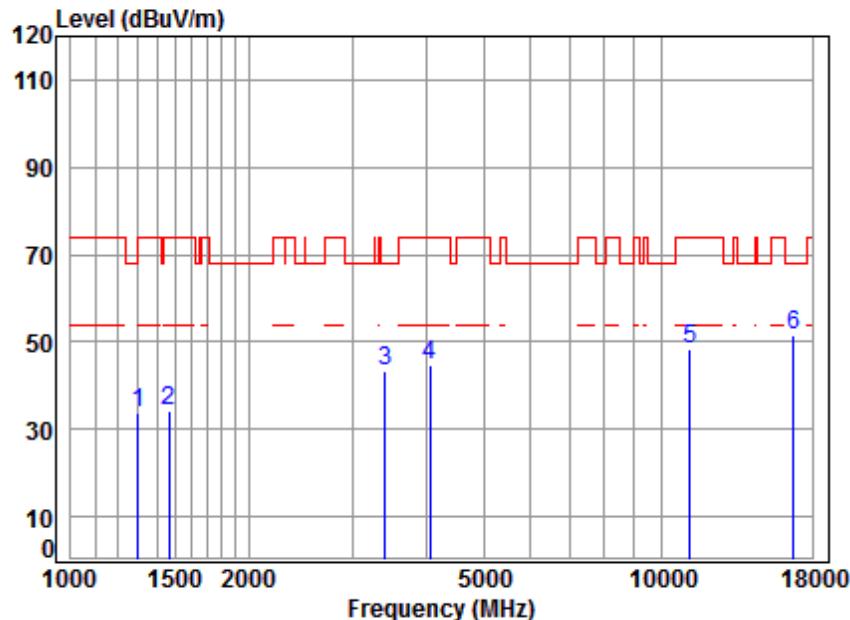

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	45.12	33.69	74.00	-40.31	peak	
2	1468.761	5.38	25.69	41.38	44.34	34.03	74.00	-39.97	peak	
3	3405.929	6.38	31.56	42.20	47.42	43.16	68.20	-25.04	peak	
4	4062.629	7.06	32.82	42.34	47.12	44.66	74.00	-29.34	peak	
5	11160.000	11.80	37.83	37.98	36.71	48.36	74.00	-25.64	peak	
6	16740.000	15.57	42.39	40.07	33.45	51.34	68.20	-16.86	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

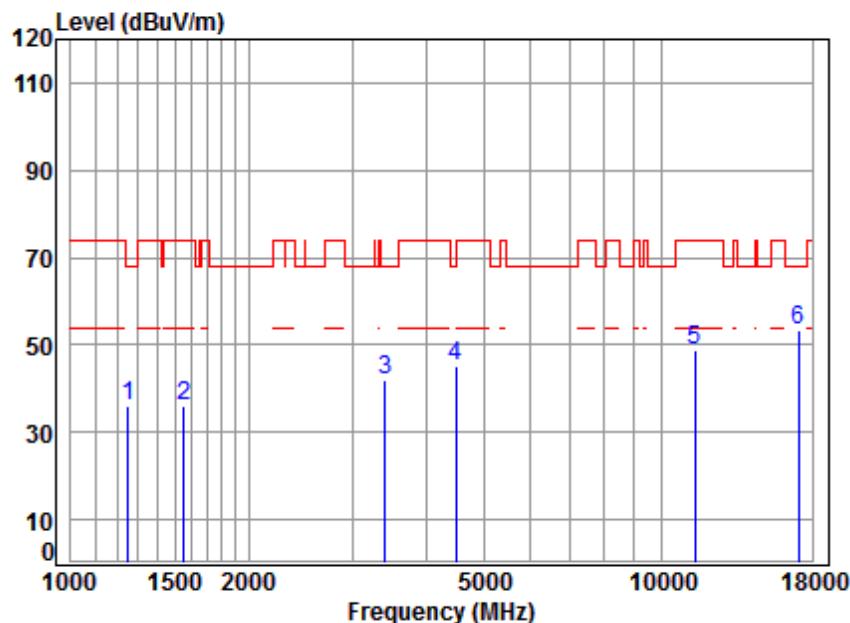

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	47.77	35.97	68.20	-32.23	peak	
2	1551.677	5.41	26.04	41.44	45.94	35.95	74.00	-38.05	peak	
3	3405.929	6.38	31.56	42.20	46.16	41.90	68.20	-26.30	peak	
4	4495.125	7.55	33.59	42.42	46.26	44.98	68.20	-23.22	peak	
5	11400.000	12.04	37.88	38.13	37.20	48.99	74.00	-25.01	peak	
6	17100.000	16.49	42.66	40.37	34.41	53.19	68.20	-15.01	peak	


Mode:d; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

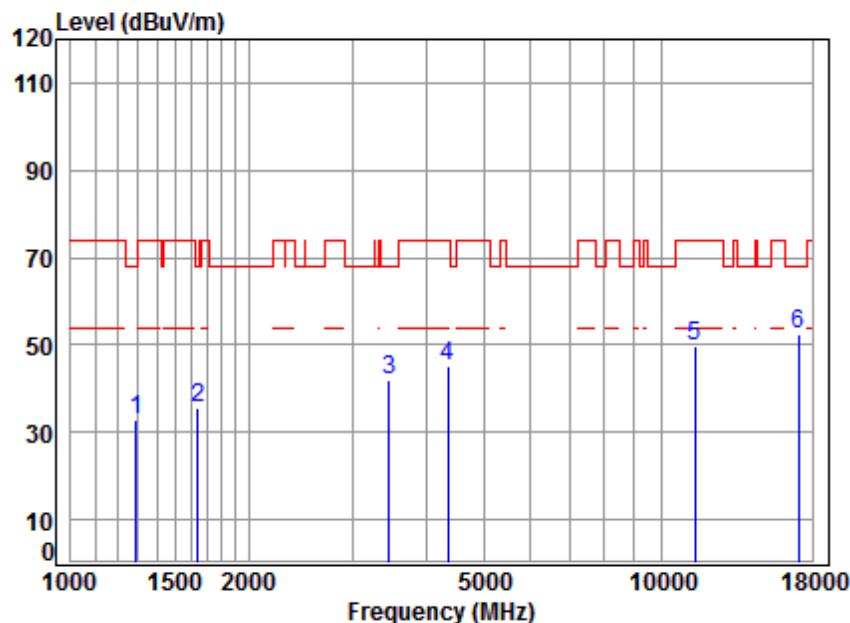

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	4.76	24.98	41.25	44.49	32.98	68.20	-35.22	peak
2	1644.019	5.30	26.44	41.50	45.29	35.53	68.20	-32.67	peak
3	3455.508	6.42	31.63	42.21	46.00	41.84	68.20	-26.36	peak
4	4354.454	7.40	33.35	42.39	46.92	45.28	74.00	-28.72	peak
5	11400.000	12.04	37.88	38.13	37.85	49.64	74.00	-24.36	peak
6	17100.000	16.49	42.66	40.37	33.63	52.41	68.20	-15.79	peak


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

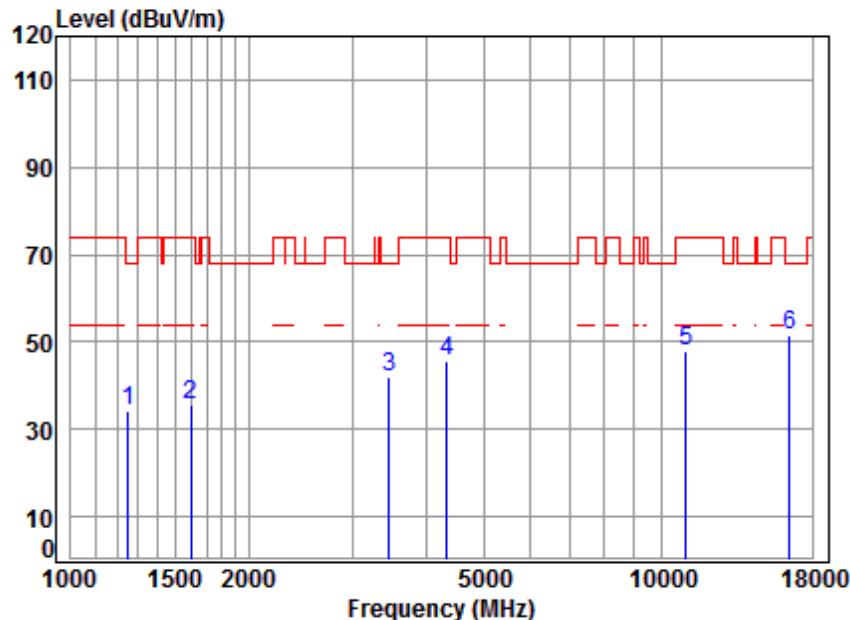

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

Freq	Cable		Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level			
MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	46.22	34.42	68.20	-33.78	peak
2 1597.181	5.35	26.24	41.47	45.54	35.66	74.00	-38.34	peak
3 3455.508	6.42	31.63	42.21	46.23	42.07	68.20	-26.13	peak
4 4341.886	7.38	33.33	42.39	47.20	45.52	74.00	-28.48	peak
5 11000.000	11.63	37.80	37.88	36.36	47.91	74.00	-26.09	peak
6 16500.000	14.50	42.20	39.86	34.89	51.73	68.20	-16.47	peak


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

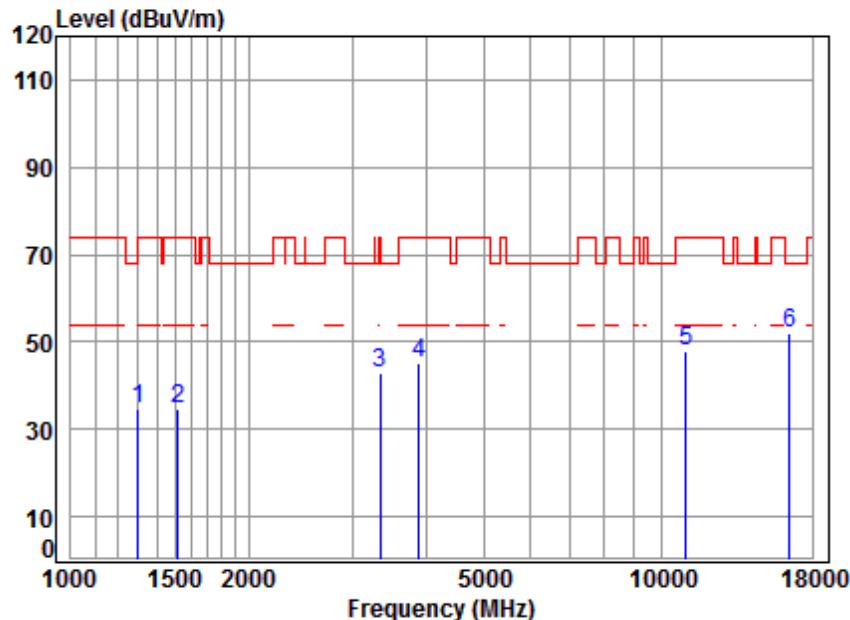

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	45.94	34.51	74.00 -39.49 peak
2	1520.598	5.45	25.89	41.42	44.67	34.59	74.00 -39.41 peak
3	3347.371	6.32	31.47	42.19	47.48	43.08	74.00 -30.92 peak
4	3890.255	6.87	32.49	42.30	48.07	45.13	74.00 -28.87 peak
5	11000.000	11.63	37.80	37.88	36.32	47.87	74.00 -26.13 peak
6	16500.000	14.50	42.20	39.86	35.23	52.07	68.20 -16.13 peak


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

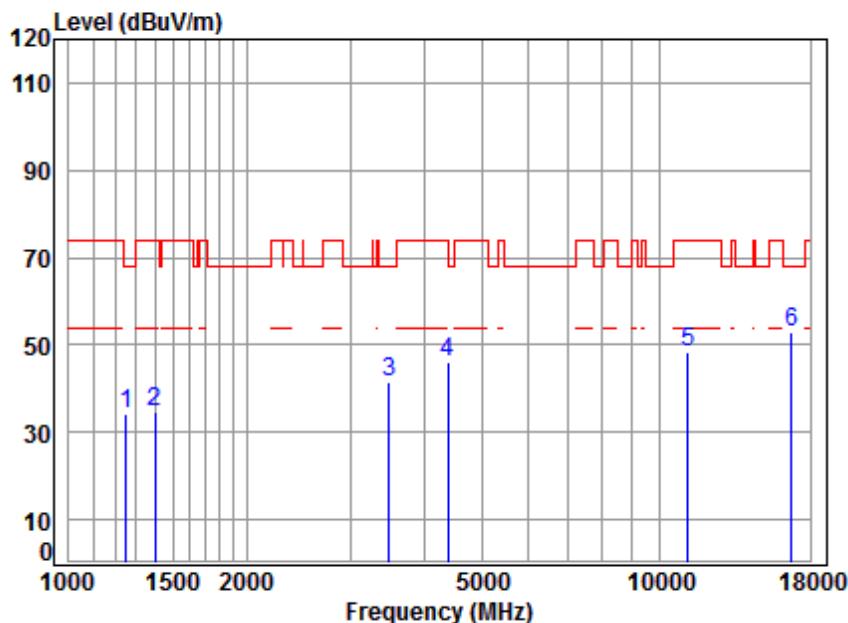

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1249.269	4.61	24.81	41.22	46.11	34.31	68.20	-33.89 peak
2	1398.336	5.15	25.42	41.34	45.28	34.51	74.00	-39.49 peak
3	3485.601	6.45	31.68	42.22	45.55	41.46	68.20	-26.74 peak
4	4379.699	7.43	33.39	42.40	47.50	45.92	74.00	-28.08 peak
5	11160.000	11.80	37.83	37.98	36.94	48.59	74.00	-25.41 peak
6	16740.000	15.57	42.39	40.07	34.91	52.80	68.20	-15.40 peak


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

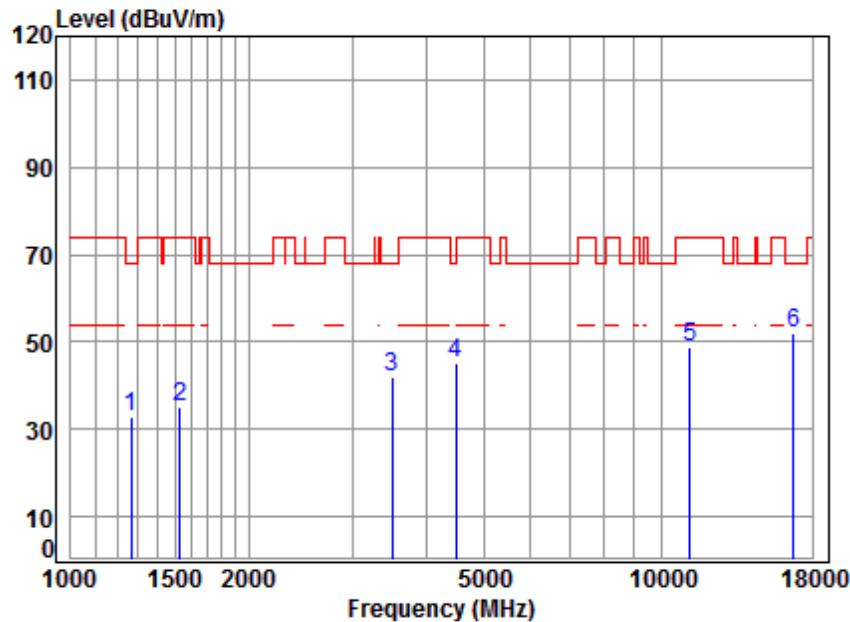

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1263.796	4.66	24.87	41.23	44.53	32.83	68.20	-35.37	peak
2	1529.414	5.44	25.94	41.43	45.38	35.33	74.00	-38.67	peak
3	3495.691	6.46	31.69	42.22	46.23	42.16	68.20	-26.04	peak
4	4495.125	7.55	33.59	42.42	46.43	45.15	68.20	-23.05	peak
5	11160.000	11.80	37.83	37.98	37.13	48.78	74.00	-25.22	peak
6	16740.000	15.57	42.39	40.07	34.35	52.24	68.20	-15.96	peak


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

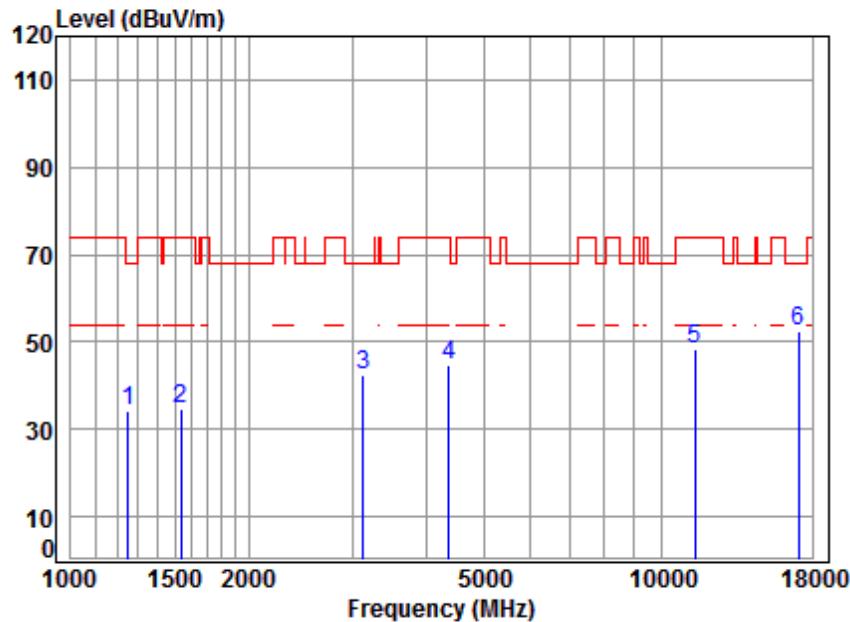

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	46.23	34.43	68.20	-33.77	peak	
2	1533.841	5.44	25.96	41.43	44.61	34.58	74.00	-39.42	peak	
3	3132.079	6.11	31.12	42.13	47.33	42.43	68.20	-25.77	peak	
4	4367.058	7.41	33.37	42.39	46.11	44.50	74.00	-29.50	peak	
5	11400.000	12.04	37.88	38.13	36.58	48.37	74.00	-25.63	peak	
6	17100.000	16.49	42.66	40.37	33.62	52.40	68.20	-15.80	peak	


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

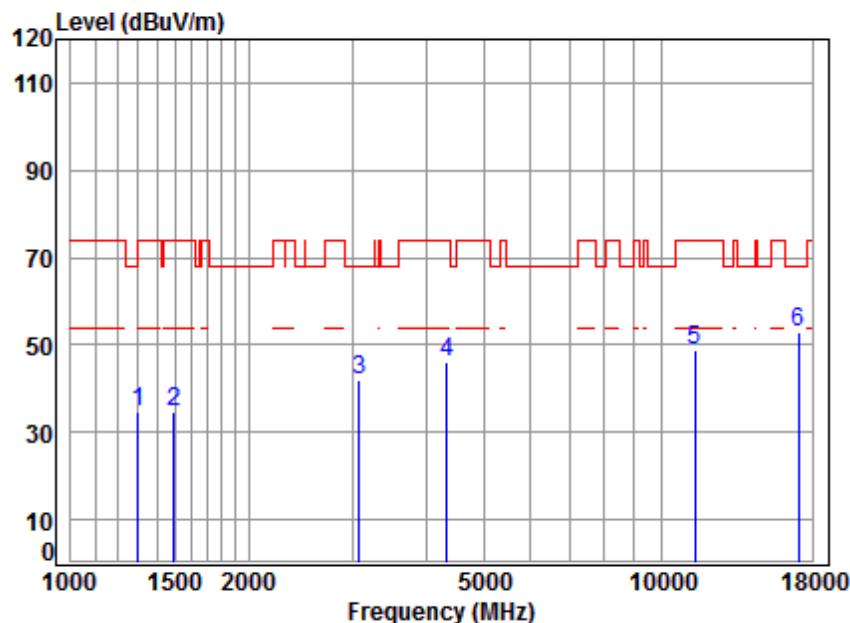

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

Freq	Cable Loss		Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	46.24	34.81	74.00	-39.19	peak
2	1494.455	5.46	25.78	41.40	45.01	34.85	74.00	-39.15	peak
3	3078.229	6.06	31.03	42.12	47.17	42.14	68.20	-26.06	peak
4	4341.886	7.38	33.33	42.39	47.69	46.01	74.00	-27.99	peak
5	11400.000	12.04	37.88	38.13	37.22	49.01	74.00	-24.99	peak
6	17100.000	16.49	42.66	40.37	34.30	53.08	68.20	-15.12	peak


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

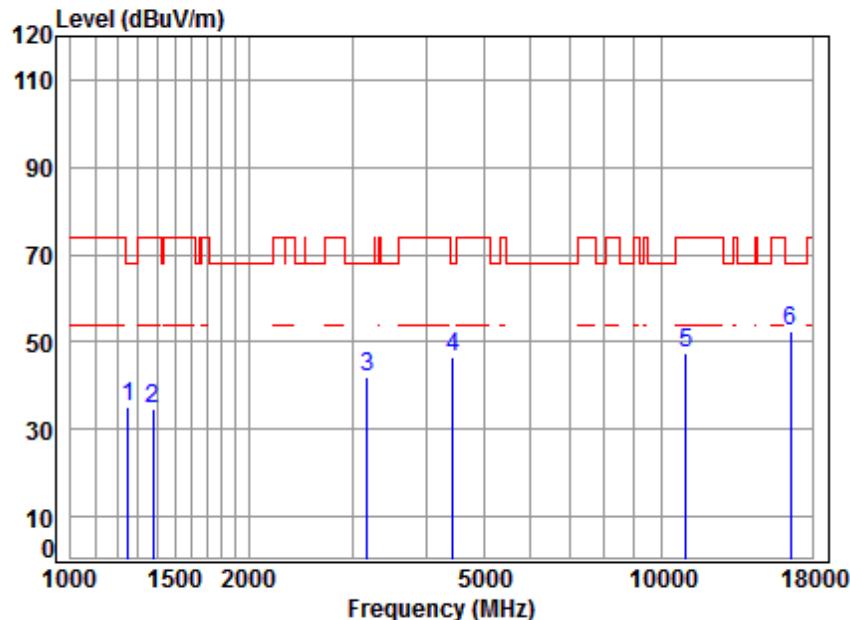

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5510 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1249.269	4.61	24.81	41.22	47.07	35.27	68.20	-32.93	peak
2	1378.273	5.08	25.34	41.32	45.38	34.48	74.00	-39.52	peak
3	3177.672	6.16	31.20	42.15	46.71	41.92	68.20	-26.28	peak
4	4443.453	7.50	33.50	42.41	47.82	46.41	68.20	-21.79	peak
5	11020.000	11.65	37.80	37.89	36.10	47.66	74.00	-26.34	peak
6	16530.000	14.63	42.22	39.89	35.36	52.32	68.20	-15.88	peak


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

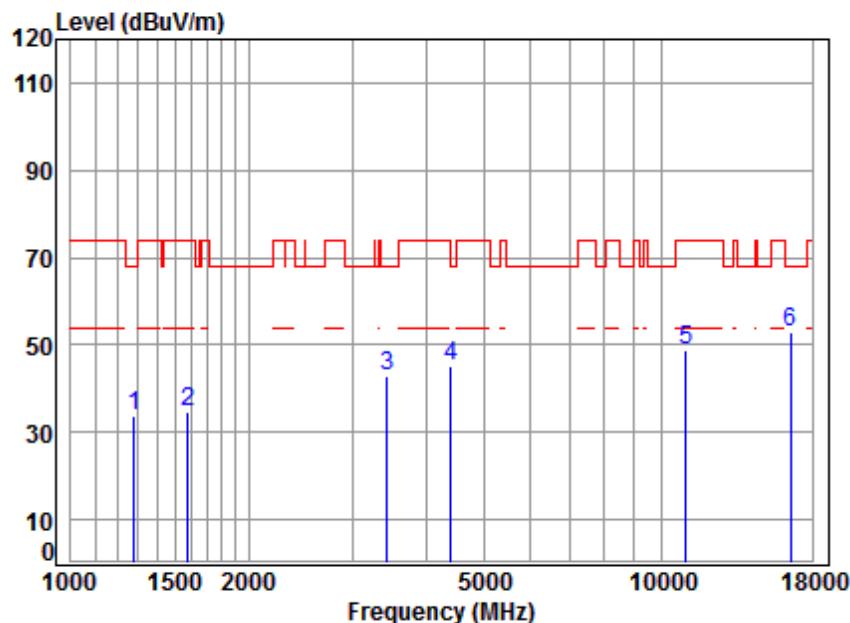

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5510 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	4.73	24.95	41.25	45.35	33.78	68.20	-34.42	peak	
2	1578.822	5.38	26.16	41.46	44.70	34.78	74.00	-39.22	peak	
3	3435.590	6.40	31.60	42.21	47.17	42.96	68.20	-25.24	peak	
4	4405.090	7.46	33.44	42.40	46.71	45.21	68.20	-22.99	peak	
5	11020.000	11.65	37.80	37.89	37.37	48.93	74.00	-25.07	peak	
6	16530.000	14.63	42.22	39.89	36.12	53.08	68.20	-15.12	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:middle

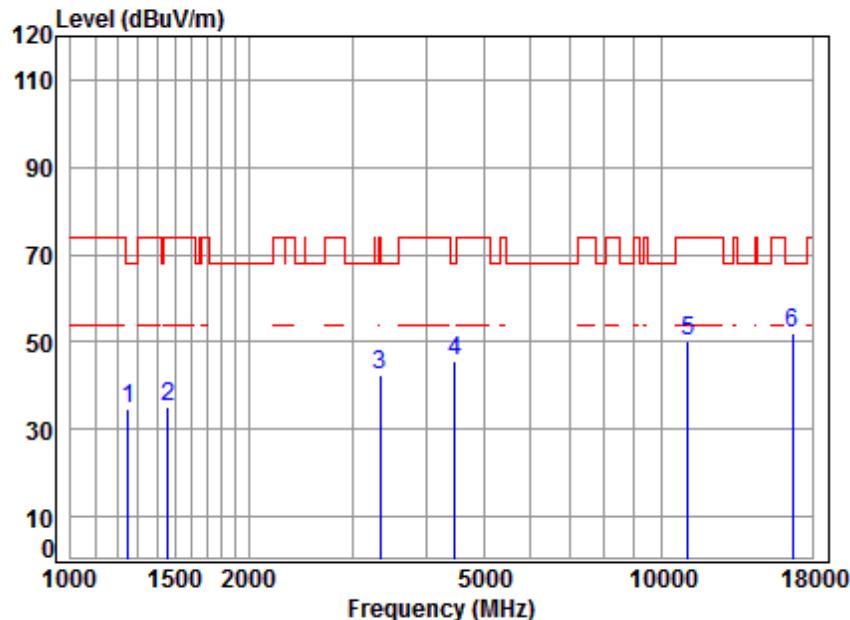

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	46.62	34.82	68.20	-33.38	peak	
2	1460.295	5.35	25.65	41.38	45.63	35.25	74.00	-38.75	peak	
3	3347.371	6.32	31.47	42.19	47.02	42.62	74.00	-31.38	peak	
4	4469.214	7.53	33.55	42.41	47.08	45.75	68.20	-22.45	peak	
5	11100.000	11.73	37.82	37.94	38.38	49.99	74.00	-24.01	peak	
6	16650.000	15.17	42.32	39.99	34.61	52.11	68.20	-16.09	peak	


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:middle

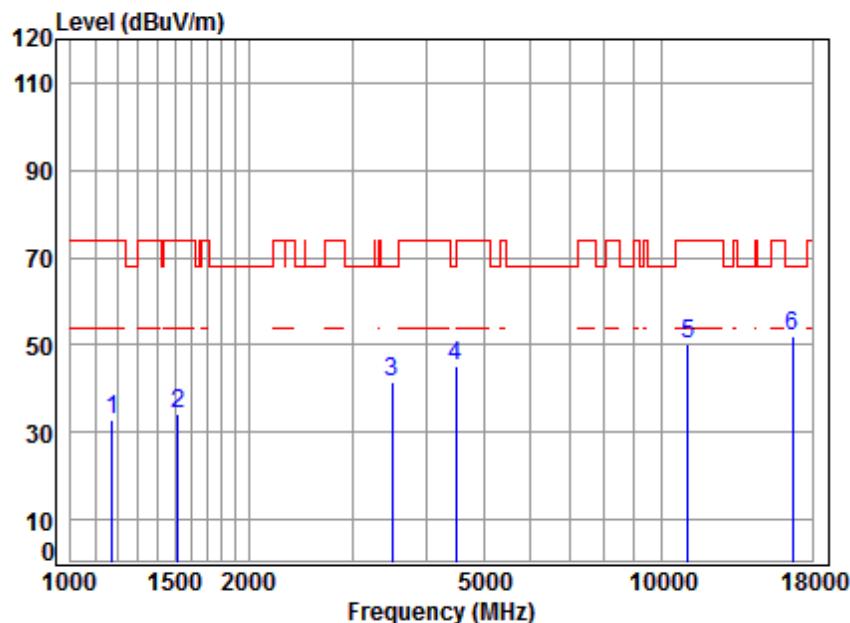

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1175.697	4.32	24.48	41.16	45.39	33.03	74.00	-40.97	peak
2	1520.598	5.45	25.89	41.42	44.43	34.35	74.00	-39.65	peak
3	3495.691	6.46	31.69	42.22	45.51	41.44	68.20	-26.76	peak
4	4482.150	7.54	33.57	42.41	46.48	45.18	68.20	-23.02	peak
5	11100.000	11.73	37.82	37.94	38.62	50.23	74.00	-23.77	peak
6	16650.000	15.17	42.32	39.99	34.70	52.20	68.20	-16.00	peak


Mode:d; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

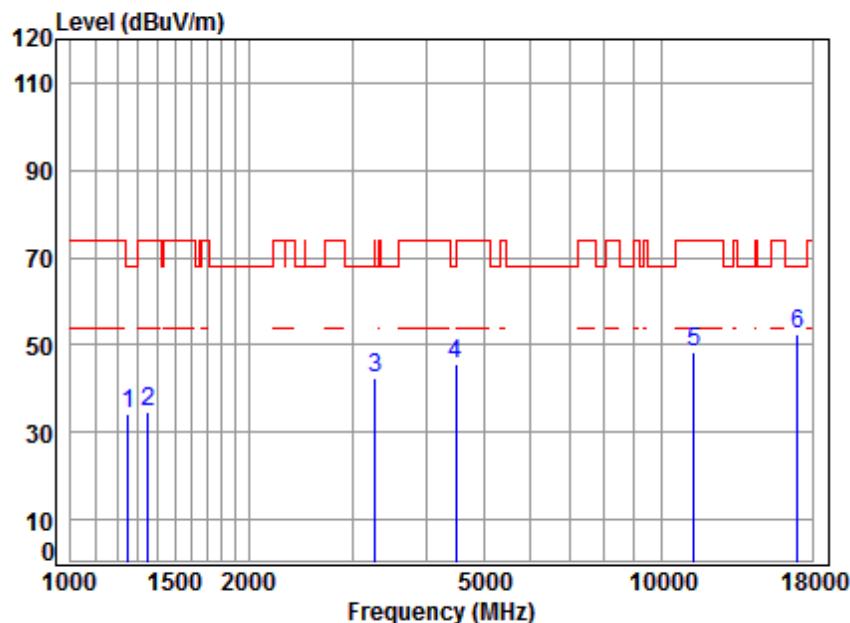

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	45.97	34.17	68.20	-34.03	peak	
2	1350.667	4.98	25.23	41.30	45.64	34.55	74.00	-39.45	peak	
3	3280.326	6.26	31.36	42.17	47.07	42.52	68.20	-25.68	peak	
4	4482.150	7.54	33.57	42.41	46.75	45.45	68.20	-22.75	peak	
5	11340.000	11.98	37.87	38.10	36.77	48.52	74.00	-25.48	peak	
6	17010.000	16.69	42.61	40.29	33.42	52.43	68.20	-15.77	peak	


Mode:d; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

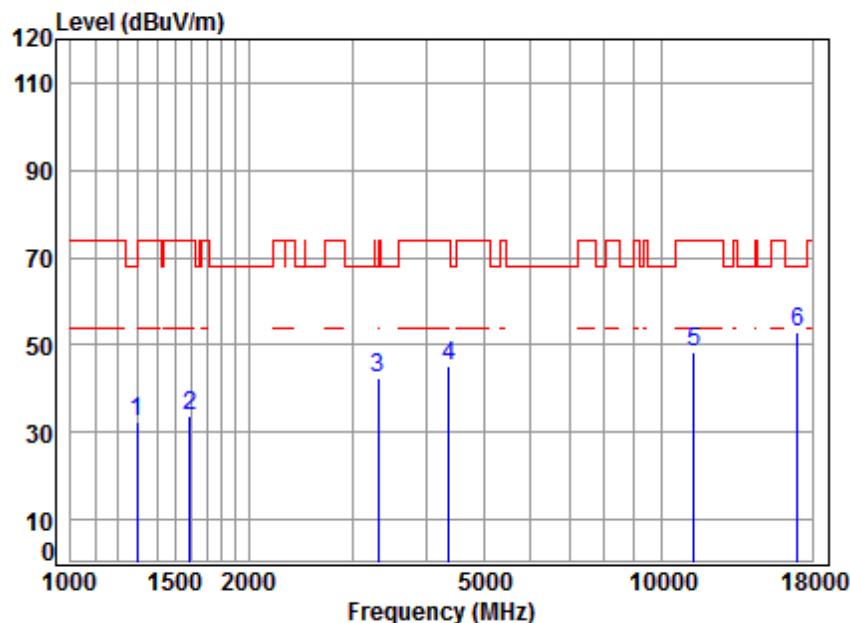

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	25.00	41.26	43.98	32.49	68.20	-35.71	peak
2	1592.571	5.36	26.22	41.47	43.51	33.62	74.00	-40.38	peak
3	3318.471	6.29	31.42	42.18	46.93	42.46	68.20	-25.74	peak
4	4367.058	7.41	33.37	42.39	46.87	45.26	74.00	-28.74	peak
5	11340.000	11.98	37.87	38.10	36.52	48.27	74.00	-25.73	peak
6	17010.000	16.69	42.61	40.29	33.89	52.90	68.20	-15.30	peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

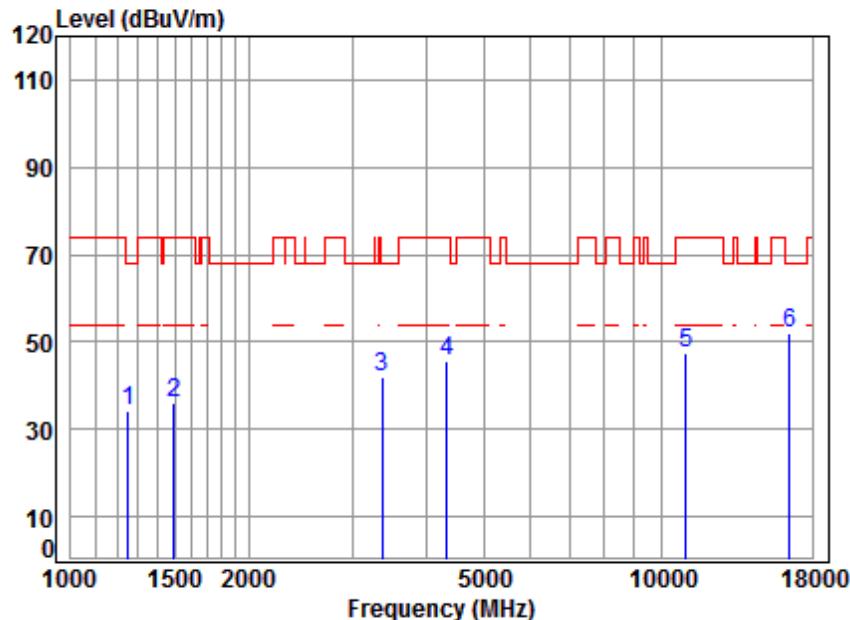

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1249.269	4.61	24.81	41.22	46.13	34.33	68.20	-33.87 peak
2	1494.455	5.46	25.78	41.40	46.29	36.13	74.00	-37.87 peak
3	3366.778	6.34	31.50	42.19	46.40	42.05	68.20	-26.15 peak
4	4341.886	7.38	33.33	42.39	47.38	45.70	74.00	-28.30 peak
5	11000.000	11.63	37.80	37.88	36.01	47.56	74.00	-26.44 peak
6	16500.000	14.50	42.20	39.86	35.23	52.07	68.20	-16.13 peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

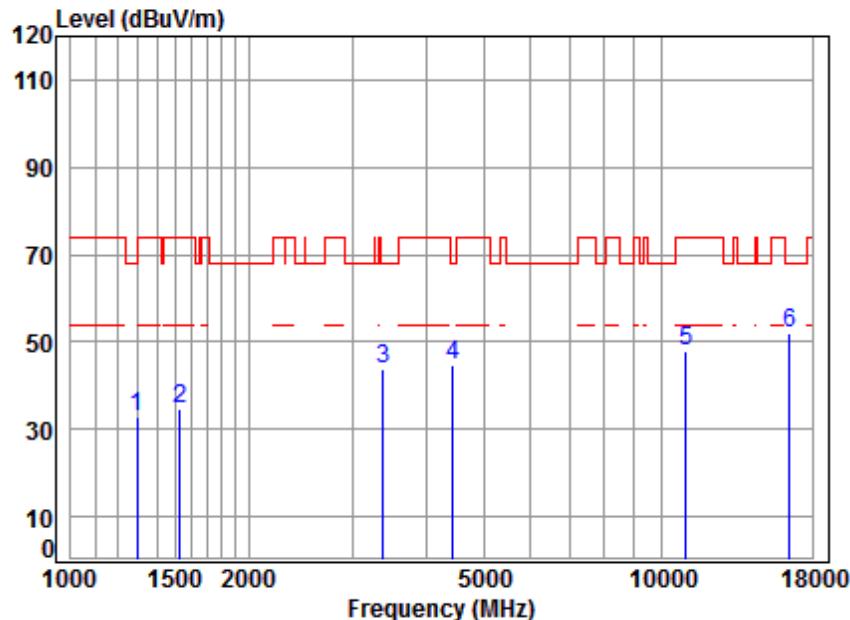

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5500 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1297.103	4.79	25.01	41.26	44.46	33.00	68.20	-35.20	peak
2	1529.414	5.44	25.94	41.43	44.86	34.81	74.00	-39.19	peak
3	3376.523	6.35	31.51	42.19	48.31	43.98	68.20	-24.22	peak
4	4430.628	7.48	33.48	42.41	46.34	44.89	68.20	-23.31	peak
5	11000.000	11.63	37.80	37.88	36.51	48.06	74.00	-25.94	peak
6	16500.000	14.50	42.20	39.86	35.04	51.88	68.20	-16.32	peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

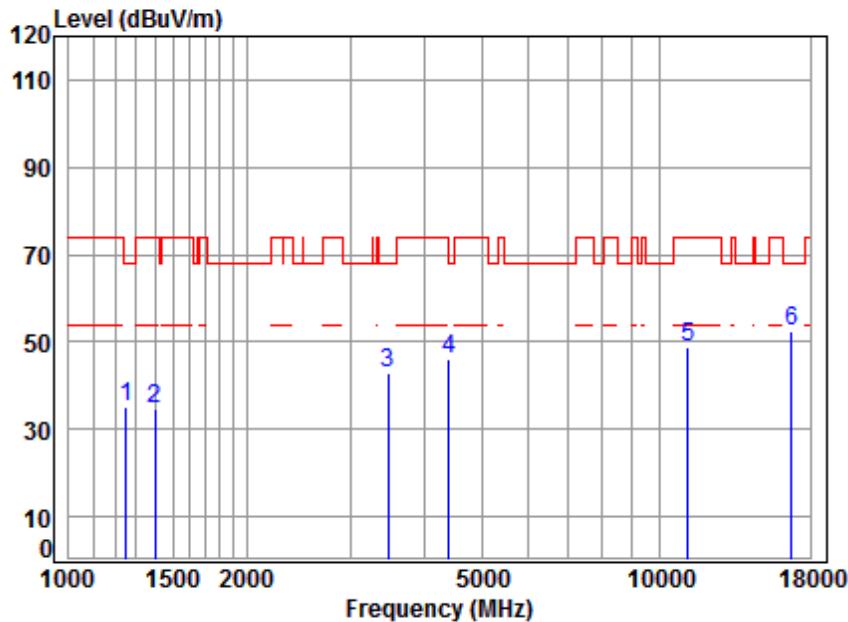

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1249.269	4.61	24.81	41.22	46.86	35.06	68.20	-33.14 peak
2	1398.336	5.15	25.42	41.34	45.40	34.63	74.00	-39.37 peak
3	3475.541	6.44	31.66	42.22	46.96	42.84	68.20	-25.36 peak
4	4405.090	7.46	33.44	42.40	47.61	46.11	68.20	-22.09 peak
5	11160.000	11.80	37.83	37.98	37.38	49.03	74.00	-24.97 peak
6	16740.000	15.57	42.39	40.07	34.62	52.51	68.20	-15.69 peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

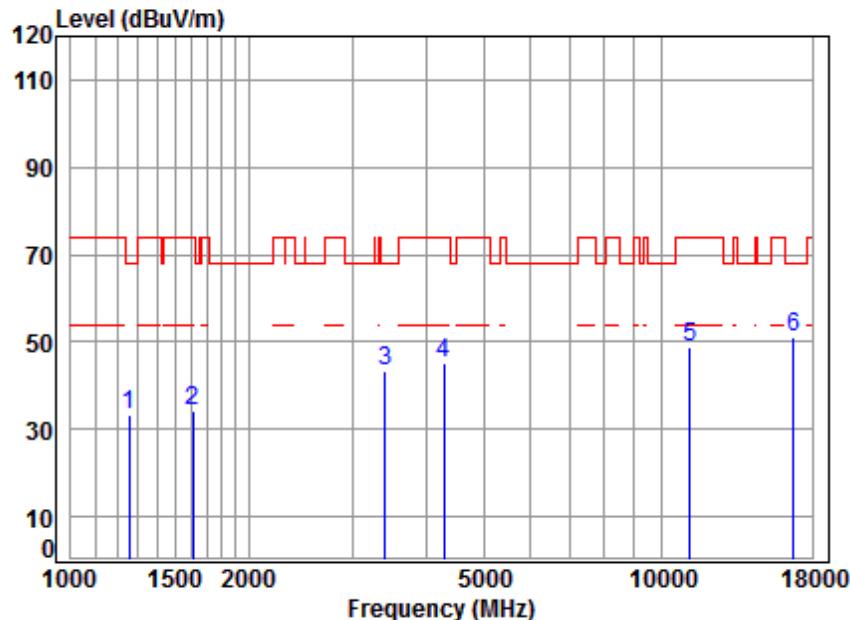

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5580 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1256.512	4.64	24.84	41.23	45.20	33.45	68.20 -34.75 peak
2	1611.091	5.34	26.30	41.48	44.13	34.29	74.00 -39.71 peak
3	3405.929	6.38	31.56	42.20	47.82	43.56	68.20 -24.64 peak
4	4291.977	7.33	33.24	42.38	47.03	45.22	74.00 -28.78 peak
5	11160.000	11.80	37.83	37.98	37.21	48.86	74.00 -25.14 peak
6	16740.000	15.57	42.39	40.07	33.38	51.27	68.20 -16.93 peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

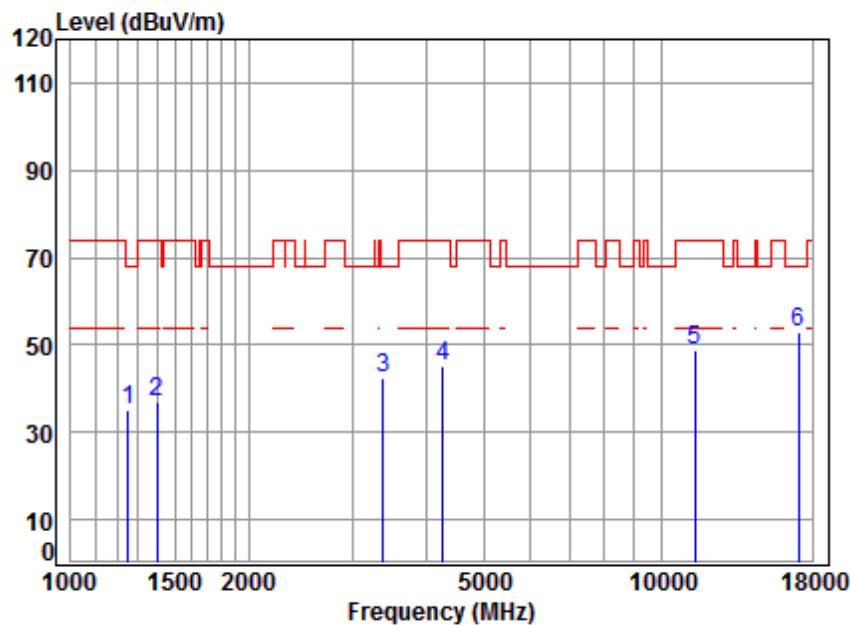

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1249.269	4.61	24.81	41.22	46.88	35.08	68.20	-33.12	peak
2	1398.336	5.15	25.42	41.34	47.58	36.81	74.00	-37.19	peak
3	3376.523	6.35	31.51	42.19	46.81	42.48	68.20	-25.72	peak
4	4267.237	7.30	33.19	42.38	47.18	45.29	74.00	-28.71	peak
5	11400.000	12.04	37.88	38.13	36.93	48.72	74.00	-25.28	peak
6	17100.000	16.49	42.66	40.37	34.17	52.95	68.20	-15.25	peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

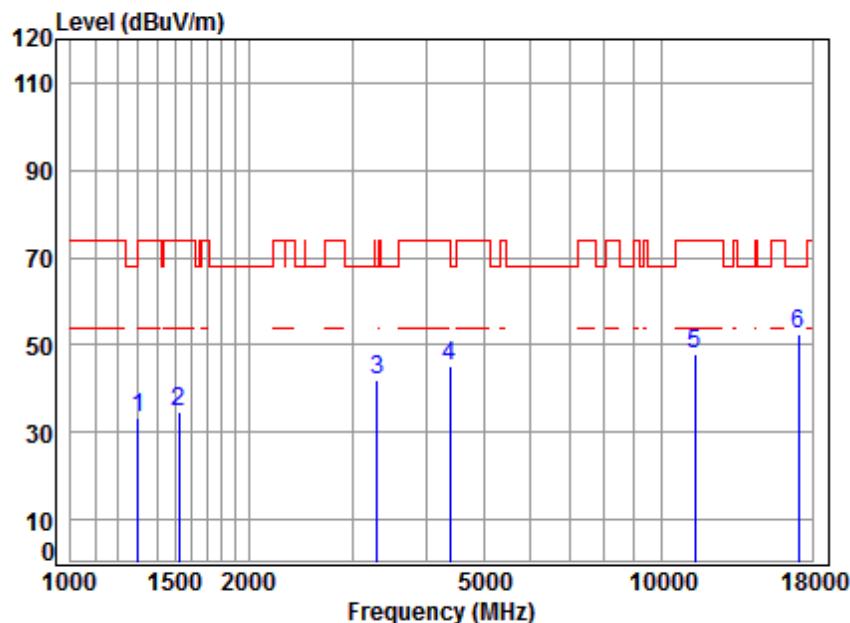

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5700 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1300.858	4.80	25.03	41.26	44.87	33.44	74.00	-40.56	peak
2	1525.000	5.45	25.91	41.42	44.85	34.79	74.00	-39.21	peak
3	3299.344	6.28	31.39	42.17	46.50	42.00	68.20	-26.20	peak
4	4392.376	7.44	33.42	42.40	46.89	45.35	74.00	-28.65	peak
5	11400.000	12.04	37.88	38.13	35.90	47.69	74.00	-26.31	peak
6	17100.000	16.49	42.66	40.37	33.76	52.54	68.20	-15.66	peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

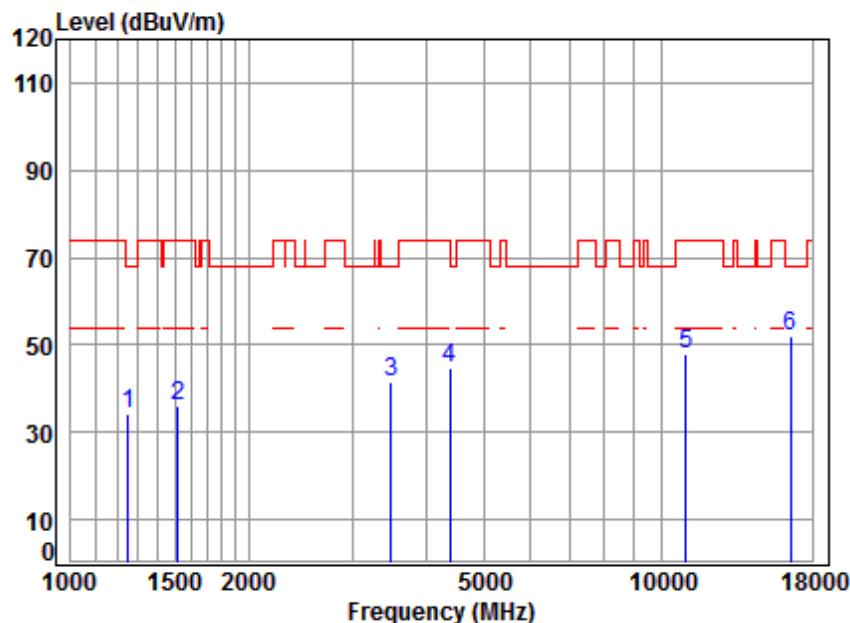

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5510 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					dB	dBuV	dBuV/m	dBuV/m
1 1249.269	4.61	24.81	41.22	45.83	34.03	68.20	-34.17	peak
2 1520.598	5.45	25.89	41.42	46.07	35.99	74.00	-38.01	peak
3 3485.601	6.45	31.68	42.22	45.75	41.66	68.20	-26.54	peak
4 4392.376	7.44	33.42	42.40	46.48	44.94	74.00	-29.06	peak
5 11020.000	11.65	37.80	37.89	36.38	47.94	74.00	-26.06	peak
6 16530.000	14.63	42.22	39.89	35.20	52.16	68.20	-16.04	peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

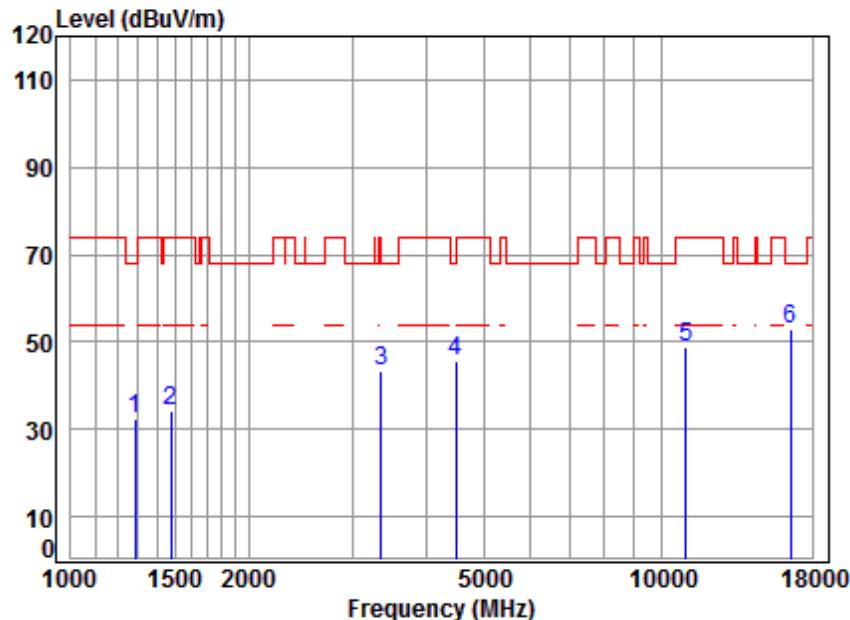

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5510 TX RSE
Note : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	4.75	24.96	41.25	44.11	32.57	68.20	-35.63	peak
2	1477.276	5.41	25.72	41.39	44.55	34.29	74.00	-39.71	peak
3	3357.061	6.33	31.48	42.19	47.51	43.13	74.00	-30.87	peak
4	4482.150	7.54	33.57	42.41	46.89	45.59	68.20	-22.61	peak
5	11020.000	11.65	37.80	37.89	37.12	48.68	74.00	-25.32	peak
6	16530.000	14.63	42.22	39.89	35.91	52.87	68.20	-15.33	peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:middle

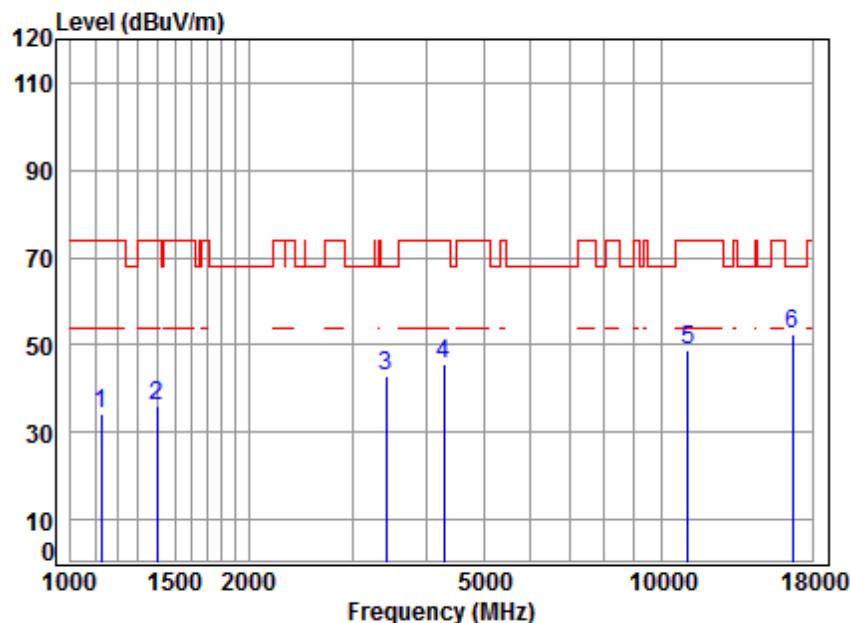

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5550 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1125.813	4.11	24.24	41.12	46.89	34.12	74.00	-39.88 peak
2 1398.336	5.15	25.42	41.34	46.98	36.21	74.00	-37.79 peak
3 3415.787	6.38	31.57	42.20	47.36	43.11	68.20	-25.09 peak
4 4279.589	7.31	33.22	42.38	47.52	45.67	74.00	-28.33 peak
5 11100.000	11.73	37.82	37.94	37.31	48.92	74.00	-25.08 peak
6 16650.000	15.17	42.32	39.99	35.05	52.55	68.20	-15.65 peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:middle

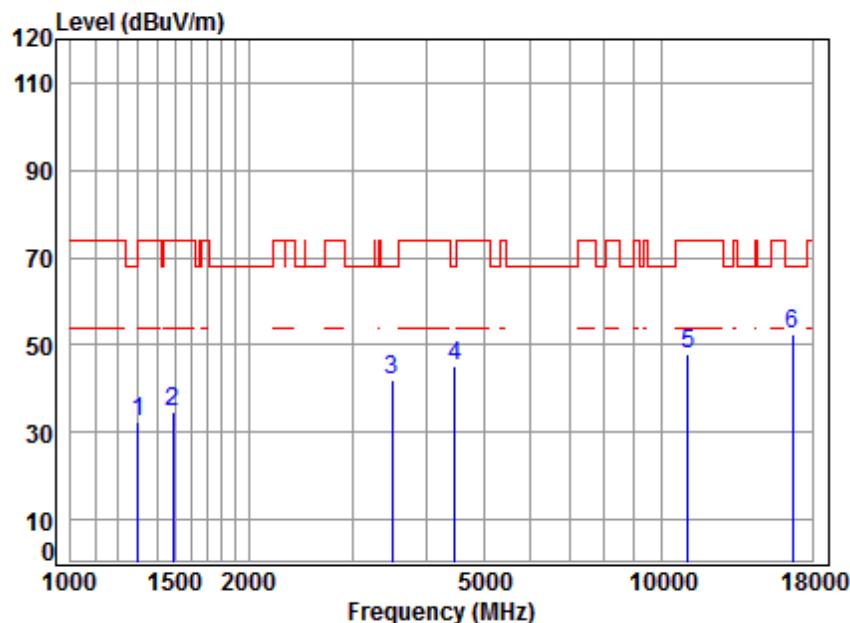

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5550 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1300.858	4.80	25.03	41.26	44.00	32.57	74.00	-41.43	peak
2	1490.142	5.45	25.76	41.40	44.70	34.51	74.00	-39.49	peak
3	3495.691	6.46	31.69	42.22	46.11	42.04	68.20	-26.16	peak
4	4469.214	7.53	33.55	42.41	46.40	45.07	68.20	-23.13	peak
5	11100.000	11.73	37.82	37.94	36.41	48.02	74.00	-25.98	peak
6	16650.000	15.17	42.32	39.99	35.02	52.52	68.20	-15.68	peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

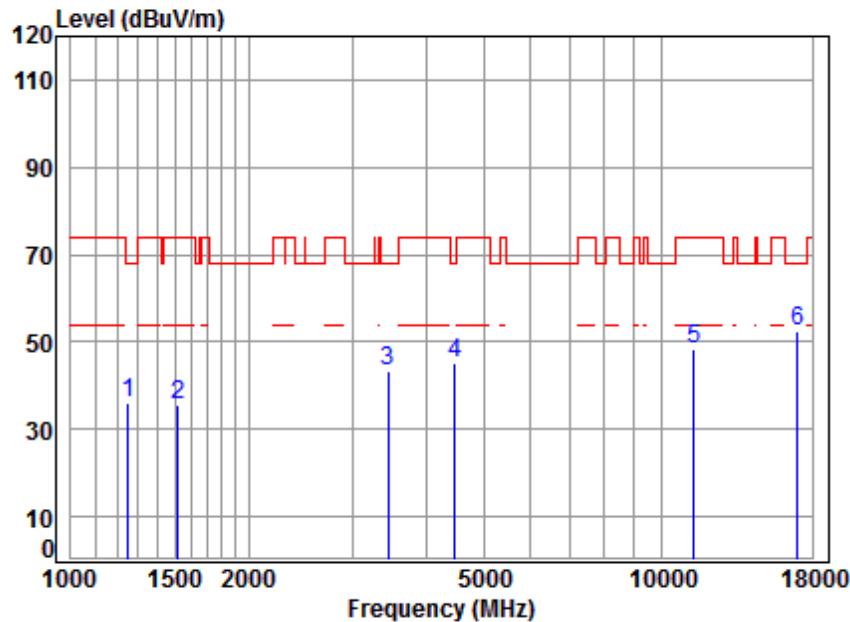

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5670 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	48.01	36.21	68.20	-31.99 peak
2 1516.210	5.46	25.87	41.42	45.75	35.66	74.00	-38.34 peak
3 3445.535	6.41	31.62	42.21	47.43	43.25	68.20	-24.95 peak
4 4469.214	7.53	33.55	42.41	46.36	45.03	68.20	-23.17 peak
5 11340.000	11.98	37.87	38.10	36.44	48.19	74.00	-25.81 peak
6 17010.000	16.69	42.61	40.29	33.65	52.66	68.20	-15.54 peak


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

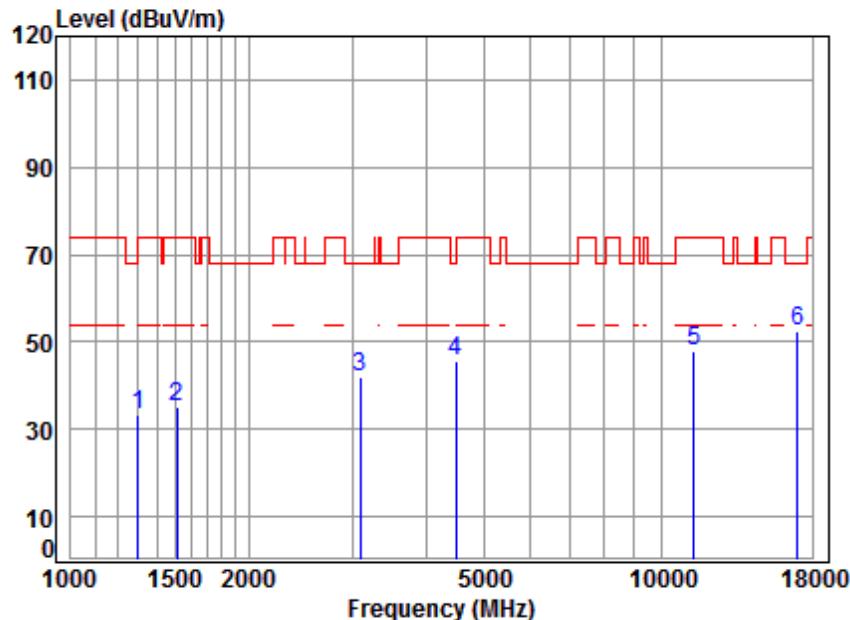

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5670 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.61	33.18	74.00	-40.82	peak	
2	1511.833	5.46	25.85	41.41	45.20	35.10	74.00	-38.90	peak	
3	3087.140	6.07	31.05	42.12	46.83	41.83	68.20	-26.37	peak	
4	4482.150	7.54	33.57	42.41	46.79	45.49	68.20	-22.71	peak	
5	11340.000	11.98	37.87	38.10	36.34	48.09	74.00	-25.91	peak	
6	17010.000	16.69	42.61	40.29	33.63	52.64	68.20	-15.56	peak	


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:Low

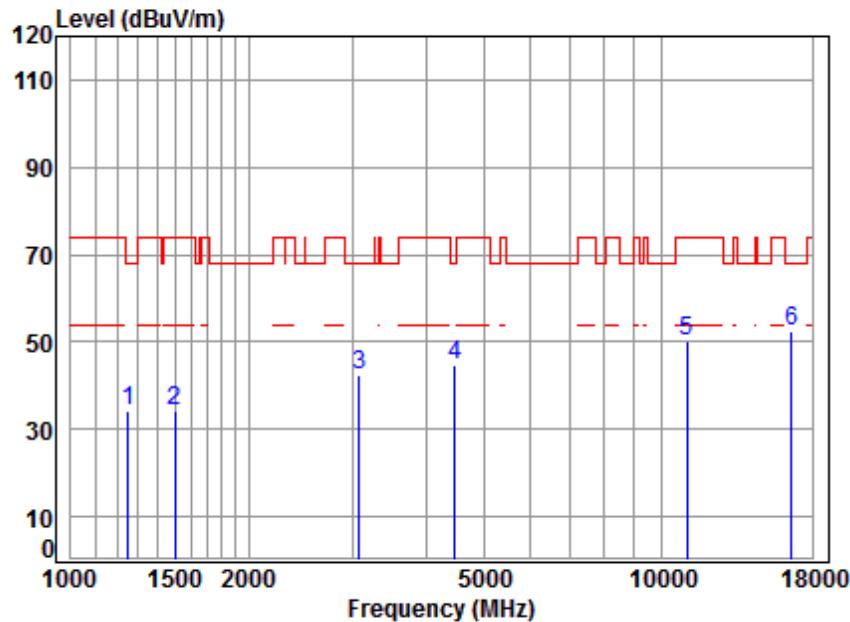

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5530 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	46.12	34.32	68.20	-33.88	peak	
2	1503.119	5.48	25.81	41.41	44.48	34.36	74.00	-39.64	peak	
3	3078.229	6.06	31.03	42.12	47.25	42.22	68.20	-25.98	peak	
4	4469.214	7.53	33.55	42.41	46.14	44.81	68.20	-23.39	peak	
5	11060.000	11.69	37.81	37.92	38.72	50.30	74.00	-23.70	peak	
6	16590.000	14.90	42.27	39.94	35.12	52.35	68.20	-15.85	peak	


Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:Low

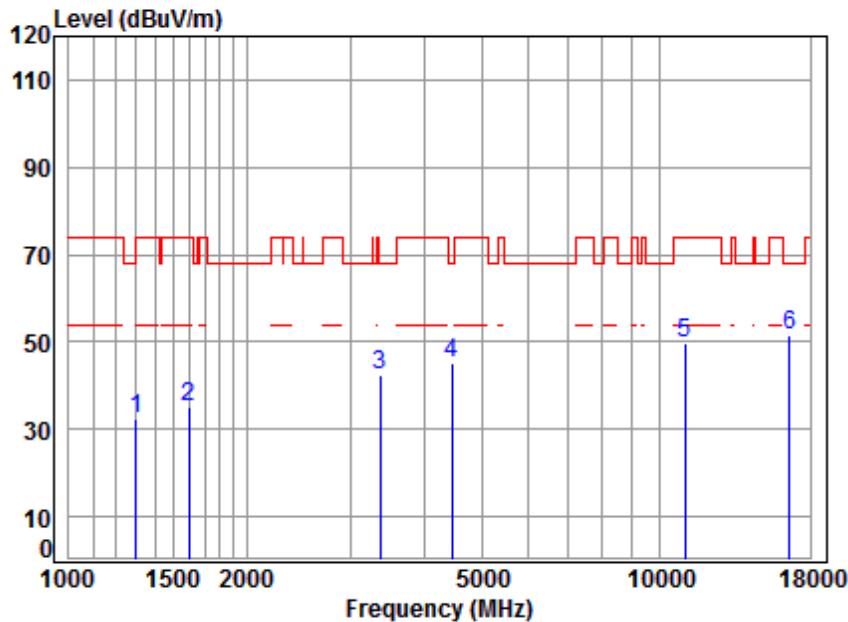

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5530 TX RSE
Note : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.03	32.60	74.00	-41.40	peak
2	1597.181	5.35	26.24	41.47	44.92	35.04	74.00	-38.96	peak
3	3366.778	6.34	31.50	42.19	46.76	42.41	68.20	-25.79	peak
4	4456.315	7.51	33.53	42.41	46.62	45.25	68.20	-22.95	peak
5	11060.000	11.69	37.81	37.92	38.35	49.93	74.00	-24.07	peak
6	16590.000	14.90	42.27	39.94	34.21	51.44	68.20	-16.76	peak


Mode:d; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:High

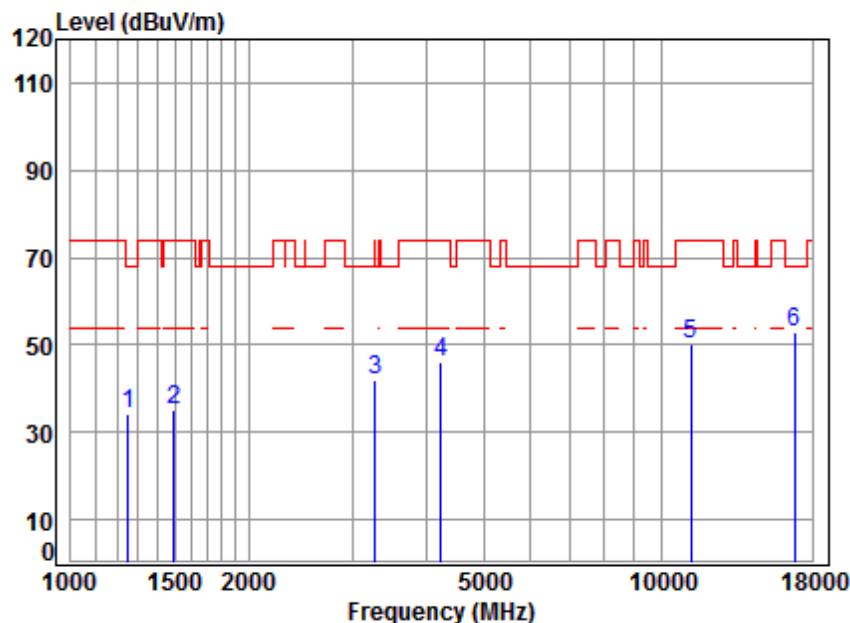

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5610 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	45.80	34.00	68.20	-34.20	peak	
2	1494.455	5.46	25.78	41.40	45.17	35.01	74.00	-38.99	peak	
3	3280.326	6.26	31.36	42.17	46.68	42.13	68.20	-26.07	peak	
4	4230.396	7.26	33.13	42.37	47.91	45.93	74.00	-28.07	peak	
5	11220.000	11.86	37.84	38.02	38.40	50.08	74.00	-23.92	peak	
6	16830.000	15.97	42.47	40.14	34.81	53.11	68.20	-15.09	peak	

Mode:d; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:High

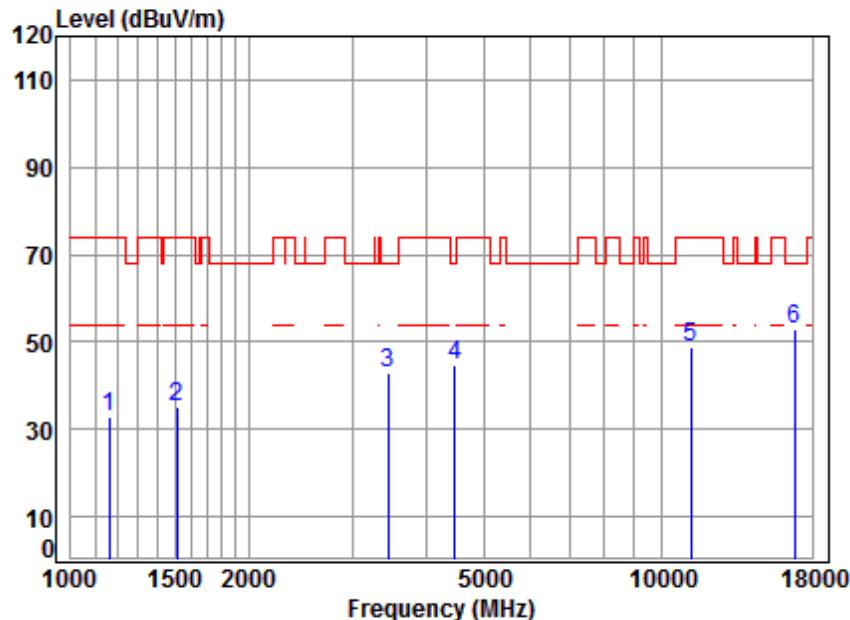


Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5610 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1162.182	4.27	24.42	41.15	45.41	32.95	74.00	-41.05	peak	
2	1511.833	5.46	25.85	41.41	45.16	35.06	74.00	-38.94	peak	
3	3445.535	6.41	31.62	42.21	47.01	42.83	68.20	-25.37	peak	
4	4469.214	7.53	33.55	42.41	46.26	44.93	68.20	-23.27	peak	
5	11220.000	11.86	37.84	38.02	37.22	48.90	74.00	-25.10	peak	
6	16830.000	15.97	42.47	40.14	34.63	52.93	68.20	-15.27	peak	

Test data for Antenna2/ Band 3:


Mode:e; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

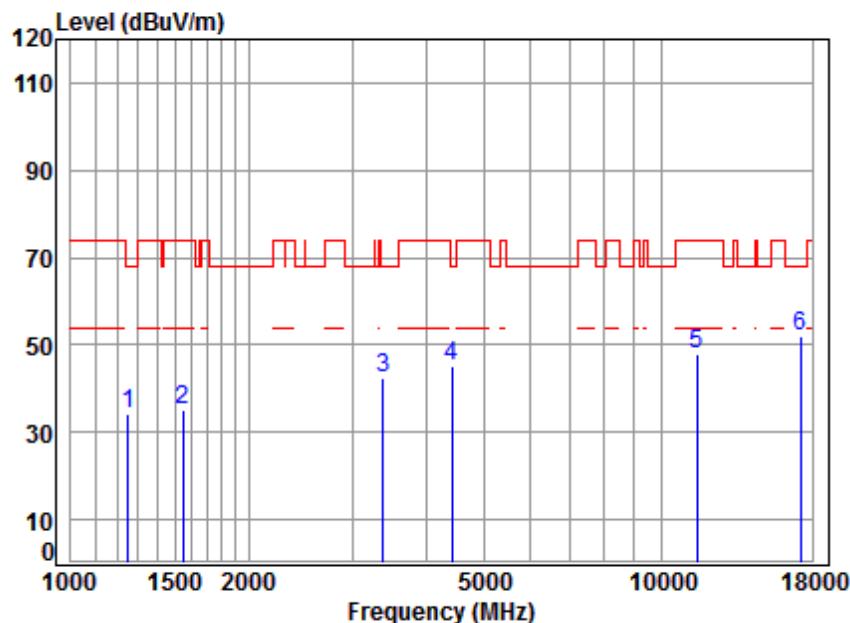

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	46.22	34.42	68.20	-33.78 peak
2 1547.199	5.42	26.02	41.44	44.98	34.98	74.00	-39.02 peak
3 3376.523	6.35	31.51	42.19	46.74	42.41	68.20	-25.79 peak
4 4417.841	7.47	33.46	42.40	46.48	45.01	68.20	-23.19 peak
5 11490.000	12.13	37.90	38.19	36.07	47.91	74.00	-26.09 peak
6 17235.000	16.18	42.74	40.48	33.56	52.00	68.20	-16.20 peak


Mode:e; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

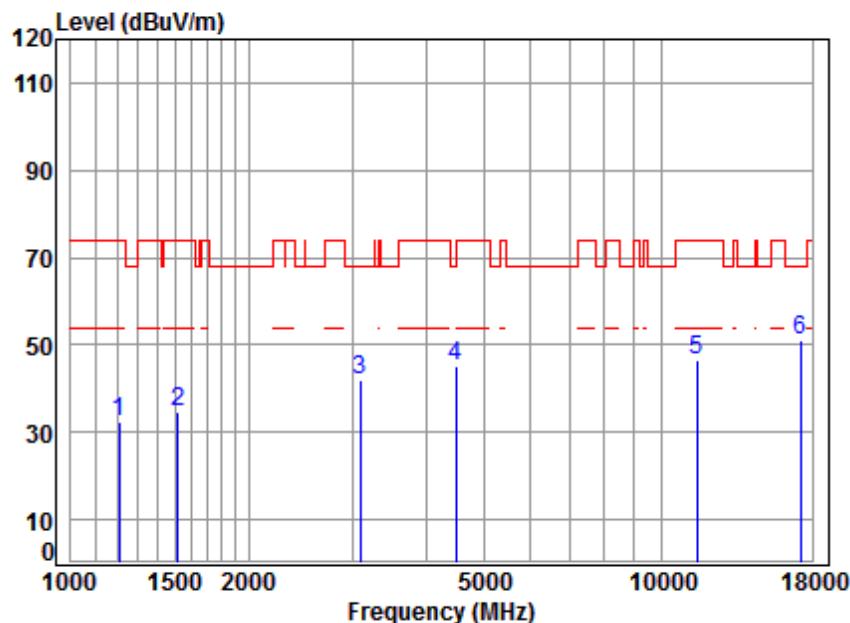

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1206.682	4.44	24.62	41.19	44.74	32.61	74.00	-41.39	peak
2	1520.598	5.45	25.89	41.42	44.77	34.69	74.00	-39.31	peak
3	3087.140	6.07	31.05	42.12	47.14	42.14	68.20	-26.06	peak
4	4495.125	7.55	33.59	42.42	46.63	45.35	68.20	-22.85	peak
5	11490.000	12.13	37.90	38.19	34.80	46.64	74.00	-27.36	peak
6	17235.000	16.18	42.74	40.48	32.65	51.09	68.20	-17.11	peak


Mode:e; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

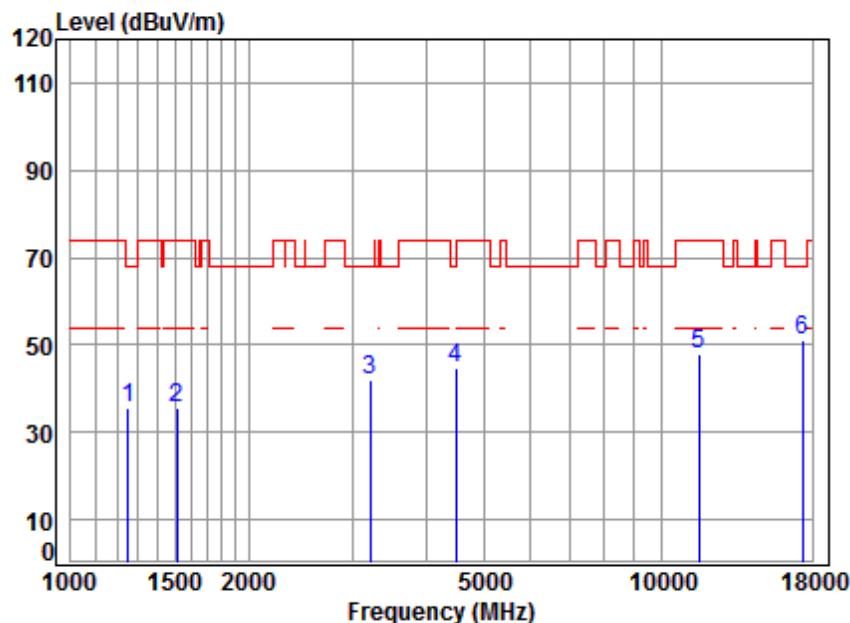

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	47.22	35.42	68.20	-32.78	peak	
2	1511.833	5.46	25.85	41.41	45.71	35.61	74.00	-38.39	peak	
3	3214.623	6.20	31.26	42.15	46.79	42.10	68.20	-26.10	peak	
4	4482.150	7.54	33.57	42.41	46.03	44.73	68.20	-23.47	peak	
5	11570.000	12.17	37.87	38.24	36.24	48.04	74.00	-25.96	peak	
6	17355.000	15.92	42.81	40.58	33.02	51.17	68.20	-17.03	peak	


Mode:e; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

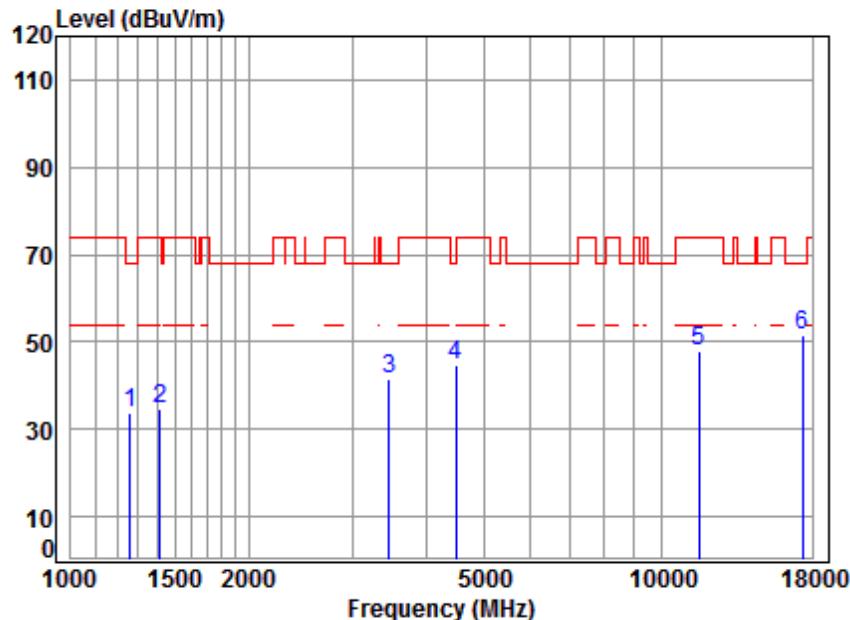

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	4.65	24.85	41.23	45.51	33.78	68.20	-34.42	peak	
2	1414.597	5.20	25.48	41.35	45.37	34.70	74.00	-39.30	peak	
3	3455.508	6.42	31.63	42.21	45.82	41.66	68.20	-26.54	peak	
4	4495.125	7.55	33.59	42.42	46.12	44.84	68.20	-23.36	peak	
5	11570.000	12.17	37.87	38.24	36.24	48.04	74.00	-25.96	peak	
6	17355.000	15.92	42.81	40.58	33.55	51.70	68.20	-16.50	peak	


Mode:e; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

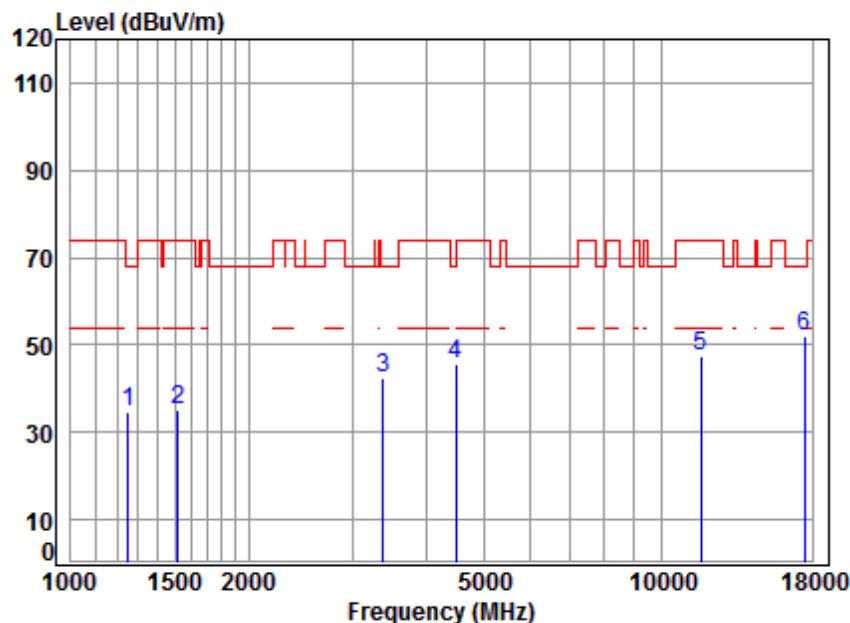

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	46.42	34.62	68.20	-33.58	peak	
2	1520.598	5.45	25.89	41.42	45.43	35.35	74.00	-38.65	peak	
3	3376.523	6.35	31.51	42.19	46.68	42.35	68.20	-25.85	peak	
4	4482.150	7.54	33.57	42.41	46.81	45.51	68.20	-22.69	peak	
5	11650.000	12.20	37.84	38.29	35.90	47.65	74.00	-26.35	peak	
6	17475.000	15.65	42.89	40.68	34.02	51.88	68.20	-16.32	peak	


Mode:e; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

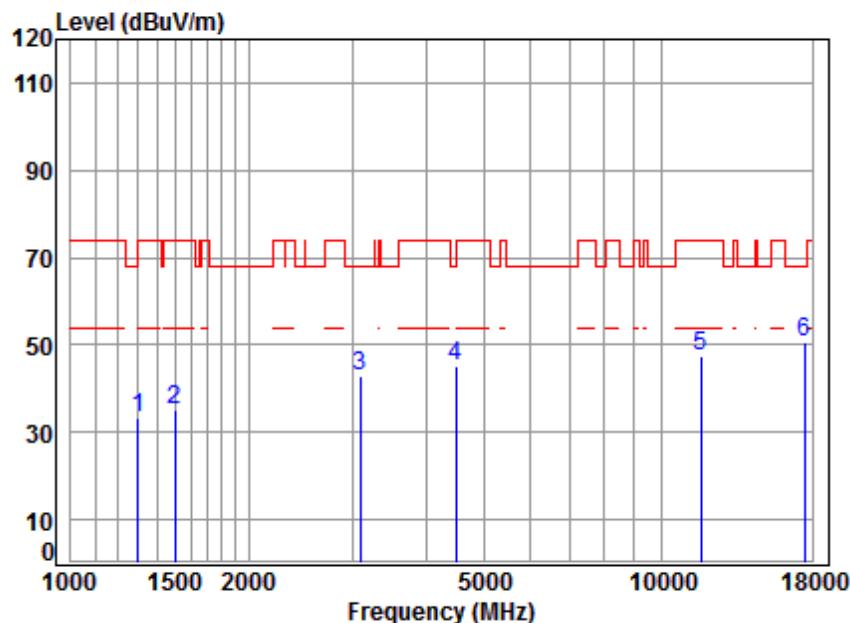

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.91	33.48	74.00	-40.52	peak
2	1498.781	5.48	25.80	41.41	45.49	35.36	74.00	-38.64	peak
3	3087.140	6.07	31.05	42.12	47.74	42.74	68.20	-25.46	peak
4	4495.125	7.55	33.59	42.42	46.26	44.98	68.20	-23.22	peak
5	11650.000	12.20	37.84	38.29	35.76	47.51	74.00	-26.49	peak
6	17475.000	15.65	42.89	40.68	32.98	50.84	68.20	-17.36	peak


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

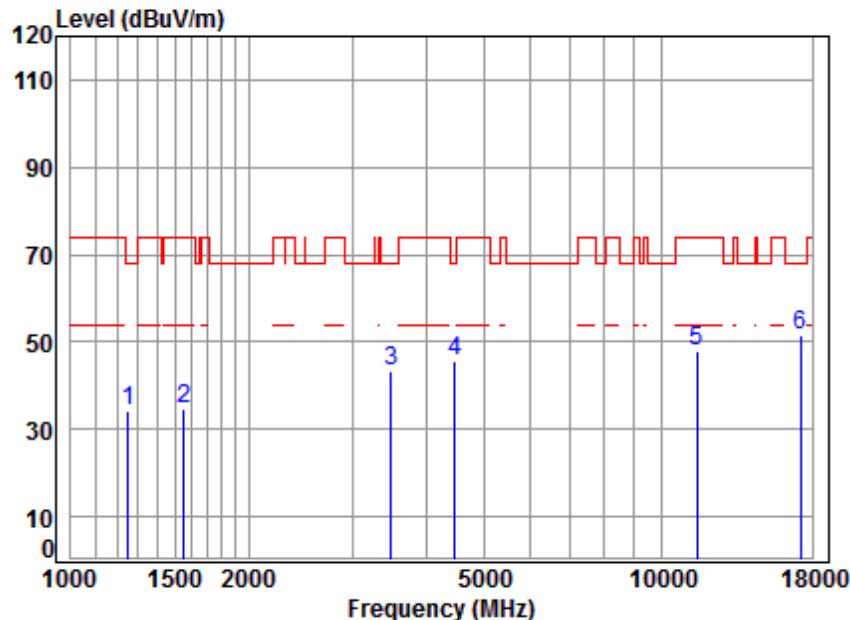

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	46.15	34.35	68.20	-33.85	peak	
2	1551.677	5.41	26.04	41.44	44.65	34.66	74.00	-39.34	peak	
3	3485.601	6.45	31.68	42.22	47.46	43.37	68.20	-24.83	peak	
4	4469.214	7.53	33.55	42.41	46.85	45.52	68.20	-22.68	peak	
5	11490.000	12.13	37.90	38.19	35.97	47.81	74.00	-26.19	peak	
6	17235.000	16.18	42.74	40.48	33.23	51.67	68.20	-16.53	peak	


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

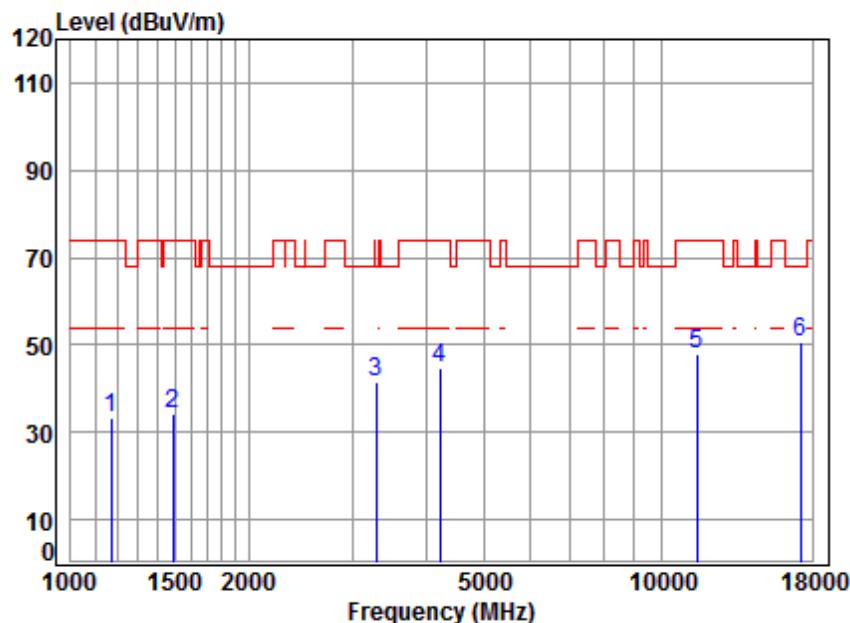

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1168.920	4.29	24.45	41.16	45.64	33.22	74.00	-40.78	peak
2	1490.142	5.45	25.76	41.40	44.48	34.29	74.00	-39.71	peak
3	3289.821	6.27	31.38	42.17	46.00	41.48	68.20	-26.72	peak
4	4218.186	7.24	33.11	42.37	46.87	44.85	74.00	-29.15	peak
5	11490.000	12.13	37.90	38.19	35.90	47.74	74.00	-26.26	peak
6	17235.000	16.18	42.74	40.48	32.31	50.75	68.20	-17.45	peak


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

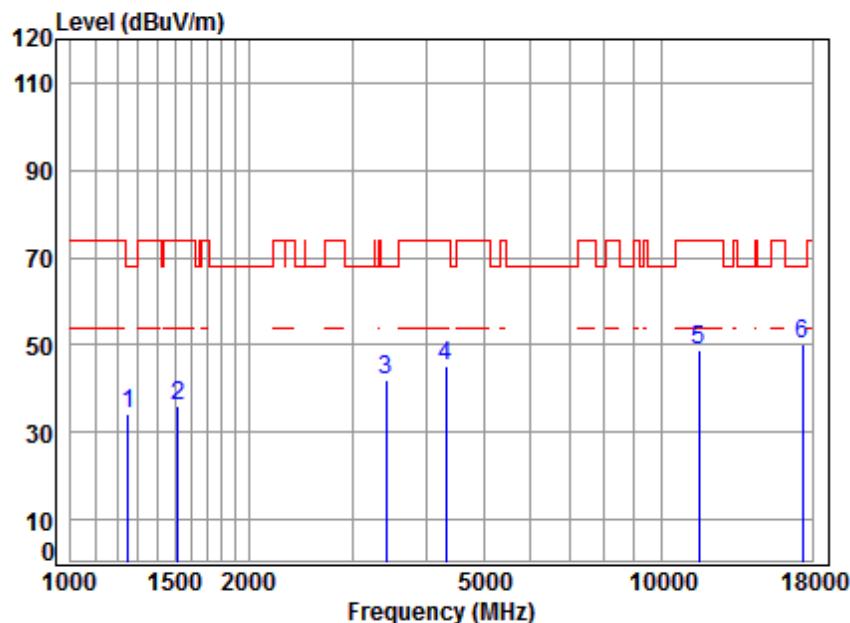

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					Level	Line		
1249.269	4.61	24.81	41.22	46.06	34.26	68.20	-33.94	peak
1516.210	5.46	25.87	41.42	46.09	36.00	74.00	-38.00	peak
3415.787	6.38	31.57	42.20	46.25	42.00	68.20	-26.20	peak
4316.859	7.36	33.28	42.38	46.69	44.95	74.00	-29.05	peak
11570.000	12.17	37.87	38.24	37.01	48.81	74.00	-25.19	peak
17355.000	15.92	42.81	40.58	32.11	50.26	68.20	-17.94	peak


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

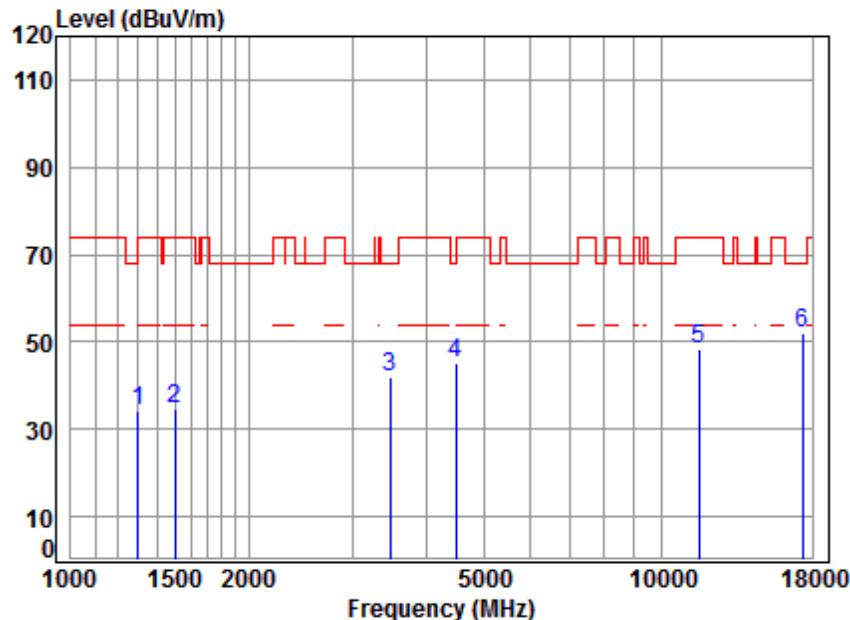

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1300.858	4.80	25.03	41.26	45.73	34.30	74.00	-39.70	peak
2	1503.119	5.48	25.81	41.41	44.77	34.65	74.00	-39.35	peak
3	3475.541	6.44	31.66	42.22	45.90	41.78	68.20	-26.42	peak
4	4495.125	7.55	33.59	42.42	46.50	45.22	68.20	-22.98	peak
5	11570.000	12.17	37.87	38.24	36.55	48.35	74.00	-25.65	peak
6	17355.000	15.92	42.81	40.58	34.00	52.15	68.20	-16.05	peak


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

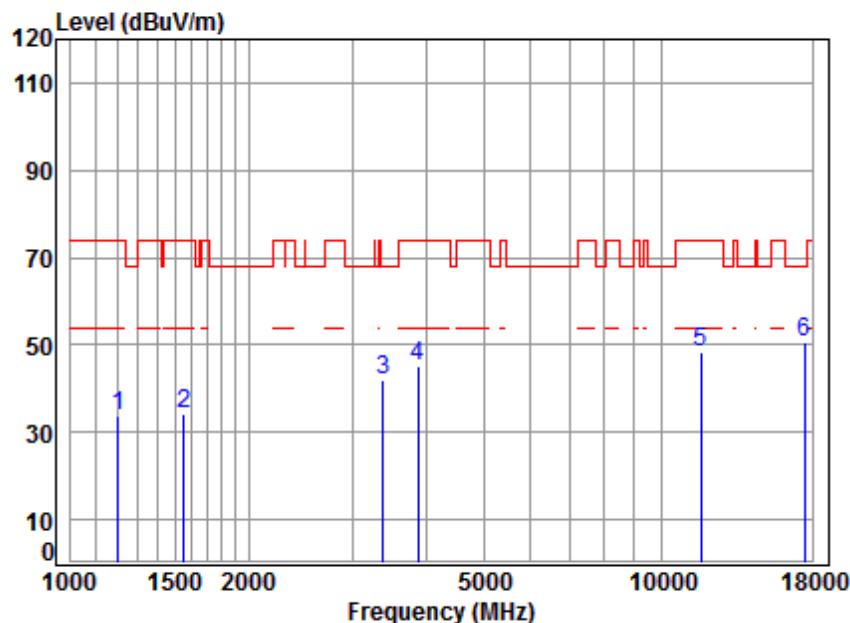

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

Freq	Cable		Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1203.199	4.43	24.60	41.19	46.05	33.89	74.00	-40.11 peak
2	1556.169	5.41	26.06	41.44	44.09	34.12	74.00	-39.88 peak
3	3376.523	6.35	31.51	42.19	46.30	41.97	68.20	-26.23 peak
4	3879.027	6.86	32.47	42.30	48.03	45.06	74.00	-28.94 peak
5	11650.000	12.20	37.84	38.29	36.72	48.47	74.00	-25.53 peak
6	17475.000	15.65	42.89	40.68	32.83	50.69	68.20	-17.51 peak


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

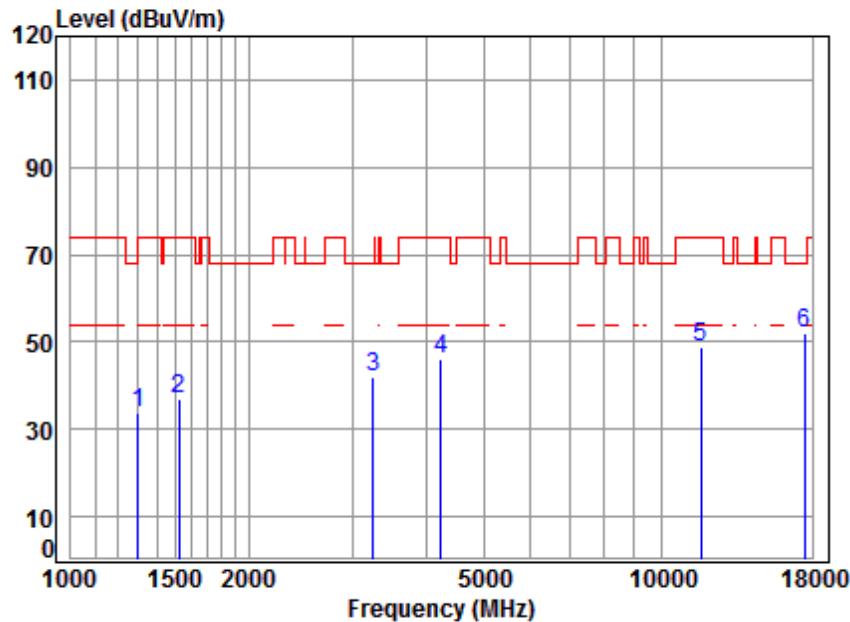

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	45.05	33.62	74.00	-40.38	peak
2	1525.000	5.45	25.91	41.42	47.20	37.14	74.00	-36.86	peak
3	3252.005	6.23	31.32	42.16	46.46	41.85	68.20	-26.35	peak
4	4230.396	7.26	33.13	42.37	48.04	46.06	74.00	-27.94	peak
5	11650.000	12.20	37.84	38.29	37.24	48.99	74.00	-25.01	peak
6	17475.000	15.65	42.89	40.68	33.95	51.81	68.20	-16.39	peak


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

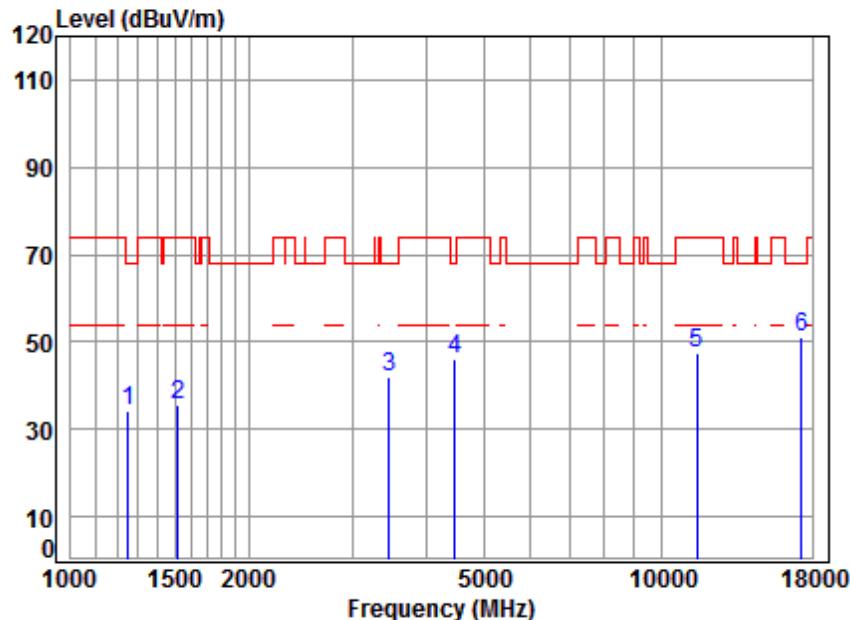

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5755 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1249.269	4.61	24.81	41.22	45.97	34.17	68.20	-34.03	peak
2	1516.210	5.46	25.87	41.42	45.47	35.38	74.00	-38.62	peak
3	3465.510	6.43	31.65	42.21	45.90	41.77	68.20	-26.43	peak
4	4469.214	7.53	33.55	42.41	47.58	46.25	68.20	-21.95	peak
5	11510.000	12.14	37.90	38.20	35.81	47.65	74.00	-26.35	peak
6	17265.000	16.12	42.76	40.51	32.94	51.31	68.20	-16.89	peak


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

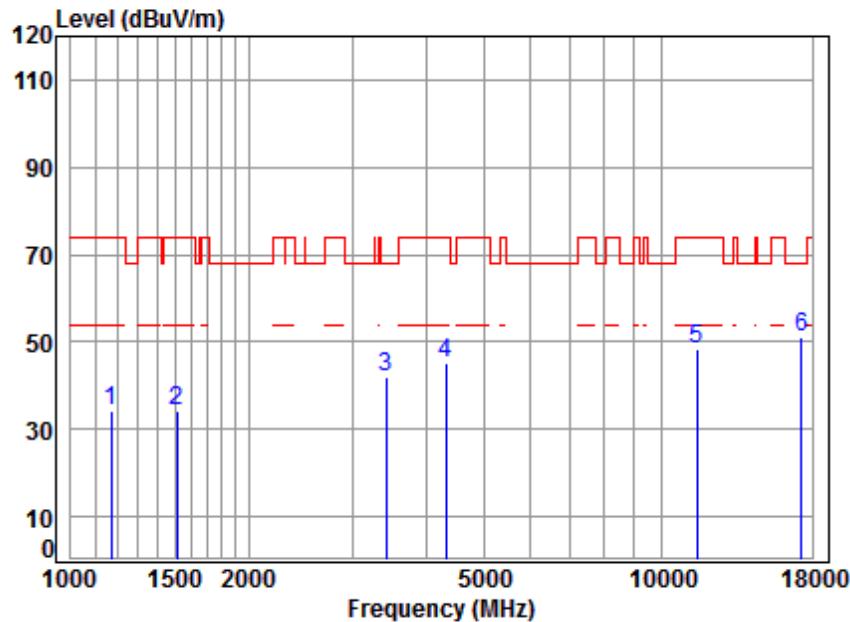

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5755 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1168.920	4.29	24.45	41.16	46.44	34.02	74.00	-39.98	peak	
2	1511.833	5.46	25.85	41.41	44.36	34.26	74.00	-39.74	peak	
3	3415.787	6.38	31.57	42.20	46.05	41.80	68.20	-26.40	peak	
4	4316.859	7.36	33.28	42.38	46.99	45.25	74.00	-28.75	peak	
5	11510.000	12.14	37.90	38.20	36.32	48.16	74.00	-25.84	peak	
6	17265.000	16.12	42.76	40.51	32.84	51.21	68.20	-16.99	peak	


Mode:e; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

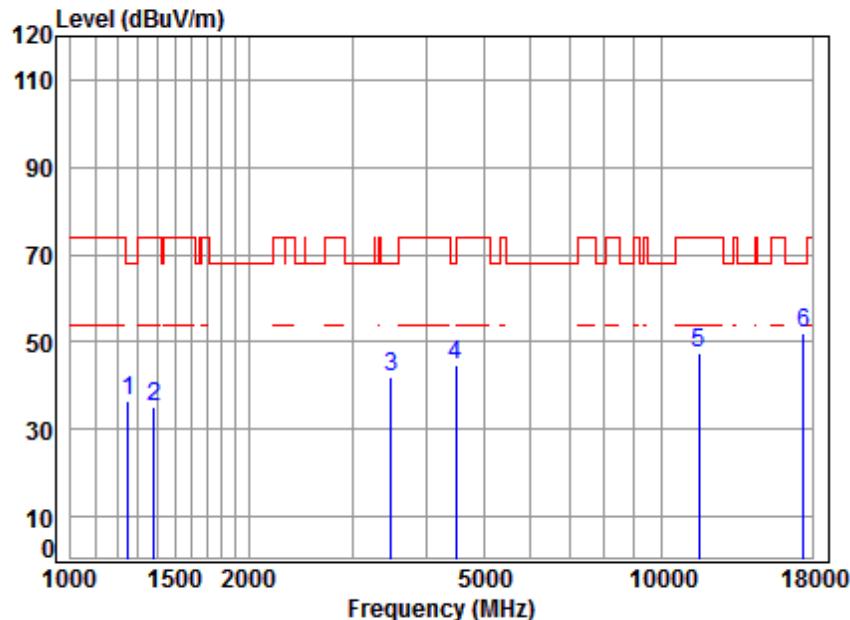

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1249.269	4.61	24.81	41.22	48.22	36.42	68.20 -31.78 peak
2	1382.262	5.09	25.36	41.32	46.05	35.18	74.00 -38.82 peak
3	3485.601	6.45	31.68	42.22	46.00	41.91	68.20 -26.29 peak
4	4495.125	7.55	33.59	42.42	46.20	44.92	68.20 -23.28 peak
5	11590.000	12.17	37.86	38.25	35.82	47.60	74.00 -26.40 peak
6	17385.000	15.85	42.83	40.60	33.85	51.93	68.20 -16.27 peak


Mode:e; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

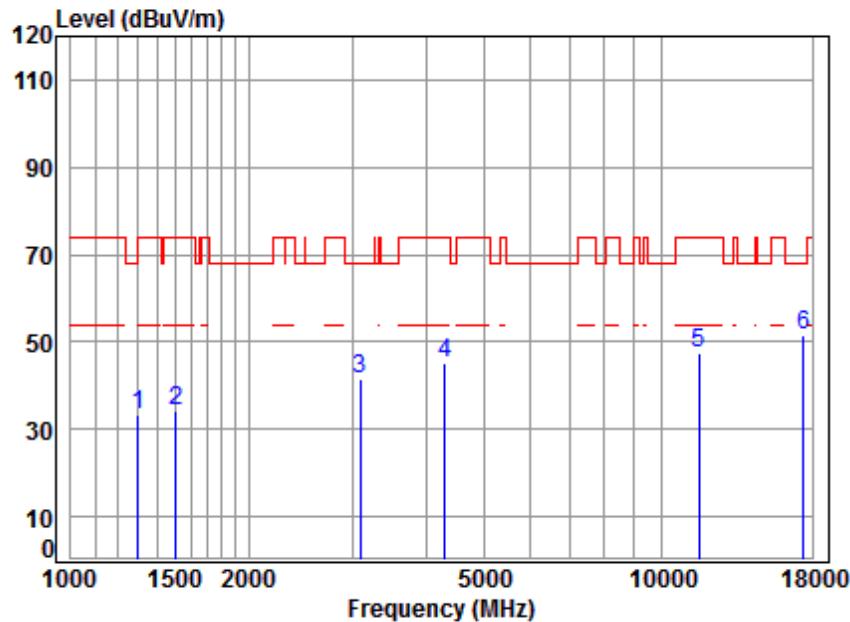

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1300.858	4.80	25.03	41.26	44.96	33.53	74.00	-40.47	peak
2	1507.470	5.47	25.83	41.41	44.50	34.39	74.00	-39.61	peak
3	3087.140	6.07	31.05	42.12	46.61	41.61	68.20	-26.59	peak
4	4304.400	7.34	33.26	42.38	46.96	45.18	74.00	-28.82	peak
5	11590.000	12.17	37.86	38.25	35.73	47.51	74.00	-26.49	peak
6	17385.000	15.85	42.83	40.60	33.53	51.61	68.20	-16.59	peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

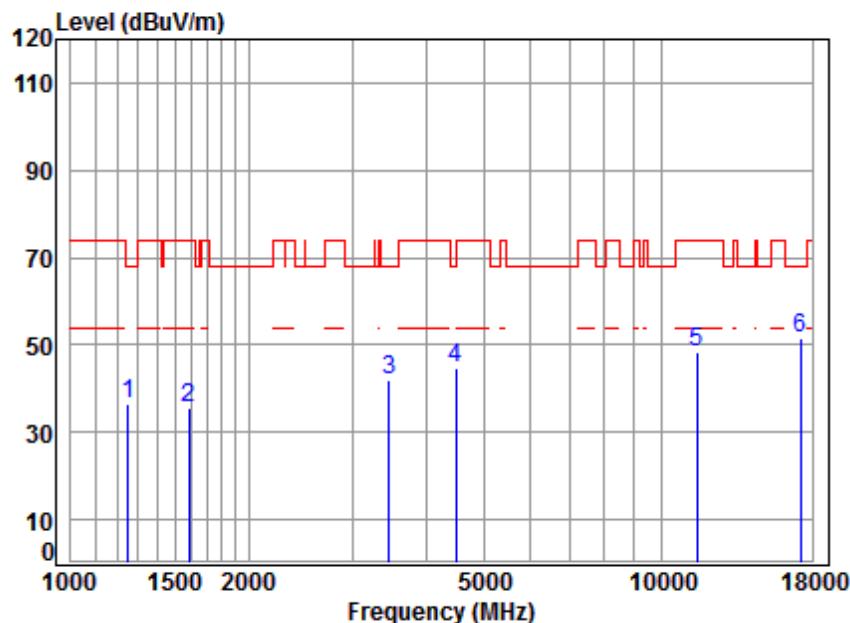

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1249.269	4.61	24.81	41.22	48.09	36.29	68.20 -31.91 peak
2	1583.392	5.37	26.18	41.46	45.32	35.41	74.00 -38.59 peak
3	3465.510	6.43	31.65	42.21	46.33	42.20	68.20 -26.00 peak
4	4495.125	7.55	33.59	42.42	45.89	44.61	68.20 -23.59 peak
5	11490.000	12.13	37.90	38.19	36.34	48.18	74.00 -25.82 peak
6	17235.000	16.18	42.74	40.48	33.28	51.72	68.20 -16.48 peak


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

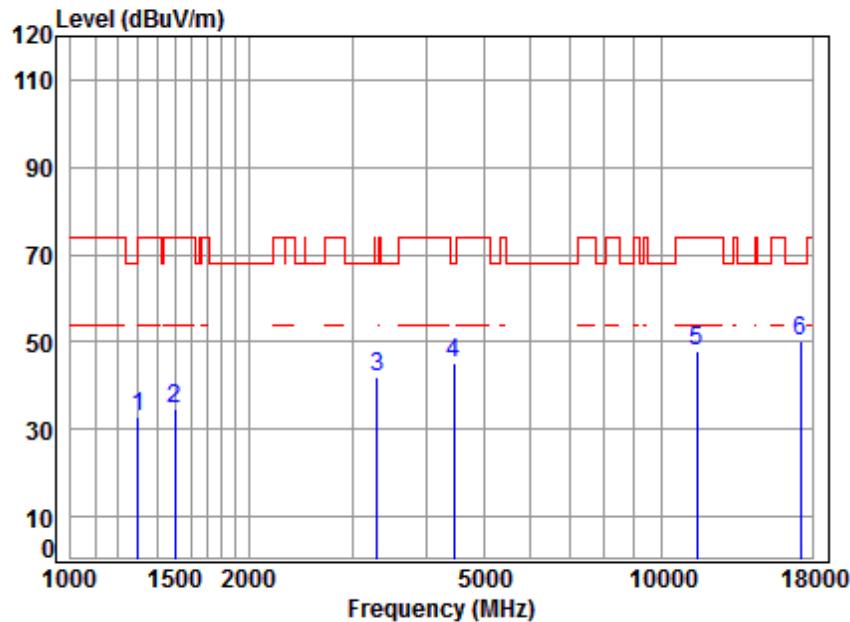

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5745 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable		Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	25.03	41.26	44.12	32.69	74.00	-41.31 peak
2	1503.119	5.48	25.81	41.41	44.98	34.86	74.00	-39.14 peak
3	3308.894	6.29	31.41	42.18	46.31	41.83	68.20	-26.37 peak
4	4456.315	7.51	33.53	42.41	46.51	45.14	68.20	-23.06 peak
5	11490.000	12.13	37.90	38.19	36.27	48.11	74.00	-25.89 peak
6	17235.000	16.18	42.74	40.48	31.80	50.24	68.20	-17.96 peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

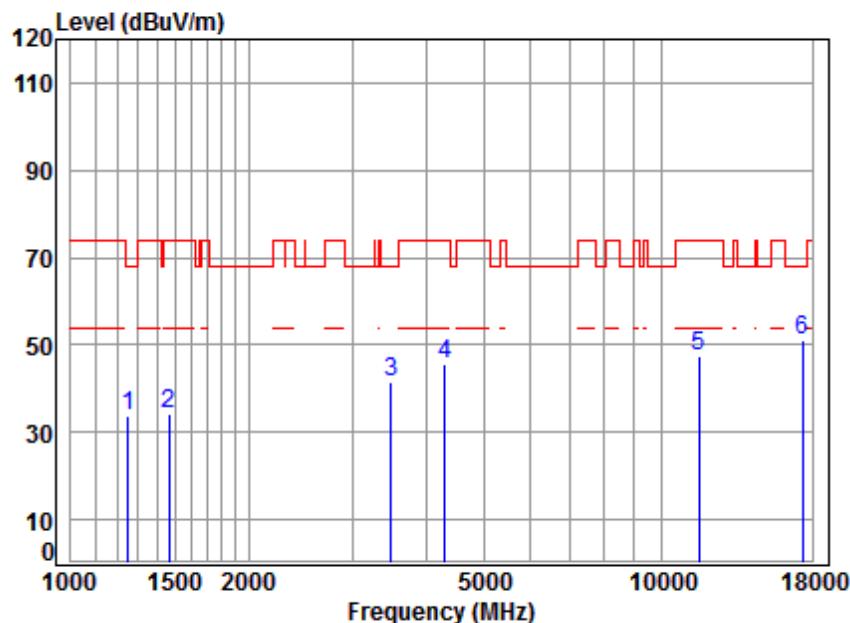

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1249.269	4.61	24.81	41.22	45.69	33.89	68.20 -34.31 peak
2	1468.761	5.38	25.69	41.38	44.66	34.35	74.00 -39.65 peak
3	3485.601	6.45	31.68	42.22	45.83	41.74	68.20 -26.46 peak
4	4304.400	7.34	33.26	42.38	47.33	45.55	74.00 -28.45 peak
5	11570.000	12.17	37.87	38.24	35.76	47.56	74.00 -26.44 peak
6	17355.000	15.92	42.81	40.58	32.92	51.07	68.20 -17.13 peak


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

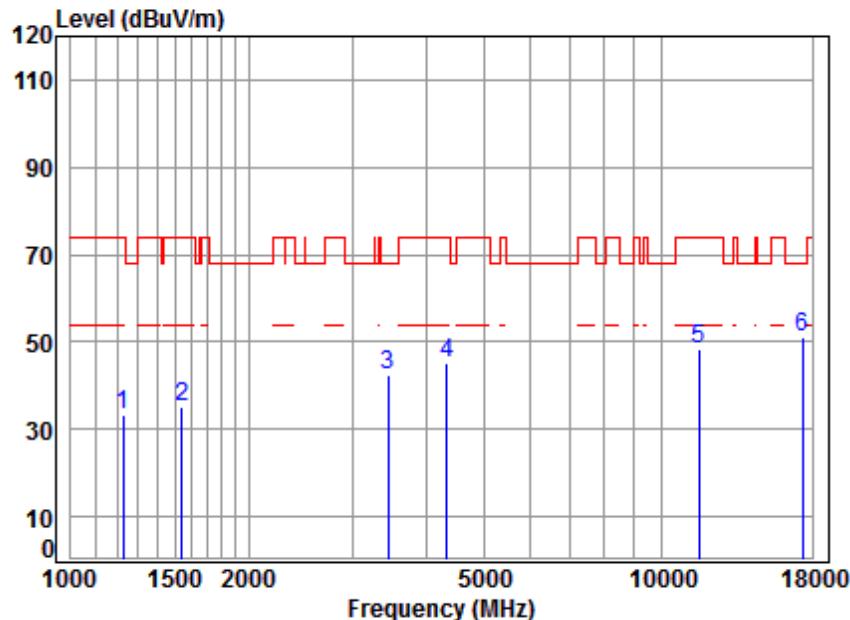

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5785 TX RSE
Note : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1227.791	4.53	24.71	41.21	45.23	33.26	74.00	-40.74	peak
2	1542.733	5.42	26.00	41.43	44.95	34.94	74.00	-39.06	peak
3	3445.535	6.41	31.62	42.21	46.48	42.30	68.20	-25.90	peak
4	4341.886	7.38	33.33	42.39	46.70	45.02	74.00	-28.98	peak
5	11570.000	12.17	37.87	38.24	36.47	48.27	74.00	-25.73	peak
6	17355.000	15.92	42.81	40.58	32.86	51.01	68.20	-17.19	peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

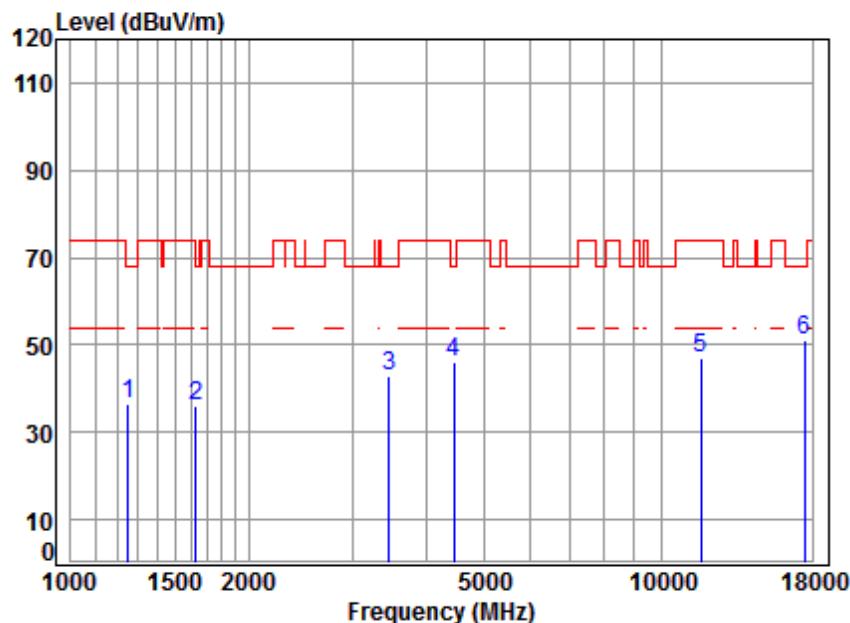

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1249.269	4.61	24.81	41.22	48.34	36.54	68.20 -31.66 peak
2	1629.825	5.31	26.38	41.49	46.03	36.23	68.20 -31.97 peak
3	3455.508	6.42	31.63	42.21	47.05	42.89	68.20 -25.31 peak
4	4456.315	7.51	33.53	42.41	47.61	46.24	68.20 -21.96 peak
5	11650.000	12.20	37.84	38.29	35.15	46.90	74.00 -27.10 peak
6	17475.000	15.65	42.89	40.68	33.38	51.24	68.20 -16.96 peak


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

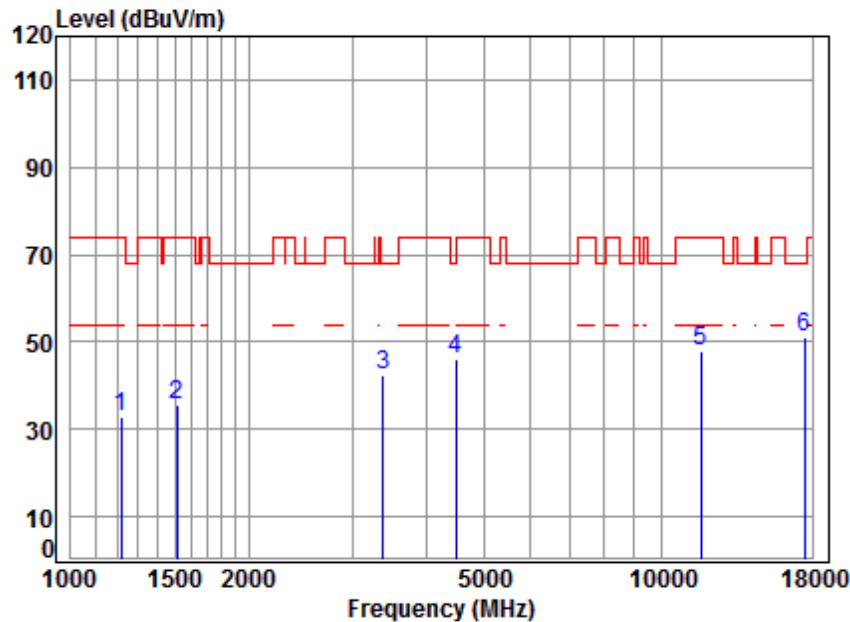

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5825 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	4.49	24.67	41.20	44.69	32.65	74.00	-41.35	peak	
2	1511.833	5.46	25.85	41.41	45.71	35.61	74.00	-38.39	peak	
3	3376.523	6.35	31.51	42.19	46.68	42.35	68.20	-25.85	peak	
4	4482.150	7.54	33.57	42.41	47.32	46.02	68.20	-22.18	peak	
5	11650.000	12.20	37.84	38.29	35.99	47.74	74.00	-26.26	peak	
6	17475.000	15.65	42.89	40.68	33.39	51.25	68.20	-16.95	peak	


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

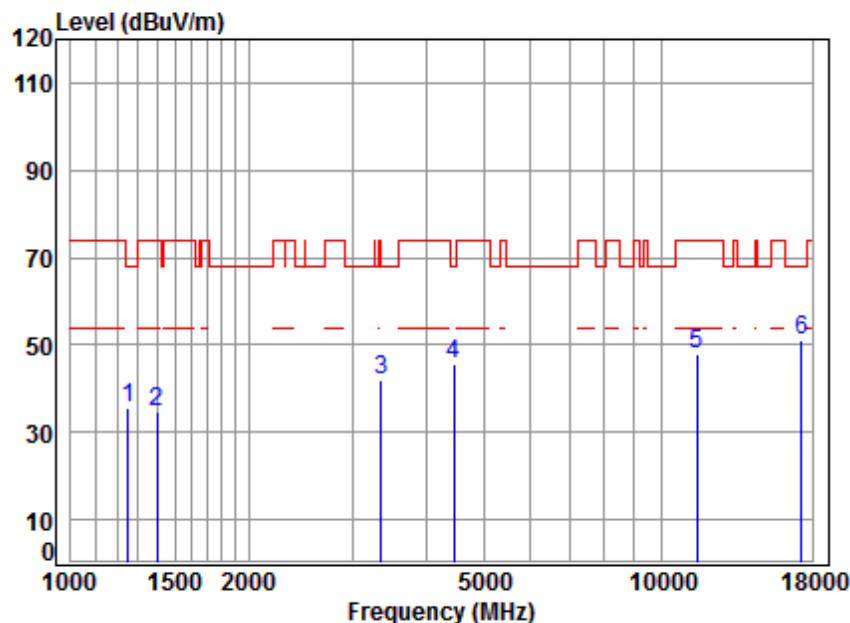

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5755 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1249.269	4.61	24.81	41.22	47.19	35.39	68.20 -32.81 peak
2	1398.336	5.15	25.42	41.34	45.57	34.80	74.00 -39.20 peak
3	3357.061	6.33	31.48	42.19	46.39	42.01	74.00 -31.99 peak
4	4456.315	7.51	33.53	42.41	46.96	45.59	68.20 -22.61 peak
5	11510.000	12.14	37.90	38.20	36.13	47.97	74.00 -26.03 peak
6	17265.000	16.12	42.76	40.51	32.58	50.95	68.20 -17.25 peak


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

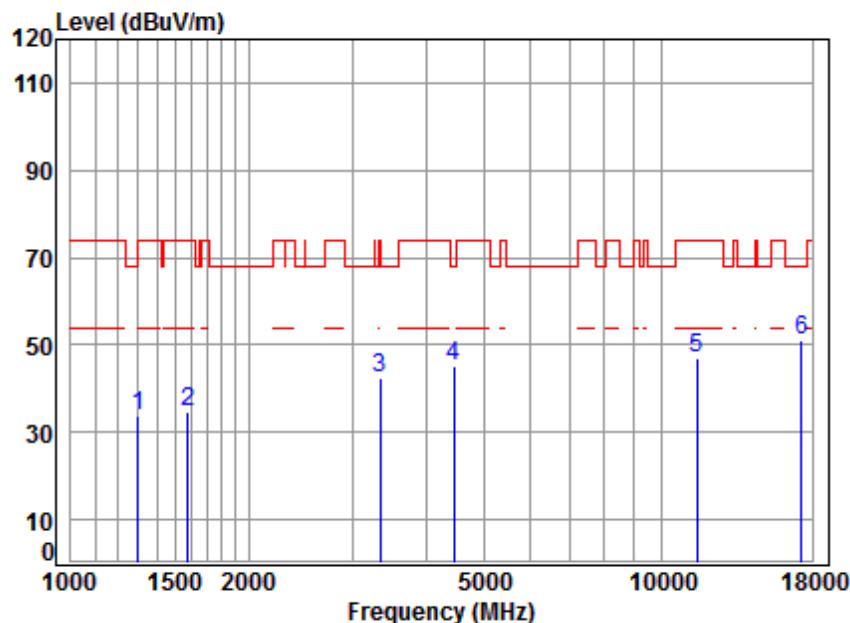

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5755 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	45.29	33.86	74.00 -40.14 peak
2	1578.822	5.38	26.16	41.46	44.48	34.56	74.00 -39.44 peak
3	3337.710	6.31	31.45	42.18	46.74	42.32	74.00 -31.68 peak
4	4456.315	7.51	33.53	42.41	46.53	45.16	68.20 -23.04 peak
5	11510.000	12.14	37.90	38.20	35.31	47.15	74.00 -26.85 peak
6	17265.000	16.12	42.76	40.51	32.92	51.29	68.20 -16.91 peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

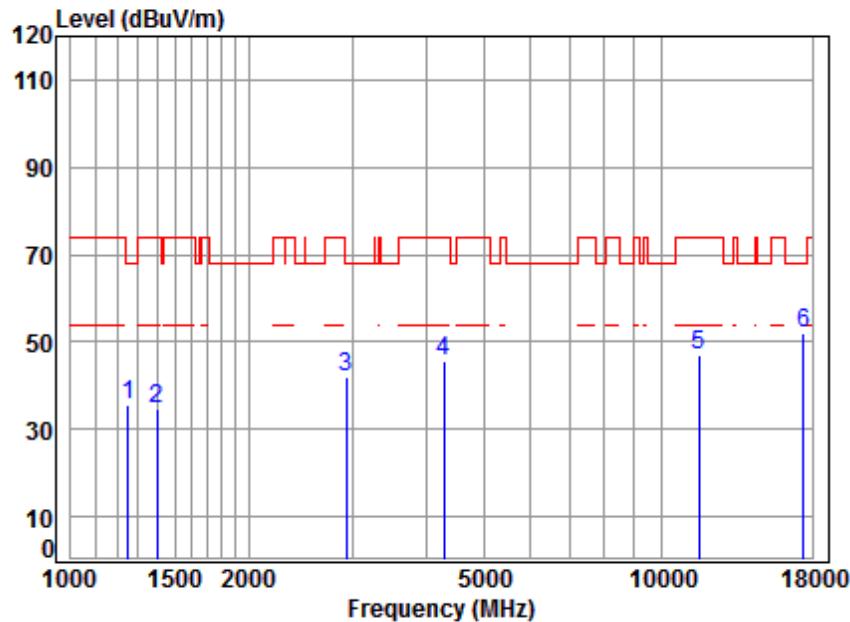

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5795 TX RSE
Note : 5G WIFI 11AC40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	47.29	35.49	68.20	-32.71	peak
2	1398.336	5.15	25.42	41.34	45.52	34.75	74.00	-39.25	peak
3	2930.633	5.93	30.62	42.08	47.67	42.14	68.20	-26.06	peak
4	4279.589	7.31	33.22	42.38	47.36	45.51	74.00	-28.49	peak
5	11590.000	12.17	37.86	38.25	35.37	47.15	74.00	-26.85	peak
6	17385.000	15.85	42.83	40.60	33.99	52.07	68.20	-16.13	peak


Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

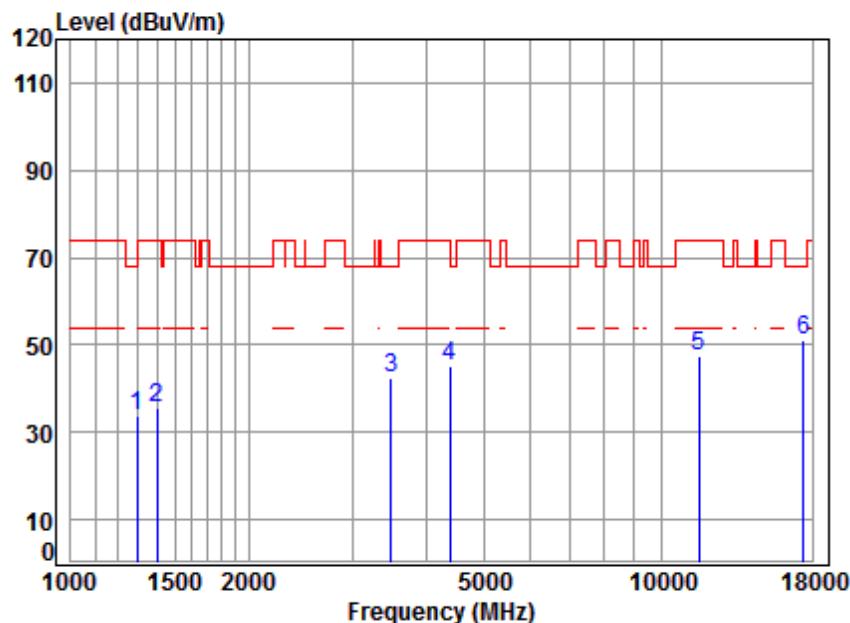

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5795 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1293.359	4.77	25.00	41.26	45.41	33.92	68.20 -34.28 peak
2	1398.336	5.15	25.42	41.34	46.27	35.50	74.00 -38.50 peak
3	3485.601	6.45	31.68	42.22	46.36	42.27	68.20 -25.93 peak
4	4379.699	7.43	33.39	42.40	46.92	45.34	74.00 -28.66 peak
5	11590.000	12.17	37.86	38.25	35.73	47.51	74.00 -26.49 peak
6	17385.000	15.85	42.83	40.60	32.82	50.90	68.20 -17.30 peak


Mode:e; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

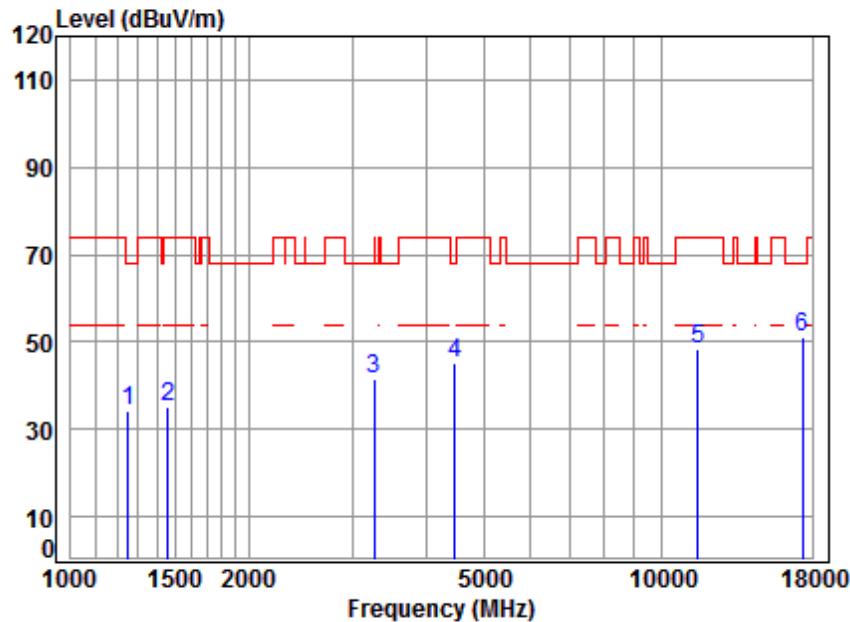

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5775 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.81	41.22	45.90	34.10	68.20	-34.10	peak	
2	1460.295	5.35	25.65	41.38	45.71	35.33	74.00	-38.67	peak	
3	3261.418	6.24	31.33	42.17	46.26	41.66	74.00	-32.34	peak	
4	4469.214	7.53	33.55	42.41	46.71	45.38	68.20	-22.82	peak	
5	11550.000	12.16	37.88	38.23	36.36	48.17	74.00	-25.83	peak	
6	17325.000	15.98	42.80	40.55	32.91	51.14	68.20	-17.06	peak	

Mode:e; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

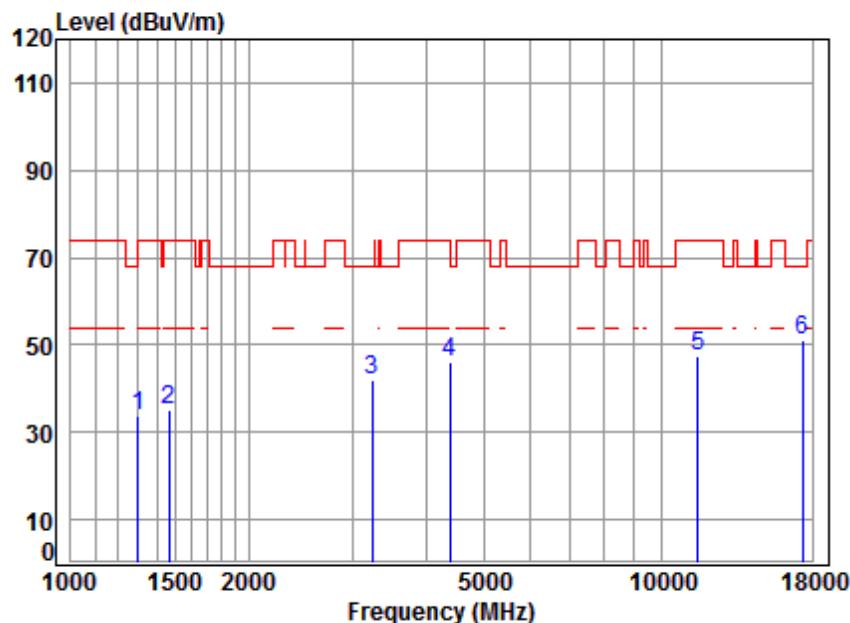


Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5775 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	45.03	33.60	74.00 -40.40 peak
2	1468.761	5.38	25.69	41.38	45.28	34.97	74.00 -39.03 peak
3	3242.619	6.22	31.30	42.16	46.69	42.05	68.20 -26.15 peak
4	4392.376	7.44	33.42	42.40	47.79	46.25	74.00 -27.75 peak
5	11550.000	12.16	37.88	38.23	35.81	47.62	74.00 -26.38 peak
6	17325.000	15.98	42.80	40.55	32.92	51.15	68.20 -17.05 peak

Test data for Antenna3/ Band 1:


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

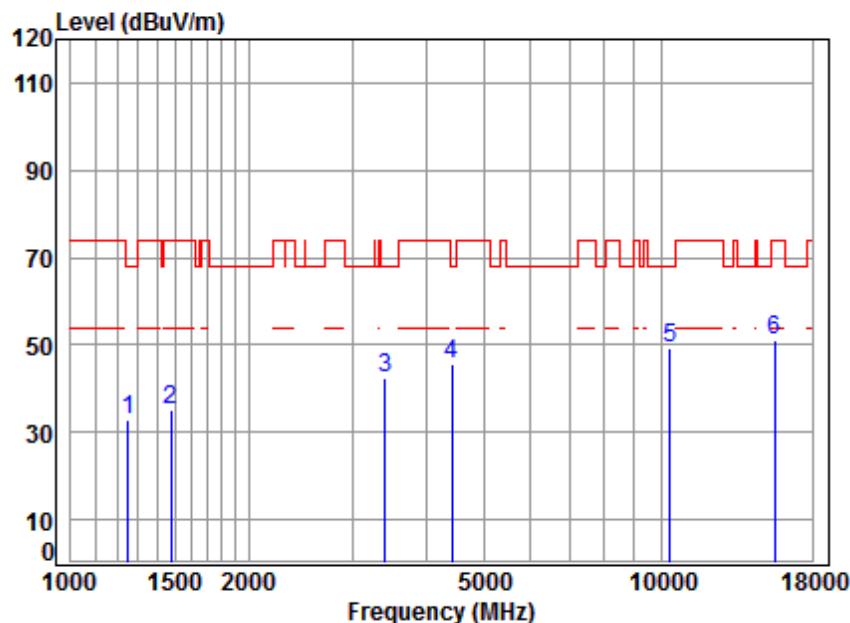

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	44.66	32.86	68.20	-35.34 peak
2 1477.276	5.41	25.72	41.39	45.41	35.15	74.00	-38.85 peak
3 3405.929	6.38	31.56	42.20	46.49	42.23	68.20	-25.97 peak
4 4417.841	7.47	33.46	42.40	46.87	45.40	68.20	-22.80 peak
5 10360.000	11.19	37.76	37.45	37.81	49.31	68.20	-18.89 peak
6 15540.000	14.30	40.72	39.00	34.92	50.94	74.00	-23.06 peak


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

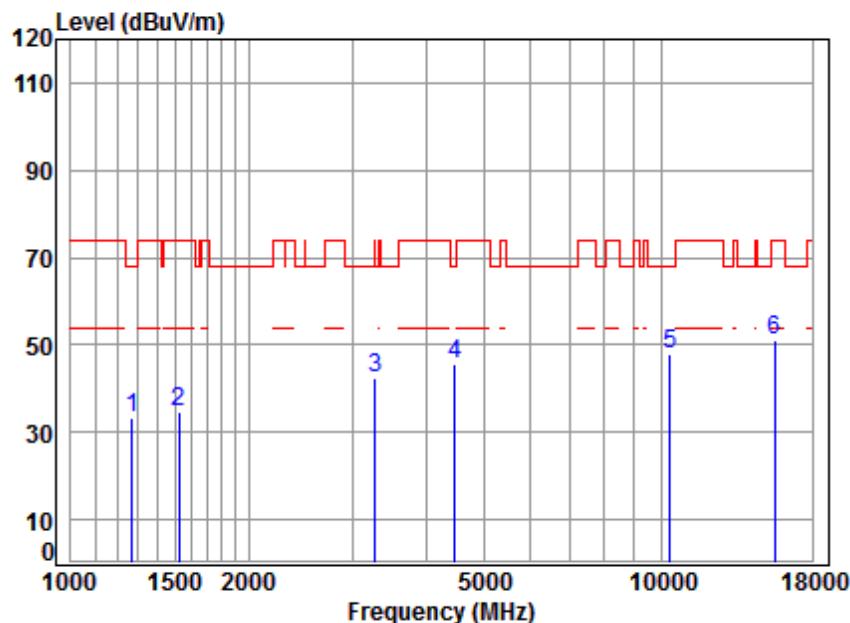

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.90	41.24	44.91	33.26	68.20	-34.94	peak	
2	1525.000	5.45	25.91	41.42	44.64	34.58	74.00	-39.42	peak	
3	3280.326	6.26	31.36	42.17	46.82	42.27	68.20	-25.93	peak	
4	4469.214	7.53	33.55	42.41	46.84	45.51	68.20	-22.69	peak	
5	10360.000	11.19	37.76	37.45	36.45	47.95	68.20	-20.25	peak	
6	15540.000	14.30	40.72	39.00	34.90	50.92	74.00	-23.08	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

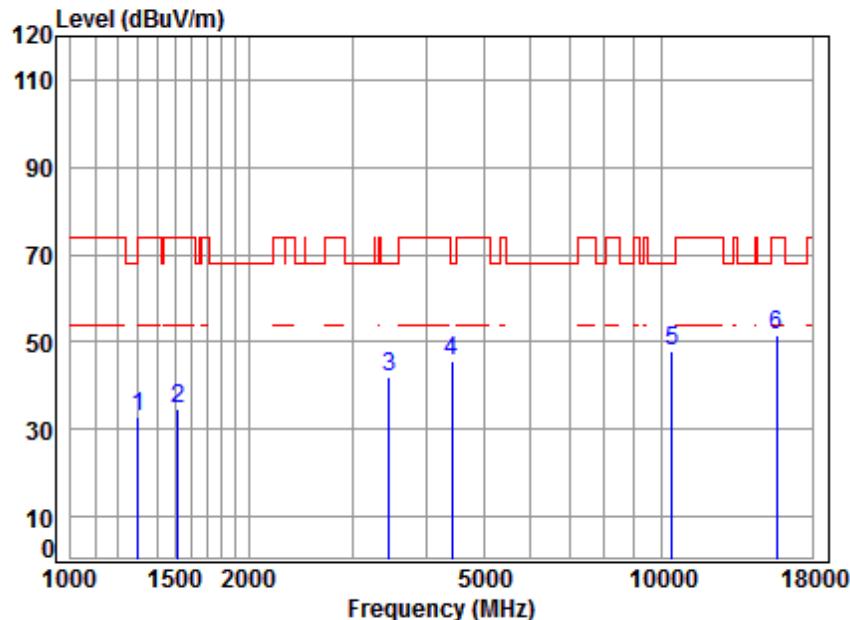

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	44.50	33.07	74.00 -40.93 peak
2	1520.598	5.45	25.89	41.42	44.71	34.63	74.00 -39.37 peak
3	3465.510	6.43	31.65	42.21	46.30	42.17	68.20 -26.03 peak
4	4417.841	7.47	33.46	42.40	46.90	45.43	68.20 -22.77 peak
5	10440.000	11.25	37.72	37.51	36.33	47.79	68.20 -20.41 peak
6	15660.000	14.48	40.80	39.11	35.44	51.61	74.00 -22.39 peak


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

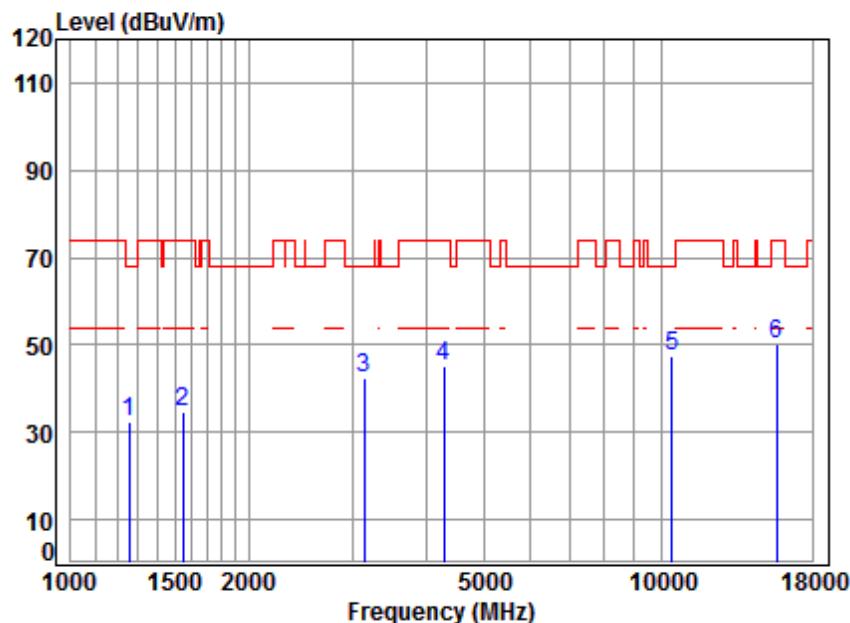

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.84	41.23	44.18	32.43	68.20	-35.77	peak		
2	1547.199	5.42	26.02	41.44	44.71	34.71	74.00	-39.29	peak		
3	3141.145	6.12	31.14	42.14	47.22	42.34	68.20	-25.86	peak		
4	4279.589	7.31	33.22	42.38	46.97	45.12	74.00	-28.88	peak		
5	10440.000	11.25	37.72	37.51	36.08	47.54	68.20	-20.66	peak		
6	15660.000	14.48	40.80	39.11	33.93	50.10	74.00	-23.90	peak		


Mode:b; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

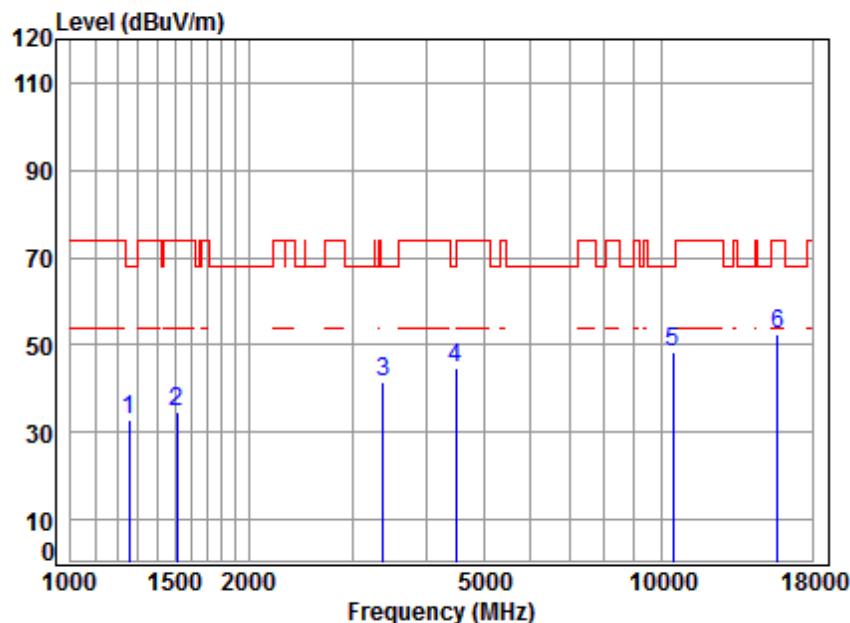

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					Level	Line		
1256.512	4.64	24.84	41.23	44.49	32.74	68.20	-35.46	peak
1511.833	5.46	25.85	41.41	44.57	34.47	74.00	-39.53	peak
3376.523	6.35	31.51	42.19	46.06	41.73	68.20	-26.47	peak
4482.150	7.54	33.57	42.41	46.21	44.91	68.20	-23.29	peak
10480.000	11.28	37.71	37.53	36.74	48.20	68.20	-20.00	peak
15720.000	14.57	40.83	39.17	36.46	52.69	74.00	-21.31	peak


Mode:b; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

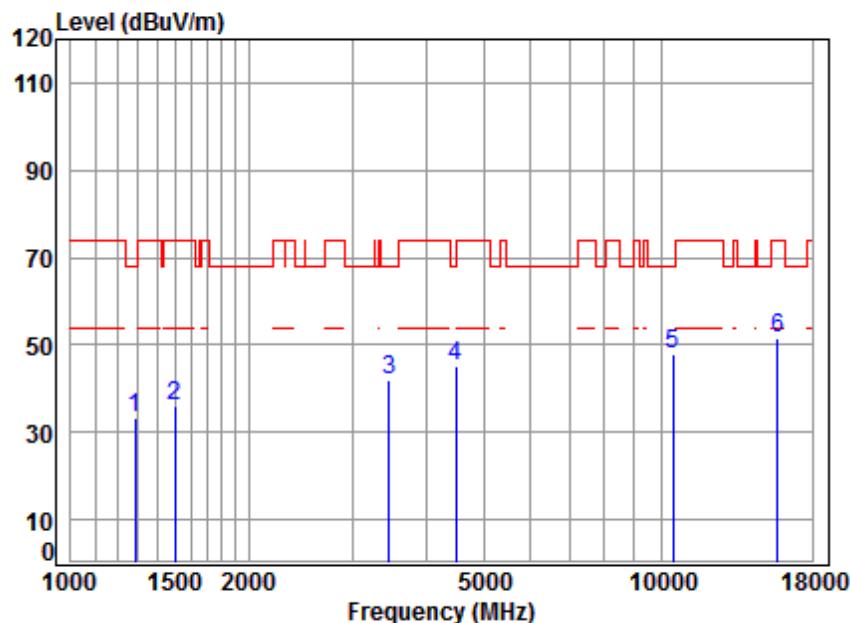

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11A

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark	
					dB	dB/m	dB	dBuV	dBuV/m
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m		
1 1285.904	4.75	24.96	41.25	44.71	33.17	68.20	-35.03	peak	
2 1498.781	5.48	25.80	41.41	46.14	36.01	74.00	-37.99	peak	
3 3455.508	6.42	31.63	42.21	46.11	41.95	68.20	-26.25	peak	
4 4482.150	7.54	33.57	42.41	46.55	45.25	68.20	-22.95	peak	
5 10480.000	11.28	37.71	37.53	36.30	47.76	68.20	-20.44	peak	
6 15720.000	14.57	40.83	39.17	35.54	51.77	74.00	-22.23	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

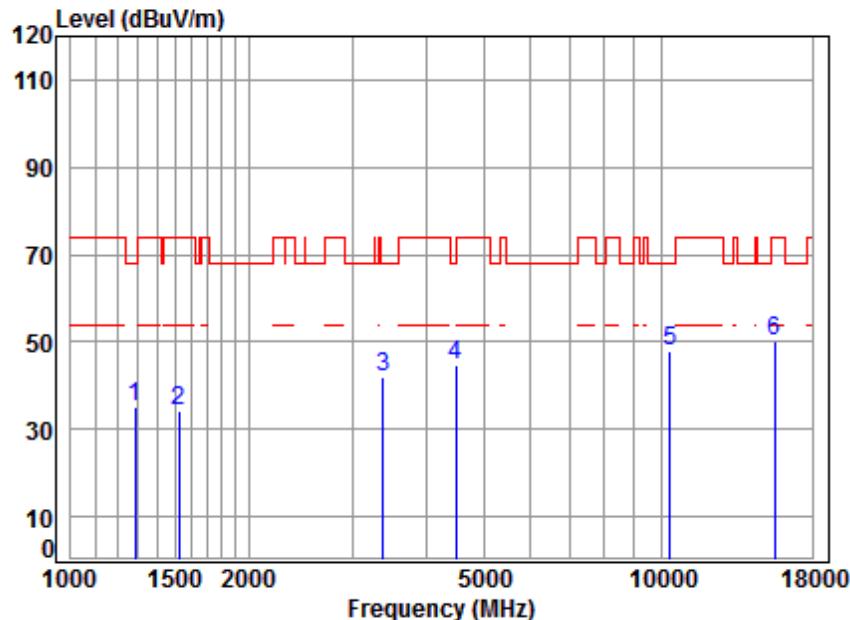

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1285.904	4.75	24.96	41.25	46.64	35.10	68.20	-33.10	peak
2	1525.000	5.45	25.91	41.42	44.48	34.42	74.00	-39.58	peak
3	3376.523	6.35	31.51	42.19	46.50	42.17	68.20	-26.03	peak
4	4482.150	7.54	33.57	42.41	46.18	44.88	68.20	-23.32	peak
5	10360.000	11.19	37.76	37.45	36.57	48.07	68.20	-20.13	peak
6	15540.000	14.30	40.72	39.00	34.07	50.09	74.00	-23.91	peak


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

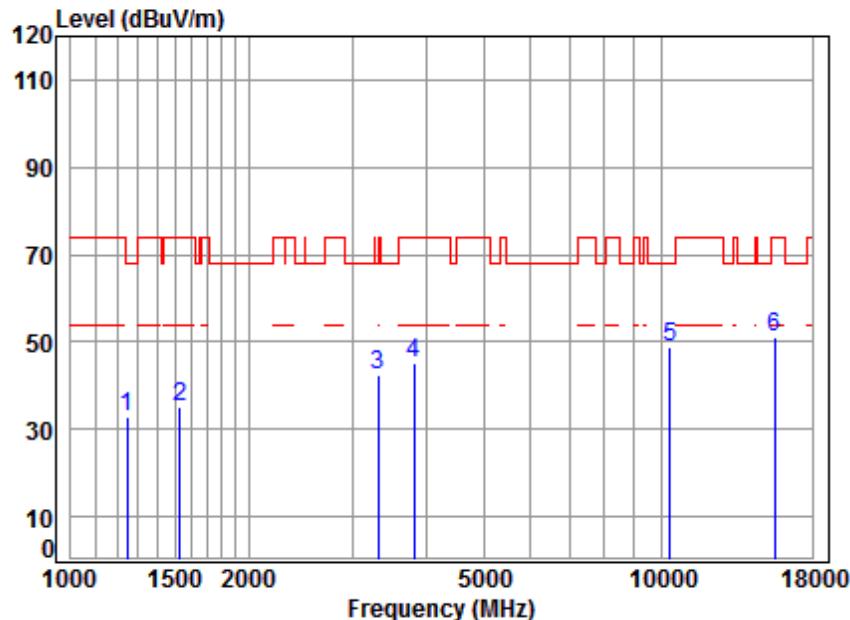

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1245.663	4.60	24.79	41.22	44.51	32.68	68.20	-35.52 peak
2	1529.414	5.44	25.94	41.43	45.39	35.34	74.00	-38.66 peak
3	3318.471	6.29	31.42	42.18	46.71	42.24	68.20	-25.96 peak
4	3812.336	6.79	32.34	42.29	48.42	45.26	74.00	-28.74 peak
5	10360.000	11.19	37.76	37.45	37.39	48.89	68.20	-19.31 peak
6	15540.000	14.30	40.72	39.00	35.16	51.18	74.00	-22.82 peak


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

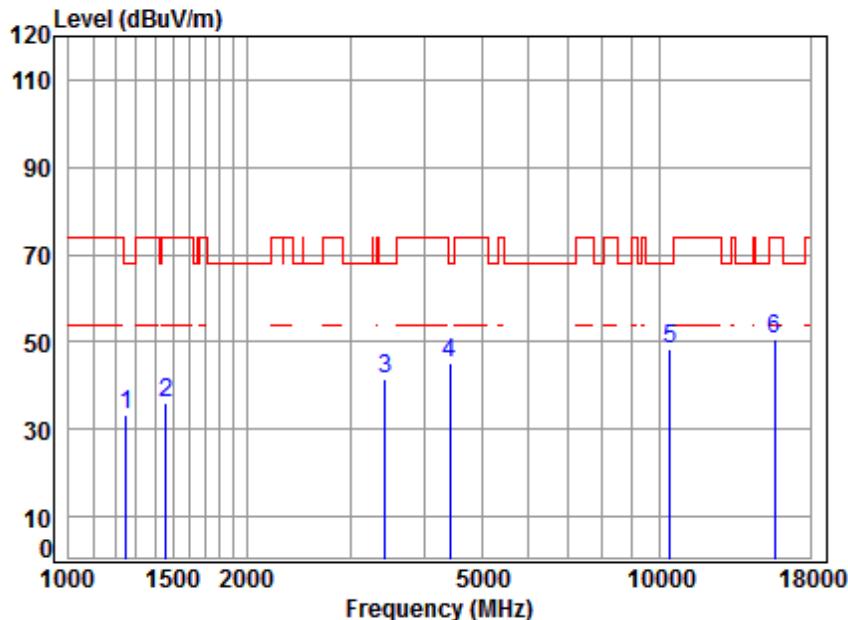

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1249.269	4.61	24.81	41.22	45.18	33.38	68.20	-34.82 peak
2	1460.295	5.35	25.65	41.38	46.43	36.05	74.00	-37.95 peak
3	3435.590	6.40	31.60	42.21	45.71	41.50	68.20	-26.70 peak
4	4417.841	7.47	33.46	42.40	46.81	45.34	68.20	-22.86 peak
5	10440.000	11.25	37.72	37.51	36.92	48.38	68.20	-19.82 peak
6	15660.000	14.48	40.80	39.11	34.27	50.44	74.00	-23.56 peak


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

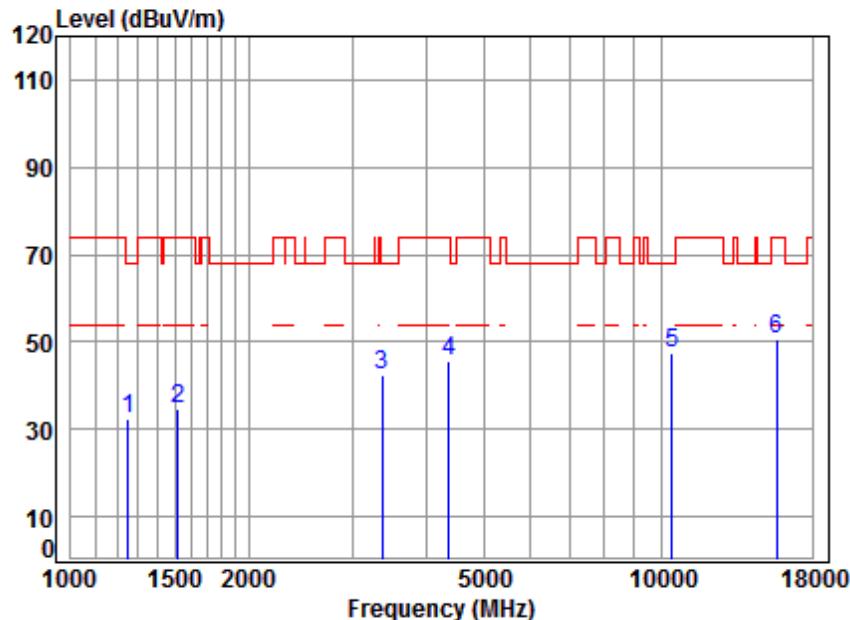

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	44.24	32.44	68.20	-35.76 peak
2 1516.210	5.46	25.87	41.42	44.55	34.46	74.00	-39.54 peak
3 3366.778	6.34	31.50	42.19	46.69	42.34	68.20	-25.86 peak
4 4367.058	7.41	33.37	42.39	47.24	45.63	74.00	-28.37 peak
5 10440.000	11.25	37.72	37.51	35.77	47.23	68.20	-20.97 peak
6 15660.000	14.48	40.80	39.11	34.58	50.75	74.00	-23.25 peak


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

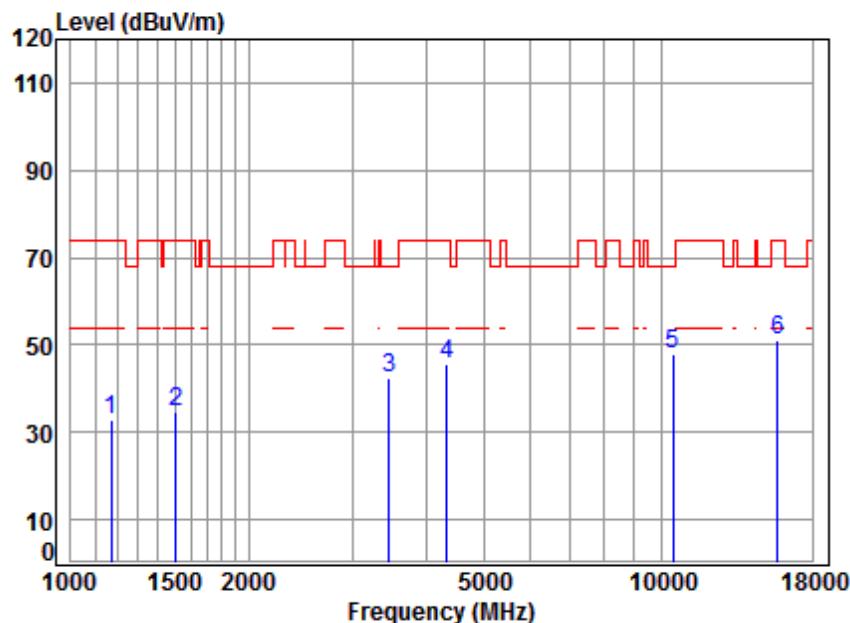

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1168.920	4.29	24.45	41.16	45.19	32.77	74.00	-41.23	peak
2	1507.470	5.47	25.83	41.41	44.70	34.59	74.00	-39.41	peak
3	3455.508	6.42	31.63	42.21	46.62	42.46	68.20	-25.74	peak
4	4341.886	7.38	33.33	42.39	47.30	45.62	74.00	-28.38	peak
5	10480.000	11.28	37.71	37.53	36.63	48.09	68.20	-20.11	peak
6	15720.000	14.57	40.83	39.17	35.01	51.24	74.00	-22.76	peak


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

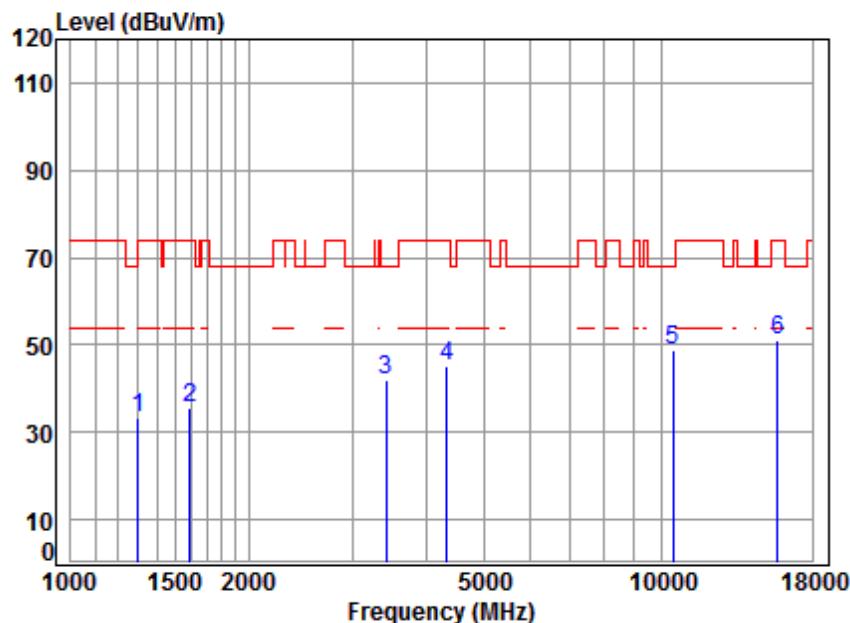

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.59	33.16	74.00	-40.84	peak	
2	1592.571	5.36	26.22	41.47	45.58	35.69	74.00	-38.31	peak	
3	3415.787	6.38	31.57	42.20	46.11	41.86	68.20	-26.34	peak	
4	4341.886	7.38	33.33	42.39	46.75	45.07	74.00	-28.93	peak	
5	10480.000	11.28	37.71	37.53	37.39	48.85	68.20	-19.35	peak	
6	15720.000	14.57	40.83	39.17	34.74	50.97	74.00	-23.03	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

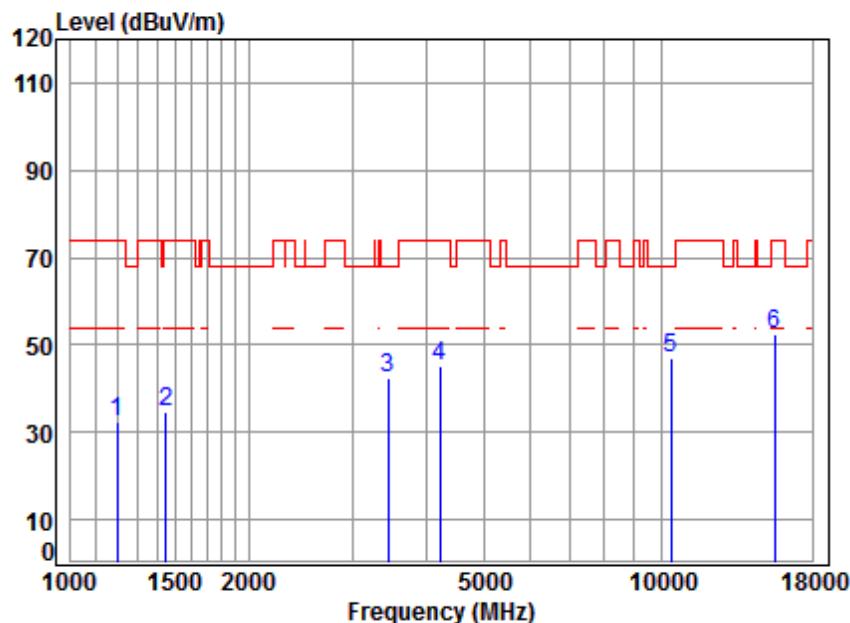

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1199.726	4.42	24.59	41.18	44.37	32.20	74.00	-41.80	peak
2	1447.688	5.31	25.61	41.37	44.92	34.47	74.00	-39.53	peak
3	3445.535	6.41	31.62	42.21	46.48	42.30	68.20	-25.90	peak
4	4218.186	7.24	33.11	42.37	47.37	45.35	74.00	-28.65	peak
5	10380.000	11.21	37.75	37.47	35.61	47.10	68.20	-21.10	peak
6	15570.000	14.35	40.74	39.03	36.37	52.43	74.00	-21.57	peak


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

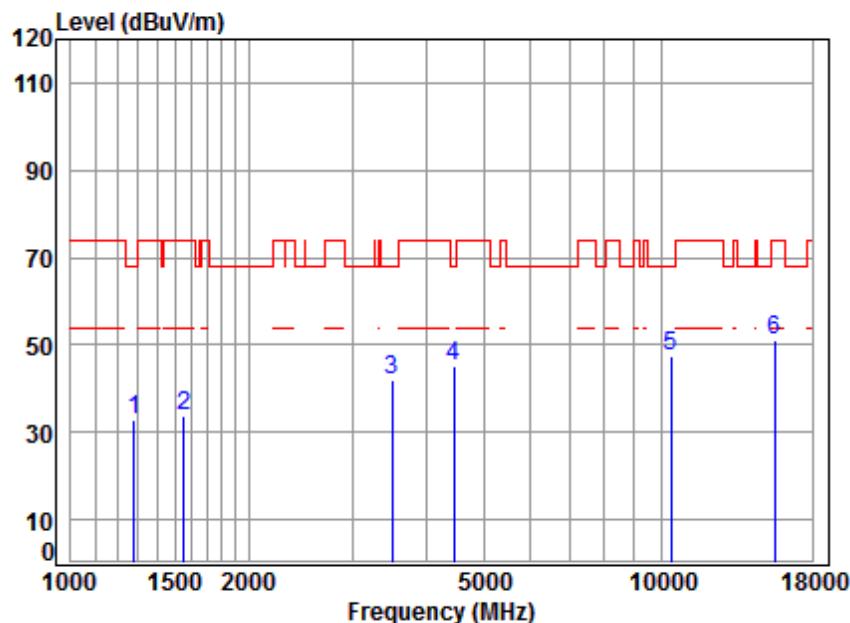

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	4.72	24.93	41.25	44.57	32.97	68.20	-35.23	peak	
2	1551.677	5.41	26.04	41.44	43.98	33.99	74.00	-40.01	peak	
3	3495.691	6.46	31.69	42.22	46.14	42.07	68.20	-26.13	peak	
4	4456.315	7.51	33.53	42.41	46.67	45.30	68.20	-22.90	peak	
5	10380.000	11.21	37.75	37.47	35.89	47.38	68.20	-20.82	peak	
6	15570.000	14.35	40.74	39.03	35.05	51.11	74.00	-22.89	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

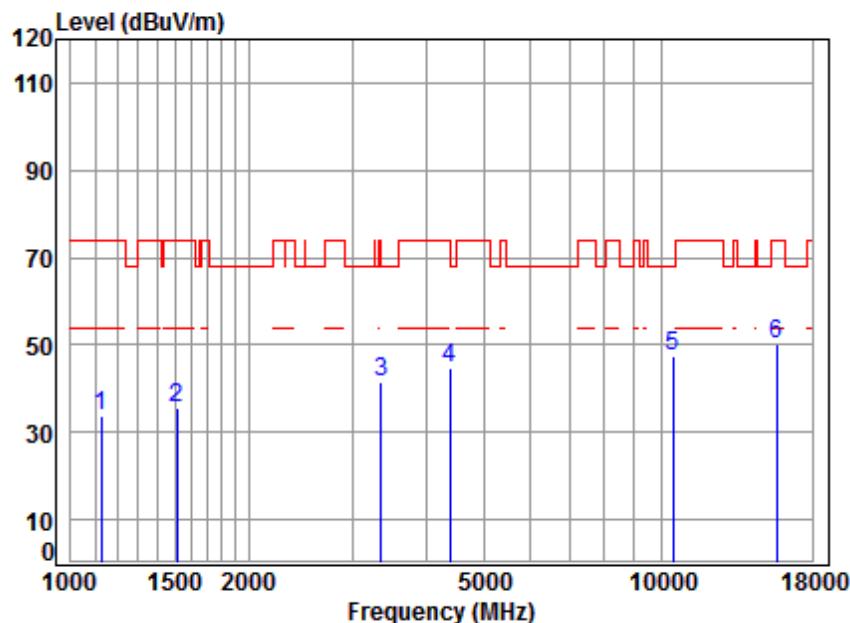

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1125.813	4.11	24.24	41.12	46.50	33.73	74.00	-40.27	peak	
2	1511.833	5.46	25.85	41.41	45.59	35.49	74.00	-38.51	peak	
3	3357.061	6.33	31.48	42.19	45.89	41.51	74.00	-32.49	peak	
4	4392.376	7.44	33.42	42.40	46.23	44.69	74.00	-29.31	peak	
5	10460.000	11.26	37.72	37.52	35.80	47.26	68.20	-20.94	peak	
6	15690.000	14.53	40.82	39.14	34.14	50.35	74.00	-23.65	peak	


Mode:b; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

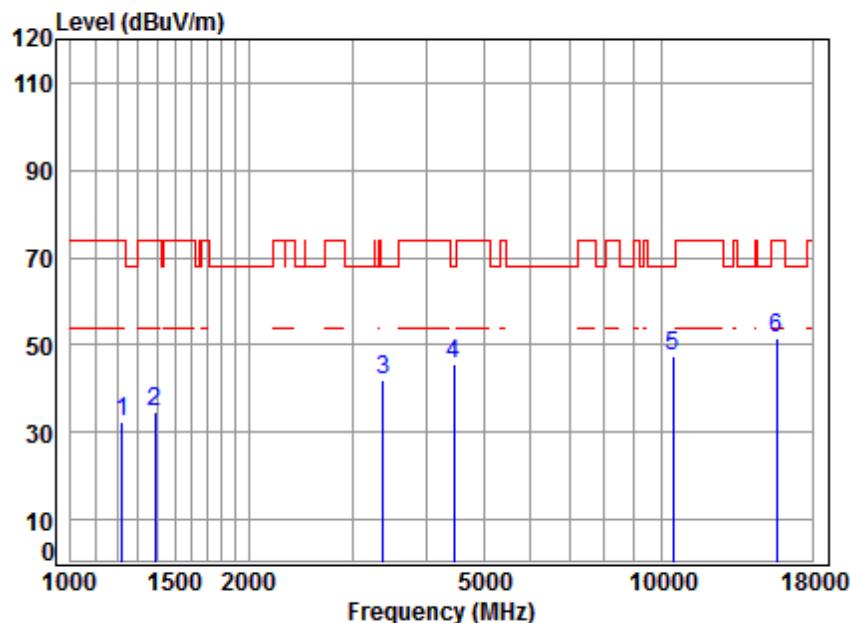

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1224.247	4.51	24.70	41.20	44.37	32.38	74.00	-41.62	peak	
2	1390.276	5.12	25.39	41.33	45.32	34.50	74.00	-39.50	peak	
3	3386.297	6.36	31.53	42.19	46.19	41.89	68.20	-26.31	peak	
4	4456.315	7.51	33.53	42.41	46.85	45.48	68.20	-22.72	peak	
5	10460.000	11.26	37.72	37.52	35.99	47.45	68.20	-20.75	peak	
6	15690.000	14.53	40.82	39.14	35.53	51.74	74.00	-22.26	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

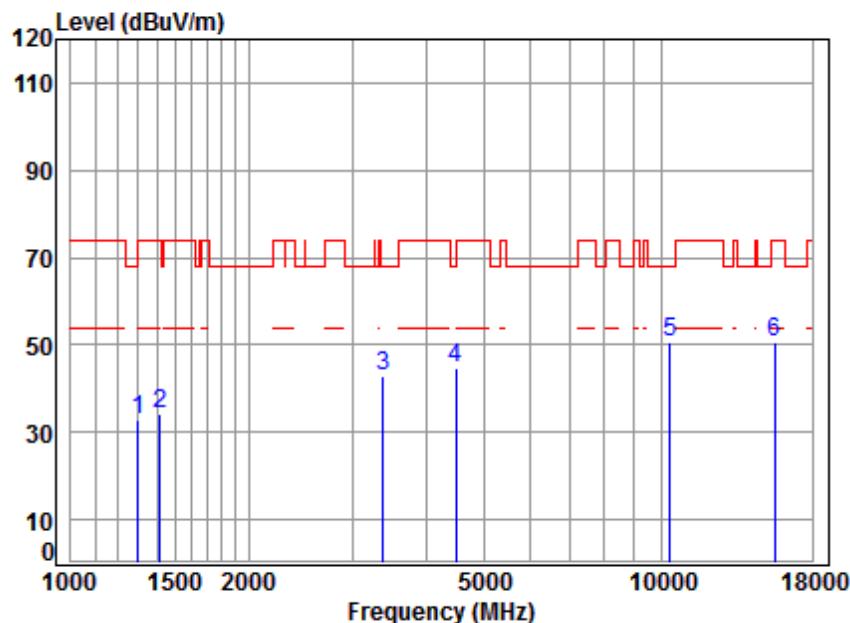

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.44	33.01	74.00	-40.99	peak	
2	1414.597	5.20	25.48	41.35	45.09	34.42	74.00	-39.58	peak	
3	3376.523	6.35	31.51	42.19	47.34	43.01	68.20	-25.19	peak	
4	4495.125	7.55	33.59	42.42	45.94	44.66	68.20	-23.54	peak	
5	10360.000	11.19	37.76	37.45	38.97	50.47	68.20	-17.73	peak	
6	15540.000	14.30	40.72	39.00	34.66	50.68	74.00	-23.32	peak	


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

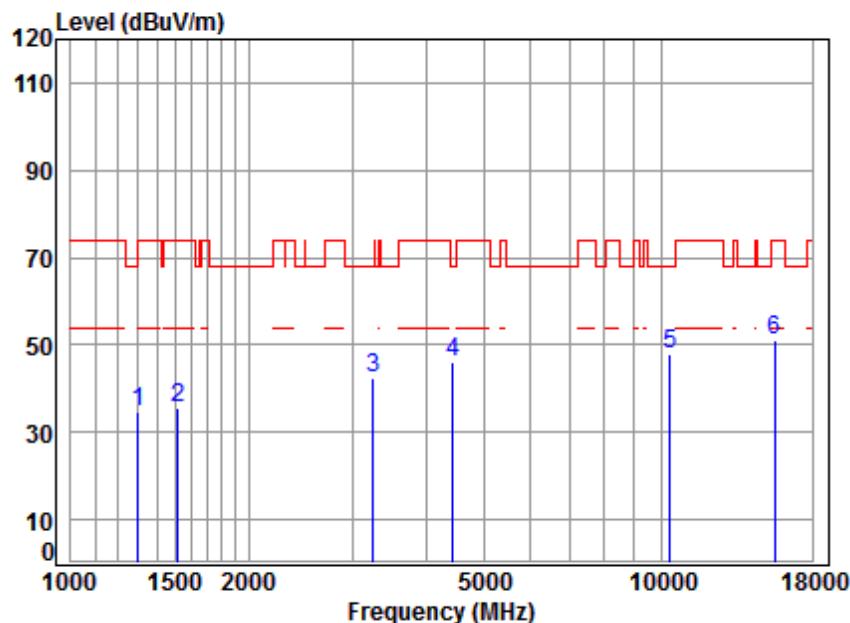

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5180 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	46.08	34.65	74.00	-39.35	peak	
2	1520.598	5.45	25.89	41.42	45.70	35.62	74.00	-38.38	peak	
3	3252.005	6.23	31.32	42.16	47.18	42.57	68.20	-25.63	peak	
4	4443.453	7.50	33.50	42.41	47.28	45.87	68.20	-22.33	peak	
5	10360.000	11.19	37.76	37.45	36.25	47.75	68.20	-20.45	peak	
6	15540.000	14.30	40.72	39.00	34.93	50.95	74.00	-23.05	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

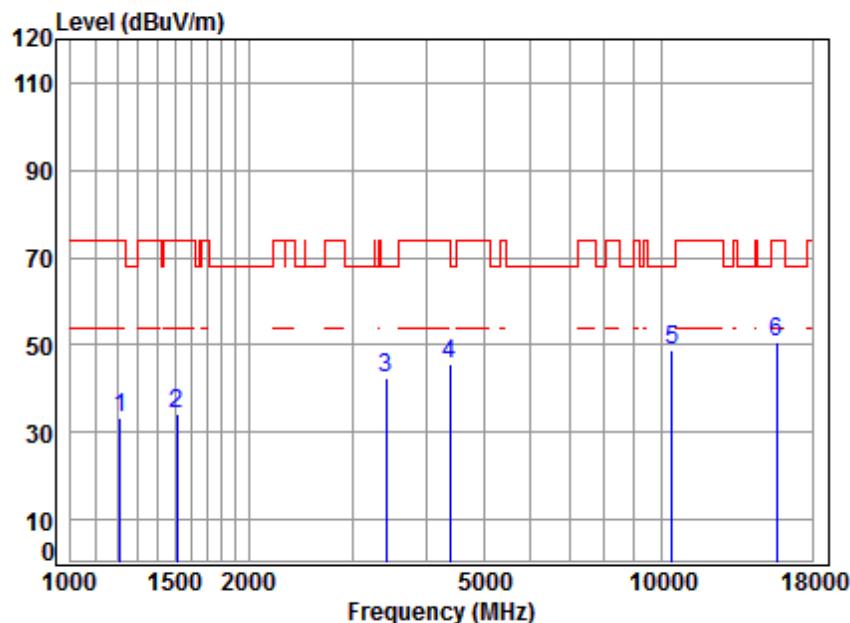

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable		Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level			
MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB	
1 1210.174	4.46	24.64	41.19	45.28	33.19	74.00	-40.81	peak
2 1511.833	5.46	25.85	41.41	44.35	34.25	74.00	-39.75	peak
3 3415.787	6.38	31.57	42.20	46.86	42.61	68.20	-25.59	peak
4 4392.376	7.44	33.42	42.40	47.13	45.59	74.00	-28.41	peak
5 10440.000	11.25	37.72	37.51	37.16	48.62	68.20	-19.58	peak
6 15660.000	14.48	40.80	39.11	34.29	50.46	74.00	-23.54	peak


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

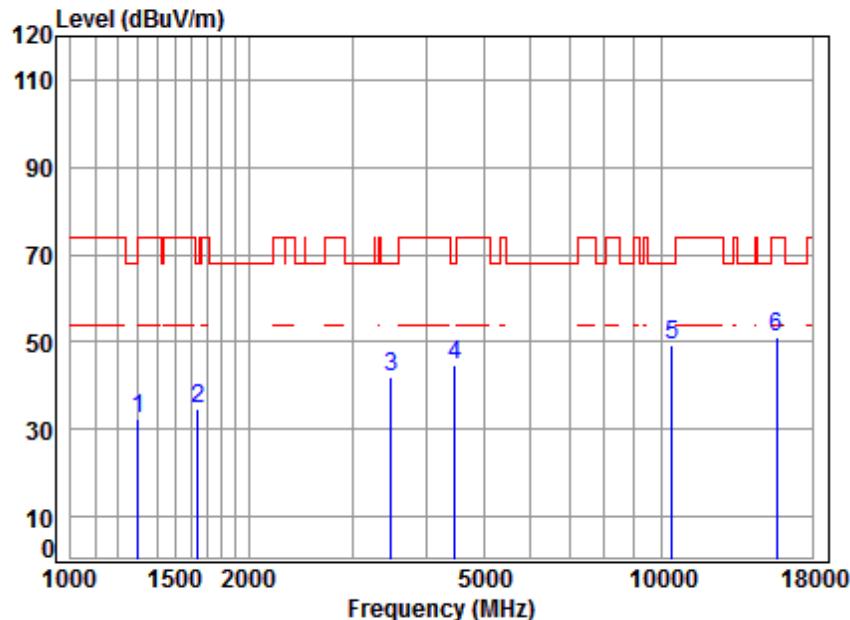

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5220 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	43.73	32.30	74.00 -41.70 peak
2	1644.019	5.30	26.44	41.50	44.60	34.84	68.20 -33.36 peak
3	3485.601	6.45	31.68	42.22	46.18	42.09	68.20 -26.11 peak
4	4469.214	7.53	33.55	42.41	46.18	44.85	68.20 -23.35 peak
5	10440.000	11.25	37.72	37.51	37.63	49.09	68.20 -19.11 peak
6	15660.000	14.48	40.80	39.11	34.94	51.11	74.00 -22.89 peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

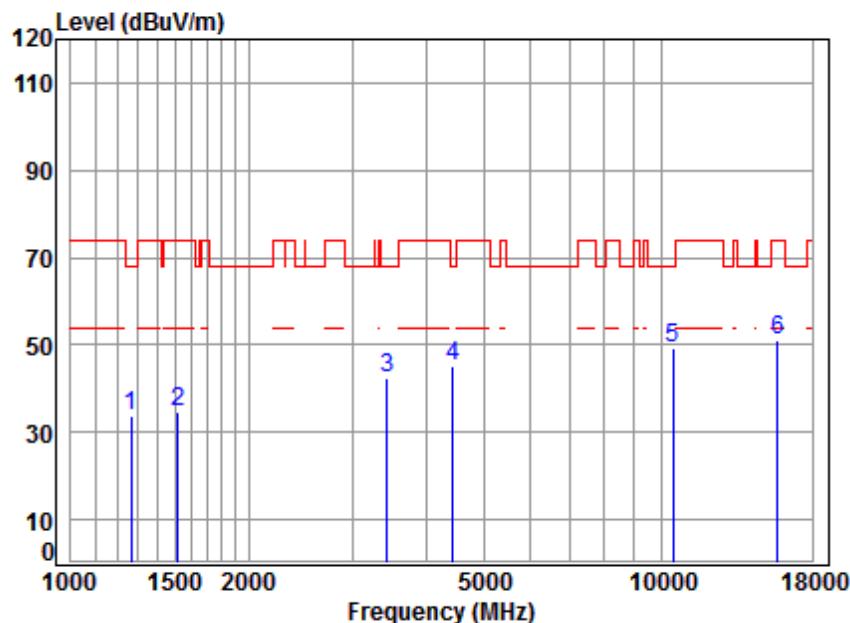

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1267.454	4.68	24.89	41.24	45.59	33.92	68.20 -34.28 peak
2	1520.598	5.45	25.89	41.42	44.62	34.54	74.00 -39.46 peak
3	3435.590	6.40	31.60	42.21	46.66	42.45	68.20 -25.75 peak
4	4430.628	7.48	33.48	42.41	46.80	45.35	68.20 -22.85 peak
5	10480.000	11.28	37.71	37.53	37.63	49.09	68.20 -19.11 peak
6	15720.000	14.57	40.83	39.17	34.94	51.17	74.00 -22.83 peak


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

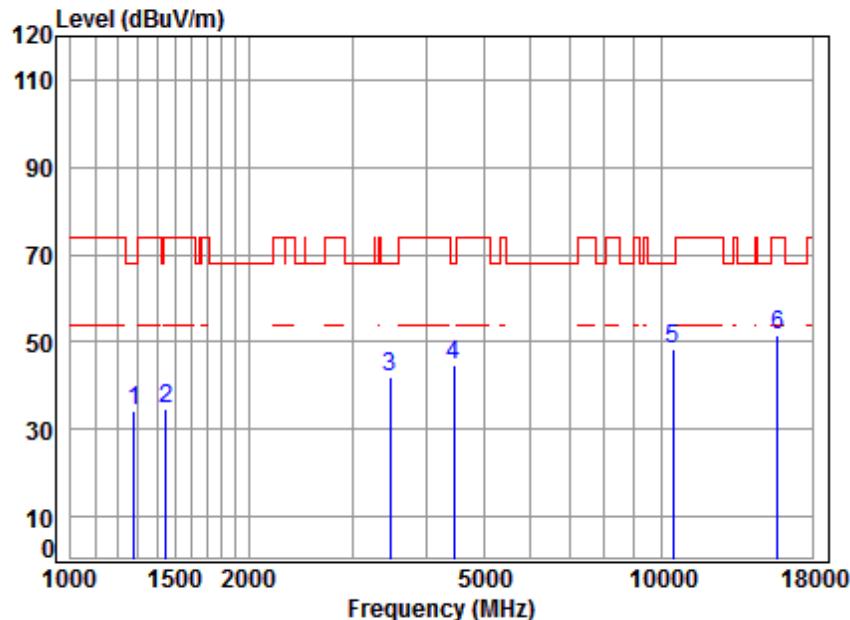

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5240 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1278.492	4.72	24.93	41.25	45.63	34.03	68.20	-34.17 peak
2 1447.688	5.31	25.61	41.37	45.24	34.79	74.00	-39.21 peak
3 3475.541	6.44	31.66	42.22	46.15	42.03	68.20	-26.17 peak
4 4456.315	7.51	33.53	42.41	46.10	44.73	68.20	-23.47 peak
5 10480.000	11.28	37.71	37.53	36.95	48.41	68.20	-19.79 peak
6 15720.000	14.57	40.83	39.17	35.17	51.40	74.00	-22.60 peak


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

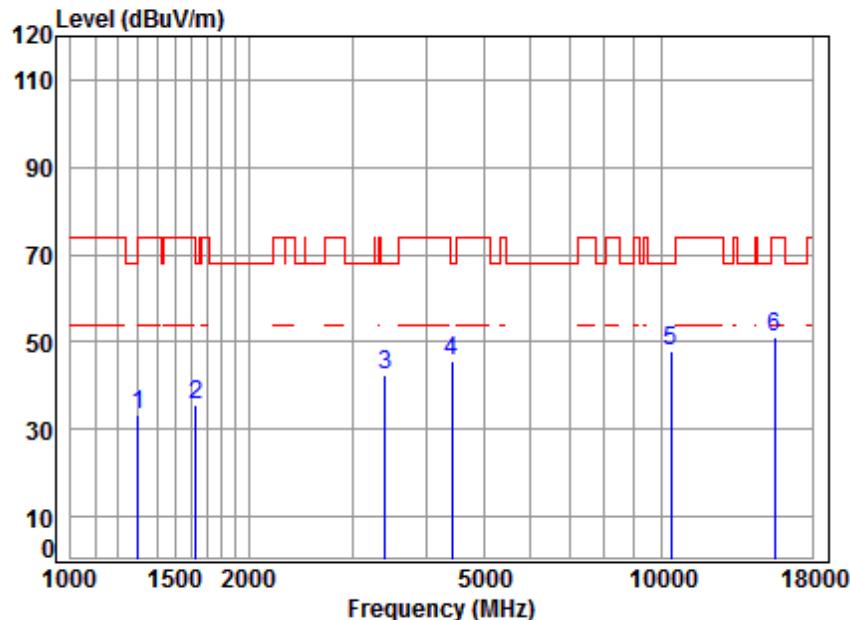

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	Loss	Factor	Factor	Level	Level	Line		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	25.03	41.26	44.72	33.29	74.00	-40.71 peak
2	1629.825	5.31	26.38	41.49	45.33	35.53	68.20	-32.67 peak
3	3405.929	6.38	31.56	42.20	46.77	42.51	68.20	-25.69 peak
4	4417.841	7.47	33.46	42.40	47.27	45.80	68.20	-22.40 peak
5	10380.000	11.21	37.75	37.47	36.28	47.77	68.20	-20.43 peak
6	15570.000	14.35	40.74	39.03	34.87	50.93	74.00	-23.07 peak


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

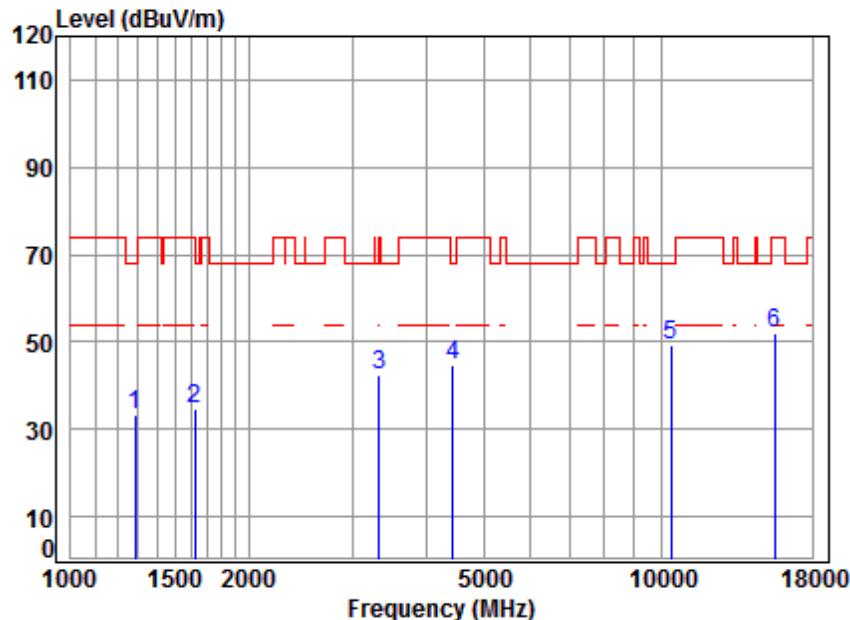

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5190 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	1285.904	4.75	24.96	41.25	44.76	33.22	68.20	-34.98	peak		
2	1625.121	5.32	26.36	41.49	44.33	34.52	74.00	-39.48	peak		
3	3328.077	6.30	31.44	42.18	46.93	42.49	68.20	-25.71	peak		
4	4430.628	7.48	33.48	42.41	46.32	44.87	68.20	-23.33	peak		
5	10380.000	11.21	37.75	37.47	37.95	49.44	68.20	-18.76	peak		
6	15570.000	14.35	40.74	39.03	35.93	51.99	74.00	-22.01	peak		


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

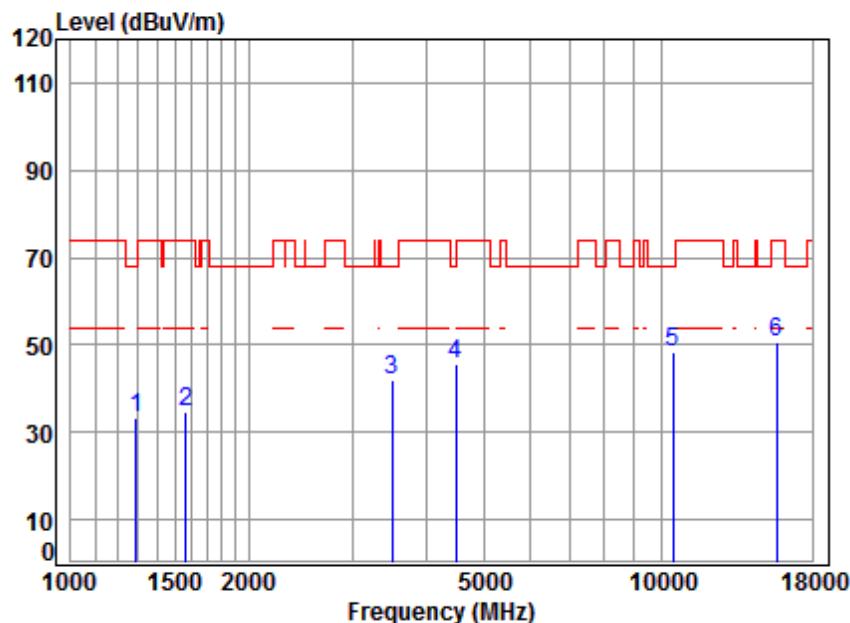

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1289.627	4.76	24.98	41.25	44.79	33.28	68.20	-34.92	peak
2	1565.191	5.39	26.10	41.45	44.69	34.73	74.00	-39.27	peak
3	3495.691	6.46	31.69	42.22	46.05	41.98	68.20	-26.22	peak
4	4495.125	7.55	33.59	42.42	46.88	45.60	68.20	-22.60	peak
5	10460.000	11.26	37.72	37.52	36.75	48.21	68.20	-19.99	peak
6	15690.000	14.53	40.82	39.14	34.37	50.58	74.00	-23.42	peak


Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

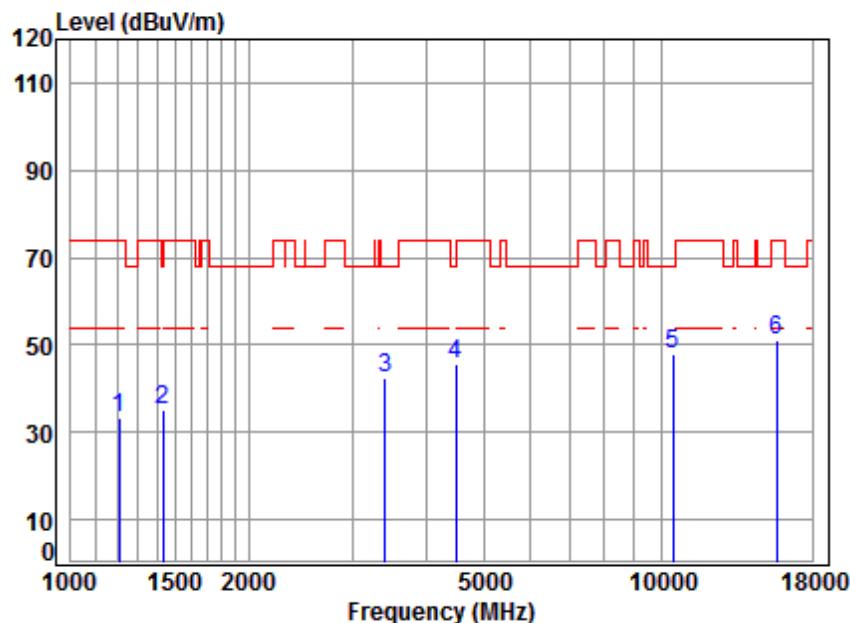

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5230 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.62	41.19	45.43	33.30	74.00	-40.70	peak	
2	1431.047	5.26	25.54	41.36	45.69	35.13	68.20	-33.07	peak	
3	3405.929	6.38	31.56	42.20	46.51	42.25	68.20	-25.95	peak	
4	4495.125	7.55	33.59	42.42	46.73	45.45	68.20	-22.75	peak	
5	10460.000	11.26	37.72	37.52	36.44	47.90	68.20	-20.30	peak	
6	15690.000	14.53	40.82	39.14	34.71	50.92	74.00	-23.08	peak	


Mode:b; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

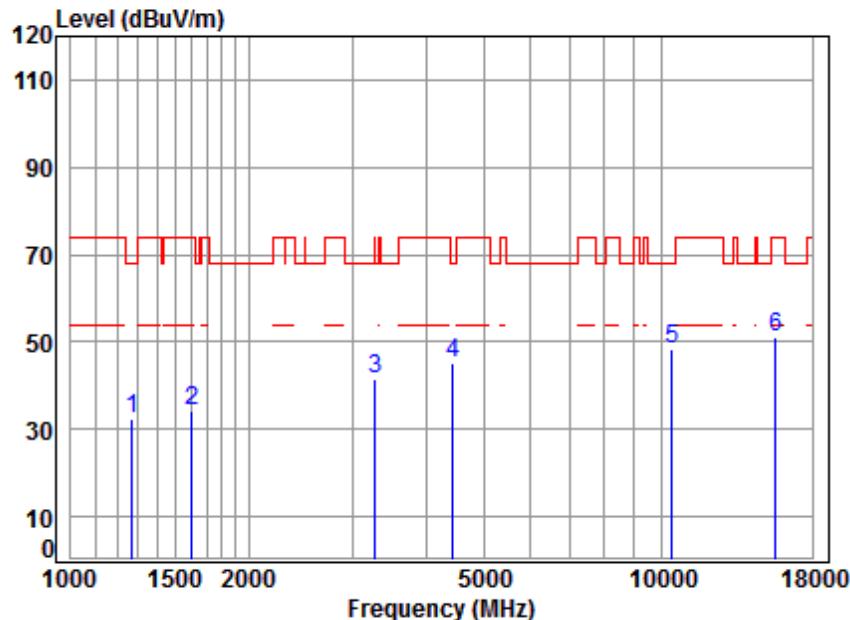

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5210 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.90	41.24	43.94	32.29	68.20	-35.91	peak	
2	1606.441	5.34	26.28	41.47	43.94	34.09	74.00	-39.91	peak	
3	3280.326	6.26	31.36	42.17	45.88	41.33	68.20	-26.87	peak	
4	4430.628	7.48	33.48	42.41	46.42	44.97	68.20	-23.23	peak	
5	10420.000	11.24	37.73	37.49	36.78	48.26	68.20	-19.94	peak	
6	15630.000	14.44	40.78	39.09	35.00	51.13	74.00	-22.87	peak	

Mode:b; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

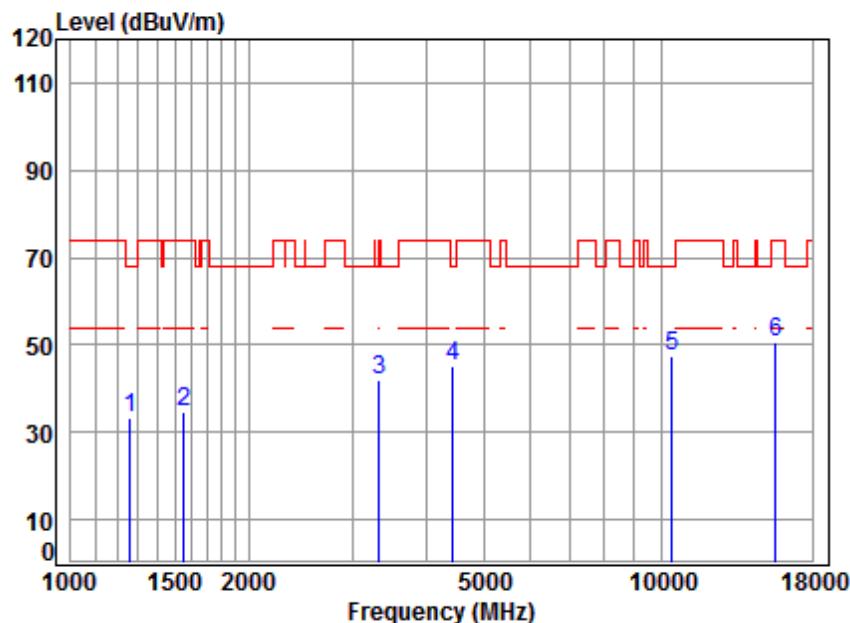


Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5210 TX RSE
Note : 5G WIFI 11AC80

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	4.65	24.85	41.23	45.07	33.34	68.20	-34.86	peak	
2	1556.169	5.41	26.06	41.44	44.59	34.62	74.00	-39.38	peak	
3	3328.077	6.30	31.44	42.18	46.42	41.98	68.20	-26.22	peak	
4	4443.453	7.50	33.50	42.41	46.43	45.02	68.20	-23.18	peak	
5	10420.000	11.24	37.73	37.49	36.17	47.65	68.20	-20.55	peak	
6	15630.000	14.44	40.78	39.09	34.58	50.71	74.00	-23.29	peak	

Test data for Antenna3/ Band 2A:


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:Low

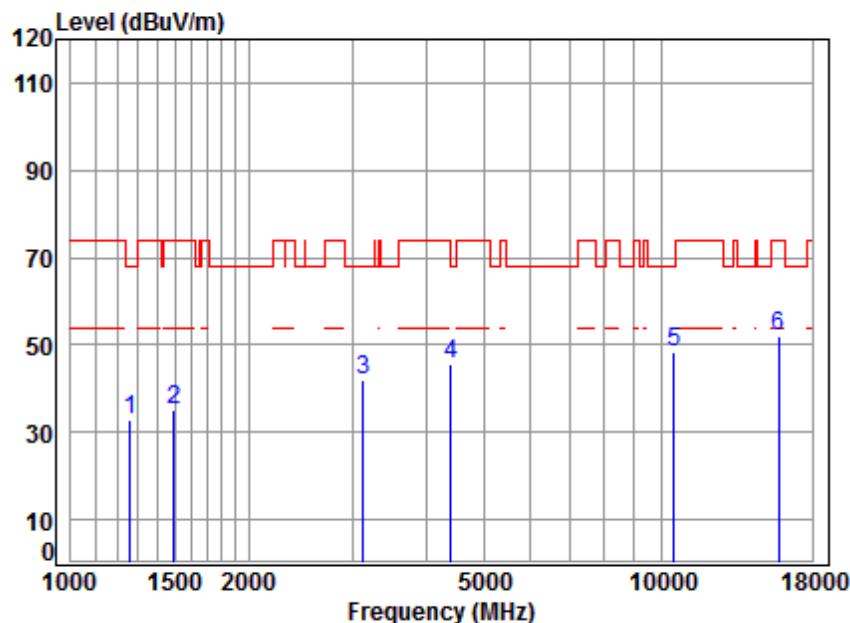

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	4.65	24.85	41.23	44.72	32.99	68.20	-35.21	peak	
2	1494.455	5.46	25.78	41.40	45.17	35.01	74.00	-38.99	peak	
3	3132.079	6.11	31.12	42.13	46.82	41.92	68.20	-26.28	peak	
4	4405.090	7.46	33.44	42.40	47.30	45.80	68.20	-22.40	peak	
5	10520.000	11.30	37.70	37.56	36.72	48.16	68.20	-20.04	peak	
6	15780.000	14.66	40.87	39.22	35.72	52.03	74.00	-21.97	peak	


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:Low

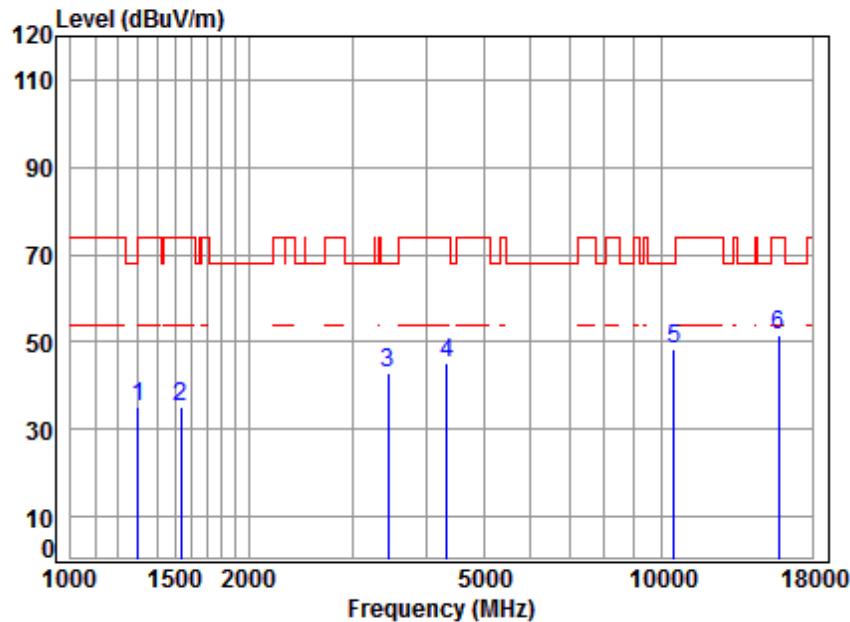

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	46.37	34.94	74.00 -39.06 peak
2	1538.281	5.43	25.98	41.43	45.18	35.16	74.00 -38.84 peak
3	3445.535	6.41	31.62	42.21	46.91	42.73	68.20 -25.47 peak
4	4341.886	7.38	33.33	42.39	46.72	45.04	74.00 -28.96 peak
5	10520.000	11.30	37.70	37.56	36.94	48.38	68.20 -19.82 peak
6	15780.000	14.66	40.87	39.22	35.29	51.60	74.00 -22.40 peak


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:middle

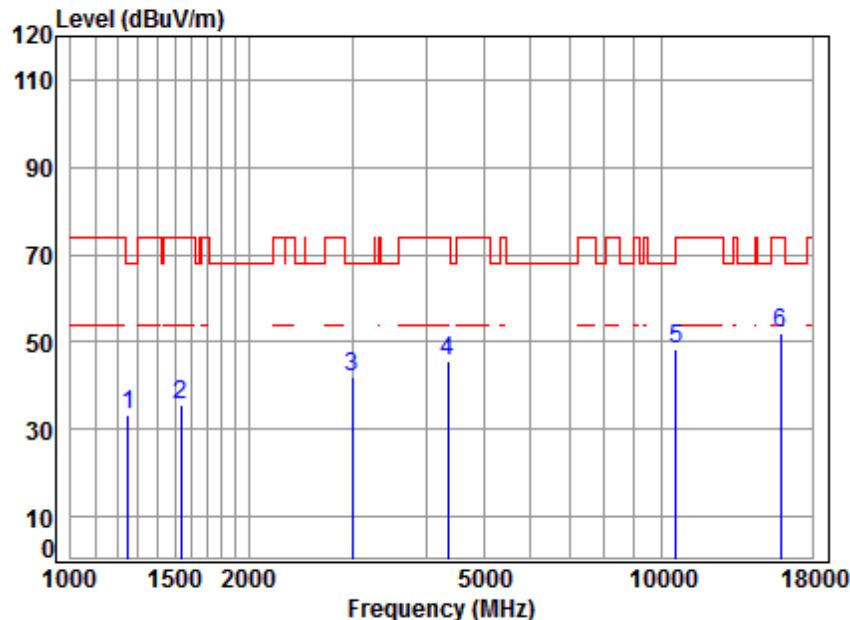

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	4.61	24.81	41.22	44.91	33.11	68.20	-35.09 peak
2 1538.281	5.43	25.98	41.43	45.43	35.41	74.00	-38.59 peak
3 2999.187	5.98	30.90	42.10	47.22	42.00	68.20	-26.20 peak
4 4354.454	7.40	33.35	42.39	47.49	45.85	74.00	-28.15 peak
5 10600.000	11.36	37.72	37.62	36.93	48.39	68.20	-19.81 peak
6 15900.000	14.84	40.94	39.33	35.75	52.20	74.00	-21.80 peak


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:middle

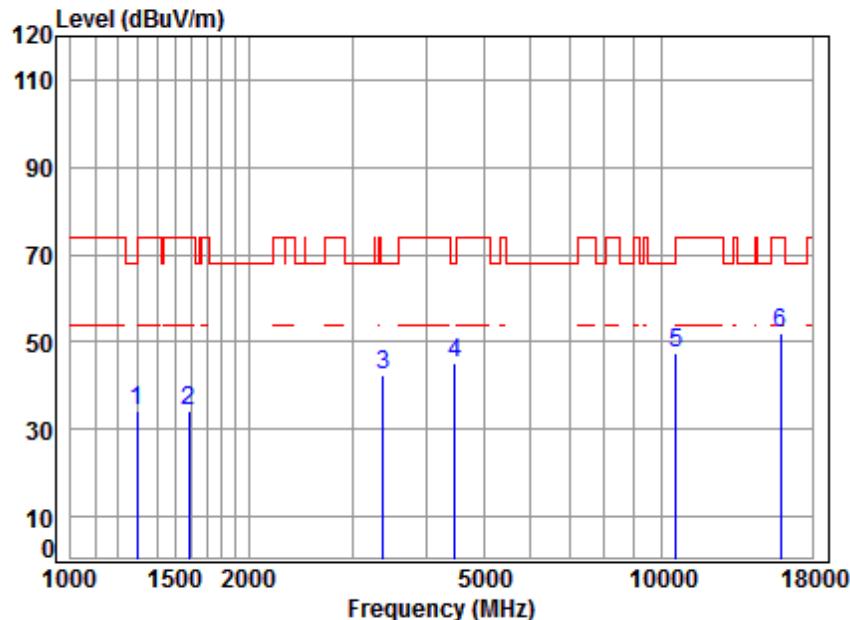

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	4.77	25.00	41.26	45.52	34.03	68.20	-34.17	peak
2	1583.392	5.37	26.18	41.46	44.19	34.28	74.00	-39.72	peak
3	3376.523	6.35	31.51	42.19	46.89	42.56	68.20	-25.64	peak
4	4469.214	7.53	33.55	42.41	46.29	44.96	68.20	-23.24	peak
5	10600.000	11.36	37.72	37.62	35.91	47.37	68.20	-20.83	peak
6	15900.000	14.84	40.94	39.33	35.63	52.08	74.00	-21.92	peak


Mode:c; Polarization:Horizontal; Modulation:802.11a; bandwidth:20MHz; Channel:High

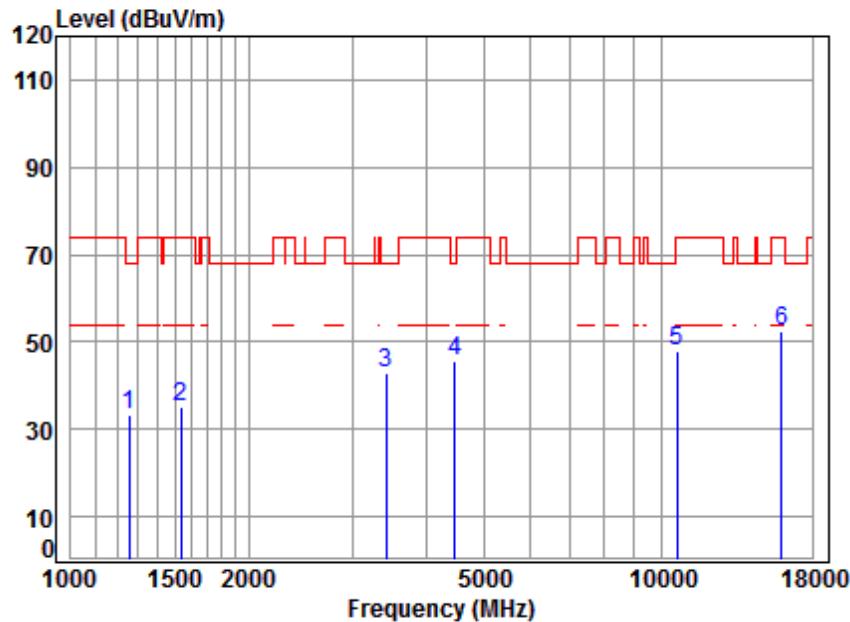

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11A

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	4.64	24.84	41.23	45.18	33.43	68.20	-34.77	peak	
2	1533.841	5.44	25.96	41.43	45.23	35.20	74.00	-38.80	peak	
3	3415.787	6.38	31.57	42.20	47.01	42.76	68.20	-25.44	peak	
4	4469.214	7.53	33.55	42.41	46.80	45.47	68.20	-22.73	peak	
5	10640.000	11.39	37.73	37.64	36.40	47.88	74.00	-26.12	peak	
6	15960.000	14.93	40.98	39.38	35.93	52.46	74.00	-21.54	peak	


Mode:c; Polarization:Vertical; Modulation:802.11a; bandwidth:20MHz; Channel:High

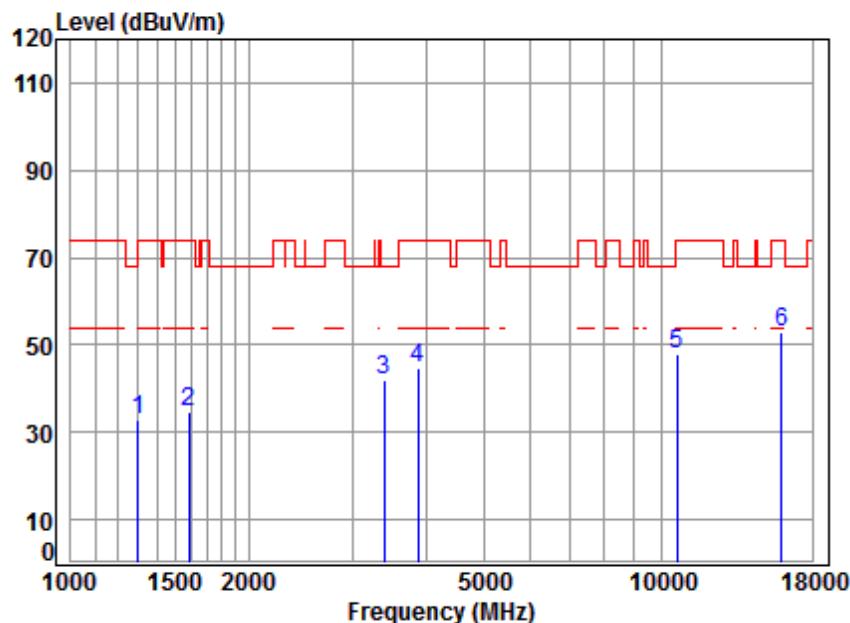

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11A

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1300.858	4.80	25.03	41.26	44.27	32.84	74.00	-41.16 peak
2	1583.392	5.37	26.18	41.46	44.72	34.81	74.00	-39.19 peak
3	3396.098	6.37	31.54	42.20	46.48	42.19	68.20	-26.01 peak
4	3879.027	6.86	32.47	42.30	47.85	44.88	74.00	-29.12 peak
5	10640.000	11.39	37.73	37.64	36.42	47.90	74.00	-26.10 peak
6	15960.000	14.93	40.98	39.38	36.62	53.15	74.00	-20.85 peak


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

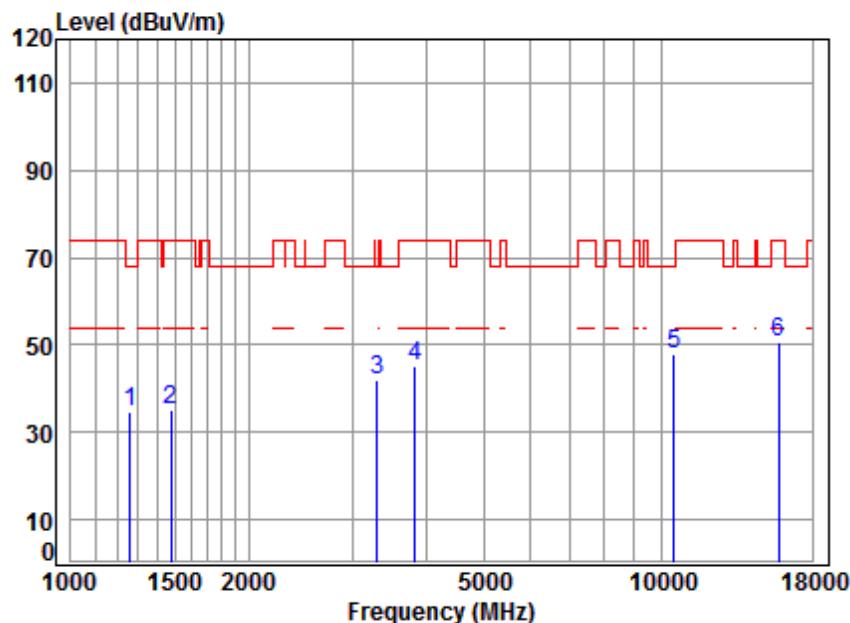

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1260.149	4.65	24.85	41.23	46.21	34.48	68.20	-33.72 peak
2	1477.276	5.41	25.72	41.39	45.50	35.24	74.00	-38.76 peak
3	3299.344	6.28	31.39	42.17	46.39	41.89	68.20	-26.31 peak
4	3834.438	6.82	32.38	42.29	48.26	45.17	74.00	-28.83 peak
5	10520.000	11.30	37.70	37.56	36.32	47.76	68.20	-20.44 peak
6	15780.000	14.66	40.87	39.22	34.47	50.78	74.00	-23.22 peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

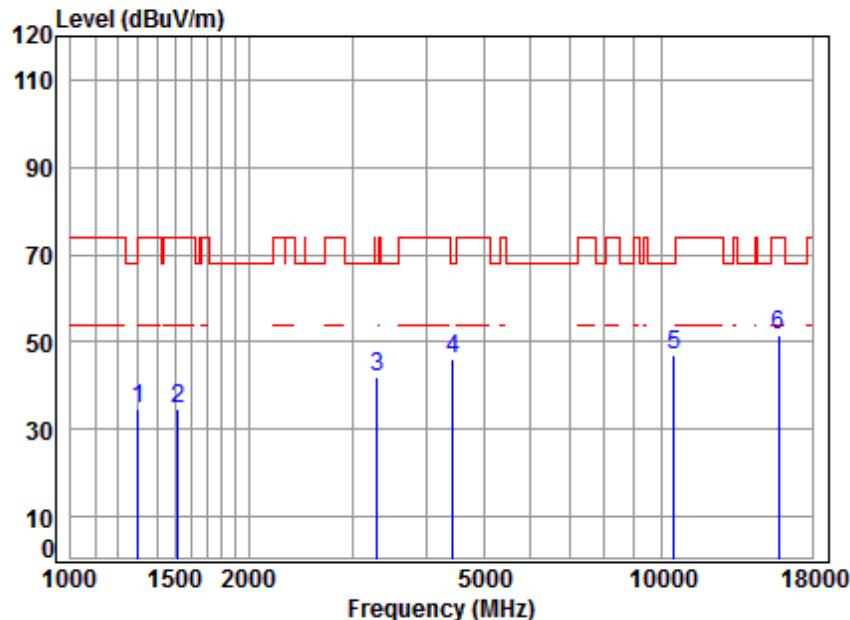

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	45.90	34.47	74.00	-39.53	peak	
2	1520.598	5.45	25.89	41.42	44.74	34.66	74.00	-39.34	peak	
3	3299.344	6.28	31.39	42.17	46.63	42.13	68.20	-26.07	peak	
4	4443.453	7.50	33.50	42.41	47.71	46.30	68.20	-21.90	peak	
5	10520.000	11.30	37.70	37.56	35.41	46.85	68.20	-21.35	peak	
6	15780.000	14.66	40.87	39.22	35.28	51.59	74.00	-22.41	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

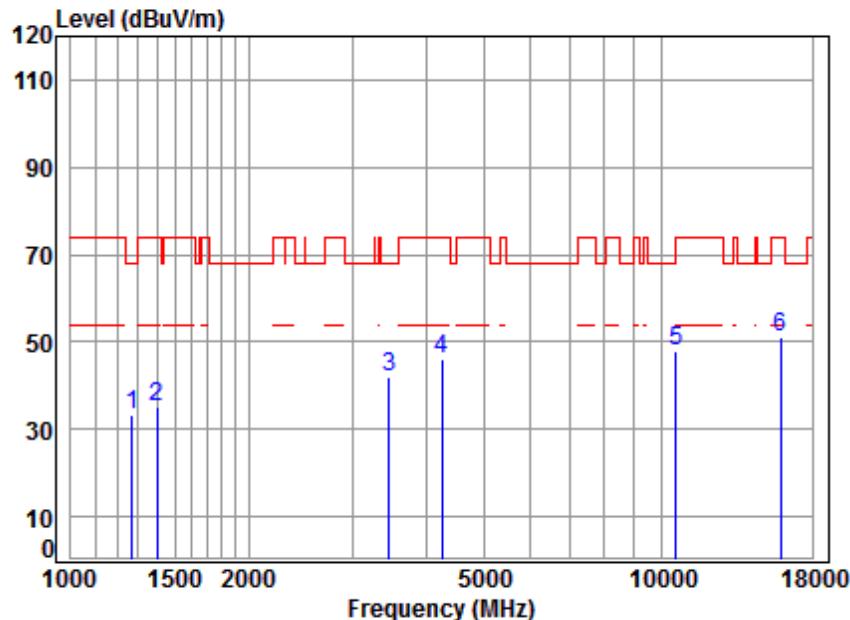

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1271.123	4.69	24.90	41.24	44.82	33.17	68.20	-35.03 peak
2 1398.336	5.15	25.42	41.34	45.82	35.05	74.00	-38.95 peak
3 3465.510	6.43	31.65	42.21	46.03	41.90	68.20	-26.30 peak
4 4242.641	7.27	33.15	42.37	48.20	46.25	74.00	-27.75 peak
5 10600.000	11.36	37.72	37.62	36.66	48.12	68.20	-20.08 peak
6 15900.000	14.84	40.94	39.33	34.87	51.32	74.00	-22.68 peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

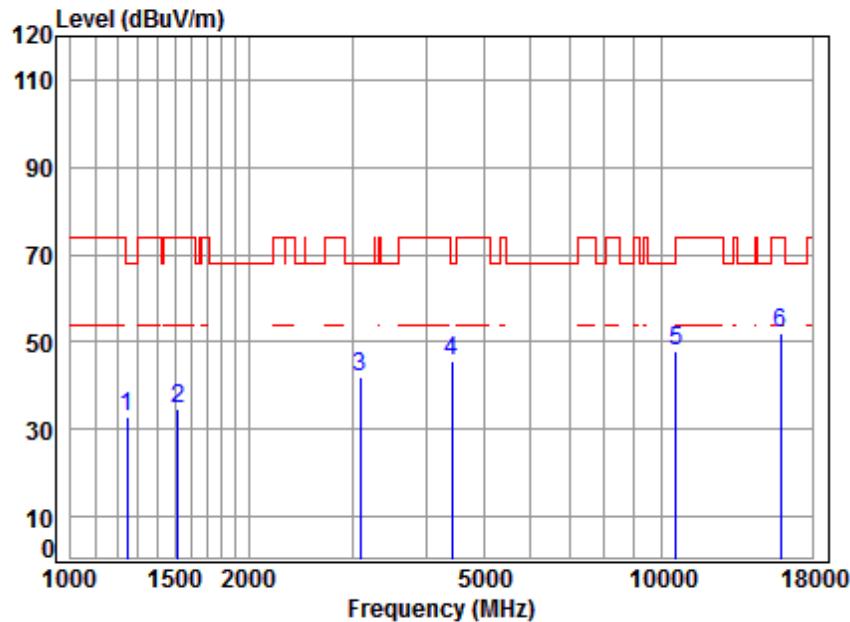

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit	Remark
					dB	dBuV	dBuV/m	dBuV/m
1 1245.663	4.60	24.79	41.22	44.82	32.99	68.20	-35.21	peak
2 1520.598	5.45	25.89	41.42	44.61	34.53	74.00	-39.47	peak
3 3087.140	6.07	31.05	42.12	46.86	41.86	68.20	-26.34	peak
4 4417.841	7.47	33.46	42.40	46.90	45.43	68.20	-22.77	peak
5 10600.000	11.36	37.72	37.62	36.24	47.70	68.20	-20.50	peak
6 15900.000	14.84	40.94	39.33	35.73	52.18	74.00	-21.82	peak


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

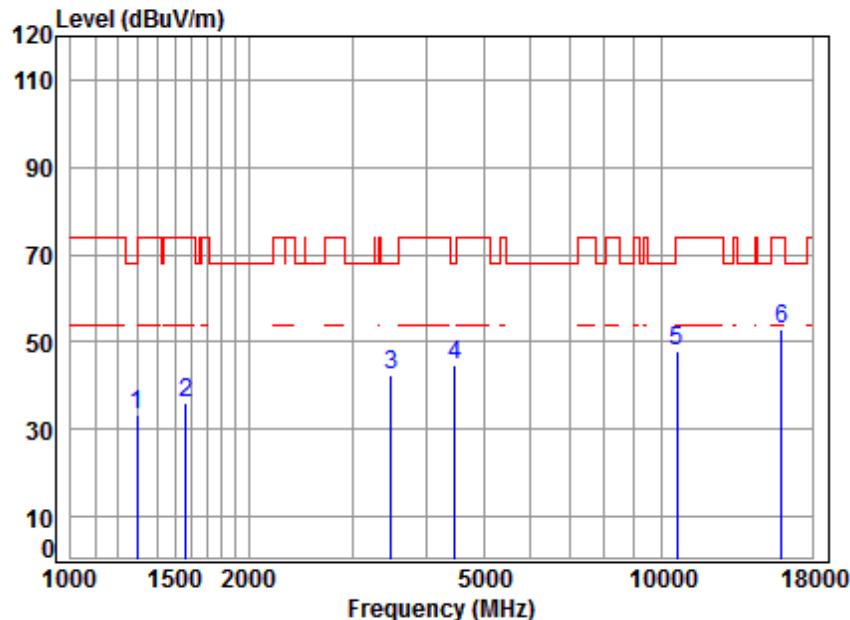

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Limit dBuV/m	Over Limit dB	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	25.01	41.26	44.81	33.35	68.20	-34.85	peak	
2	1569.721	5.39	26.12	41.45	45.91	35.97	74.00	-38.03	peak	
3	3485.601	6.45	31.68	42.22	46.56	42.47	68.20	-25.73	peak	
4	4469.214	7.53	33.55	42.41	46.24	44.91	68.20	-23.29	peak	
5	10640.000	11.39	37.73	37.64	36.35	47.83	74.00	-26.17	peak	
6	15960.000	14.93	40.98	39.38	36.27	52.80	74.00	-21.20	peak	


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

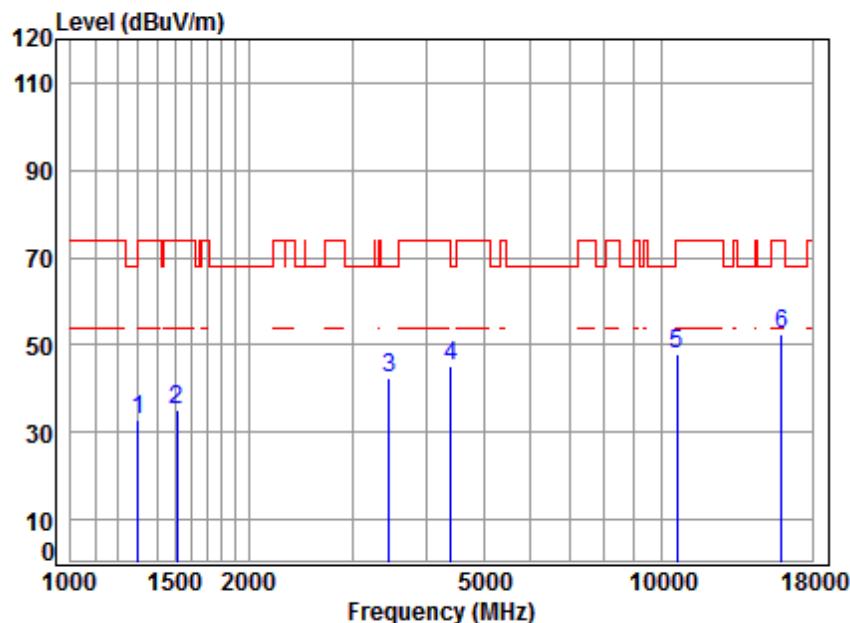

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	4.80	25.03	41.26	44.50	33.07	74.00	-40.93	peak	
2	1511.833	5.46	25.85	41.41	45.03	34.93	74.00	-39.07	peak	
3	3455.508	6.42	31.63	42.21	46.59	42.43	68.20	-25.77	peak	
4	4405.090	7.46	33.44	42.40	46.73	45.23	68.20	-22.97	peak	
5	10640.000	11.39	37.73	37.64	36.28	47.76	74.00	-26.24	peak	
6	15960.000	14.93	40.98	39.38	35.88	52.41	74.00	-21.59	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

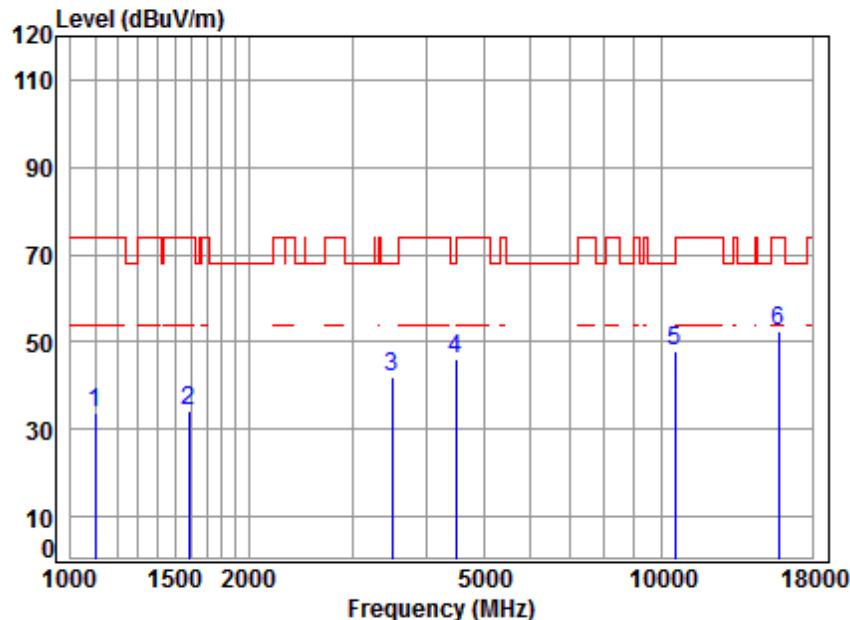

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1100.079	4.00	24.12	41.10	46.89	33.91	74.00 -40.09 peak
2	1583.392	5.37	26.18	41.46	44.00	34.09	74.00 -39.91 peak
3	3495.691	6.46	31.69	42.22	46.00	41.93	68.20 -26.27 peak
4	4495.125	7.55	33.59	42.42	47.27	45.99	68.20 -22.21 peak
5	10540.000	11.32	37.71	37.57	36.67	48.13	68.20 -20.07 peak
6	15810.000	14.71	40.89	39.25	36.23	52.58	74.00 -21.42 peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

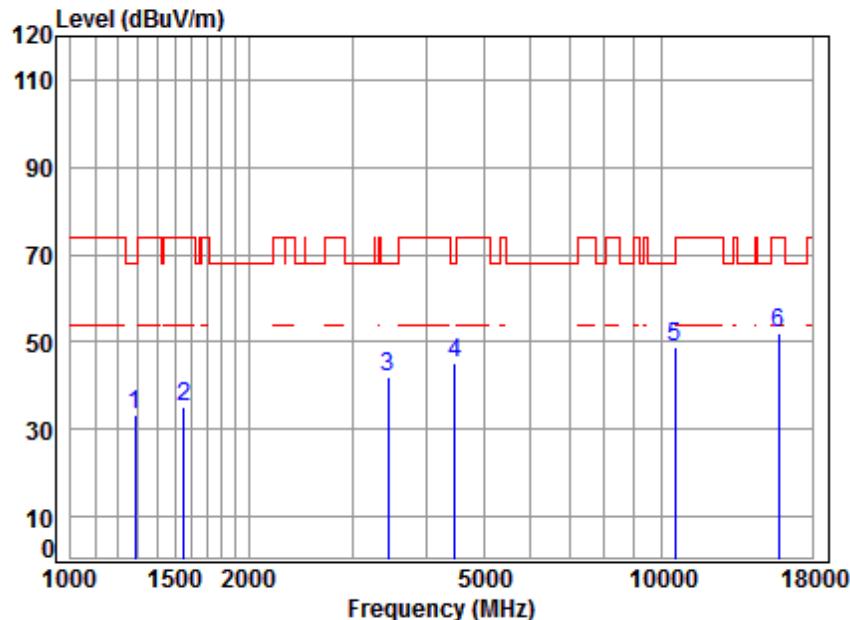

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1285.904	4.75	24.96	41.25	44.89	33.35	68.20	-34.85 peak
2	1551.677	5.41	26.04	41.44	45.01	35.02	74.00	-38.98 peak
3	3445.535	6.41	31.62	42.21	46.01	41.83	68.20	-26.37 peak
4	4469.214	7.53	33.55	42.41	46.32	44.99	68.20	-23.21 peak
5	10540.000	11.32	37.71	37.57	37.17	48.63	68.20	-19.57 peak
6	15810.000	14.71	40.89	39.25	35.74	52.09	74.00	-21.91 peak


Mode:c; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

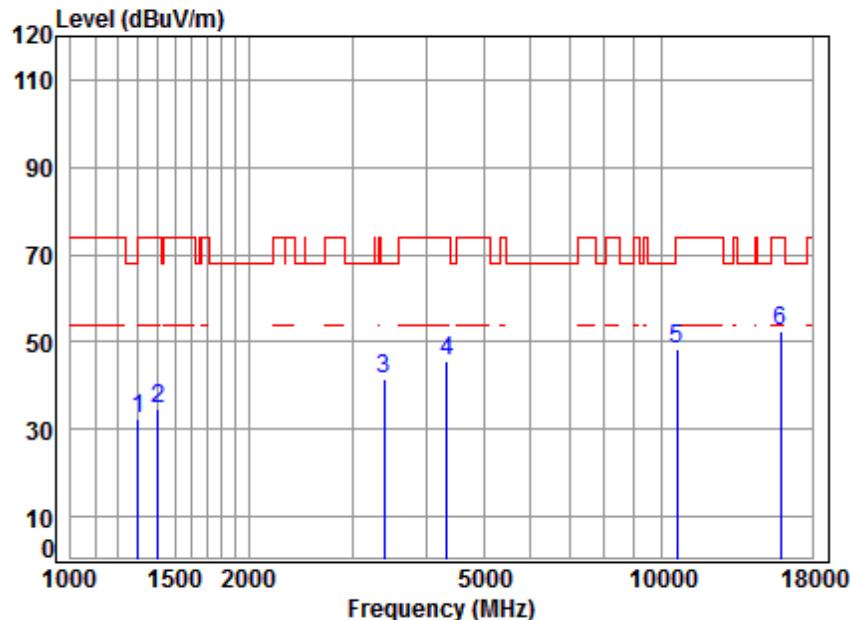

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1300.858	4.80	25.03	41.26	43.85	32.42	74.00	-41.58 peak
2 1406.443	5.17	25.45	41.34	45.24	34.52	74.00	-39.48 peak
3 3396.098	6.37	31.54	42.20	45.77	41.48	68.20	-26.72 peak
4 4341.886	7.38	33.33	42.39	47.22	45.54	74.00	-28.46 peak
5 10620.000	11.37	37.72	37.63	37.13	48.59	74.00	-25.41 peak
6 15930.000	14.89	40.96	39.36	35.79	52.28	74.00	-21.72 peak


Mode:c; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

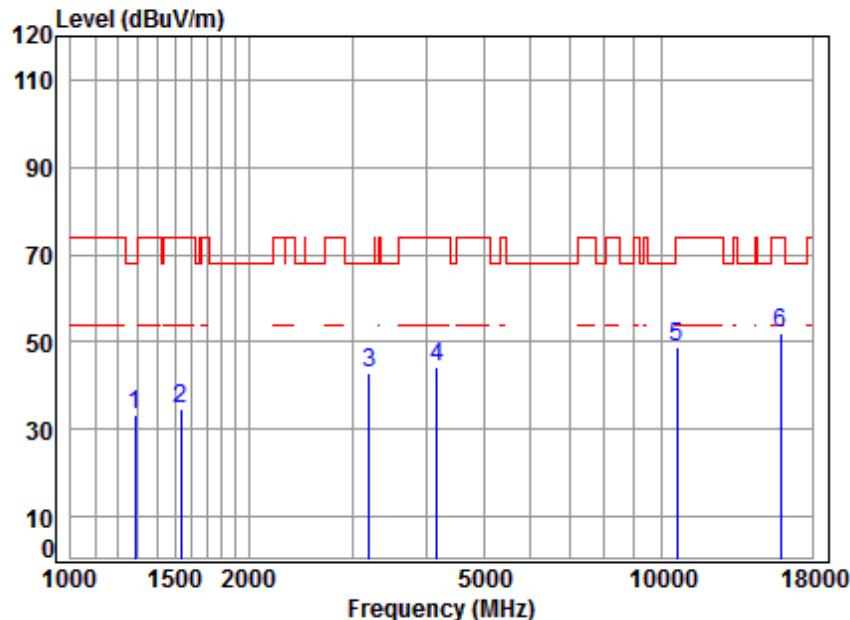

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	4.75	24.96	41.25	44.79	33.25	68.20	-34.95	peak
2	1538.281	5.43	25.98	41.43	44.71	34.69	74.00	-39.31	peak
3	3205.345	6.19	31.24	42.15	47.40	42.68	68.20	-25.52	peak
4	4169.698	7.18	33.02	42.36	46.44	44.28	74.00	-29.72	peak
5	10620.000	11.37	37.72	37.63	37.30	48.76	74.00	-25.24	peak
6	15930.000	14.89	40.96	39.36	35.66	52.15	74.00	-21.85	peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

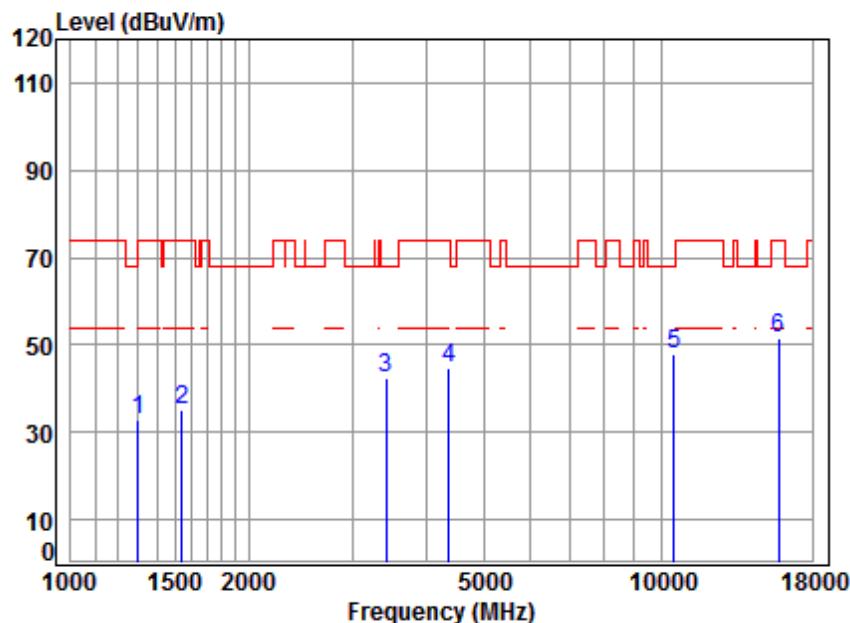

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1300.858	4.80	25.03	41.26	44.38	32.95	74.00 -41.05 peak
2	1542.733	5.42	26.00	41.43	45.02	35.01	74.00 -38.99 peak
3	3415.787	6.38	31.57	42.20	46.51	42.26	68.20 -25.94 peak
4	4367.058	7.41	33.37	42.39	46.32	44.71	74.00 -29.29 peak
5	10520.000	11.30	37.70	37.56	36.39	47.83	68.20 -20.37 peak
6	15780.000	14.66	40.87	39.22	35.31	51.62	74.00 -22.38 peak


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:Low

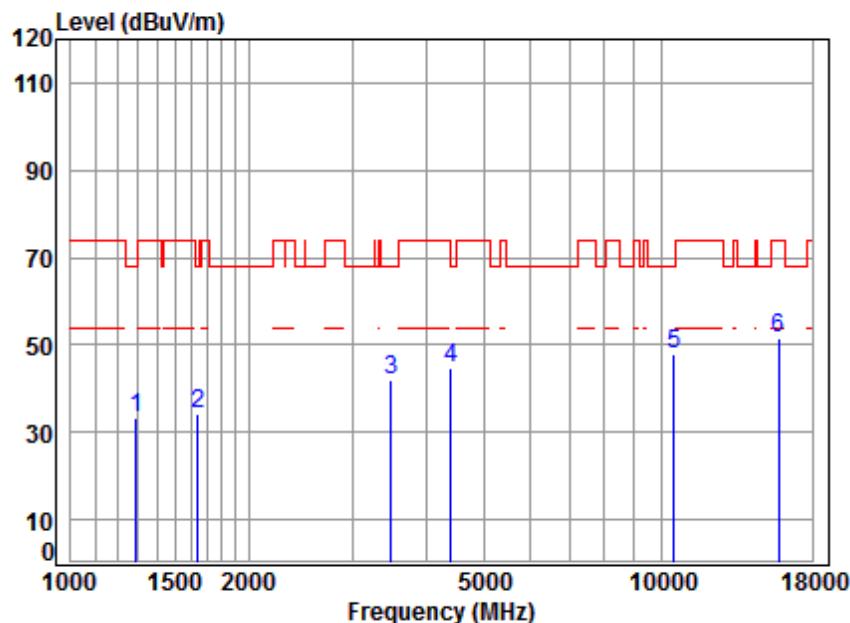

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5260 TX RSE
Note : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1289.627	4.76	24.98	41.25	44.69	33.18	68.20	-35.02	peak
2	1639.274	5.30	26.42	41.49	44.13	34.36	68.20	-33.84	peak
3	3485.601	6.45	31.68	42.22	46.12	42.03	68.20	-26.17	peak
4	4405.090	7.46	33.44	42.40	46.23	44.73	68.20	-23.47	peak
5	10520.000	11.30	37.70	37.56	36.30	47.74	68.20	-20.46	peak
6	15780.000	14.66	40.87	39.22	35.29	51.60	74.00	-22.40	peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

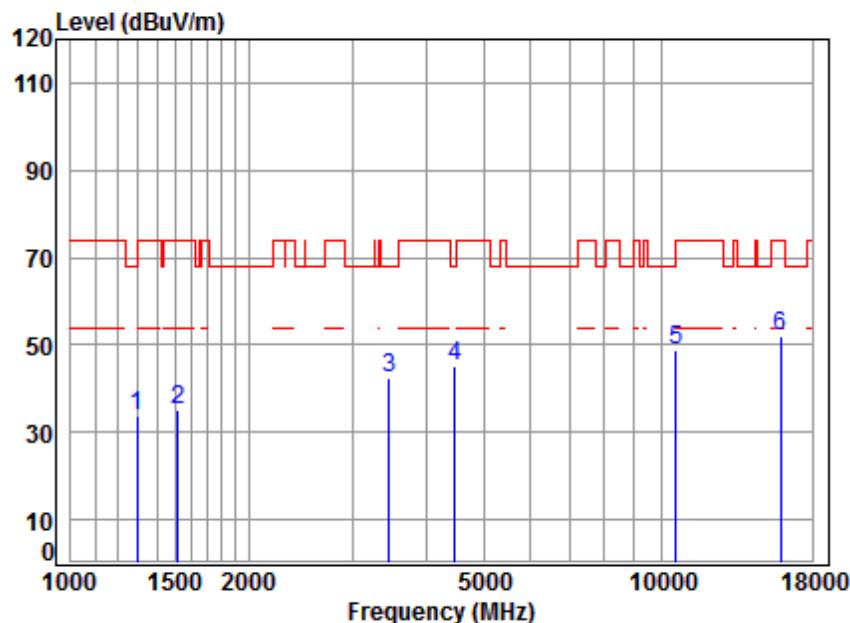

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1297.103	4.79	25.01	41.26	45.04	33.58	68.20 -34.62 peak
2	1520.598	5.45	25.89	41.42	45.13	35.05	74.00 -38.95 peak
3	3455.508	6.42	31.63	42.21	46.39	42.23	68.20 -25.97 peak
4	4469.214	7.53	33.55	42.41	46.56	45.23	68.20 -22.97 peak
5	10600.000	11.36	37.72	37.62	37.18	48.64	68.20 -19.56 peak
6	15900.000	14.84	40.94	39.33	35.70	52.15	74.00 -21.85 peak


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:middle

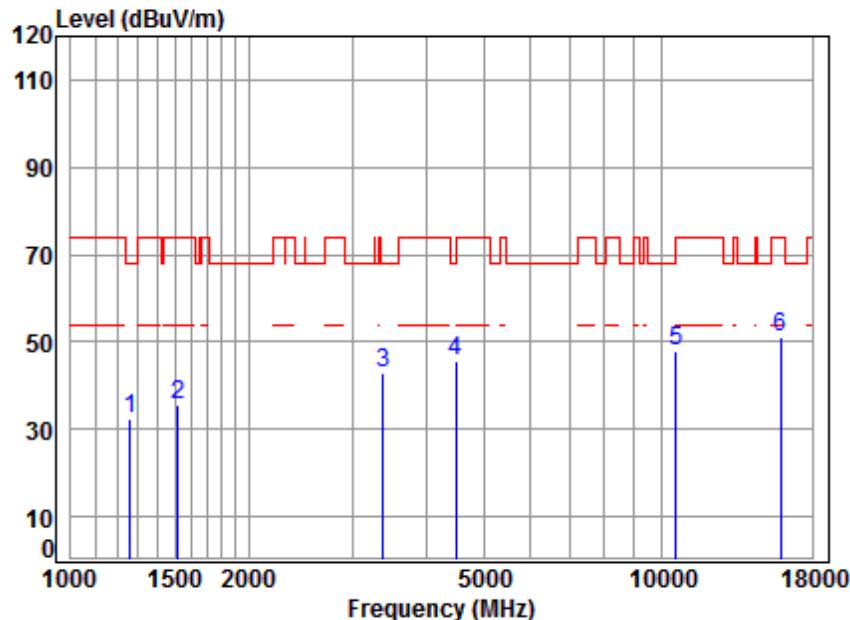

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5300 TX RSE
Note : 5G WIFI 11AC20

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1260.149	4.65	24.85	41.23	44.12	32.39	68.20	-35.81	peak	
2	1520.598	5.45	25.89	41.42	45.45	35.37	74.00	-38.63	peak	
3	3376.523	6.35	31.51	42.19	47.36	43.03	68.20	-25.17	peak	
4	4495.125	7.55	33.59	42.42	47.12	45.84	68.20	-22.36	peak	
5	10600.000	11.36	37.72	37.62	36.55	48.01	68.20	-20.19	peak	
6	15900.000	14.84	40.94	39.33	34.43	50.88	74.00	-23.12	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:20MHz; Channel:High

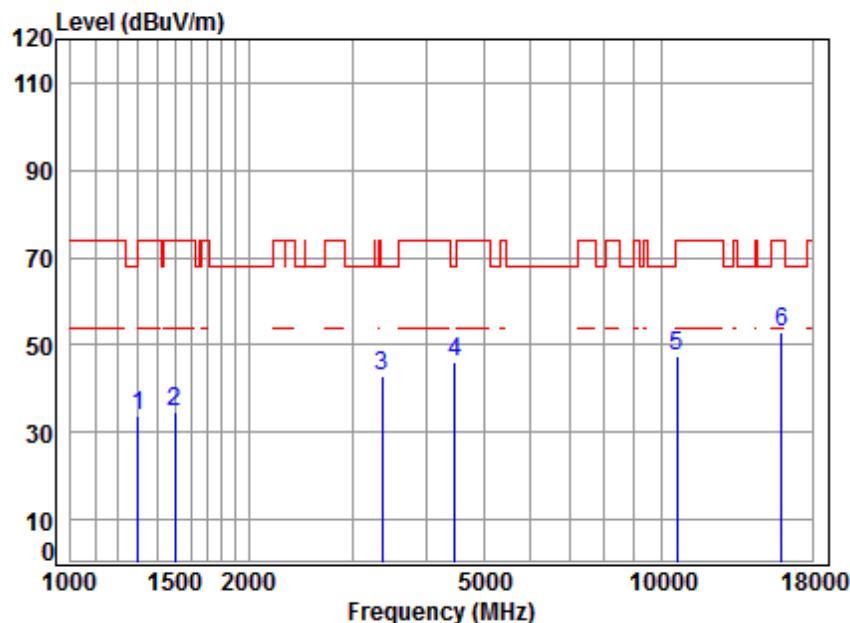

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1300.858	4.80	25.03	41.26	45.28	33.85	74.00	-40.15 peak
2 1498.781	5.48	25.80	41.41	44.95	34.82	74.00	-39.18 peak
3 3366.778	6.34	31.50	42.19	47.11	42.76	68.20	-25.44 peak
4 4469.214	7.53	33.55	42.41	47.48	46.15	68.20	-22.05 peak
5 10640.000	11.39	37.73	37.64	35.87	47.35	74.00	-26.65 peak
6 15960.000	14.93	40.98	39.38	36.47	53.00	74.00	-21.00 peak


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:20MHz; Channel:High

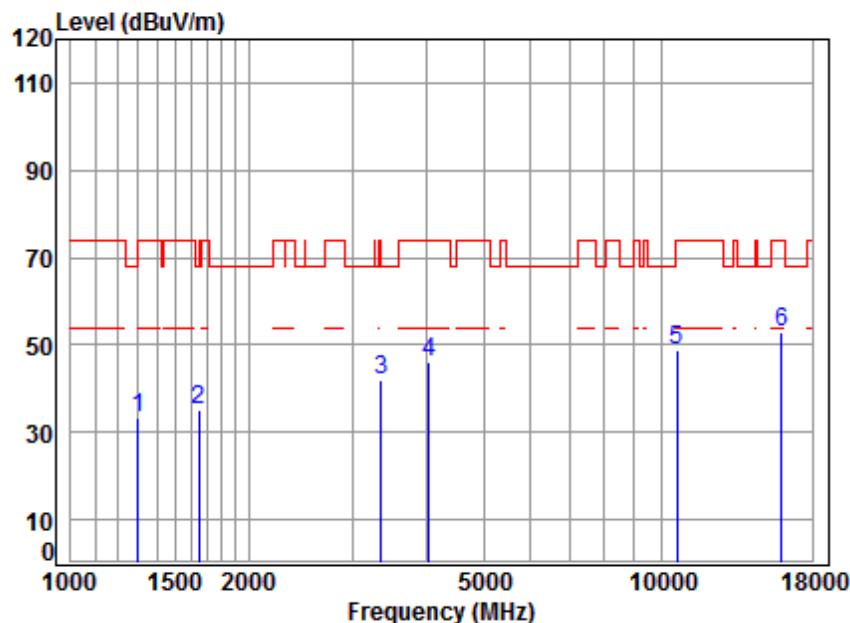

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5320 TX RSE
Note : 5G WIFI 11AC20

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1300.858	4.80	25.03	41.26	44.88	33.45	74.00	-40.55 peak
2	1648.778	5.29	26.46	41.50	44.87	35.12	68.20	-33.08 peak
3	3357.061	6.33	31.48	42.19	46.47	42.09	74.00	-31.91 peak
4	4039.212	7.03	32.77	42.33	48.66	46.13	74.00	-27.87 peak
5	10640.000	11.39	37.73	37.64	37.19	48.67	74.00	-25.33 peak
6	15960.000	14.93	40.98	39.38	36.31	52.84	74.00	-21.16 peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

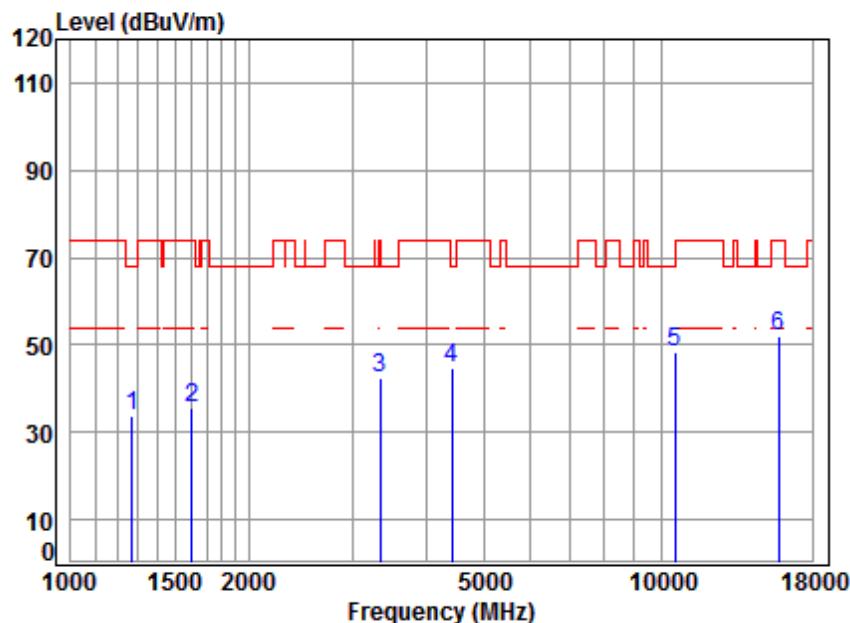

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark	
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
1	1271.123	4.69	24.90	41.24	45.61	33.96	68.20	-34.24 peak
2	1606.441	5.34	26.28	41.47	45.59	35.74	74.00	-38.26 peak
3	3337.710	6.31	31.45	42.18	47.06	42.64	74.00	-31.36 peak
4	4417.841	7.47	33.46	42.40	46.10	44.63	68.20	-23.57 peak
5	10540.000	11.32	37.71	37.57	36.86	48.32	68.20	-19.88 peak
6	15810.000	14.71	40.89	39.25	35.65	52.00	74.00	-22.00 peak


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:Low

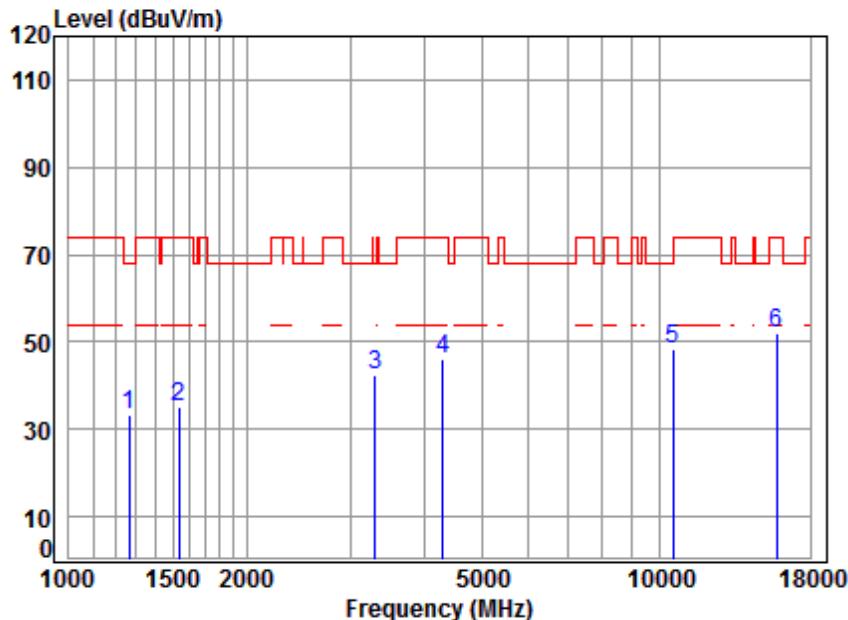

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5270 TX RSE
Note : 5G WIFI 11AC40

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1263.796	4.66	24.87	41.23	44.87	33.17	68.20	-35.03	peak	
2	1538.281	5.43	25.98	41.43	45.15	35.13	74.00	-38.87	peak	
3	3308.894	6.29	31.41	42.18	46.79	42.31	68.20	-25.89	peak	
4	4304.400	7.34	33.26	42.38	47.86	46.08	74.00	-27.92	peak	
5	10540.000	11.32	37.71	37.57	36.78	48.24	68.20	-19.96	peak	
6	15810.000	14.71	40.89	39.25	35.54	51.89	74.00	-22.11	peak	


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:40MHz; Channel:High

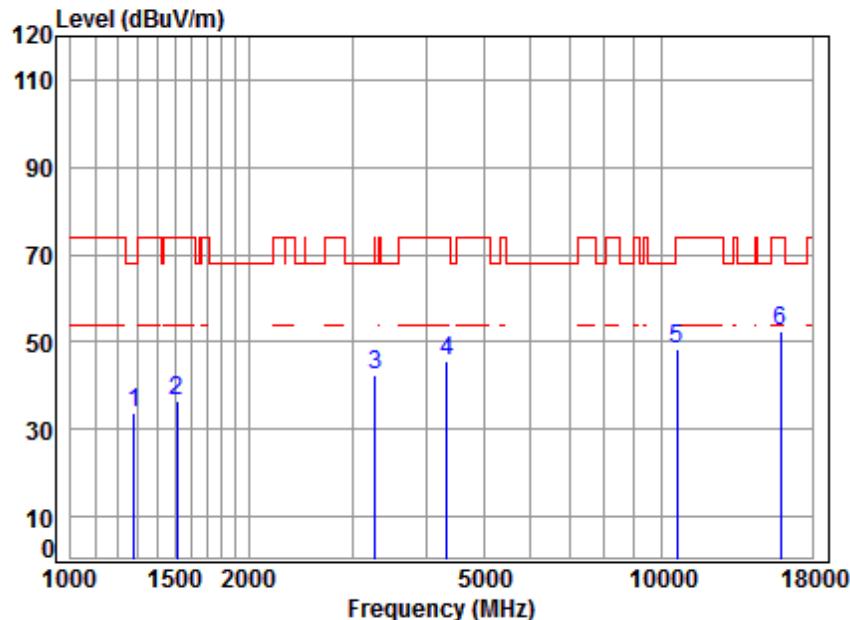

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1278.492	4.72	24.93	41.25	45.55	33.95	68.20	-34.25 peak
2 1511.833	5.46	25.85	41.41	46.67	36.57	74.00	-37.43 peak
3 3270.858	6.25	31.35	42.17	46.86	42.29	68.20	-25.91 peak
4 4329.354	7.37	33.30	42.39	47.43	45.71	74.00	-28.29 peak
5 10620.000	11.37	37.72	37.63	37.11	48.57	74.00	-25.43 peak
6 15930.000	14.89	40.96	39.36	36.07	52.56	74.00	-21.44 peak


Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:40MHz; Channel:High

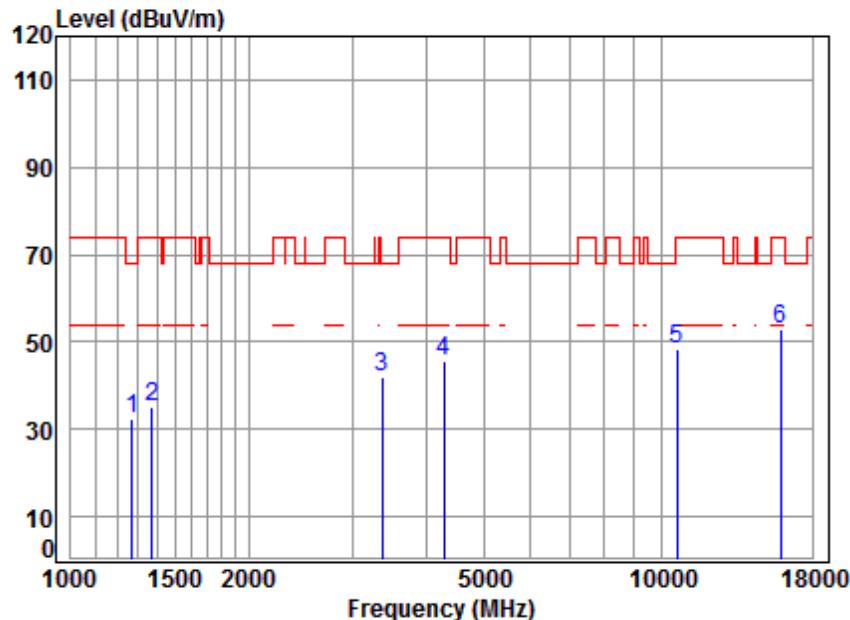

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5310 TX RSE
Note : 5G WIFI 11AC40

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark		
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit	
1	1271.123	4.69	24.90	41.24	43.95	32.30	68.20	-35.90	peak
2	1374.295	5.06	25.33	41.32	45.90	34.97	74.00	-39.03	peak
3	3366.778	6.34	31.50	42.19	46.30	41.95	68.20	-26.25	peak
4	4291.977	7.33	33.24	42.38	47.39	45.58	74.00	-28.42	peak
5	10620.000	11.37	37.72	37.63	36.83	48.29	74.00	-25.71	peak
6	15930.000	14.89	40.96	39.36	36.47	52.96	74.00	-21.04	peak


Mode:c; Polarization:Horizontal; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

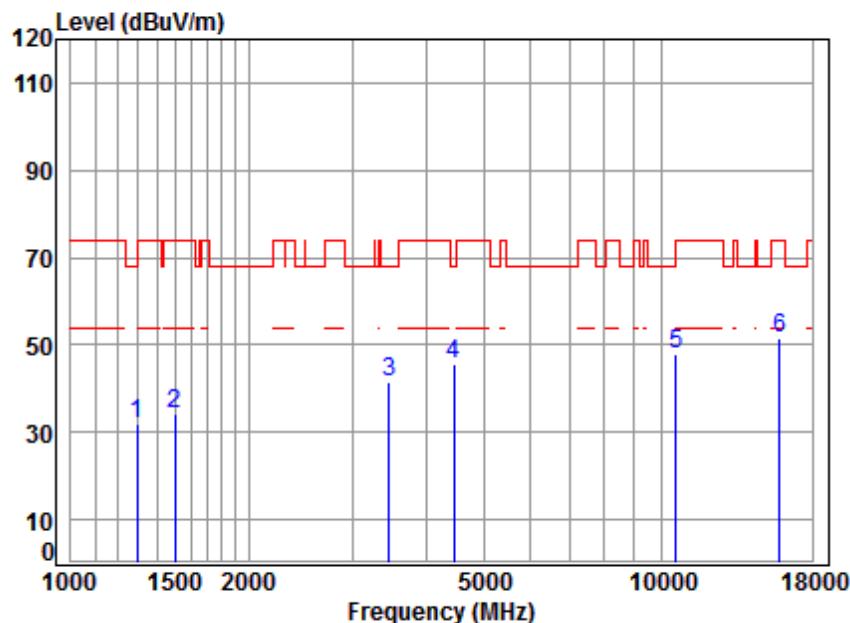

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 5290 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	MHz	Loss	Factor	Factor	Level	Level	
1	1297.103	4.79	25.01	41.26	43.52	32.06	68.20 -36.14 peak
2	1503.119	5.48	25.81	41.41	44.23	34.11	74.00 -39.89 peak
3	3455.508	6.42	31.63	42.21	45.62	41.46	68.20 -26.74 peak
4	4456.315	7.51	33.53	42.41	46.92	45.55	68.20 -22.65 peak
5	10580.000	11.35	37.72	37.60	36.66	48.13	68.20 -20.07 peak
6	15870.000	14.80	40.92	39.30	35.25	51.67	74.00 -22.33 peak

Mode:c; Polarization:Vertical; Modulation:802.11ac; bandwidth:80MHz; Channel:middle

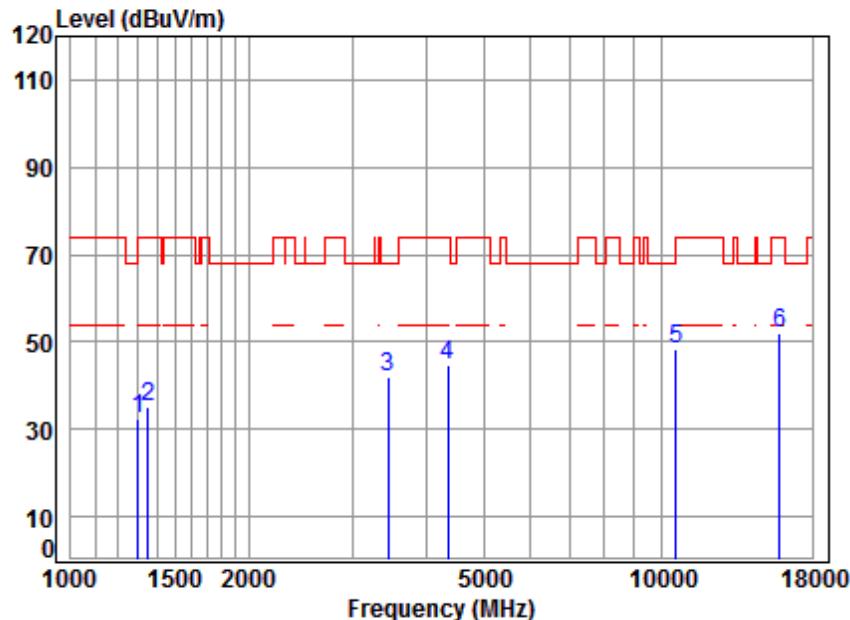

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 5290 TX RSE
Note : 5G WIFI 11AC80

Freq	Cable		Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	4.80	25.03	41.26	44.03	32.60	74.00	-41.40 peak
2	1350.667	4.98	25.23	41.30	46.29	35.20	74.00	-38.80 peak
3	3445.535	6.41	31.62	42.21	46.08	41.90	68.20	-26.30 peak
4	4354.454	7.40	33.35	42.39	46.42	44.78	74.00	-29.22 peak
5	10580.000	11.35	37.72	37.60	37.07	48.54	68.20	-19.66 peak
6	15870.000	14.80	40.92	39.30	35.58	52.00	74.00	-22.00 peak