



TEST REPORT

Fibocom Wireless Inc.

APPLICANI	: Fibocom wireless inc.
PRODUCT NAME	: LTE Module
MODEL NAME	: SC218-NA
BRAND NAME	: Fibocom
FCC ID	: ZMOSC218NA
STANDARD(S)	: 47 CFR Part 15 Subpart C
RECEIPT DATE	: 2023-08-29
TEST DATE	: 2023-09-07 to 2023-10-07
ISSUE DATE	: 2023-10-23



Edited by:

Yong Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn



DIRECTORY

1. S	Summary of Test Result ······· 4
1.1.	Testing Applied Standards 5
1.2.	Test Equipment List ······ 6
1.3.	Measurement Uncertainty 8
1.4.	Testing Laboratory 8
2. G	eneral Description ······9
2.1.	Information of Applicant and Manufacturer9
2.2.	Information of EUT······9
2.3.	Channel List of EUT ······10
2.4.	Test Configuration of EUT ······11
	Test Conditions ·······11
2.6.	Test Setup Layout Diagram ······11
3. T	est Results ······14
3.1.	Antenna Requirement ······14
3.2.	Hopping Mechanism ······14
3.3.	Number of Hopping Frequency 15
3.4.	Duty Cycle of Test Signal16
3.5.	Maximum Peak Conducted Output Power ······17
3.6.	Maximum Average Conducted Output Power ······18
3.7.	20 dB Bandwidth ······19
3.8.	Carried Frequency Separation20
3.9.	Time of Occupancy (Dwell time)21
3.10.	Conducted Spurious Emissions and Band Edge22
3.11.	Conducted Emission23
3.12.	Restricted Frequency Bands24
3.13.	Radiated Emission





Change History			
Version	Date	Reason for change	
1.0	2023-10-23	First edition	



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Sep. 07, 2023	He Yuyang	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Sep. 07, 2023	He Yuyang	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Sep. 07, 2023	He Yuyang	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Sep. 07, 2023	He Yuyang	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Sep. 07, 2023	He Yuyang	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Sep. 07, 2023	He Yuyang	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Sep. 07, 2023	He Yuyang	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Sep. 07, 2023	He Yuyang	PASS	No deviation
11	15.207	Conducted Emission	Sep. 18, 2023	Wang Deyong	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Oct. 07, 2023	Gao Jianrou	PASS	No deviation
13	15.209,	Radiated	Oct. 07, 2023	Gao Jianrou	PASS	No deviation




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn





15.247(d) Emission	
--------------------	--

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB558074 D01 v05r02 and DA 00-075.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR Part 15 Subpart C Radio Frequency Devices





1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal	MY53470836	N9010A	Agilopt	2023.02.27	2024.02.26
Analzyer	MT55470650	119010A	Agilent	2023.02.27	2024.02.20
RF Cable		RF01	Morlab	N1/A	NI/A
(30MHz-26GHz)	CB01	REUI	INIOLIAD	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0



Http://www.morlab.cn




1.2.4 Radiated Test Equipments

Equipment	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Name	Certai No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong
Laboratory Address	Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm	226174
Registration Number	220174



Fax: 86-755-36698525 E-mail: service@morlab.cn



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Fibocom Wireless Inc.
Annlinent Address	1101, Tower A, Building 6, Shenzhen International Innovation
Applicant Address	Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Manufacturer	Fibocom Wireless Inc.
	1101,Tower A, Building 6, Shenzhen International Innovation
Manufacturer Address	Valley, Dashi 1st Rd, Nanshan, Shenzhen, China

2.2. Information of EUT

Product Name:	LTE Module
Sample No.:	1#
Hardware Version:	V1.1
Software Version:	SC218-T6.00.03
Equipment Type:	Bluetooth classic
Bluetooth Version:	5.0
Modulation Type:	FHSS (GFSK(1Mbps), π/4-DQPSK(EDR 2Mbps),
Modulation Type:	8-DPSK(EDR 3Mbps))
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	Fixed External Antenna
Antenna Gain:	2.00dBi

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	27 2429 47 2449		67	2469	
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1.Conducted Measurement



2.6.2.Conducted Emission Measurement

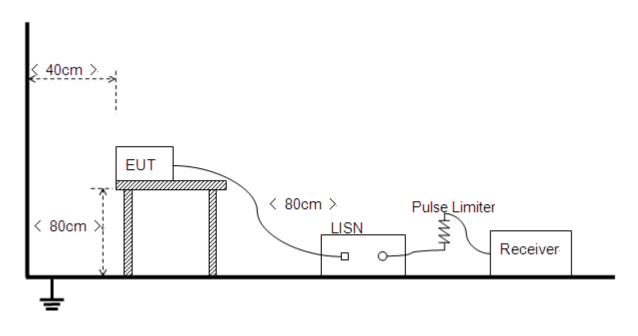



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

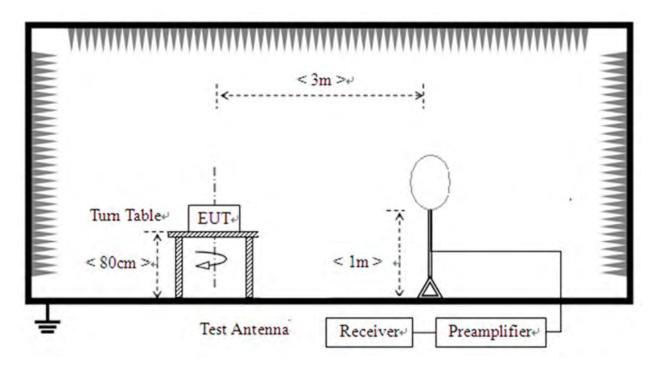

2) For radiated emissions from 30MHz to1GHz

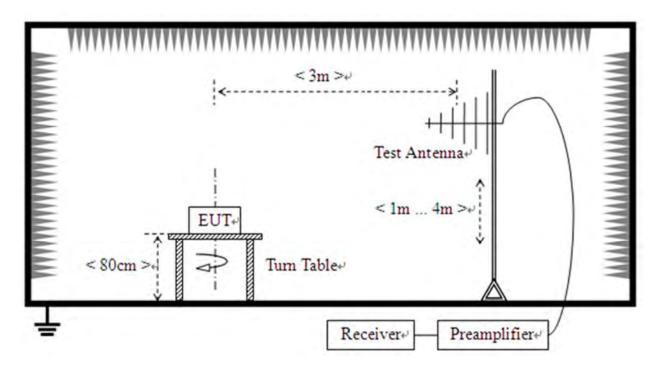




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3) For radiated emissions above 1GHz

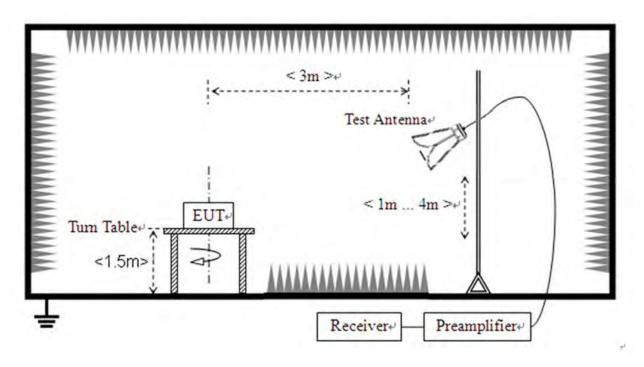



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



3.1. Antenna Requirement

3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2.Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

3.2. Hopping Mechanism

3.2.1.Requirement


According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2.Test Result

The hopping mechanism of the EUT is in compliance with the document "*Bluetooth core specification v5.1*".







3.3. Number of Hopping Frequency

3.3.1.Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

3.3.2.Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize

3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4.Test Result

Refer to Annex A.1 in this report.



Tel: 86-755-36698555

Fax: 86-755-36698525



3.4. Duty Cycle of Test Signal

3.4.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.4.2.Test Result

Refer to Annex A.2 in this report.





3.5. Maximum Peak Conducted Output Power

3.5.1.Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.5.2.Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.5.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4.Test Result

Refer to Annex A.3 in this report.



Fax: 86-755-36698525



3.6. Maximum Average Conducted Output Power

3.6.1.Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.6.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4.Test Result

Refer to Annex A.4 in this report.



Fax: 86-755-36698525

Page 18 of 110



3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10*\log 1\% = 20$ dB) taking the total RF output power.

3.7.1.Test Procedures

Use the following spectrum analyzer settings: Span = between 2 to 5 times the OBW, centered on the test channel RBW= 1% to 5% of the OBW VBW \geq 3 x RBW Sweep = auto Detector function = peak Trace = max hold

3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.3.Test Result

Refer to Annex A.5 in this report.



Tel: 86-755-36698555

Fax: 86-755-36698525



3.8. Carried Frequency Separation

3.8.1.Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

3.8.2.Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.8.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.8.4.Test Result

Refer to Annex A.6 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525



3.9. Time of Occupancy (Dwell time)

3.9.1.Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.9.2.Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) *(1600 / 2 /79)*31.6 Millisecond DH3: Dwell time equal to Pulse time (ms) * (1600 /4 /79) *31.6 Millisecond DH5: Dwell time equal to Pulse Time (ms)* (1600 / 6 /79) *31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) (800 / 2 / 20)(0.4 + 20) Millisecond DH3: Dwell time equal to Pulse time (ms) (800 / 4 / 20)(0.4 + 20) Millisecond DH5: Dwell time equal to Pulse Time (ms) (800 / 6 / 20)(0.4 + 20) Millisecond.

3.9.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.9.4.Test Result

Refer to Annex A.7 in this report.





3.10. Conducted Spurious Emissions and Band Edge

3.10.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.10.2.Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize.

3.10.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.10.4.Test Result

Refer to Annex A.8 and A.9 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



3.11. Conducted Emission

3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/ 50Ω line impedance stabilization network (LISN).

Frequency Panga (MHz)	Conducted Limit (dBµV)					
Frequency Range (MHz)	Quai-peak	Average				
0.15 - 0.50	66 to 56	56 to 46				
0.50 - 5	56	46				
5 - 30	60	50				

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.11.4.Test Result

Refer to Annex A.10 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3.12. Restricted Frequency Bands

3.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.12.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1GHz

VBW = 3 MHz Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.12.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.12.4.Test Result

Refer to Annex A.11 in this report.





3.13. Radiated Emission

3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).





3.13.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.13.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.13.4.Test Result

Refer to Annex A.12 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



Annex A Test Data and Result

A.1. Number of Hopping Frequency

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



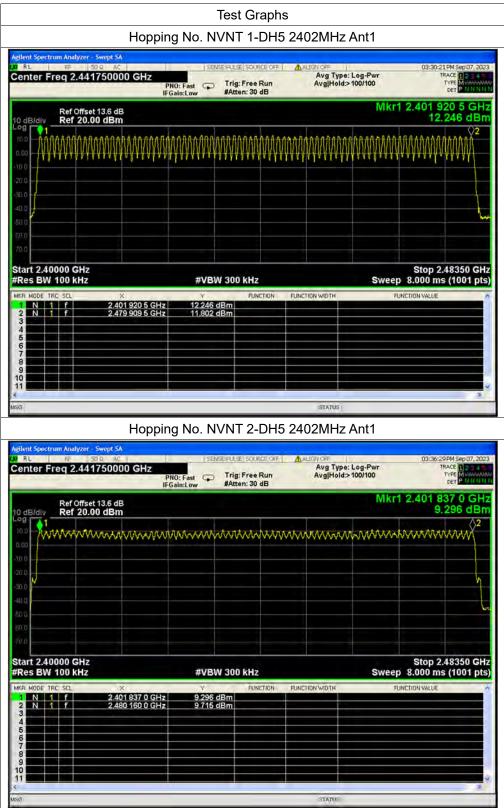



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



gilent Spe RL	etrum A	nalyzer - Swej	N SA		T 3-DH			03:41:	:22 PM Sep 07, 202
enter	Freq	2.44175	DOOO GHZ PNO: IFGai	rast the	g: Free Run ten: 30 dB		/pe: Log-Pwr Id:>100/100		TRACE
0 dB/div		f Offset 13. f 20.00 d					Mk	r1 2.402 10	004 0 GH 0.656 dBr
	1 AMY	man	MAMMAN	mmmm	AMAM	mmm	www.	mann	mything2
0.00									
20.0									
50.0									Ŋ
40.Q									-
200									
/0.0									
tart 2.4	40000	GHz						Stop 2	2.48350 GH
Res B	N 100	kHz		#VBW 30	0 kHz		Swe	ep 8.000 m	ns (1001 pts
KR MODE	TRC SC		× 2.402 004 0 GHz	7 10,656 dBm	FUNCTION	FUNCTION WIDTH	-	FUNCTION VALUE	
	1 9		2.490 410 5 GHz	6.010 dBm					
4									
6 7									
8									
11									
					_	STATU		_)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.2. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	76.96	1.14	0.35
NVNT	1-DH5	2441	Ant1	76.96	1.14	0.35
NVNT	1-DH5	2480	Ant1	76.96	1.14	0.35
NVNT	2-DH5	2402	Ant1	77.01	1.13	0.35
NVNT	2-DH5	2441	Ant1	77.01	1.13	0.35
NVNT	2-DH5	2480	Ant1	77.01	1.13	0.35
NVNT	3-DH5	2402	Ant1	77.07	1.13	0.35
NVNT	3-DH5	2441	Ant1	77.07	1.13	0.35
NVNT	3-DH5	2480	Ant1	77.07	1.13	0.35




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



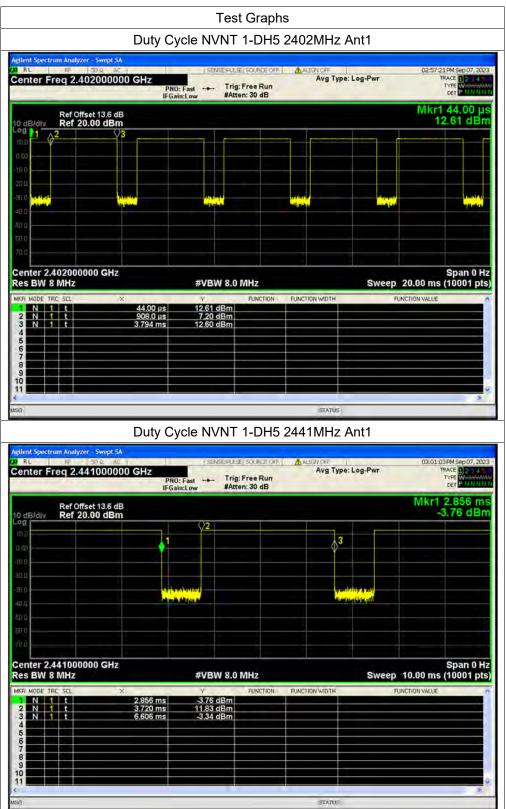




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-7 Http://www.morlab.cn E-mail: s

Fax: 86-755-36698525 E-mail: service@morlab.cn



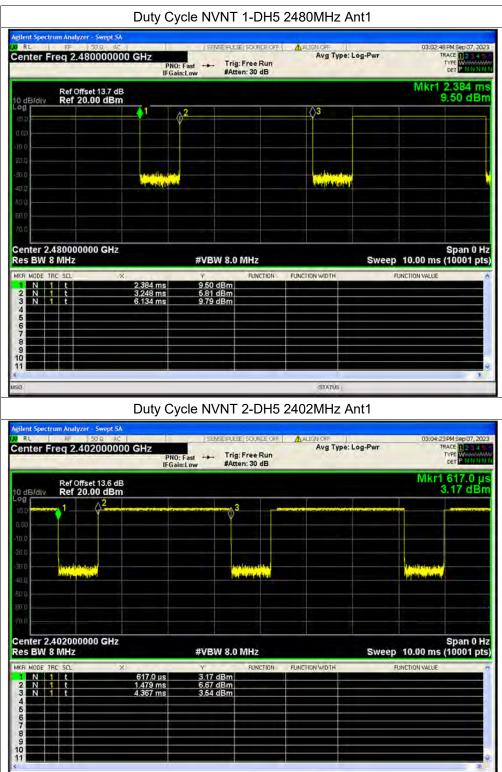



STATUS




enter Freq 2.4410	000000 GHz		ee Run	ALIGN OFF Avg Type: Log-Pw		TRACE
Ref Offset 1 dB/div Ref 20.00	13.6 dB				Mkr	1.323 n 5.41 dB
dB/div Ref 20.00	¢2		\$ ³		nineis finter bedre fer	
w 						
no <mark>na</mark>	and a state of the		astalle and are a			Arra de Parking
10						
1.0						
enter 2.441000000 s BW 8 MHz	GHz	#VBW 8.0 M	Hz	Sv	veep 10.00 m	Span 0 s (10001 p
R MODE THE SEL	× 1.323 ms	5.41 dBm	FUNCTION FUNC	TION WIDTH	FUNCTION VALUE	
N 1 t N 1 t	2.185 ms 5.073 ms	4.07 dBm 5.79 dBm				
)
				STATUS		
		cle NVNT 2	-DH5 248	status 30MHz Ant1		
ent Spestrum Analyzer - S RL nF 50	wept SA Ω AC	cle NVNT 2		30MHz Ant1		:22PM Sep 07, 20 TRACE RISE
ent Spestrum Analyzer - S RL nF 50	wept SA	Fast → Trig:Fr	ource off 🛛 🛕	30MHz Ant1	r	
Rent Spestrum Analyzer - S RL IF 150 enter Freq 2.4800 Ref Offset 1 dB/div Ref 20.00	wept SA 2 AC 000000 GHz PNO: IFGair 13.7 dB	Fast → Trig:Fr	ource off 🛛 🛕	30MHz Ant1	r	
Ref Offset 1 dB/dI/ Ref 20.00	wept SA 2 AC 000000 GHz PNO: IFGair 13.7 dB	Fast → Trig:Fi Rast → Trig:Fi n:Low #Atten:	ource off 🛛 🛕	30MHz Ant1	r	TRACE 121 TYPE WHANNE DET PINNIN
Ref Offset 1 dB/div Ref 20.00 Ref 0ffset 1 dB/div Ref 20.00	wept SA 9. AC 900000 GHz PNO: IFGair 13.7 dB 1 dBm	Fast → Trig:Fi Rast → Trig:Fi n:Low #Atten:	ounce of F [A ee Run 30 dB	30MHz Ant1	r	TRACE 121 TYPE WHANNE DET PINNIN
Ref Offset 1 dB/div Ref 20.00 0 0 0 0 0 0 0 0 0 0 0 0	wept SA 9. AC 900000 GHz PNO: IFGair 13.7 dB 1 dBm	Fast → Trig:Fi Rast → Trig:Fi n:Low #Atten:	ounce of F [A ee Run 30 dB	30MHz Ant1	r	TRACE 121 TYPE WHANNE DET PINNIN
Ref Offset 1 dB/div Ref 20.00 Conter Freq 2.4800	wept SA R AC D000000 GHz PNO: IFGain I dBm 22	Fast → Trig:Fi Rast → Trig:Fi n:Low #Atten:	ounce of F [A ee Run 30 dB	30MHz Ant1	Mkr	TRACE 121 TYPE WHANNE DET PINNIN
Ref Offset 1 dB/div Ref 20.00 Ref Offset 1 dB/div Ref 20.00 Ref offset 1 dB/div Ref 20.00 Ref offset 1 dB/div Ref 20.00 Ref 0 Ref 0	wept SA R AC D000000 GHz PNO: IFGain I dBm 22	Fast → Trig:Fi Rast → Trig:Fi n:Low #Atten:	CURCEOFF A	30MHz Ant1	Mkr	1.046 n 5.28 dB
Ref Offset 1 dB/div Ref 20.00	wept SA R AC D000000 GHz PNO: IFGain I dBm 22	Fast → Trig:Fi Rast → Trig:Fi n:Low #Atten:	CURCEOFF A	30MHz Ant1	Mkr	1.046 n 5.28 dB
lent Spectrum Analyzer - 5 RL IF 50 enter Freq 2.4800 Boo 1 dB/div Ref 20.00 9 1 0 0 0 0 0 0 0 0 0 0 0 0 0	wept SA Q AC D000000 GHz IFGain 13.7 dB d Bm Q2 ATA	Fast → Trig:Fi Rast → Trig:Fi n:Low #Atten:	CURCEOFF A	BOMHz Ant1	Mkr	TRACE 0.23 A
Ref Offset 1 dB/dlv Ref 20.00 B/dlv Ref 20.00 a 1 a 24.40 a 2	wept SA Q AC D000000 GHz PNO: IFGain I3.7 dB dBm Q 2 CHz GHz	Fast → Trig: Fr #Atten:	OURCE OFF	BOMHz Ant1	Mkr veep 10.00 m	Tree 123 4 Tree 123 4 Tree 123 4 1.046 n 5.28 dB
dB/div Ref 20.00	wept SA Q AC D000000 GHz IFGain 13.7 dB d Bm Q2 ATA	Fast → Trig: Fr #Atten:	OURCE OFF	BOMHz Ant1	Mkr	Span 0 I s (10001 p



STATUS



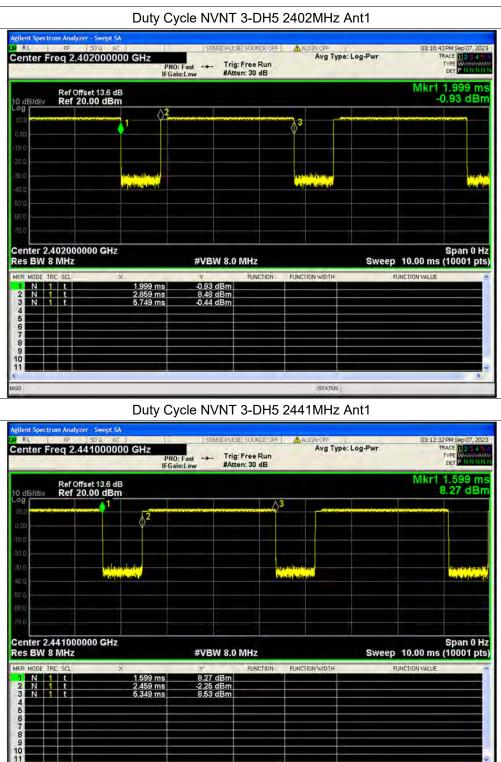



STATUS



R			萨	er - Swept S 50 9 A0 8000000	00 GHz	Fast +++	Trig: I	Free Run 1: 30 dB	ALI ALI	Avg Type: L	.og-Pwr	03:15:	08 PM Sep 07, 202 TRACE
0 d	B/div			fset 13.7 dl 0.00 dBn								Mkr	1 331.0 µ 8.61 dBn
og		1				1	∆3						
	ALC: N			2	the second sectors		Y	- Colores				- F	
				2									
0.01													
		-											
		Lon	diant for				digradue	district.			^	interingent	
		locality.	August				A Baddela	Lat and			2	and the second second	
	-												
	_				1		_				-		0
		2.48		000 GHz		#VB	N 8.0 M	ЛНz			Sweep	10.00 ms	Span 0 H
KR	MODE	TRC	SCL	2	X	Y		FUNCTION	FUNCTION	ON WIDTH	F	UNCTION VALUE	
1		1			331.0 µs	8.61	dBm						
23		1			1.191 ms 4.081 ms	-3.07 8.87							
4					1,000,11113	0.01							
5													
67	_												
8													
9													



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	12.59	0	12.59	0.01816	30	Pass
NVNT	1-DH5	2441	Ant1	12.73	0	12.73	0.01875	30	Pass
NVNT	1-DH5	2480	Ant1	12.24	0	12.24	0.01675	30	Pass
NVNT	2-DH5	2402	Ant1	12.11	0	12.11	0.01626	30	Pass
NVNT	2-DH5	2441	Ant1	12.07	0	12.07	0.01611	30	Pass
NVNT	2-DH5	2480	Ant1	11.75	0	11.75	0.01496	30	Pass
NVNT	3-DH5	2402	Ant1	12.25	0	12.25	0.01679	30	Pass
NVNT	3-DH5	2441	Ant1	12.38	0	12.38	0.0173	30	Pass
NVNT	3-DH5	2480	Ant1	11.96	0	11.96	0.0157	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



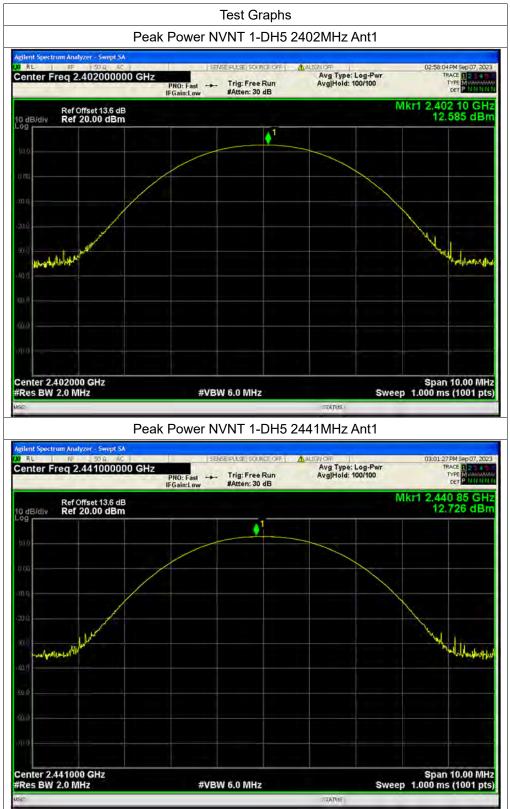



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China









Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





gilent Spectrum Analyzer - Swept SA RL ENSE/PULSE SOURCE OFF Center Freq 2.480000000 GHz TYPE MUM Avg Type: Log-Pwr Avg|Hold: 100/100 PNO: Fast --- Trig: Free Run IFGain:Low #Atten: 30 dB Mkr1 2.479 94 GHz 11.753 dBm Ref Offset 13.7 dB Ref 20.00 dBm 10 dB/div 1 Wandhard Muddelwyle Span 10.00 MHz Sweep 1.000 ms (1001 pts) Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz TATUS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





Peak Power NVNT 3-DH5 2441MHz Ant1





Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.4. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	11.16	1.14	12.3	0.01698	30	Pass
NVNT	1-DH5	2441	Ant1	11.49	1.14	12.63	0.01832	30	Pass
NVNT	1-DH5	2480	Ant1	10.71	1.14	11.85	0.01531	30	Pass
NVNT	2-DH5	2402	Ant1	8.85	1.13	9.98	0.00995	30	Pass
NVNT	2-DH5	2441	Ant1	8.53	1.13	9.66	0.00925	30	Pass
NVNT	2-DH5	2480	Ant1	8.43	1.13	9.56	0.00904	30	Pass
NVNT	3-DH5	2402	Ant1	8.51	1.13	9.64	0.0092	30	Pass
NVNT	3-DH5	2441	Ant1	8.37	1.13	9.5	0.00891	30	Pass
NVNT	3-DH5	2480	Ant1	8.53	1.13	9.66	0.00925	30	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlal




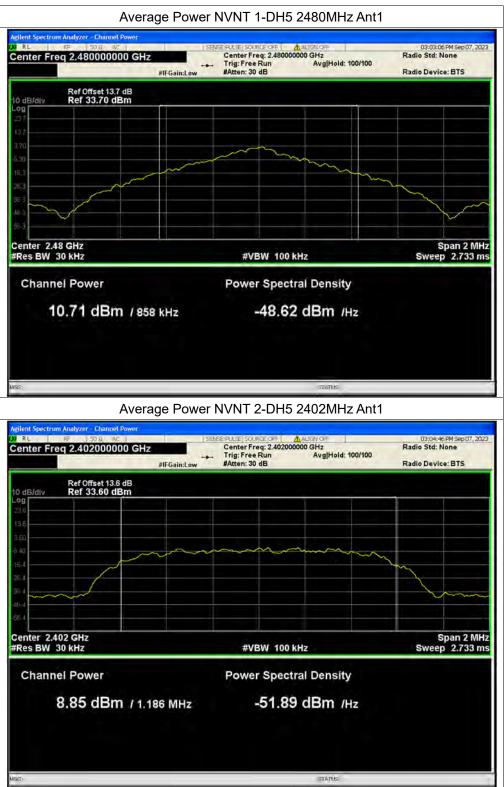

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



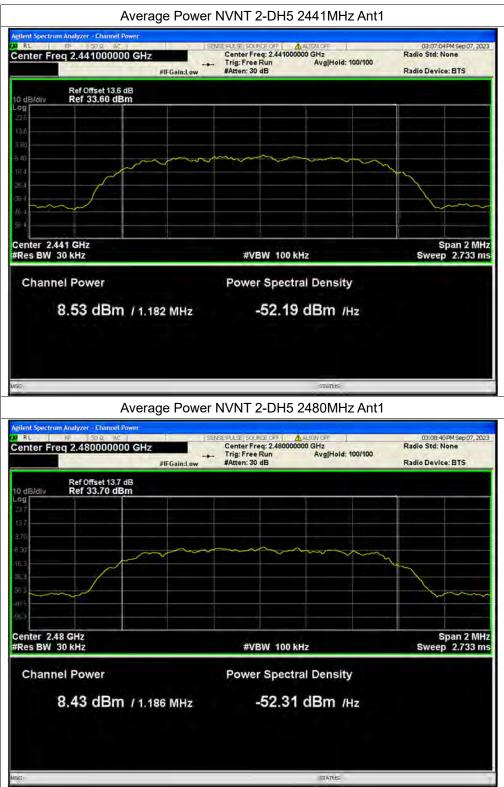


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn



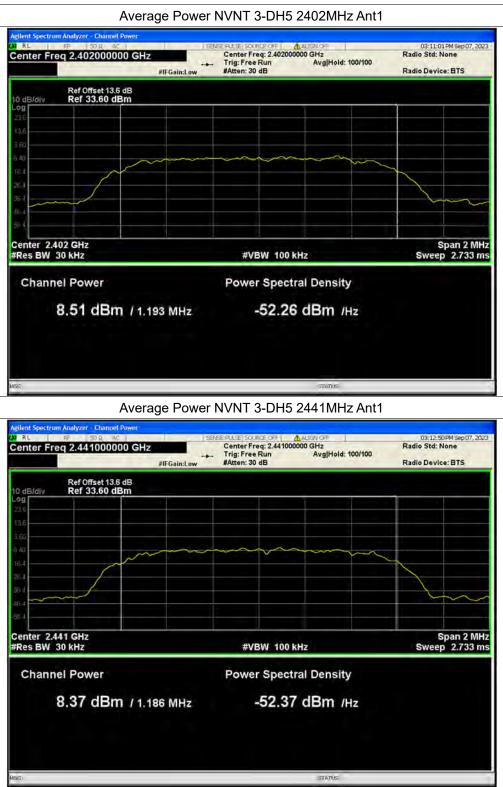


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



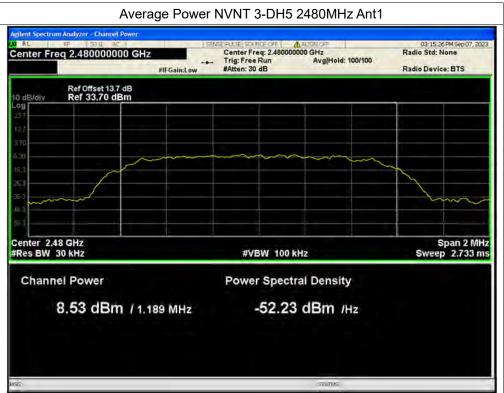



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.5. 20 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	0.944
NVNT	1-DH5	2441	Ant1	0.933
NVNT	1-DH5	2480	Ant1	0.943
NVNT	2-DH5	2402	Ant1	1.322
NVNT	2-DH5	2441	Ant1	1.311
NVNT	2-DH5	2480	Ant1	1.303
NVNT	3-DH5	2402	Ant1	1.303
NVNT	3-DH5	2441	Ant1	1.285
NVNT	3-DH5	2480	Ant1	1.293




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



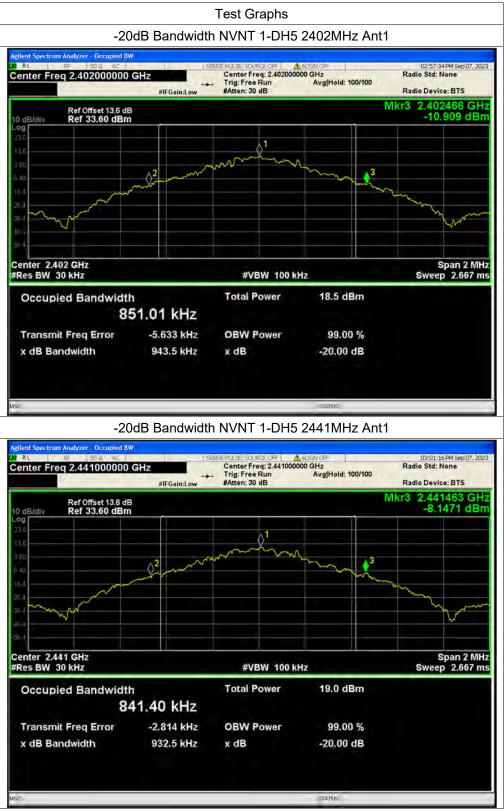




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fa Http://www.morlab.cn E-

Fax: 86-755-36698525 E-mail: service@morlab.cn



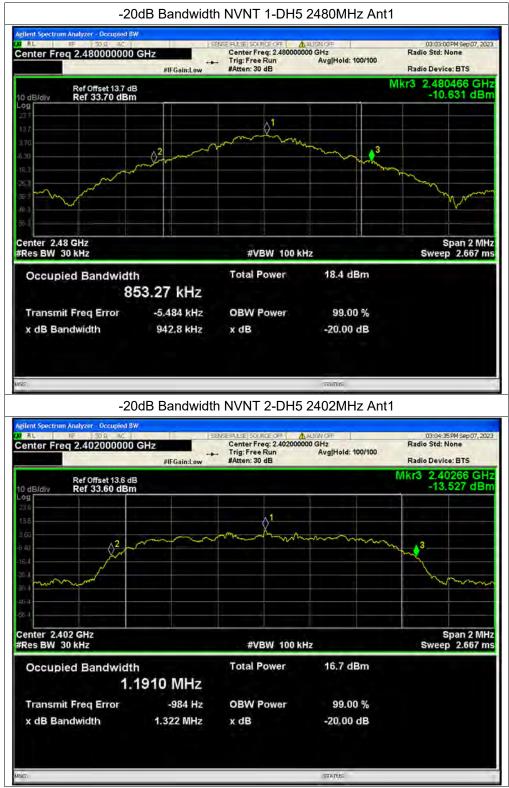



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



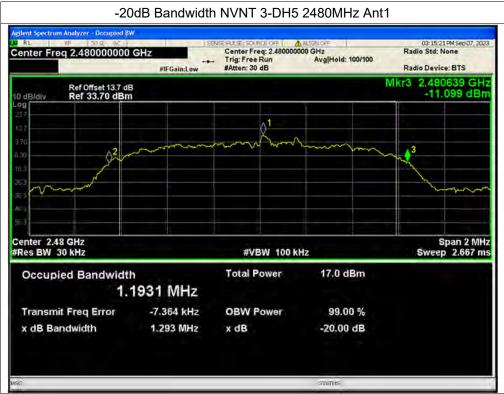



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



A.6. Carried Frequency Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS	Limit	Verdict
Contaition					(MHz)	(MHz)	Voraiot
NVNT	1-DH5	Ant1	2402.014	2403.014	1	0.629	Pass
NVNT	2-DH5	Ant1	2402.006	2403.028	1.022	0.881	Pass
NVNT	3-DH5	Ant1	2402.13	2403.032	0.902	0.869	Pass

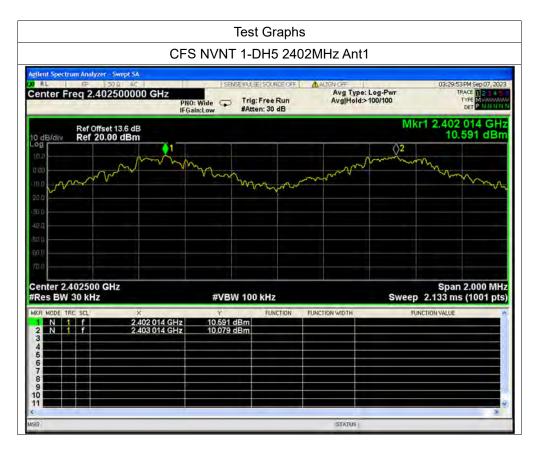



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



		S NVNT	2-DH5 240	2MHz Ant1		
ilent Spectrum Analyzer RL πF enter Freq 2.40	50 R AC 2500000 GHz PN0	: Wide 😱	EPULSE SOURCE OFF Trig: Free Run #Atten: 30 dB	ALIGN OFF Avg Type: Log Avg Hold>100	g-Pwr	03:33:53 PM Sep 07, 20 TRACE 234 TYPE MOMMAN DET P NNNN
0 dB/div Ref 20.	et 13.6 dB 00 dBm				Mkr1 2	402 006 GH 8.892 dBr
og d.di	<u> </u>				2^2	
0.0	man	man	m	man	min	m
0.0						
0.0						
aig						
00						
enter 2.402500 G	Hz		-			Span 2.000 MI
Res BW 30 kHz			100 kHz		Sweep 2.13	33 ms (1001 pl
KR MODE TRC SCL	× 2.402 006 GHz 2.403 028 GHz	8.892 d 8.196 d	FUNCTION	FUNCTION WIDTH	FUNCTION	VALUE
	2,400 020 0112	0,130 4	5117			
3				STATUS		
ilent Spectrum Analyzer RL RF enter Freq 2.40	- Swept SA 50 Ω AC 2500000 GHz		3-DH5 240	2MHz Ant1	g-Pwr	03:39:26 PM Sep 07, 20 TRACE 2 3 TYPE MAAAA DET P N N N
	IFGa	in:Low	#Atten: 30 dB		Mkr1.2	402 130 GH
	et 13.6 dB 00 dBm					5.329 dB
0.0	and and	1		m m m m	mm-	
			m	1.202 10.10		martin
00						
0.0						
0'0						
00						
enter 2.402500 G	Hz					Span 2.000 MI
Res BW 30 kHz	×		100 kHz	FUNCTION WIDTH	Sweep 2.1	33 ms (1001 pt
1 N 1 F	2.402 130 GHz 2.403 032 GHz	5.329 d 7.454 d	Bm	FUNCTION WIDTH	FUNCTION	YALUE
2 N 1 f 3 4						
2 N 1 f 3 4 5 6						
2 N 1 F 3 4 4 6 7 8 8 9						
2 N 1 F 3 4 5 5 6 4 7 7 8						



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





A.7. Time of Occupancy (Dwell time)

Condition	Mode	Frequency	Antenna	Pulse Time	Total Dwell	Burst	Period	Limit	Verdict
	woue	(MHz)		(ms)	Time (ms)	Count	Time (ms)	(ms)	vertici
NVNT	1-DH1	2402	Ant1	0.382	120.712	316	31600	400	Pass
NVNT	1-DH3	2402	Ant1	1.638	263.718	161	31600	400	Pass
NVNT	1-DH5	2402	Ant1	2.886	291.486	101	31600	400	Pass
NVNT	2-DH1	2402	Ant1	0.387	121.518	314	31600	400	Pass
NVNT	2-DH3	2402	Ant1	1.639	257.323	157	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.887	314.683	109	31600	400	Pass
NVNT	3-DH1	2402	Ant1	0.387	122.292	316	31600	400	Pass
NVNT	3-DH3	2402	Ant1	1.638	260.442	159	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.889	332.235	115	31600	400	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



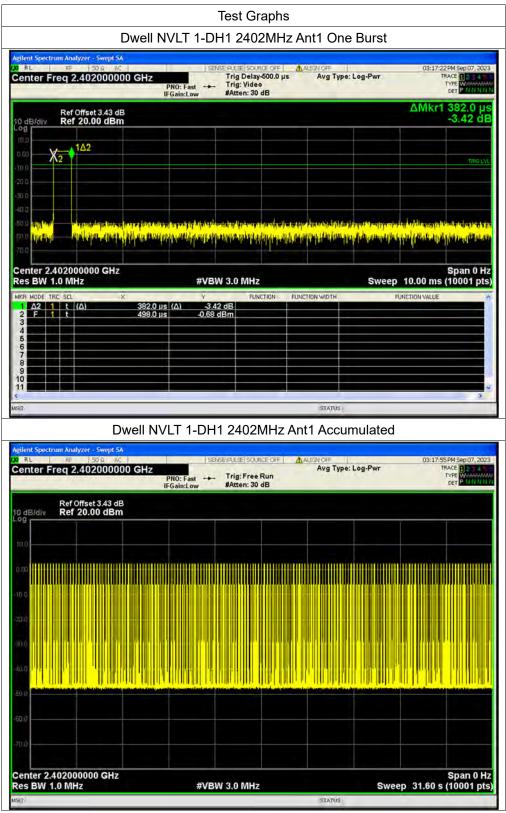




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



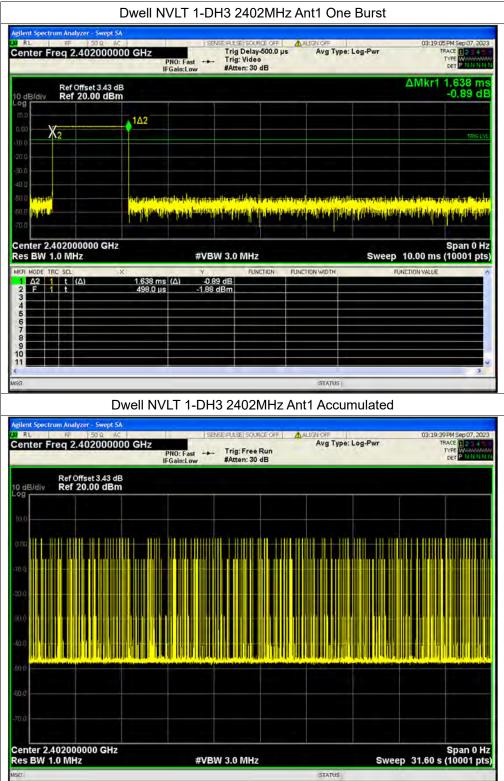


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




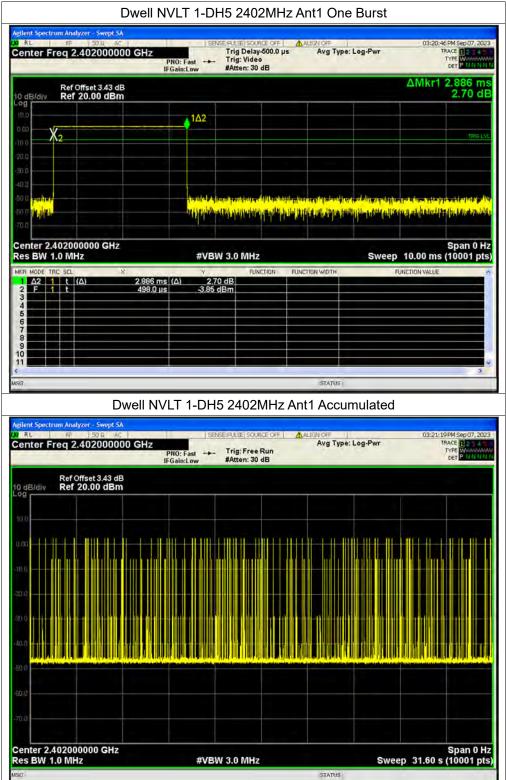



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




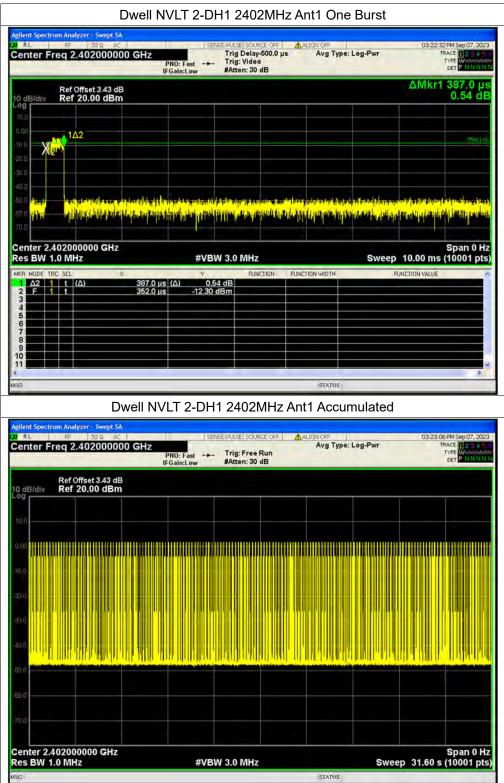



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




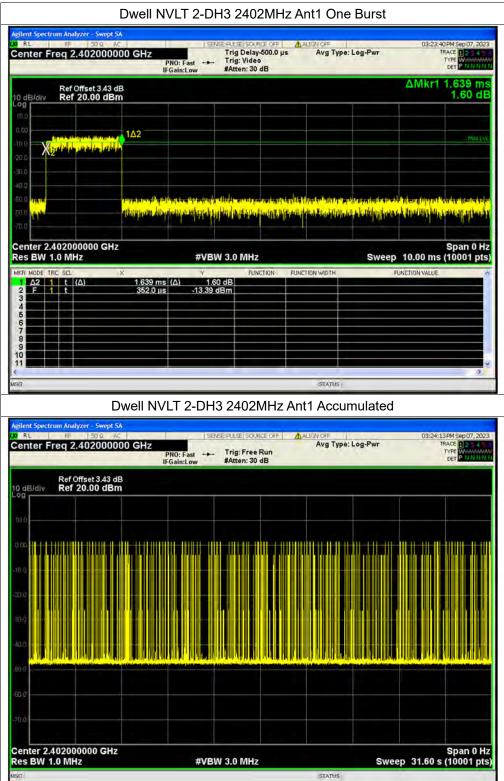



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




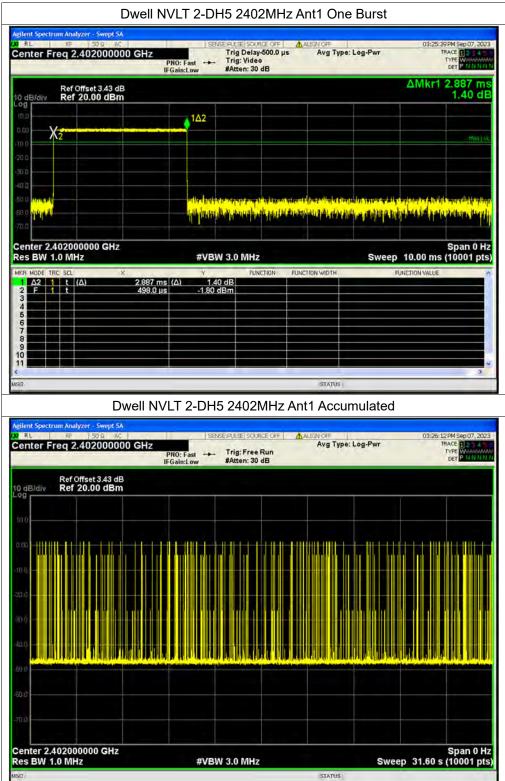



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



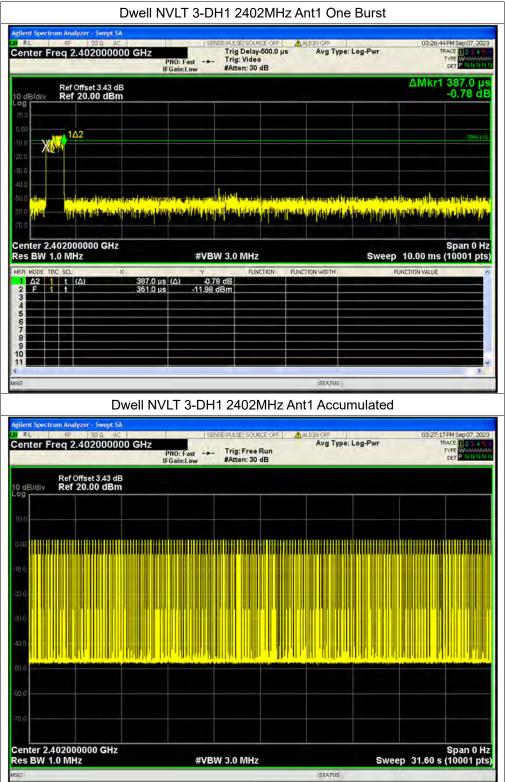




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




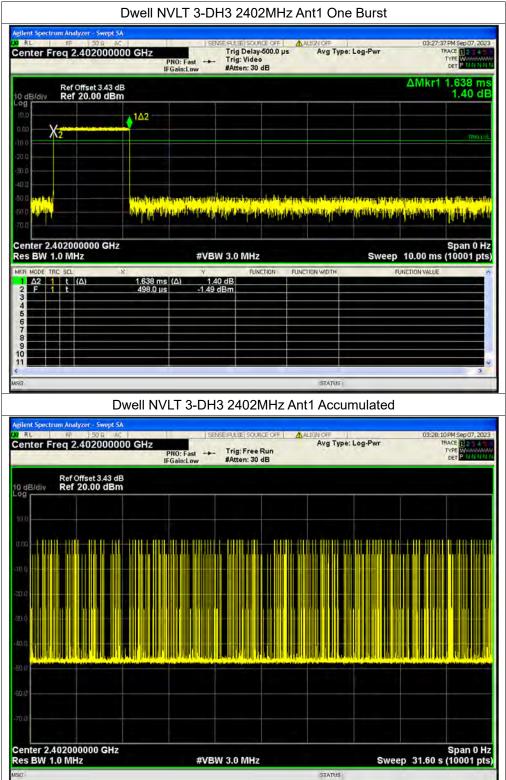



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



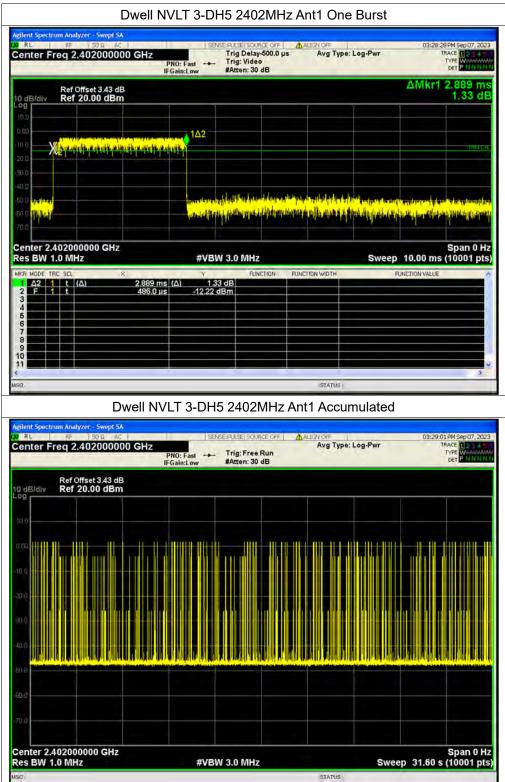



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



A.8. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-50.19	-20	Pass
NVNT	1-DH5	2441	Ant1	-50.77	-20	Pass
NVNT	1-DH5	2480	Ant1	-50.39	-20	Pass
NVNT	2-DH5	2402	Ant1	-47.83	-20	Pass
NVNT	2-DH5	2441	Ant1	-48.76	-20	Pass
NVNT	2-DH5	2480	Ant1	-48.34	-20	Pass
NVNT	3-DH5	2402	Ant1	-48.97	-20	Pass
NVNT	3-DH5	2441	Ant1	-49.01	-20	Pass
NVNT	3-DH5	2480	Ant1	-47.94	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




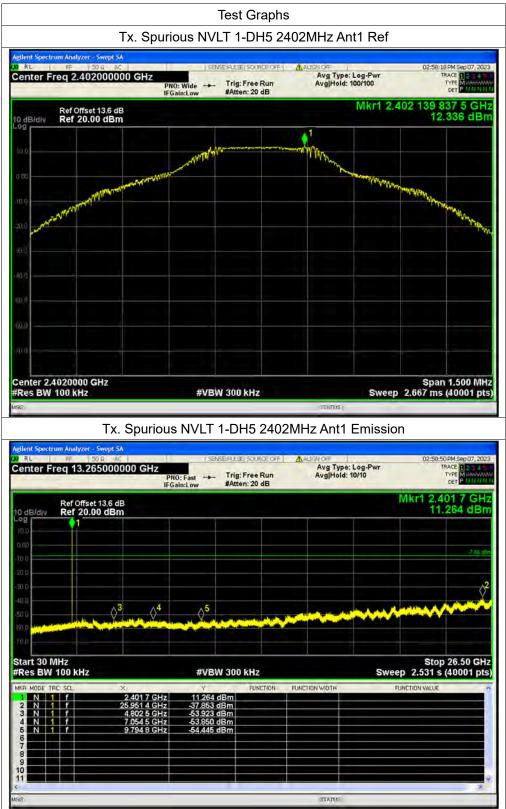




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



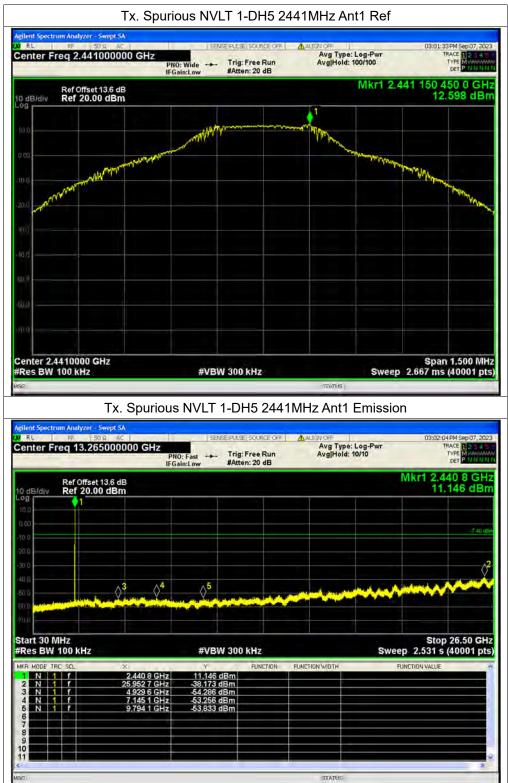

Shenzhen Morlab Communications Technology Co., Ltd. **MORLAB** FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




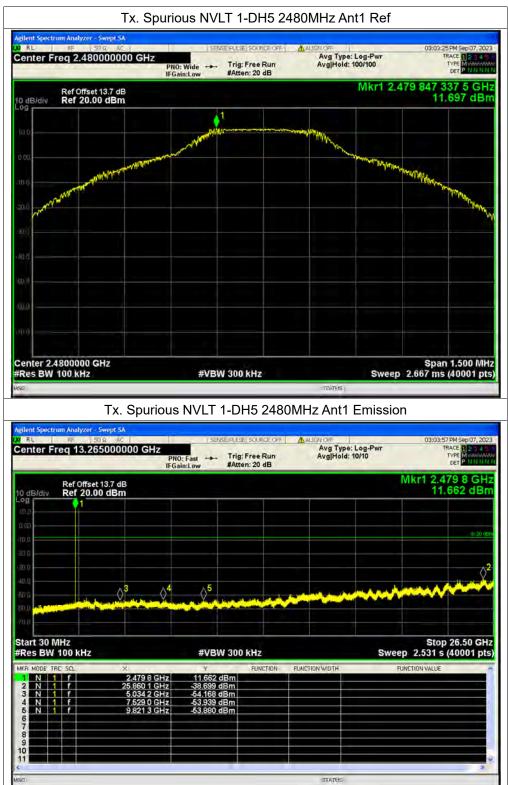

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




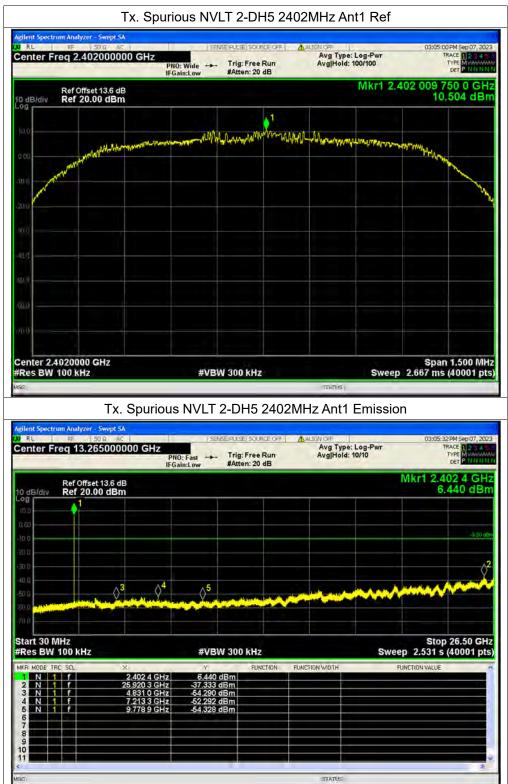



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




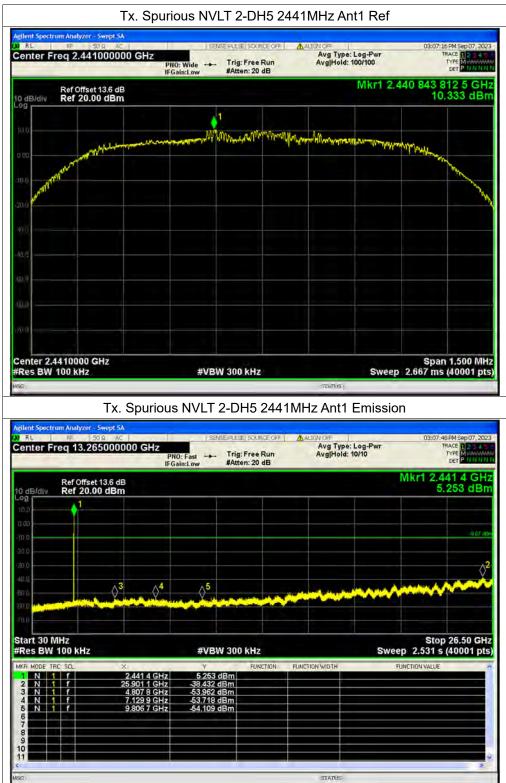



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




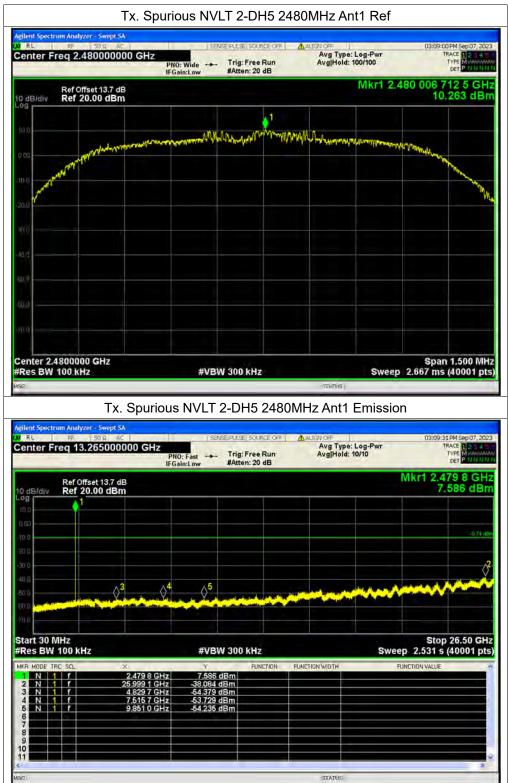

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


MORLAB



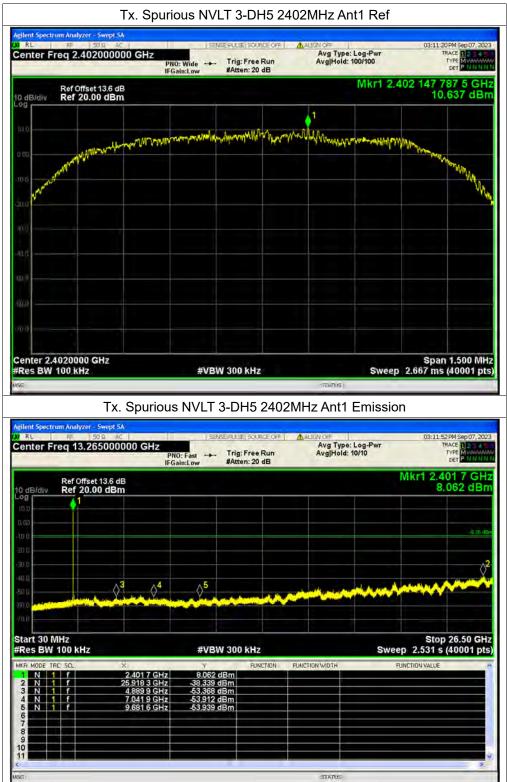






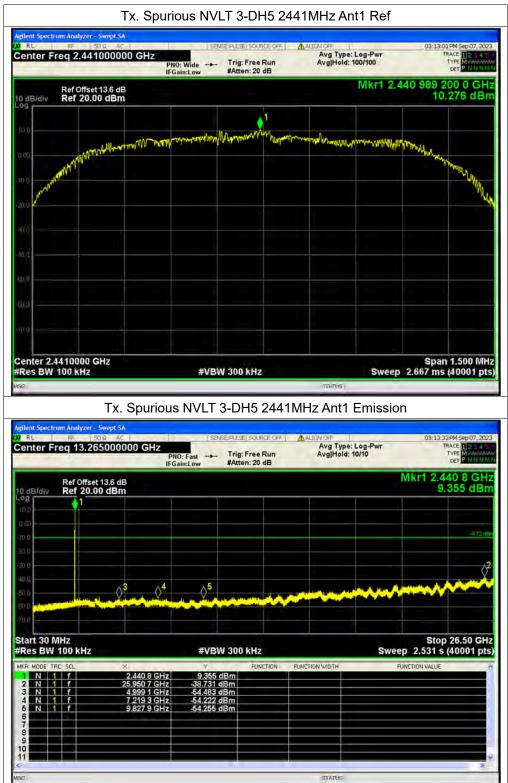





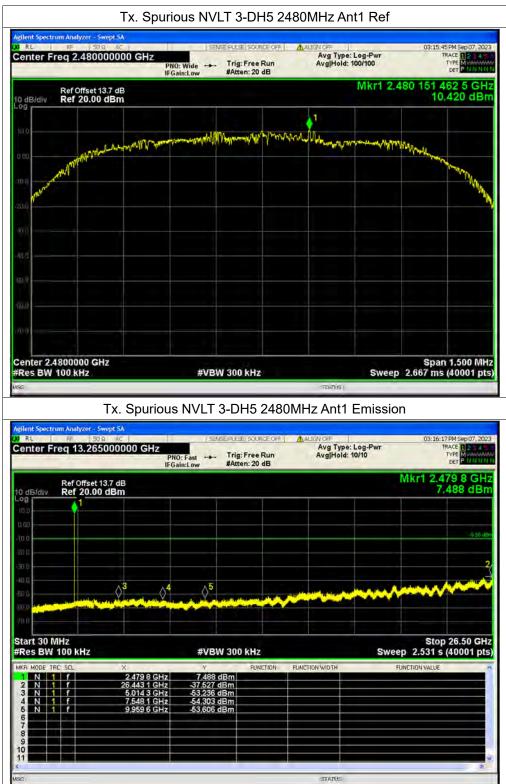





A.9. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-57.7	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-56.43	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-55.48	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-54.5	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-53.25	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-53.65	-20	Pass
NVNT	1-DH5	2402	Ant1	Hopping	-56.14	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-56.57	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-52.9	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-54.39	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-54.81	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-54.56	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



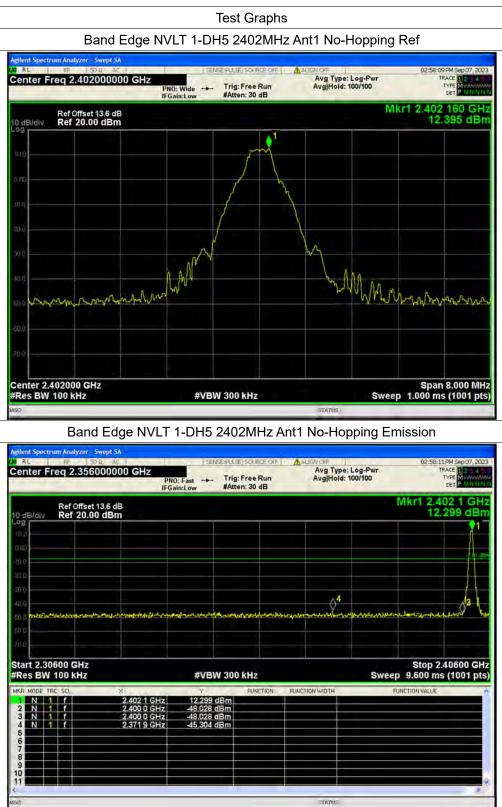


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn



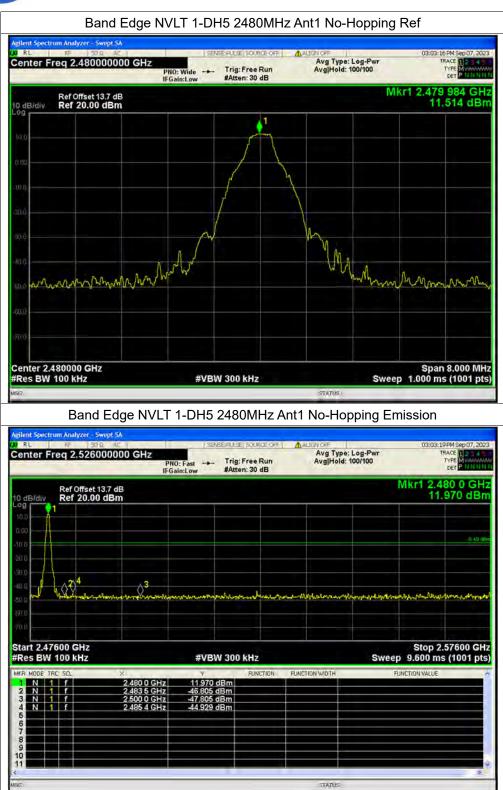

E-mail: service@morlab.cn

Fax: 86-755-36698525

Tel: 86-755-36698555

Http://www.morlab.cn


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.

FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



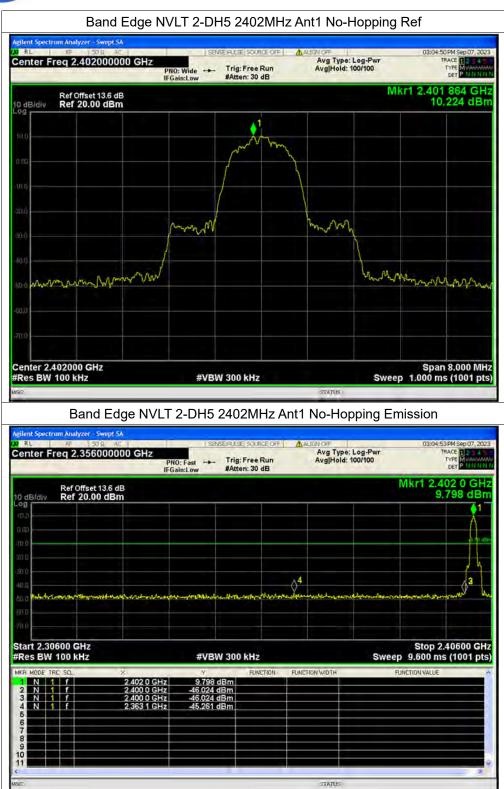

FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Http://www.morlab.cn


Shenzhen Morlab Communications Technology Co., Ltd.

E-mail: service@morlab.cn

Fax: 86-755-36698525


Tel: 86-755-36698555



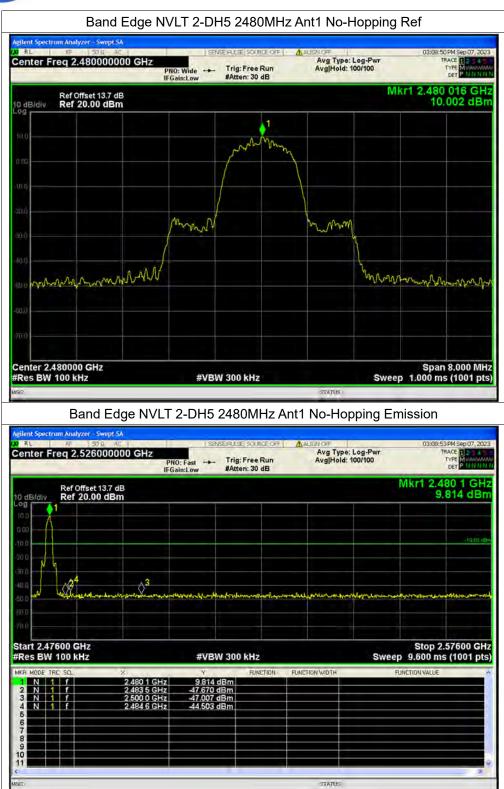

MORLAB




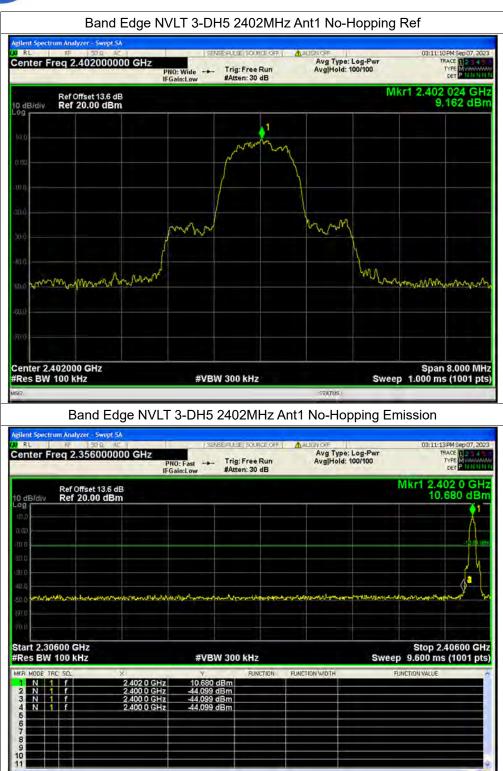



STATUS



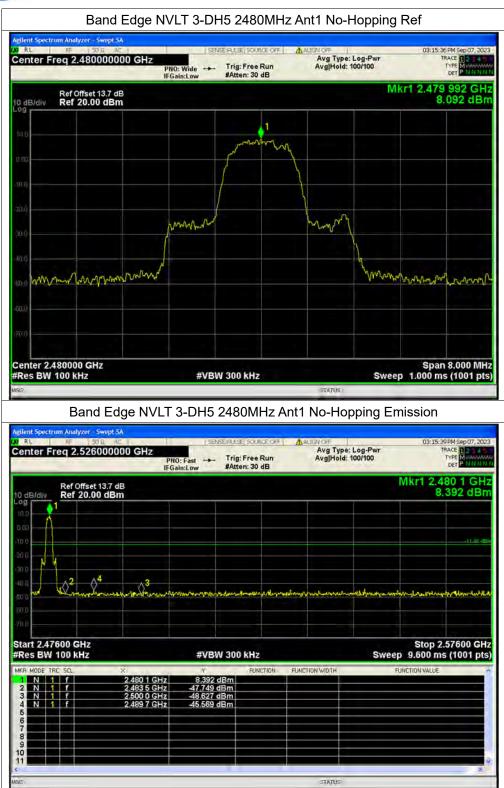


Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

MORLAB





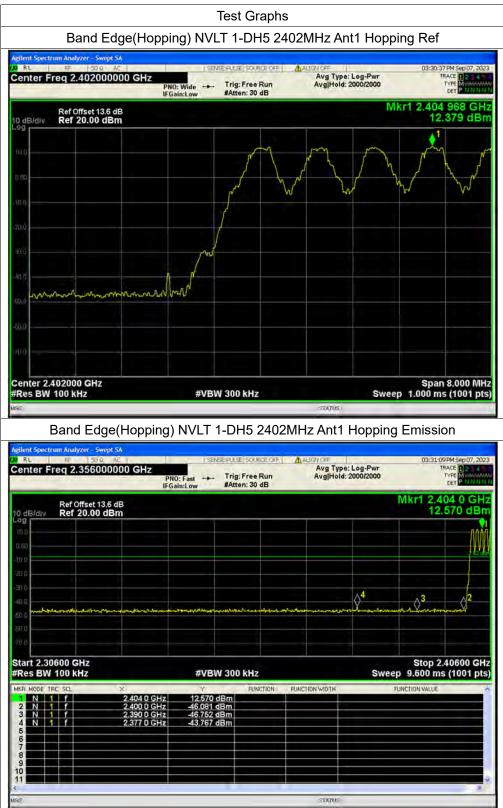


















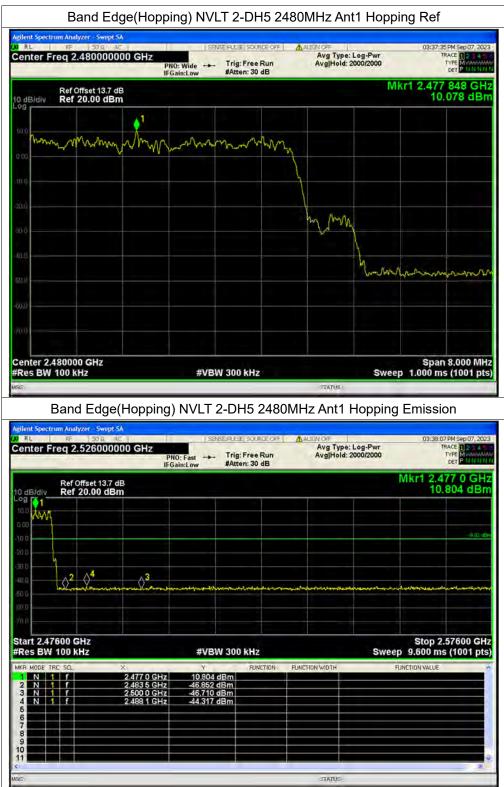

MORLAB





Fax: 86-755-36698525

E-mail: service@morlab.cn

Tel: 86-755-36698555

Http://www.morlab.cn







MORLAB





A.10. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


A. Test Setup:

Test Mode: <u>EUT+Antenna+DC source+PC+PC Adapter+USB cable + BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: $E [dB\mu V] = U_R + L_{Cable loss} [dB] + A_{Factor}$ U_R : Receiver Reading A_{Factor}: Voltage division factor of LISN






B. Test Plot:

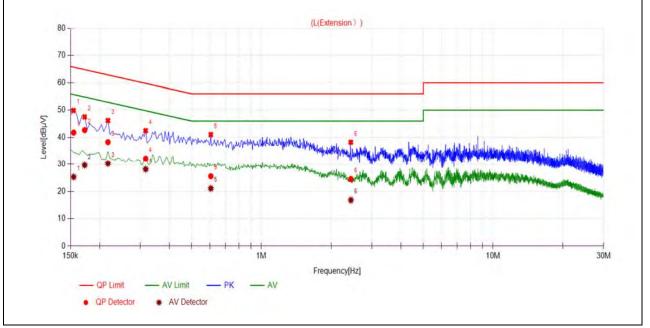


(L Phase)

No.	Fre.	Emission L	evel (dBµV)	Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1547	41.75	25.28	65.75	55.75		PASS
2	0.1726	42.68	29.64	64.84	54.84		PASS
3	0.2175	38.22	30.28	62.91	52.91	Line	PASS
4	0.3165	32.12	28.15	59.80	49.80	Line	PASS
5	0.6048	25.54	21.05	56.00	46.00		PASS
6	2.4334	24.51	16.77	56.00	46.00		PASS







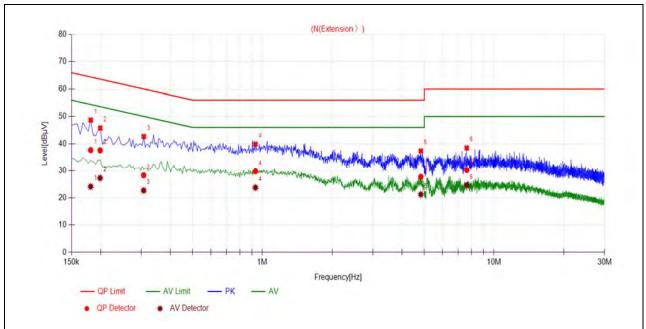

(N	Phase)
----	--------

No.	Fre.	Emission L	evel (dBµV)	Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1814	37.69	24.10	64.42	54.42		PASS
2	0.1993	37.58	27.26	63.64	53.64		PASS
3	0.3072	28.31	22.66	60.05	50.05	Noutral	PASS
4	0.9331	29.79	23.74	56.00	46.00	Neutral	PASS
5	4.8313	27.72	21.21	56.00	46.00		PASS
6	7.6284	30.23	24.55	60.00	50.00		PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.11. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

AT: Total correction Factor except Antenna

U_R: Receiver Reading

GFSK Mode

Gpreamp: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Channel	Frequency (MHz)	Detector	Receiver Reading U _R	A⊤ (dB)	A _{Factor} (dB@3m)	Max. Emission E	Limit (dBµV/m)	Verdict
		PK/ AV	(dBµV)			(dBµV/m)		
0	2385.38	PK	23.09	6.74	27.20	57.03	74	PASS
0	2347.94	AV	11.66	6.74	27.20	45.60	54	PASS
78	2483.61	PK	25.20	6.74	27.20	59.14	74	PASS
78	2487.92	AV	13.08	6.74	27.20	47.02	54	PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





ight Spectrum Analyzer -		SENSE:INT	ALIGN OFF	03:04:02 PM Oct 06, 2023	0
er 1 2.385384 PREAMP	PNO: Fast O IFGain:Low	Trig: Free Run #Atten: 6 dB	#Avg Type: Voltage Avg Hold:>100/100	TRACE 1 2 3 4 5 6 TYPE MWWWWW DET P NNNNN	Marker Select Marker
/div Ref 82.9	9 dBµV		Mkr1	2.385 384 GHz 23.094 dBµV	Jelect Marker
					Norma
Laudide phy will proper dy hyp	n sightmatat ni fait na na	and mather and a strength of the strength of t	An and Sector Sector Sector And		Delt
					Fixed
2.30000 GHz BW (CISPR) 1 I	MHz #VB	W 3.0 MHz		Stop 2.40400 GHz .000 ms (1001 pts)	0
ODE TRC SCL	× 2.385 384 GHz 2.390 000 GHz	¥ FU 23,094 dBµV 20,839 dBµV	NCTION FUNCTION WIDTH	FUNCTION VALUE	
					Properties
					Mor 1 of

(PEAK, Channel 0, GFSK)



(AVERAGE, Channel 0, GFSK)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn

Page **93** of **110**



Marker	03:52:34 PM Oct 06, 2023 TRACE 2 3 4 5 6 TYPE M WWWWW DET P N N N N	ALIGN OFF Type: Voltage Hold:>100/100	#Av	SENSE:IN Trig: Free Run #Atten: 6 dB	GHz PNO: Fast	0000000	AB361	22	arke
Select Marker 2	2.483 610 GHz 25.198 dBµV	Mkr2			I Guilleon	9 dBµV			dB/d
Norm								1	10 10 10
Dell	terestantes and the second	******	James gayo			2		/	
Fixed									99
o	Stop 2.50000 GHz 000 ms (1001 pts)	Sweep 1.	FUNCTION	3.0 MHz	#VBV	MHz	00 GHz SPR) 1	V (CI	
Properties	E			23.718 dBµV 25.198 dBµV	500 GHz 610 GHz			1	I N N 3
Mor 1 of									
	170	STATUS							

(PEAK, Channel 78, GFSK)

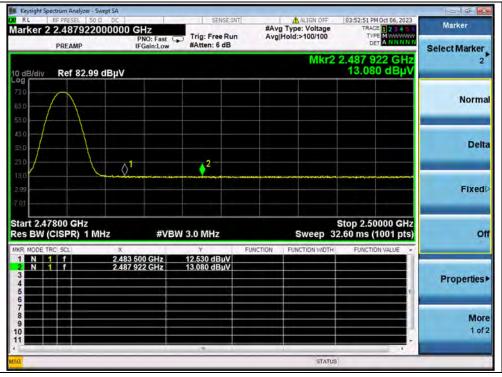

(AVERAGE, Channel 78, GFSK)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn


Fax: 86-755-36698525 E-mail: service@morlab.cn

-



π/4-DQPSK Mode

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Voraiot
0	2366.25	PK	22.76	6.74	27.20	56.70	74	PASS
0	2371.76	AV	11.64	6.74	27.20	45.58	54	PASS
78	2483.85	PK	23.24	6.74	27.20	57.18	74	PASS
78	2483.74	AV	13.64	6.74	27.20	47.58	54	PASS

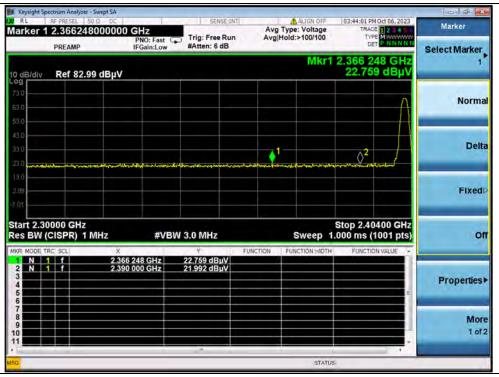


(PEAK, Channel 0,π/4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn


Fax: 86-755-36698525





Marker Select Marke	Oct 06, 2023	03:44:35 PM C TRACE TYPE DET	ALIGN OFF g Type: Voltage Hold:>100/100	#AN	SENSE:IN Trig: Free Run #Atten: 6 dB	GHz PNO: Fast	50 Ω DC		r 1 2	rke
ocicetimarke	0 GHz dBµV	2.371 76 11.636	Mkr1				2.99 dBµV	Ref 82	liv	iB/d
Norm	\wedge))
Del										
Fixed		²	•••				18			
c	001 pts)	Stop 2.404 54.0 ms (10	Sweep 15		3.0 MHz	#VBW	1 MHz		W (C	B
Properties	VALUE *	FUNCTION	FUNCTION WIDTH	FUNCTION	11.636 dBµV 11.456 dBµV		× 2.371 2.390	f		N
Mo 1 o										

(AVERAGE, Channel 0, π/4-DQPSK)

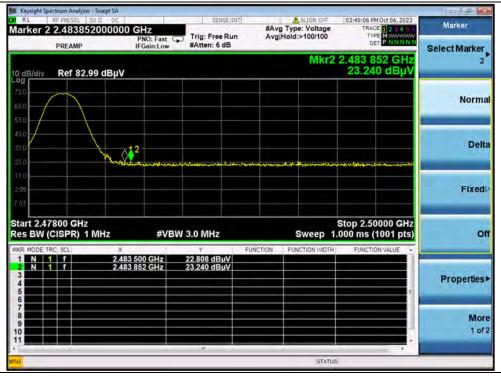

(PEAK, Channel 78, π/4-DQPSK)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn



0.6	PM Oct 06, 2023	03:48:44	ALIGN OFF		SE:INT	SE			nalyzer - Swep SEL 50 Ω		1
Marker Select Marke	ACE 1 2 3 4 5 6 YPE M WARMAN DET A N N N N N	TR	vpe: Voltage Id:>100/100		Run		Z NO: Fast G Gain:Low	0000 G	374200		
Select Marke	742 GHz 43 dBµV		Mkr2					ЗμV	82.99 d	Ref	dív
Norm										\land	1
Del											/
Fixed					ontra in co						
c	50000 GHz (1001 pts)	2.60 ms	Sweep 3	INCTION		3.0 MHz	#VBV	×	GHz R) 1 MH2	7800 CISPI	W (
Properties					ΨV ΨV	12,168 dE 13.643 dE	0 GHz 2 GHz	2.483 50 2.483 74		f	
Mo											
10											+-

(AVERAGE, Channel 78, π/4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



8-DPSK Mode

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
ondimor	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Voraiot
0	2353.46	PK	23.92	6.74	27.20	57.86	74	PASS
0	2336.92	AV	11.78	6.74	27.20	45.72	54	PASS
78	2484.86	РК	23.27	6.74	27.20	57.21	74	PASS
78	2483.85	AV	13.21	6.74	27.20	47.15	54	PASS

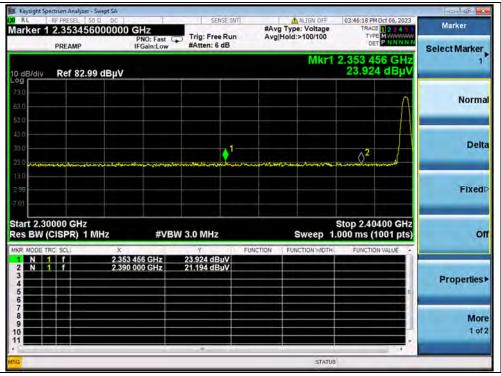

(PEAK, Channel 0, 8-DPSK)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



Marker Select Marker	Oct 06, 2023	TYPE	ALIGN OFF Type: Voltage Hold:>100/100	#/	SENSE:IN Trig: Free Run #Atten: 6 dB	GHz PNO: Fast	920000000	
1	0 GHz dBµV	2.336 92 11.775	Mkr1				82.99 dBµV	B/div Ref 8
Norm	Λ							
Delt								
Fixed		\$ ²				<u>}</u> '		
0	001 pts)		Sweep 1		3.0 MHz	#VBW) 1 MHz	t 2.30000 GH BW (CISPR)
Properties	E	FUNCTION	FUNCTION WDTH	FUNCTION	11.775 dBµV 11.420 dBµV		× 2,336 2,390	N 1 f N 1 f
Mor 1 of								
			STATUS					

(AVERAGE, Channel 0, 8-DPSK)

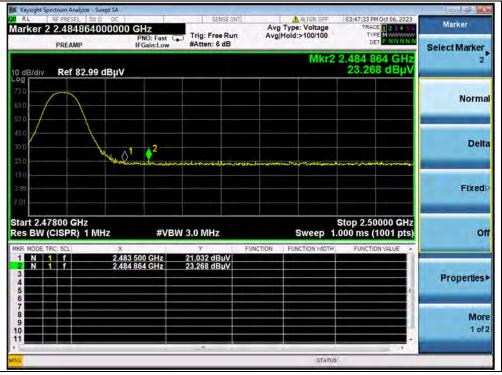

(PEAK, Channel 78, 8-DPSK)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn

Page **99** of **110**



	03:47:47 PM Oct 06, 2023 Marker
rker 2 2.48385200000 PREAMP	TRACE 2 3 4 5 TYPE MWWWWWW DET A NNNNN Select Marker
dB/div Ref 82.99 dBµ\	2.483 852 GHz 13.208 dBµV
	Norm
	Del
0 99 11	Fixed
art 2.47800 GHz s BW (CISPR) 1 MHz	Stop 2.50000 GHz .60 ms (1001 pts)
N 1 7 2.4 N 1 7 2.4	FUNCTION VALUE
	Properties
	Mo
	10

(AVERAGE, Channel 78, 8-DPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.12. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555




GFSK Mode

Plots for Channel 0

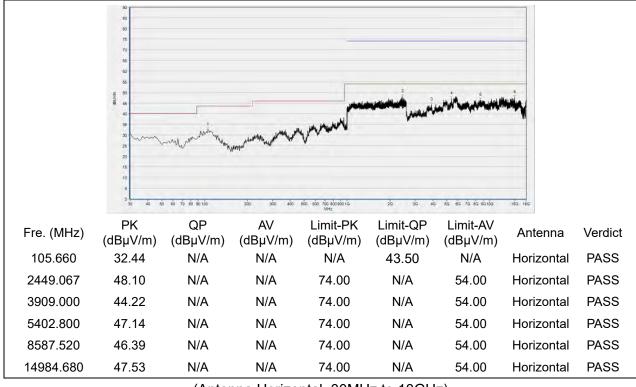

(Antenna Horizontal, 30MHz to 18GHz)

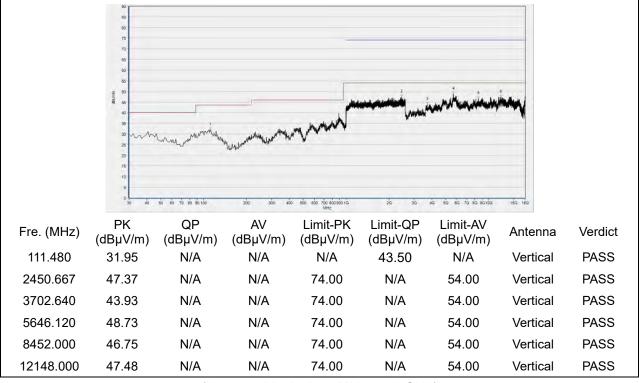

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



Plot for Channel 39

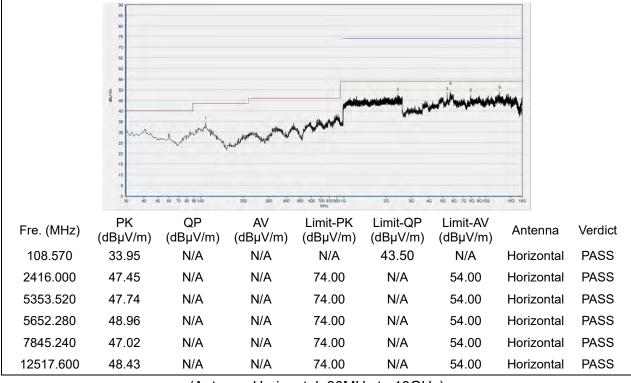

(Antenna Horizontal, 30MHz to 18GHz)

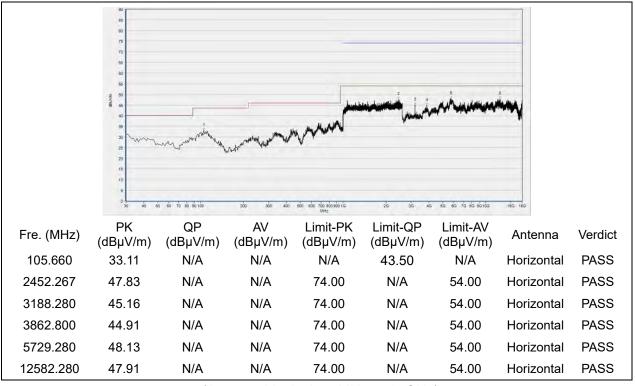

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



Plot for Channel 78

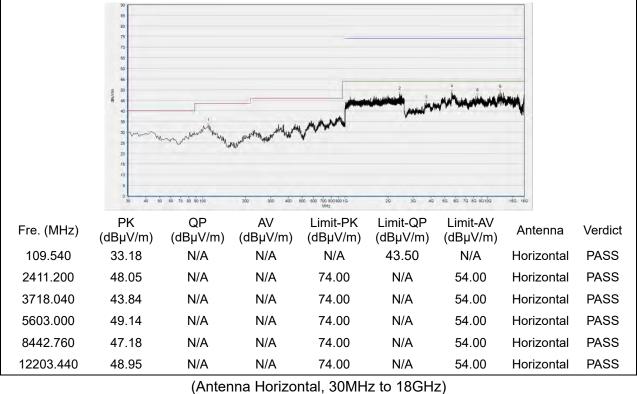

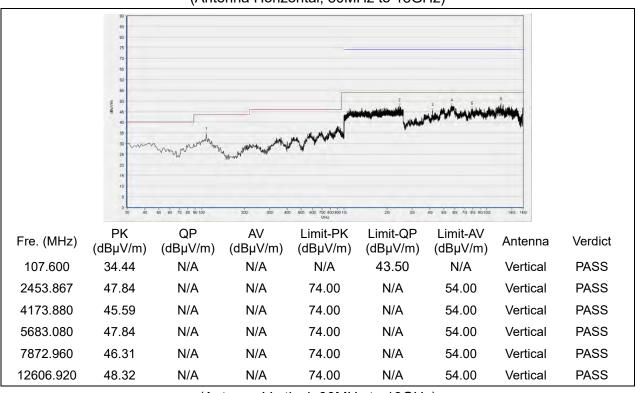

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




π/4-DQPSK Mode

Plots for Channel 0

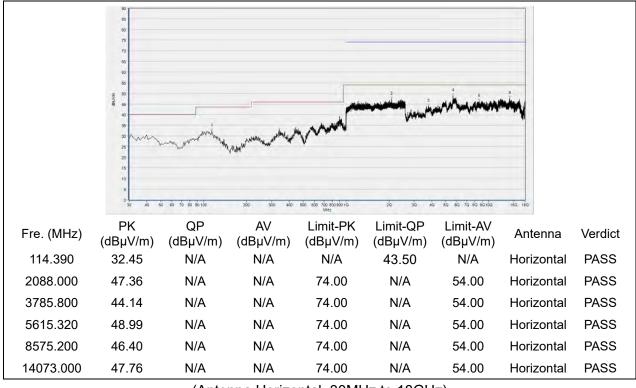

(Antenna Horizontal, 30MHz to 18GHz)

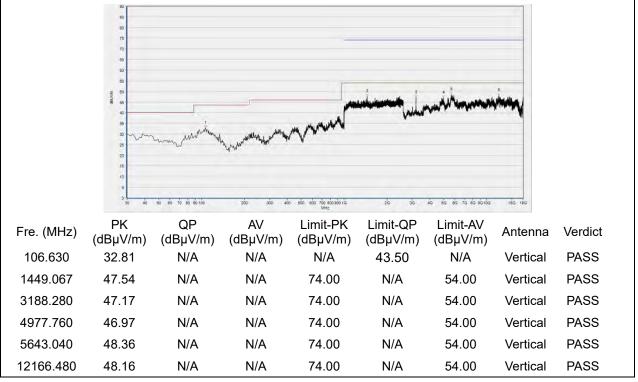

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



Plot for Channel 39

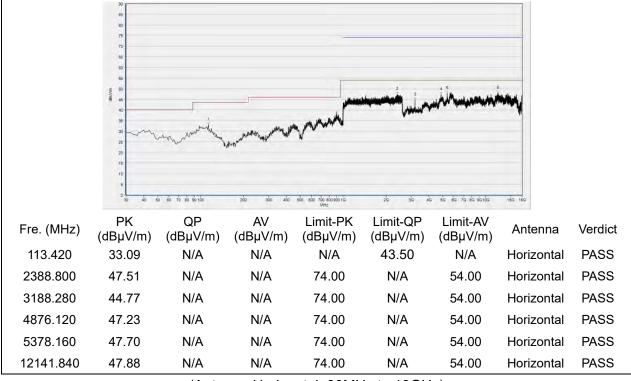

(Antenna Horizontal, 30MHz to 18GHz)

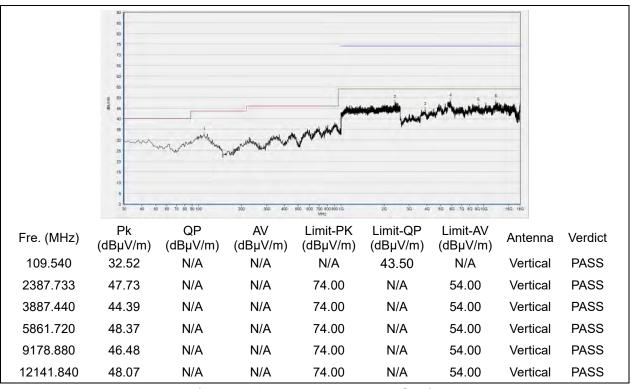

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn


Http://www.morlab.cn



Plot for Channel 78

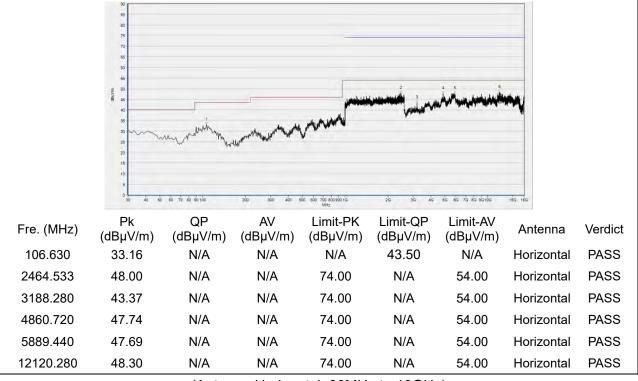

(Antenna Horizontal, 30MHz to 18GHz)

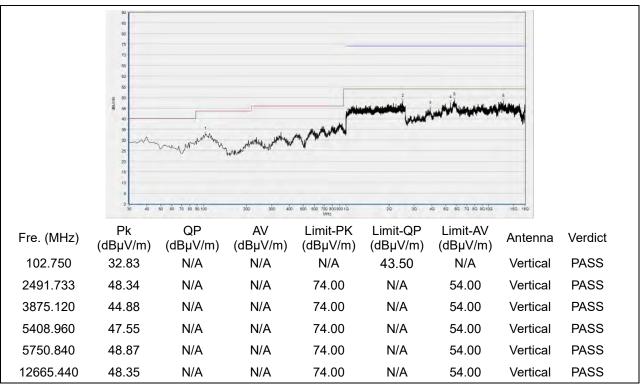

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525




8-DPSK Mode

Plots for Channel 0

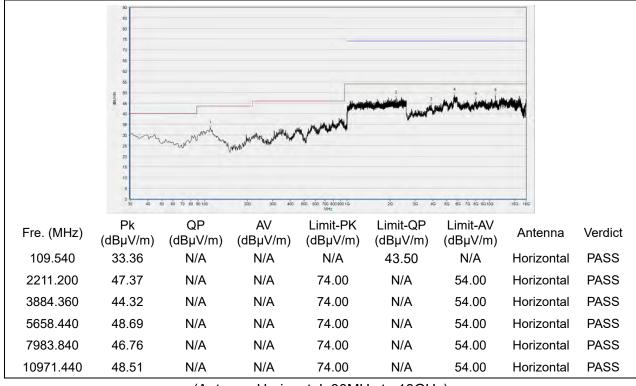

(Antenna Horizontal, 30MHz to 18GHz)

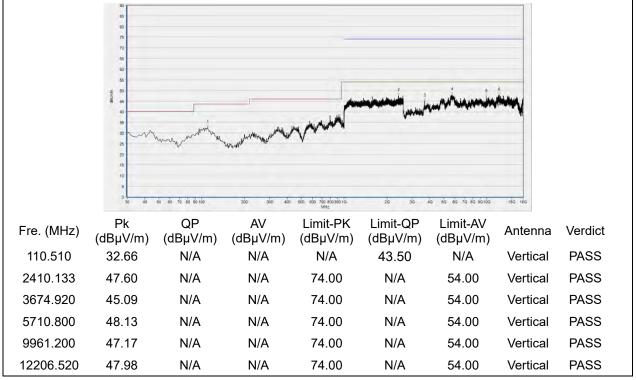


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 39

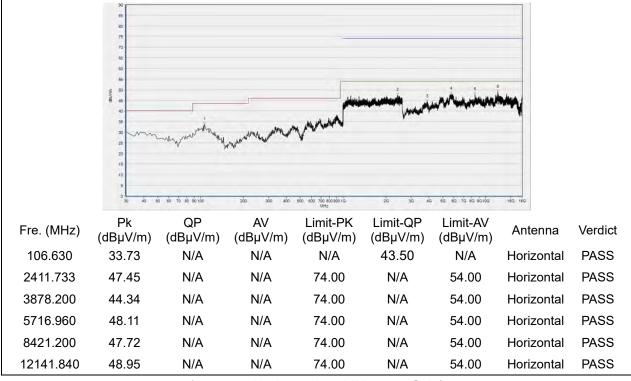

(Antenna Horizontal, 30MHz to 18GHz)

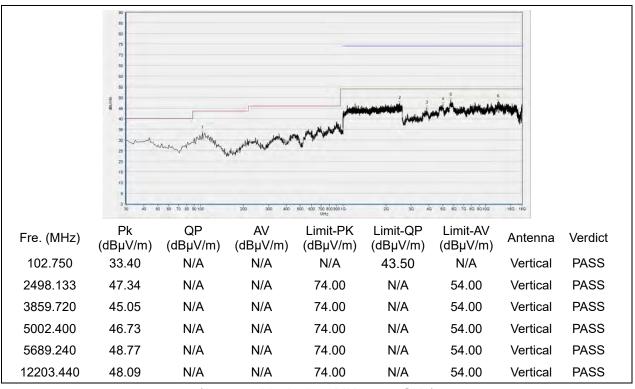


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 78

		Man Market Mark	N. J., J. K. Martin M. J. K. Martin M. P. Martin M. P. Martin M. J. Ma		2 2 2 do do	to to so socio ido i		
Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
109.540	33.98	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2412.267	48.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3868.960	44.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5855.560	48.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8507.440	46.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12148.000	48.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

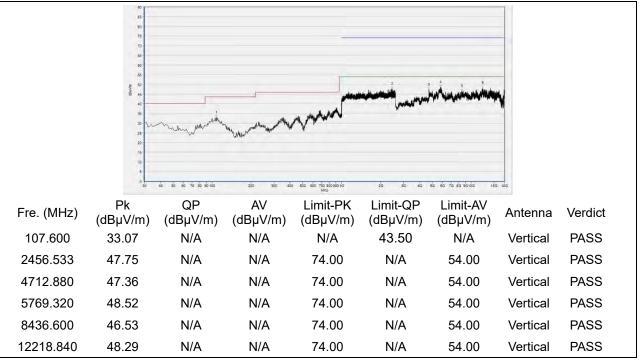

(Antenna Vertical, 30MHz to 18GHz)

- END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn