

This device is not intended for sale in the USA.

Part 15.21 statement

" Change or Modifications that are not expressly approved by the manufacturer could void the user's authority to operate the equipment. "

Part 15.105 statement

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Part 15 Class B Compliance

This device and its accessories comply with part 15 of FCC rules and ICES-003 Class B digital apparatus requirements for Industry Canada. Operation is subject to the following two conditions:(1) This device and its accessories may not cause harmful interference, and (2) this device and its accessories must accept any interference received, including interference that may cause undesired operation.

Body-worn Operation

This device was tested for typical body-worn operations with the back of the phone kept 1.5cm (0.59 inches) between the user's body and the back of the phone. To comply with FCC RF exposure requirements, a minimum separation distance of 1.5cm (0.59 inches) must be maintained between the user's body and the back of the phone. Third-party belt-clips, holsters, and similar accessories containing metallic components should not be used. Body-worn accessories that cannot maintain 1.5cm (0.59 inches) separation distance between the user's body and the back of the phone, and have not been tested for typical body-worn operations may not comply with FCC RF exposure limits and should be avoided.

Conformité aux normes FCC Part 15 Class B

Cet appareil et ses accessoires sont conformes aux normes FCC Part 15 Class B de la Federal Communications Commission et aux exigences pour appareils numériques ICES-003 Class B d'Industrie Canada. Son fonctionnement est sujet aux deux conditions suivantes : (1) Cet appareil et ses accessoires ne doivent pas provoquer de brouillage préjudiciable, et (2) cet appareil et ses accessoires doivent accepter toutes les interférences reçues, y compris celles pouvant causer un fonctionnement indésirable.


Utilisation comme appareil portatif

Ce téléphone a été testé en vue d'une utilisation type comme appareil portatif, avec une distance de 1.5cm (0,59 pouces) entre l'arrière de l'appareil et le corps de l'utilisateur. Pour satisfaire aux exigences de la FCC en matière d'exposition aux radiofréquences, une distance d'au moins 1.5cm (0,59 pouces) doit être maintenue entre le corps de l'utilisateur et l'arrière du téléphone. Les pinces de ceinture, les étuis et autres accessoires semblables d'autres marques et contenant des composantes métalliques ne doivent pas être utilisés. Les accessoires portatifs empêchant le maintien d'une distance de 1.5cm (0,59 pouces) entre le corps de l'utilisateur et l'arrière du téléphone et qui n'ont pas été testés en vue d'une utilisation type comme accessoires portatifs peuvent ne pas satisfaire aux limites d'exposition aux radiofréquences stipulées par la FCC et, par conséquent, ne doivent pas être utilisés.

LG-A275 User Guide - English

This guide will help you to understand your new mobile phone. It will provide you with useful explanations of the features on your phone. Some of the contents of this manual may differ from your phone depending on the phone software or your service provider.

Getting to know your phone

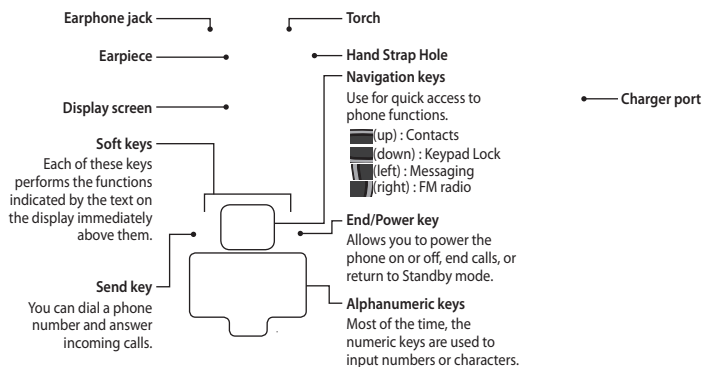

Installing the SIM Card and Charging the Battery

Installing the SIM Card

When you subscribe to a mobile phone network, you are provided with a plug-in SIM card which is loaded with your subscription details, such as your PIN, any optional services available and many others.

Important! The plug-in SIM card and its contacts can easily be damaged by scratches or bending, so be careful when handling, inserting or removing the card. Keep all SIM cards out of the reach of small children.
 only 2G SIM supported

Illustrations

- | | | | |
|---------------------------|---|---|---|
| 1 Open battery cover | 1 | 2 | 3 |
| 2 Remove the battery | | | |
| 3 Insert your SIM | | | |
| 4 Insert the battery | | | |
| 5 Close the battery cover | | | |
| 6 Charge your battery | 4 | 5 | 6 |

WARNING: Do not remove the battery while the phone is switched on, as this may damage the phone.

You can enter alphanumeric characters via the phone's keypad. For example, storing names in Contacts, writing a message and scheduling events in the calendar all require entering text. To change modes, press the **[*#*#]** key. The input method is displayed in the upper right corner of your phone.

Indicator	Function (English Smart mode)
123	Numeric
ABC	Multitap Abc
abc	Multitap abc
ABC	Multitap ABC

T9 Mode

In Editor, Press Options Choose "Set T9" Select On. This mode allows you to enter words with only one keystroke per letter. Each key on the keypad is associated with more than one letter. T9 mode automatically compares your keystrokes with an internal linguistic dictionary to determine the correct word, thus requiring far fewer keystrokes than the traditional ABC mode.


NOTE: T9 mode is only available for English and Hindi language.

Turning Your Phone On and Off

You can power the phone on and off by pressing or holding the power key.

Menu and Options

Your phone offers a set of functions that allow you to customise it. These functions are arranged in menus and sub-menus, which are accessed via the left and right soft keys. The label at the bottom of the display screen immediately above the soft keys indicates their current function.

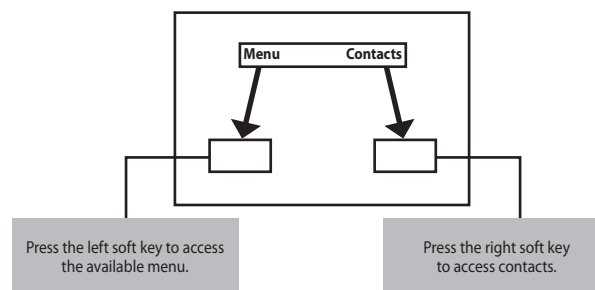

Quick feature reference

Messaging

Sending a message

- Press **Menu**, select **Messaging** and choose **New message**.
 - A new message editor will open. The default setting of the message editor is SMS mode.
 - Enter your message using either the T9 predictive mode or Abc manual mode or 123 mode. You can switch text input modes by pressing **[*#*#]**.
 - Press **Options** and choose **Insert** to add **Symbol**, **Template**, **Contact**, **Business card**.
 - Press **Send to**.
 - Enter the phone number or press **Options** and select **Contacts** or **Recent list** to open your contacts list.
 - Press **Options** and choose **Send**.
- Inbox** – You will be alerted when you have received a message. It will also be saved here.
 - Drafts** – This menu shows the message you have saved.
 - Outbox** – This menu allows you to view the message which is about to be send or that have failed to send.
 - Sent** – This menu allows you to view the messages which have already been sent, including time and content.

Games

Your LG-A275 comes with preloaded games to keep you amused when you have time to spare. Press **Menu** and select **Games**.

FM radio (Wireless FM)

With embedded FM antenna, you can receive FM radio without an external earphone. You can listen to your favourite radio station anytime.

Note: In weak FM radio signal area the sensitivity can degrade with wireless and antenna mode. So it is advisable to insert the ear-mic for better and enhanced FM quality.


Listening to the radio

- Press **Menu** and select **FM radio**.
 - Select the channel number of the station you would like to listen to.
- Note:** You can listen to the radio via built-in speaker. Press **Options**, select **Listen via Speaker** when ear-mic is inserted.

On-Screen Icons

	Tells you the strength of the network signal.
	Indicates the battery charge level.
	Indicates new text message(s).
	Indicates new voice message(s).
	Indicates that the alarm clock is set.
	Indicates that your phone is using the general settings.
	Indicates that your phone is using the silent settings.
	Indicates that your phone is using the outdoor settings.
	Indicates that your phone is using the headset setting.
	Indicates that all calls are being diverted to another number.
	Indicates that your phone is in Flight mode.
	Indicates new schedule(s).

Display Information



Making a Call

- Key in the number on the keypad.
- Press **[*]** to initiate the call.
- To end the call, press **[*]**.

TIP! To enter + when making an international call, press and hold **0**.

Making a call from your contacts

- Press **[*]** (up) to open the contacts.
- On the keypad, enter the first few letter of the contact you want to call.
- To scroll through your contacts, use the up and down navigation keys. And to scroll through their different numbers, use the left and right navigation keys.
- Press **[*]** to initiate the call.

Answering and rejecting a call

When your phone rings, press **Accept** or press **[*]** to answer the call. While your phone is ringing, select **Silent** to mute the ringing. This is great if you have forgotten to change your profile to **Silent** for a meeting.

Press **[*]** or **Reject** to reject the incoming call.

TIP! You can change the settings on your phone to answer your calls in different ways. Press **Menu**, select **Settings** and choose **Call**. Press **Common settings**, select **Answer mode** and choose **Any key** or **Send key only**.

- Any key** – You can answer a call by pressing any key.
- Send key only** – You can answer a call only by pressing the Send key.

Changing your call settings

You can set the menu depending on the call. Press **Menu**, select **Settings** and press **Call** then choose **SIM1** or **SIM2**.

- Call divert** – Select methods for diverting calls.
- Call barring** – Choose a barring password for all outgoing calls, outgoing international, outgoing international except to home country, all incoming calls, or incoming when abroad.
- Call waiting** – Select Active or cancel call waiting.
- Fixed dial number** – Choosing a PIN2 code to enable fixed dial number lets you restrict calls to only those in Contacts.

Checking your call history

You can check the record of all, missed, dialled, received calls and call durations. The number and name (if available) are displayed together with the date and time at which the call was made. You can also view the number of times you have called. Press **Menu**, select **Call history**.

- Memory status** – You can check the memory status of your SIM and phone.
- Information**
 - Service dial numbers** – Access the list of service numbers assigned by your service provider securely.
 - Own number** – You can save and check your own numbers on the SIM card.
 - Business card** – You can save and check your business card containing information including your name, mobile, home, office and email and send it in a message.

Call history

You can check the record of all, missed, dialled, received calls and call durations. The number and name (if available) are displayed together with the date and time at which the call was made. You can also view the number of times you have called.

- All calls** – Displays the lists of all three types (Received/Dialled/Missed calls) by time.
- Missed calls** – This option lets you view the last 20 unanswered calls.
- Dialled calls** – This option lets you view the last 20 outgoing calls (called or attempted).
- Received calls** – This option lets you view the last 20 received calls.
- Call duration** – Allows you to view the duration of your last call, all calls, dialled calls and received calls.

- Listen voicemail** – This menu provides you with a quick way to access your voice mailbox.
- Info messages** – Info service messages are text messages that are delivered by the network to your handset.
- Templates** – There are pre-defined messages in the list. You can view and edit the template messages or create new messages.
- Settings** – This menu allows you to set the features of your network service provider.





Contacts

You can search for a contact in your Contacts.

- Press **Contacts** (Up navigation key) and choose **Search** or press **[*]** (Right soft key) from the standby screen or select **Contacts** from the **Menu** screen.
 - On the keypad, enter the first few letter of the contact you want to call.
 - To scroll through the contacts, use the up and down navigation keys. To scroll through their different numbers use the left and right navigation keys.
- New contact** – You can add phonebook entries by using this menu.
 - Speed dials** – Assign contacts to any keys between 2 and 8.
 - Copy all** – You can copy all entries from the SIM card memory to the Phone memory or from the Phone memory to the SIM card memory.
 - Delete all** – You can delete all entries from the SIM card memory or Phone memory.

Profiles

You change your profile, then choose from General, Silent, Outdoor, Flight mode and Headset.

- **General** – After setting up this profile, the indicator  will be displayed on the standby screen.
- **Silent** – Ring tone is disabled and Vibrate is activated. When you set up this profile, the indicator  will be displayed on the standby screen.
- **Outdoor** – This is the default profile. Ring tone and key tone volume are set to maximum. When you set up this profile, the indicator  will be displayed on the standby screen.
- **Flight mode** – Use this function to switch the Flight mode On or Off. You will not be able to make calls or send messages also cannot play FM radio when **Flight mode** is switched On.
- **Headset** – When the headset is connected to the phone, the indicator  will be displayed on the standby screen. You can personalise your call alert type, ring tones, ring volume, message alert type, message tones, message volume, keypad tones, keypad volume, effect sound volume and power on/off volume.

Tools

- **Torch** – Turn on/off the torch or turn on/off the torch directly by holding the up navigation key for 3 seconds
- **Self call** – This is a useful function for avoiding awkward situation politely. You can call yourself by setting the time in self call menu.

- **Calculator** – This contains the standard functions such as Addition, Subtraction, Multiplication and Division.
- **Stopwatch** – This option allows you to use the function of a stopwatch.
- **Unit converter** – This converts many measurement into a unit you want.
- **World clock** – Allows you to determine the current time in another time zone or country.

Organiser

- **Alarms** – You can set up to 3 alarm clocks to go on at a specified time.
- **Calendar** – When you enter this menu, a calendar appears. A square cursor is placed on the current date. You can move the cursor to another date using the navigation keys, also you can set scheduler for desired date and time.
- **Memo** – You can register your own memos here.

Settings

- **Dual SIM** – You can see two Network Signal icons on the left-top of the screen when you insert two SIM-Card.
- **Date & Time** – You can set functions related to the date and time.
- **Language** – You can change the language for the display texts in your phone. This change will also affect the Language Input mode.
- **Display** – You can adjust settings for the phone display.

- **Call** – You can set the menu depending on the call.
- **Auto key lock** – Lock the keypad automatically in standby screen.
- **Security** – This menu allows you to set the phone security.
 - › **PIN code request** – Choose a PIN code to be requested when you turn your phone on.
 - › **Phone lock** – Choose a security code to lock your phone, When power on, When SIM changed or Immediately.
 - › **Anti Theft Mobile Tracker (ATMT)** – Anti-theft mobile tracker (ATMT) allows you to track your lost phone. When someone uses your phone without your permission, the tracking service will be activated. You are reminded by a text message sent to the default phone number you have set, without the unauthorized user's knowledge. You can always activate the ATMT and configure your personal settings.
 - › **Change codes** – Change your Security code, PIN code, PIN2 code or ATMT code.
- **Power save** – If you set Always on, you can save the battery power when you are not using the phone. Choose to switch between power save settings **Always on**, **Night only** or **Off**.
- **Network selection** – You can select a network that will be registered either automatically or manually.
- **SOS service** – This allows you to send SOS message to your friends automatically by long press No. 9 key on your keypad when you are in emergency.
- **Reset settings** – Use **Reset settings** to restore the factory settings. You need the security code to activate this function. The default number is "0000".
- **Memory status** – You can check the memory status of your SIM and phone.