

Operation Mode: CH Mid(GFSK)

| Frequency [MHz] | Reading dBuV | *A.F+CL-AMP GAIN [dB] | ANT. POL [H/V] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|--------------------|-----------------|--------------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4882 | 48.77 | -0.37 | V | 48.40 | 74 | 25.60 | PK |
| 4882 | 35.72 | -0.37 | V | 35.35 | 54 | 18.65 | AV |
| 7323 | 45.49 | 8.72 | V | 54.21 | 74 | 19.80 | PK |
| 7323 | 34.02 | 8.72 | V | 42.74 | 54 | 11.27 | AV |
| 4882 | 51.02 | -0.37 | H | 50.65 | 74 | 23.35 | PK |
| 4882 | 35.22 | -0.37 | H | 34.85 | 54 | 19.15 | AV |
| 7323 | 47.54 | 8.72 | H | 56.26 | 74 | 17.75 | PK |
| 7323 | 35.04 | 8.72 | H | 43.76 | 54 | 10.25 | AV |

Operation Mode: CH Mid(8DPSK)

| Frequency [MHz] | Reading DBuV | *A.F+CL-AMP GAIN [dB] | ANT. POL [H/V] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|--------------------|-----------------|--------------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4882 | 50.05 | -0.37 | V | 49.68 | 74 | 24.32 | PK |
| 4882 | 37.11 | -0.37 | V | 36.74 | 54 | 17.26 | AV |
| 7323 | 49.03 | 8.72 | V | 57.75 | 74 | 16.26 | PK |
| 7323 | 34.72 | 8.72 | V | 43.44 | 54 | 10.57 | AV |
| 4882 | 49.05 | -0.37 | H | 48.68 | 74 | 25.32 | PK |
| 4882 | 35.87 | -0.37 | H | 35.50 | 54 | 18.50 | AV |
| 7323 | 48.77 | 8.72 | H | 57.49 | 74 | 16.52 | PK |
| 7323 | 36.01 | 8.72 | H | 44.73 | 54 | 9.28 | AV |

Operation Mode: CH Mid($\pi/4$ DQPSK)

| Frequency [MHz] | Reading DBuV | *A.F+CL-AMP GAIN [dB] | ANT. POL [H/V] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|--------------------|-----------------|--------------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4882 | 49.89 | -0.37 | V | 49.52 | 74 | 24.48 | PK |
| 4882 | 35.72 | -0.37 | V | 35.35 | 54 | 18.65 | AV |
| 7323 | 49.04 | 8.72 | V | 57.76 | 74 | 16.25 | PK |
| 7323 | 36.22 | 8.72 | V | 44.94 | 54 | 9.07 | AV |
| 4882 | 48.98 | -0.37 | H | 48.61 | 74 | 25.39 | PK |
| 4882 | 35.24 | -0.37 | H | 34.87 | 54 | 19.13 | AV |
| 7323 | 47.94 | 8.72 | H | 56.66 | 74 | 17.35 | PK |
| 7323 | 34.47 | 8.72 | H | 43.19 | 54 | 10.82 | AV |

* A.F: ANTENNA FACTOR
 C.L: CABLE LOSS
 AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
 We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

| | | | |
|---------------------------------|---------------------------------|---|--|
| FCC PT.15.247 TEST REPORT | FCC CERTIFICATION REPORT | | www.hct.co.kr |
| Test Report No. HCTR1307FR18 | Date of Issue: July 16, 2013 | EUT Type: GSM/WCDMA Phone with Bluetooth3.0, VMI802.11 b/g/n | FCC ID: ZNFE410J |

Operation Mode: CH High(GFSK)

| Frequency [MHz] | Reading dBuV | *A.F+CL-AMP GAIN [dB] | ANT. POL [H/V] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|--------------------|-----------------|--------------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4960 | 47.54 | 0.50 | V | 48.04 | 74 | 25.96 | PK |
| 4960 | 34.22 | 0.50 | V | 34.72 | 54 | 19.28 | AV |
| 7440 | 48.05 | 8.95 | V | 57.00 | 74 | 17.00 | PK |
| 7440 | 37.03 | 8.95 | V | 45.98 | 54 | 8.02 | AV |
| 4960 | 49.05 | 0.50 | H | 49.55 | 74 | 24.45 | PK |
| 4960 | 34.92 | 0.50 | H | 35.42 | 54 | 18.58 | AV |
| 7440 | 50.43 | 8.95 | H | 59.38 | 74 | 14.62 | PK |
| 7440 | 35.24 | 8.95 | H | 44.19 | 54 | 9.81 | AV |

Operation Mode: CH High(8DPSK)

| Frequency [MHz] | Reading DBuV | *A.F+CL-AMP GAIN [dB] | ANT. POL [H/V] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|--------------------|-----------------|--------------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4960 | 49.22 | 0.50 | V | 49.72 | 74 | 24.28 | PK |
| 4960 | 36.01 | 0.50 | V | 36.51 | 54 | 17.49 | AV |
| 7440 | 49.75 | 8.95 | V | 58.70 | 74 | 15.30 | PK |
| 7440 | 35.87 | 8.95 | V | 44.82 | 54 | 9.18 | AV |
| 4960 | 47.77 | 0.50 | H | 48.27 | 74 | 25.73 | PK |
| 4960 | 36.02 | 0.50 | H | 36.52 | 54 | 17.48 | AV |
| 7440 | 48.14 | 8.95 | H | 57.09 | 74 | 16.91 | PK |
| 7440 | 37.11 | 8.95 | H | 46.06 | 54 | 7.94 | AV |

Operation Mode: CH High ($\pi/4$ DQPSK)

| Frequency [MHz] | Reading DBuV | *A.F+CL-AMP GAIN [dB] | ANT. POL [H/V] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|--------------------|-----------------|--------------------------|-------------------|-------------------|-------------------|----------------|--------|
| 4960 | 47.95 | 0.50 | V | 48.45 | 74 | 25.55 | PK |
| 4960 | 34.84 | 0.50 | V | 35.34 | 54 | 18.66 | AV |
| 7440 | 50.10 | 8.95 | V | 59.05 | 74 | 14.95 | PK |
| 7440 | 35.72 | 8.95 | V | 44.67 | 54 | 9.33 | AV |
| 4960 | 49.22 | 0.50 | H | 49.72 | 74 | 24.28 | PK |
| 4960 | 36.04 | 0.50 | H | 36.54 | 54 | 17.46 | AV |
| 7440 | 49.83 | 8.95 | H | 58.78 | 74 | 15.22 | PK |
| 7440 | 35.28 | 8.95 | H | 44.23 | 54 | 9.77 | AV |

* A.F: ANTENNA FACTOR
C.L: CABLE LOSS
AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

| | | | |
|---------------------------------|---------------------------------|---|--|
| FCC PT.15.247 TEST REPORT | FCC CERTIFICATION REPORT | | www.hct.co.kr |
| Test Report No. HCTR1307FR18 | Date of Issue: July 16, 2013 | EUT Type: GSM/WCDMA Phone with Bluetooth3.0, VMI802.11 b/g/n | FCC ID: ZNF410J |

Operation Mode EDR($\pi/4$ DQPSK)
 Operating Frequency 2402 MHz
 Channel No CH 0

| Frequency [MHz] | Reading dBuV | *A.F+CL [dB] | ANT. POL [H/V] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|-----------------|--------------|--------------|----------------|----------------|----------------|-------------|--------|
| 2390.0 | 24.67 | 33.90 | H | 58.57 | 74 | 15.43 | PK |
| 2390.0 | 11.73 | 33.90 | H | 45.63 | 54 | 8.37 | AV |
| 2390.0 | 24.19 | 33.90 | V | 58.09 | 74 | 15.91 | PK |
| 2390.0 | 11.75 | 33.90 | V | 45.65 | 54 | 8.35 | AV |

* A.F: ANTENNA FACTOR
 CL: CABLE LOSS

Notes:

- 1.. Frequency range of measurement = 2310 MHz ~ 2390 MHz
2. Total = Fundamental Reading Value + Antenna Factor + Cable Loss
3. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
 We performed using a reduced video BW method was done with the analyzer in linear mode.
4. We have done Normal Mode and EDR Mode.
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna



Operation Mode Normal(GFSK)
 Operating Frequency 2480 MHz
 Channel No CH 78

| Frequency [MHz] | Reading dBuV | ※ A.F.+CL [dB] | Ant. Pol. [HV] | Duty Cycle Correction [dB] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|-----------------|--------------|----------------|----------------|----------------------------|----------------|----------------|-------------|--------|
| 2483.5 | 34.24 | 33.99 | H | 0 | 68.23 | 74 | 5.77 | PK |
| 2483.5 | 29.95 | 33.99 | H | -24.76 | 39.18 | 54 | 14.82 | AV |
| 2483.5 | 25.62 | 33.99 | V | 0 | 59.61 | 74 | 14.39 | PK |
| 2483.5 | 24.23 | 33.99 | V | -24.76 | 33.46 | 54 | 20.54 | AV |

Operation Mode EDR(8DPSK)
 Operating Frequency 2480 MHz
 Channel No CH 78

| Frequency [MHz] | Reading dBuV | ※ A.F.+CL [dB] | Ant. Pol. [HV] | Duty Cycle Correction [dB] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|-----------------|--------------|----------------|----------------|----------------------------|----------------|----------------|-------------|--------|
| 2483.5 | 35.24 | 33.99 | H | 0 | 69.23 | 74 | 4.77 | PK |
| 2483.5 | 28.87 | 33.99 | H | -24.76 | 38.10 | 54 | 15.90 | AV |
| 2483.5 | 26.54 | 33.99 | V | 0 | 60.53 | 74 | 13.47 | PK |
| 2483.5 | 21.25 | 33.99 | V | -24.76 | 30.48 | 54 | 23.52 | AV |

Operation Mode EDR($\pi/4$ DQPSK)
 Operating Frequency 2480 MHz
 Channel No CH 78

| Frequency [MHz] | *Fund. Reading dBuV | * A.F.+CL [dB] | Ant. Pol. [HV] | Duty Cycle Correction [dB] | Total [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Detect |
|-----------------|---------------------|----------------|----------------|----------------------------|----------------|----------------|-------------|--------|
| 2483.5 | 34.34 | 33.99 | H | 0 | 68.33 | 74 | 5.67 | PK |
| 2483.5 | 28.39 | 33.99 | H | -24.76 | 37.62 | 54 | 16.38 | AV |
| 2483.5 | 24.75 | 33.99 | V | 0 | 58.74 | 74 | 15.26 | PK |
| 2483.5 | 19.25 | 33.99 | V | -24.76 | 28.48 | 54 | 25.52 | AV |

* A.F: ANTENNA FACTOR
 C.L: CABLE LOSS
 AMP GAIN: AMPLIFIER GAIN

Notes:

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Fundamental Reading Value + Antenna Factor + Cable Loss – Delta Value + Duty Cycle Correction Factor
3. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
 We performed using a reduced video BW method was done with the analyzer in linear mode.
4. FYI : Duty Cycle Correction Factor (79 channel hopping)
 - a. Time to cycle through all channels= $\Delta t = \tau$ [ms] x 79 channels = 228.468 ms, where τ = pulse width
 - b. $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 1$
 - c. Worst Case Dwell Time = τ [ms] x $H' = 2.892$ ms
 - d. Duty Cycle Correction = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -30.776 dB
5. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
 - a. Time to cycle through all channels= $\Delta t = \tau$ [ms] x 20 channels = 57.84 ms, where τ = pulse width
 - b. $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 2$
 - c. Worst Case Dwell Time = τ [ms] x $H' = 5.784$ ms
 - d. Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -24.7554 dB
 - e. We applied DCCF in the test result which hopping channel number is 20.
6. We have done Normal Mode, EDR Mode.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. This test is performed with hopping off and 3 Mbps (3-DH5) data rate of No.39 channel.

■ RESULT PLOTS

Conducted Emissions (Line 1)


HCT

EMC

EUT: LG-E410j
 Manufacturer: LG
 Operating Condition: BT MODE
 Test Site: SHIELD ROOM
 Operator: JC SHIN
 Test Specification: FCC PART15 B
 Comment: H

SCAN TABLE: "FCC CLASS B(H)"

| Start Frequency | Stop Frequency | Step Width | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|------------|----------|------------|-----------|------------|
| 150.0 kHz | 500.0 kHz | 4.0 kHz | MaxPeak | 10.0 ms | 9 kHz | None |
| | | | Average | | | |
| 500.0 kHz | 5.0 MHz | 4.0 kHz | MaxPeak | 10.0 ms | 9 kHz | None |
| | | | Average | | | |
| 5.0 MHz | 30.0 MHz | 4.0 kHz | MaxPeak | 10.0 ms | 9 kHz | None |
| | | | Average | | | |

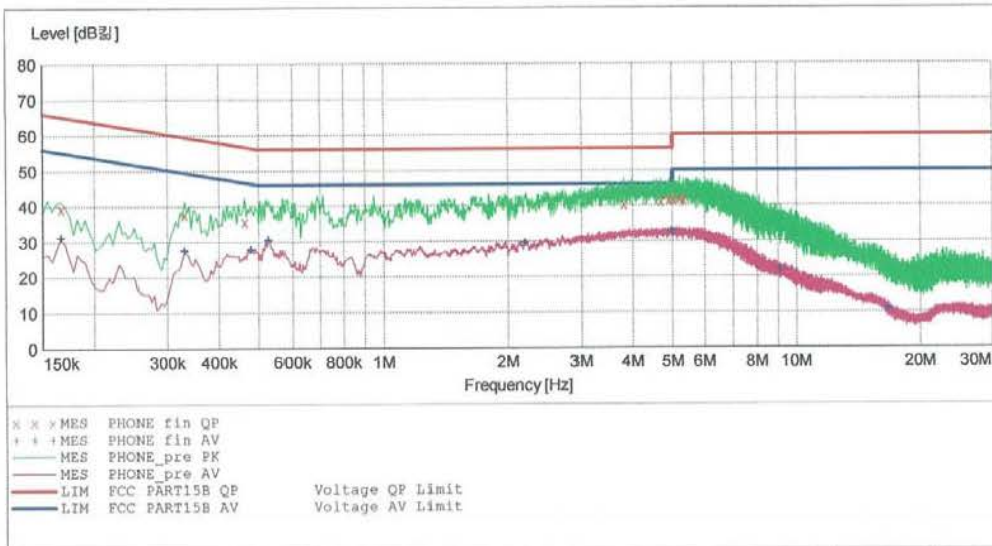

MEASUREMENT RESULT: "PHONE_fin_QP"

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.166001 | 39.40 | 9.8 | 65 | 25.8 | --- | --- |
| 0.330001 | 37.70 | 9.8 | 60 | 21.8 | --- | --- |
| 0.462001 | 35.70 | 9.8 | 57 | 20.9 | --- | --- |
| 3.808000 | 40.40 | 10.1 | 56 | 15.6 | --- | --- |
| 4.704000 | 41.20 | 10.2 | 56 | 14.8 | --- | --- |
| 4.920000 | 41.60 | 10.2 | 56 | 14.4 | --- | --- |
| 5.000000 | 41.70 | 10.2 | 56 | 14.3 | --- | --- |
| 5.216000 | 41.90 | 10.2 | 60 | 18.1 | --- | --- |
| 5.324000 | 41.50 | 10.2 | 60 | 18.5 | --- | --- |

MEASUREMENT RESULT: "PHONE_fin AV"

2013-06-30 2:55오 후

| Frequency MHz | Level dB _{μV} | Transd dB | Limit dB _{μV} | Margin dB | Line | PE |
|------------------|---------------------------|--------------|---------------------------|--------------|------|-----|
| 0.166001 | 31.20 | 9.8 | 55 | 23.9 | --- | --- |
| 0.330001 | 27.50 | 9.8 | 50 | 22.0 | --- | --- |
| 0.478001 | 27.80 | 9.8 | 46 | 18.6 | --- | --- |
| 0.528000 | 30.30 | 9.8 | 46 | 15.7 | --- | --- |
| 2.204000 | 29.50 | 10.0 | 46 | 16.5 | --- | --- |
| 4.976000 | 32.70 | 10.2 | 46 | 13.3 | --- | --- |
| 5.000000 | 32.40 | 10.2 | 46 | 13.6 | --- | --- |
| 9.096000 | 21.80 | 10.4 | 50 | 28.2 | --- | --- |
| 16.656000 | 10.70 | 10.8 | 50 | 39.3 | --- | --- |

Conducted Emissions (Line 2)


HCT

EMC

EUT: LG-E410j
 Manufacturer: LG
 Operating Condition: BT MODE
 Test Site: SHIELD ROOM
 Operator: JC SHIN
 Test Specification: FCC PART15 B
 Comment: N

SCAN TABLE: "FCC CLASS B(N)"

| Short Description: | | | KN22 CLASS B | | | |
|--------------------|----------------|------------|--------------|------------|-----------|------------|
| Start Frequency | Stop Frequency | Step Width | Detector | Meas. Time | IF Bandw. | Transducer |
| 150.0 kHz | 500.0 kHz | 4.0 kHz | MaxPeak | 10.0 ms | 9 kHz | None |
| | | | Average | | | |
| 500.0 kHz | 5.0 MHz | 4.0 kHz | MaxPeak | 10.0 ms | 9 kHz | None |
| | | | Average | | | |
| 5.0 MHz | 30.0 MHz | 4.0 kHz | MaxPeak | 10.0 ms | 9 kHz | None |
| | | | Average | | | |

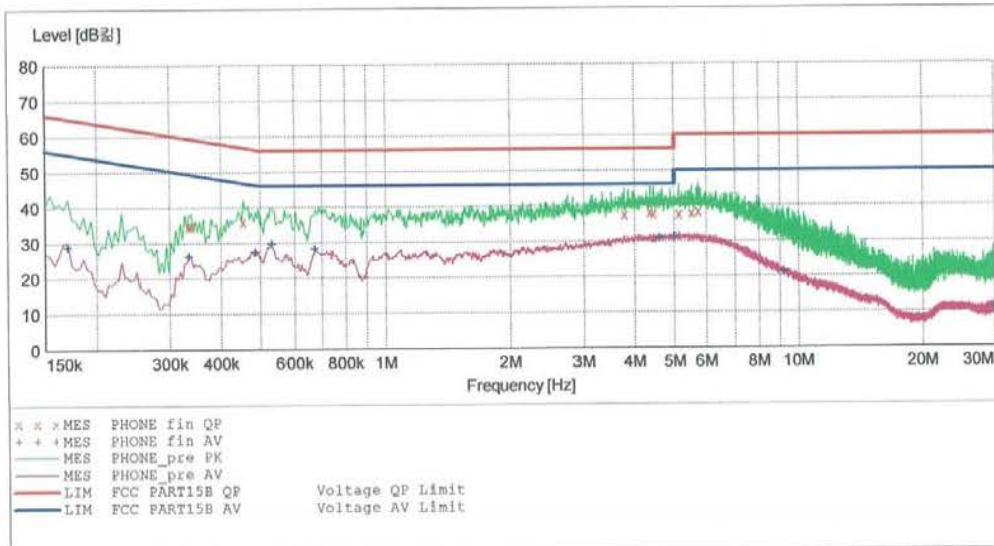

MEASUREMENT RESULT: "PHONE_fin_QP"

2013-06-30 2:52오후

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.334001 | 34.80 | 10.0 | 59 | 24.6 | --- | --- |
| 0.338001 | 34.80 | 10.0 | 59 | 24.5 | --- | --- |
| 0.454001 | 36.00 | 10.0 | 57 | 20.8 | --- | --- |
| 3.780000 | 37.30 | 10.3 | 56 | 18.7 | --- | --- |
| 4.380000 | 38.00 | 10.3 | 56 | 18.0 | --- | --- |
| 4.464000 | 37.80 | 10.3 | 56 | 18.2 | --- | --- |
| 5.144000 | 37.60 | 10.4 | 60 | 22.4 | --- | --- |
| 5.528000 | 37.90 | 10.4 | 60 | 22.1 | --- | --- |
| 5.744000 | 38.30 | 10.4 | 60 | 21.7 | --- | --- |

MEASUREMENT RESULT: "PHONE_fin AV"

2013-06-30 2:52오후

| Frequency MHz | Level dB _{μV} | Transd dB | Limit dB _{μV} | Margin dB | Line | PE |
|------------------|---------------------------|--------------|---------------------------|--------------|------|-----|
| 0.170001 | 28.80 | 10.0 | 55 | 26.2 | --- | --- |
| 0.334001 | 26.20 | 10.0 | 49 | 23.1 | --- | --- |
| 0.486001 | 27.30 | 10.0 | 46 | 18.9 | --- | --- |
| 0.532000 | 29.60 | 10.0 | 46 | 16.4 | --- | --- |
| 0.672000 | 28.20 | 10.0 | 46 | 17.8 | --- | --- |
| 4.612000 | 30.90 | 10.4 | 46 | 15.1 | --- | --- |
| 5.000000 | 31.20 | 10.4 | 46 | 14.8 | --- | --- |
| 9.216000 | 21.30 | 10.7 | 50 | 28.7 | --- | --- |
| 29.992000 | 11.00 | 11.8 | 50 | 39.0 | --- | --- |

| | | | | |
|---------------------------------|---------------------------------|--|--|--|
| FCC PT.15.247 TEST REPORT | | FCC CERTIFICATION REPORT | | www.hct.co.kr |
| Test Report No. HCTR1307FR18 | Date of Issue: July 18, 2013 | EUT Type: GSM/WCDMA Phone with Bluetooth3.0, VMFI802.11 b/g/n | | FCC ID: ZNFE410J |

9. LIST OF TEST EQUIPMENT

| Manufacturer | Model / Equipment | Calibration Interval | Calibration Due | Serial No. |
|-----------------------|--|----------------------|-----------------|--------------------|
| Rohde & Schwarz | ENV216/ LISN | Annual | 02/06/2014 | 100073 |
| Schwarzbeck | VULB 9160/ TRILOG Antenna | Biennial | 12/17/2014 | 3150 |
| Rohde & Schwarz | ESI 40 / EMI TEST RECEIVER | Annual | 04/16/2014 | 831564103 |
| Agilent | E4440A/ Spectrum Analyzer | Annual | 04/25/2014 | US45303008 |
| Agilent | N9020A/ SIGNAL ANALYZER | Annual | 05/14/2014 | MY51110063 |
| HD | MA240/ Antenna Position Tower | N/A | N/A | 556 |
| EMCO | 1050/ Turn Table | N/A | N/A | 114 |
| HD GmbH | HD 100/ Controller | N/A | N/A | 13 |
| HD GmbH | KMS 560/ SlideBar | N/A | N/A | 12 |
| Rohde & Schwarz | SCU-18/ Signal Conditioning Unit | Annual | 09/11/2013 | 10094 |
| MITEQ | AMF-6B-180265-35-10P / POWER AMP | Annual | 04/16/2014 | 667624 |
| CERNEX | CBL26405040 / POWER AMP | Annual | 04/16/2014 | 19660 |
| Schwarzbeck | BBHA 9120D/ Horn Antenna | Biennial | 10/17/2013 | 937 |
| Schwarzbeck | BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz) | Biennial | 10/30/2014 | BBHA9170124 |
| Rohde & Schwarz | FSP / Spectrum Analyzer | Annual | 02/08/2014 | 839117/011 |
| Agilent | E4416A /Power Meter | Annual | 11/07/2013 | GB41291412 |
| Agilent | E9327A /POWER SENSOR | Annual | 04/16/2014 | MY4442009 |
| Wainwright Instrument | WHF3.0/18G-10EF / High Pass Filter | Annual | 02/08/2014 | F6 |
| Wainwright Instrument | WHNX6.0/26.5G-6SS / High Pass Filter | Annual | 04/16/2014 | 1 |
| Wainwright Instrument | WHNX7.0/18G-8SS / High Pass Filter | Annual | 04/16/2014 | 29 |
| Wainwright Instrument | WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter | Annual | 03/19/2014 | 1 |
| Hewlett Packard | 11636B/Power Divider | Annual | 11/07/2013 | 11377 |
| Agilent | 87300B/Directional Coupler | Annual | 12/24/2013 | 3116A03621 |
| Hewlett Packard | 11667B / Power Splitter | Annual | 05/29/2014 | 05001 |
| DIGITAL | EP-3010 /DC POWER SUPPLY | Annual | 11/07/2013 | 3110117 |
| ITECH | IT6720 / DC POWER SUPPLY | Annual | 11/07/2013 | 010002156287001199 |
| TESCOM | TC-3000C / BLUETOOTH TESTER | Annual | 04/24/2014 | 3000C000276 |
| Rohde & Schwarz | CBT / BLUETOOTH TESTER | Annual | 04/25/2014 | 100422 |
| EMCO | 6502.LOOP ANTENNA | Biennial | 01/11/2014 | 9009-2536 |
| CERNEX | CBLU1183540 / POWER AMP | Annual | 07/27/2013 | 21691 |
| Agilent | 8493C / Attenuator(10 dB) | Annual | 07/30/2013 | 76649 |
| WEINSCHTEL | 2-3 / Attenuator(3 dB) | Annual | 11/07/2013 | BR0617 |

| | | | |
|--|--|---|--|
| FCC PT.15.247 TEST REPORT | FCC CERTIFICATION REPORT | | www.hct.co.kr |
| Test Report No. HCTR1307FR18 | Date of Issue: July 16, 2013 | EUT Type: GSM/WCDMA Phone with Bluetooth3.0, VMFI802.11 b/g/n | FCC ID: ZNF410J |