



TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1909-0243(1)
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-G850EMW
FCC ID : ZNFG850EMW
5. Test Method Used : KDB971168 D01v03, ANSI/TIA-603-E-2016, ANSI C63.26-2015
Test Specification : §2, §22, §24, §27
6. Date of Test : 2019.08.16 ~ 2019.09.16
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by Name : InHee Bae 	Reviewed by Name : Geunki Son  (Signature)
-------------	-------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2019 . 09 . 30 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1909-0243	Sep. 24, 2019	Initial issue
DRTFCC1909-0243(1)	Sep. 30, 2019	Revised the section 7.5 and 7.6

Table of Contents

- 1. GENERAL INFORMATION5**
- 2. INTRODUCTION7**
 - 2.1 EUT DESCRIPTION7
 - 2.2. EUT CAPABILITIES7
 - 2.3. TESTING ENVIRONMENT7
 - 2.4 MEASURING INSTRUMENT CALIBRATION.....7
 - 2.5. MEASUREMENT UNCERTAINTY7
 - 2.6. TEST FACILITY7
- 3. DESCRIPTION OF TESTS.....8**
 - 3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power) 8
 - 3.2 PEAK TO AVERAGE RATIO 10
 - 3.3 OCCUPIED BANDWIDTH. 11
 - 3.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL 12
 - 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL 13
 - 3.6 UNDESIRABLE EMISSIONS 14
 - 3.7 FREQUENCY STABILITY 15
- 4. LIST OF TEST EQUIPMENT 16**
- 5. SUMMARY OF TEST RESULTS 17**
- 6. SAMPLE CALCULATION 18**
- 7. TEST DATA 21**
 - 7.1 OCCUPIED BANDWIDTH..... 21
 - 7.2 PEAK TO AVERAGE RATIO 21
 - 7.3 BAND EDEG EMISSIONS (Conducted)..... 21
 - 7.4 SPURIOUS AND HARMONICS EMISSIONS (Conducted) 21
 - 7.5 ERP & EIRP 22
 - 7.5.1 LTE Band 12,17 22
 - 7.5.2 LTE Band 12..... 23
 - 7.5.3 LTE Band 5..... 24
 - 7.5.4 LTE Band 4..... 26
 - 7.5.5 LTE Band 2..... 29
 - 7.5.6 LTE Band 41..... 32
 - 7.5.7 LTE Band 7..... 34
 - 7.6 UNDESIRABLE EMISSIONS (Radiated) 36
 - 7.6.1 LTE Band 12, 17..... 36
 - 7.6.2 LTE Band 5..... 37
 - 7.6.3 LTE Band 4..... 38
 - 7.6.4 LTE Band 2..... 39
 - 7.6.5 LTE Band 41..... 40
 - 7.6.6 LTE Band 7..... 41

7.7 FREQUENCY STABILITY	42
7.7.1 LTE Band 12, 17.....	42
7.7.2 LTE Band 5.....	43
7.7.3 LTE Band 4.....	44
7.7.4 LTE Band 2.....	45
7.7.5 LTE Band 41.....	46
7.7.6 LTE Band 7.....	47
8. TEST PLOTS	48
8.1 OCCUPIED BANDWIDTH.....	48
8.1.1 LTE Band 12, 17.....	48
8.1.2 LTE Band 12.....	52
8.1.3 LTE Band 5.....	56
8.1.4 LTE Band 4.....	64
8.1.5 LTE Band 2.....	76
8.1.6 LTE Band 41.....	88
8.1.7 LTE Band 7.....	96
8.2 PEAK TO AVERAGE RATIO	104
8.2.1 LTE Band 12, 17.....	104
8.2.2 LTE Band 12.....	108
8.2.3 LTE Band 5.....	112
8.2.4 LTE Band 4.....	120
8.2.5 LTE Band 2.....	132
8.2.6 LTE Band 41.....	144
8.2.7 LTE Band 7.....	152
8.3 BAND EDGE EMISSIONS(Conducted).....	160
8.3.1 LTE Band 12, 17.....	160
8.3.2 LTE Band 12.....	164
8.3.3 LTE Band 5.....	168
8.3.4 LTE Band 4.....	176
8.3.5 LTE Band 2.....	188
8.3.6 LTE Band 41.....	200
8.3.7 LTE Band 7.....	208
8.4 SPURIOUS AND HARMONICS EMISSIONS(Conducted)	214
8.4.1 LTE Band 12, 17.....	214
8.4.2 LTE Band 12.....	217
8.4.3 LTE Band 5.....	221
8.4.4 LTE Band 4.....	227
8.4.5 LTE Band 2.....	245
8.4.6 LTE Band 41.....	263
8.4.7 LTE Band 7.....	275

1. GENERAL INFORMATION

Applicant Name : LG Electronics USA, Inc.
Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
FCC ID : ZNFG850EMW
FCC Classification : PCS Licensed Transmitter held to ear (PCE)
EUT Type : Mobile Phone
Model Name : LM-G850EMW
Add Model Name : LMG850EMW, G850EMW, LM-G850EM, LMG850EM, G850EM,
 LM-G850EMWX, LMG850EMWX, G850EMWX, LM-G850EMX,
 LMG850EMX, G850EMX
Supplying power : DC 3.87 V
Antenna Information : PIFA Antenna

Mode	TX Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max power (dBm)	Max power (W)
LTE Band 12, 17	704 ~ 711	8M95G7D	QPSK	15.60	0.036
LTE Band 12, 17	704 ~ 711	8M92W7D	16QAM	14.92	0.031
LTE Band 12, 17	704 ~ 711	8M96W7D	64QAM	13.56	0.023
LTE Band 12, 17	701.5 ~ 713.5	4M48G7D	QPSK	17.45	0.056
LTE Band 12, 17	701.5 ~ 713.5	4M49W7D	16QAM	16.77	0.048
LTE Band 12, 17	701.5 ~ 713.5	4M49W7D	64QAM	14.89	0.031
LTE Band 12	700.5 ~ 714.5	2M69G7D	QPSK	18.09	0.064
LTE Band 12	700.5 ~ 714.5	2M69W7D	16QAM	17.15	0.052
LTE Band 12	700.5 ~ 714.5	2M69W7D	64QAM	15.16	0.033
LTE Band 12	699.7 ~ 715.3	1M09G7D	QPSK	17.64	0.058
LTE Band 12	699.7 ~ 715.3	1M09W7D	16QAM	17.07	0.051
LTE Band 12	699.7 ~ 715.3	1M09W7D	64QAM	15.13	0.033
LTE Band 5	829 ~ 844	8M97G7D	QPSK	19.09	0.081
LTE Band 5	829 ~ 844	8M97W7D	16QAM	17.86	0.061
LTE Band 5	829 ~ 844	8M96W7D	64QAM	16.23	0.042
LTE Band 5	826.5 ~ 846.5	4M49G7D	QPSK	18.11	0.065
LTE Band 5	826.5 ~ 846.5	4M49W7D	16QAM	17.07	0.051
LTE Band 5	826.5 ~ 846.5	4M49W7D	64QAM	15.80	0.038
LTE Band 5	825.5 ~ 847.5	2M69G7D	QPSK	17.33	0.054
LTE Band 5	825.5 ~ 847.5	2M69W7D	16QAM	16.41	0.044
LTE Band 5	825.5 ~ 847.5	2M69W7D	64QAM	15.72	0.037
LTE Band 5	824.7 ~ 848.3	1M09G7D	QPSK	17.15	0.052
LTE Band 5	824.7 ~ 848.3	1M09W7D	16QAM	16.21	0.042
LTE Band 5	824.7 ~ 848.3	1M09W7D	64QAM	14.95	0.031

Mode	TX Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max power(dBm)	Max power(W)
LTE Band 4	1720 ~ 1745	17M9G7D	QPSK	21.52	0.142
LTE Band 4	1720 ~ 1745	17M9W7D	16QAM	20.57	0.114
LTE Band 4	1720 ~ 1745	17M9W7D	64QAM	19.50	0.089
LTE Band 4	1717.5 ~ 1747.5	13M4G7D	QPSK	21.55	0.143
LTE Band 4	1717.5 ~ 1747.5	13M4W7D	16QAM	20.60	0.115
LTE Band 4	1717.5 ~ 1747.5	13M4W7D	64QAM	19.62	0.092
LTE Band 4	1715 ~ 1750	8M97G7D	QPSK	21.46	0.140
LTE Band 4	1715 ~ 1750	8M96W7D	16QAM	20.55	0.114
LTE Band 4	1715 ~ 1750	8M96W7D	64QAM	19.57	0.091
LTE Band 4	1712.5 ~ 1752.5	4M49G7D	QPSK	22.05	0.160
LTE Band 4	1712.5 ~ 1752.5	4M49W7D	16QAM	20.74	0.119
LTE Band 4	1712.5 ~ 1752.5	4M51W7D	64QAM	19.77	0.095
LTE Band 4	1711.5 ~ 1753.5	2M69G7D	QPSK	21.55	0.143
LTE Band 4	1711.5 ~ 1753.5	2M70W7D	16QAM	20.62	0.115
LTE Band 4	1711.5 ~ 1753.5	2M69W7D	64QAM	19.67	0.093
LTE Band 4	1710.7 ~ 1754.3	1M09G7D	QPSK	21.54	0.143
LTE Band 4	1710.7 ~ 1754.3	1M09W7D	16QAM	20.57	0.114
LTE Band 4	1710.7 ~ 1754.3	1M09W7D	64QAM	19.62	0.092
LTE Band 2	1860 ~ 1900	17M9G7D	QPSK	21.33	0.136
LTE Band 2	1860 ~ 1900	17M9W7D	16QAM	19.89	0.097
LTE Band 2	1860 ~ 1900	17M9W7D	64QAM	18.96	0.079
LTE Band 2	1857.5 ~ 1902.5	13M5G7D	QPSK	20.76	0.119
LTE Band 2	1857.5 ~ 1902.5	13M4W7D	16QAM	19.79	0.095
LTE Band 2	1857.5 ~ 1902.5	13M4W7D	64QAM	18.88	0.077
LTE Band 2	1855 ~ 1905	8M96G7D	QPSK	20.79	0.120
LTE Band 2	1855 ~ 1905	8M95W7D	16QAM	19.79	0.095
LTE Band 2	1855 ~ 1905	8M97W7D	64QAM	18.91	0.078
LTE Band 2	1852.5 ~ 1907.5	4M49G7D	QPSK	20.71	0.118
LTE Band 2	1852.5 ~ 1907.5	4M49W7D	16QAM	19.69	0.093
LTE Band 2	1852.5 ~ 1907.5	4M49W7D	64QAM	18.80	0.076
LTE Band 2	1851.5 ~ 1908.5	2M68G7D	QPSK	20.74	0.119
LTE Band 2	1851.5 ~ 1908.5	2M70W7D	16QAM	19.78	0.095
LTE Band 2	1851.5 ~ 1908.5	2M70W7D	64QAM	18.68	0.074
LTE Band 2	1850.7 ~ 1909.3	1M09G7D	QPSK	20.64	0.116
LTE Band 2	1850.7 ~ 1909.3	1M09W7D	16QAM	19.68	0.093
LTE Band 2	1850.7 ~ 1909.3	1M09W7D	64QAM	18.79	0.076
LTE Band 41	2506 ~ 2680	17M8G7D	QPSK	25.30	0.339
LTE Band 41	2506 ~ 2680	17M8W7D	16QAM	24.22	0.264
LTE Band 41	2506 ~ 2680	17M9W7D	64QAM	23.32	0.215
LTE Band 41	2503.5 ~ 2682.5	13M3G7D	QPSK	25.16	0.328
LTE Band 41	2503.5 ~ 2682.5	13M2W7D	16QAM	24.19	0.262
LTE Band 41	2503.5 ~ 2682.5	13M4W7D	64QAM	23.13	0.206
LTE Band 41	2501 ~ 2685	8M86G7D	QPSK	25.43	0.349
LTE Band 41	2501 ~ 2685	8M88W7D	16QAM	24.47	0.280
LTE Band 41	2501 ~ 2685	8M80W7D	64QAM	23.05	0.202
LTE Band 41	2498.5 ~ 2687.5	4M48G7D	QPSK	26.36	0.433
LTE Band 41	2498.5 ~ 2687.5	4M32W7D	16QAM	24.80	0.302
LTE Band 41	2498.5 ~ 2687.5	4M44W7D	64QAM	23.86	0.243
LTE Band 7	2510 ~ 2560	17M9G7D	QPSK	21.95	0.157
LTE Band 7	2510 ~ 2560	17M9W7D	16QAM	20.53	0.113
LTE Band 7	2510 ~ 2560	17M9W7D	64QAM	19.51	0.089
LTE Band 7	2507.5 ~ 2562.5	13M4G7D	QPSK	21.45	0.140
LTE Band 7	2507.5 ~ 2562.5	13M4W7D	16QAM	20.46	0.111
LTE Band 7	2507.5 ~ 2562.5	13M4W7D	64QAM	19.38	0.087
LTE Band 7	2505 ~ 2565	8M96G7D	QPSK	21.37	0.137
LTE Band 7	2505 ~ 2565	8M95W7D	16QAM	20.52	0.113
LTE Band 7	2505 ~ 2565	8M96W7D	64QAM	19.65	0.092
LTE Band 7	2502.5 ~ 2567.5	4M49G7D	QPSK	21.13	0.130
LTE Band 7	2502.5 ~ 2567.5	4M49W7D	16QAM	20.02	0.100
LTE Band 7	2502.5 ~ 2567.5	4M50W7D	64QAM	19.00	0.079

2. INTRODUCTION

2.1 EUT DESCRIPTION

The Equipment Under Test (EUT) supports GSM/WCDMA/LTE Phone with Bluetooth, WLAN, NFC, WPC.

2.2. EUT CAPABILITIES

This EUT contains the following capabilities:

850/1900 GSM, 850/1700/1900 WCDMA/HSUPA, Multi-band LTE, 802.11b/g/n/ac WLAN(2.4GHz)
802.11a/n/ac WLAN(5GHz), Bluetooth(BDR, EDR, LE), NFC, WPC.

2.3. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+21 °C ~ +25 °C
▪ Relative Humidity	41 % ~ 47 %

2.4 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	5.1 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (Above 18 GHz)	5.3 dB (The confidence level is about 95 %, $k = 2$)


2.6. TEST FACILITY

DT&C Co., Ltd.	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site comply with the requirements of § 2.948 according to ANSI 63.4-2014.	
- FCC MRA Accredited Test Firm No. : KR0034	
www.dtnc.net	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

3. DESCRIPTION OF TESTS

3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

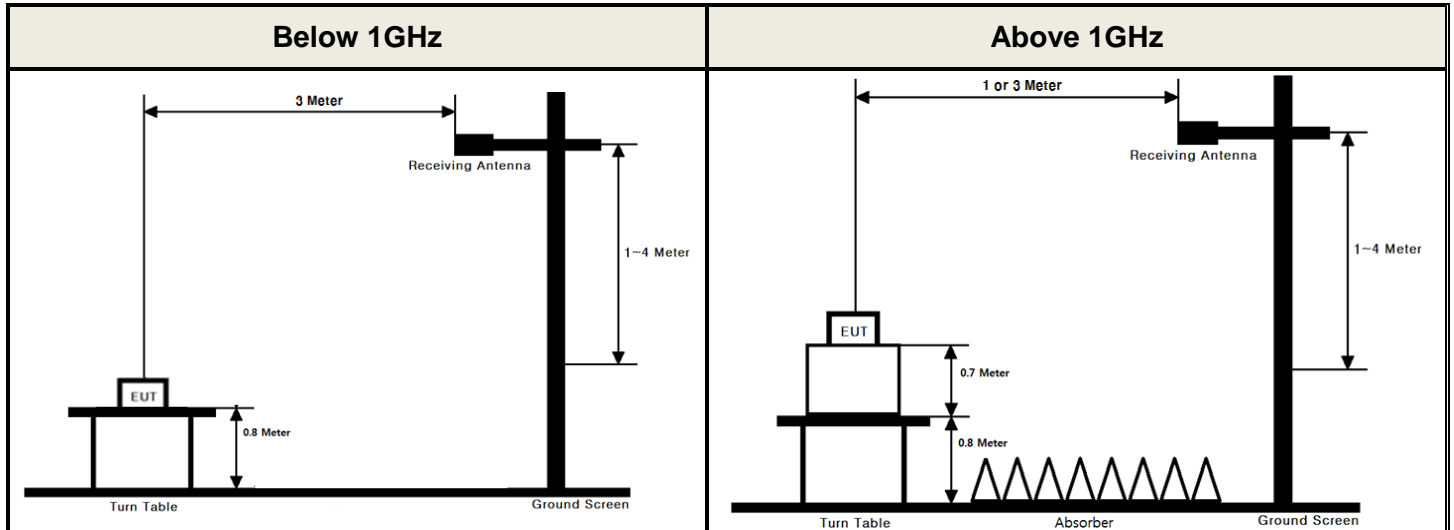

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 1.5-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.17
- KDB971168 D01v03 - Section 5.2.2
- ANSI C63.26-2015 – Section 5.2.4.4.1

Test setting

1. Set span to 2 x to 3 x the OBW.
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW \geq 3 x RBW.
4. Set number of points in sweep \geq 2 x span / RBW.
5. Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set \geq $[10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2 PEAK TO AVERAGE RATIO

Test set-up

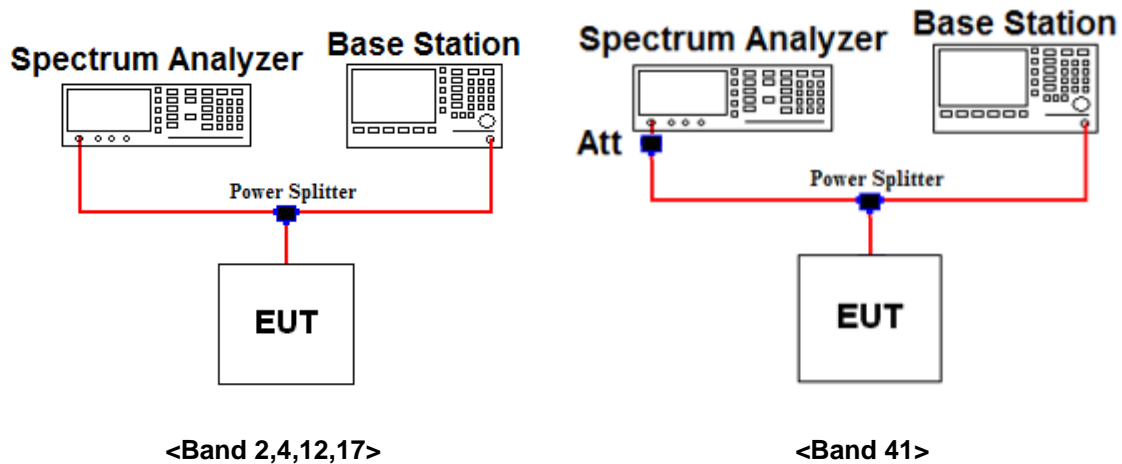

Test Procedure

- KDB971168 D01v03 - Section 5.7.2
- ANSI C63.26-2015 – Section 5.2.3.4

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The present of time the signal spends at or above the level defines the probability for that particular power level.


Test setting

The spectrum Analyzer's CCDF measurement function is enabled.

1. Set resolution/measurement bandwidth \geq OBW or specified reference bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to the greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
4. Record the maximum PAPR level associated with a probability of 0.1%.
5. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

3.3 OCCUPIED BANDWIDTH.

Test set-up

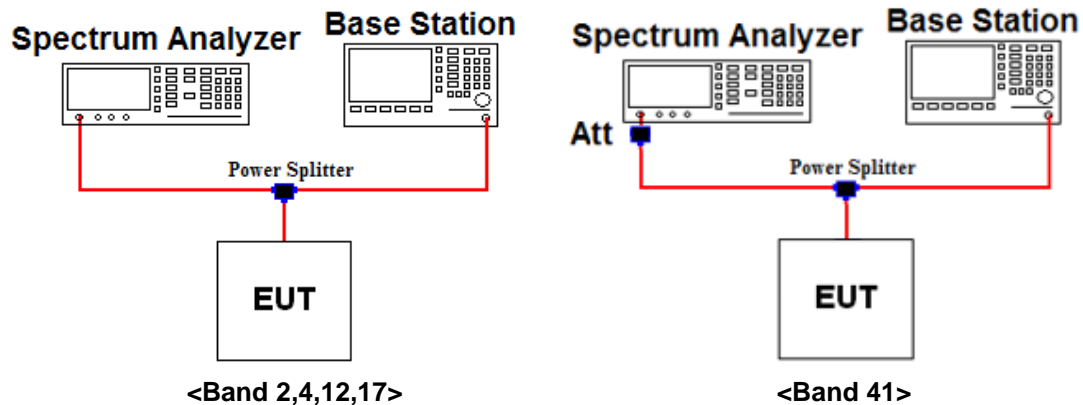

Test Procedure

- KDB971168 D01v03 - Section 4.3
- ANSI C63.26-2015 – Section 5.4.4


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 \sim 5 \%$ of the expected OBW & $VBW \geq 3 \times RBW$
3. Detector = Peak
4. Trance mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within 1 ~ 5 % of the 99 % occupied bandwidth observed in step 6.

3.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL

Test set-up

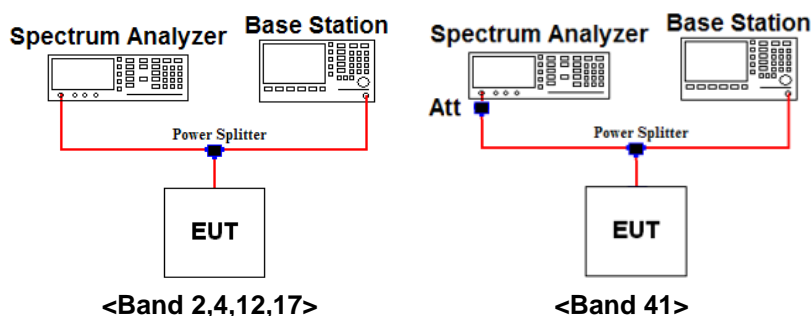

Test Procedure

- KDB971168 D01v03 - Section 6
- ANSI C63.26-2015 – Section 5.7

All out of band emissions are measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its lowest and highest channel with all bandwidths, modulations and RB configurations.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.

Test setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission bandwidth
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS & Trace mode = Max hold
6. Sweep time = Auto couple or 1 s for band edge
7. Number of sweep point $\geq 2 \times$ span / RBW
8. The trace was allowed to stabilize

Note 1: Per Part 22.917(b)(1) / 24.238(b) / 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


Note 2: Per Part 27(g) for operations in the 600 MHz band and the 698-746 MHz band, compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Note 3: For part 27.53(m)(4) the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz.

Note 4: Per part 27.53(m)(6) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 MHz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

Test set-up

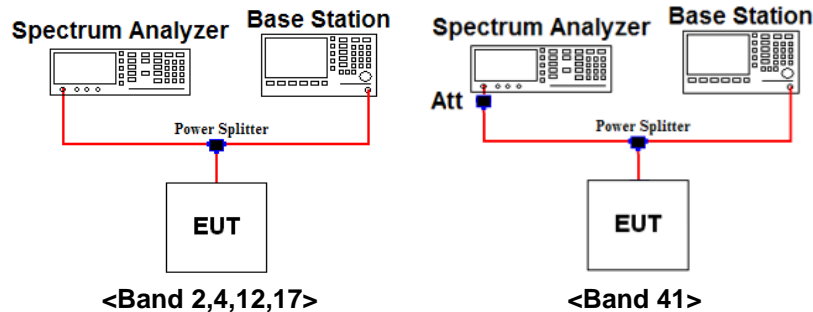

Test Procedure

- KDB971168 D01v03 - Section 6
- ANSI C63.26-2015 – Section 5.7

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations. The spectrum is scanned from 9 kHz up to a frequency including its 10th harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.


Test setting

1. RBW = 100 kHz (Below 1 GHz) or 1 MHz (Above 1 GHz) & VBW $\geq 3 \times$ RBW (Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1GHz and 1MHz or greater for frequencies greater than 1GHz.

3.6 UNDESIRABLE EMISSIONS

Test Set-up

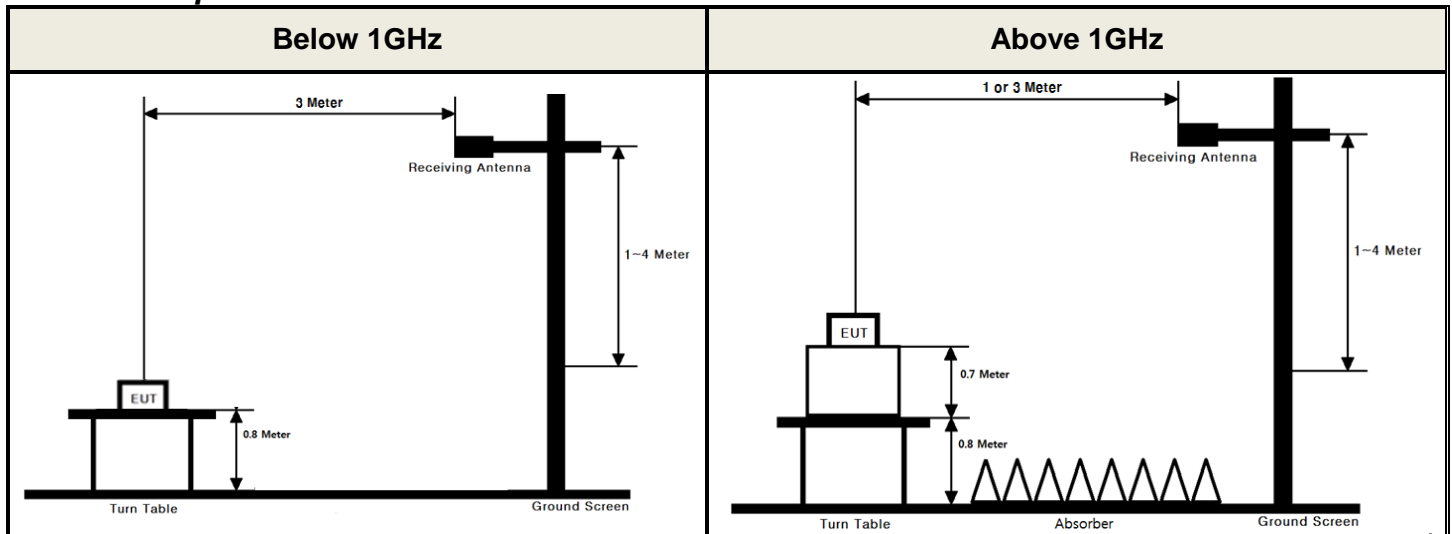

These measurements were performed at 3 test site. The equipment under test is placed on a non-conductive table 1.5-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.12
- KDB971168 D01v03 - Section 5.8
- ANSI C63.26-2015 – Section 5.5

Test setting

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW \geq 3 X RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point \geq 2 X span / RBW
5. The trace was allowed to stabilize

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.7 FREQUENCY STABILITY

Test Set-up

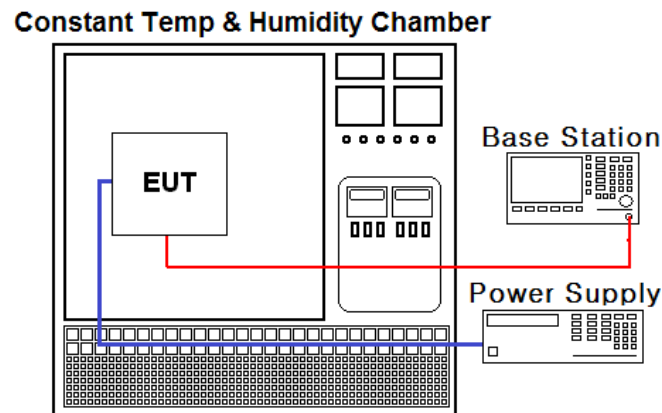

Test Procedure

- ANSI/TIA-603-E-2016
- KDB971168 D01v03 - Section 9

The frequency stability of the transmitter is measured by:

a.) **Temperature:**

The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:**

The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24, 27. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(20 °C to provide a reference)
2. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	19/06/26	20/06/26	MY46471251
Spectrum Analyzer	Agilent Technologies	N9020A	19/06/26	20/06/26	MY50410163
Spectrum Analyzer	Agilent Technologies	N9030A	19/03/15	20/03/15	MY53310140
DC power supply	Agilent Technologies	66332A	19/06/25	20/06/25	MY43000394
Multimeter	FLUKE	17B	18/12/18	19/12/18	26030065WS
Power Splitter	Anritsu	K241B	18/12/19	19/12/19	016681
Temp & Humi	MG Indus	THP31R1	19/07/04	20/07/04	20131002-1
Radio Communication Analyzer	ANRITSU	MT8820C	18/12/20	19/12/20	6201274516
Thermohygrometer	BODYCOM	BJ5478	18/12/27	19/12/27	120612-2
Thermohygrometer	BODYCOM	BJ5478	18/12/27	19/12/27	120612-1
Signal Generator	Rohde Schwarz	SMBV100A	18/12/19	19/12/19	255571
Signal Generator	ANRITSU	MG3695C	18/12/20	19/12/20	173501
Loop Antenna	ETS	6502	19/03/21	21/03/21	3471
Bilog Antenna	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
Dipole Antenna	Schwarzbeck	VHA9103	19/02/28	21/02/28	2116
Dipole Antenna	Schwarzbeck	VHA9103	18/04/13	20/04/13	2117
Dipole Antenna	Schwarzbeck	UHA9105	19/02/28	21/02/28	2261
Dipole Antenna	Schwarzbeck	UHA9105	18/04/13	20/04/13	2262
HORN ANT	ETS	3117	18/05/10	20/05/10	00140394
HORN ANT	ETS	3117	18/03/26	20/03/26	00152145
HORN ANT	A.H.Systems	SAS-574	19/04/23	21/04/23	154
HORN ANT	A.H.Systems	SAS-574	19/07/03	21/07/03	155
Amplifier	EMPOWER	BBS3Q7ELU	19/06/24	20/06/24	1020
PreAmplifier	H.P	8447D	18/12/18	19/12/18	2944A07774
PreAmplifier	Agilent	8449B	19/06/27	20/06/27	3008A02108
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	19/06/24	20/06/24	7
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	19/06/24	20/06/24	3
High-pass filter	Wainwright	WHNX8.5/26.5G-6SS	19/06/24	20/06/24	1
Cable	DTNC	Cable	19/01/16	20/01/16	M-01
Cable	DTNC	Cable	19/01/16	20/01/16	M-04
Cable	Junkosha	MWX315	19/01/16	20/01/16	M-05
Cable	Junkosha	MWX221	19/01/16	20/01/16	M-06
Cable	DTNC	Cable	19/01/16	20/01/16	RF-73
Cable	Radiall	Cable	19/01/16	20/01/16	RF-84

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Status Note 1
2.1046	Conducted Output Power	N/A	Conducted	C Note2
2.1049	Occupied Bandwidth	N/A		C
24.232(d) 27.50(d.5)	Peak to Average Ratio	< 13 dB		C
2.1051 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Band Edge / Conducted Spurious Emissions	> 43 + 10log ₁₀ (P) dB at Band edge and for all out-of-band emissions		C
27.53(m)	Band Edge / Conducted Spurious Emissions	> 40 + 10log ₁₀ (P) dB at channel edge and 5 MHz from the channel edge > 43 + 10log ₁₀ (P) dB at 5 MHz and X MHz from the channel edge > 55 + 10log ₁₀ (P) dB at all frequencies more than X MHz from the channel edge		C
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) Fundamental emissions must stay within Authorized frequency block (Part 24, 27)		C
27.50(c.10)	Radiated Output Power (B12, 17)	< 3 Watts max. ERP		Radiated
22.913(a.5)	Radiated Output Power (B5)	< 7 Watts max. ERP	C	
27.50(d.4)	Radiated Output Power (B4)	< 1 Watts max. EIRP	C	
24.232(c)	Radiated Output Power(B2)	< 2 Watts max. EIRP	C	
27.50(h.2)	Radiated Output Power (B7, B41)	< 2 Watts max. EIRP	C	
2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Undesirable Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions	C	
27.53(m)	Undesirable Emissions(B7, B41)	> 55 + 10log ₁₀ (P) dB for all out-of-band emissions	C	

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: Refer to RF Exposure Report (Test Report SAR)

Note 3: This device supports wireless charging & Can use Dual Display.

So per KDB648474 D03v01r04, the radiated test items were performed all not charging, charging and Dual Display conditions. For wireless charging condition, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration.

And the worst case data was reported.

6. SAMPLE CALCULATION

A. Emission Designator

LTE Band 12, 17(QPSK)

Emission Designator = **8M95G7D**
LTE OBW = 8.949 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 12, 17(64QAM)

Emission Designator = **8M96W7D**
LTE OBW = 8.960 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 5(QPSK)

Emission Designator = **8M97G7D**
LTE OBW = 8.971 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 5(64QAM)

Emission Designator = **8M96W7D**
LTE OBW = 8.964 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 4(QPSK)

Emission Designator = **17M9G7D**
LTE OBW = 17.914 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 4(64QAM)

Emission Designator = **17M9W7D**
LTE OBW = 17.911 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 12, 17(16QAM)

Emission Designator = **8M92W7D**
LTE OBW = 8.920 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 5(16QAM)

Emission Designator = **8M97W7D**
LTE OBW = 8.970 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 4(16QAM)

Emission Designator = **17M9W7D**
LTE OBW = 17.889 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 2(QPSK)

Emission Designator = **17M9G7D**
LTE OBW = 17.935 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 2(64QAM)

Emission Designator = **17M9W7D**
LTE OBW = 17.940 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 41(QPSK)

Emission Designator = **17M8G7D**
LTE OBW = 17.835 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 41(64QAM)

Emission Designator = **17M9W7D**
LTE OBW = 17.905 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 7(QPSK)

Emission Designator = **17M9G7D**
LTE OBW = 17.923 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 7(64QAM)

Emission Designator = **17M9W7D**
LTE OBW = 17.866 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 2(16QAM)

Emission Designator = **17M9W7D**
LTE OBW = 17.885 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 41(16QAM)

Emission Designator = **17M8W7D**
LTE OBW = 17.793 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

LTE Band 7(16QAM)

Emission Designator = **17M9W7D**
LTE OBW = 17.905 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data Transmission

B. For substitution method

EIRP for Band 41

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Spectrum Reading Value(dBm)	Ant Pol (H/V)	Generator Output (dBm)	T.F (dB) ^{Note1}	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
5	2687.5	QPSK	1/12	-24.02	V	-16.32	36.47	20.15	6.21	26.36	0.433

Level (dBm) @ ant Terminal = Generator output(dBm) + Gain or Loss of equipments

ERP or EIRP = Level @ Ant Terminal Level(dBm) + Tx Ant. Gain

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
 - 2) During the test, the turn table is rotated until the maximum signal is found.
 - 3) Record the field strength meter's level.
 - 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
 - 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
 - 6) The signal generator output level with substituted antenna gain is the rating of ERP, EIRP or Radiated spurious emission.
- Note 1: For radiated output power test item was used power amplifier and cable. (T.F= power amplifier gain[dB] + cable loss[dB])
 For radiated spurious emission test item was used cable only. (T.F= cable loss[dB])

7. TEST DATA

7.1 OCCUPIED BANDWIDTH

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.1

7.2 PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.2

7.3 BAND EDGE EMISSIONS (Conducted)

- Plots of the EUT's Band Edge Emissions are shown in Clause 8.3

7.4 SPURIOUS AND HARMONICS EMISSIONS (Conducted)

- Plots of the EUT's Spurious Emissions are shown in Clause 8.4

7.5 ERP & EIRP

7.5.1 LTE Band 12,17

- Measurement data: Without wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)	Note
10	704	QPSK	1/0	V	14.32	1.28	15.60	0.036	-
		16QAM	1/0	V	13.64	1.28	14.92	0.031	-
		64QAM	1/0	V	11.70	1.28	12.98	0.020	-
	711	QPSK	1/25	V	14.29	1.28	15.57	0.036	-
		16QAM	1/25	V	13.42	1.28	14.70	0.030	-
		64QAM	1/25	V	12.28	1.28	13.56	0.023	-
5	701.5	QPSK	1/0	V	16.17	1.28	17.45	0.056	-
		16QAM	1/0	V	15.49	1.28	16.77	0.048	-
		64QAM	1/0	V	13.61	1.28	14.89	0.031	-
	707.5	QPSK	1/0	V	15.60	1.28	16.88	0.049	-
		16QAM	1/0	V	14.43	1.28	15.71	0.037	-
		64QAM	1/0	V	13.31	1.28	14.59	0.029	-
	713.5	QPSK	1/0	V	14.33	1.28	15.61	0.036	-
		16QAM	1/0	V	13.28	1.28	14.56	0.029	-
		64QAM	1/0	V	12.15	1.28	13.43	0.022	-

Note: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

7.5.2 LTE Band 12

- Measurement data: Without wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)	Note
3	700.5	QPSK	1/0	V	16.41	1.28	17.69	0.059	-
		16QAM	1/0	V	15.87	1.28	17.15	0.052	-
		64QAM	1/0	V	13.88	1.28	15.16	0.033	-
	707.5	QPSK	1/0	V	16.81	1.28	18.09	0.064	With Dual Display (180)
		QPSK	1/0	V	15.39	1.28	16.67	0.046	-
		16QAM	1/0	V	14.31	1.28	15.59	0.036	-
	714.5	64QAM	1/0	V	13.20	1.28	14.48	0.028	-
		QPSK	1/14	V	14.16	1.28	15.44	0.035	-
		16QAM	1/14	V	13.32	1.28	14.60	0.029	-
1.4	699.7	64QAM	1/14	V	11.93	1.28	13.21	0.021	-
		QPSK	1/0	V	16.36	1.28	17.64	0.058	-
		16QAM	1/0	V	15.79	1.28	17.07	0.051	-
	707.5	64QAM	1/0	V	13.85	1.28	15.13	0.033	-
		QPSK	1/0	V	14.93	1.28	16.21	0.042	-
		16QAM	1/0	V	14.05	1.28	15.33	0.034	-
	715.3	64QAM	1/0	V	12.97	1.28	14.25	0.027	-
QPSK		1/0	V	14.01	1.28	15.29	0.034	-	
16QAM		1/0	V	13.06	1.28	14.34	0.027	-	
		64QAM	1/0	V	11.70	1.28	12.98	0.020	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)	Note
10	704	QPSK	1/0	H	13.88	1.28	15.16	0.033	-
		16QAM	1/0	H	12.83	1.28	14.11	0.026	-
		64QAM	1/0	H	11.76	1.28	13.04	0.020	-
5	701.5	QPSK	1/0	H	15.35	1.28	16.63	0.046	-
		16QAM	1/0	H	14.40	1.28	15.68	0.037	-
		64QAM	1/0	H	13.44	1.28	14.72	0.030	-
3	700.5	QPSK	1/0	H	15.66	1.28	16.94	0.049	-
		16QAM	1/0	H	14.62	1.28	15.90	0.039	-
		64QAM	1/0	H	13.58	1.28	14.86	0.031	-
		QPSK	1/0	H	15.95	1.28	17.23	0.053	With Dual Display (180)°
1.4	699.7	QPSK	1/0	H	15.48	1.28	16.76	0.047	-
		16QAM	1/0	H	14.43	1.28	15.71	0.037	-
		64QAM	1/0	H	13.41	1.28	14.69	0.029	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.5.3 LTE Band 5

- Measurement data: Without wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)	Note
10	829	QPSK	1/49	V	16.82	1.23	18.05	0.064	-
		16QAM	1/49	V	15.82	1.23	17.05	0.051	-
		64QAM	1/49	V	14.53	1.23	15.76	0.038	-
	836.5	QPSK	1/25	V	16.93	1.22	18.15	0.065	-
		16QAM	1/25	V	15.92	1.22	17.14	0.052	-
		64QAM	1/25	V	14.40	1.22	15.62	0.036	-
	844	QPSK	1/0	V	17.48	1.21	18.69	0.074	-
		16QAM	1/0	V	16.65	1.21	17.86	0.061	-
		64QAM	1/0	V	15.02	1.21	16.23	0.042	-
QPSK		1/0	V	16.62	1.21	17.83	0.061	With Dual Display (180)°	
5	826.5	QPSK	1/24	V	16.88	1.23	18.11	0.065	-
		16QAM	1/24	V	15.84	1.23	17.07	0.051	-
		64QAM	1/24	V	14.57	1.23	15.80	0.038	-
	836.5	QPSK	1/12	V	16.67	1.22	17.89	0.062	-
		16QAM	1/12	V	15.72	1.22	16.94	0.049	-
		64QAM	1/12	V	14.43	1.22	15.65	0.037	-
	846.5	QPSK	1/12	V	16.47	1.21	17.68	0.059	-
		16QAM	1/12	V	15.53	1.21	16.74	0.047	-
		64QAM	1/12	V	14.41	1.21	15.62	0.036	-
3	825.5	QPSK	1/7	V	15.56	1.23	16.79	0.048	-
		16QAM	1/7	V	14.65	1.23	15.88	0.039	-
		64QAM	1/7	V	13.49	1.23	14.72	0.030	-
	836.5	QPSK	1/0	V	15.86	1.22	17.08	0.051	-
		16QAM	1/0	V	14.78	1.22	16.00	0.040	-
		64QAM	1/0	V	14.50	1.22	15.72	0.037	-
	847.5	QPSK	1/0	V	16.12	1.21	17.33	0.054	-
		16QAM	1/0	V	15.20	1.21	16.41	0.044	-
		64QAM	1/0	V	14.01	1.21	15.22	0.033	-
1.4	824.7	QPSK	1/2	V	15.92	1.23	17.15	0.052	-
		16QAM	1/2	V	14.98	1.23	16.21	0.042	-
		64QAM	1/2	V	13.72	1.23	14.95	0.031	-
	836.5	QPSK	1/2	V	15.66	1.22	16.88	0.049	-
		16QAM	1/2	V	14.64	1.22	15.86	0.039	-
		64QAM	1/2	V	13.38	1.22	14.60	0.029	-
	848.3	QPSK	1/2	V	15.70	1.21	16.91	0.049	-
		16QAM	1/2	V	14.78	1.21	15.99	0.040	-
		64QAM	1/2	V	13.73	1.21	14.94	0.031	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)	Note
10	844	QPSK	1/0	H	15.83	1.21	17.04	0.051	-
		16QAM	1/0	H	14.72	1.21	15.93	0.039	-
		64QAM	1/0	H	13.64	1.21	14.85	0.031	-
		QPSK	1/0	H	17.88	1.21	19.09	0.081	With Dual Display (180)°
5	826.5	QPSK	1/24	H	13.61	1.23	14.84	0.030	-
		16QAM	1/24	H	12.68	1.23	13.91	0.025	-
		64QAM	1/24	H	11.73	1.23	12.96	0.020	-
3	847.5	QPSK	1/0	H	13.93	1.21	15.14	0.033	-
		16QAM	1/0	H	13.00	1.21	14.21	0.026	-
		64QAM	1/0	H	12.08	1.21	13.29	0.021	-
1.4	824.7	QPSK	1/2	H	13.82	1.23	15.05	0.032	-
		16QAM	1/2	H	12.86	1.23	14.09	0.026	-
		64QAM	1/2	H	11.95	1.23	13.18	0.021	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.5.4 LTE Band 4

- Measurement data: Without wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
20	1720	QPSK	1/50	V	14.98	5.95	20.93	0.124	-
		16QAM	1/50	V	13.91	5.95	19.86	0.097	-
		64QAM	1/50	V	12.99	5.95	18.94	0.078	-
	1732.5	QPSK	1/50	V	14.82	5.84	20.66	0.116	-
		16QAM	1/50	V	13.85	5.84	19.69	0.093	-
		64QAM	1/50	V	12.77	5.84	18.61	0.073	-
	1745	QPSK	1/50	V	15.79	5.73	21.52	0.142	-
		16QAM	1/50	V	14.84	5.73	20.57	0.114	-
		64QAM	1/50	V	13.77	5.73	19.50	0.089	-
15	1717.5	QPSK	1/36	V	14.92	5.97	20.89	0.123	-
		16QAM	1/36	V	13.97	5.97	19.94	0.099	-
		64QAM	1/36	V	13.00	5.97	18.97	0.079	-
	1732.5	QPSK	1/36	V	15.06	5.84	20.90	0.123	-
		16QAM	1/36	V	13.98	5.84	19.82	0.096	-
		64QAM	1/36	V	13.17	5.84	19.01	0.080	-
	1747.5	QPSK	1/36	V	15.85	5.70	21.55	0.143	-
		16QAM	1/36	V	14.90	5.70	20.60	0.115	-
		64QAM	1/36	V	13.92	5.70	19.62	0.092	-
10	1715	QPSK	1/25	V	14.41	6.00	20.41	0.110	-
		16QAM	1/25	V	13.52	6.00	19.52	0.090	-
		64QAM	1/25	V	12.65	6.00	18.65	0.073	-
	1732.5	QPSK	1/25	V	15.19	5.84	21.03	0.127	-
		16QAM	1/25	V	14.29	5.84	20.13	0.103	-
		64QAM	1/25	V	13.42	5.84	19.26	0.084	-
	1750	QPSK	1/25	V	15.78	5.68	21.46	0.140	-
		16QAM	1/25	V	14.87	5.68	20.55	0.114	-
		64QAM	1/25	V	13.89	5.68	19.57	0.091	-

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
5	1712.5	QPSK	1/12	V	14.55	6.02	20.57	0.114	-
		16QAM	1/12	V	13.51	6.02	19.53	0.090	-
		64QAM	1/12	V	12.46	6.02	18.48	0.070	-
	1732.5	QPSK	1/12	V	14.96	5.84	20.80	0.120	-
		16QAM	1/12	V	13.94	5.84	19.78	0.095	-
		64QAM	1/12	V	12.85	5.84	18.69	0.074	-
	1752.5	QPSK	1/12	V	16.04	5.65	21.69	0.148	-
		16QAM	1/12	V	15.09	5.65	20.74	0.119	-
		64QAM	1/12	V	14.12	5.65	19.77	0.095	-
		QPSK	1/12	V	16.40	5.65	22.05	0.160	With Dual Display (360°)
3	1711.5	QPSK	1/7	V	14.40	6.03	20.43	0.110	-
		16QAM	1/7	V	13.51	6.03	19.54	0.090	-
		64QAM	1/7	V	12.47	6.03	18.50	0.071	-
	1732.5	QPSK	1/7	V	14.71	5.84	20.55	0.114	-
		16QAM	1/7	V	13.78	5.84	19.62	0.092	-
		64QAM	1/7	V	12.84	5.84	18.68	0.074	-
	1753.5	QPSK	1/7	V	15.92	5.63	21.55	0.143	-
		16QAM	1/7	V	14.99	5.63	20.62	0.115	-
		64QAM	1/7	V	14.04	5.63	19.67	0.093	-
1.4	1710.7	QPSK	1/2	V	14.52	6.03	20.55	0.114	-
		16QAM	1/2	V	13.58	6.03	19.61	0.091	-
		64QAM	1/2	V	12.54	6.03	18.57	0.072	-
	1732.5	QPSK	1/2	V	14.72	5.84	20.56	0.114	-
		16QAM	1/2	V	13.80	5.84	19.64	0.092	-
		64QAM	1/2	V	12.85	5.84	18.69	0.074	-
	1754.3	QPSK	1/2	V	15.92	5.62	21.54	0.143	-
		16QAM	1/2	V	14.95	5.62	20.57	0.114	-
		64QAM	1/2	V	14.00	5.62	19.62	0.092	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
20	1745	QPSK	1/50	H	14.36	5.73	20.09	0.102	-
		16QAM	1/50	H	13.41	5.73	19.14	0.082	-
		64QAM	1/50	H	12.35	5.73	18.08	0.064	-
15	1747.5	QPSK	1/36	H	14.46	5.70	20.16	0.104	-
		16QAM	1/36	H	13.39	5.70	19.09	0.081	-
		64QAM	1/36	H	12.36	5.70	18.06	0.064	-
10	1750	QPSK	1/25	H	14.30	5.68	19.98	0.100	-
		16QAM	1/25	H	13.28	5.68	18.96	0.079	-
		64QAM	1/25	H	12.23	5.68	17.91	0.062	-
5	1732.5	QPSK	1/12	H	14.94	5.65	20.59	0.115	-
		16QAM	1/12	H	13.89	5.65	19.54	0.090	-
		64QAM	1/12	H	12.84	5.65	18.49	0.071	-
		QPSK	1/12	H	14.63	5.65	20.28	0.107	With Dual Display (0°)
3	1732.5	QPSK	1/7	H	14.70	5.63	20.33	0.108	-
		16QAM	1/7	H	13.62	5.63	19.25	0.084	-
		64QAM	1/7	H	12.68	5.63	18.31	0.068	-
1.4	1732.5	QPSK	1/2	H	14.76	5.62	20.38	0.109	-
		16QAM	1/2	H	13.79	5.62	19.41	0.087	-
		64QAM	1/2	H	12.72	5.62	18.34	0.068	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.5.5 LTE Band 2

- Measurement data: Without wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
20	1860	QPSK	1/50	V	15.93	4.91	20.84	0.121	-
		16QAM	1/50	V	14.98	4.91	19.89	0.097	-
		64QAM	1/50	V	14.05	4.91	18.96	0.079	-
	1880	QPSK	1/50	V	15.88	4.80	20.68	0.117	-
		16QAM	1/50	V	15.02	4.80	19.82	0.096	-
		64QAM	1/50	V	14.08	4.80	18.88	0.077	-
	1900	QPSK	1/50	V	15.88	4.69	20.57	0.114	-
		16QAM	1/50	V	14.94	4.69	19.63	0.092	-
		64QAM	1/50	V	14.05	4.69	18.74	0.075	-
		QPSK	1/50	V	16.42	4.91	21.33	0.136	With Dual Display (360°)
15	1857.5	QPSK	1/36	V	15.74	4.92	20.66	0.116	-
		16QAM	1/36	V	14.77	4.92	19.69	0.093	-
		64QAM	1/36	V	13.84	4.92	18.76	0.075	-
	1880	QPSK	1/36	V	15.96	4.80	20.76	0.119	-
		16QAM	1/36	V	14.99	4.80	19.79	0.095	-
		64QAM	1/36	V	14.08	4.80	18.88	0.077	-
	1902.5	QPSK	1/36	V	15.85	4.68	20.53	0.113	-
		16QAM	1/36	V	14.88	4.68	19.56	0.090	-
		64QAM	1/36	V	13.96	4.68	18.64	0.073	-
10	1855	QPSK	1/25	V	15.71	4.94	20.65	0.116	-
		16QAM	1/25	V	14.79	4.94	19.73	0.094	-
		64QAM	1/25	V	13.84	4.94	18.78	0.076	-
	1880	QPSK	1/25	V	15.99	4.80	20.79	0.120	-
		16QAM	1/25	V	14.99	4.80	19.79	0.095	-
		64QAM	1/25	V	14.11	4.80	18.91	0.078	-
	1905	QPSK	1/25	V	15.71	4.67	20.38	0.109	-
		16QAM	1/25	V	14.81	4.67	19.48	0.089	-
		64QAM	1/25	V	13.92	4.67	18.59	0.072	-

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
5	1852.5	QPSK	1/12	V	15.65	4.95	20.60	0.115	-
		16QAM	1/12	V	14.61	4.95	19.56	0.090	-
		64QAM	1/12	V	13.72	4.95	18.67	0.074	-
	1880	QPSK	1/12	V	15.91	4.80	20.71	0.118	-
		16QAM	1/12	V	14.89	4.80	19.69	0.093	-
		64QAM	1/12	V	14.00	4.80	18.80	0.076	-
	1907.5	QPSK	1/12	V	15.72	4.65	20.37	0.109	-
		16QAM	1/12	V	14.78	4.65	19.43	0.088	-
		64QAM	1/12	V	13.86	4.65	18.51	0.071	-
3	1851.5	QPSK	1/7	V	15.56	4.95	20.51	0.112	-
		16QAM	1/7	V	14.63	4.95	19.58	0.091	-
		64QAM	1/7	V	13.64	4.95	18.59	0.072	-
	1880	QPSK	1/7	V	15.94	4.80	20.74	0.119	-
		16QAM	1/7	V	14.98	4.80	19.78	0.095	-
		64QAM	1/7	V	13.88	4.80	18.68	0.074	-
	1908.5	QPSK	1/7	V	15.72	4.65	20.37	0.109	-
		16QAM	1/7	V	14.78	4.65	19.43	0.088	-
		64QAM	1/7	V	13.84	4.65	18.49	0.071	-
1.4	1850.7	QPSK	1/2	V	15.54	4.96	20.50	0.112	-
		16QAM	1/2	V	14.62	4.96	19.58	0.091	-
		64QAM	1/2	V	13.73	4.96	18.69	0.074	-
	1880	QPSK	1/2	V	15.84	4.80	20.64	0.116	-
		16QAM	1/2	V	14.88	4.80	19.68	0.093	-
		64QAM	1/2	V	13.99	4.80	18.79	0.076	-
	1909.3	QPSK	1/2	V	15.72	4.64	20.36	0.109	-
		16QAM	1/2	V	14.78	4.64	19.42	0.087	-
		64QAM	1/2	V	13.83	4.64	18.47	0.070	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
20	1860	QPSK	1/50	H	15.46	4.91	20.37	0.109	-
		16QAM	1/50	H	14.37	4.91	19.28	0.085	-
		64QAM	1/50	H	13.42	4.91	18.33	0.068	-
		QPSK	1/50	H	15.21	4.91	20.12	0.103	With Dual Display (0°)
15	1880	QPSK	1/36	H	15.34	4.80	20.14	0.103	-
		16QAM	1/36	H	14.26	4.80	19.06	0.081	-
		64QAM	1/36	H	13.32	4.80	18.12	0.065	-
10	1880	QPSK	1/25	H	15.43	4.80	20.23	0.105	-
		16QAM	1/25	H	14.40	4.80	19.20	0.083	-
		64QAM	1/25	H	13.34	4.80	18.14	0.065	-
5	1880	QPSK	1/12	H	15.35	4.80	20.15	0.104	-
		16QAM	1/12	H	14.23	4.80	19.03	0.080	-
		64QAM	1/12	H	13.34	4.80	18.14	0.065	-
3	1880	QPSK	1/7	H	15.37	4.80	20.17	0.104	-
		16QAM	1/7	H	14.32	4.80	19.12	0.082	-
		64QAM	1/7	H	13.28	4.80	18.08	0.064	-
1.4	1880	QPSK	1/2	H	15.34	4.80	20.14	0.103	-
		16QAM	1/2	H	14.25	4.80	19.05	0.080	-
		64QAM	1/2	H	13.21	4.80	18.01	0.063	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.5.6 LTE Band 41
- Measurement data: Without wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
20	2506	QPSK	1/50	V	19.18	5.96	25.14	0.327	-
		16QAM	1/50	V	18.23	5.96	24.19	0.262	-
		64QAM	1/50	V	17.27	5.96	23.23	0.210	-
	2593	QPSK	1/50	V	19.39	5.91	25.30	0.339	-
		16QAM	1/50	V	18.31	5.91	24.22	0.264	-
		64QAM	1/50	V	17.41	5.91	23.32	0.215	-
	2680	QPSK	1/50	V	18.84	6.18	25.02	0.318	-
		16QAM	1/50	V	17.80	6.18	23.98	0.250	-
		64QAM	1/50	V	16.87	6.18	23.05	0.202	-
15	2503.5	QPSK	1/36	V	18.92	5.97	24.89	0.308	-
		16QAM	1/36	V	17.95	5.97	23.92	0.247	-
		64QAM	1/36	V	16.96	5.97	22.93	0.196	-
	2593	QPSK	1/36	V	19.24	5.91	25.15	0.327	-
		16QAM	1/36	V	18.28	5.91	24.19	0.262	-
		64QAM	1/36	V	17.22	5.91	23.13	0.206	-
	2682.5	QPSK	1/36	V	18.97	6.19	25.16	0.328	-
		16QAM	1/36	V	17.98	6.19	24.17	0.261	-
		64QAM	1/36	V	16.92	6.19	23.11	0.205	-
10	2501	QPSK	1/25	V	18.69	5.98	24.67	0.293	-
		16QAM	1/25	V	17.82	5.98	23.80	0.240	-
		64QAM	1/25	V	16.86	5.98	22.84	0.192	-
	2593	QPSK	1/25	V	19.35	5.91	25.26	0.336	-
		16QAM	1/25	V	18.19	5.91	24.10	0.257	-
		64QAM	1/25	V	17.14	5.91	23.05	0.202	-
	2685	QPSK	1/25	V	19.23	6.20	25.43	0.349	-
		16QAM	1/25	V	18.27	6.20	24.47	0.280	-
		64QAM	1/25	V	16.33	6.20	22.53	0.179	-
5	2498.5	QPSK	1/12	V	18.77	5.98	24.75	0.299	-
		16QAM	1/12	V	17.81	5.98	23.79	0.239	-
		64QAM	1/12	V	16.86	5.98	22.84	0.192	-
	2593	QPSK	1/12	V	19.32	5.91	25.23	0.333	-
		16QAM	1/12	V	18.29	5.91	24.20	0.263	-
		64QAM	1/12	V	17.36	5.91	23.27	0.212	-
	2687.5	QPSK	1/12	V	19.67	6.21	25.88	0.387	-
		16QAM	1/12	V	18.59	6.21	24.80	0.302	-
		64QAM	1/12	V	17.65	6.21	23.86	0.243	-
QPSK		1/12	V	20.15	6.21	26.36	0.433	With Dual Display (360°)	

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
20	2593	QPSK	1/50	H	18.78	5.91	24.69	0.294	-
		16QAM	1/50	H	17.71	5.91	23.62	0.230	-
		64QAM	1/50	H	16.66	5.91	22.57	0.181	-
15	2682.5	QPSK	1/36	H	18.21	6.19	24.40	0.275	-
		16QAM	1/36	H	17.09	6.19	23.28	0.213	-
		64QAM	1/36	H	16.15	6.19	22.34	0.171	-
10	2685	QPSK	1/25	H	18.60	6.20	24.80	0.302	-
		16QAM	1/25	H	17.53	6.20	23.73	0.236	-
		64QAM	1/25	H	16.50	6.20	22.70	0.186	-
5	2687.5	QPSK	1/12	H	19.32	6.21	25.53	0.357	-
		16QAM	1/12	H	18.23	6.21	24.44	0.278	-
		64QAM	1/12	H	17.29	6.21	23.50	0.224	-
		QPSK	1/12	H	19.23	6.21	25.44	0.350	With Dual Display (0°)

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.5.7 LTE Band 7

- Measurement data: Without wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note	
20	2510	QPSK	1/50	V	13.85	5.95	19.80	0.095	-	
		16QAM	1/50	V	12.90	5.95	18.85	0.077	-	
		64QAM	1/50	V	12.04	5.95	17.99	0.063	-	
	2535	QPSK	1/50	V	14.93	5.89	20.82	0.121	-	
		16QAM	1/50	V	14.05	5.89	19.94	0.099	-	
		64QAM	1/50	V	13.14	5.89	19.03	0.080	-	
	2560	QPSK	1/50	V	15.79	5.86	21.65	0.146	-	
		16QAM	1/50	V	14.67	5.86	20.53	0.113	-	
		64QAM	1/50	V	13.65	5.86	19.51	0.089	-	
		QPSK	1/50	V	16.09	5.86	21.95	0.157	With Dual Display (360°)	
	15	2507.5	QPSK	1/36	V	13.91	5.96	19.87	0.097	-
			16QAM	1/36	V	12.96	5.96	18.92	0.078	-
64QAM			1/36	V	11.98	5.96	17.94	0.062	-	
2535		QPSK	1/36	V	15.13	5.89	21.02	0.126	-	
		16QAM	1/36	V	14.16	5.89	20.05	0.101	-	
		64QAM	1/36	V	13.23	5.89	19.12	0.082	-	
2562.5		QPSK	1/36	V	15.58	5.87	21.45	0.140	-	
		16QAM	1/36	V	14.59	5.87	20.46	0.111	-	
		64QAM	1/36	V	13.51	5.87	19.38	0.087	-	
10	2505	QPSK	1/25	V	14.15	5.97	20.12	0.103	-	
		16QAM	1/25	V	13.22	5.97	19.19	0.083	-	
		64QAM	1/25	V	12.29	5.97	18.26	0.067	-	
	2535	QPSK	1/25	V	15.48	5.89	21.37	0.137	-	
		16QAM	1/25	V	14.63	5.89	20.52	0.113	-	
		64QAM	1/25	V	13.76	5.89	19.65	0.092	-	
	2565	QPSK	1/25	V	15.19	5.87	21.06	0.128	-	
		16QAM	1/25	V	14.14	5.87	20.01	0.100	-	
		64QAM	1/25	V	13.09	5.87	18.96	0.079	-	
5	2502.5	QPSK	1/12	V	13.87	5.97	19.84	0.096	-	
		16QAM	1/12	V	12.83	5.97	18.80	0.076	-	
		64QAM	1/12	V	11.81	5.97	17.78	0.060	-	
	2535	QPSK	1/12	V	15.24	5.89	21.13	0.130	-	
		16QAM	1/12	V	14.13	5.89	20.02	0.100	-	
		64QAM	1/12	V	13.11	5.89	19.00	0.079	-	
	2567.5	QPSK	1/12	V	15.09	5.88	20.97	0.125	-	
		16QAM	1/12	V	14.03	5.88	19.91	0.098	-	
		64QAM	1/12	V	12.98	5.88	18.86	0.077	-	

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Note
20	2560	QPSK	1/50	H	15.11	5.86	20.97	0.125	-
		16QAM	1/50	H	14.00	5.86	19.86	0.097	-
		64QAM	1/50	H	13.03	5.86	18.89	0.077	-
		QPSK	1/50	H	15.00	5.86	20.86	0.122	With Dual Display (0°)
15	2562.5	QPSK	1/36	H	14.83	5.87	20.70	0.117	-
		16QAM	1/36	H	13.91	5.87	19.78	0.095	-
		64QAM	1/36	H	12.84	5.87	18.71	0.074	-
10	2535	QPSK	1/25	H	14.35	5.89	20.24	0.106	-
		16QAM	1/25	H	13.28	5.89	19.17	0.083	-
		64QAM	1/25	H	12.44	5.89	18.33	0.068	-
5	2535	QPSK	1/12	H	14.21	5.89	20.10	0.102	-
		16QAM	1/12	H	13.26	5.89	19.15	0.082	-
		64QAM	1/12	H	12.13	5.89	18.02	0.063	-

Note1: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note2: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.6 UNDESIRABLE EMISSIONS (Radiated)

7.6.1 LTE Band 12, 17

- Measurement data: Without wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
10	704	1/0	QPSK	1398.83	V	-58.69	2.69	-56.00	71.60	28.60	-
			16QAM	1396.60	V	-58.95	2.68	-56.27	71.19	27.92	-
			64QAM	1397.51	V	-58.88	2.68	-56.20	71.12	25.98	-
	711	1/25	QPSK	1421.23	V	-59.53	2.91	-56.62	72.19	28.57	-
			16QAM	1423.07	V	-58.89	2.93	-55.96	70.66	27.70	-
			64QAM	1421.21	V	-58.82	2.91	-55.91	70.61	26.56	-
3	700.5	1/0	QPSK	1394.54	V	-58.43	2.67	-55.76	72.91	30.15	With Dual Display (180°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
3	700.5	1/0	QPSK	1395.79	V	-58.61	2.67	-55.94	73.09	30.15	-
			QPSK	1396.13	V	-58.38	2.67	-55.71	72.86		With Dual Display (180°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.6.2 LTE Band 5

- Measurement data: Without wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
10	829	1/49	QPSK	1667.92	V	-56.98	3.88	-53.10	71.15	31.05	-
			16QAM	1667.52	V	-56.91	3.88	-53.03	70.08	30.05	-
			64QAM	1666.58	V	-56.79	3.87	-52.92	69.97	28.76	-
	836.5	1/25	QPSK	1672.21	V	-56.94	3.89	-53.05	71.20	31.15	-
			16QAM	1673.41	V	-57.35	3.89	-53.46	70.60	30.14	-
			64QAM	1672.41	V	-56.85	3.89	-52.96	70.10	28.62	-
	844	1/0	QPSK	1676.91	V	-57.00	3.91	-53.09	71.78	31.69	-
			16QAM	1679.30	V	-56.86	3.91	-52.95	70.81	30.86	-
			64QAM	1678.45	V	-57.17	3.91	-53.26	71.12	29.23	-
5	846.5	1/12	QPSK	1693.77	V	-56.65	3.96	-52.69	68.31	28.62	With Dual Display (180°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
5	846.5	1/12	QPSK	1692.58	V	-56.55	3.96	-52.59	68.21	28.62	-
				1693.86	V	-56.20	3.96	-52.24	67.86		With Dual Display (180°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.6.3 LTE Band 4

- Measurement data: Without wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
20	1720	1/50	QPSK	3439.83	H	-55.45	8.05	-47.40	68.33	33.93	-
				5159.94	V	-52.85	10.28	-42.57	63.50		-
			16QAM	3441.44	H	-55.71	8.06	-47.65	67.51	32.86	-
				5160.33	V	-53.12	10.28	-42.84	62.70		-
			64QAM	3439.22	H	-55.55	8.05	-47.50	67.36	31.94	-
				5160.23	V	-53.02	10.28	-42.74	62.60		-
	1732.5	1/50	QPSK	3465.06	H	-55.20	8.12	-47.08	67.74	33.66	-
				5196.01	V	-52.54	10.33	-42.21	62.87		-
			16QAM	3464.54	H	-55.50	8.11	-47.39	67.08	32.69	-
				5196.21	V	-52.36	10.33	-42.03	61.72		-
			64QAM	3463.57	H	-54.97	8.11	-46.86	66.55	31.61	-
				5198.79	V	-52.74	10.34	-42.40	62.09		-
	1745	1/50	QPSK	3489.14	H	-54.47	8.17	-46.30	67.82	34.52	-
				5233.99	V	-49.41	10.33	-39.08	60.60		-
			16QAM	3488.89	H	-54.49	8.17	-46.32	66.89	33.57	-
				5235.97	V	-49.87	10.33	-39.54	60.11		-
64QAM			3488.98	H	-54.53	8.17	-46.36	66.93	32.50	-	
			5234.33	V	-50.10	10.33	-39.77	60.34		-	
5	1752.5	1/12	QPSK	5257.70	V	-51.97	10.32	-41.65	61.42	32.77	With Dual Display (360°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
5	1752.5	1/12	QPSK	5256.48	H	-51.47	10.32	-41.15	60.92	32.77	-
				5258.29	H	-52.09	10.32	-41.77	61.54		With Dual Display (180°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.6.4 LTE Band 2

- Measurement data: Without wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
20	1860	1/50	QPSK	3718.66	H	-49.95	8.39	-41.56	62.40	33.84	-
				5578.96	H	-45.31	10.51	-34.80	55.64		-
			16QAM	3720.51	H	-49.88	8.39	-41.49	61.38	32.89	-
				5580.56	H	-45.32	10.51	-34.81	54.70		-
			64QAM	3721.23	H	-49.75	8.39	-41.36	61.25	31.96	-
				5580.05	H	-45.42	10.51	-34.91	54.80		-
	1880	1/50	QPSK	3760.47	H	-51.48	8.36	-43.12	63.80	33.68	-
				5638.54	H	-45.76	10.64	-35.12	55.80		-
			16QAM	3759.72	H	-51.51	8.37	-43.14	62.96	32.82	-
				5641.49	H	-45.68	10.65	-35.03	54.85		-
			64QAM	3758.84	H	-51.03	8.37	-42.66	62.48	31.88	-
				5639.23	H	-45.14	10.64	-34.50	54.32		-
	1900	1/50	QPSK	3800.05	H	-53.63	8.22	-45.41	65.98	33.57	-
				5700.23	H	-46.94	10.74	-36.20	56.77		-
			16QAM	3799.45	H	-53.62	8.22	-45.40	65.03	32.63	-
				5700.82	H	-46.79	10.74	-36.05	55.68		-
64QAM			3801.28	H	-53.40	8.22	-45.18	64.81	31.74	-	
			5701.13	H	-47.14	10.74	-36.40	56.03		-	
10	1880	1/25	QPSK	5640.35	H	-46.59	10.64	-35.95	56.74	33.79	With Dual Display (360°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
10	1880	1/25	QPSK	5638.53	H	-47.02	10.64	-36.38	57.17	33.79	-
				5639.95	H	-46.85	10.64	-36.21	57.00		With Dual Display (180°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.6.5 LTE Band 41

- Measurement data: Without wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
20	2506	1/50	QPSK	5014.21	H	-52.92	10.03	-42.89	68.03	50.14	-
			16QAM	5010.56	H	-53.52	10.02	-43.50	67.69	49.19	-
			64QAM	5010.75	H	-53.42	10.02	-43.40	67.59	48.23	-
	2593	1/50	QPSK	5186.27	H	-49.26	10.32	-38.94	64.24	50.30	-
			16QAM	5185.77	H	-50.53	10.32	-40.21	64.43	49.22	-
			64QAM	5186.33	H	-50.74	10.32	-40.42	64.64	48.32	-
	2680	1/50	QPSK	5360.34	H	-47.05	10.29	-36.76	61.78	50.02	-
			16QAM	5360.15	H	-47.43	10.29	-37.14	61.12	48.98	-
			64QAM	5360.30	H	-47.76	10.29	-37.47	61.45	48.05	-
			QPSK	5359.17	H	-52.09	10.29	-41.80	66.82	50.02	With Dual Display (360°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
20	2680	1/50	QPSK	5360.32	H	-52.57	10.29	-42.28	67.30	50.02	-
				5359.68	H	-52.72	10.29	-42.43	67.45		With Dual Display (180°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.6.6 LTE Band 7

- Measurement data: Without wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
20	2510	1/50	QPSK	5019.39	H	-53.41	10.03	-43.38	63.18	44.80	-
			16QAM	5021.27	H	-53.05	10.04	-43.01	61.86	43.85	-
			64QAM	5019.52	H	-52.98	10.04	-42.94	61.79	42.99	-
	2535	1/50	QPSK	5068.99	H	-53.17	10.16	-43.01	63.83	45.82	-
			16QAM	5069.50	H	-52.95	10.16	-42.79	62.73	44.94	-
			64QAM	5071.04	H	-53.06	10.17	-42.89	62.83	44.03	-
	2560	1/50	QPSK	5119.65	H	-52.84	10.27	-42.57	64.22	46.65	-
			16QAM	5120.58	H	-53.28	10.27	-43.01	63.54	45.53	-
			64QAM	5119.07	H	-53.20	10.27	-42.93	63.46	44.51	-
10	2565	1/25	QPSK	5129.44	H	-52.71	10.26	-42.45	61.41	43.96	With Dual Display (360°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 and 360 degrees and the worst case data was reported.

- Measurement data: With wireless charging pad

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)	Note
								(dBm)	(dBc)		
10	2565	1/25	QPSK	5128.51	H	-52.77	10.26	-42.51	61.47	43.96	-
				5129.28	H	-52.67	10.26	-42.41	61.37		With Dual Display (180°)

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4: With Dual Display mode was tested at 0, 90, 180 degrees which are possible to wireless charge and the worst case data was reported.

7.7 FREQUENCY STABILITY

7.7.1 LTE Band 12, 17

OPERATING FREQUENCY : 707.5 MHz
 REFERENCE VOLTAGE : 3.87 VDC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.87	+20(Ref)	707,500,006	6	0.0085	0.000000848
100%		-30	707,500,008	8	0.0113	0.000001131
100%		-20	707,500,010	10	0.0141	0.000001413
100%		-10	707,499,989	-11	-0.0155	-0.000001555
100%		0	707,499,992	-8	-0.0113	-0.000001131
100%		+10	707,500,009	9	0.0127	0.000001272
100%		+20	707,500,006	6	0.0085	0.000000848
100%		+30	707,499,993	-7	-0.0099	-0.000000989
100%		+40	707,500,007	7	0.0099	0.000000989
100%		+50	707,499,992	-8	-0.0113	-0.000001131
11450%		4.45	+20	707,500,013	13	0.0184
BATT.ENDPOINT	2.40	+20	707,499,988	-12	-0.0170	-0.000001696

Note 1: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.7.2 LTE Band 5

OPERATING FREQUENCY : 836.5 MHz
 REFERENCE VOLTAGE : 3.87 VDC
 LIMIT : < 2.5ppm

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.87	+20(Ref)	836,500,011	11	0.0132	0.000001315
100%		-30	836,500,013	13	0.0155	0.000001554
100%		-20	836,500,016	16	0.0191	0.000001913
100%		-10	836,499,988	-12	-0.0143	-0.000001435
100%		0	836,499,992	-8	-0.0096	-0.000000956
100%		+10	836,499,994	-6	-0.0072	-0.000000717
100%		+20	836,500,011	11	0.0132	0.000001315
100%		+30	836,500,007	7	0.0084	0.000000837
100%		+40	836,499,992	-8	-0.0096	-0.000000956
100%		+50	836,499,987	-13	-0.0155	-0.000001554
115%		4.45	+20	836,500,010	10	0.0120
BATT.ENDPOINT	2.40	+20	836,499,988	-12	-0.0143	-0.000001435

Note 1: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.7.3 LTE Band 4

OPERATING FREQUENCY : 1732.5 MHz
 REFERENCE VOLTAGE : 3.87 VDC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.87	+20(Ref)	1,732,499,994	-6	-0.0035	-0.000000346
100%		-30	1,732,499,992	-8	-0.0046	-0.000000462
100%		-20	1,732,499,990	-10	-0.0058	-0.000000577
100%		-10	1,732,499,992	-8	-0.0046	-0.000000462
100%		0	1,732,499,991	-9	-0.0052	-0.000000519
100%		+10	1,732,499,987	-13	-0.0075	-0.000000750
100%		+20	1,732,499,994	-6	-0.0035	-0.000000346
100%		+30	1,732,500,014	14	0.0081	0.000000808
100%		+40	1,732,500,016	16	0.0092	0.000000924
100%		+50	1,732,499,988	-12	-0.0069	-0.000000693
115%		4.45	+20	1,732,500,010	10	0.0058
BATT.ENDPOINT	2.40	+20	1,732,500,009	9	0.0052	0.000000519

Note 1: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.7.4 LTE Band 2

OPERATING FREQUENCY : 1880 MHz
 REFERENCE VOLTAGE : 3.87 VDC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.87	+20(Ref)	1,880,000,011	11	0.0059	0.000000585
100%		-30	1,880,000,013	13	0.0069	0.000000691
100%		-20	1,879,999,989	-11	-0.0059	-0.000000585
100%		-10	1,880,000,008	8	0.0043	0.000000426
100%		0	1,880,000,009	9	0.0048	0.000000479
100%		+10	1,879,999,990	-10	-0.0053	-0.000000532
100%		+20	1,880,000,011	11	0.0059	0.000000585
100%		+30	1,879,999,988	-12	-0.0064	-0.000000638
100%		+40	1,879,999,992	-8	-0.0043	-0.000000426
100%		+50	1,879,999,993	-7	-0.0037	-0.000000372
115%		4.45	+20	1,880,000,007	7	0.0037
BATT.ENDPOINT	2.40	+20	1,879,999,992	-8	-0.0043	-0.000000426

Note 1: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.7.5 LTE Band 41

OPERATING FREQUENCY : 2593 MHz
 REFERENCE VOLTAGE : 3.87 VDC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.87	+20(Ref)	2,593,000,009	9	0.0035	0.000000347
100%		-30	2,593,000,008	8	0.0031	0.000000309
100%		-20	2,592,999,988	-12	-0.0046	-0.000000463
100%		-10	2,592,999,986	-14	-0.0054	-0.000000540
100%		0	2,593,000,015	15	0.0058	0.000000578
100%		+10	2,592,999,991	-9	-0.0035	-0.000000347
100%		+20	2,593,000,009	9	0.0035	0.000000347
100%		+30	2,593,000,009	9	0.0035	0.000000347
100%		+40	2,592,999,992	-8	-0.0031	-0.000000309
100%		+50	2,593,000,016	16	0.0062	0.000000617
115%	4.45	+20	2,592,999,987	-13	-0.0050	-0.000000501
BATT.ENDPOINT	2.40	+20	2,593,000,010	10	0.0039	0.000000386

Note 1: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.7.6 LTE Band 7

OPERATING FREQUENCY : 2535 MHz
 REFERENCE VOLTAGE : 3.87 VDC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.87	+20(Ref)	2,535,000,016	16	0.0063	0.000000631
100%		-30	2,534,999,988	-12	-0.0047	-0.000000473
100%		-20	2,534,999,987	-13	-0.0051	-0.000000513
100%		-10	2,534,999,992	-8	-0.0032	-0.000000316
100%		0	2,534,999,990	-10	-0.0039	-0.000000394
100%		+10	2,535,000,010	10	0.0039	0.000000394
100%		+20	2,535,000,016	16	0.0063	0.000000631
100%		+30	2,535,000,007	7	0.0028	0.000000276
100%		+40	2,534,999,994	-6	-0.0024	-0.000000237
100%		+50	2,534,999,985	-15	-0.0059	-0.000000592
115%		4.45	+20	2,534,999,991	-9	-0.0036
BATT.ENDPOINT	2.40	+20	2,534,999,992	-8	-0.0032	-0.000000316


Note 1: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

8. TEST PLOTS


Note: All bandwidths, RB configurations, and modulations were investigated.
The worst case test results are reported.

8.1 OCCUPIED BANDWIDTH


8.1.1 LTE Band 12, 17

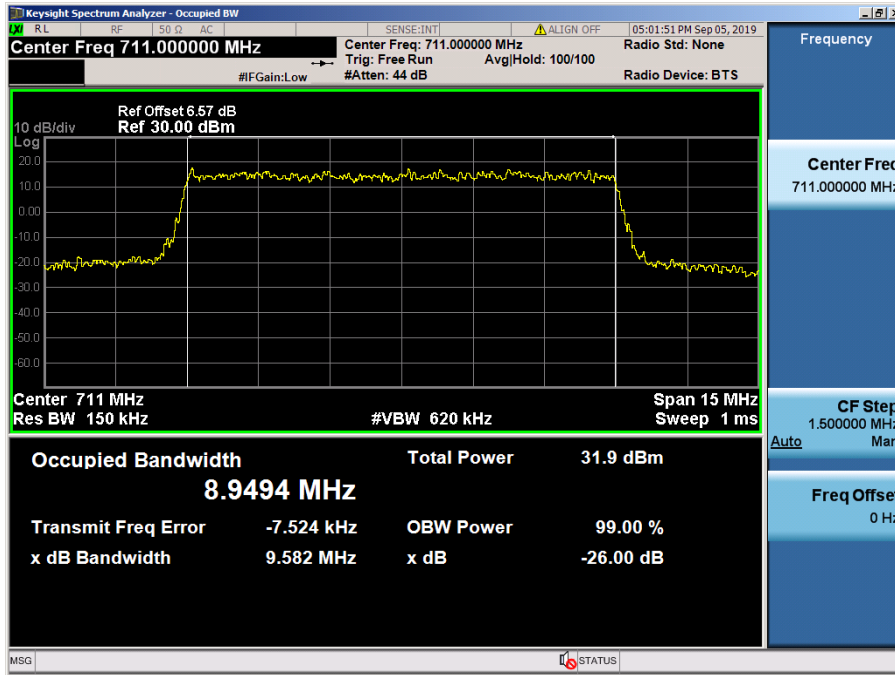


LTE Band 12, 17 / 10 MHz / QPSK - RB Size 50

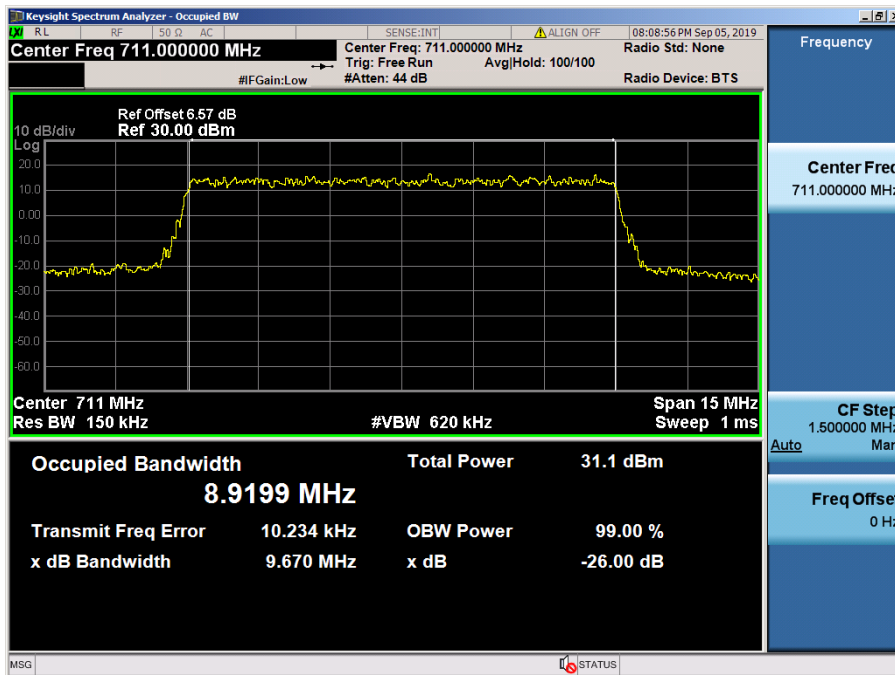


LTE Band 12, 17 / 10 MHz / 16QAM - RB Size 50

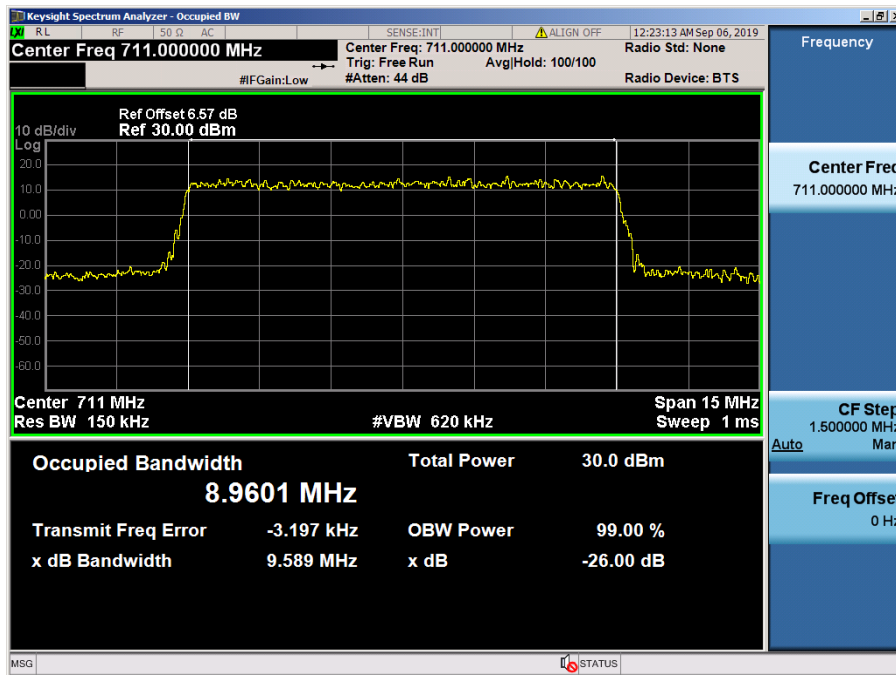

LTE Band 12, 17 / 10 MHz / 64QAM- RB Size 50

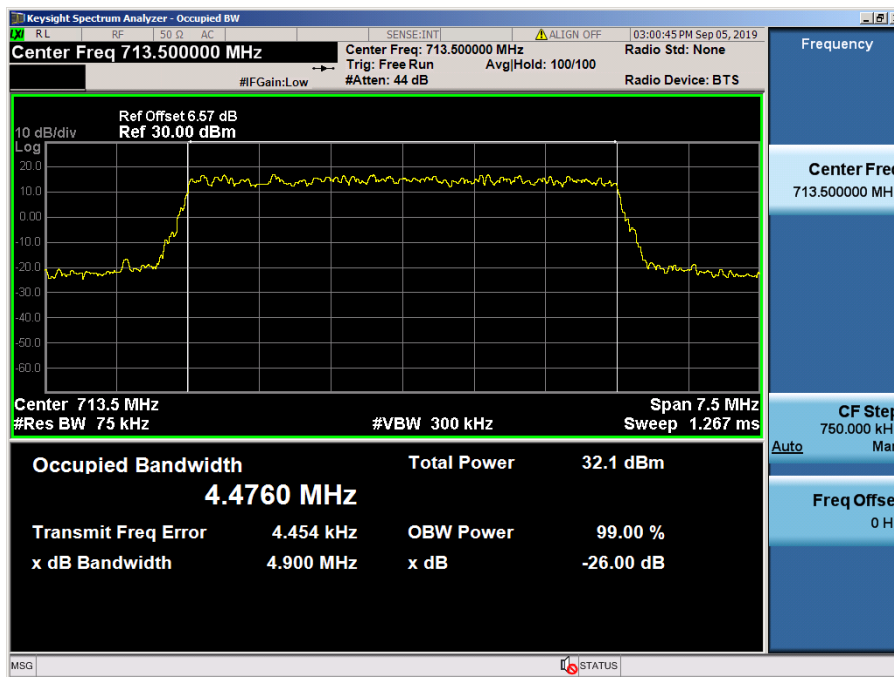

LTE Band 12, 17 / 5 MHz / QPSK - RB Size 25

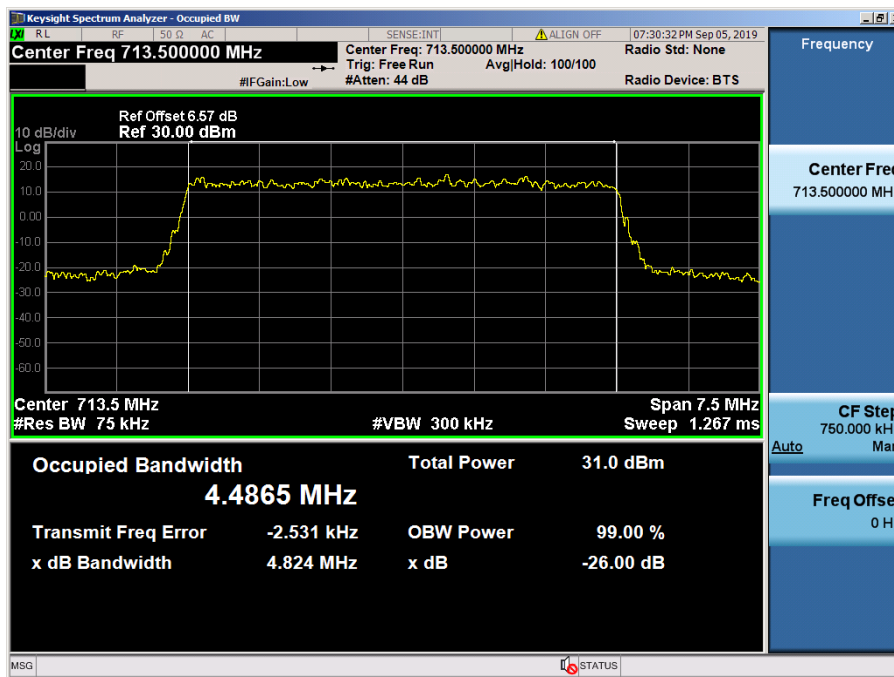


LTE Band 12, 17 / 5 MHz / 16QAM - RB Size 25




LTE Band 12, 17 / 5 MHz / 64QAM - RB Size 25


8.1.2 LTE Band 12

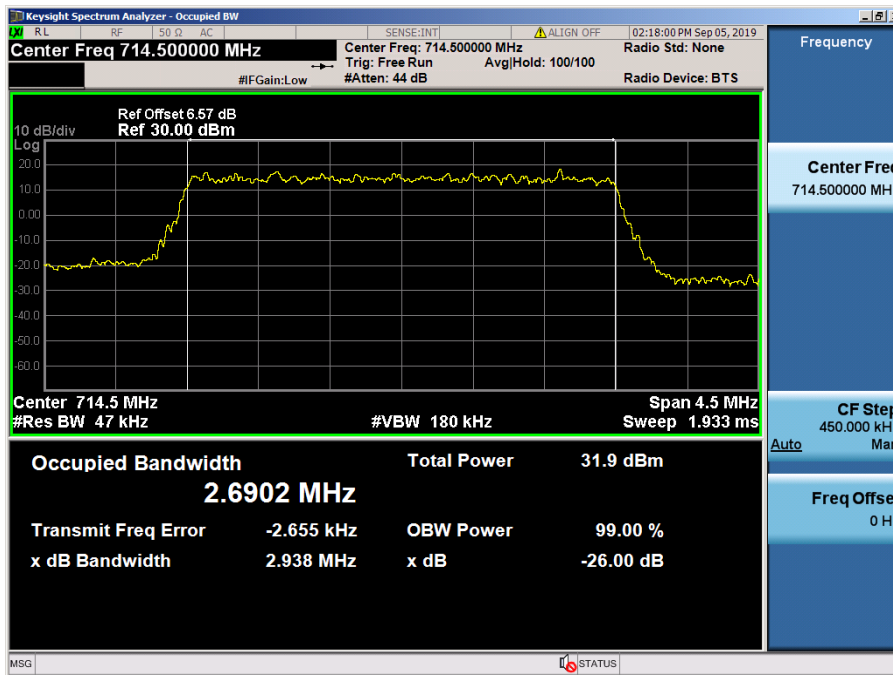


LTE Band 12 / 3 MHz / QPSK - RB Size 15

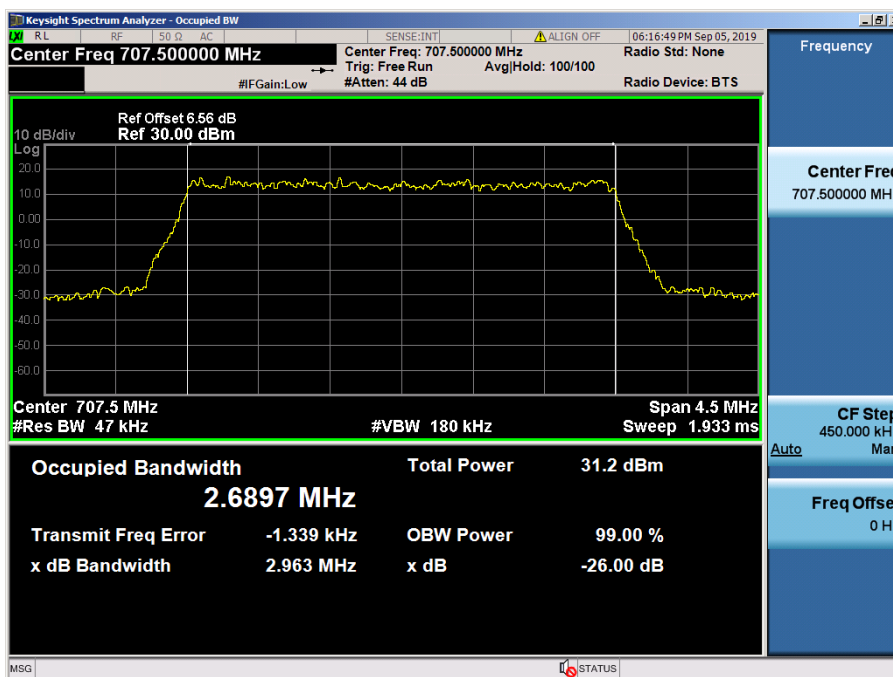


LTE Band 12 / 3 MHz / 16QAM - RB Size 15

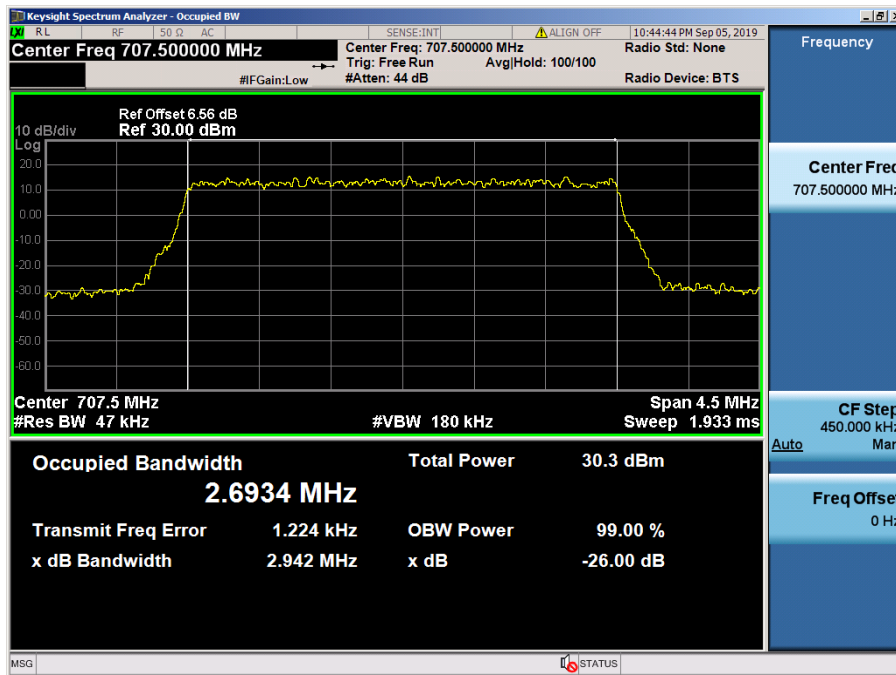


LTE Band 12 / 3 MHz / 64QAM - RB Size 15

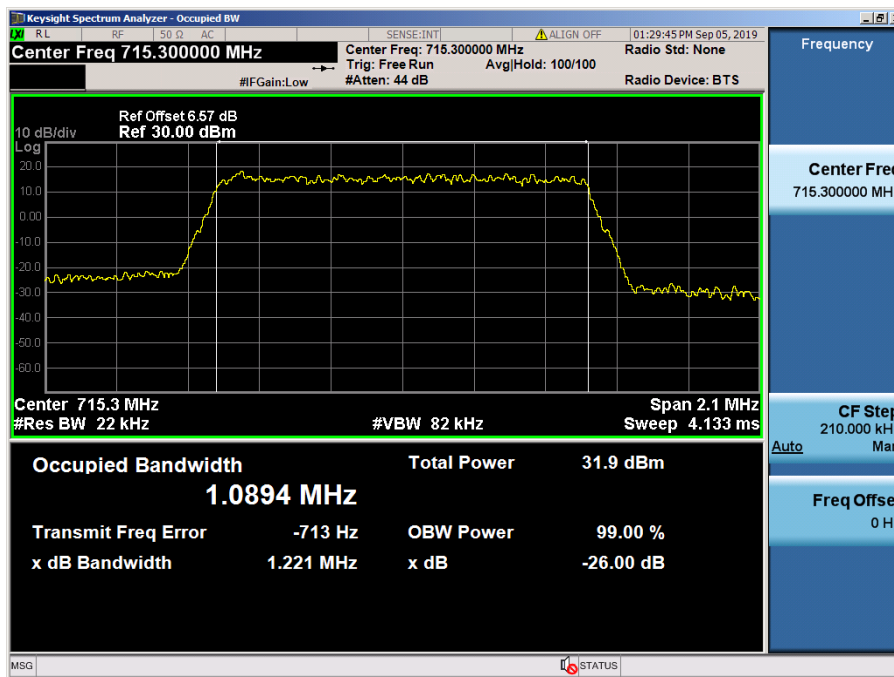

LTE Band 12 / 1.4 MHz / QPSK - RB Size 6

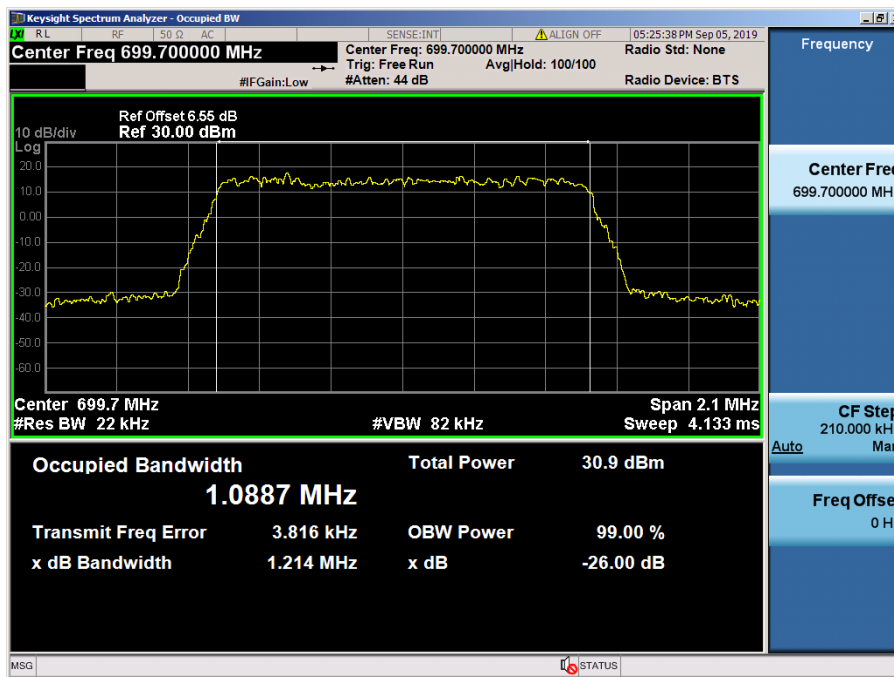


LTE Band 12 / 1.4 MHz / 16QAM - RB Size 6

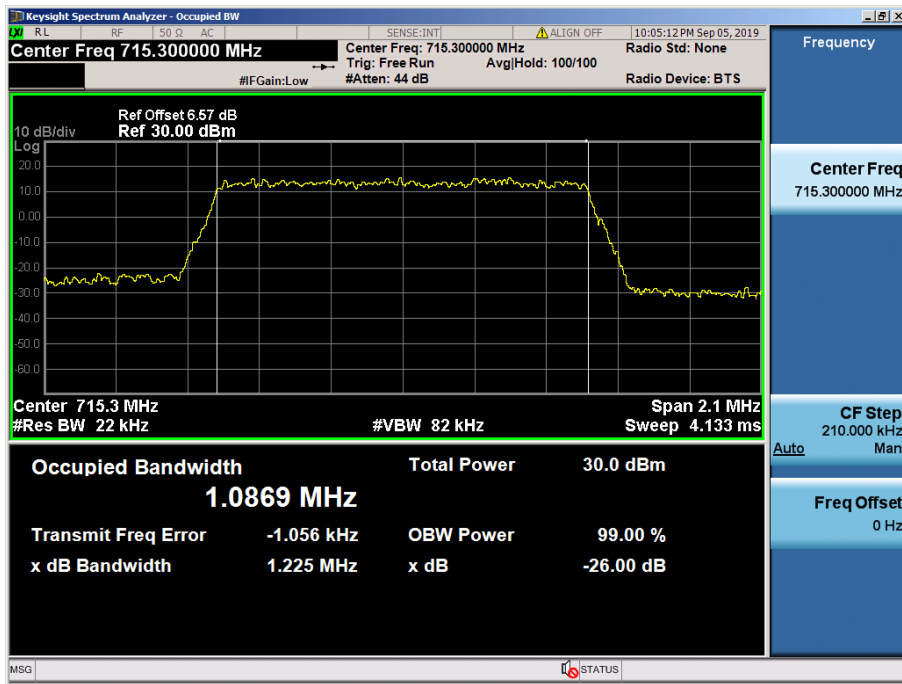


LTE Band 12 / 1.4 MHz / 64QAM - RB Size 6


8.1.3 LTE Band 5

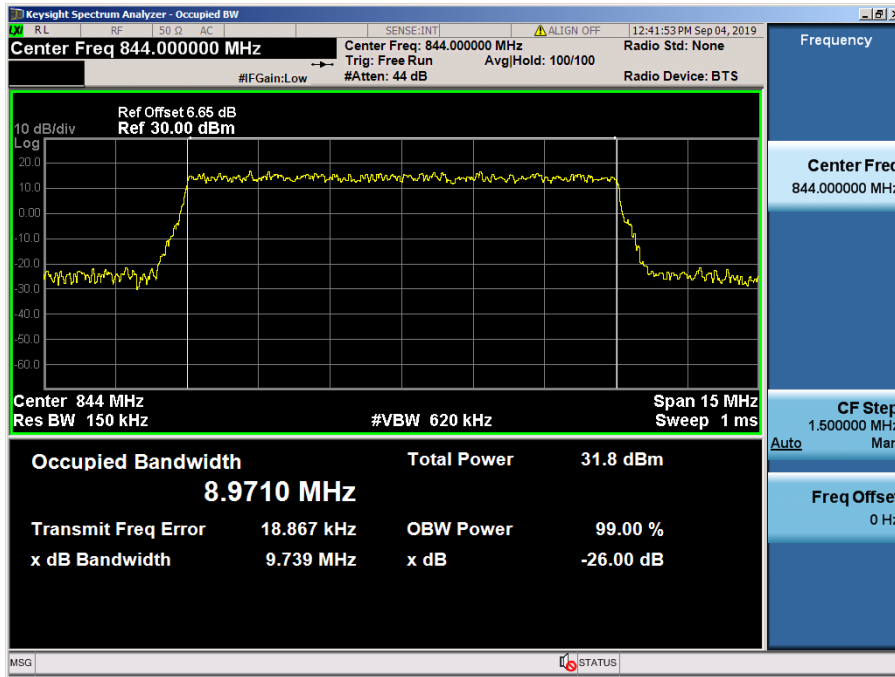


LTE Band 5 / 10 MHz / QPSK - RB Size 50

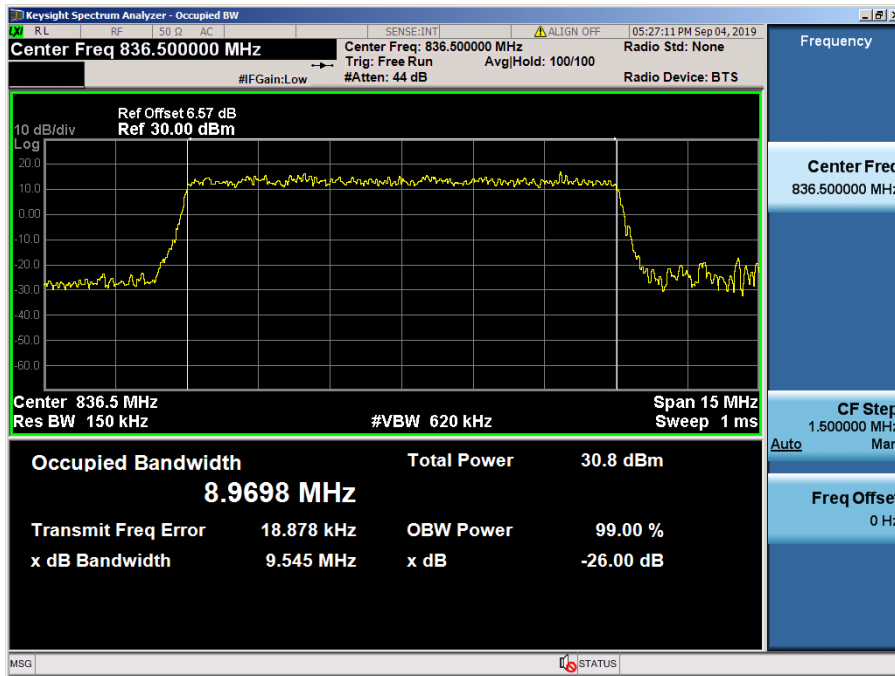


LTE Band 5 / 10 MHz / 16QAM - RB Size 50

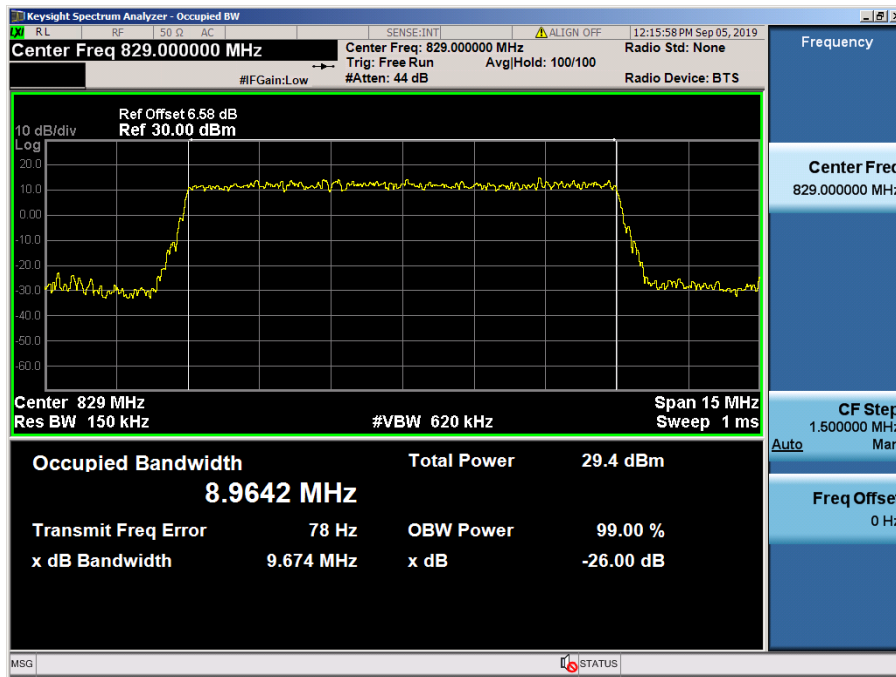


LTE Band 5 / 10 MHz / 64QAM - RB Size 50

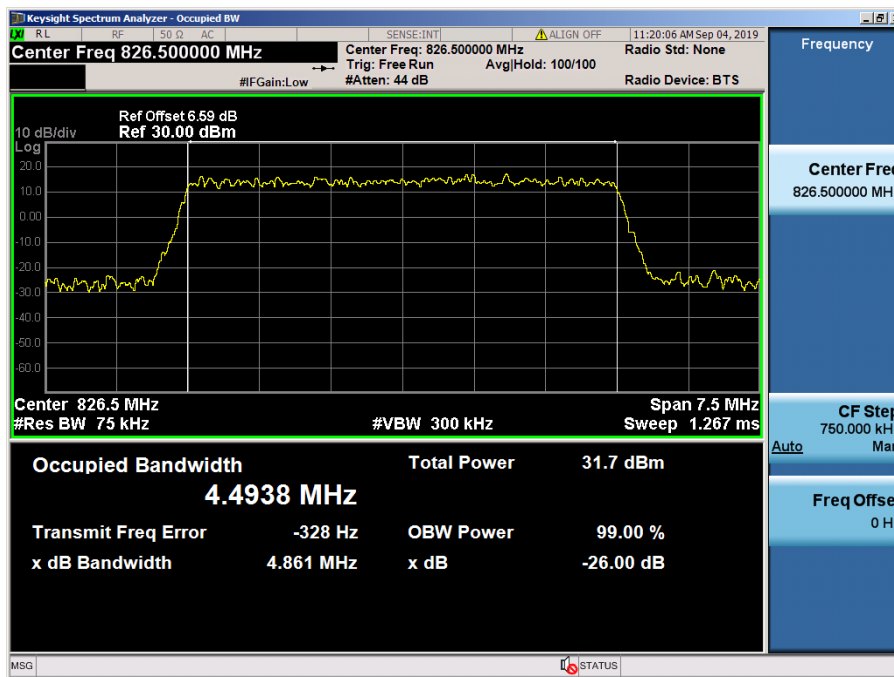


LTE Band 5 / 5 MHz / QPSK - RB Size 25

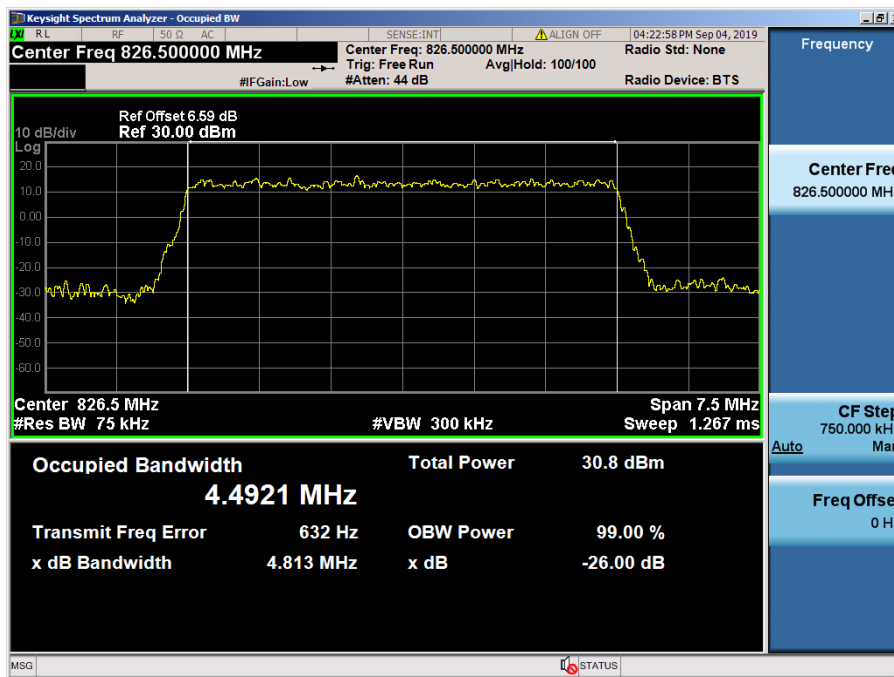


LTE Band 5 / 5 MHz / 16QAM - RB Size 25

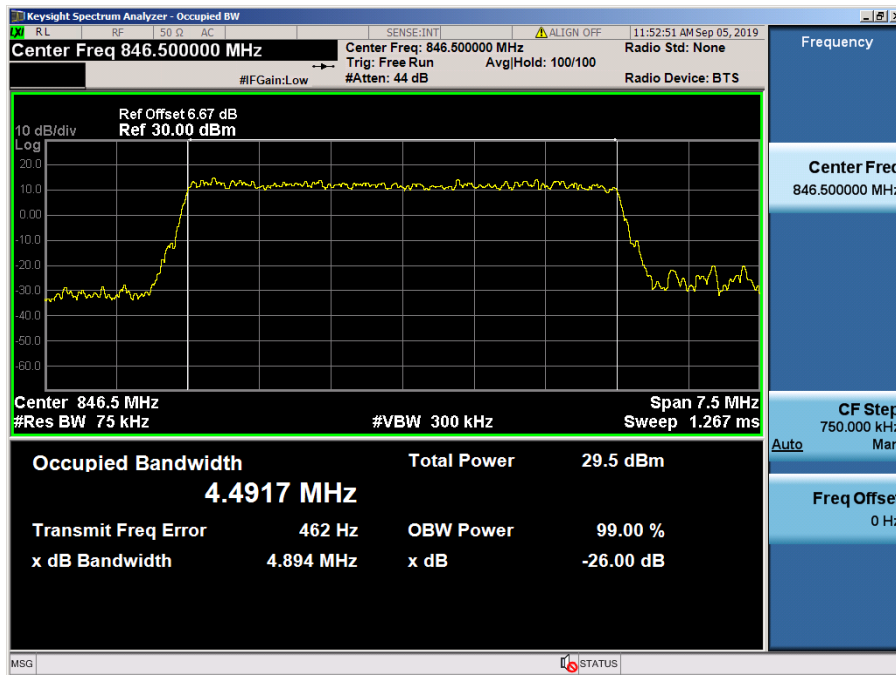


LTE Band 5 / 5 MHz / 64QAM - RB Size 25

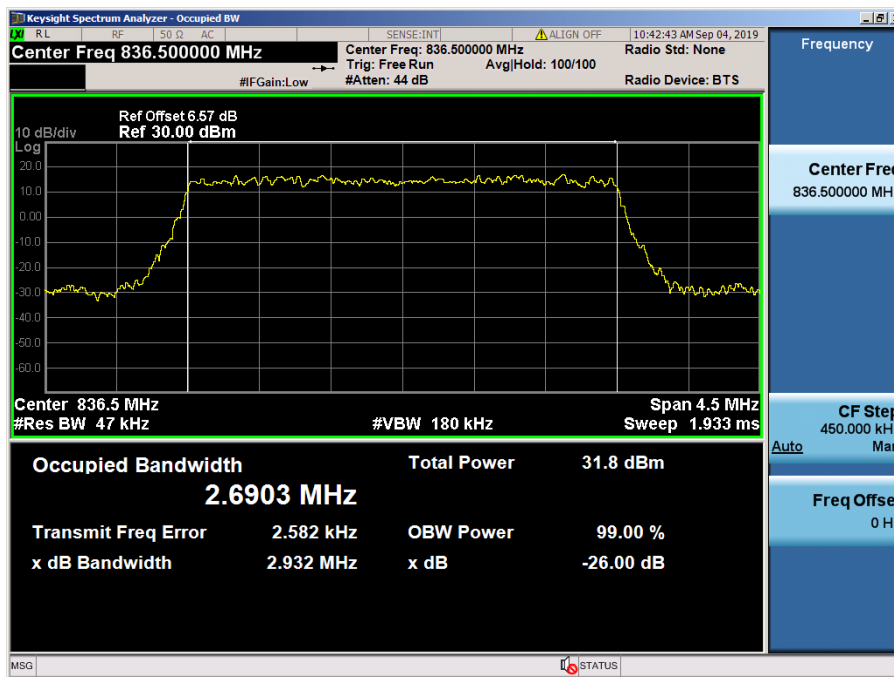


LTE Band 5 / 3 MHz / QPSK - RB Size 15

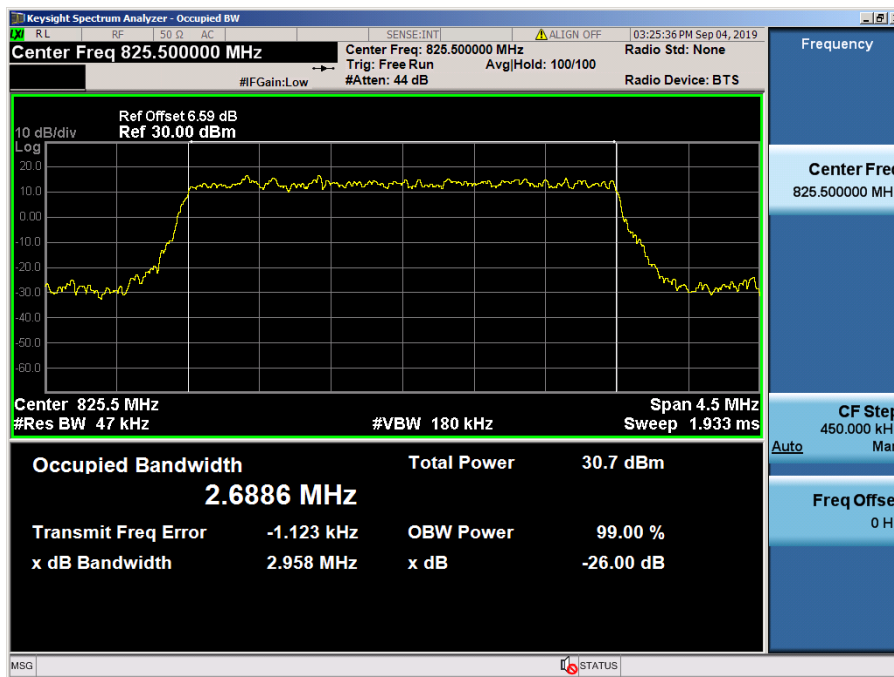


LTE Band 5 / 3 MHz / 16QAM - RB Size 15

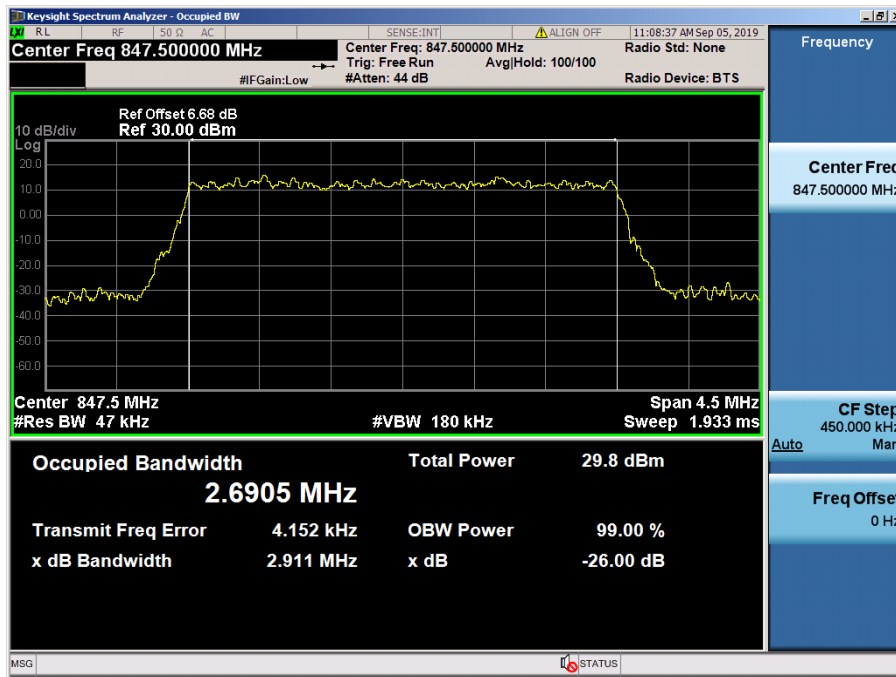


LTE Band 5 / 3 MHz / 64QAM - RB Size 15

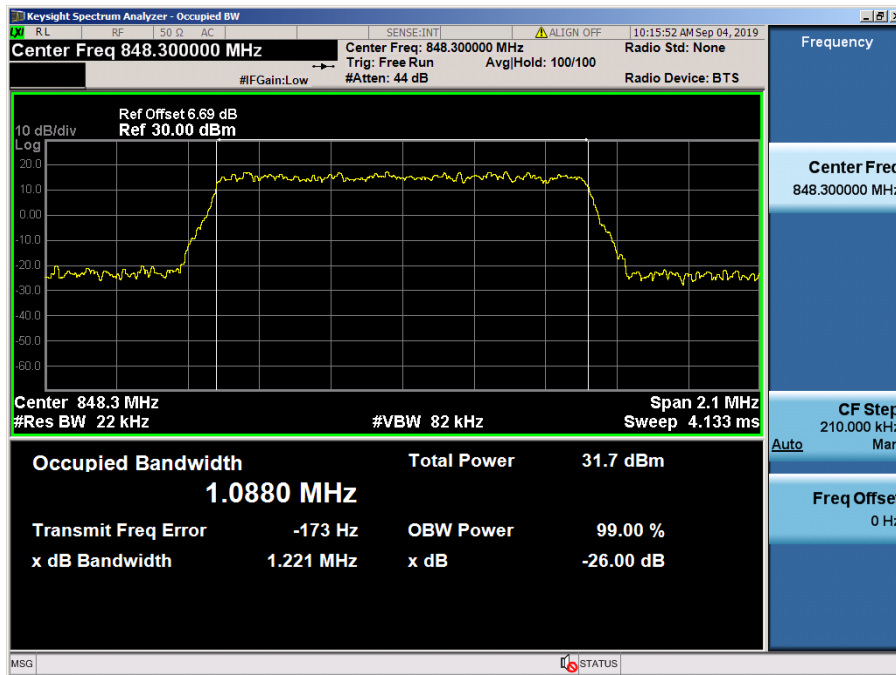

LTE Band 5 / 1.4 MHz / QPSK - RB Size 6

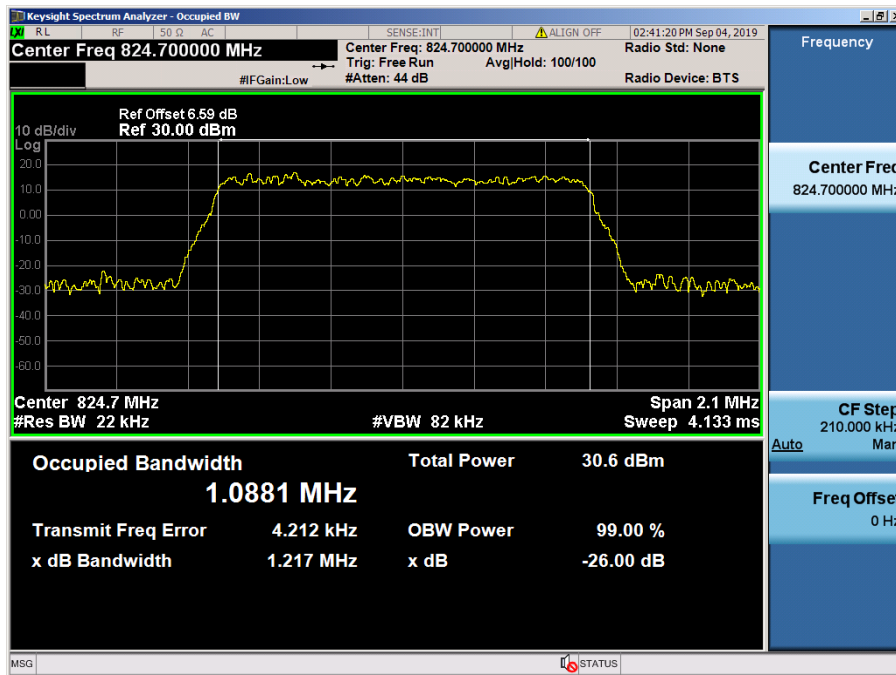


LTE Band 5 / 1.4 MHz / 16QAM - RB Size 6

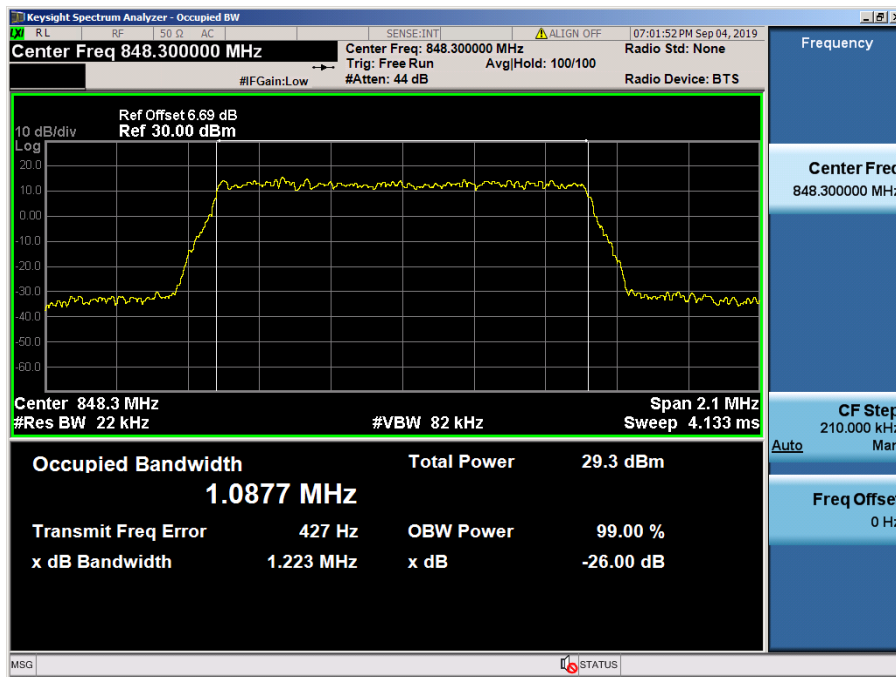


LTE Band 5 / 1.4 MHz / 64QAM - RB Size 6


8.1.4 LTE Band 4

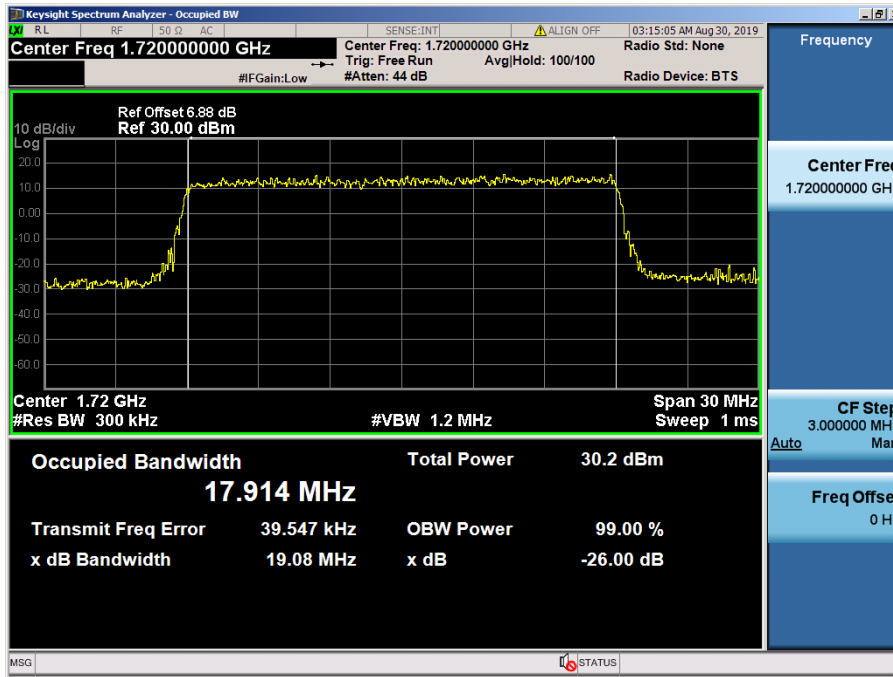


LTE Band 4 / 20 MHz / QPSK - RB Size 100

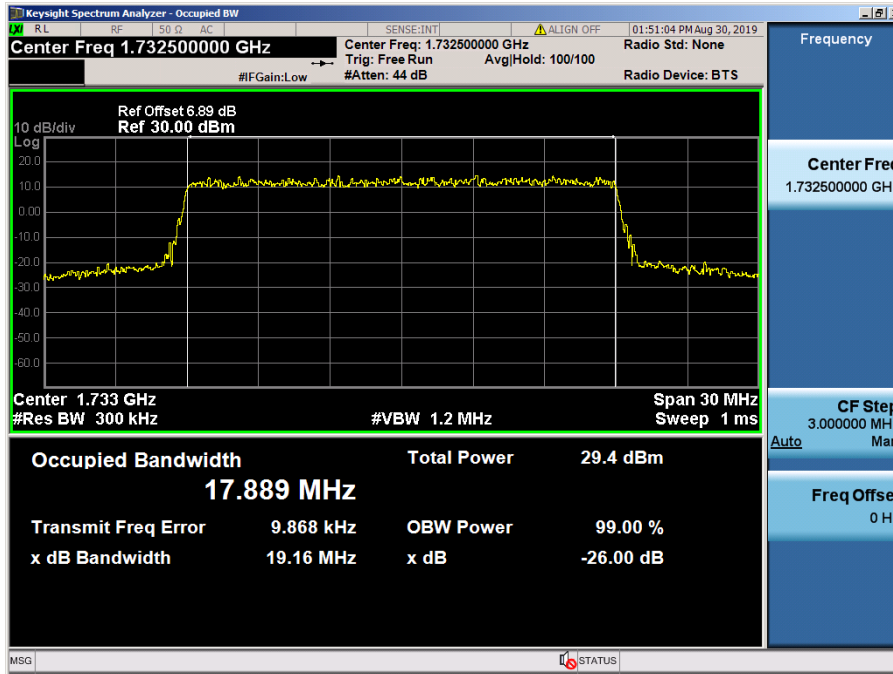


LTE Band 4 / 20 MHz / 16QAM - RB Size 100

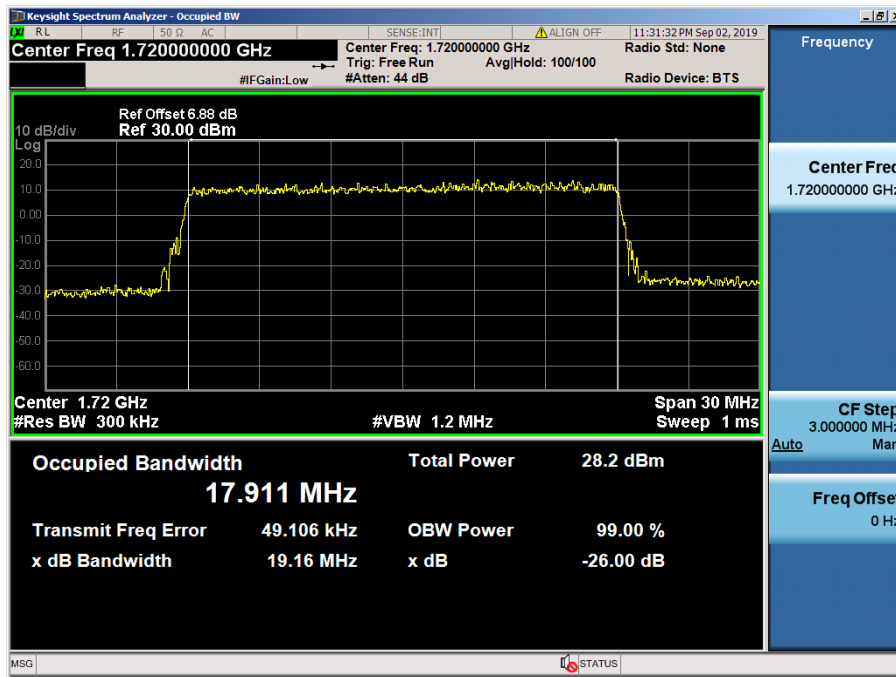


LTE Band 4 / 20 MHz / 64QAM - RB Size 100

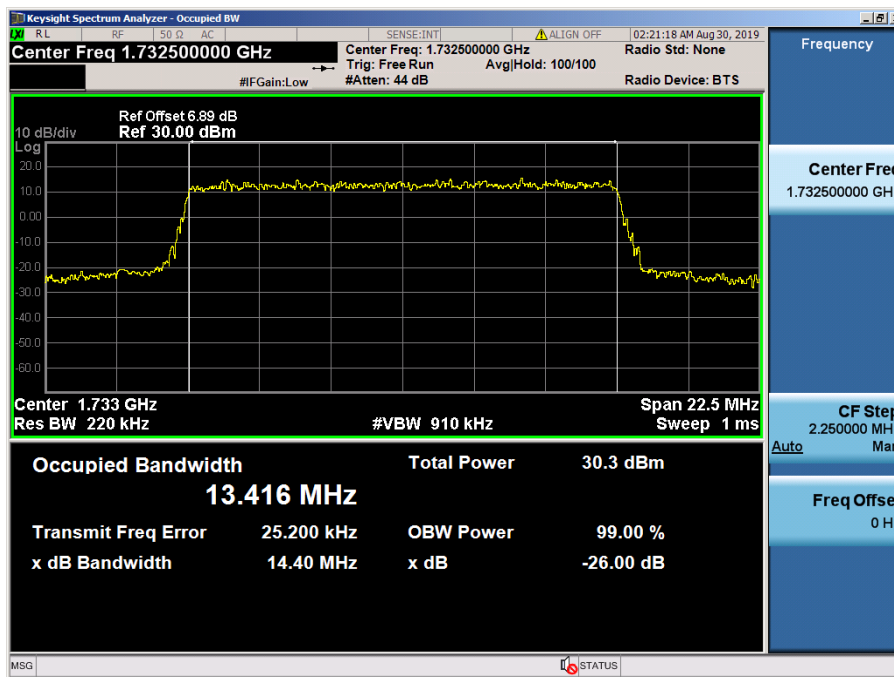


LTE Band 4 / 15 MHz / QPSK - RB Size 75

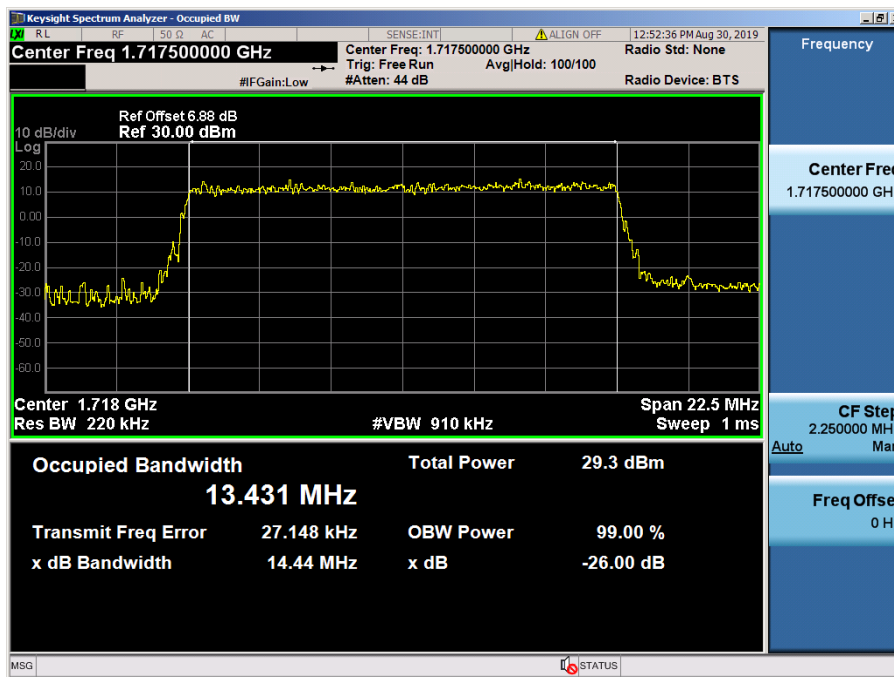


LTE Band 4 / 15 MHz / 16QAM - RB Size 75

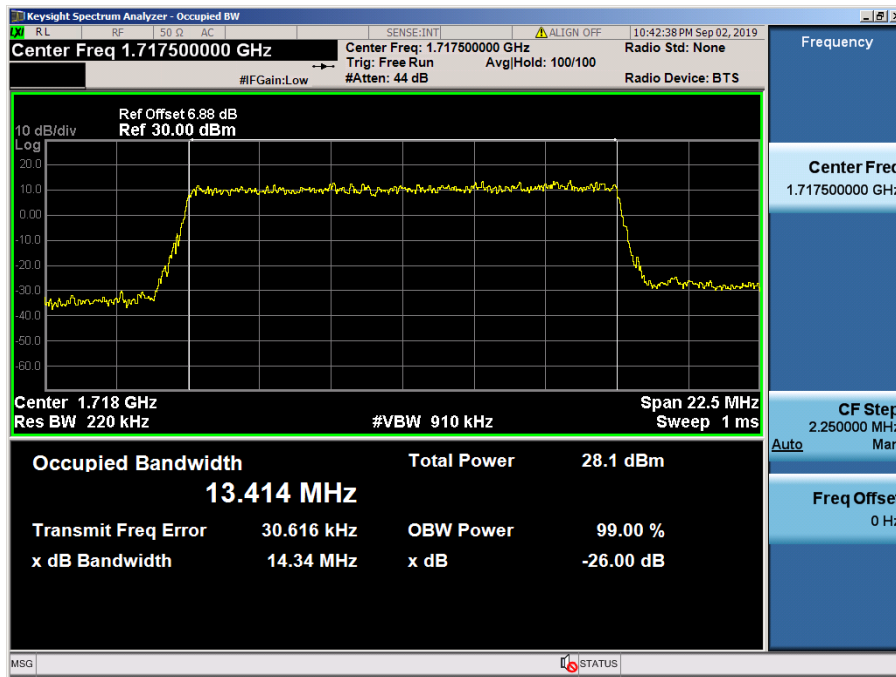


LTE Band 4 / 15 MHz / 64QAM - RB Size 75

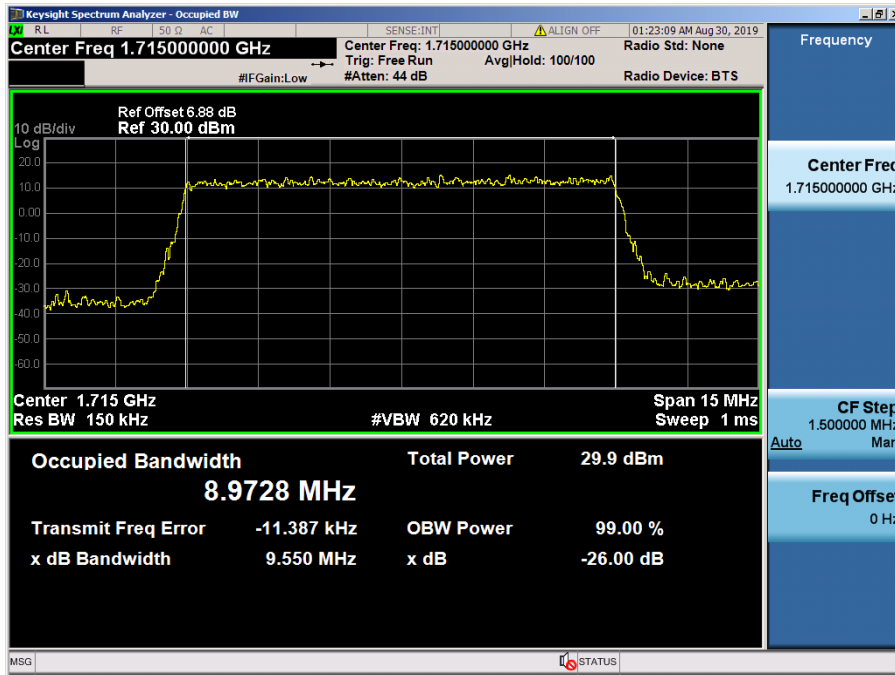


LTE Band 4 / 10 MHz / QPSK - RB Size 50

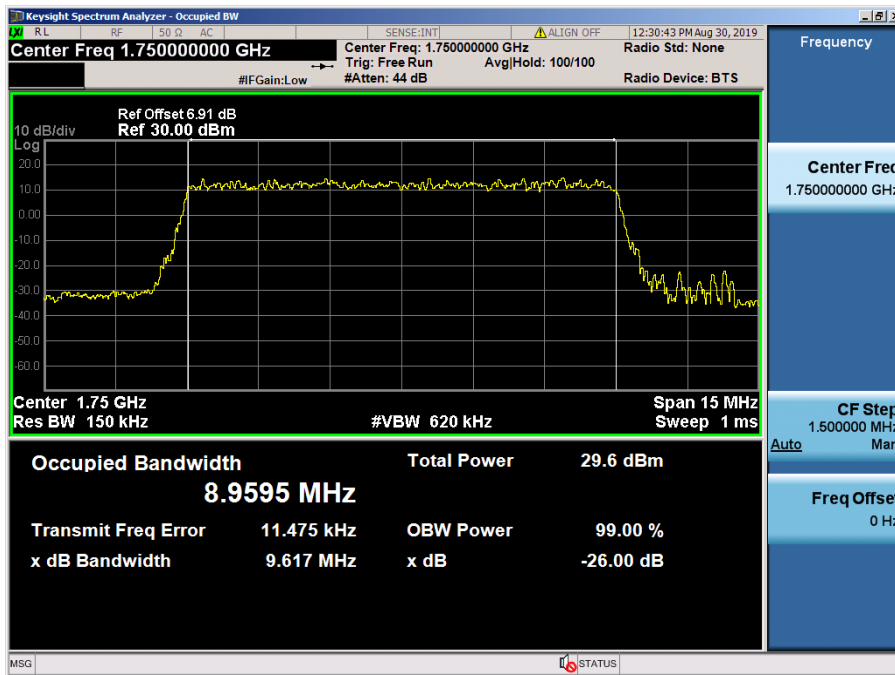


LTE Band 4 / 10 MHz / 16QAM - RB Size 50

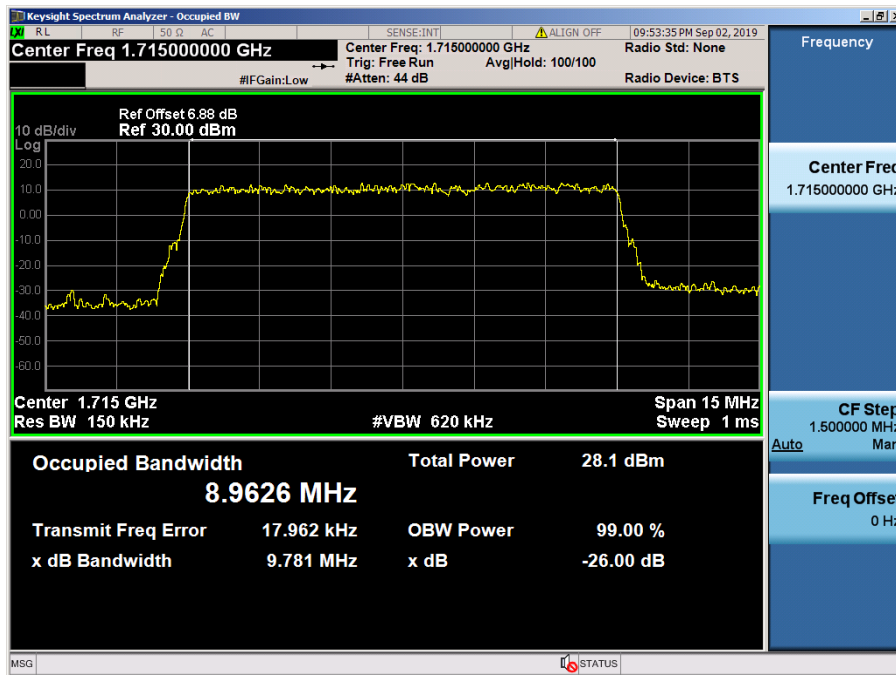


LTE Band 4 / 10 MHz / 64QAM - RB Size 50

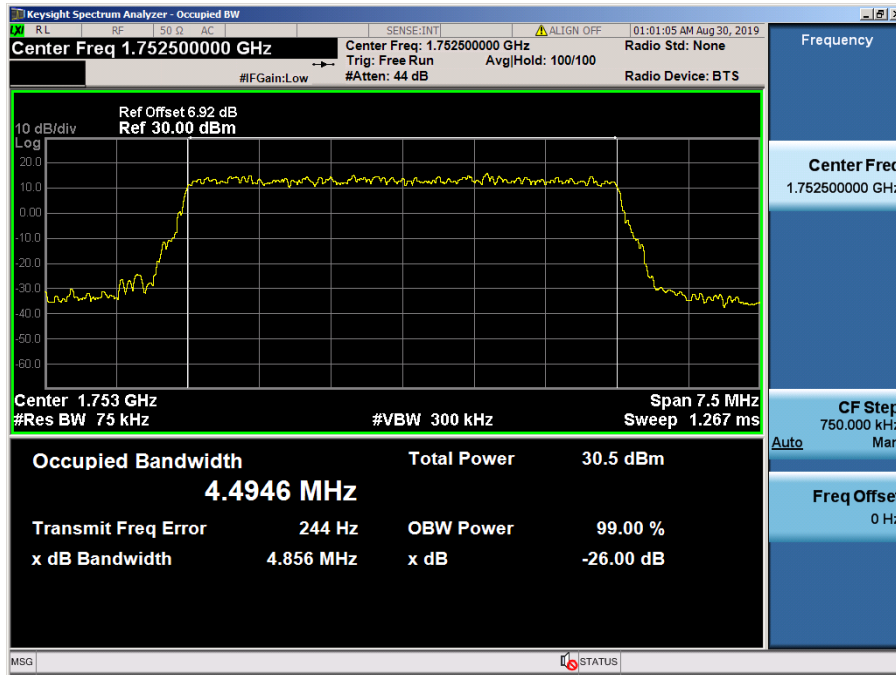


LTE Band 4 / 5 MHz / QPSK - RB Size 25

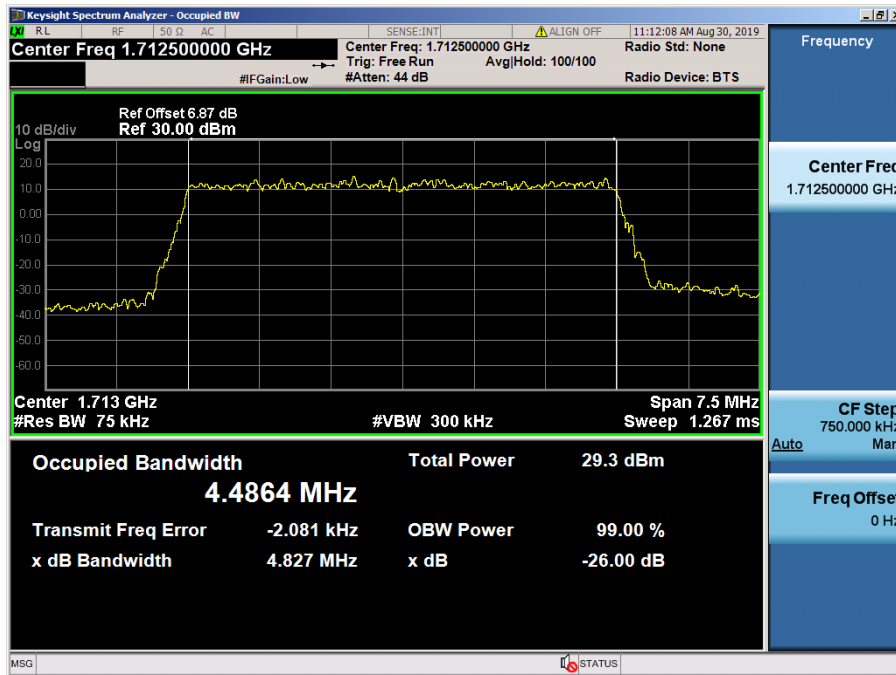


LTE Band 4 / 5 MHz / 16QAM - RB Size 25

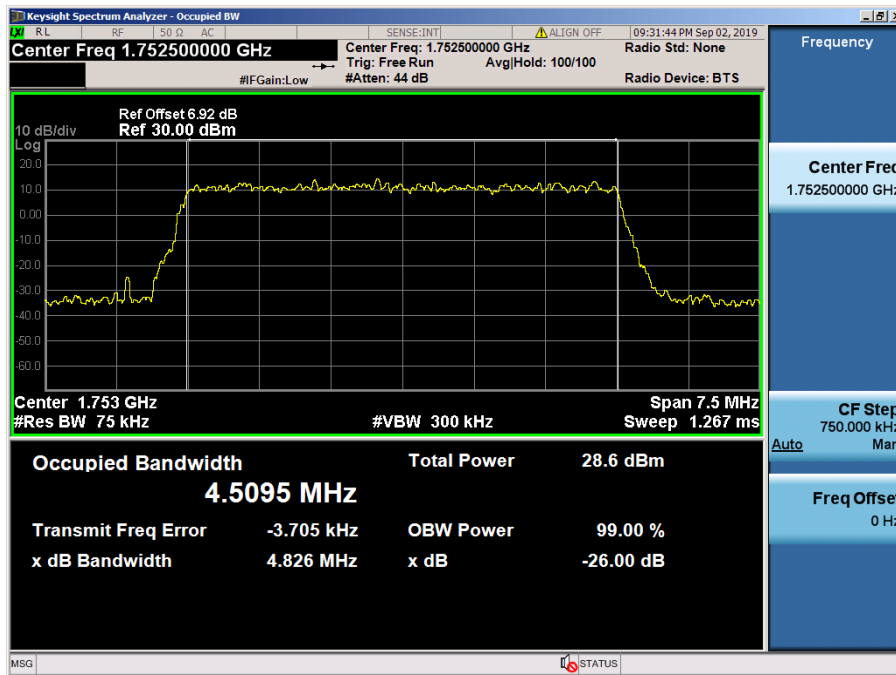


LTE Band 4 / 5 MHz / 64QAM - RB Size 25

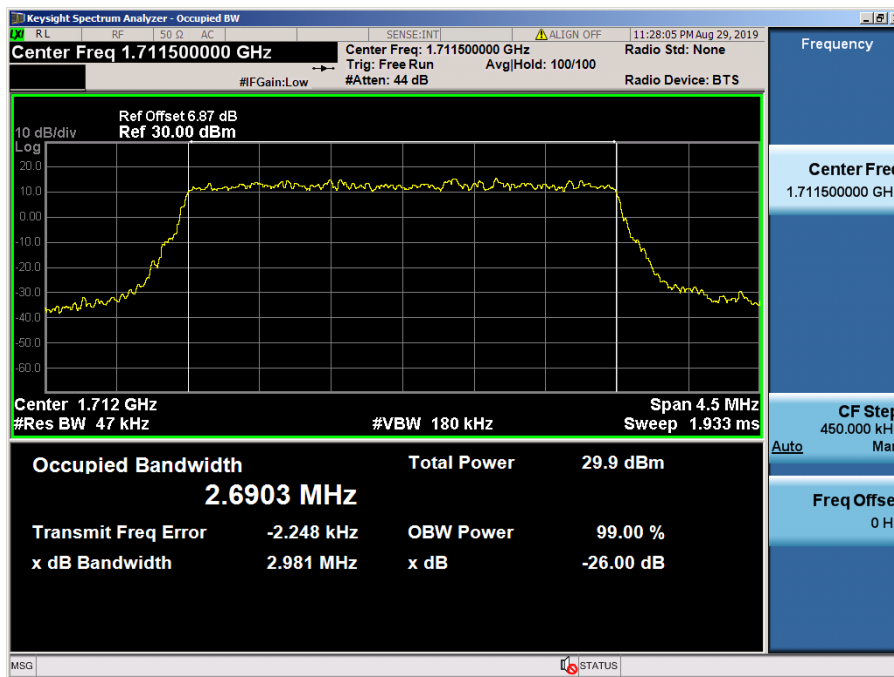


LTE Band 4 / 3 MHz / QPSK - RB Size 15

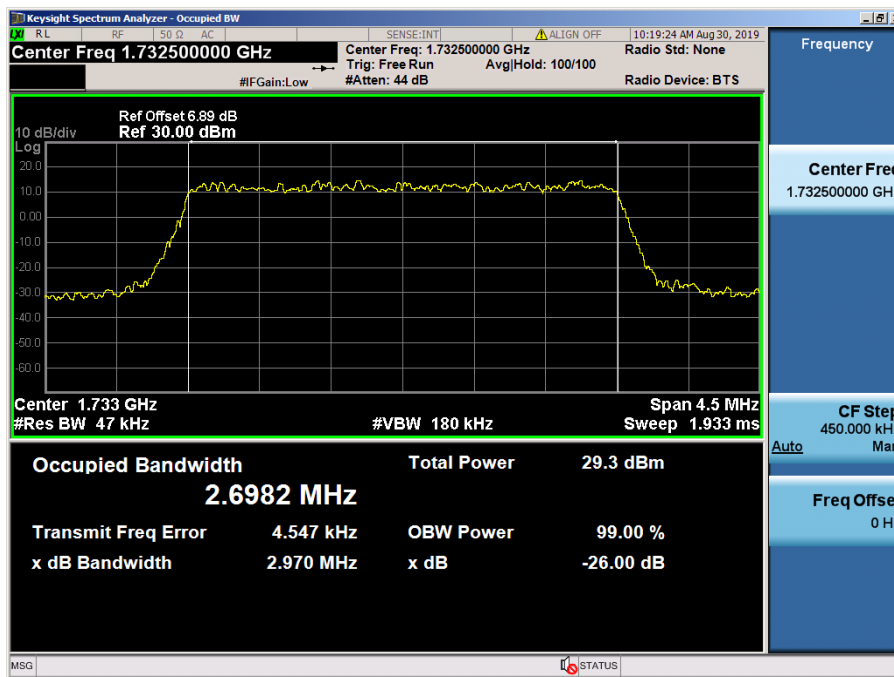


LTE Band 4 / 3 MHz / 16QAM - RB Size 15

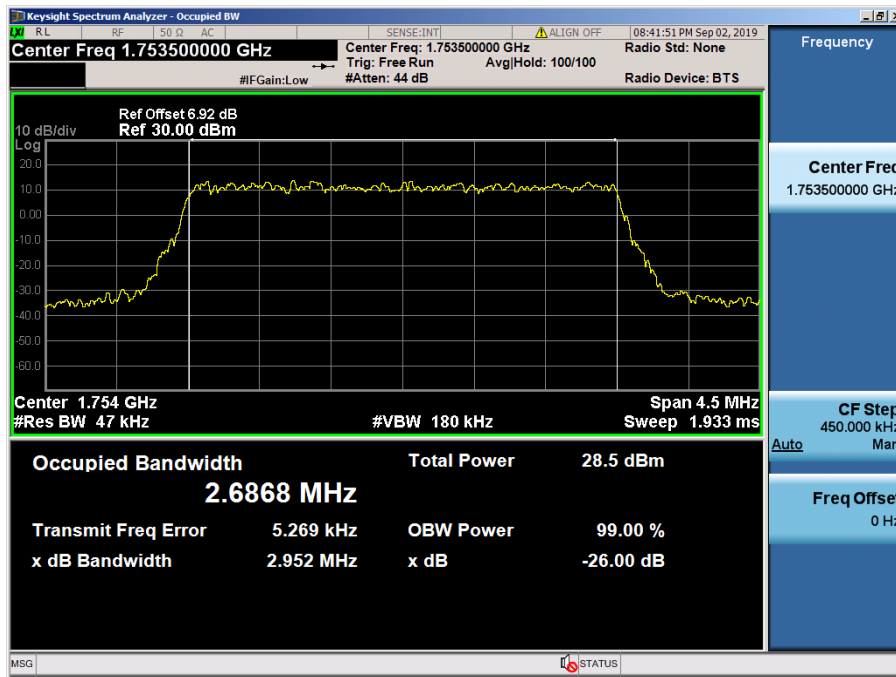


LTE Band 4 / 3 MHz / 64QAM - RB Size 15

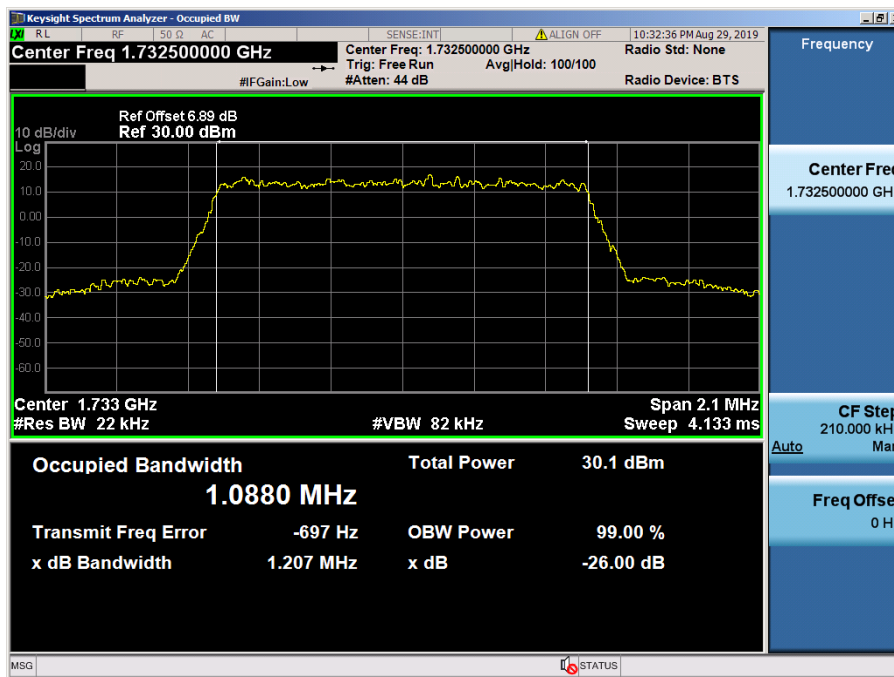

LTE Band 4 / 1.4 MHz / QPSK - RB Size 6

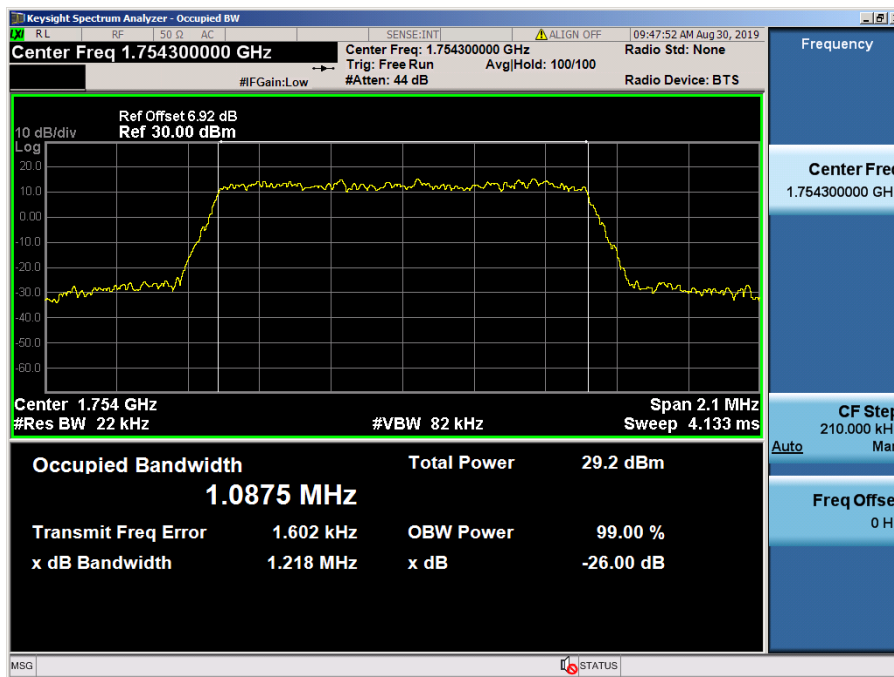


LTE Band 4 / 1.4 MHz / 16QAM - RB Size 6

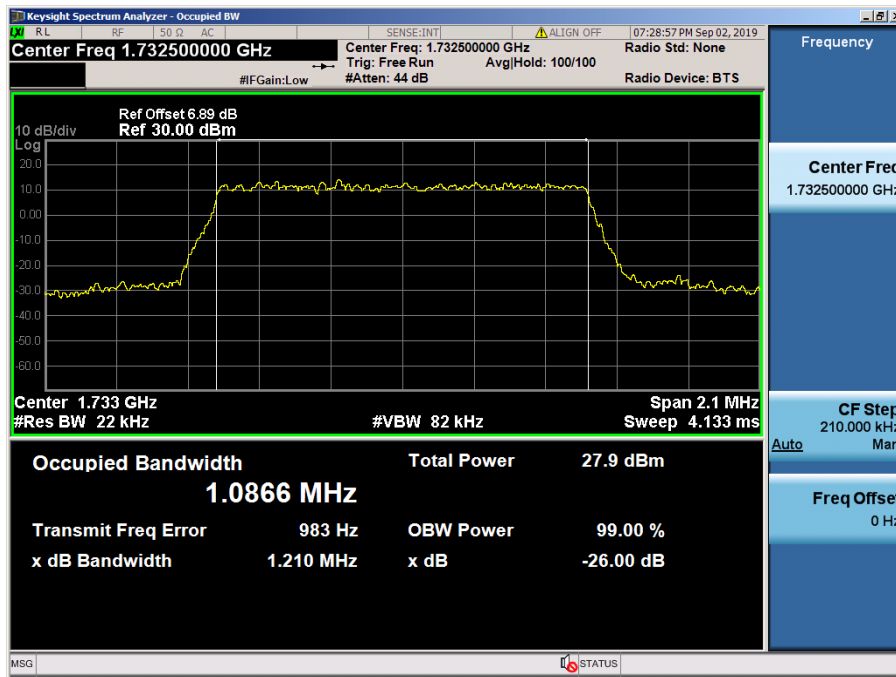


LTE Band 4 / 1.4 MHz / 64QAM - RB Size 6


8.1.5 LTE Band 2

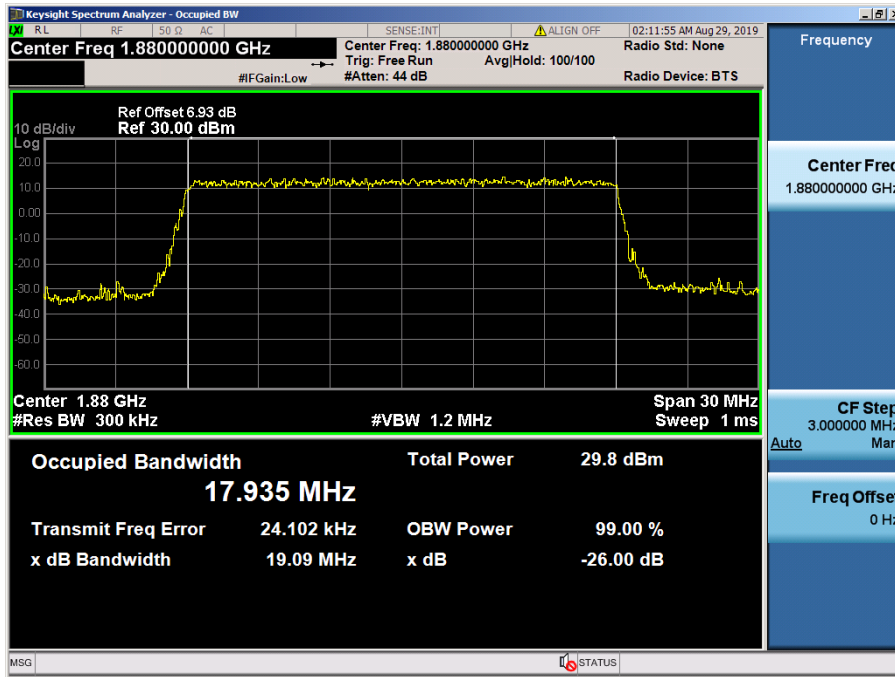


LTE Band 2 / 20 MHz / QPSK - RB Size 100

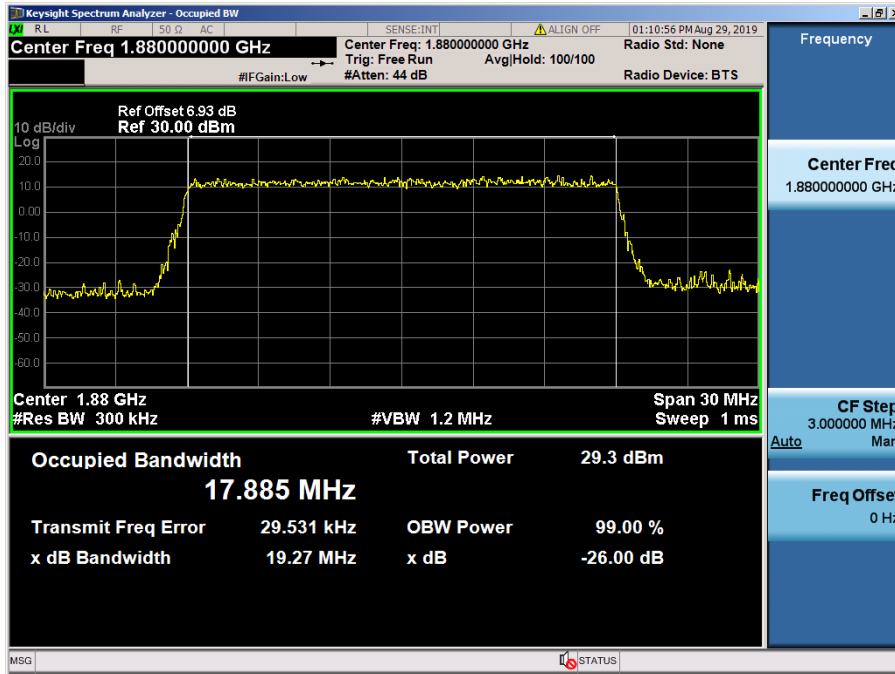


LTE Band 2 / 20 MHz / 16QAM - RB Size 100

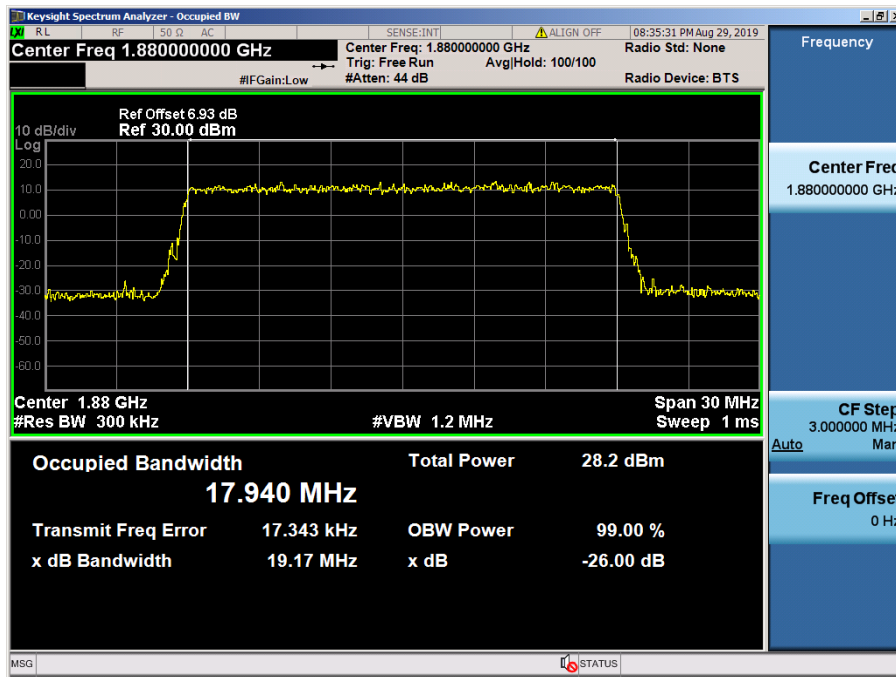


LTE Band 2 / 20 MHz / 64QAM - RB Size 100

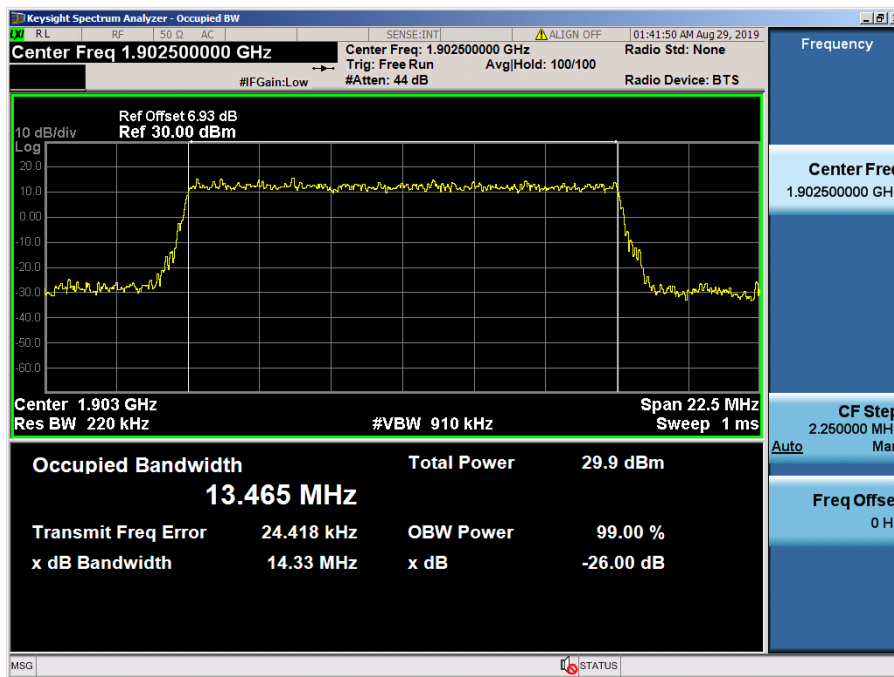


LTE Band 2 / 15 MHz / QPSK - RB Size 75

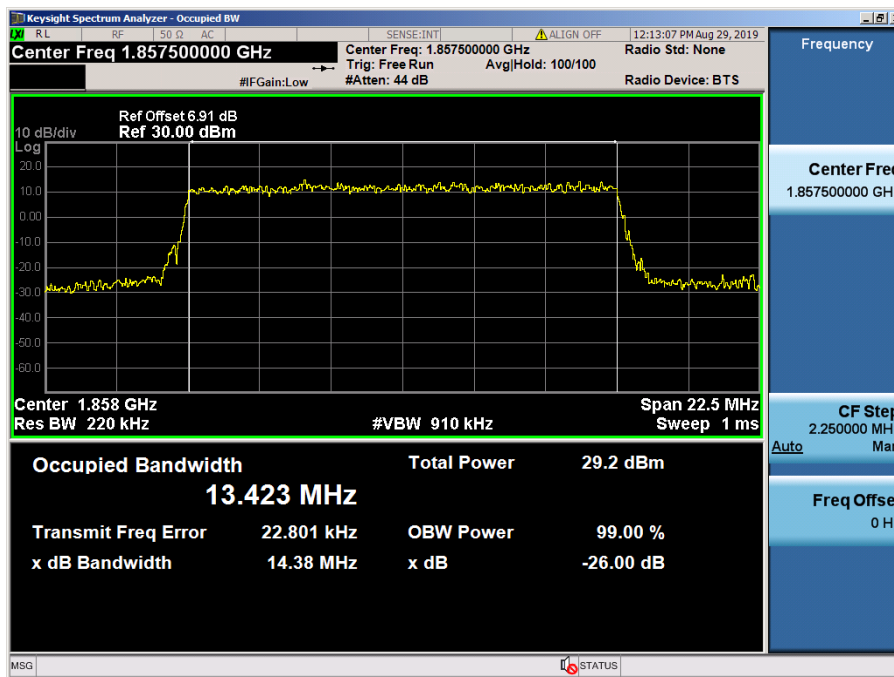


LTE Band 2 / 15 MHz / 16QAM - RB Size 75

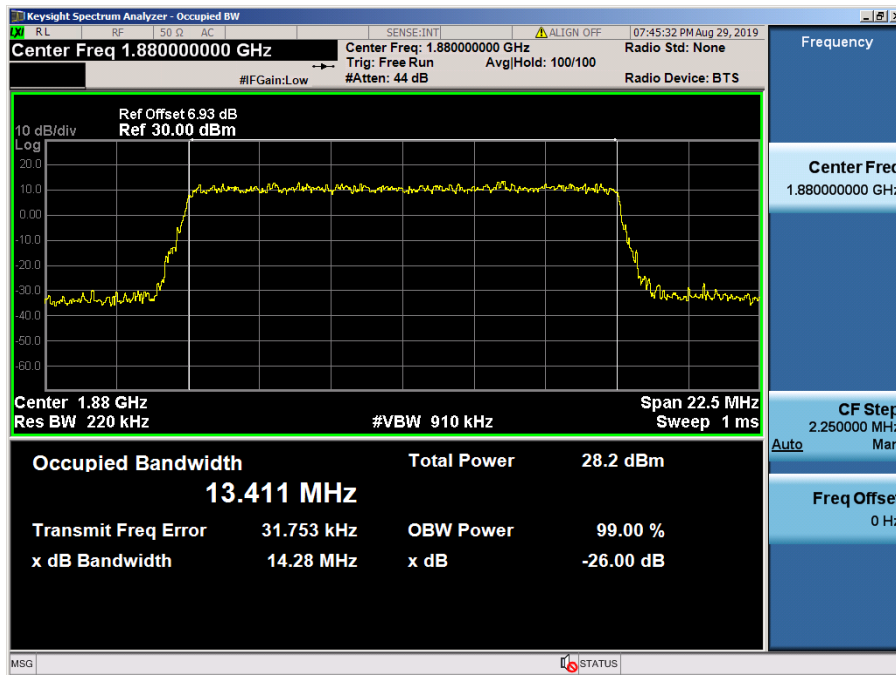


LTE Band 2 / 15 MHz / 64QAM - RB Size 75

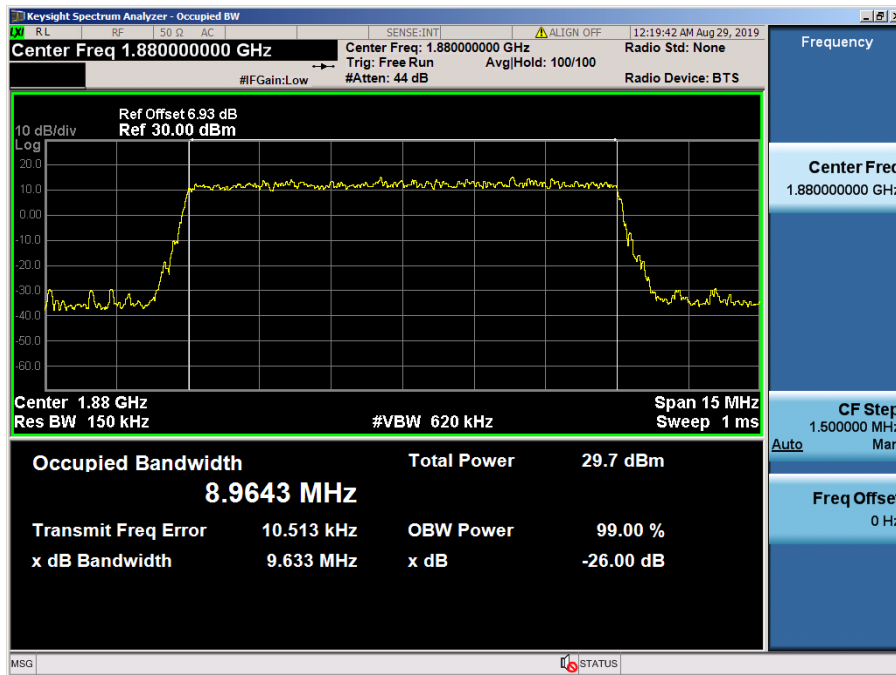


LTE Band 2 / 10 MHz / QPSK - RB Size 50

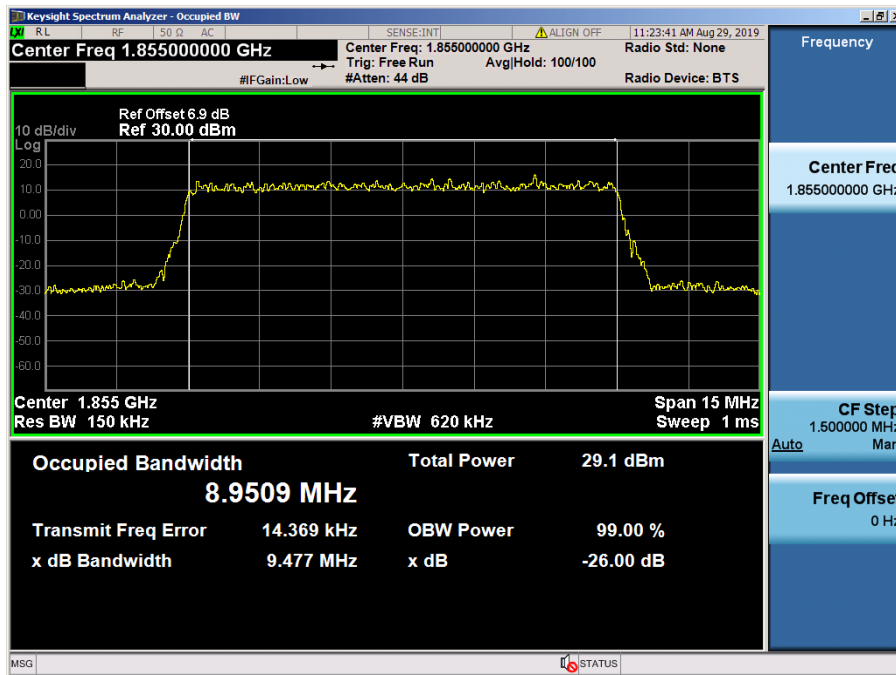


LTE Band 2 / 10 MHz / 16QAM - RB Size 50

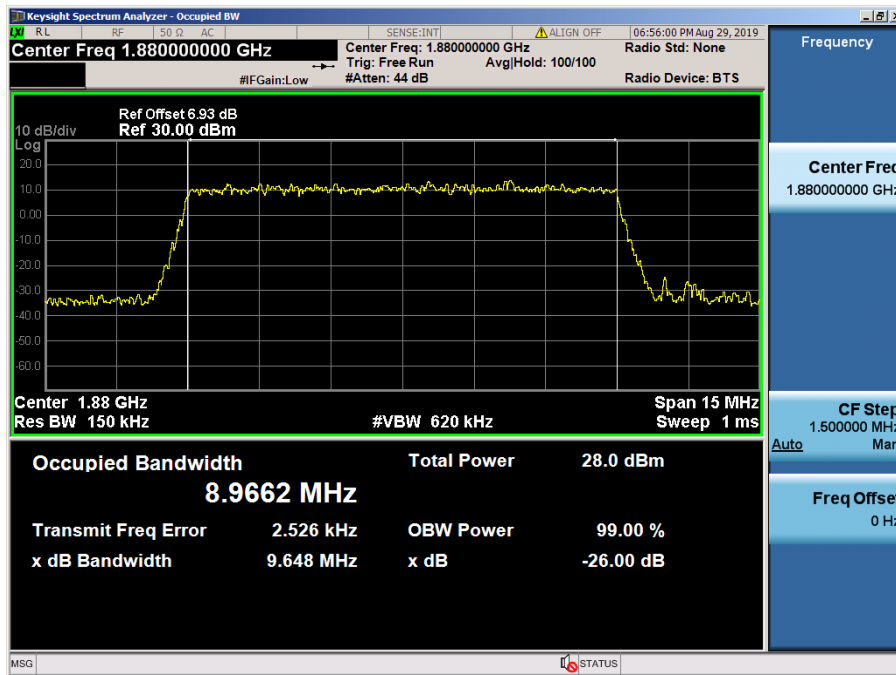


LTE Band 2 / 10 MHz / 64QAM - RB Size 50

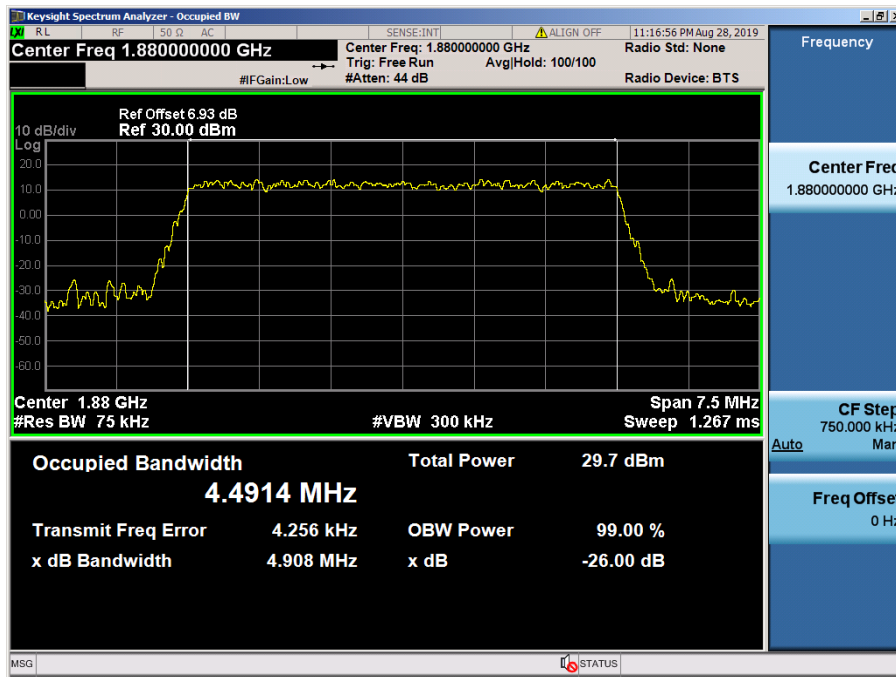


LTE Band 2 / 5 MHz / QPSK - RB Size 25

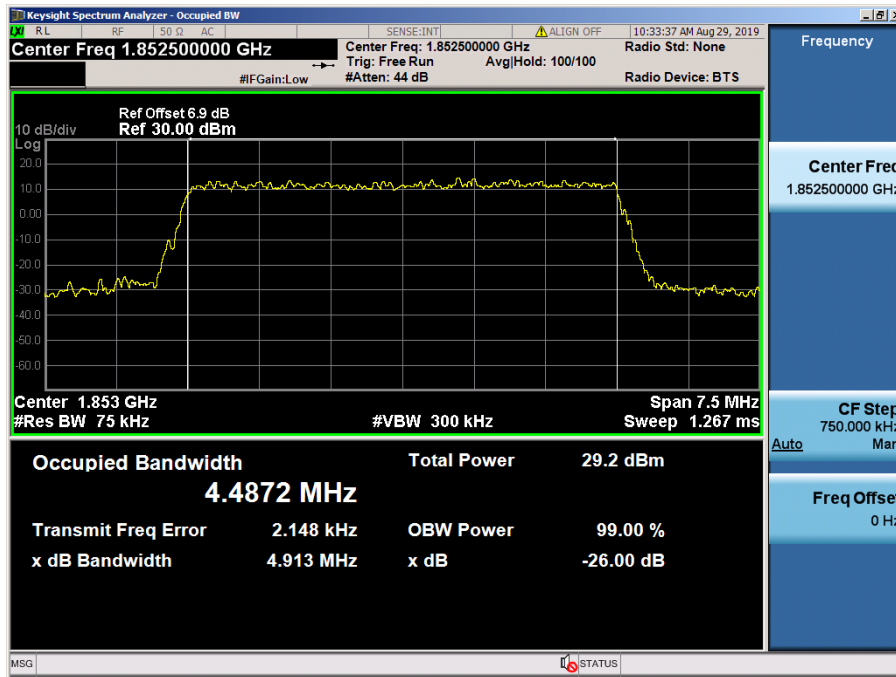


LTE Band 2 / 5 MHz / 16QAM - RB Size 25

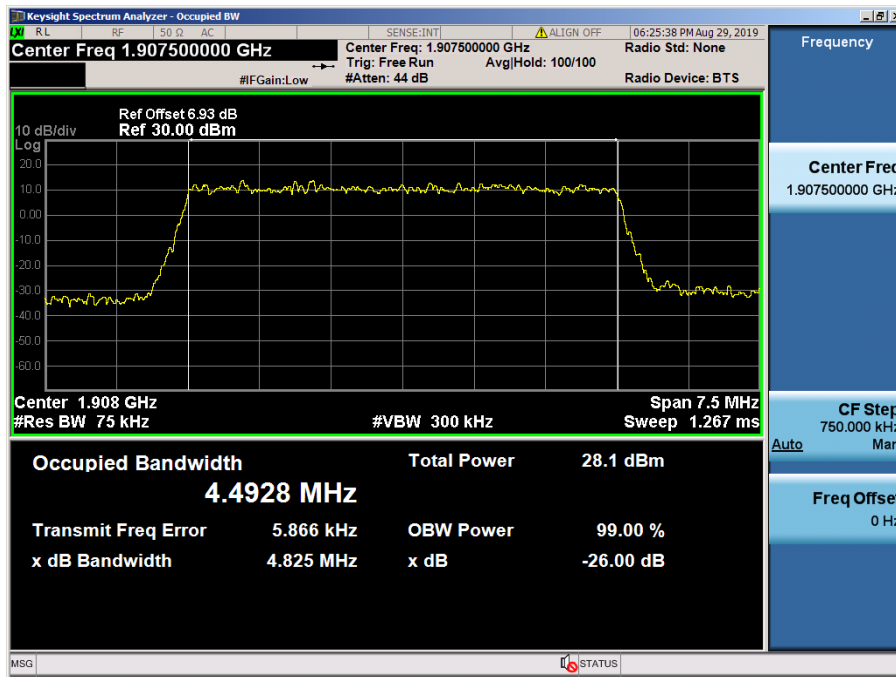


LTE Band 2 / 5 MHz / 64QAM - RB Size 25

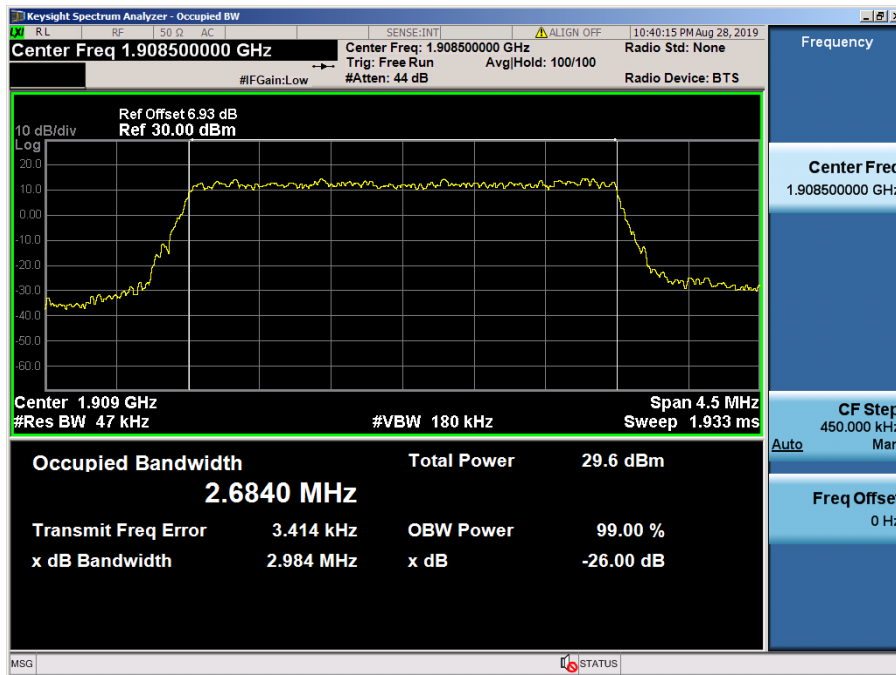

LTE Band 2 / 3 MHz / QPSK - RB Size 15

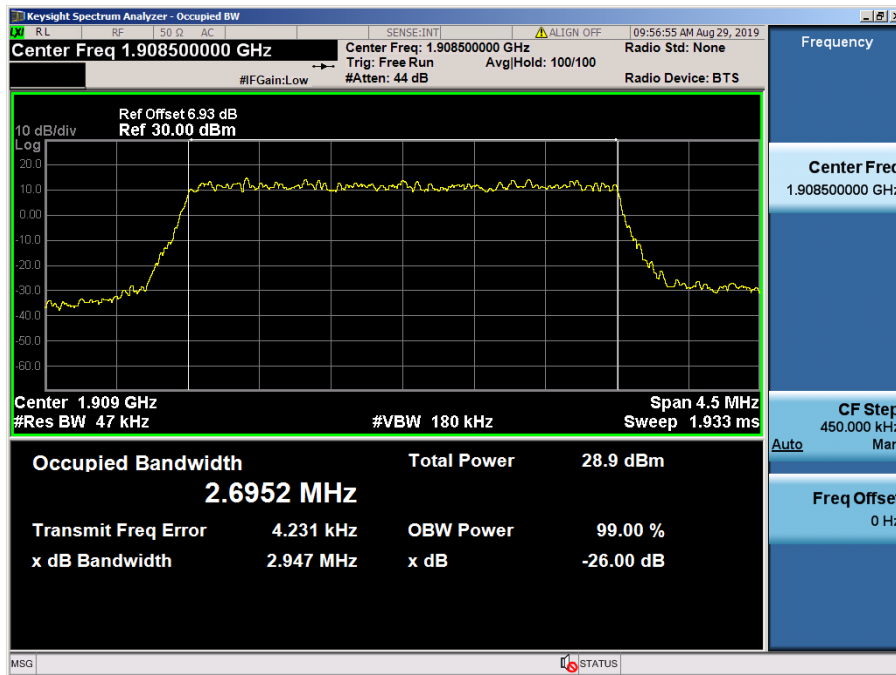

LTE Band 2 / 3 MHz / 16QAM - RB Size 15

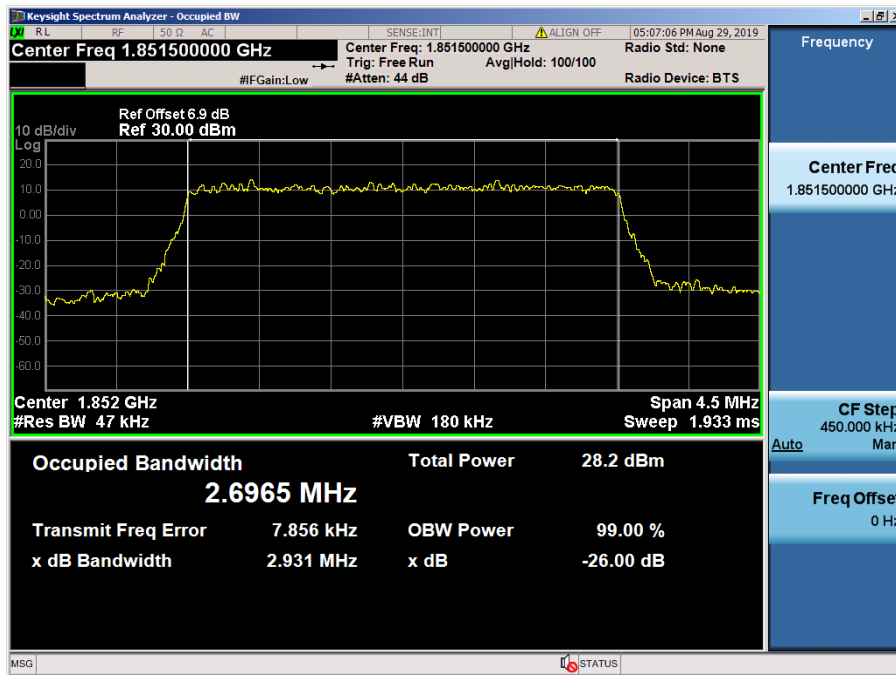

LTE Band 2 / 3 MHz / 64QAM - RB Size 15