



## PART 2 RF EXPOSURE EVALUATION REPORT

**Applicant Name:**  
LG Electronics U.S.A., Inc.  
111 Sylvan Avenue, North Building  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
7/12/20 - 07/27/20  
**Test Site/Location:**  
PCTEST, Columbia, MD, USA  
**Document Serial No.:**  
1M2004230076-17.ZNF

**FCC ID:** **ZNFG900VM**

**APPLICANT:** **LG ELECTRONICS U.S.A., INC.**

**DUT Type:** Portable Handset  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §2.1093  
**Model:** LM-G900VM  
**Additional Model(s):** LMG900VM, G900VM, LM-G900QM6, LMG900QM6, G900QM6, LM-G902V, LMG902V, G902V

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.



\_\_\_\_\_  
Randy Ortanez  
President



FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 1 of 93	

## T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST.....	3
2	RF EXPOSURE LIMITS.....	5
3	TIME VARYING TRANSMISSION TEST CASES.....	7
4	FCC MEASUREMENT PROCEDURES (FREQ < 6 GHZ).....	10
5	FCC MEASUREMENT PROCEDURES (FREQ > 6 GHZ).....	21
6	MEASUREMENT TEST SETUP (FREQ < 6 GHZ).....	28
7	MEASUREMENT TEST SETUP (FREQ > 6 GHZ).....	31
8	TEST CONFIGURATIONS (FREQ < 6 GHZ).....	33
9	CONDUCTED TX CASES (FREQ < 6 GHZ).....	36
10	SYSTEM VERIFICATION (FREQ < 6 GHZ).....	60
11	SAR TEST RESULTS (FREQ < 6 GHZ).....	62
12	TEST CONFIGURATIONS (FREQ > 6 GHZ).....	69
13	RADIATED POWER TX CASES (FREQ > 6 GHZ).....	72
14	SYSTEM VERIFICATION (FREQ > 6 GHZ).....	84
15	POWER DENSITY TEST RESULTS (FREQ > 6 GHZ).....	85
16	EQUIPMENT LIST.....	88
17	MEASUREMENT UNCERTAINTIES.....	89
18	CONCLUSION.....	91
19	REFERENCES.....	92
APPENDIX A: VERIFICATION PLOTS		
APPENDIX B: SAR TISSUE SPECIFICATIONS		
APPENDIX C: SAR SYSTEM VALIDATION		
APPENDIX D: TEST SETUP PHOTOGRAPHS		
APPENDIX E: TEST SEQUENCES		
APPENDIX F: TEST PROCEDURES FOR SUB6 NR + NR RADIO		
APPENDIX G: CALIBRATION CERTIFICATES		

FCC ID: ZNFG900VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	PART 2 RF EXPOSURE EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 2 of 93	

# 1 DEVICE UNDER TEST

## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
Cell. CDMA/EVDO	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 48	Voice/Data	3552.5 - 3697.5 MHz
NR Band n5	Data	826.5 - 846.5 MHz
NR Band n66	Data	1712.5 - 1777.5 MHz
NR Band n2	Data	1852.5 - 1907.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
WMC	Data	500 Hz - 4 kHz

## 1.2 Time-Averaging Algorithm for RF Exposure Compliance

The device under test (DUT) contains:

Qualcomm® SM7250 modem supporting 2G/3G/4G/5G NR WWAN technologies

Qualcomm® SM7250 modem is enabled with Qualcomm® Smart Transmit feature. This feature performs time averaging algorithm in real time to control and manage transmitting power and ensure the time-averaged RF exposure is in compliance with FCC requirements all the time.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR\_design\_target or PD\_design\_target, below the predefined time-averaged power limit (i.e., Plimit for sub-6 radio, and input.power.limit for 5G mmW NR), for each characterized technology and band.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 3 of 93	

Smart Transmit allows the device to transmit at higher power instantaneously, as high as  $P_{max}$ , when needed, but enforces power limiting to maintain time-averaged transmit power to  $P_{limit}$  for frequencies < 6 GHz and *input.power.limit* for frequencies > 6 GHz.

Note that the device uncertainty for sub-6GHz WWAN is 1.0dB for this DUT, the device uncertainty for mmW is 2.1 dB, and the reserve power margin is 3 dB.

This purpose of the Part 2 report is to demonstrate the DUT complies with FCC RF exposure requirement under Tx varying transmission scenarios, thereby validity of Qualcomm® Smart Transmit feature implementation in this device. It serves to compliment the Part 0 and Part 1 Test Reports to justify compliance per FCC.

### 1.3 Bibliography

Report Type	Report Serial Number
Part 0 SAR Test Report	Rev. F
Part 1 SAR Test Report	1M2004230076-01-R1.ZNF
Part 0 Power Density Test Report	Rev. A
Part 1 Power Density Test Report	1M2004230076-16-R1.ZNF
RF Exposure Compliance Summary	1M2004230076-18.ZNF

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 4 of 93	

### 2.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 2.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### 2.3 RF Exposure Limits for Frequencies Below 6 GHz

**Table 2-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 5 of 93

## 2.4 RF Exposure Limits for Frequencies Above 6 GHz

Per §1.1310 (d)(3), the MPE limits are applied for frequencies above 6 GHz. Power Density is expressed in units of W/m<sup>2</sup> or mW/cm<sup>2</sup>.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4 cm<sup>2</sup> per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes.

**Table 2-2  
Human Exposure Limits Specified in FCC 47 CFR §1.1310**

Human Exposure to Radiofrequency (RF) Radiation Limits		
Frequency Range [MHz]	Power Density [mW/cm <sup>2</sup> ]	Averaging Time [Minutes]
(A) Limits for Occupational / Controlled Environments		
1,500 – 100,000	5.0	6
(B) Limits for General Population / Uncontrolled Environments		
1,500 – 100,000	1.0	30

Note: 1.0 mW/cm<sup>2</sup> is 10 W/m<sup>2</sup>

## 2.5 Time Averaging Windows for FCC Compliance

Per October 2018 TCB Workshop Notes, the below time-averaging windows can be used for assessing time-averaged exposures for devices that are capable of actively monitoring and adjusting power output over time to comply with exposure limits.

Interim Guidance	Frequency (GHz)	Maximum Averaging Time (sec)
SAR	< 3	100
	3 – 6	60
MPE	6 - 10	30
	10 - 16	14
	16 – 24	8
	24 – 42	4
	42 – 95	2

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of element	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 6 of 93	

### 3

## TIME VARYING TRANSMISSION TEST CASES

To validate the time averaging feature and demonstrate the compliance in Tx varying transmission conditions, the following transmission scenarios are covered in the Part 2 test:

1. During a time-varying Tx power transmission: To prove that the Smart Transmit feature accounts for Tx power variations in time accurately.
2. During a call disconnect and re-establish scenario: To prove that the Smart Transmit feature accounts for history of past Tx power transmissions accurately.
3. During a technology/band handover: To prove that the Smart Transmit feature functions correctly during transitions in technology/band.
4. During a DSI (Device State Index) change: To prove that the Smart Transmit feature functions correctly during transition from one device state (DSI) to another.
5. During an antenna (or beam) switch: To prove that the Smart Transmit feature functions correctly during transitions in antenna (such as AsDiv scenario) or beams (different antenna array configurations) or beams (different antenna array configurations).
6. SAR vs. PD exposure switching during sub-6+mmW transmission: To prove that the Smart Transmit feature functions correctly and ensures total RF exposure compliance during transitions in SAR dominant exposure, SAR+PD exposure, and PD dominant exposure scenarios.
7. During time window switch: To prove that the Smart Transmit feature correctly handles the transition from one time window to another specified by FCC, and maintains the normalized time-averaged RF exposure to be less than normalized FCC limit of 1.0 at all times.
8. SAR exposure switching between two active radios (radio1 and radio2): To prove that the Smart Transmit feature functions correctly and ensures total RF exposure compliance when exposure varies among SAR\_radio1 only, SAR\_radio1 + SAR\_radio2, and SAR\_radio2 only scenarios.

As described in Part 0 report, the RF exposure is proportional to the Tx power for a SAR- and PD-characterized wireless device. Thus, feature validation in Part 2 can be effectively performed through conducted (for  $f < 6\text{GHz}$ ) and radiated (for  $f \geq 6\text{GHz}$ ) power measurement. Therefore, the compliance demonstration under dynamic transmission conditions and feature validation are done in conducted/radiated power measurement setup for transmission scenario 1 through 8.

To add confidence in the feature validation, the time-averaged SAR and PD measurements are also performed but only performed for transmission scenario 1 to avoid the complexity in SAR and PD measurement (such as, for scenario 3 requiring change in SAR probe calibration file to accommodate different bands and/or tissue simulating liquid).

The strategy for testing in Tx varying transmission condition is outlined as follows:

- Demonstrate the total RF exposure averaged over FCC defined time windows does not exceed FCC's SAR and PD limits, through time-averaged power measurements
  - Measure conducted Tx power (for  $f < 6\text{GHz}$ ) versus time, and radiated Tx power (EIRP for  $f > 10\text{GHz}$ ) versus time.
  - Convert it into RF exposure and divide by respective FCC limits to get normalized exposure versus time.
  - Perform running time-averaging over FCC defined time windows.
  - Demonstrate that the total normalized time-averaged RF exposure is less than 1 for all transmission scenarios (i.e., transmission scenarios 1, 2, 3, 4, 5, 6, 7, and 8) at all times.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 7 of 93

Mathematical expression:

For < 6 GHz transmission only:

$$1g\_or\_10gSAR(t) = \frac{conducted\_Tx\_power(t)}{conducted\_Tx\_power\_P_{limit}} * 1g\_or\_10gSAR\_P_{limit} \quad (1a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR\ limit} \leq 1 \quad (1b)$$

For sub-6+mmW transmission:

$$1g\_or\_10gSAR(t) = \frac{conducted\_Tx\_power(t)}{conducted\_Tx\_power\_P_{limit}} * 1g\_or\_10gSAR\_P_{limit} \quad (2a)$$

$$4cm^2PD(t) = \frac{radiated\_Tx\_power(t)}{radiated\_Tx\_power\_input\_power\_limit} * 4cm^2PD\_input\_power\_limit \quad (2b)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR\ limit} + \frac{\frac{1}{T_{PD}} \int_{t-T_{PD}}^t 4cm^2PD(t) dt}{FCC\ 4cm^2\ PD\ limit} \leq 1 \quad (2c)$$

where, *conducted\_Tx\_power(t)*, *conducted\_Tx\_power\_P<sub>limit</sub>*, and *1g\_or\_10gSAR\_P<sub>limit</sub>* correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at *P<sub>limit</sub>*, and measured 1gSAR or 10gSAR values at *P<sub>limit</sub>* corresponding to sub-6 transmission. Similarly, *radiated\_Tx\_power(t)*, *radiated\_Tx\_power\_input.power.limit*, and *4cm<sup>2</sup>PD\_input.power.limit* correspond to the measured instantaneous radiated Tx power, radiated Tx power at *input.power.limit* (i.e., radiated power limit), and 4cm<sup>2</sup>PD value at *input.power.limit* corresponding to mmW transmission. Both *P<sub>limit</sub>* and *input.power.limit* are the parameters pre-defined in Part 0 and loaded via Embedded File System (EFS) onto the EUT. *T<sub>SAR</sub>* is the FCC defined time window for sub-6 radio; *T<sub>PD</sub>* is the FCC defined time window for mmW radio.

- Demonstrate the total RF exposure averaged over FCC defined time windows does not exceed FCC's SAR and PD limits, through time-averaged SAR and PD measurements. Note as mentioned earlier, this measurement is performed for transmission scenario 1 only.
  - For sub-6 transmission only, measure instantaneous SAR versus time; for LTE+sub6 NR transmission, request low power (or all-down bits) on LTE so that measured SAR predominantly corresponds to sub6 NR.
  - For LTE + mmW transmission, measure instantaneous E-field versus time for mmW radio and instantaneous conducted power versus time for LTE radio.
  - Convert it into RF exposure and divide by respective FCC limits to obtain normalized exposure versus time.
  - Perform time averaging over FCC defined time window.
  - Demonstrate that the total normalized time-averaged RF exposure is less than 1 for transmission scenario 1 at all times.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of  element	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 8 of 93	

Mathematical expression:

- For sub-6 transmission only:

$$1g\_or\_10gSAR(t) = \frac{pointSAR(t)}{pointSAR\_Plimit} * 1g\_or\_10gSAR(t)\_Plimit \quad (3a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR\ limit} \leq 1 \quad (3b)$$

- For LTE+mmW transmission:

$$1g\_or\_10gSAR(t) = \frac{conducted\_Tx\_power(t)}{conducted\_Tx\_power\_Plimit} * 1g\_or\_10gSAR\_Plimit \quad (4a)$$

$$4cm^2PD(t) = \frac{[pointE(t)]^2}{[pointE\_input.power.limit]^2} * 4cm^2PD\_input.power.limit \quad (4b)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR\ limit} + \frac{\frac{1}{T_{PD}} \int_{t-T_{PD}}^t 4cm^2PD(t) dt}{FCC\ 4cm^2PD\ limit} \leq 1 \quad (4c)$$

where,  $pointSAR(t)$ ,  $pointSAR\_Plimit$ , and  $1g\_or\_10gSAR\_Plimit$  correspond to the measured instantaneous point SAR, measured point SAR at  $Plimit$ , and measured  $1gSAR$  or  $10gSAR$  values at  $Plimit$  corresponding to sub-6 transmission. Similarly,  $pointE(t)$ ,  $pointE\_input.power.limit$ , and  $4cm^2PD\_input.power.limit$  correspond to the measured instantaneous E-field, E-field at  $input.power.limit$ , and  $4cm^2PD$  value at  $input.power.limit$  corresponding to mmW transmission.

Note: cDASY6 measurement system by Schmid & Partner Engineering AG (SPEAG ) of Zurich, Switzerland measures relative E-field, and provides ratio of  $\frac{[pointE(t)]^2}{[pointE\_input.power.limit]^2}$  versus time.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 9 of 93	

This chapter provides the test plan and test procedure for validating Qualcomm Smart Transmit feature for sub-6 transmission. The 100 seconds time window for operating  $f < 3\text{GHz}$  is used as an example to detail the test procedures in this chapter. The same test plan and test procedures described in this chapter apply to 60 seconds time window for operating  $f \geq 3\text{GHz}$ .

#### 4.1 Test sequence determination for validation

Following the FCC recommendation, two test sequences having time-variation in Tx power are predefined for sub-6 ( $f < 6\text{GHz}$ ) validation:

- Test sequence 1: request DUT's Tx power to be at maximum power, measured  $P_{max}^{\dagger}$ , for 80s, then requesting for half of the maximum power, i.e., measured  $P_{max}/2$ , for the rest of the time.
- Test sequence 2: request DUT's Tx power to vary with time. This sequence is generated relative to measured  $P_{max}$ , measured  $P_{limit}$  and calculated  $P_{reserve}$  (= measured  $P_{limit}$  in dBm - *Reserve\_power\_margin* in dB) of DUT based on measured  $P_{limit}$ .

The details for generating these two test sequences is described and listed in Appendix E.

NOTE: For test sequence generation, "measured  $P_{limit}$ " and "measured  $P_{max}$ " are used instead of the " $P_{limit}$ " specified in EFS entry and " $P_{max}$ " specified for the device, because the Smart Transmit feature operates against the actual power level of the " $P_{limit}$ " that was calibrated for the DUT. The "measured  $P_{limit}$ " accurately reflects what the feature is referencing to, therefore, it should be used during feature validation testing. The RF tune up and device-to-device variation are already considered in Part 0 report prior to determining  $P_{limit}$ .

#### 4.2 Test configuration selection criteria for validating Smart Transmit feature

For validating the Smart Transmit feature, this section provides the general guidance to select test cases.

##### 4.2.1 Test configuration selection for time-varying Tx power transmission

The Smart Transmit time averaging feature operation is independent of bands, modes, and channels for a given technology. Hence, validation of Smart Transmit in one band/mode/channel per technology is sufficient. Two bands per technology are proposed and selected for this testing to provide high confidence in this validation.

The criteria for the selection are based on the  $P_{limit}$  values determined in Part 0 report. Select two bands\* in each supported technology that correspond to least\*\* and highest\*\*\*  $P_{limit}$  values that are less than  $P_{max}$  for validating Smart Transmit.

\* If one  $P_{limit}$  level applies to all the bands within a technology, then only one band needs to be tested. In this case, within the bands having the same  $P_{limit}$ , the radio configuration (e.g., # of RBs, channel#) and device position that correspond to the highest measured 1gSAR at  $P_{limit}$  shown in Part 1 report is selected.

\*\* In case of multiple bands having the same least  $P_{limit}$  within the technology, then select the band having the highest measured 1gSAR at  $P_{limit}$ .

\*\*\* The band having a higher  $P_{limit}$  needs to be properly selected so that the power limiting enforced by Smart Transmit can be validated using the pre-defined test sequences. If the highest  $P_{limit}$  in a technology is too high where the power limiting enforcement is not needed when testing with the pre-defined test sequences, then the

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 10 of 93	

next highest level is checked. This process is continued within the technology until the second band for validation testing is determined.

#### 4.2.2 Test configuration selection for change in call

The criteria to select a test configuration for call-drop measurement is:

- Select technology/band with least  $P_{limit}$  among all supported technologies/bands, and select the radio configuration (e.g., # of RBs, channel#) in this technology/band that corresponds to the highest *measured* 1gSAR at  $P_{limit}$  listed in Part 1 report.
- In case of multiple bands having same least  $P_{limit}$ , then select the band having the highest *measured* 1gSAR at  $P_{limit}$  in Part 1 report.

This test is performed with the DUT's Tx power requested to be at maximum power, the above band selection will result in Tx power enforcement (i.e., DUT forced to have Tx power at  $P_{reserve}$ ) for longest duration in one FCC defined time window. The call change (call drop/reestablish) is performed during the Tx power enforcement duration (i.e., during the time when DUT is forced to have Tx power at  $P_{reserve}$ ). One test is sufficient as the feature operation is independent of technology and band.

#### 4.2.3 Test configuration selection for change in technology/band

The selection criteria for this measurement is, for a given antenna, to have DUT switch from a technology/band with lowest  $P_{limit}$  within the technology group (in case of multiple bands having the same  $P_{limit}$ , then select the band with highest *measured* 1gSAR at  $P_{limit}$ ) to a technology/band with highest  $P_{limit}$  within the technology group, in case of multiple bands having the same  $P_{limit}$ , then select the band with lowest *measured* 1gSAR at  $P_{limit}$  in Part 1 report, or vice versa.

This test is performed with the DUT's Tx power requested to be at maximum power, the technology/band switch is performed during Tx power enforcement duration (i.e., during the time when DUT is forced to have Tx power at  $P_{reserve}$ ).

#### 4.2.4 Test configuration selection for change in antenna

The criteria to select a test configuration for antenna switch measurement is:

- Whenever possible and supported by the DUT, first select antenna switch configuration within the same technology/band (i.e., same technology and band combination).
- Then, select any technology/band that supports multiple Tx antennas, and has the highest difference in  $P_{limit}$  among all supported antennas.
- In case of multiple bands having same difference in  $P_{limit}$  among supported antennas, then select the band having the highest *measured* 1gSAR at  $P_{limit}$  in Part 1 report.

This test is performed with the DUT's Tx power requested to be at maximum power in selected technology/band, and antenna change is conducted during Tx power enforcement duration (i.e., during the time when DUT is forced to have Tx power at  $P_{reserve}$ ).

#### 4.2.5 Test configuration selection for change in DSI

The criteria to select a test configuration for DSI change test is

- Select a technology/band having the  $P_{limit} < P_{max}$  within any technology and DSI group, and for the same technology/band having a different  $P_{limit}$  in any other DSI group. Note that the selected DSI transition need to be supported by the device.

This test is performed with the DUT's Tx power requested to be at maximum power in selected technology/band, and DSI change is conducted during Tx power enforcement duration (i.e., during the time when DUT is forced to have Tx power at  $P_{reserve}$ ).

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 11 of 93	

#### 4.2.6 Test configuration selection for change in time window

FCC specifies different time window for time averaging based on operation frequency. The criteria to select a test configuration for validating Smart Transmit feature and demonstrating the compliance during the change in time window is

- Select any technology/band that has operation frequency classified in one time window defined by FCC (such as 100-seconds time window), and its corresponding  $P_{limit}$  is less than  $P_{max}$  if possible.
- Select the 2<sup>nd</sup> technology/band that has operation frequency classified in a different time window defined by FCC (such as 60-seconds time window), and its corresponding  $P_{limit}$  is less than  $P_{max}$  if possible.
- Note it is preferred both  $P_{limit}$  values of two selected technology/band less than corresponding  $P_{max}$ , but if not possible, at least one of technologies/bands has its  $P_{limit}$  less than  $P_{max}$ .

This test is performed with the EUT's Tx power requested to be at maximum power in selected technology/band. Test for one pair of time windows selected is sufficient as the feature operation is the same.

#### 4.2.7 Test configuration selection for SAR exposure switching

If supported, the test configuration for SAR exposure switching should cover

1. SAR exposure switch when two active radios are in the same time window
2. SAR exposure switch when two active radios are in different time windows. One test with two active radios in any two different time windows is sufficient as Smart Transmit operation is the same for RF exposure switch in any combination of two different time windows. For device supporting LTE + mmW NR, this test is covered in SAR vs PD exposure switch validation.

The Smart Transmit time averaging operation is independent of the source of SAR exposure (for example, LTE vs. Sub6 NR) and ensures total time-averaged RF exposure compliance. Hence, validation of Smart Transmit in any one simultaneous SAR transmission scenario (i.e., one combination for LTE + Sub6 NR transmission) is sufficient, where the SAR exposure varies among SAR<sub>radio1</sub> only, SAR<sub>radio1</sub> + SAR<sub>radio2</sub>, and SAR<sub>radio2</sub> only scenarios.

The criteria to select a test configuration for validating Smart Transmit feature during SAR exposure switching scenarios is

- Select any two < 6GHz technologies/bands that the EUT supports simultaneous transmission (for example, LTE+Sub6 NR).
- Among all supported simultaneous transmission configurations, the selection order is
  1. select one configuration where both  $P_{limit}$  of radio1 and radio2 is less than their corresponding  $P_{max}$ , preferably, with different  $P_{limits}$ . If this configuration is not available, then,
  2. select one configuration that has  $P_{limit}$  less than its  $P_{max}$  for at least one radio. If this can not be found, then,
  3. select one configuration that has  $P_{limit}$  of radio1 and radio2 greater than  $P_{max}$  but with least  $(P_{limit} - P_{max})$  delta.

Test for one simultaneous transmission scenario is sufficient as the feature operation is the same.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 12 of 93	

### 4.3 Test procedures for conducted power measurements

This section provides general conducted power measurement procedures to perform compliance test under dynamic transmission scenarios described in Section 3. In practice, an adjustment can be made in these procedures. The justification/clarification may be provided.

#### 4.3.1 Time-varying Tx power transmission scenario

This test is performed with the two pre-defined test sequences described in Section 4.1 for all the technologies and bands selected in Section 4.2.1. The purpose of the test is to demonstrate the effectiveness of power limiting enforcement and that the time-averaged SAR (corresponding time-averaged Tx power) does not exceed the FCC limit at all times (see Eq. (1a) and (1b)).


#### Test procedure

1. Measure  $P_{max}$ , measure  $P_{limit}$  and calculate  $P_{reserve}$  (= measured  $P_{limit}$  in dBm – *Reserve\_power\_margin* in dB) and follow Section 4.1 to generate the test sequences for all the technologies and bands selected in Section 4.2.1. Both test sequence 1 and test sequence 2 are created based on measured  $P_{max}$  and measured  $P_{limit}$  of the DUT. Test condition to measure  $P_{max}$  and  $P_{limit}$  is:
  - a. Measure  $P_{max}$  with Smart Transmit disabled and callbox set to request maximum power.
  - b. Measure  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.
2. Set *Reserve\_power\_margin* to actual (intended) value (3dB for this DUT based on Part 1 report) and reset power on DUT to enable Smart Transmit, establish radio link in desired radio configuration, with callbox requesting the DUT's Tx power to be at pre-defined test sequence 1, measure and record Tx power versus time, and then convert the conducted Tx power into 1gSAR or 10gSAR value (see Eq. (1a)) using measured  $P_{limit}$  from above Step 1. Perform running time average to determine time-averaged power and 1gSAR or 10gSAR versus time as illustrated in Figure 4-1 where using 100-seconds time window as an example.

Note: In Eq.(1a), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at  $P_{limit}$  for the corresponding technology/band/antenna/DSI reported in Part 1 report.

Note: For an easier computation of the running time average, 0 dBm can be added at the beginning of the test sequences the length of the responding time window, for example, add 0dBm for 100-seconds so the running time average can be directly performed starting with the first 100-seconds data using excel spreadsheet. This technique applies to all tests performed in this Part 2 report for easier time-averaged computation using excel spreadsheet.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 13 of 93	

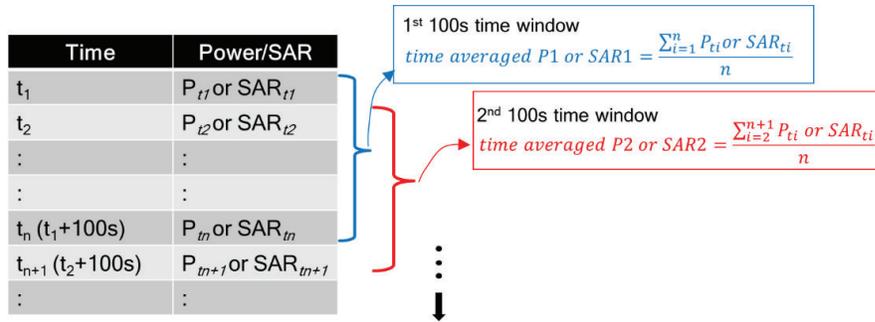

**Figure 4-1  
Running Average Illustration**

3. Make one plot containing:
  - a. Instantaneous Tx power versus time measured in Step 2,
  - b. Requested Tx power used in Step 2 (test sequence 1),
  - c. Computed time-averaged power versus time determined in Step 2,
  - d. Time-averaged power limit (corresponding to FCC SAR limit of 1.6 W/kg for 1gSAR or 4.0W/kg for 10gSAR) given by

$$Time\ averaged\ power\ limit = meas.P_{limit} + 10 \times \log\left(\frac{FCC\ SAR\ limit}{meas.SAR\_Plimit}\right) \quad (5a)$$

where  $meas.P_{limit}$  and  $meas.SAR\_Plimit$  correspond to measured power at  $P_{limit}$  and measured SAR at  $P_{limit}$ .

4. Make another plot containing:
  - a. Computed time-averaged 1gSAR or 10gSAR versus time determined in Step 2
  - b. FCC  $1gSAR_{limit}$  of 1.6W/kg or FCC  $10gSAR_{limit}$  of 4.0W/kg.
5. Repeat Steps 2 ~ 4 for pre-defined test sequence 2 and replace the requested Tx power (test sequence 1) in Step 2 with test sequence 2.
6. Repeat Steps 2 ~ 5 for all the selected technologies and bands.
7. The validation criteria are, at all times, the time-averaged power versus time shown in Step 3 plot shall not exceed the time-averaged power limit (defined in Eq. (5a)), in turn, the time-averaged 1gSAR or 10gSAR versus time shown in Step 4 plot shall not exceed the FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR (i.e., Eq. (1b)).

### 4.3.2 Change in call scenario

This test is to demonstrate that Smart Transmit feature accurately accounts for the past Tx powers during time-averaging when a new call is established.

The call disconnect and re-establishment needs to be performed during power limit enforcement, i.e., when the DUT's Tx power is at  $P_{reserve}$  level, to demonstrate the continuity of RF exposure management and limiting in call change scenario. In other words, the RF exposure averaged over any FCC defined time window (including the time windows containing the call change) doesn't exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 14 of 93	

## Test procedure

1. Measure  $P_{limit}$  for the technology/band selected in Section 4.2.2. Measure  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.
2. Set *Reserve\_power\_margin* to actual (intended) value and reset power on DUT to enable Smart Transmit.
3. Establish radio link with callbox in the selected technology/band.
4. Request DUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, followed by requesting DUT's Tx power to be at maximum power for about ~60 seconds, and then drop the call for ~10 seconds. Afterwards, re-establish another call in the same radio configuration (i.e., same technology/band/channel) and continue callbox requesting DUT's Tx power to be at maximum power for the remaining time of at least another full duration of the specified time window. Measure and record Tx power versus time. Once the measurement is done, extract instantaneous Tx power versus time, convert the measured conducted Tx power into 1gSAR or 10gSAR value using Eq. (1a), and then perform the running time average to determine time-averaged power and 1gSAR or 10gSAR versus time.

NOTE: In Eq.(1a), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at  $P_{limit}$  for the corresponding technology/band/antenna/DSI reported in Part 1 report.

5. Make one plot containing: (a) instantaneous Tx power versus time, (b) requested power, (c) computed time-averaged power, (d) time-averaged power limit calculated using Eq.(5a).
6. Make another plot containing: (a) computed time-averaged 1gSAR or 10gSAR versus time, and (b) FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

The validation criteria are, at all times, the time-averaged power versus time shall not exceed the time-averaged power limit (defined in Eq.(5a)), in turn, the time-averaged 1gSAR or 10gSAR versus time shall not exceed the FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR (i.e., Eq. (1b)).

### 4.3.3 Change in technology and band

This test is to demonstrate the correct power control by Smart Transmit during technology switches and/or band handovers.

Similar to the change in call test in Section 4.3.2, to validate the continuity of RF exposure limiting during the transition, the technology and band handover needs to be performed when DUT's Tx power is at  $P_{reserve}$  level (i.e., during Tx power enforcement) to make sure that the DUT's Tx power from previous  $P_{reserve}$  level to the new  $P_{reserve}$  level (corresponding to new technology/band). Since the  $P_{limit}$  could vary with technology and band, Eq. (1a) can be written as follows to convert the instantaneous Tx power in 1gSAR or 10gSAR exposure for the two given radios, respectively:

$$1g\_or\_10gSAR_1(t) = \frac{conducted\_Tx\_power\_1(t)}{conducted\_Tx\_power\_P_{limit\_1}} * 1g\_or\_10gSAR\_P_{limit\_1} \quad (6a)$$

$$1g\_or\_10gSAR_2(t) = \frac{conducted\_Tx\_power\_2(t)}{conducted\_Tx\_power\_P_{limit\_2}} * 1g\_or\_10gSAR\_P_{limit\_2} \quad (6b)$$

$$\frac{1}{T_{SAR}} \left[ \int_{t-T_{SAR}}^{t_1} \frac{1g\_or\_10gSAR_1(t)}{FCC\ SAR\ limit} dt + \int_{t-T_{SAR}}^t \frac{1g\_or\_10gSAR_2(t)}{FCC\ SAR\ limit} dt \right] \leq 1 \quad (6c)$$

where,  $conducted\_Tx\_power\_1(t)$ ,  $conducted\_Tx\_power\_P_{limit\_1}$ , and  $1g\_or\_10gSAR\_P_{limit\_1}$  correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at  $P_{limit}$ , and measured 1gSAR or 10gSAR value at  $P_{limit}$  of technology1/band1;  $conducted\_Tx\_power\_2(t)$ ,

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 15 of 93	

$conducted\_Tx\_power\_P_{limit\_2}(t)$ , and  $1g\_or\_10gSAR\_P_{limit\_2}$  correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at  $P_{limit}$ , and measured 1gSAR or 10gSAR value at  $P_{limit}$  of technology2/band2. Transition from technology1/band1 to the technology2/band2 happens at time-instant ' $t_i$ '.

## Test procedure

1. Measure  $P_{limit}$  for both the technologies and bands selected in Section 4.2.3. Measure  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.
2. Set *Reserve\_power\_margin* to actual (intended) value and reset power on DUT to enable Smart Transmit
3. Establish radio link with callbox in first technology/band selected.
4. Request DUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, followed by requesting DUT's Tx power to be at maximum power for about ~60 seconds, and then switch to second technology/band selected. Continue with callbox requesting DUT's Tx power to be at maximum power for the remaining time of at least another full duration of the specified time window. Measure and record Tx power versus time for the full duration of the test.
5. Once the measurement is done, extract instantaneous Tx power versus time, and convert the conducted Tx power into 1gSAR or 10gSAR value using Eq. (6a) and (6b) and corresponding measured  $P_{limit}$  values from Step 1 of this section. Perform the running time average to determine time-averaged power and 1gSAR or 10gSAR versus time.

NOTE: In Eq.(6a) & (6b), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at  $P_{limit}$  for the corresponding technology/band/antenna/DSI reported in Part 1 report.

6. Make one plot containing: (a) instantaneous Tx power versus time, (b) requested power, (c) computed time-averaged power, (d) time-averaged power limit calculated using Eq.(5a).
7. Make another plot containing: (a) computed time-averaged 1gSAR or 10gSAR versus time, and (b) FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

The validation criteria are, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed the FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR (i.e., Eq. (6c)).

### 4.3.4 Change in antenna

This test is to demonstrate the correct power control by Smart Transmit during antenna switches from one antenna to another. The test procedure is identical to Section 4.3.3, by replacing technology/band switch operation with antenna switch. The validation criteria are, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

NOTE: If the DUT does not support antenna switch within the same technology/band, but has multiple antennas to support different frequency bands, then the antenna switch test is included as part of change in technology and band (Section 4.3.3) test.

### 4.3.5 Change in DSI

This test is to demonstrate the correct power control by Smart Transmit during DSI switches from one DSI to another. The test procedure is identical to Section 4.3.3, by replacing technology/band switch operation with DSI switch. The validation criteria are, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 16 of 93	

### 4.3.6 Change in time window

This test is to demonstrate the correct power control by Smart Transmit during the change in averaging time window when a specific band handover occurs. FCC specifies time-averaging windows of 100s for Tx frequency < 3GHz, and 60s for Tx frequency between 3GHz and 6GHz.

To validate the continuity of RF exposure limiting during the transition, the band handover test needs to be performed when EUT handovers from operation band less than 3GHz to greater than 3GHz and vice versa. The equations (3a) and (3b) in Section 2 can be written as follows for transmission scenario having change in time window,

$$1gSAR_1(t) = \frac{\text{conducted\_Tx\_power\_1}(t)}{\text{conducted\_Tx\_power\_P}_{limit\_1}} * 1g\_or\ 10g\_SAR\_P_{limit\_1} \quad (7a)$$

$$1gSAR_2(t) = \frac{\text{conducted\_Tx\_power\_2}(t)}{\text{conducted\_Tx\_power\_P}_{limit\_2}} * 1g\_or\ 10g\_SAR\_P_{limit\_2} \quad (7b)$$

$$\frac{1}{T_{1SAR}} \left[ \int_{t-T_{1SAR}}^{t_1} \frac{1g\_or\ 10g\_SAR_1(t)}{FCC\ SAR\ limit} dt \right] + \frac{1}{T_{2SAR}} \left[ \int_{t-T_{2SAR}}^t \frac{1g\_or\ 10g\_SAR_2(t)}{FCC\ SAR\ limit} dt \right] \leq 1 \quad (7c)$$

where, *conducted\_Tx\_power\_1(t)*, *conducted\_Tx\_power\_P<sub>limit\_1</sub>(t)*, and *1g\_or 10g\_SAR\_P<sub>limit\_1</sub>* correspond to the instantaneous Tx power, conducted Tx power at *P<sub>limit</sub>*, and compliance *1g\_or 10g\_SAR* values at *P<sub>limit\_1</sub>* of band1 with time-averaging window '*T<sub>1SAR</sub>*'; *conducted\_Tx\_power\_2(t)*, *conducted\_Tx\_power\_P<sub>limit\_2</sub>(t)*, and *1g\_or 10g\_SAR\_P<sub>limit\_2</sub>* correspond to the instantaneous Tx power, conducted Tx power at *P<sub>limit</sub>*, and compliance *1g\_or 10g\_SAR* values at *P<sub>limit\_2</sub>* of band2 with time-averaging window '*T<sub>2SAR</sub>*'. One of the two bands is less than 3GHz, another is greater than 3GHz. Transition from first band with time-averaging window '*T<sub>1SAR</sub>*' to the second band with time-averaging window '*T<sub>2SAR</sub>*' happens at time-instant '*t<sub>1</sub>*'.

### Test procedure

1. Measure *P<sub>limit</sub>* for both the technologies and bands selected in Section 4.2.6. Measure *P<sub>limit</sub>* with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.
2. Set *Reserve\_power\_margin* to actual (intended) value and enable Smart Transmit

### Transition from 100s time window to 60s time window, and vice versa

3. Establish radio link with callbox in the technology/band having 100s time window selected in Section 4.2.6.
4. Request EUT's Tx power to be at 0 dBm for at least 100 seconds, followed by requesting EUT's Tx power to be at maximum power for about ~140 seconds, and then switch to second technology/band (having 60s time window) selected in Section 4.2.6. Continue with callbox requesting EUT's Tx power to be at maximum power for about ~60s in this second technology/band, and then switch back to the first technology/band. Continue with callbox requesting EUT's Tx power to be at maximum power for at least another 100s. Measure and record Tx power versus time for the entire duration of the test.
5. Once the measurement is done, extract instantaneous Tx power versus time, and convert the conducted Tx power into 1gSAR or 10gSAR value (see Eq. (7a) and (7b)) using corresponding technology/band Step 1 result, and then perform 100s running average to determine time-averaged 1gSAR or 10gSAR versus time. Note that in Eq.(7a) & (7b), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the worst-case 1gSAR or 10gSAR value tested in Part 1 for the selected technologies/bands at *P<sub>limit</sub>*.
6. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 4.
7. Make another plot containing: (a) instantaneous 1gSAR versus time determined in Step 5, (b) computed time-averaged 1gSAR versus time determined in Step 5, and (c) corresponding regulatory *1gSAR<sub>limit</sub>* of 1.6W/kg or *10gSAR<sub>limit</sub>* of 4.0W/kg.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 17 of 93	

## Transition from 60s time window to 100s time window, and vice versa

8. Establish radio link with callbox in the technology/band having 60s time window selected in Section 4.2.6.
9. Request EUT's Tx power to be at 0 dBm for at least 60 seconds, followed by requesting EUT's Tx power to be at maximum power for about ~80 seconds, and then switch to second technology/band (having 100s time window) selected in Section 4.2.6. Continue with callbox requesting EUT's Tx power to be at maximum power for about ~100s in this second technology/band, and then switch back to the first technology/band. Continue with callbox requesting EUT's Tx power to be at maximum power for the remaining time for a total test time of 500 seconds. Measure and record Tx power versus time for the entire duration of the test.
10. Repeat above Step 5~7 to generate the plots

The validation criteria is, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed the regulatory  $1gSAR_{limit}$  of 1.6W/kg or  $10gSAR_{limit}$  of 4.0W/kg.

### 4.3.7 SAR exposure switching

This test is to demonstrate that Smart Transmit feature is accurately accounts for switching in exposures among SAR from radio1 only, SAR from both radio1 and radio2, and SAR from radio2 only scenarios, and ensures total time-averaged RF exposure complies with the FCC limit. Here, radio1 represents primary radio (for example, LTE anchor in a NR non-standalone mode call) and radio2 represents secondary radio (for example, sub6 NR or mmW NR). The detailed test procedure for SAR exposure switching in the case of LTE+Sub6 NR non-standalone mode transmission scenario is provided in APPENDIX F:.

#### Test procedure:

1. Measure conducted Tx power corresponding to  $P_{limit}$  for radio1 and radio2 in selected band. Test condition to measure conducted  $P_{limit}$  is:
  - Establish device in call with the callbox for radio1 technology/band. Measure conducted Tx power corresponding to radio1  $P_{limit}$  with Smart Transmit enabled and Reserve\_power\_margin set to 0 dB, callbox set to request maximum power.
  - Repeat above step to measure conducted Tx power corresponding to radio2  $P_{limit}$ . If radio2 is dependent on radio1 (for example, non-standalone mode of Sub6 NR requiring radio1 LTE as anchor), then establish radio1 + radio2 call with callbox, and request all down bits for radio1 LTE. In this scenario, with callbox requesting maximum power from radio2 Sub6 NR, measured conducted Tx power corresponds to radio2  $P_{limit}$  (as radio1 LTE is at all-down bits)
2. Set Reserve\_power\_margin to actual (intended) value, with EUT setup for radio1 + radio2 call. In this description, it is assumed that radio2 has lower priority than radio1. Establish device in radio1+radio2 call, and request all-down bits or low power on radio1, with callbox requesting EUT's Tx power to be at maximum power in radio2 for at least one time window. After one time window, set callbox to request EUT's Tx power to be at maximum power on radio1, i.e., all-up bits. Continue radio1+radio2 call with both radios at maximum power for at least one time window, and drop (or request all-down bits on) radio2. Continue radio1 at maximum power for at least one time window. Record the conducted Tx power for both radio1 and radio2 for the entire duration of this test.
3. Once the measurement is done, extract instantaneous Tx power versus time for both radio1 and radio2 links. Convert the conducted Tx power for both these radios into 1gSAR or 10gSAR value (see Eq. (6a) and (6b)) using corresponding technology/band  $P_{limit}$  measured in Step 1, and then perform the running time average to determine time-averaged 1gSAR or 10gSAR versus time.
4. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 2.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 18 of 93

5. Make another plot containing: (a) instantaneous 1gSAR versus time determined in Step 3, (b) computed time-averaged 1gSAR versus time determined in Step 3, and (c) corresponding regulatory  $1gSAR_{limit}$  of 1.6W/kg or  $10gSAR_{limit}$  of 4.0W/kg.

The validation criteria is, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed the regulatory  $1gSAR_{limit}$  of 1.6W/kg or  $10gSAR_{limit}$  of 4.0W/kg.

#### 4.4 Test procedure for time-varying SAR measurements

This section provides general time-varying SAR measurement procedures to perform compliance test under dynamic transmission scenarios described in Section 3. In practice, an adjustment can be made in these procedures. The justification/clarification may be provided.

To perform the validation through SAR measurement for transmission scenario 1 described in Section 3, the “path loss” between callbox antenna and DUT needs to be calibrated to ensure that the DUT Tx power reacts to the requested power from callbox in a radiated call. It should be noted that when signaling in closed loop mode, protocol-level power control is in play, resulting in DUT not solely following callbox TPC (Tx power control) commands. In other words, DUT response has many dependencies (RSSI, quality of signal, path loss variation, fading, etc..) other than just TPC commands. These dependencies have less impact in conducted setup (as it is a controlled environment and the path loss can be very well calibrated) but have significant impact on radiated testing in an uncontrolled environment, such as SAR test setup. Therefore, the deviation in DUT Tx power from callbox requested power is expected, however the time-averaged SAR should not exceed FCC SAR requirement at all times as Smart Transmit controls Tx power at DUT.

The following steps are for time averaging feature validation through SAR measurement:

1. “Path Loss” calibration: Place the DUT against the phantom in the worst-case position determined based on Section 4.2.1. For each band selected, prior to SAR measurement, perform “path loss” calibration between callbox antenna and DUT. Since the SAR test environment is not controlled and well calibrated for OTA (Over the Air) test, extreme care needs to be taken to avoid the influence from reflections. The test setup is described in Section 6.2.
2. Time averaging feature validation:
  - i For a given radio configuration (technology/band) selected in Section 4.2.1, enable Smart Transmit and set *Reserve\_power\_margin* to 0 dB, with callbox to request maximum power, perform area scan, conduct pointSAR measurement at peak location of the area scan. This point SAR value,  $pointSAR_{P_{limit}}$ , corresponds to point SAR at the measured  $P_{limit}$  (i.e., measured  $P_{limit}$  from the DUT in Step 1 of Section 4.3.1).
  - ii Set *Reserve\_power\_margin* to actual (intended) value and reset power on DUT to enable Smart Transmit. Note, if *Reserve\_power\_margin* cannot be set wirelessly, care must be taken to re-position the DUT in the exact same position relative to the SAM phantom as in above Step 2.i. Establish radio link in desired radio configuration, with callbox requesting the DUT’s Tx power at power levels described by test sequence 1 generated in Step 1 of Section 4.3.1, conduct point SAR measurement versus time at peak location of the area scan determined in Step 2.i of this section. Once the measurement is done, extract instantaneous point SAR vs time data,  $pointSAR(t)$ , and convert it into instantaneous 1gSAR or 10gSAR vs. time using Eq. (3a), re-written below:

$$1g\_or\_10gSAR(t) = \frac{pointSAR(t)}{pointSAR_{P_{limit}}} * 1g\_or\_10gSAR_{P_{limit}}$$

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 19 of 93

where,  $pointSAR_{P_{limit}}$  is the value determined in Step 2.i, and  $pointSAR(t)$  is the instantaneous point SAR measured in Step 2.ii,  $1g\_or\_10gSAR_{P_{limit}}$  is the measured 1gSAR or 10gSAR value listed in Part 1 report.

- iii Perform 100s running average to determine time-averaged 1gSAR or 10gSAR versus time.
- iv Make one plot containing: (a) time-averaged 1gSAR or 10gSAR versus time determined in Step 2.iii of this section, (b) FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.
- v Repeat 2.ii ~ 2.iv for test sequence 2 generated in Step 1 of Section 4.3.1.
- vi Repeat 2.i ~ 2.v for all the technologies and bands selected in Section 4.2.1.

The time-averaging validation criteria for SAR measurement is that, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR (i.e., Eq. (3b)).

FCC ID: ZNFG900VM	 <b>PART 2 RF EXPOSURE EVALUATION REPORT</b>		 <b>Approved by:</b> Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 20 of 93

This section provides the test plan and test procedures for validating Qualcomm Smart Transmit feature for mmW transmission. For this EUT, millimeter wave (mmW) transmission is only in non-standalone mode, i.e., it requires an LTE link as anchor.

### 5.1 Test sequence for validation in mmW NR transmission

In 5G mmW NR transmission, the test sequence for validation is with the callbox requesting EUT's Tx power in 5G mmW NR at maximum power all the time.

### 5.2 Test configuration selection criteria for validating Smart Transmit feature

#### 5.2.1 Test configuration selection for time-varying Tx power transmission

The Smart Transmit time averaging feature operation is independent of bands, modes, channels, and antenna configurations (beams) for a given technology. Hence, validation of Smart Transmit in any one band/mode/channel per technology is sufficient.

#### 5.2.2 Test configuration selection for change in antenna configuration (beam)

The Smart Transmit time averaging feature operation is independent of bands, modes, channels, and antenna configurations (beams) for a given technology. Hence, validation of Smart Transmit with beam switch between any two beams is sufficient.

#### 5.2.3 Test configuration selection for SAR vs. PD exposure switch during transmission

The Smart Transmit time averaging feature operation is independent of the nature of exposure (SAR vs. PD) and ensures total time-averaged RF exposure compliance. Hence, validation of Smart Transmit in any one band/mode/channel/beam for mmW + sub-6 (LTE) transmission is sufficient, where the exposure varies among SAR dominant scenario, SAR+PD scenario, and PD dominant scenario.

### 5.3 Test procedures for mmW radiated power measurements

Perform conducted power measurement (for  $f < 6\text{GHz}$ ) and radiated power measurement (for  $f > 6\text{GHz}$ ) for LTE + mmW transmission to validate Smart Transmit time averaging feature in the various transmission scenarios described in Section 3.

This section provides general conducted power measurement procedures to perform compliance test under dynamic transmission scenarios described in Section 3. In practice, an adjustment can be made in these procedures. The justification/clarification may be provided.

#### 5.3.1 Time-varying Tx power scenario

The purpose of the test is to demonstrate the effectiveness of power limiting enforcement and that the time-averaged Tx power when converted into RF exposure values does not exceed the FCC limit at all times (see Eq. (2a), (2b) & (2c) in Section 3).

#### Test procedure:

1. Measure conducted Tx power corresponding to  $P_{limit}$  for LTE in selected band, and measure radiated Tx power corresponding to *input.power.limit* in desired mmW band/channel/beam by following below steps:

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 21 of 93

- a. Measure radiated power corresponding to mmW *input.power.limit* by setting up the EUT's Tx power in desired band/channel/beam at *input.power.limit* in Factory Test Mode (FTM). This test is performed in a calibrated anechoic chamber. Rotate the EUT to obtain maximum radiated Tx power, keep the EUT in this position and do not disturb the position of the EUT inside the anechoic chamber for the rest of this test.
  - b. Reset EUT to place in online mode and establish radio link in LTE, measure conducted Tx power corresponding to LTE  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.
2. Set *Reserve\_power\_margin* to actual (intended) value and reset power on EUT to enable Smart Transmit. With EUT setup for a mmW NR call in the desired/selected LTE band and mmW NR band, perform the following steps:
- a. Establish LTE and mmW NR connection in desired band/channel/beam used in Step 1. As soon as the mmW connection is established, immediately request all-down bits on LTE link. With callbox requesting EUT's Tx power to be at maximum mmW power to test predominantly PD exposure scenario (as SAR exposure is less when LTE's Tx power is at low power).
  - b. After 120s, request LTE to go all-up bits for at least 100s. SAR exposure is dominant. There are two scenarios:
    - i If  $P_{limit} < P_{max}$  for LTE, then the RF exposure margin (provided to mmW NR) gradually runs out (due to high SAR exposure). This results in gradual reduction in the 5G mmW NR transmission power and eventually seized 5G mmW NR transmission when LTE goes to  $P_{reserve}$  level.
    - ii If  $P_{limit} \geq P_{max}$  for LTE, then the 5G mmW NR transmission's averaged power should gradually reduce but the mmW NR connection can sustain all the time (assuming TxAGC uncertainty = 0dB).
  - c. Record the conducted Tx power of LTE and radiated Tx power of mmW for the full duration of this test of at least 300s.
3. Once the measurement is done, extract instantaneous Tx power versus time for both LTE and mmW links. Convert the conducted Tx power for LTE into 1gSAR or 10gSAR value using Eq. (2a) and  $P_{limit}$  measured in Step 1.b, and then divide by FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR to obtain instantaneous normalized 1gSAR or 10gSAR versus time. Perform 100s running average to determine normalized 100s-averaged 1gSAR or 10gSAR versus time.

NOTE: In Eq.(2a), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at  $P_{limit}$  for the corresponding technology/band/antenna/DSI reported in Part 1 report.

4. Similarly, convert the radiated Tx power for mmW into 4cm<sup>2</sup>PD value using Eq. (2b) and the radiated Tx power limit (i.e., radiated Tx power at *input.power.limit*) measured in Step 1.a, then divide by FCC 4cm<sup>2</sup>PD limit of 10W/m<sup>2</sup> to obtain instantaneous normalized 4cm<sup>2</sup>PD versus time. Perform 4s running average to determine normalized 4s-averaged 4cm<sup>2</sup>PD versus time.

NOTE: In Eq.(2b), instantaneous radiated Tx power is converted into instantaneous 4cm<sup>2</sup>PD by applying the worst-case 4cm<sup>2</sup>PD value measured at *input.power.limit* for the selected band/beam in Part 1 report.

5. Make one plot containing: (a) instantaneous conducted Tx power for LTE versus time, (b) computed 100s-averaged conducted Tx power for LTE versus time, (c) instantaneous radiated Tx power for

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 22 of 93

mmW versus time, as measured in Step 2, (d) computed 4s-averaged radiated Tx power for mmW versus time, and (e) time-averaged conducted and radiated power limits for LTE and mmW radio using Eq. (5a) & (5b), respectively:

$$\text{Time averaged LTE power limit} = \text{meas. } P_{\text{limit}} + 10 \times \log\left(\frac{\text{FCC SAR limit}}{\text{meas.SAR}_P\text{limit}}\right) \quad (5a)$$

$$\text{Time averaged mmW NR power limit} = \text{meas. } EIRP_{\text{input.power.limit}} + 10 \times \log\left(\frac{\text{FCC PD limit}}{\text{meas.PD}_{\text{input.power.limit}}}\right) \quad (5b)$$

where  $\text{meas. } EIRP_{\text{input.power.limit}}$  and  $\text{meas. } PD_{\text{input.power.limit}}$  correspond to measured EIRP at  $\text{input.power.limit}$  and measured power density at  $\text{input.power.limit}$ .

6. Make another plot containing: (a) computed normalized 100s-averaged 1gSAR or 10gSAR versus time determined in Step 3, (b) computed normalized 4s-averaged 4cm<sup>2</sup>PD versus time determined in Step 4, and (c) corresponding total normalized time-averaged RF exposure (sum of steps (6.a) and (6.b)) versus time.

The validation criteria are, at all times, the total normalized time-averaged RF exposure versus time determined in Step 6.c shall not exceed the normalized limit of 1.0 of FCC requirement (i.e., Eq. (2c)).

### 5.3.2 Switch in SAR vs. PD exposure during transmission

This test is to demonstrate that Smart Transmit feature is independent of the nature of exposure (SAR vs. PD), accurately accounts for switching in exposures among SAR dominant, SAR+PD, and PD dominant scenarios, and ensures total time-averaged RF exposure compliance.

#### Test procedure:

1. Measure conducted Tx power corresponding to  $P_{\text{limit}}$  for LTE in selected band, and measure radiated Tx power corresponding to  $\text{input.power.limit}$  in desired mmW band/channel/beam by following below steps:
  - a. Measure radiated power corresponding to  $\text{input.power.limit}$  by setting up the EUT's Tx power in desired band/channel/beam at  $\text{input.power.limit}$  in FTM. This test is performed in a calibrated anechoic chamber. Rotate the EUT to obtain maximum radiated Tx power, keep the EUT in this position and do not disturb the position of the EUT inside the anechoic chamber for the rest of this test.
  - b. Reset EUT to place in online mode and establish radio link in LTE, measure conducted Tx power corresponding to LTE  $P_{\text{limit}}$  with Smart Transmit enabled and  $\text{Reserve\_power\_margin}$  set to 0 dB, callbox set to request maximum power.
2. Set  $\text{Reserve\_power\_margin}$  to actual (intended) value and reset power in EUT, with EUT setup for LTE + mmW call, perform the following steps:
  - a. Establish LTE (sub-6) and mmW NR connection with callbox.
  - b. As soon as the mmW connection is established, immediately request all-down bits on LTE link. Continue LTE (all-down bits) + mmW transmission for more than 100s duration to test predominantly PD exposure scenario (as SAR exposure is negligible from all-down bits in LTE).
  - c. After 120s, request LTE to go all-up bits, mmW transmission should gradually run out of RF exposure margin if LTE's  $P_{\text{limit}} < P_{\text{max}}$  and seize mmW transmission (SAR only scenario); or mmW transmission should gradually reduce in Tx power and will sustain the connection if LTE's  $P_{\text{limit}} > P_{\text{max}}$ .
  - d. After 75s, request LTE to go all-down bits, mmW transmission should start getting back RF exposure margin and resume transmission again.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 23 of 93	

- e. Record the conducted Tx power of LTE and radiated Tx power of mmW for the entire duration of this test of at least 300s.
3. Once the measurement is done, extract instantaneous Tx power versus time for both LTE and mmW links. Convert the conducted Tx power for LTE into 1gSAR or 10gSAR value using Eq. (2a) and  $P_{limit}$  measured in Step 1.b, and then divide by FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR to obtain instantaneous normalized 1gSAR or 10gSAR versus time. Perform 100s running average to determine normalized 100s-averaged 1gSAR or 10gSAR versus time.

NOTE: In Eq.(2a), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at  $P_{limit}$  for the corresponding technology/band/antenna/DSI reported in Part 1 report.

4. Similarly, convert the radiated Tx power for mmW into 4cm<sup>2</sup>PD value using Eq. (2b) and the radiated Tx power limit (i.e., radiated Tx power at *input.power.limit*) measured in Step 1.a, then divide this by FCC 4cm<sup>2</sup>PD limit of 10W/m<sup>2</sup> to obtain instantaneous normalized 4cm<sup>2</sup>PD versus time. Perform 4s running average to determine normalized 4s-averaged 4cm<sup>2</sup>PD versus time.

NOTE: In Eq.(2b), instantaneous radiated Tx power is converted into instantaneous 4cm<sup>2</sup>PD by applying the worst-case 4cm<sup>2</sup>PD value measured at *input.power.limit* for the selected band/beam in Part 1 report.

5. Make one plot containing: (a) instantaneous conducted Tx power for LTE versus time, (b) computed 100s-averaged conducted Tx power for LTE versus time, (c) instantaneous radiated Tx power for mmW versus time, as measured in Step 2, (d) computed 4s-averaged radiated Tx power for mmW versus time, and (e) time-averaged conducted and radiated power limits for LTE and mmW radio using Eq. (5a) & (5b), respectively.
6. Make another plot containing: (a) computed normalized 100s-averaged 1gSAR or 10gSAR versus time determined in Step 3, (b) computed normalized 4s-averaged 4cm<sup>2</sup>PD versus time determined in Step 4, and (c) corresponding total normalized time-averaged RF exposure (sum of steps (6.a) and (6.b)) versus time.

The validation criteria are, at all times, the total normalized time-averaged RF exposure versus time determined in Step 6.c shall not exceed the normalized limit of 1.0 of FCC requirement (i.e., Eq. (2c)).

### 5.3.3 Change in antenna configuration (beam)

This test is to demonstrate the correct power control by Smart Transmit during changes in antenna configuration (beam). Since the *input.power.limit* varies with beam, the Eq. (2a), (2b) and (2c) in Section 3 are written as below for transmission scenario having change in beam,

$$1g\_or\_10gSAR(t) = \frac{conducted\_Tx\_power(t)}{conducted\_Tx\_power\_P_{limit}} * 1g\_or\_10gSAR\_P_{limit} \quad (8a)$$

$$4cm^2PD_1(t) = \frac{radiated\_Tx\_power\_1(t)}{radiated\_Tx\_power\_input.power.limit_1} * 4cm^2PD\_input.power.limit_1 \quad (8b)$$

$$4cm^2PD_2(t) = \frac{radiated\_Tx\_power\_2(t)}{radiated\_Tx\_power\_input.power.limit_2} * 4cm^2PD\_input.power.limit_2 \quad (8c)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR\ limit} + \frac{\frac{1}{T_{PD}} \left[ \int_{t-T_{PD}}^{t_1} 4cm^2PD_1(t) dt + \int_{t_1}^t 4cm^2PD_2(t) dt \right]}{FCC\ 4cm^2\ PD\ limit} \leq 1 \quad (8d)$$

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 24 of 93	

where,  $conducted\_Tx\_power(t)$ ,  $conducted\_Tx\_power\_P_{limit}$ , and  $1g\_or\_10gSAR\_P_{limit}$  correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at  $P_{limit}$ , and measured  $1gSAR$  or  $10gSAR$  values at  $P_{limit}$  corresponding to LTE transmission. Similarly,  $radiated\_Tx\_power\_1(t)$ ,  $radiated\_Tx\_power\_input.power.limit\_1$ , and  $4cm^2PD\_input.power.limit\_1$  correspond to the measured instantaneous radiated Tx power, radiated Tx power at  $input.power.limit$ , and  $4cm^2PD$  value at  $input.power.limit$  of beam 1;  $radiated\_Tx\_power\_2(t)$ ,  $radiated\_Tx\_power\_input.power.limit\_2$ , and  $4cm^2PD\_input.power.limit\_2$  correspond to the measured instantaneous radiated Tx power, radiated Tx power at  $input.power.limit$ , and  $4cm^2PD$  value at  $input.power.limit$  of beam 2 corresponding to mmW transmission.

### Test procedure:

1. Measure conducted Tx power corresponding to  $P_{limit}$  for LTE in selected band, and measure radiated Tx power corresponding to  $input.power.limit$  in desired mmW band/channel/beam by following below steps:
    - a. Measure radiated power corresponding to mmW  $input.power.limit$  by setting up the EUT's Tx power in desired band/channel at  $input.power.limit$  of beam 1 in FTM. Do not disturb the position of the EUT inside the anechoic chamber for the rest of this test. Repeat this Step 1.a for beam 2.
    - b. Reset EUT to place in online mode and establish radio link in LTE, measure conducted Tx power corresponding to LTE  $P_{limit}$  with Smart Transmit enabled and  $Reserve\_power\_margin$  set to 0 dB, callbox set to request maximum power.
  2. Set  $Reserve\_power\_margin$  to actual (intended) value and reset power in EUT, With EUT setup for LTE + mmW connection, perform the following steps:
    - a. Establish LTE (sub-6) and mmW NR connection in beam 1. As soon as the mmW connection is established, immediately request all-down bits on LTE link with the callbox requesting EUT's Tx power to be at maximum mmW power.
    - b. After beam 1 continues transmission for at least 20s, request the EUT to change from beam 1 to beam 2, and continue transmitting with beam 2 for at least 20s.
    - c. Record the conducted Tx power of LTE and radiated Tx power of mmW for the entire duration of this test.
  3. Once the measurement is done, extract instantaneous Tx power versus time for both LTE and mmW links. Convert the conducted Tx power for LTE into  $1gSAR$  or  $10gSAR$  value using the similar approach described in Step 3 of Section 5.3.2. Perform 100s running average to determine normalized 100s-averaged  $1gSAR$  versus time.
  4. Similarly, convert the radiated Tx power for mmW NR into  $4cm^2PD$  value using Eq. (8b), (8c) and the radiated Tx power limits (i.e., radiated Tx power at  $input.power.limit$ ) measured in Step 1.a for beam 1 and beam 2, respectively, and then divide the resulted PD values by FCC  $4cm^2PD$  limit of  $10W/m^2$  to obtain instantaneous normalized  $4cm^2PD$  versus time for beam 1 and beam 2. Perform 4s running average to determine normalized 4s-averaged  $4cm^2PD$  versus time.
- NOTE: In Eq.(8b) and (8c), instantaneous radiated Tx power of beam 1 and beam 2 is converted into instantaneous  $4cm^2PD$  by applying the worst-case  $4cm^2PD$  value measured at the  $input.power.limit$  of beam 1 and beam 2 in Part 1 report, respectively.
5. Since the measured radiated powers for beam 1 and beam 2 in Step 1.a were performed at an arbitrary rotation of EUT in anechoic chamber, repeat Step 1.a of this procedure by rotating the EUT to determine maximum radiated power at  $input.power.limit$  in FTM mode for both beams separately.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 25 of 93	

Re-scale the measured instantaneous radiated power in Step 2.c by the delta in radiated power measured in Step 5 and the radiated power measured in Step 1.a for plotting purposes in next Step. In other words, this step essentially converts measured instantaneous radiated power during the measurement in Step 2 into maximum instantaneous radiated power for both beams. Perform 4s running average to compute 4s-averaged radiated Tx power. Additionally, use these EIRP values measured at *input.power.limit* at respective peak locations to determine the EIRP limits (using Eq. (5b)) for both these beams.

6. Make one plot containing: (a) instantaneous conducted Tx power for LTE versus time, (b) computed 100s-averaged conducted Tx power for LTE versus time, (c) instantaneous radiated Tx power for mmW versus time, as obtained in Step 5, (d) computed 4s-averaged radiated Tx power for mmW versus time, as obtained in Step 5, and (e) time-averaged conducted and radiated power limits for LTE and mmW radio, respectively.
7. Make another plot containing: (a) computed normalized 100s-averaged 1gSAR versus time determined in Step 3, (b) computed normalized 4s-averaged 4cm<sup>2</sup>PD versus time determined in Step 4, and (c) corresponding total normalized time-averaged RF exposure (sum of steps (6.a) and (6.b)) versus time.

The validation criteria are, at all times, the total normalized time-averaged RF exposure versus time determined in Step 6.c shall not exceed the normalized limit of 1.0 of FCC requirement (i.e., (8d)).

## 5.4 Test procedure for time-varying PD measurements

The following steps are used to perform the validation through PD measurement for transmission scenario 1 described in Section 3:

1. Place the EUT on the cDASY6 platform to perform PD measurement in the worst-case position/surface for the selected mmW band/beam. In PD measurement, the callbox is set to request maximum Tx power from EUT all the time. Hence, “path loss” calibration between callbox antenna and EUT is not needed in this test.
2. Time averaging feature validation:
  - a. Measure conducted Tx power corresponding to  $P_{limit}$  for LTE in selected band, and measure point E-field corresponding to *input.power.limit* in desired mmW band/channel/beam by following the below steps:
    - i. Measure conducted Tx power corresponding to LTE  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, with callbox set to request maximum power.
    - ii. Measure point E-field at peak location of fast area scan corresponding to *input.power.limit* by setting up the EUT’s Tx power in desired mmW band/channel/beam at *input.power.limit* in FTM. Do not disturb the position of EUT and mmW cDASY6 probe.
  - b. Set *Reserve\_power\_margin* to actual value (i.e., intended value) and reset power on EUT, place EUT in online mode. With EUT setup for LTE (sub-6) + mmW NR call, as soon as the mmW NR connection is established, request all-down bits on LTE link. Continue LTE (all-down bits) + mmW transmission for more than 100s duration to test predominantly PD exposure scenario. After 120s, request LTE to go all-up bits, mmW transmission should gradually reduce. Simultaneously, record the conducted Tx power of LTE transmission using power meter and point E-field (in terms of ratio of  $\frac{[pointE(t)]^2}{[pointE\_input.power.limit]^2}$ ) of mmW transmission using cDASY6 E-field probe at peak location identified in Step 2.a.ii for the entire duration of this test of at least 300s.
  - c. Once the measurement is done, extract instantaneous conducted Tx power versus time for LTE transmission and  $\frac{[pointE(t)]^2}{[pointE\_input.power.limit]^2}$  ratio versus time from cDASY6 system for mmW

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 26 of 93	

transmission. Convert the conducted Tx power for LTE into 1gSAR or 10gSAR value using Eq. (4a) and  $P_{limit}$  measured in Step 2.a.i, and then divide this by FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR to obtain instantaneous normalized 1gSAR or 10gSAR versus time. Perform 100s running average to determine normalized 100s-averaged 1gSAR or 10gSAR versus time

NOTE: In Eq.(4a), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at  $P_{limit}$  for the corresponding technology/band reported in Part 1 report.

- d. Similarly, convert the point E-field for mmW transmission into  $4\text{cm}^2\text{PD}$  value using Eq. (4b) and radiated power limit measured in Step 2.a.ii, and then divide this by FCC  $4\text{cm}^2\text{PD}$  limit of  $10\text{W}/\text{m}^2$  to obtain instantaneous normalized  $4\text{cm}^2\text{PD}$  versus time. Perform 4s running average to determine normalized 4s-averaged  $4\text{cm}^2\text{PD}$  versus time.
- e. Make one plot containing: (i) computed normalized 100s-averaged 1gSAR or 10gSAR versus time determined in Step 2.c, (ii) computed normalized 4s-averaged  $4\text{cm}^2\text{PD}$  versus time determined in Step 2.d, and (iii) corresponding total normalized time-averaged RF exposure (sum of steps (2.e.i) and (2.e.ii)) versus time.

The validation criteria are, at all times, the total normalized time-averaged RF exposure versus time determined in Step 2.e.iii shall not exceed the normalized limit of 1.0 of FCC requirement (i.e., Eq. (4c)).

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 27 of 93	

## 6.1 Conducted Measurement Test setup

### Legacy Test Setup

The Rohde & Schwarz CMW500 callbox was used in this test. The test setup schematic is shown in Figure 6-1a (Appendix D – Test Setup Photo 1) for measurements with a single antenna of DUT, and in Figure 6-1b (Appendix D – Test Setup Photo 2) for measurements involving antenna switch. For single antenna measurement, one port (RF1 COM) of the callbox is connected to the RF port of the DUT using a directional coupler. For technology/band switch measurement, one port (RF1 COM) of the callbox used for signaling two different technologies is connected to a combiner, which is in turn connected to a directional coupler. The other end of the directional coupler is connected to a splitter to connect to two RF ports of the DUT corresponding to the two antennas of interest. In the setups, power meter is used to tap the directional coupler for measuring the conducted output power of the DUT. For all legacy conducted tests, only RF1 COM port of the callbox is used to communicate with the DUT.

Note that for this EUT, antenna switch test is included within time-window switch test as the selected technology/band combinations for the time-window switch test are on two different antennas


All the path losses from RF port of DUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter.

### LTE+Sub6 NR test setup:


LTE conducted port and Sub6 NR conducted port are different on this EUT, therefore, the LTE and Sub6 NR signals for power meter measurement are performed on separate paths, as shown in below Figure 6-1c (Appendix D – Test Setup Photo 3).

All the path losses from RF port of DUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter.


FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 28 of 93

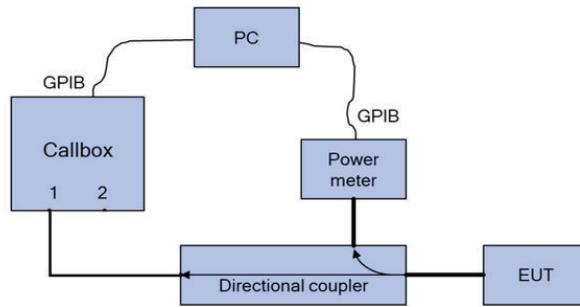

(a) Appendix D – Test Setup Photo 1

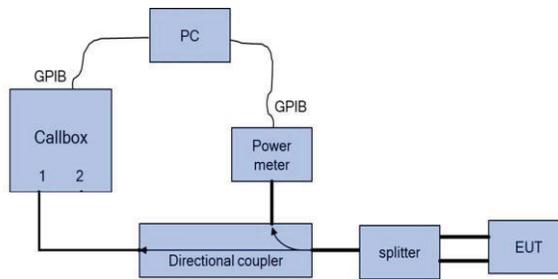

(b) Appendix D – Test Setup Photo 2

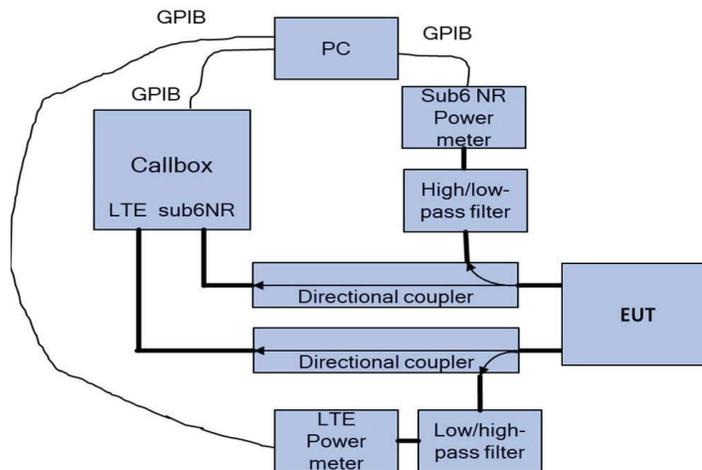

(c) Appendix D – Test Setup Photo 3

**Figure 6-1**  
**Conducted power measurement setup**

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 29 of 93

Both the callbox and power meter are connected to the PC using GPIB cables. Two test scripts are custom made for automation, and the test duration set in the test scripts is 500 seconds.

For time-varying Tx power measurement, the PC runs the 1<sup>st</sup> test script to send GPIB commands to control the callbox’s requested power versus time, while at the same time to record the conducted power measured at DUT RF port using the power meter. The commands sent to the callbox to request power are:

- 0dBm for 100 seconds
- test sequence 1 or test sequence 2 (defined in Section 4.1 and generated in Section 4.2.1), for 360 seconds
- stay at the last power level of test sequence 1 or test sequence 2 for the remaining time.

Power meter readings are periodically recorded every 100ms. A running average of this measured Tx power over 100 seconds is performed in the post-data processing to determine the 100s-time averaged power.

For call drop, technology/band/antenna switch, and DSI switch tests, after the call is established, the callbox is set to request the DUT’s Tx power at 0dBm for 100 seconds while simultaneously starting the 2<sup>nd</sup> test script runs at the same time to start recording the Tx power measured at DUT RF port using the power meter. After the initial 100 seconds since starting the Tx power recording, the callbox is set to request maximum power from the DUT for the rest of the test. Note that the call drop/re-establish, or technology/band/antenna switch or DSI switch is manually performed when the Tx power of DUT is at  $P_{reserve}$  level. See Section 4.3 for detailed test procedure of call drop test, technology/band/antenna switch test and DSI switch test.

## 6.2 SAR Measurement setup

The measurement setup is similar to normal SAR measurements as described in the Part 1 Test Report. The difference in SAR measurement setup for time averaging feature validation is that the callbox is signaling in close loop power control mode (instead of requesting maximum power in open loop control mode) and callbox is connected to the PC using GPIB so that the test script executed on PC can send GPIB commands to control the callbox’s requested power over time (test sequence). The same test script used in conducted setup for time-varying Tx power measurements is also used in this section for running the test sequences during SAR measurements, and the recorded values from the disconnected power meter by the test script were discarded.

As mentioned in Section 4.4, for DUT to follow TPC command sent from the callbox wirelessly, the “path loss” between callbox antenna and the DUT needs to be very well calibrated. Since the SAR chamber is in uncontrolled environment, precautions must be taken to minimize the environmental influences on “path loss”. Similarly, in the case of time-varying SAR measurements in Sub6 NR (with LTE as anchor), “path loss” between callbox antenna and the EUT needs to be carefully calibrated for both LTE link as well as for Sub6 NR link.


The DUT is placed in worst-case position according to Table 8-2.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 30 of 93	

### 7.1 Radiated Power Measurement Test setup

The Keysight Technologies E7515B UXM callbox is used in this test. The schematic of the setup is shown in Figure 7-1. The UXM callbox has two RF radio heads to up/down convert IF to mmW frequencies, which in turn are connected to two horn antennas for V- and H-polarizations for downlink communication. In the uplink, a directional coupler is used in the path of one of the horn antennas to measure and record radiated power using a Rohde & Schwarz NRP50S power sensor. Note here that the isolation of the directional coupler may not be sufficient to attenuate the downlink signal from the callbox, which will result in high noise floor masking the recording of radiated power from EUT. In that case, either lower the downlink signal strength emanating from the RF radio heads of callbox or add an attenuator between callbox radio heads and directional coupler. Additionally, note that since the measurements performed in this validation are all relative, measurement of EUT's radiated power in one polarization is sufficient. The EUT is placed inside an anechoic chamber with V- and H-pol horn antennas to establish the radio link as shown in Figure 7-1. The callbox's LTE port is directly connected to the EUT's RF port via a directional coupler to measure the EUT's conducted Tx power using a Rohde & Schwarz NRP8S power sensor. Additionally, EUT is connected to the PC via USB connection for sending beam switch command. Care is taken to route the USB cable and RF cable (for LTE connection) away from the EUT's mmW antenna modules.

Setup in Figure 7-1 is used for the test scenario 1, 5 and 6 described in Section 3. The test procedures described in Section 5 are followed. The path losses from the EUT to both the power meters are calibrated and used as offset in the power meter.

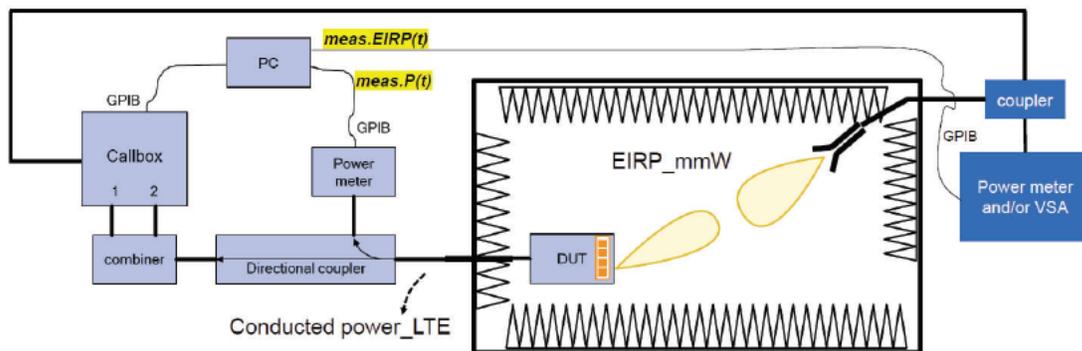

**Figure 7-1**  
**mmW NR radiated power measurement setup – Test Setup Photo 8**

Both the callbox and power meters are connected to the PC using USB cables. Test scripts are custom made for automation of establishing LTE + mmW call, conducted Tx power recording for LTE and radiated Tx power recording for mmW. These tests are manually stopped after desired time duration. Test script is programmed to set LTE Tx power to all-down bits on the callbox immediately after the mmW link is established, and programmed to set toggle between all-up and all-down bits depending on the transmission scenario being evaluated. Similarly, test script is also programmed to send beam switch command manually to the EUT via USB connection. For all the tests, the callbox is set to request maximum Tx power in mmW NR radio from EUT all the time.

Test configurations for this validation are detailed in Section 5.2. Test procedures are listed in Section 5.3.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 31 of 93



### 8.1 WWAN (sub-6) transmission

The  $P_{limit}$  values, corresponding to 1.0 W/kg (1gSAR) and 2.5 W/kg (10gSAR) of  $SAR_{design\_target}$ , for technologies and bands supported by DUT are derived in Part 0 report and summarized in Table 8-1. Note all  $P_{limit}$  power levels entered in Table 8-1 correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes.

**Table 8-1**  
 **$P_{limit}$  for supported technologies and bands ( $P_{limit}$  in EFS file)**

Exposure Scenario:		Head	Body-Worn	Phablet	Hotspot	Phablet	Maximum Tune-Up Output Power*
Averaging Volume:		1g	1g	10g	1g	10g	
Spacing:		0 mm	10 mm	2, 1, 4 mm	10 mm	0 mm	
DSI:		1			5	8	
Technology/Band	Antenna	$P_{limit}$					$P_{max}$
GSM/GPRS/EDGE 850 MHz	1	27.9					24.8
GSM/GPRS/EDGE 1900 MHz	2	23.0					21.8
UMTS B5	1	27.2					24.5
UMTS B2	2	24.6			22.0		24.5
CDMA/EVDO BC0	1	28.2					24.5
CDMA/EVDO BC1	2	24.6			22.0		24.5
LTE FDD B12	1	28.9					24.5
LTE FDD B13	1	28.9					24.5
LTE FDD B5	1	27.5					24.5
LTE FDD B66/B4	2	24.6			23.0		24.5
LTE FDD B2	2	24.7			22.5		24.5
LTE TDD B48	8	20.5					21.5
NR FDD n5	1	27.9					23.8
NR FDD n66	3	23.5					24.5
NR FDD n2	1	23.5					24.5

\* Maximum tune up target power,  $P_{max}$ , is configured in NV settings in DUT to limit maximum transmitting power. This power is converted into peak power in NV settings for TDD schemes. The DUT maximum allowed output power is equal to  $P_{max} + 1$  dB device uncertainty.

Based on selection criteria described in Section 4.2.1, the selected technologies/bands for testing time-varying test sequences are highlighted in yellow in Table 8-1. Per the manufacturer, the  $Reserve\_power\_margin$  (dB) is set to 3dB in EFS and is used in Part 2 test.

The radio configurations used in Part 2 test for selected technologies, bands, DSIs and antennas are listed in Table 8-2. The corresponding worst-case radio configuration 1gSAR or 10gSAR values for selected technology/band/DSI are extracted from Part 1 report and are listed in the last column of Table 8-2.

Based on equations (1a), (2a), (3a) and (4a), it is clear that Part 2 testing outcome is normalized quantity, which implies that it can be applied to any radio configuration within a selected technology/band/DSI. Thus, as long as applying the worst-case SAR obtained from the worst radio configuration in Part 1 testing to calculate time-varying SAR exposure in equations (1a),

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 33 of 93

(2a), (3a) and (4a), the accuracy in compliance demonstration remains the same. Therefore, there may be some differences between the radio configuration selected for Part 2 testing and the radio configuration associated with worst-case SAR obtained in the Part 1 evaluation.

**Table 8-2  
Radio configurations selected for Part 2 test**

Test Case #	Test Scenario	Tech	Band	Antenna	DSI	Channel	Frequency [MHz]	RB/RB Offset/Bandwidth (MHz)	Mode	SAR Exposure Scenario	Part 1 Worst Case Measured SAR at Plimit (W/kg)
1	Test Sequence 1	LTE	B66	2	5	132322	1745	1/50/20 MHz BW	QPSK	Hotspot, bottom edge, 10 mm	0.797
	132322					1745	1/50/20 MHz BW	QPSK			
2	Test Sequence 2		B48	8	5	56207	3646.7	1/0/20 MHz BW	QPSK		
	56207					3646.7	1/0/20 MHz BW	QPSK			
3	Test Sequence 1	UMTS	B2	2	5	9400	1880	-	RMC	Hotspot, bottom edge, 10 mm	0.937
	Test Sequence 2					9400	1880	-	RMC		
4	Test Sequence 1	CDMA	BC1	2	5	600	1880	-	EVDO	Hotspot, bottom edge, 10 mm	0.777
	Test Sequence 2					600	1880	-			
5	Test Sequence 1	Sub6 NR	n66	3	5	349000	1745	1/1/20 MHz BW	DFT-S-OFDM, QPSK	Hotspot, right edge, 10 mm	0.770
	Test Sequence 2					349000	1745	1/1/20 MHz BW	DFT-S-OFDM, QPSK		
6	Test Sequence 1		n2	3	5	376000	1880	1/1/20 MHz BW	DFT-S-OFDM, QPSK	Hotspot, right edge, 10 mm	1.040
	Test Sequence 2					376000	1880	1/1/20 MHz BW	DFT-S-OFDM, QPSK		
7	Change in Call	LTE	B48	8	5	56207	3646.7	1/0/20 MHz BW	QPSK	Hotspot, back side, 10 mm	0.337
8	Tech/Band Switch	LTE	B66	2	5	132322	1745	1/50/20 MHz BW	QPSK	Hotspot, bottom edge, 10 mm	0.797
		UMTS	B2	2	5	9400	1880	-	RMC	Hotspot, bottom edge, 10 mm	0.937
9	DSI Switch	UMTS	B2	2	5	9400	1880	-	RMC	Hotspot, bottom edge, 10 mm	0.937
				2	1	9400	1880	-	RMC	Phablet, front side, 1 mm	2.84
10	Time Window/Antenna Switch	LTE	B66	2	5	132322	1745	1/50/20 MHz BW	QPSK	Hotspot, bottom edge, 10 mm	0.797
			B48	8	5	56207	3646.7	1/0/20 MHz BW	QPSK	Hotspot, back side, 10 mm	0.337
11	SAR1 vs SAR2	LTE	B2	2	5	18900	1880	1/50/20 MHz BW	QPSK	Hotspot, bottom edge, 10 mm	1.08
		sub6 NR	n66	3	5	349000	1745	1/1/20 MHz BW	DFT-S-OFDM, QPSK	Hotspot, right edge, 10 mm	0.770

Note that the DUT has a proximity sensor to manage extremity exposure, which is represented with DSI = 8; similarly, the hotspot exposure is distinguished via hotspot mode, represented as DSI = 5; DSI = 1 represents all other exposures which cannot be distinguished, thus, in this case, the maximum 1g SAR and/or 10g SAR among all remaining exposure scenarios or the minimum Plimit among all remaining exposure scenarios (i.e., head 1g SAR, body worn 1g SAR evaluation at 10 mm spacing, phablet 10gSAR extremity evaluation at 1~4mm spacing, phablet 10g SAR extremity evaluation at 0mm spacing for left surface) is used in Smart Transmit feature for time averaging operation. Based on the selection criteria described in Section 4.2, the radio configurations for the Tx varying transmission test cases listed in Section 3 are:

- Technologies and bands for time-varying Tx power transmission: The test case 1~6 listed in Table 8-2 are selected to test with the test sequences defined in Section 4.1 in both time-varying conducted power measurement and time-varying SAR measurement.
- Technology and band for change in call test: LTE Band 48, having the lowest  $P_{limit}$  among all technologies and bands (test case 7 in Table 8-2), is selected for performing the call drop test in conducted power setup.
- Technologies and bands for change in technology/band test: Following the guidelines in Section 4.2.3, test case 8 in Table 8-2 is selected for handover test from a technology/band within one technology group (LTE Band 66, DSI=5, antenna 2), to a technology/band in the same DSI within another technology group (UMTS 1900, DSI=5, antenna 2) in conducted power setup.
- Technologies and bands for change in DSI: Based on selection criteria in Section 4.2.5, for a given technology and band, test case 9 in Table 8-2 is selected for DSI switch test by establishing a call in UMTS 1900 in DSI=5, and then handing over to DSI = 1 exposure scenario in conducted power setup.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 34 of 93	

5. Technologies and bands for change in time-window/antenna: Based on selection criteria in Section 4.2.6, for a given DSI=5, test case 10 in Table 8-2 is selected for time window switch between 60s window (LTE Band 48, Antenna 8) and 100s window (LTE Band 66, Antenna 2) in conducted power setup.
6. Technologies and bands for switch in SAR exposure: Based on selection criteria in Section 4.2.7 Scenario 1, test case 11 in Table 8-2 is selected for SAR exposure switching test in one of the supported simultaneous WWAN transmission scenario, i.e., LTE + Sub6 NR active in the same 100s time window, in conducted power setup. Since this device supports LTE+mmW NR, test for Section 4.2.7 Scenario 2 for RF exposure switch is covered in Sections 13.1 and 13.2 between LTE (100s window) and mmW NR (4s window).

## 8.2 $P_{limit}$ and $P_{max}$ measurement results

The measured  $P_{limit}$  for all the selected radio configurations given in Table 8-2 are listed in below Table 8-3.  $P_{max}$  was also measured for radio configurations selected for testing time-varying Tx power transmission scenarios in order to generate test sequences following the test procedures in Section 4.1.

**Table 8-3**  
**Measured  $P_{limit}$  and  $P_{max}$  of selected radio configurations**

Test Case #	Test Scenario	Tech	Band	Antenna	DSI	Channel	Frequency [MHz]	RB/RB Offset/Bandwidth [MHz]	Mode	SAR Exposure Scenario	EFS $P_{limit}$ [dBm]	Tune-up $P_{max}$ [dBm]	Measured $P_{limit}$ [dBm]	Measured $P_{max}$ [dBm]
1	Test Sequence 1	LTE	B66	2	5	132322	1745	1/50/20 MHz BW	QPSK	Hotspot	23.00	24.50	22.60	24.94
	132322					1745	1/50/20 MHz BW	QPSK	23.00		24.50	22.60	24.94	
2	Test Sequence 1		B48	8	5	56207	3646.7	1/0/20 MHz BW	QPSK	Hotspot	20.50	21.50	19.80	21.71
	Test Sequence 2					56207	3646.7	1/0/20 MHz BW	QPSK		20.50	21.50	19.80	21.71
3	Test Sequence 1	UMTS	B2	2	5	9400	1880	-	RMC	Hotspot	22.00	24.50	21.87	24.85
	Test Sequence 2					9400	1880	-	RMC		22.00	24.50	21.87	24.85
4	Test Sequence 1	CDMA	BC1	2	5	600	1880	-	EVDO	Hotspot	22.00	24.50	21.55	25.08
	Test Sequence 2					600	1880	-			22.00	24.50	21.55	25.08
5	Test Sequence 1	Sub6 NR	n66	3	5	349000	1745	1/1/20 MHz BW	DFT-S-OFDM, QPSK	Hotspot	23.50	24.50	23.88	24.99
	Test Sequence 2					349000	1745	1/1/20 MHz BW	DFT-S-OFDM, QPSK		23.50	24.50	23.88	24.99
6	Test Sequence 1		n2	3	5	376000	1880	1/1/20 MHz BW	DFT-S-OFDM, QPSK	Hotspot	23.50	24.50	23.95	25.00
	Test Sequence 2					376000	1880	1/1/20 MHz BW	DFT-S-OFDM, QPSK		23.50	24.50	23.95	25.00
7	Change in Call	LTE	B48	8	5	56207	3646.7	1/0/20 MHz BW	QPSK	Hotspot	20.50	21.50	19.80	21.71
8	Tech/Band Switch	LTE	B66	2	5	132322	1745	1/50/20 MHz BW	QPSK	Hotspot	23.00	24.50	22.60	24.94
		UMTS	B2	2	5	9400	1880	-	RMC	Hotspot	22.00	24.50	21.87	24.85
9	DSI Switch	UMTS	B2	2	5	9400	1880	-	QPSK	Hotspot	22.00	24.50	21.60	24.93
				2	1	9400	1880	-	QPSK	Phablet	24.60	24.50	24.93	24.93
10	Time Window/Antenna Switch	LTE	B66	2	5	132322	1745	1/50/20 MHz BW	QPSK	Hotspot	23.00	24.50	22.60	24.94
			B48	8	5	56207	3646.7	1/0/20 MHz BW	QPSK	Hotspot	20.50	21.50	19.80	21.71
11	SAR1 vs SAR2	LTE	B2	2	5	18900	1880	1/50/20 MHz BW	QPSK	Hotspot	22.50	24.50	23.35	25.25
		sub6 NR	n66	3	5	349000	1745	1/1/20 MHz BW	DFT-S-OFDM, QPSK	Hotspot	23.50	24.50	23.88	24.99

Note: The device uncertainty of  $P_{max}$  is +/- 1 dB as provided by manufacturer.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 35 of 93	

### 9.1 Time-varying Tx Power Case

The measurement setup is shown in Figure 6-1. The purpose of the time-varying Tx power measurement is to demonstrate the effectiveness of power limiting enforcement and that the time-averaged Tx power when represented in time-averaged 1gSAR or 10gSAR values does not exceed FCC limit as shown in Eq. (1a) and (1b), rewritten below:

$$1g\_or\_10gSAR(t) = \frac{conducted\_Tx\_power(t)}{conducted\_Tx\_power\_P_{limit}} * 1g\_or\_10gSAR\_P_{limit} \quad (1a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g\_or\_10gSAR(t) dt}{FCC\ SAR\ limit} \leq 1 \quad (1b)$$

where,  $conducted\_Tx\_power(t)$ ,  $conducted\_Tx\_power\_P_{limit}$ , and  $1g\_or\_10gSAR\_P_{limit}$  correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at  $P_{limit}$ , and measured 1gSAR and 10gSAR values at  $P_{limit}$  reported in Part 1 test (listed in Table 8-2 of this report as well).

Following the test procedure in Section 4.3, the conducted Tx power measurement for all selected configurations are reported in this section. In all the conducted Tx power plots, the dotted line represents the requested power by callbox (test sequence 1 or test sequence 2), the blue curve represents the instantaneous conducted Tx power measured using power meter, the green curve represents time-averaged power and red line represents the conducted power limit that corresponds to FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.


Similarly, in all the 1g or 10gSAR plots (when converted using Eq. (1a)), the green curve represents the 100s/60s-time averaged 1gSAR or 10gSAR value calculated based on instantaneous 1gSAR or 10gSAR; and the red line limit represents the FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

Time-varying Tx power measurements were conducted on test cases #1 ~ #6 in Table 8-2, by generating test sequence 1 and test sequence 2 given in APPENDIX E: using measured  $P_{limit}$  and measured  $P_{max}$  (last two columns of Table 8-3) for each of these test cases. Measurement results for test cases #1 ~ #6 are given in Sections 9.1.1-9.1.6.


FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 36 of 93

9.1.1 LTE Band 66

Test result for test sequence 1:

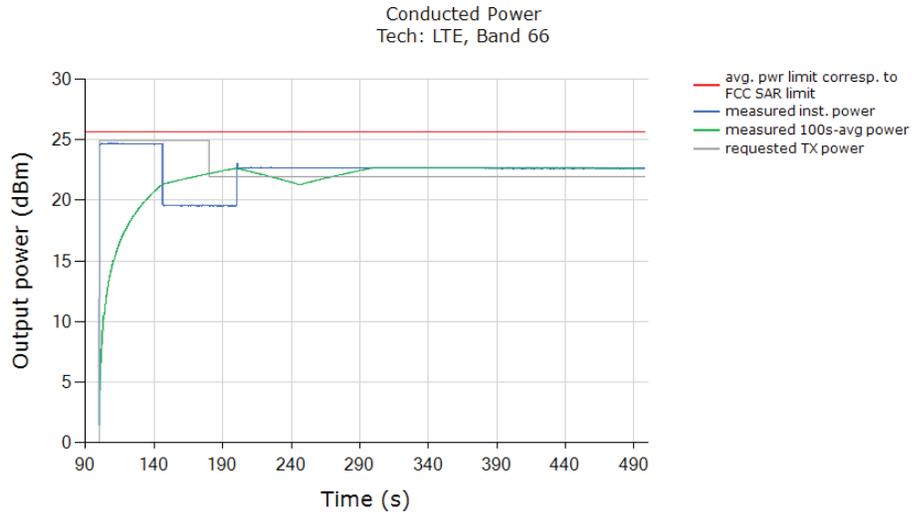


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

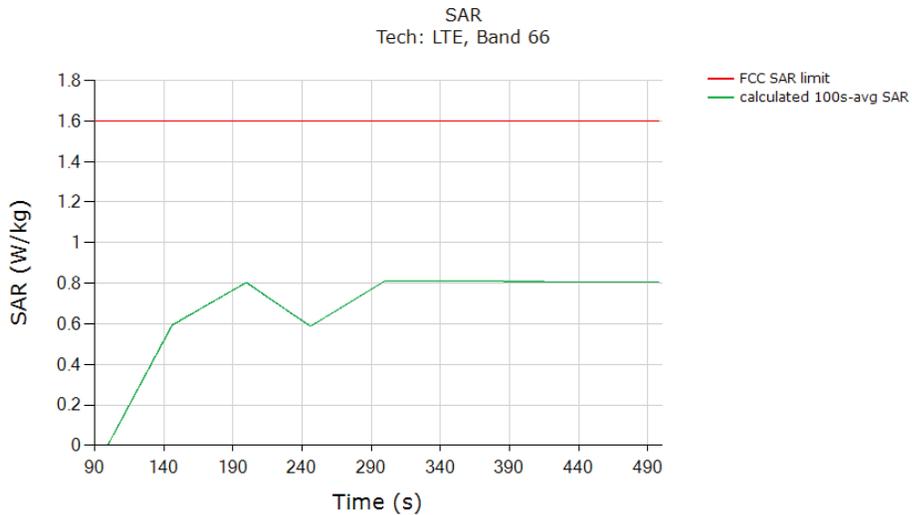


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.811
Validated: Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	PART 2 RF EXPOSURE EVALUATION REPORT	LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 37 of 93

Test result for test sequence 2:

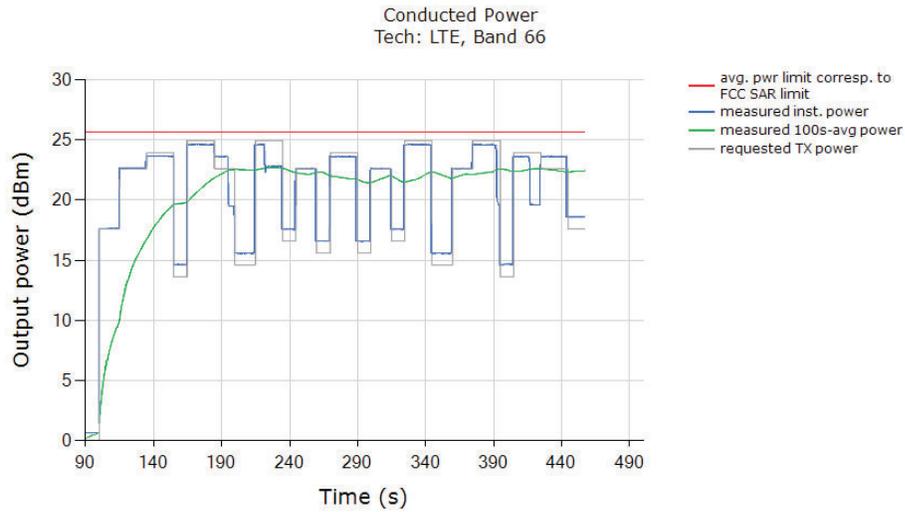

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

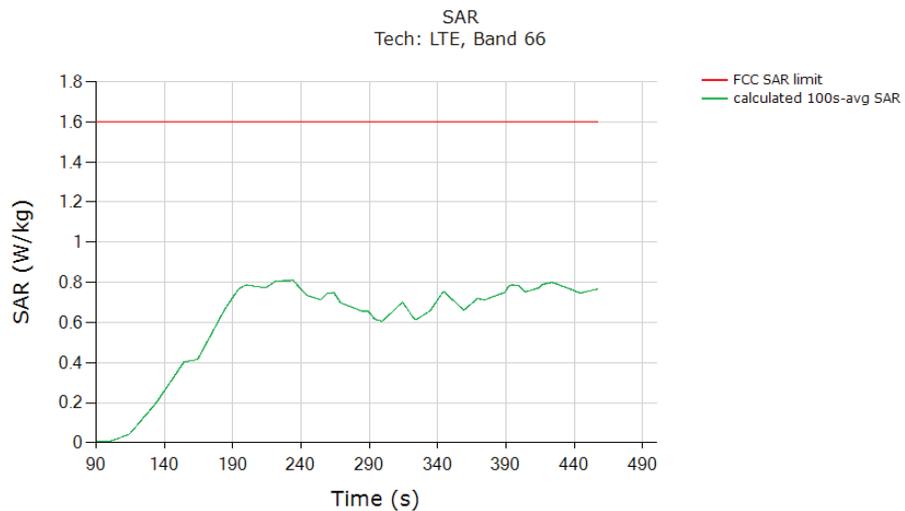


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.809
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	


FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 38 of 93

## 9.1.2 LTE Band 48

### Test result for test sequence 1:

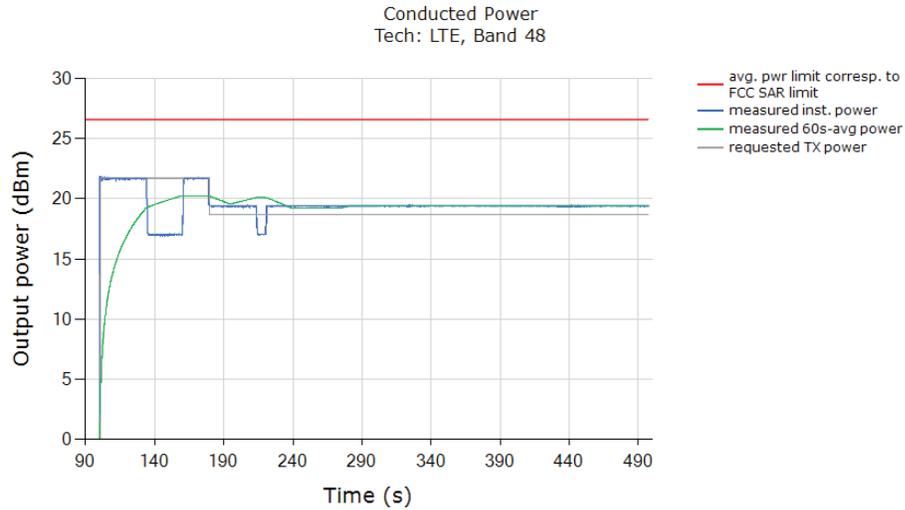


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

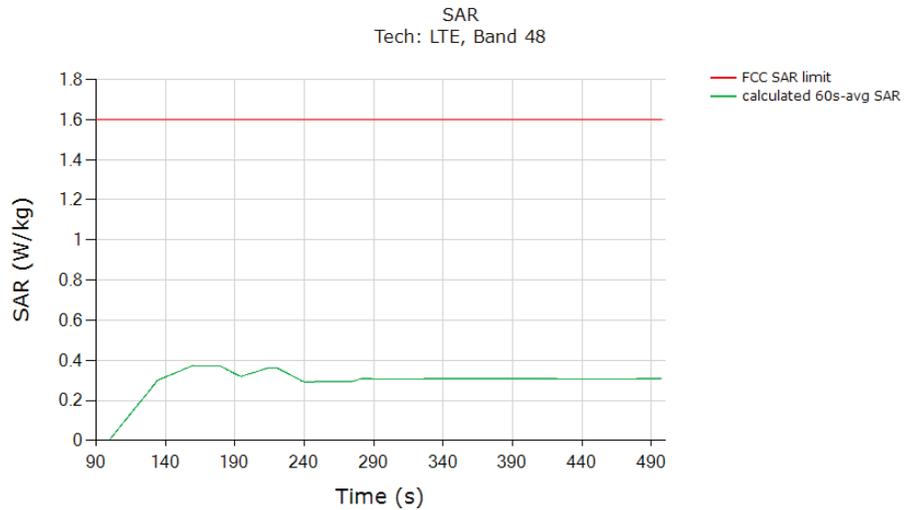


	(W/kg)
FCC 1gSAR limit	1.6
Max 60s-time averaged 1gSAR (green curve)	0.374
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 39 of 93

Test result for test sequence 2:

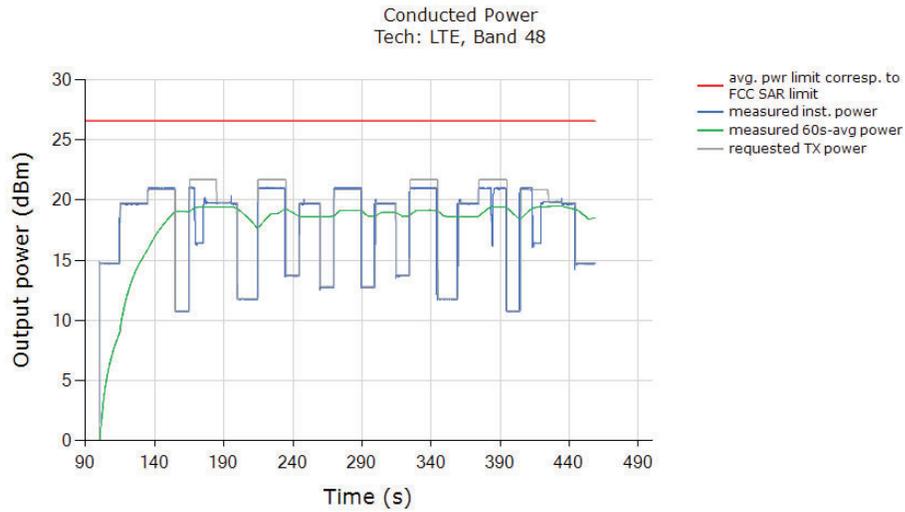

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

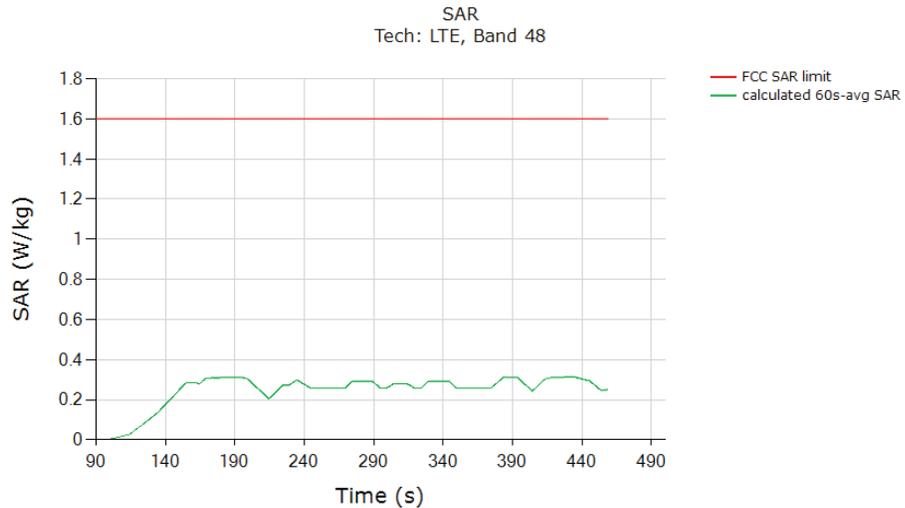


	(W/kg)
FCC 1gSAR limit	1.6
Max 60s-time averaged 1gSAR (green curve)	0.313
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 40 of 93	


9.1.3

UMTS B2

Test result for test sequence 1:

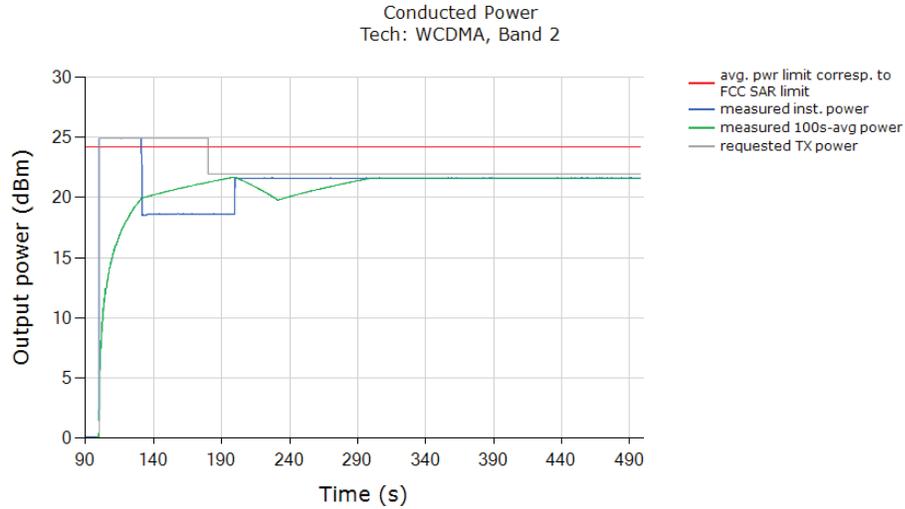


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

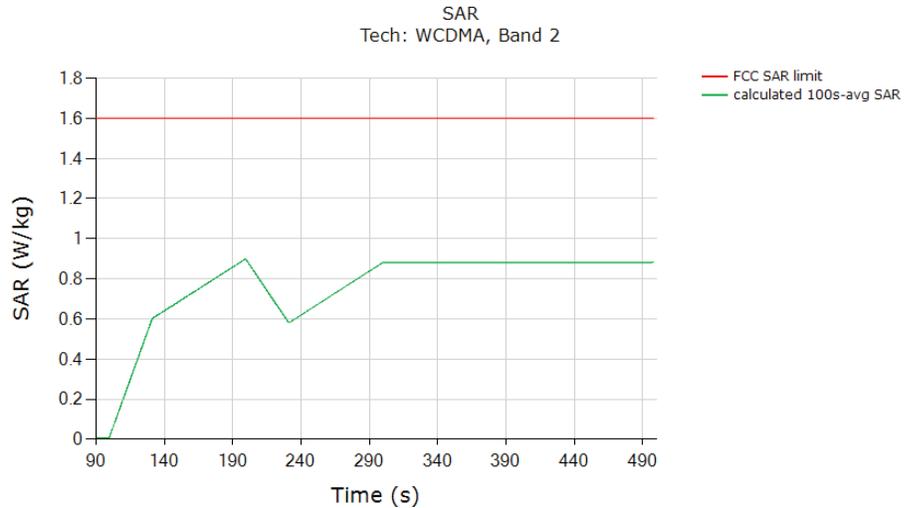


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.899
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 41 of 93

Test result for test sequence 2:

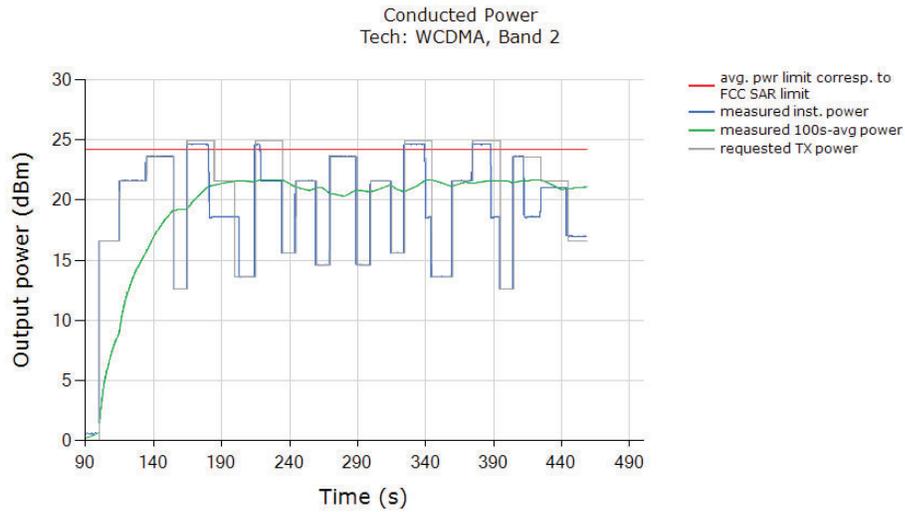

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

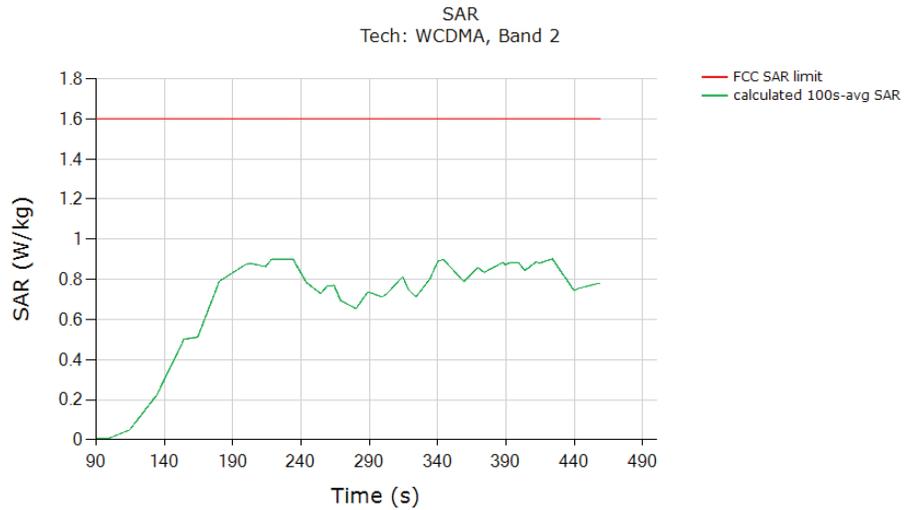


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.901
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 42 of 93


9.1.4

CDMA/EVDO BC1

Test result for test sequence 1:

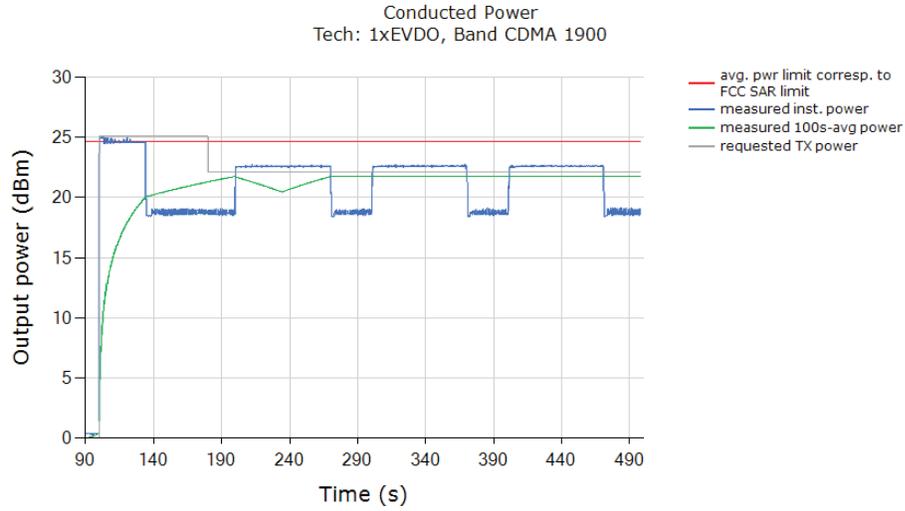


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

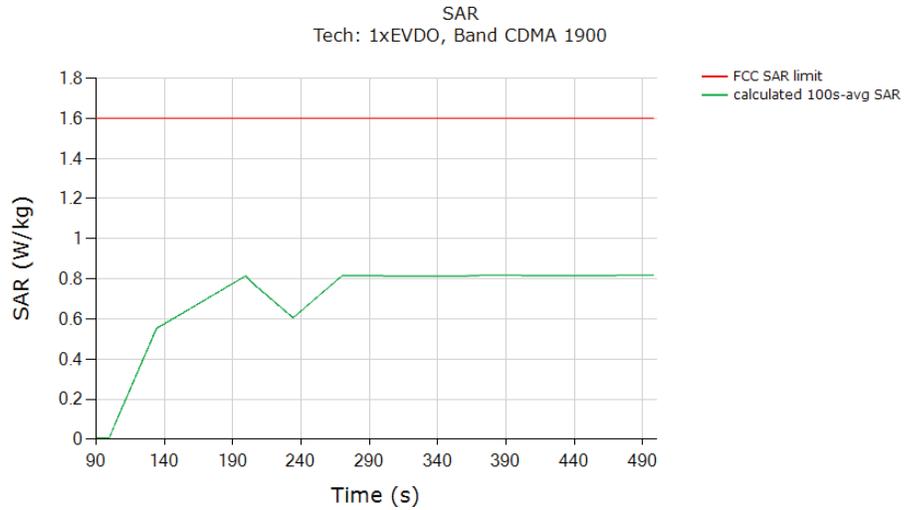


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.814
Validated: Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 43 of 93

Test result for test sequence 2:

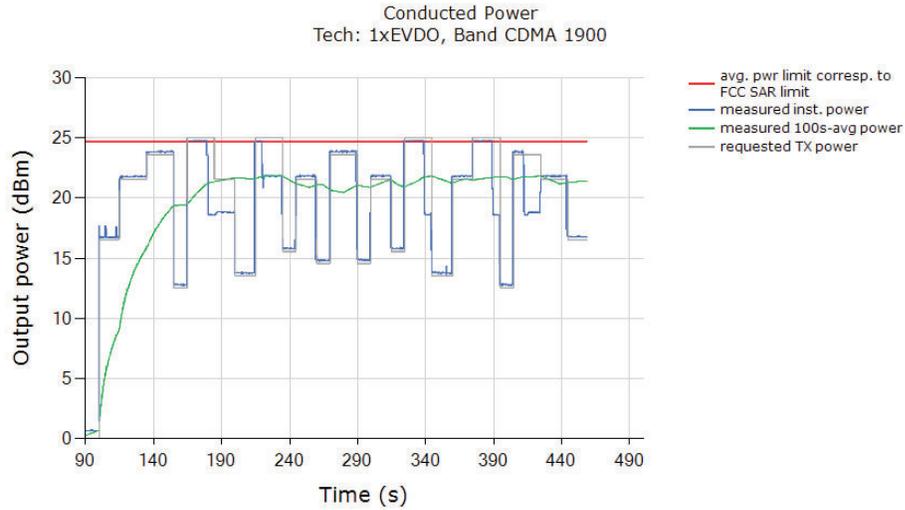

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

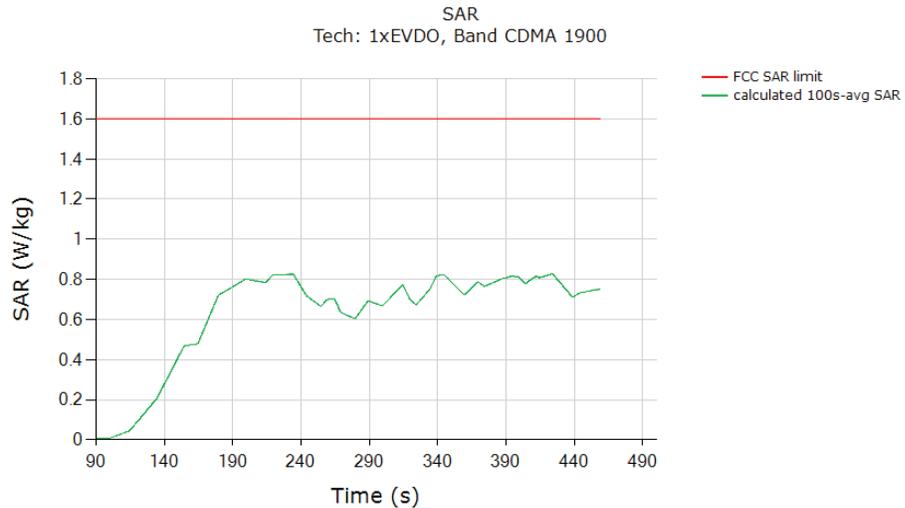


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.827
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 44 of 93	


9.1.5

NR n66

Test result for test sequence 1:

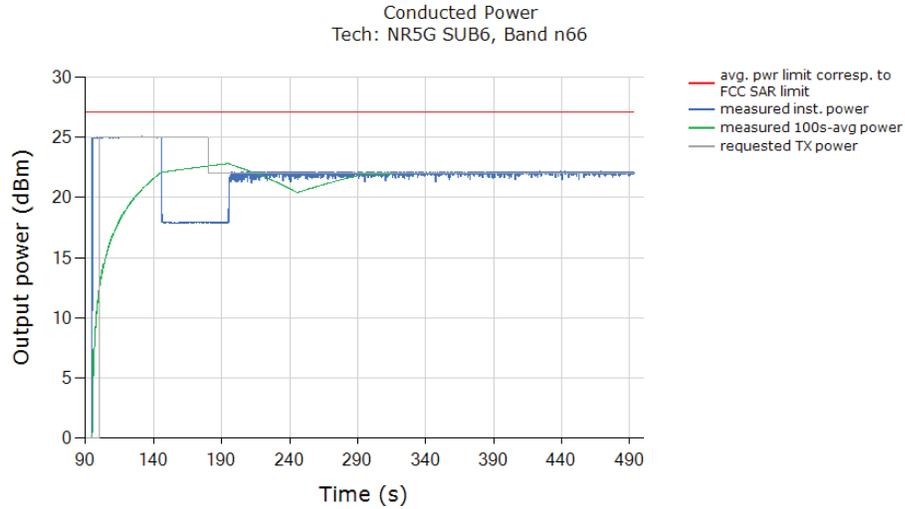


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

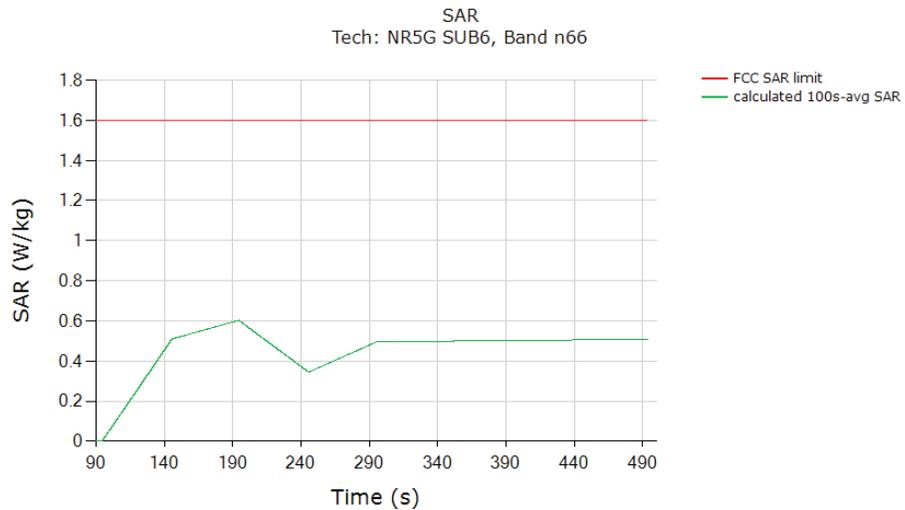


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.603
<b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB Reserve_power_margin setting) of the measured SAR at P <sub>limit</sub> (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 45 of 93	

Test result for test sequence 2:

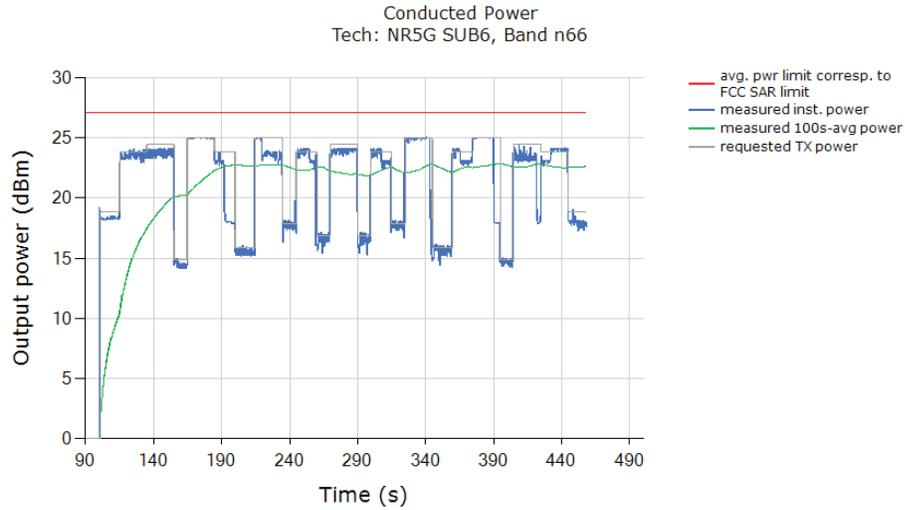

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

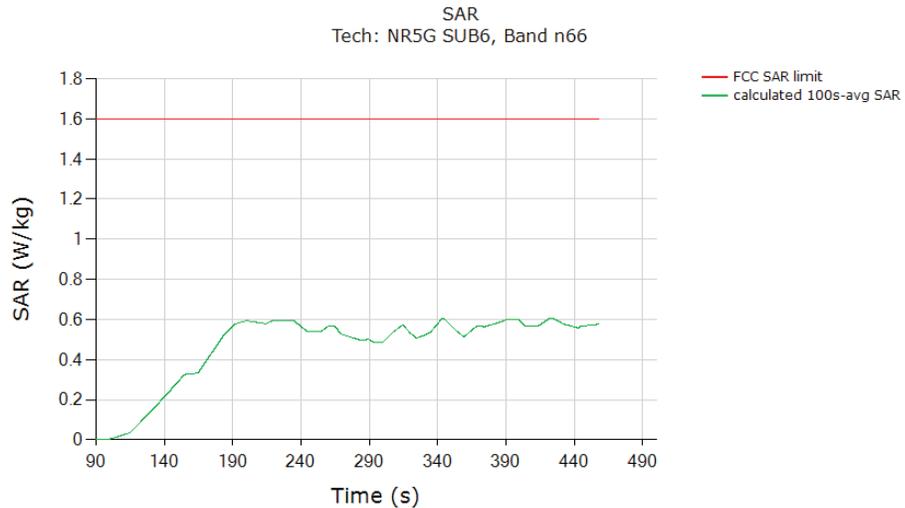


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.604
<b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at <i>Plimit</i> (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 46 of 93


9.1.6

NR n2

Test result for test sequence 1:

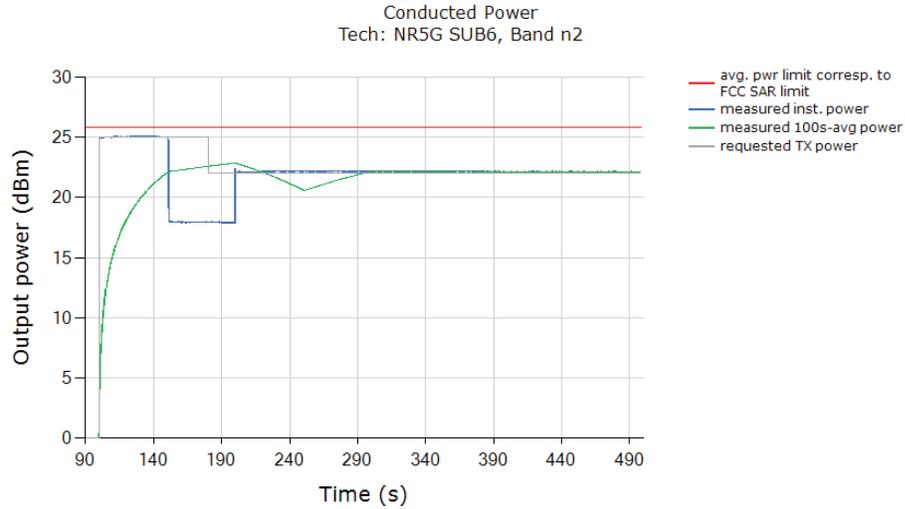


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

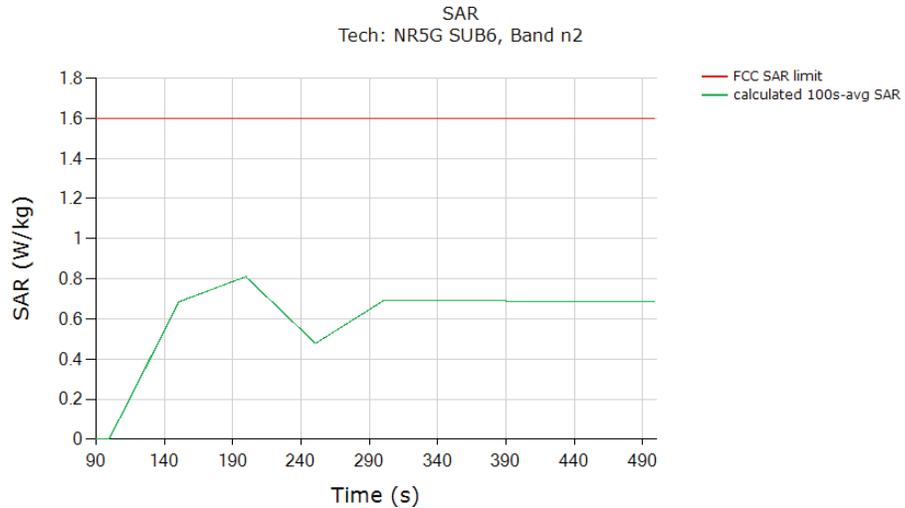


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.810
Validated: Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB Reserve_power_margin setting) of the measured SAR at P <sub>limit</sub> (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 47 of 93

Test result for test sequence 2:

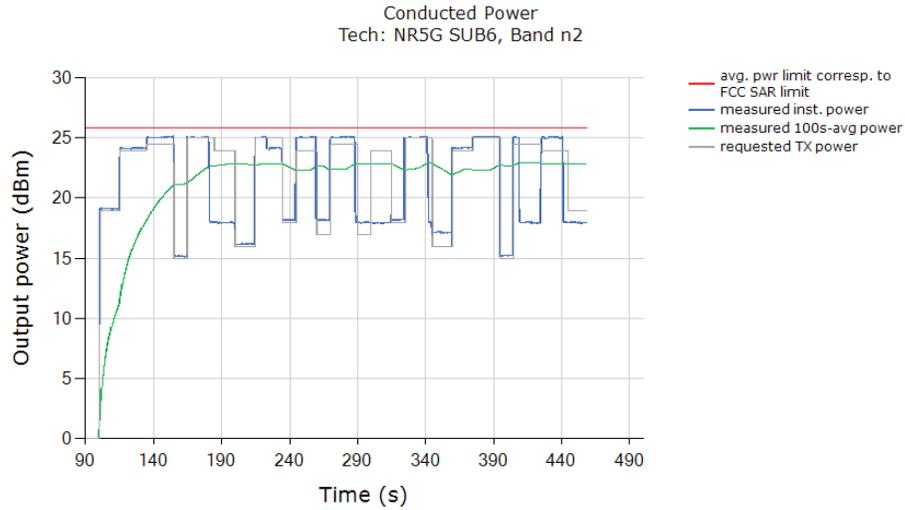

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

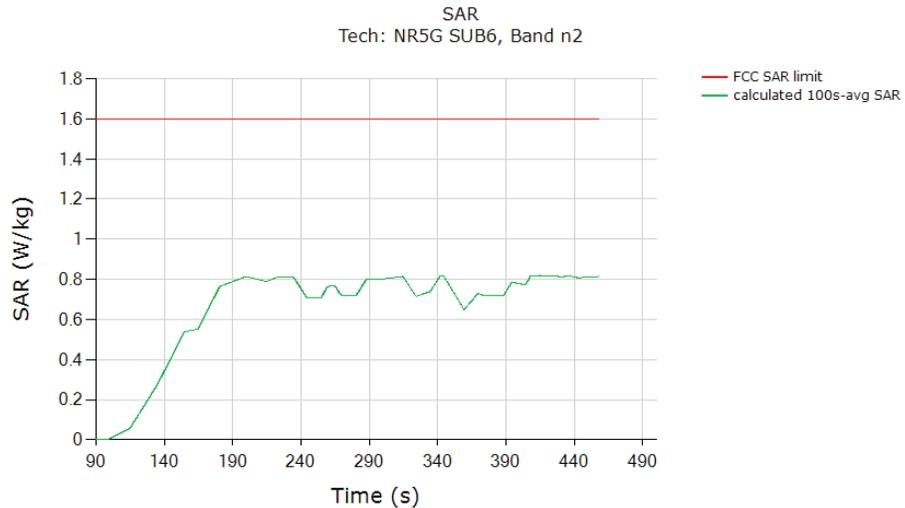

	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.819
<b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB Reserve_power_margin setting) of the measured SAR at P <sub>limit</sub> (last column in Table 8-2).	


FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 48 of 93

## 9.2 Call Drop Test Case

This test was measured LTE Band 48, Antenna 8, DSI=5, and with callbox requesting maximum power. The call drop was manually performed when the DUT is transmitting at  $P_{reserve}$  level as shown in the plot below (dotted black region). The measurement setup is shown in Figure 6-1. The detailed test procedure is described in Section 4.3.2.


### Call drop test result:

Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power kept the same  $P_{reserve}$  level of LTE Band 48 after the call was re-established:

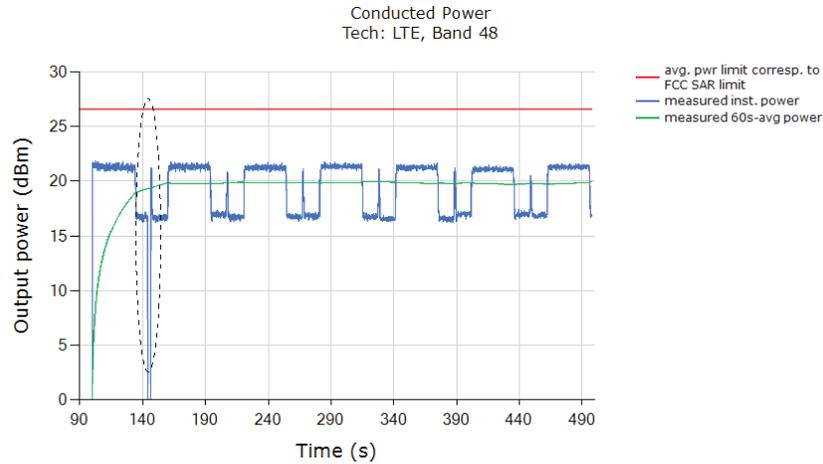

Plot Notes: The power level after the change in call kept the same  $P_{reserve}$  level of LTE Band 48. The conducted power plot shows expected Tx transition.

Plot 2: Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

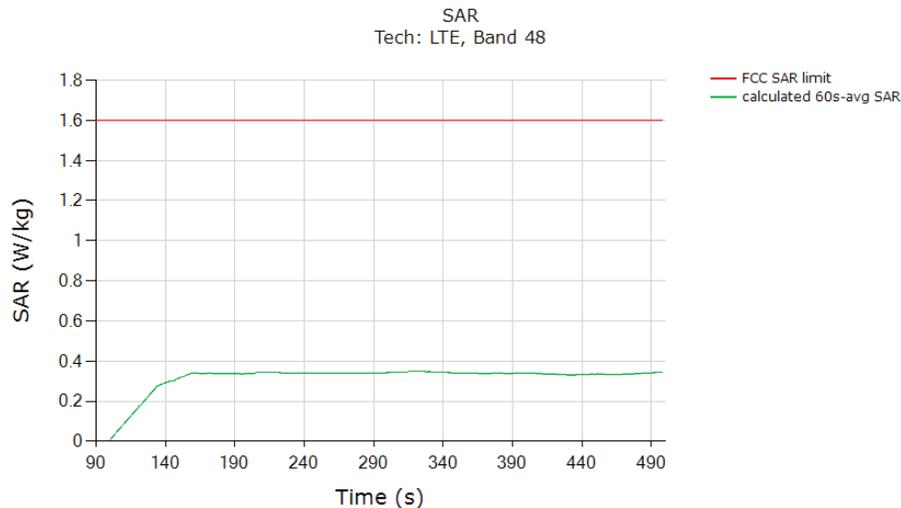

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 49 of 93

	(W/kg)
FCC 1gSAR limit	1.6
Max 60s-time averaged 1gSAR (green curve)	0.347
Validated	


The test result validated the continuity of power limiting in call change scenario.

### 9.3 Change in Technology/Band Test Case

This test was conducted with callbox requesting maximum power, and with a technology switch from LTE 66, Antenna 2, DSI = 5 to UMTS B2, Antenna 2, DSI = 5. Following procedure detailed in Section 4.3.3, and using the measurement setup shown in Figure 6-1, the technology/band switch was performed when the DUT is transmitting at  $P_{reserve}$  level as shown in the plot below (dotted black region).

#### Test result for change in technology/band:

Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power changed from LTE Band 66, Antenna 2, DSI = 5  $P_{reserve}$  level to UMTS 1900, Antenna 2, DSI = 5  $P_{reserve}$  level (within 1 dB device uncertainty):

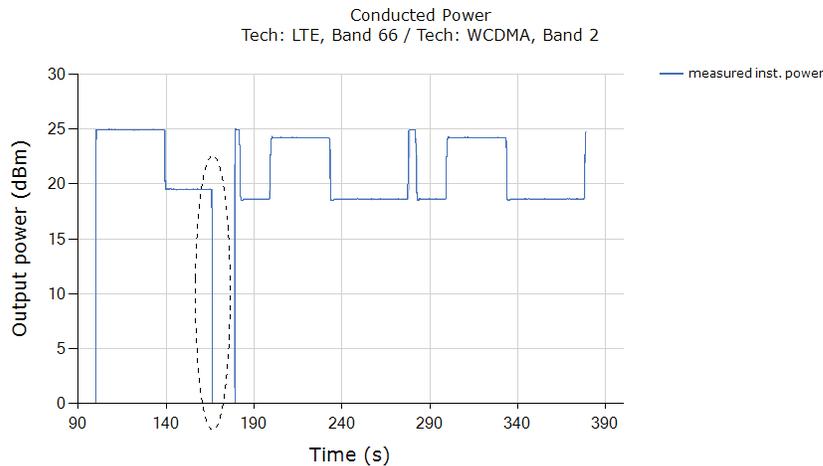


Note: As per the manufacturer,  $Reserve\_power\_margin = 3$  dB. Based on Table 8-1,  $EFS\ Plimit = 23.0$  dBm for LTE Band 66 (DSI=5), and  $EFS\ Plimit = 22.0$  dBm for UMTS 1900 (DSI=5), it can be seen from above plot that the difference in  $Preserve (= Plimit - 3dB\ Reserve\_power\_margin)$  power level

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 50 of 93	

corresponds to the expected difference in *Plimit* levels of 1dB (within 1dB of sub6 radio design related uncertainty). Therefore, the conducted power plot shows expected transition in Tx power.

Plot 2: All the time-averaged conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (6a), (6b) and (6c), and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the normalized FCC limit of 1:

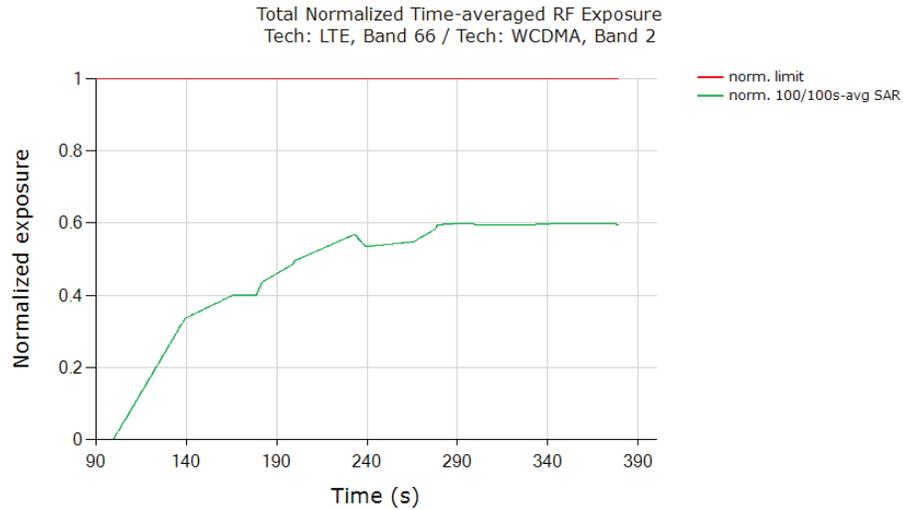

	(W/kg)
FCC normalized SAR limit	1.0
Max 100s-time averaged normalized SAR (green curve)	0.562
Validated	

The test result validated the continuity of power limiting in technology/band switch scenario.


FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 51 of 93	

## 9.4 DSI Switch Test Case

This test was conducted with callbox requesting maximum power, and with DSI switch from UMTS 1900 DSI = 5 (hotspot) to DSI = 1 (phablet). Following procedure detailed in Section 4.3.5 using the measurement setup shown in Figure 6-1, the DSI switch was performed when the DUT is transmitting at  $P_{reserve}$  level as shown in the plot below (dotted black circle).

### Test result for change in DSI:


Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power changed when DSI = 5 switches to DSI = 1:

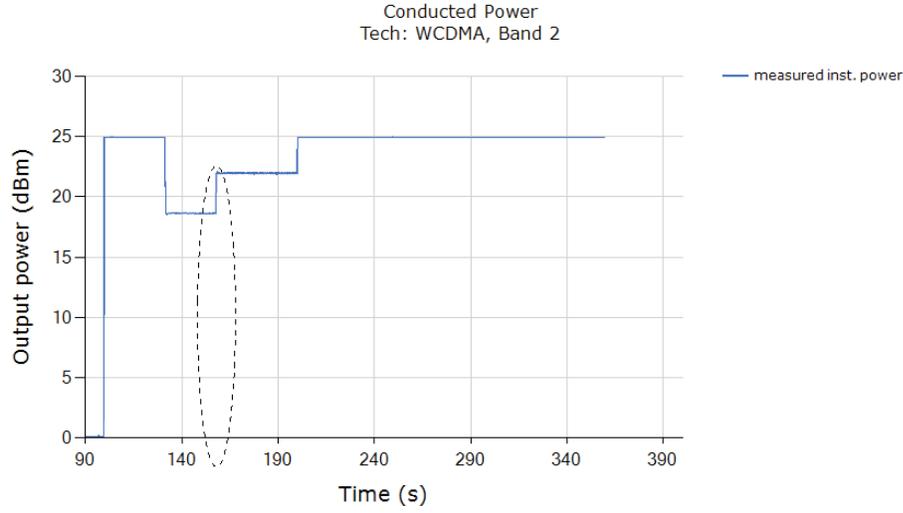

Note: As per the manufacturer, Reserve power margin = 3dB. Based on Table 8-1, EFS Plimit = 22.0 dBm for UMTS B2 hotspot DSI = 5, and EFS Plimit = 24.6 dBm for Phablet DSI = 1. The difference in Preserve (= Plimit – 3dB Reserve power margin) level corresponds to the expected different in Plimit levels of 2.6 dB (within 1dB of sub6 radio design related uncertainty). Therefore, the conducted power plot shows expected transition in Tx power. Plot 2: All the time-averaged conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (6a), (6b) and (6c), and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the FCC limit of 1 unit.

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 52 of 93	

Total Normalized Time-averaged RF Exposure  
Tech: WCDMA, Band 2

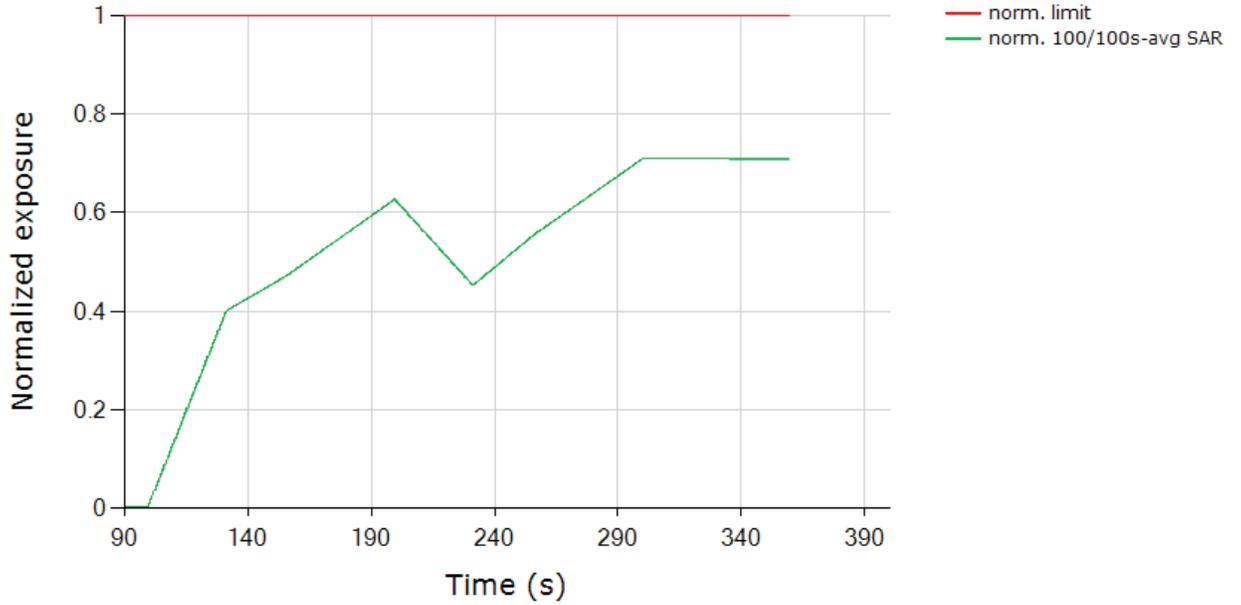

	(W/kg)
FCC normalized total exposure limit	1.0
Max 100s-time averaged normalized SAR (green curve)	0.709
Validated	

The test result validated the continuity of power limiting in DSI switch scenario.

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 53 of 93	


## 9.5 Change in Time window / antenna switch test results

This test was conducted with callbox requesting maximum power, and with time-window/antenna switch between LTE Band 66, Antenna 2, DSI = 5 (100s window) and LTE B48, Antenna 8, DSI = 5 (60s window). Following procedure detailed in Section 4.3.6, and using the measurement setup shown in Figure 6-1(b), the time-window switch via tech/band/antenna switch was performed when the EUT is transmitting at  $P_{reserve}$  level.

### 9.5.1 Test case 1: transition from LTE Band 66 to LTE Band 48 (i.e., 100s to 60s), then back to LTE Band 66

Test result for change in time-window (from 100s to 60s to 100s):

Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power changed when LTE Band 66 switches to LTE Band 48 (~240 seconds timestamp) and switches back to LTE Band 66 (~310 seconds timestamp):

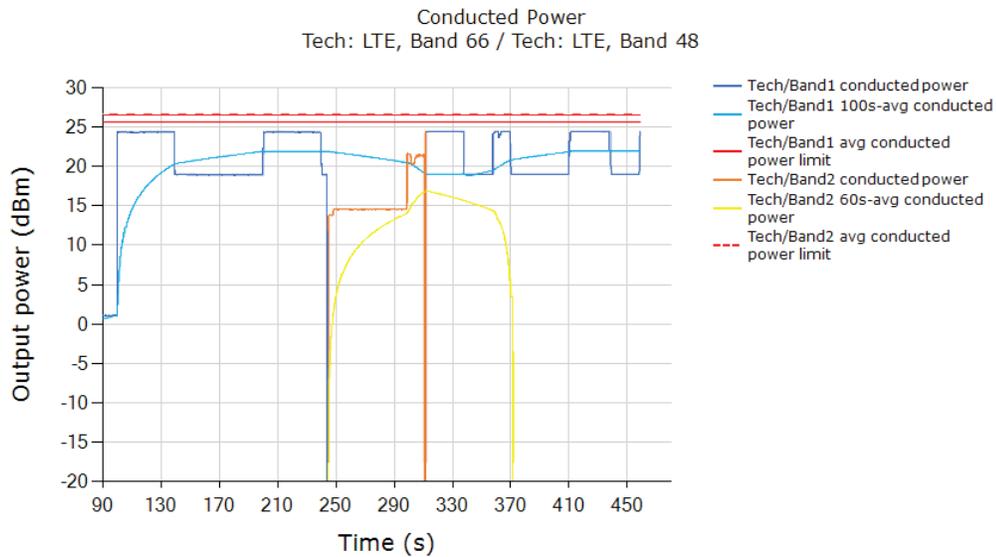


Plot Notes: As per the manufacturer,  $Reserve\_power\_margin = 3\text{dB}$ . Based on Table 8-1,  $EFS\ P_{limit} = 23\text{dBm}$  for LTE Band 66 DSI = 5 (100s window), and  $EFS\ P_{limit} = 20.5\text{dBm}$  for LTE Band 48 DSI = 5 (60s window). The conducted power plot shows expected transitions in Tx power at ~240 seconds (100s-to-60s transition) and at ~310 seconds (60s-to-100s transition) in order to maintain total time-averaged RF exposure compliance across time windows, as show in next plot.

Plot 2: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the FCC limit of 1 unit. Equation (7a) is used to convert the Tx power of device to obtain 100s-averaged normalized SAR in LTE Band 66 as shown in black curve. Similarly, equation (7b) is used to obtain 60s-averaged normalized SAR in LTE B48 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset	Page 54 of 93	

Total Normalized Time-averaged RF Exposure  
Tech: LTE, Band 66 / Tech: LTE, Band 48

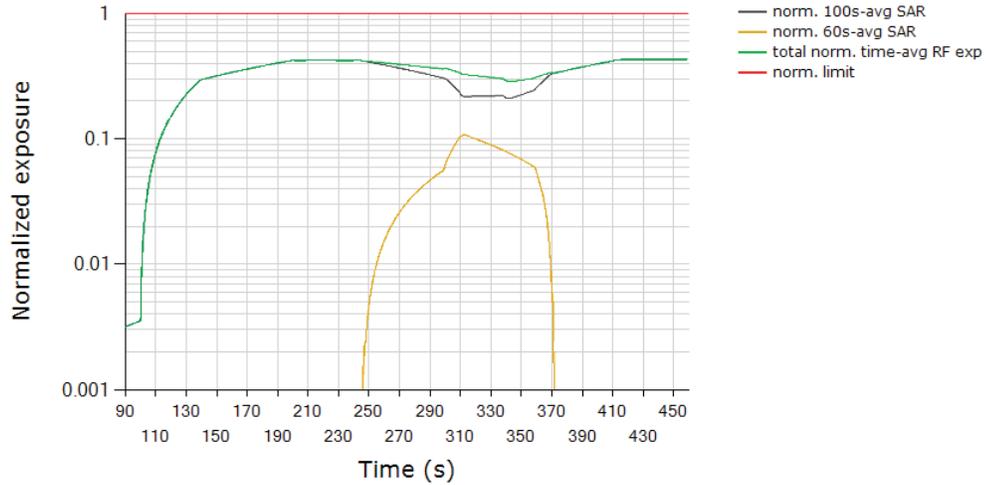

	(W/kg)
FCC normalized total exposure limit	1.0
Max time averaged normalized SAR (green curve)	0.429
Validated	


Plot Notes: Maximum power is requested by callbox for the entire duration of the test, with tech/band switches from 100s-to-60s window at ~240s time stamp, and from 60s-to-100s window at ~310s time stamp. Smart Transmit controls the Tx power during these time-window switches to ensure total time-averaged RF exposure, i.e., sum of black and orange curves given by equation (7c), is always compliant. In time-window switch test, at all times the total time-averaged normalized RF exposure (green curve) should not exceed normalized  $SAR_{design\_target} + 1dB$  device uncertainty. In this test, with a maximum normalized SAR of 0.429 being  $\leq 0.79 (= 1.01/1.6 + 1dB$  device uncertainty), the above test result validated the continuity of power limiting in time-window switch scenario.

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 55 of 93	

## 9.5.2 Test case 2: transition from LTE Band 48 to LTE Band 66 (i.e., 60s to 100s), then back to LTE Band 48

Test result for change in time-window (from 60s to 100s to 60s):


Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power changed when LTE Band 48 switches to LTE Band 66 (~185 seconds timestamp) and switches back to LTE Band 48 (~290 seconds timestamp):

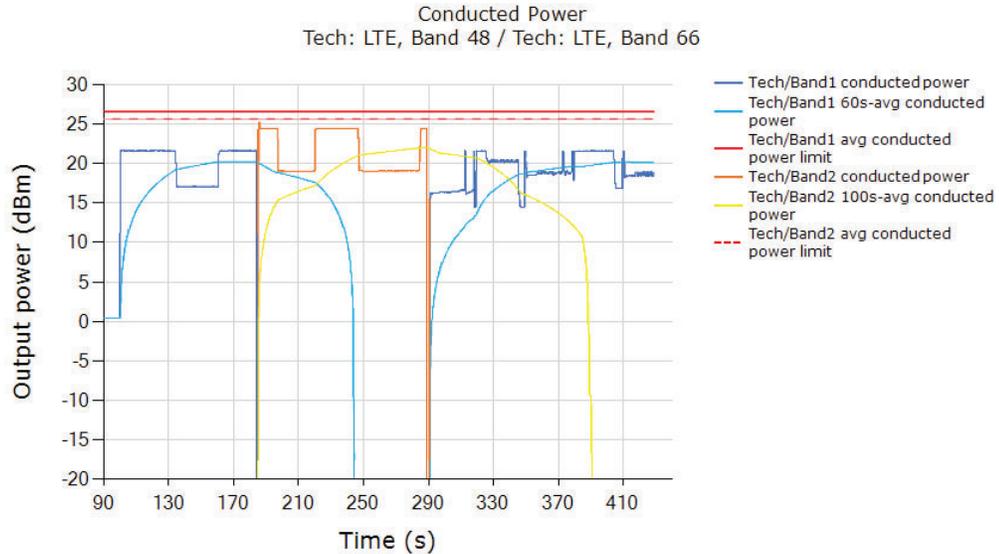

Note: As per the manufacturer, *Reserve\_power\_margin* = 3dB. Based on Table 8-1, *EFS P<sub>limit</sub>* = 20.5dBm for LTE Band 48 DSI = 5 (60s window), and *EFS P<sub>limit</sub>* = 23dBm for LTE B66 DSI = 5 (100s window). The conducted power plot shows expected transitions in Tx power at ~185s (60s-to-100s transition) and at ~290s (100s-to-60s transition) in order to maintain total time-averaged RF exposure compliance across time windows, as show in next plot.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 56 of 93	

Plot 2: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the FCC limit of 1 unit. Equation (7a) is used to convert the Tx power of device to obtain 60s-averaged normalized SAR in LTE Band 48 as shown in black curve. Similarly, equation (7b) is used to obtain 100s-averaged normalized SAR in LTE Band 66 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

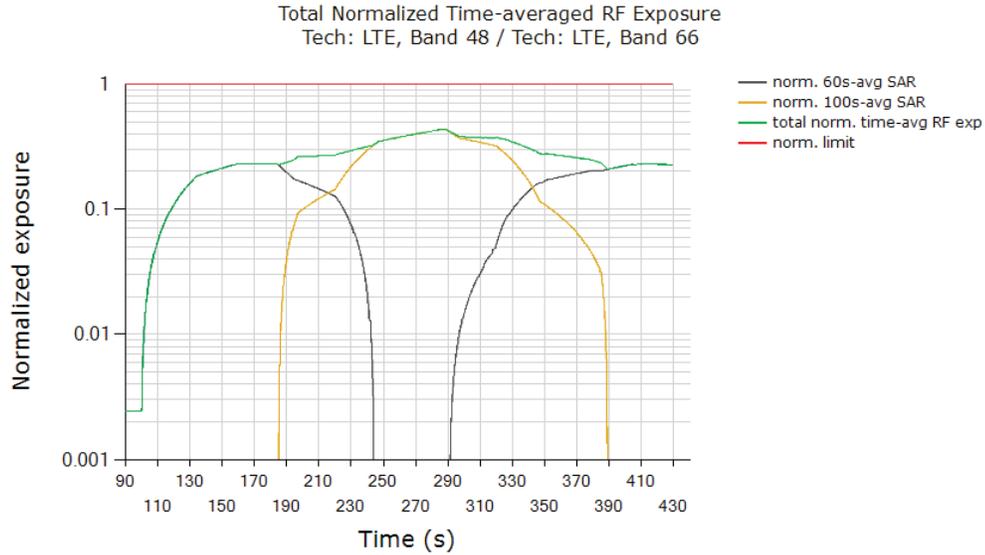


	(W/kg)
FCC normalized total exposure limit	1.0
Max time averaged normalized SAR (green curve)	0.432
Validated	

Plot Notes: Maximum power is requested by callbox for the entire duration of the test, with tech/band switches from 60s-to-100s window at ~185 time stamp, and from 100s-to-60s window at ~290s time stamp. Smart Transmit controls the Tx power during these time-window switches to ensure total time-averaged RF exposure, i.e., sum of black and orange curves given by equation (7c), is always compliant. In time-window switch test, at all times the total time-averaged normalized RF exposure (green curve) should not exceed normalized *SAR\_design\_target* + 1dB device uncertainty. In this test, with a maximum normalized SAR of 0.432 being  $\leq 0.79$  ( $= 1.01/1.6 + 1\text{dB device uncertainty}$ ), the above test result validated the continuity of power limiting in time-window switch scenario.

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 57 of 93	

## 9.6 Switch in SAR exposure test results


This test was conducted with callbox requesting maximum power, and with the EUT in LTE Band 2 + Sub6 NR Band n66 call. Following procedure detailed in Section 4.3.7 and Appendix F.2, and using the measurement setup shown in Figure 6-1(c) since LTE and Sub6 NR are sharing the same antenna port, the SAR exposure switch measurement is performed with the EUT in various SAR exposure scenarios, i.e., in SAR<sub>Sub6NR</sub> only scenario (t = 0s ~ 120s), SAR<sub>Sub6NR</sub> + SAR<sub>LTE</sub> scenario (t = 120s ~ 240s) and SAR<sub>LTE</sub> only scenario (t > 240s).

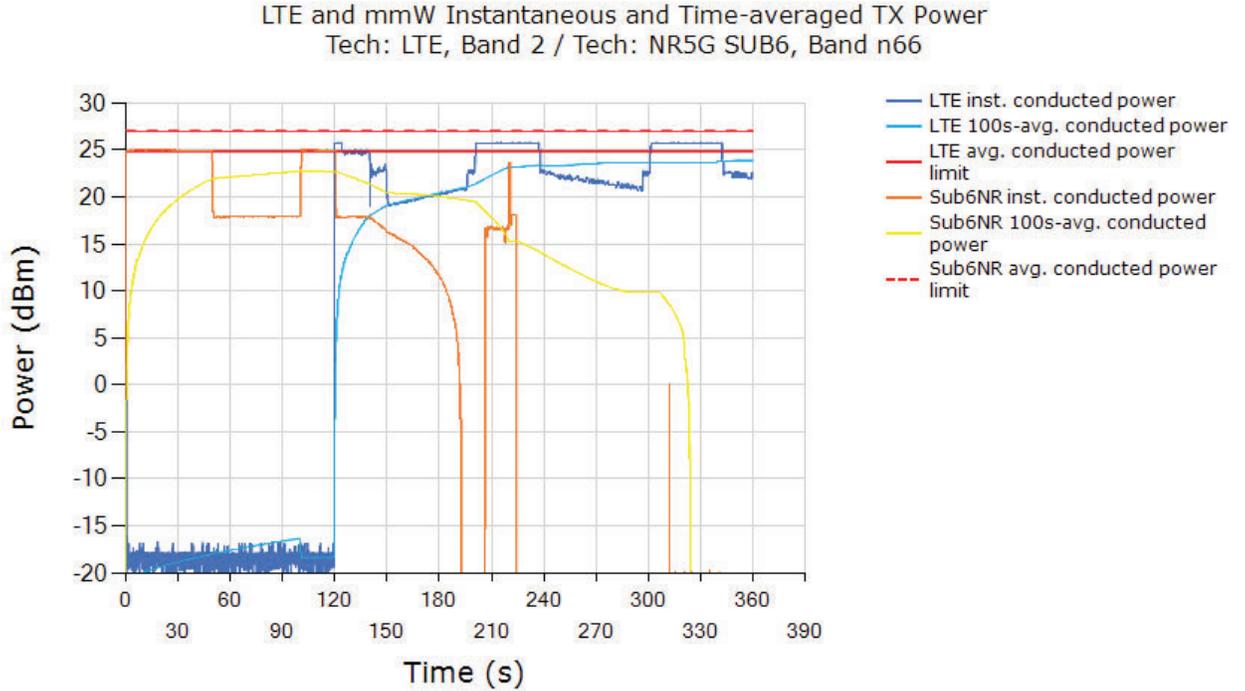

Plot 2: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the FCC limit of 1 unit. Equation (7a) is used to convert the LTE Tx power of device to obtain 100s-averaged normalized SAR in LTE B2 as shown in black curve. Similarly, equation (7b) is used to obtain 100s-averaged normalized SAR in Sub6 NR n66 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 58 of 93

Total Normalized Time-averaged RF Exposure  
 Tech: LTE, Band 2 / Tech: NR5G SUB6, Band n66

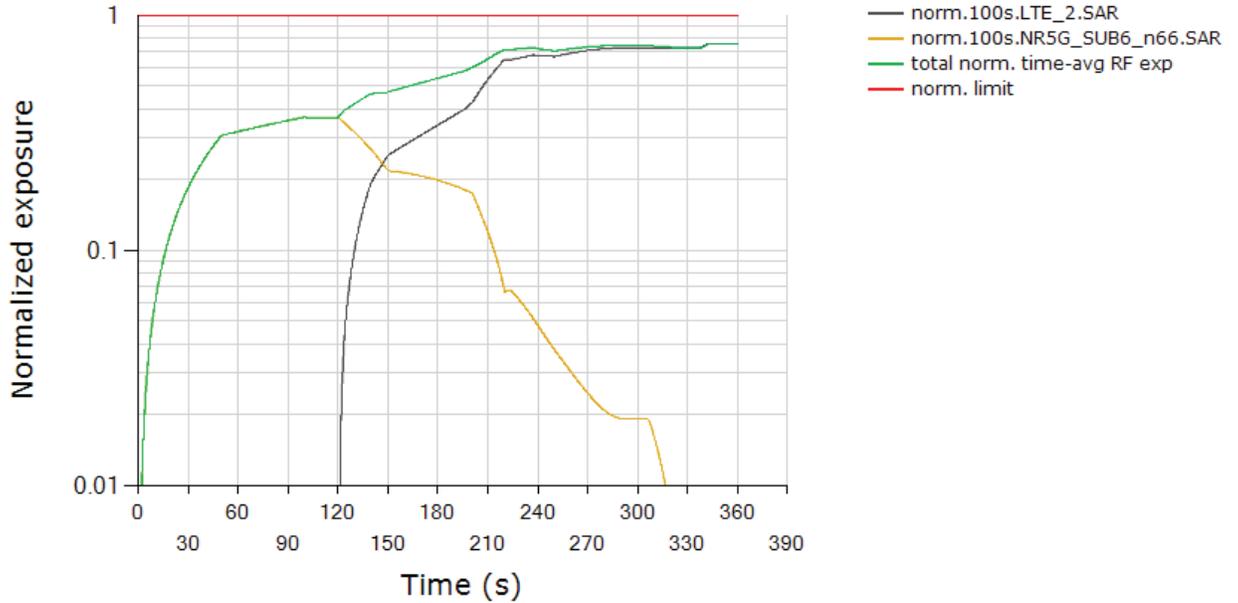

	(W/kg)
FCC normalized total exposure limit	1.0
Max time averaged normalized SAR (green curve)	0.759
Validated	

**Plot Notes:** Device starts predominantly in Sub6 NR SAR exposure scenario between 0s and 120s, and in LTE SAR + Sub6 NR SAR exposure scenario between 120s and 240s, and in predominantly in LTE SAR exposure scenario after t=240s. Here, Smart Transmit allocates a maximum of 75% of exposure margin (based on 3dB reserve margin setting) for Sub6 NR. This corresponds to a normalized 1gSAR exposure value = 75% \* 0.77 W/kg measured SAR at Sub6 NR *Plimit* / 1.6W/kg limit = 0.361 ± 1dB device related uncertainty (see orange curve between 0s~120s). For predominantly LTE SAR exposure scenario, maximum normalized 1gSAR exposure should correspond to 100% exposure margin = 1.08 W/kg measured SAR at LTE *Plimit* / 1.6W/kg limit = 0.675 ± 1dB device related uncertainty (see black curve after t = 240s). Additionally, in SAR exposure switch test, at all times the total time-averaged normalized RF exposure (green curve) should not exceed normalized *SAR\_design\_target* + 1dB device uncertainty. In this test, with a maximum normalized SAR of 0.759 being ≤ 0.79 (= 1.01/1.6 + 1dB device uncertainty), the above test result validated the continuity of power limiting in SAR exposure switch scenario.

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 59 of 93	

# 10 SYSTEM VERIFICATION (FREQ < 6 GHZ)

## 10.1 Tissue Verification

**Table 10-1  
Measured Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
07/15/2020	1750 Body	22.7	1710	1.438	55.264	1.463	53.537	-1.71%	3.23%
			1720	1.444	55.247	1.469	53.511	-1.70%	3.24%
			1745	1.462	55.201	1.485	53.445	-1.55%	3.29%
			1750	1.466	55.191	1.488	53.432	-1.48%	3.29%
			1770	1.479	55.154	1.501	53.379	-1.47%	3.33%
			1790	1.493	55.121	1.514	53.326	-1.39%	3.37%
07/16/2020	1900 Body	23.2	1850	1.528	54.740	1.520	53.300	0.53%	2.70%
			1860	1.539	54.736	1.520	53.300	1.25%	2.69%
			1880	1.552	54.692	1.520	53.300	2.11%	2.61%
			1900	1.565	54.675	1.520	53.300	2.96%	2.58%
			1905	1.569	54.666	1.520	53.300	3.22%	2.56%
			1910	1.571	54.661	1.520	53.300	3.36%	2.55%
07/18/2020	1900 Body	22.4	1850	1.527	54.684	1.520	53.300	0.46%	2.60%
			1860	1.533	54.672	1.520	53.300	0.86%	2.57%
			1880	1.546	54.654	1.520	53.300	1.71%	2.54%
			1900	1.559	54.638	1.520	53.300	2.57%	2.51%
			1905	1.562	54.634	1.520	53.300	2.76%	2.50%
			1910	1.566	54.631	1.520	53.300	3.03%	2.50%
07/16/2020	3600 Body	20.7	3500	3.154	52.289	3.314	51.321	-4.83%	1.89%
			3550	3.215	52.211	3.372	51.254	-4.66%	1.87%
			3560	3.227	52.190	3.384	51.240	-4.64%	1.85%
			3600	3.273	52.149	3.431	51.186	-4.61%	1.88%
			3650	3.333	52.065	3.489	51.118	-4.47%	1.85%
			3690	3.379	51.985	3.536	51.063	-4.44%	1.81%
			3700	3.394	51.953	3.548	51.050	-4.34%	1.77%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.


FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17_ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 60 of 93	

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix C.

**Table 10-2**  
**System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
M	1750	BODY	07/15/2020	22.0	22.7	0.100	1150	7526	3.710	36.600	37.100	1.37%
M	1900	BODY	07/16/2020	21.9	23.2	0.100	5d148	7526	4.020	39.100	40.200	2.81%
M	1900	BODY	07/18/2020	22.0	22.4	0.100	5d148	7526	3.780	39.100	37.800	-3.32%
M	3700	BODY	07/16/2020	22.0	20.7	0.100	1067	7526	6.250	65.200	62.500	-4.14%

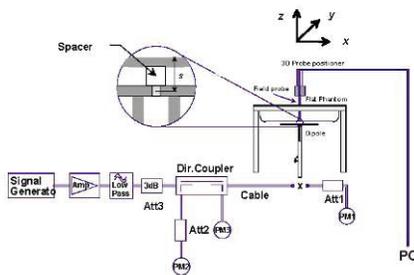

**Figure 10-1**  
**System Verification Setup Diagram**



**Figure 10-2**  
**System Verification Setup Photo**

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	PART 2 RF EXPOSURE EVALUATION REPORT	<b>LG</b>	Approved by: Quality Manager
Document S/N: 1M2004230076-17.ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 61 of 93

# 11 SAR TEST RESULTS (FREQ < 6 GHZ)

## 11.1 Time-varying Tx Power Case

Following Section 4.4 procedure, time-averaged SAR measurements are conducted using a SAR probe at peak location of area scan over 500 seconds. cDASY6 system verification for SAR measurement is provided in Section 10, and the associated SPEAG certificates are attached in Appendix G.

SAR probe integration times depend on the communication signal being tested as defined in the probe calibration parameters.

Since the sampling rate used by cDASY6 for pointSAR measurements is not in user control, the number of points in 100s interval is determined from the scan duration setting in cDASY6 time-average pointSAR measurement by (100s cDASY6\_scan\_duration \* total number of pointSAR values recorded). Running average is performed over these number of points in excel spreadsheet to obtain 100s averaged point SAR.

Following Section 4.4, for each of selected technology/band (listed in Table 8-2):

7. With *Reserve\_power\_margin* set to 0 dB, area scan is performed at  $P_{limit}$ , and time-averaged pointSAR measurements are conducted to determine the pointSAR at  $P_{limit}$  at peak location, denoted as  $pointSAR_{P_{limit}}$ .
8. With *Reserve\_power\_margin* set to actual (intended) value, two more time-averaged pointSAR measurements are performed at the same peak location for test sequences 1 and 2.

To demonstrate compliance, all the pointSAR measurement results were converted into 1gSAR or 10gSAR values by using Equation (3a), rewritten below:

$$1g\_or\_10gSAR(t) = \frac{pointSAR(t)}{pointSAR_{P_{limit}}} * 1g\_or\_10gSAR_{P_{limit}} \quad (3a)$$


where,  $pointSAR(t)$ ,  $pointSAR_{P_{limit}}$ , and  $1g\_or\_10gSAR_{P_{limit}}$  correspond to the measured instantaneous point SAR, measured point SAR at  $P_{limit}$  from above step 1 and 2, and measured 1gSAR or 10gSAR values at  $P_{limit}$  obtained from Part 1 report and listed in Table 8-2 of this report.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 62 of 93

11.1.1


LTE Band 66

SAR test results for test sequence 1:

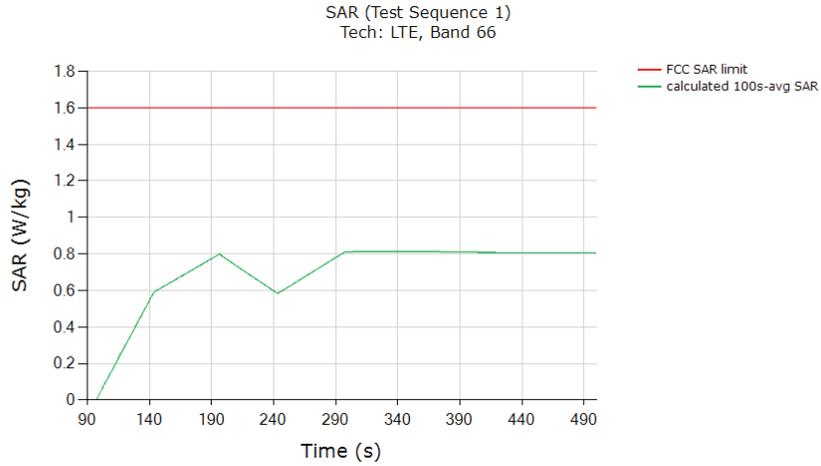

	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged point 1gSAR (green curve)	0.813
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

SAR test results for test sequence 2:

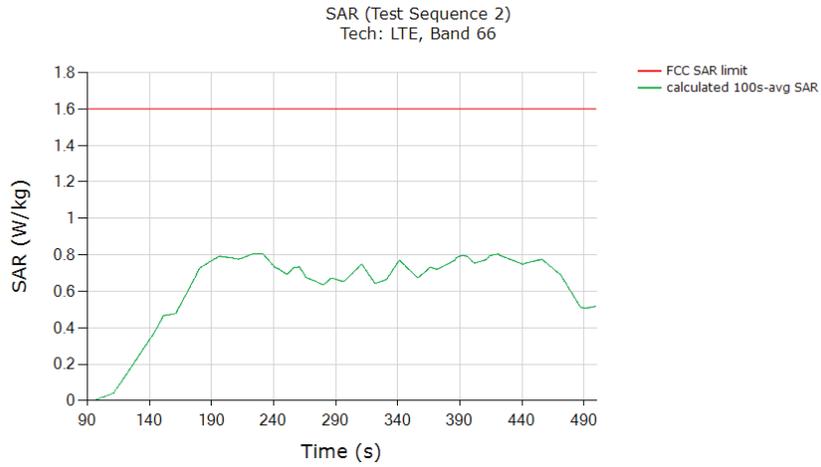


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.805
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 63 of 93	

11.1.2


LTE Band 48

SAR test results for test sequence 1:

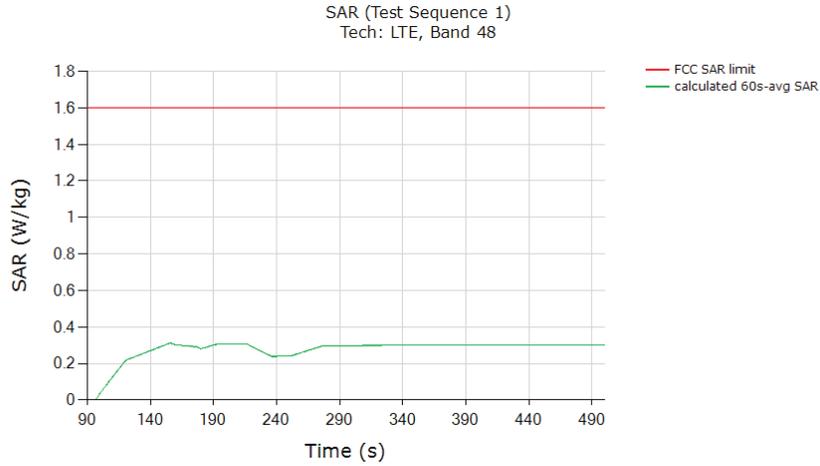

	(W/kg)
FCC 1gSAR limit	1.6
Max 60s-time averaged point 1gSAR (green curve)	0.313
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

SAR test results for test sequence 2:

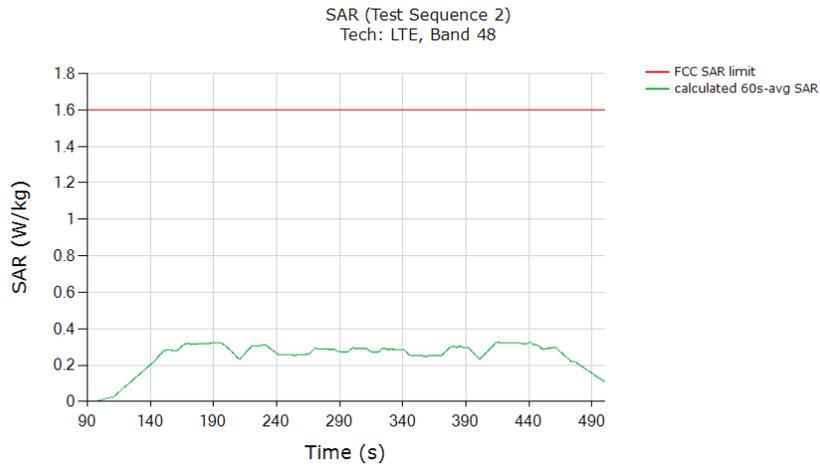


	(W/kg)
FCC 1gSAR limit	1.6
Max 60s-time averaged 1gSAR (green curve)	0.326
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 64 of 93	

11.1.3


UMTS B2

SAR test results for test sequence 1:

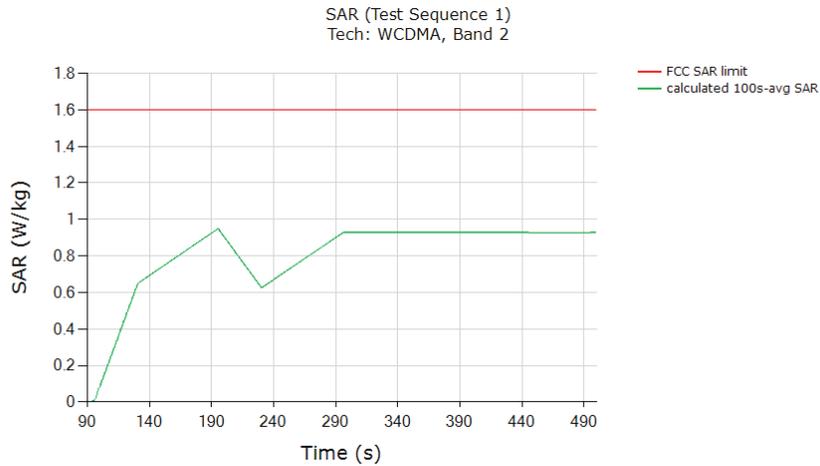

	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged point 1gSAR (green curve)	0.948
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

SAR test results for test sequence 2:

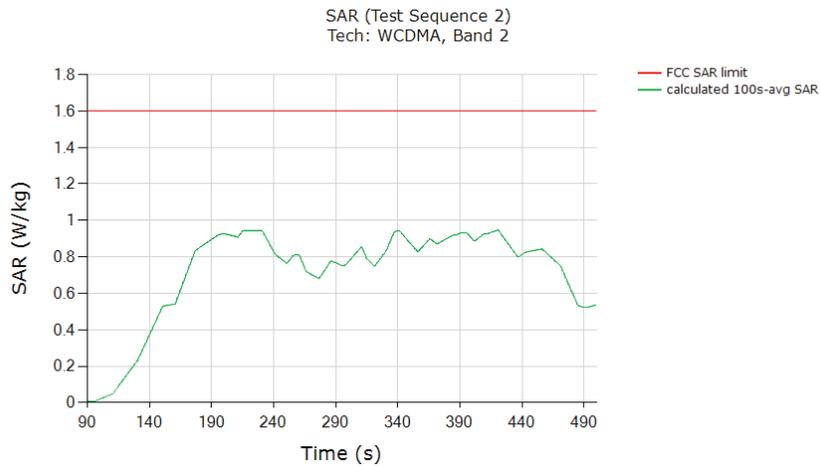


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.947
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 65 of 93	

11.1.4


CDMA/EVDO BC1

SAR test results for test sequence 1:

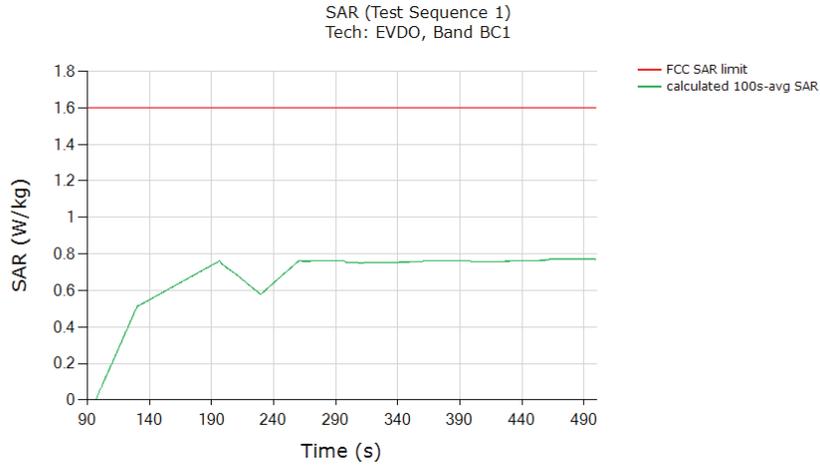

	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged point 1gSAR (green curve)	0.771
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

SAR test results for test sequence 2:

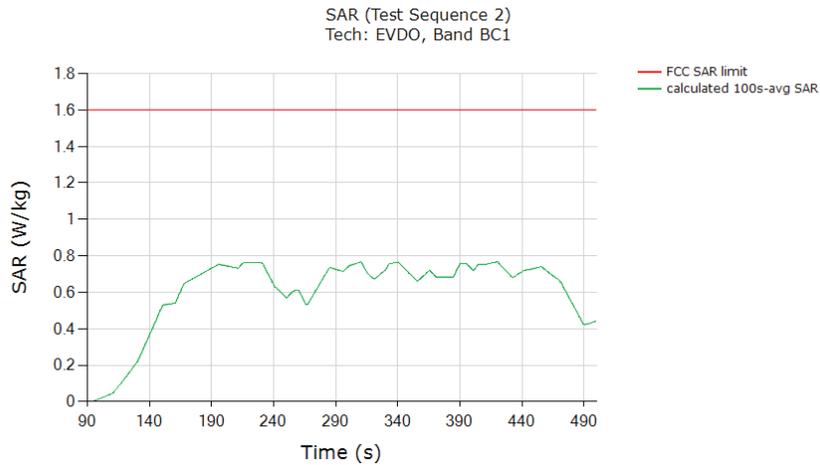


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.766
<b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 8-2).	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 66 of 93	

11.1.5


NR n66

SAR test results for test sequence 1:

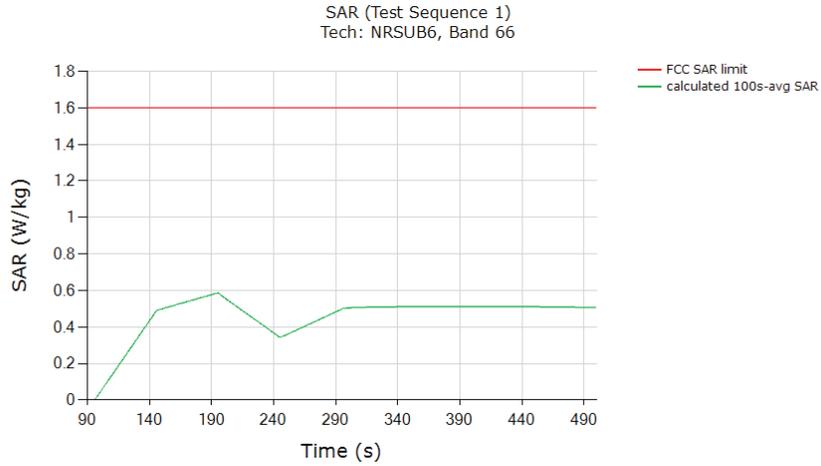

	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged point 1gSAR (green curve)	0.586
<p><b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at <i>Plimit</i> (last column in Table 8-2).</p>	

SAR test results for test sequence 2:

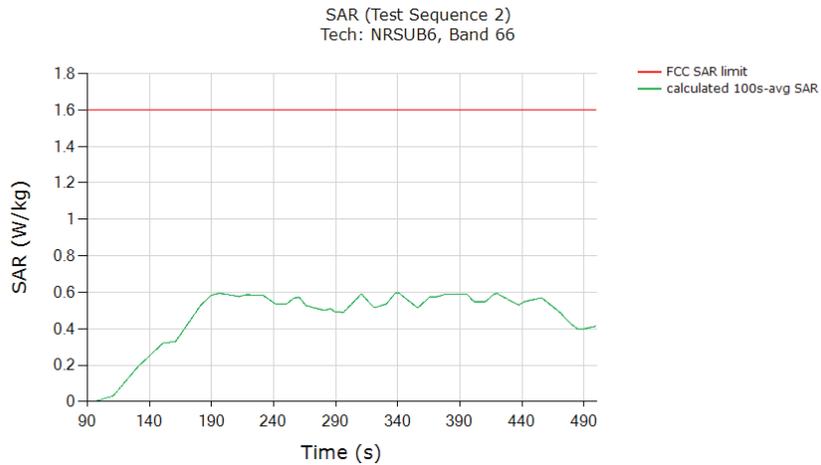


	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.594
<p><b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at <i>Plimit</i> (last column in Table 8-2).</p>	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 67 of 93	

11.1.6


NR n2

SAR test results for test sequence 1:

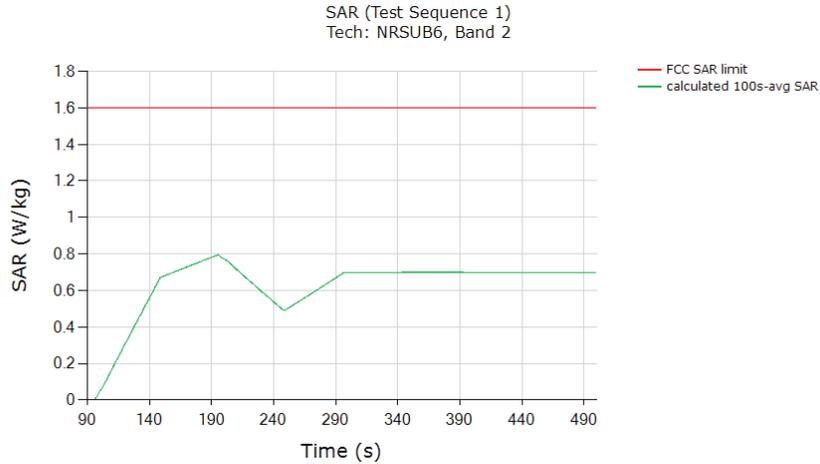

	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged point 1gSAR (green curve)	0.794
<p><b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at <i>Plimit</i> (last column in Table 8-2).</p>	

SAR test results for test sequence 2:

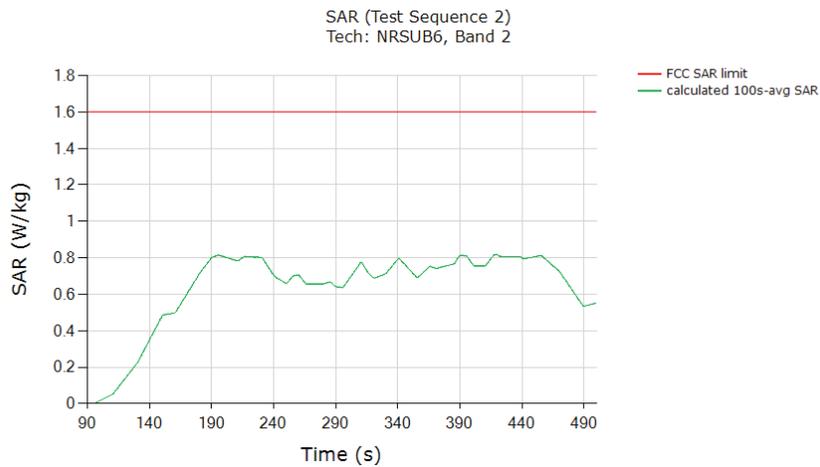

	(W/kg)
FCC 1gSAR limit	1.6
Max 100s-time averaged 1gSAR (green curve)	0.816
<p><b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at <i>Plimit</i> (last column in Table 8-2).</p>	

FCC ID: ZNFG900VM	<b>PCTEST</b> Proud to be part of  element	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	<b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 68 of 93	

## 12 TEST CONFIGURATIONS (FREQ > 6 GHZ)

### 12.1 LTE + mmW NR transmission

Based on the selection criteria described in Section 4.2, the selections for LTE and mmW NR validation test are listed in Table 12-1. The radio configurations used in this test are listed in Table 12-2.

**Table 12-1**  
Selections for LTE + mmW NR validation measurements

Transmission Scenario	Test	Technology and Band	mmW Beam
Time-varying Tx power test	1. Cond. & Rad. Power meas.	LTE Band 2 and n261	Beam ID 41
	2. PD meas.	LTE Band 2 and n260	Beam ID 31
Switch in SAR vs. PD	1. Cond. & Rad. Power meas.	LTE Band 2 and n261	Beam ID 41
		LTE Band 2 and n260	Beam ID 31
Beam switch test	1. Cond. & Rad. Power meas.	LTE Band 2 and n261	Beam ID 24 to Beam ID 1
		LTE Band 2 and n260	Beam ID 31 to Beam ID 2

**Table 12-2**  
Test configuration for LTE + mmW NR validation

Tech	Band	Antenna	DSI	Channel	Freq (MHz)	RB/RB Offset/Bandwidth (MHz)	Mode	UL Duty Cycle
LTE	2	2	5	18900	1880	1/0/20 MHz BW	QPSK	100%
mmW NR	n261	QTM2	-	2071821	27559.32	66/0/100 MHz BW	CP-OFDM, QPSK	75.6%*
	n260	QTM2	-	2254147	38498.88	66/0/100 MHz BW	CP-OFDM, QPSK	75.6%*

### 12.2 mmW NR radiated power test results

To demonstrate the compliance, the conducted Tx power of LTE 2 in DSI = 5 is converted to 1gSAR exposure by applying the corresponding worst-case 1g SAR value at  $P_{limit}$  as reported in Part 1 report and listed in Table 8-2 of this report.

Similarly, following Step 4 in Section 5.3.1, radiated Tx power of mmW Band n261 and n260 for the beams tested is converted by applying the corresponding measured worst-case  $4\text{cm}^2\text{PD}$  values, and listed in below Table 12-3. Qualcomm Smart Transmit feature operates based on time-averaged Tx power reported on a per symbol basis, which is independent of modulation, channel and bandwidth (RBs), therefore the worst-case  $4\text{cm}^2\text{PD}$  was conducted with the EUT in FTM mode, with CW modulation and 100% duty cycle. cDASY6 system verification for power density measurement is provided in Section 14, and the associated SPEAG certificates are attached in Appendix G.

Both the worst-case 1gSAR and  $4\text{cm}^2\text{PD}$  values used in this section are listed in Table 12-3. The measured EIRP at *input.power.limit* for the beams tested in this section are also listed in Table 12-3.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	PART 2 RF EXPOSURE EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2004230076-17_ZNF	Test Dates: 07/12/2020 - 07/27/2020	DUT Type: Portable Handset		Page 69 of 93

**Table 12-3**  
**Worst-case 1gSAR, 4cm<sup>2</sup> avg. PD and EIRP measured at *input.power.limit* for the selected configuration**

Tech	Band	Antenna	Beam ID	input.power.limit (dBm)	Measured psPD at input.power.limit		Measured EIRP at input.power.limit (dBm)
					4cm <sup>2</sup> psPD (W/m <sup>2</sup> )	Test Position	
mmW NR	n261	QTM 2	41	4.7	4.28	Back	12.42
		QTM 0	24	7.5	6.13	Back	15.65
		QTM 0	1	7.0*	2.75	Back	7.62
mmW NR	n260	QTM2	31	4.4	4.1	Back	15.59
		QTM2	2	6.0**	2.39	Back	8.14

Tech	Band	Antenna	DSI	Measured Plimit (dBm)	Measured 1g SAR at Plimit	
					1g SAR (W/kg)	Test Position
LTE	2	2	5	22.61	1.08	Back


\*The *input.power.limit* for n261 beam 1 is 13.2 dBm. However, the maximum input power of SM7250 for n261 CP-OFDM modulation is 7.0 dBm for the test configuration used, thus, the *input.power.limit* was adjusted to 7.0 dBm in the static PD measurement via FTM for n261 beam 1 to obtain the maximum PD exposure for CP-OFDM modulation.

\*\*The *input.power.limit* for n260 beam 2 is 9.3 dBm. However, the maximum input power of SM7250 for n261 CP-OFDM modulation is 6.0 dBm for the test configuration used, thus, the *input.power.limit* was adjusted to 6.0 dBm in the static PD measurement via FTM for n260 beam 2 to obtain the maximum PD exposure for CP-OFDM modulation.


The 4cm<sup>2</sup> psPD distributions for the highest PD value per band, as listed in Table 12-3, are plotted below.

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset	Page 70 of 93	

**Figure 12-1**  
**4cm<sup>2</sup> psPD distribution measured at *input.power.limit* of 7.5 dBm on the back surface for n261 beam 24**

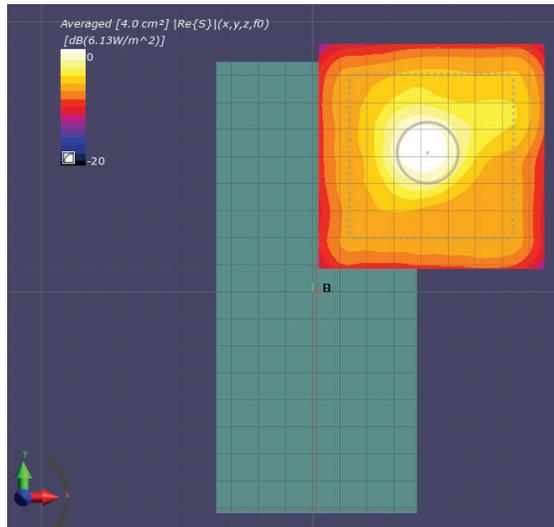

**Figure 12-2**  
**4cm<sup>2</sup> psPD distribution measured at *input.power.limit* of 4.4 dBm on the back surface for n260 beam 31**

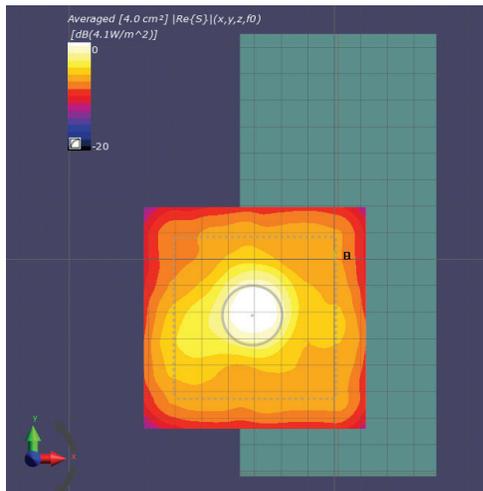

FCC ID: ZNFG900VM	 <b>PCTEST</b> Proud to be part of 	<b>PART 2 RF EXPOSURE EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2004230076-17.ZNF	<b>Test Dates:</b> 07/12/2020 - 07/27/2020	<b>DUT Type:</b> Portable Handset		Page 71 of 93