

FCC BT LE REPORT

FCC Certification

Applicant Name:

LG Electronics MobileComm U.S.A., Inc.

Address:

1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue: March 27, 2015 Test Site/Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majangmyeon, Icheon-si, Gyeonggi-do, Korea Report No.: HCT-R-1503-F027 HCT FRN: 0005866421

FCC ID

: ZNFH220

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-H220
Additional Model(s):	LGH220, H220
EUT Type:	Cellular/PCS GSM Phone with WLAN and Bluetooth
Peak RF Output Power:	-0.021 dBm (0.995 mW)
Frequency Range:	2402 MHz -2480 MHz
Modulation type	GFSK
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant

to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by : Kyung Soo Kang Test Engineer of RF Team

Approved by : Kyoung Houn Seo Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1503-F027	March 27, 2015	- First Approval Report



Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	6
7. SUMMARY TEST OF RESULTS	7
8. TEST RESULT	8
8.1 DUTY CYCLE	8
8.2 6dB BANDWIDTH MEASUREMENT 1	0
8.3 OUTPUT POWER MEASUREMENT 1	10
	13
8.4 POWER SPECTRAL DENSITY 2	-
8.4 POWER SPECTRAL DENSITY2 8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 2	20
	20 24
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 2	20 24 35
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 2 8.6 RADIATED MEASUREMENT	20 24 35 35
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 2 8.6 RADIATED MEASUREMENT	20 24 35 35 44
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS 2 8.6 RADIATED MEASUREMENT	20 24 35 35 44
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	20 24 35 35 44 46 51



Model: LG-H220

1. GENERAL INFORMATION

Applicant:	LG Electronics MobileComm U.S.A., Inc.
Address:	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID:	ZNFH220
EUT Type:	Cellular/PCS GSM Phone with WLAN and Bluetooth
Model name(s):	LG-H220
Additional Model(s):	LGH220, H220
Date(s) of Tests:	March 19, 2015 ~ March 25, 2015
Place of Tests:	HCT Co., Ltd. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
	(IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

FCC Model Name	LG-H220	LG-H220			
Additional Model	LGH220, H220				
EUT Type	Cellular/PCS GS	M Phone with WLAN and Bluetooth			
Power Supply	DC 3.8 V				
Battery type	Li-ion Battery(Sta	andard)			
Frequency Range	TX: 2402 MHz ~	TX: 2402 MHz ~ 2480 MHz			
	RX: 2402 MHz ~	RX: 2402 MHz ~ 2480 MHz			
Max. RF Output Power	Peak	-0.021 dBm (0.995 mW)			
	Average	Average -0.348 dBm (0.923 mW)			
BT Operating Mode	BT_Low Energy	BT_Low Energy Mode			
Modulation Type	GFSK	GFSK			
Number of Channels	40 Channels				
Antenna Specification	Manufacturer: IN	Manufacturer: IM-TECH			
	Antenna type: Sl	JS Antenna			
	Peak Gain : -2.54	4 dBi			



3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r02 dated June 05, 2014 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247" were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203



7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz		PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band	CONDUCTED	PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.6.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.2	RADIATED	PASS




8. TEST RESULT 8.1 DUTY CYCLE

TEST PROCEDURE

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T \leq 16.7 microseconds.)

TEST CONFIGURATION

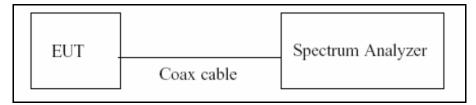

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested accroding to the zerospan measurement method, 6.0)b) in KDB 558074(issued 06/05/2014)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if T \leq 6.25 microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are > 50/T.

- 1. RBW = 8 MHz (the largest available value)
- 2. VBW = 8 MHz (≥ RBW)
- 3. SPAN = 0 Hz
- 4. Detector = Peak
- 5. Number of points in sweep > 100
- 6. Trace mode = Clear write
- 7. Measure T_{total} and T_{on}
- 8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10*\log(1/Duty Cycle)$

LE Mode	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
	0.3904	0.6240	0.6256	2.04



Model: LG-H220

RESULT PLOTS

Agilent Spectrum Ana							
Center Freq 2	50 Ω AC 2.402000000	GHz	SENSE:INT		ALIGNAUTO pe: Pwr(RMS)	01:42:31 PM Mar 23, 2015 TRACE 1 2 3 4 5 6 TYPE WWWWWW	Frequency
		PNO: Fast ↔→ IFGain:Low	Atten: 20 dB			DET PPPPP	
10 dB/div Ref	Offset 10.3 dB 20.00 dBm					Mkr3 1.250 ms -0.72 dBm	Auto Tune
10.0			1	^ 2	3		Center Freq
0.00		Y					2.402000000 GHz
-10.0							
-30.0							Start Freq 2.402000000 GHz
-40.0		With Hole Martin		htten	hvala ulawina		2.402000000 0112
-50.0	¶*	. I Prese Ville P.V.			le de cite sec h		Stop Freq
-70.0							2.402000000 GHz
Center 2.40200 Res BW 8 MHz		#VBW	8.0 MHz		Sweep 1.	Span 0 Hz 598 ms (1000 pts)	CF Step 8.000000 MHz
MKR MODE TRC SCL	×	626.4 µs	∀ -0.61 dBm	FUNCTION F	UNCTION WIDTH	FUNCTION VALUE	<u>Auto</u> Man
2 N 1 t 3 N 1 t 4		1.017 ms 1.250 ms	-0.46 dBm -0.72 dBm				Freq Offset
5							0 Hz
7 8							
9 10							
11 12							
мsg 🗼Points char	nged; all traces cl	eared			STATUS		



8.2 6dB BANDWIDTH MEASUREMENT

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.


The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 06/05/2014)

RBW = 100 kHz VBW ≥ 3 x RBW Detector = Peak Trace mode = max hold Sweep = auto couple Allow the trace to stabilize


Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.



RESULT PLOTS

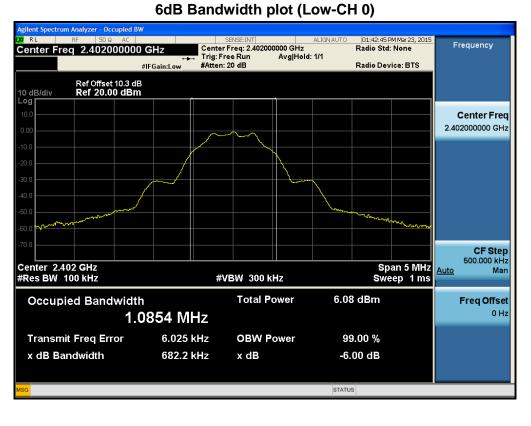

6dB Bandwidth plot (Mid-CH 19)

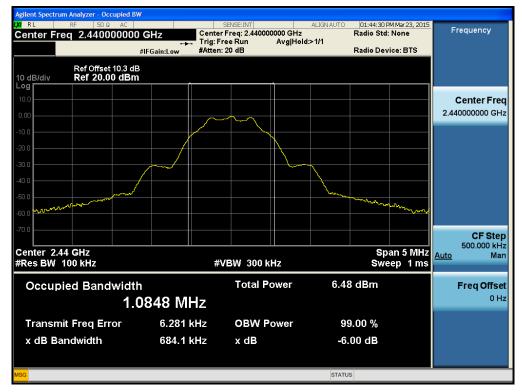





6dB Bandwidth plot (High-CH 39)



8.3 OUTPUT POWER MEASUREMENT


Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 9.1.1 in KDB 558074, issued 06/05/2014)
 - RBW ≥ DTS Bandwidth
 - VBW ≥ 3 x RBW
 - SPAN ≥ 3 x RBW
 - Detector Mode = Peak
 - Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level

Average Power (Procedure 9.2.2.4 in KDB 558074, issued 06/05/2014)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW \geq 3 x RBW.

Number of points in sweep $\ge 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\le \text{RBW}/2$,

so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".



Model: LG-H220

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor Output Power = 10 dBm + 10 dB + 0.8 dB + 0.2 dB = 21.0 dBm

Note :

- 1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.



TEST RESULTS-Peak

Conducted Output Power Measurements

LE Mode		Measured	Limit
Frequency[MHz] Channel No.		Power(dBm)	(dBm)
2402	0	-0.420	30
2440	19	-0.021	30
2480	39	-0.065	30

TEST RESULTS-Average

Conducted Output Power Measurements

LE Mode			Duty Cycle	Measured		
Frequency[MHz]	Channel No.	Measured Power(dBm)	Duty Cycle Factor (dB)	Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)	
2402	0	-2.716	2.04	-0.679	30	
2440	19	-2.385	2.04	-0.348	30	
2480	39	-2.413	2.04	-0.376	30	



RESULT PLOTS-Peak

gilent Spectrum Analyzer - Swept SA RL #Avg Type: Pwr(RMS) Avg|Hold: 1/1 :58 PM Mar 23, 2015 Frequency TRACE 123456 TYPE MWWWWW DET PPPPP Center Freq 2.402000000 GHz Trig: Free Run Atten: 20 dB PNO: Fast ↔ IFGain:Low Auto Tune Mkr1 2.401 989 GHz -0.420 dBm Ref Offset 10.3 dB Ref 20.00 dBm 10 dB/div Loa **Center Freq** 2.402000000 GHz Start Freq 2.400500000 GHz Stop Freq 2.403500000 GHz CF Step 300.000 kHz <u>Auto</u> Man Freq Offset 0 Hz Center 2.402000 GHz #Res BW 1.0 MHz Span 3.000 MHz Sweep 1.07 ms (1000 pts) #VBW 3.0 MHz Points changed; all traces cleared STATU

Conducted Output Power (Low-CH 0)

Conducted Output Power (Mid-CH 19)





Agilent Spectr	um Analyzer - Swept SA RF 50 Ω AC		SENSE:INT	ALIGNAUTO	01:45:52 PM Mar 23, 2015	
	req 2.48000000) GHz PNO: Fast ++-		#Avg Type: Pwr(RMS) Avg Hold: 1/1	TRACE 123456 TYPE M WANAAAAA	Frequency
		IFGain:Low	Atten: 20 dB		DETPPPP	Auto Tune
10 dB/div Log	Ref Offset 10.3 dB Ref 20.00 dBm			Mkr1	2.479 995 GHz -0.065 dBm	
						Center Freq
10.0			1			2.480000000 GHz
0.00			•			
-10.0						Start Freq 2.478500000 GHz
-10.0						
-20.0						Stop Freq
-30.0						2.481500000 GHz
						CF Step
-40.0						300.000 kHz Auto Man
-50.0						<u>, 1410</u>
-60.0						Freq Offset
						0 Hz
-70.0						
Center-2	180000 GHz				Span 3.000 MHz	
#Res BW		#VBW	3.0 MHz	Sweep ′	1.07 ms (1000 pts)	
мsg 🗼 Point	s changed; all traces o	leared		STATUS		

Conducted Output Power (High-CH 39)




RESULT PLOTS-Average

Conducted Output Power (Low-CH 0)

Spectrum Analyzer - Channel Pow 01:43:11 PM Mar 23, 2015 Radio Std: None ALIGN AUTO Frequency Center Freg 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run Avg|Hold: 100/100 #Atten: 20 dB Radio Device: BTS #IFGain:Low Ref Offset 10.3 dB Ref 20.00 dBm 10 dB/di .og **Center Freq** 2.402000000 GHz **CF** Step 217.073 kHz Man Center 2.402 GHz #Res BW 33 kHz Span 2.171 MHz Sweep 2.467 ms Auto #VBW 100 kHz Freq Offset **Channel Power Power Spectral Density** 0 Hz -63.07 dBm /Hz -2.72 dBm / 1.085 MHz STATUS

Conducted Output Power (Mid-CH 19)

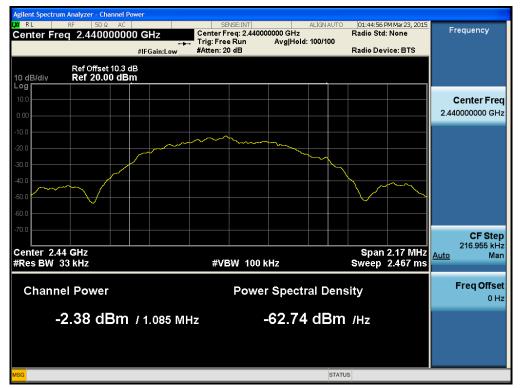





Conducted Output Power (High-CH 39)




8.4 POWER SPECTRAL DENSITY

Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

TEST CONFIGURATION



TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 06/05/2014

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

 $RBW = 3 kHz \le RBW \le 100 kHz.$

VBW \geq 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm Note :

- 1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So,10.2 dB is offset for 2.4 GHz Band.



Model: LG-H220

TEST RESULTS

Channel	Channel	Test Result				
	Mode	PSD	Limit	Pass/		
(MHz) No.		(dBm)	(dBm)	Fail		
0		-15.613	8	Pass		
19	LE	-15.240	8	Pass		
39		-15.315	8	Pass		
	19	No. Mode 0 19 LE	Channel No.ModePSD0(dBm)0-15.61319LE-15.240	Channel No. Mode PSD Limit 0 (dBm) (dBm) 19 LE -15.613 8		

Conducted Power Density Measurements



RESULT PLOTS



Power Spectral Density (Low-CH 0)

Power Spectral Density (Mid-CH 19)







Power Spectral Density (High-CH 39)




8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.205(c)).

Limit : 20 dBc

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 06/05/2014)

RBW = 100 kHz

VBW ≥ 3 x RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points \geq 2*Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.



- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.
- 4. In case of conducted spurious emissions test, please check factors blow table.
- 5. In order to simplify the report, attached plots were only the worst case channel and data rate.

FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)				
30	9.95				
100	10.01				
200	10.03				
300	10.04				
400	10.05				
500	10.04				
600	10.03				
700	10.09				
800	10.10				
900	10.08				
1000	10.11				
2000	10.25				
2400*	10.19				
2500*	10.24				
3000	10.27				
4000	10.22				
5000	10.48				
5700*	10.42				
5800*	10.48				
6000	10.48				
7000	10.57				
8000	10.45				
9000	10.50				
10000	10.64				
11000	10.69				
12000	10.75				
13000	10.92				
14000	11.90				



Model: LG-H220


15000	11.00
16000	11.03
17000	10.93
18000	10.96
19000	10.85
20000	12.11
21000	11.17
22000	10.99
23000	11.12
24000	11.10
25000	11.42

Note : 1. '*' is fundamental frequency range.

2. Factor = Cable loss + Attenuator loss




RESULT PLOTS

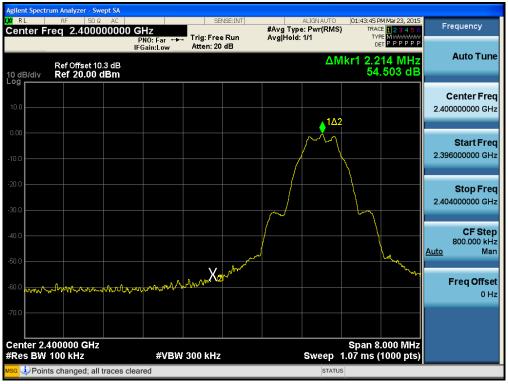


BandEdge (Low-CH 0)

BandEdge (High-CH 39)

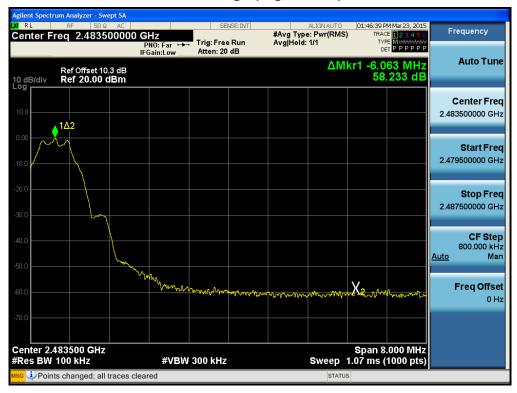



30 MHz ~ 1 GHz

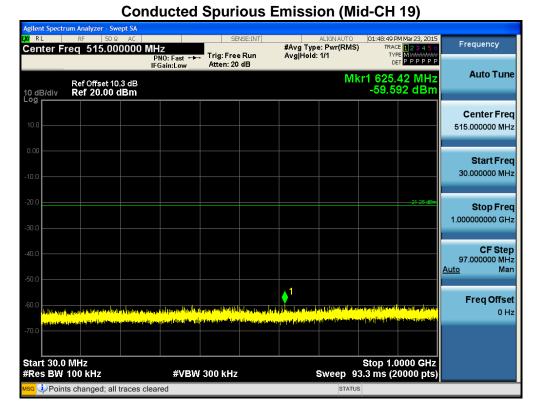


1 GHz ~ 3 GHz

Agilent Spectrum Analyz									
Center Freq 2.0	50Ω AC					ALIGNAUTO Pwr(RMS 1/1	;) TRAC	M Mar 23, 2015 E 1 2 3 4 5 6 E M WWWWW	Frequency
		PNO: Fast ↔↔ IFGain:Low	Atten: 20		rightera.		DE		Auto Tune
	set 10.3 dB).00 dBm					Mkr	1 2.726	90 GHz 36 dBm	Autorune
209									Center Freq
10.0									2.00000000 GHz
0.00									Otert Erer
-10.0									Start Freq 1.00000000 GHz
-20.0									Stop Freq 3.00000000 GHz
-30.0									3.00000000 GH2
-40.0									CF Step
									200.000000 MHz <u>Auto</u> Man
-50.0							↓ ¹		
-60.0	<mark>Wayilan Malan Pagalah</mark>	and horse have the	A THE PLAN AND A	entri d ⁱ fanisi aran	hinnin tin lipit	an start and the	e pilo di belalle Normania	With a set of the	Freq Offset 0 Hz
-70.0	Na amin'ny faranana manana	na hal maalaan dalahan mada aha	(Hansenballa) palities	in a state and a state of the s	in de Challander () wit i	All and a second se		allangoakca)	
Start 1.000 GHz #Res BW 100 kH	,	#VBW	300 kHz			Sween		.000 GHz 0001 pts)	
мsg iPoints change						STATU	_	enter prov	



$3 \text{ GHz} \sim 5 \text{ GHz}$

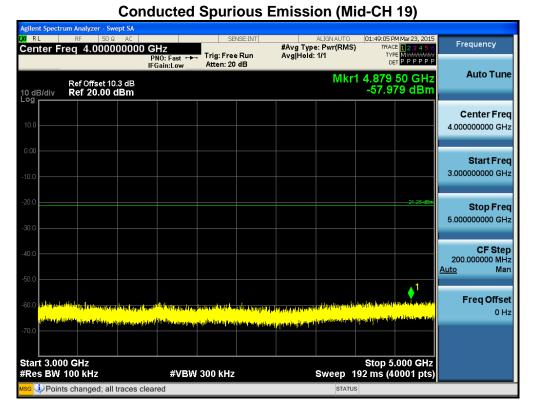


5 GHz ~ 7 GHz

	trum Analyzer - Swe									
KI RL	RF 50 ହ Freg 6.0000		Hz	SEI	NSE:INT	#Avg Typ	ALIGNAUTO e: Pwr(RMS)	TRAC	M Mar 23, 2015	Frequency
Genter	-	Р	NO: Fast ↔ Gain:Low	Trig: Free Atten: 20		Avg Hold:		TYP	е М илиили Т Р Р Р Р Р Р	A
10 dB/div Log	Ref Offset 10 Ref 20.00 c						Mkr		45 GHz 84 dBm	Auto Tune
10.0										Center Freq
										6.000000000 GHz
0.00										Start Freq 5.00000000 GHz
-10.0										5.00000000 GHz
-20.0									21.25 dBm	Stop Freq 7.000000000 GHz
-30.0										
-40.0										CF Step 200.000000 MHz
-50.0						<u> </u>				<u>Auto</u> Man
-60.0 <mark>. 1997 n.</mark>	alaring posterior details	te bla an little baller	n ta Mitel (pil), di	dipetitioninipue	initia privitation	A de Mild de recent	ini and a standard	endal per per site de la	n in her bet bin herer	Freq Offset 0 Hz
-70.0		ating and the storight	india a production	alikining faithing da sit	ng persingan series and a	ung na sa	i in the second s	ng planda print i f	Updalo Continuita da	
Start 5.0 #Res BW	00 GHZ / 100 kHz		#VBW	300 kHz			Sweep 1		.000 GHz 0001 pts)	
<mark>мsg</mark> 🗘 Poi	nts changed; all	traces clear	red				STATUS	5		



7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

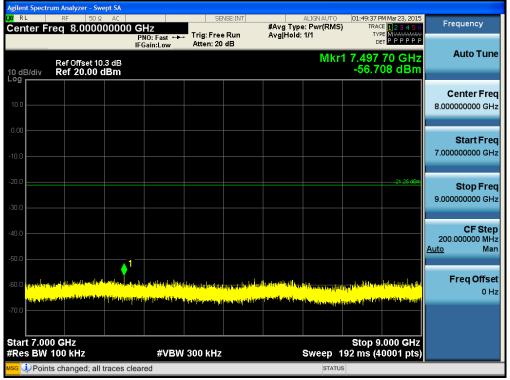


9 GHz ~ 11 GHz

		ım Analyzer - S									
LXI R		RF 50			SEI	VSE:INT		ALIGN AUTO		M Mar 23, 2015	Frequency
Cen	iter Fr	eq 10.00	0000000	GHz		_		e: Pwr(RMS) TRAC	E 1 2 3 4 5 6 E MWWWW	Frequency
			F	NO: Fast ↔	Trig: Free Atten: 20		Avg Hold:	าก	DE	TPPPPP	
			IF	Gain:Low	Atten: 20	ab					Auto Tune
		Ref Offset 1	9240					Mkr	1 9.371	15 GHz	Auto Tune
<u>1</u> 0 dl	Bidiy	Ref 20.00							-55.6	41 dBm	
Lõg		1101 20100									
											Center Freq
											•
10.0											10.00000000 GHz
											Start Freg
											9.000000000 GHz
	——										9.00000000 GHZ
-20.0										21.25 dBm	
										-21.25 000	Stop Freq
											11.00000000 GHz
											CF Step
											200.000000 MHz
											Auto Man
-50.0			_ _ 1								<u>Mato</u>
		and the	late at the		i din ana	and the set of					Freq Offset
	dis jahihad	n and a state of the second	and the following the former						dia lema dale ate per p		
	Lister of the	and a state of the second s	Constant of States and	(London put field	a fait with ministry	<mark>delentitutitelet</mark> e	ويربع المتحفظ الأور الأحققا	والمتحاد والمتحد والمتح	and a bit the strength of the later	daa canadi aadeedaal	0 Hz
-70.0	factor of the			, be and produced as	1.		1			a that the second	
	t 9.000								Stop 11	.000 GHz	
#Re	s BW ′	100 kHz		#VBW	300 kHz			Sweep '	192 ms (4	0001 pts)	
MSG	i) Points	s changed; a	Il traces clea	red				STATU	s		
	- · · · · ·	gou, a									



11 GHz ~ 13 GHz

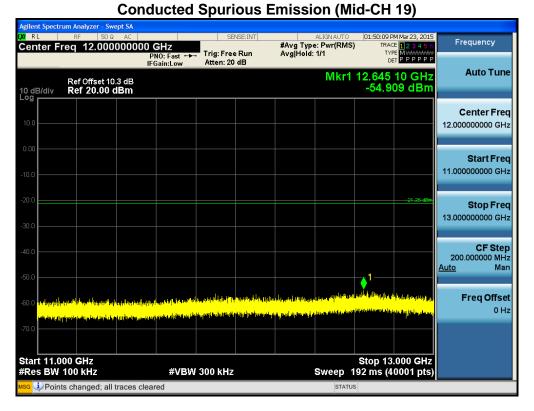


13 GHz ~ 15 GHz

	Agilent Spectrum Analyzer - Swept SA									
Center F	RF 50Ω Freq 14.000	AC 000000	GHz		NSE:INT		ALIGNAUTO : Pwr(RMS) TRAC	M Mar 23, 2015 E 1 2 3 4 5 6	Frequency
		PI	NO: Fast 🔸	Trig: Free Atten: 20		Avg Hold:	1/1	DE	тем и и и и и и и и и и и и и и и и и и и	
	Ref Offset 10	.3 dB					Mkr1	14.930	55 GHz	Auto Tune
10 dB/div Log	Ref 20.00 c	dBm						-54.0	25 dBm	
										Center Freq
10.0										14.000000000 GHz
0.00										
										Start Freq
-10.0										13.00000000 GHz
-20.0									21.25 dBm	
-20.0									21.23 0.511	Stop Freq 15.00000000 GHz
-30.0										15.00000000 GHz
										CF Step
-40.0										200.000000 MHz
-50.0									1	<u>Auto</u> Man
	والمراقع أوالمتحتمر والطوري لا		Land Antipland Street	and and a state of a	فالأربينين وا	La Marcad Di .		ale wales shely rolari	ada had to get the last de	Freg Offset
-60.0		and the second	·		attender in de			ahlapparinna.		0 Hz
-70.0	a di pantina yang kang dan kan Kang dan kang	a the botter pays			- Contractory					
Start 13.0	000 GHz							Stop 15	.000 GHz	
#Res BW			#VBW	300 kHz			Sweep		0001 pts)	
<mark>мѕс</mark> 連 Роіг	nts changed; all	traces clear	ed				STATU	IS		



15 GHz ~ 17 GHz

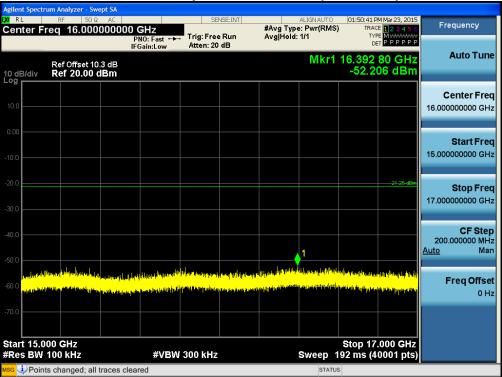

Conducted Spurious Emission (Mid-CH 19)

17 GHz ~ 19 GHz

	um Analyzer - Swept SA								
Center F	RF 50Ω AC req 18.000000	000 GHz		VSE:INT	#Avg Type	ALIGNAUTO : Pwr(RMS) TRAC	M Mar 23, 2015 E <mark>1 2 3 4 5 6</mark>	Frequency
		PNO: Fast ↔↔ IFGain:Low	Trig: Free Atten: 20		Avg Hold:	1/1	TYF	E MWWWWW T P P P P P P	
	Ref Offset 10.3 dB					Mkr1	18.961		Auto Tune
10 dB/div Log	Ref 20.00 dBm						-51.6	28 dBm	
									Center Freq
10.0									18.00000000 GHz
0.00									
0.00									Start Freq
-10.0									17.00000000 GHz
-20.0								21.25 dBm	Stop Freq
-30.0									19.00000000 GHz
-40.0									CF Step 200.000000 MHz
-50.0									<u>Auto</u> Man
	edente de Atteleuter au grand aut	اسانف ا				Later the shade	l d ina sa ang kata kata	enter and all desired	
-60.0 -60.0									Freq Offset
	a support of the second state	<mark>,</mark>	lat di multi di l	lan hurada kala h					0 Hz
-70.0									
Start 17.0 #Res BW		#\/B\A	300 kHz			Sween_		.000 GHz 0001 pts)	
	s changed; all traces		500 KH2			SWEED	· · ·	ooor proj	



19 GHz ~ 21 GHz



Conducted Spurious Emission (Mid-CH 19)

21 GHz ~ 23 GHz

Agilent Spectr	um Analyzer - Swe	pt SA					•			
LXIRL	RF 50 Ω			SEI	NSE:INT		ALIGNAUTO e: Pwr(RMS		M Mar 23, 2015 E <mark>1 2 3 4 5 6</mark>	Frequency
Center F	req 22.000	JUUUUU	GHZ N0: Fast ↔→	Trig: Free		Avg Hold:		TYF	E MWWWWW T P P P P P P	
		IF	Gain:Low	Atten: 20	dB					Auto Tune
	Ref Offset 10.						Mkr1	21.046	95 GHz 56 dBm	Auto Tune
10 dB/div	Ref 20.00 d	Bm						-49.2	о авш	
										Center Freq
10.0										22.000000000 GHz
0.00										
										Start Freq 21.00000000 GHz
-10.0										21.00000000 GHZ
-20.0									21.25 dBm	Stop Freq
-30.0										23.00000000 GHz
-30.0										
-40.0										CF Step
▲1										200.000000 MHz Auto Man
-50.0			i alla a a							Auto Marr
Nakata an	ter din ter du stalad.									En a Offerst
-60.0	<mark>di Manangangan Salada</mark> k	i pisici di la dala da la d La da la d	i and a line i sui i sa i	alian (hints have	<mark>غرج حي معادر غير ا</mark> غ	غدى يأداد (متدارا غار يستأدي <mark>،</mark>	<mark>na pilan kuta kuta kuta kuta kuta kuta kuta kuta</mark>	an <mark>an ang ang ang ang ang ang ang ang ang a</mark>	<u>u silasi kanin k</u>	Freq Offset 0 Hz
										0 H2
-70.0										
Start 21.0	00 GHz							Stop 23	.000 GHz	
#Res BW	100 kHz		#VBW	300 kHz			Sweep	192 ms (4		
<mark>мsg</mark> 🔱 Poin	ts changed; all t	races clea	red				STATU	JS		



23 GHz ~ 25 GHz

Agiler	nt Spectrum Analyzer	- Swept SA					/		
LXI R		50 Ω AC		SENSE:1	INT	ALIGN AUTO	01:52:02 PM M	lar 23, 2015	
Cer	ter Freq 24.0	F	NO: Fast ++ T	rig: Free Ru Atten: 20 dB		Type: Pwr(RMS lold: 1/1	TYPE	23456 WWWWW PPPPP	Frequency
10 di Log	Ref Offse B/div Ref 20.	et 10.3 dB 0 0 dBm				Mkr1	24.971 35 -46.237		Auto Tune
10.0									Center Freq 24.000000000 GHz
0.00 -10.0									Start Freq 23.00000000 GHz
-20.0 -30.0								<u>-21.25 dBm</u>	Stop Freq 25.00000000 GHz
-40.0 -50.0	V for al gall days of the public second to			allo((****) ^[199] ta	- tin per piten to kerne v	helden tilsterig	a fallele and a factor of a		CF Step 200.000000 MHz <u>Auto</u> Man
-60.0	i far far gelik den sen far sjære far som en sen far Hilden det som er sen far som er s	n a fransk konstant a stander og som en stander og som en stander og som en stander og som en som en som en so Til som en so	nethere and the staff of the staff	konna datta info mata a pompila di	<mark>het Den ac Glober da Marke, fij a diel bl</mark>	al distriction of the second secon	<mark>le lan jita yan na sin din jita yan ta l</mark> ita na	, and a state of the second	Freq Offset 0 Hz
-70.0 Star	t 23.000 GHz						Stop 25.00	0 GH7	
#Re	s BW 100 kHz	ell tresses at a	#VBW 30	00 kHz		Sweep	192 ms (400		
Mod	Forms changed	, an traces clea	leu			STATU			



8.6 RADIATED MEASUREMENT.8.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3



Model: LG-H220

Test Configuration

Below 30 MHz

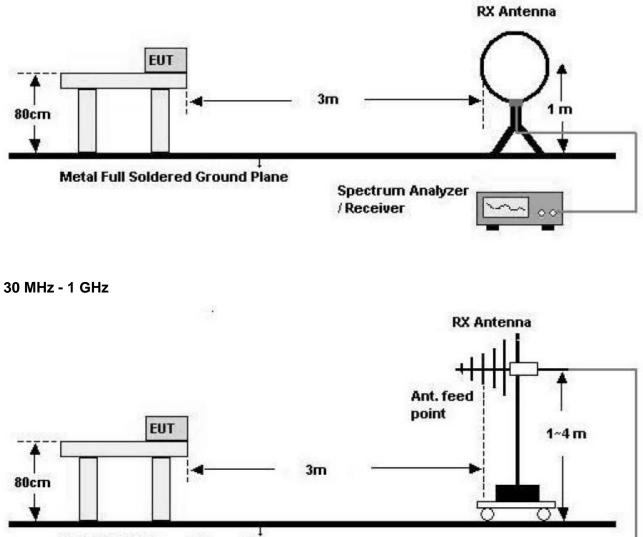

Metal Full Soldered Ground Plane


Spectrum Analyzer / Receiver



Model: LG-H220

Page 37 of 52

Above 1 GHz

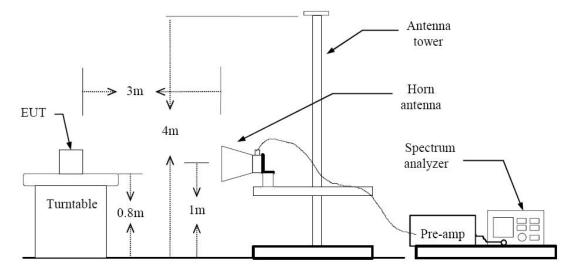

TEST PROCEDURE USED

Method 12.1 in KDB 558074, issued 06/05/2014

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW \geq 3 x RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

	nequency
Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

Table 1 — RBW as a function of frequency



- Average

Set RBW = 1 MHz

Set VBW \geq 1/T.(at least 100 times less than the resolution bandwidth, but no less than 10 Hz.)

Select spectrum analyzer linear display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Note :

1. We are performed the RSE and radiated band edge using standard radiated method.

2. The actual setting value of VBW for BT LE mode.

BT LE Mode	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
	0.3904	0.6240	62.56	2561	3000



TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBµN/m	dBm /m	dBm	(H/V)	dBµN/m	dBµN/m	dB
No Critical peaks found							

- 1. Measuring frequencies from 9 kHz to the 30MHz.
- 2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
- 3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
- 4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
- 5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBµN/m	dBm /m	dBm	(H/V)	dBµN/m	dBµN/m	dB
No Critical peaks found							

- 1. Measuring frequencies from 30 MHz to the 1 GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
- 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Model: LG-H220

Page 41 of 52

Above 1 GHz

Operation Mode: CH Low(LE Mode)

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV/m]	[dBm]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4804	50.42	-2.16	V	48.26	73.98	25.72	PK
4804	38.74	-2.16	V	36.58	53.98	17.40	AV
7206	46.23	7.31	V	53.54	73.98	20.44	PK
7206	33.27	7.31	V	40.58	53.98	13.40	AV
4804	50.26	-2.16	Н	48.10	73.98	25.88	PK
4804	40.59	-2.16	Н	38.43	53.98	15.55	AV
7206	46.25	7.31	Н	53.56	73.98	20.42	PK
7206	33.43	7.31	Н	40.74	53.98	13.24	AV

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Model: LG-H220

Page 42 of 52

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV/m]	[dBm]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4880	51.25	-1.87	V	49.38	73.98	24.60	PK
4880	39.72	-1.87	V	37.85	53.98	16.13	AV
7320	46.14	7.35	V	53.49	73.98	20.49	PK
7320	33.54	7.35	V	40.89	53.98	13.09	AV
4880	50.86	-1.87	Н	48.99	73.98	24.99	PK
4880	38.85	-1.87	Н	36.98	53.98	17.00	AV
7320	46.96	7.35	Н	54.31	73.98	19.67	PK
7320	33.64	7.35	Н	40.99	53.98	12.99	AV

Operation Mode: CH Mid(LE Mode)

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Model: LG-H220

Page 43 of 52

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV/m]	[dBm]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4960	51.03	-1.84	V	49.19	73.98	24.79	PK
4960	39.18	-1.84	V	37.34	53.98	16.64	AV
7440	46.44	7.13	V	53.57	73.98	20.41	PK
7440	33.09	7.13	V	40.22	53.98	13.76	AV
4960	50.52	-1.84	Н	48.68	73.98	25.30	PK
4960	38.90	-1.84	Н	37.06	53.98	16.92	AV
7440	46.35	7.13	Н	53.48	73.98	20.50	PK
7440	33.34	7.13	Н	40.47	53.98	13.51	AV

Operation Mode: CH High(LE Mode)

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



8.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

BT_LE		
2402 MHz		
0 Ch		

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dBm]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	26.22	31.47	н	57.69	73.98	16.29	PK
2390.0	13.00	31.47	Н	44.47	53.98	9.51	AV
2390.0	26.17	31.47	V	57.64	73.98	16.34	PK
2390.0	13.05	31.47	V	44.52	53.98	9.46	AV

- 1. Frequency range of measurement = 2310 MHz ~ 2390 MHz
- 2. Total = Reading Value + Antenna Factor + Cable Loss
- 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
- 4. The radiated restricted band edge measurements are measured with a spectrum analyzer connected to the receive antenna while the EUT is transmitting.



Model: LG-H220	Page 45 of 52		
BT_LE			
2480 MHz			
39 Ch			
	BT_LE 2480 MHz		

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dBm]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	27.56	31.46	Н	59.02	73.98	14.96	PK
2483.5	18.79	31.46	Н	50.25	53.98	3.73	AV
2483.5	27.50	31.46	V	58.96	73.98	15.02	PK
2483.5	18.28	31.46	V	49.74	53.98	4.24	AV

- 1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
- 2. Total = Reading Value + Antenna Factor + Cable Loss
- 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
- 4. The radiated restricted band edge measurements are measured with a spectrum analyzer connected to the receive antenna while the EUT is transmitting.



8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

	Limits (dBµV)				
Frequency Range (MHz)	Quasi-peak	Average			
0.15 to 0.50	66 to 56	56 to 46			
0.50 to 5	56	46			
5 to 30	60	50			

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration


See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
- 2. The EUT is connected via LISN to a test power supply.
- 3. The measurement results are obtained as described below:
- 4. Detectors Quasi Peak and Average Detector.
- 5. We are performed the AC Power Line Conducted Emission test for Ch.19 on BT LE mode. Because Ch.19 on BT LE mode is worst case.



RESULT PLOTSConducted Emissions (Line 1)

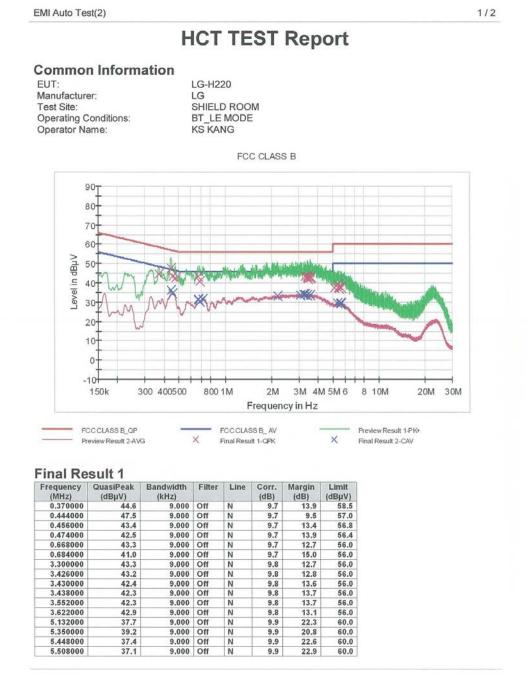

3/25/2015

10:57:39



2/2

EMI Auto Test(2)

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
5.614000	38.1	9.000	Off	N	9.9	22.0	60.0
5,684000	37.6	9.000	Off	N	9.9	22.4	60.0

Final Result 2


Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.446000	36.4	9.000	Off	N	9.7	10.5	46.9
0.454000	34.4	9.000	Off	N	9.7	12.4	46.8
0.668000	31.4	9.000	Off	N	9.7	14.6	46.0
0.672000	31.4	9.000	Off	N	9.7	14.6	46.0
0.682000	30.4	9.000	Off	N	9.7	15.6	46.0
0.718000	31.7	9.000	Off	N	9.7	14.3	46.0
2.206000	33.1	9.000	Off	N	9.8	12.9	46.0
3.088000	33.6	9.000	Off	N	9.8	12.4	46.0
3.214000	34.1	9.000	Off	N	9.8	11.9	46.0
3.300000	34.0	9.000	Off	N	9.8	12.0	46.0
3.426000	33.6	9.000	Off	N	9.8	12.4	46.0
3.552000	33.8	9.000	Off	N	9.8	12.2	46.0
5.346000	29.5	9.000	Off	N	9.9	20.5	50.0
5.350000	29.5	9.000	Off	N	9.9	20.5	50.0
5.354000	29.3	9.000	Off	N	9.9	20.7	50.0
5.590000	29.7	9.000	Off	N	9.9	20.3	50.0
5.614000	29.3	9.000	Off	N	9.9	20.7	50.0
5.668000	29.5	9.000	Off	N	9.9	20.5	50.0

3/25/2015

10:57:39



Conducted Emissions (Line 2)

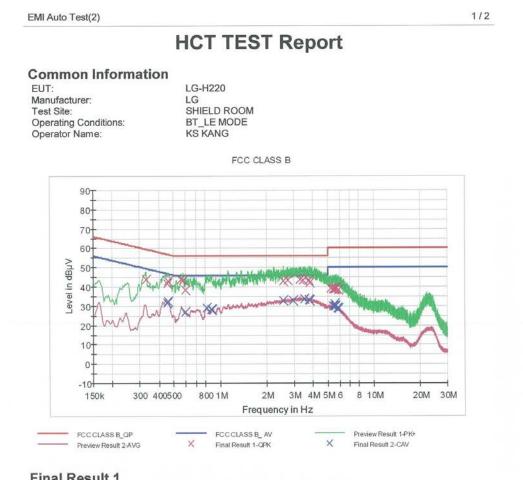

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.330000	43.6	9.000	Off	L1	9.7	15.9	59.5
0.456000	41.8	9.000	Off	L1	9.7	15.0	56.8
0.462000	43.1	9.000	Off	L1	9.7	13.6	56.7
0.560000	43.6	9.000	Off	L1	9.6	12.4	56.0
0.576000	43.3	9.000	Off	L1	9.6	12.7	56.0
0.596000	38.5	9.000	Off	L1	9.6	17.5	56.0
2.568000	43.0	9.000	Off	L1	9,8	13.0	56.0
2.738000	43.4	9.000	Off	L1	9.8	12.6	56.0
3.284000	43.7	9.000	Off	L1	9.8	12.3	56.0
3.462000	43.4	9.000	Off	L1	9.8	12.6	56.0
3.780000	43.2	9.000	Off	L1	9.9	12.8	56.0
3.818000	42.3	9.000	Off	L1	9.9	13.7	56.0
5.256000	39.4	9.000	Off	L1	9.9	20.6	60.0
5.452000	38.8	9.000	Off	L1	9.9	21.2	60.0
5.526000	39.3	9.000	Off	L1	9.9	20.7	60.0
5.552000	38.9	9.000	Off	L1	9.9	21.1	60.0

3/25/2015

11:07:50



EMI Auto Test(2)

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
5.686000	39.3	9.000	Off	L1	9.9	20.7	60.0
5.880000	38.3	9.000	Off	L1	9.9	21.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.456000	31.8	9.000	Off	L1	9.7	15.0	46.8
0.462000	32.5	9.000	Off	L1	9.7	14.2	46.7
0.596000	26.8	9.000	Off	L1	9.6	19.2	46.0
0.824000	29.1	9.000	Off	L1	9.7	16.9	46.0
0.882000	28.1	9.000	Off	L1	9.7	17.9	46.0
0.888000	28.3	9.000	Off	L1	9.7	17.7	46.0
2.568000	33.1	9.000	Off	L1	9.8	13.0	46.0
2.586000	32.9	9.000	Off	L1	9.8	13.1	46.0
2.984000	33.0	9.000	Off	L1	9.8	13.0	46.0
3.520000	33.7	9.000	Off	L1	9.8	12.3	46.0
3.776000	33.5	9.000	Off	L1	9.9	12.5	46.0
3.818000	33.1	9.000	Off	L1	9.9	12.9	46.0
5.452000	29.8	9.000	Off	L1	9.9	20.2	50.0
5.526000	29.9	9.000	Off	L1	9.9	20.1	50.0
5.552000	31.3	9.000	Off	L1	9.9	18.7	50.0
5.586000	29.9	9.000	Off	L1	9.9	20.1	50.0
5.808000	29.1	9.000	Off	L1	9.9	20.9	50.0
5.880000	28.6	9.000	Off	L1	9.9	21.4	50.0

2/2

11:07:50



9. LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/13/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	MY51110063
Agilent	N1911A/Power Meter	01/15/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2014	Annual	MY45241059
Agilent	87300B/Directional Coupler	12/08/2014	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/19/2014	Annual	11275
ITECH	IT6720 / DC POWER SUPPLY	11/04/2014	Annual	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Agilent	8493C / Attenuator(10 dB)	07/21/2014	Annual	76649



9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufactures	Madel / Emilerent	Calibration	Calibration	Operative	
Manufacturer	Model / Equipment	Date	Interval	Serial No.	
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368	
HD	MA240/ Antenna Position Tower	N/A	N/A	556	
EMCO	1050/ Turn Table	N/A	N/A	114	
HD GmbH	HD 100/ Controller	N/A	N/A	13	
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12	
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/04/2014	Annual	10094	
CERNEX	CBL18265035 / POWER AMP	07/23/2014	Annual	22966	
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	19660	
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	1151	
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40	07/05/2013 Biennial		BBHA9170541	
Schwarzbeck	GHz)	07/05/2013	Dienniai		
Rohde & Schwarz	FSP / Spectrum Analyzer	10/23/2014	Annual	836650/016	
Wainwright	WHF3.0/18G-10EF / High Pass Filter	06/23/2014	Annual	8	
Instrument	WHF3.0/16G-10EF / High Fass Filler	00/23/2014	Annuai	O	
Wainwright	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	1	
Instrument	WT INVO.0/20.30-0337 High T ass T iller	04/03/2014	Annual	•	
Wainwright	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	29	
Instrument		04/04/2014	Annual	29	
Wainwright	WRCJ2400/2483.5-2370/2520-60/14SS	06/17/2014	Annual	1	
Instrument	/ Band Reject Filter	00/11/2014	Annual	•	
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276	
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422	
Rohde & Schwarz	LOOP ANTENNA	09/03/2014	Biennial	1513-175	
CERNEX	CBL06185030 / POWER AMP	07/21/2014	Annual	22965	
CERNEX	CBLU1183540 / POWER AMP	07/21/2014	Annual	22964	