

FCC/ IC_ GSM/WCDMA REPORT

Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: April 23, 2015
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
	Report No.: HCT-R-1504-F006-1 HCT FRN: 0005866421 IC Recognition No.: 5944A-3

FCC ID:	ZNFH815
IC:	2703C-H815
APPLICANT:	LG Electronics MobileComm U.S.A., Inc.

FCC/ IC Model(s): LG-H815

Additional FCC/ IC Model(s): LGH815, H815, LG-H815P, LGH815P, H815P, LG-H815p, LGH815p, H815p, LG-H815L, LGH815L, H815L, LG-H815I, LGH815I, H815I, LG-H815AR, LGH815AR, H815AR, LG-H815ar, LGH815ar, H815ar, LG-H815K, LGH815K, H815K, LG-H815k, LGH815k, H815k

EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §22, §24, §2

IC Rule: RSS-Gen (Issue 4), RSS-132 (Issue 3), RSS-133 (Issue 6)

Standalone with normal cover

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	246 KGXW	0.261	24.16
GSM850 EDGE			252 KG7W	0.058	17.66
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M13F9W	0.050	16.96

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	246 KGXW	1.325	31.22
GSM1900 EDGE			245 KG7W	0.467	26.69
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M16F9W	0.289	24.61

Standalone with wireless charging cover (close)

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	ERP	
			Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	0.309	24.90
GSM850 EDGE			0.066	18.21
WCDMA850	826.4 – 846.6	871.4 – 891.6	0.054	17.31

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	EIRP	
			Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	1.192	30.76
GSM1900 EDGE			0.457	26.60
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	0.222	23.46

With wireless charging pad

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	ERP	
			Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	0.280	24.48
GSM850 EDGE			0.063	18.00
WCDMA850	826.4 – 846.6	871.4 – 891.6	0.058	17.66

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	EIRP	
			Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	0.722	28.58
GSM1900 EDGE			0.246	23.91
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	0.122	20.85

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)



Report prepared by
: Ki Hyun Kim
Test engineer of RF Team



Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1504-F006	April 16, 2015	- First Approval Report
HCT-R-1504-F006-1	April 23, 2015	- Added the Information for Emission Designator on page 16 - Add Model name - Revised the Test Mode for Radiated Emissions on Section 7.1 ~ 7.9

Table of Contents

1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. EUT DESCRIPTION.....	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	8
3.2 PEAK- TO- AVERAGE RATIO	9
3.3 OCCUPIED BANDWIDTH.	11
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
4. LIST OF TEST EQUIPMENT	14
5. SUMMARY OF TEST RESULTS	15
6. SAMPLE CALCULATION.....	16
7. TEST DATA	17
7.1 EFFECTIVE RADIATED POWER OUTPUT_ Standalone with normal cover.....	17
7.2 EQUIVALENT ISOTROPIC RADIATED POWER_ Standalone with normal cover	18
7.3 EFFECTIVE RADIATED POWER OUTPUT_ Standalone with wireless charging cover (close). 19	
7.4 EQUIVALENT ISOTROPIC RADIATED POWER_ Standalone with wireless charging cover (close)	20
7.5 EFFECTIVE RADIATED POWER OUTPUT_ With wireless charging pad.....	21
7.6 EQUIVALENT ISOTROPIC RADIATED POWER_ With wireless charging pad	22
7.7 RADIATED SPURIOUS EMISSIONS_ Standalone with normal cover	23
7.7.1 RADIATED SPURIOUS EMISSIONS (GSM850)	23
7.7.2 RADIATED SPURIOUS EMISSIONS (GSM1900)	24
7.7.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)	25
7.7.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900).....	26
7.8 RADIATED SPURIOUS EMISSIONS_ Standalone with wireless charging cover (close)	27
7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)	27
7.8.2 RADIATED SPURIOUS EMISSIONS (GSM1900)	28
7.8.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)	29
7.8.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900).....	30
7.9 RADIATED SPURIOUS EMISSIONS_ With wireless charging pad	31
7.9.1 RADIATED SPURIOUS EMISSIONS (GSM850)	31
7.9.2 RADIATED SPURIOUS EMISSIONS (GSM1900)	32
7.9.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)	33

7.9.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900).....	34
7.10 PEAK-TO-AVERAGE RATIO	35
7.11 OCCUPIED BANDWIDTH	36
7.12 CONDUCTED SPURIOUS EMISSIONS	37
7.12.1 BAND EDGE.....	37
7.13 RECEIVER SPURIOUS EMISSIONS_ Standalone with normal cover.....	38
7.14 RECEIVER SPURIOUS EMISSIONS_ Standalone with wireless charging cover (close)	39
7.15 RECEIVER SPURIOUS EMISSIONS_ With wireless charging pad	40
7.16 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	41
7.16.1 FREQUENCY STABILITY (GSM850).....	41
7.16.2 FREQUENCY STABILITY (GSM1900).....	42
7.16.3 FREQUENCY STABILITY (WCDMA850).....	43
7.16.4 FREQUENCY STABILITY (WCDMA1900).....	44
8. TEST PLOTS.....	45

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFH815
IC: 2703C-H815
Application Type: Certification
FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s): §22, §24, §2
EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC
FCC/ IC Model(s): LG-H815
Additional FCC/ IC Model(s): LGH815, H815, LG-H815P, LGH815P, H815P, LG-H815p, LGH815p, H815p, LG-H815L, LGH815L, H815L, LG-H815I, LGH815I, H815I, LG-H815AR, LGH815AR, H815AR, LG-H815ar, LGH815ar, H815ar, LG-H815K, LGH815K, H815K, LG-H815k, LGH815k, H815k

Tx Frequency: 824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.4 - 1 907.6 MHz (WCDMA1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 MHz (WCDMA850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.4 - 1 987.6 MHz (WCDMA1900)

Max. RF Output Power: **Standalone with normal cover:**
0.261 W GSM850 (24.16 dBm) / 1.325 W GSM1900 (31.22 dBm)
0.058 W GSM850 EDGE (17.66 dBm) / 0.467 W GSM1900 EDGE (26.69 dBm)
0.050 W WCDMA850 (16.96 dBm) / 0.289 W WCDMA1900 (24.61 dBm)

Standalone with wireless charging cover (close) :
0.309 W GSM850 (24.90 dBm) / 1.192 W GSM1900 (30.76 dBm)
0.066 W GSM850 EDGE (18.21 dBm) / 0.457 W GSM1900 EDGE (26.60 dBm)
0.054 W WCDMA850 (17.31 dBm) / 0.222 W WCDMA1900 (23.46 dBm)

With wireless charging pad :
0.280 W GSM850 (24.48 dBm) / 0.722 W GSM1900 (28.58 dBm)
0.063 W GSM850 EDGE (18.00 dBm) / 0.246 W GSM1900 EDGE (23.91 dBm)
0.058 W WCDMA850 (17.66 dBm) / 0.122 W WCDMA1900 (20.85 dBm)

Emission Designator(s): 246 KGXW (GSM850) 246 KGXW (GSM1900)
252 KG7W (GSM850 EDGE) 245 KG7W (GSM1900 EDGE)
4M13F9W (WCDMA850) 4M16F9W (WCDMA1900)

Date(s) of Tests: March 21, 2015 ~ April 14, 2015

Antenna Specification Manufacturer: Ace Technology
Antenna type: PIFA Antenna (Planar Inverted F)
Peak Gain: GSM850/ WCDMA850 : -2.58 dBi
GSM1900/ WCDMA1900 : -3.33 dBi

2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc. LG-H815 Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC consists of GPRS Class33, EDGE33, GSM850, GSM1900, WCDMA850, WCDMA1900, HSDPA, HSUPA and HSPA Release 9.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.**

3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dB})}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

1. Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.
2. The EUT was setup to maximum output power. The 100 kHz RBW was used to scan from 30 MHz to 1 GHz. Also, the 1 MHz RBW was used to scan from 1 GHz to 10 GHz(GSM850/WCDMA850) or 20 GHz(GSM1900/WCDMA1900). The high, low and a middle channel were tested for out of band measurements.

3.2 PEAK- TO- AVERAGE RATIO

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

- Section 5.7.1 CCDF Procedure for PAPR

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure for PAPR

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm)$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW \geq OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points \geq span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

3.3 OCCUPIED BANDWIDTH.

Test set-up

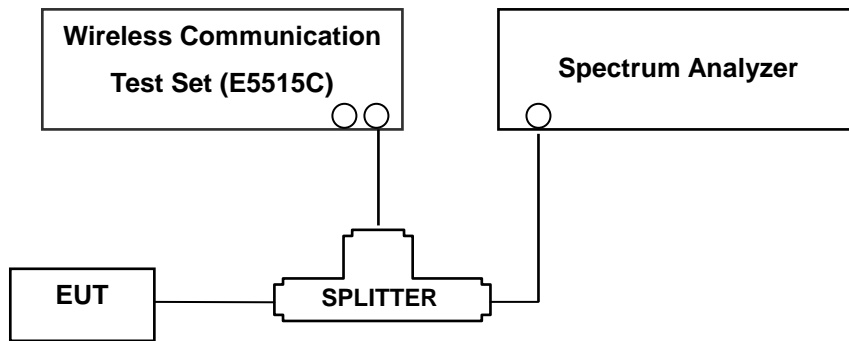

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The RBW settings used in the testing are greater than 1 % of the occupied bw. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at - 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Measurements of all out of band are made on RBW = 1MHz and VBW \geq 3 MHz in the worst case despite RBW = 100 kHz and VBW \geq 300 kHz upon 1 GHz.

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto
- Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

- Band Edge Requirement : According to FCC 22.917, 24.238 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

In GSM mode, the center frequency of spectrum set to the band edge frequency. The span is 1MHz (RBW = at least 1 % of the EBW, VBW $\geq 3*RBW$, Detector = Average).


In WCDMA mode, the center frequency of spectrum set to the band edge frequency. The span is 7MHz (RBW = at least 1% of the EBW, $\geq 3*RBW$, Detector = Average).

NOTES: The analyzer plot offsets were determined by below conditions.

- For GSM850 and WCDMA850, total offset 26.8 dB = 20 dB attenuator + 6 dB Splitter + 0.8 dB RF cables.
- For GSM1900 and WCDMA1900, total offset 27.5 dB = 20 dB attenuator + 6 dB Splitter + 1.5 dB RF cables.

3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

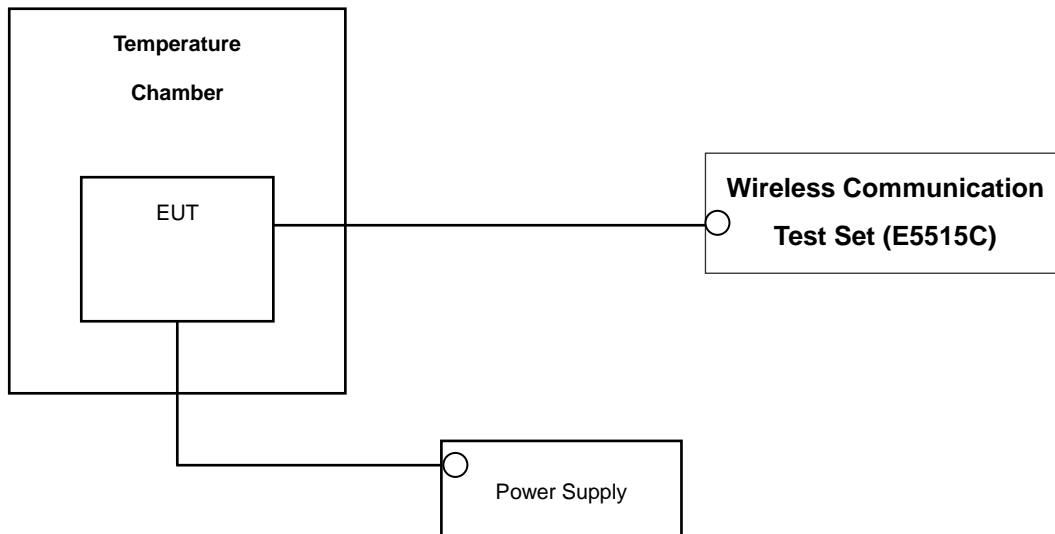

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-C-2004 section 2.2.2.

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(GSM1900/WCDMA1900). The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency(GSM850/WCDMA850).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
LG innotek CHINA	WCD-110/WCP	LF1NA625283010191(1.1)		
Agilent	N1921A/ Power Sensor	MY45241059	Annual	07/09/2015
Agilent	N1911A/ Power Meter	MY45100523	Annual	01/15/2016
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/04/2015
Wainwright	WHK1.2/15G-10EF/H.P.F	4	Annual	06/17/2015
Wainwright	WRCJV2400/2483.5-2370/2520-60/12SS / B.R.F.	1	Annual	06/17/2015
Wainwright	WHK3.3/18G-10EF/H.P.F	2	Annual	06/17/2015
Hewlett Packard	11667B / Power Splitter	10545	Annual	02/22/2016
Hewlett Packard	11667B / Power Splitter	11275	Annual	05/19/2015
Digital	EP-3010/ Power Supply	3110117	Annual	10/29/2015
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/23/2017
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/23/2017
Korea Engineering	KR-1005L / Chamber	KRAC05063-3CH	Annual	10/29/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	09/01/2016
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	Biennial	10/05/2015
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170541	Biennial	07/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	03/18/2016
WEINSCHL	ATTENUATOR	BR0592	Annual	10/22/2015
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/09/2015
Agilent	8960 (E5515C)/ Base Station	MY48360222	Annual	08/26/2015
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	Annual	03/24/2016

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	RSS-Gen(6.6) RSS-133(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	RSS-132(5.5) RSS-133(6.5)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
* 2.1046	RSS-132(5.4) RSS-133(4.1)	Conducted Output Power	-		PASS
24.232(d)	RSS-133(6.4)	Peak- to- Average Ratio	< 13 dB		PASS
2.1055, 22.355	RSS-132(5.3) RSS-133(6.3)	Frequency stability / variation of ambient temperature	< 2.5 ppm (Part22)		PASS
24.235			Emission must remain in band (Part24)		PASS
22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts max. ERP < 11.5 Watts max. ERP	RADIATED	PASS
24.232(c)	RSS-133(6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	RSS-132(5.5) RSS-133(6.5)	Radiated Spurious and Harmonic Emissions	< 43 + 10log10 (P[Watts]) for all out-of band emissions		PASS
	RSS-Gen(7)	Receiver Spurious Emissions	Cf.)Section 7.13~7.15		PASS

*: See SAR Report

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER OUTPUT_ Standalone with normal cover

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-26.67	35.30	-10.59	0.88	V	0.241	23.83
190	836.60	-26.47	35.30	-10.54	0.89	V	0.244	23.87
251	848.80	-25.41	35.54	-10.49	0.89	V	0.261	24.16
EDGE 251	848.80	-31.91	35.54	-10.49	0.89	V	0.058	17.66

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
4132	826.40	-33.76	28.42	-10.58	0.88	V	0.050	16.96
4183	836.60	-33.66	28.11	-10.54	0.89	V	0.047	16.68
4233	846.60	-33.18	27.91	-10.50	0.89	V	0.045	16.52

Note: Standard batteries are the only options for this phone.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in GSM850 and WCDMA850 mode. Also worst case of detecting Antenna is in vertical polarization in GSM850 and WCDMA850 mode.

worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.2 EQUIVALENT ISOTROPIC RADIATED POWER_ Standalone with normal cover

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
512	1,850.20	-10.14	22.54	10.04	1.36	H	1.325	31.22
661	1,880.00	-10.50	22.46	10.05	1.37	H	1.301	31.14
810	1,909.80	-10.90	22.33	10.06	1.38	H	1.260	31.01
EDGE 512	1,850.20	-14.67	22.54	10.04	1.36	H	0.467	26.69

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
9262	1,852.40	-17.56	15.12	10.04	1.36	H	0.240	23.80
9400	1,880.00	-17.88	15.08	10.05	1.37	H	0.238	23.76
9538	1,907.60	-17.30	15.93	10.06	1.38	H	0.289	24.61

Note: Standard batteries are the only options for this phone.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 and WCDMA1900 mode.

worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.3 EFFECTIVE RADIATED POWER OUTPUT_Standalone with wireless charging cover (close)

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-26.28	35.69	-10.59	0.88	V	0.264	24.22
190	836.60	-25.76	36.01	-10.54	0.89	V	0.287	24.58
251	848.80	-24.67	36.28	-10.49	0.89	V	0.309	24.90
EDGE 251	848.80	-31.36	36.28	-10.49	0.89	V	0.066	18.21

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
4132	826.40	-33.52	28.66	-10.58	0.88	V	0.052	17.20
4183	836.60	-33.03	28.74	-10.54	0.89	V	0.054	17.31
4233	846.60	-32.44	28.65	-10.50	0.89	V	0.053	17.26

Note: Standard batteries are the only options for this phone.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in GSM850 and WCDMA850 mode. Also worst case of detecting Antenna is in vertical polarization in GSM850 and WCDMA850 mode.

worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.4 EQUIVALENT ISOTROPIC RADIATED POWER_Standalone with wireless charging cover (close)

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
512	1,850.20	-10.60	22.08	10.04	1.36	H	1.192	30.76
661	1,880.00	-11.51	21.45	10.05	1.37	H	1.031	30.13
810	1,909.80	-12.08	21.15	10.06	1.38	H	0.961	29.83
EDGE 512	1850.20	-14.76	22.08	10.04	1.36	H	0.457	26.60

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
9262	1,852.40	-18.56	14.12	10.04	1.36	H	0.191	22.80
9400	1,880.00	-19.18	13.78	10.05	1.37	H	0.176	22.46
9538	1,907.60	-18.45	14.78	10.06	1.38	H	0.222	23.46

Note: Standard batteries are the only options for this phone.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 and WCDMA1900 mode.

worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.5 EFFECTIVE RADIATED POWER OUTPUT_With wireless charging pad

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-26.02	35.95	-10.59	0.88	V	0.280	24.48
190	836.60	-26.27	35.50	-10.54	0.89	V	0.255	24.07
251	848.80	-25.41	35.54	-10.49	0.89	V	0.261	24.16
EDGE 128	824.20	-32.50	35.95	-10.59	0.88	V	0.063	18.00

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
4132	826.40	-33.06	29.12	-10.58	0.88	V	0.058	17.66
4183	836.60	-33.14	28.63	-10.54	0.89	V	0.052	17.20
4233	846.60	-32.72	28.37	-10.50	0.89	V	0.050	16.98

Note: Standard batteries are the only options for this phone.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in GSM850 and WCDMA850 mode. Also worst case of detecting Antenna is in vertical polarization in GSM850 and WCDMA850 mode.

worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.6 EQUIVALENT ISOTROPIC RADIATED POWER_With wireless charging pad

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
512	1,850.20	-12.78	19.90	10.04	1.36	V	0.722	28.58
661	1,880.00	-14.46	18.50	10.05	1.37	V	0.523	27.18
810	1,909.80	-15.51	17.72	10.06	1.38	V	0.436	26.40
EDGE 512	1850.20	-17.45	19.90	10.04	1.36	V	0.246	23.91

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
9262	1,852.40	-20.51	12.17	10.04	1.36	V	0.122	20.85
9400	1,880.00	-21.69	11.27	10.05	1.37	V	0.099	19.95
9538	1,907.60	-21.80	11.43	10.06	1.38	V	0.102	20.11

Note: Standard batteries are the only options for this phone.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in vertical polarization in GSM1900 and WCDMA1900 mode.

worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.7 RADIATED SPURIOUS EMISSIONS_ Standalone with normal cover

7.7.1 RADIATED SPURIOUS EMISSIONS (GSM850)

- MEASURED OUTPUT POWER: 24.16 dBm = 0.261 W
- MODULATION SIGNAL: GSM850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 37.16 dBc

Ch.	Freq.(MHz)	Measured Level	Ant. Gain (dBd)	Substitute	C.L	Pol.	ERP (dBm)	dBc
		[dBm]		Level [dBm]				
128 (824.2)	1,648.40	-50.49	9.71	-58.52	1.29	H	-50.10	74.26
	2,472.60	-50.23	10.54	-55.41	1.60	H	-46.47	70.63
	3,296.80	-56.07	12.21	-61.14	1.85	H	-50.78	74.94
190 (836.6)	1,673.20	-50.25	9.77	-58.43	1.28	V	-49.94	74.10
	2,509.80	-50.69	10.65	-55.67	1.61	H	-46.63	70.79
	3,346.40	-56.72	12.41	-62.20	1.86	H	-51.65	75.81
251 (848.8)	1,697.60	-48.01	9.85	-56.20	1.30	V	-47.65	71.81
	2,546.40	-45.48	10.72	-50.36	1.64	H	-41.28	65.44
	3,395.20	-56.41	12.39	-61.73	1.88	V	-51.22	75.38

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.7.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

- MEASURED OUTPUT POWER: 31.22 dBm = 1.325 W
- MODULATION SIGNAL: GSM1900
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 44.22 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-42.99	12.32	-46.65	2.03	H	-36.36	67.58
	5,550.60	-28.45	13.02	-27.34	2.52	V	-16.84	48.06
	7,400.80	-37.53	11.06	-28.20	2.91	V	-20.05	51.27
661 (1880.0)	3,760.00	-43.80	12.29	-47.40	1.93	H	-37.04	68.26
	5,640.00	-29.20	13.12	-28.26	2.57	V	-17.71	48.93
	7,520.00	-38.44	11.09	-29.60	3.03	V	-21.54	52.76
810 (1909.8)	3,819.60	-45.84	12.28	-48.81	2.04	H	-38.57	69.79
	5,729.40	-31.30	13.06	-30.11	2.55	V	-19.60	50.82
	7,639.20	-41.18	11.38	-31.76	3.11	V	-23.49	54.71

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.7.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

- MEASURED OUTPUT POWER: 16.96 dBm = 0.050 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.96 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-55.51	9.71	-63.55	1.29	V	-55.13	72.09
	2,479.20	-57.21	10.54	-62.23	1.61	V	-53.30	70.26
	3,305.60	-56.75	12.26	-61.93	1.86	H	-51.53	68.49
4,183 (836.6)	1,673.20	-56.43	9.77	-64.61	1.28	V	-56.12	73.08
	2,509.80	-57.34	10.65	-62.33	1.61	H	-53.29	70.25
	3,346.40	-57.21	12.41	-62.69	1.86	H	-52.14	69.10
4,233 (846.6)	1,693.20	-55.09	9.83	-63.34	1.30	H	-54.81	71.77
	2,539.80	-58.18	10.71	-63.00	1.63	V	-53.92	70.88
	3,386.40	-55.58	12.40	-61.03	1.84	H	-50.47	67.43

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.7.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

- MEASURED OUTPUT POWER: 24.61 dBm = 0.289 W
- MODULATION SIGNAL: WCDMA1900
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 37.61 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262 (1852.4)	3,704.80	-40.87	12.32	-44.49	2.01	H	-34.18	58.79
	5,557.20	-55.02	13.03	-53.89	2.53	V	-43.39	68.00
	7,409.60	-56.42	11.05	-46.92	2.92	V	-38.79	63.40
9400 (1880.0)	3,760.00	-46.55	12.29	-50.16	1.93	H	-39.79	64.40
	5,640.00	-53.65	13.12	-52.72	2.57	V	-42.17	66.78
	7,520.00	-56.03	11.09	-47.19	3.03	V	-39.13	63.74
9538 (1907.6)	3,815.20	-46.12	12.28	-49.32	2.04	H	-39.08	63.69
	5,722.80	-53.96	13.80	-53.48	2.57	H	-42.25	66.86
	7,630.40	-56.07	11.36	-46.60	3.19	V	-38.43	63.04

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.8 RADIATED SPURIOUS EMISSIONS_ Standalone with wireless charging cover (close)

7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)

- MEASURED OUTPUT POWER: 24.90 dBm = 0.309 W
- MODULATION SIGNAL: GSM850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 37.90 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-48.80	9.71	-56.84	1.29	H	-48.42	73.32
	2,472.60	-47.79	10.54	-52.97	1.60	H	-44.03	68.93
	3,296.80	-57.45	12.21	-62.52	1.85	V	-52.16	77.06
190 (836.6)	1,673.20	-52.14	9.77	-60.32	1.28	H	-51.83	76.73
	2,509.80	-49.23	10.65	-54.21	1.61	H	-45.17	70.07
	3,346.40	-57.75	12.41	-63.24	1.86	H	-52.69	77.59
251 (848.8)	1,697.60	-50.30	9.85	-58.50	1.30	H	-49.95	74.85
	2,546.40	-46.54	10.72	-51.42	1.64	V	-42.34	67.24
	3,395.20	-56.75	12.39	-62.07	1.88	H	-51.56	76.46

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.8.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

- MEASURED OUTPUT POWER: 30.76 dBm = 1.192 W
- MODULATION SIGNAL: GSM1900
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 43.76 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-43.91	12.32	-47.57	2.03	V	-37.28	68.04
	5,550.60	-31.48	13.02	-30.37	2.52	V	-19.87	50.63
	7,400.80	-39.94	11.06	-30.62	2.91	V	-22.47	53.23
661 (1880.0)	3,760.00	-45.13	12.29	-48.73	1.93	H	-38.37	69.13
	5,640.00	-31.92	13.12	-30.99	2.57	V	-20.44	51.20
	7,520.00	-40.41	11.09	-31.57	3.03	V	-23.51	54.27
810 (1909.8)	3,819.60	-45.95	12.28	-48.91	2.04	H	-38.67	69.43
	5,729.40	-33.74	13.06	-32.55	2.55	V	-22.04	52.80
	7,639.20	-42.46	11.38	-33.03	3.11	V	-24.76	55.52

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.8.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

- MEASURED OUTPUT POWER: 17.31 dBm = 0.054 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 30.31 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-54.39	9.71	-62.43	1.29	V	-54.01	71.32
	2,479.20	-55.17	10.54	-60.19	1.61	H	-51.26	68.57
	3,305.60	-56.89	12.26	-62.07	1.86	H	-51.67	68.98
4,183 (836.6)	1,673.20	-54.12	9.77	-62.30	1.28	H	-53.81	71.12
	2,509.80	-54.01	10.65	-58.99	1.61	H	-49.95	67.26
	3,346.40	-56.83	12.41	-62.32	1.86	V	-51.77	69.08
4,233 (846.6)	1,693.20	-52.26	9.83	-60.51	1.30	V	-51.98	69.29
	2,539.80	-54.83	10.71	-59.65	1.63	H	-50.57	67.88
	3,386.40	-56.40	12.40	-61.85	1.84	V	-51.29	68.60

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.8.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

- MEASURED OUTPUT POWER: 23.46 dBm = 0.222 W
- MODULATION SIGNAL: WCDMA1900
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 36.46 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262 (1852.4)	3,704.80	-42.30	12.32	-45.92	2.01	H	-35.62	59.08
	5,557.20	-53.40	13.03	-52.28	2.53	V	-41.78	65.24
	7,409.60	-56.70	11.05	-47.20	2.92	V	-39.07	62.53
9400 (1880.0)	3,760.00	-45.32	12.29	-48.93	1.93	H	-38.56	62.02
	5,640.00	-52.87	13.12	-51.94	2.57	V	-41.39	64.85
	7,520.00	-56.12	11.09	-47.28	3.03	H	-39.22	62.68
9538 (1907.6)	3,815.20	-44.05	12.28	-47.25	2.04	H	-37.01	60.47
	5,722.80	-51.43	13.80	-50.96	2.57	V	-39.73	63.19
	7,630.40	-56.98	11.36	-47.50	3.19	H	-39.33	62.79

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.9 RADIATED SPURIOUS EMISSIONS_With wireless charging pad

7.9.1 RADIATED SPURIOUS EMISSIONS (GSM850)

- MEASURED OUTPUT POWER: 24.48 dBm = 0.280 W
- MODULATION SIGNAL: GSM850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 37.48 dBc

Ch.	Freq.(MHz)	Measured Level	Ant. Gain (dBd)	Substitute	C.L	Pol.	ERP (dBm)	dBc
		[dBm]		Level [dBm]				
128 (824.2)	1,648.40	-53.69	9.71	-61.73	1.29	V	-53.31	77.79
	2,472.60	-52.56	10.54	-57.74	1.60	V	-48.80	73.28
	3,296.80	-56.96	12.21	-62.02	1.85	H	-51.66	76.14
190 (836.6)	1,673.20	-51.57	9.77	-59.75	1.28	V	-51.26	75.74
	2,509.80	-53.26	10.65	-58.24	1.61	V	-49.20	73.68
	3,346.40	-56.40	12.41	-61.88	1.86	V	-51.33	75.81
251 (848.8)	1,697.60	-50.18	9.85	-58.38	1.30	H	-49.83	74.31
	2,546.40	-48.81	10.72	-53.69	1.64	V	-44.61	69.09
	3,395.20	-56.01	12.39	-61.32	1.88	V	-50.81	75.29

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.9.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

- MEASURED OUTPUT POWER: 28.58 dBm = 0.722 W
- MODULATION SIGNAL: GSM1900
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 41.58 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-46.74	12.32	-50.40	2.03	H	-40.11	68.69
	5,550.60	-41.32	13.02	-40.20	2.52	V	-29.70	58.28
	7,400.80	-47.29	11.06	-37.97	2.91	H	-29.82	58.40
661 (1880.0)	3,760.00	-46.40	12.29	-50.01	1.93	H	-39.65	68.23
	5,640.00	-40.83	13.12	-39.89	2.57	H	-29.34	57.92
	7,520.00	-47.87	11.09	-39.03	3.03	H	-30.97	59.55
810 (1909.8)	3,819.60	-47.31	12.28	-50.28	2.04	V	-40.04	68.62
	5,729.40	-40.46	13.06	-39.27	2.55	H	-28.76	57.34
	7,639.20	-48.52	11.38	-39.10	3.11	H	-30.83	59.41

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.9.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

- MEASURED OUTPUT POWER: 17.66 dBm = 0.058 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 30.66 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-56.03	9.71	-64.07	1.29	V	-55.65	73.31
	2,479.20	-56.89	10.54	-61.91	1.61	H	-52.98	70.64
	3,305.60	-57.06	12.26	-62.24	1.86	H	-51.84	69.50
4,183 (836.6)	1,673.20	-53.87	9.77	-62.06	1.28	V	-53.57	71.23
	2,509.80	-56.50	10.65	-61.49	1.61	V	-52.45	70.11
	3,346.40	-57.27	12.41	-62.76	1.86	H	-52.21	69.87
4,233 (846.6)	1,693.20	-51.77	9.83	-60.02	1.30	V	-51.49	69.15
	2,539.80	-57.27	10.71	-62.09	1.63	H	-53.01	70.67
	3,386.40	-56.99	12.40	-62.44	1.84	H	-51.88	69.54

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.9.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

- MEASURED OUTPUT POWER: 20.85 dBm = 0.122 W
- MODULATION SIGNAL: WCDMA1900
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 33.85 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262 (1852.4)	3,704.80	-46.61	12.32	-50.23	2.01	H	-39.93	60.78
	5,557.20	-54.07	13.03	-52.95	2.53	V	-42.45	63.30
	7,409.60	-57.22	11.05	-47.72	2.92	V	-39.59	60.44
9400 (1880.0)	3,760.00	-48.41	12.29	-52.02	1.93	H	-41.66	62.51
	5,640.00	-54.34	13.12	-53.40	2.57	V	-42.85	63.70
	7,520.00	-56.99	11.09	-48.15	3.03	H	-40.09	60.94
9538 (1907.6)	3,815.20	-46.68	12.28	-49.88	2.04	V	-39.64	60.49
	5,722.80	-52.35	13.80	-51.88	2.57	H	-40.65	61.50
	7,630.40	-57.28	11.36	-47.81	3.19	H	-39.64	60.49

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

7.10 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{PK} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{PK} - P _{Avg} (dB)	Limit (dB)	Pass / Fail
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)			
GSM1900	661	30.70	21.05	4.6232	0.5507	9.24	0.41	13	Pass
GSM1900 EDGE	661	29.13	16.26				3.63		
WCDMA1900	9400	CCDF Procedure					3.07		

- Plots of the EUT's Peak- to- Average Ratio are shown Page 50 ~ 52, 55.

NOTES:

Peak to Average Power Ratio was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

Only GSM(include EDGE) Mode was tested by Section 5.7.2 Alternate Procedure

$P.A.R_{(dB)} = P_{PK (dBm)} - P_{Avg (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

Duty cycle Factor = $10 \log (1/x)$, $x = Tx_{On} / Tx_{Total}$

7.11 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	244.5214
	190	836.60	240.9381
	251	848.80	246.3425
GSM850 EDGE	251	848.80	251.7085
GSM1900	512	1,850.20	246.2609
	661	1,880.00	243.2361
	810	1,909.80	242.8366
GSM1900 EDGE	512	1,850.20	244.7074
WCDMA850	4132	826.40	4.1185
	4183	836.60	4.1335
	4233	846.60	4.1228
WCDMA1900	9262	1852.40	4.1620
	9400	1880.00	4.1304
	9538	1907.60	4.1500

- Plots of the EUT's Occupied Bandwidth are shown Page 46 ~ 49, 52 ~ 55.

7.12 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	4.826800	-31.06
	190	4.976390	-31.09
	251	4.951050	-30.71
GSM1900	512	6.990800	-28.95
	661	6.982330	-29.04
	810	6.985320	-28.52
WCDMA850	4132	4.614080	-30.32
	4183	4.603150	-29.22
	4233	4.927190	-30.33
WCDMA1900	9262	6.581540	-28.95
	9400	6.967870	-28.88
	9538	6.985820	-28.25

- Plots of the EUT's Conducted Spurious Emissions are shown Page 72 ~ 83.

7.12.1 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 56 ~ 71.

7.13 RECEIVER SPURIOUS EMISSIONS_ Standalone with normal cover

FCC Rule(s) RSS-Gen
 Test Requirements: Emission Level shall not exceed RSS-Gen 6(a) limits
 Operating conditions: Under normal test conditions
 Method of testing: Radiated

S/A. Settings: F < 1 GHz: RBW: 100 kHz, VBW: 300 kHz (Peak)
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)
 Mode of operation: Receive

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30 – 88	100 (40 dBuV)	3
88 - 216	150 (43.5 dBuV))	3
216 – 960	200 (46 dBuV)	3
Above 960	500 (54 dBuV)	3

Operation Mode: Receive:

30 MHz ~ 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

Above 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

7.14 RECEIVER SPURIOUS EMISSIONS_Standalone with wireless charging cover (close)

FCC Rule(s) RSS-Gen
 Test Requirements: Emission Level shall not exceed RSS-Gen 6(a) limits
 Operating conditions: Under normal test conditions
 Method of testing: Radiated

 S/A. Settings: F < 1 GHz: RBW: 100 kHz, VBW: 300 kHz (Peak)
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)
 Mode of operation: Receive

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30 – 88	100 (40 dBuV)	3
88 - 216	150 (43.5 dBuV))	3
216 – 960	200 (46 dBuV)	3
Above 960	500 (54 dBuV)	3

Operation Mode: Receive:

30 MHz ~ 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

Above 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

7.15 RECEIVER SPURIOUS EMISSIONS_With wireless charging pad

FCC Rule(s) RSS-Gen
 Test Requirements: Emission Level shall not exceed RSS-Gen 6(a) limits
 Operating conditions: Under normal test conditions
 Method of testing: Radiated

S/A. Settings: F < 1 GHz: RBW: 100 kHz, VBW: 300 kHz (Peak)
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)
 Mode of operation: Receive

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30 – 88	100 (40 dBuV)	3
88 - 216	150 (43.5 dBuV))	3
216 – 960	200 (46 dBuV)	3
Above 960	500 (54 dBuV)	3

Operation Mode: Receive:

30 MHz ~ 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

Above 1 GHz


Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

7.16 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.16.1 FREQUENCY STABILITY (GSM850)

- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	836 599 993	0	0.000 000	0.000
100%		-30	836 600 000	6.45	0.000 001	0.008
100%		-20	836 600 002	9.34	0.000 001	0.011
100%		-10	836 600 001	7.53	0.000 001	0.009
100%		0	836 600 000	6.73	0.000 001	0.008
100%		+10	836 600 000	6.76	0.000 001	0.008
100%		+30	836 599 999	5.83	0.000 001	0.007
100%		+40	836 600 000	6.79	0.000 001	0.008
100%		+50	836 600 001	7.82	0.000 001	0.009
Batt. Endpoint		3.27	+20	836 600 000	6.60	0.000 001

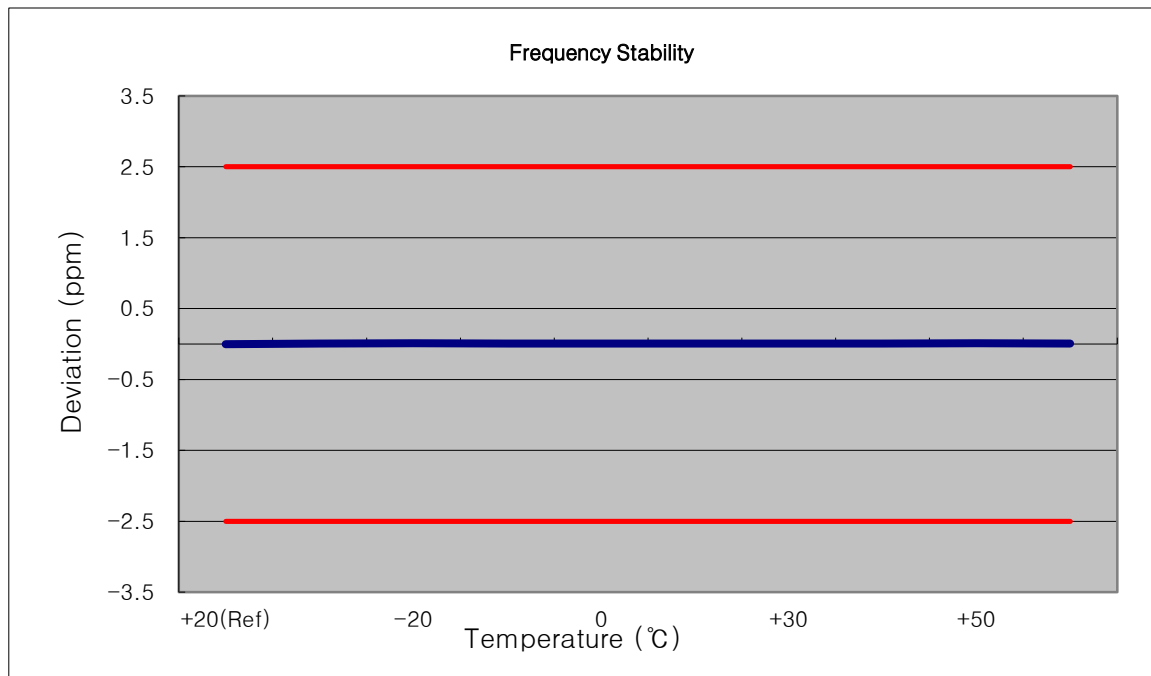

7.16.2 FREQUENCY STABILITY (GSM1900)

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1879 999 966	0	0.000 000	0.000
100%		-30	1879 999 996	30.30	0.000 002	0.016
100%		-20	1879 999 995	29.11	0.000 002	0.015
100%		-10	1879 999 996	30.07	0.000 002	0.016
100%		0	1879 999 999	33.12	0.000 002	0.018
100%		+10	1879 999 997	30.46	0.000 002	0.016
100%		+30	1879 999 998	32.40	0.000 002	0.017
100%		+40	1879 999 995	28.59	0.000 002	0.015
100%		+50	1879 999 996	29.60	0.000 002	0.016
Batt. Endpoint		3.27	+20	1879 999 997	30.51	0.000 002

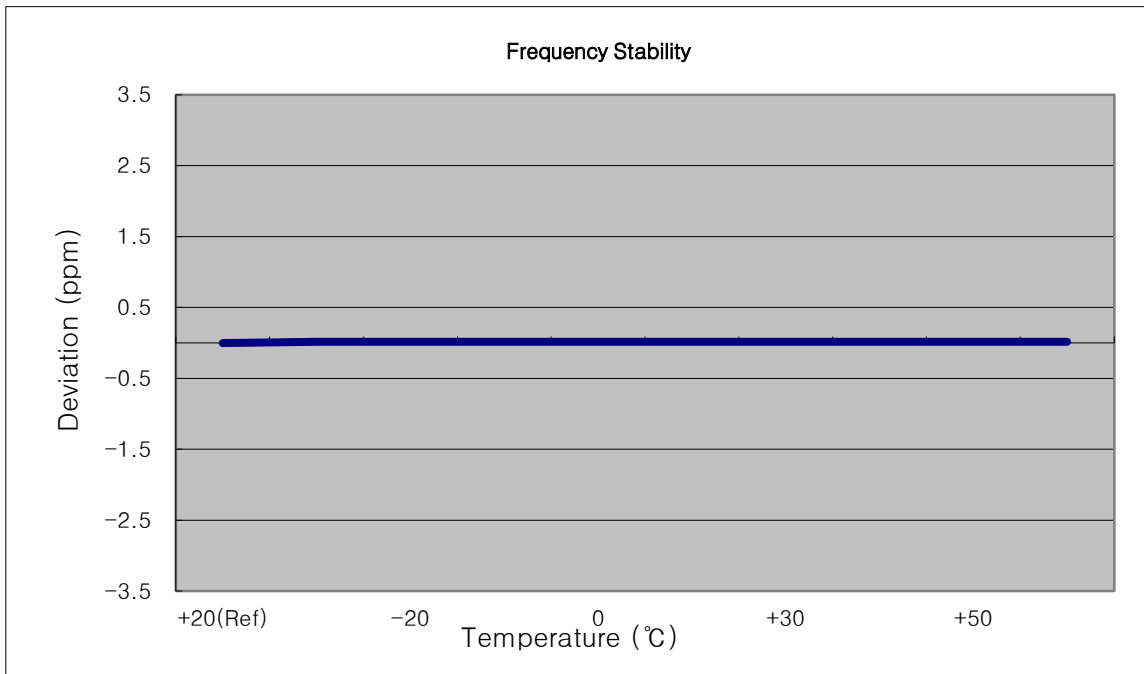

7.16.3 FREQUENCY STABILITY (WCDMA850)

- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 4183
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	836 600 003	0	0.000 000	0.000
100%		-30	836 599 997	-2.56	0.000 000	-0.003
100%		-20	836 599 997	-3.03	0.000 000	-0.004
100%		-10	836 599 997	-3.04	0.000 000	-0.004
100%		0	836 599 997	-3.41	0.000 000	-0.004
100%		+10	836 599 996	-3.74	0.000 000	-0.004
100%		+30	836 599 997	-3.01	0.000 000	-0.004
100%		+40	836 599 997	-2.51	0.000 000	-0.003
100%		+50	836 599 997	-3.35	0.000 000	-0.004
Batt. Endpoint	3.27	+20	836 599 997	-2.93	0.000 000	-0.004

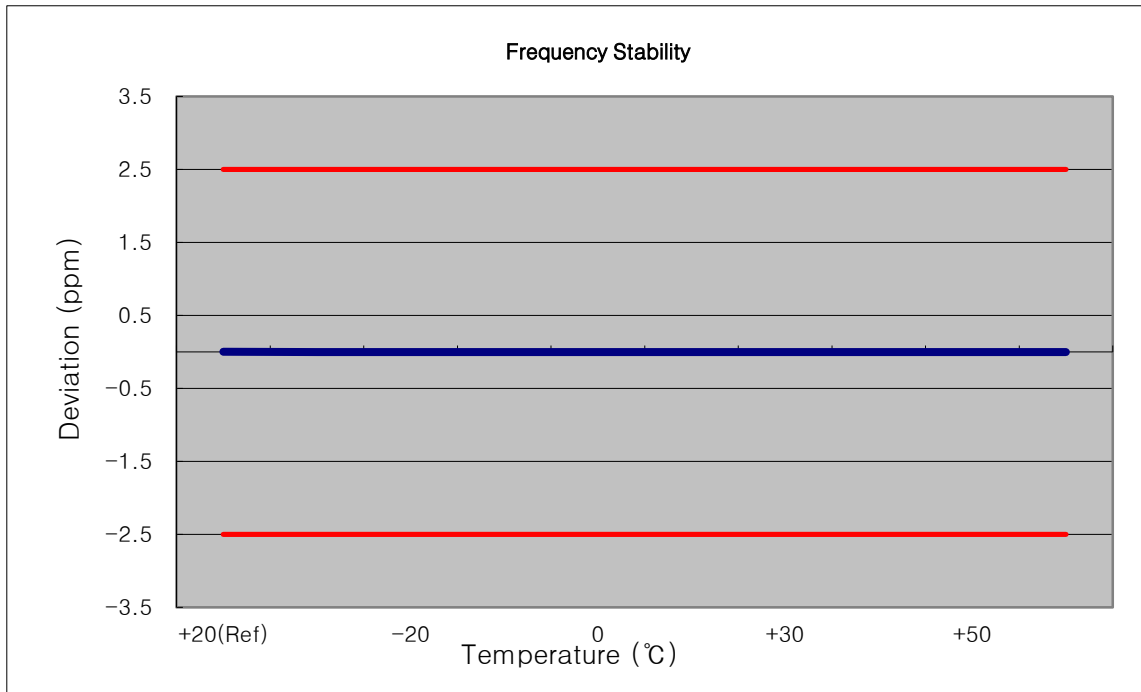

7.16.4 FREQUENCY STABILITY (WCDMA1900)


- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1880 000 004	0	0.000 000	0.000
100%		-30	1879 999 996	-4.00	0.000 000	-0.002
100%		-20	1879 999 994	-5.54	0.000 000	-0.003
100%		-10	1879 999 995	-4.91	0.000 000	-0.003
100%		0	1879 999 996	-3.86	0.000 000	-0.002
100%		+10	1879 999 996	-3.99	0.000 000	-0.002
100%		+30	1879 999 996	-4.01	0.000 000	-0.002
100%		+40	1879 999 996	-4.46	0.000 000	-0.002
100%		+50	1879 999 996	-4.02	0.000 000	-0.002
Batt. Endpoint	3.27	+20	1879 999 995	-5.07	0.000 000	-0.003

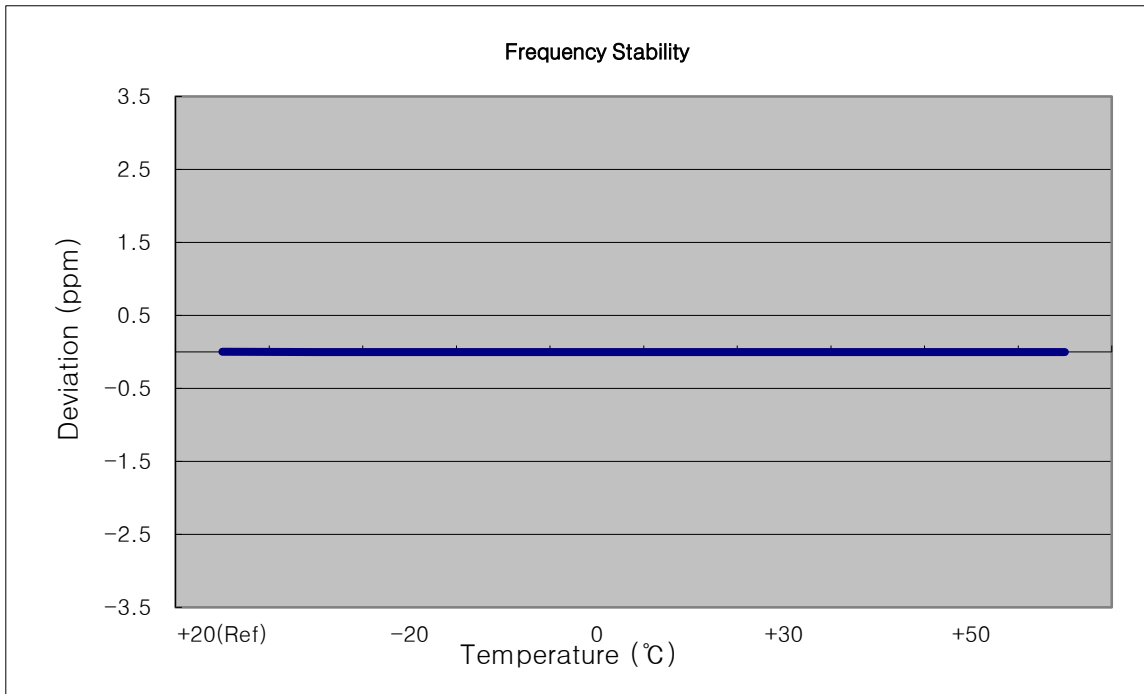


8. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

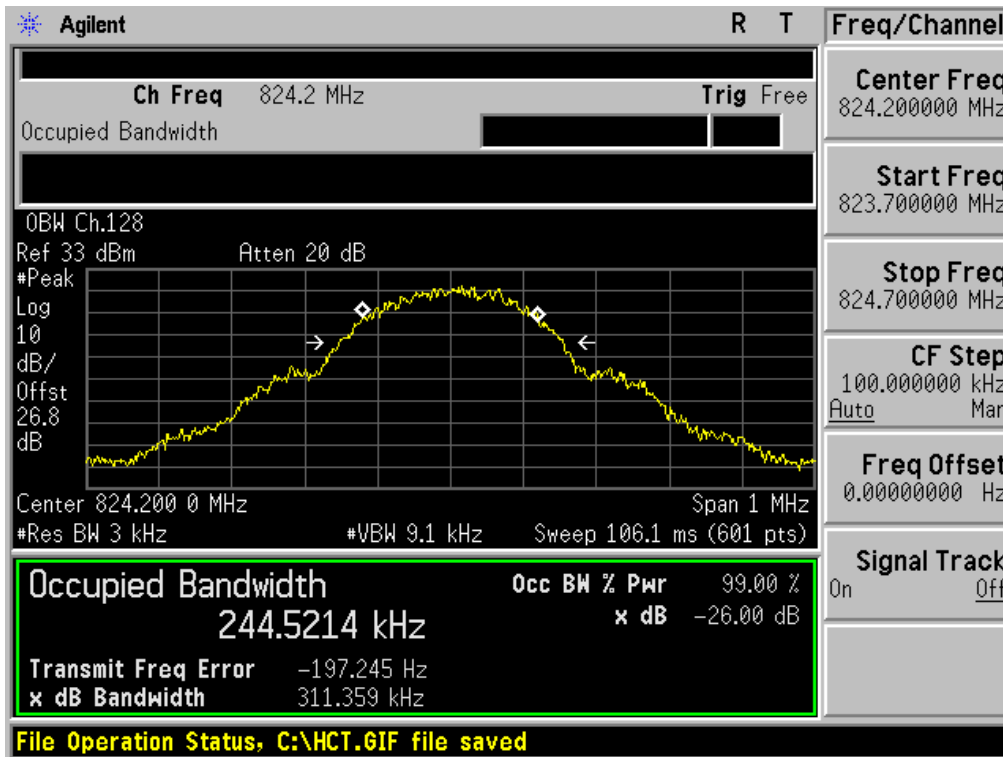


■ GSM850 MODE (190 CH.) Occupied Bandwidth

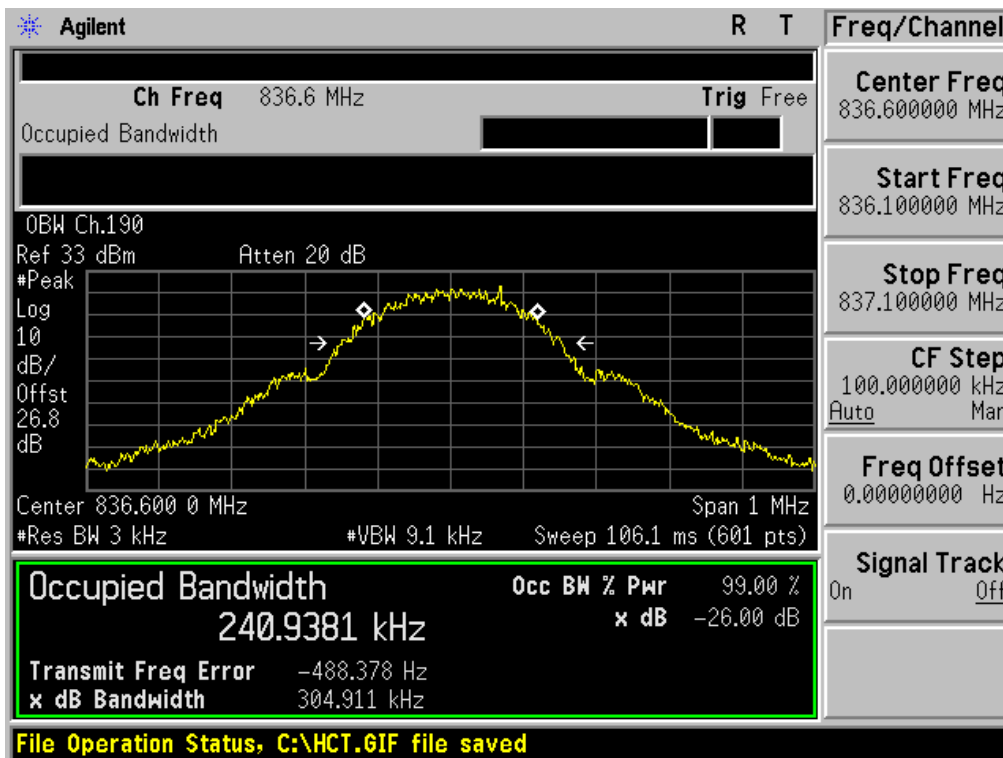


■ GSM850 MODE (251 CH.) Occupied Bandwidth

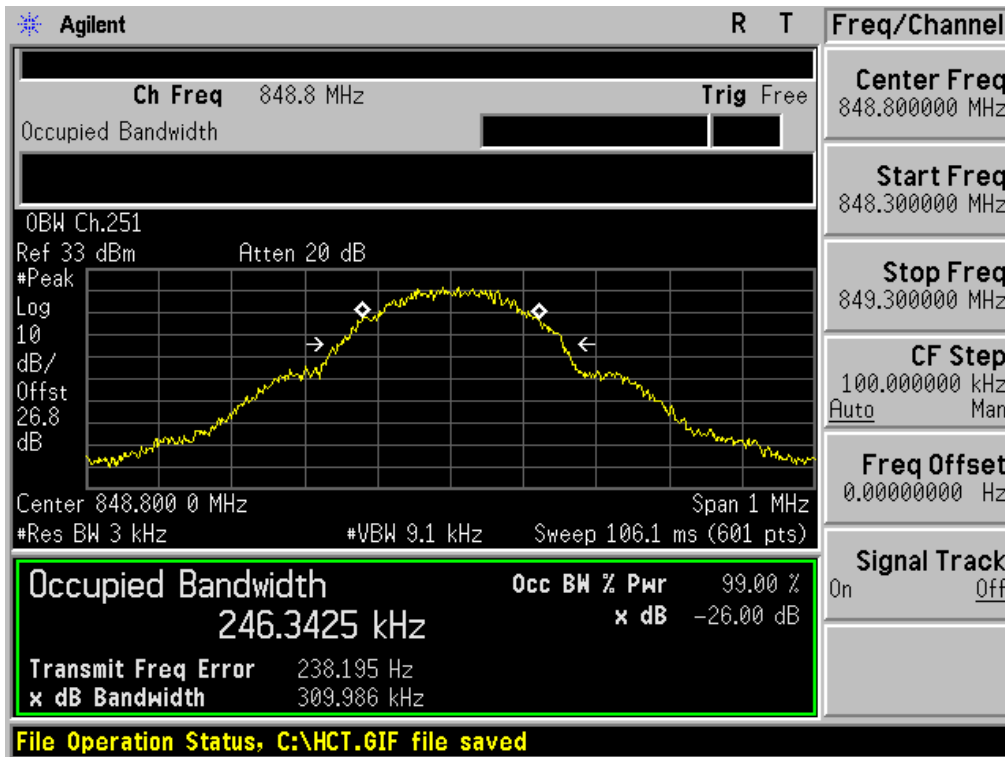


■ GSM850 EDGE (251 CH.) Occupied Bandwidth

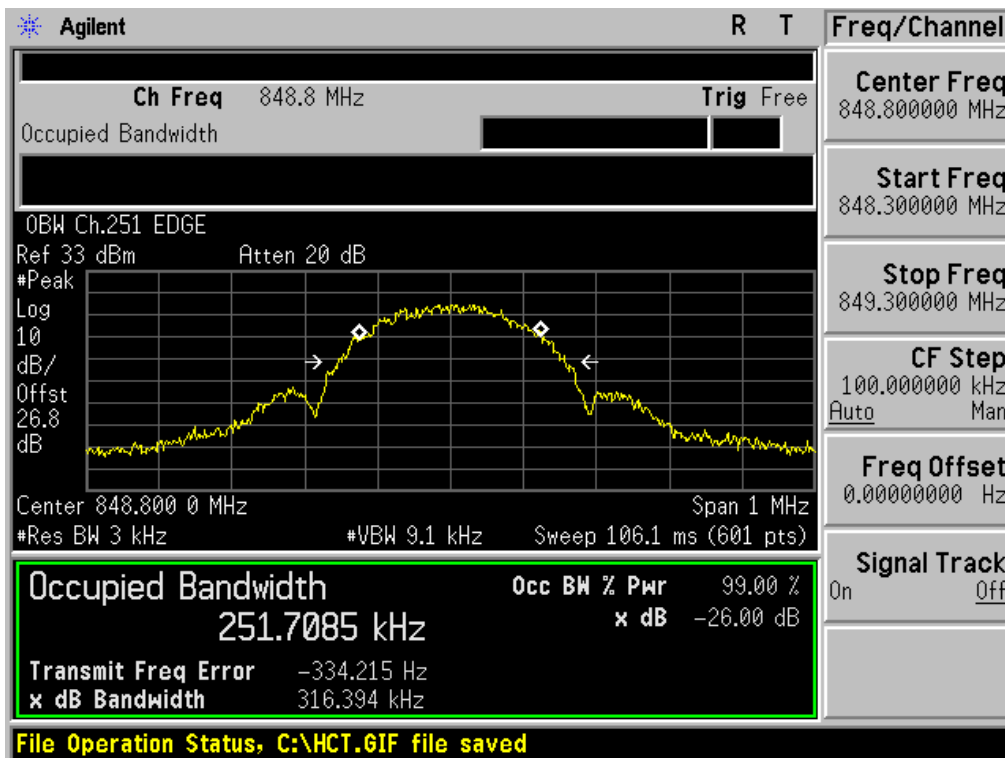


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

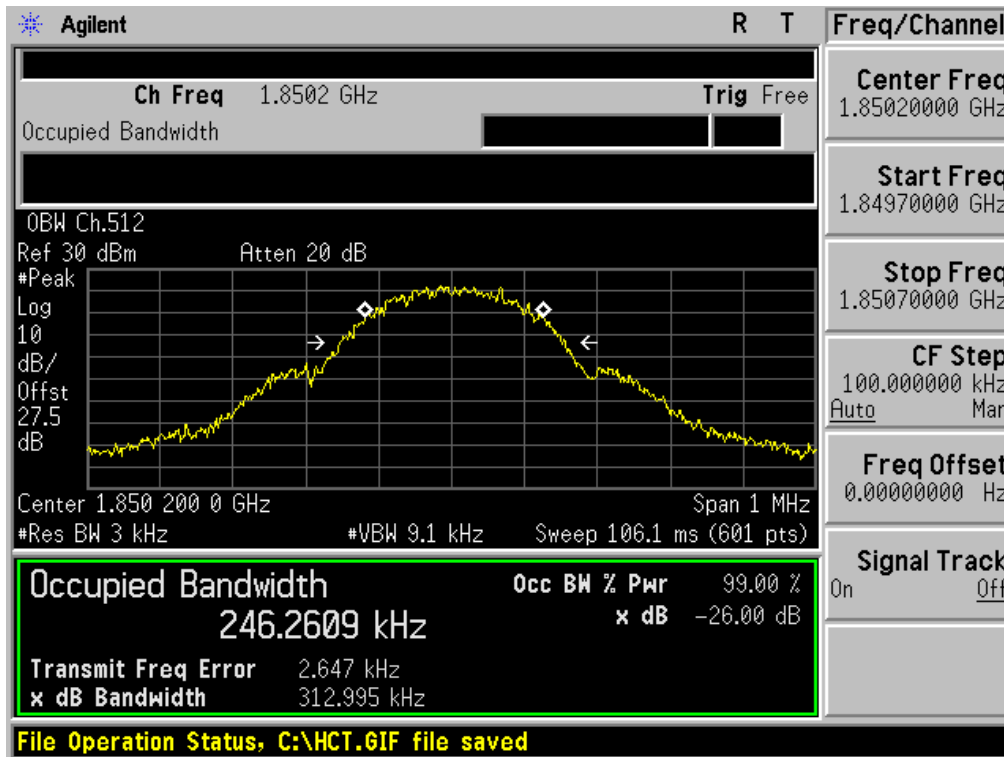


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

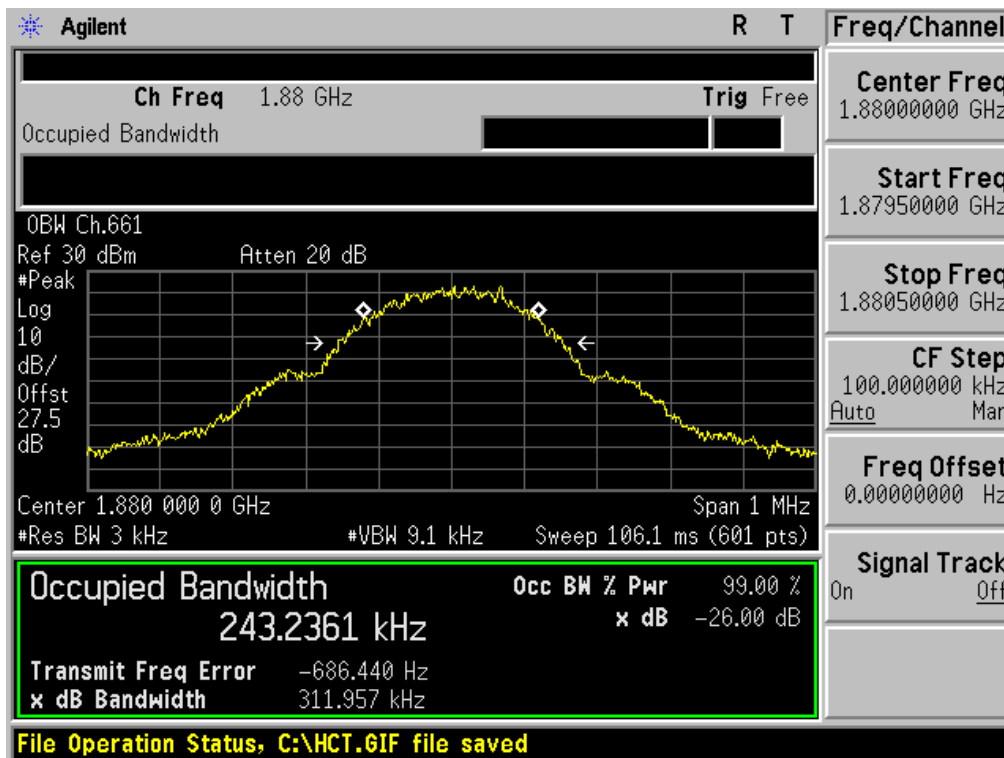


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

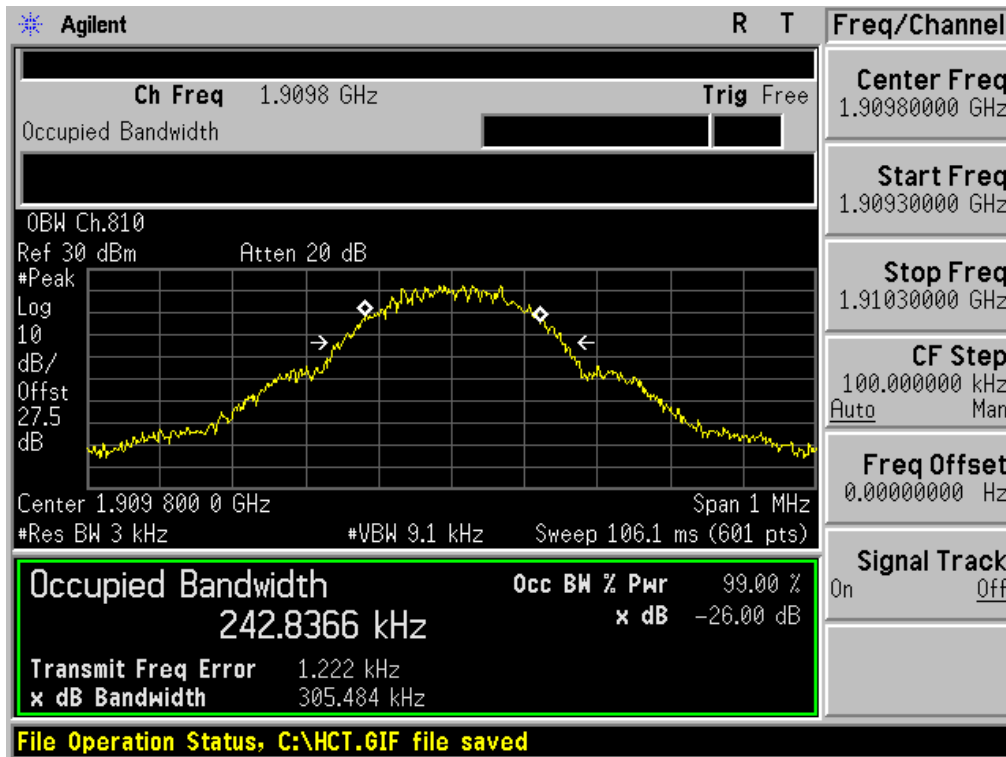


■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

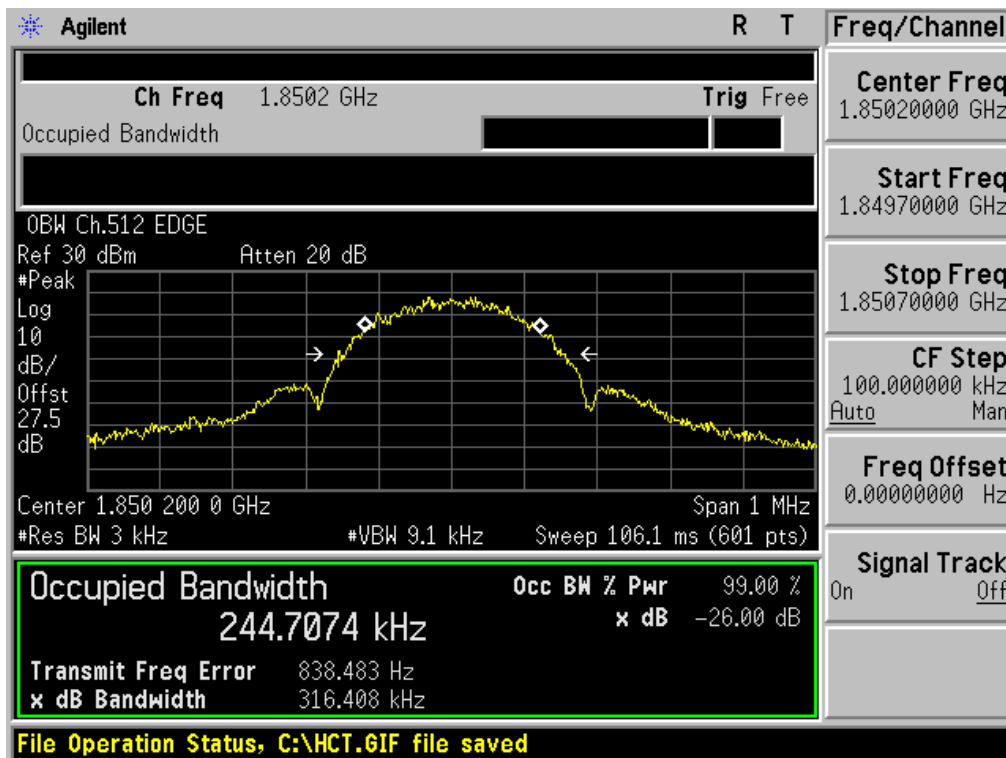


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Pk}

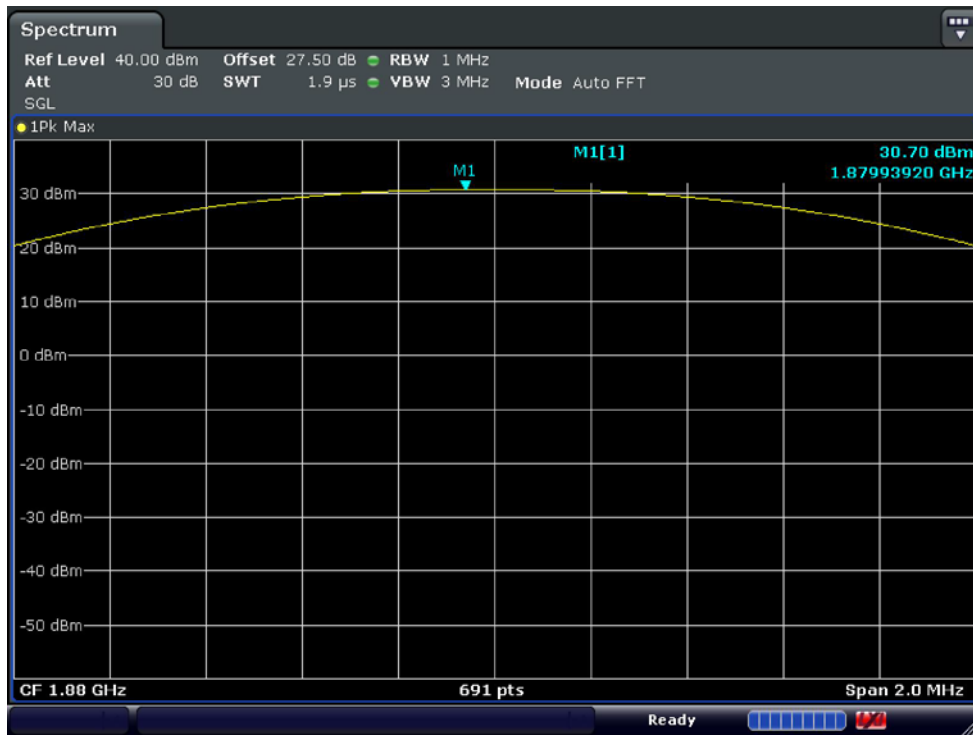


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

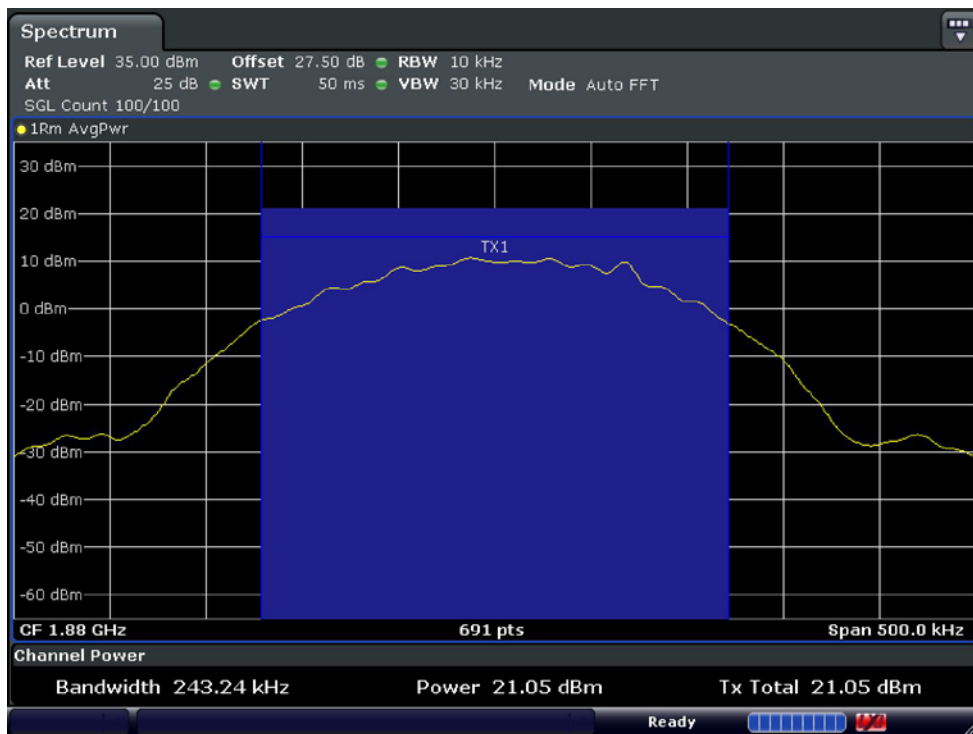


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

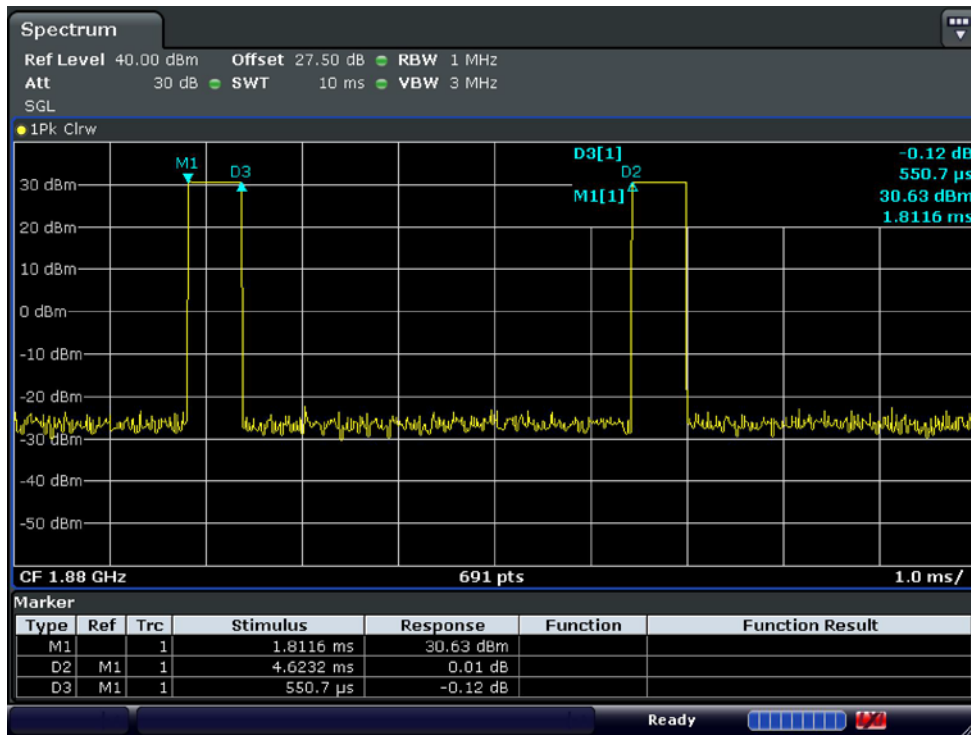


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Pk}

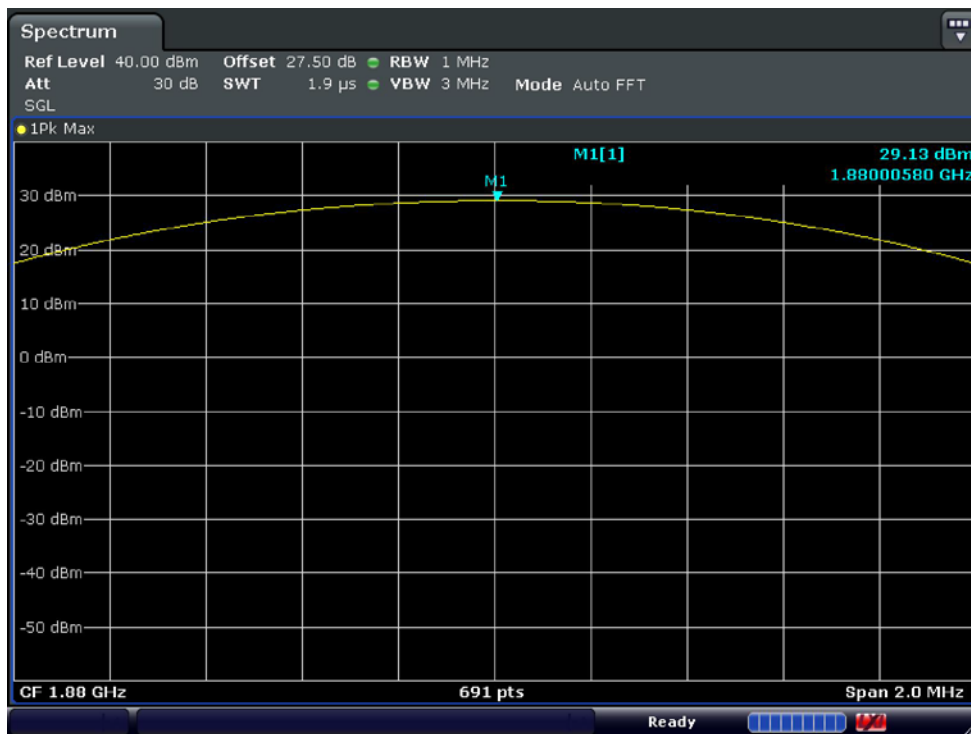


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

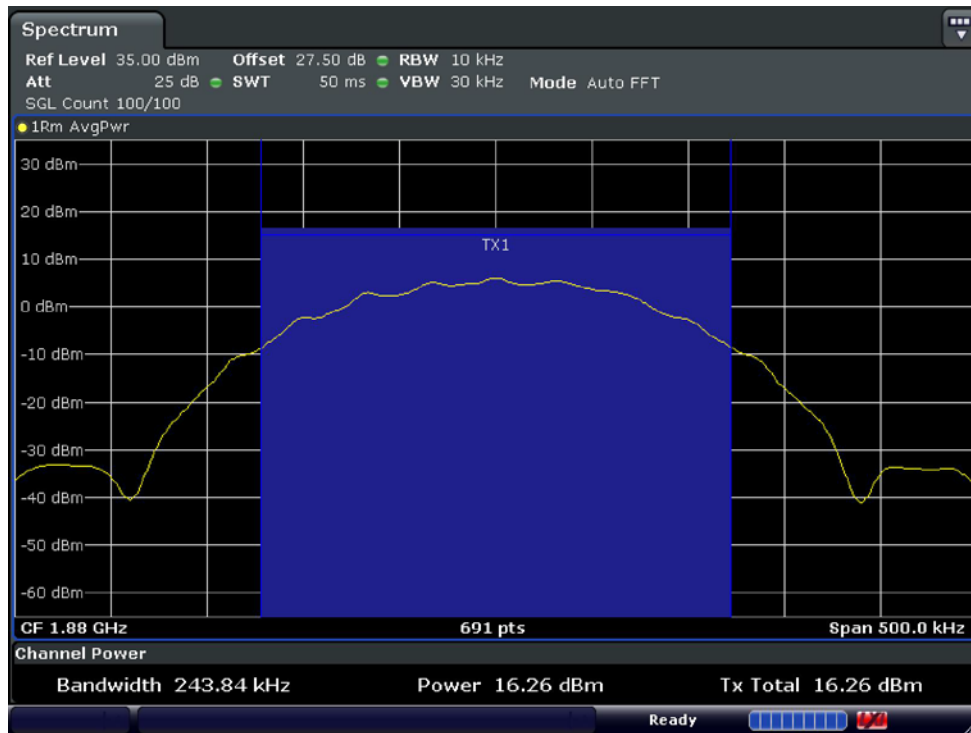


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

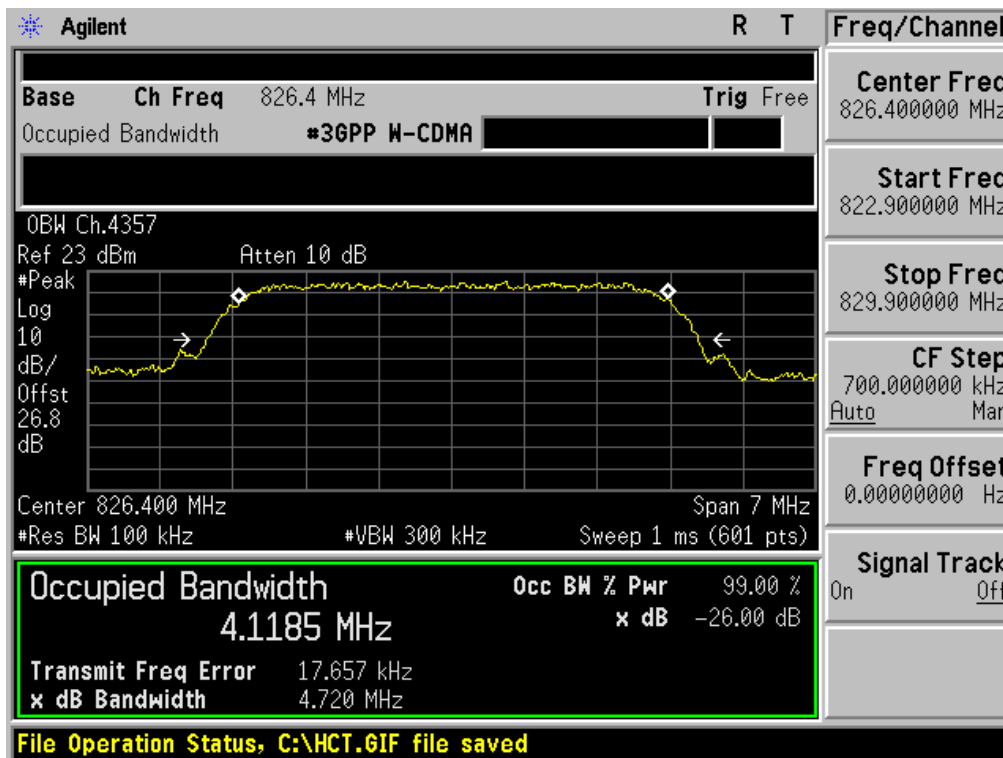


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

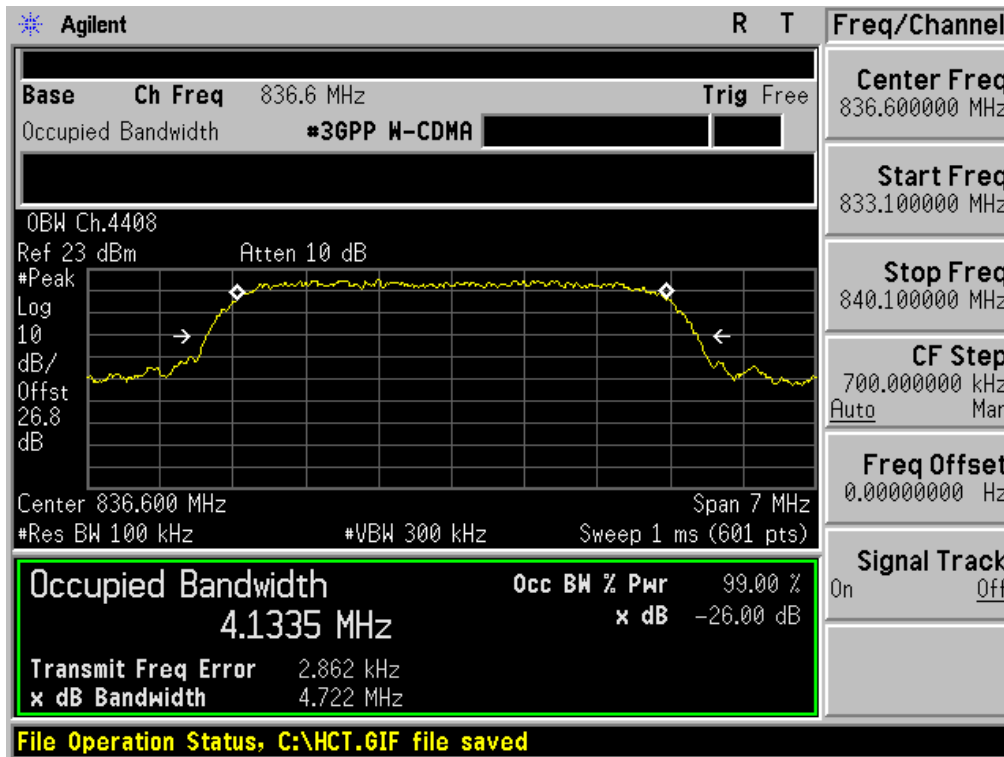


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

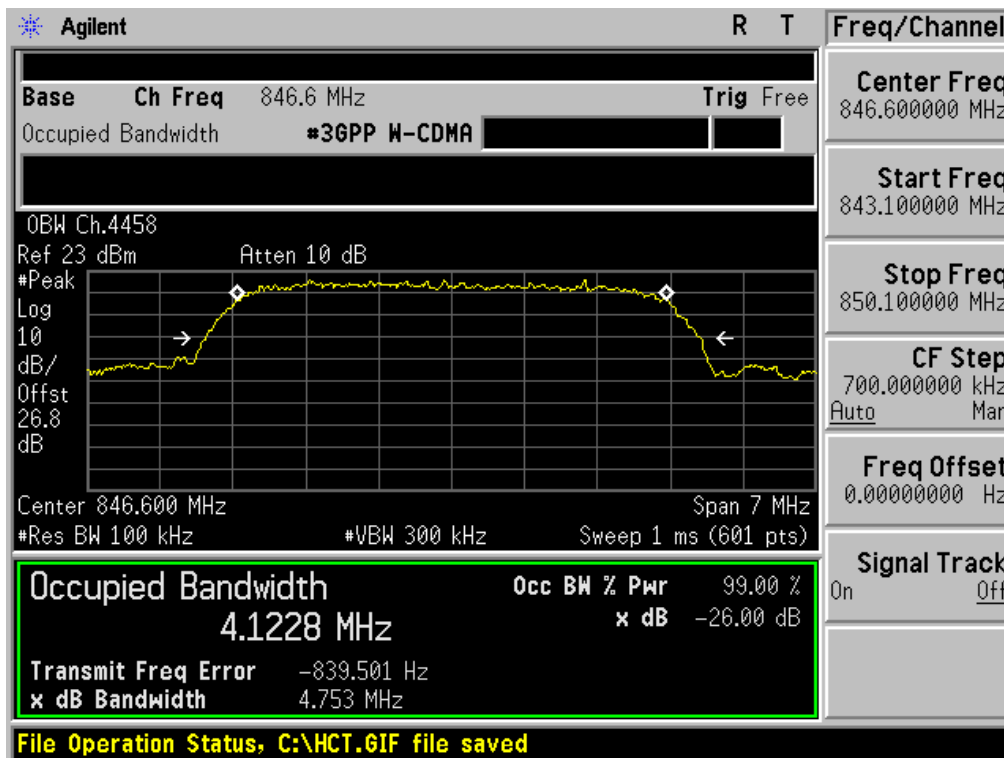


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

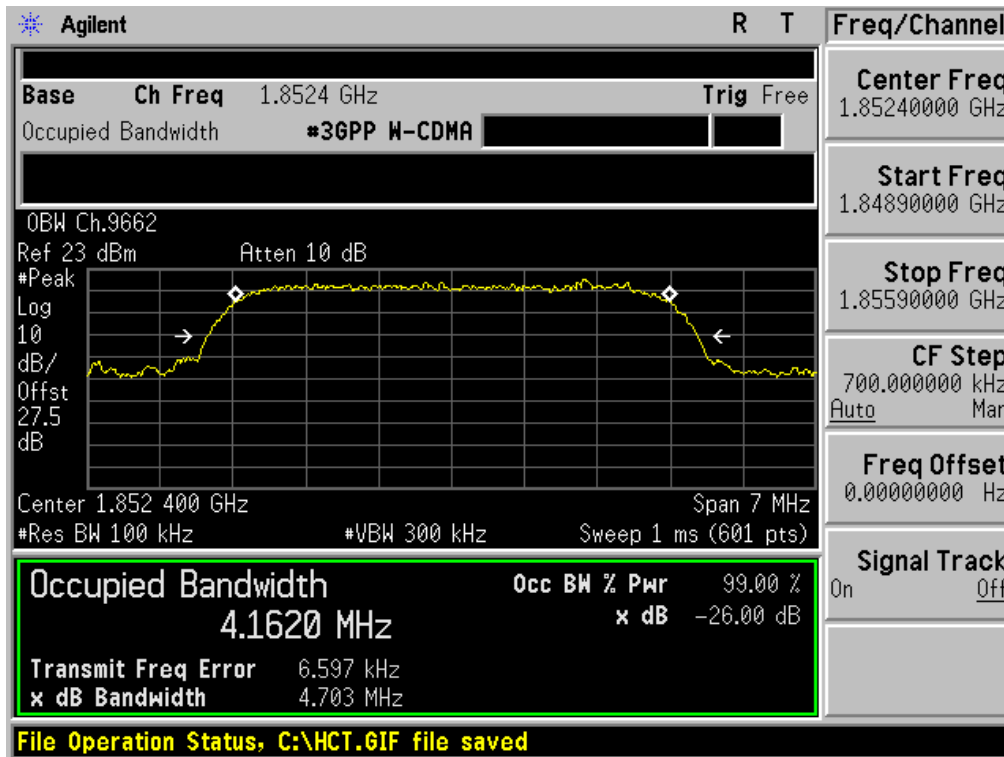


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

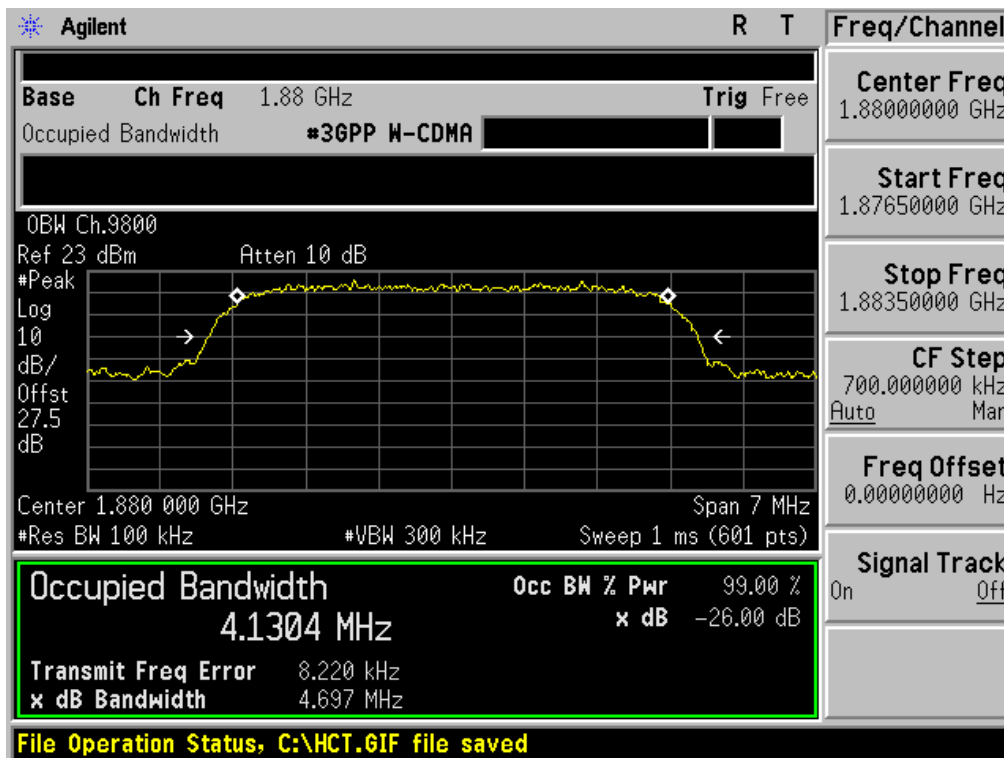


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

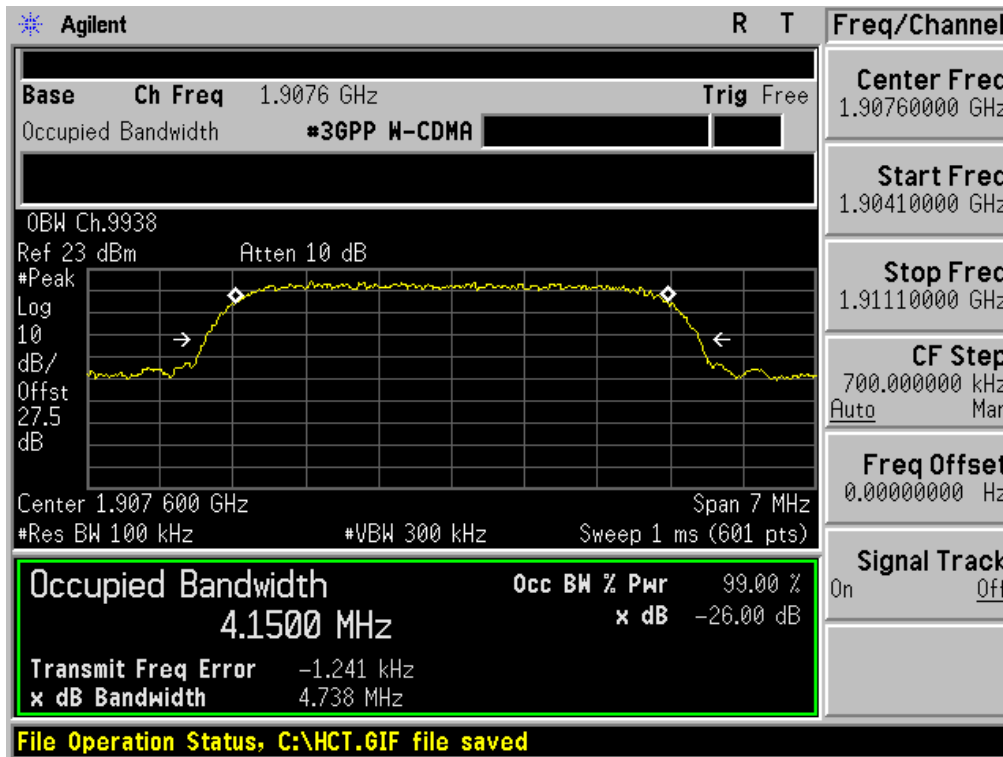


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

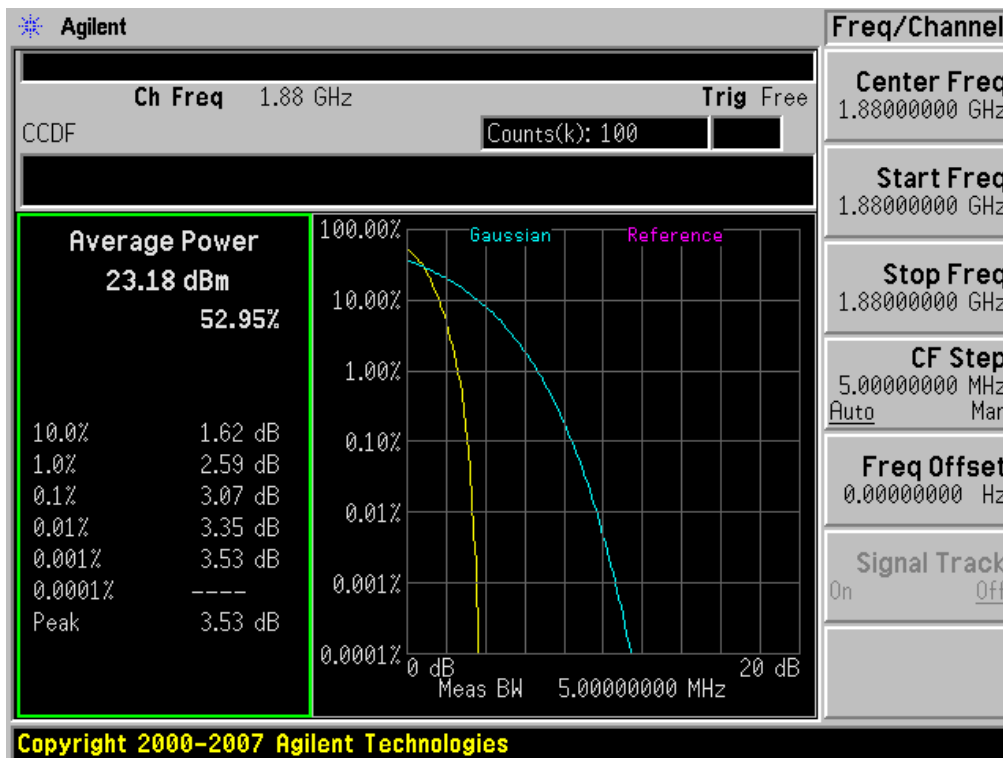


■ GSM850 MODE (128 CH.) Block Edge 1

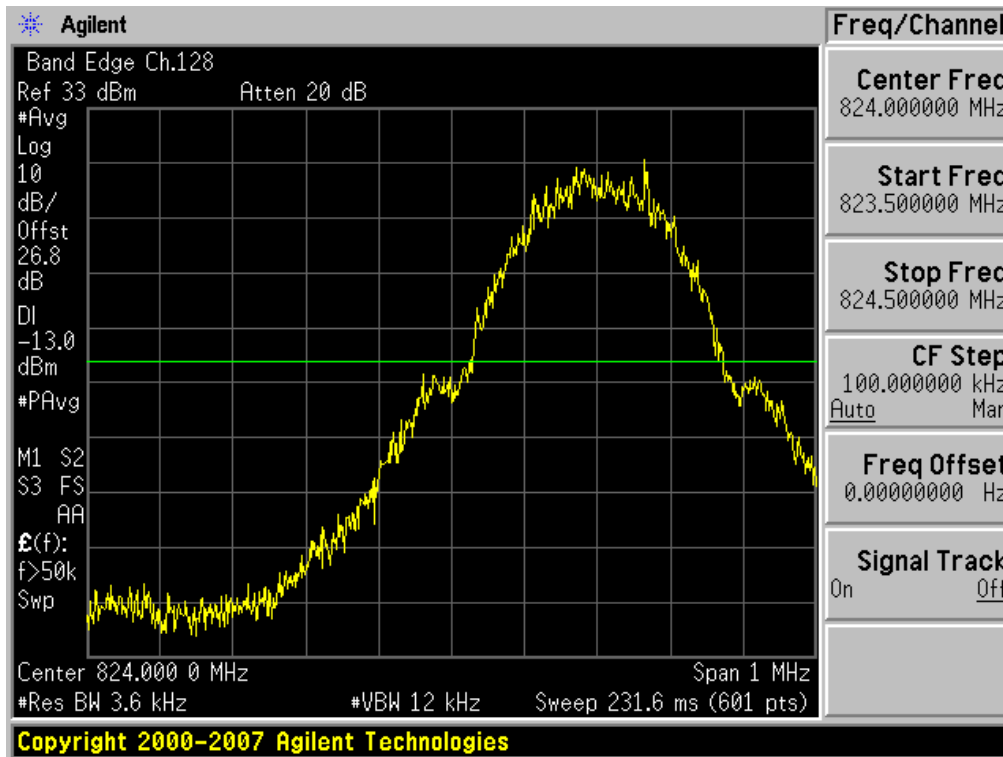


■ GSM850 MODE (128 CH.) Block Edge 2

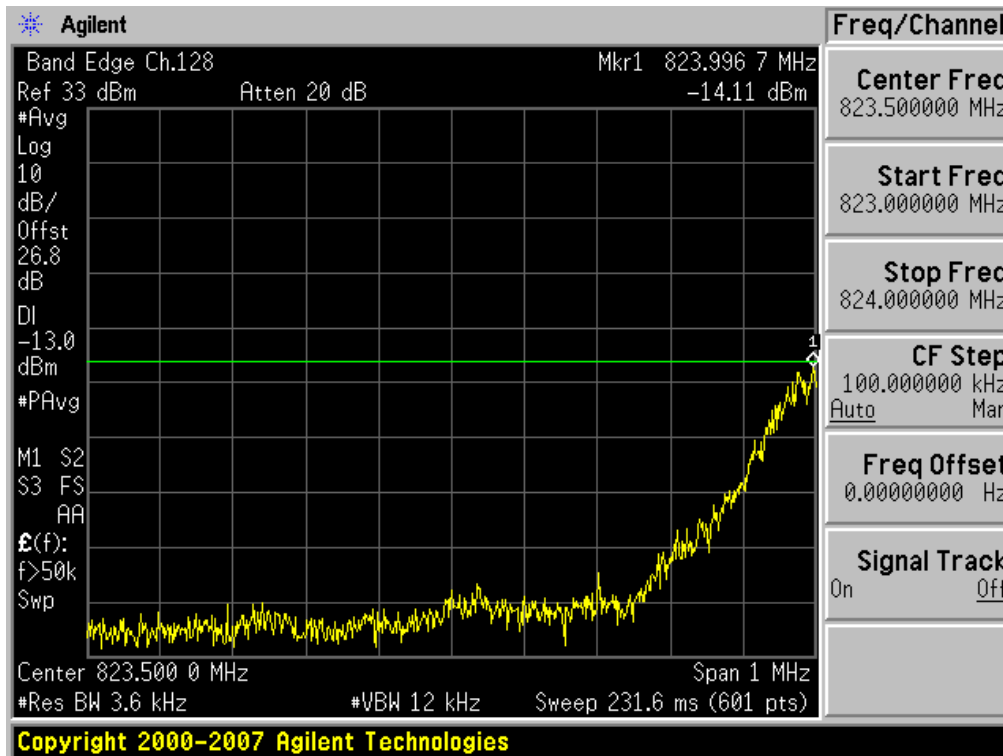


■ GSM850 MODE (128 CH.) Block Edge 3

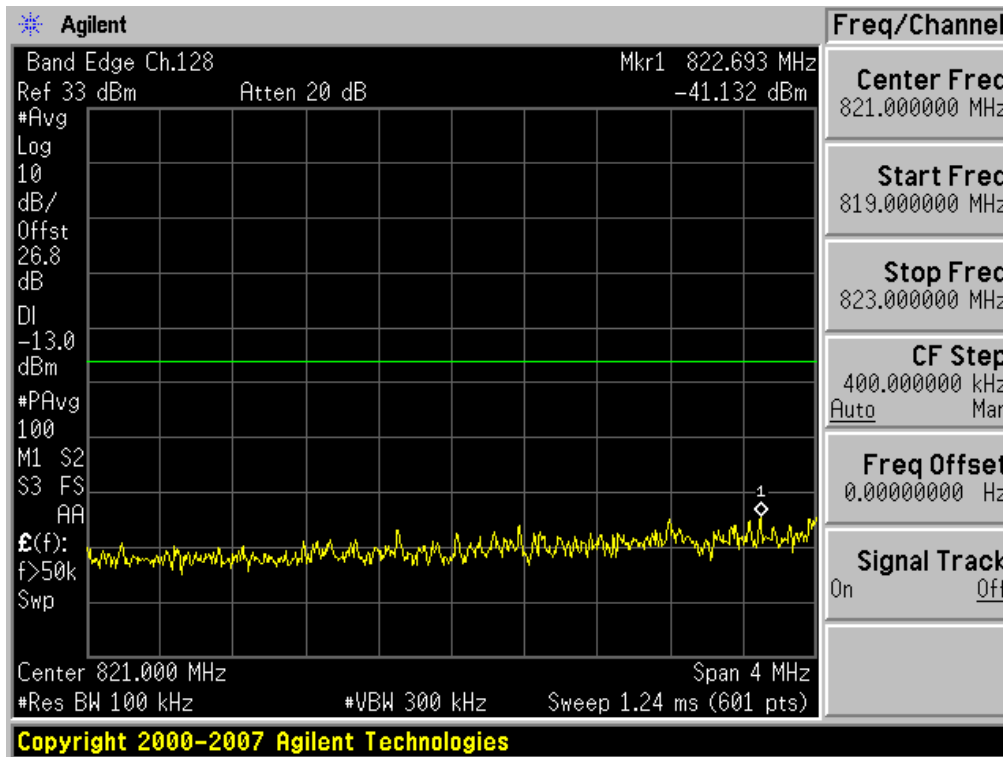


■ GSM850 MODE (251 CH.) Block Edge 1

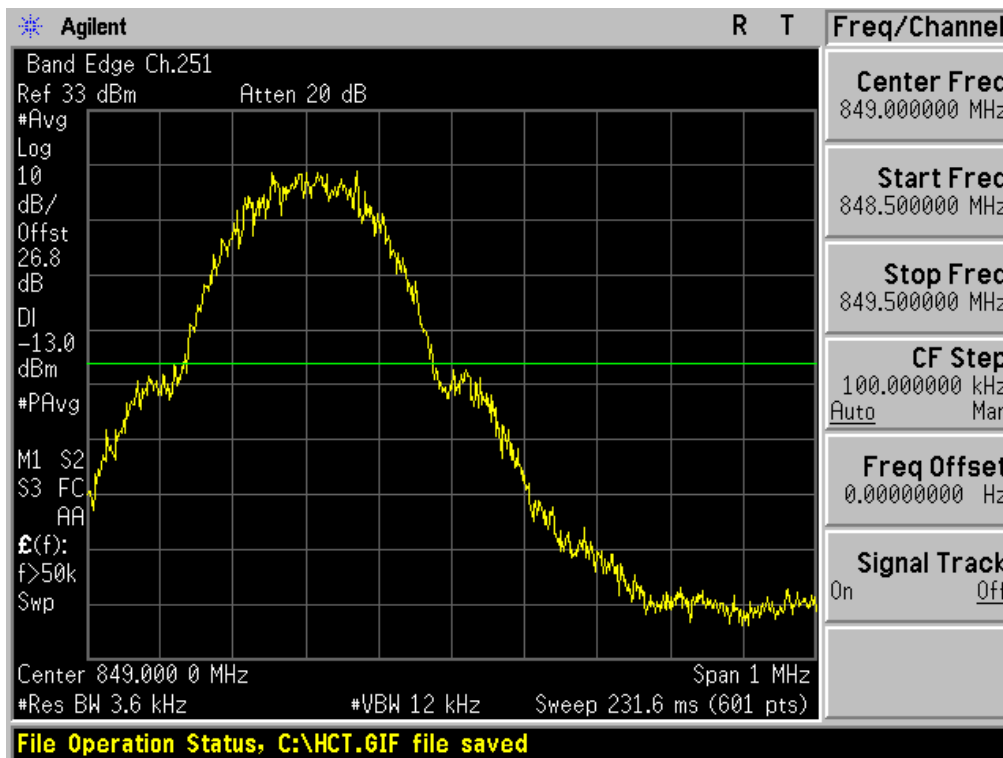


■ GSM850 MODE (251 CH.) Block Edge 2

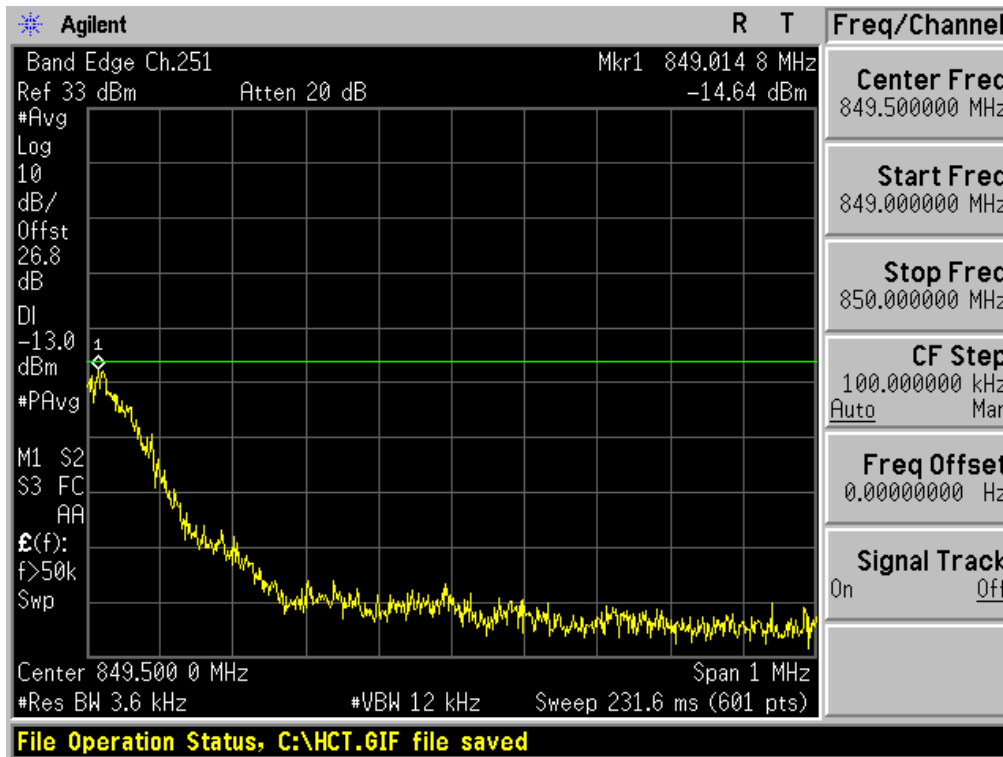


■ GSM850 MODE (251 CH.) Block Edge 3

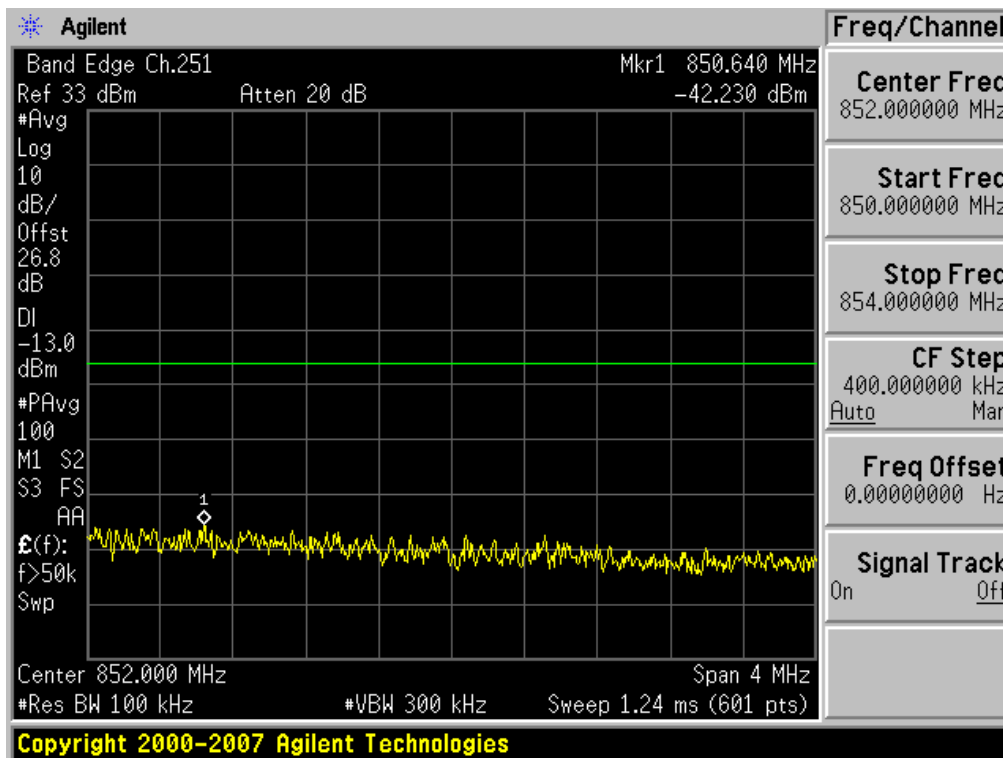


■ EDGE MODE (128 CH.) Block Edge 1

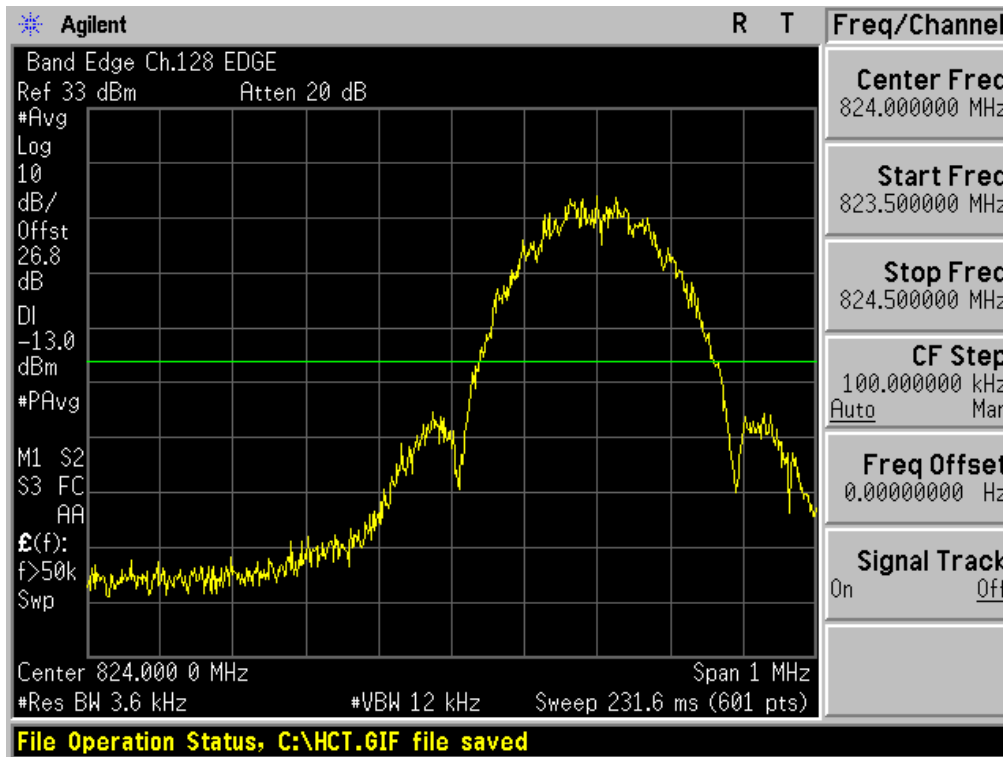


■ EDGE MODE (128 CH.) Block Edge 2

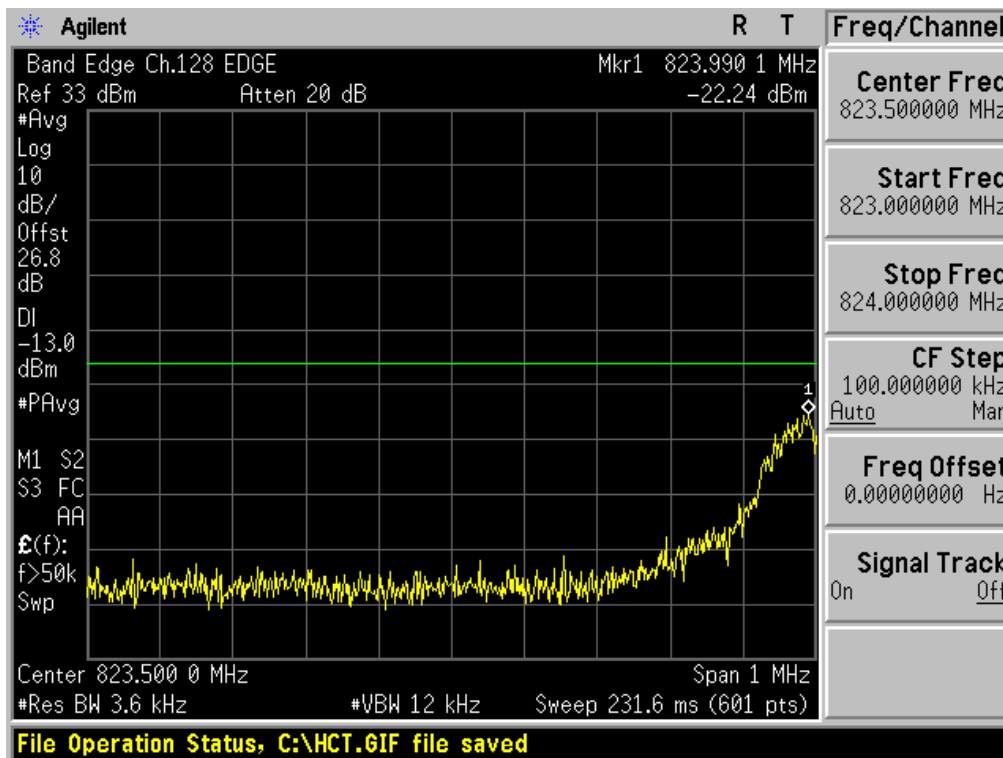


■ EDGE MODE (128 CH.) Block Edge 3

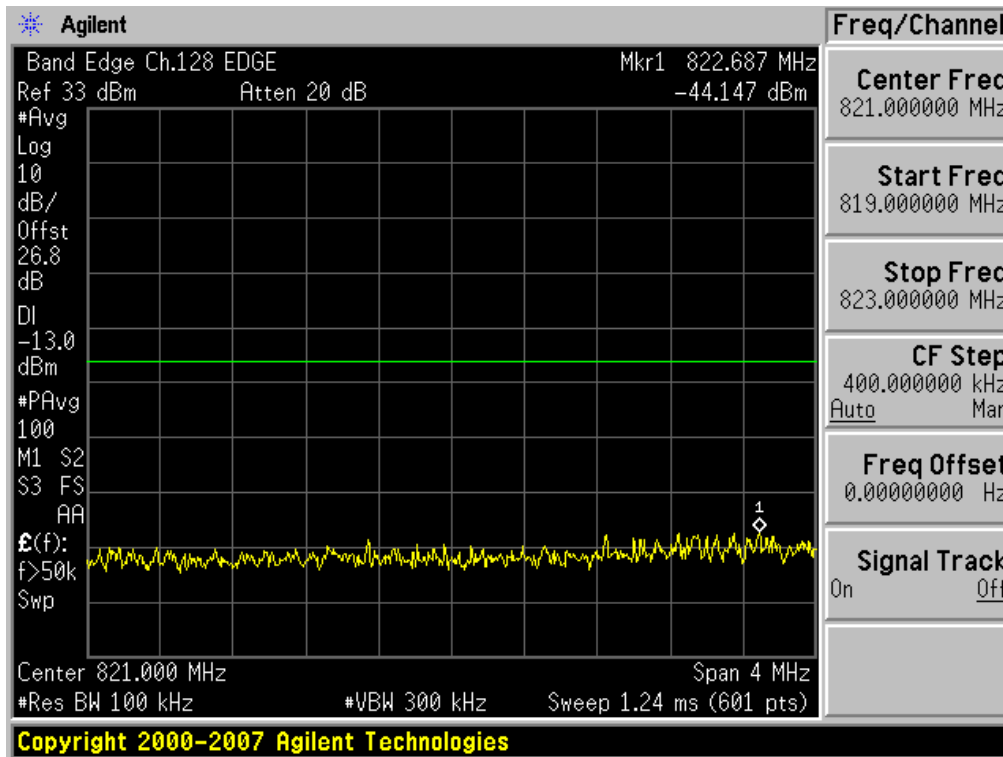


■ EDGE MODE (251 CH.) Block Edge 1

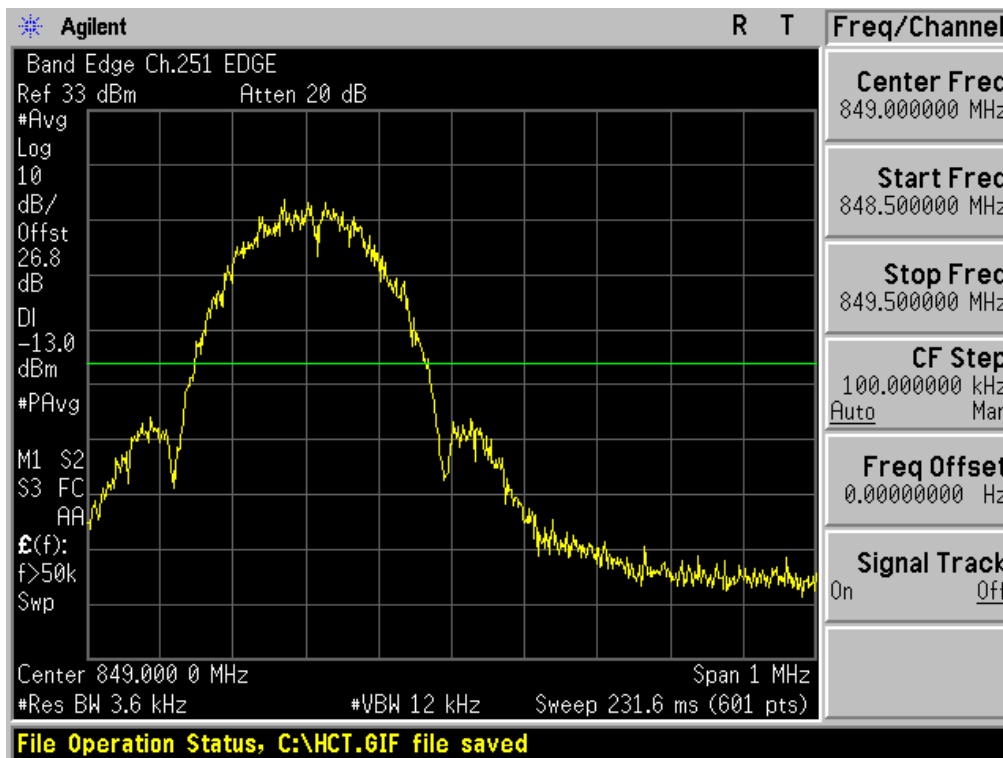


■ EDGE MODE (251 CH.) Block Edge 2

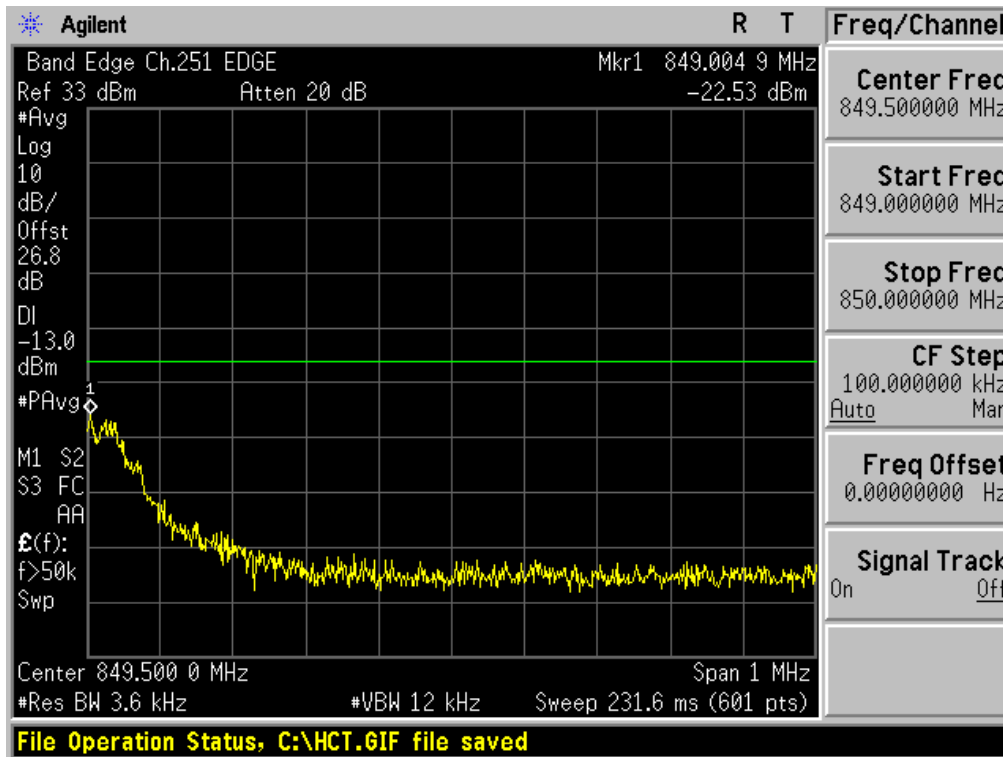


■ EDGE MODE (251 CH.) Block Edge 3

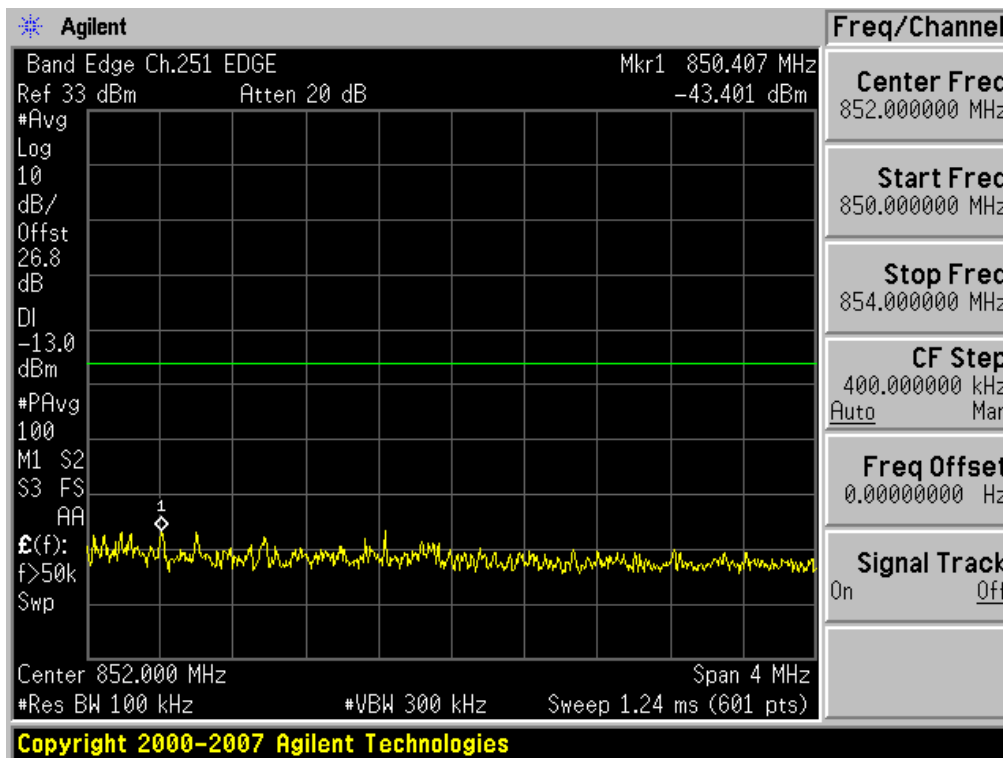


■ GSM1900 MODE (512 CH.) Block Edge 1

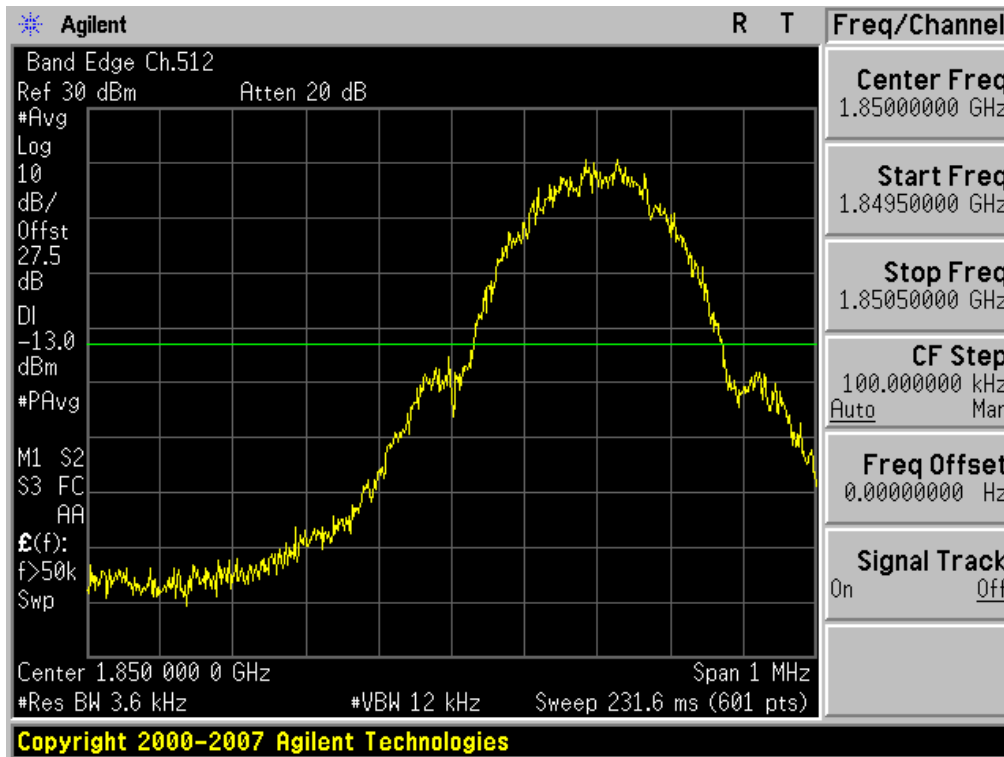

■ GSM1900 MODE (512 CH.) Block Edge 2

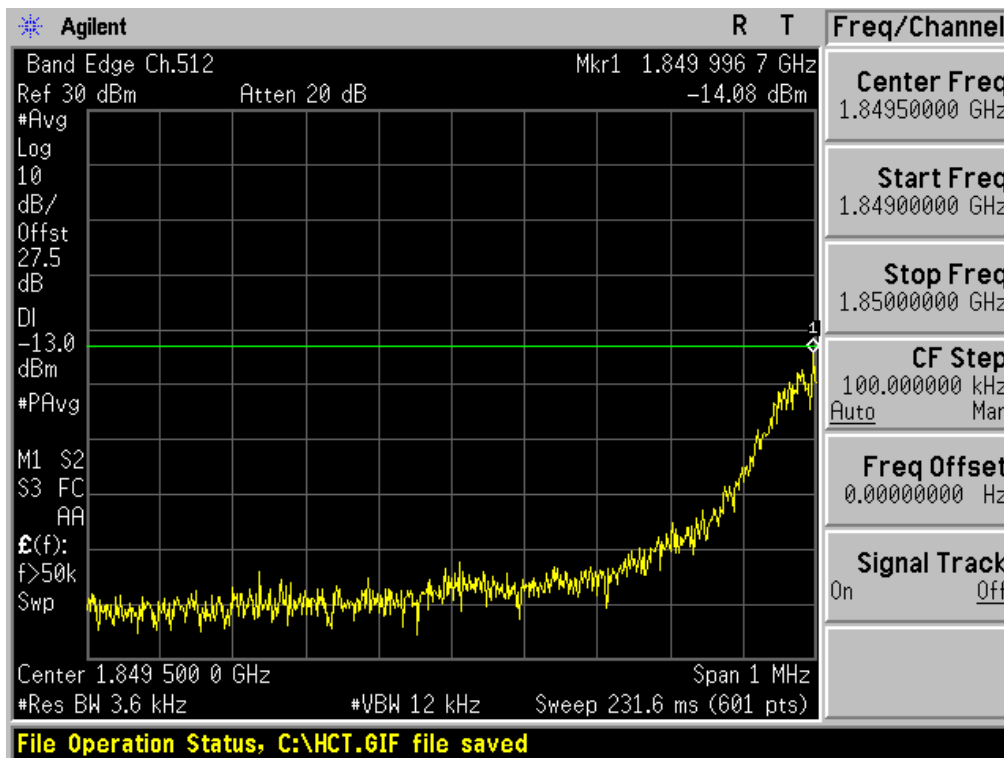


■ GSM1900 MODE (512 CH.) Block Edge 3

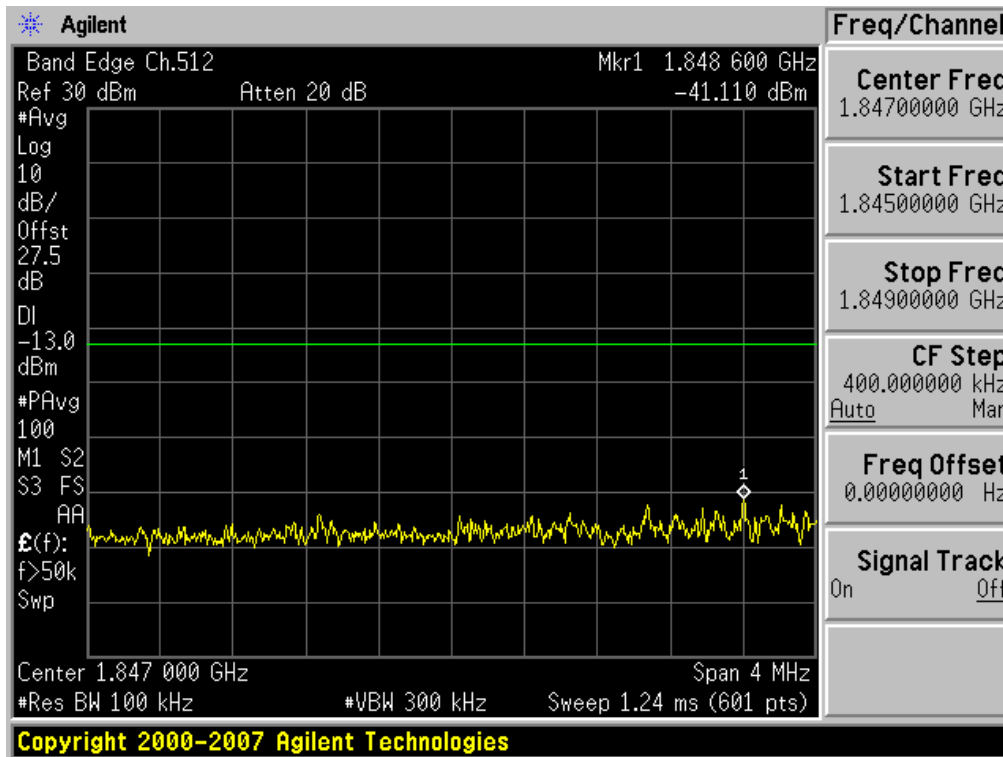


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10*log(1 MHz/100 kHz) dB = -41.110 dBm + 10 dB = **-31.110 dBm**


■ GSM1900 MODE (810 CH.) Block Edge 1

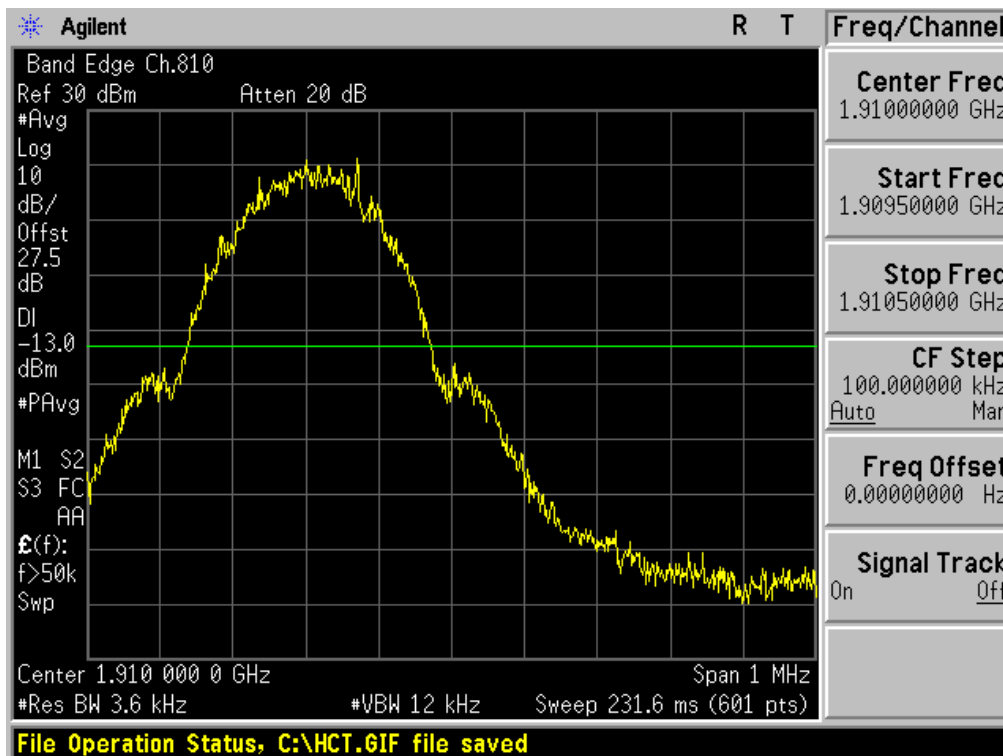

■ GSM1900 MODE (810 CH.) Block Edge 2

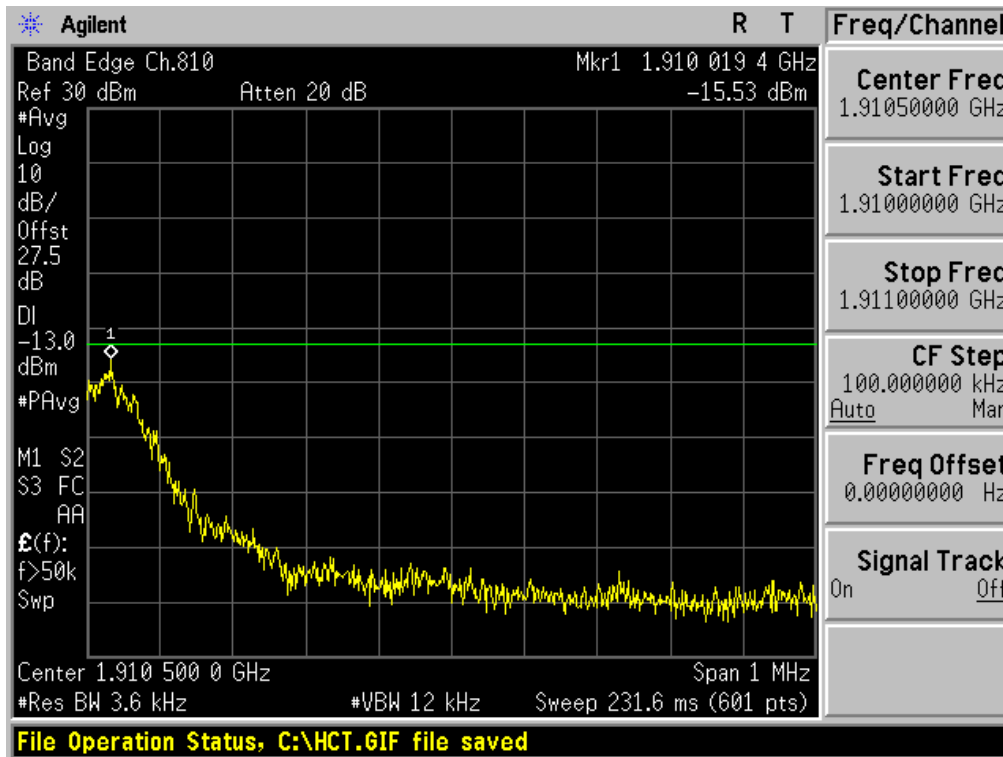


■ GSM1900 MODE (810 CH.) Block Edge 3

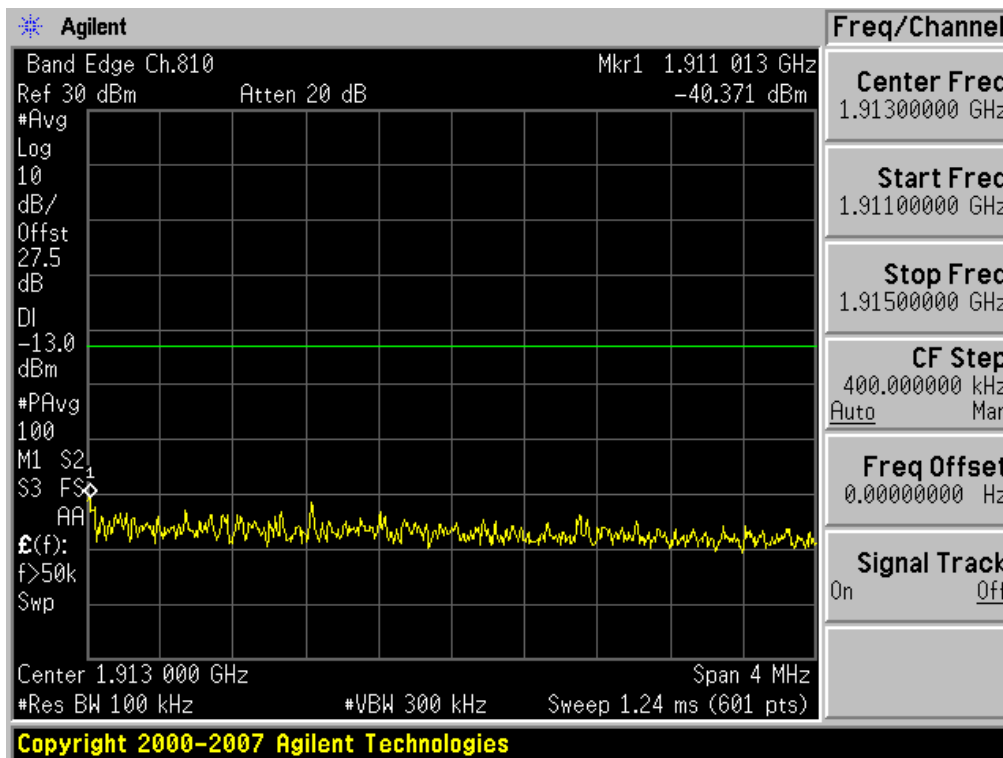


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10*log(1 MHz/100 kHz) dB = -40.371 dBm + 10 dB = **-30.371 dBm**


■ EDGE MODE (512 CH.) Block Edge 1

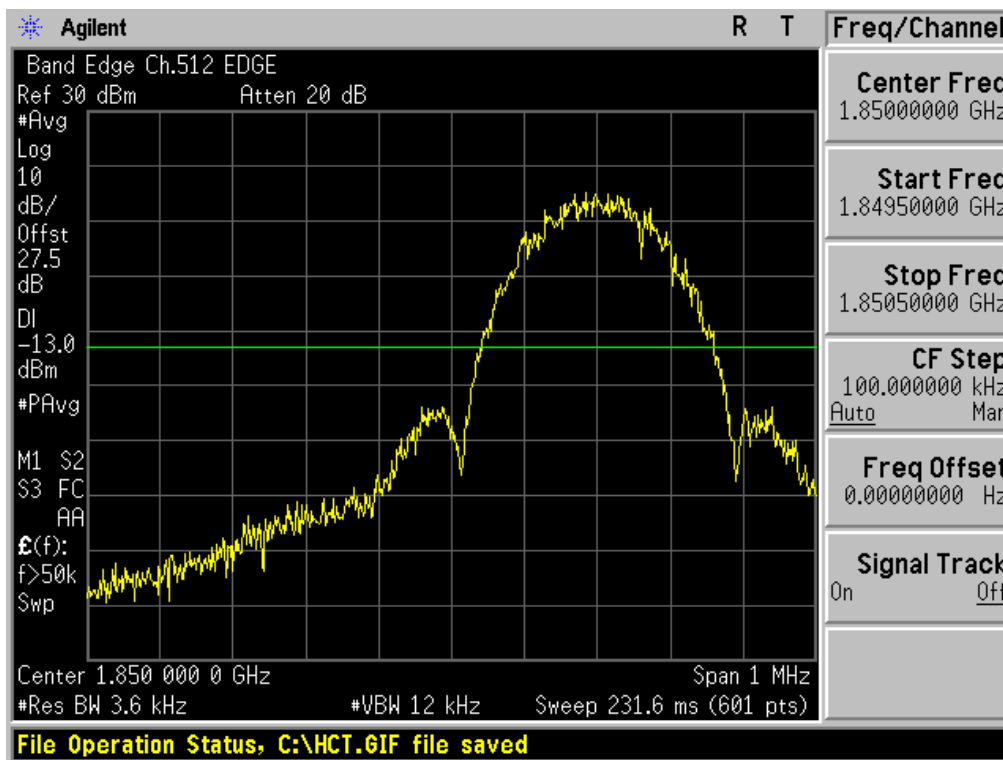

■ EDGE MODE (512 CH.) Block Edge 2

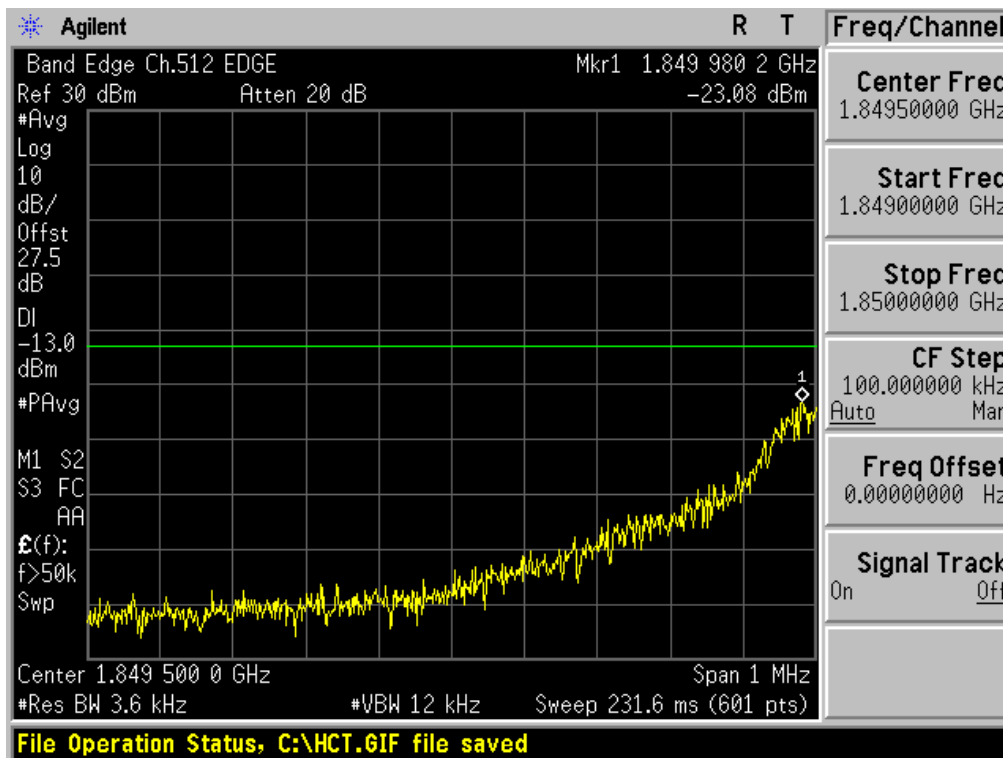


■ EDGE MODE (512 CH.) Block Edge 3

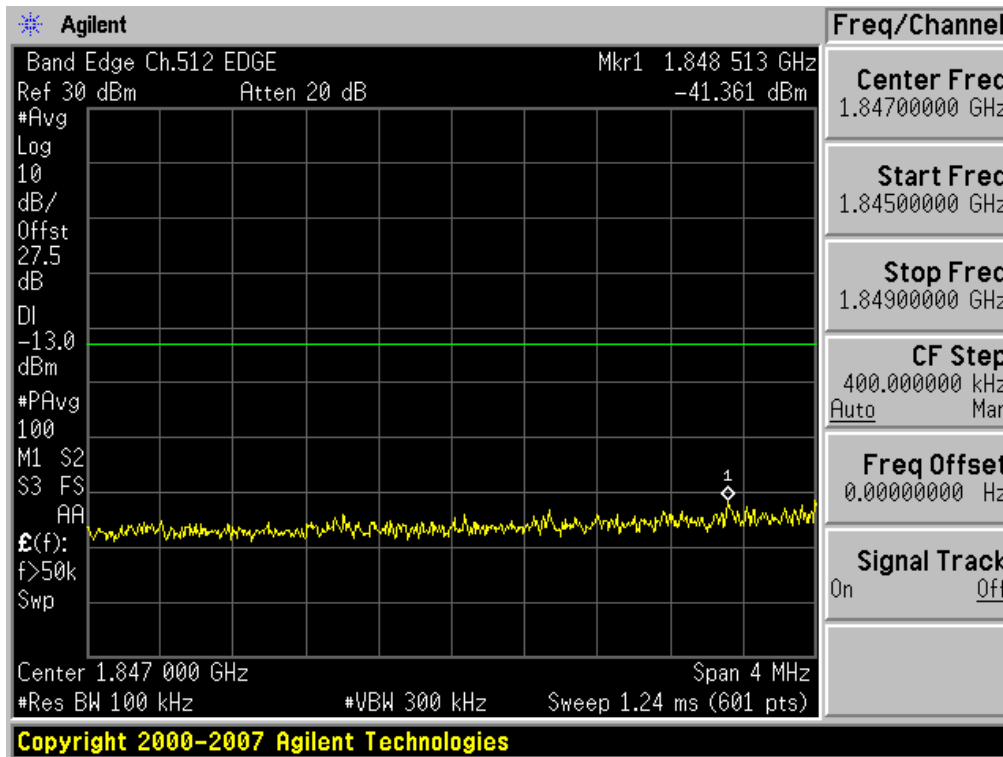


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10*log(1 MHz/100 kHz) dB = -41.361 dBm + 10 dB = **-31.361 dBm**


■ EDGE MODE (810 CH.) Block Edge 1

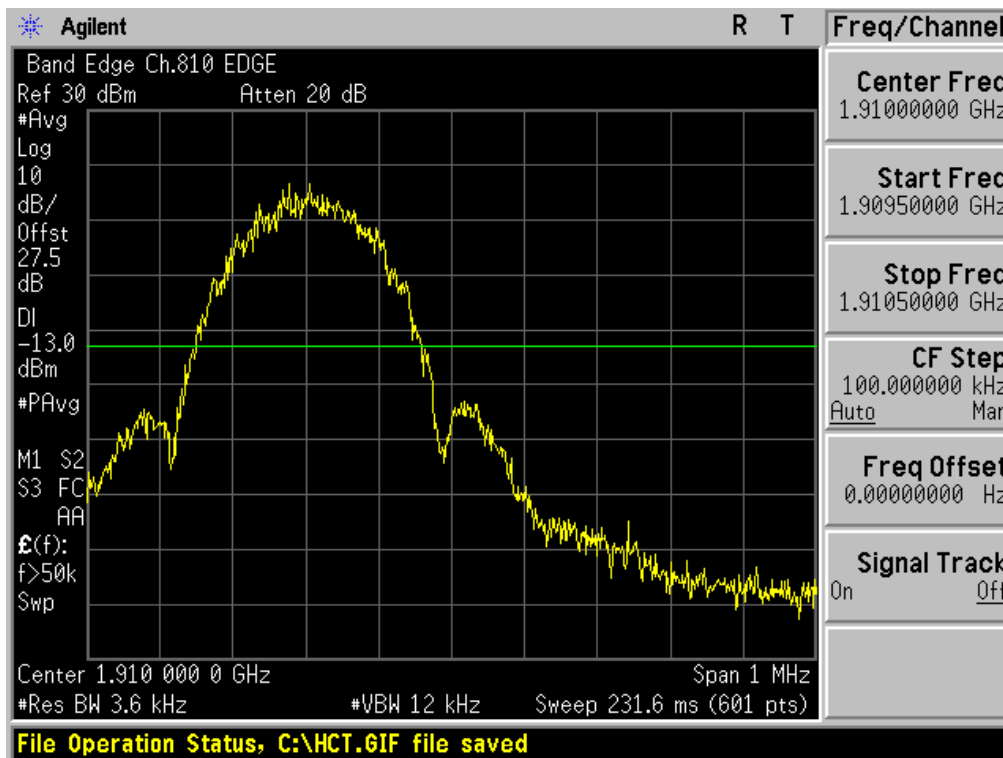

■ EDGE MODE (810 CH.) Block Edge 2

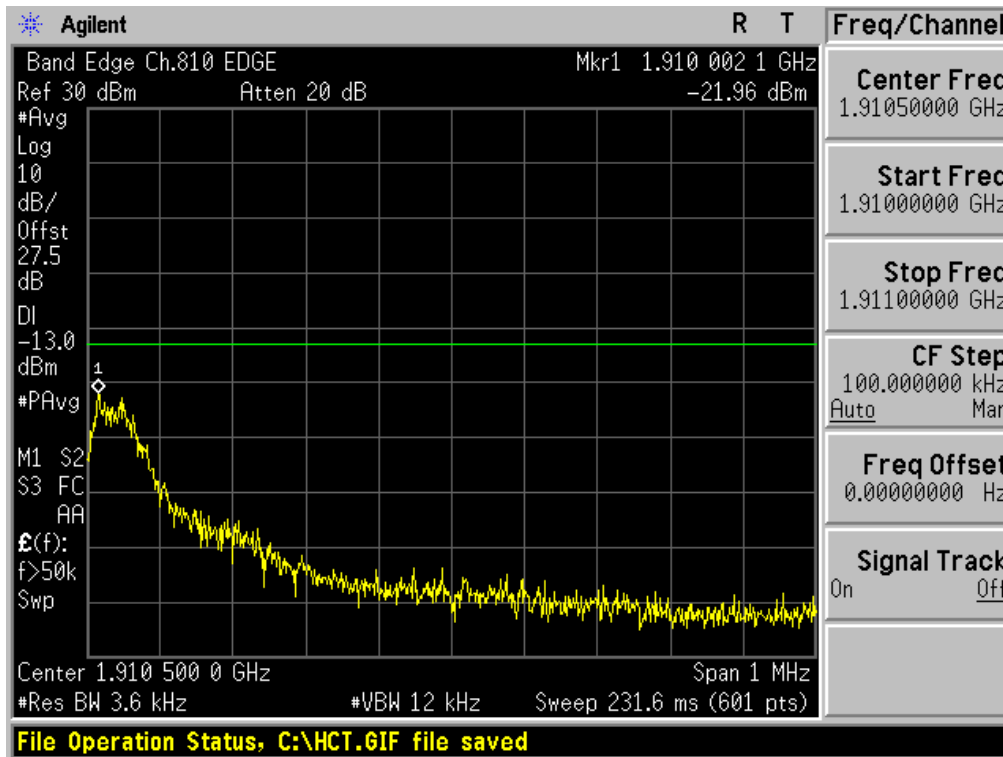


■ EDGE MODE (810 CH.) Block Edge 3

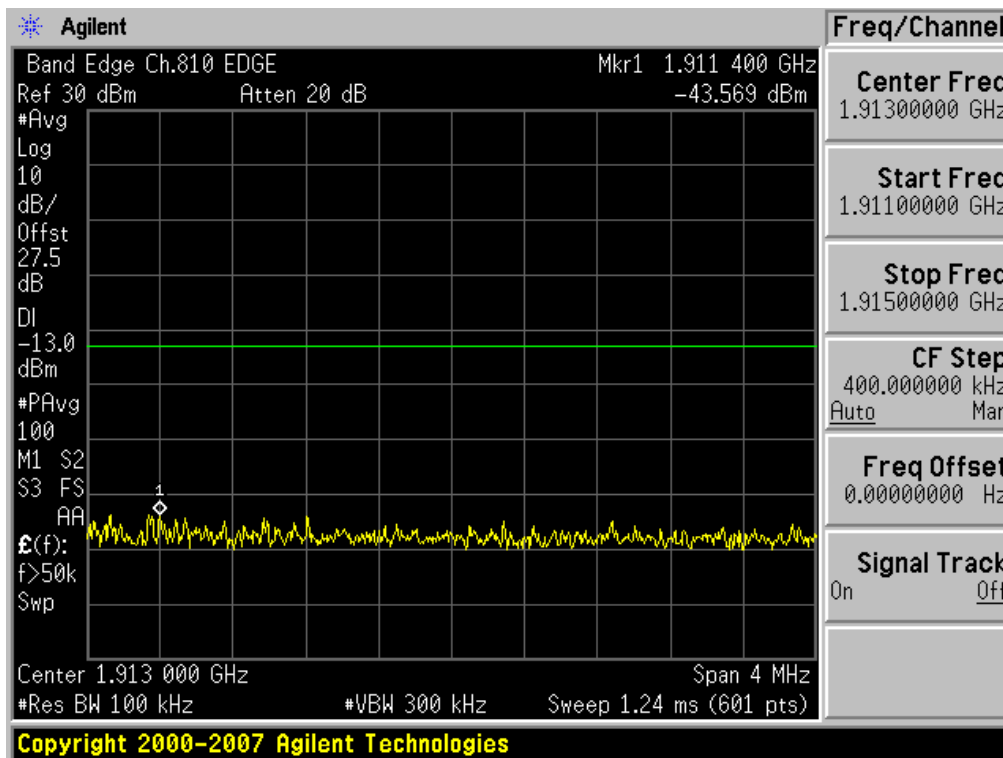


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10*log(1 MHz/100 kHz) dB = -43.569 dBm + 10 dB = **-33.569 dBm**


■ WCDMA850 MODE (4132 CH.) Block Edge

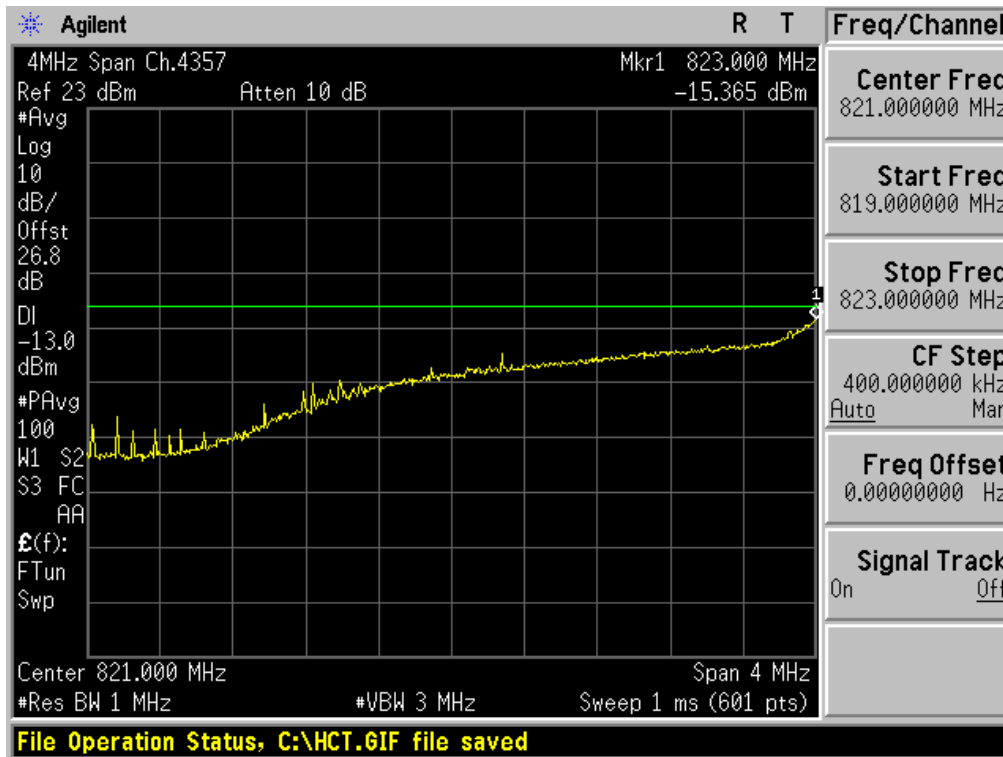


■ WCDMA850 MODE (4132 CH.) – 4 MHz Span

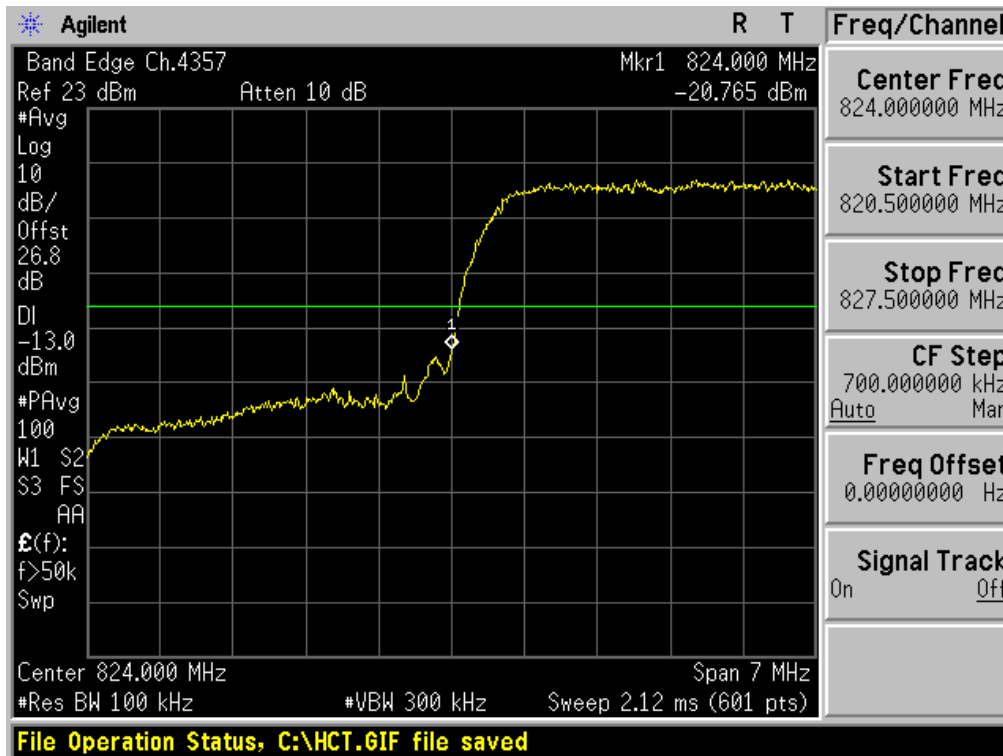


■ WCDMA850MODE (4233 CH.) Block Edge

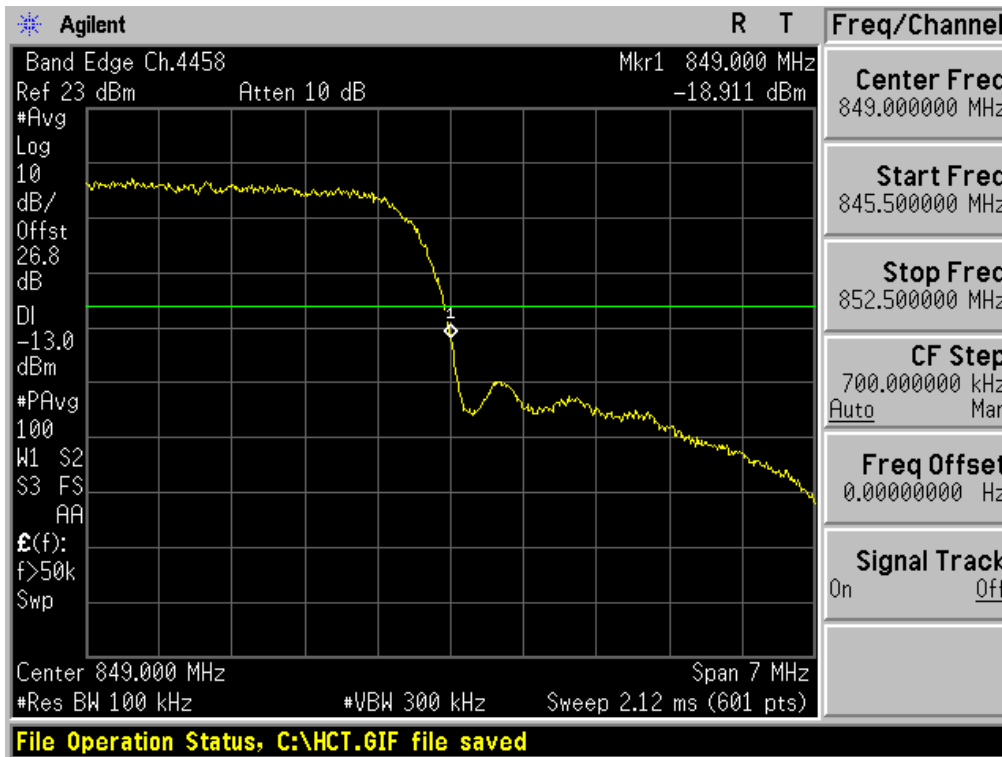


■ WCDMA850MODE (4233 CH.) – 4 MHz Span

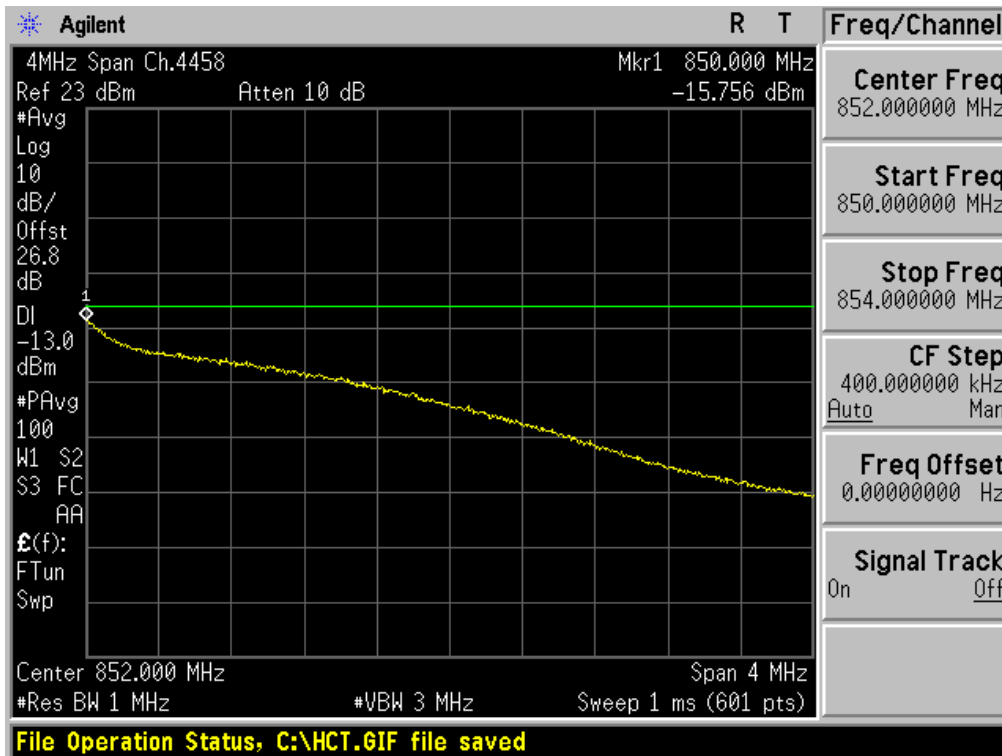


■ WCDMA1900 MODE (9262 CH.) Block Edge

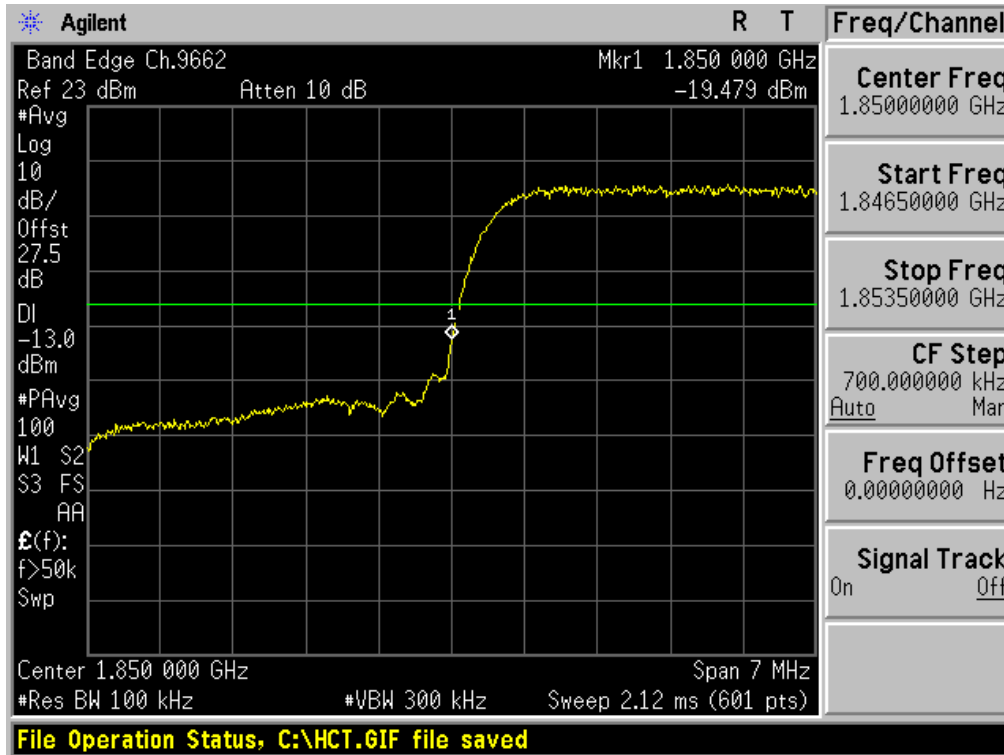


■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span

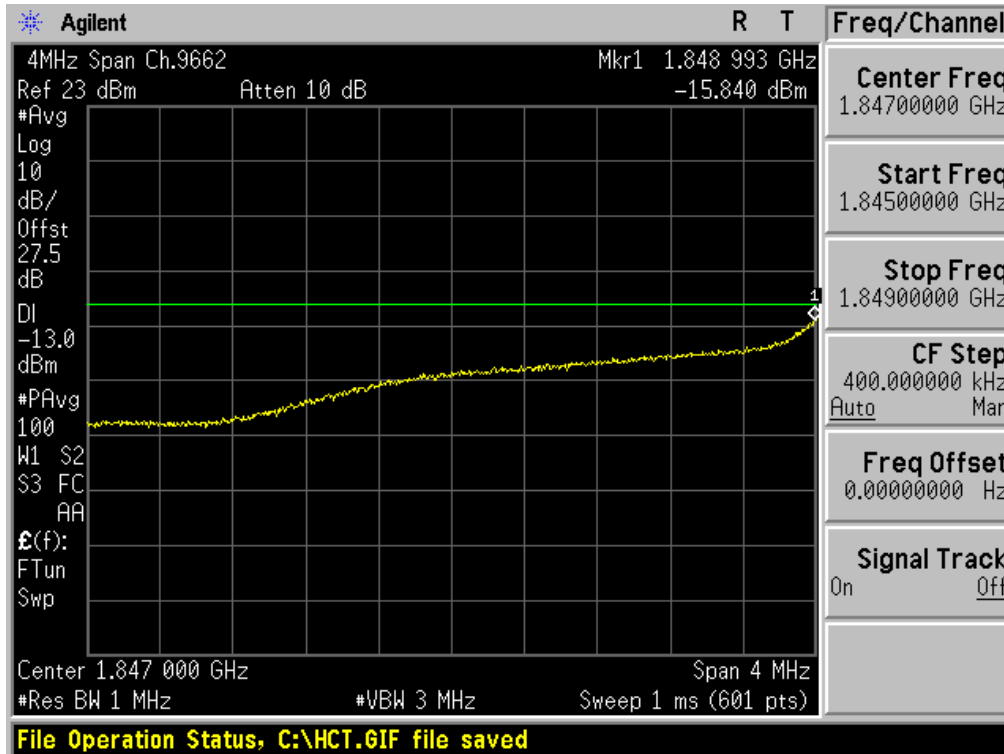


■ WCDMA1900 MODE (9538 CH.) Block Edge

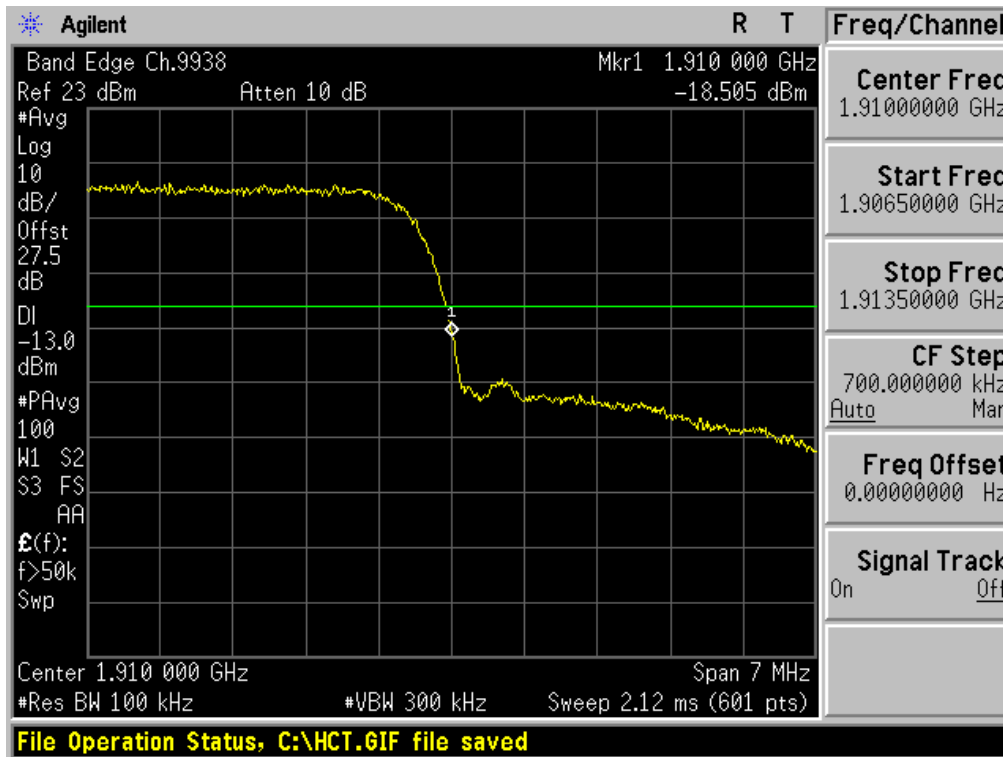


■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span

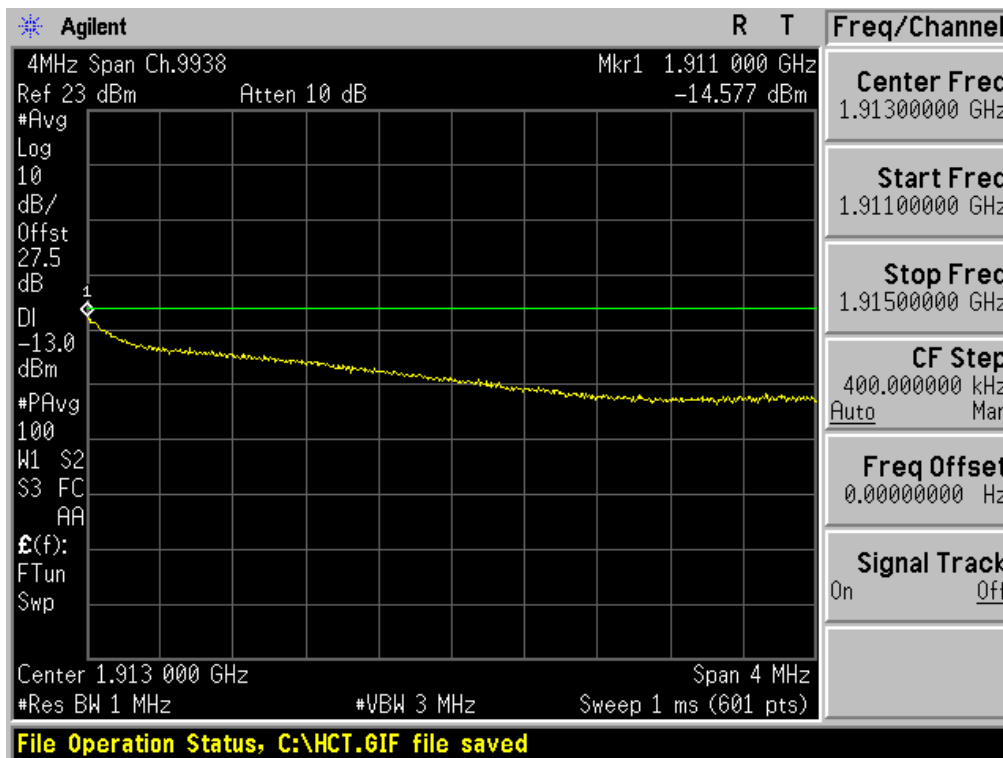


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

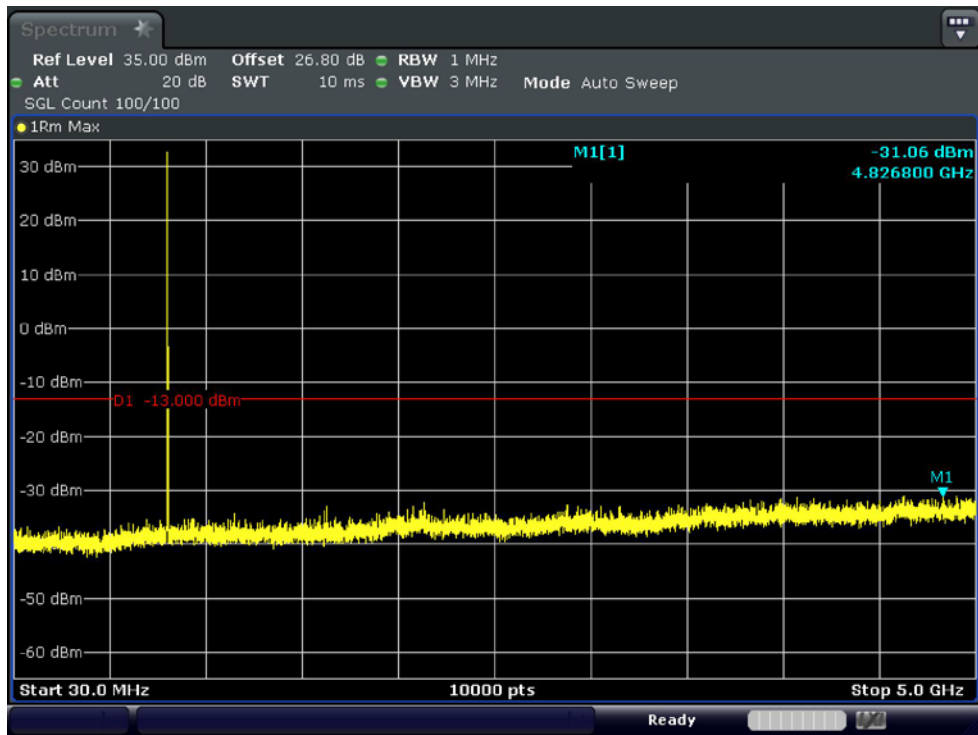


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

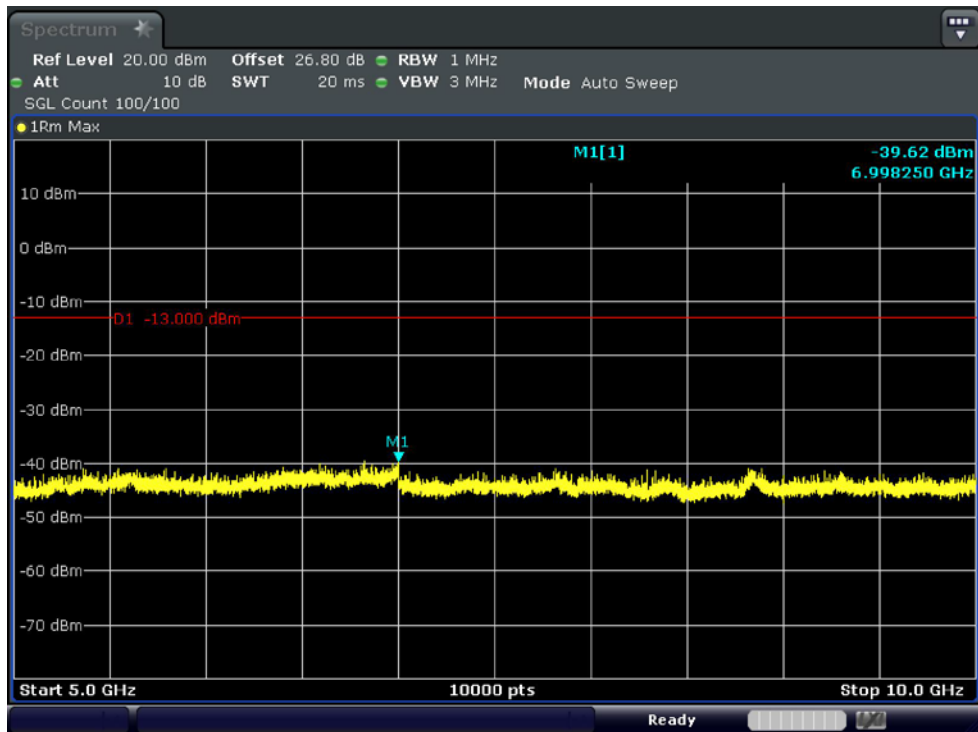


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

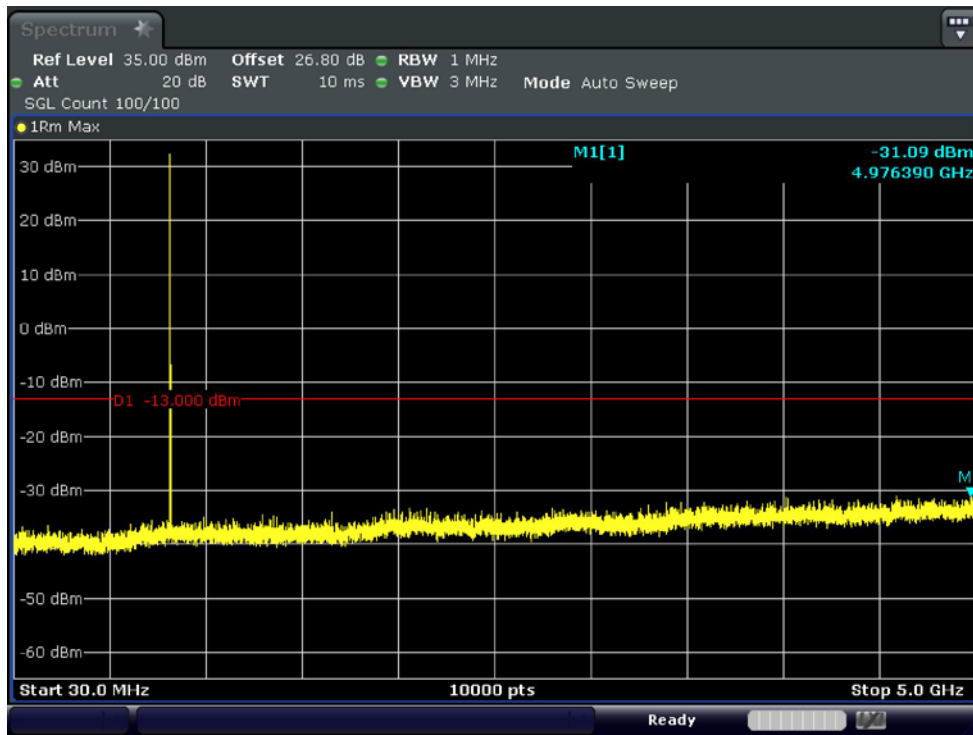


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2

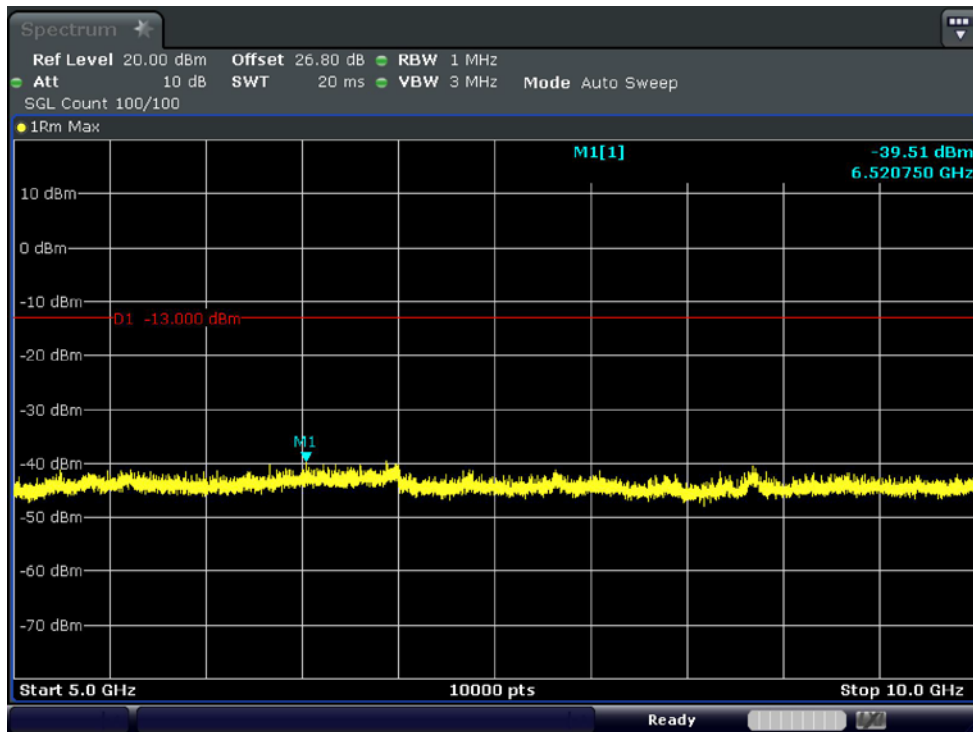


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

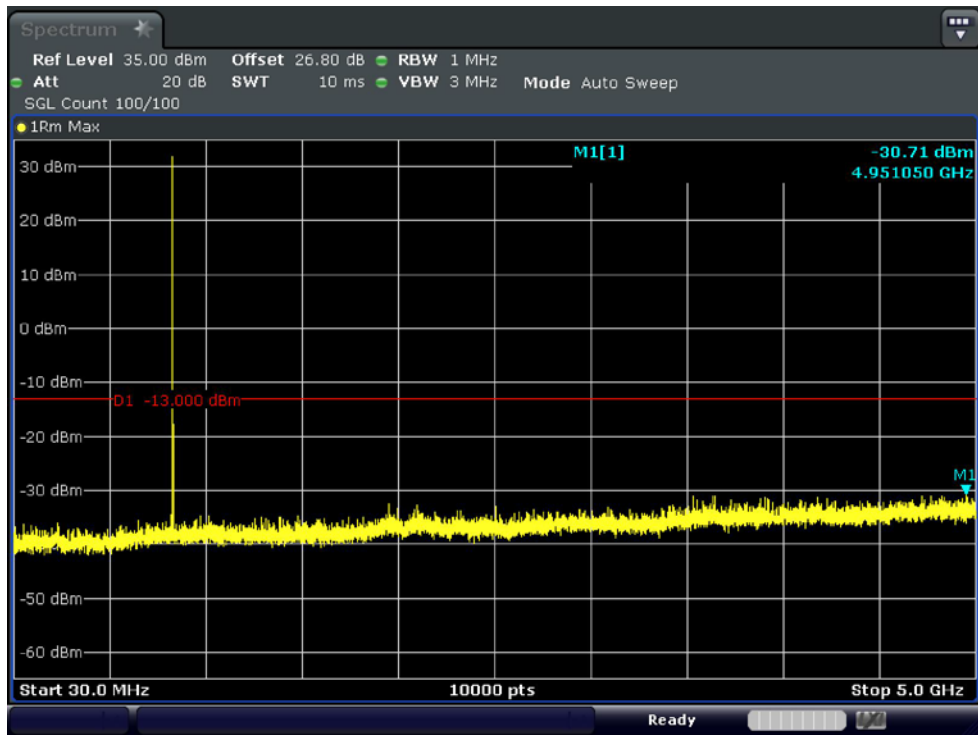


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

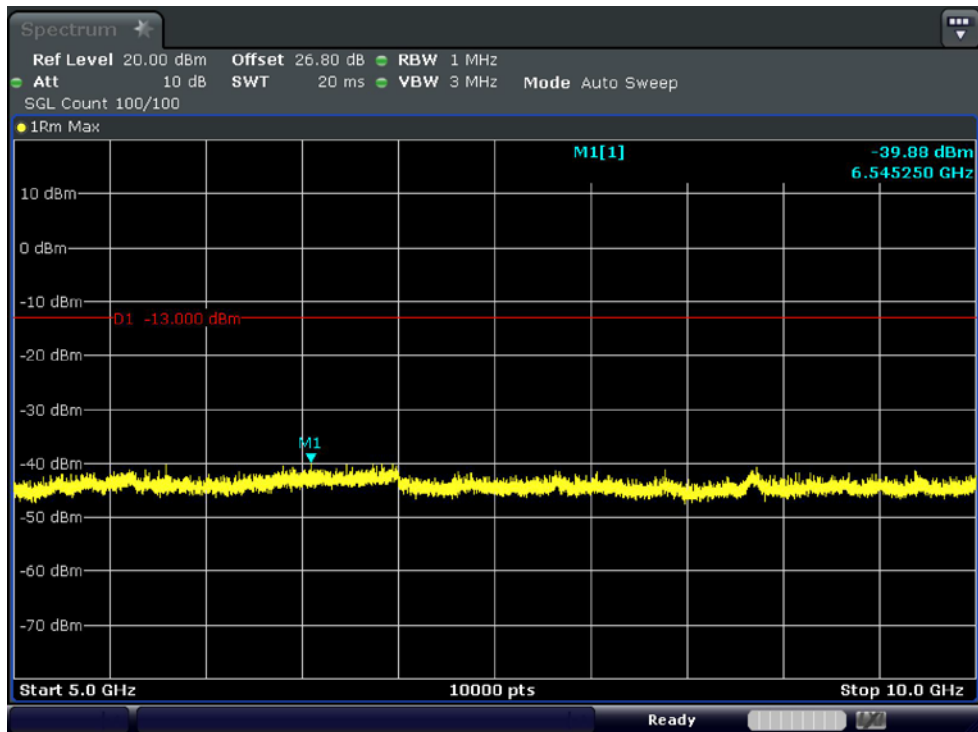


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

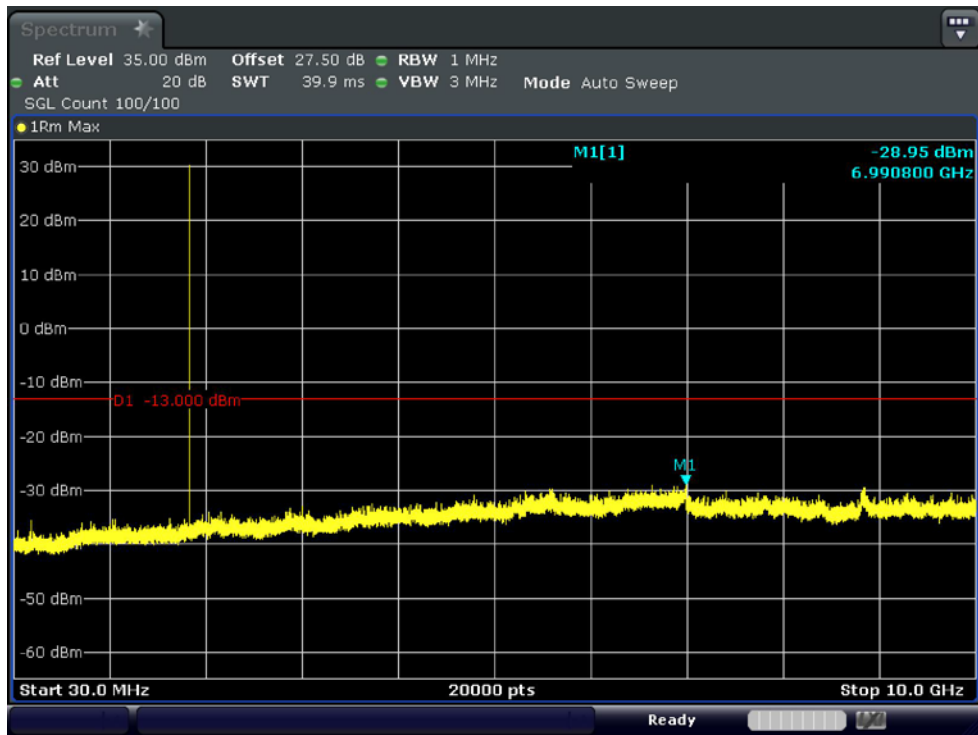


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

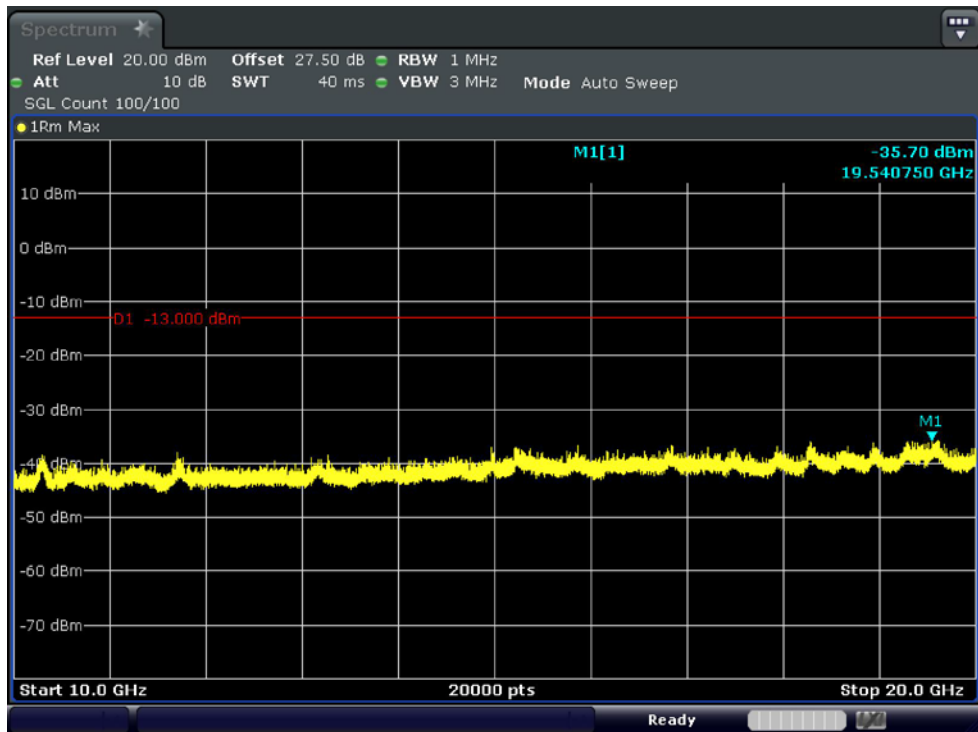


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

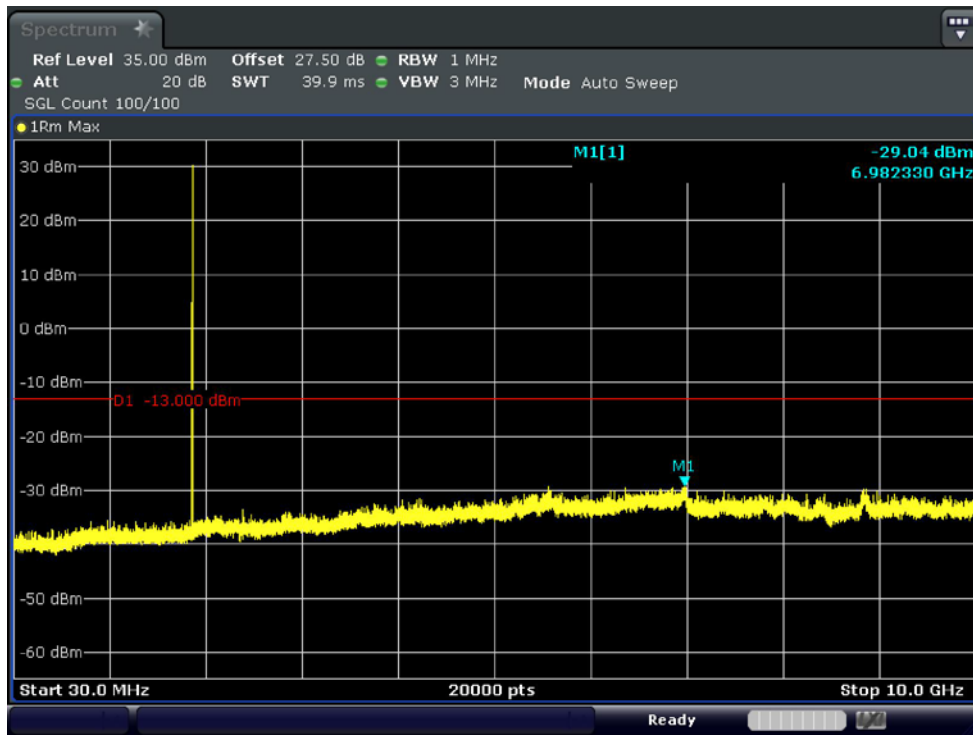


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

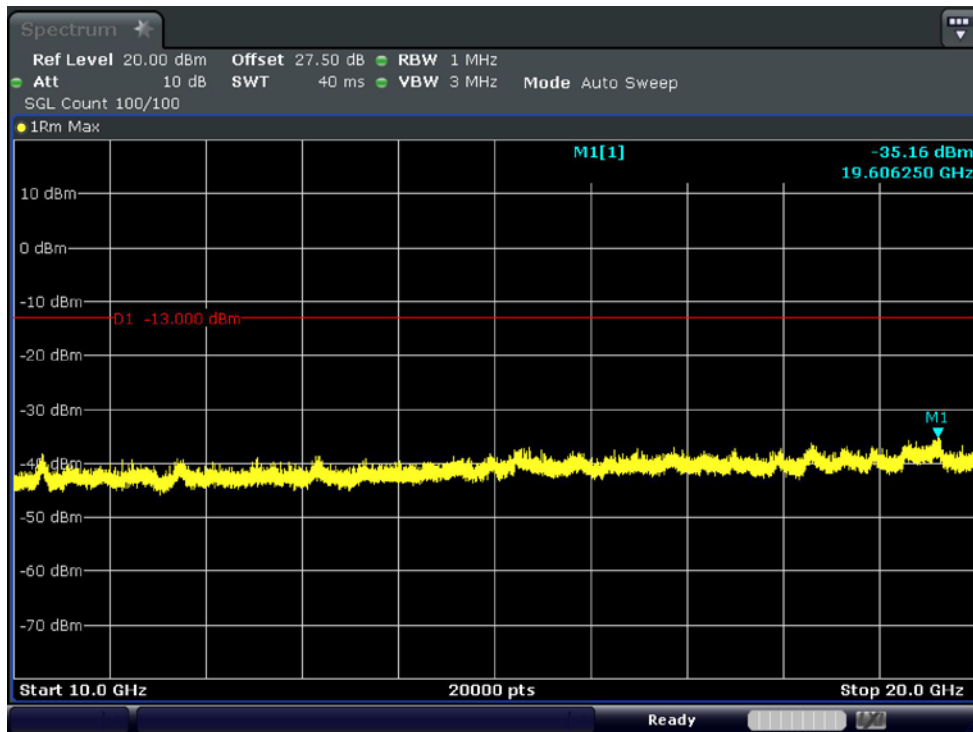


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions1

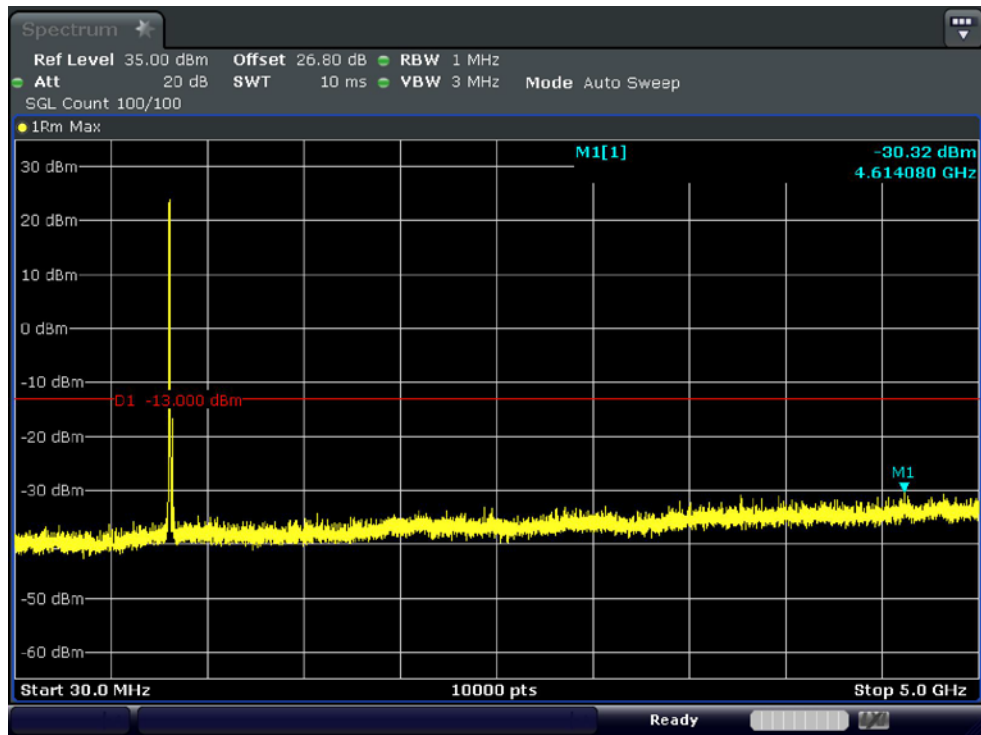


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions2

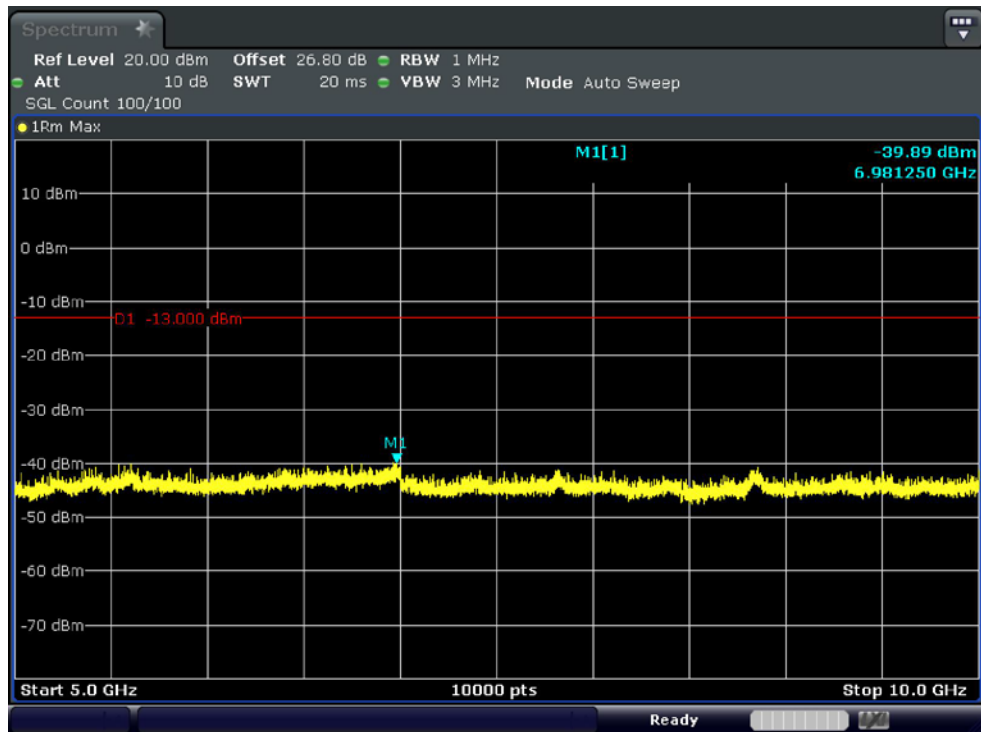


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions1

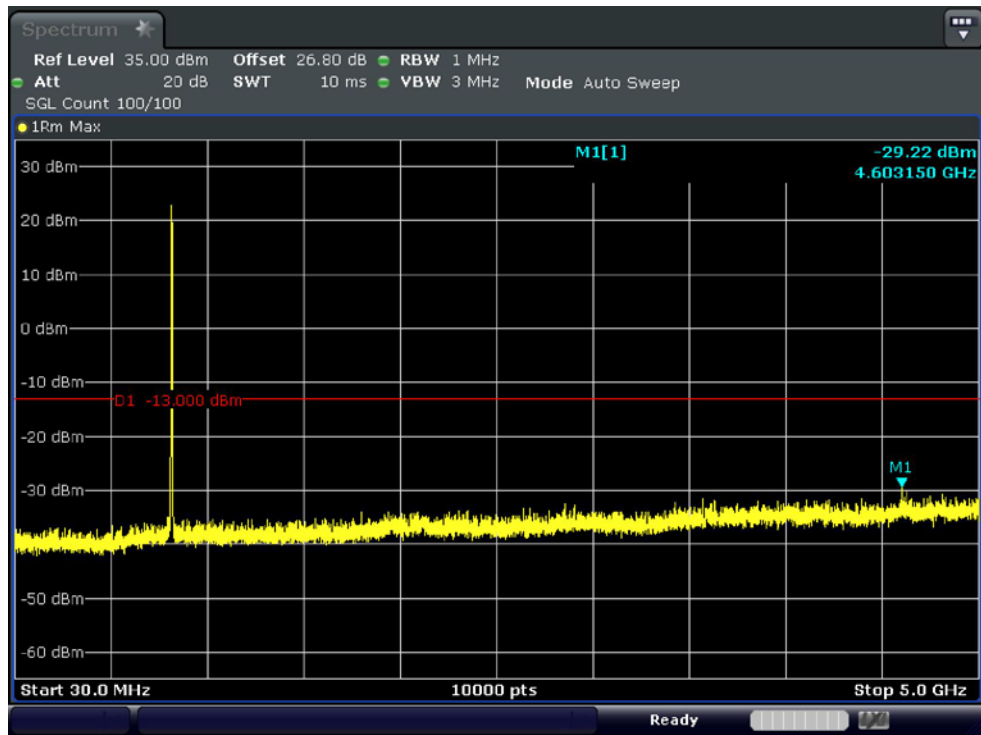


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions2

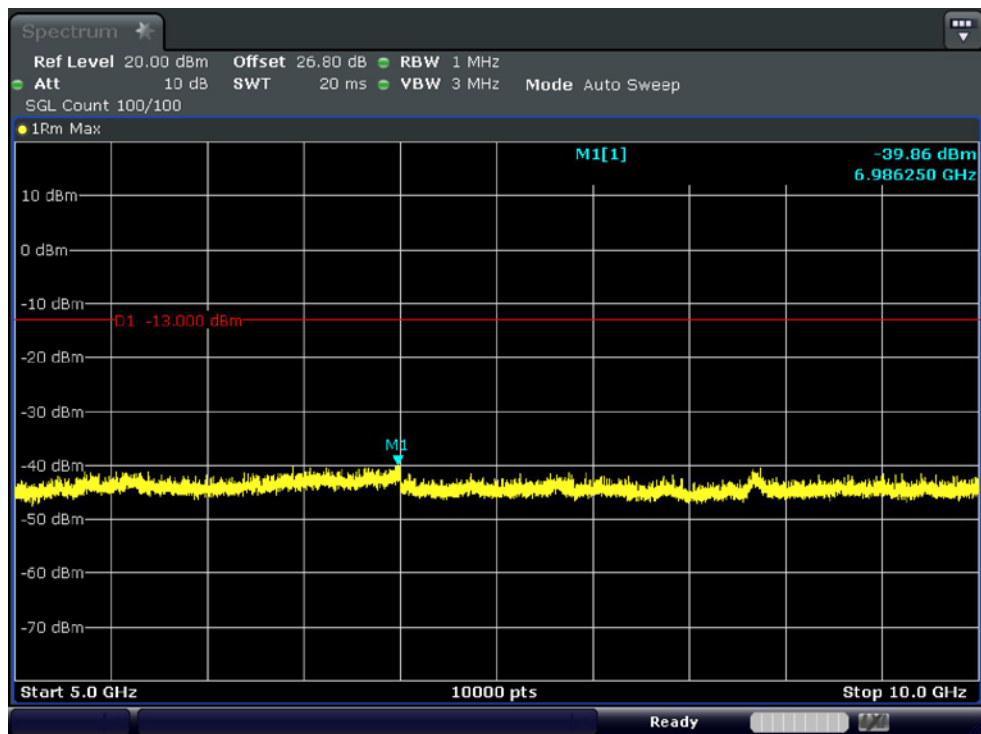


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions1

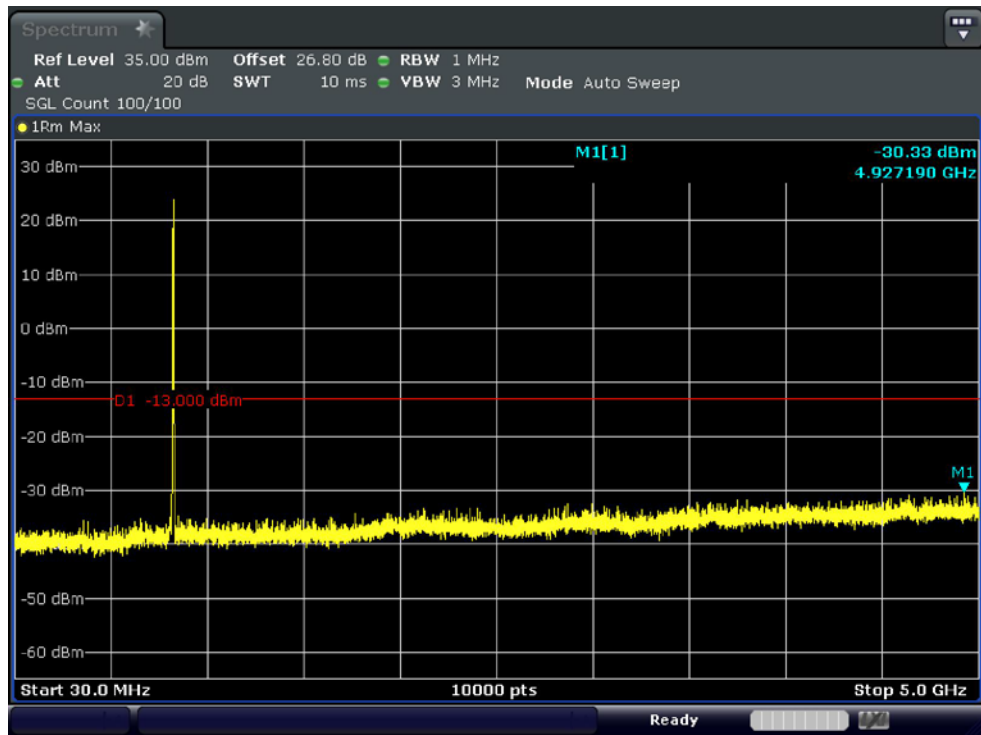


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions2

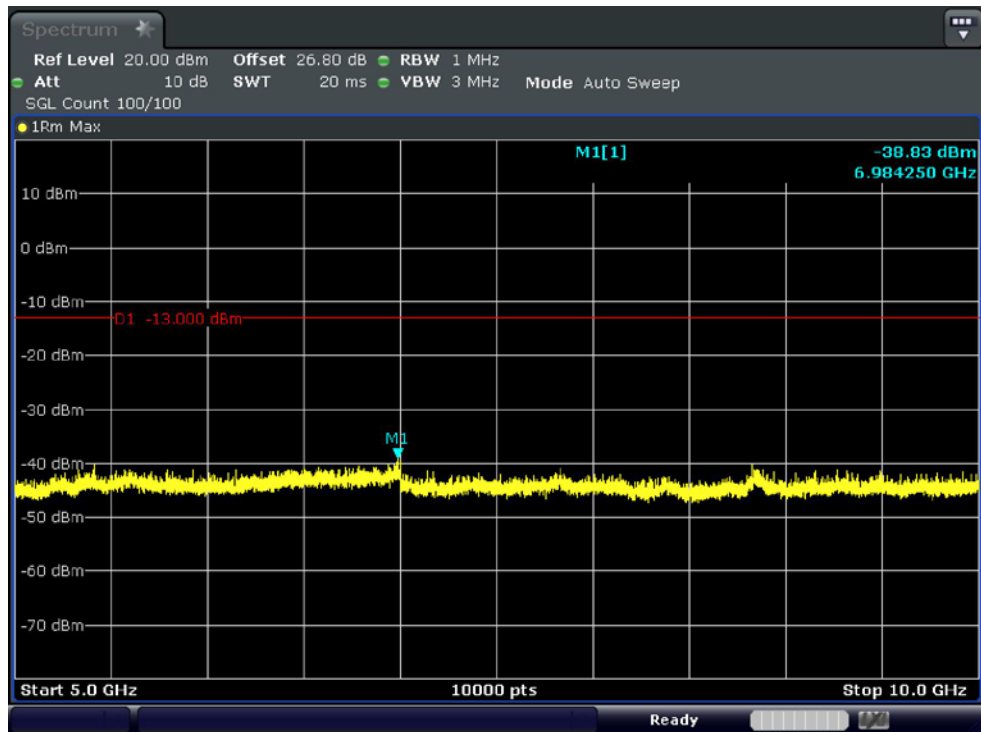


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

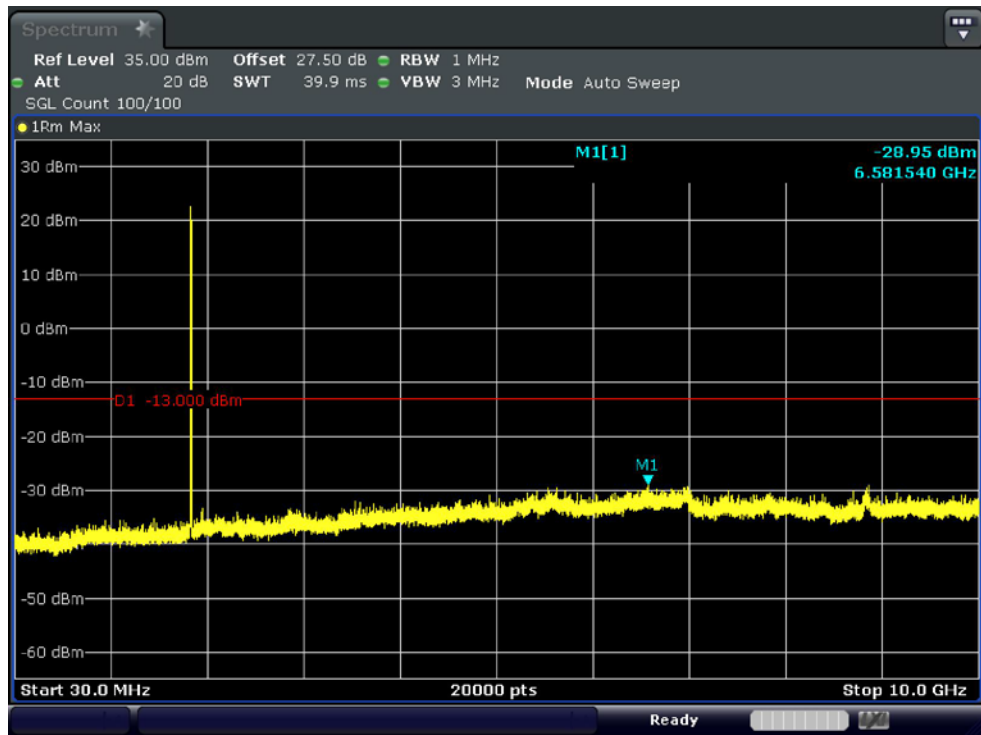


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

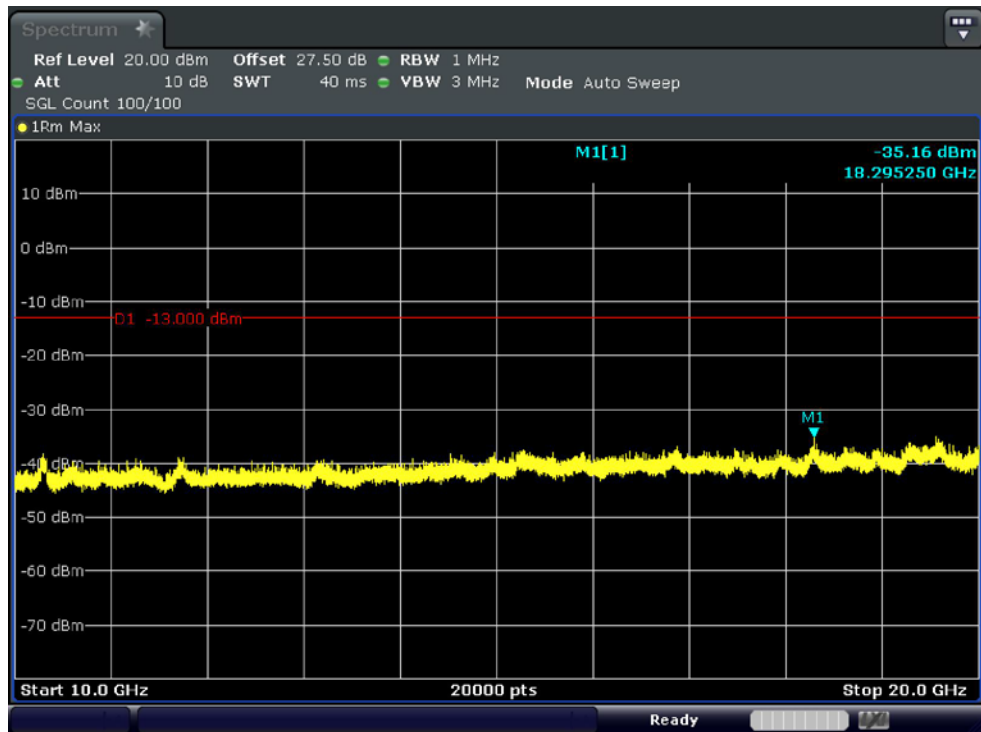


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

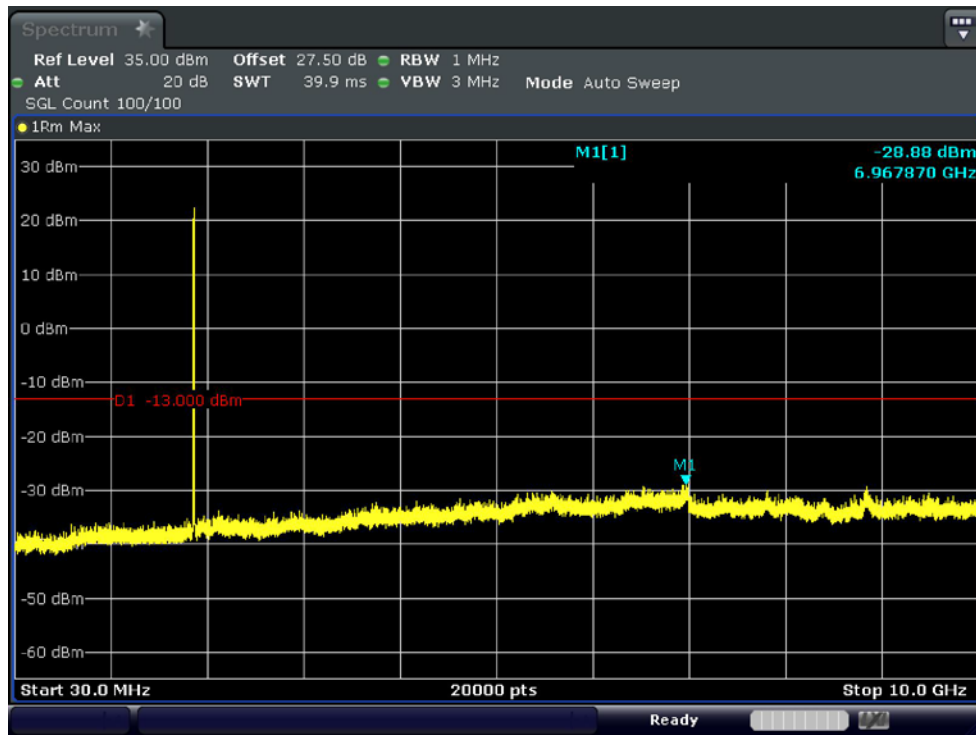

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2

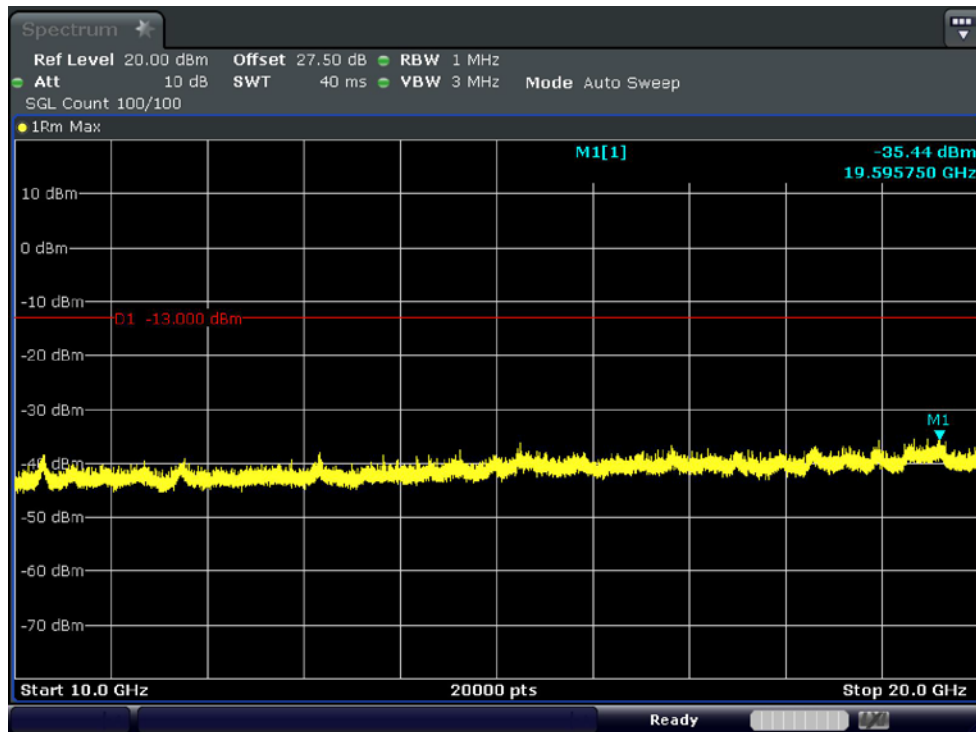

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

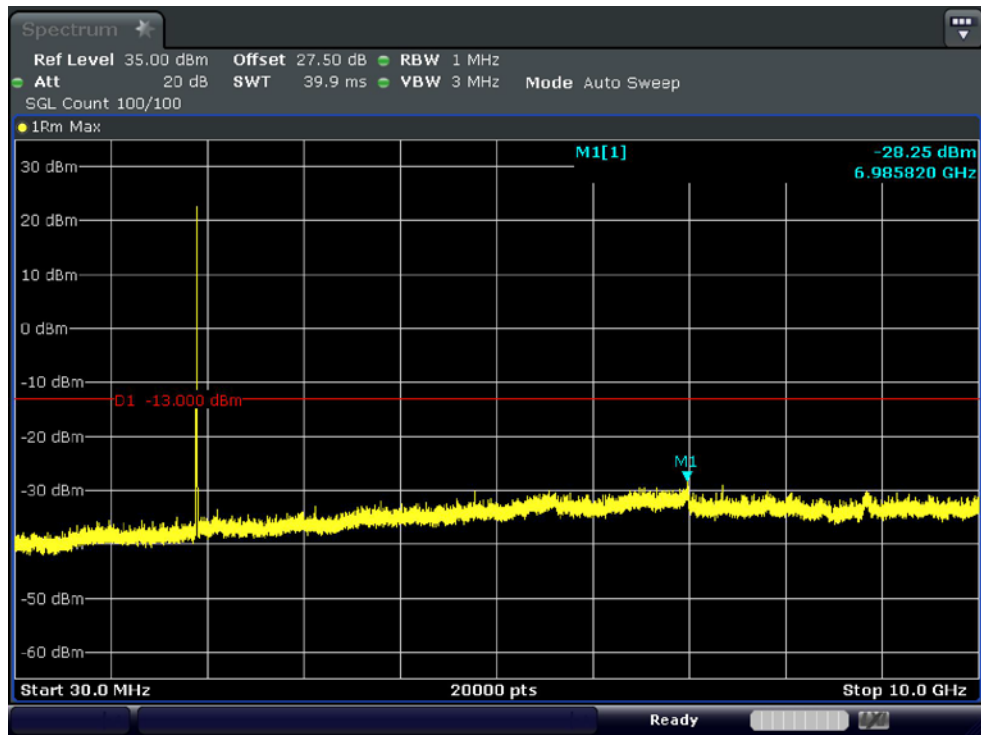

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

