

FCC BT LE REPORT

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:
June 10, 2016
Test Site/Location:
HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-myeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-R-1605-F036-1
HCT FRN: 0005866421
IC Recognition No.: 5944A-5

FCC ID : ZNFK220Z

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : ZNFK220H report.

Model(s): LG-K220Z
Additional Model(s): LGK220Z,K220Z,LG-K220T,LGK220T,K220T
EUT Type: GSM WCDMA LTE Phone with BT & WLAN
RF Peak Output Power: 0.044 dBm (1.010 mW)
Frequency Range: 2402 MHz -2480 MHz
Modulation type GFSK
FCC Classification: Digital Transmission System(DTS)
FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by
: Seoul Ki Lee
Test Engineer of RF Team



Approved by
: Jong Seok Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1605-F036	May 24, 2016	- First Approval Report
HCT-R-1605-F036-1	June 10, 2016	- Revised the Cover Page

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	6
7. MEASUREMENT UNCERTAINTY	7
8. SUMMARY TEST OF RESULTS	8
9. TEST RESULT	9
9.1 DUTY CYCLE.....	9
9.2 6 dB BANDWIDTH MEASUREMENT	11
9.3 OUTPUT POWER MEASUREMENT.....	14
9.4 POWER SPECTRAL DENSITY	21
9.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	25
9.6 RADIATED MEASUREMENT.....	36
9.6.1 RADIATED SPURIOUS EMISSIONS.....	36
9.6.2 RADIATED RESTRICTED BAND EDGES	46
9.7 POWERLINE CONDUCTED EMISSIONS	49
10. LIST OF TEST EQUIPMENT	54
10.1 LIST OF TEST EQUIPMENT(Conducted Test)	54
10.2 LIST OF TEST EQUIPMENT(Radiated Test).....	55

1. GENERAL INFORMATION

Applicant:	LG Electronics MobileComm U.S.A., Inc
Address:	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID:	ZNFK220Z
EUT Type:	GSM WCDMA LTE Phone with BT & WLAN
Model (s):	LG-K220Z
Additional Modl(s):	LGK220Z,K220Z,LG-K220T,LGK220T,K220T
Date(s) of Tests:	April 20, 2016 ~ May 17, 2016
Place of Tests:	HCT Co., Ltd. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea (IC Recognition No. : 5944A-5)

2. EUT DESCRIPTION

Model	LG-K220Z	
Additiani Model	LGK220Z,K220Z,LG-K220T,LGK220T,K220T	
EUT Type	GSM WCDMA LTE Phone with BT & WLAN	
Power Supply	DC 3.85 V	
Battery Infomation	Model: BL-T24 Type: Li-ion Polymer Battery	
Frequency Range	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
Max. RF Output Power	Peak	0.044dBm (1.010 mW)
	Average	-0.153 dBm (0.965 mW)
BT Operating Mode	BT _Low Energy Mode	
Modulation Type	GFSK	
Number of Channels	40 Channels	
Antenna Specification	Manufacturer: AT&T Co.,Ltd. Antenna type: INTERNAL ANTENNA Peak Gain : -0.56 dBi	

3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r05 dated April 8, 2016 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074 v03r05)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.6.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.2		PASS


9. TEST RESULT

9.1 DUTY CYCLE

■ TEST PROCEDURE

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

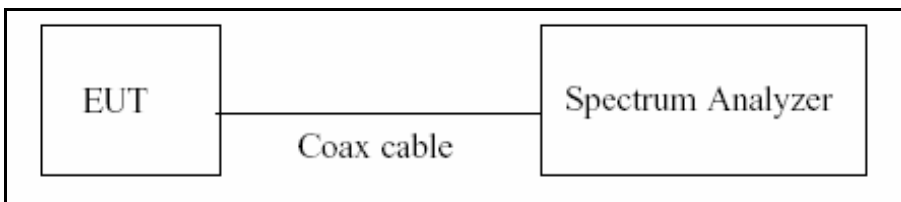

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v03r05.


The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

LE Mode	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
	0.3787	0.6245	0.6065	2.17

RESULT PLOTS

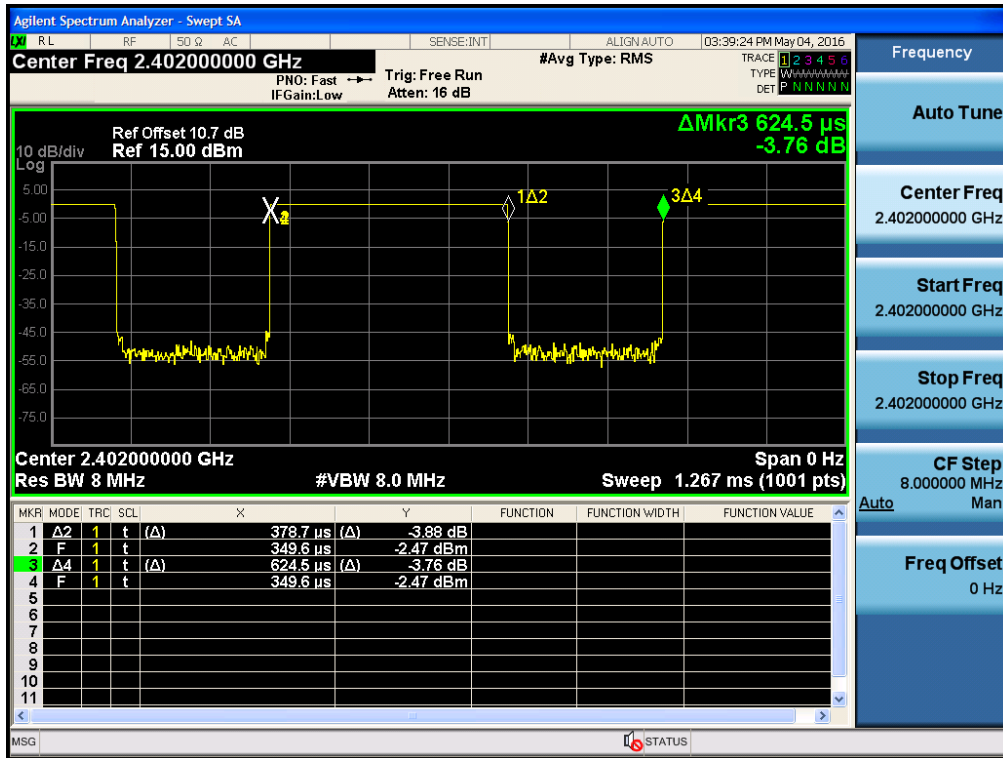


9.2 6 dB BANDWIDTH MEASUREMENT

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

■ TEST CONFIGURATION

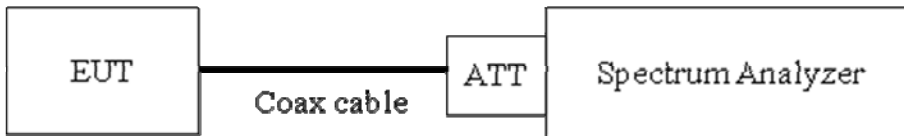

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.1 in KDB 558074 v03r05)

RBW = 100 kHz

VBW ≥ 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

■ TEST RESULT

Mode	Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Pass/Fail
BT LE	0	685.7	> 500	Pass
	19	688.8		Pass
	39	686.9		Pass

▣ RESULT PLOTS


6 dB Bandwidth plot (Low-CH 0)

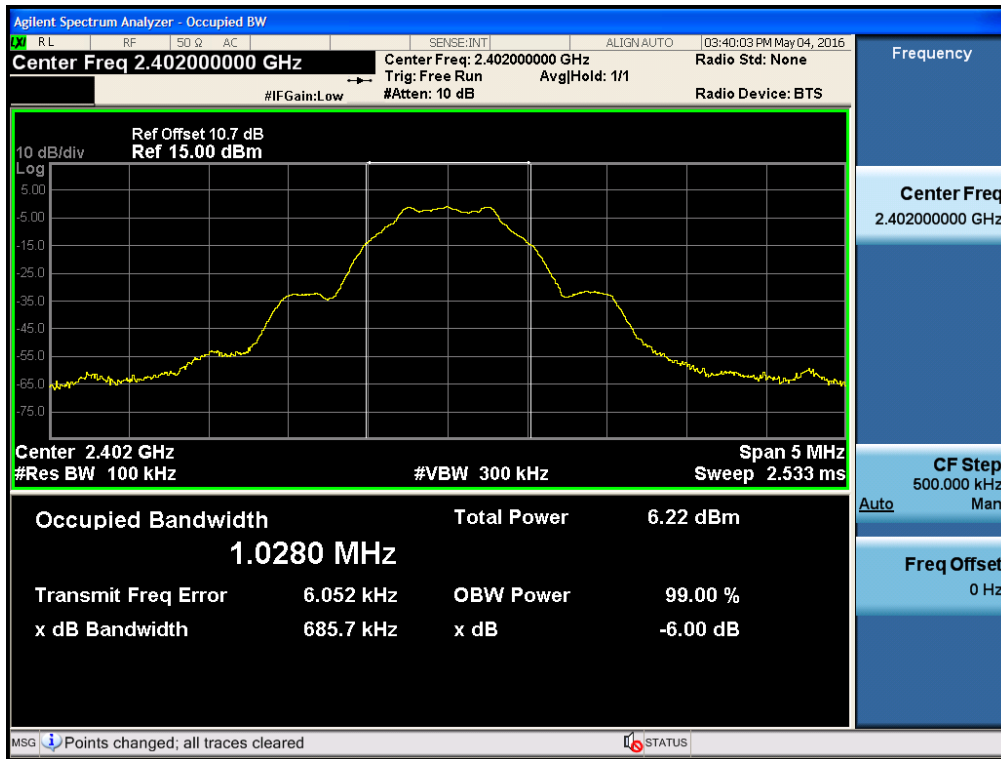

6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)

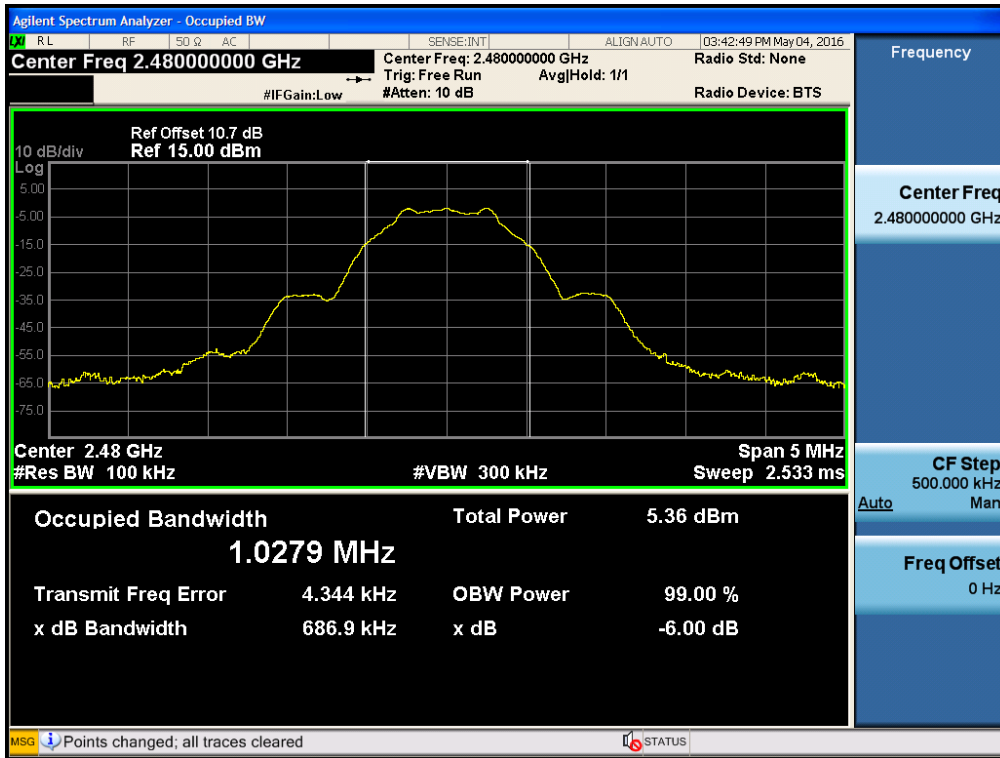


9.3 OUTPUT POWER MEASUREMENT

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

■ TEST CONFIGURATION

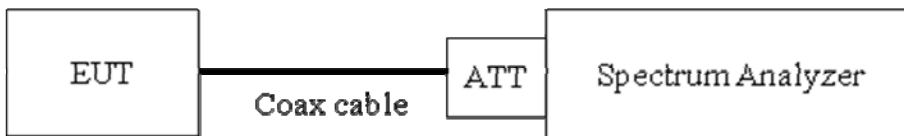

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 9.1.1 in KDB 558074 v03r05)
 - RBW \geq DTS Bandwidth
 - VBW $\geq 3 \times$ RBW
 - SPAN $\geq 3 \times$ RBW
 - Detector Mode = Peak
 - Sweep = auto couple
 - Trace Mode = max hold
 - Allow trace to fully stabilize.
 - Use peak marker function to determine the peak amplitude level

- Average Power (Procedure 9.2.2.4 in KDB 558074 v03r05)
 - Measure the duty cycle
 - Set span to at least 1.5 times the OBW
 - RBW = 1-5 % of the OBW, not to exceed 1 MHz.
 - VBW $\geq 3 \times$ RBW.
 - Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
 - Sweep time = auto.
 - Detector = RMS(i.e., power averaging)
 - Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 10 dBm + 10 dB + 0.8 dB + 0.2 dB = 21.0 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.

▣ TEST RESULTS-Peak

Conducted Output Power Measurements

LE Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2402	0	-0.184	30
2440	19	0.044	30
2480	39	-1.017	30


▣ TEST RESULTS-Average

Conducted Output Power Measurements


LE Mode		Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency[MHz]	Channel No.				
2402	0	-2.55	2.17	-0.38	30
2440	19	-2.33	2.17	-0.15	30
2480	39	-3.48	2.17	-1.31	30

▣ RESULT PLOTS-Peak


Conducted Output Power (Low-CH 0)

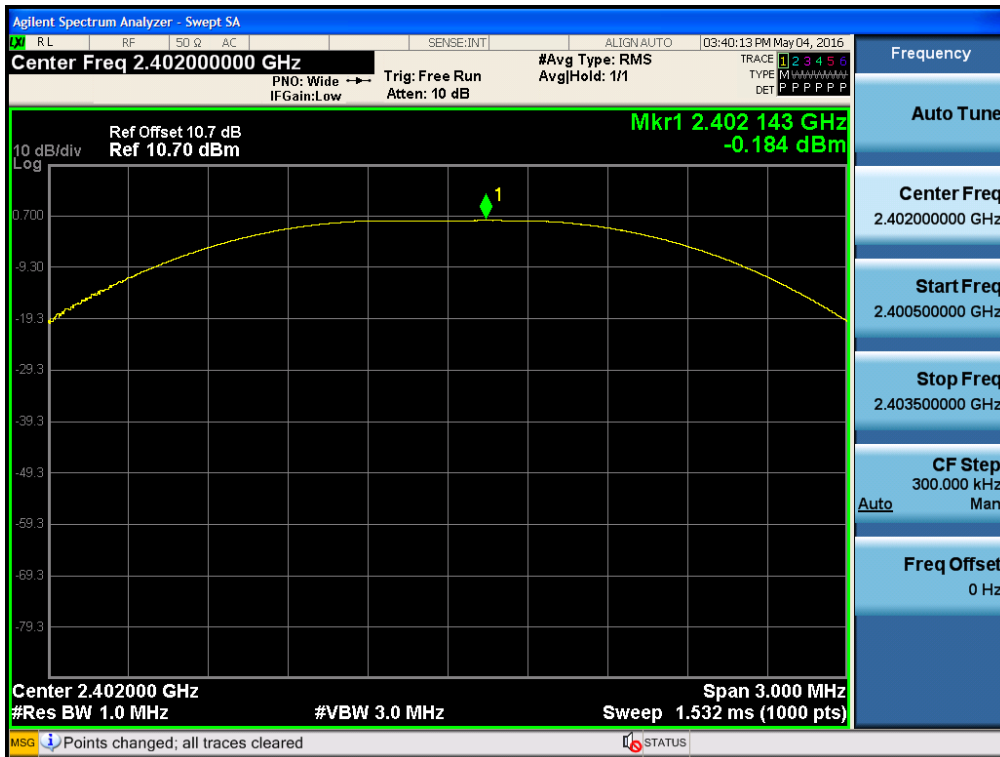

Conducted Output Power (Mid-CH 19)

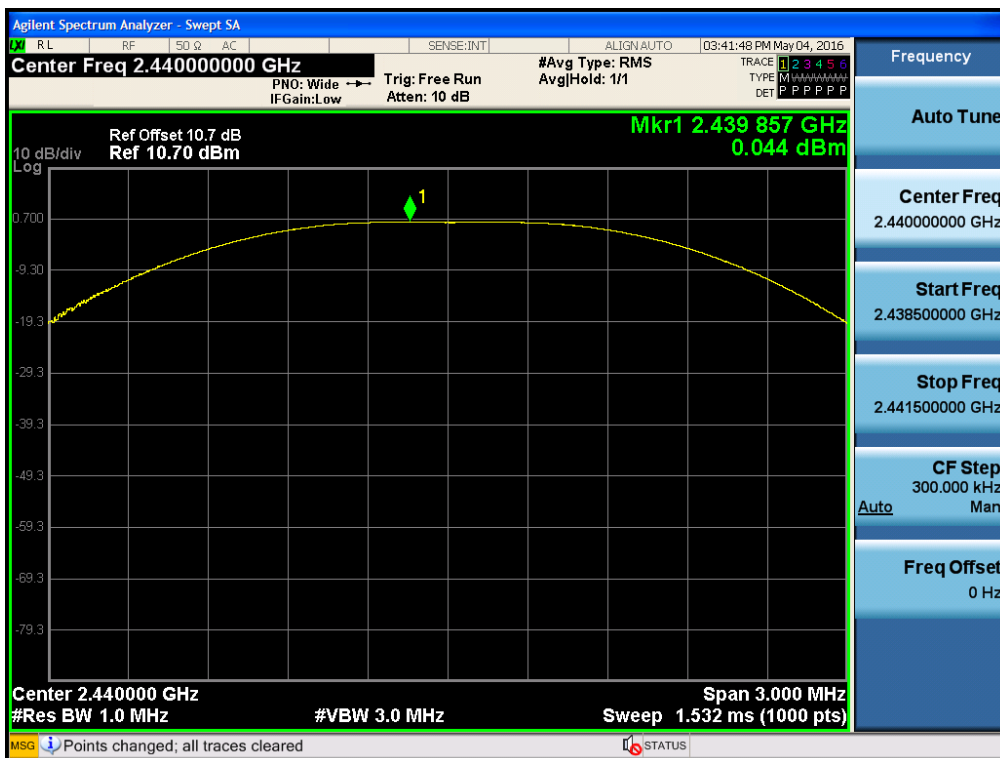


Conducted Output Power (High-CH 39)

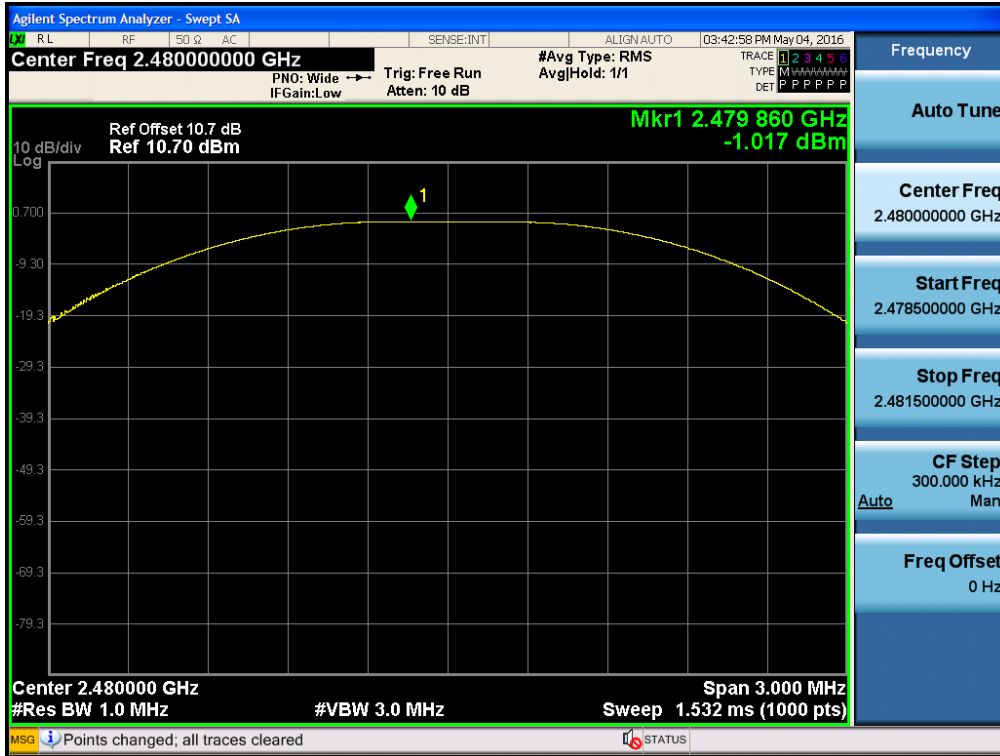


RESULT PLOTS-Average


Conducted Output Power (Low-CH 0)

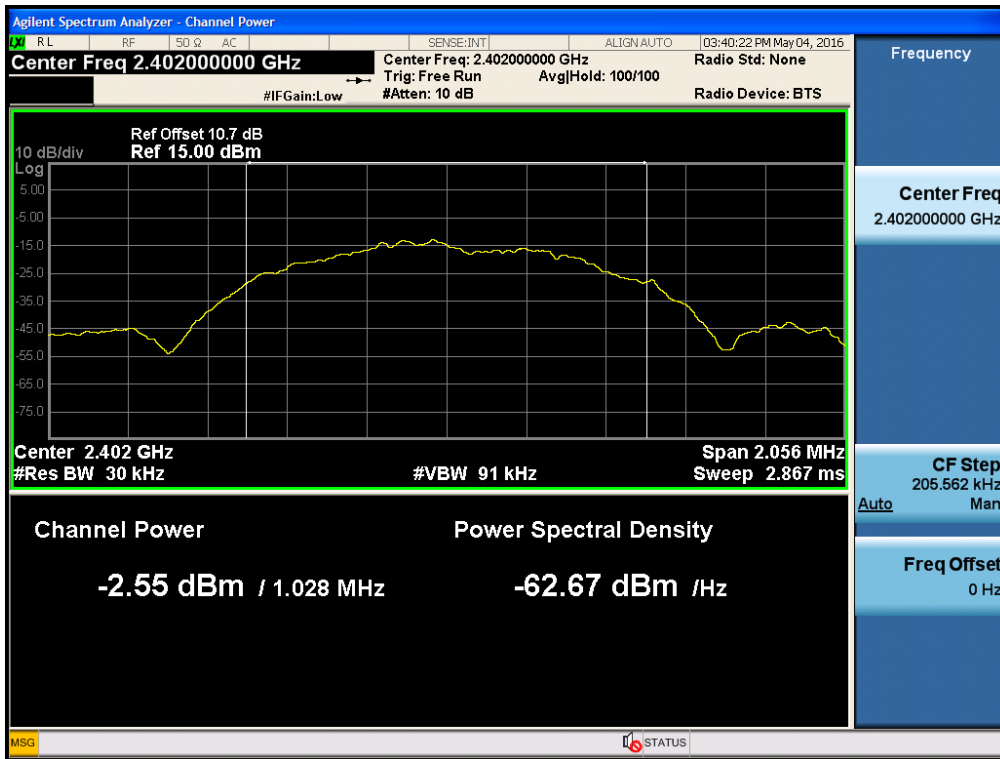

Conducted Output Power (Mid-CH 19)

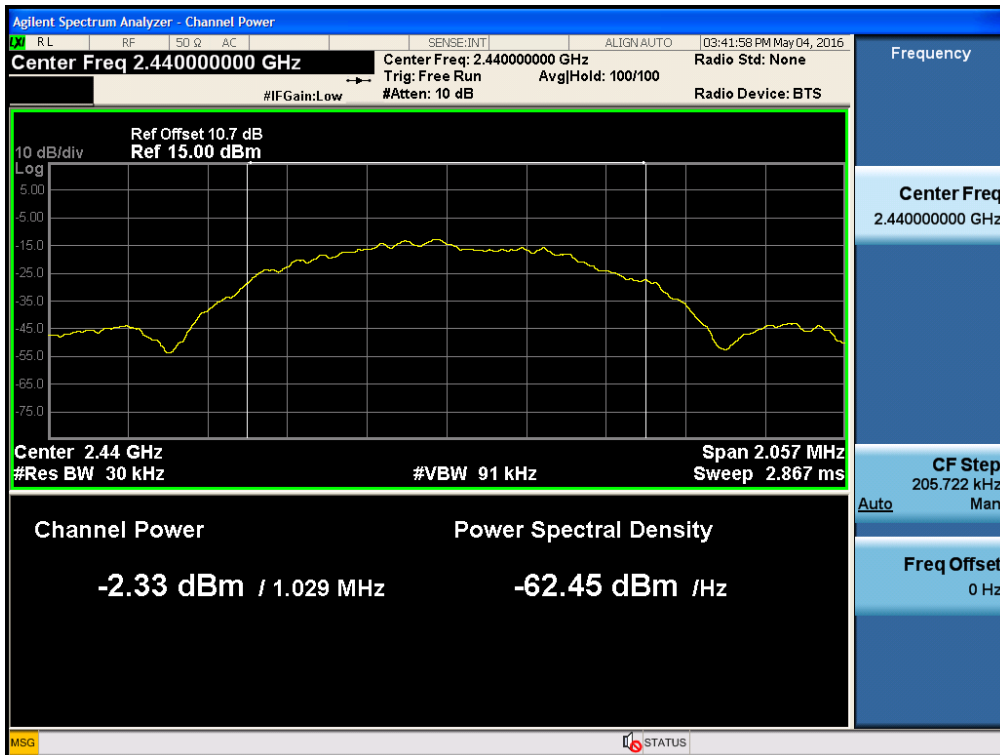

Conducted Output Power (High-CH 39)

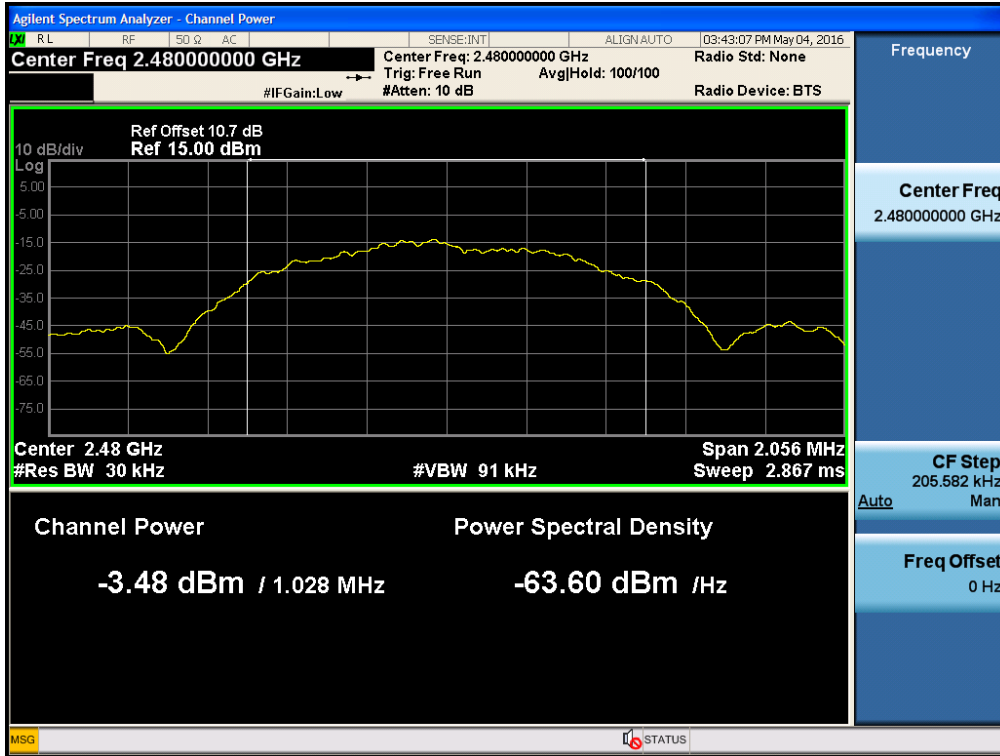


9.4 POWER SPECTRAL DENSITY

Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

■ TEST CONFIGURATION

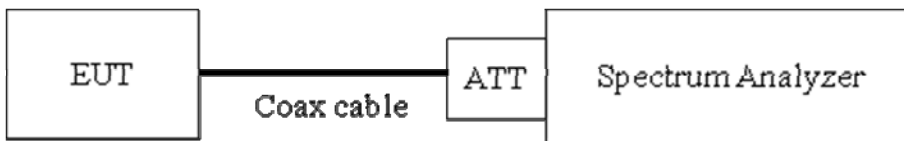

■ TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 04/08/2016

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz ≤ RBW ≤ 100 kHz.

VBW ≥ 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.


■ TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/ Fail
2402	0	LE	-15.591	8	Pass
2440	19		-15.321	8	Pass
2480	39		-16.364	8	Pass

▣ RESULT PLOTS


Power Spectral Density (Low-CH 0)

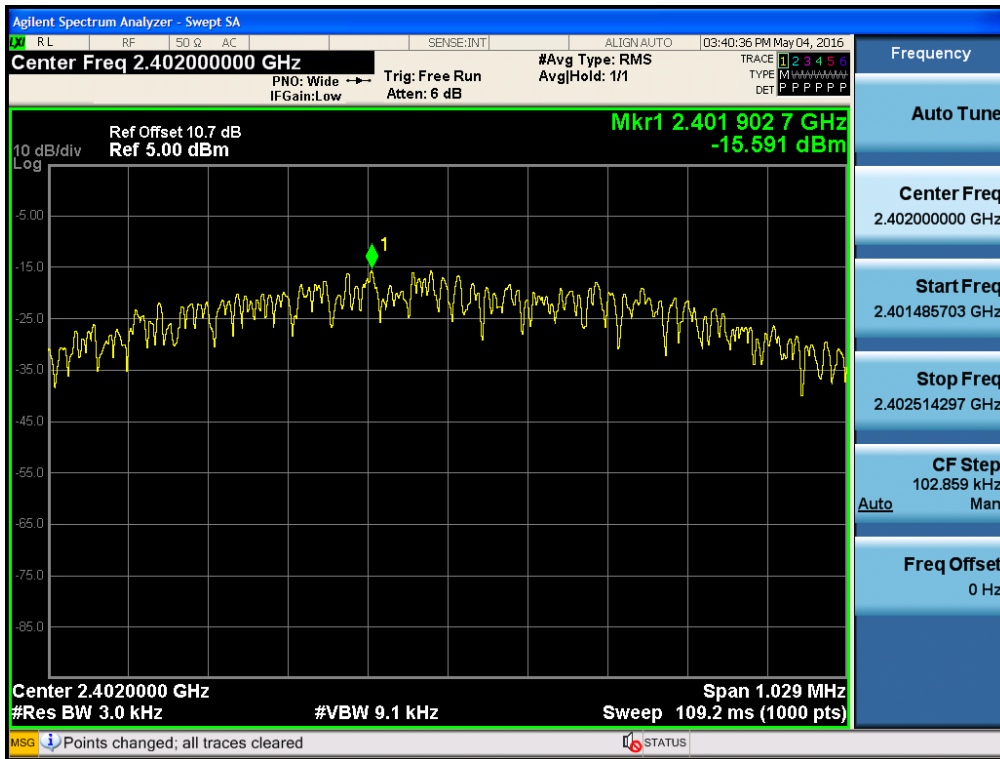

Power Spectral Density (Mid-CH 19)

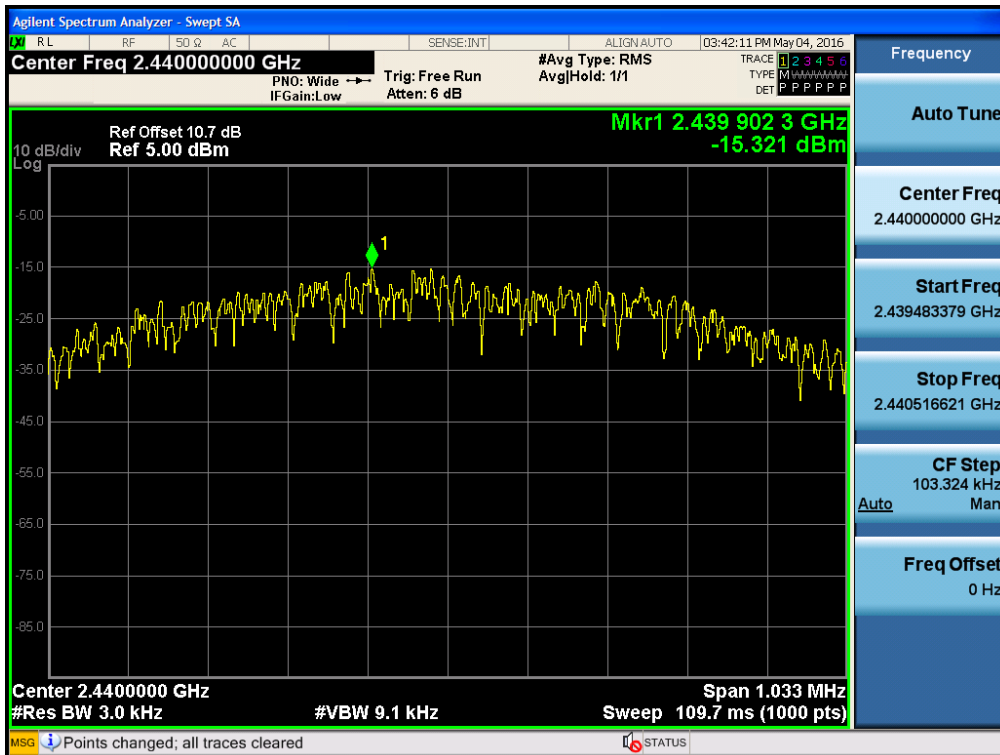


Power Spectral Density (High-CH 39)

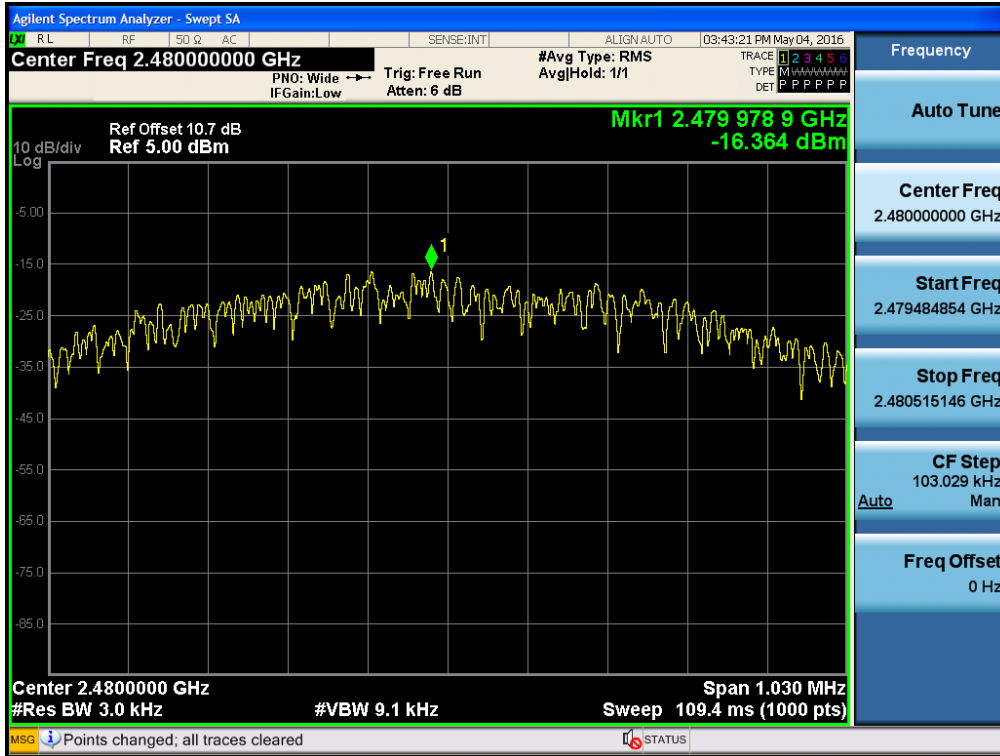

9.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS**Test Requirements and limit, §15.247(d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

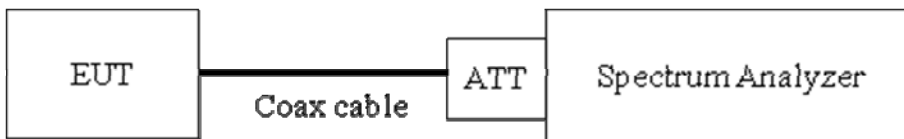Limit : 20 dBc**■ TEST CONFIGURATION****■ TEST PROCEDURE**

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 04/08/2016)

RBW = 100 kHz

VBW \geq 3 x RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points \geq 2*Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1(KDB558074 v03r05), so the peak output power measured in any 100 kHz bandwidth outside

of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

2. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.
3. Spectrum offset = Attenuator loss + Cable loss
4. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.
5. In case of conducted spurious emissions test, please check factors blow table.
6. In order to simplify the report, attached plots were only the worst case channel and data rate.

■ FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68


13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53

Note : 1. ** is fundamental frequency range.


2. Factor = Cable loss + Attenuator loss

▣ RESULT PLOTS

BandEdge (Low-CH 0)

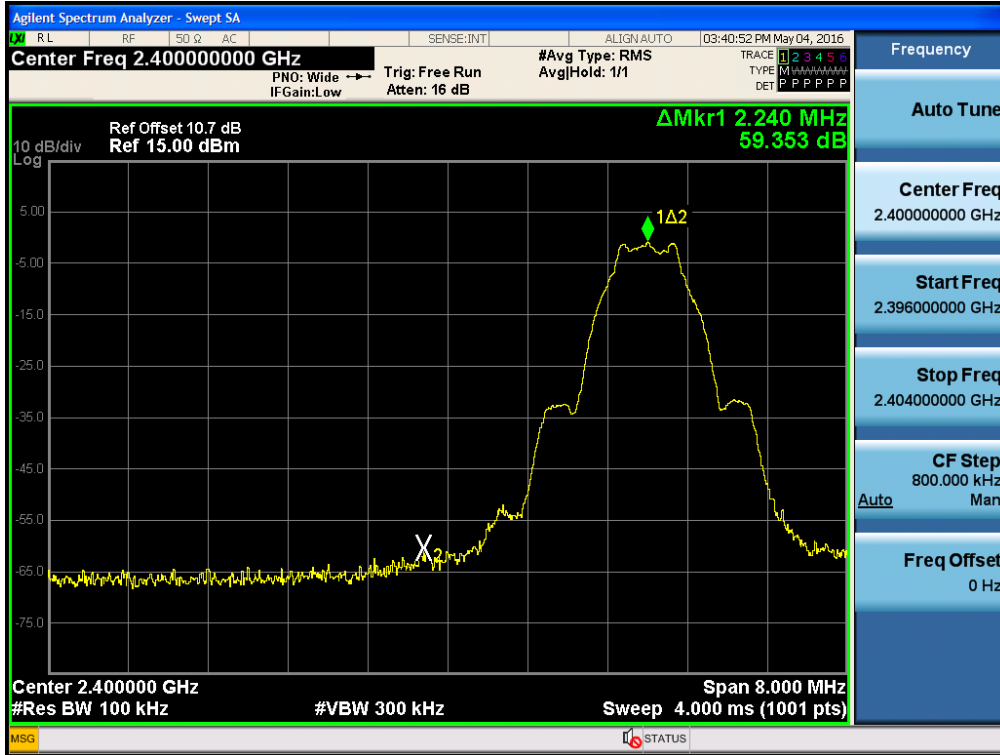


BandEdge (High-CH 39)

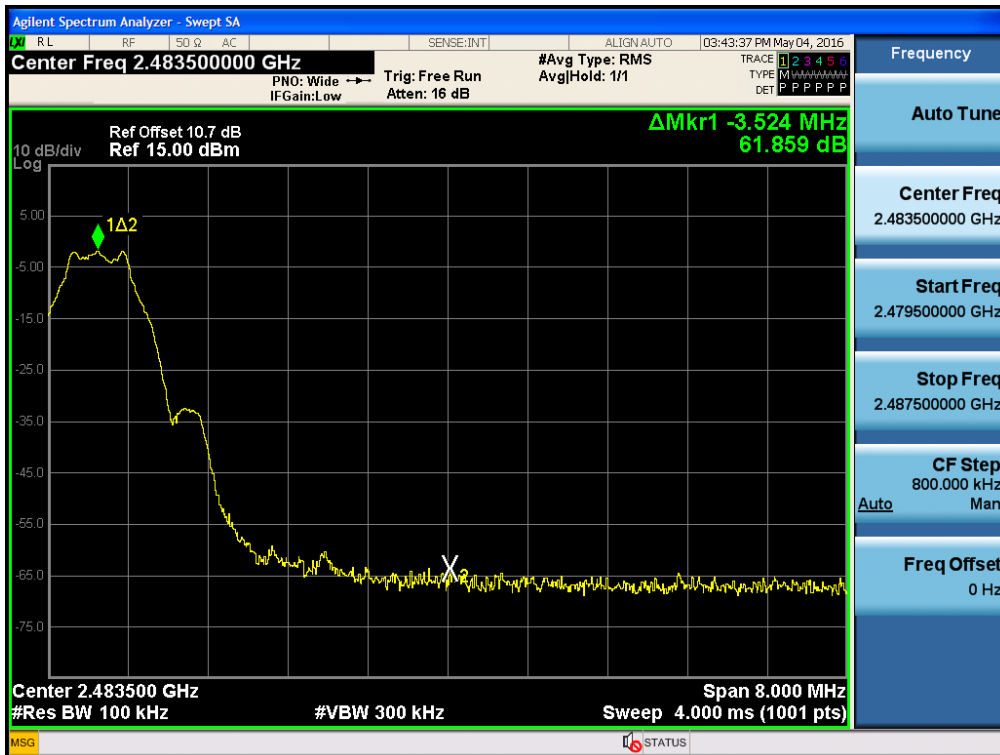


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

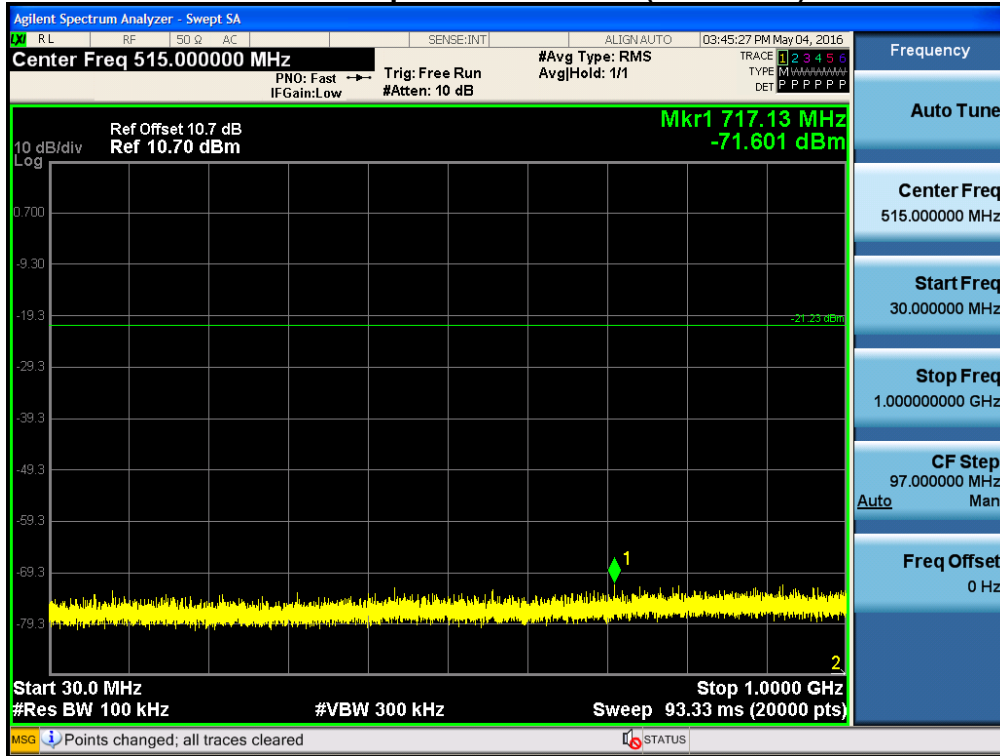


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

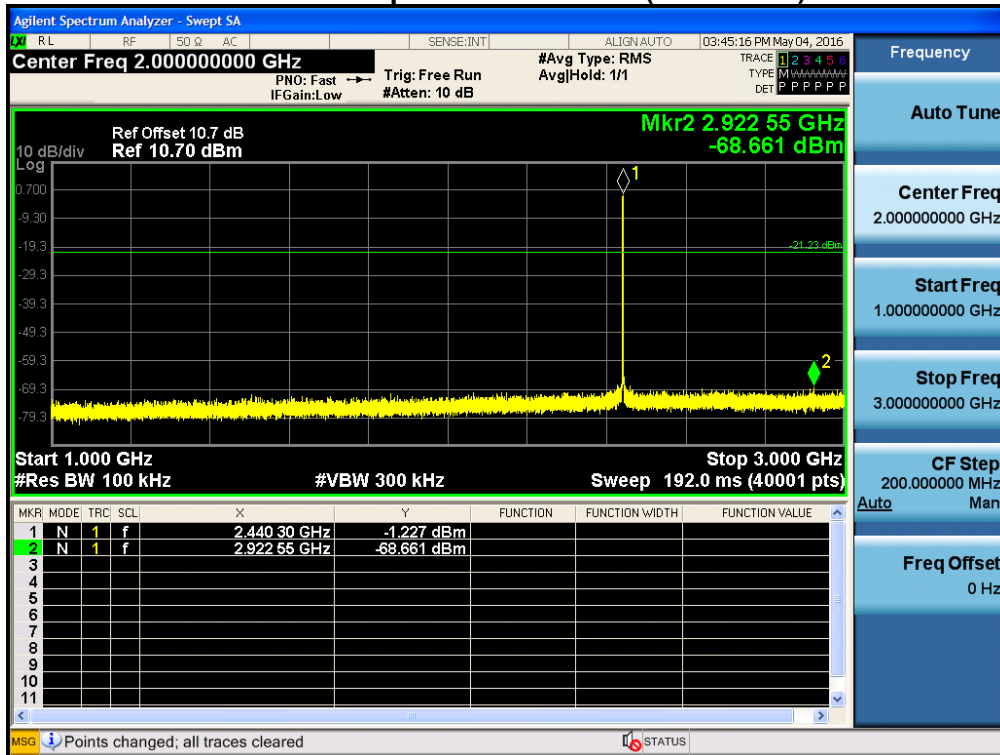


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

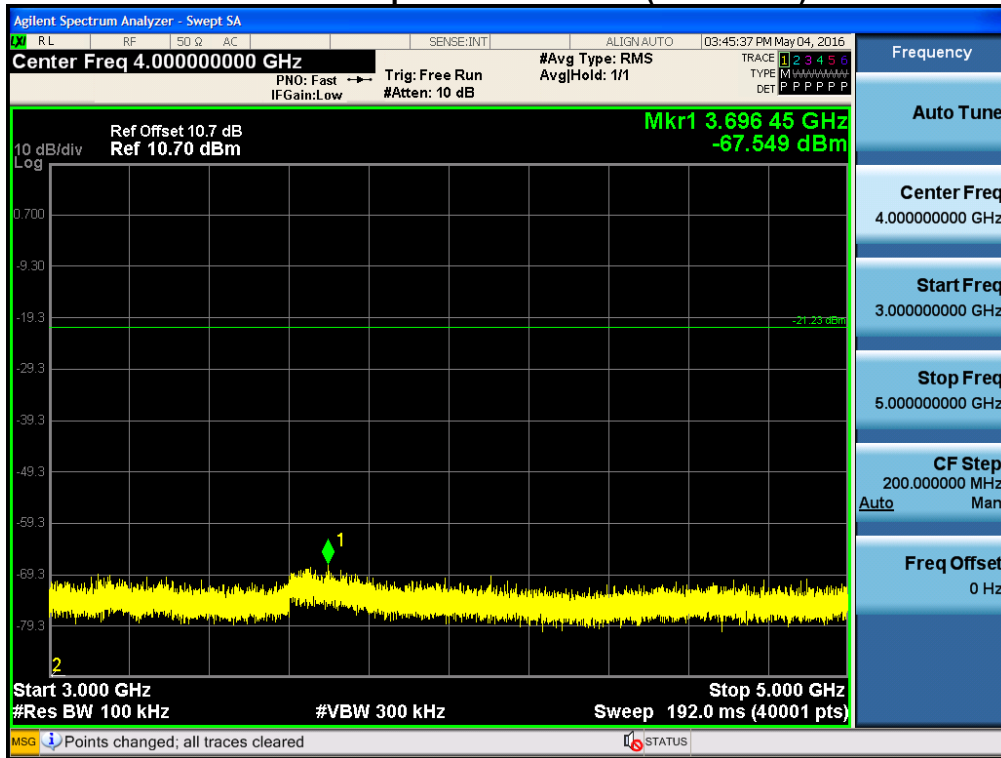


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

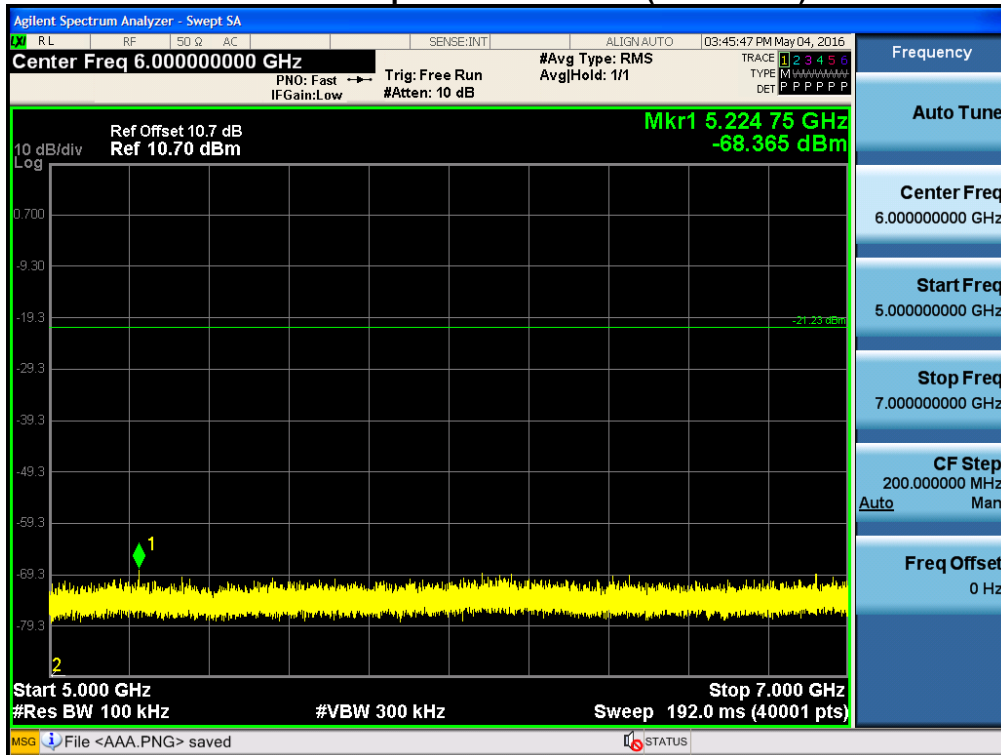


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

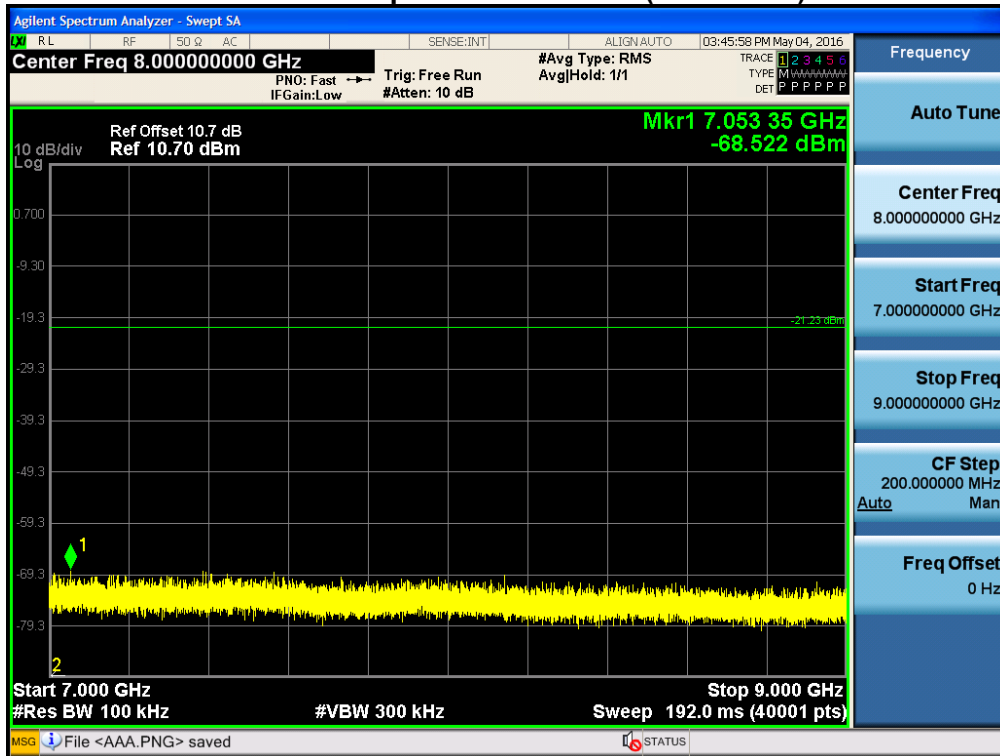


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

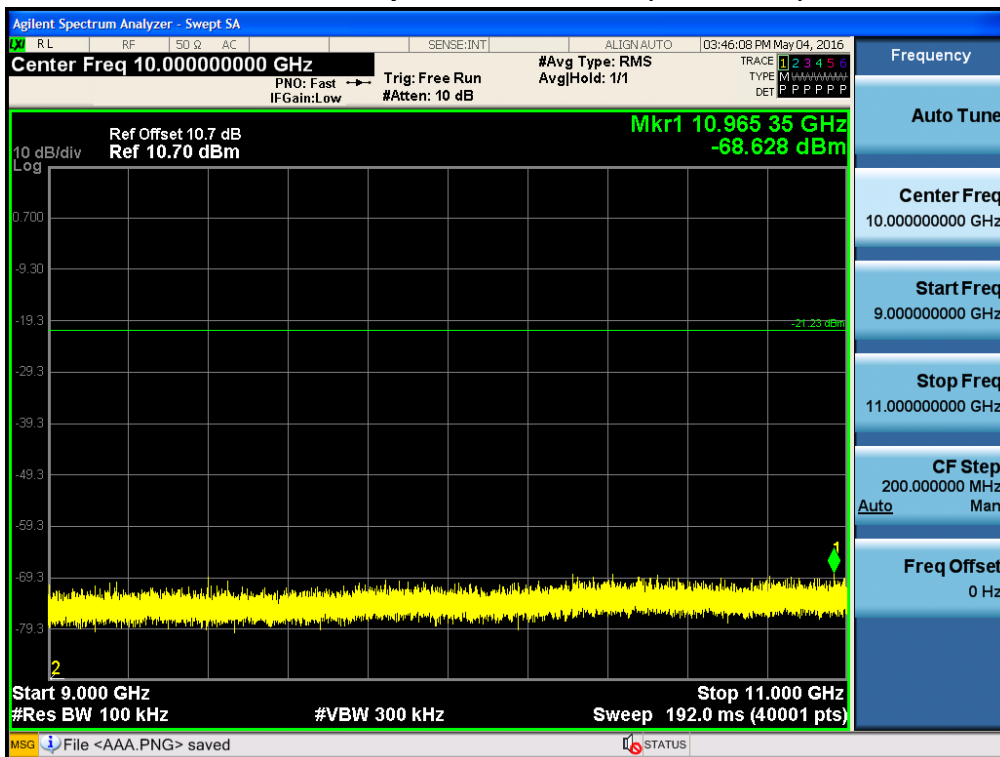


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

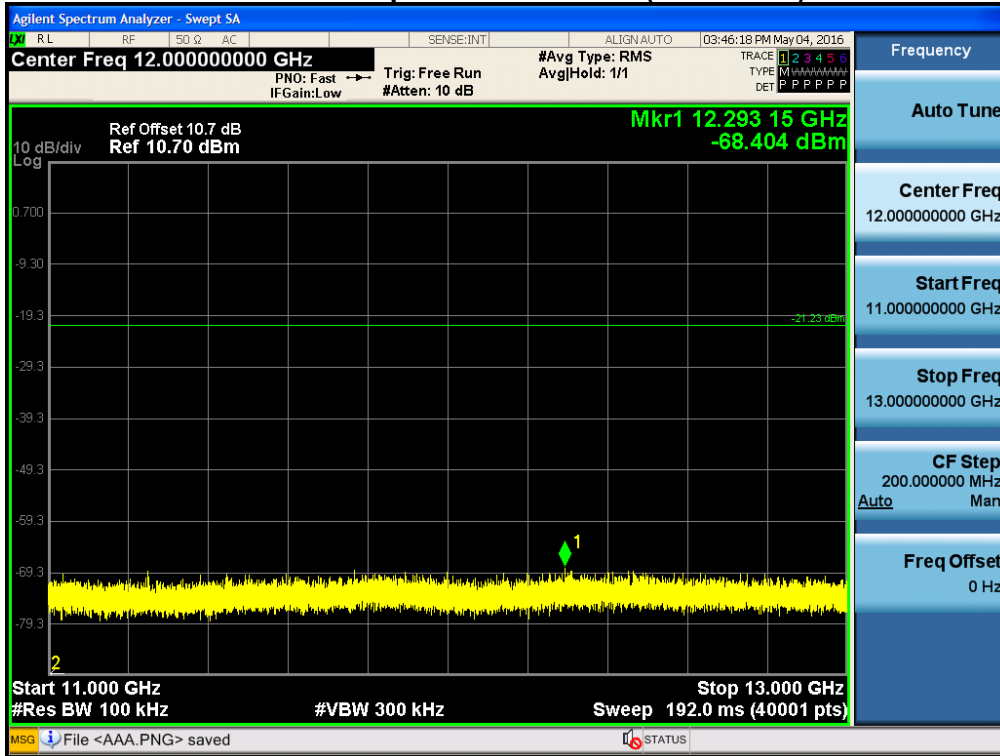


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

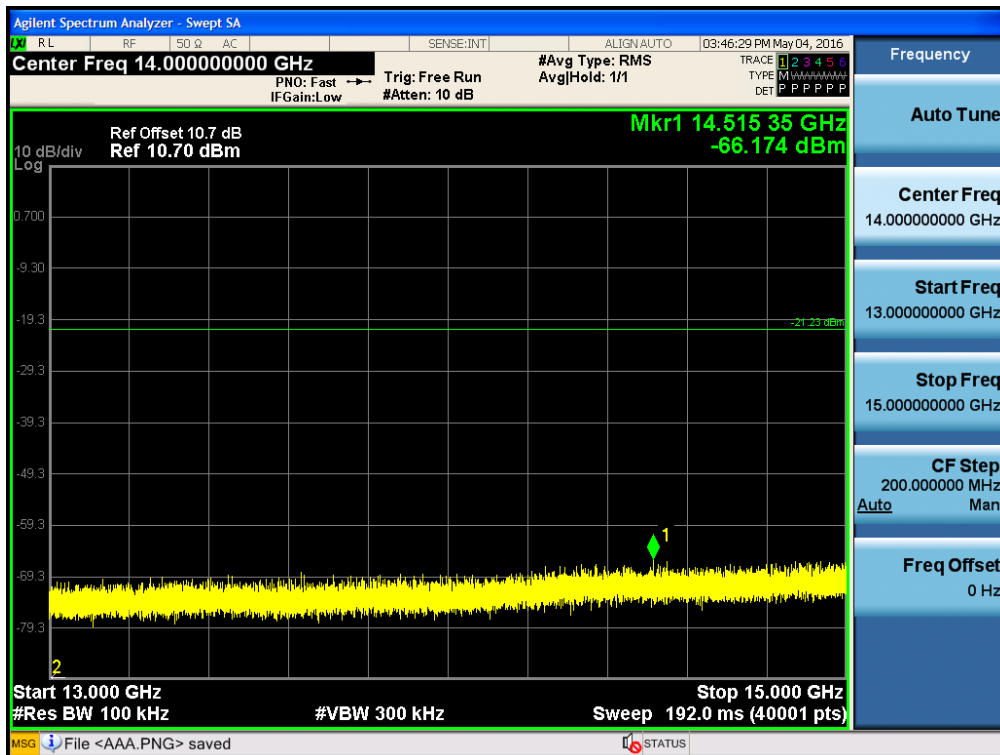


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

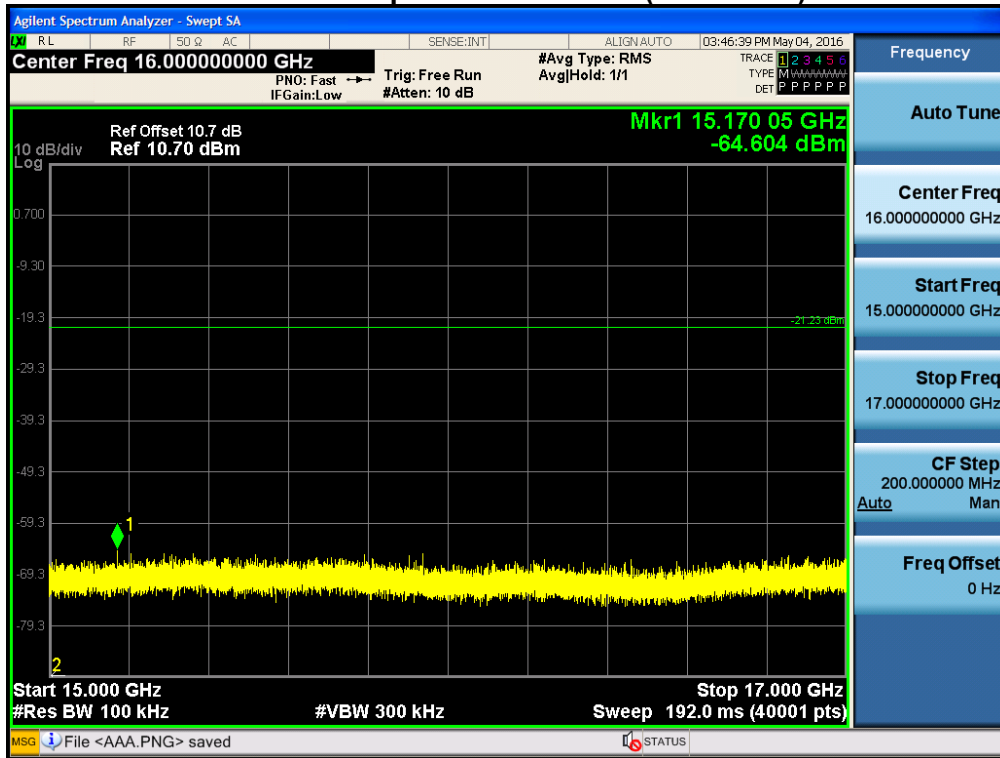


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

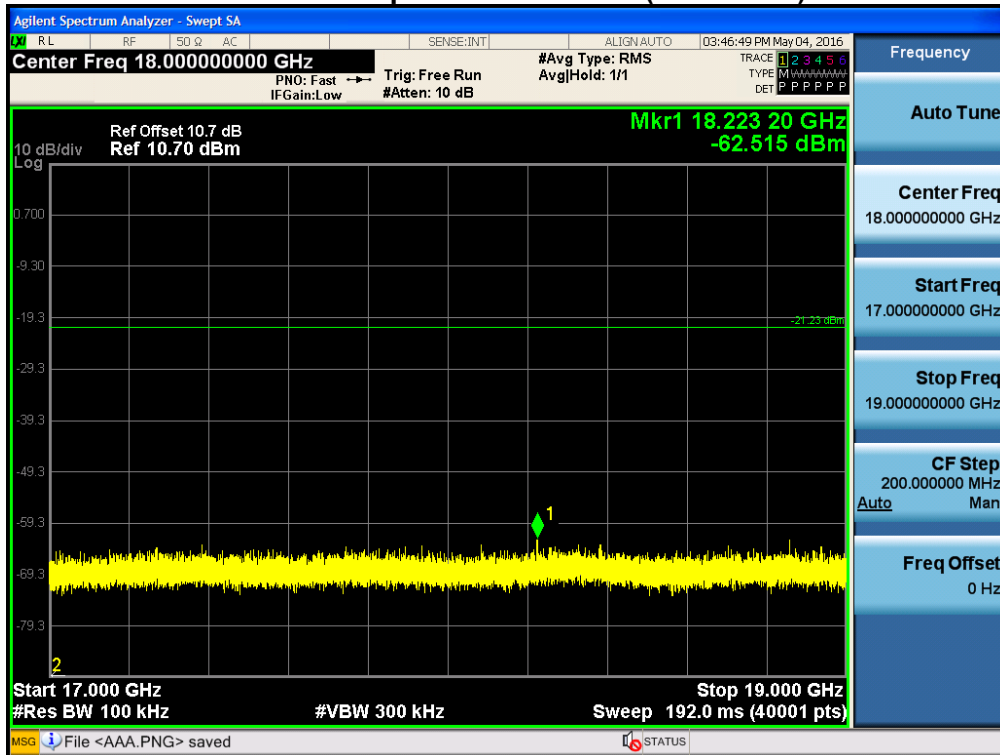


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

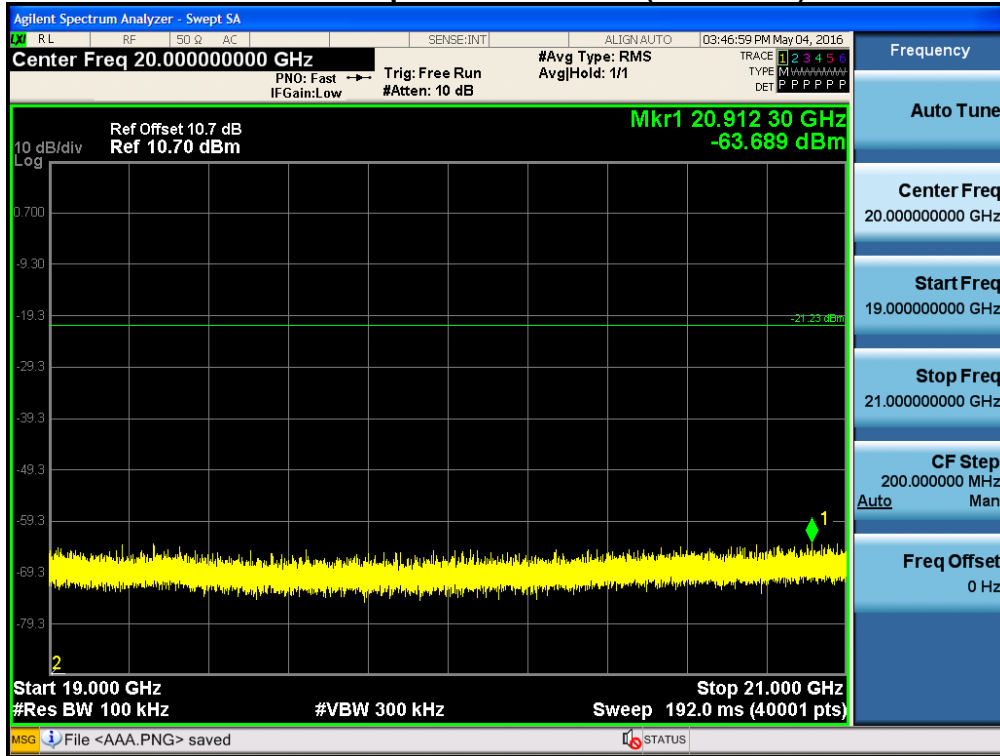


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

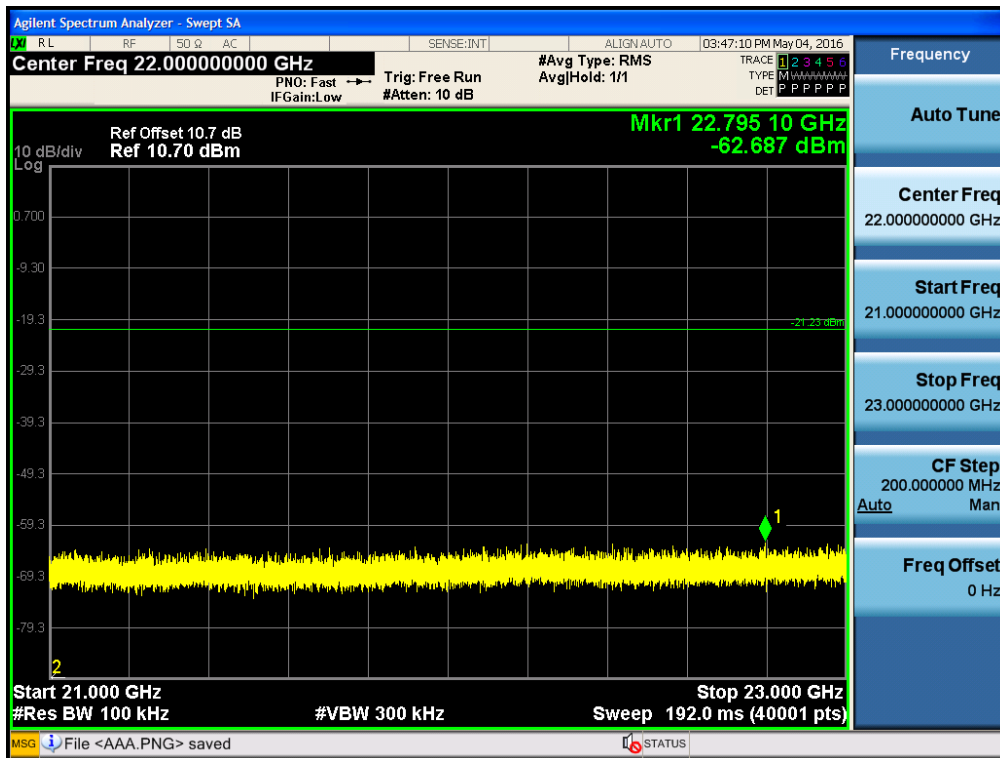

23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

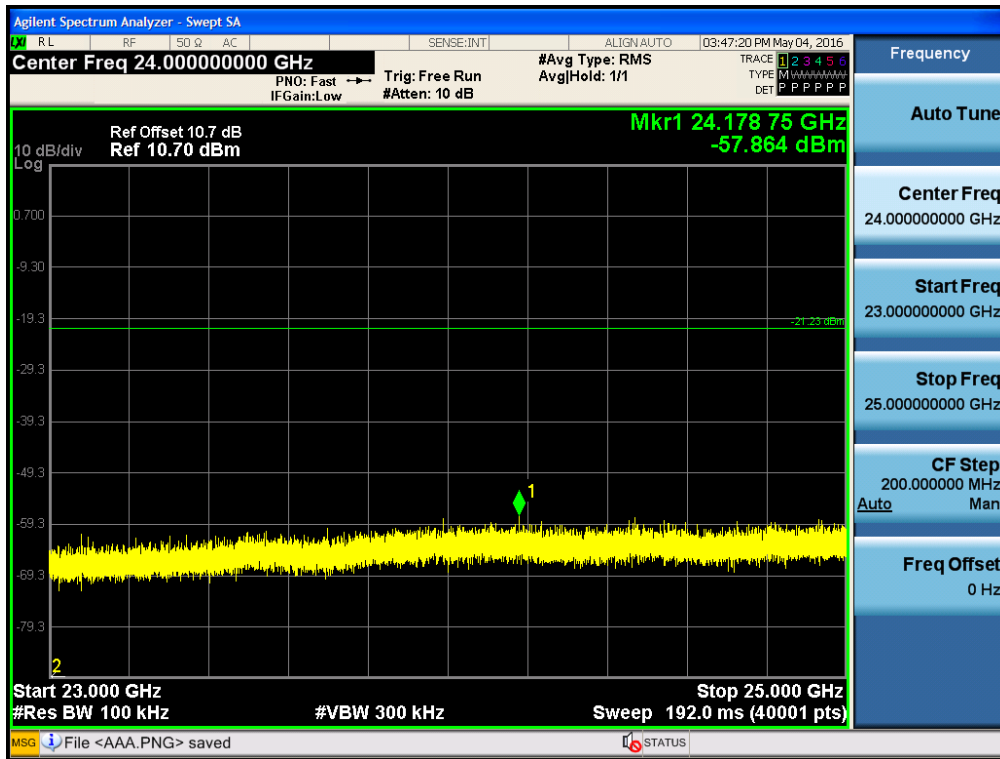


9.6 RADIATED MEASUREMENT.**9.6.1 RADIATED SPURIOUS EMISSIONS.**

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

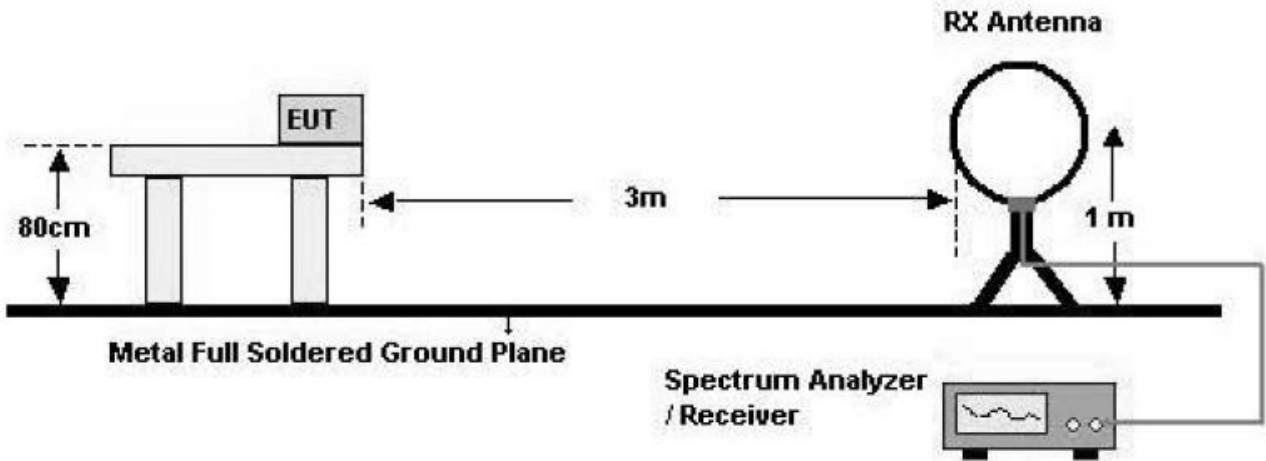

30 MHz - 1 GHz

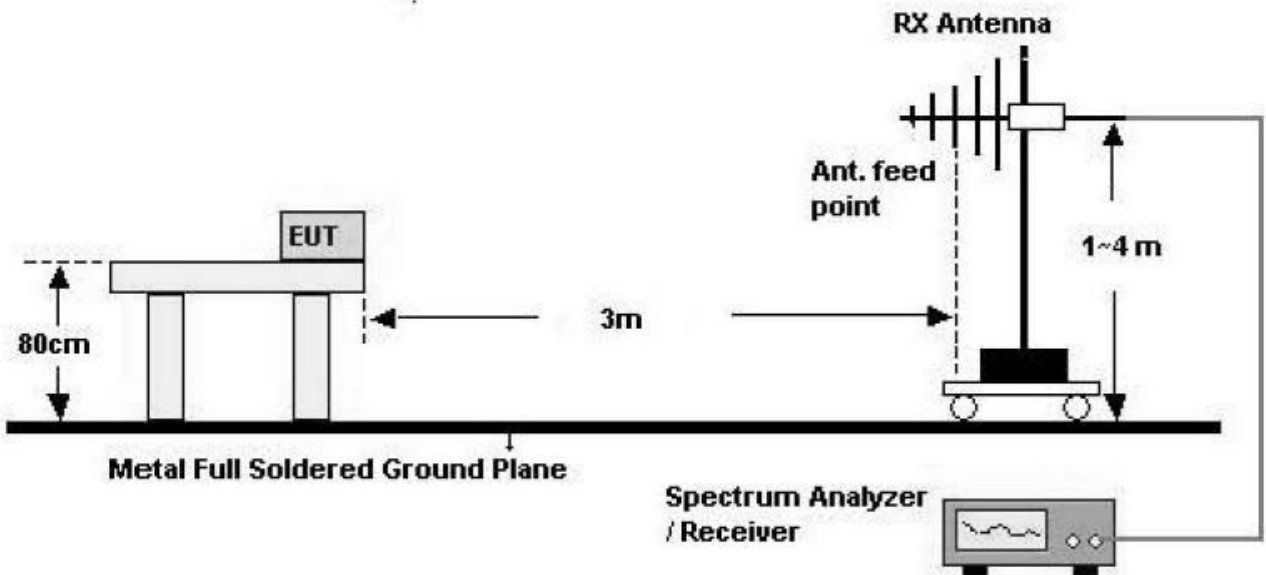

Above 1 GHz

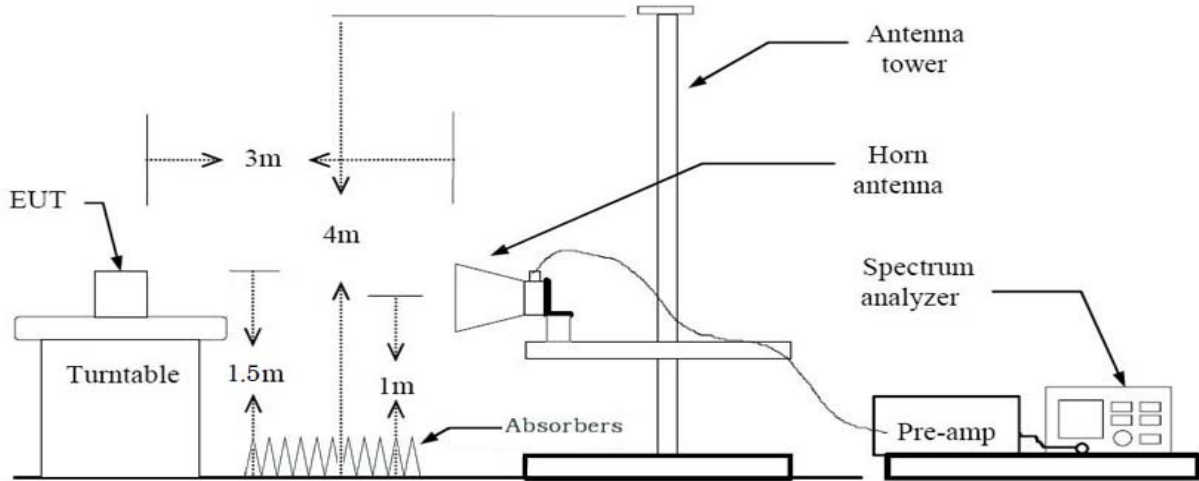

TEST PROCEDURE USED

Method 12.1 in KDB 558074 v03r05

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW $\geq 3 \times$ RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Average (duty cycle < 98%, duty cycle variations are less than $\pm 2\%$)

Set RBW = 1 MHz

Set VBW $\geq 3 \times$ RBW

Detector = RMS.

Averaging type = power (*i.e.*, RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

LE Mode	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
	0.3787	0.6245	0.6065	2.17

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS**Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Operation Mode: CH.0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor	A.F.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.86	0.00	-2.96	V	45.90	73.98	28.08	PK
4804	37.19	2.17	-2.96	V	36.4	53.98	17.58	AV
7206	45.57	0.00	6.88	V	52.45	73.98	21.53	PK
7206	33.58	2.17	6.88	V	42.63	53.98	11.35	AV
4804	49.43	0.00	-2.96	H	46.47	73.98	27.51	PK
4804	37.22	2.17	-2.96	H	36.43	53.98	17.55	AV
7206	46.04	0.00	6.88	H	52.92	73.98	21.06	PK
7206	33.65	2.17	6.88	H	42.7	53.98	11.28	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: CH.19

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor	A.F.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	49.95	0.00	-2.60	V	47.35	73.98	26.63	PK
4882	37.75	2.17	-2.60	V	37.32	53.98	16.66	AV
7323	45.94	0.00	6.11	V	52.05	73.98	21.93	PK
7323	34.26	2.17	6.11	V	42.54	53.98	11.44	AV
4882	50.03	0.00	-2.60	H	47.43	73.98	26.55	PK
4882	37.81	2.17	-2.60	H	37.38	53.98	16.60	AV
7323	46.41	0.00	6.11	H	52.52	73.98	21.46	PK
7323	34.32	2.17	6.11	H	42.6	53.98	11.38	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: CH.39


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor	A.F.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.90	0.00	-2.53	V	46.37	73.98	27.61	PK
4960	37.87	2.17	-2.53	V	37.51	53.98	16.47	AV
7440	45.46	0.00	5.73	V	51.19	73.98	22.79	PK
7440	33.74	2.17	5.73	V	41.64	53.98	12.34	AV
4960	50.00	0.00	-2.53	H	47.47	73.98	26.51	PK
4960	37.92	2.17	-2.53	H	37.56	53.98	16.42	AV
7440	46.62	0.00	5.73	H	52.35	73.98	21.63	PK
7440	33.84	2.17	5.73	H	41.74	53.98	12.24	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ RESULT PLOTS (Worst case : x-H)

Radiated Spurious Emissions plot – Average Reading (Ch.0 3rd Harmonic)

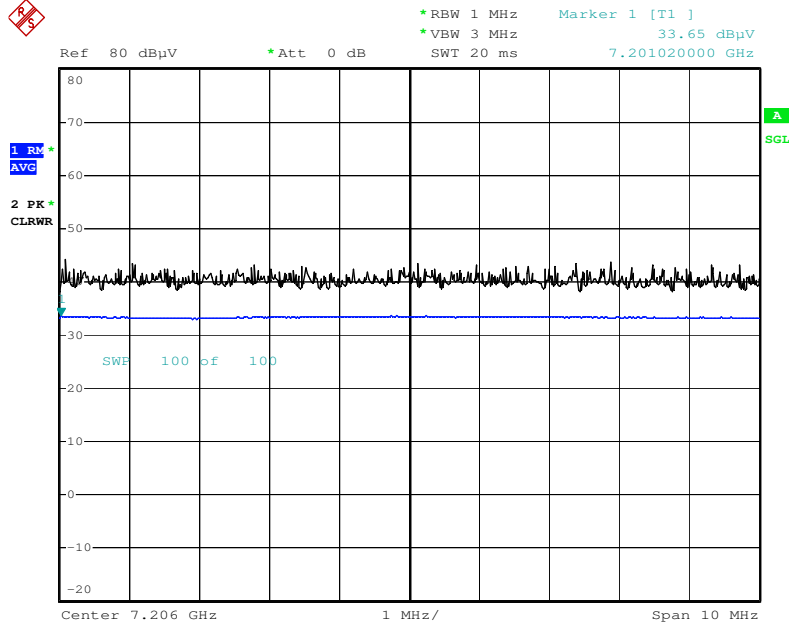

Date: 4.MAY.2016 15:07:44

Radiated Spurious Emissions plot – Peak Reading (Ch.0 3rd Harmonic)

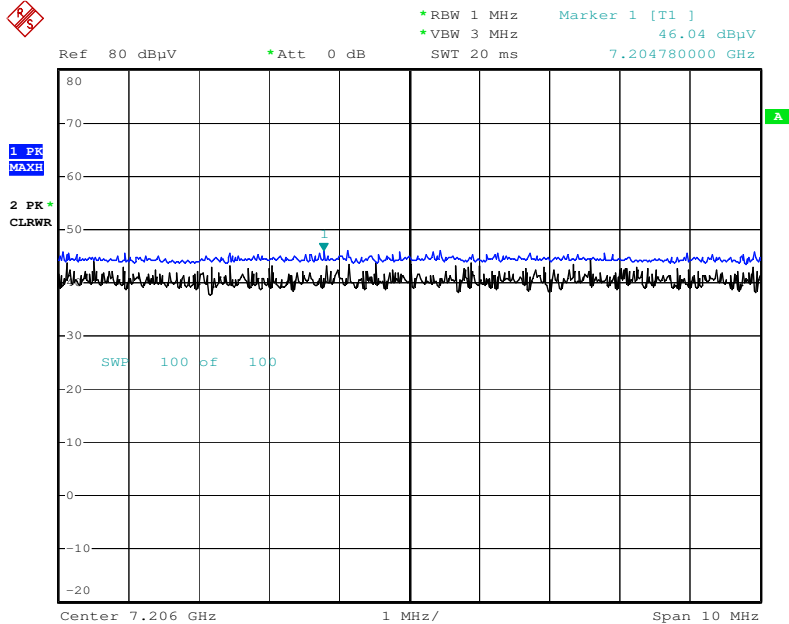

Date: 4.MAY.2016 15:11:00

Note : Only the worst case plots for Radiated Spurious Emissions.

9.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode	BT_LE
Operating Frequency	2402 MHz
Channel No.	0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	27.34	0.00	31.31	H	58.65	73.98	15.33	PK
2390.0	15.44	2.17	31.31	H	48.92	53.98	5.06	AV
2390.0	27.21	0.00	31.31	V	58.52	73.98	15.46	PK
2390.0	15.23	2.17	31.31	V	48.71	53.98	5.27	AV

Notes:

1. Frequency range of measurement = 2310 MHz ~ 2390 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Factor
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode BT_LE
 Operating Frequency 2480 MHz
 Channel No. 39


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	27.08	0.00	31.37	H	58.45	73.98	15.53	PK
2483.5	15.64	2.17	31.37	H	49.18	53.98	4.80	AV
2483.5	26.99	0.00	31.37	V	58.36	73.98	15.62	PK
2483.5	15.54	2.17	31.37	V	49.08	53.98	4.90	AV

Notes:


1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Factor
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

▣ RESULT PLOTS (Worst case : x-H)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

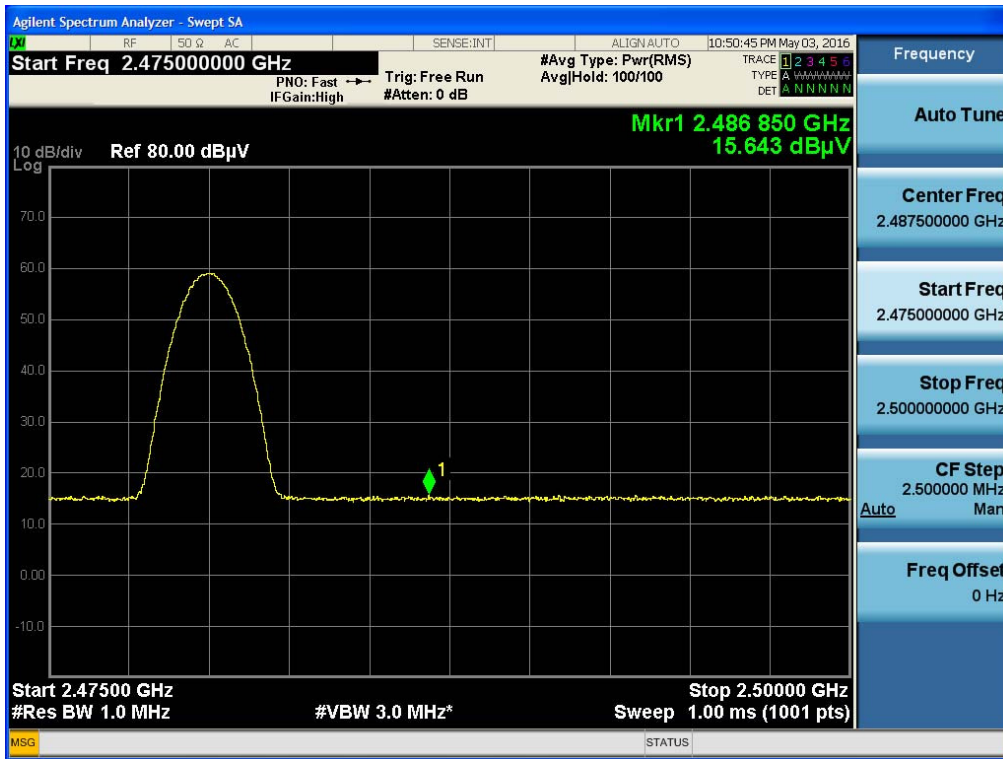

Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

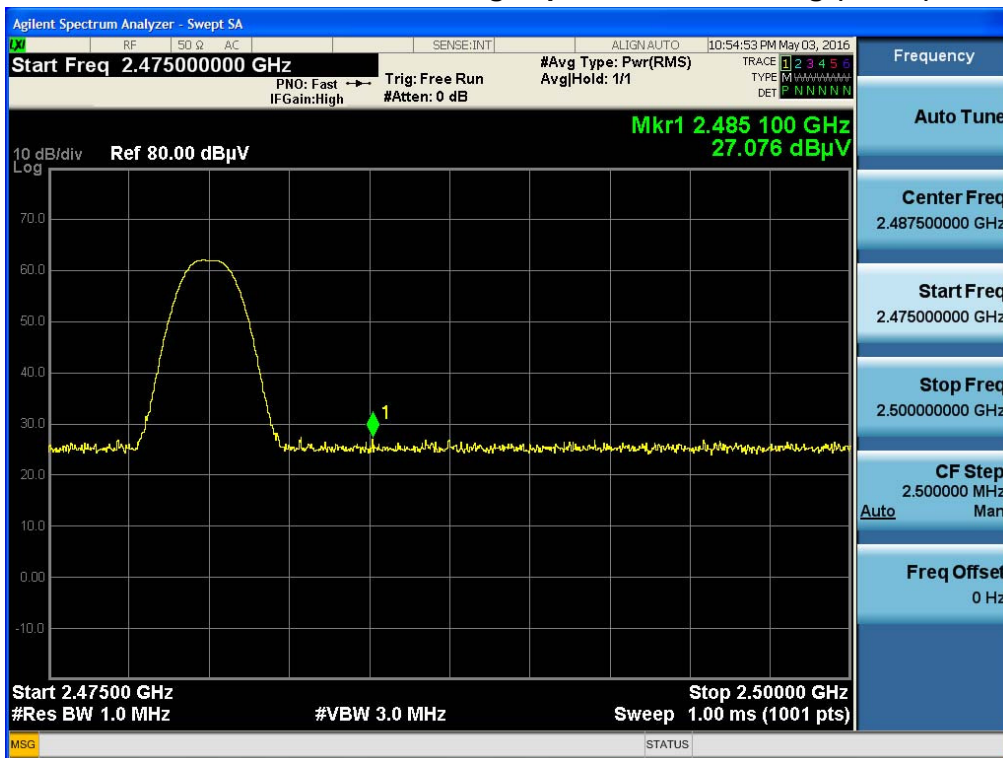

Note : Only the worst case plots for Radiated Restricted Band Edges.

9.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ RESULT PLOTS

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LG-K220H
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BT LE MODE

FCC CLASS B

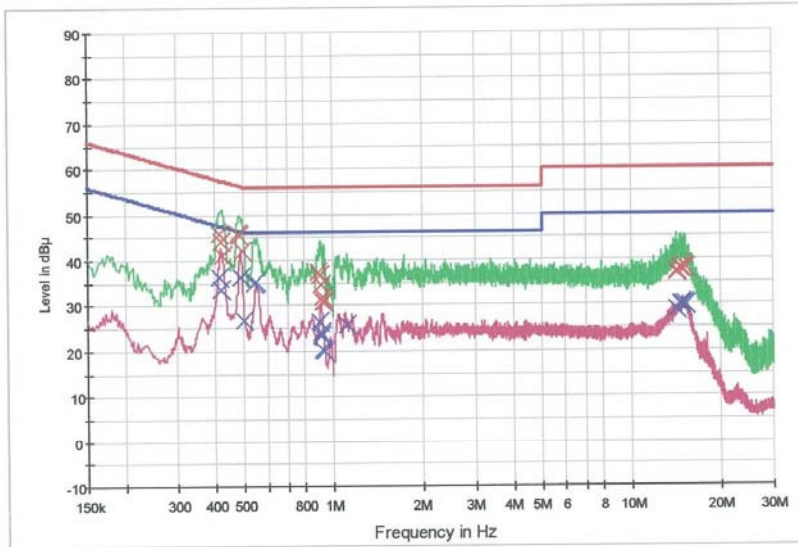

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.414000	45.7	9.000	Off	N	9.6	11.9	57.6
0.418000	44.1	9.000	Off	N	9.6	13.4	57.5
0.424000	40.9	9.000	Off	N	9.6	16.5	57.4
0.480000	45.7	9.000	Off	N	9.6	10.7	56.3
0.484000	45.4	9.000	Off	N	9.6	10.9	56.3
0.492000	41.9	9.000	Off	N	9.6	14.2	56.1
0.892000	37.1	9.000	Off	N	9.7	18.9	56.0
0.898000	36.5	9.000	Off	N	9.7	19.5	56.0
0.906000	34.5	9.000	Off	N	9.7	21.5	56.0
0.916000	31.8	9.000	Off	N	9.7	24.2	56.0
0.920000	31.0	9.000	Off	N	9.7	25.0	56.0
0.934000	30.8	9.000	Off	N	9.7	25.2	56.0
14.202000	37.1	9.000	Off	N	10.1	22.9	60.0
14.212000	37.1	9.000	Off	N	10.1	22.9	60.0
14.550000	37.8	9.000	Off	N	10.1	22.2	60.0
14.658000	38.0	9.000	Off	N	10.1	22.0	60.0
14.962000	38.3	9.000	Off	N	10.1	21.7	60.0
15.150000	37.8	9.000	Off	N	10.1	22.2	60.0

Final Result 2

2016-05-04

오후 4:38:17

Test

2 / 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.416000	36.4	9.000	Off	N	9.6	11.2	47.5
0.420000	33.6	9.000	Off	N	9.6	13.8	47.4
0.486000	36.2	9.000	Off	N	9.6	10.0	46.2
0.500000	26.6	9.000	Off	N	9.6	19.4	46.0
0.544000	34.9	9.000	Off	N	9.6	11.1	46.0
0.548000	35.2	9.000	Off	N	9.6	10.8	46.0
0.898000	26.3	9.000	Off	N	9.7	19.7	46.0
0.906000	24.0	9.000	Off	N	9.7	22.0	46.0
0.910000	23.5	9.000	Off	N	9.7	22.5	46.0
0.920000	20.3	9.000	Off	N	9.7	25.7	46.0
0.934000	19.9	9.000	Off	N	9.7	26.1	46.0
1.114000	25.9	9.000	Off	N	9.7	20.1	46.0
14.212000	28.9	9.000	Off	N	10.1	21.1	60.0
14.658000	29.9	9.000	Off	N	10.1	20.1	50.0
14.662000	30.0	9.000	Off	N	10.1	20.0	50.0
14.962000	30.3	9.000	Off	N	10.1	19.7	50.0
14.982000	30.2	9.000	Off	N	10.1	19.8	50.0
15.150000	29.9	9.000	Off	N	10.1	20.1	50.0

2016-05-04

오후 4:38:17

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LG-K220H
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BT LE MODE

FCC CLASS B

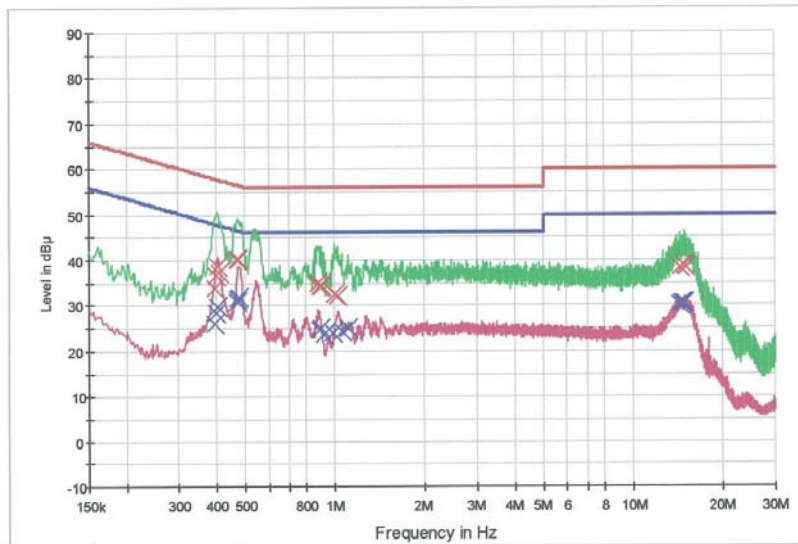

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.398000	34.0	9.000	Off	L1	9.7	23.9	57.9
0.400000	36.5	9.000	Off	L1	9.7	21.3	57.9
0.404000	38.6	9.000	Off	L1	9.7	19.2	57.8
0.410000	37.2	9.000	Off	L1	9.7	20.4	57.6
0.470000	40.2	9.000	Off	L1	9.7	16.3	56.5
0.474000	40.1	9.000	Off	L1	9.7	16.4	56.4
0.880000	34.8	9.000	Off	L1	9.7	21.2	56.0
0.884000	34.1	9.000	Off	L1	9.7	21.9	56.0
0.896000	34.2	9.000	Off	L1	9.7	21.8	56.0
0.900000	34.6	9.000	Off	L1	9.7	21.4	56.0
0.994000	32.6	9.000	Off	L1	9.7	23.4	56.0
1.016000	32.1	9.000	Off	L1	9.7	23.9	56.0
14.338000	38.2	9.000	Off	L1	10.1	21.8	60.0
14.436000	38.4	9.000	Off	L1	10.1	21.6	60.0
14.834000	38.7	9.000	Off	L1	10.1	21.3	60.0
14.848000	38.8	9.000	Off	L1	10.1	21.2	60.0
14.940000	38.5	9.000	Off	L1	10.1	21.5	60.0
15.124000	38.4	9.000	Off	L1	10.2	21.6	60.0

Final Result 2

2016-05-04

오후 4:47:32

Test

2 / 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.398000	26.1	9.000	Off	L1	9.7	21.8	47.9
0.402000	28.3	9.000	Off	L1	9.7	19.5	47.8
0.406000	29.8	9.000	Off	L1	9.7	18.0	47.7
0.470000	30.7	9.000	Off	L1	9.7	15.8	46.5
0.474000	31.5	9.000	Off	L1	9.7	14.9	46.4
0.478000	31.8	9.000	Off	L1	9.7	14.5	46.4
0.892000	24.8	9.000	Off	L1	9.7	21.2	46.0
0.900000	25.1	9.000	Off	L1	9.7	20.9	46.0
0.916000	23.7	9.000	Off	L1	9.7	22.3	46.0
0.988000	24.0	9.000	Off	L1	9.7	22.0	46.0
1.058000	24.5	9.000	Off	L1	9.7	21.5	46.0
1.102000	25.1	9.000	Off	L1	9.7	20.9	46.0
14.338000	30.1	9.000	Off	L1	10.1	19.9	50.0
14.436000	30.1	9.000	Off	L1	10.1	19.9	50.0
14.452000	30.3	9.000	Off	L1	10.1	19.7	50.0
14.658000	30.5	9.000	Off	L1	10.1	19.5	50.0
14.694000	30.5	9.000	Off	L1	10.1	19.5	50.0
14.834000	30.5	9.000	Off	L1	10.1	19.5	50.0

2016-05-04

오후 4:47:32

10. LIST OF TEST EQUIPMENT

10.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	12/28/2015	Annual	100073
Rohde & Schwarz	ESCI / TEST RECEIVER	12/28/2015	Annual	100584
Agilent	E4440A/ Spectrum Analyzer	03/18/2016	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9030A / SIGNAL ANALYZER	11/24/2015	Annual	MY49431210
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /Power Sensor	03/11/2016	Annual	MY52260025
Agilent	87300B/Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC POWER SUPPLY	03/09/2016	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/23/2015	Annual	07560
Rohde & Schwarz	CBT / BLUETOOTH TESTER	03/10/2016	Annual	100808

10.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/15/2015	Biennial	255
Audix	AM4000 / Antenna Position Tower	N/A	N/A	N/A
Audix	Turn Table	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	09/03/2015	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	01/15/2016	Annual	839117/011
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/23/2015	Annual	101068-SZ
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	06/29/2015	Annual	8
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	07/06/2015	Annual	2
Rohde & Schwarz	LOOP ANTENNA	02/23/2016	Biennial	1513-175
Agilent	8493C-10 / Attenuator(10 dB)	08/20/2015	Annual	76649
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964
CERNEX	CBL26405040 / Power Amplifier	07/09/2015	Annual	25956
Rohde & Schwarz	CBT / BLUETOOTH TESTER	03/10/2016	Annual	100808
TESCOM	TC-3000C / Bluetooth Tester	04/01/2016	Annual	3000C000276