

FCC BT LE REPORT

FCC Certification

Applicant Name:

LG Electronics MobileComm U.S.A., Inc.

Address:

1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue: January 13, 2016 Test Site/Location: HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majangmyeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA Report No.: HCT-R-1601-F028 HCT FRN: 0005866421

IC Recognition No.: 5944A-5

FCC ID

: ZNFK430H

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-K430H
FCC Additional Model(s):	LGK430H,K430H
EUT Type:	GSM WCDMA LTE Phone with BT & WLAN
Peak RF Output Power:	-0.327 dBm (0.927 mW)
Frequency Range:	2402 MHz -2480 MHz
Modulation type	GFSK
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247
Note	The device, LG-K430H (FCC ID: ZNFK430H) is electrically identical compare to LG-K430T (FCC ID: ZNFK430T), confirmed by spot-check tests. Therefore, the test result data of LG-K430T (FCC ID: ZNFK430T) shall be reused.

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant

to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by : Kyung Soo Kang Test Engineer of RF Team

Approved by

: Sang Jun Lee Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1601-F028	January 13, 2016	- First Approval Report



Table of Contents

1. GENERAL INFORMATION 4
2. EUT DESCRIPTION 4
3. TEST METHODOLOGY
3.1 EUT CONFIGURATION
3.2 EUT EXERCISE
3.3 GENERAL TEST PROCEDURES
3.4 DESCRIPTION OF TEST MODES 5
4. INSTRUMENT CALIBRATION 6
5. FACILITIES AND ACCREDITATIONS
5.1 FACILITIES
5.2 EQUIPMENT
6. ANTENNA REQUIREMENTS 6
7. SUMMARY TEST OF RESULTS
8. TEST RESULT
8.1 DUTY CYCLE
8.2 6dB BANDWIDTH MEASUREMENT 10
8.2 6dB BANDWIDTH MEASUREMENT 10 8.3 OUTPUT POWER MEASUREMENT 13
8.3 OUTPUT POWER MEASUREMENT 13
8.3 OUTPUT POWER MEASUREMENT
8.3 OUTPUT POWER MEASUREMENT. 13 8.4 POWER SPECTRAL DENSITY. 20 8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS
8.3 OUTPUT POWER MEASUREMENT. 13 8.4 POWER SPECTRAL DENSITY. 20 8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS



Model: LG-K430H

1. GENERAL INFORMATION

Applicant:	LG Electronics MobileComm U.S.A., Inc
Address:	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID:	ZNFK430H
EUT Type:	GSM WCDMA LTE Phone with BT & WLAN
FCC Model name(s):	LG-K430H
FCC Additional Model(s):	LGK430H,K430H
Date(s) of Tests:	December 22, 2015 ~ January 07, 2016
Place of Tests:	HCT Co., Ltd. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
	(IC Recognition No. : 5944A-5)

2. EUT DESCRIPTION

FCC Model Name	LG-K430H	LG-K430H		
FCC Additional Model(s)	LGK430H,K430H			
EUT Type	GSM WCDMA LT	E Phone with BT & WLAN		
Power Supply	DC 3.8 V			
Pottony Information	Model: BL-45A1H	1		
Battery Infomation	Type: Li-ion Batte	ery		
Frequency Range	TX: 2402 MHz ~ 2	2480 MHz		
	RX: 2402 MHz ~ 2480 MHz			
May DE Outrast Damas	Peak	-0.327 dBm (0.927 mW)		
Max. RF Output Power	Average	-0.509 dBm (0.889 mW)		
BT Operating Mode	BT_Low Energy	Mode		
Modulation Type	GFSK			
Number of Channels	40 Channels			
	Manufacturer: AT&C Co.LTD.			
Antenna Specification	Antenna type: IN	Antenna type: INTERNAL ANTENNA		
	Peak Gain : 0.61	dBi		



3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r03 dated June 09, 2015 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) Operating Under §15.247" were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

All equipments(spectrum, antenna, accessory, etc.) for measurement is calibrated in accordance with the requirements of C63.5 (latest edition).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203



7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz		PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band	CONDUCTED	PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.6.1	BADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.2	NAUNIEU	PASS




8. TEST RESULT 8.1 DUTY CYCLE

TEST PROCEDURE

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T \leq 16.7 microseconds.)

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested accroding to the zerospan measurement method, 6.0)b) in KDB 558074(issued 06/09/2015)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if T \leq 6.25 microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are > 50/T.

- 1. RBW = 8 MHz (the largest available value)
- 2. VBW = 8 MHz (≥ RBW)
- 3. SPAN = 0 Hz
- 4. Detector = Peak
- 5. Number of points in sweep > 100
- 6. Trace mode = Clear write
- 7. Measure T_{total} and T_{on}
- 8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10^{10}(1/Duty Cycle)$

LE Mode	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor
	0.3787	0.6245	0.6065	2.17



RESULT PLOTS

Agilent Spectrum Analyzer - Swept SA			
M RL RF 50 Ω AC Center Freq 2.402000000		ALIGNAUTO 10:26:03 AM Dec 31, 2015 #Avg Type: Pwr(RMS) TRACE 1 2 3 4 5 6	Frequency
Ref Offset 10.7 dB 10 dB/div Ref 15.00 dBm	PNO: Fast ++- Trig: Free Run IFGain:Low Atten: 16 dB	ΔMkr3 624.5 μs -5.26 dB	Auto Tune
5.00 -15.0	X2	¹ Δ2 3Δ4	Center Fred 2.402000000 GHz
-25.0	www.withant		Start Freq 2.402000000 GHz
-65.0			Stop Fred 2.402000000 GHz
Center 2.402000000 GHz Res BW 8 MHz	#VBW 8.0 MHz	Span 0 Hz Sweep 1.267 ms (1001 pts)	CF Step 8.000000 MH
MKR MODE TRC SCL Χ 1 Δ2 1 t (Δ) 2 F 1 t	Υ 378.7 μs (Δ) 0.90 dB 475.0 μs -4.90 dBm	FUNCTION FUNCTION WIDTH FUNCTION VALUE	<u>Auto</u> Mar
3 Δ4 1 t (Δ) 4 F 1 t 5 6 6 6	624.5 μs (Δ) -5.26 dB 475.0 μs -4.90 dBm		Freq Offse 0 Hz
7 8 9 10 11 12			
MSG		STATUS	



8.2 6dB BANDWIDTH MEASUREMENT

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.1 in KDB 558074, issued 06/09/2015)


RBW = 100 kHz VBW ≥ 3 x RBW Detector = Peak Trace mode = max hold Sweep = auto couple Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.



RESULT PLOTS

6dB Bandwidth plot (Low-CH 0)

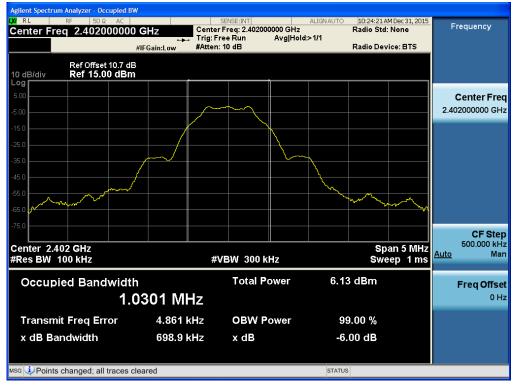

6dB Bandwidth plot (Mid-CH 19)







6dB Bandwidth plot (High-CH 39)



8.3 OUTPUT POWER MEASUREMENT

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 9.1.1 in KDB 558074, issued 06/09/2015)
 - RBW ≥ DTS Bandwidth
 - VBW ≥ 3 x RBW

SPAN ≥ 3 x RBW

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level

Average Power (Procedure 9.2.2.4 in KDB 558074, issued 06/09/2015)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW \geq 3 x RBW.

Number of points in sweep $\ge 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\le \text{RBW}/2$,

so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".



Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor Output Power = 10 dBm + 10 dB + 0.8 dB + 0.2 dB = 21.0 dBm

Note :

- 1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.



TEST RESULTS-Peak

Conducted Output Power Measurements

LE Mode		Measured	Limit
Frequency[MHz]	Channel No.	Power(dBm)	(dBm)
2402	0	-0.402	30
2440	19	-0.741	30
2480	39	-0.327	30

TEST RESULTS-Average

Conducted Output Power Measurements

LE Mode				Measured	
Frequency[MHz]	Channel No.	Measured Power(dBm)	Duty Cycle Factor	Power(dBm) + Duty Cycle Factor	Limit (dBm)
2402	0	-2.787	2.17	-0.615	30
2440	19	-3.072	2.17	-0.900	30
2480	39	-2.681	2.17	-0.509	30



RESULT PLOTS-Peak


lent Spectrum Analyzer - Swept SA a RL :30 AM Dec 31, 2015 Frequency #Avg Type: Pwr(RMS) Avg|Hold: 1/1 Center Freq 2.402000000 GHz PNO: Fast TRACE 123456 TYPE MWWWWW DET PPPPP Trig: Free Run Atten: 10 dB Auto Tune Mkr1 2.402 134 GHz -0.402 dBm Ref Offset 10.7 dB Ref 10.70 dBm 10 dB/div **Center Freq ≜**¹ 2.402000000 GHz Start Freq 2.400500000 GHz Stop Freq 2.403500000 GHz CF Step 300.000 kHz <u>Auto</u> Man Freq Offset 0 Hz Span 3.000 MHz Sweep 1.07 ms (1000 pts) Center 2.402000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Points changed; all traces cleared STATUS

Conducted Output Power (Low-CH 0)

Conducted Output Power (Mid-CH 19)

Agilent Spectrum Analyzer - Swept SA					
RL RF 50 Ω AC Center Freq 2.440000000	GHz	SENSE:INT	ALIGNAUTO #Avg Type: Pwr(RMS)	10:27:04 AM Dec 31, 2015 TRACE 1 2 3 4 5 6	Frequency
Ref Offset 10.7 dB 10 dB/div Ref 10.70 dBm	PNO: Fast ↔ IFGain:Low	. Trig: Free Run Atten: 10 dB	Avg Hold: 1/1 Mkr1	2.439 848 GHz -0.741 dBm	Auto Tune
		↓ 1			Center Freq 2.440000000 GHz
-9.30					Start Freq 2.438500000 GHz
-29.3					Stop Freq 2.441500000 GHz
-49.3					CF Step 300.000 kHz <u>Auto</u> Mar
-69.3					Freq Offse 0 Hz
Center 2.440000 GHz #Res BW 1.0 MHz	#VBW	3.0 MHz	Sweep	Span 3.000 MHz 1.07 ms (1000 pts)	
мsg i)Points changed; all traces c	leared		STATUS		



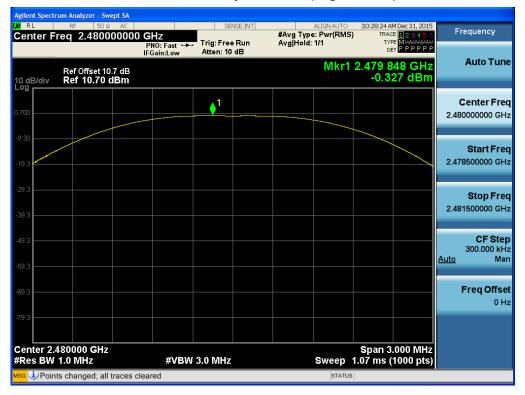


Conducted Output Power (High-CH 39)



RESULT PLOTS-Average

Conducted Output Power (Low-CH 0)

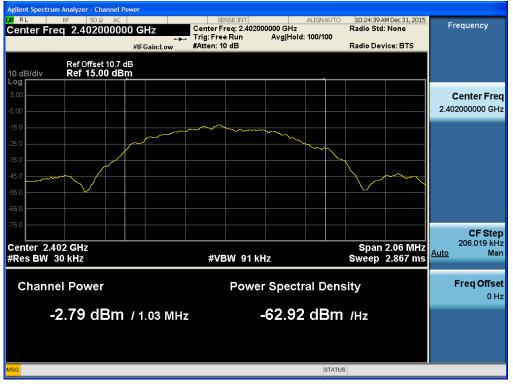


Conducted Output Power (Mid-CH 19)





Model: LG-K430H

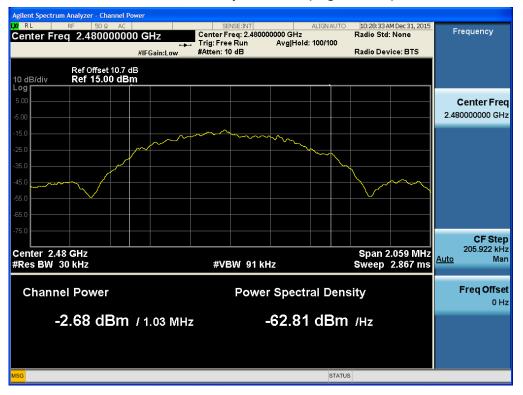

Conducted Output Power (High-CH 39)




8.4 POWER SPECTRAL DENSITY

Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

TEST CONFIGURATION



TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 06/09/2015

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

 $RBW = 3 kHz \le RBW \le 100 kHz.$

VBW \geq 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm Note :

- 1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So,10.7 dB is offset for 2.4 GHz Band.



Model: LG-K430H

TEST RESULTS

Frequency Channel		Test Result			
(MHz)	No.	Mode	PSD	Limit	Pass/
			(dBm)	(dBm)	Fail
2402	0		-15.586	8	Pass
2440	19	LE	-16.335	8	Pass
2480	39		-15.593	8	Pass

Conducted Power Density Measurements



RESULT PLOTS



Power Spectral Density (Low-CH 0)

Power Spectral Density (Mid-CH 19)







Power Spectral Density (High-CH 39)




8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.205(c)).

Limit : 20 dBc

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 06/09/2015)

RBW = 100 kHz

VBW ≥ 3 x RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points $\geq 2^{*}$ Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.



- 2. Spectrum offset = Attenuator loss + Cable loss
- 3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.
- 4. In case of conducted spurious emissions test, please check factors blow table.
- 5. In order to simplify the report, attached plots were only the worst case channel and data rate.

FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35
8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04



Model: LG-K430H

17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53

Note : 1. '*' is fundamental frequency range.

2. Factor = Cable loss + Attenuator loss




RESULT PLOTS




BandEdge (Low-CH 0)

BandEdge (High-CH 39)

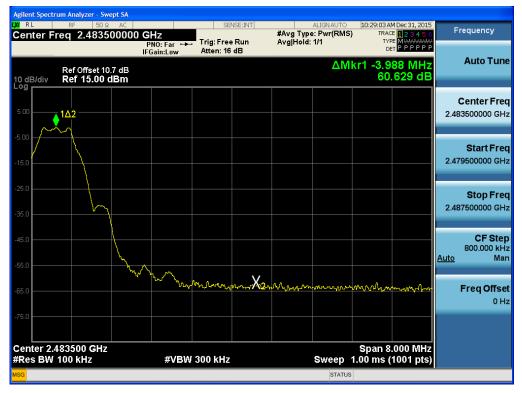




30 MHz ~ 1 GHz

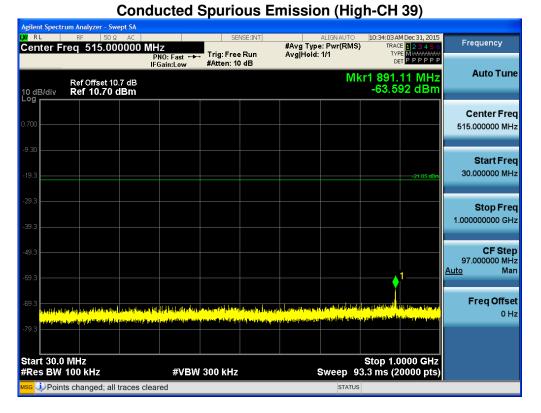

1 GHz ~ 3 GHz

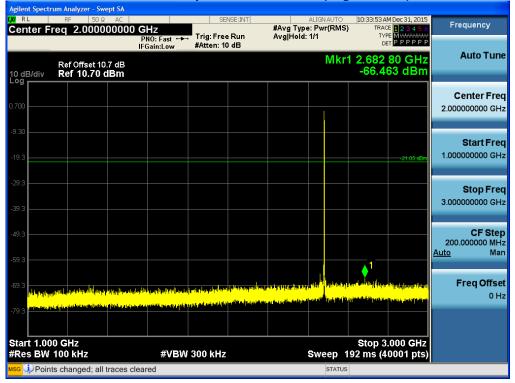




3 GHz ~ 5 GHz

Conducted Spurious Emission (High-CH 39) RL :14 AM Dec 31, 2015 #Avg Type: Pwr(RMS) Avg|Hold: 1/1 Frequency Center Freq 4.000000000 GHz 3 4 5 RACE Trig: Free Run #Atten: 10 dB түр PNO: Fast IFGain:Low Auto Tune Mkr1 4.991 95 GHz -67.313 dBm Ref Offset 10.7 dB Ref 10.70 dBm 10 dB/div **Center Freq** 4.000000000 GHz Start Freq 3.000000000 GHz Stop Freq 5.00000000 GHz **CF** Step 200.000000 MHz Man <u>Auto</u> **Freq Offset** 0 Hz Stop 5.000 GHz Sweep 192 ms (40001 pts) Start 3.000 GHz #Res BW 100 kHz #VBW 300 kHz Points changed; all traces cleared


$5~\text{GHz}\sim7~\text{GHz}$

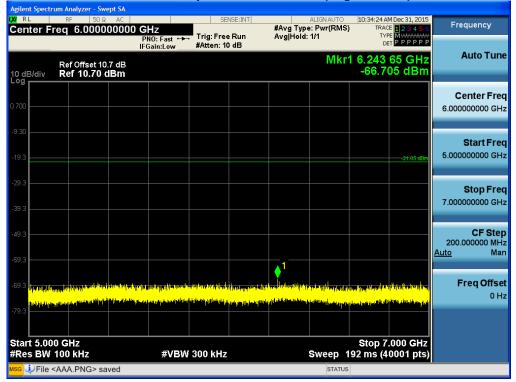




7 GHz ~ 9 GHz

Conducted Spurious Emission (High-CH 39)

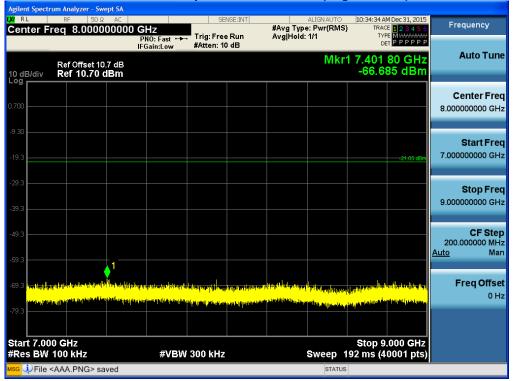

9 GHz ~ 11 GHz

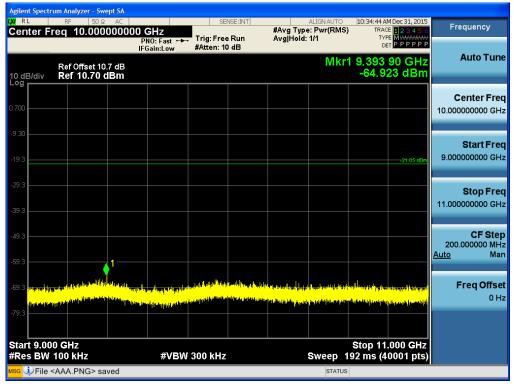



11 GHz ~ 13 GHz


Conducted Spurious Emission (High-CH 39) RL 5 AM Dec 31, 2015 #Avg Type: Pwr(RMS) Avg|Hold: 1/1 Frequency Center Freq 12.000000000 GHz TRACE 34: Trig: Free Run #Atten: 10 dB түр PNO: Fast IFGain:Low Auto Tune Mkr1 12.640 60 GHz -65.180 dBm Ref Offset 10.7 dB Ref 10.70 dBm 10 dB/div **Center Freq** 12.00000000 GHz Start Freq 11.00000000 GHz Stop Freq 13.00000000 GHz **CF Step** 200.000000 MHz <u>uto</u> Man <u>Auto</u> 1 Freq Offset 0 Hz Start 11.000 GHz #Res BW 100 kHz Stop 13.000 GHz Sweep 192 ms (40001 pts) #VBW 300 kHz File <AAA.PNG> saved

13 GHz ~ 15 GHz

Agilent Spectrum Analyzer - Swept SA								
Center Freq 14		GHz N0: East ↔ Trig: Fre		#Avg Type Avg Hold:	ALIGNAUTO Professional Contemporation Alignment Alignme	TRAC	M Dec 31, 2015 E 1 2 3 4 5 6 M WWWWWW T P P P P P P	Frequency
10 dB/div Ref 10	⊮ set 10.7 dB 0.70 dBm	Gain:Low #Atten:	10 dB		Mkr1	14.317	55 GHz 14 dBm	Auto Tune
0.700								Center Freq 14.00000000 GHz
-9.30							-21.05 dBm	Start Freq 13.000000000 GHz
-29.3								Stop Freq 15.00000000 GHz
-49.3								CF Step 200.000000 MHz Auto Man
-69.3 <mark>dallanlingebeti ya liki</mark>	la de les étamitésistesset Algun de les férigeset	hay the hand states for the defined on the polarity for the second states of the		1 - C	dili Gerlin gerstadi e verdu dista en utverper	an laboration Apro-restation	erenden of streak (we feasible and streak (Freq Offset 0 Hz
-79.3 Start 13.000 GHz							.000 GHz	
#Res BW 100 kH		#VBW 300 kH	Z		Sweep 1 STATUS	92 ms (4	0001 pts)	



15 GHz ~ 17 GHz

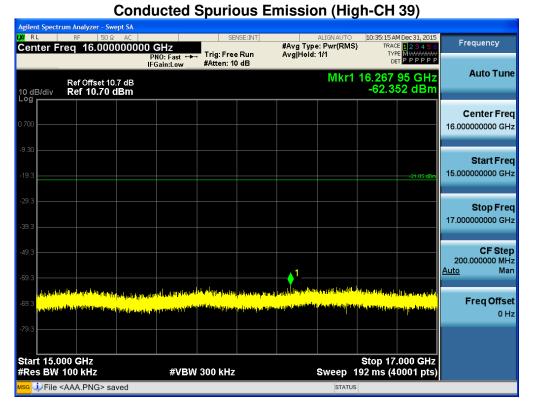

17 GHz ~ 19 GHz

Center Freq 13.000000000 Frast Trig: Free Run #Atten: 10 dB AvgHold: 1/1 Trig: Free Run PEP PP P Ref Offset 10.7 dB Mkr1 18.996 80 GHz -61.128 dBm Auto Tur 0 dB/div Ref 10.70 dBm -61.128 dBm 0.700 -61.128 dBm -61.128 dBm 19.00000000 G -61.128 dBm -61.128 dBm -93 -93 -93 -93 -93 -93 -94 dBm -94 dBm -94 dBm<	XI RL	um Analyzer - Swe RF 50 Ω	AC		SE	NSE:INT	#Aug Type	ALIGNAUTO		M Dec 31, 2015	Frequency
Ref Offset 10.7 dB INIKIT 16.986 80 CGH2 0 dB/div Ref 10.70 dBm -61.128 dBm -61.128 dBm -61.128 dBm 930 -61.128 dBm 931 -61.128 dBm 933 -61.128 dBm 934 -61.128 dBm 935 -61.128 dBm 936 -61.128 dBm 937 -61.128 dBm 938 -61.128 dBm 939 -61.128 dBm 931 -61.128 dBm 932 -61.128 dBm 933 -61.128 dBm 934 -61.128 dBm 935 -61.128 dBm 936 -61.128 dBm 937 -61.128 dBm 938 -61.128 dBm 939 -61.128 dBm 931 -61.128 dBm 932 -61.128 dBm 933 -61.128 dBm 934 -61.128 dBm 935 -61.128 dBm 941 -61.128 dBm 941 -61.128 dBm 941 -61.128 dBm 941 -61.128 dBm <t< th=""><th>Senter F</th><th>req 18.000</th><th>Р</th><th>NO: Fast +</th><th></th><th></th><th></th><th></th><th>TY</th><th>PE M WARANA</th><th></th></t<>	Senter F	req 18.000	Р	NO: Fast +					TY	PE M WARANA	
Image: Start Free of Start								Mkr1	18.986 -61.1	80 GHz 28 dBm	Auto Tune
9.30 9.30											Center Free
19.3 Image: state free state sta											18.000000000 GH:
29.3 21.000											Start Free
33 3 Image: Stop Free of the second	-19.3									-21:05 dDm	17.000000000 GH2
 39.3 49.3 49.3 49.3 49.3 49.4 <li< td=""><td>-29.3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>Stop Free</td></li<>	-29.3										Stop Free
200.00000 MI 200 200 200.00000 MI 200	-39.3										19.00000000 GH.
	49.3										CF Step 200.000000 MH
	59.3	Mar In.						1.0		1 http://www.	<u>Auto</u> Mar
	-69.3 <mark>11111111</mark>								<mark>i (persion (-standar) sen</mark> Antenne (-standar) sen	an a	Freq Offset
Start 17.000 GHz Stop 19.000 GHz	Start 17.0	00 CHz							Stop 10	000 CHz	
Start 17.000 GH2 Stop 19.000 GH2 Gres BW 100 kHz #VBW 300 kHz Sweep 192 ms (40001 pts) So ① File <aaa, png=""> saved status</aaa,>	Res BW	100 kHz		#VBW	300 kHz			_	192 ms (4	0001 pts)	



19 GHz ~ 21 GHz

RL 5 AM Dec 31, 2015 #Avg Type: Pwr(RMS) Avg|Hold: 1/1 Frequency Center Freq 20.000000000 GHz 34: RACE Trig: Free Run #Atten: 10 dB түр PNO: Fast IFGain:Low Auto Tune Mkr1 20.761 50 GHz -58.910 dBm Ref Offset 10.7 dB Ref 10.70 dBm 10 dB/div **Center Freq** 20.00000000 GHz Start Freq 19.00000000 GHz Stop Freq 21.00000000 GHz **CF Step** 200.000000 MHz <u>uto</u> Man ▲1 <u>Auto</u> Freq Offset 0 Hz Start 19.000 GHz #Res BW 100 kHz Stop 21.000 GHz Sweep 192 ms (40001 pts) #VBW 300 kHz File <AAA.PNG> saved

21 GHz ~ 23 GHz

Agilent Spectrum Analyzer - Sw	vept SA								
X RL RF 503 Center Freq 22.000	PN	0: Fast 🔸	SEN Trig: Free #Atten: 10		#Avg Type Avg Hold:	ALIGNAUTO : Pwr(RMS) 1/1	TRACE	1 Dec 31, 2015 1 2 3 4 5 6 M WWWWWW P P P P P P	Frequency
Ref Offset 1 10 dB/div Ref 10.70	0.7 dB	ain:Low	#Aπen: 10	dB		Mkr1	21.005		Auto Tune
0.700									Center Freq 22.000000000 GHz
.19.3								-21.85 dDm	Start Fred 21.000000000 GHz
-29.3									Stop Freq 23.000000000 GHz
-49.3 -59.3 Theorem is a second secon	h t a di	i fan an ar							CF Step 200.000000 MH ; <u>Auto</u> Mar
-59.3 Therefore the second sec	en al la serie de la companya de la serie de la companya de la companya de la companya de la companya de la com La companya de la comp	ana in inini ana 19	erne Frinklik (ny fi <mark>Ernelten de 18. de</mark> 17	lan, din talap bina <mark>nganakapat kangangangangangangangan banangangan kangan kangan kangan kangan kangangan kangangan kangangan kang Ngangangan kangan kanganganganganganganganganganganganganga</mark>	dadina suga a sebera da <mark>Anon a sebera da angle</mark>	lilanan philippin Mirippe bendipiten	die feste die teilenste Ageneratieren ander die state	nderforden verspillen for _{Altern} deren gener die beer	Freq Offset 0 Hz
-/*** Start 21.000 GHz #Res BW 100 kHz		#VBW 3	300 kHz			Sweep 1	Stop 23. 92 ms (40	000 GHz 001 pts)	
<mark>⊮sg</mark> ᢤFile <aaa.png> s</aaa.png>	aved					STATUS			



23 GHz ~ 25 GHz

RL 56 AM Dec 31, 2015 Center Freq 24.000000000 GHz PN0: Fast #Avg Type: Pwr(RMS) Avg[Hold: 1/1 Frequency TRACE 123456 TYPE MWWWWW DET PPPPP Trig: Free Run #Atten: 10 dB Auto Tune Mkr1 24.935 20 GHz -56.021 dBm Ref Offset 10.7 dB Ref 10.70 dBm 10 dB/div **Center Freq** 24.00000000 GHz Start Freq 23.00000000 GHz Stop Freq 25.00000000 GHz CF Step 200.000000 MHz <u>uto</u>Man ۵ <u>Auto</u> Freq Offset 0 Hz Start 23.000 GHz #Res BW 100 kHz Stop 25.000 GHz Sweep 192 ms (40001 pts) #VBW 300 kHz File <AAA.PNG> saved



8.6 RADIATED MEASUREMENT. 8.6.1 RADIATED SPURIOUS EMISSIONS.


Test Requirements and limit, §15.205, §15.209

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3



Test Configuration


Below 30 MHz

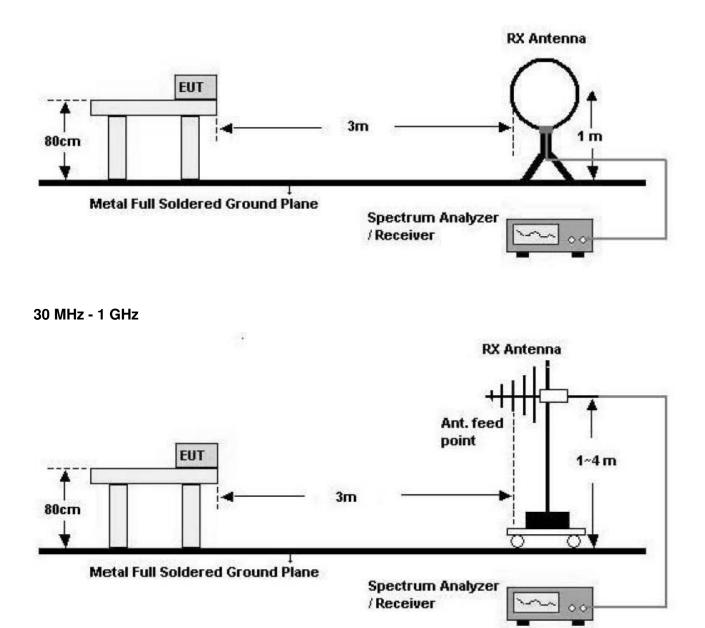



Model: LG-K430H

Above 1 GHz

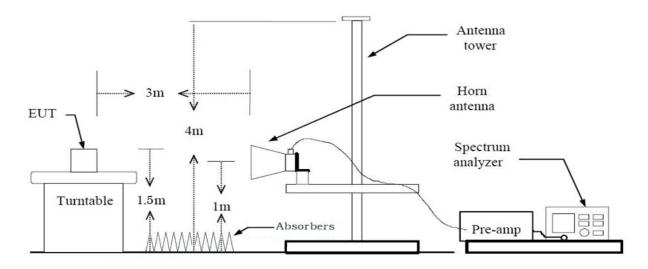

TEST PROCEDURE USED

Method 12.1 in KDB 558074, issued 06/09/2015

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW \geq 3 x RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table T —RBW as a function of	Table T—RBW as a function of frequency					
Frequency	RBW					
9-150 kHz	200-300 Hz					
0.15-30 MHz	9-10 kHz					
30-1000 MHz	100-120 kHz					
> 1000 MHz	1 MHz					

Table 1 — RBW as a function of frequency



Average (duty cycle < 98%, duty cycle variations are less than ±2%)
Set RBW = 1 MHz
Set VBW ≥ 3 x RBW
Detector = RMS.
Averaging type = power (*i.e.*, RMS).
Sweep time = auto.

Trace mode = average (at least 100 traces).

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.



TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin	
MHz	dBµN/m	dBm /m	dBm	(H/V)	dBµN/m	dBµN/m	dB	
No Critical peaks found								

- 1. Measuring frequencies from 9 kHz to the 30MHz.
- 2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
- 3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
- 4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
- 5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBµN/m	dBm /m	dBm	(H/V)	dBµN/m	dBµN/m	dB
No Critical peaks found							

- 1. Measuring frequencies from 30 MHz to the 1 GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
- 3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Model: LG-K430H

Above 1 GHz

Operation Mode: CH Low(LE Mode)

Frequency	Reading	A.F.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV/m]	[dBm]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4804	49.17	-2.96	V	46.21	73.98	27.77	PK
4804	37.08	-2.96	V	34.12	53.98	19.86	AV
7206	46.48	6.88	V	53.36	73.98	20.62	PK
7206	33.75	6.88	V	40.63	53.98	13.35	AV
4804	49.26	-2.96	Н	46.30	73.98	27.68	PK
4804	37.12	-2.96	Н	34.16	53.98	19.82	AV
7206	46.52	6.88	Н	53.40	73.98	20.58	PK
7206	33.88	6.88	Н	40.76	53.98	13.22	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. The Reading values are already added value of the duty cycle factor.
- 5. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Frequency	Reading	A.F.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV/m]	[dBm]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4882	50.02	-2.60	V	47.42	73.98	26.56	PK
4882	37.76	-2.60	V	35.16	53.98	18.82	AV
7323	46.18	6.11	V	52.29	73.98	21.69	PK
7323	33.92	6.11	V	40.03	53.98	13.95	AV
4882	50.04	-2.60	Н	47.44	73.98	26.54	PK
4882	37.81	-2.60	Н	35.21	53.98	18.77	AV
7323	46.23	6.11	Н	52.34	73.98	21.64	PK
7323	33.95	6.11	Н	40.06	53.98	13.92	AV

Operation Mode: CH Mid(LE Mode)

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. The Reading values are already added value of the duty cycle factor.
- 5. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.




Frequency	Reading	A.F.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV/m]	[dBm]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
4960	49.54	-2.53	V	47.01	73.98	26.97	PK
4960	37.34	-2.53	V	34.81	53.98	19.17	AV
7440	46.05	5.73	V	51.78	73.98	22.20	PK
7440	32.98	5.73	V	38.71	53.98	15.27	AV
4960	49.61	-2.53	Н	47.08	73.98	26.90	PK
4960	37.41	-2.53	Н	34.88	53.98	19.10	AV
7440	46.14	5.73	Н	51.87	73.98	22.11	PK
7440	34.05	5.73	Н	39.78	53.98	14.20	AV

Operation Mode: CH High(LE Mode)


- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. The Reading values are already added value of the duty cycle factor.
- 5. Total = Reading Value + Antenna Factor + Cable Loss Amp Gain
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



RESULT PLOTS Radiated Spurious Emissions plot – Average Reading (LE, Ch. Low 3rd Harmonic)

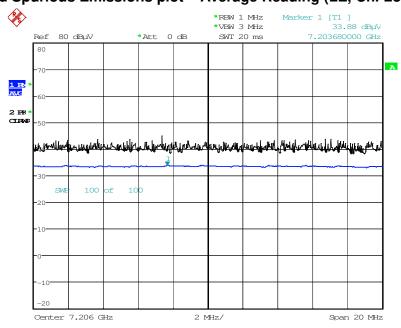

Date: 5.JAN.2016 05:45:51

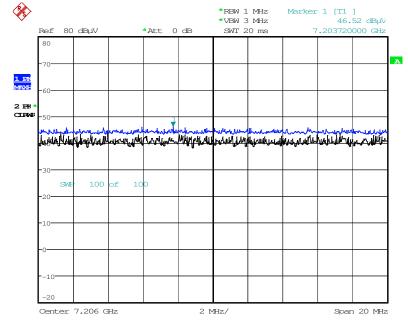

Radiated Spurious Emissions plot – Peak Reading (LE, Ch. Low 3rd Harmonic)

Note : Only the worst case plots for Radiated Spurious Emissions.

Date: 5.JAN.2016 05:45:11



8.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

BT_LE
2402 MHz
0 Ch

Frequency	Reading	A.F.+CL	Ant. Pol.	Total	Limit		Measurement
[MHz]	[dBuV/m]	[dBm]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Туре
2390.0	26.61	31.31	Н	57.92	73.98	16.06	PK
2390.0	14.84	31.31	Н	46.15	53.98	7.83	AV
2390.0	26.67	31.31	V	57.98	73.98	16.00	PK
2390.0	14.88	31.31	V	46.19	53.98	7.79	AV

- 1. Frequency range of measurement = 2310 MHz ~ 2390 MHz
- 2. The Reading values are already added value of the duty cycle factor.
- 3. Total = Reading Value + Antenna Factor + Cable Loss
- 4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
- 5. The radiated restricted band edge measurements are measured with a spectrum analyzer connected to the receive antenna while the EUT is transmitting.



Operation Mode	BT_LE
Operating Frequency	2480 MHz
Channel No	39 Ch

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dBm]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	27.36	31.37	н	58.73	73.98	15.25	PK
2483.5	15.28	31.37	н	46.65	53.98	7.33	AV
2483.5	27.42	31.37	V	58.79	73.98	15.19	PK
2483.5	15.33	31.37	V	46.70	53.98	7.28	AV

- 1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
- 2. The Reading values are already added value of the duty cycle factor.
- 3. Total = Reading Value + Antenna Factor + Cable Loss
- 4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
- 5. The radiated restricted band edge measurements are measured with a spectrum analyzer connected to the receive antenna while the EUT is transmitting.



RESULT PLOTS

Radiated Restricted Band Edges plot – Average Reading (LE, High Ch.)

Agilent Spectrum Analyzer - Swept SA 4 PM Jan 05, 2016 #Avg Type: RMS Avg|Hold: 100/100 Frequency Start Freq 2.483500000 GHz TRACE 1 2 TYPE A M DET A P Trig: Free Run #Atten: 0 dB PNO: Fast IFGain:High Auto Tune Mkr1 2.498 795 5 GHz 15.334 dBµV 10 dB/div Log Ref 80.00 dBµV **Center Freq** 2.491750000 GHz Start Freq 2.483500000 GHz Stop Freq 2.500000000 GHz CF Step 1.650000 MHz V Man <u>Auto</u> **Freq Offset** 0 Hz Start 2.483500 GHz #Res BW 1.0 MHz Stop 2.500000 GHz Sweep 1.000 ms (1001 pts) #VBW 3.0 MHz* STATUS

Radiated Restricted Band Edges plot – Peak Reading (LE, High Ch.)

a Start Free	RF 50 Ω 2.4835000		Trig: Fre		#Avg Typ Avg Hold:		TRAC	4 Jan 05, 2016 E 1 2 3 4 5 6 PE MMWWWW T P P N N N N	Frequency
0 dB/div	Ref 80.00 dE					Mkr1 2	.488 840 27.42	δ 0 GHz 0 dBμV	Auto Tur
70.0									Center Fre 2.491750000 GF
50.0									Start Fre 2.483500000 GH
40.0 30.0		∳ ¹							Stop Fre 2.500000000 GF
*}ri~	เหกเหล่าสไปใหลงเการเป็นสุดคร	and have the second	itravij e k iletovije konstruktivni k	er fall her menter	har we allow a sound and a sound	nah kuh dala	hantan markan sa	haaddaa ar a	CF Ste 1.650000 MI <u>Auto</u> M
).00									Freq Offs 01
itart 2.48	3500 GHz	#\/	BW 3.0 MHz				Stop 2.500 1.000 ms (
SG SG		#1				SWEED		roor pis)	

Note : Only the worst case plots for Radiated Restricted Band Edges.



8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

	Limits	(dBµV)
Frequency Range (MHz)	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE


- 1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
- 2. The EUT is connected via LISN to a test power supply.
- 3. The measurement results are obtained as described below:
- 4. Detectors Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor



RESULT PLOTS **Conducted Emissions (Line 1)**

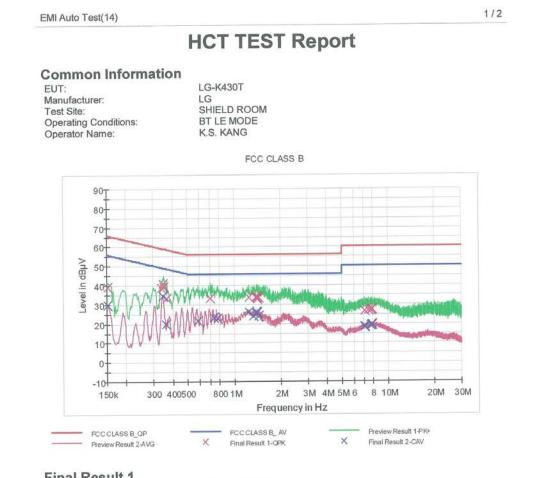

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.152000	39.2	9.000	Off	N	9.6	26.7	65.9
0.340000	38.6	9.000	Off	N	9.6	20.6	59.2
0.346000	40.8	9.000	Off	N	9.6	18.3	59.1
0.352000	39.0	9.000	Off	N	9.6	19.9	58.9
0.368000	33.3	9.000	Off	N	9.6	25.3	58.5
0.700000	33.2	9.000	Off	N	9.7	22.8	56.0
1.244000	33.6	9.000	Off	N	9.7	22.4	56.0
1.394000	33.7	9.000	Off	N	9.7	22.3	56.0
1,398000	34.0	9.000	Off	N	9.7	22.0	56.0
1.412000	33.0	9.000	Off	N	9.7	23.0	56.0
1.418000	33.7	9.000	Off	N	9.7	22.3	56.0
1.440000	33.6	9.000	Off	N	9.7	22.4	56.0
7.006000	26.6	9.000	Off	N	9.9	33.4	60.0
7.416000	27.0	9.000	Off	N	9.9	33.0	60.0
7.424000	26.9	9.000	Off	N	9.9	33.1	60.0
7.688000	27.0	9.000	Off	N	9.9	33.0	60.0

1/5/2016

12:08:11



EMI Auto Test(14)

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
7.832000	27.5	9,000	Off	N	9.9	32.5	60.0
7.858000	27.2	9.000	Off	N	9.9	32.8	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.152000	29.8	9.000	Off	N	9.6	26.1	55.9
0.346000	34.7	9.000	Off	N	9.6	14.4	49.1
0.362000	19.6	9.000	Off	N	9.6	29.1	48.7
0.586000	21.4	9.000	Off	N	9.6	24.6	46.0
0.740000	23.3	9.000	Off	N	9.7	22.7	46.0
0.784000	22.9	9.000	Off	N	9.7	23.1	46.0
1.244000	26.1	9.000	Off	N	9.7	19.9	46.0
1.330000	24.2	9.000	Off	N	9.7	21.8	46.0
1.394000	26.2	9.000	Off	N	9.7	19.8	46.0
1.398000	25.4	9.000	Off	N	9.7	20.6	46.0
1.418000	25.8	9.000	Off	N	9.7	20.2	46.0
1.442000	24.1	9.000	Off	N	9.7	21.9	46.0
7.006000	18.5	9.000	Off	N	9.9	31.5	50.0
7.040000	18.3	9.000	Off	N	9.9	31.7	50.0
7,688000	19.1	9.000	Off	N	9.9	30.9	50.0
7.832000	19.4	9.000	Off	N	9.9	30.6	50.0
7.858000	19.3	9.000	Off	N	9.9	30.7	50.0
7.912000	19.3	9.000	Off	N	9.9	30.7	50.0


2/2

1/5/2016

12:08:11



Conducted Emissions (Line 2)

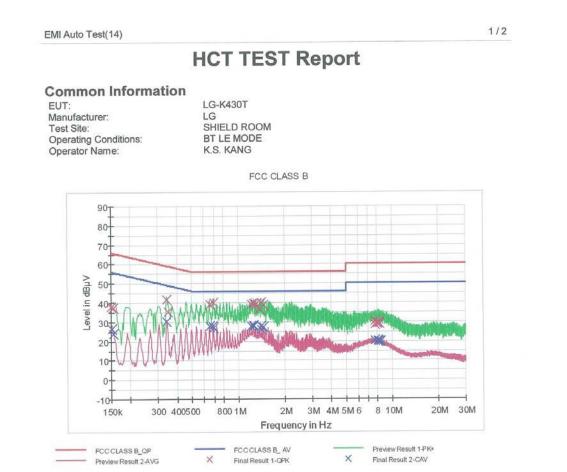

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	38.0	9.000	Off	L1	9.7	28.0	66.0
0.156000	37.6	9.000	Off	L1	9.6	28.1	65.7
0.344000	41.5	9.000	Off	L1	9.6	17.6	59.1
0.350000	35.2	9.000	Off	L1	9.6	23.8	59.0
0.650000	39.4	9.000	Off	L1	9.7	16.6	56.0
0.688000	39.9	9.000	Off	L1	9.7	16.1	56.0
1.222000	39.0	9.000	Off	L1	9.7	17.0	56.0
1.260000	39.5	9.000	Off	L1	9.7	16.5	56.0
1.298000	39.0	9.000	Off	L1	9.7	17.0	56.0
1.378000	36.5	9.000	Off	L1	9.7	19.5	56.0
1.412000	39.8	9.000	Off	L1	9.7	16.2	56.0
1.452000	38.9	9.000	Off	L1	9.7	17.1	56.0
7.678000	30.1	9.000	Off	L1	10.0	29.9	60.0
7.684000	28.8	9.000	Off	L1	10.0	31.2	60.0
7.934000	29.2	9.000	Off	L1	10.0	30.8	60.0
8.094000	29.4	9.000	Off	L1	10.0	30.6	60.0

1/5/2016

12:37:35



2/2

EMI Auto Test(14)

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
8.172000	29.3	9.000	Off	L1	10.0	30.7	60.0
8.292000	29.0	9.000	Off	L1	10.0	31.0	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.152000	26.7	9.000	Off	L1	9.6	29.2	55.9
0.156000	24.2	9.000	Off	L1	9.6	31.5	55.7
0.344000	30.2	9.000	Off	L1	9.6	18.9	49.1
0.650000	27.8	9.000	Off	L1	9.7	18.2	46.0
0.686000	27.8	9.000	Off	L1	9.7	18.2	46.0
0.690000	27.1	9.000	Off	L1	9.7	18.9	46.0
1.222000	27.8	9.000	Off	L1	9.7	18.2	46.0
1.258000	27.7	9.000	Off	L1	9.7	18.3	46.0
1.262000	28.2	9.000	Off	L1	9.7	17.8	46.0
1.412000	27.6	9.000	Off	L1	9.7	18.4	46.0
1.416000	26.3	9,000	Off	L1	9.7	19.7	46.0
1.452000	27.3	9.000	Off	L1	9.7	18.7	46.0
7.678000	20.3	9.000	Off	L1	10.0	29.7	50.0
7.684000	20.0	9.000	Off	L1	10.0	30.0	50.0
8.094000	20.1	9.000	Off	L1	10.0	29.9	50.0
8.102000	20.0	9.000	Off	L1	10.0	30.0	50.0
8.292000	19.7	9.000	Off	L1	10.0	30.3	50.0
8,440000	19.7	9.000	Off	L1	10.0	30.3	50.0

1/5/2016

12:37:35



9. LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/13/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	03/18/2015	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9020A / SIGNAL ANALYZER	07/02/2015	Annual	MY50510304
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2015	Annual	MY45241059
Agilent	87300B/Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC POWER SUPPLY	03/11/2015	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/21/2015	Annual	07560



9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/30/2015	Biennial	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/22/2015	Annual	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	06/29/2015	Annual	8
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/15/2015	Annual	1
Rohde & Schwarz	LOOP ANTENNA	09/03/2014	Biennial	1513-175
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964