HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:
May 27, 2014

Test Site/Location:
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1405-F036

HCT FRN: 0005866421

FCC ID:	**ZNFLGL24**
APPLICANT:	**LG Electronics MobileComm U.S.A., Inc.**

FCC Model(s):	LGL24
EUT Type:	Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §2
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900)
Max. RF Output Power:	0.435 W GSM850 (26.38 dBm) / 0.493 W GSM1900 (26.93 dBm) 0.286 W GSM850 EDGE (24.57 dBm) / 0.431 W GSM1900 EDGE (26.34 dBm) 0.114 W WCDMA850 (20.55 dBm)
Emission Designator(s):	245 KGXW (GSM850) 246 KGXW (GSM1900) 246 KG7W (GSM850 EDGE) 246 KG7W (GSM1900 EDGE) 4M17F9W (WCDMA850)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by
: Jong Seok Lee
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1405-F036	May 27, 2014	- First Approval Report

Table of Contents

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	LG Electronics MobileComm U.S.A., Inc.
Address:	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID:	ZNFLGL24
Application Type:	Certification
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §2
EUT Type:	Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC
FCC Model(s):	LGL24
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900)
Max. RF Output Power:	0.435 W GSM850 (26.38 dBm) / 0.493 W GSM1900 (26.93 dBm) 0.286 W GSM850 EDGE (24.57 dBm) / 0.431 W GSM1900 EDGE (26.34 dBm) 0.114 W WCDMA850 (20.55 dBm)
Emission Designator(s):	245 KGXW (GSM850) 246 KGXW (GSM1900) 246 KG7W (GSM850 EDGE) 246 KG7W (GSM1900 EDGE) 4M17F9W (WCDMA850)
Date(s) of Tests:	May 02, 2014 ~ May 27, 2014
Antenna Specification	Manufacturer: acetechnologyA Antenna type: Internal Antenna Peak Gain: GSM850/ WCDMA850 : -4.84 dBi GSM1900 : 0.27 dBi

2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc. LGL24 Cellular/PCS GSM, Cellular WCDMA, LTE Phone with Bluetooth/WLAN/NFC consists of GPRS Class12, EDGE12, GSM850, GSM1900, WCDMA850, HSDPA and HSUPA.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.

3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.
A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
The power is calculated by the following formula;

$$P_{d(dBm)} = Pg_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

1. Frequency Range : 30 MHz ~ 10^{th} Harmonics of highest channel fundamental frequency.
2. The EUT was setup to maximum output power. The 100 kHz RBW was used to scan from 30 MHz to 1 GHz. Also, the 1 MHz RBW was used to scan from 1 GHz to 10 GHz(GSM850/WCDMA850) or 20 GHz(GSM1900). The high, low and a middle channel were tested for out of band measurements.

3.2 PEAK- TO- AVERAGE RATIO

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.7.

- Section 5.7.1 CCDF Procedure

a) Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
b) Set the number of counts to a value that stabilizes the measured CCDF curve;
c) Set the measurement interval as follows:
   1) for continuous transmissions, set to 1 ms,
   2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk}. Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg}. Determine the P.A.R. from: $P.A.R_{(dB)} = P_{Pk\ (dBm)} - P_{Avg\ (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

a) Set the RBW ≥ OBW.
b) Set VBW ≥ 3 × RBW.
c) Set span ≥ 2 x RBW
d) Sweep time = auto couple.
e) Detector = peak.
f) Ensure that the number of measurement points ≥ span/RBW.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the peak amplitude level.

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle

If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:

a) Set span to at least 1.5 times the OBW.

b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

c) Set VBW ≥ 3 x RBW.

d) Number of points in sweep ≥ 2 × span / RBW. (This gives bin-to-bin spacing ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)

e) Sweep time = auto.

f) Detector = RMS (power averaging).

g) Set sweep trigger to “free run”.

h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

j) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add 10 log (1/0.25) = 6 dB if the duty cycle is a constant 25%.

3.3 OCCUPIED BANDWIDTH.

Test set-up

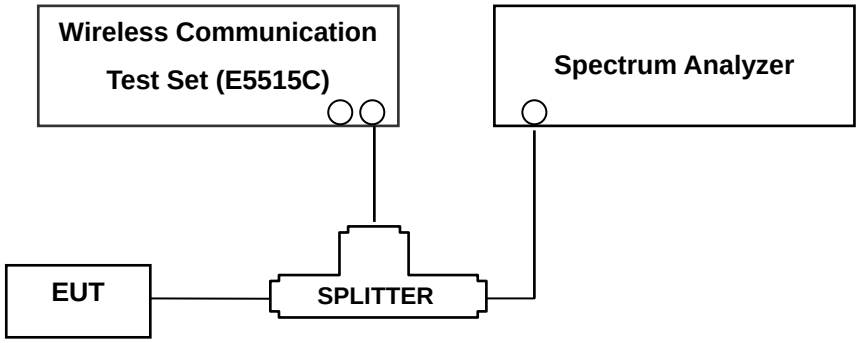

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 4.2..

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. The RBW settings used in the testing are greater than 1 % of the occupied bw. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Measurements of all out of band are made on RBW = 1MHz and VBW ≥ 3 MHz in the worst case despite RBW = 100 kHz and VBW ≥ 300 kHz upon 1 GHz.

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto
- Number of points in sweep ≥ 2 * Span / RBW

- Band Edge Requirement : According to FCC 22.917 , 24.238(a) specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The center frequency of spectrum is the band edge frequency and span is 1MHz RB of the spectrum is 3KHz and VB of the spectrum is 3KHz (GSM)

The center frequency of spectrum is the band edge frequency and span is 5MHz RB of the spectrum is 100KHz and VB of the spectrum is 100KHz(WCDMA)

NOTES: The analyzer plot offsets were determined by below conditions.

- For GSM850 and WCDMA850, total offset 27.5dBm = 20dBm attenuator + 6dBm Divider + 1.5dBm RF cables.
- For GSM1900, total offset 28.6dBm = 20dBm attenuator + 6dBm Divider + 2.6dBm RF cables.

3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

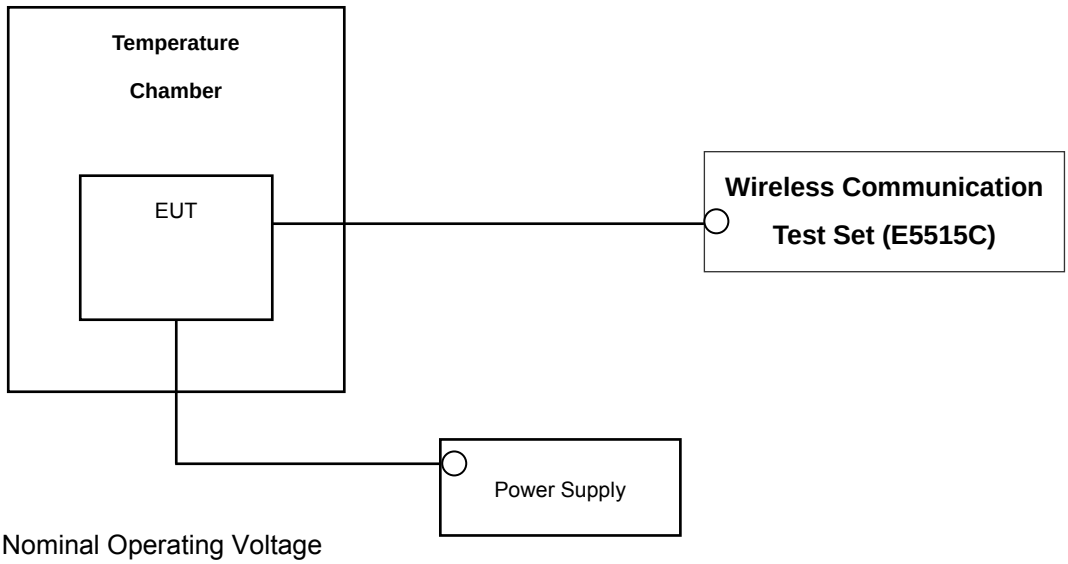

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-C-2004 section 2.2.2.

The frequency stability of the transmitter is measured by:
a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(GSM1900). The frequency stability of the transmitter shall be maintained within ± 0.000 25 %(± 2.5 ppm) of the center frequency(GSM850/WCDAM850).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.
NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
LG Electronics USA	WCP-300/WCP (FCC ID : BEJWCP300)	303HYYR026898	-	-	-
Agilent	N1921A/ Power Sensor	MY45241059	07/11/2013	Annual	07/11/2014
Agilent	N1911A/ Power Meter	MY45100523	01/24/2014	Annual	01/24/2015
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	09/12/2013	Annual	09/12/2014
Wainwright	WHK1.2/15G-10EF/H.P.F	4	06/24/2013	Annual	06/24/2014
Wainwright	WHK3.3/18G-10EF/H.P.F	2	06/24/2013	Annual	06/24/2014
Hewlett Packard	11667B / Power Splitter	10545	02/22/2014	Annual	02/22/2015
Digital	EP-3010/ Power Supply	3110117	10/29/2013	Annual	10/29/2014
Schwarzbeck	UHAP/ Dipole Antenna	557	03/05/2013	Biennial	03/05/2015
Schwarzbeck	UHAP/ Dipole Antenna	558	05/03/2013	Biennial	05/03/2015
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	10/30/2013	Annual	10/30/2014
Schwarzbeck	BBHA 9120D/ Horn Antenna	1191	12/03/2013	Biennial	12/03/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	10/05/2013	Biennial	10/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	04/09/2014	Annual	04/09/2015
WEINSCHEL	ATTENUATOR	BR0592	10/28/2013	Annual	10/28/2014
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	06/10/2013	Annual	06/10/2014
Agilent	8960 (E5515C)/ Base Station	GB45070669	08/31/2013	Annual	08/31/2014

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
* 2.1046	Conducted Output Power	-		PASS
24.232(d)	Peak- to- Average Ratio	< 13 dB		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	< 2.5 ppm		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS
	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	< 43 + 10log10 (P[Watts]) for all out-of band emissions		PASS

*: See SAR Report

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitude LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = SubstitudeLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

1) The EUT mounted on a non-conductive tuntable is 0.8 meter above test site ground level.
2) During the test , the turn table is rotated until the maximum signal is found.
3) Record the field strength meter's level.
4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**ERP**).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER OUTPUT

(GSM850 Mode)

Ch./ Freq.		Measured	Substitude	Ant. Gain	C.L	Pol.	ERP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
128	824.20	-24.74	37.82	-10.59	0.85	H	0.435	26.38
190	836.60	-25.18	37.20	-10.53	0.89	H	0.379	25.78
251	848.80	-24.75	37.63	-10.48	0.88	V	0.424	26.27
EDGE 128	824.20	-26.55	37.82	-10.59	0.85	H	0.286	24.57

(WCDMA850 Mode)

Ch./ Freq.		Measured	Substitude	Ant. Gain	C.L	Pol.	ERP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
4132	826.40	-30.62	31.97	-10.58	0.84	H	0.114	20.55
4183	836.60	-30.91	31.47	-10.53	0.89	H	0.101	20.05
4233	846.60	-30.67	31.89	-10.49	0.85	H	0.113	20.55

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with RBW ≥ OBW, VBW ≥ 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to “1” and in GSM mode using a Power Control Level of “0” in the PCS Band and “5” in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is z plane in GSM850 (y plane ch 251) and WCDMA850 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM850 (channel 251 : vertical polarization) and WCDMA850 mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.2 EQUIVALENT ISOTROPIC RADIATED POWER

(GSM1900 Mode)

Ch./ Freq.		Measured	Substitude	Ant. Gain	C.L	Pol.	EIRP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBi)			**W**	**dBm**
512	1,850.20	-13.54	18.08	10.04	1.19	H	0.493	26.93
661	1,880.00	-14.62	17.11	10.04	1.23	V	0.391	25.92
810	1,909.80	-15.90	16.08	10.05	1.22	V	0.310	24.91
EDGE 512	1,850.20	-14.13	18.08	10.04	1.19	H	0.431	26.34

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, a peak detector is used, with RBW ≥ OBW, VBW ≥ 3 x RBW. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of “0” in the PCS Band and “5” in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is z plane in GSM1900 (x plane ch 512) mode. Also worst case of detecting Antenna is in vertical polarization in GSM1900 (channel 512 : horizontal polarization) mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

7.3 RADIATED SPURIOUS EMISSIONS

7.3.1 RADIATED SPURIOUS EMISSIONS (GSM850)

▣ MEASURED OUTPUT POWER: 26.38 dBm = 0.435 W

▣ MODULATION SIGNAL: GSM850

▣ DISTANCE: 3 meters

▣ LIMIT: 43 + 10 lo_{g10} (W) = 39.38 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-56.51	7.55	-65.59	1.13	V	-59.17	85.55
	2,472.60	-51.91	8.39	-58.58	1.35	H	-51.54	77.92
	3,296.80	-56.86	10.07	-63.92	1.58	H	-55.43	81.81
190 (836.6)	1,673.20	-49.43	7.62	-58.67	1.12	V	-52.17	78.55
	2,509.80	-52.45	8.50	-59.03	1.35	H	-51.88	78.26
	3,346.40	-56.91	10.26	-64.12	1.61	V	-55.47	81.85
251 (848.8)	1,697.60	-55.32	7.69	-64.66	1.16	H	-58.13	84.51
	2,546.40	-53.77	8.57	-60.67	1.37	H	-53.47	79.85
	3,395.20	-56.95	10.25	-64.07	1.62	V	-55.44	81.82

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.3.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

▣ MEASURED OUTPUT POWER: 26.93 dBm = 0.493 W

▣ MODULATION SIGNAL: GSM1900

▣ DISTANCE: 3 meters

▣ LIMIT: 43 + 10 $\log_{10}$ (W) = 39.93 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-51.70	12.32	-57.42	1.73	V	-46.83	73.76
	5,550.60	-52.36	13.02	-52.86	2.12	H	-41.96	68.89
	7,400.80	-51.83	11.06	-42.32	2.42	H	-33.68	60.61
661 (1880.0)	3,760.00	-52.90	12.29	-58.22	1.66	H	-47.59	74.52
	5,640.00	-53.80	13.12	-54.08	2.11	V	-43.07	70.00
	7,520.00	-54.00	11.09	-44.99	2.35	H	-36.25	63.18
810 (1909.8)	3,819.60	-51.95	12.28	-57.07	1.80	H	-46.58	73.51
	5,729.40	-52.42	13.06	-52.48	2.14	V	-41.56	68.49
	7,639.20	-55.32	11.38	-45.56	2.41	H	-36.59	63.52

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.3.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

▣ MEASURED OUTPUT POWER: 20.55 dBm = 0.114 W

▣ MODULATION SIGNAL: WCDMA850

▣ DISTANCE: 3 meters

▣ LIMIT: 43 + 10 $\log_{10}$ (W) = 33.55 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-42.31	7.57	-51.54	1.13	H	-45.10	65.66
	2,479.20	-50.95	8.39	-57.63	1.34	H	-50.58	71.13
	3,305.60	-56.25	10.11	-63.34	1.59	H	-54.82	75.37
4,183 (836.6)	1,673.20	-44.71	7.62	-53.94	1.13	H	-47.45	68.00
	2,509.80	-48.53	8.50	-55.11	1.35	H	-47.96	68.51
	3,346.40	-54.72	10.26	-61.93	1.61	H	-53.28	73.84
4,233 (846.6)	1,693.20	-47.37	7.68	-56.71	1.15	H	-50.18	70.73
	2,539.80	-50.98	8.56	-57.54	1.37	H	-50.35	70.90
	3,386.40	-54.26	10.25	-61.39	1.61	H	-52.75	73.30

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P_{Pk} (dBm)	Measured P_{Avg} (dBm)	P_{Avg} (Duty Cycle)			P.A.R. = P_{Pk} - P_{Avg} (dB)	Limit (dB)	Pass / Fail
				Tx_{Total} (ms)	Tx_{On} (ms)	Factor (dB)			
GSM1900	661	30.10	20.59	4.6232	0.5507	9.24	0.27	13	Pass
GSM1900 EDGE	661	28.83	16.21				3.38		Pass

- Plots of the EUT's Peak- to- Average Ratio are shown Page 31 ~ 33.

NOTES:

Peak to Average Power Ratio was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.7.

Only GSM(include EDGE) Mode was tested by Section 5.7.2 Alternate Procedure

$P.A.R_{(dB)} = P_{Pk\ (dBm)} - P_{Avg\ (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

Duty cycle Factor = 10 log (1/x), x = Tx_{On} / Tx_{Total}

7.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	242.1307
	190	836.60	243.5635
	251	848.80	244.6337
GSM850 EDGE	251	848.80	246.3655
GSM1900	512	1,850.20	244.0024
	661	1,880.00	245.5133
	810	1,909.80	243.2650
GSM1900 EDGE	661	1,880.00	245.9565
WCDMA850	4132	826.40	4.1668
	4183	836.60	4.1321
	4233	846.60	4.1461

- Plots of the EUT's Occupied Bandwidth are shown Page 27 ~ 30, 33 ~ 34.

7.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	4.842200	-27.94
	190	4.053460	-27.75
	251	4.612590	-27.40
GSM1900	512	6.993800	-24.95
	661	6.979340	-24.83
	810	6.971860	-25.08
WCDMA850	4132	4.627500	-28.19
	4183	4.780080	-28.23
	4233	4.586250	-27.94

- Plots of the EUT's Conducted Spurious Emissions are shown Page 45 ~ 53.

7.6.1 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 35 ~ 44.

7.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.7.1 FREQUENCY STABILITY (GSM850)

▣ OPERATING FREQUENCY: 836,600,000 Hz

▣ CHANNEL: 190

▣ REFERENCE VOLTAGE: 3.8 VDC

▣ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 599 987	0	0.000 000	0.000
100%		-30	836 600 001	14.60	0.000 002	0.017
100%		-20	836 600 000	13.58	0.000 002	0.016
100%		-10	836 600 003	16.67	0.000 002	0.020
100%		0	836 600 001	14.47	0.000 002	0.017
100%		+10	836 600 005	18.92	0.000 002	0.023
100%		+30	836 600 001	14.41	0.000 002	0.017
100%		+40	836 600 003	16.62	0.000 002	0.020
100%		+50	836 600 004	17.15	0.000 002	0.020
115%	4.35	+20	836 600 001	14.67	0.000 002	0.018
Batt. Endpoint	3.42	+20	836 600 002	15.95	0.000 002	0.019

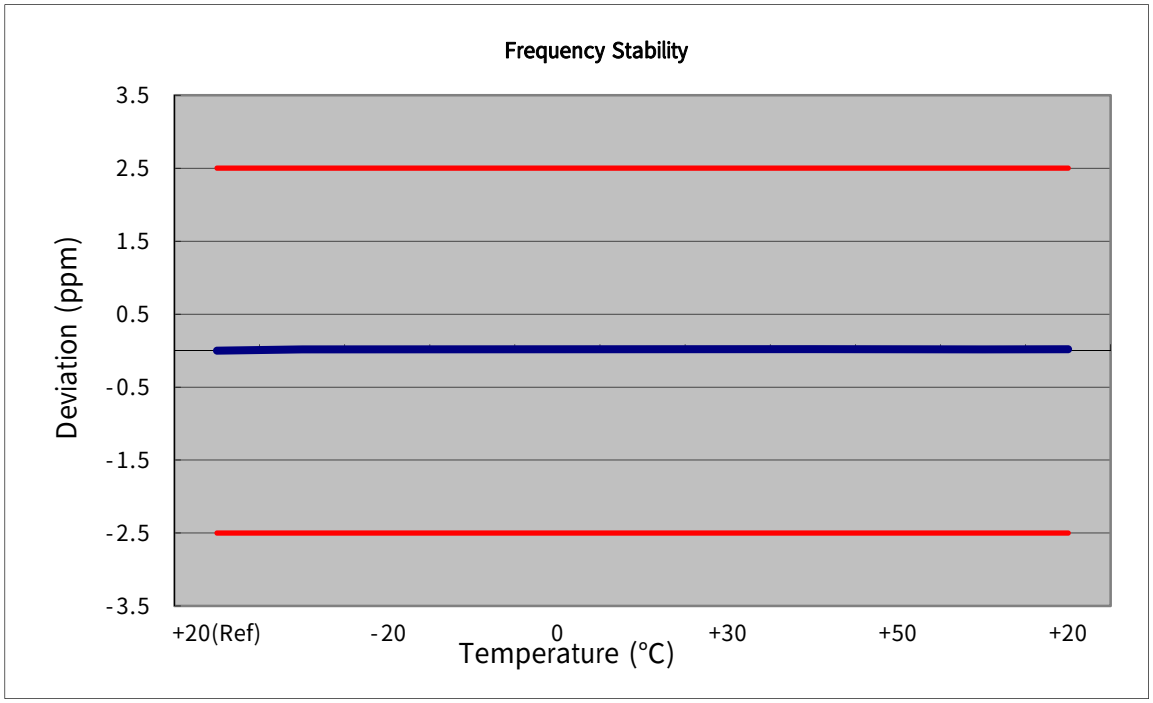

7.7.2 FREQUENCY STABILITY (GSM1900)

▣ OPERATING FREQUENCY: 1880,000,000 Hz

▣ CHANNEL: 661

▣ REFERENCE VOLTAGE: 3.8 VDC

▣ DEVIATION LIM IT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1879 999 950	0	0.000 000	0.000
100%		-30	1879 999 999	48.77	0.000 003	0.026
100%		-20	1880 000 000	50.29	0.000 003	0.027
100%		-10	1880 000 005	55.08	0.000 003	0.029
100%		0	1880 000 002	51.84	0.000 003	0.028
100%		+10	1880 000 005	54.67	0.000 003	0.029
100%		+30	1880 000 006	55.61	0.000 003	0.030
100%		+40	1880 000 005	55.22	0.000 003	0.029
100%		+50	1880 000 000	50.08	0.000 003	0.027
115%	4.35	+20	1880 000 010	59.60	0.000 003	0.032
Batt. Endpoint	3.42	+20	1880 000 004	54.10	0.000 003	0.029

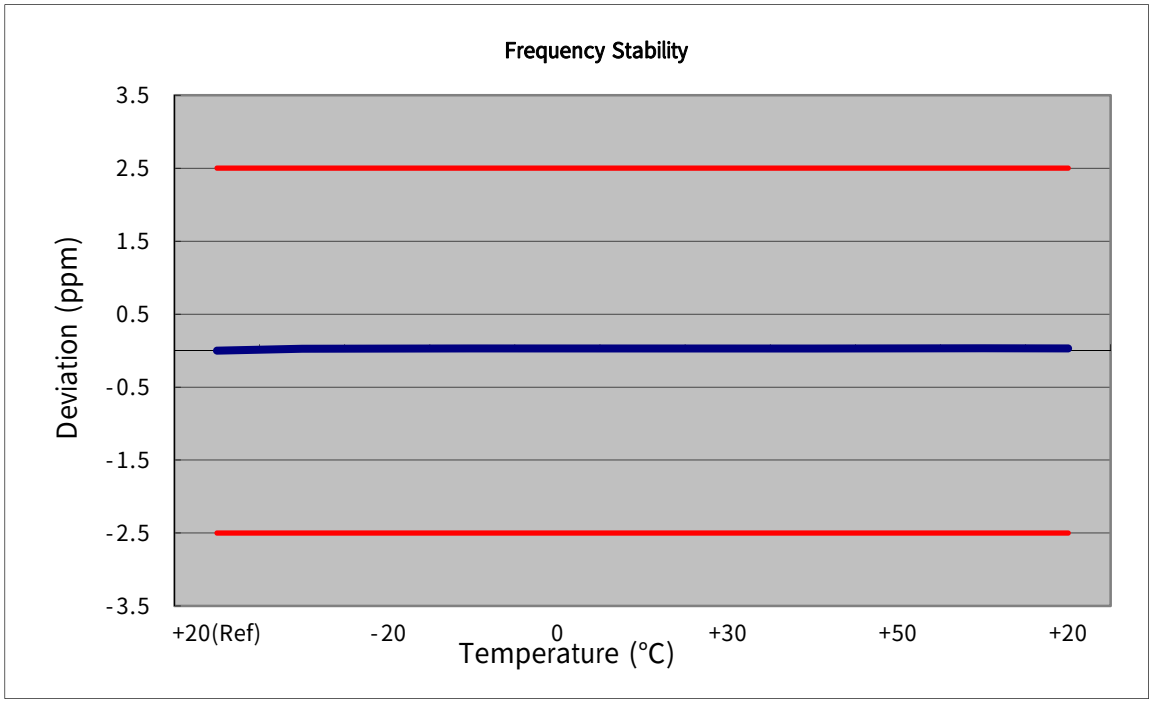

7.7.3 FREQUENCY STABILITY (WCDMA850)

▣ OPERATING FREQUENCY: 836,600,000 Hz

▣ CHANNEL: 4183

▣ REFERENCE VOLTAGE: 3.8 VDC

▣ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 600 004	0	0.000 000	0.000
100%		-30	836 599 996	-3.70	0.000 000	-0.004
100%		-20	836 599 997	-3.41	0.000 000	-0.004
100%		-10	836 599 998	-2.47	0.000 000	-0.003
100%		0	836 599 997	-2.90	0.000 000	-0.003
100%		+10	836 599 996	-3.60	0.000 000	-0.004
100%		+30	836 599 998	-2.11	0.000 000	-0.003
100%		+40	836 599 996	-4.50	-0.000 001	-0.005
100%		+50	836 599 998	-2.37	0.000 000	-0.003
115%	4.35	+20	836 599 997	-2.84	0.000 000	-0.003
Batt. Endpoint	3.42	+20	836 599 997	-2.72	0.000 000	-0.003

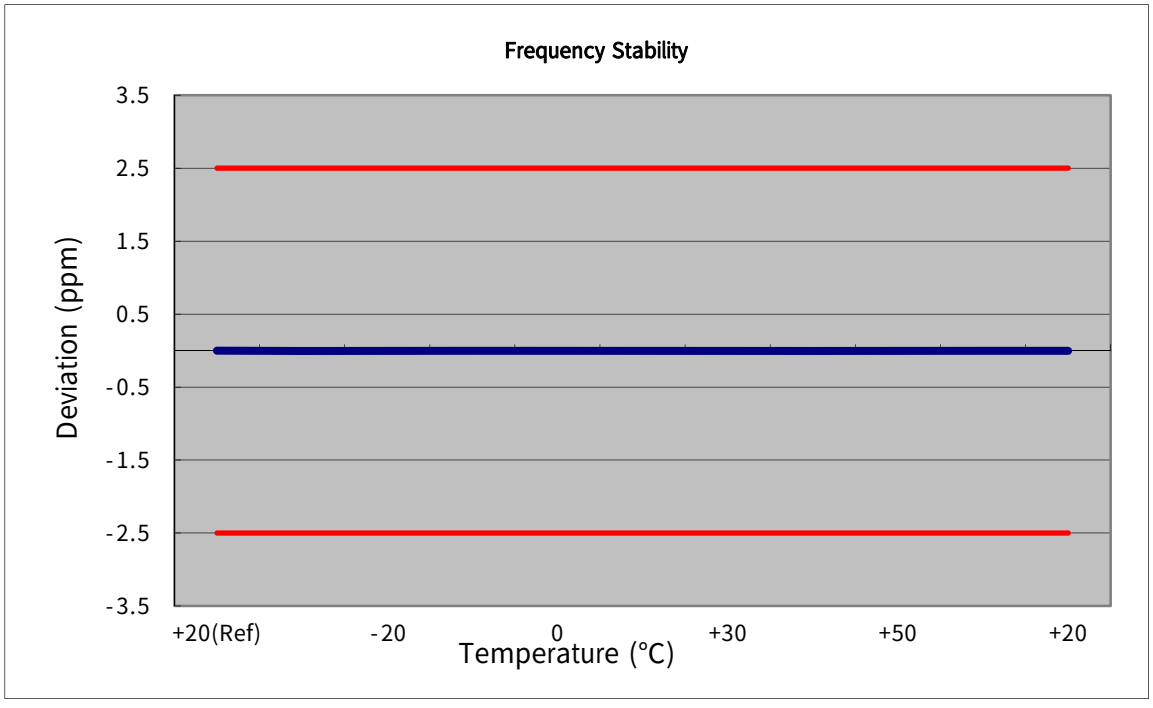

8. TEST PLOTS

■ GSM850 MODE (128 CH.) Occupied Bandwidth

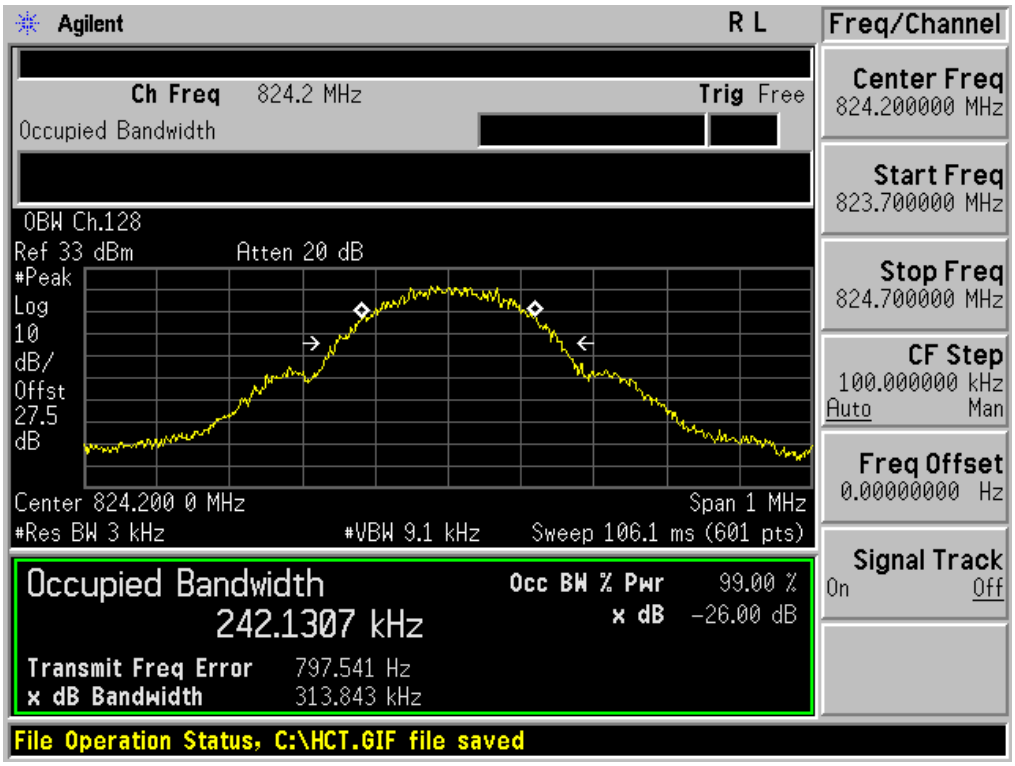

■ GSM850 MODE (190 CH.) Occupied Bandwidth

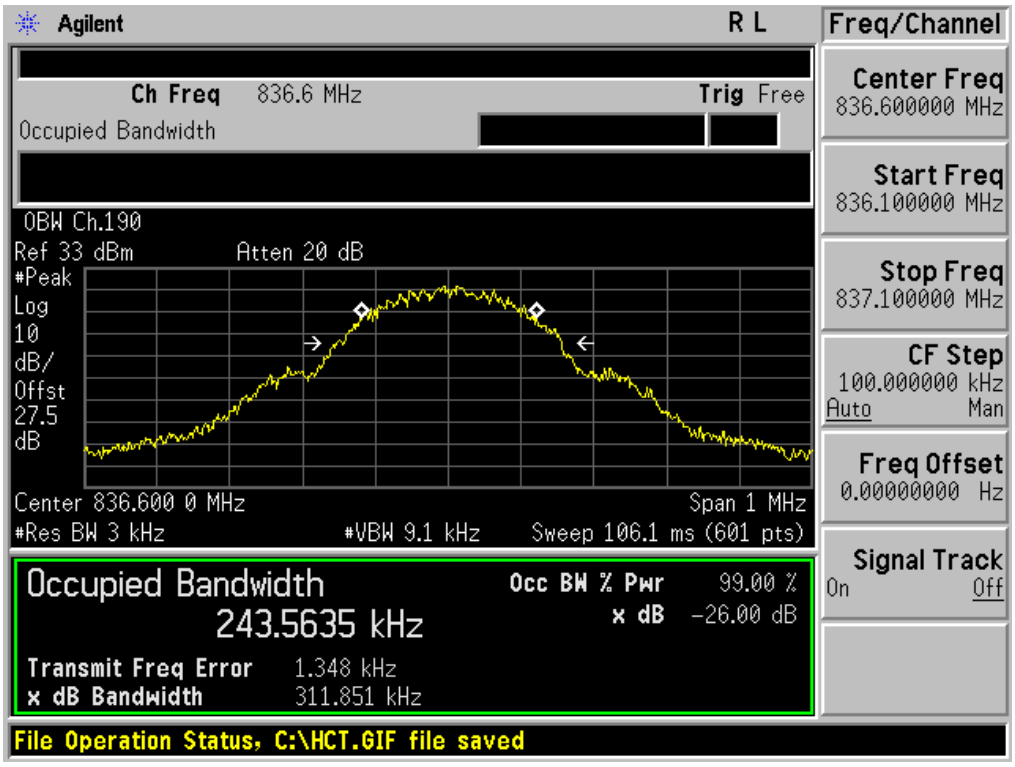

■ GSM850 MODE (251 CH.) Occupied Bandwidth

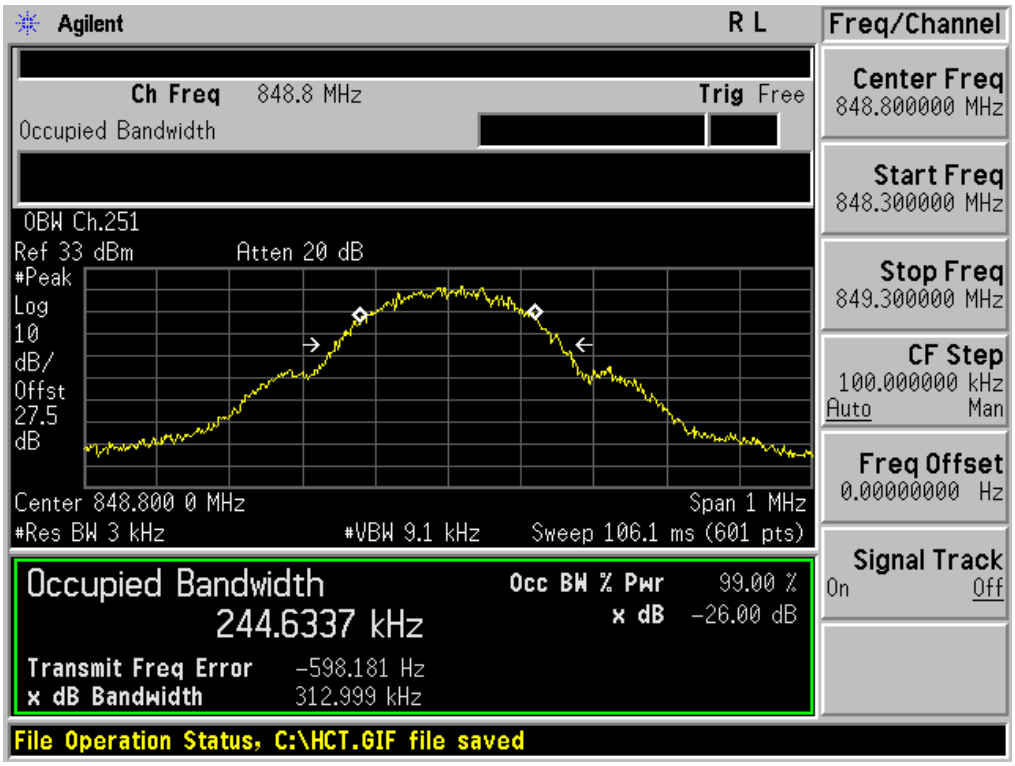

■ GSM850 EDGE (251 CH.) Occupied Bandwidth

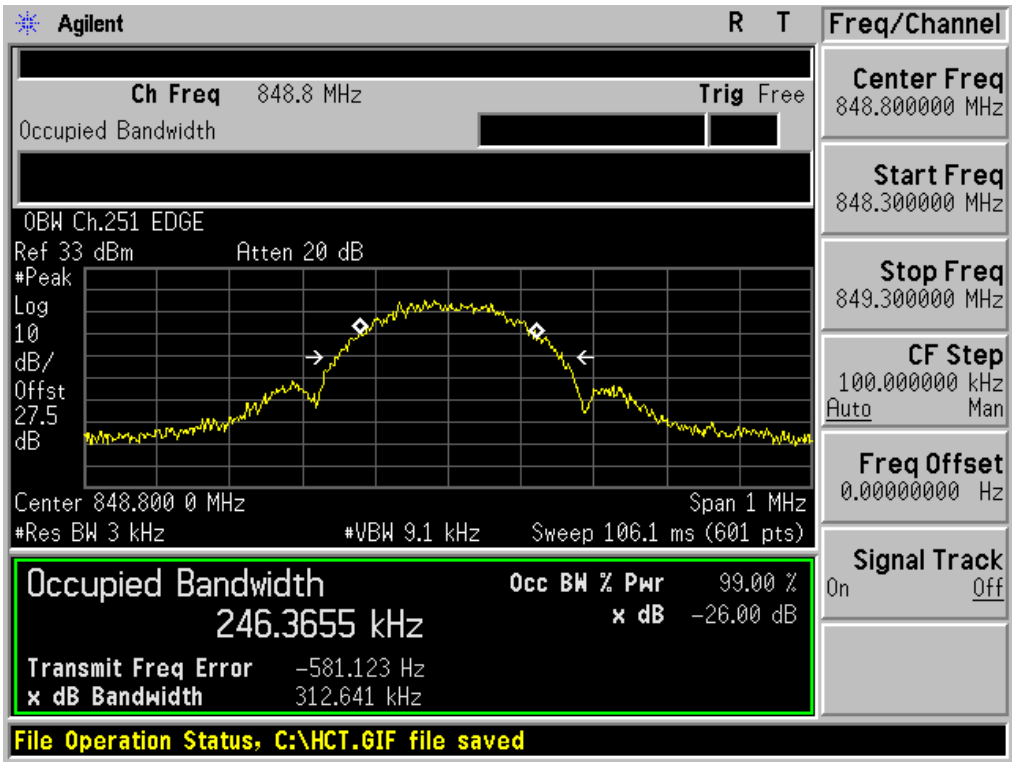

■ GSM1900 MODE (512 CH.) Occupied Bandwidth

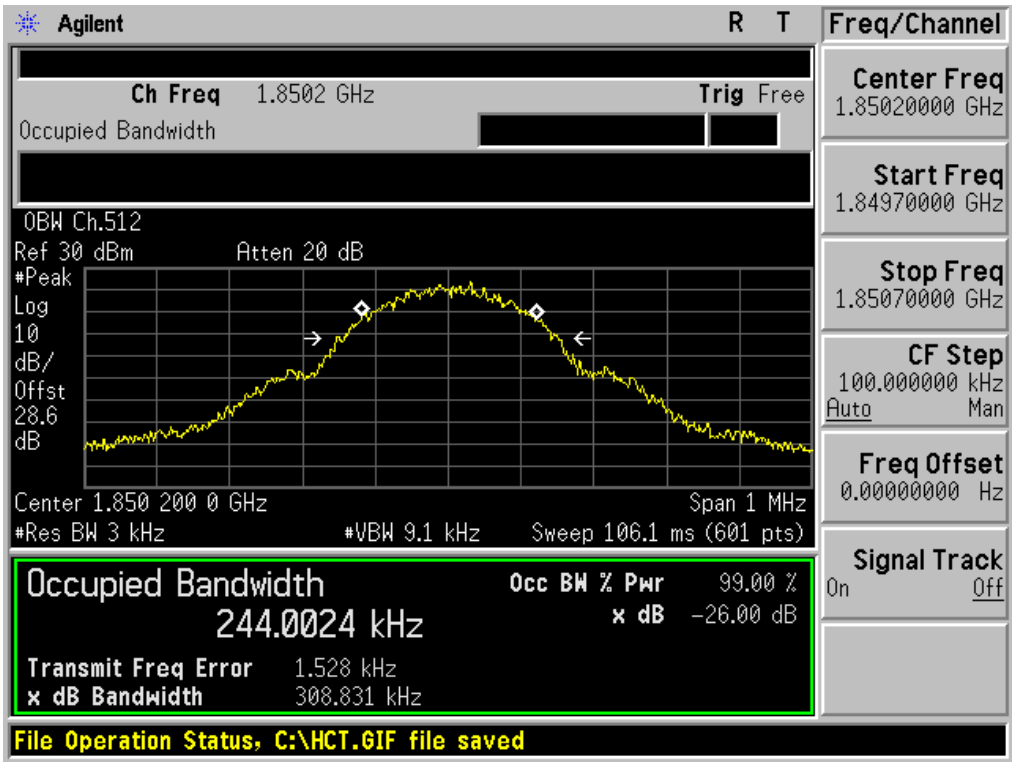

■ GSM1900 MODE (661 CH.) Occupied Bandwidth

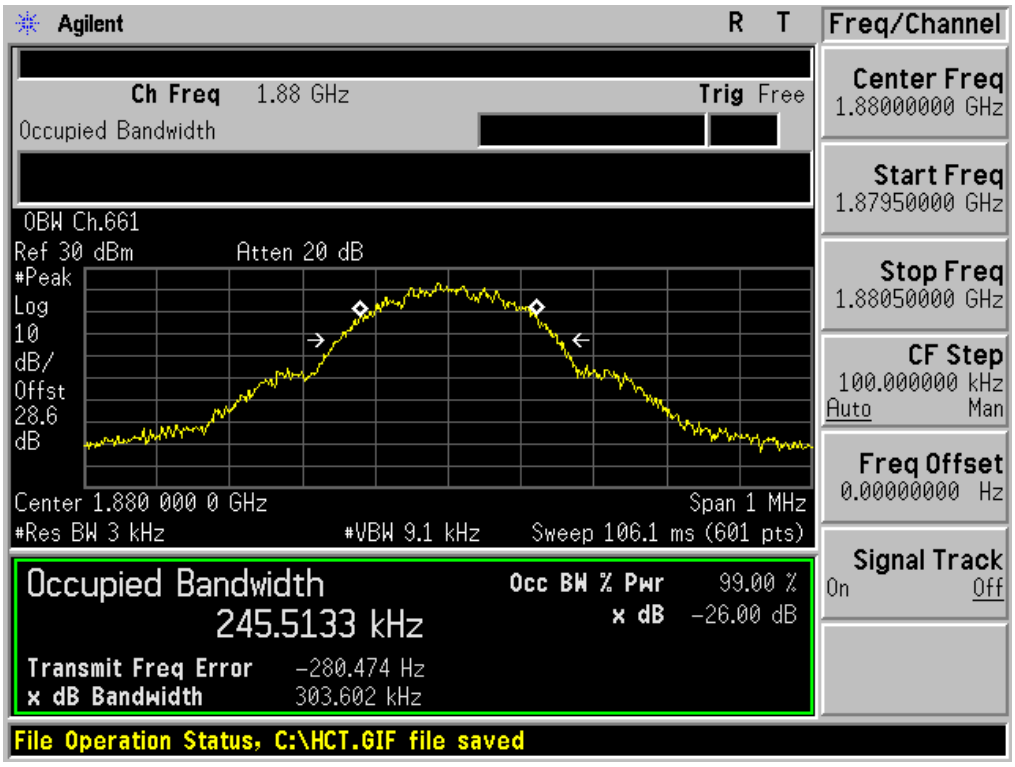

■ GSM1900 MODE (810 CH.) Occupied Bandwidth

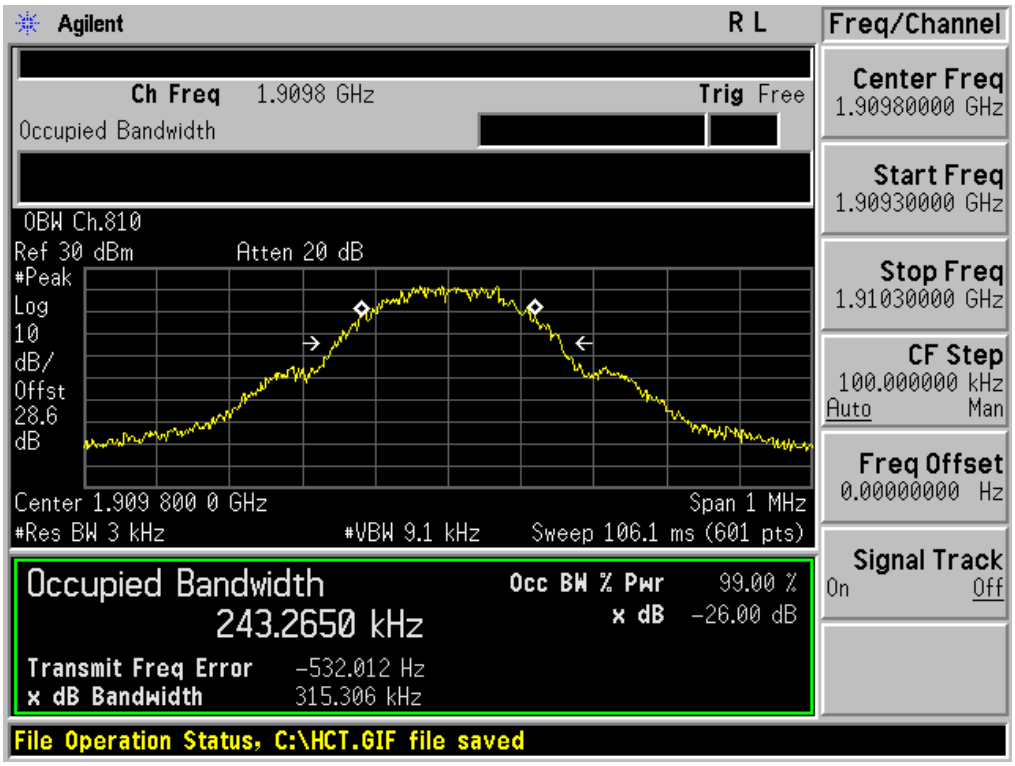

■ GSM1900 EDGE (661 CH.) Occupied Bandwidth

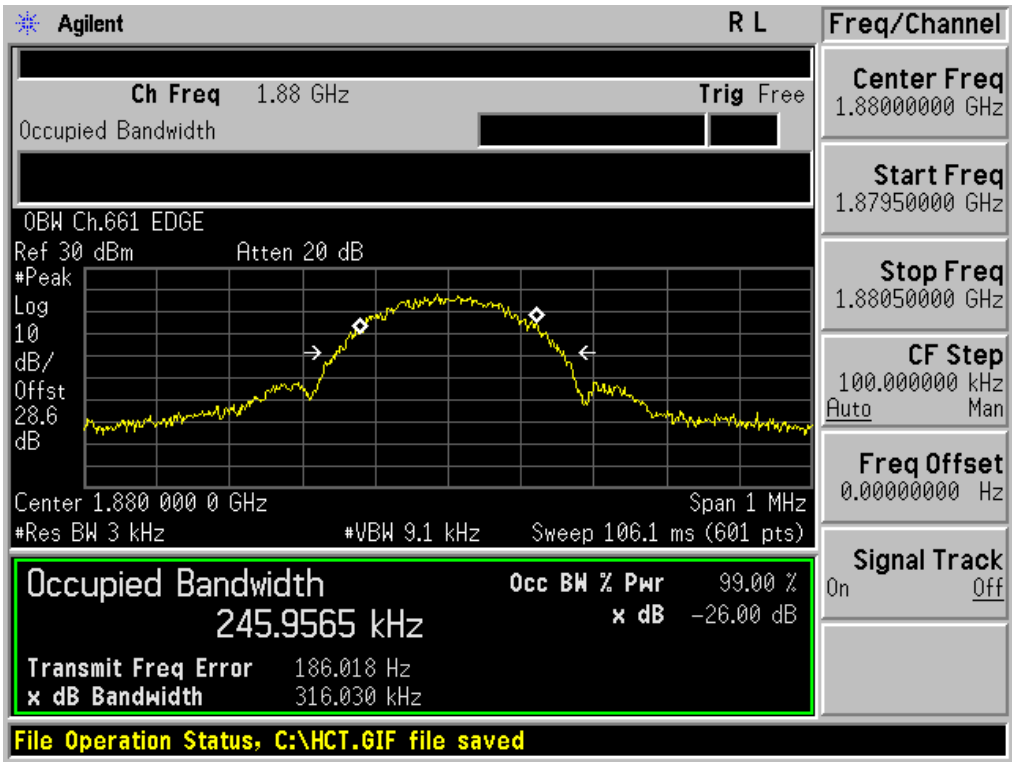

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Pk}

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

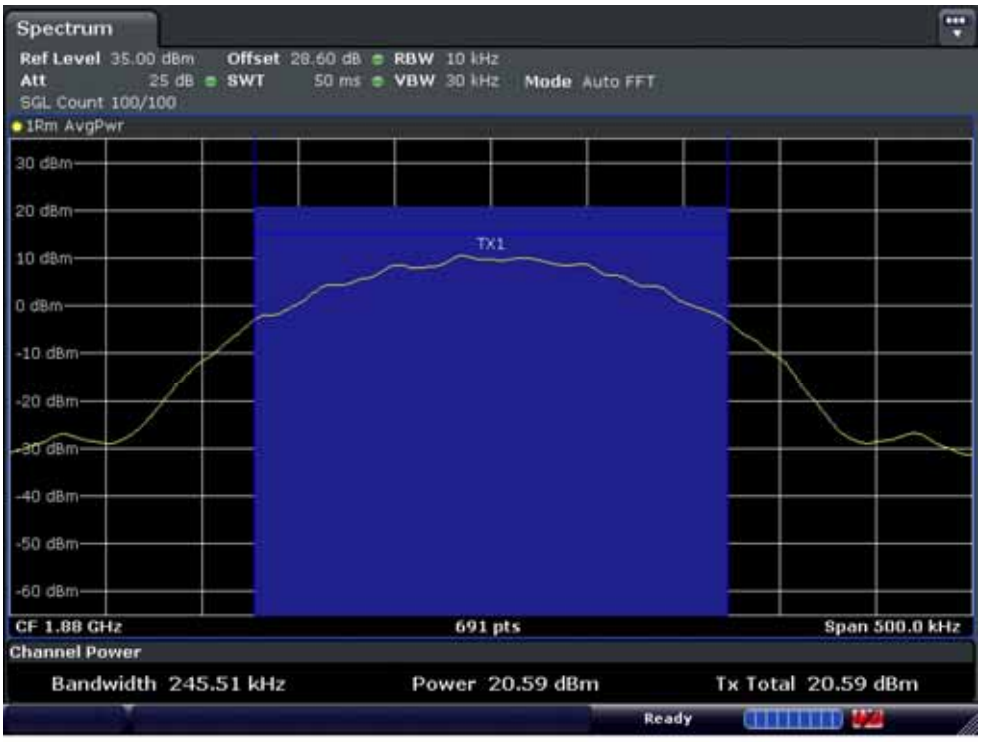

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Pk}

■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

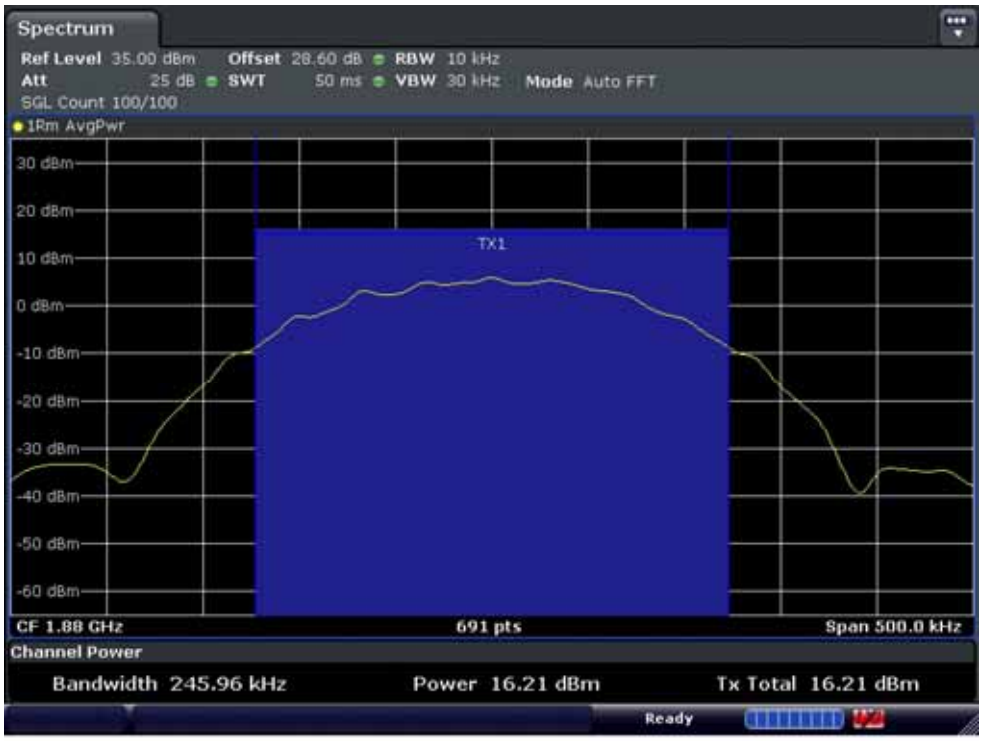

■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

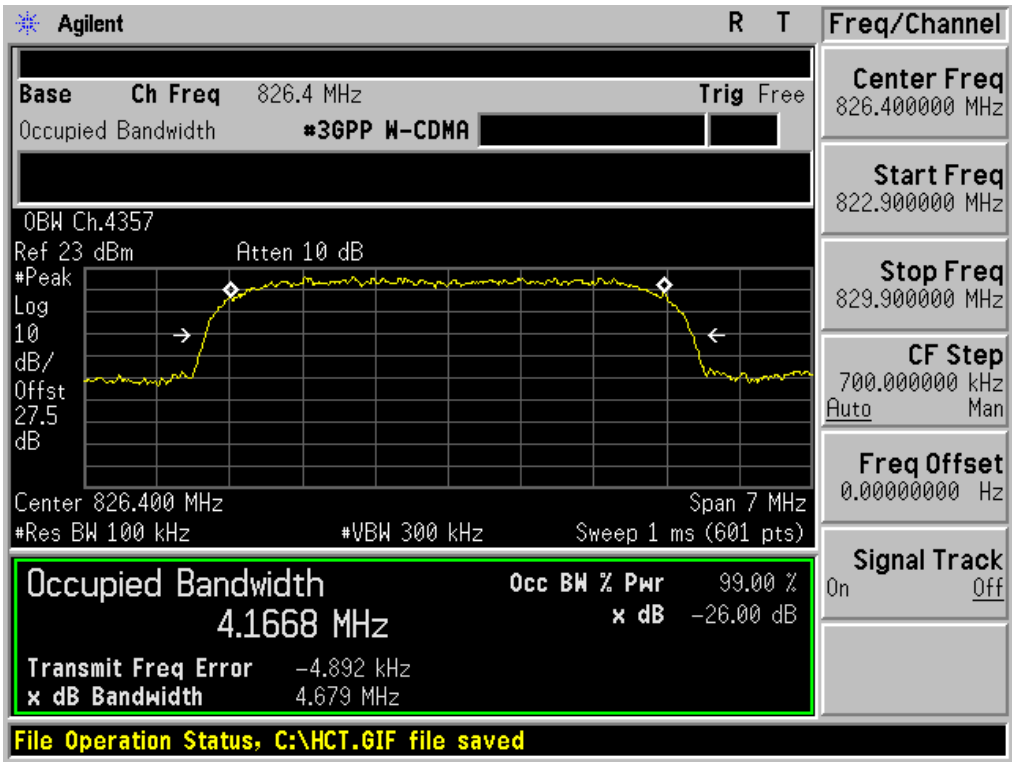

■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

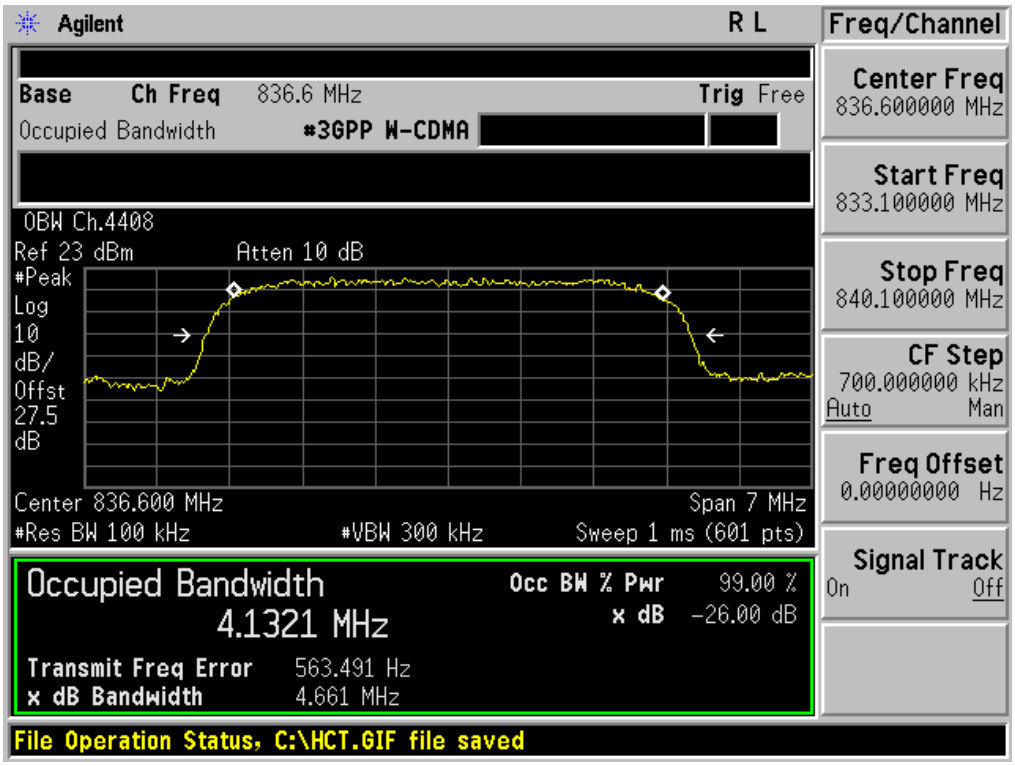

■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

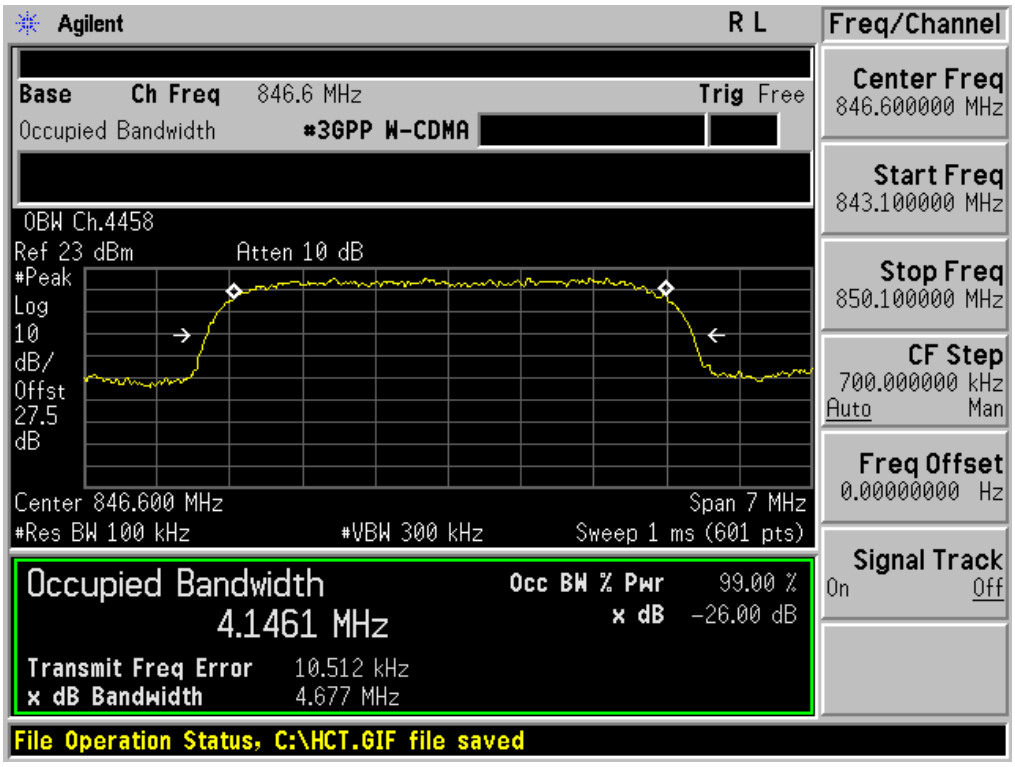

■ GSM850 MODE (128 CH.) Block Edge 1

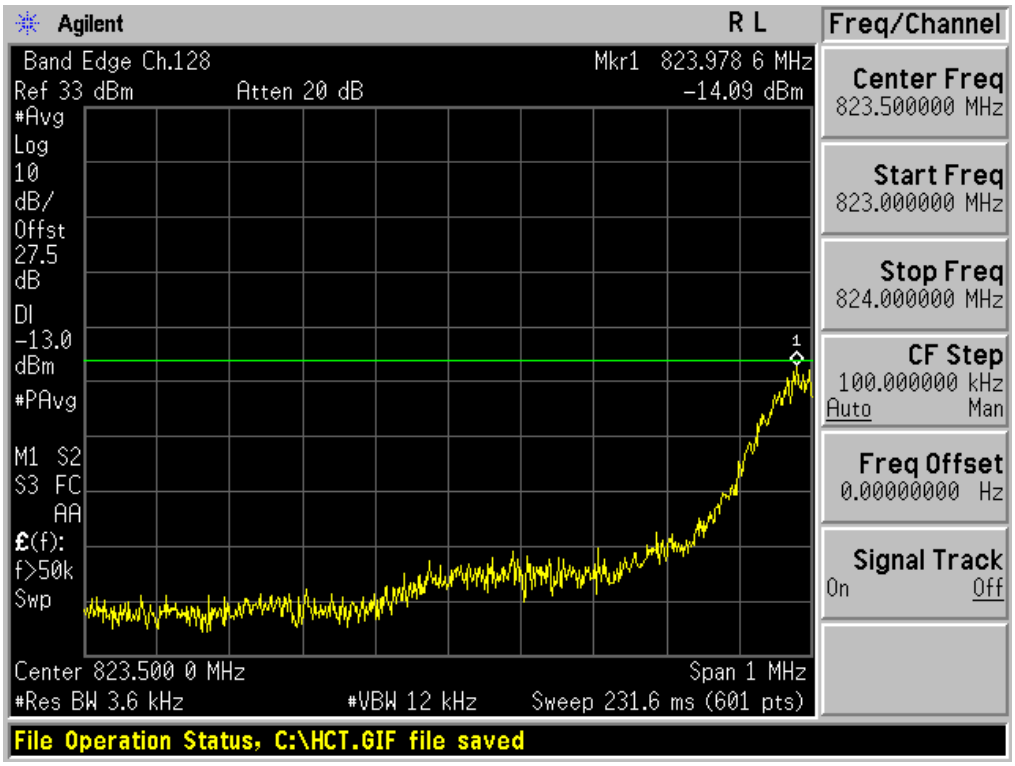

■ GSM850 MODE (128 CH.) Block Edge 2

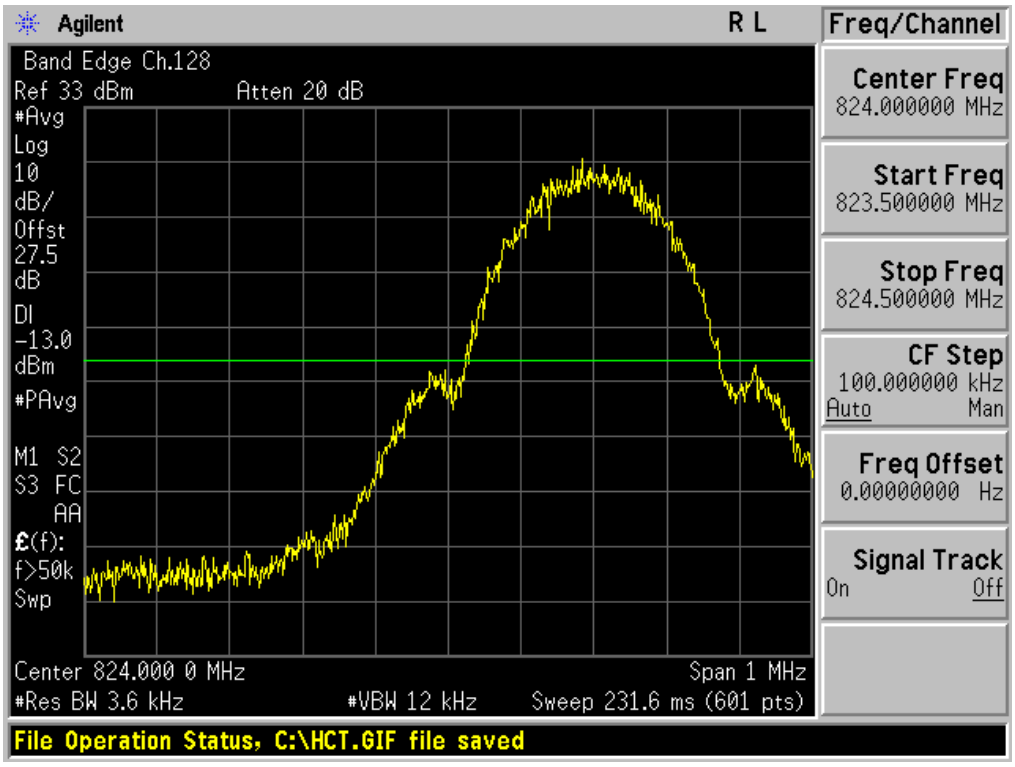

■ GSM850 MODE (251 CH.) Block Edge 1

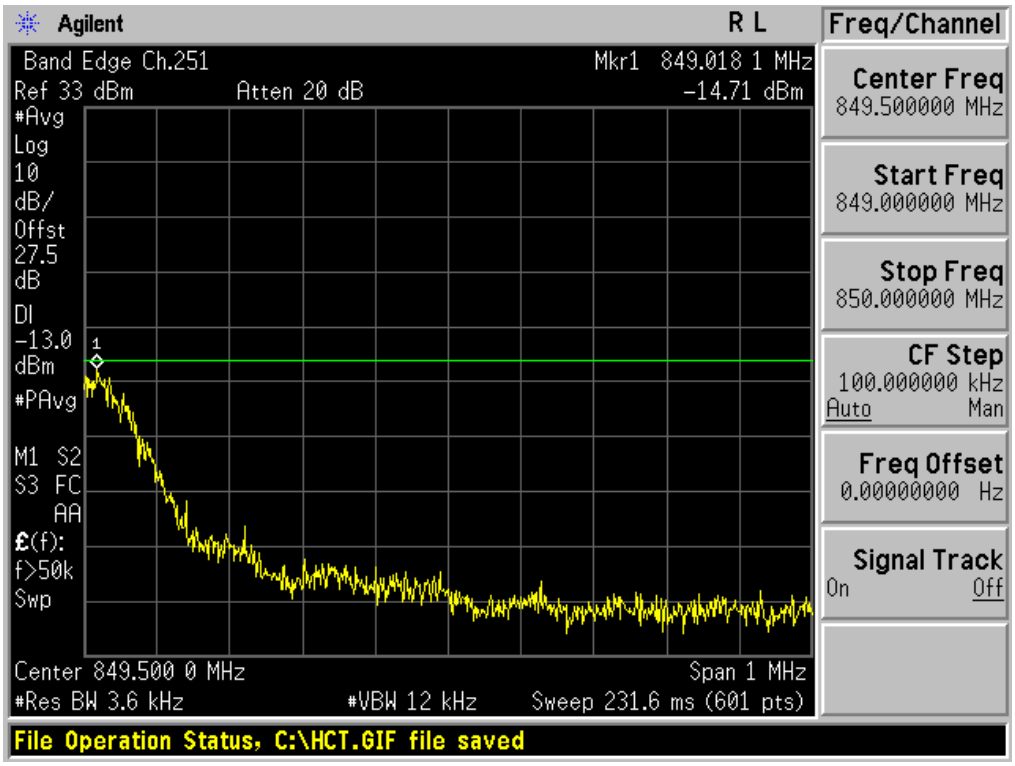

■ GSM850 MODE (251 CH.) Block Edge 2

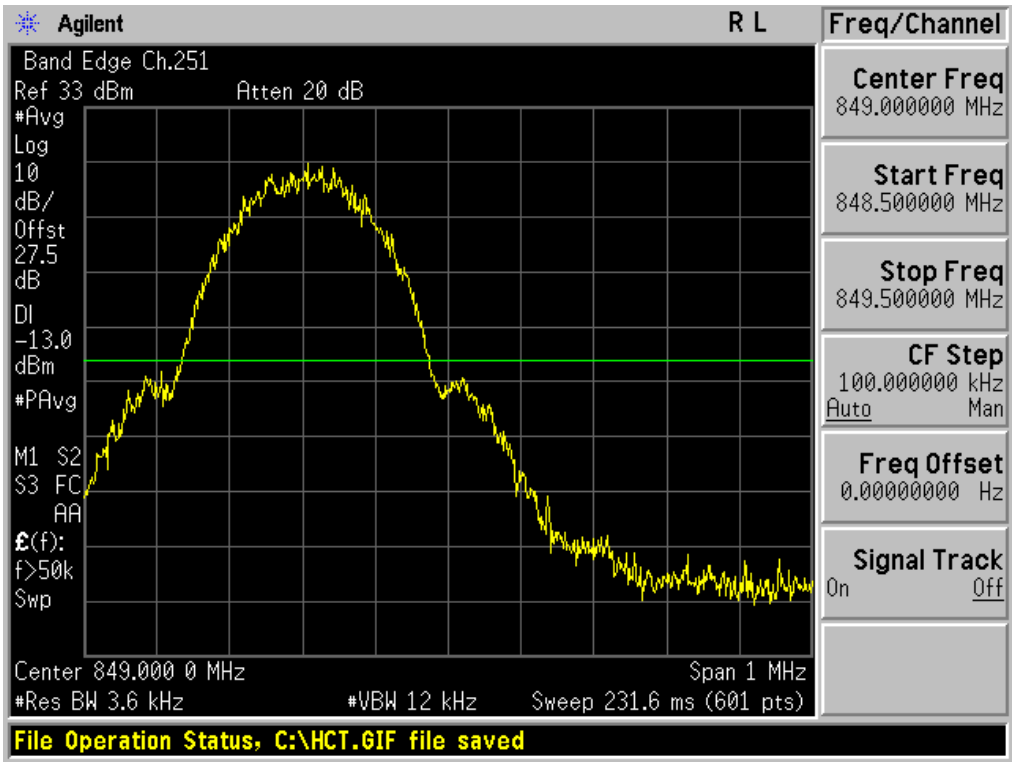

■ EDGE MODE (128 CH.) Block Edge 1

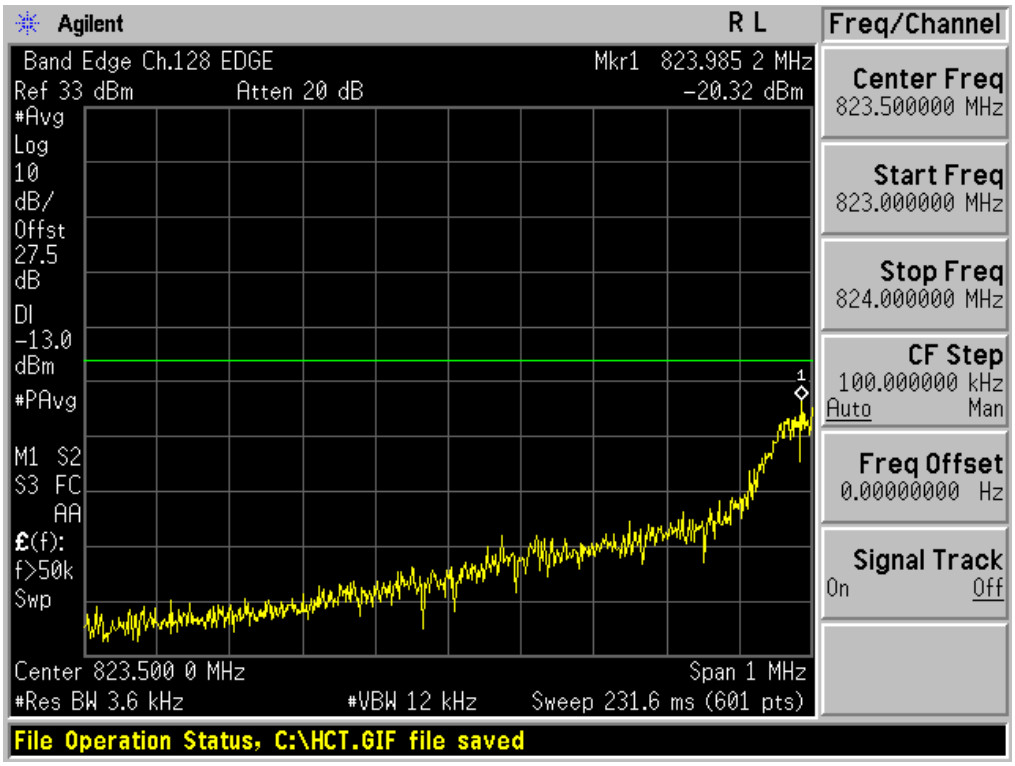

■ EDGE MODE (128 CH.) Block Edge 2

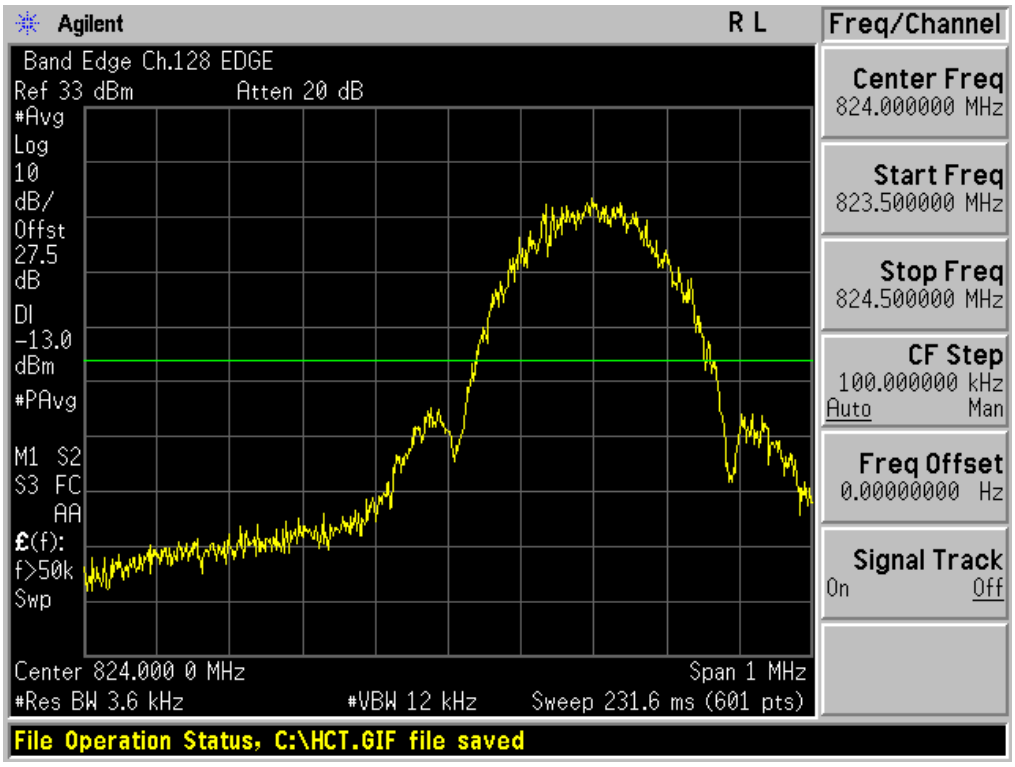

■ EDGE MODE (251 CH.) Block Edge 1

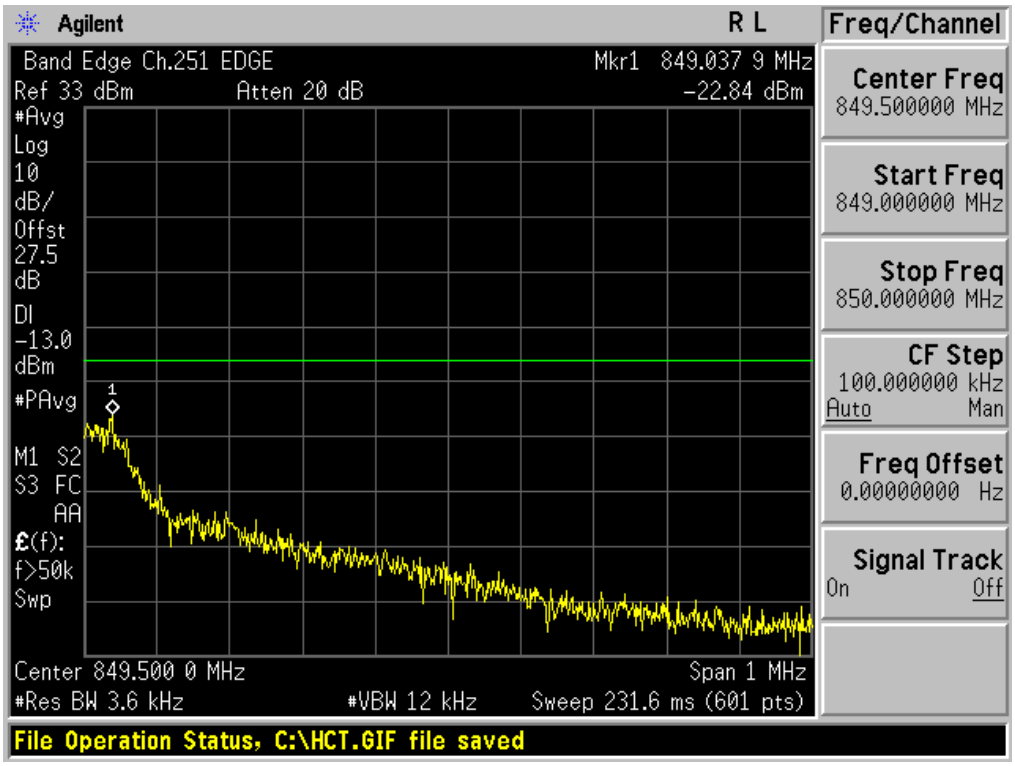

■ EDGE MODE (251 CH.) Block Edge 2

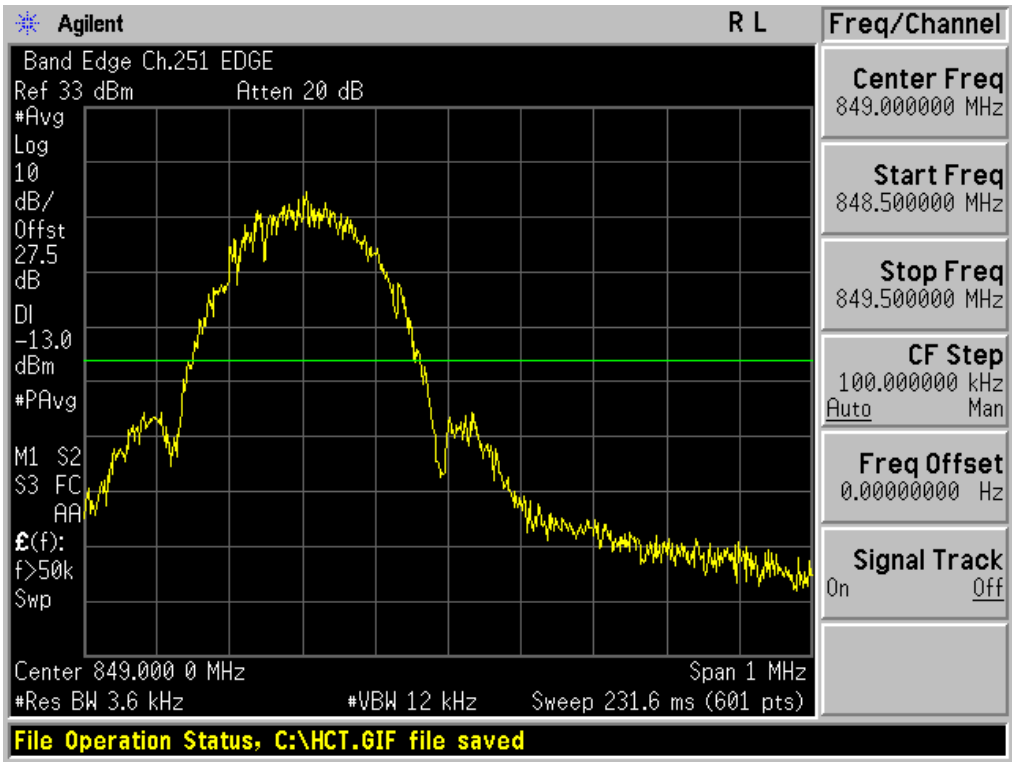

■ GSM1900 MODE (512 CH.) Block Edge 1

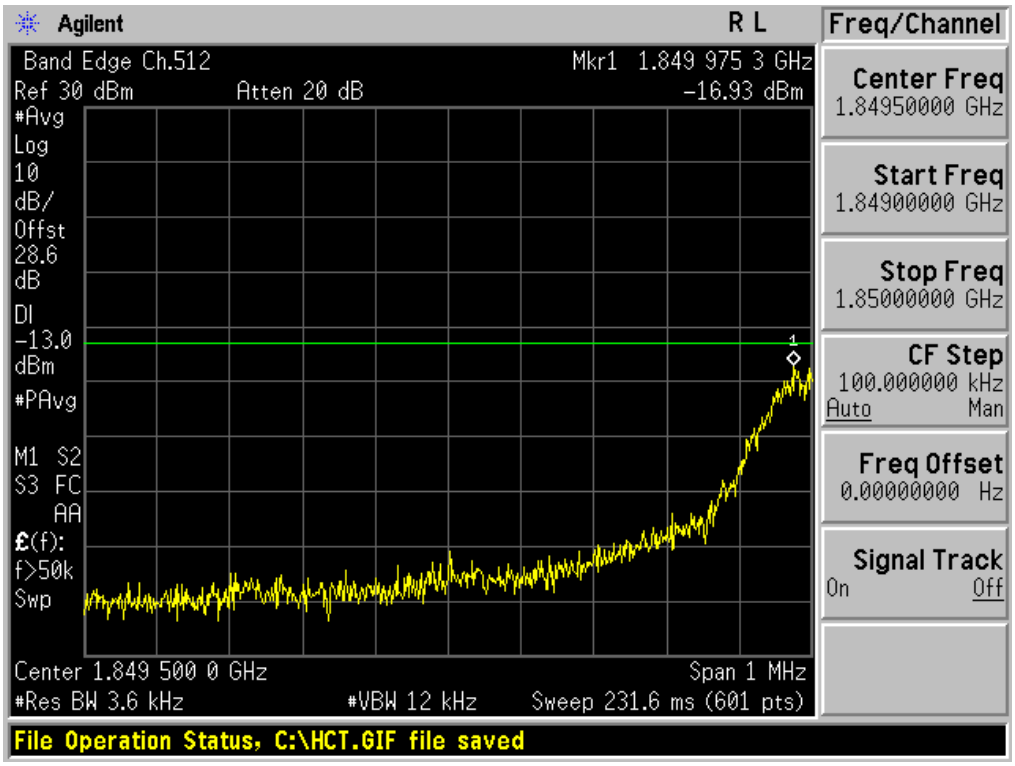

■ GSM1900 MODE (512 CH.) Block Edge 2

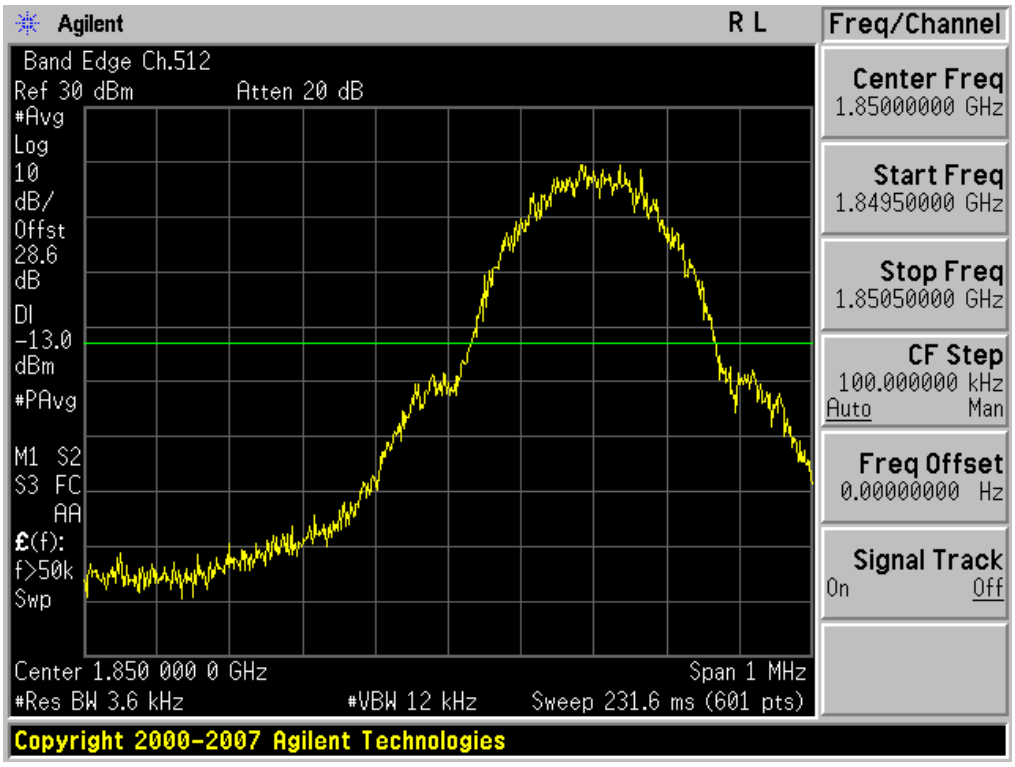

■ GSM1900 MODE (810 CH.) Block Edge 1

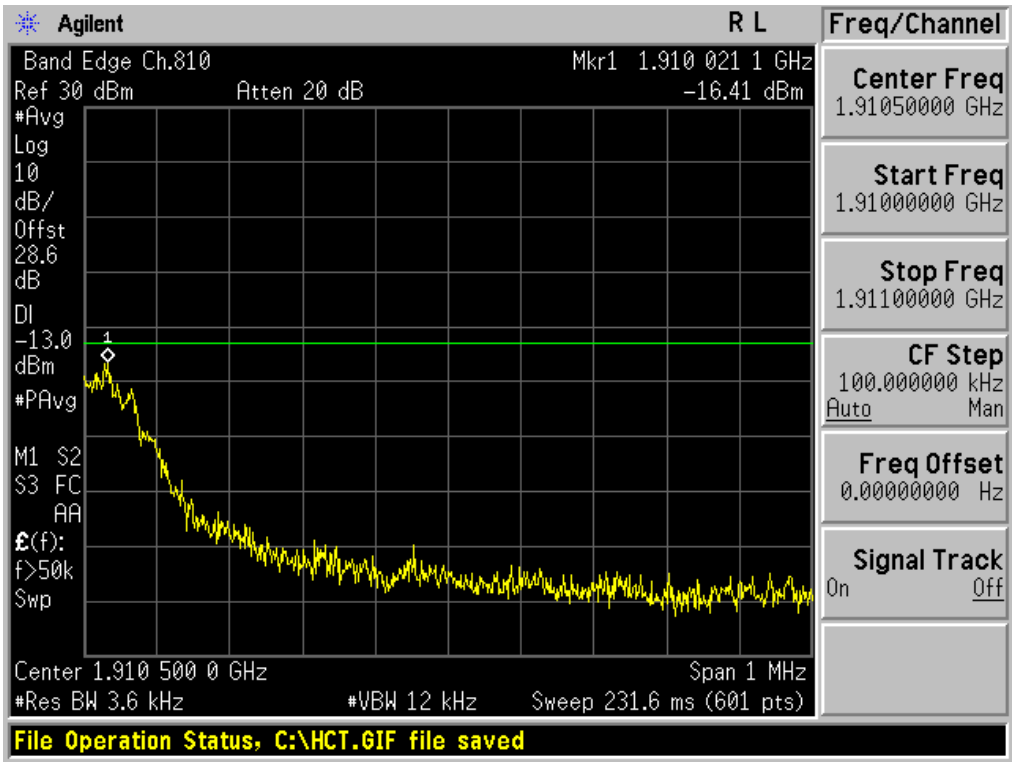

■ GSM1900 MODE (810 CH.) Block Edge 2

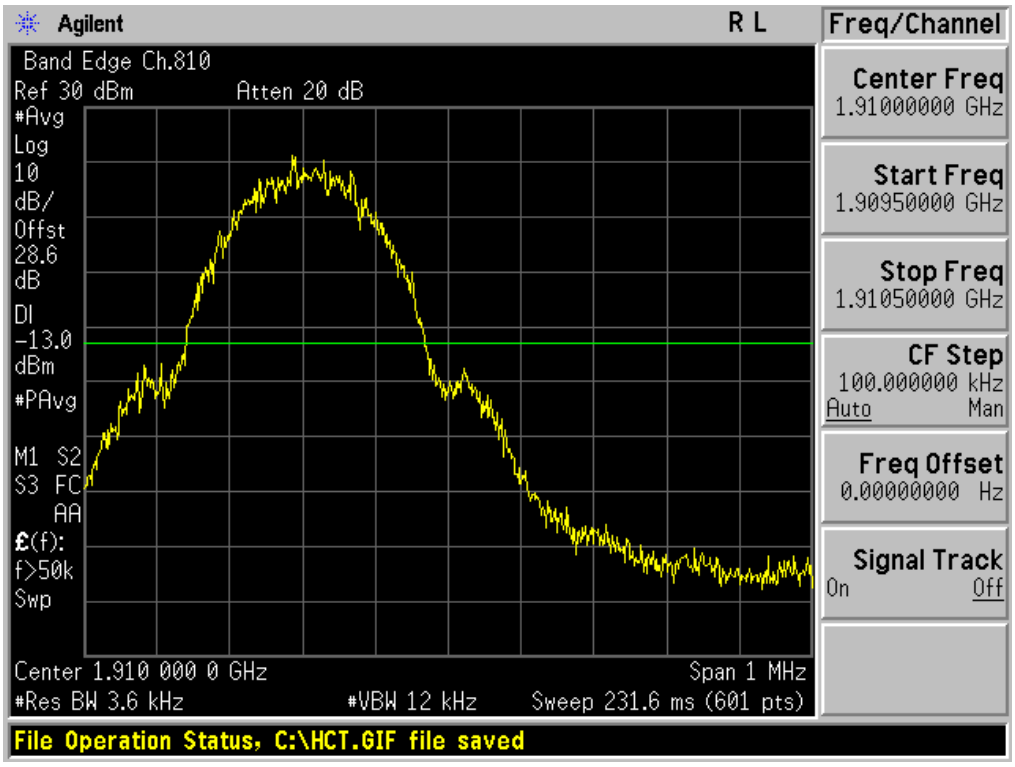

■ EDGE MODE (512 CH.) Block Edge 1

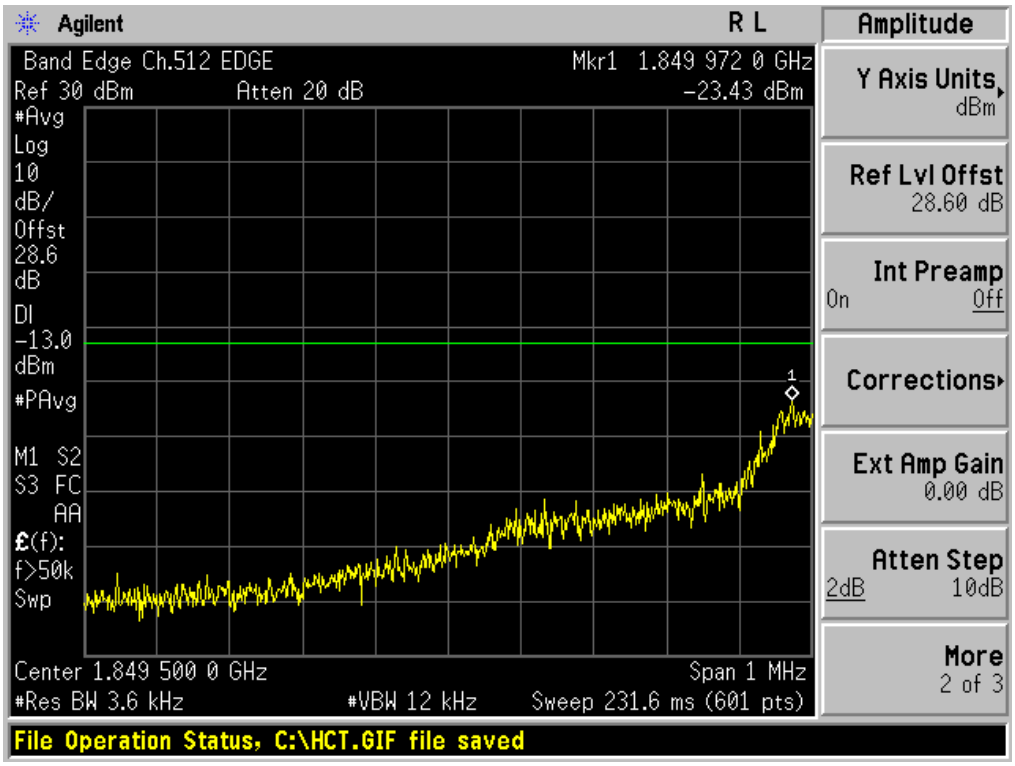

■ EDGE MODE (512 CH.) Block Edge 2

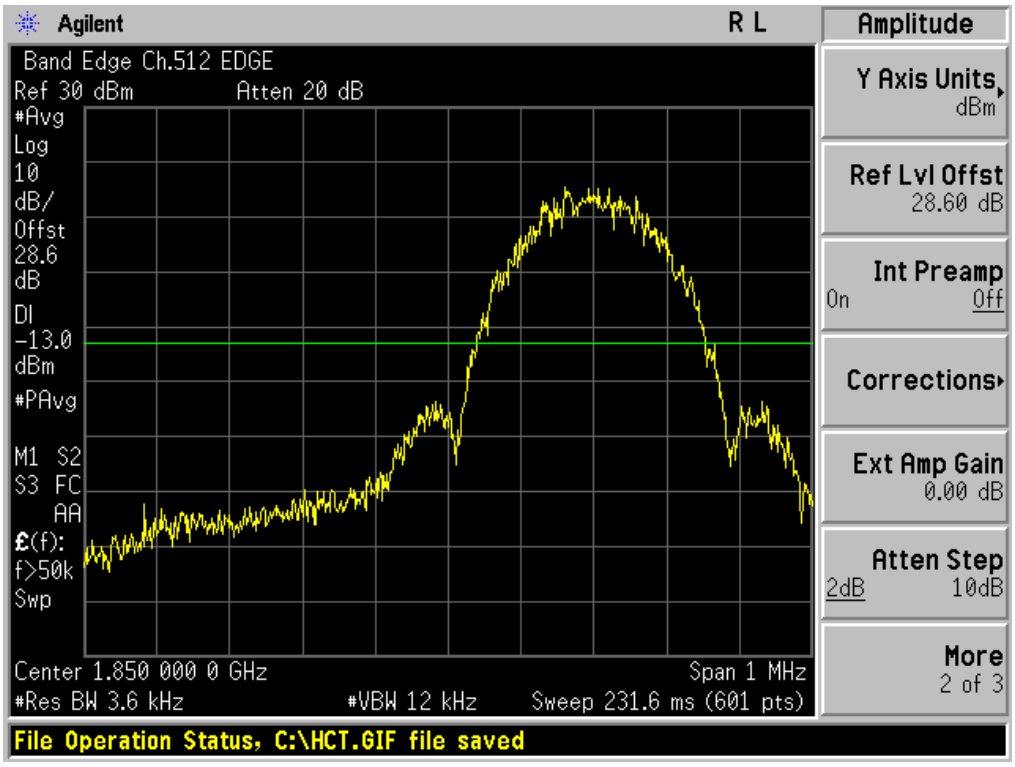

■ EDGE MODE (810 CH.) Block Edge 1

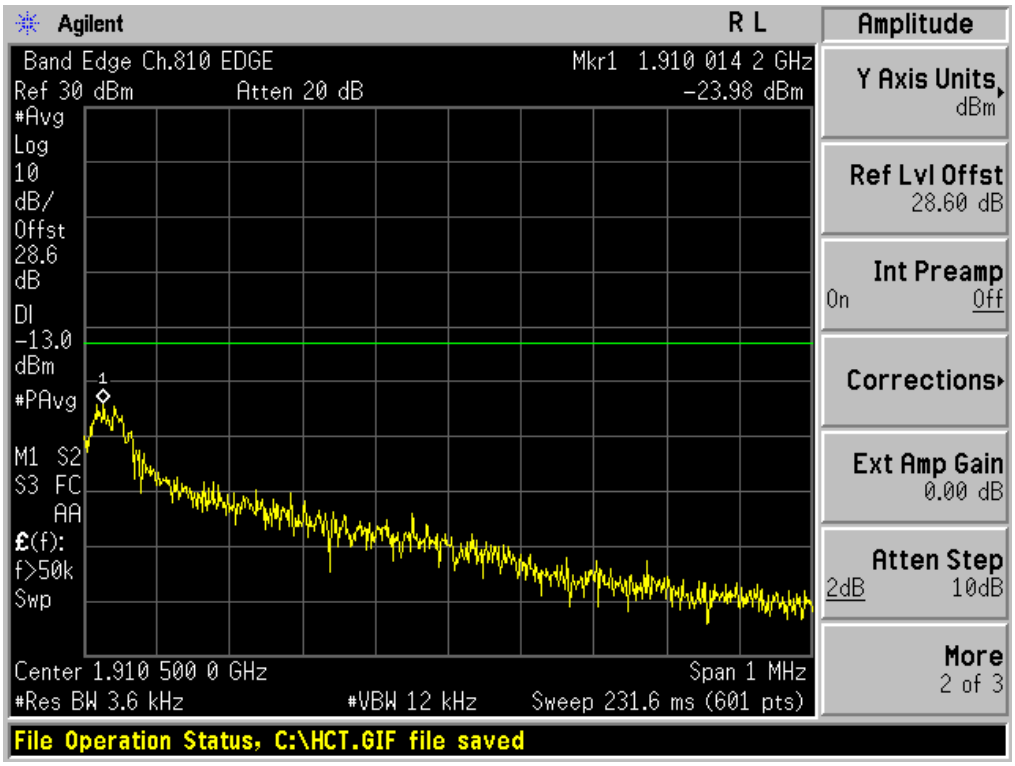

■ EDGE MODE (810 CH.) Block Edge 2

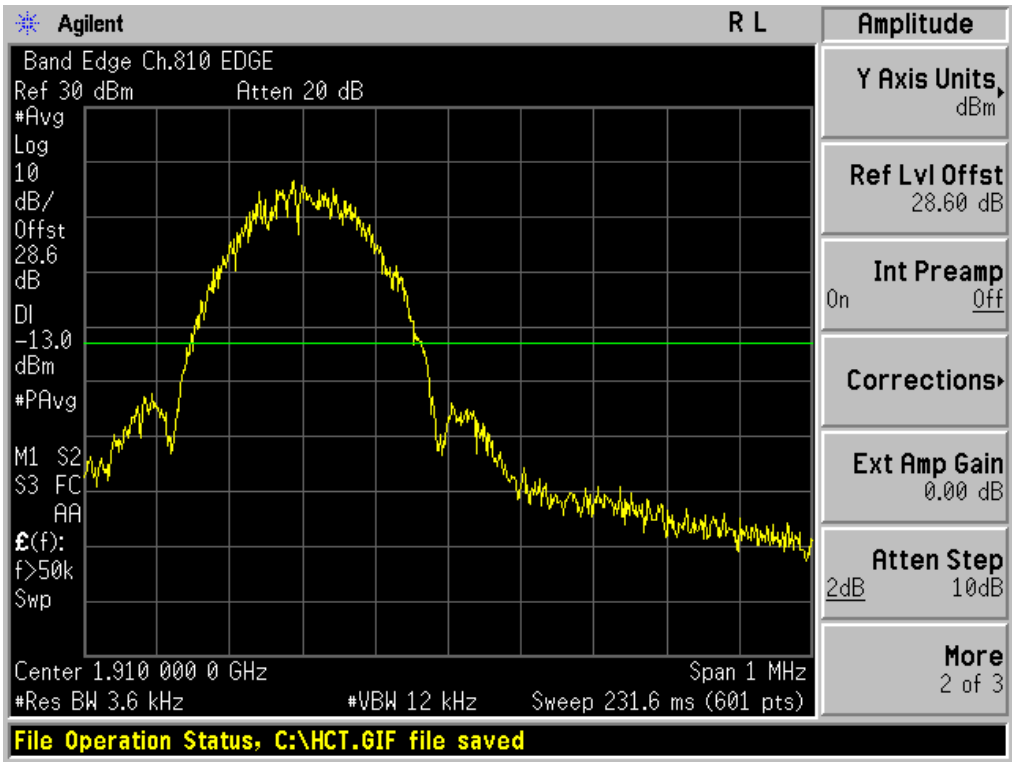

■ WCDMA850 MODE (4132 CH.) Block Edge

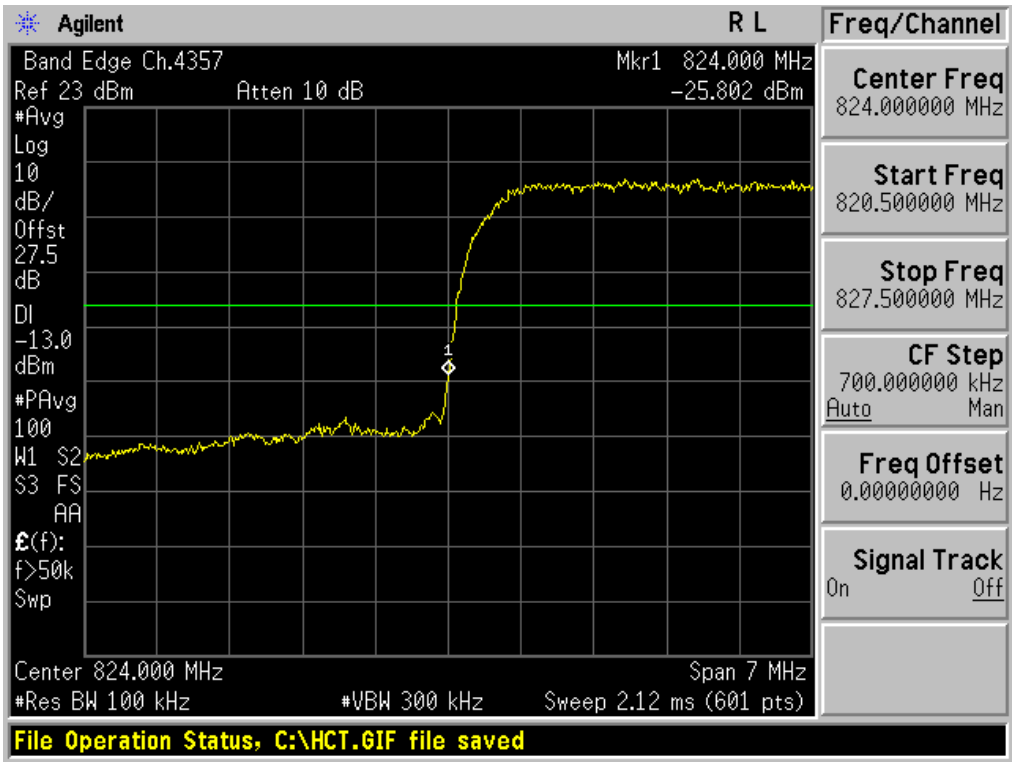

■ WCDMA850MODE (4233 CH.) Block Edge

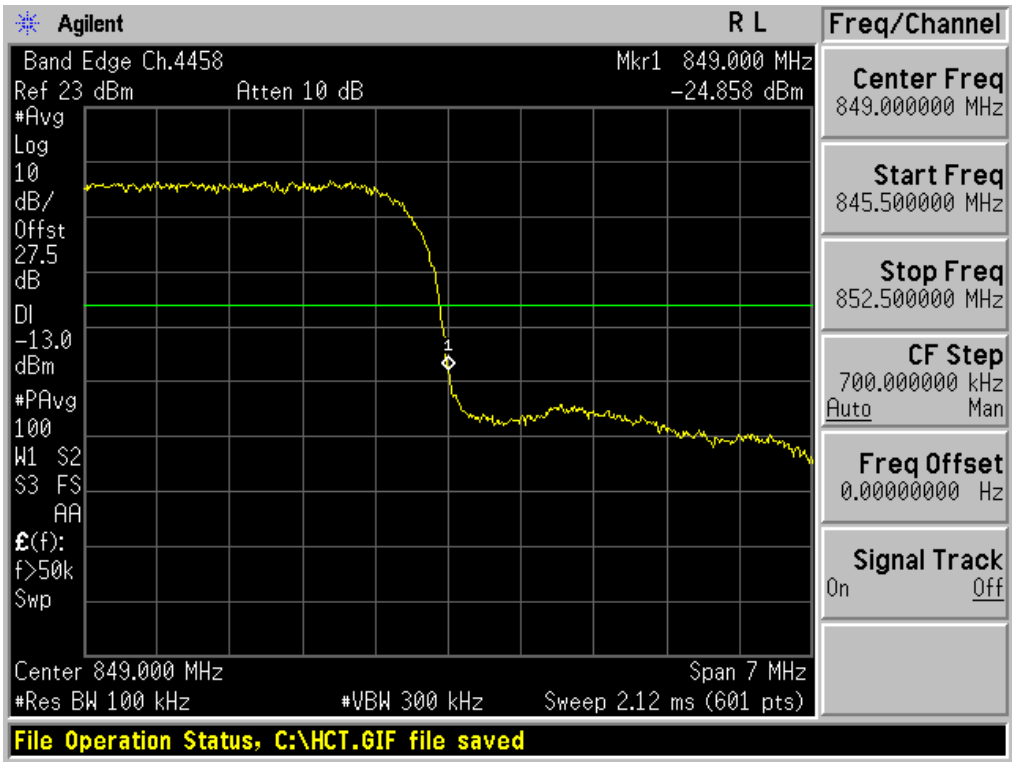

■ WCDMA850 MODE (4132 CH.) – 4 MHz Span

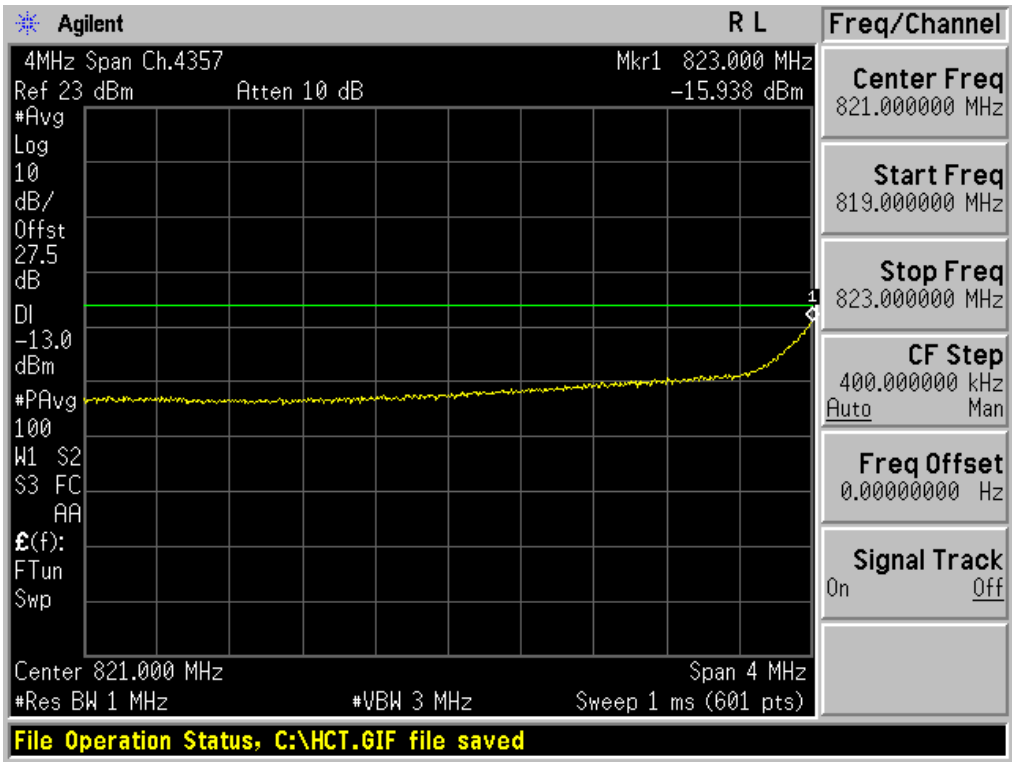

■ WCDMA850MODE (4233 CH.) – 4 MHz Span

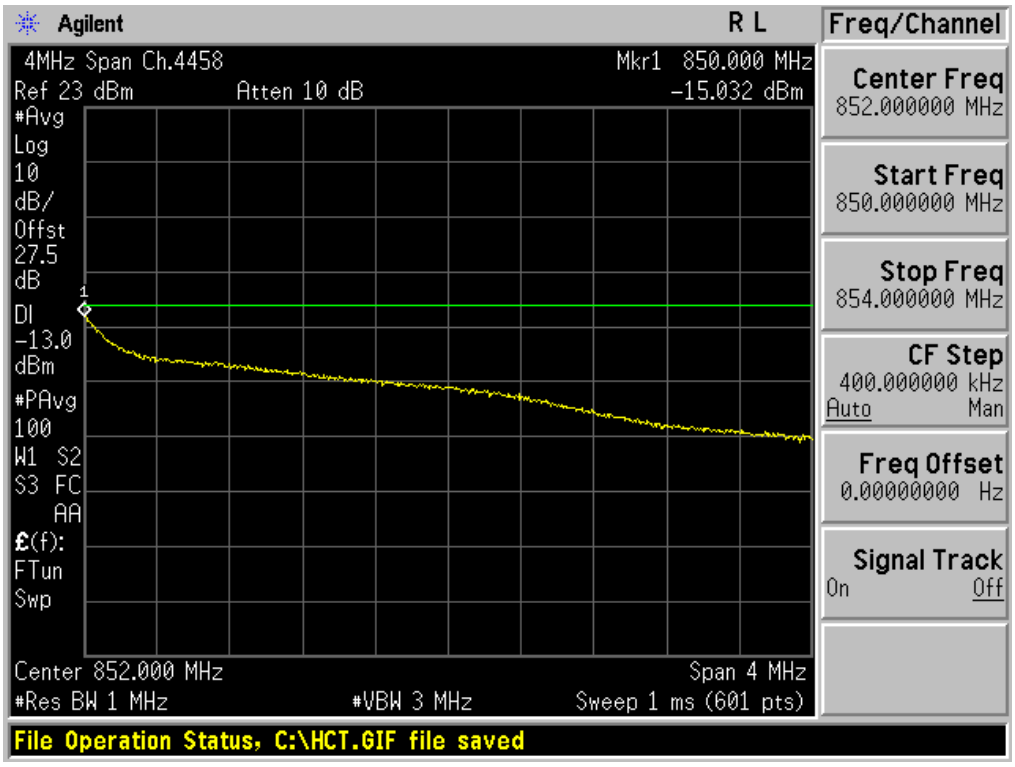

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

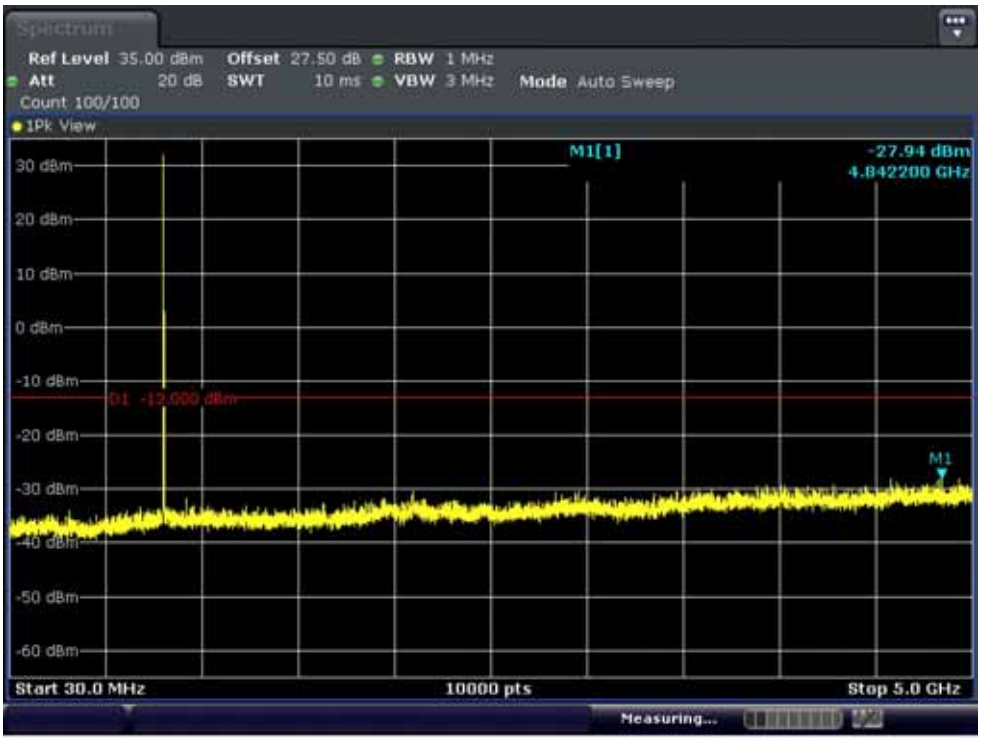

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

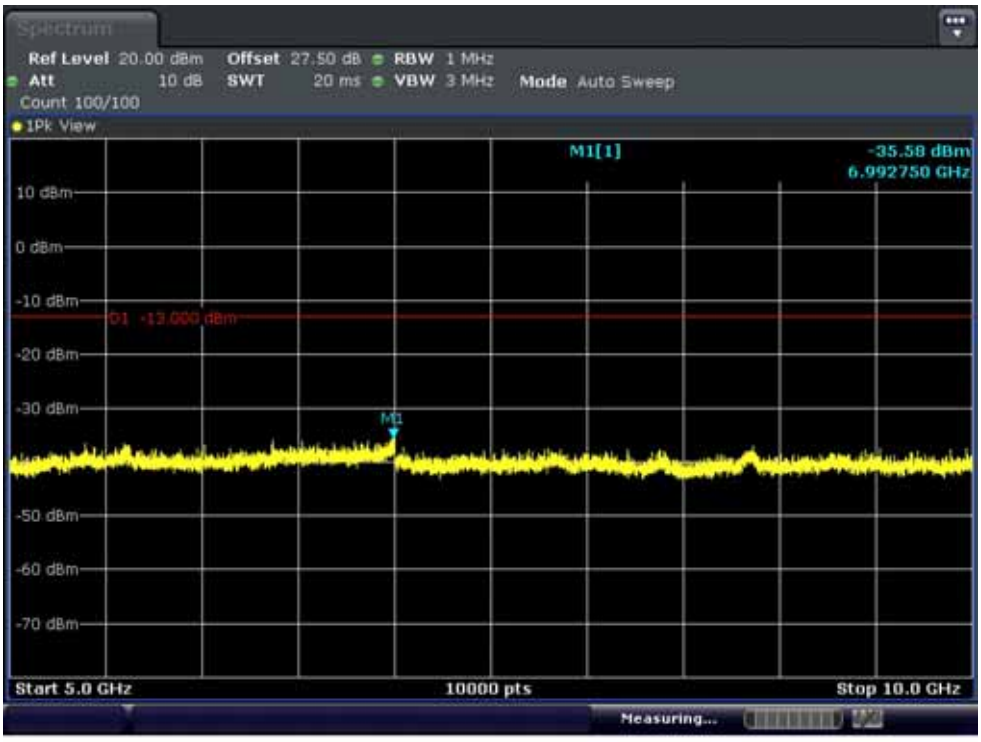

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

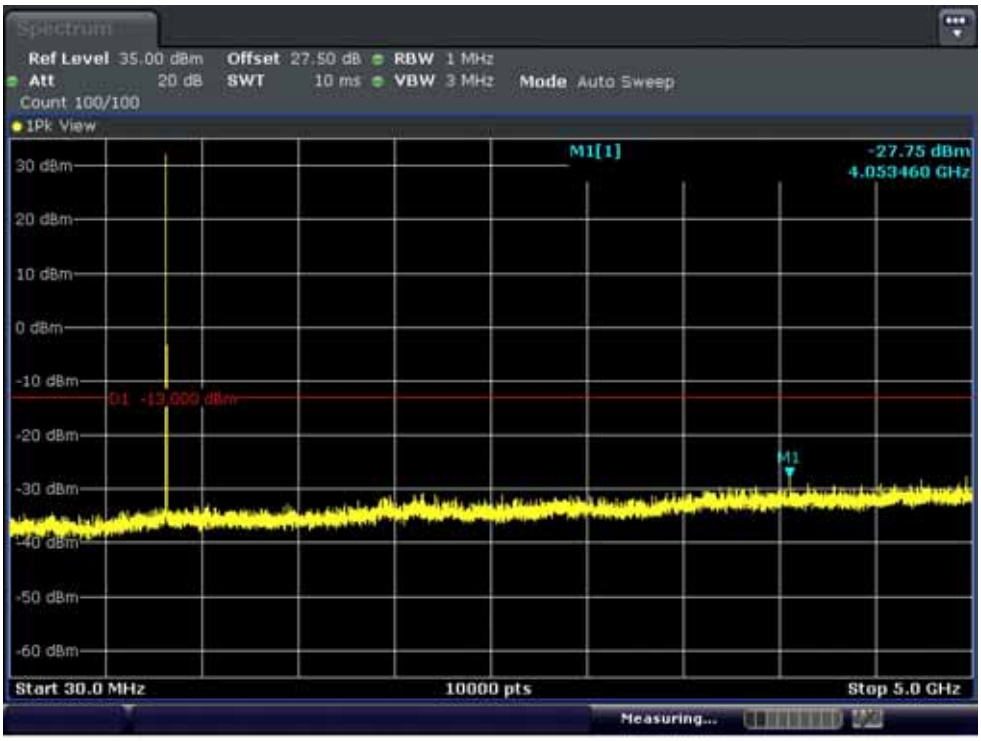

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2

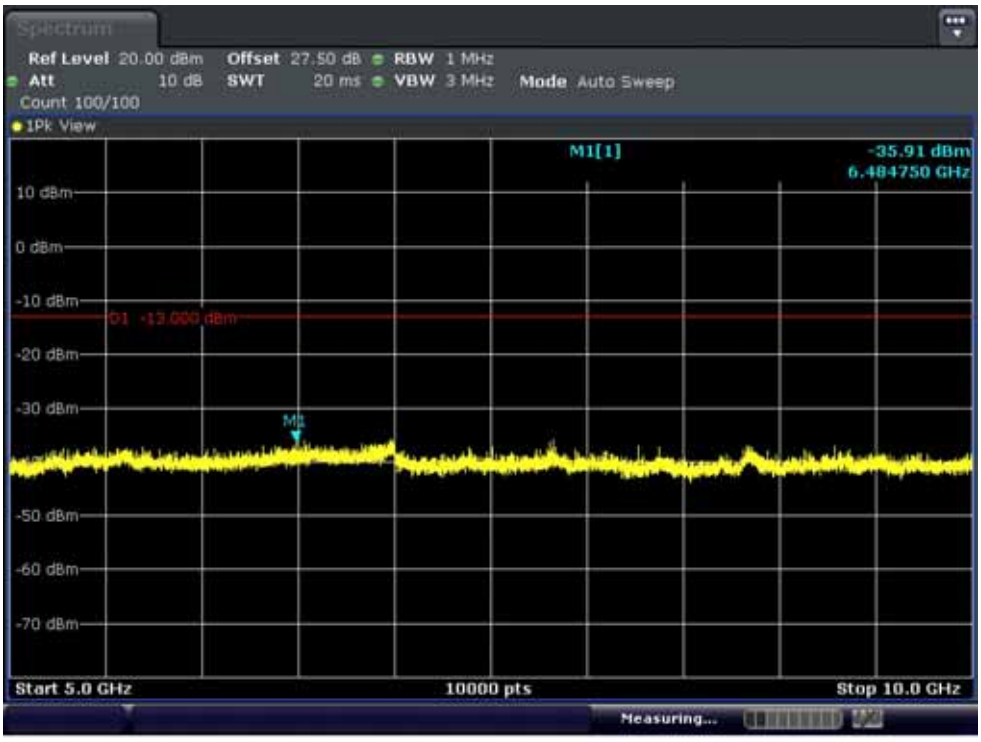

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

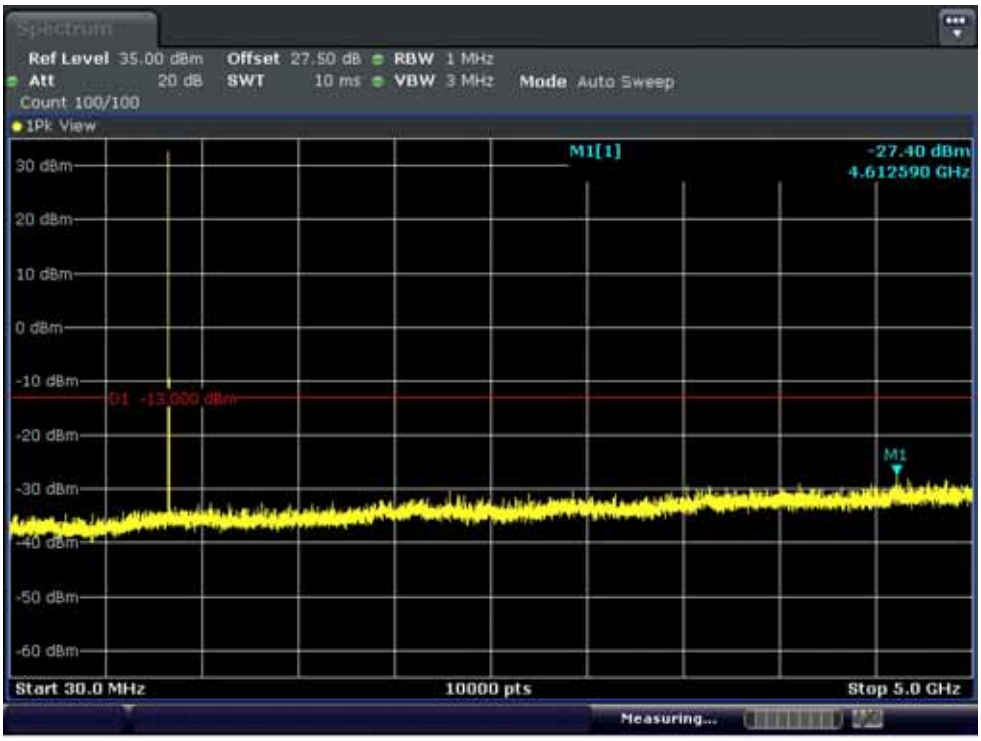

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

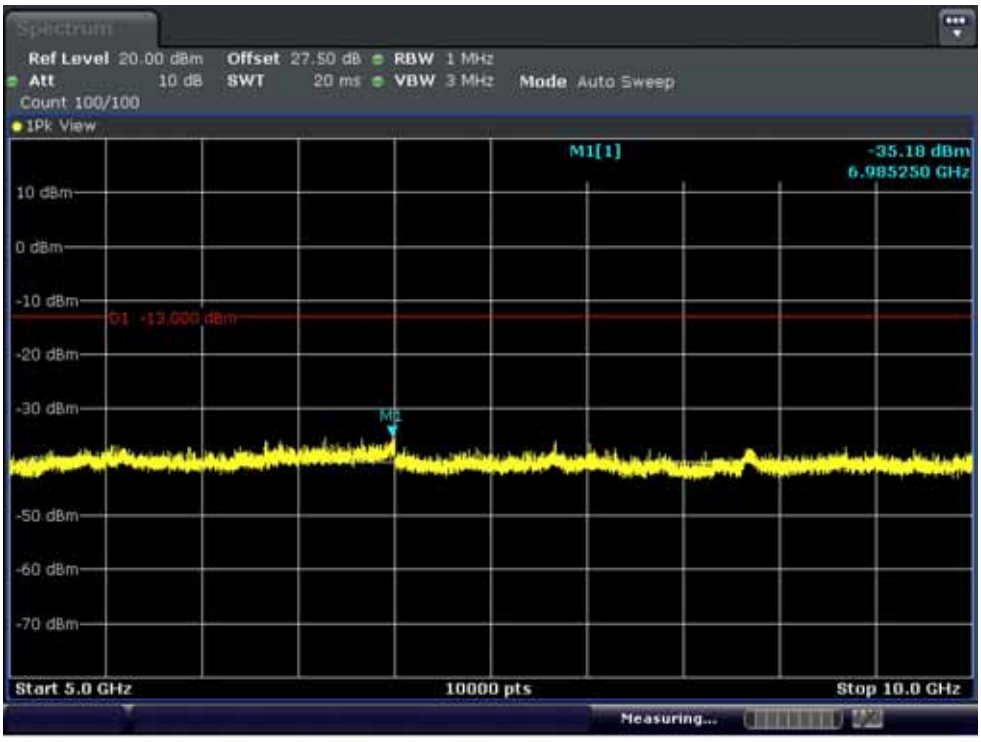

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

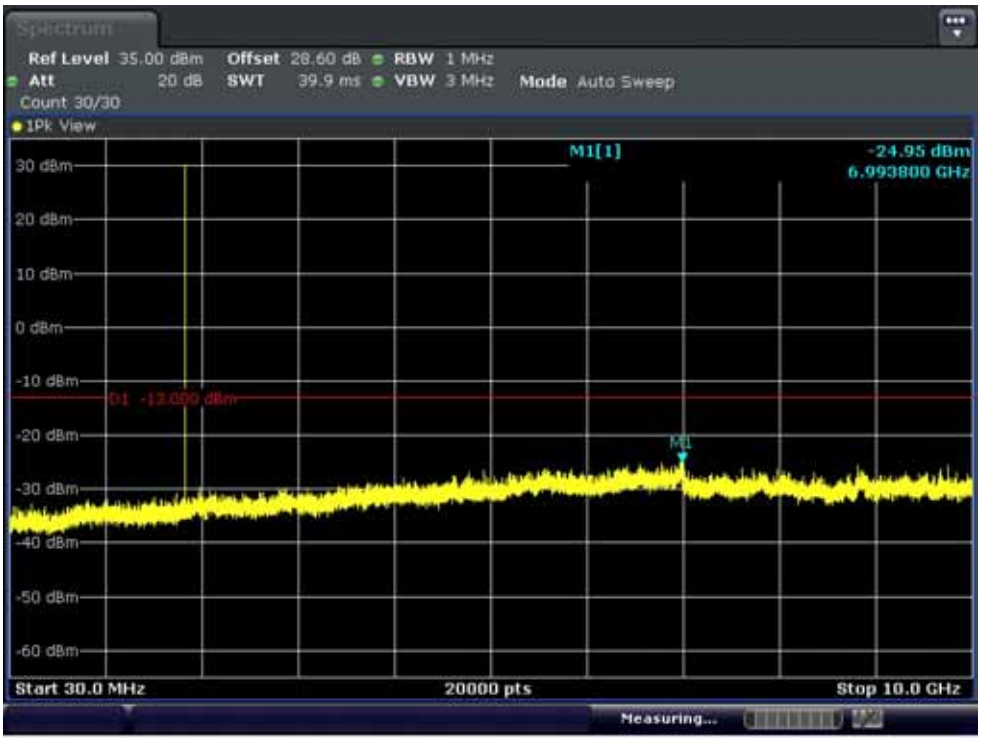

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

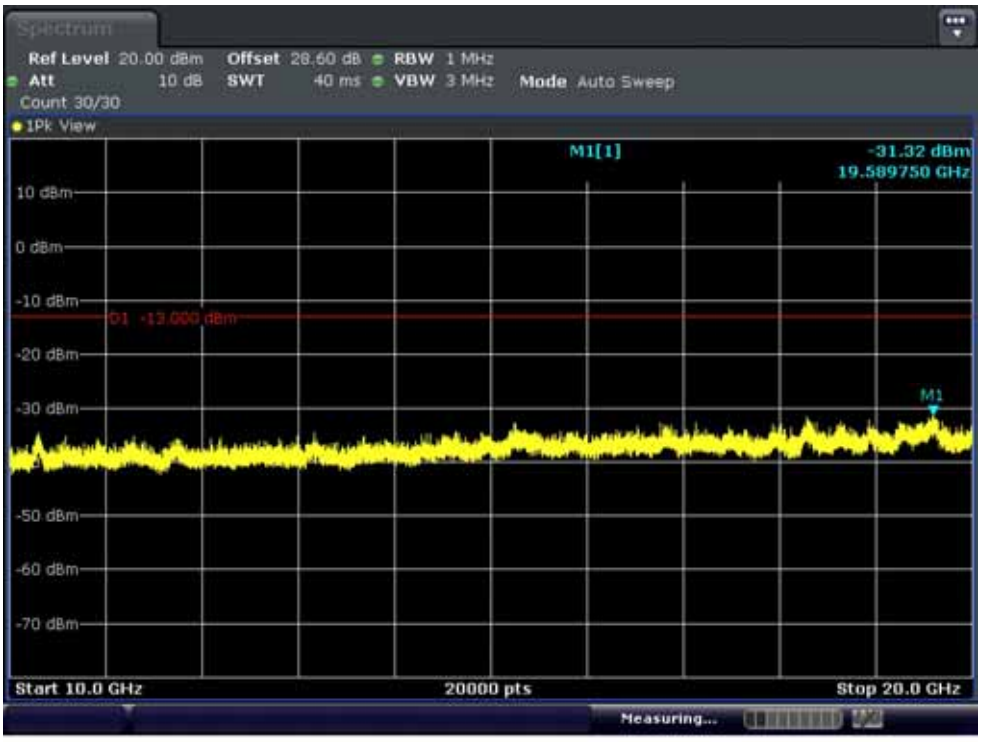

■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

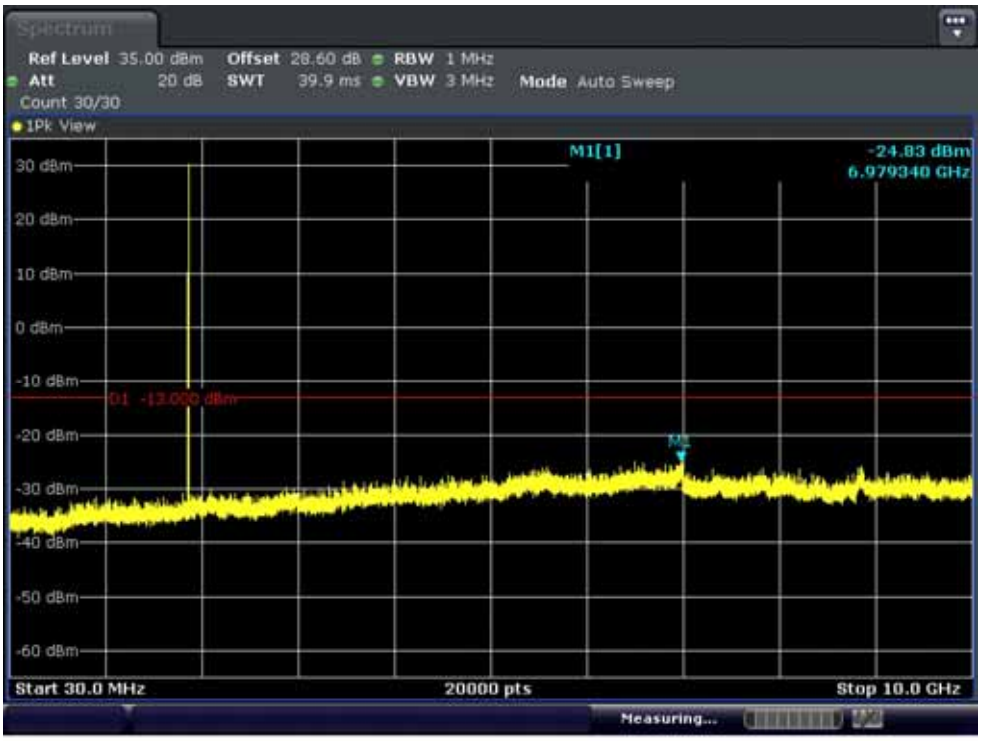

■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

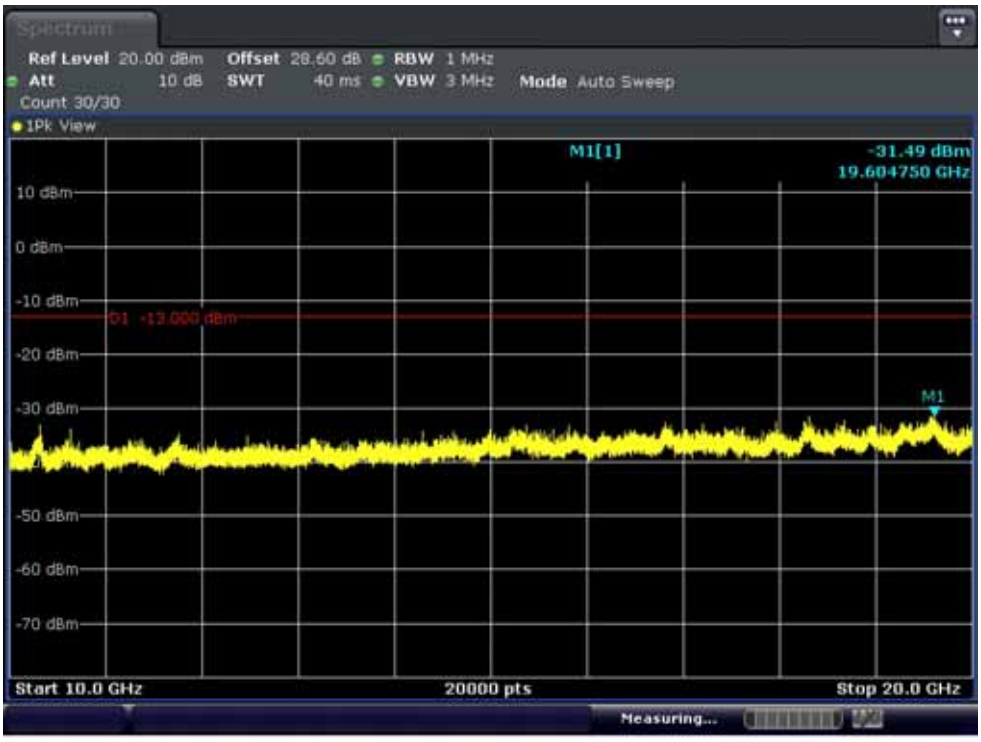

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

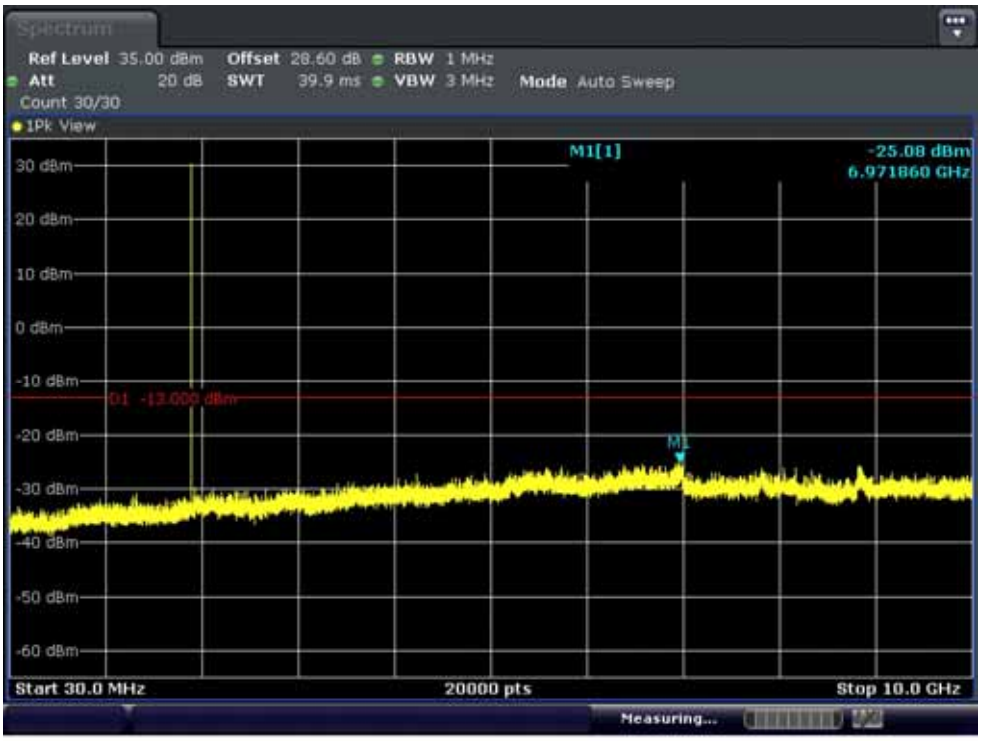

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

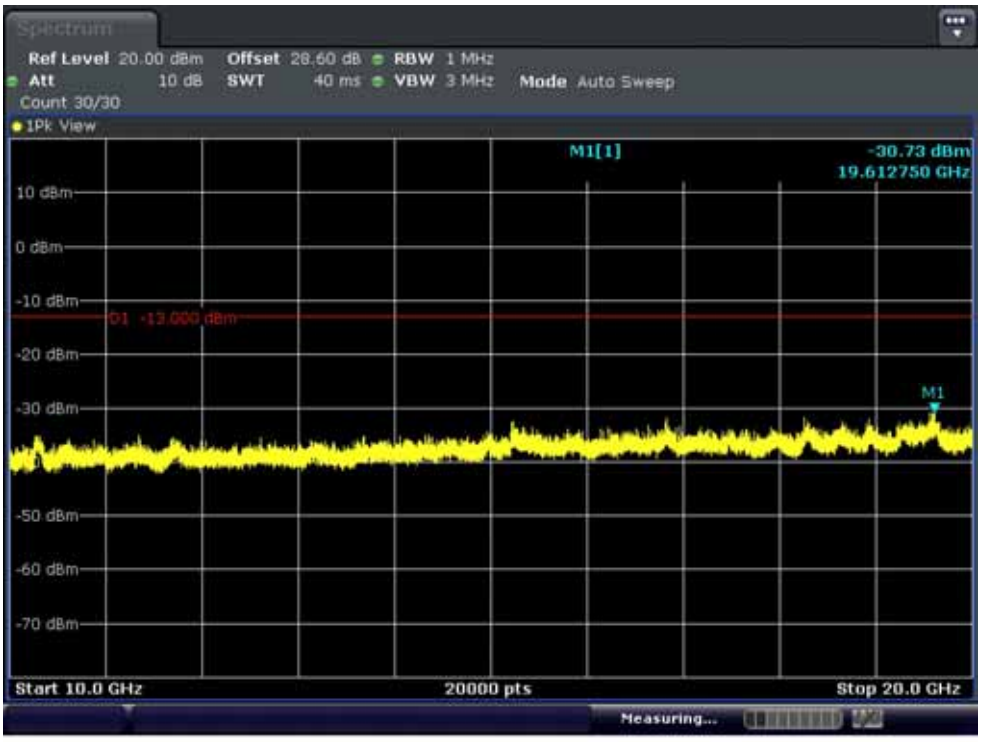

■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions1

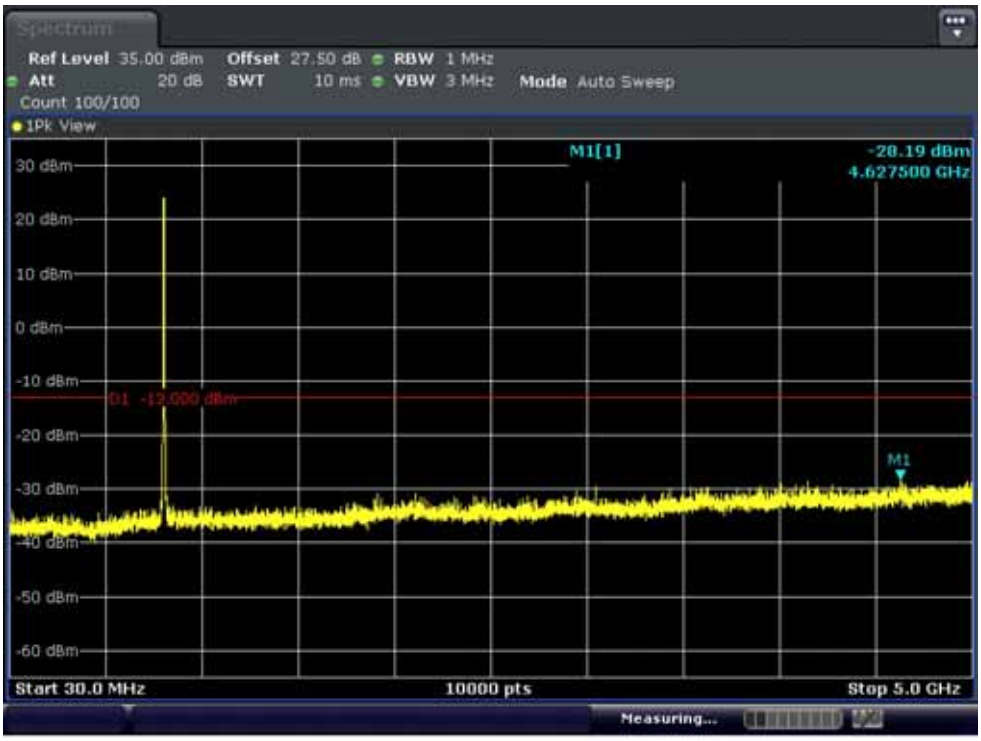

■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions2

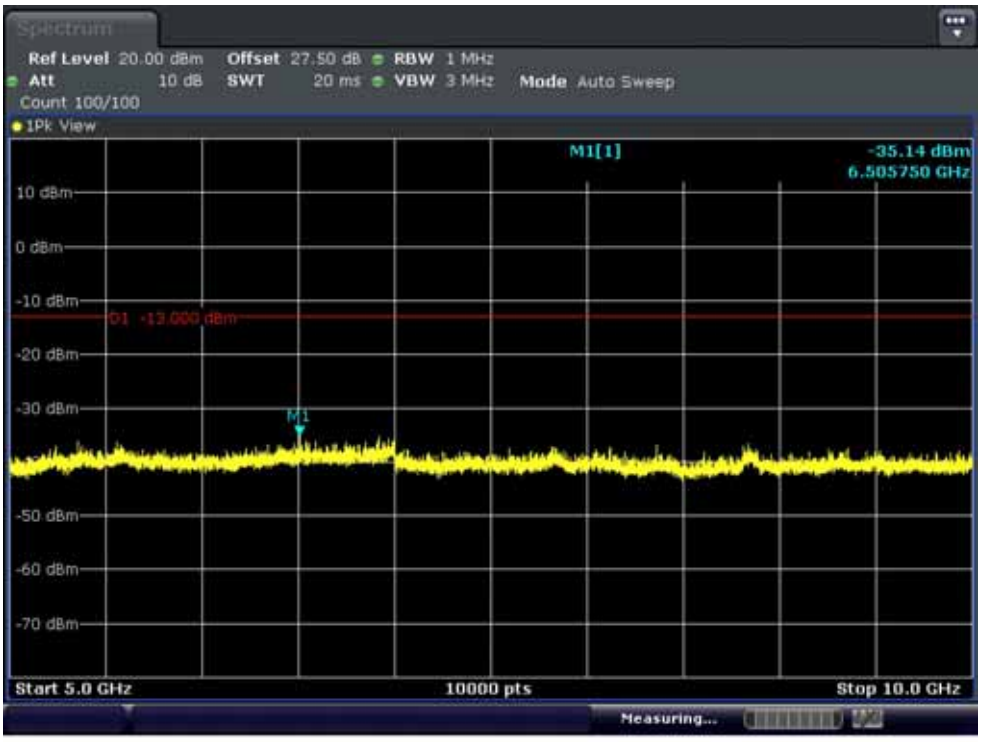

■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions1

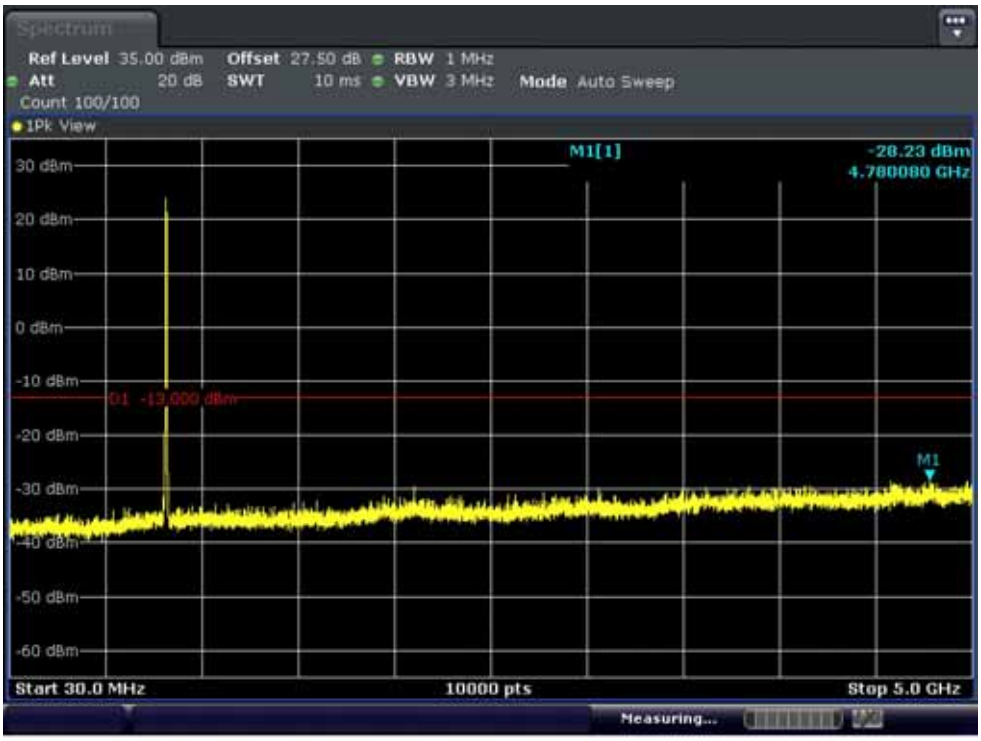

■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions2

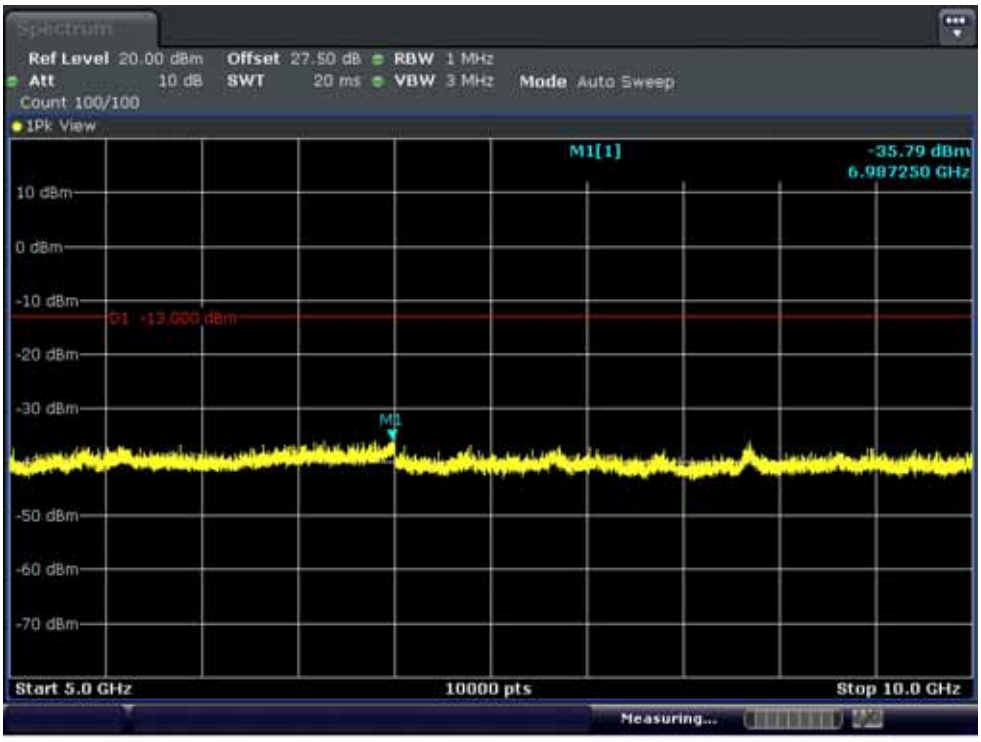

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions1

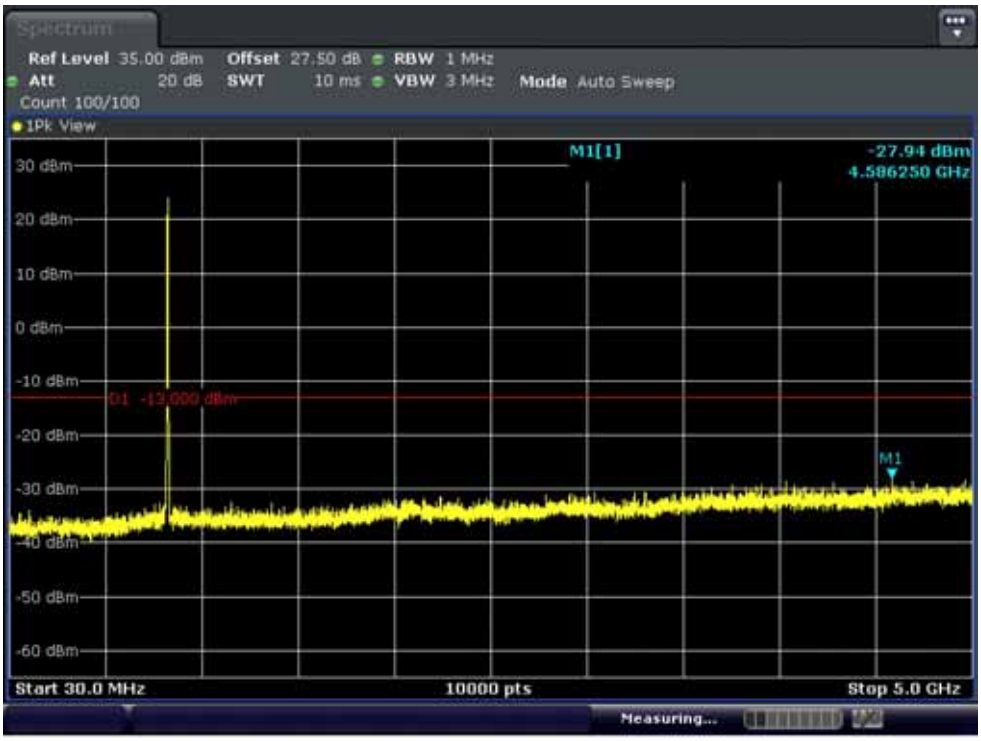

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions2