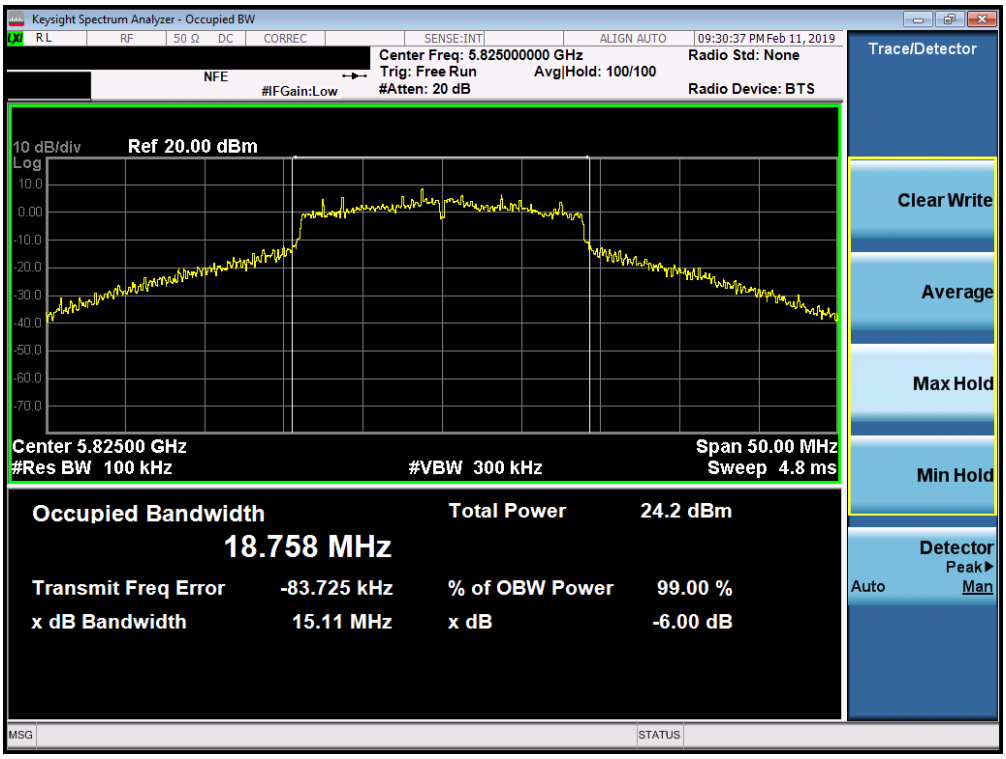

Plot 7-75. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

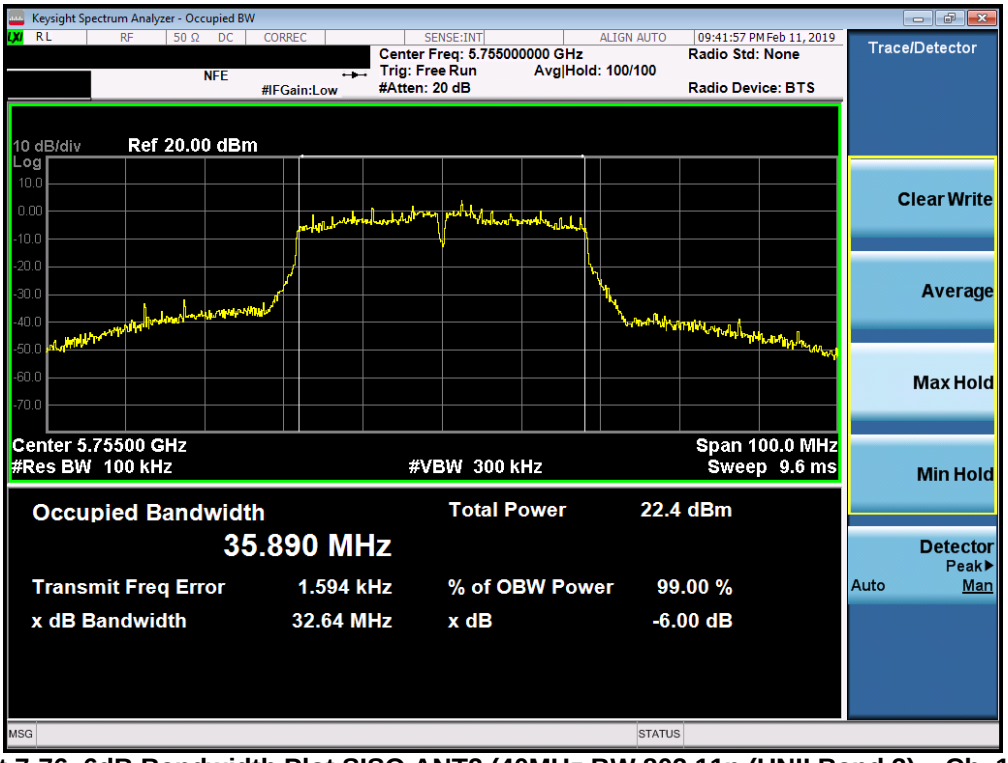

Plot 7-76. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

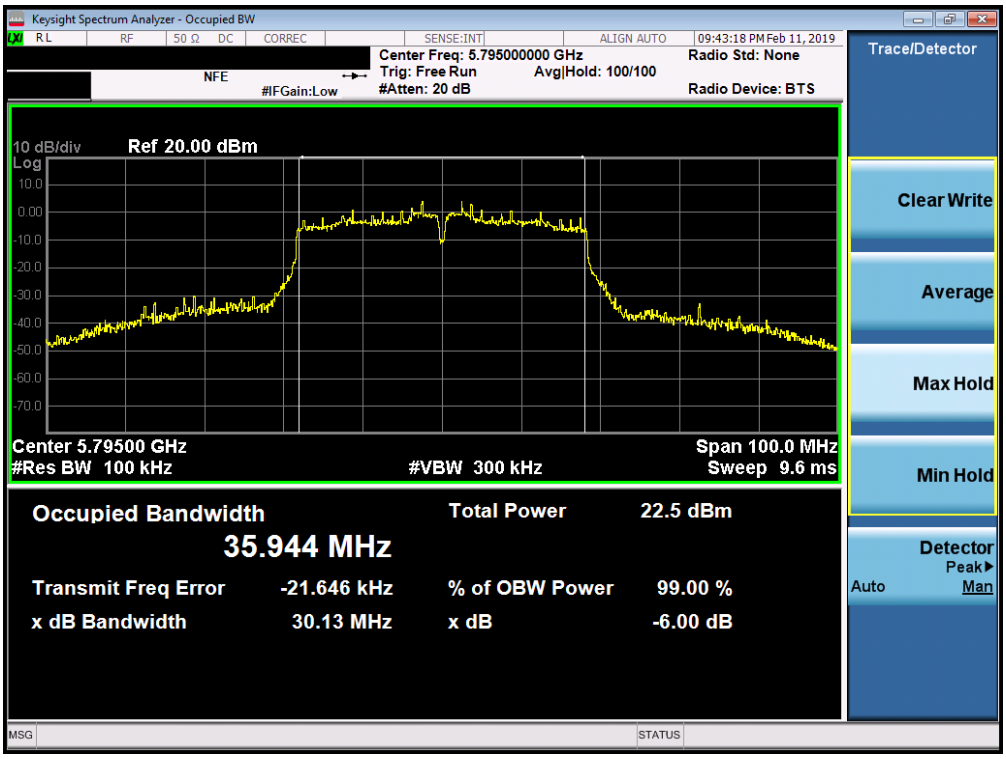

Plot 7-77. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

Plot 7-78. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

7.4 UNII Output Power Measurement – 802.11a/n/ac

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or 10 + 10 log10B, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and 11 dBm + 10log$_{10}$(26dB BW) = 11 dBm + 10log$_{10}$(19.17) = 23.83dBm. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or 17 + 10 log10B, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and 11 dBm + 10log$_{10}$(26dB BW) = 11 dBm + 10log$_{10}$(19.91) = 23.99dBm. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or 17 + 10 log10B, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

SISO Antenna-1 Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ac		
	5180	36	AVG	16.52	16.79	16.80	23.98	-7.18
	5200	40	AVG	17.94	17.75	17.82	23.98	-6.04
	5220	44	AVG	16.31	16.89	16.82	23.98	-7.09
	5240	48	AVG	16.36	16.83	16.91	23.98	-7.07
	5260	52	AVG	16.35	16.86	16.92	23.83	-6.91
	5280	56	AVG	17.96	17.84	17.89	23.83	-5.87
	5300	60	AVG	16.27	16.98	16.98	23.83	-6.85
	5320	64	AVG	16.39	16.97	16.95	23.83	-6.86
	5500	100	AVG	16.41	16.97	16.88	23.98	-7.01
	5600	120	AVG	16.50	16.36	16.25	23.98	-7.48
	5620	124	AVG	16.44	16.38	16.31	23.98	-7.54
	5720	144	AVG	16.03	16.91	16.90	23.98	-7.07
	5745	149	AVG	16.02	16.91	16.90	30.00	-13.09
	5785	157	AVG	17.05	17.99	17.99	30.00	-12.01
	5825	165	AVG	17.39	17.27	17.27	30.00	-12.61

Table 7-6. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ac		
	5190	38	AVG	15.36	15.42	23.98	-8.56
	5230	46	AVG	15.44	15.47	23.98	-8.51
	5270	54	AVG	15.36	15.38	23.83	-8.45
	5310	62	AVG	15.52	15.54	23.83	-8.29
	5510	102	AVG	15.46	15.46	23.98	-8.52
	5590	118	AVG	15.73	15.73	23.98	-8.25
	5630	126	AVG	15.60	15.71	23.98	-8.27
	5710	142	AVG	15.52	15.50	23.98	-8.46
	5755	151	AVG	15.35	15.24	30.00	-14.65
	5795	159	AVG	15.82	15.80	30.00	-14.18

Table 7-7. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac		
	5210	42	AVG	12.86	23.98	-11.12
	5290	58	AVG	13.06	23.83	-10.77
	5530	106	AVG	13.16	23.98	-10.82
	5610	122	AVG	13.19	23.98	-10.79
	5690	138	AVG	13.23	23.98	-10.75
	5775	155	AVG	13.11	30.00	-16.89

Table 7-8. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power

SISO Antenna-2 Conducted Output Power Measurements

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11a	802.11n	802.11ac		
	5180	36	AVG	16.90	16.64	16.67	23.98	-7.08
	5200	40	AVG	17.99	17.83	17.83	23.98	-5.99
	5220	44	AVG	16.91	16.73	16.83	23.98	-7.07
	5240	48	AVG	16.41	16.83	16.90	23.98	-7.08
	5260	52	AVG	16.98	16.88	16.82	23.83	-6.85
	5280	56	AVG	17.53	17.95	17.91	23.83	-5.88
	5300	60	AVG	16.59	16.91	16.91	23.83	-6.92
	5320	64	AVG	16.95	16.80	16.83	23.83	-6.88
	5500	100	AVG	16.96	16.88	16.84	23.98	-7.02
	5600	120	AVG	16.99	16.73	16.75	23.98	-6.99
	5620	124	AVG	16.92	16.77	16.75	23.98	-7.06
	5720	144	AVG	16.96	16.80	16.85	23.98	-7.02
	5745	149	AVG	16.30	16.91	16.96	30.00	-13.04
	5785	157	AVG	17.36	17.29	17.27	30.00	-12.64
	5825	165	AVG	17.24	17.92	17.99	30.00	-12.01

Table 7-9. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	IEEE Transmission Mode		Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11n	802.11ac		
	5190	38	AVG	15.44	15.50	23.98	-8.48
	5230	46	AVG	15.44	15.36	23.98	-8.54
	5270	54	AVG	15.41	15.42	23.83	-8.41
	5310	62	AVG	15.49	15.55	23.83	-8.28
	5510	102	AVG	15.40	15.37	23.98	-8.58
	5590	118	AVG	15.45	15.44	23.98	-8.53
	5630	126	AVG	15.50	15.51	23.98	-8.47
	5710	142	AVG	15.40	15.30	23.98	-8.58
	5755	151	AVG	15.70	15.61	30.00	-14.30
	5795	159	AVG	15.96	15.98	30.00	-14.02

Table 7-10. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power

	Freq [MHz]	Channel	Detector	IEEE Transmission Mode	Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				802.11ac		
5GHz (80MHz Bandwidth)	5210	42	AVG	13.13	23.98	-10.85
	5290	58	AVG	13.35	23.83	-10.48
	5530	106	AVG	13.29	23.98	-10.69
	5610	122	AVG	13.06	23.98	-10.92
	5690	138	AVG	13.17	23.98	-10.81
	5775	155	AVG	12.67	30.00	-17.33

Table 7-11. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power

MIMO Maximum Conducted Output Power Measurements

	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				ANT1	ANT2	MIMO		
5GHz (20MHz Bandwidth)	5180	36	AVG	16.52	16.90	19.72	23.98	-4.25
	5200	40	AVG	17.94	17.99	20.98	23.98	-3.00
	5220	44	AVG	16.31	16.91	19.63	23.98	-4.35
	5240	48	AVG	16.36	16.41	19.40	23.98	-4.58
	5260	52	AVG	16.35	16.98	19.69	23.83	-4.14
	5280	56	AVG	17.96	17.53	20.76	23.83	-3.07
	5300	60	AVG	16.27	16.59	19.44	23.83	-4.39
	5320	64	AVG	16.39	16.95	19.69	23.83	-4.14
	5500	100	AVG	16.41	16.96	19.70	23.98	-4.28
	5600	120	AVG	16.50	16.99	19.76	23.98	-4.22
	5620	124	AVG	16.44	16.92	19.70	23.98	-4.28
	5720	144	AVG	16.03	16.96	19.53	23.98	-4.45
	5745	149	AVG	16.02	16.30	19.17	30.00	-10.83
	5785	157	AVG	17.05	17.36	20.22	30.00	-9.78
	5825	165	AVG	17.39	17.24	20.33	30.00	-9.67

Table 7-12. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power

	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				ANT1	ANT2	MIMO		
5GHz (20MHz Bandwidth)	5180	36	AVG	16.79	16.79	19.80	23.98	-4.18
	5200	40	AVG	17.75	17.75	20.76	23.98	-3.22
	5220	44	AVG	16.89	16.89	19.90	23.98	-4.08
	5240	48	AVG	16.83	16.83	19.84	23.98	-4.14
	5260	52	AVG	16.86	16.86	19.87	23.83	-3.96
	5280	56	AVG	17.84	17.84	20.85	23.83	-2.98
	5300	60	AVG	16.98	16.98	19.99	23.83	-3.84
	5320	64	AVG	16.97	16.97	19.98	23.83	-3.85
	5500	100	AVG	16.97	16.97	19.98	23.98	-4.00
	5600	120	AVG	16.36	16.36	19.37	23.98	-4.61
	5620	124	AVG	16.38	16.38	19.39	23.98	-4.59
	5720	144	AVG	16.91	16.91	19.92	23.98	-4.06
	5745	149	AVG	16.91	16.91	19.92	30.00	-10.08
	5785	157	AVG	17.99	17.99	21.00	30.00	-9.00
	5825	165	AVG	17.27	17.27	20.28	30.00	-9.72

Table 7-13. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				ANT1	ANT2	MIMO		
	5180	36	AVG	16.80	16.80	19.81	23.98	-4.17
	5200	40	AVG	17.82	17.82	20.83	23.98	-3.15
	5220	44	AVG	16.82	16.82	19.83	23.98	-4.15
	5240	48	AVG	16.91	16.91	19.92	23.98	-4.06
	5260	52	AVG	16.92	16.92	19.93	23.83	-3.90
	5280	56	AVG	17.89	17.89	20.90	23.83	-2.93
	5300	60	AVG	16.98	16.98	19.99	23.83	-3.84
	5320	64	AVG	16.95	16.95	19.96	23.83	-3.87
	5500	100	AVG	16.88	16.88	19.89	23.98	-4.09
	5600	120	AVG	16.25	16.25	19.26	23.98	-4.72
	5620	124	AVG	16.31	16.31	19.32	23.98	-4.66
	5720	144	AVG	16.90	16.90	19.91	23.98	-4.07
	5745	149	AVG	16.90	16.90	19.91	30.00	-10.09
	5785	157	AVG	17.99	17.99	21.00	30.00	-9.00
	5825	165	AVG	17.27	17.27	20.28	30.00	-9.72

Table 7-14. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				ANT1	ANT2	MIMO		
	5190	38	AVG	15.36	15.42	18.40	23.98	-5.58
	5230	46	AVG	15.44	15.47	18.47	23.98	-5.51
	5270	54	AVG	15.36	15.38	18.38	23.83	-5.45
	5310	62	AVG	15.52	15.54	18.54	23.83	-5.29
	5510	102	AVG	15.46	15.46	18.47	23.98	-5.51
	5590	118	AVG	15.73	15.73	18.74	23.98	-5.24
	5630	126	AVG	15.60	15.71	18.67	23.98	-5.31
	5710	142	AVG	15.52	15.50	18.52	23.98	-5.46
	5755	151	AVG	15.35	15.24	18.31	30.00	-11.69
	5795	159	AVG	15.82	15.80	18.82	30.00	-11.18

Table 7-15. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
				ANT1	ANT2	MIMO		
5GHz (40MHz Bandwidth)	5190	38	AVG	15.42	15.50	18.47	23.98	-5.51
	5230	46	AVG	15.47	15.36	18.43	23.98	-5.55
	5270	54	AVG	15.38	15.42	18.41	23.83	-5.42
	5310	62	AVG	15.54	15.55	18.56	23.83	-5.27
	5510	102	AVG	15.46	15.37	18.43	23.98	-5.55
	5590	118	AVG	15.73	15.44	18.60	23.98	-5.38
	5630	126	AVG	15.71	15.51	18.62	23.98	-5.36
	5710	142	AVG	15.50	15.30	18.41	23.98	-5.57
	5755	151	AVG	15.24	15.61	18.44	30.00	-11.56
	5795	159	AVG	15.80	15.98	18.90	30.00	-11.10

Table 7-16. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

	Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]
				ANT1	ANT2	MIMO	
5GHz (80MHz Bandwidth)	5210	42	AVG	12.86	13.13	16.01	23.98
	5290	58	AVG	13.06	13.35	16.22	23.83
	5530	106	AVG	13.16	13.29	16.24	23.98
	5610	122	AVG	13.19	13.06	16.14	23.98
	5690	138	AVG	13.23	13.17	16.21	23.98
	5775	155	AVG	13.11	12.67	15.91	30.00

Table 7-17. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT}, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \ldots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted output power was measured to be 16.79 dBm for Antenna-1 and 16.79 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

(16.79 dBm + 16.79 dBm) = (47.75 mW + 47.75 mW) = 95.51 mW = 16.79 dBm

7.5 Maximum Power Spectral Density – 802.11a/n/ac

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F
ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq$ 2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None

SISO Antenna-1 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	-5.76	11.0	-16.76
	5200	40	a	6	-4.78	11.0	-15.78
	5240	48	a	6	-5.32	11.0	-16.32
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	-6.25	11.0	-17.25
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	-5.31	11.0	-16.31
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	-5.69	11.0	-16.69
	5190	38	n (40MHz)	13.5/15 (MCS0)	-9.88	11.0	-20.88
	5230	46	n (40MHz)	13.5/15 (MCS0)	-9.74	11.0	-20.74
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-15.22	11.0	-26.22
Band 2A	5260	52	a	6	-5.27	11.0	-16.27
	5280	56	a	6	-3.97	11.0	-14.97
	5320	64	a	6	-5.57	11.0	-16.57
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	-5.55	11.0	-16.55
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	-4.50	11.0	-15.50
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	-5.68	11.0	-16.68
	5270	54	n (40MHz)	13.5/15 (MCS0)	-9.45	11.0	-20.45
	5310	62	n (40MHz)	13.5/15 (MCS0)	-10.10	11.0	-21.10
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-15.15	11.0	-26.15
Band 2C	5500	100	a	6	-5.51	11.0	-16.51
	5600	120	a	6	-6.16	11.0	-17.16
	5720	144	a	6	-5.72	11.0	-16.72
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	-5.42	11.0	-16.42
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	-6.63	11.0	-17.63
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	-6.20	11.0	-17.20
	5510	102	n (40MHz)	13.5/15 (MCS0)	-10.01	11.0	-21.01
	5590	118	n (40MHz)	13.5/15 (MCS0)	-10.32	11.0	-21.32
	5710	142	n (40MHz)	13.5/15 (MCS0)	-10.19	11.0	-21.19
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-15.13	11.0	-26.13
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-15.74	11.0	-26.74
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-17.83	11.0	-28.83

Table 7-18. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1

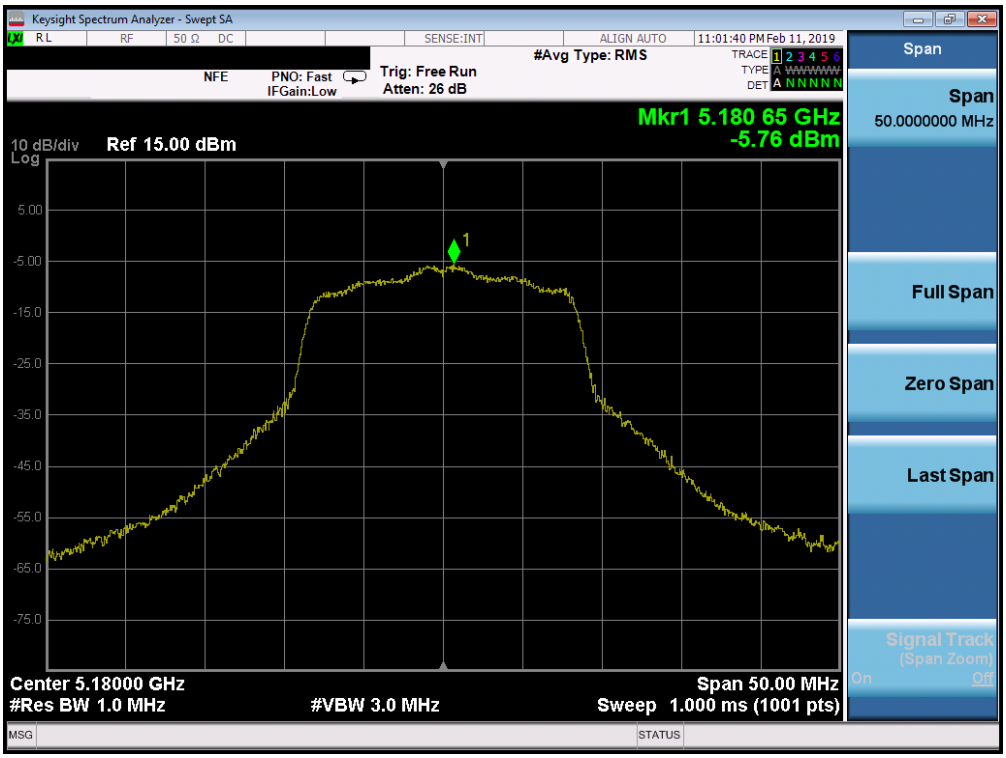

Plot 7-79. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 36)

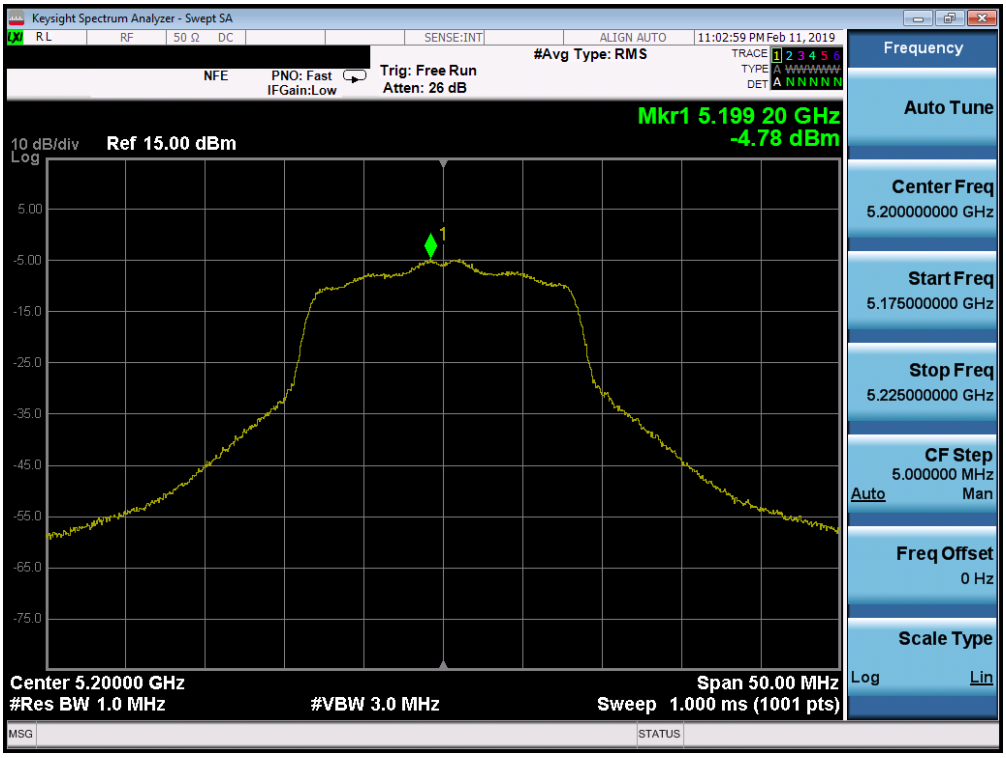

Plot 7-80. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 40)

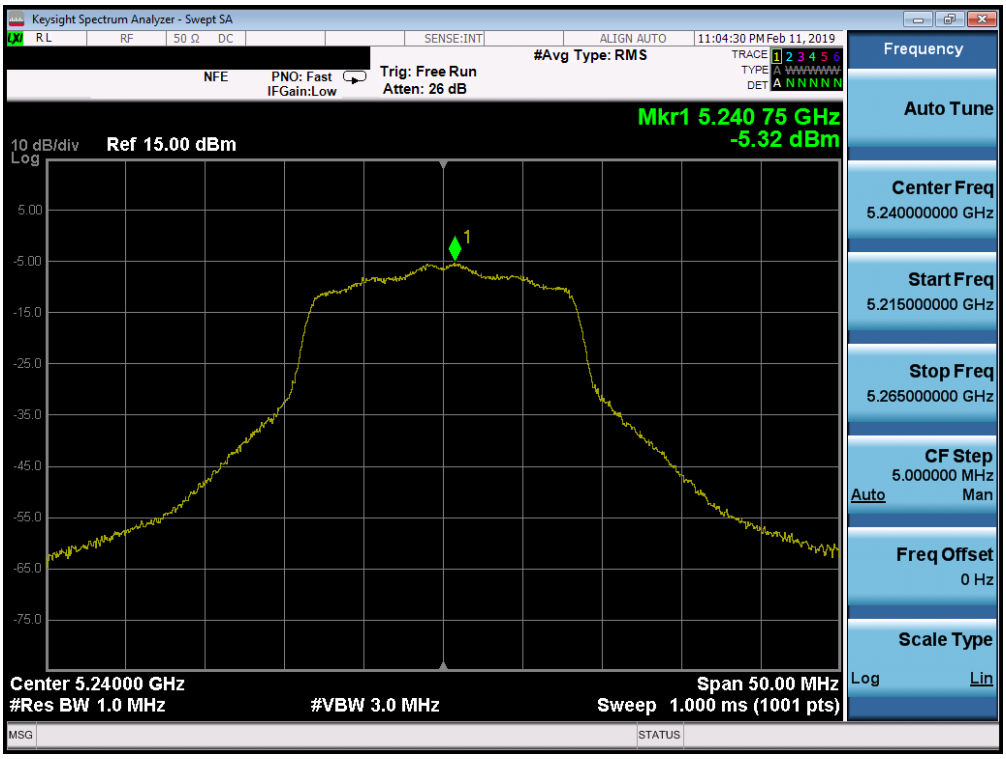

Plot 7-81. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 1) – Ch. 48)

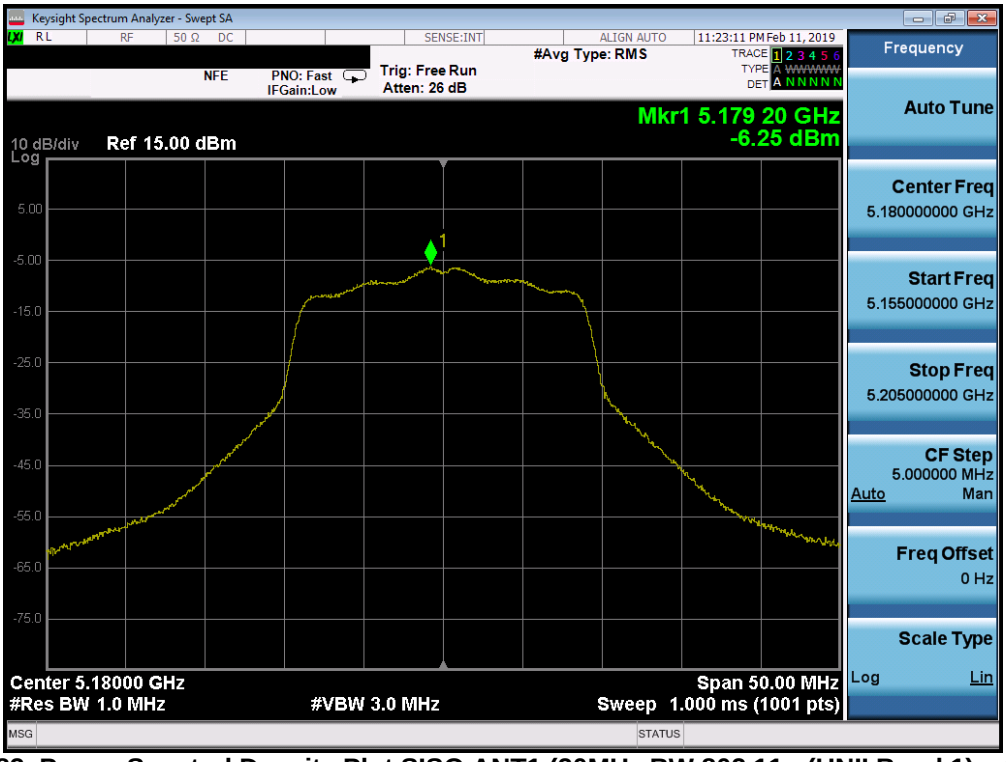

Plot 7-82. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

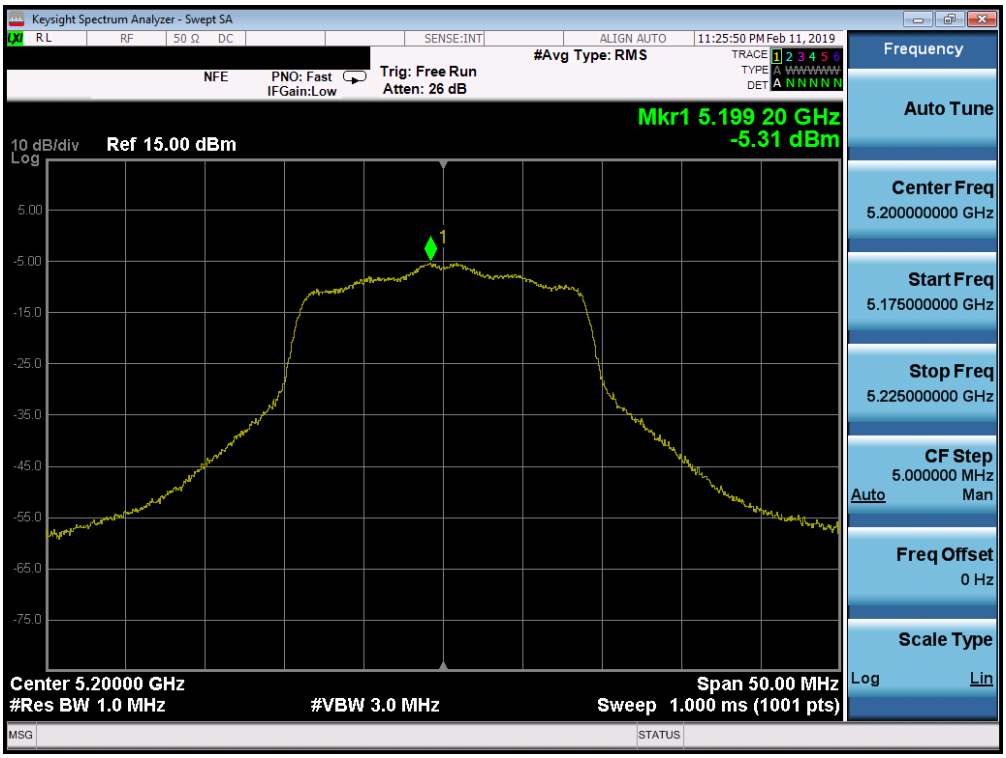

Plot 7-83. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

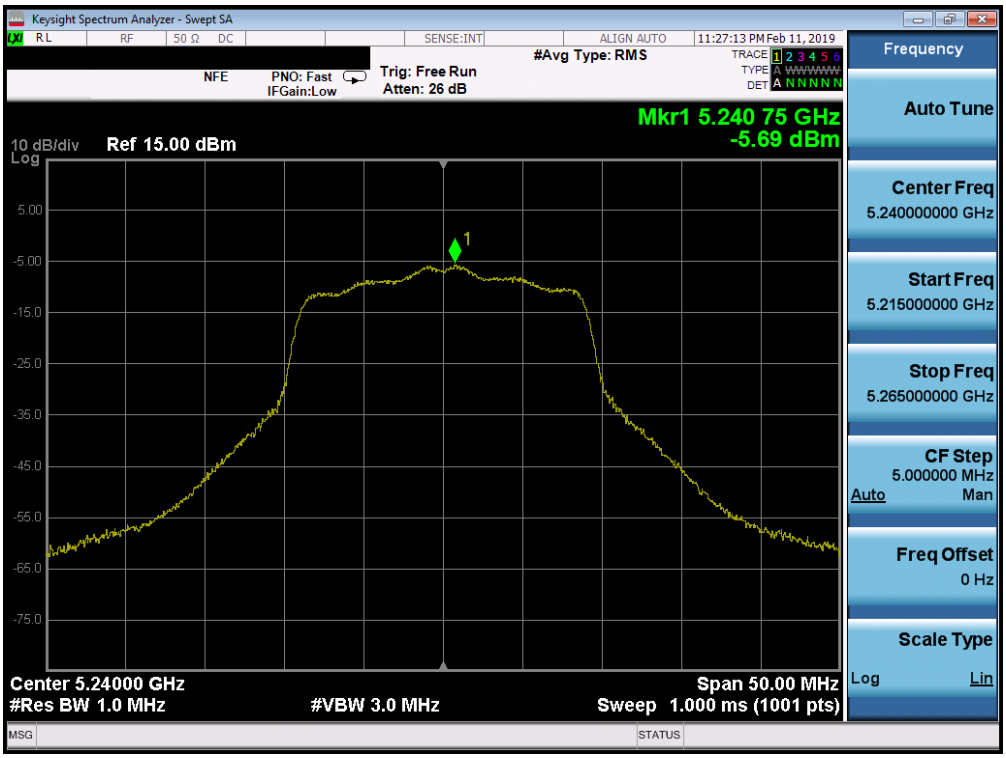

Plot 7-84. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

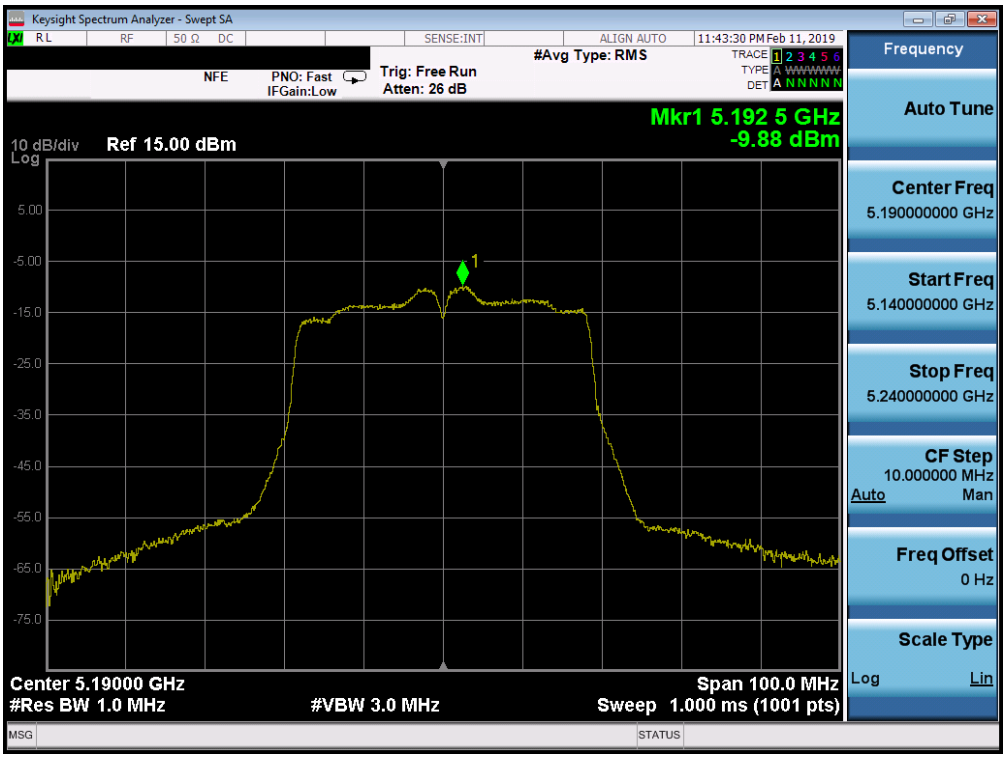

Plot 7-85. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

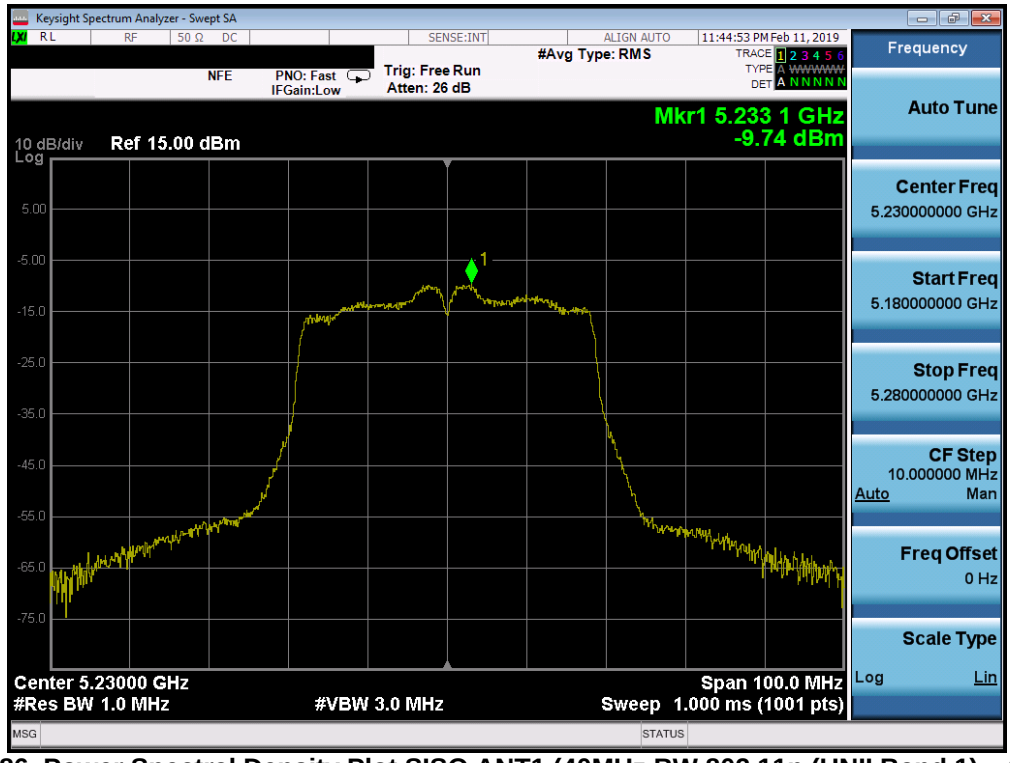

Plot 7-86. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

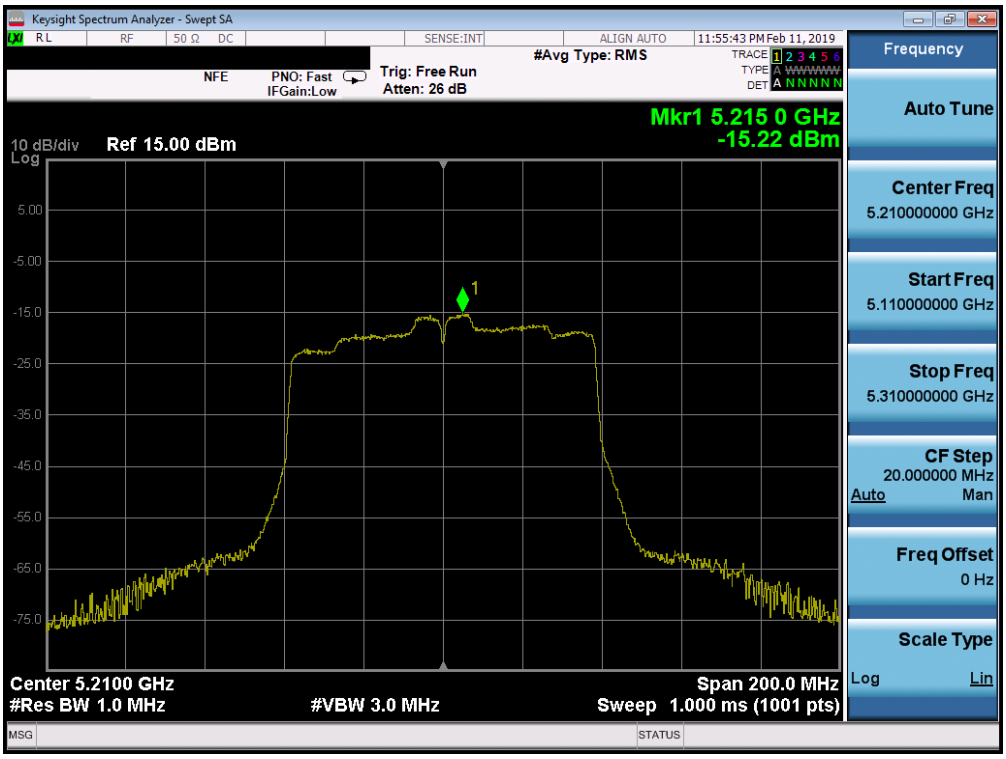

Plot 7-87. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

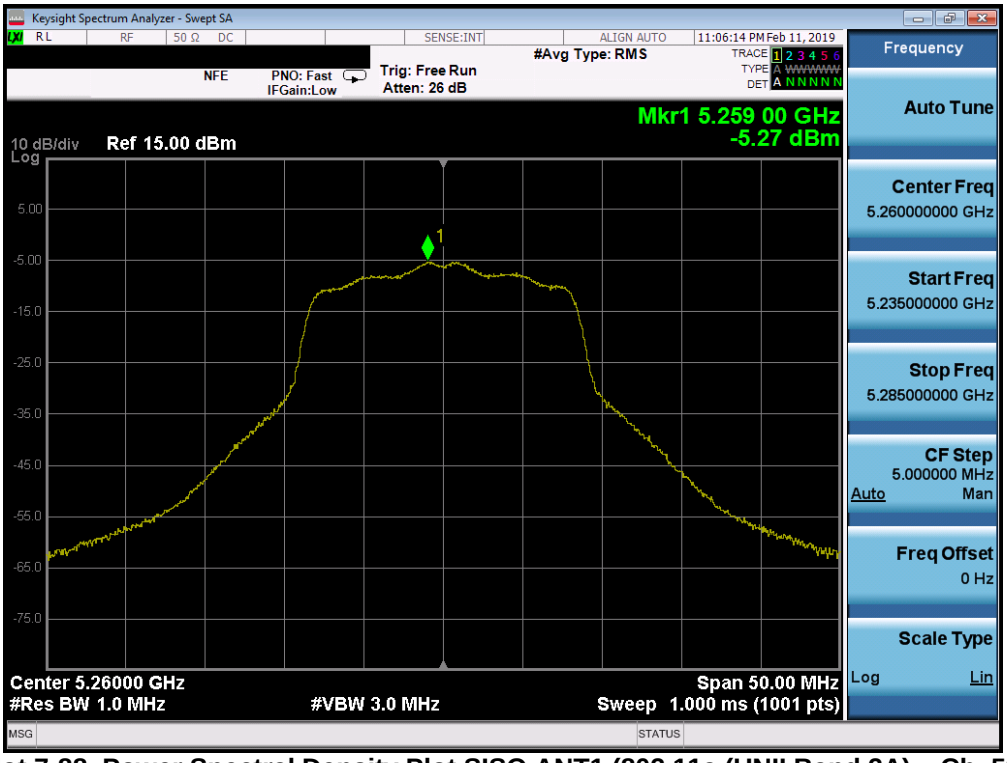

Plot 7-88. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 52)

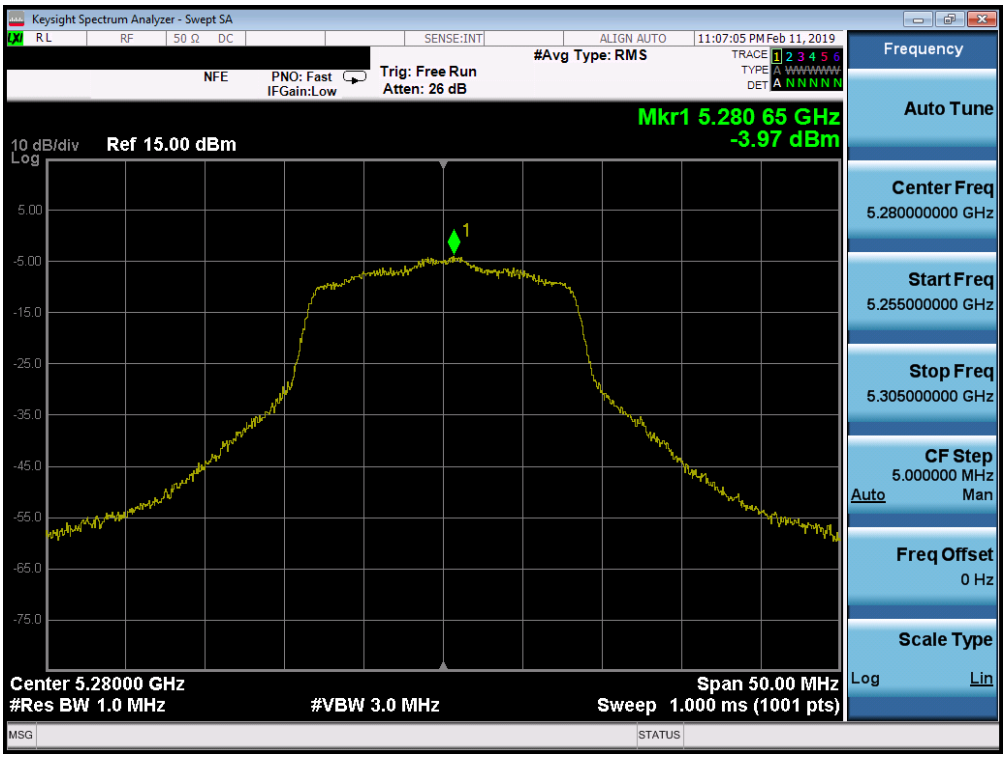

Plot 7-89. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 56)

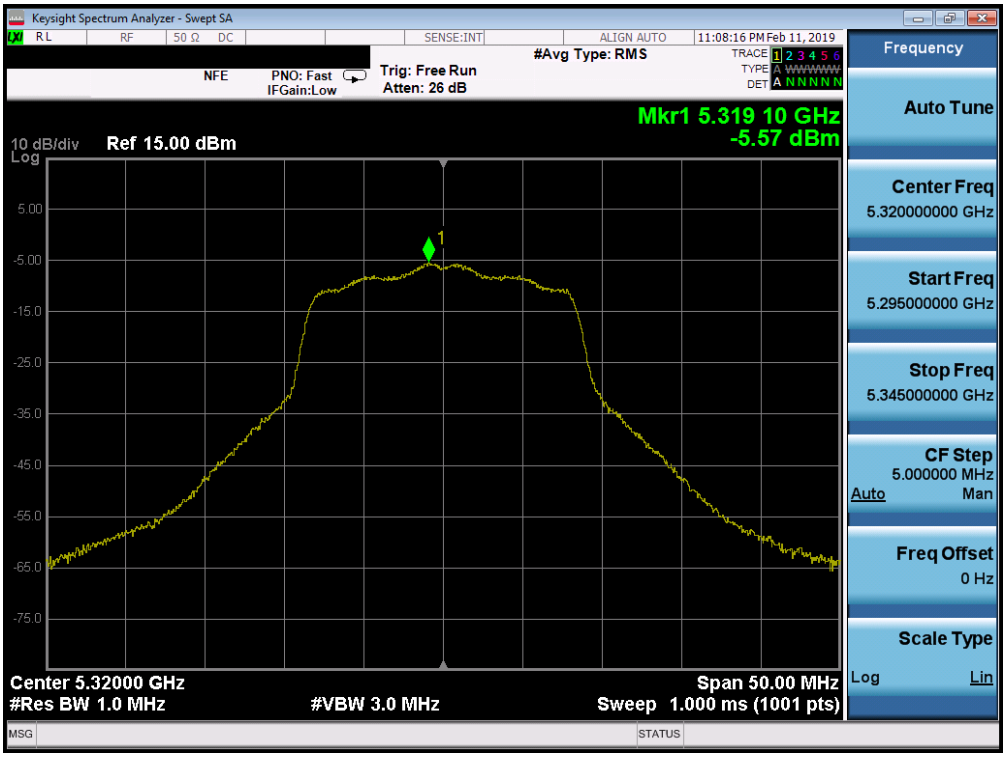

Plot 7-90. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2A) – Ch. 64)

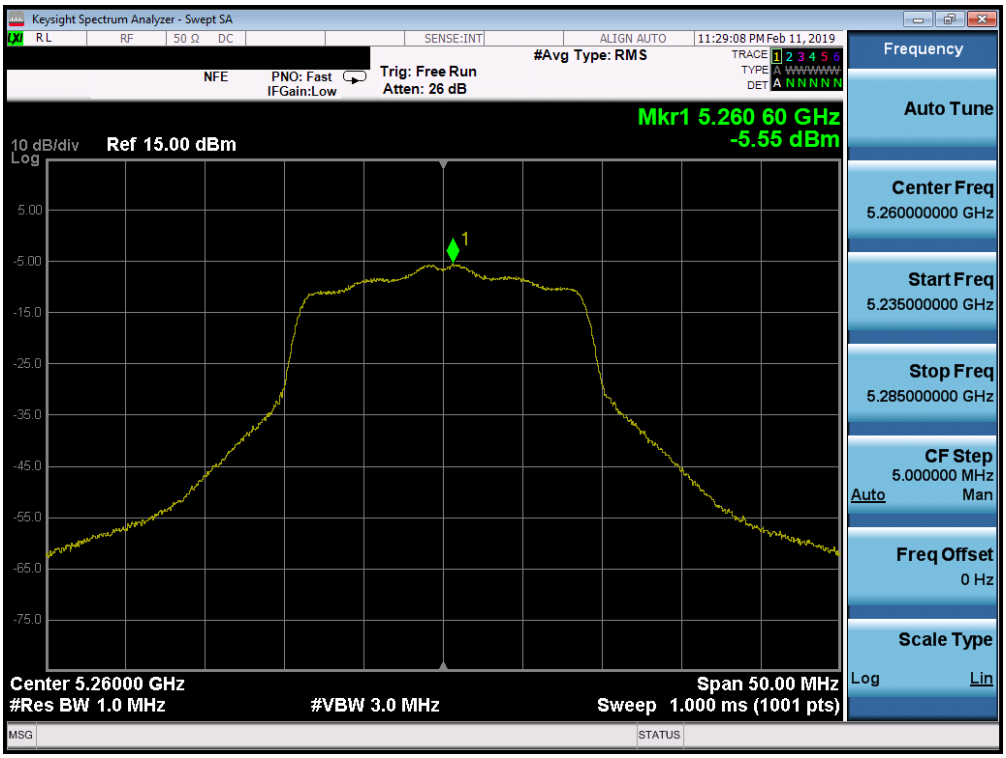

Plot 7-91. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

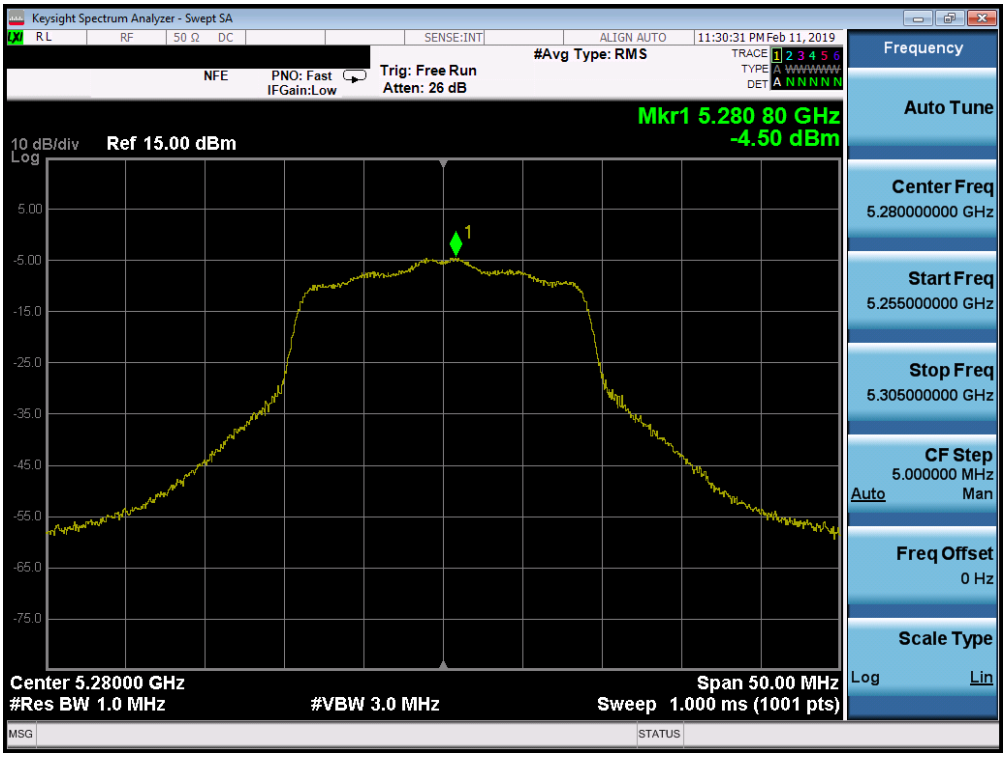

Plot 7-92. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

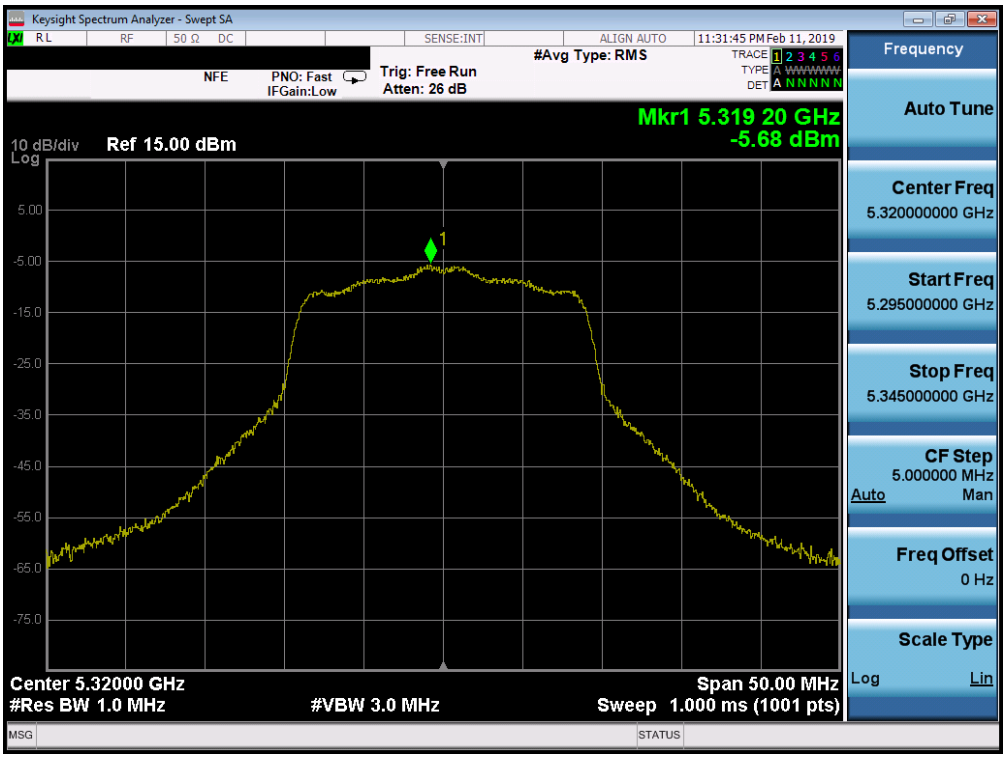

Plot 7-93. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

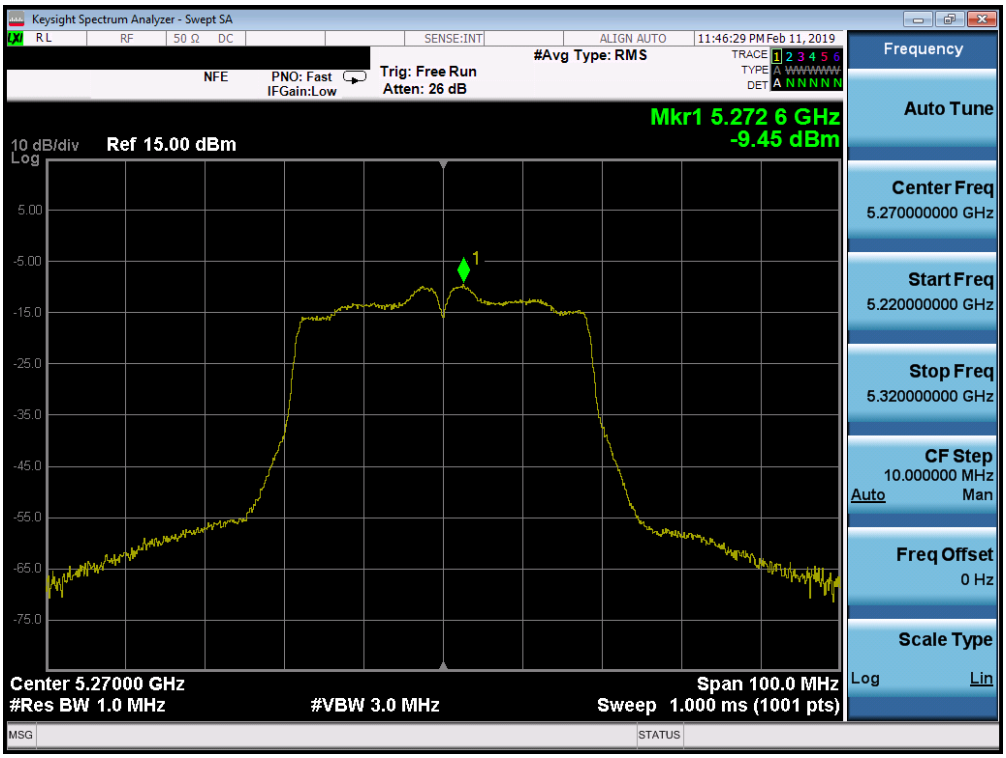

Plot 7-94. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

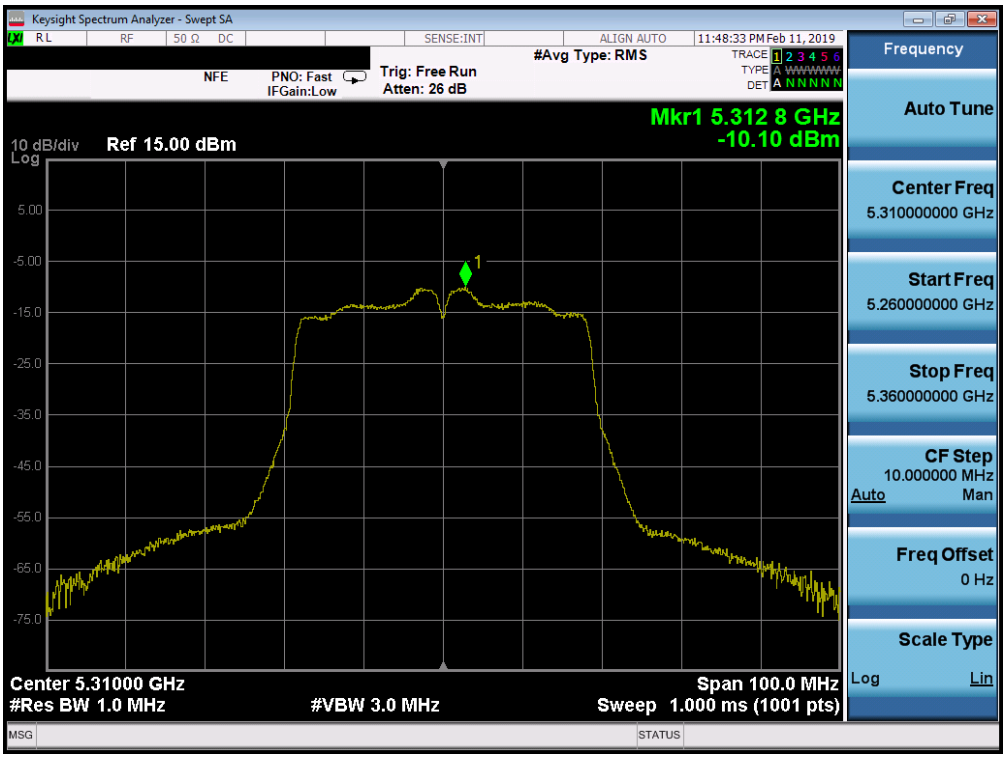

Plot 7-95. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

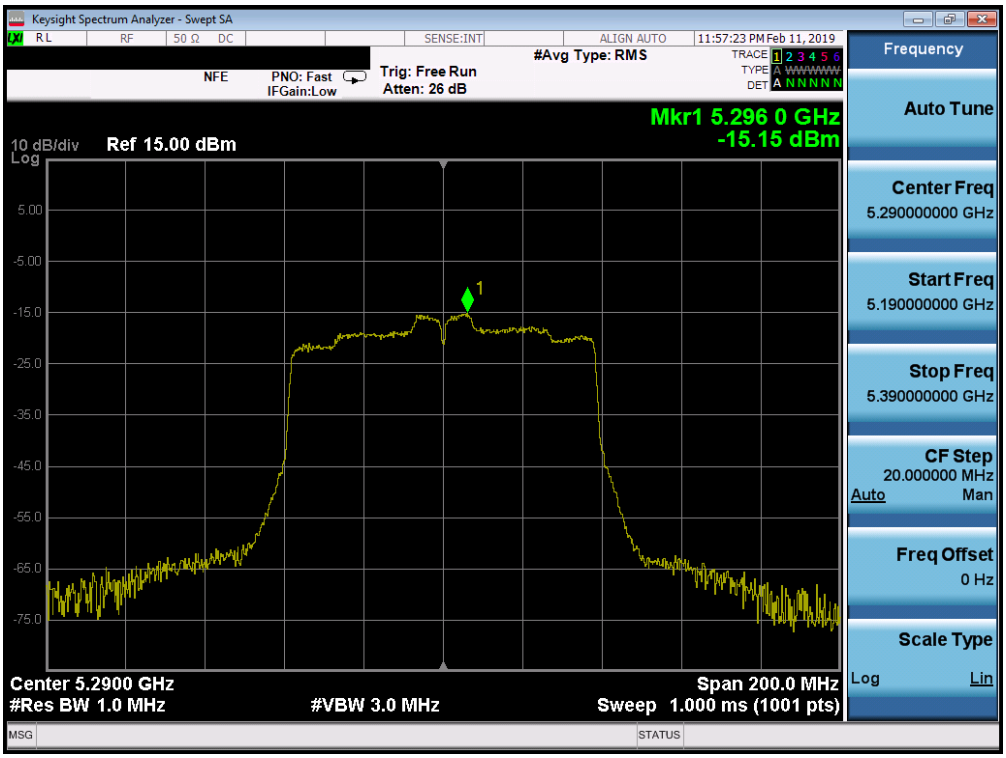

Plot 7-96. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

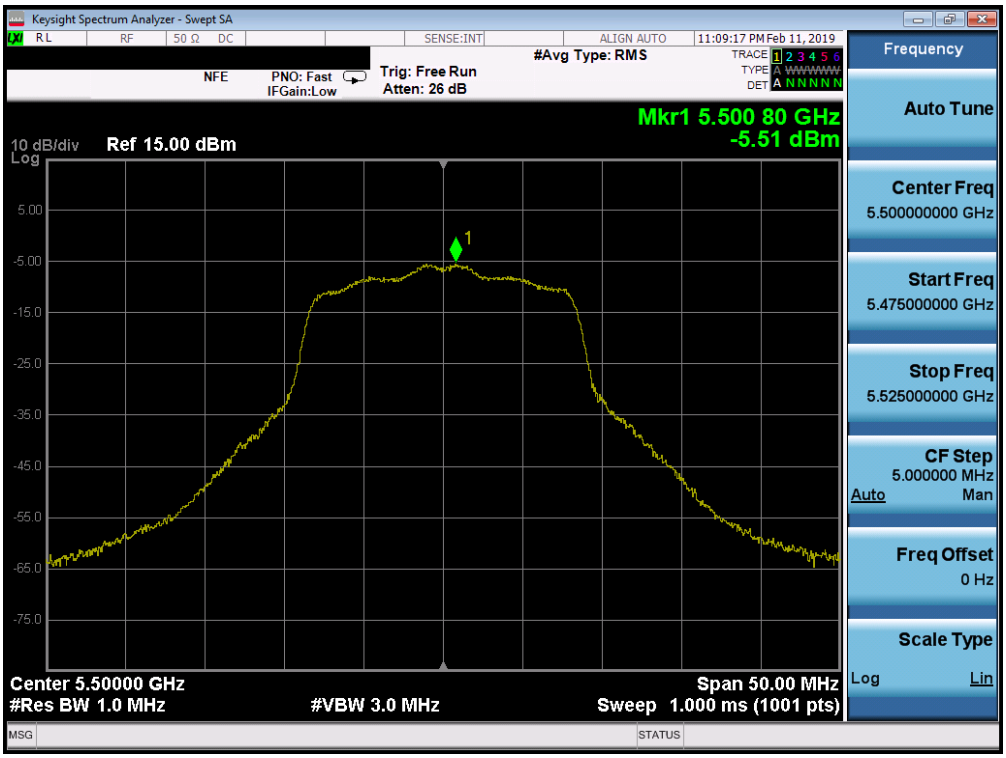

Plot 7-97. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 100)

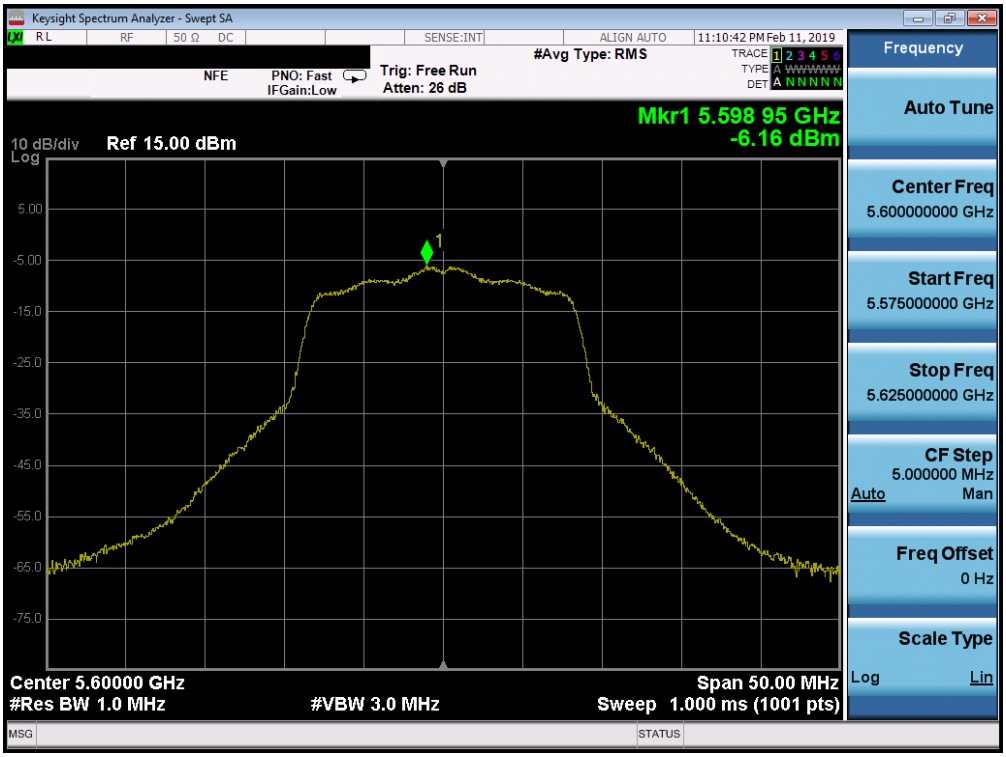

Plot 7-98. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 120)

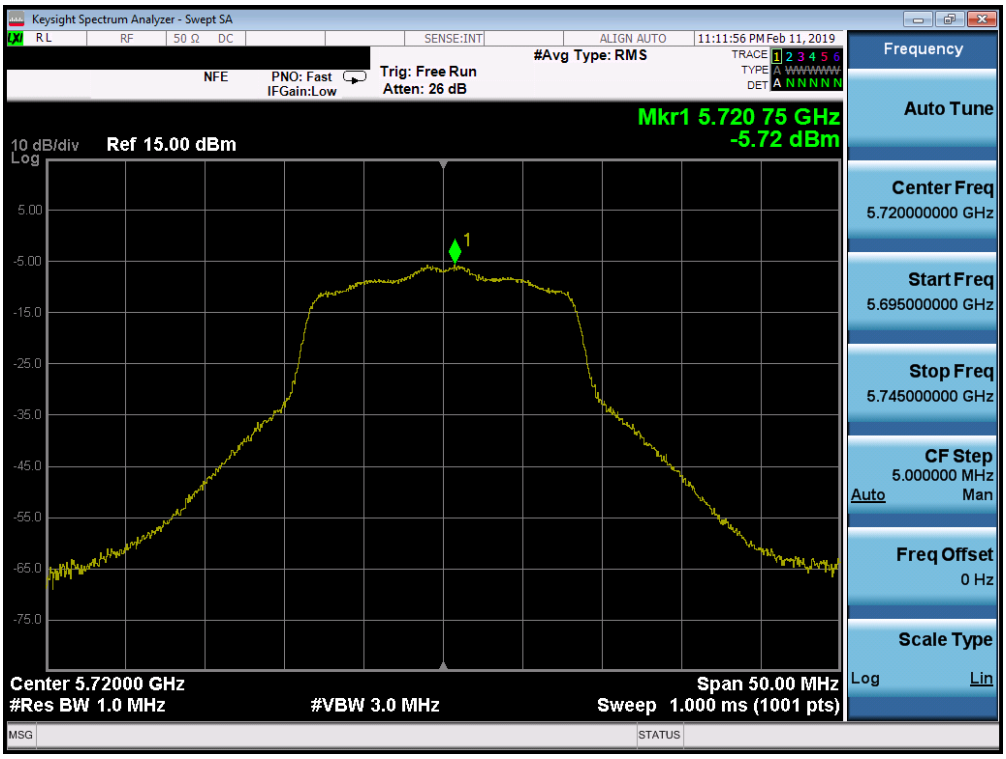

Plot 7-99. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 2C) – Ch. 144)

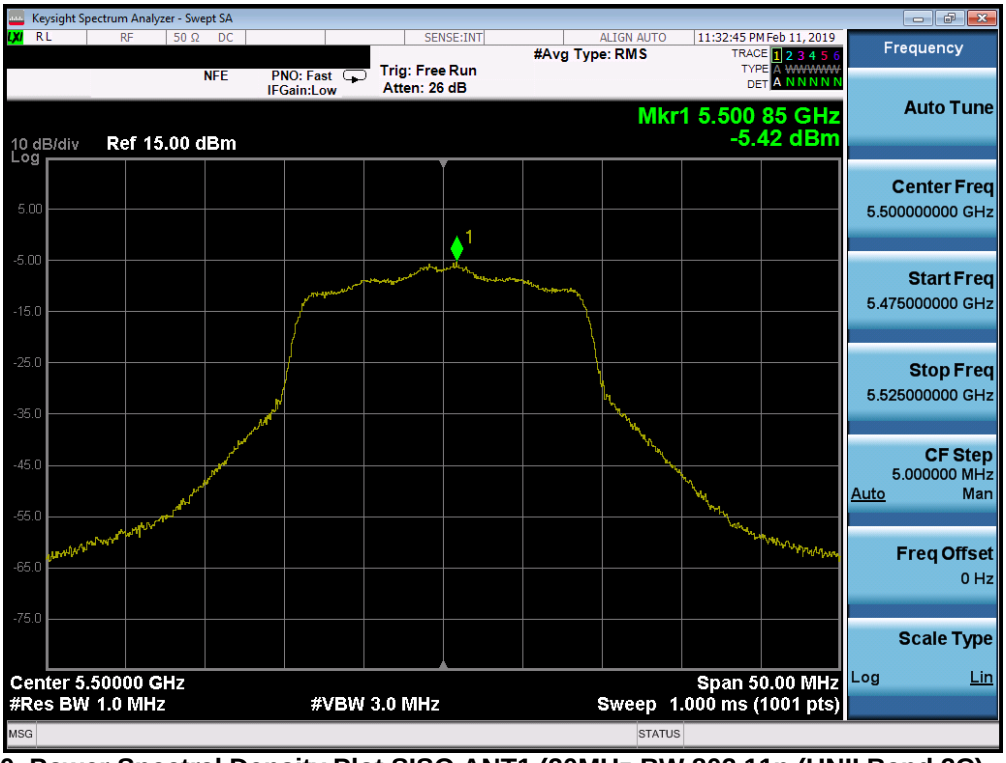

Plot 7-100. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

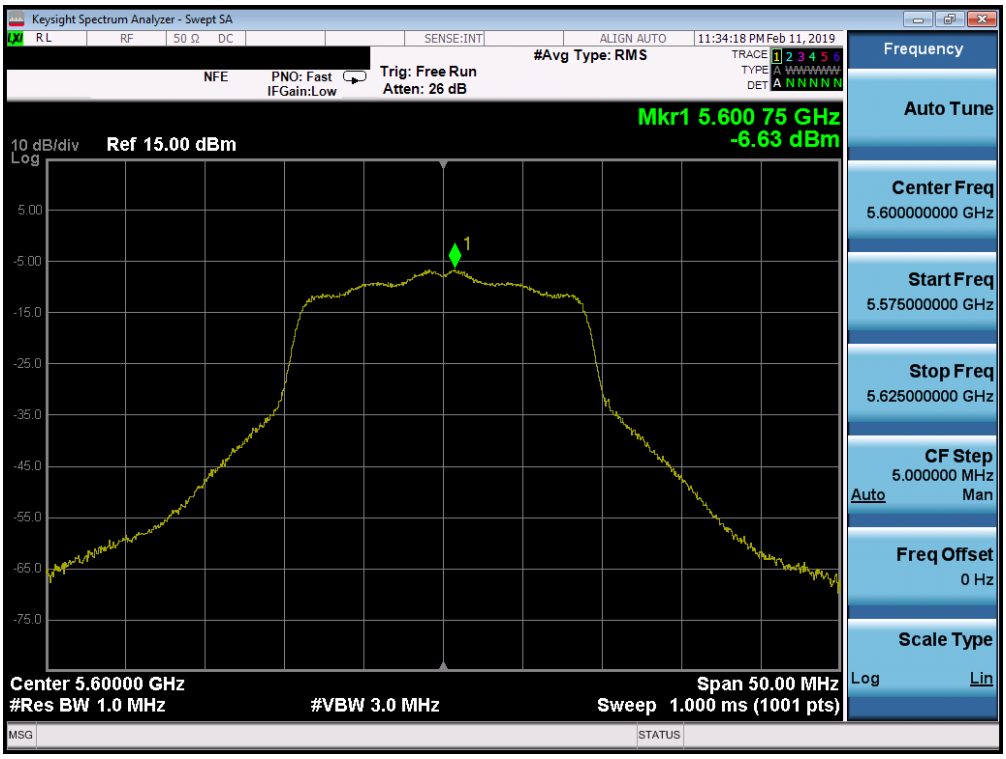

Plot 7-101. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

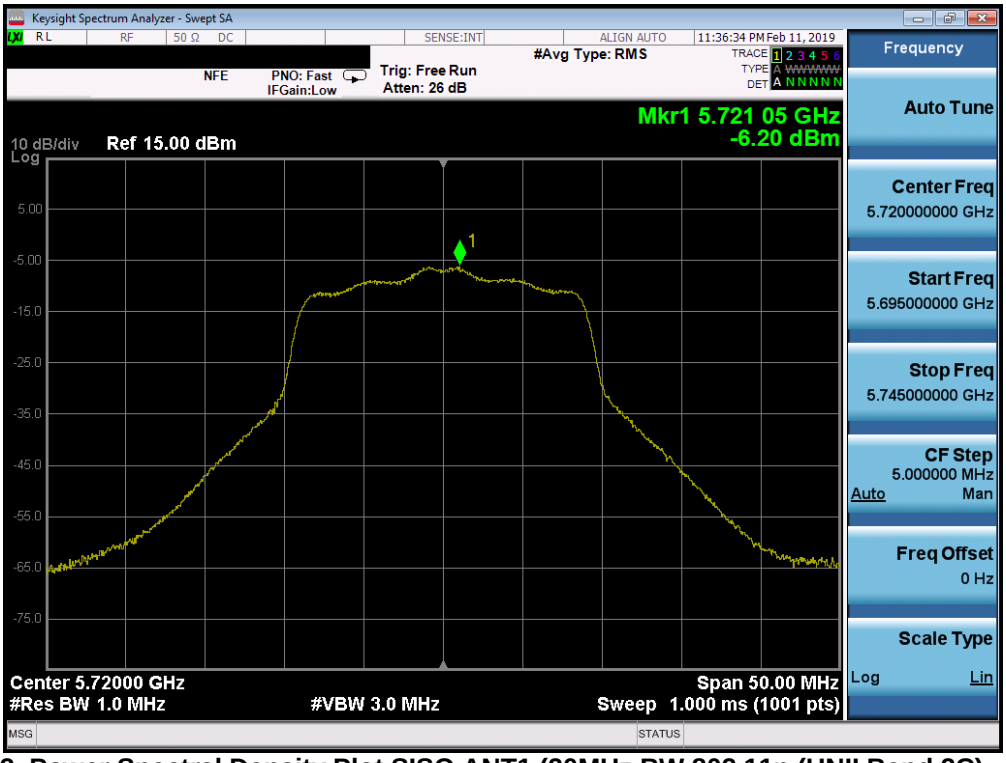

Plot 7-102. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

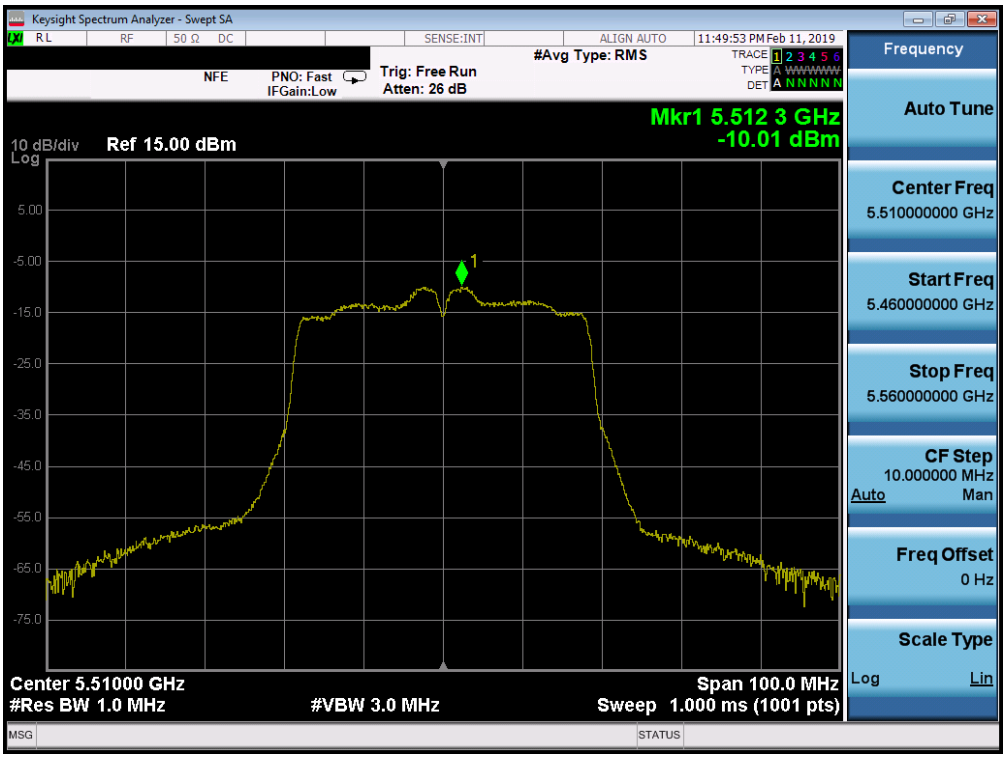

Plot 7-103. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

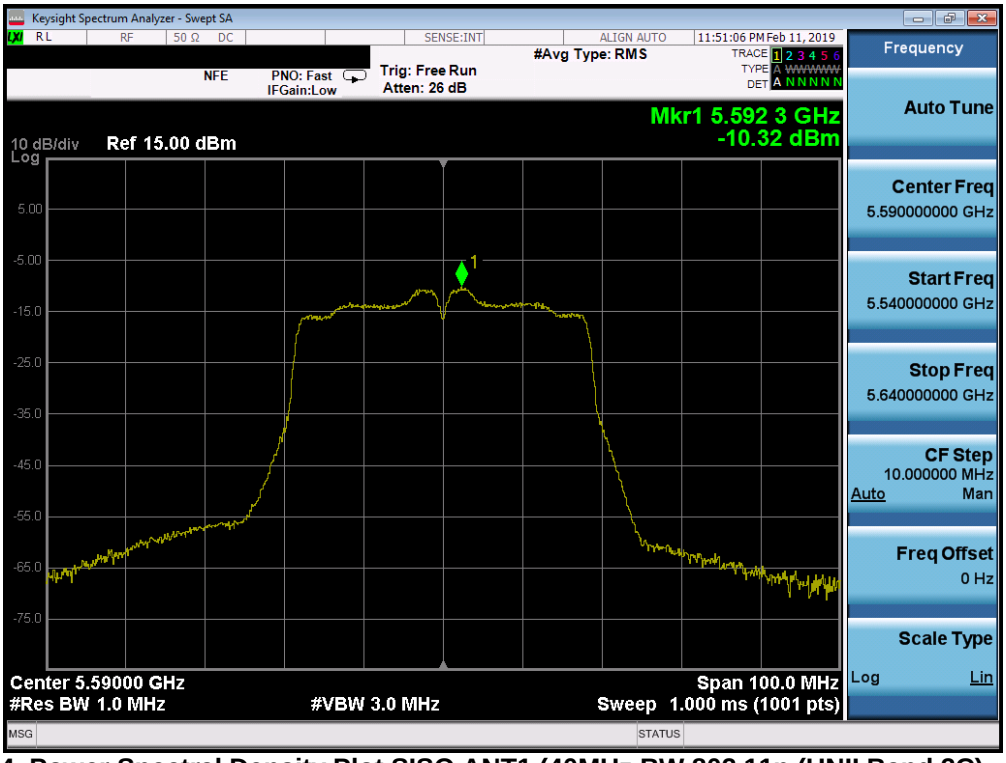

Plot 7-104. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

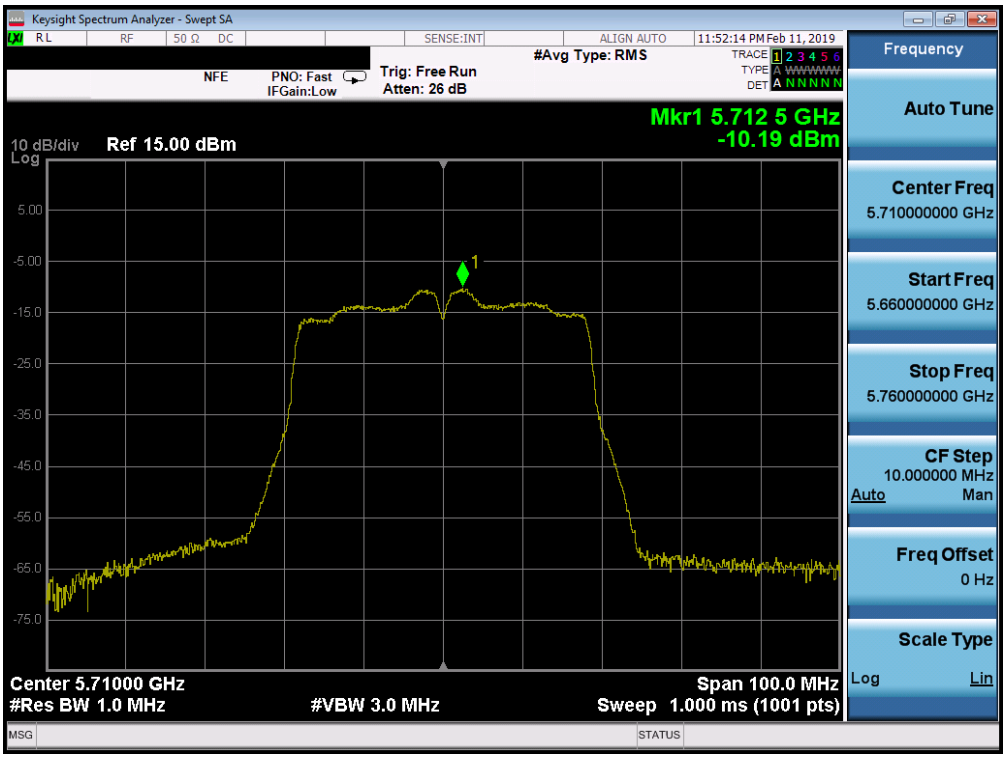

Plot 7-105. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

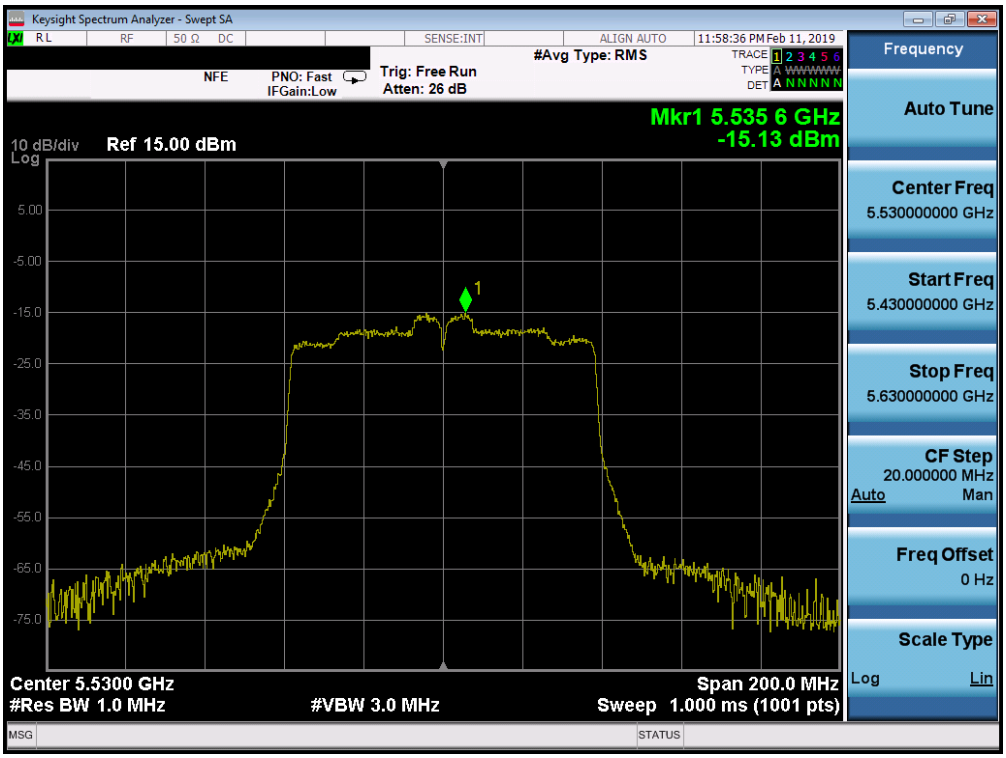

Plot 7-106. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

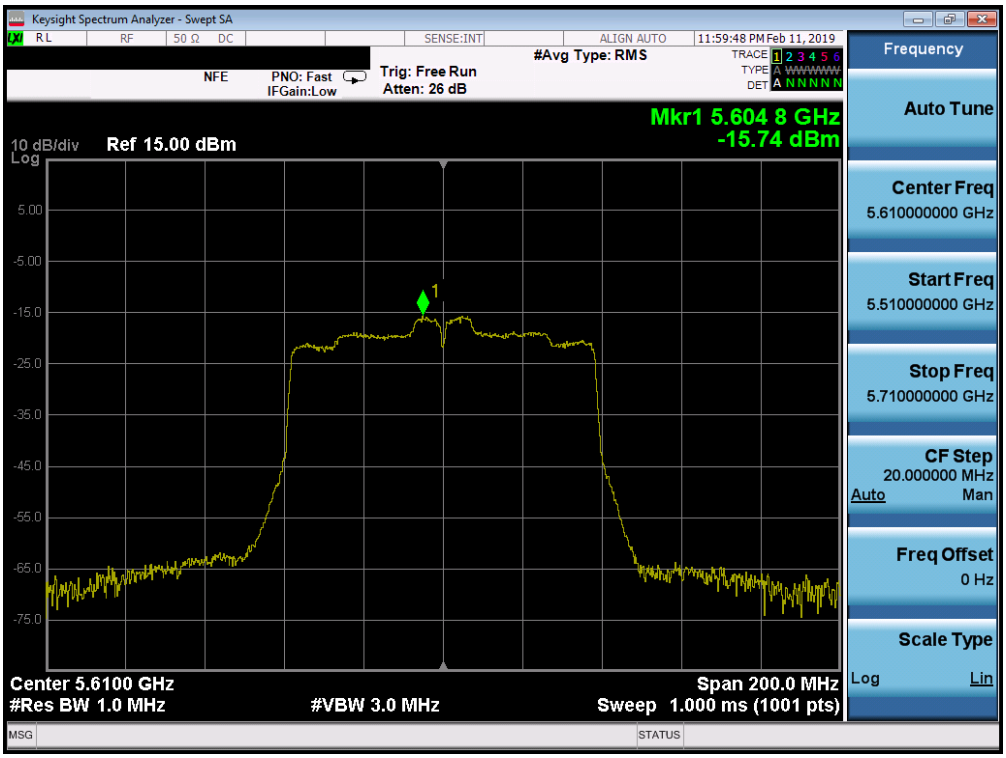

Plot 7-107. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

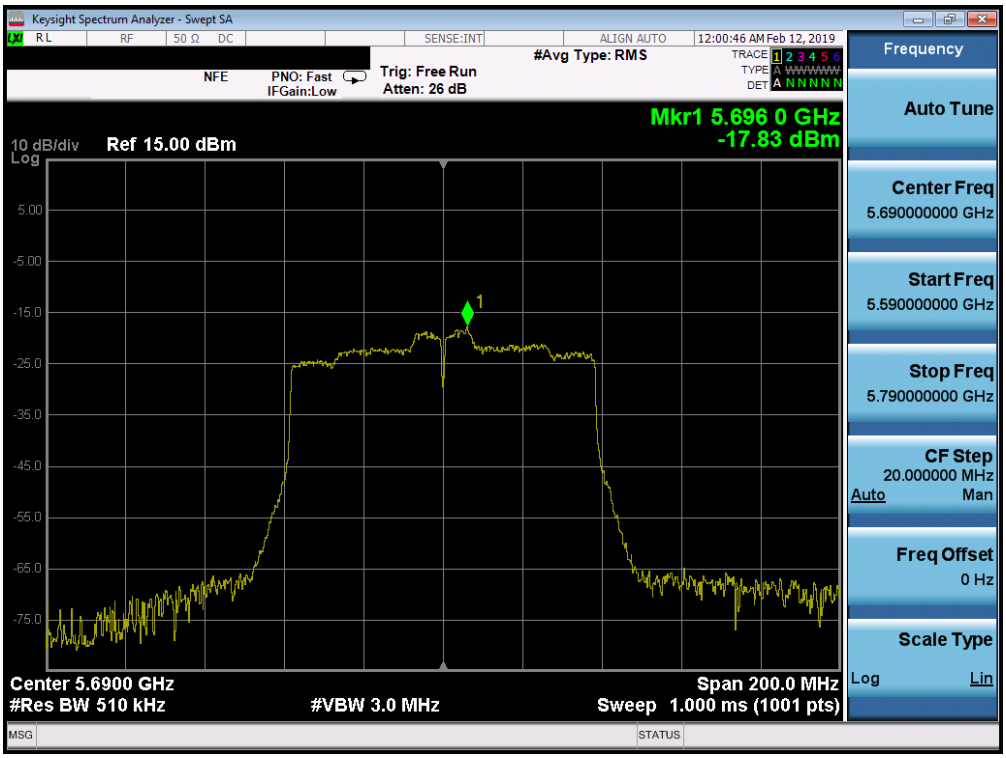

Plot 7-108. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	-8.09	30.0	-38.09
	5785	157	a	6	-6.61	30.0	-36.61
	5825	165	a	6	-7.17	30.0	-37.17
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	-8.38	30.0	-38.38
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	-6.91	30.0	-36.91
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	-7.57	30.0	-37.57
	5755	151	n (40MHz)	13.5/15 (MCS0)	-12.84	30.0	-42.84
	5795	159	n (40MHz)	13.5/15 (MCS0)	0.67	30.0	-29.33
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-15.21	30.0	-45.21

Table 7-19. Band 3 Conducted Power Spectral Density Measurements SISO ANT1

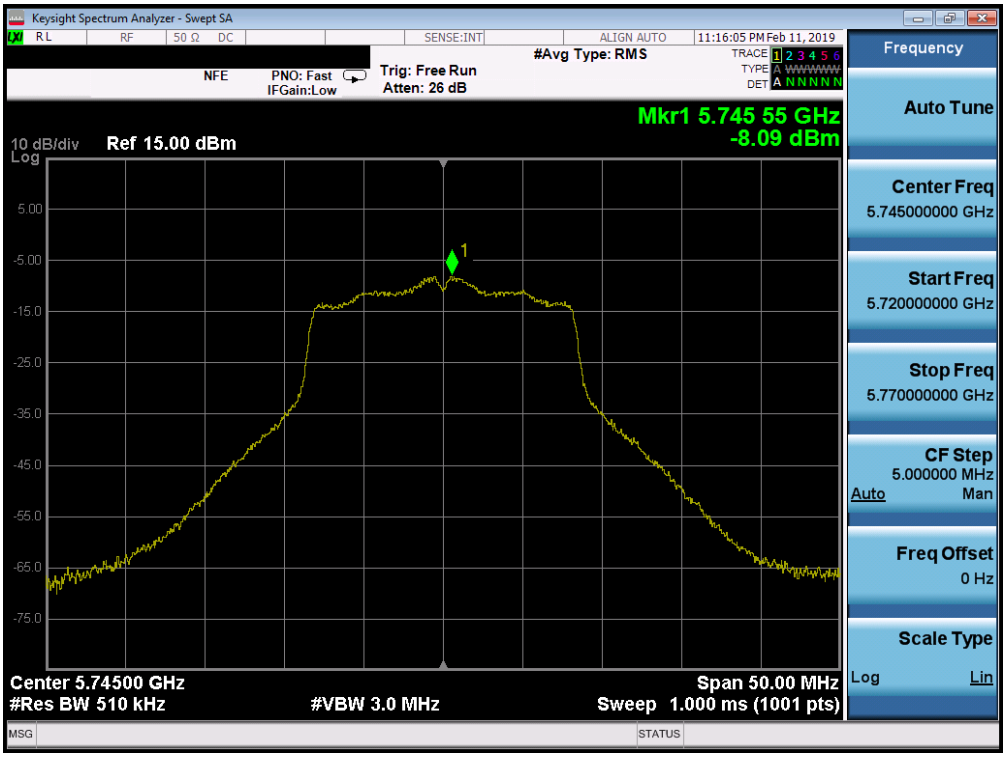

Plot 7-109. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 149)

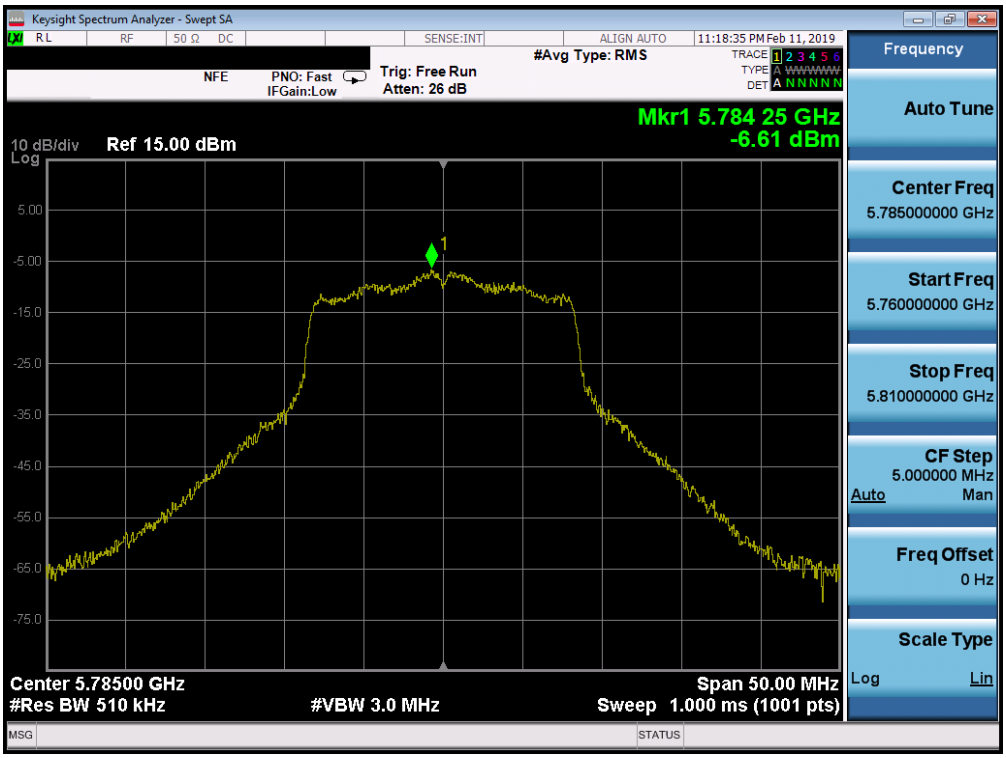

Plot 7-110. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 157)

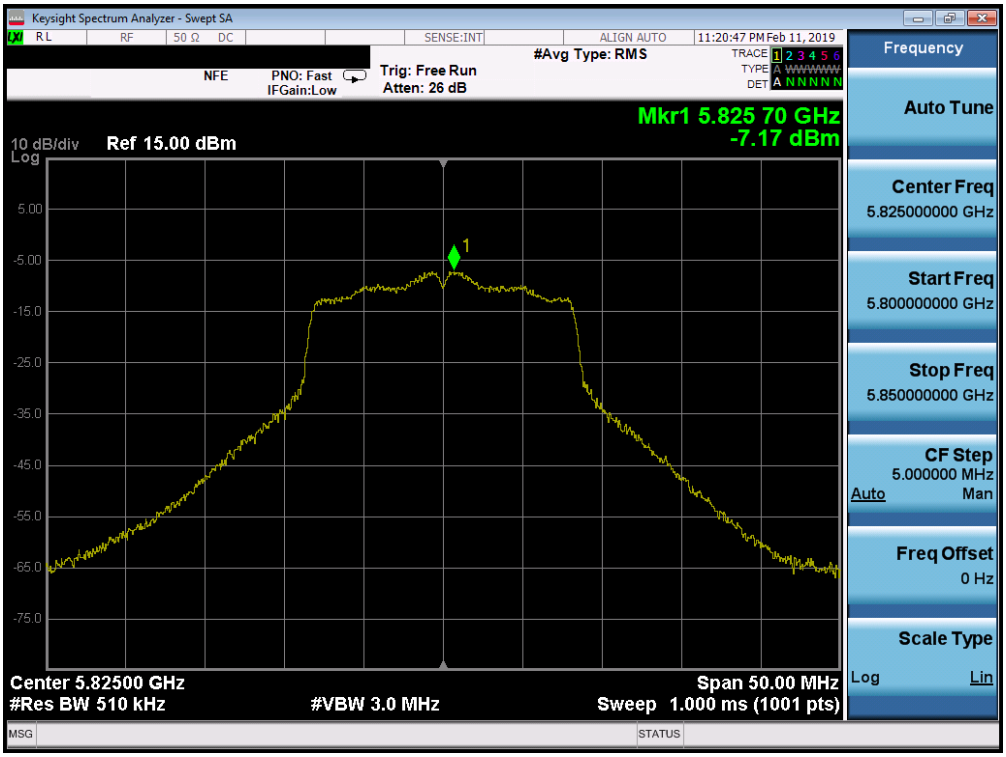

Plot 7-111. Power Spectral Density Plot SISO ANT1 (802.11a (UNII Band 3) – Ch. 165)

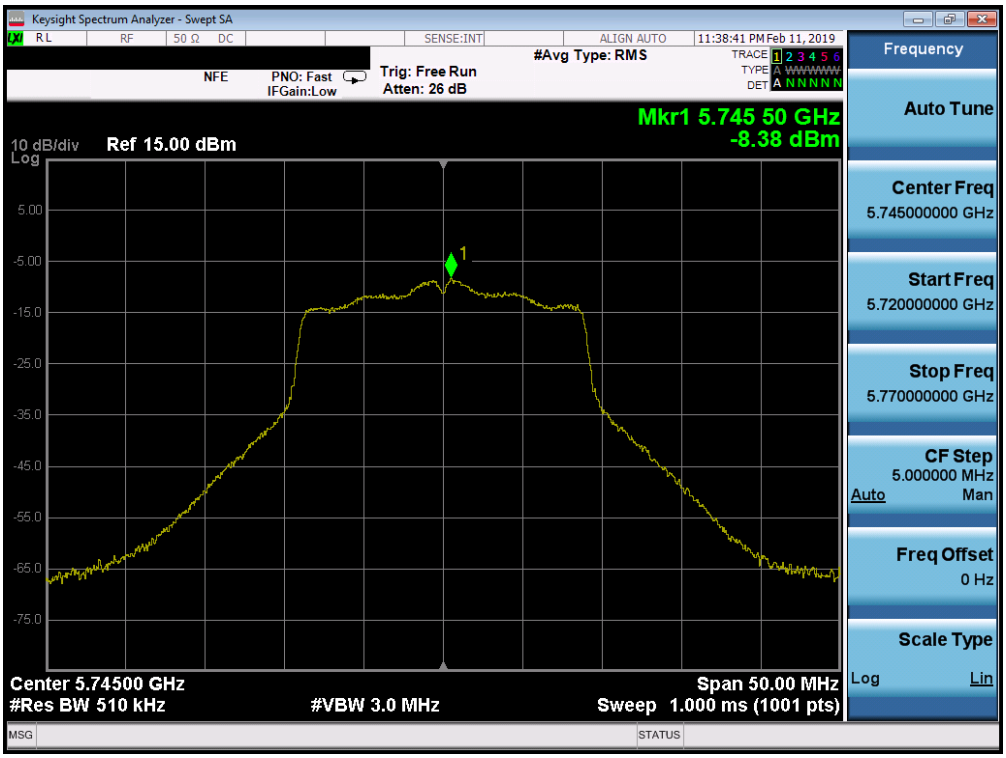

Plot 7-112. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

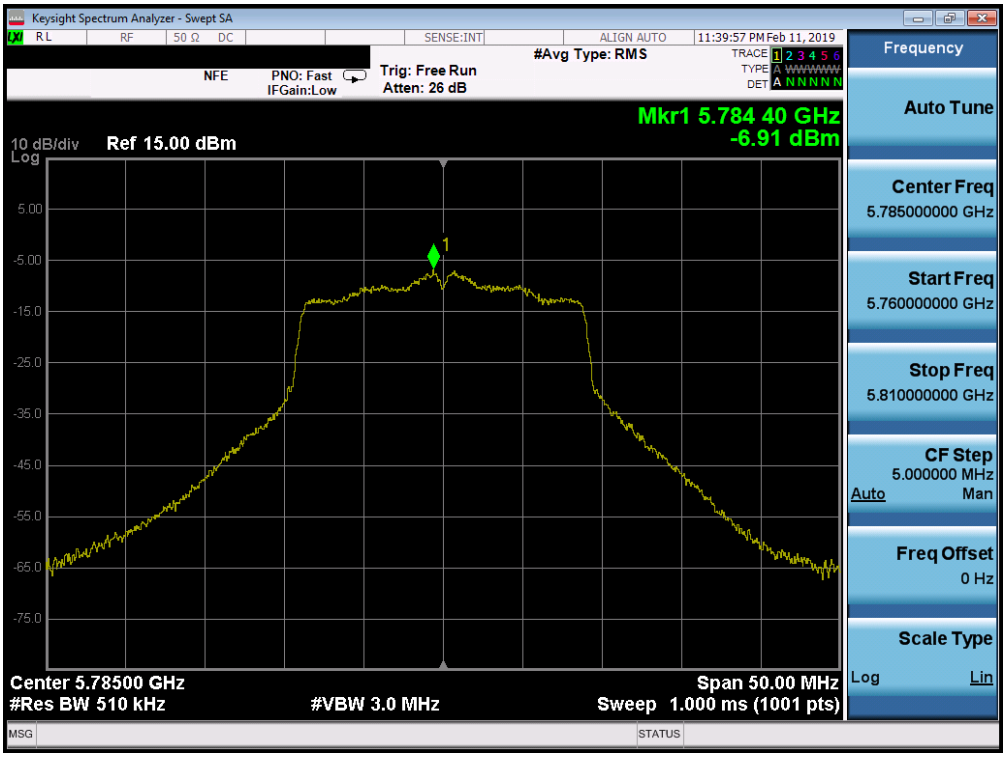

Plot 7-113. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

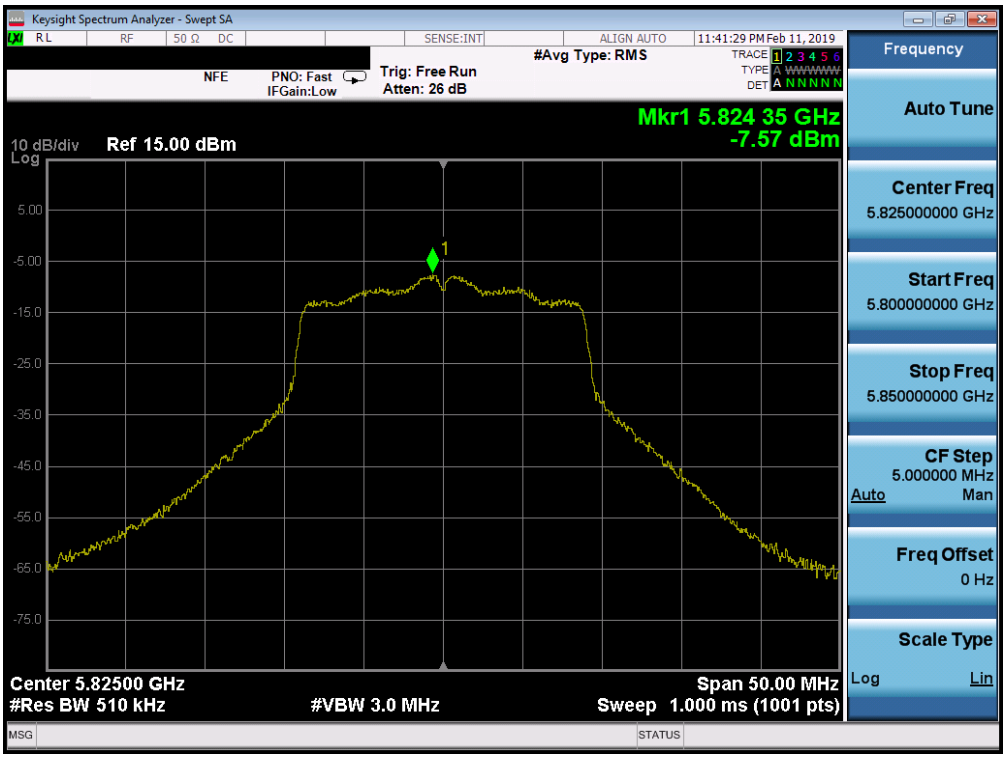

Plot 7-114. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

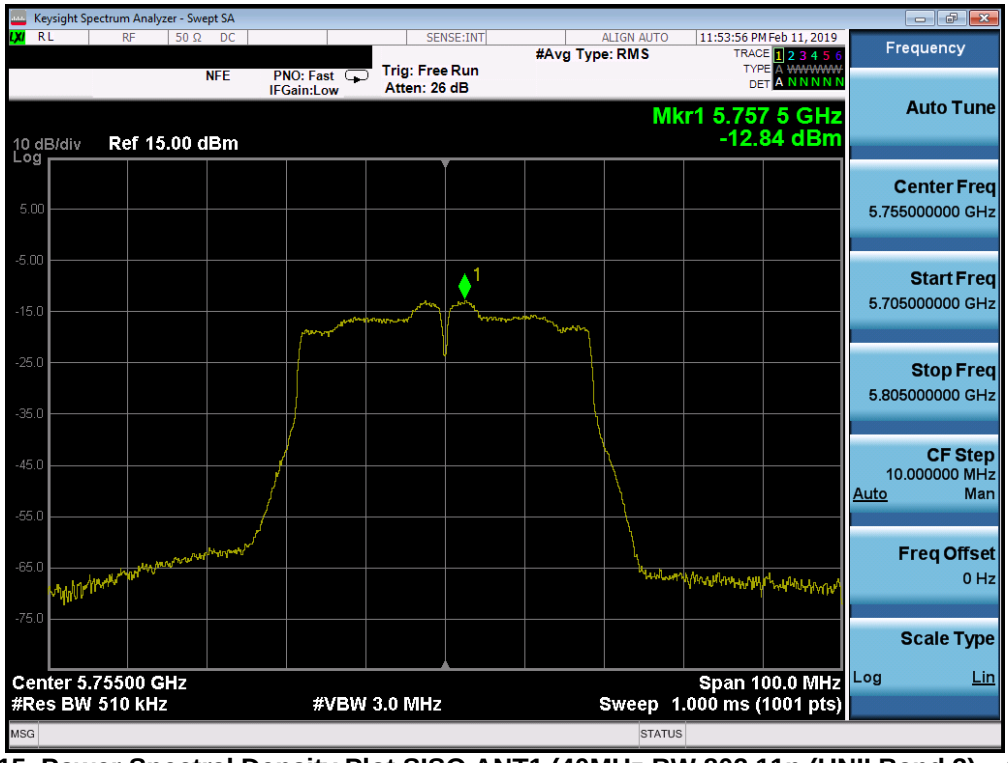

Plot 7-115. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

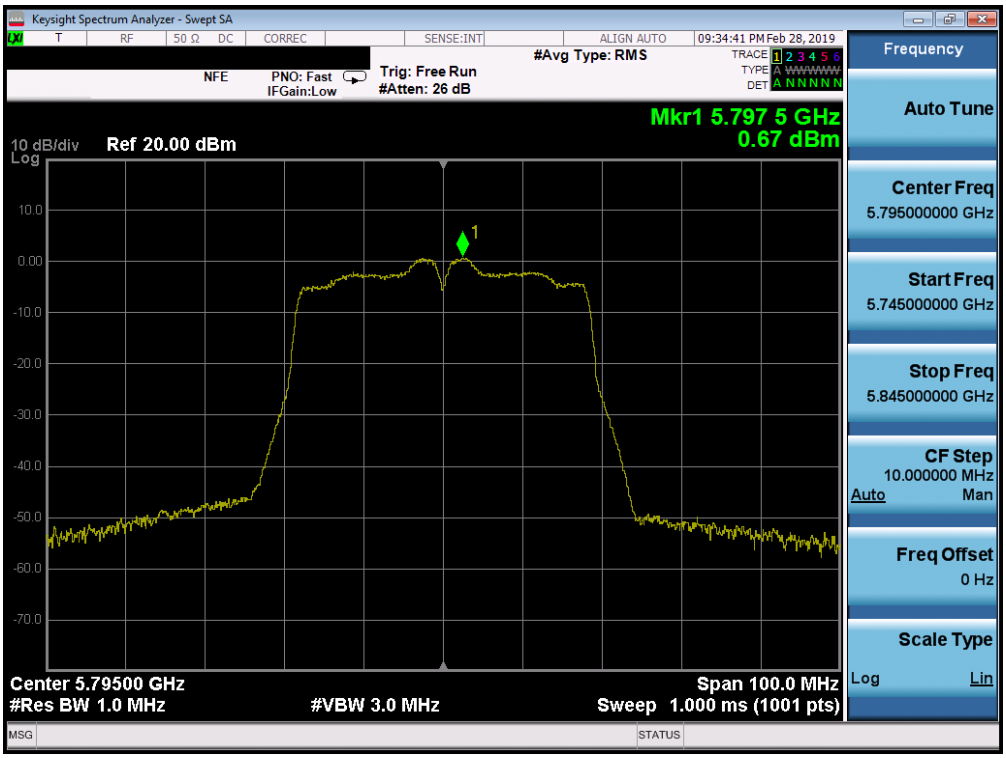

Plot 7-116. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

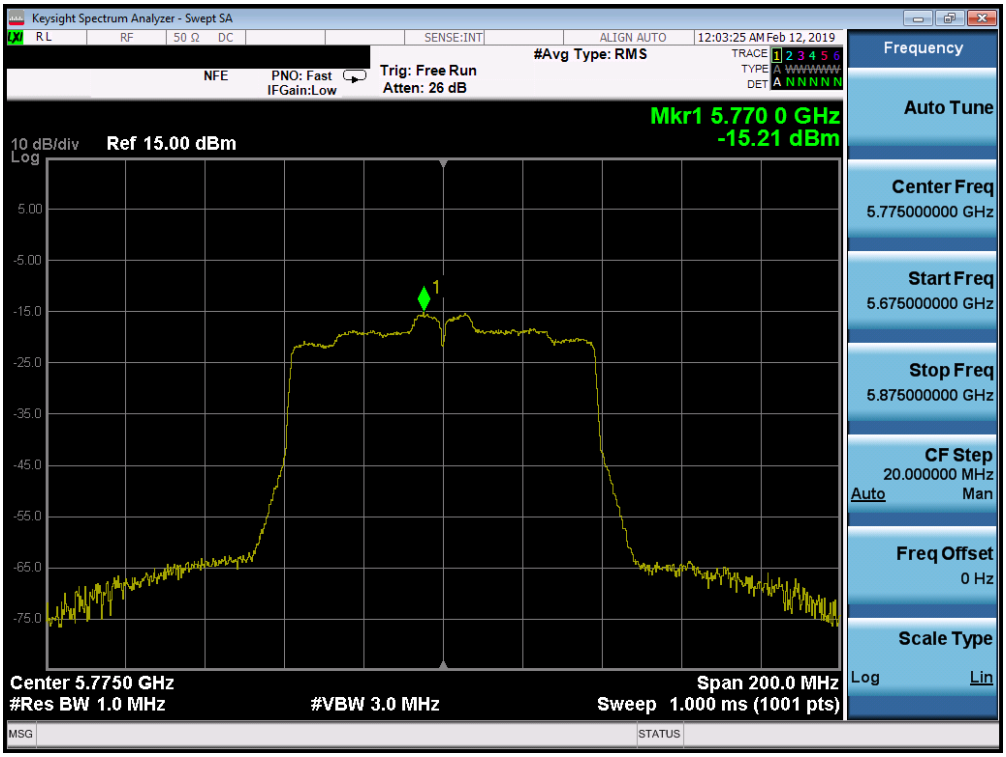

Plot 7-117. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

SISO Antenna-2 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	a	6	7.21	11.0	-3.79
	5200	40	a	6	7.50	11.0	-3.50
	5240	48	a	6	6.88	11.0	-4.12
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	5.56	11.0	-5.44
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	6.92	11.0	-4.08
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	6.57	11.0	-4.43
	5190	38	n (40MHz)	13.5/15 (MCS0)	2.27	11.0	-8.73
	5230	46	n (40MHz)	13.5/15 (MCS0)	3.07	11.0	-7.93
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-2.16	11.0	-13.16
Band 2A	5260	52	a	6	6.80	11.0	-4.20
	5280	56	a	6	8.70	11.0	-2.30
	5320	64	a	6	6.98	11.0	-4.02
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	6.73	11.0	-4.27
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	7.72	11.0	-3.28
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	6.80	11.0	-4.20
	5270	54	n (40MHz)	13.5/15 (MCS0)	2.73	11.0	-8.27
	5310	62	n (40MHz)	13.5/15 (MCS0)	2.96	11.0	-8.04
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-2.51	11.0	-13.51
Band 2C	5500	100	a	6	7.28	11.0	-3.72
	5600	120	a	6	6.59	11.0	-4.41
	5720	144	a	6	6.93	11.0	-4.07
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	6.94	11.0	-4.06
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	6.64	11.0	-4.36
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	6.37	11.0	-4.63
	5510	102	n (40MHz)	13.5/15 (MCS0)	3.04	11.0	-7.96
	5590	118	n (40MHz)	13.5/15 (MCS0)	2.31	11.0	-8.69
	5710	142	n (40MHz)	13.5/15 (MCS0)	2.45	11.0	-8.55
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-2.18	11.0	-13.18
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-2.90	11.0	-13.90
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-5.27	11.0	-16.27

Table 7-20. Conducted Power Spectral Density Measurements SISO ANT2

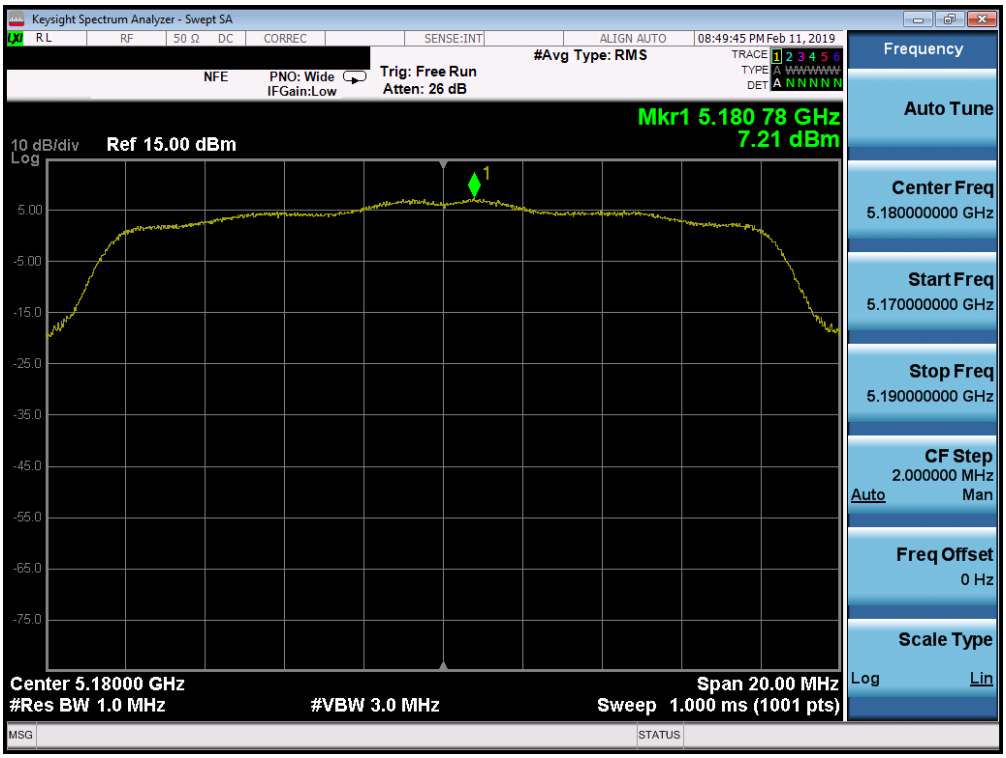

Plot 7-118. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 1) – Ch. 36)

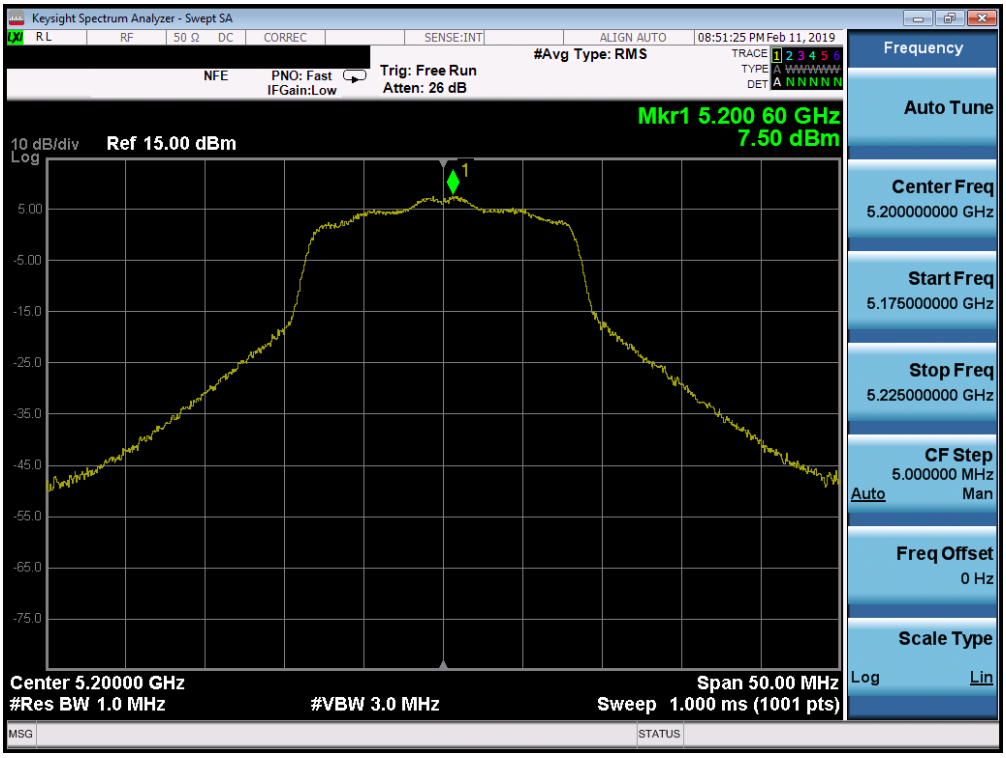

Plot 7-119. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 1) – Ch. 40)

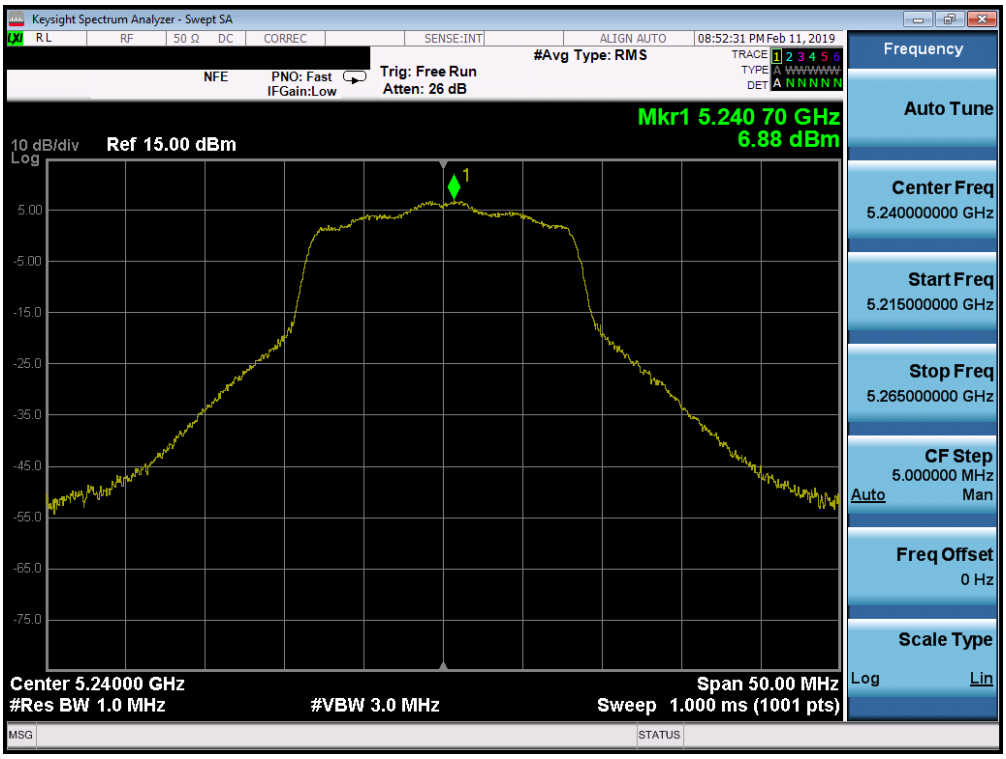

Plot 7-120. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 1) – Ch. 48)

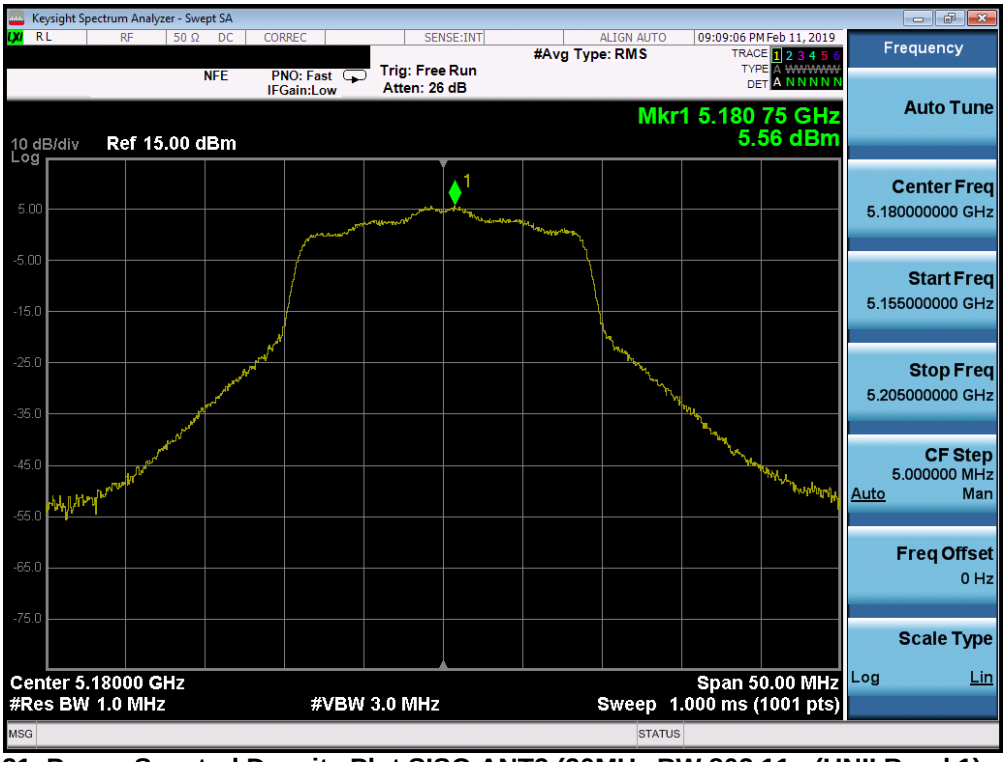

Plot 7-121. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

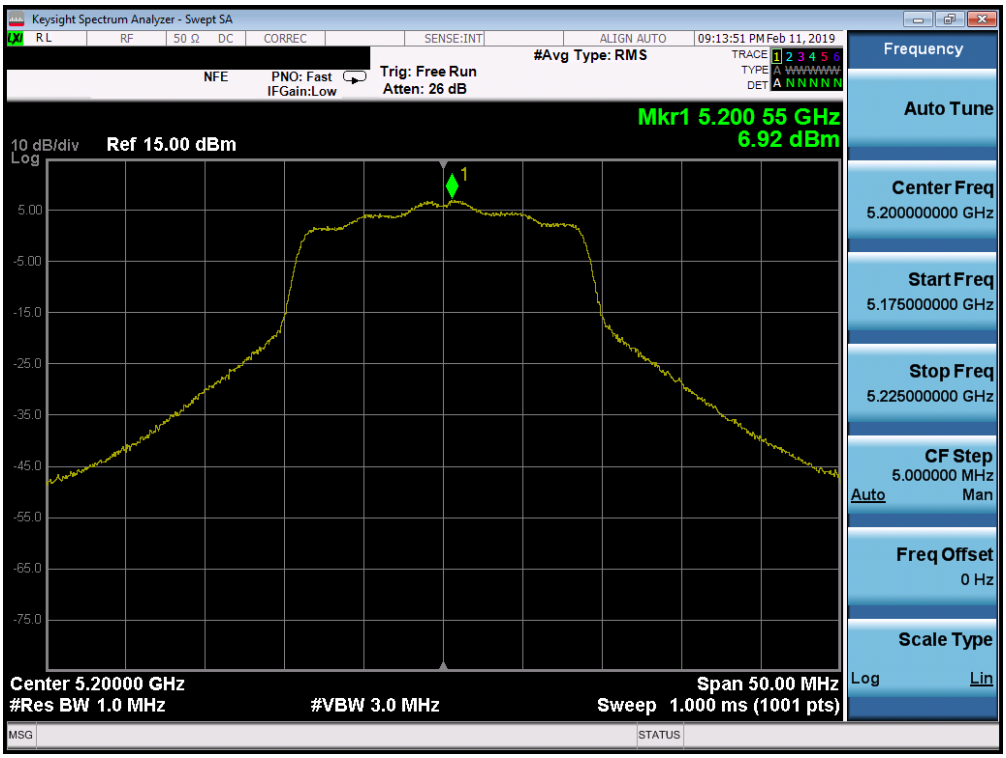

Plot 7-122. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

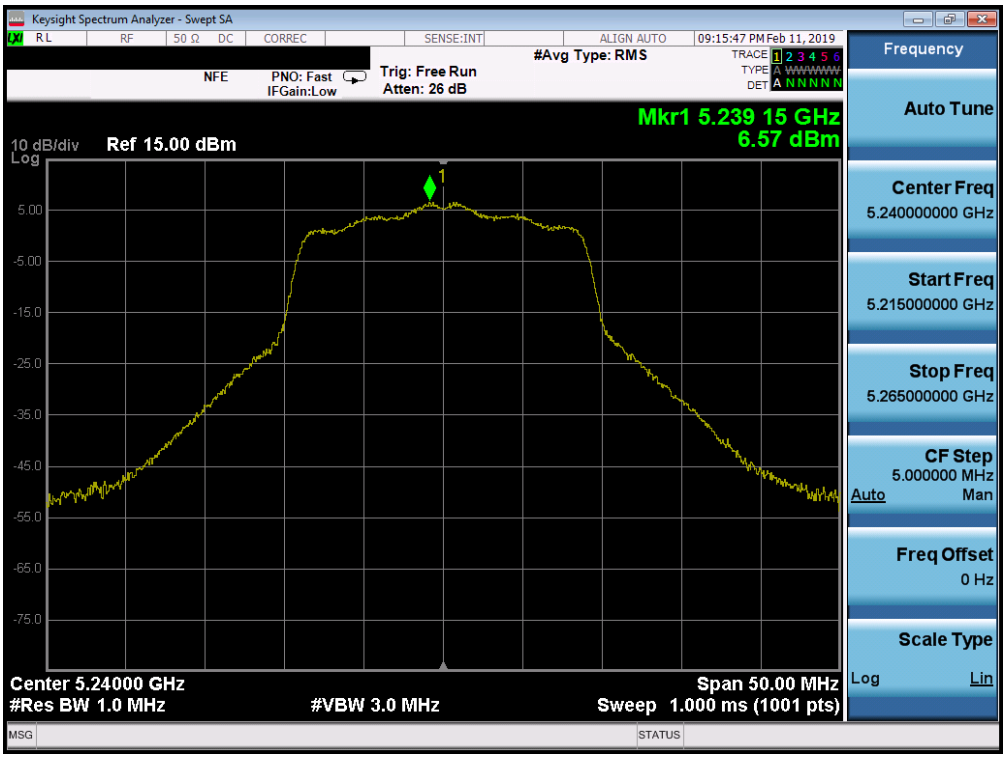

Plot 7-123. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

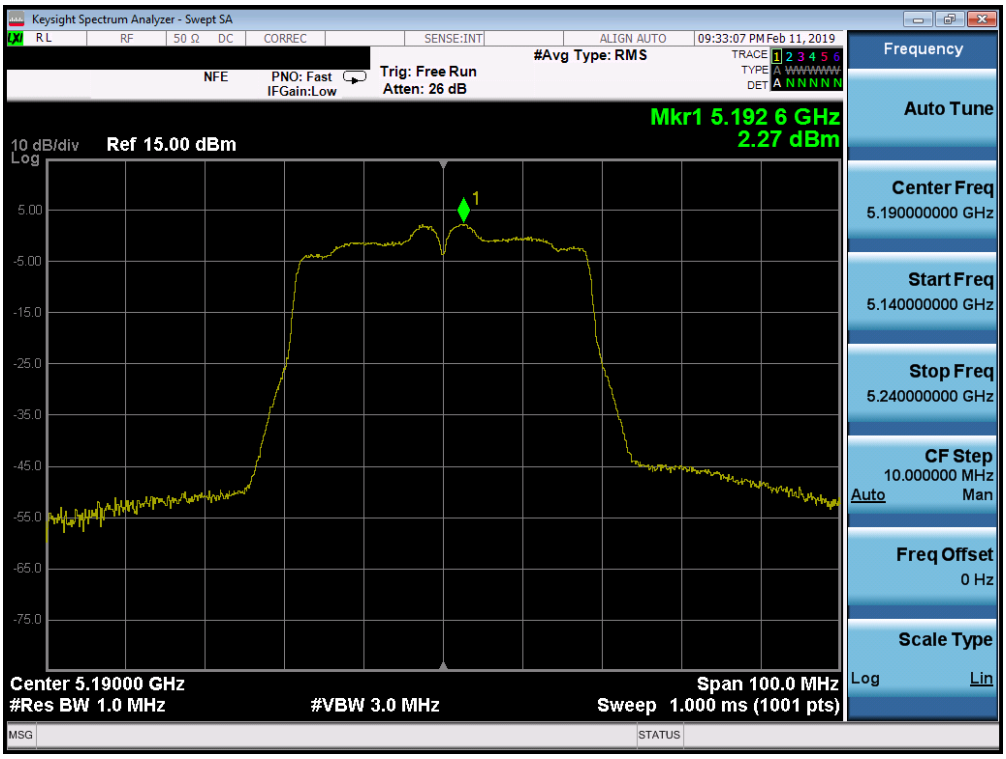

Plot 7-124. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

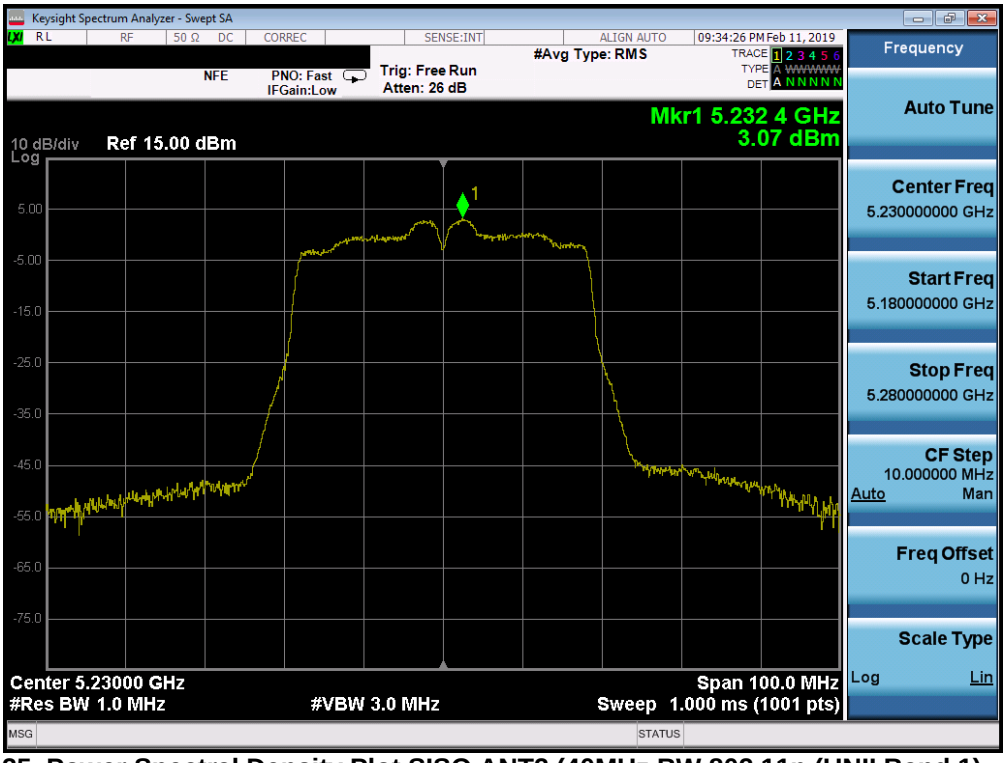

Plot 7-125. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

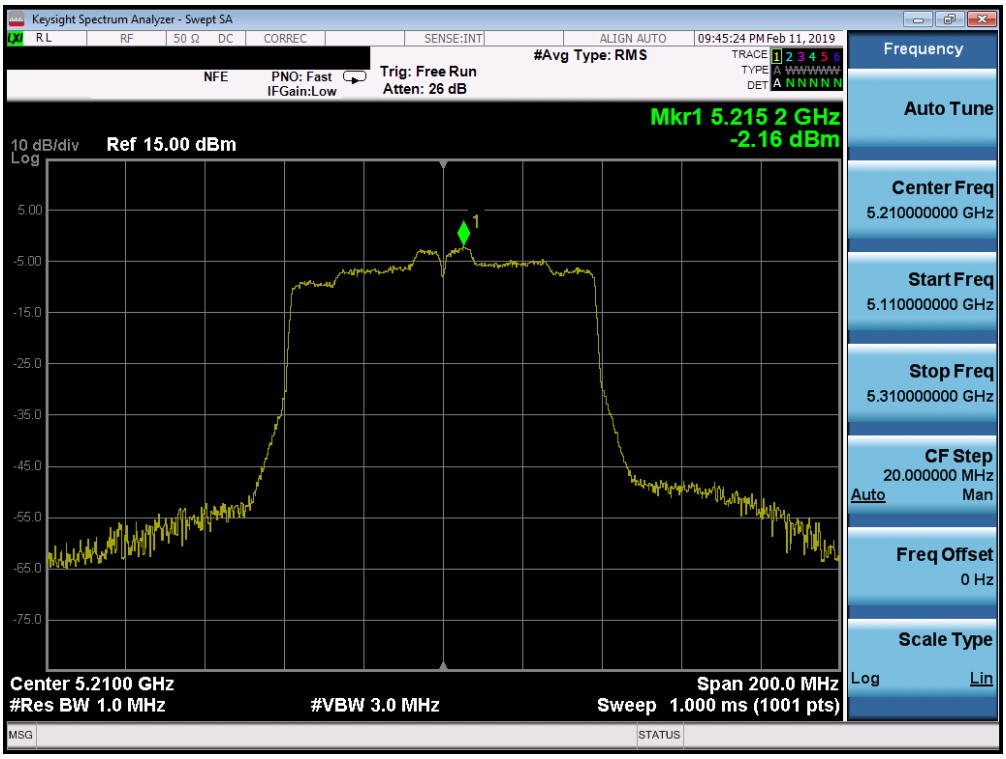

Plot 7-126. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

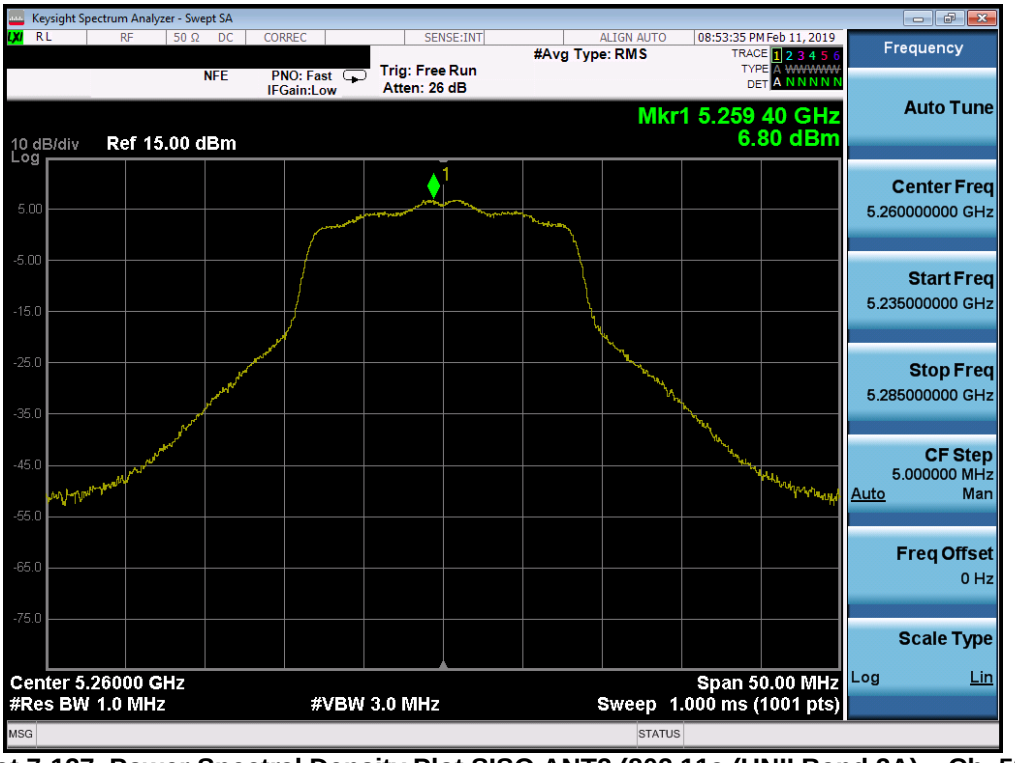

Plot 7-127. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 2A) – Ch. 52)

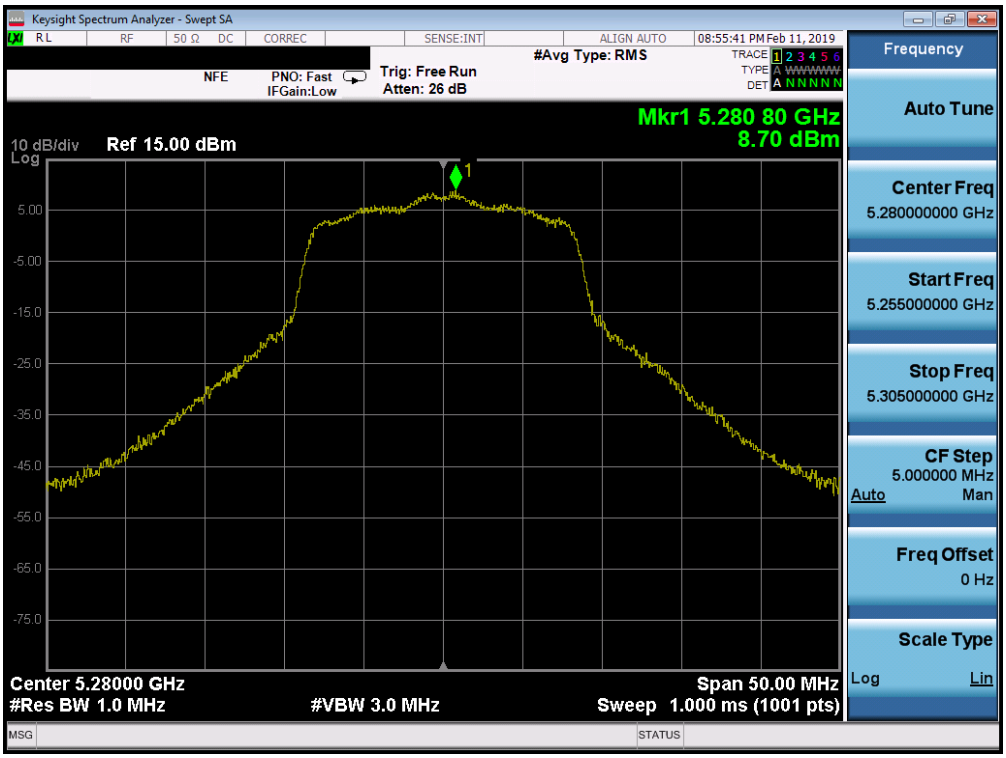

Plot 7-128. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 2A) – Ch. 56)

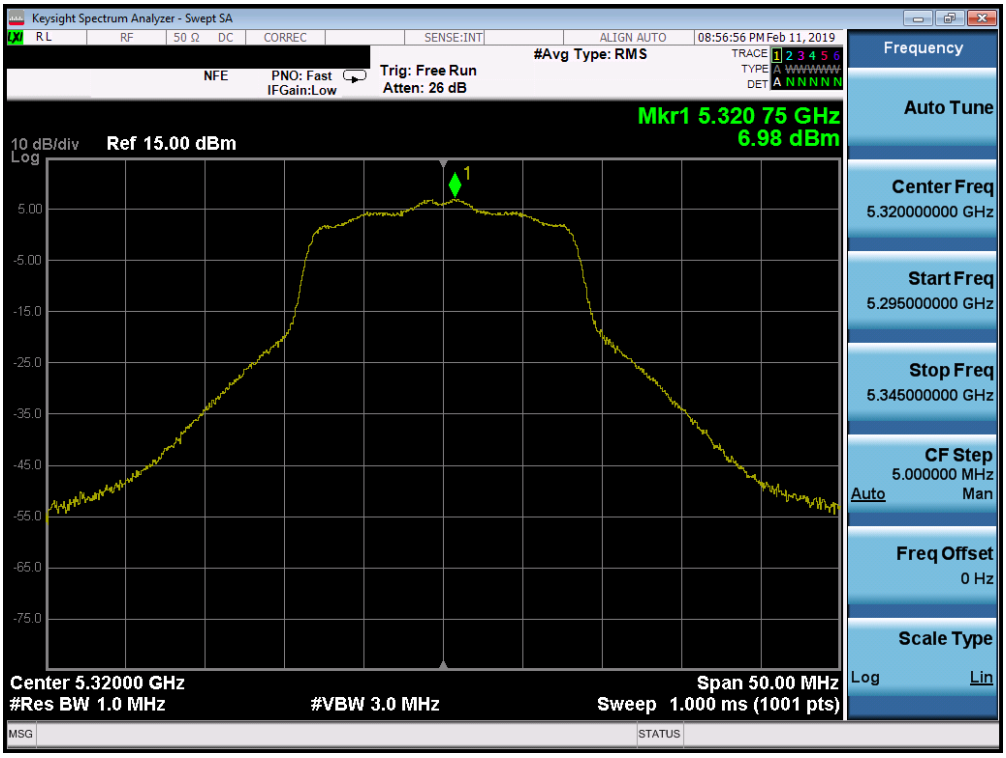

Plot 7-129. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 2A) – Ch. 64)

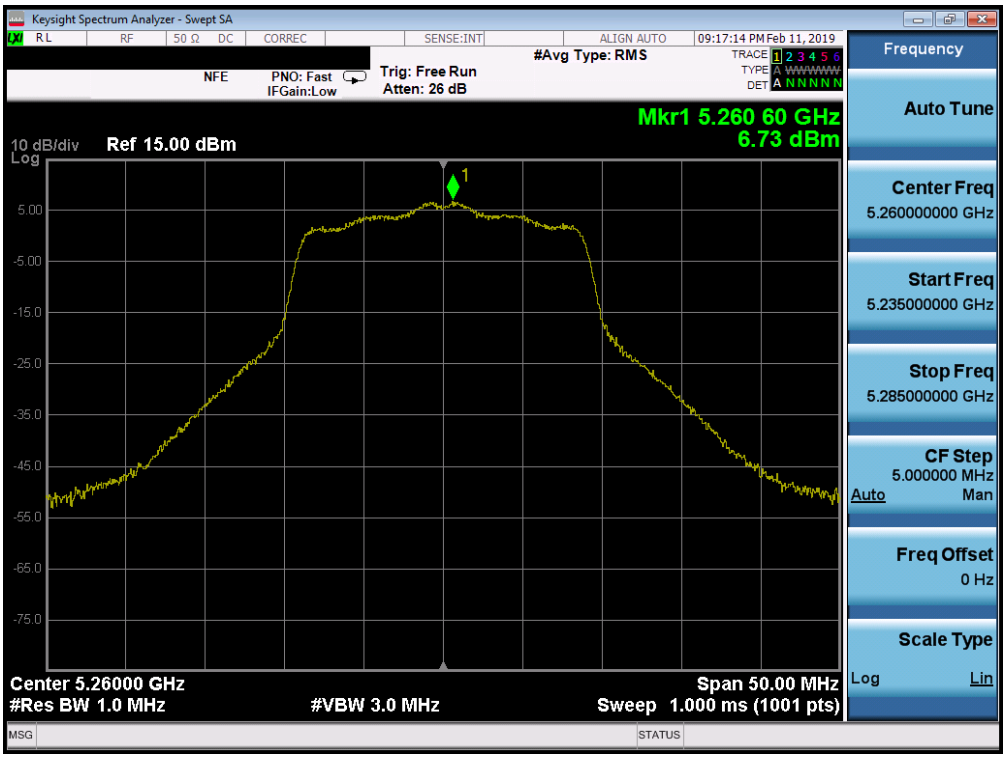

Plot 7-130. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

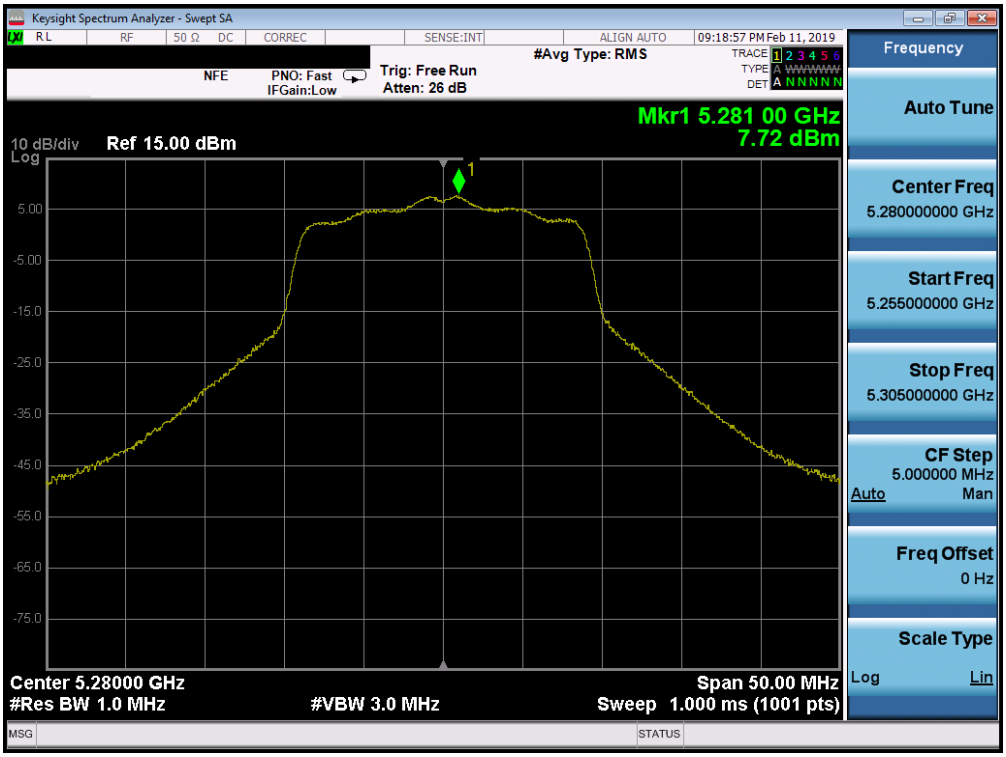

Plot 7-131. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

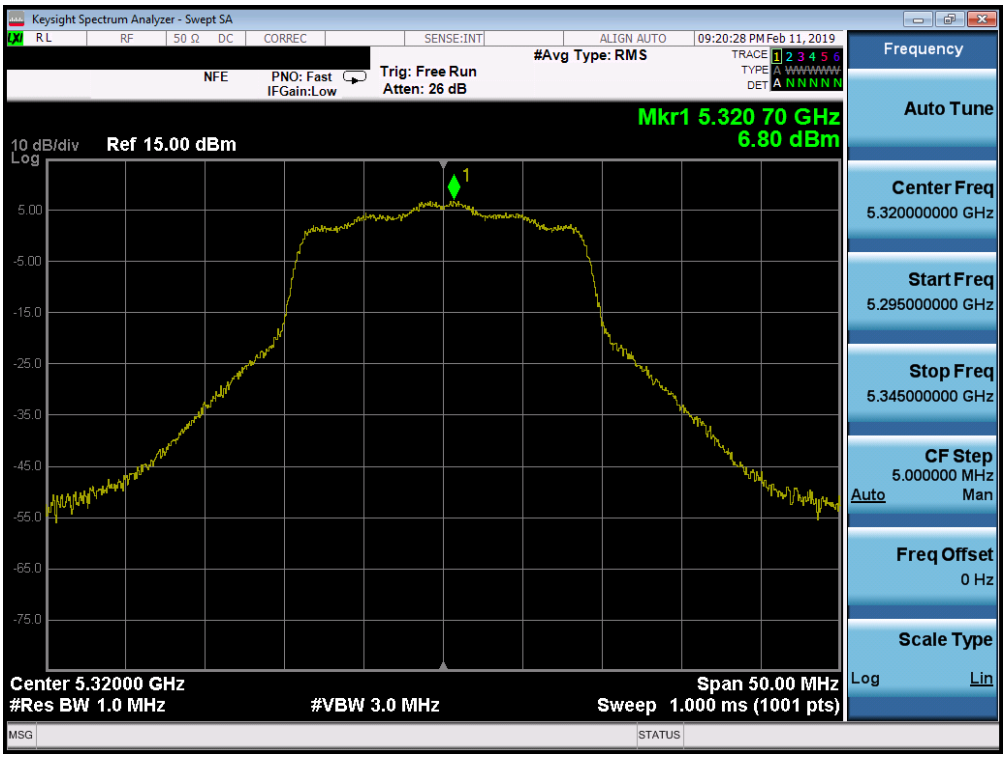

Plot 7-132. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

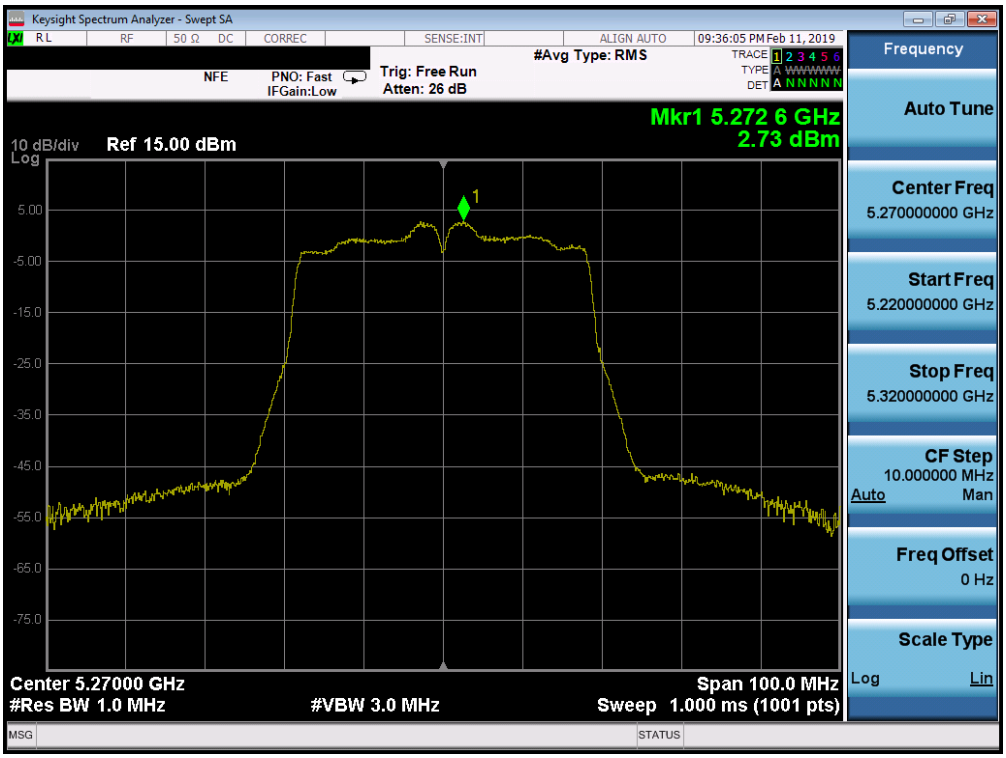

Plot 7-133. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

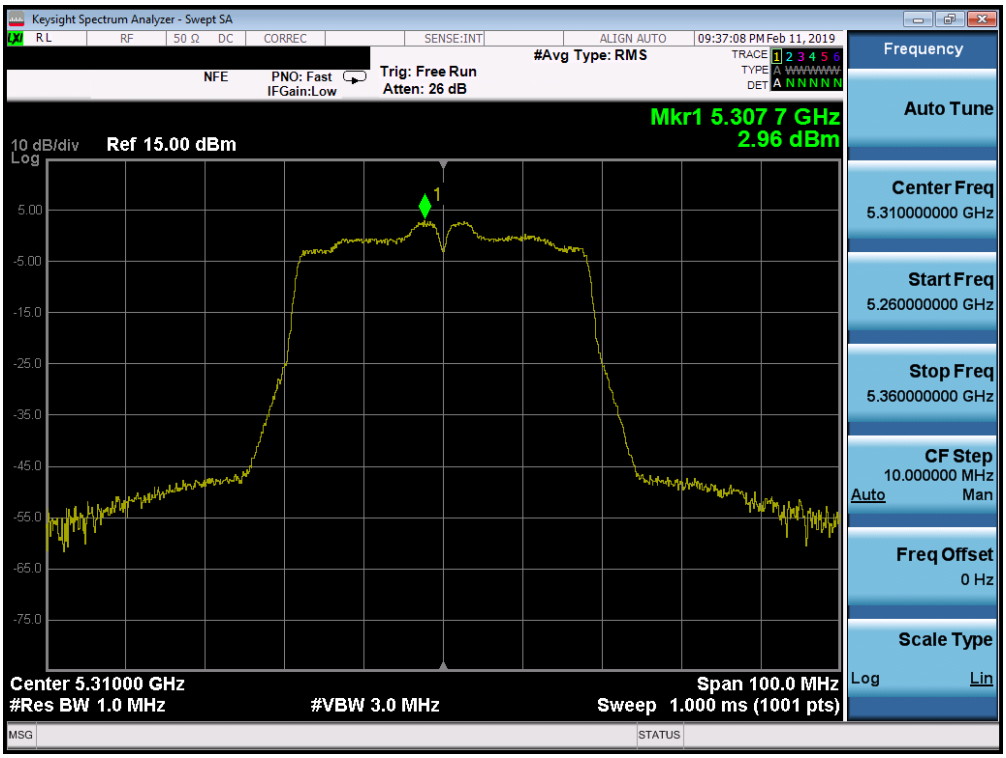

Plot 7-134. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

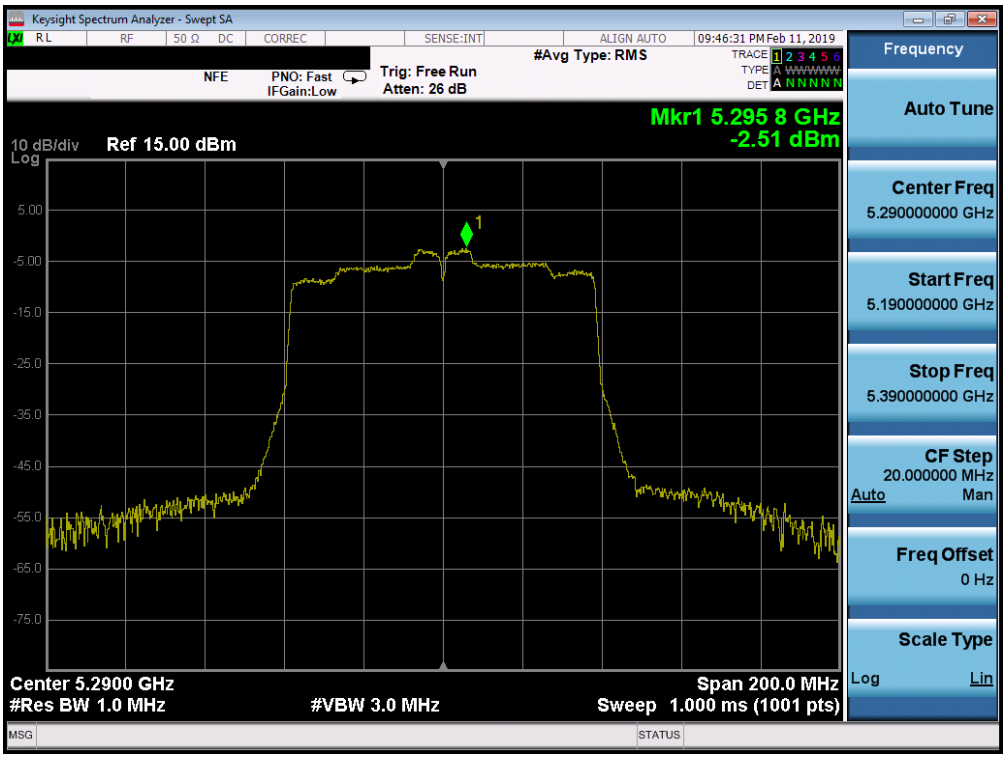

Plot 7-135. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

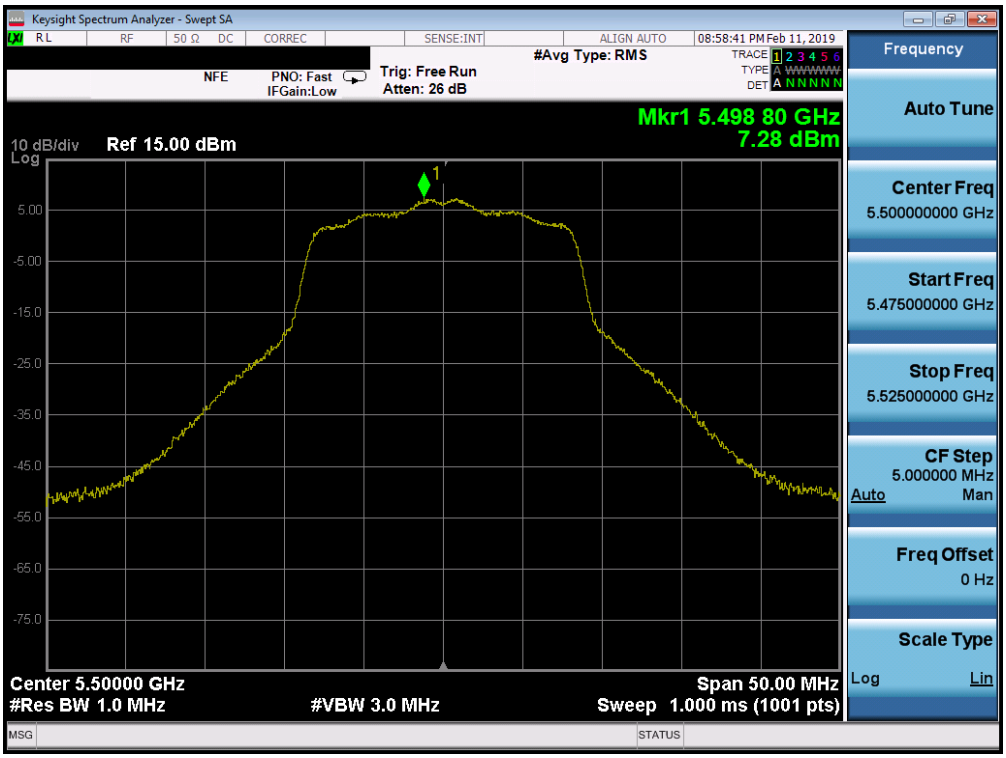

Plot 7-136. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 2C) – Ch. 100)

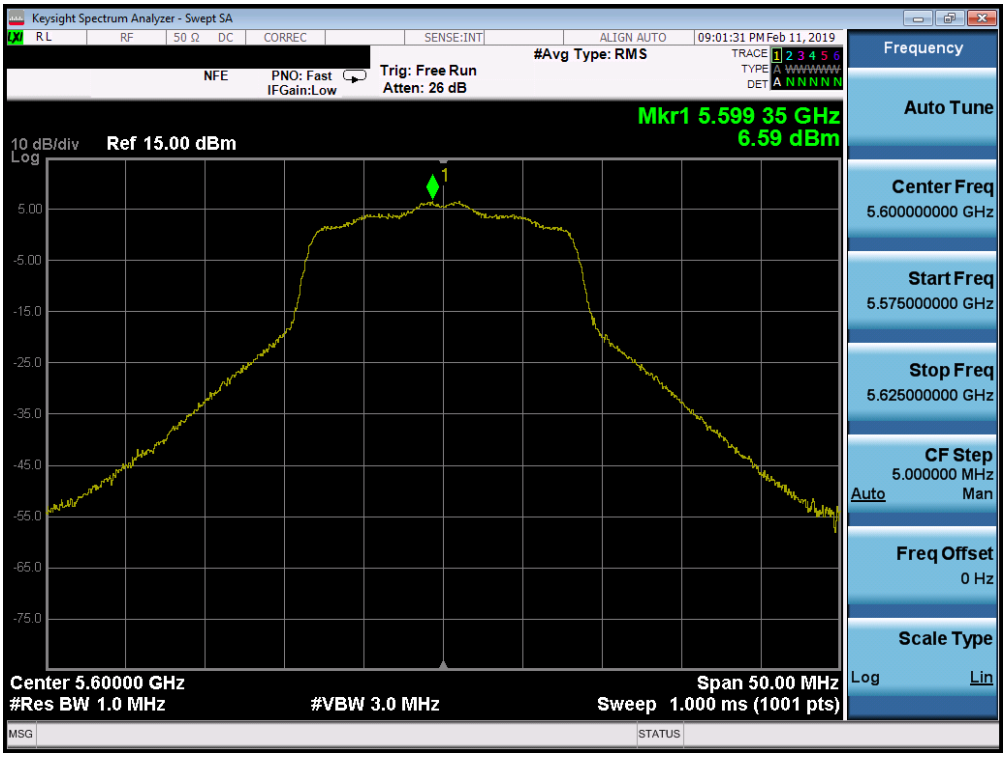

Plot 7-137. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 2C) – Ch. 120)

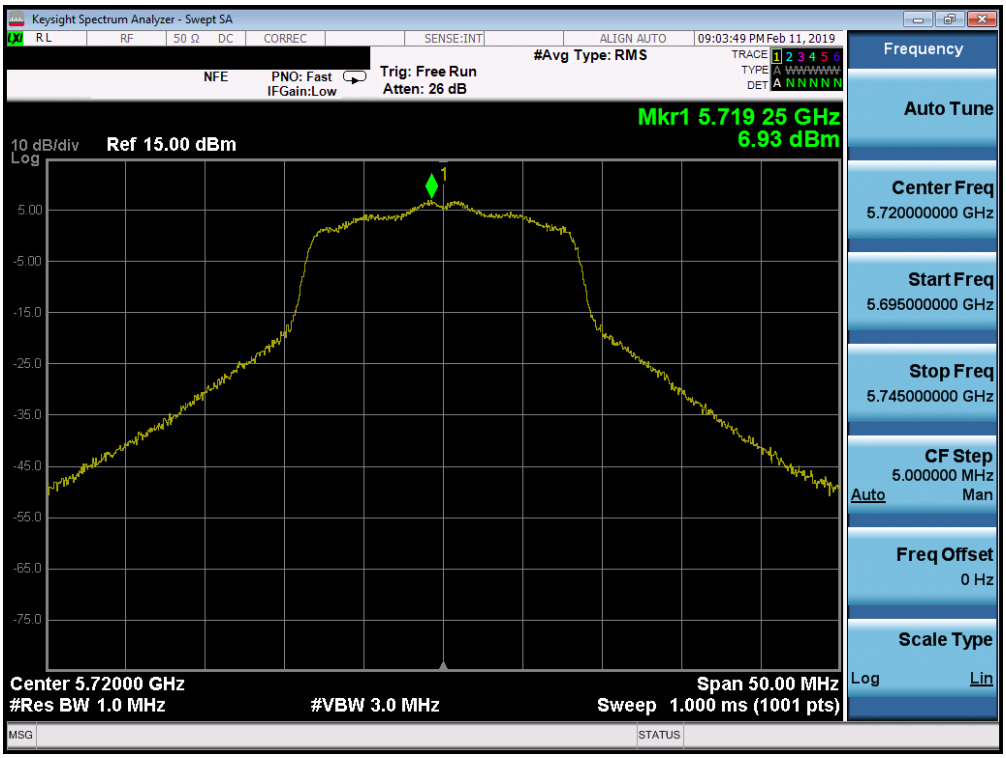

Plot 7-138. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 2C) – Ch. 144)

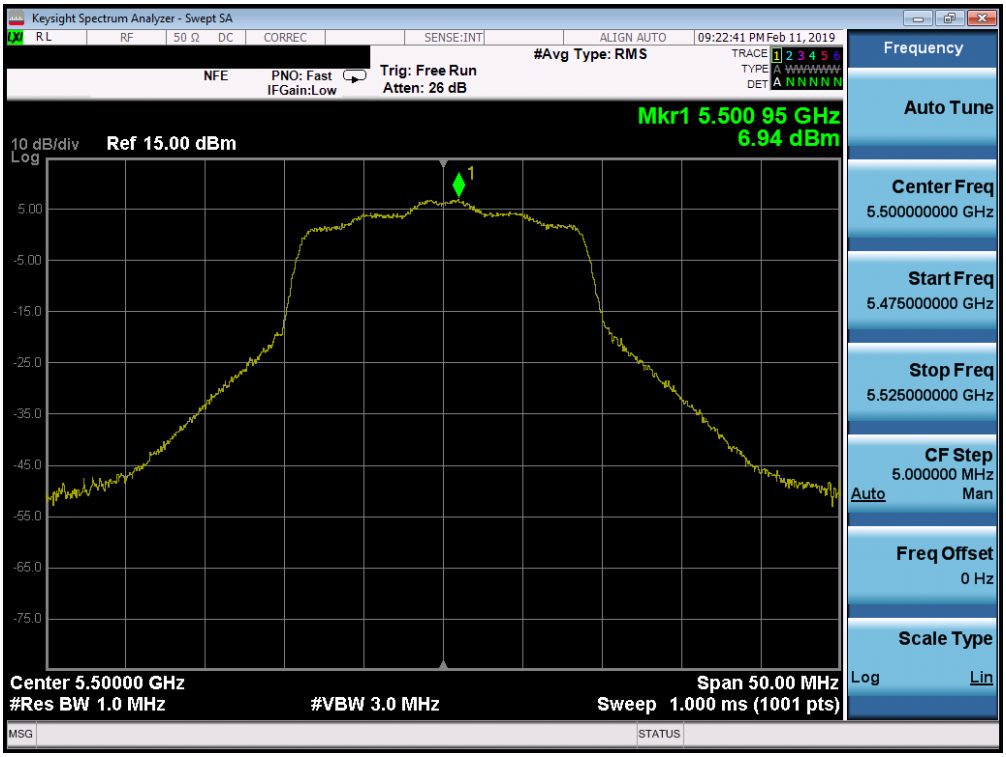

Plot 7-139. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

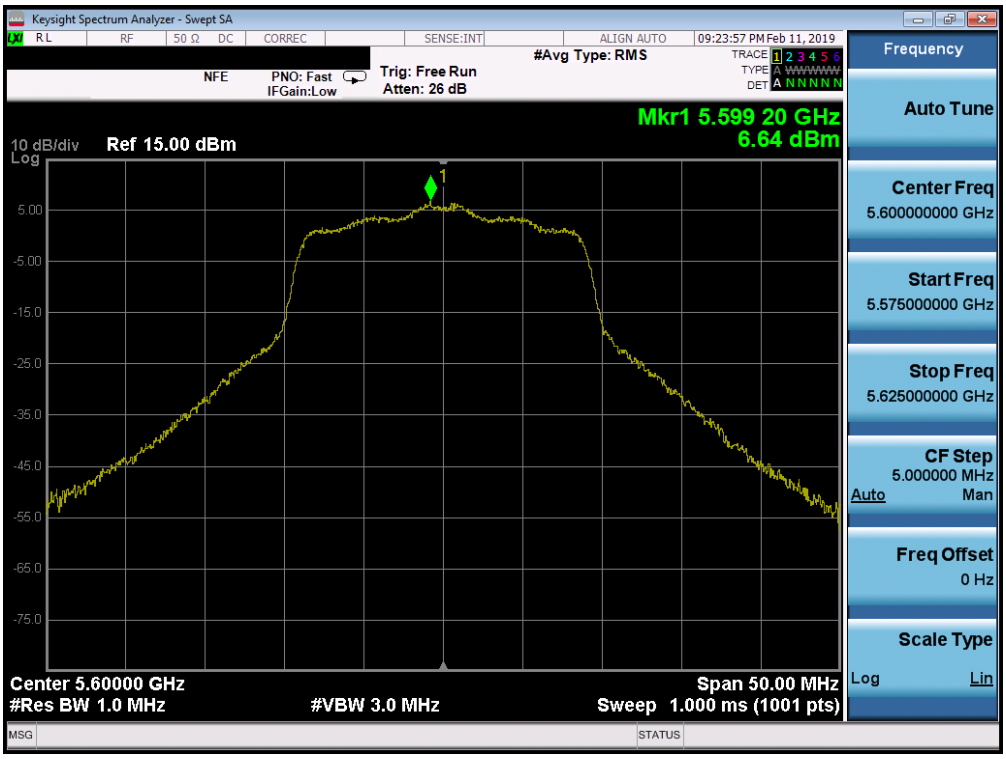

Plot 7-140. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

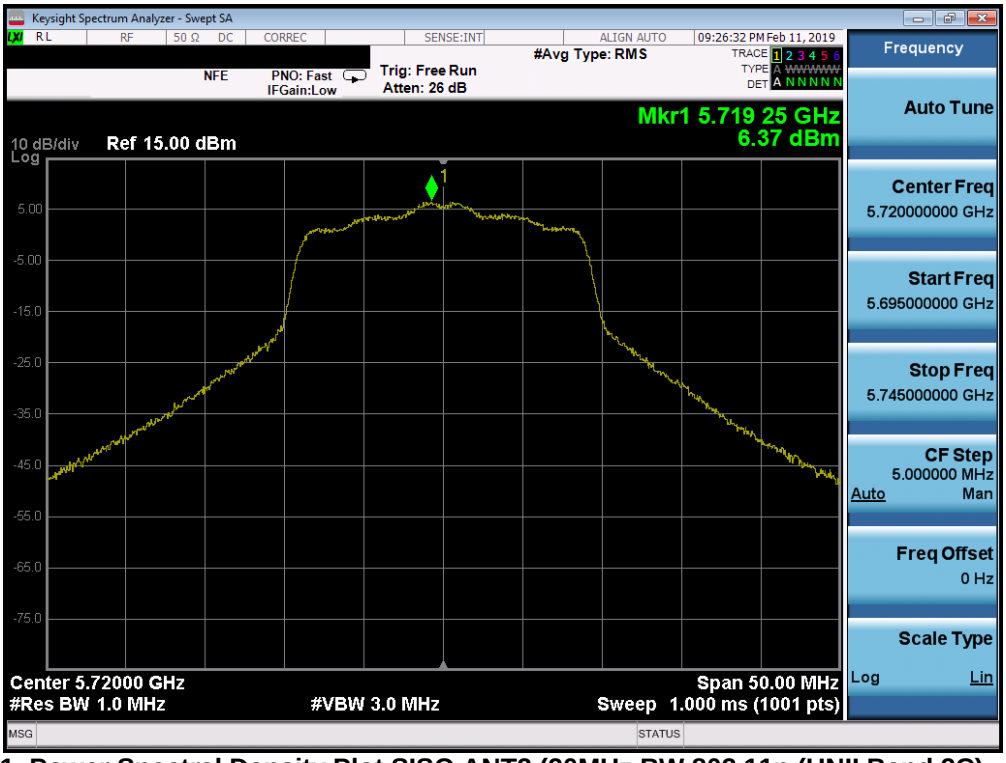

Plot 7-141. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

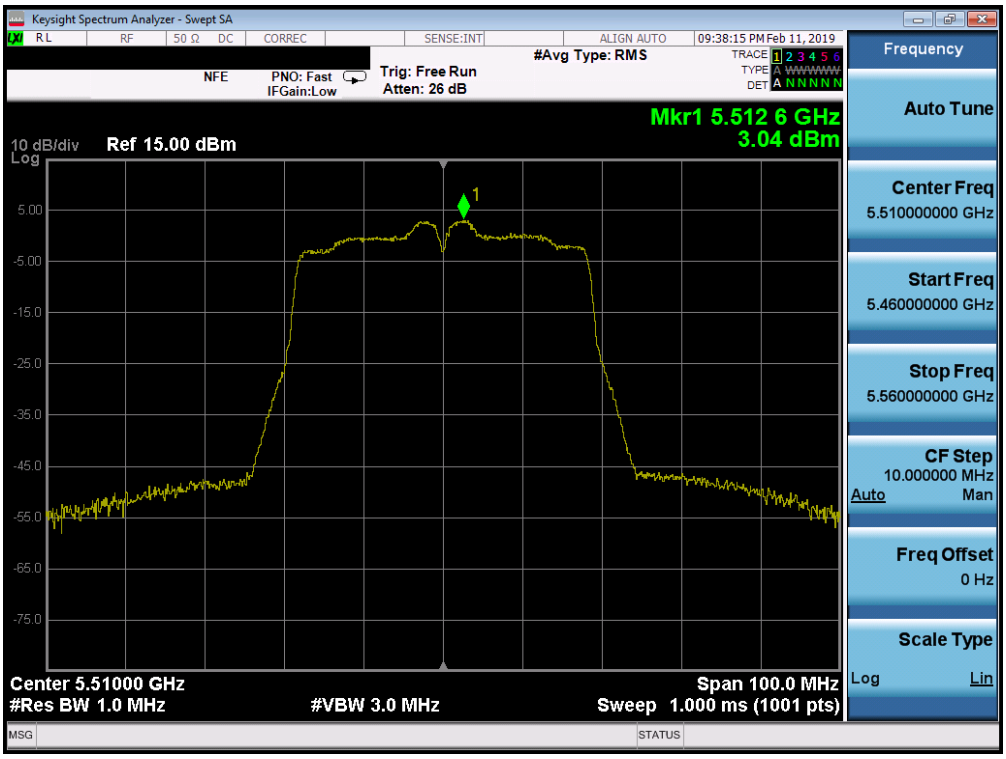

Plot 7-142. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

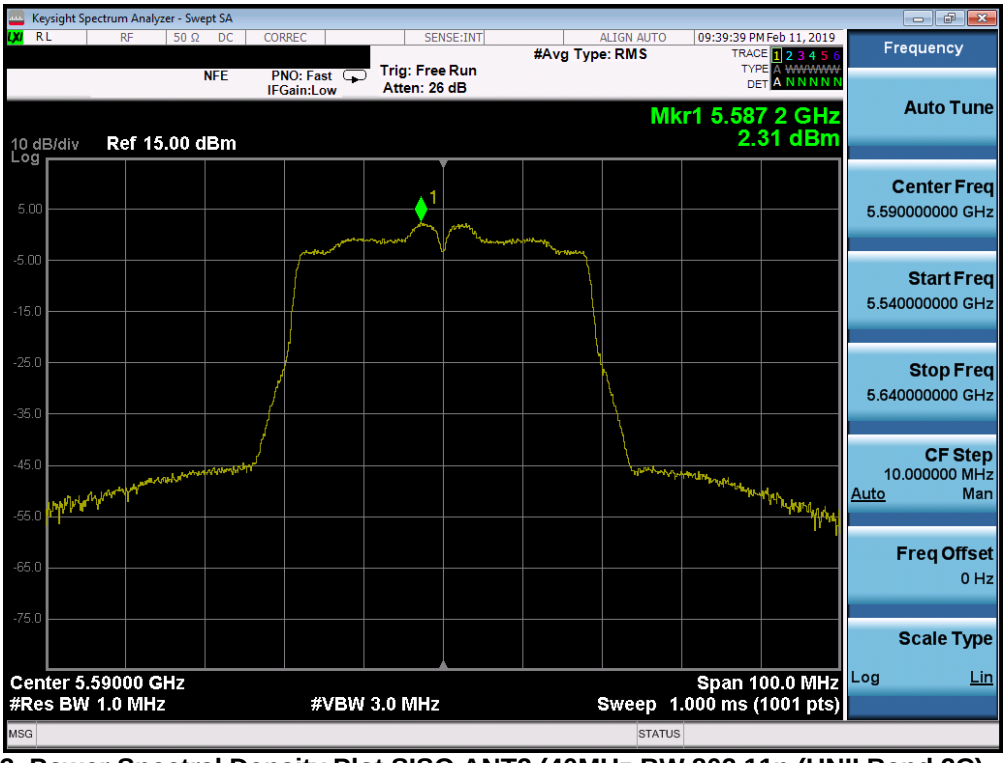

Plot 7-143. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

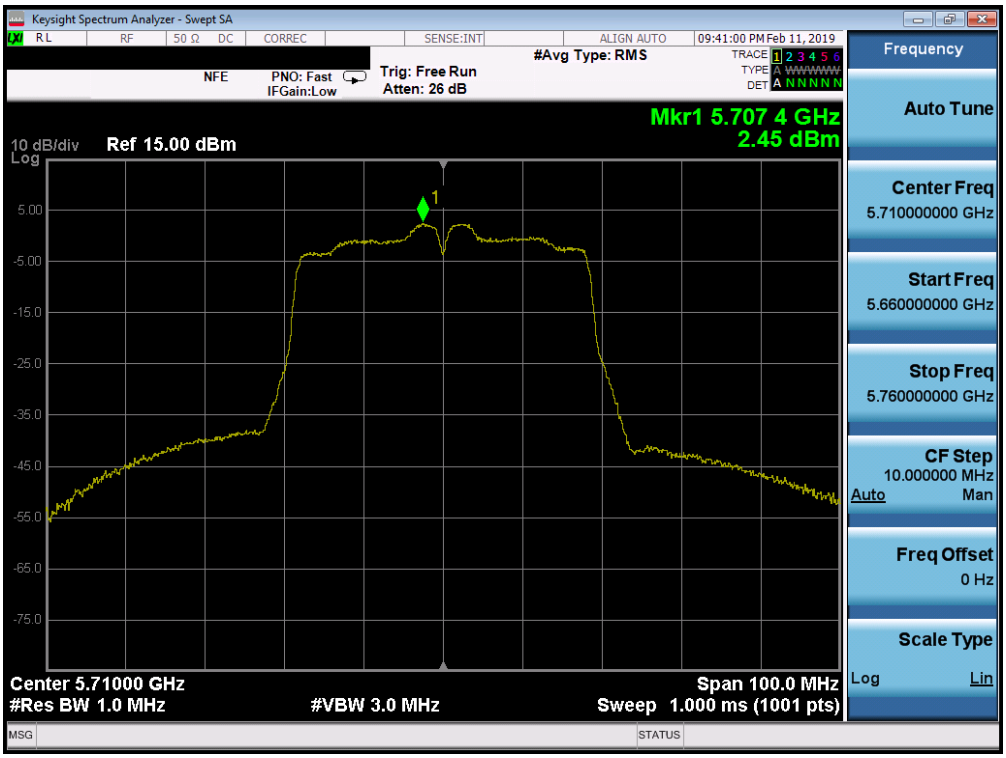

Plot 7-144. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

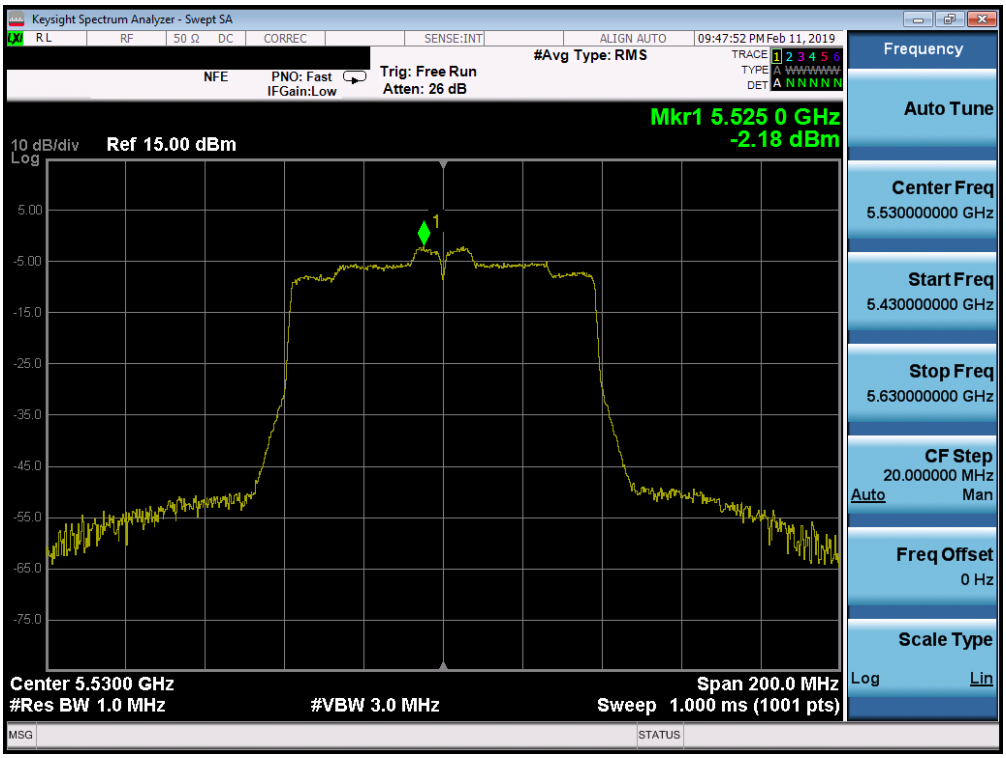

Plot 7-145. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

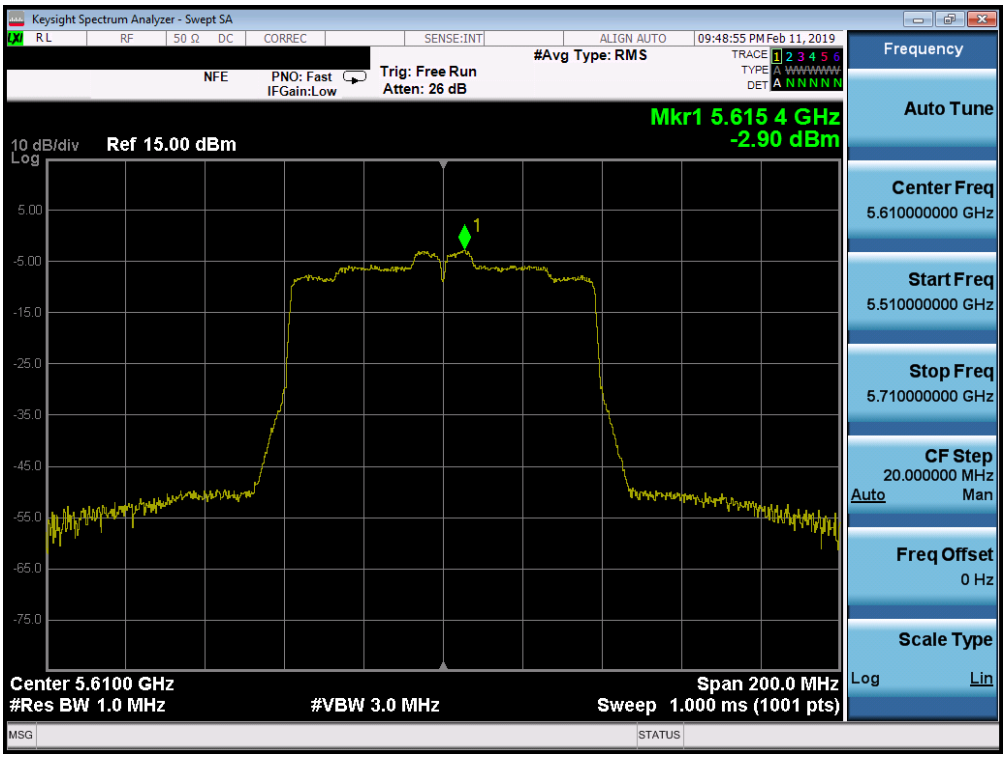

Plot 7-146. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

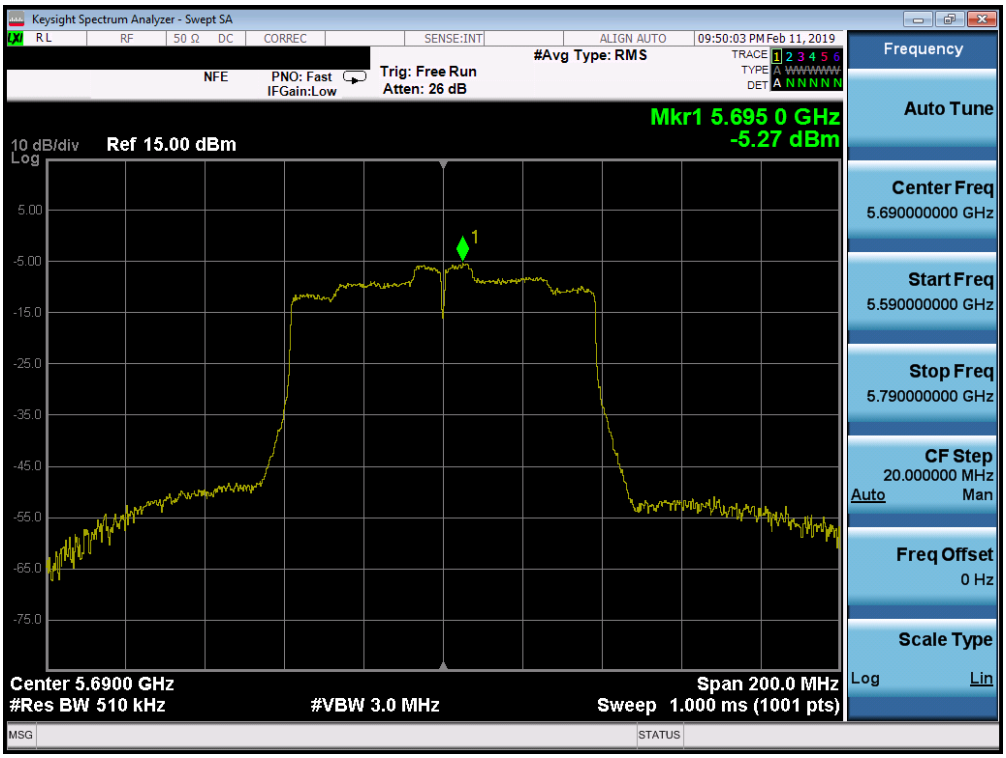

Plot 7-147. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	4.49	30.0	-25.51
	5785	157	a	6	5.90	30.0	-24.10
	5825	165	a	6	5.43	30.0	-24.57
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	3.81	30.0	-26.19
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	5.62	30.0	-24.38
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	4.81	30.0	-25.19
	5755	151	n (40MHz)	13.5/15 (MCS0)	0.28	30.0	-29.72
	5795	159	n (40MHz)	13.5/15 (MCS0)	0.57	30.0	-29.43
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-1.42	30.0	-31.42

Table 7-21. Band 3 Conducted Power Spectral Density Measurements SISO ANT2

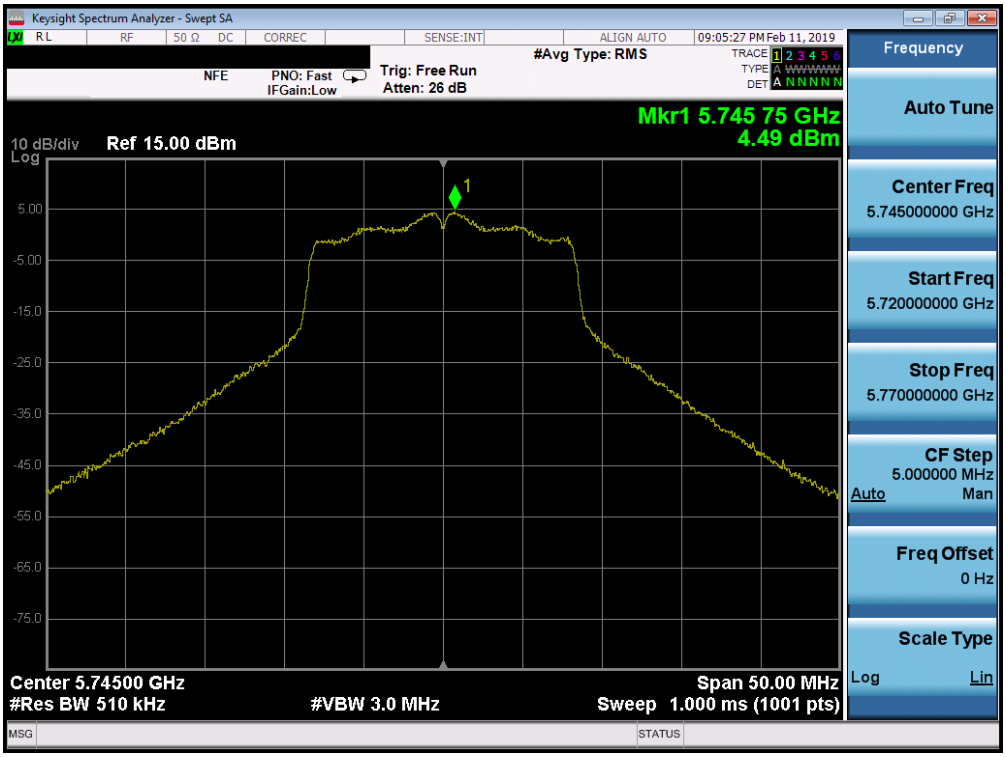

Plot 7-148. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 149)

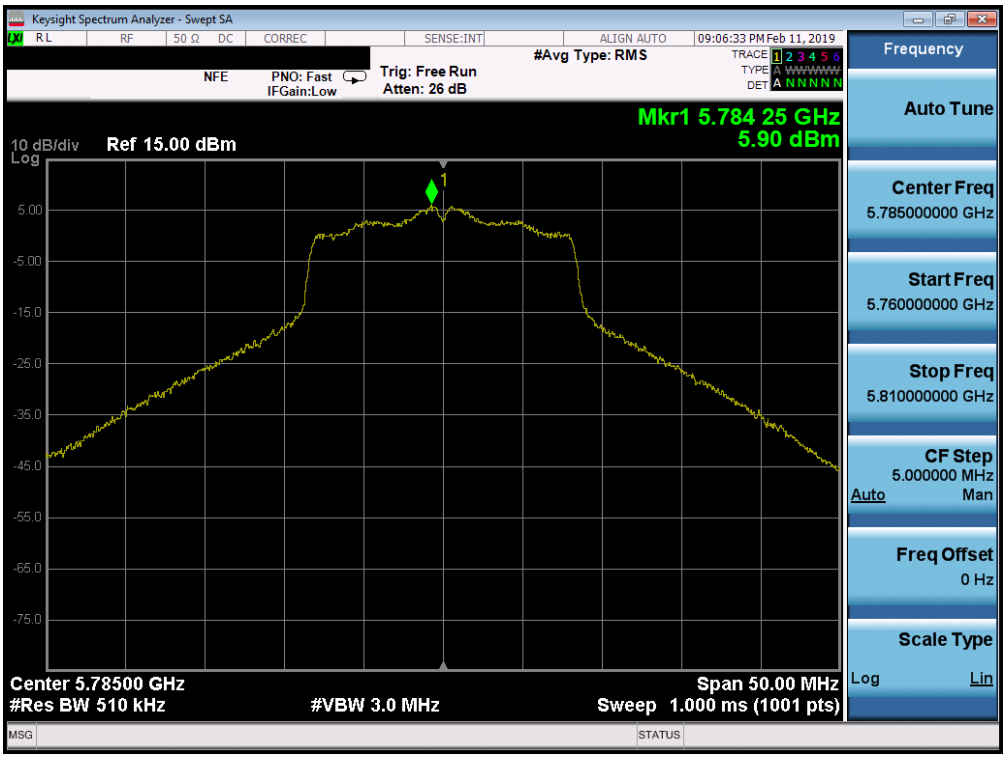

Plot 7-149. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 157)

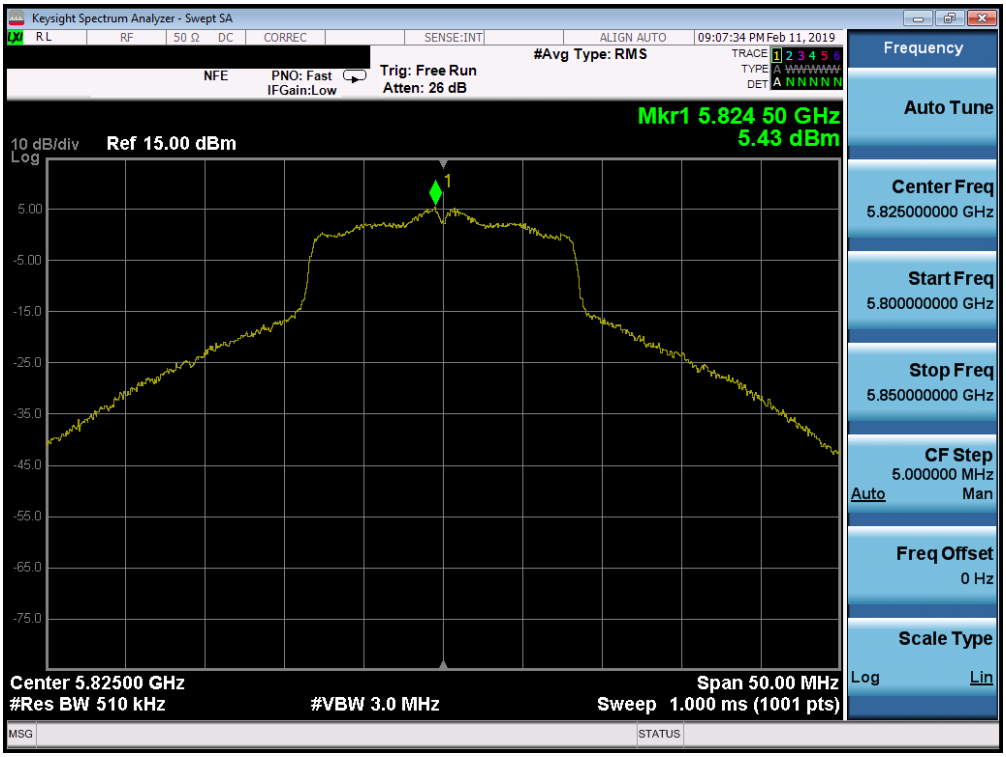

Plot 7-150. Power Spectral Density Plot SISO ANT2 (802.11a (UNII Band 3) – Ch. 165)

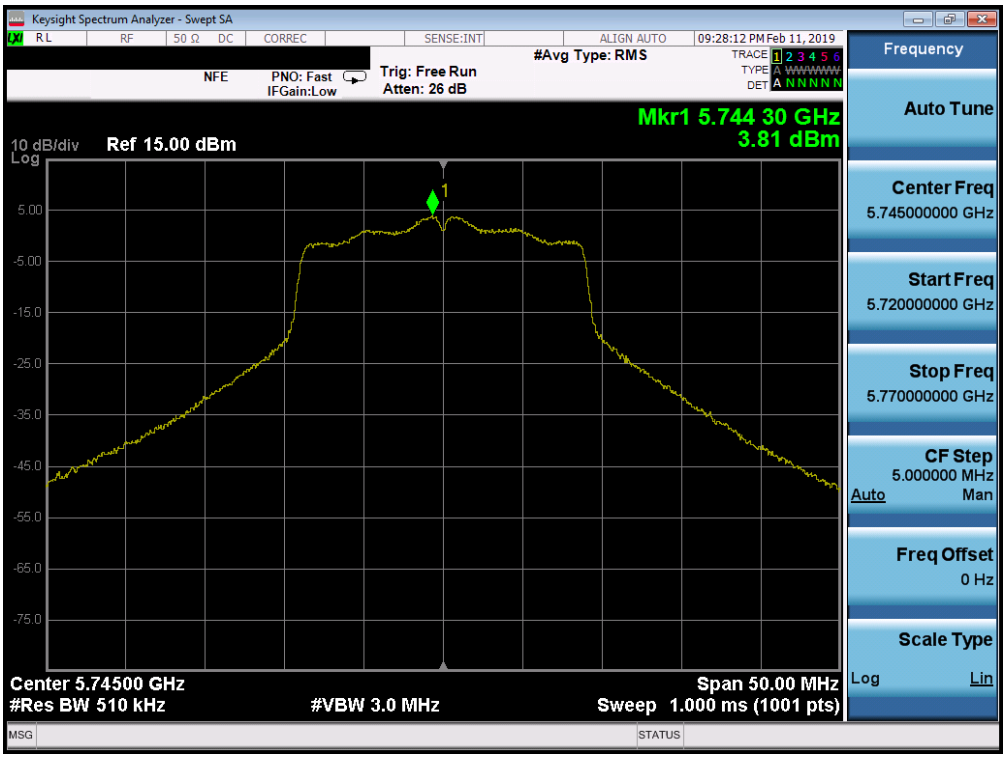

Plot 7-151. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

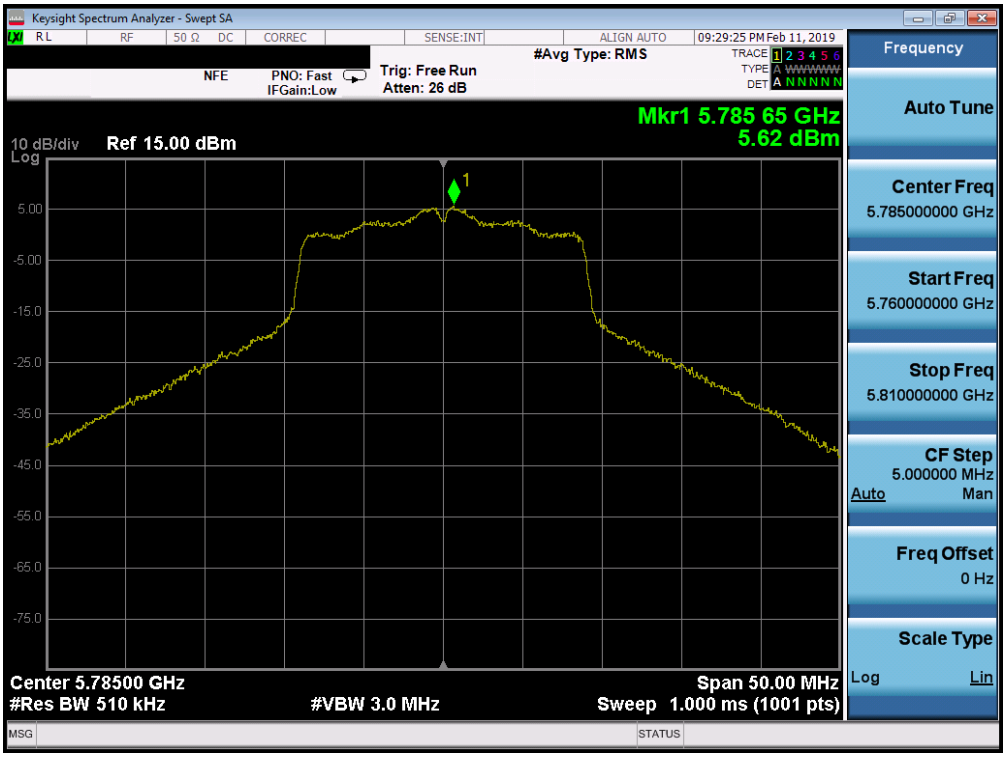

Plot 7-152. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

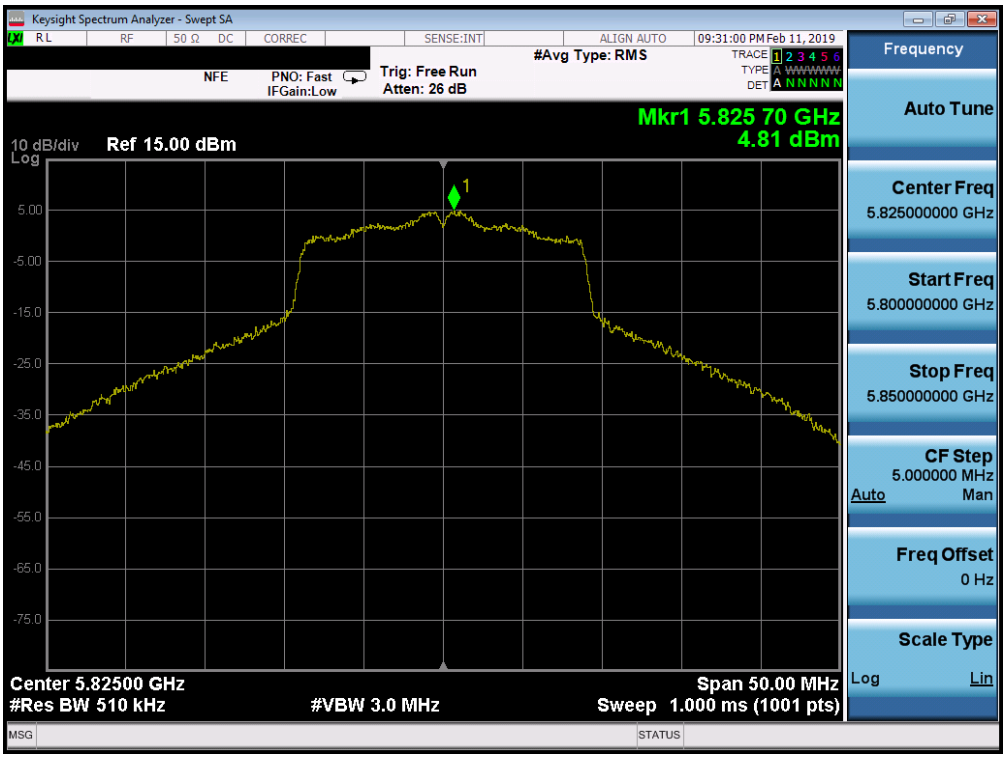

Plot 7-153. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

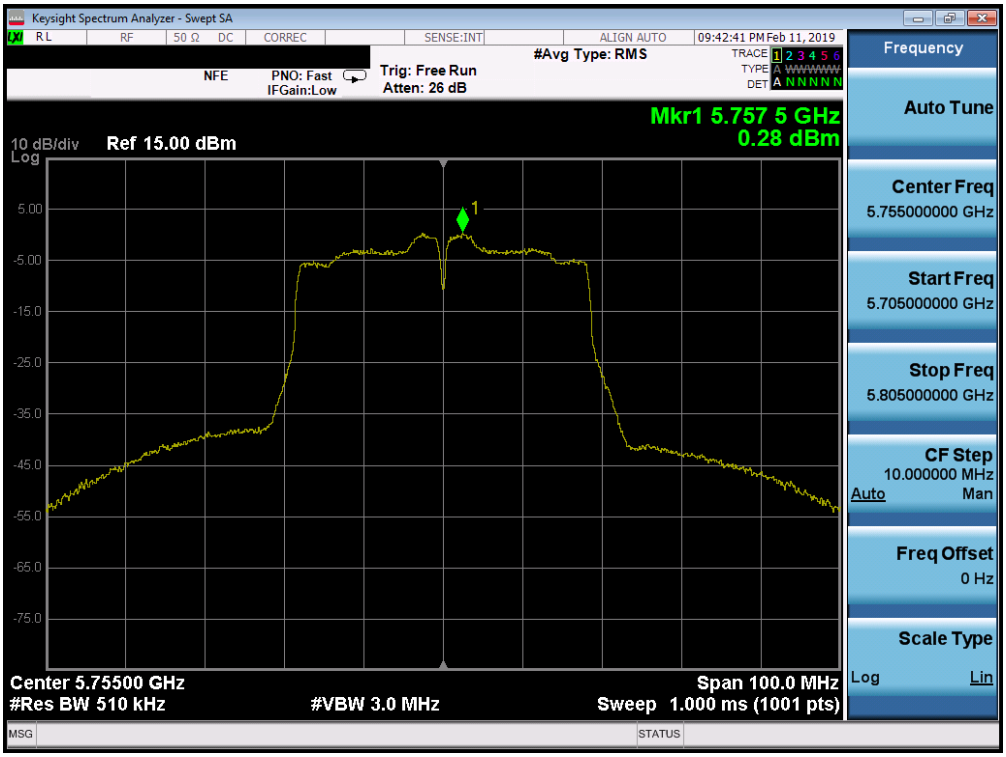

Plot 7-154. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

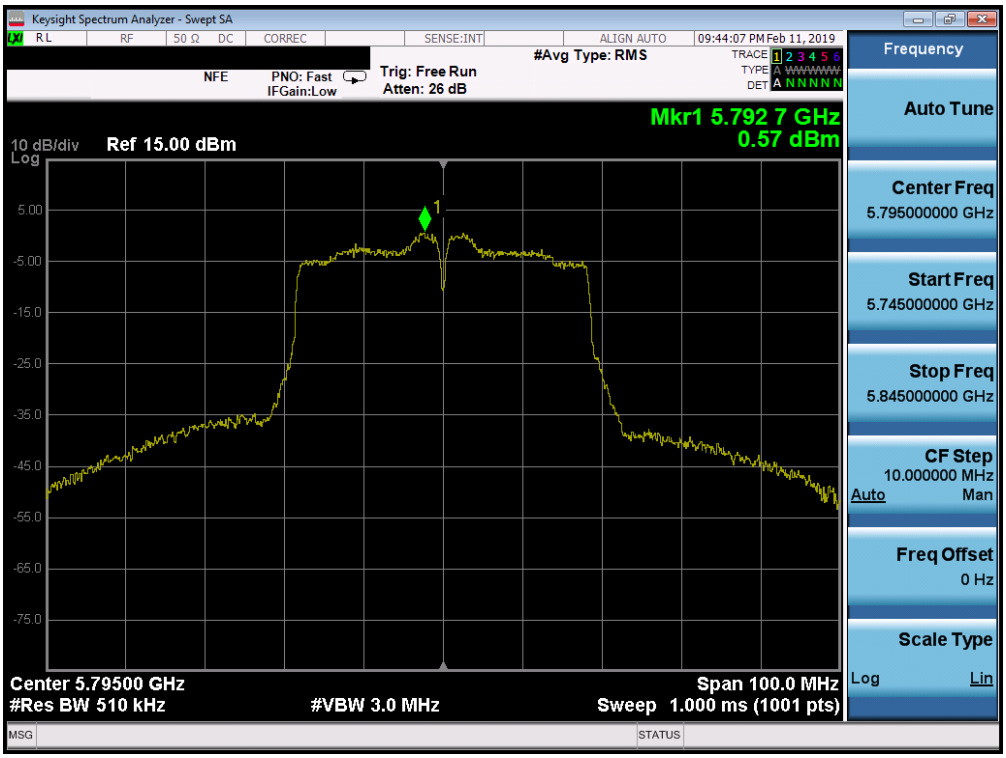

Plot 7-155. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

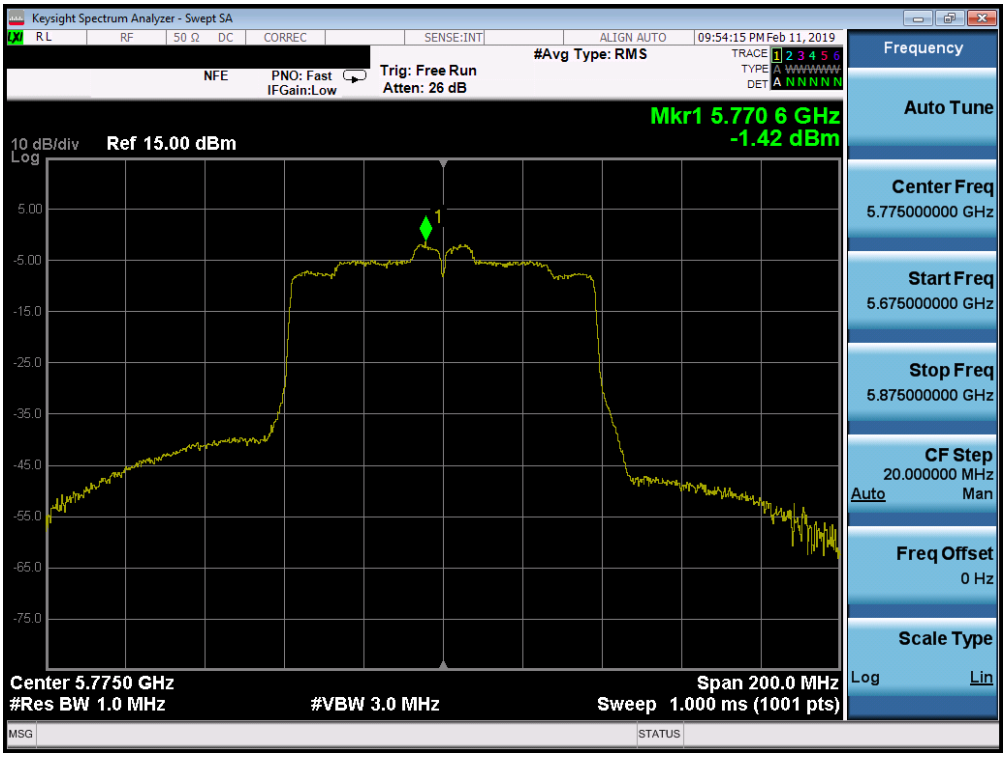

Plot 7-156. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)