

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctestlab.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics MobileComm U.S.A. Inc. 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 **United States**

Date of Testing: 01/22/2016 - 02/25/2016 Test Site/Location: PCTEST Lab, Columbia, MD, USA **Test Report Serial No.:** 0Y1601180126-R3.ZNF

FCC ID: ZNFVS987

APPLICANT: LG ELECTRONICS MOBILECOMM U.S.A. INC.

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Certification CFR §20.19(b) FCC Rule Part(s): **HAC Standard:** ANSI C63.19-2011 **EUT Type:** Portable Handset

LG-VS987, LGVS987, VS987, LG-US992, LGUS992, US992, Model(s):

LG-RS988, LGRS988, RS988, LG-RS988L, LGRS988L, RS988L,

LG-VS987T, LG-VS987G, LG-VS987P

Test Device Serial No.: Pre-Production Sample [S/N: 03753]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 0Y1601180126-R3.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dog 1 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 1 of 115

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	TEST SITE LOCATION	4
3.	EUT DESCRIPTION	5
4.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
5.	METHOD OF MEASUREMENT	8
6.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	18
7.	FCC 3G MEASUREMENTS	20
8.	TEST SUMMARY	22
9.	MEASUREMENT UNCERTAINTY	81
10.	EQUIPMENT LIST	82
11.	TEST DATA	83
12.	CALIBRATION CERTIFICATES	102
13.	CONCLUSION	109
14.	REFERENCES	110
15.	TEST SETUP PHOTOGRAPHS	112

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 2 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 2 of 115

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-86581 to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 2 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 3 of 115

2. TEST SITE LOCATION

I. Introduction

The map at the right shows the location of the PCTEST LABORATORY in Columbia, Maryland. It is in proximity to the FCC Laboratory, the Baltimore-Washington International (BWI) airport, the city of Baltimore and Washington, DC (See Figure 2-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in Stonewood Business Center, Guilford Industrial Park, Columbia, Maryland. The site address is 7185 Oakland Mills Road, Columbia, MD 21046. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 10' 24" N latitude and 76° 49' 50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory.



Figure 2-1
Map of the Greater Baltimore and Metropolitan
Washington, D.C. area

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 4 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 4 of 115

3. **EUT DESCRIPTION**



FCC ID: ZNFVS987

Applicant: LG Electronics MobileComm U.S.A. Inc.

1000 Sylvan Avenue Englewood Cliffs, NJ 07632

United States

LG-VS987, LGVS987, VS987, LG-US992, LGUS992, US992, Model(s): LG-RS988, LGRS988, RS988, LG-RS988L, LGRS988L, RS988L,

LG-VS987T, LG-VS987G, LG-VS987P

Camera Module Accessory: **CBG-700** 03753 Serial Number: HW Version: Rev. 1.0 SW Version: VS9870CF Antenna: Internal Antenna

HAC Test Configurations: Cellular CDMA, 1013, 384, 777, BT Off, WLAN Off, LTE Off

PCS CDMA, 25, 600, 1175, BT Off, WLAN Off, LTE Off GSM 850, 128, 190, 251, BT Off, WLAN Off, LTE Off GSM 1900, 512, 661, 810, BT Off, WLAN Off, LTE Off UMTS V, 4132, 4183, 4233, BT Off, WLAN Off, LTE Off UMTS II, 9262, 9400, 9538, BT Off, WLAN Off, LTE Off

LTE FDD B2; BW's: 20MHz, 15MHz, 10MHz, 5MHz, 3MHz, 1.4MHz; BT Off, WLAN Off LTE FDD B4; BW's: 20MHz, 15MHz, 10MHz, 5MHz, 3MHz, 1.4MHz; BT Off, WLAN Off

LTE FDD B5; BW's: 10MHz, 5MHz, 3MHz, 1.4MHz; BT Off, WLAN Off LTE FDD B7; BW's: 20MHz, 15MHz, 10MHz, 5MHz; BT Off, WLAN Off LTE FDD B12; BW's: 10MHz, 5MHz, 3MHz, 1.4MHz; BT Off, WLAN Off

LTE FDD B13; BW's: 10MHz, 5MHz; BT Off, WLAN Off LTE FDD B17; BW's: 10MHz, 5MHz; BT Off, WLAN Off

LTE FDD B25; BW's: 20MHz, 15MHz, 10MHz, 5MHz, 3MHz, 1.4MHz; BT Off, WLAN Off * Note: LTE test channels for different bands and bandwidths can be found in Sect. 8.II

EUT Type: Portable Handset

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Voice over Digital Transport OTT Capability	WIFI Low Power	Additional GSM Powe Reduction
	850	VO	Yes	Yes: WIFI or BT	N/A	N/A	No
GSM	1900	***	163	res. will of bi	11/15	14/7	140
	GPRS/EDGE	DT	No	Yes: WIFI or BT	Yes	N/A	No
	850	VD	Yes	Yes: WIFI or BT	N/A	N/A	N/A
UMTS	1900	VD	163	res. WIFI OF BT	N/A	N/A	N/A
	HSPA	DT	No	Yes: WIFI or BT	Yes	N/A	N/A
	835	vo	Yes	Yes: WIFI or BT	N/A	N/A	N/A
CDMA	1900	***	163	res. will of bi	11/15	14/7	19/6
	EVDO	DT	No	Yes: WIFI or BT	Yes	N/A	N/A
700 (B12)							
	700 (B17)		Yes	Yes: WIFI or BT	Yes	N/A	N/A
	780 (B13)						
LTE (FDD)	850 (B5)	VD1					
LIE (FUU)	1700 (B4)	VD.					
	1900 (B2)						
	1900 (B25)						
	2500 (B7)						
	2450						
	5200						
	5300	VD	No ²	Yes: CDMA, GSM, UMTS, or LTE	Yes	N/A	N/A
	5500						
	5800						
BT	2450	DT	No	Yes: CDMA, GSM, UMTS, or LTE	N/A	N/A	N/A
Type Transport VO = Voice Onl			Notes: 1. The 3GPP V	OLTE CMRS service is defined by	GSMA in PRD IR.92 for IP	Voice Service a	and Digital Transport.

DT = Digital Data - Not intended for CMRS Service 2. Not tested in accordance with the guidance issued by OET in KDB publication 285076 D02 T-Coil testing for VD = CMRS and Data Transport

Table 3-1: ZNFVS987 HAC Air Interfaces

FCC ID: ZNFVS987	PCTEST	PCTEST HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo E of 11E
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 5 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

4. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

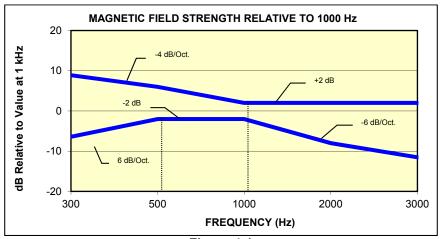


Figure 4-1
Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

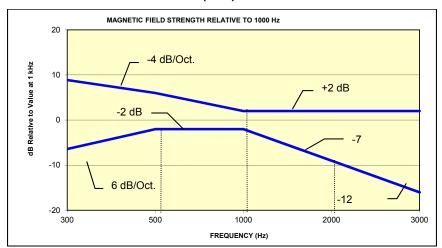


Figure 4-2
Magnetic Field frequency response for wireless devices with an axial field that exceeds
-15 dB(A/m) at 1 kHz

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 6 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 6 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

REV 3.1.M 12/9/2015

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters			
Category	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]			
T1	0 to 10 dB			
T2	10 to 20 dB			
Т3	20 to 30 dB			
T4	> 30 dB			
Table 4-1 Magnetic Coupling Parameters				

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 7 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 7 of 115

METHOD OF MEASUREMENT 5.

I. **Test Setup**

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:


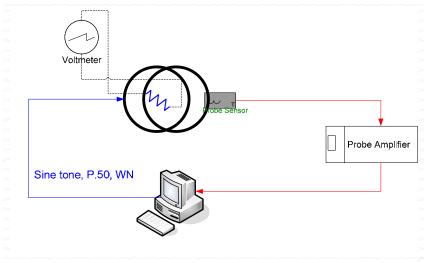


Figure 5-1 Validation Setup with Helmholtz Coil

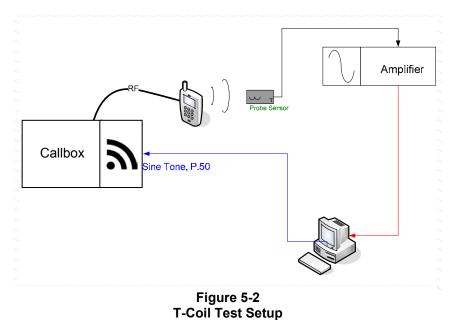

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 8 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Fage 6 01 115

II. **Scanning Mechanism**

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm

Maximum speed 6.1 cm/sec 115 VAC Line Voltage: Line Frequency: 60 Hz

Material Composite: Delrin (Acetal) Data Control: Parallel Port

Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm

Dimensions: 36" x 25" x 38" Operating Area: 36" x 49" x 55"

Reflections: < -20 dB (in anechoic chamber)




Figure 5-3 RF Near-Field Scanner

ITU-T P.50 Artificial Voice III.

Manufacturer: ITU-T

Active Frequency 100 Hz - 8 kHz

Range:

Stimulus Type: Male and Female, no spaces

Single Sample 20.96 seconds

Duration:

Activity Level: 100%




Figure 5-4 Spectral Characteristic of full P.50





Figure 5-5 Temporal Characteristic of full P.50

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 9 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 9 01 115



ABM2 Measurement Block Diagram:



Figure 5-6 Magnetic Measurement Processing Steps

IV. Test Procedure

- 1. Ambient Noise Check per C63.19 §7.3.1
 - a. Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - b. "A-weighting" and Half-Band Integration was applied to the measurements.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation(See Figure 5-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - b. ABM1 Validation The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

Where H_c = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.13m; R=10.193 Ω and using V=29mV:

$$H_c = \frac{20 \cdot (\frac{0.029}{10.193})}{0.13 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 29mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of $-10 \, \text{dB}(A/m)$ in the center of the Helmholtz coil which was used to validate the probe measurement at $-10 \, \text{dB}(A/m)$. This was verified to be within $\pm 0.5 \, \text{dB}$ of the $-10 \, \text{dB}(A/m)$ value (see Pages 79 and 80).

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 10 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 10 01 115

© 2016 PCTEST Engineering Laboratory, Inc.

c. Frequency Response Validation

The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the P.50 signal as shown below:



Figure 5-7 Frequency Response Validation


d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

Table 5-1
ABM2 Frequency Response Validation

	HBI, A -	HBI, A -	
f (Hz)	Measured	Theoretical	dB Var.
	(dB re 1kHz)	(dB re 1kHz)	
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 11 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 11 of 115



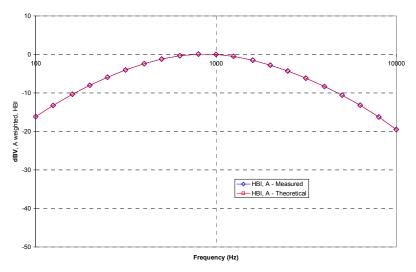


Figure 5-8 **ABM2 Frequency Response Validation**

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and Aweighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 5-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:




Figure 5-9 **ABM2 Validation Block Diagram**

The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 5-2 **ABM2 Power Sum Validation**

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.36	-60.2	0.16
-50	-50.19	-50.13	0.06
-40	-40.14	-40.03	0.11
-30	-30.13	-30.01	0.12
-20	-20.12	-20	0.12
-10	-10.14	-10	0.14

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 10 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 12 of 115

© 2016 PCTEST Engineering Laboratory, Inc.




Figure 5-10 **ABM2 Power Sum Validation**

- 3. Measurement Test Setup
 - a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below:




Figure 5-11 **Measurement Distance**

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 5-15 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN™	TDMA (22 and 11 Hz)	-18

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 12 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 13 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

The CMU200 audio levels were determined using base station simulator manufacturer calibration procedures resulting in the below corresponding voltages relative to handset test point level (in dBm0):

> Table 5-3 CMU200 Voltage Input Levels for Audio

Olifozoo Voltage Input Levels for Addio					
dBm0 Ref.	Voltage		Notes		
3.14 dBm0	990.5 mV	-0.08 dBV	From GSM "DECODER CAL". (What is needed through Encoder for FS)		
-16 dBm0	109.4 mV	-19.2 dBV	For Speechcod/Handset Low		
dBm0 Ref.	Voltage		Notes		
3.14 dBm0	1068.5 mV	0.58 dBV	From UMTS "DECODER CAL". (What is needed through Encoder for FS)		
-16 dBm0	118.0 mV	-18.6 dBV	For Handset Low		
dBm0 Ref.	Input Voltage		Notes		
3.14 dBm0	1052.0 mV	0.4 dBV	From CDMA2K "DECODER CAL". (What is needed through Encoder for FS)		
-18 dBm0	92.260 mV	-20.7 dBV	For 8k Enhanced (Low)		

- ii. See Section 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE) testing.
- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (see below for GSM, see Section 7 for more information regarding worst-case configurations for CDMA and UMTS. LTE configuration information can be found in Section 6):




Figure 5-12 Vocoder Analysis for ABM Noise for GSM

- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 14 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 14 of 115

b. Frequency Response

- i. The appropriate frequency response curve was measured to curves in Figure 4-1 or Figure 4-2 between 300 - 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
- ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 5-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
- iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.

c. Signal Quality Index

- i. Ensuring the WD was at maximum RF power, maximum volume, backlight on, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz -10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
- ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
- iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

V. Test Setup




Figure 5-13 **Audio Magnetic Field Test Setup**

VI. **Deviation from C63.19 Test Procedure**

Non-conducted RF connection due to inaccessibility of RF ports with battery installed.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 15 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 15 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS were tested for T-coil unless otherwise noted. See Table 3-1 for more details regarding which modes were tested.

According to the April 2013 TCB workshop slides, OTT data services are outside the current definition of a managed CMRS service and are currently not required to be evaluated.

VoIP over WIFI CMRS air interfaces were not tested in accordance with the guidance issued by OET in KDB publication 285076 D02 T-Coil testing for CMRS IP.

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band.


> Table 5-4 Center Channels and Frequencies

Test frequencies & associated channels				
Channel	Frequency (MHz)			
Cellular 850				
384 (CDMA)	836.52			
190 (GSM)	836.60			
4183 (UMTS)	836.60			
PCS 1900				
600 (CDMA)	1880			
661 (GSM)	1880			
9400 (UMTS)	1880			

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. See Tables 8-30 through 8-65 for LTE bandwidths and channels.

IX. RF Emission Effect on T-coil Measurements



High power RF Emissions Effect with HAC Dipole on the T-coil Probe System 10mm between dipole maximum and magnetic probe

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 16 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 16 of 115

X. Test Flow

The flow diagram below was followed (From C63.19):

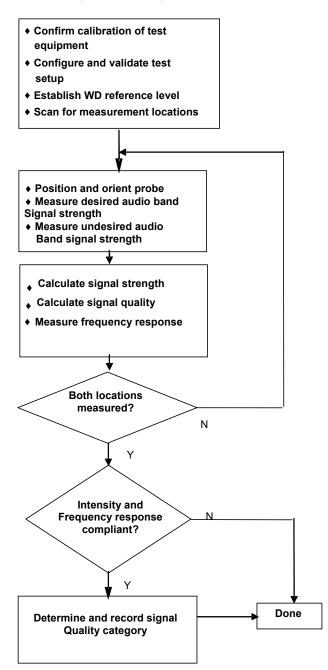


Figure 5-15 C63.19 T-Coil Signal Test Process

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 17 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 17 01 115

6. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE is shown below (adopted from FCC KDB 285076 D02). The callbox used when performing VoLTE T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

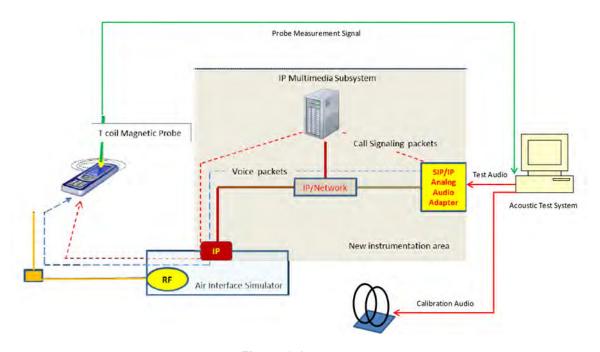


Figure 6-1
Test Setup for VoLTE T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for LTE T-coil testing, -16dBm0 shall be used for the normal speech input level*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 10 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 18 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

II. **DUT Configuration for VoLTE T-coil Testing**

1. Radio Configuration

An investigation was performed on the worst-case LTE Band and bandwidth combination to determine the modulation and RB configuration to be used for testing. 16QAM, 1RB, 0RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
1860.0	18700	20	QPSK	1	0	7.03	-39.95	46.98
1860.0	18700	20	QPSK	1	50	7.19	-39.84	47.03
1860.0	18700	20	QPSK	1	99	7.06	-40.27	47.33
1860.0	18700	20	QPSK	50	0	7.02	-42.34	49.36
1860.0	18700	20	QPSK	50	25	7.05	-40.98	48.03
1860.0	18700	20	QPSK	50	50	7.13	-40.41	47.54
1860.0	18700	20	QPSK	100	0	7.06	-42.64	49.70
1860.0	18700	20	16QAM	1	0	7.09	-33.35	40.44
1860.0	18700	20	16QAM	1	50	7.03	-36.25	43.28
1860.0	18700	20	16QAM	1	99	7.06	-34.27	41.33
1860.0	18700	20	16QAM	50	0	7.00	-41.03	48.03
1860.0	18700	20	16QAM	50	25	6.92	-40.18	47.10
1860.0	18700	20	16QAM	50	50	7.04	-40.35	47.39
1860.0	18700	20	16QAM	100	0	7.05	-41.42	48.47

Figure 6-2 LTE SNNR by Radio Configuration

2. Codec Configuration

An investigation was performed on the worst-case LTE Band and bandwidth combination to determine the audio codec configuration to be used for testing. The NB AMR 12.2kbps setting was used for the audio codec on the CMW500 for VoLTE T-coil testing. See below table for ABM1 and ABM2 comparisons between different codecs and codec data rates:

Codec Setting:	WB AMR 12.65kbps	NB AMR 12.2kbps	Orientation	Channel	
ABM1 Pre-test (dBA/m)	6.72	7.04			
ABM2 Pre-test (dBA/m) (A-weight, Half-Band Int.)	-35 19	-33.38	Axial	18700 (B2, 20MHz)	
S+N/N (dB)	41.91	40.42			

Table 6-1 FCC 4G ABM Measurements for ZNFVS987

Mute on; Backlight on; Max Volume; Max Contrast

TPC = "Max Power"




Figure 6-3 **Audio Band Magnetic Curve Measurement Block Diagram**

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 10 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 19 of 115

7. FCC 3G MEASUREMENTS

I. CDMA Test Configurations

Radio Configuration 1, Service Option 3 (thick, green data curve) was used for the testing as the worst-case configuration for the handset due to vocoder gating from the EVRC logic. See below plot for ABM noise comparison between operational field service options and radio configurations for a CDMA2000 handset:

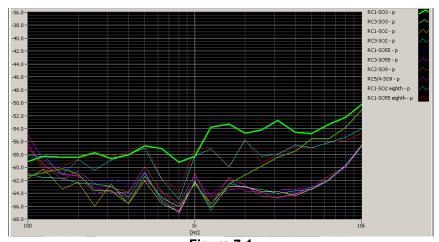


Figure 7-1
CDMA Audio Band Magnetic Noise

II. UMTS Test Configurations

AMR at 12.2kbps, 13.6kbps SRB was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:

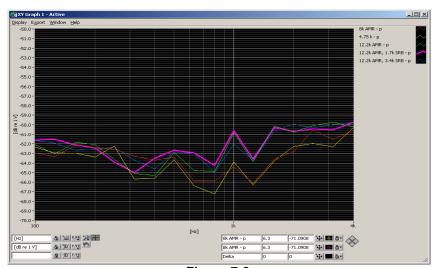


Figure 7-2
UMTS Audio Band Magnetic Noise

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 20 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 20 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

REV 3.1.M 12/9/2015

III. **ABM Measurements**

Table 7-1 FCC 3G ABM Measurements for ZNFVS987 (CDMA)


Codec Setting:	RC1/SO3	RC3/SO3	RC4/SO3	Orientation	Channel
ABM1 Pre-test (dBA/m)	1.06	0.44	0.76		
ABM2 Pre-test (dBA/m) (A-weight, Half-Band Int.)	-/4 nn	-48.90	-49.24	Axial	25
S+N/N (dB)	30.71	49.34	50.00		

- Mute on; Backlight on; Max Volume; Max Contrast
- Power Control Bits = "All Up"

Table 7-2 FCC 3G ABM Measurements for ZNFVS987 (UMTS)

Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel
ABM1 Pre-test (dBA/m)	4.48	4.47	4.47		9400
ABM2 Pre-test (dBA/m) (A-weight, Half-Band Int.)		-47.78	-47.77	Axial	
S+N/N (dB)	52.09	52.25	52.24		

- Mute on; Backlight on; Max Volume; Max Contrast
- TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 21 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 21 01 115

8. TEST SUMMARY

I. T-Coil Test Summary

Table 8-1
Table of Results for CDMA

C63.19 Sec.	Mode	Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	0.5	PASS
8.3.1			Intensity, Radial	-18	-7.3	PASS
8.3.4	CDMA	Cellular	Signal-to-Noise/Noise, Axial	20	30.7	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	44.5	PASS
8.3.2			Frequency Response, Axial	0	1.9	PASS
8.3.1			Intensity, Axial	-18	0.7	PASS
8.3.1			Intensity, Radial	-18	-7.7	PASS
8.3.4	CDMA	PCS	Signal-to-Noise/Noise, Axial	20	30.4	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	43.5	PASS
8.3.2			Frequency Response, Axial	0	1.9	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-24.

Table 8-2
Table of Results for CDMA – Camera Module accessory

C63.19 Sec.	Mode	Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	2.6	PASS
8.3.1			Intensity, Radial	-18	-6.5	PASS
8.3.4	CDMA	Cellular	Signal-to-Noise/Noise, Axial	20	37.9	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	44.4	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	2.4	PASS
8.3.1			Intensity, Radial	-18	-6.7	PASS
8.3.4	CDMA	PCS	Signal-to-Noise/Noise, Axial	20	36.8	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	44.3	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-25.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 22 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 22 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

Table 8-3
Table of Results for GSM

C63.19 Sec.	Mode	Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	7.4	PASS
8.3.1			Intensity, Radial	-18	0.3	PASS
8.3.4	GSM	Cellular	Signal-to-Noise/Noise, Axial	20	22.1	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	33.6	PASS
8.3.2			Frequency Response, Axial	0	1.3	PASS
			•			
8.3.1			Intensity, Axial	-18	7.4	PASS
8.3.1			Intensity, Radial	-18	0.3	PASS
8.3.4	GSM	PCS	Signal-to-Noise/Noise, Axial	20	28.0	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	39.3	PASS
8.3.2			Frequency Response, Axial	0	1.5	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-26.

Table 8-4
Table of Results for GSM – Camera Module accessory

		abic of ites	uits for Goivi – Califera Modu	ic accessor	y	
C63.19 Sec.	Mode	Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	6.9	PASS
8.3.1			Intensity, Radial	-18	-0.1	PASS
8.3.4	GSM	Cellular	Signal-to-Noise/Noise, Axial	20	25.9	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	34.3	PASS
8.3.2			Frequency Response, Axial	0	1.1	PASS
8.3.1			Intensity, Axial	-18	6.9	PASS
8.3.1			Intensity, Radial	-18	-0.2	PASS
8.3.4	GSM	PCS	Signal-to-Noise/Noise, Axial	20	32.8	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	41.2	PASS
8.3.2			Frequency Response, Axial	0	1.2	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-27.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 22 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 23 of 115

Table 8-5 **Table of Results for UMTS**

C63.19 Sec.	Mode	Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	4.5	PASS
8.3.1			Intensity, Radial	-18	-2.8	PASS
8.3.4	UMTS	Cellular	Signal-to-Noise/Noise, Axial	20	52.1	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	59.2	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	4.5	PASS
8.3.1			Intensity, Radial	-18	-2.7	PASS
8.3.4	UMTS	PCS	Signal-to-Noise/Noise, Axial	20	51.8	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	59.3	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-28.

> Table 8-6 Table of Results for UMTS - Camera Module accessory

	Table of Results for OWTS - Califera Module accessory							
C63.19 Sec.	Mode	Band	Test Description	Minimum Limit*	Measured	Verdict		
				dBA/m	dBA/m	PASS/FAIL		
8.3.1			Intensity, Axial	-18	3.9	PASS		
8.3.1			Intensity, Radial	-18	-3.2	PASS		
8.3.4	UMTS	Cellular	Signal-to-Noise/Noise, Axial	20	54.8	PASS		
8.3.4			Signal-to-Noise/Noise, Radial	20	58.2	PASS		
8.3.2			Frequency Response, Axial	0	1.7	PASS		
8.3.1			Intensity, Axial	-18	4.1	PASS		
8.3.1			Intensity, Radial	-18	-3.2	PASS		
8.3.4	UMTS	PCS	Signal-to-Noise/Noise, Axial	20	54.4	PASS		
8.3.4			Signal-to-Noise/Noise, Radial	20	58.3	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-29.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 24 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 24 of 115

Table 8-7
Table of Results for LTE B12

C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	7.2	PASS
8.3.1		1.4MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 12	Signal-to-Noise/Noise, Axial	20	42.7	PASS
8.3.4		Dana 12	Signal-to-Noise/Noise, Radial	20	53.0	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.2	PASS
8.3.1		3MHz/	Intensity, Radial	-18	-0.3	PASS
8.3.4	LTE	Band 12	Signal-to-Noise/Noise, Axial	20	43.6	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	53.4	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.2	PASS
8.3.1		5MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 12	Signal-to-Noise/Noise, Axial	20	45.8	PASS
8.3.4		Dana 12	Signal-to-Noise/Noise, Radial	20	54.4	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.2	PASS
8.3.1		10MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 12	Signal-to-Noise/Noise, Axial	20	44.1	PASS
8.3.4		Danu 12	Signal-to-Noise/Noise, Radial	20	53.6	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-30 and Table 8-31.

Table 8-8
Table of Results for LTE B17

C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	6.3	PASS
8.3.1		5MHz/	Intensity, Radial	-18	-1.1	PASS
8.3.4	LTE	Band 17	Signal-to-Noise/Noise, Axial	20	42.9	PASS
8.3.4		Dana 17	Signal-to-Noise/Noise, Radial	20	54.3	PASS
8.3.2			Frequency Response, Axial	0	1.7	PASS
8.3.1			Intensity, Axial	-18	6.5	PASS
8.3.1		10MHz/ F	Intensity, Radial	-18	-1.2	PASS
8.3.4	LTE		Signal-to-Noise/Noise, Axial	20	42.0	PASS
8.3.4		Dana 1/	Signal-to-Noise/Noise, Radial	20	51.8	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-32.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo OF of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 25 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

Table 8-9 **Table of Results for LTE B13**

C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	7.1	PASS
8.3.1		5MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 13	Signal-to-Noise/Noise, Axial	20	44.0	PASS
8.3.4		Dana 13	Signal-to-Noise/Noise, Radial	20	54.7	PASS
8.3.2			Frequency Response, Axial	0	1.9	PASS
8.3.1			Intensity, Axial	-18	7.1	PASS
8.3.1		10MHz/	Intensity, Radial	-18	-0.3	PASS
8.3.4	LTE	Band 13	Signal-to-Noise/Noise, Axial	20	42.6	PASS
8.3.4		Dana 13	Signal-to-Noise/Noise, Radial	20	53.8	PASS
8.3.2			Frequency Response, Axial	0	1.7	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-33.

Table 8-10 Table of Results for LTE B5

Table of Results for LTL D3							
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict	
				dBA/m	dBA/m	PASS/FAIL	
8.3.1			Intensity, Axial	-18	7.2	PASS	
8.3.1		1.4MHz/	Intensity, Radial	-18	-0.5	PASS	
8.3.4	LTE	Band 5	Signal-to-Noise/Noise, Axial	20	43.2	PASS	
8.3.4		Dana 3	Signal-to-Noise/Noise, Radial	20	52.9	PASS	
8.3.2			Frequency Response, Axial	0	1.8	PASS	
8.3.1			Intensity, Axial	-18	7.2	PASS	
8.3.1		3MHz/	Intensity, Radial	-18	-0.4	PASS	
8.3.4	LTE	Band 5	Signal-to-Noise/Noise, Axial	20	44.5	PASS	
8.3.4		Band 3	Signal-to-Noise/Noise, Radial	20	53.1	PASS	
8.3.2			Frequency Response, Axial	0	1.7	PASS	
8.3.1			Intensity, Axial	-18	7.2	PASS	
8.3.1		5MHz/	Intensity, Radial	-18	-0.4	PASS	
8.3.4	LTE	Band 5	Signal-to-Noise/Noise, Axial	20	46.4	PASS	
8.3.4		Danu 3	Signal-to-Noise/Noise, Radial	20	55.3	PASS	
8.3.2			Frequency Response, Axial	0	1.8	PASS	
8.3.1			Intensity, Axial	-18	7.2	PASS	
8.3.1		10MHz/	Intensity, Radial	-18	-0.4	PASS	
8.3.4	LTE	10MHz/	Signal-to-Noise/Noise, Axial	20	45.1	PASS	
8.3.4		Band 5	Signal-to-Noise/Noise, Radial	20	54.0	PASS	
8.3.2			Frequency Response, Axial	0	1.7	PASS	

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-34 and Table 8-35.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 26 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 20 01 115

© 2016 PCTEST Engineering Laboratory, Inc.

Table 8-11
Table of Results for LTE B4

			Table of Results for LTE 64			
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	7.0	PASS
8.3.1			Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	1.4MHz/	Signal-to-Noise/Noise, Axial	20	42.9	PASS
8.3.4		Band 4	Signal-to-Noise/Noise, Radial	20	53.6	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
310.12			q	<u> </u>		11100
8.3.1			Intensity, Axial	-18	6.9	PASS
8.3.1			Intensity, Radial	-18	-0.5	PASS
8.3.4	LTE	3MHz/	Signal-to-Noise/Noise, Axial	20	44.0	PASS
8.3.4		Band 4	Signal-to-Noise/Noise, Radial	20	53.7	PASS
8.3.2			Frequency Response, Axial	0	1.7	PASS
		1	The system of th	-		
8.3.1			Intensity, Axial	-18	7.0	PASS
8.3.1		D. 611. /	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	5MHz/ Band 4	Signal-to-Noise/Noise, Axial	20	45.3	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	54.9	PASS
8.3.2			Frequency Response, Axial	0	1.7	PASS
8.3.1			Intensity, Axial	-18	7.0	PASS
8.3.1		100411-/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	10MHz/	Signal-to-Noise/Noise, Axial	20	42.7	PASS
8.3.4		Band 4	Signal-to-Noise/Noise, Radial	20	53.3	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.0	PASS
8.3.1		15MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE		Signal-to-Noise/Noise, Axial	20	42.8	PASS
8.3.4		Band 4	Signal-to-Noise/Noise, Radial	20	53.8	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.0	PASS
8.3.1		20MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 4	Signal-to-Noise/Noise, Axial	20	42.9	PASS
8.3.4		Dallu 4	Signal-to-Noise/Noise, Radial	20	54.3	PASS
8.3.2			Frequency Response, Axial	0	1.7	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-36 to Table 8-38.

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 27 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 27 Of 115

Table 8-12
Table of Results for LTE B2

Sample Sample Sample Signal-to-Noise/Noise, Axial Company Signal-t	C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
Name					dBA/m	dBA/m	PASS/FAIL
Signal-to-Noise/Noise, Axial 20 41.6 PASS	8.3.1			Intensity, Axial	-18	7.1	PASS
Signal-to-Noise/Noise, Axial 20	8.3.1		1 41/41/17/	Intensity, Radial	-18	-0.3	PASS
Signal-to-Noise/Noise, Radial 20 53.1 PASS	8.3.4	LTE		Signal-to-Noise/Noise, Axial	20	41.6	PASS
Sa.3.1	8.3.4		Dana 2	Signal-to-Noise/Noise, Radial	20	53.1	PASS
R.3.1	8.3.2			Frequency Response, Axial	0	1.8	PASS
R.3.1							
Signal-to-Noise/Noise, Axial 20 42.2 PASS	8.3.1			Intensity, Axial	-18	7.0	PASS
Signal-to-Noise/Noise, Axial 20 42.2 PASS	8.3.1		3MH ₇ /	Intensity, Radial	-18	-0.4	PASS
Signal-to-Noise/Noise, Radial 20 54.9 PASS	8.3.4	LTE	1	Signal-to-Noise/Noise, Axial	20	42.2	PASS
Sample Sample Signal-to-Noise/Noise, Axial Signal-to-Noise/Noise, Radial Signal-to-Noise/Noise, Axial Signal-to-Noise/Noise, Axial Signal-to-Noise/Noise, Radial Signal-to-Noi	8.3.4		Dana 2		20	54.9	PASS
S.3.1	8.3.2			Frequency Response, Axial	0	1.8	PASS
S.3.1							
Signal-to-Noise/Noise, Axial 20 44.1 PASS			I	Intensity, Axial	-18		PASS
Band 2 Signal-to-Noise/Noise, Axial 20 44.1 PASS	8.3.1		5MH ₇ /		-18	-0.4	PASS
Signal-to-Noise/Noise, Radial 20 54.7 PASS	8.3.4	LTE	1		20	44.1	PASS
B.3.1 LTE Band 2 Intensity, Axial -18 7.1 PASS Intensity, Radial -18 -0.4 PASS Signal-to-Noise/Noise, Axial 20 42.1 PASS Signal-to-Noise/Noise, Radial 20 53.5 PASS PASS Frequency Response, Axial 0 1.8 PASS PASS	8.3.4			Signal-to-Noise/Noise, Radial	20	54.7	PASS
B.3.1 LTE Band 2 Intensity, Radial -18 -0.4 PASS Signal-to-Noise/Noise, Axial 20 42.1 PASS Signal-to-Noise/Noise, Radial 20 53.5 PASS Signal-to-Noise/Noise, Radial 20 53.5 PASS PASS Signal-to-Noise/Noise, Axial 0 1.8 PASS PASS Signal-to-Noise/Noise, Axial -18 7.2 PASS Signal-to-Noise/Noise, Axial 20 41.5 PASS Signal-to-Noise/Noise, Radial 20 53.2 PASS Signal-to-Noise/Noise, Radial 20 53.2 PASS Signal-to-Noise/Noise, Axial 0 1.8 PASS PASS Signal-to-Noise/Noise, Axial 0 1.8 PASS Signal-to-Noise/Noise, Axial -18 7.0 PASS Signal-to-Noise/Noise, Axial -18 7.0 PASS Signal-to-Noise/Noise, Axial -18 -0.4 PASS Signal-to-Noise/Noise, Axial -18 -0.4 PASS Signal-to-Noise/Noise, Axial 20 40.3 PASS Signal-to-Noise/Noise, Axial 40.4 PASS Signal-to-Noise/Noise, Axial 40.4 PASS Signal-to-Noise/Noise, Axial 40.4 PASS Signal-to-Noise/Noise, Ax	8.3.2			Frequency Response, Axial	0	1.8	PASS
B.3.1 LTE Band 2 Intensity, Radial -18 -0.4 PASS Signal-to-Noise/Noise, Axial 20 42.1 PASS Signal-to-Noise/Noise, Radial 20 53.5 PASS Signal-to-Noise/Noise, Radial 20 53.5 PASS PASS Signal-to-Noise/Noise, Axial 0 1.8 PASS PASS Signal-to-Noise/Noise, Axial -18 7.2 PASS Signal-to-Noise/Noise, Axial 20 41.5 PASS Signal-to-Noise/Noise, Radial 20 53.2 PASS Signal-to-Noise/Noise, Radial 20 53.2 PASS Signal-to-Noise/Noise, Axial 0 1.8 PASS PASS Signal-to-Noise/Noise, Axial 0 1.8 PASS Signal-to-Noise/Noise, Axial -18 7.0 PASS Signal-to-Noise/Noise, Axial -18 7.0 PASS Signal-to-Noise/Noise, Axial -18 -0.4 PASS Signal-to-Noise/Noise, Axial -18 -0.4 PASS Signal-to-Noise/Noise, Axial 20 40.3 PASS Signal-to-Noise/Noise, Axial 40.4 PASS Signal-to-Noise/Noise, Axial 40.4 PASS Signal-to-Noise/Noise, Axial 40.4 PASS Signal-to-Noise/Noise, Ax			ļ				
Signal-to-Noise/Noise, Axial 20 42.1 PASS							
Band 2 Band 2 Signal-to-Noise/Noise, Axial 20 42.1 PASS			10MHz/				
Signal-to-Noise/Noise, Radial 20 53.5 PASS		LTE			-		
Same							
8.3.1 LTE 15MHz/Band 2 Intensity, Radial -18 -0.3 PASS Signal-to-Noise/Noise, Axial 20 41.5 PASS Signal-to-Noise/Noise, Radial 20 53.2 PASS Signal-to-Noise/Noise, Radial 20 53.2 PASS Signal-to-Noise/Noise, Axial -18 7.0 PASS Signal-to-Noise/Noise, Axial -18 7.0 PASS Signal-to-Noise/Noise, Axial -18 -0.4 PASS Signal-to-Noise/Noise, Axial -0.4 PASS Signal-to-Noise/Noise, Axial 20 40.3 PASS Signal-to-Noise/Noise, Axial 20 40.3 PASS Signal-to-Noise/Noise, Axial 20 40.3 PASS Signal-to-Noise/Noise, Axial	8.3.2			Frequency Response, Axial	0	1.8	PASS
S.3.1 LTE Band 2 Intensity, Radial -18 -0.3 PASS	0.2.1			Tutousite: Assis1	10	7.2	DACC
Signal-to-Noise/Noise, Axial 20 41.5 PASS							
Band 2 Signal-to-Noise/Noise, Radial 20 53.2 PASS		I TE	15MHz/				
8.3.2 Frequency Response, Axial 0 1.8 PASS 8.3.1 Intensity, Axial -18 7.0 PASS 8.3.1 Intensity, Axial -18 -0.4 PASS 8.3.4 LTE Band 2 Signal-to-Noise/Noise, Axial 20 40.3 PASS		LIE	Band 2				
8.3.1 Intensity, Axial -18 7.0 PASS 8.3.1 Intensity, Axial -18 -0.4 PASS 8.3.4 LTE Band 2 Signal-to-Noise/Noise, Axial 20 40.3 PASS							
8.3.1 LTE 20MHz/ Band 2 Intensity, Radial -18 -0.4 PASS Signal-to-Noise/Noise, Axial 20 40.3 PASS	8.3.2			Frequency Response, Axiai	U	1.8	PASS
8.3.1 LTE 20MHz/ Band 2 Intensity, Radial -18 -0.4 PASS Signal-to-Noise/Noise, Axial 20 40.3 PASS	Q 2 1			Intensity Avial	_10	7.0	DACC
8.3.4 LTE Signal-to-Noise/Noise, Axial 20 40.3 PASS							
Band 7		LTE					
8.3.4 Signal-to-Noise/Noise, Radial 20 54.3 PASS			Band 2				PASS
							PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-39 to Table 8-41 as well as Table 8-47.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 28 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 20 01 115

© 2016 PCTEST Engineering Laboratory, Inc.

Table 8-13
Table of Results for LTE B25

			Table of Results for LTE B25			
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	7.2	PASS
8.3.1		1.0.57	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	1.4MHz/	Signal-to-Noise/Noise, Axial	20	43.2	PASS
8.3.4		Band 25	Signal-to-Noise/Noise, Radial	20	52.7	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.3	PASS
8.3.1		22.411-/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	3MHz/ Band 25	Signal-to-Noise/Noise, Axial	20	45.1	PASS
8.3.4		Band 25	Signal-to-Noise/Noise, Radial	20	53.9	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.1	PASS
8.3.1		5MII_/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	5MHz/ Band 25	Signal-to-Noise/Noise, Axial	20	46.0	PASS
8.3.4			Signal-to-Noise/Noise, Radial	20	52.7	PASS
8.3.2			Frequency Response, Axial	0	1.9	PASS
8.3.1			Intensity, Axial	-18	7.1	PASS
8.3.1		10MHz/	Intensity, Radial	-18	-0.5	PASS
8.3.4	LTE	Band 25	Signal-to-Noise/Noise, Axial	20	44.4	PASS
8.3.4		Dana 23	Signal-to-Noise/Noise, Radial	20	51.3	PASS
8.3.2			Frequency Response, Axial	0	1.7	PASS
8.3.1			Intensity, Axial	-18	7.2	PASS
8.3.1		15MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 25	Signal-to-Noise/Noise, Axial	20	45.8	PASS
8.3.4		Dana 23	Signal-to-Noise/Noise, Radial	20	52.7	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.2	PASS
8.3.1		20MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 25	Signal-to-Noise/Noise, Axial	20	46.6	PASS
8.3.4		Durid 23	Signal-to-Noise/Noise, Radial	20	53.2	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-42 to Table 8-44 as well as Table 8-47.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 20 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 29 of 115

Table 8-14
Table of Results for LTE B7

			Table of Results for LTL D7			
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	7.1	PASS
8.3.1		5MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 7	Signal-to-Noise/Noise, Axial	20	46.9	PASS
8.3.4		Danu /	Signal-to-Noise/Noise, Radial	20	54.3	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.2	PASS
8.3.1		10MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	LTE Band 7	Signal-to-Noise/Noise, Axial	20	43.9	PASS
8.3.4		Dana /	Signal-to-Noise/Noise, Radial	20	51.5	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.1	PASS
8.3.1		15MHz/	Intensity, Radial	-18	-0.4	PASS
8.3.4	LTE	Band 7	Signal-to-Noise/Noise, Axial	20	44.4	PASS
8.3.4		Danu /	Signal-to-Noise/Noise, Radial	20	52.2	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.0	PASS
8.3.1	LTE	20MHz/	Intensity, Radial	-18	-0.5	PASS
8.3.4		Band 7	Signal-to-Noise/Noise, Axial	20	42.1	PASS
8.3.4		Danu /	Signal-to-Noise/Noise, Radial	20	55.0	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-45 and Table 8-46.

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 30 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 30 01 115

Table 8-15
Table of Results for LTE B12 – Camera Module accessory

	Table of Results for LTE B12 – Camera Module accessory						
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict	
				dBA/m	dBA/m	PASS/FAIL	
8.3.1			Intensity, Axial	-18	7.1	PASS	
8.3.1		1.4MHz/	Intensity, Radial	-18	-1.9	PASS	
8.3.4	LTE	Band 12	Signal-to-Noise/Noise, Axial	20	44.3	PASS	
8.3.4		Dana 12	Signal-to-Noise/Noise, Radial	20	47.9	PASS	
8.3.2			Frequency Response, Axial	0	1.8	PASS	
8.3.1			Intensity, Axial	-18	7.1	PASS	
8.3.1		3MHz/	Intensity, Radial	-18	-1.9	PASS	
8.3.4	LTE	Band 12	Signal-to-Noise/Noise, Axial	20	43.1	PASS	
8.3.4		Dana 12	Signal-to-Noise/Noise, Radial	20	49.5	PASS	
8.3.2			Frequency Response, Axial	0	1.9	PASS	
				-		-	
8.3.1			Intensity, Axial	-18	7.0	PASS	
8.3.1		5MHz/	Intensity, Radial	-18	-1.7	PASS	
8.3.4	LTE	Band 12	Signal-to-Noise/Noise, Axial	20	43.2	PASS	
8.3.4		Dana 12	Signal-to-Noise/Noise, Radial	20	49.7	PASS	
8.3.2			Frequency Response, Axial	0	1.9	PASS	
8.3.1			Intensity, Axial	-18	7.1	PASS	
8.3.1	LTE	10MHz/	Intensity, Radial	-18	-1.9	PASS	
8.3.4		Band 12	Signal-to-Noise/Noise, Axial	20	42.0	PASS	
8.3.4		Danu 12	Signal-to-Noise/Noise, Radial	20	48.0	PASS	
8.3.2			Frequency Response, Axial	0	1.8	PASS	

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-48 and Table 8-49.

Table 8-16
Table of Results for LTE B17 – Camera Module accessory

C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	7.0	PASS
8.3.1		5MHz/	Intensity, Radial	-18	-1.8	PASS
8.3.4	LTE	Band 17	Signal-to-Noise/Noise, Axial	20	45.2	PASS
8.3.4		Dana 17	Signal-to-Noise/Noise, Radial	20	49.1	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.0	PASS
8.3.1		10MHz/	Intensity, Radial	-18	-1.8	PASS
8.3.4	LTE Band 1		Signal-to-Noise/Noise, Axial	20	42.0	PASS
8.3.4		Danu 17	Signal-to-Noise/Noise, Radial	20	49.2	PASS
8.3.2			Frequency Response, Axial	0	1.9	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-50.

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 31 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 31 01 115

© 2016 PCTEST Engineering Laboratory, Inc.

Table 8-17 Table of Results for LTE B13 - Camera Module Accessory

C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict
				dBA/m	dBA/m	PASS/FAIL
8.3.1			Intensity, Axial	-18	7.1	PASS
8.3.1		5MHz/	Intensity, Radial	-18	-1.8	PASS
8.3.4	LTE	Band 13	Signal-to-Noise/Noise, Axial	20	47.1	PASS
8.3.4		Dana 13	Signal-to-Noise/Noise, Radial	20	51.8	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS
8.3.1			Intensity, Axial	-18	7.1	PASS
8.3.1		10MHz/	Intensity, Radial	-18	-1.8	PASS
8.3.4	LTE	Band 13	Signal-to-Noise/Noise, Axial	20	45.3	PASS
8.3.4		Danu 13	Signal-to-Noise/Noise, Radial	20	50.6	PASS
8.3.2			Frequency Response, Axial	0	1.8	PASS

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-51.

> **Table 8-18** Table of Results for LTE B5 - Camera Module accessory

	Table of Results for LTE B5 – Camera Module accessory								
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict			
				dBA/m	dBA/m	PASS/FAIL			
8.3.1			Intensity, Axial	-18	7.1	PASS			
8.3.1		1.4MHz/	Intensity, Radial	-18	-2.0	PASS			
8.3.4	LTE	Band 5	Signal-to-Noise/Noise, Axial	20	45.0	PASS			
8.3.4		Dana 3	Signal-to-Noise/Noise, Radial	20	51.5	PASS			
8.3.2			Frequency Response, Axial	0	1.8	PASS			
8.3.1			Intensity, Axial	-18	7.1	PASS			
8.3.1		3MHz/ Band 5	Intensity, Radial	-18	-2.0	PASS			
8.3.4	LTE		Signal-to-Noise/Noise, Axial	20	44.8	PASS			
8.3.4			Signal-to-Noise/Noise, Radial	20	51.5	PASS			
8.3.2			Frequency Response, Axial	0	1.8	PASS			
8.3.1			Intensity, Axial	-18	7.0	PASS			
8.3.1		5MHz/	Intensity, Radial	-18	-1.8	PASS			
8.3.4	LTE	Band 5	Signal-to-Noise/Noise, Axial	20	44.7	PASS			
8.3.4		Dana 3	Signal-to-Noise/Noise, Radial	20	50.7	PASS			
8.3.2			Frequency Response, Axial	0	1.8	PASS			
8.3.1			Intensity, Axial	-18	7.1	PASS			
8.3.1		10MHz/	Intensity, Radial	-18	-1.8	PASS			
8.3.4	LTE	Band 5	Signal-to-Noise/Noise, Axial	20	43.9	PASS			
8.3.4		Dana 3	Signal-to-Noise/Noise, Radial	20	49.6	PASS			
8.3.2			Frequency Response, Axial	0	1.9	PASS			

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-52 and Table 8-53.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 22 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 32 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

Table 8-19 Table of Results for LTE B4 - Camera Module accessory

Table of Results for LTE B4 – Camera Module accessory								
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict		
				dBA/m	dBA/m	PASS/FAIL		
8.3.1			Intensity, Axial	-18	7.0	PASS		
8.3.1		1 43 451 /	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	1.4MHz/	Signal-to-Noise/Noise, Axial	20	41.8	PASS		
8.3.4		Band 4	Signal-to-Noise/Noise, Radial	20	49.3	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		3MHz/	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	Band 4	Signal-to-Noise/Noise, Axial	20	42.2	PASS		
8.3.4		Dana 4	Signal-to-Noise/Noise, Radial	20	48.9	PASS		
8.3.2			Frequency Response, Axial	0	1.9	PASS		
		•						
8.3.1			Intensity, Axial	-18	7.0	PASS		
8.3.1		5MHz/	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	Band 4	Signal-to-Noise/Noise, Axial	20	43.4	PASS		
8.3.4			Signal-to-Noise/Noise, Radial	20	49.0	PASS		
8.3.2			Frequency Response, Axial	0	1.9	PASS		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		10MHz/	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	Band 4	Signal-to-Noise/Noise, Axial	20	41.7	PASS		
8.3.4		Dana 4	Signal-to-Noise/Noise, Radial	20	48.7	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.2	PASS		
8.3.1		15MHz/	Intensity, Radial	-18	-2.0	PASS		
8.3.4	LTE	Band 4	Signal-to-Noise/Noise, Axial	20	42.4	PASS		
8.3.4		Dana 1	Signal-to-Noise/Noise, Radial	20	50.1	PASS		
8.3.2			Frequency Response, Axial	0	1.9	PASS		
8.3.1			Intensity, Axial	-18	7.0	PASS		
8.3.1		20MHz/	Intensity, Radial	-18	-2.0	PASS		
8.3.4	LTE	Band 4	Signal-to-Noise/Noise, Axial	20	43.7	PASS		
8.3.4		Duna	Signal-to-Noise/Noise, Radial	20	48.0	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-54 to Table 8-56.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 33 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 33 01 113

© 2016 PCTEST Engineering Laboratory, Inc.

REV 3.1.M 12/9/2015

Table 8-20 Table of Results for LTE B2 - Camera Module accessory

Table of Results for LTE B2 – Camera Module accessory								
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict		
				dBA/m	dBA/m	PASS/FAIL		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		1.00	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	1.4MHz/	Signal-to-Noise/Noise, Axial	20	44.2	PASS		
8.3.4		Band 2	Signal-to-Noise/Noise, Radial	20	50.1	PASS		
8.3.2			Frequency Response, Axial	0	1.9	PASS		
8.3.1			Intensity, Axial	-18	7.2	PASS		
8.3.1		3MHz/	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	Band 2	Signal-to-Noise/Noise, Axial	20	42.6	PASS		
8.3.4		Dana 2	Signal-to-Noise/Noise, Radial	20	50.1	PASS		
8.3.2			Frequency Response, Axial	0	1.7	PASS		
8.3.1			Intensity, Axial	-18	7.0	PASS		
8.3.1		5MHz/	Intensity, Radial	-18	-1.8	PASS		
8.3.4	LTE	Band 2	Signal-to-Noise/Noise, Axial	20	42.9	PASS		
8.3.4			Signal-to-Noise/Noise, Radial	20	48.1	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		10MHz/	Intensity, Radial	-18	-1.8	PASS		
8.3.4	LTE	Band 2	Signal-to-Noise/Noise, Axial	20	41.4	PASS		
8.3.4		Bung 2	Signal-to-Noise/Noise, Radial	20	48.2	PASS		
8.3.2			Frequency Response, Axial	0	1.9	PASS		
8.3.1			Intensity, Axial	-18	6.9	PASS		
8.3.1		15MHz/	Intensity, Radial	-18	-2.0	PASS		
8.3.4	LTE	Band 2	Signal-to-Noise/Noise, Axial	20	41.4	PASS		
8.3.4		Build 2	Signal-to-Noise/Noise, Radial	20	47.7	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.2	PASS		
8.3.1	T (777)	20MHz/	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	Band 2	Signal-to-Noise/Noise, Axial	20	43.7	PASS		
8.3.4			Signal-to-Noise/Noise, Radial	20	49.0	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-57 to Table 8-59 as well as Table 8-65.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 34 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 34 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

Table 8-21 Table of Results for LTE B25 - Camera Module accessory

Table of Results for LTE B25 – Camera Module accessory								
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict		
				dBA/m	dBA/m	PASS/FAIL		
8.3.1			Intensity, Axial	-18	7.0	PASS		
8.3.1		1.00	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	1.4MHz/	Signal-to-Noise/Noise, Axial	20	42.5	PASS		
8.3.4		Band 30	Signal-to-Noise/Noise, Radial	20	49.3	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.0	PASS		
8.3.1		3MHz/	Intensity, Radial	-18	-2.0	PASS		
8.3.4	LTE	Band 30	Signal-to-Noise/Noise, Axial	20	42.3	PASS		
8.3.4		Dana 30	Signal-to-Noise/Noise, Radial	20	49.1	PASS		
8.3.2			Frequency Response, Axial	0	1.9	PASS		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		5MHz/	Intensity, Radial	-18	-1.8	PASS		
8.3.4	LTE	Band 30	Signal-to-Noise/Noise, Axial	20	43.8	PASS		
8.3.4			Signal-to-Noise/Noise, Radial	20	49.5	PASS		
8.3.2			Frequency Response, Axial	0	1.9	PASS		
8.3.1			Intensity, Axial	-18	7.0	PASS		
8.3.1		10MHz/	Intensity, Radial	-18	-1.8	PASS		
8.3.4	LTE	Band 30	Signal-to-Noise/Noise, Axial	20	43.3	PASS		
8.3.4		Dana 30	Signal-to-Noise/Noise, Radial	20	49.2	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		15MHz/	Intensity, Radial	-18	-1.9	PASS		
8.3.4	LTE	Band 30	Signal-to-Noise/Noise, Axial	20	42.9	PASS		
8.3.4		Duna 30	Signal-to-Noise/Noise, Radial	20	49.6	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.2	PASS		
8.3.1		20MHz/	Intensity, Radial	-18	-2.0	PASS		
8.3.4	LTE	Band 30	Signal-to-Noise/Noise, Axial	20	43.0	PASS		
8.3.4			Signal-to-Noise/Noise, Radial	20	51.5	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-60 to Table 8-62.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 25 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 35 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

Table 8-22
Table of Results for LTE B7 – Camera Module accessory

	Table of Results for LTE B7 - Califera Module accessory							
C63.19 Sec.	Mode	BW/Band	Test Description	Minimum Limit*	Measured	Verdict		
				dBA/m	dBA/m	PASS/FAIL		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		5MHz/	Intensity, Radial	-18	-1.8	PASS		
8.3.4	LTE	Band 7	Signal-to-Noise/Noise, Axial	20	43.7	PASS		
8.3.4		Bang /	Signal-to-Noise/Noise, Radial	20	49.0	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		10MHz/	Intensity, Radial	-18	-1.8	PASS		
8.3.4	LTE	Band 7	Signal-to-Noise/Noise, Axial	20	42.0	PASS		
8.3.4			Signal-to-Noise/Noise, Radial	20	49.0	PASS		
8.3.2			Frequency Response, Axial	0	1.9	PASS		
8.3.1			Intensity, Axial	-18	7.2	PASS		
8.3.1		15MHz/	Intensity, Radial	-18	-2.0	PASS		
8.3.4	LTE	Band 7	Signal-to-Noise/Noise, Axial	20	42.8	PASS		
8.3.4		Danu /	Signal-to-Noise/Noise, Radial	20	50.7	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		
8.3.1			Intensity, Axial	-18	7.1	PASS		
8.3.1		20MHz/	Intensity, Radial	-18	-2.0	PASS		
8.3.4	LTE	Band 7	Signal-to-Noise/Noise, Axial	20	43.9	PASS		
8.3.4		DailQ /	Signal-to-Noise/Noise, Radial	20	50.8	PASS		
8.3.2			Frequency Response, Axial	0	1.8	PASS		

Note: The above summary table represents the worst-case numerical values according to configurations in Table 8-63 and Table 8-64.

Table 8-23
Consolidated Tabled Results

		Freq. Re Ma	rgin	0	Intensity dict		SNNR dict	C63.19- 2011 RATING
		Axial	Radial	Axial	Radial	Axial	Radial	
CDMA	Cellular	PASS	NA	PASS	PASS	PASS	PASS	T4
CDIVIA	PCS	PASS	NA	PASS	PASS	PASS	PASS	14
CCM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	Т3
GSM	PCS	PASS	NA	PASS	PASS	PASS	PASS	13
UMTS	Cellular	PASS	NA	PASS	PASS	PASS	PASS	T4
UIVITS	PCS	PASS	NA	PASS	PASS	PASS	PASS	14
	B12	PASS	NA	PASS	PASS	PASS	PASS	
	B17	PASS	NA	PASS	PASS	PASS	PASS	
	B13	PASS	NA	PASS	PASS	PASS	PASS	
LTC	B5	PASS	NA	PASS	PASS	PASS	PASS	Τ4
LTE	B4	PASS	NA	PASS	PASS	PASS	PASS	T4
	B2	PASS	NA	PASS	PASS	PASS	PASS	
	B25	PASS	NA	PASS	PASS	PASS	PASS	
	B7	PASS	NA	PASS	PASS	PASS	PASS	

Note: Result shown is for T-coil category only.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 36 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 30 01 113

© 2016 PCTEST Engineering Laboratory, Inc.

II. Raw Handset Data

Table 8-24
Raw Data Results for CDMA

	Volume			Cellula	r Band		
		1013	Axial 384	777	1013	Radial 384	777
ABM1, dBA/m		1.06	0.66	0.50	-7.17	-7.30	-7.20
ABM2, dBA/m		-33.14	-30.21	-30.24	-54.21	-51.81	-51.83
Ambient Noise, dBA/m		-63.40	-63.40	-63.40	-63.26	-63.26	-63.26
Freq. Response Margin (dB)	Maximum	1.89	1.93	2.00	N/A	N/A	N/A
S+N/N (dB)	Maximum	34.20	30.87	30.74	47.04	44.51	44.63
S+N/N per orientation (dB)		3 1.20				44.51	
C63.19-2011 Rating per orientation			T4			T4	
	Volume	PCS Band					
	Volume	Axial				Radial	
		25	600	1175	25	600	1175
ABM1, dBA/m		0.66	0.83	0.96	-7.15	-7.69	-7.09
ABM2, dBA/m		-29.76	-30.70	-31.32	-50.69	-51.54	-53.13
Ambient Noise, dBA/m		-63.40	-63.40	-63.40	-63.26	-63.26	-63.26
Freq. Response Margin (dB)		2.00	2.00	1.89	N/A	N/A	N/A
S+N/N (dB)	Maximum	30.42	31.53	32.28	43.54	43.85	46.04
S+N/N per orientation (dB)			30.42		43.54		
C63.19-2011 Rating per orientation		T4		T4			
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6 2.6,			2.6, 3.3		

- 1. Power Configuration: Power Control Bits = "All Up"
- 2. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 3. Vocoder Configuration: RC1/SO3 (CDMA EVRC)
- 4. 'Radial' orientation refers to radial transverse.
- 5. Speech Signal: ITU-T P.50 Artificial Voice
- 6. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 27 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 37 of 115

Table 8-25
Raw Data Results for CDMA – Camera Module accessory

Naw Data N		· · · · · ·		ia wiout			
	Volume			Cellula	r Band		
			Axial			Radial	
		1013	384	777	1013	384	777
ABM1, dBA/m		2.84	2.64	3.33	-6.44	-6.39	-6.52
ABM2, dBA/m		-37.64	-35.23	-34.77	-53.86	-51.96	-50.89
Ambient Noise, dBA/m		-62.75	-62.75	-62.75	-62.88	-62.88	-62.88
Freq. Response Margin (dB)		1.84	1.91	1.91	N/A	N/A	N/A
S+N/N (dB)	Maximum	40.48	37.87	38.10	47.42	45.57	44.37
S+N/N per orientation (dB)			37.87			44.37	
C63.19-2011 Rating per orientation			T4			T4	
	Volume	PCS Band					
	Volume	Axial			Radial		
		25	600	1175	25	600	1175
ABM1, dBA/m		2.59	2.54	2.37	-6.25	-6.41	-6.67
ABM2, dBA/m		-34.20	-35.46	-35.60	-50.56	-51.04	-51.16
Ambient Noise, dBA/m		-62.75	-62.75	-62.75	-62.88	-62.88	-62.88
Freq. Response Margin (dB)	NA i	1.98	1.84	1.95	N/A	N/A	N/A
S+N/N (dB)	Maximum	36.79	38.00	37.97	44.31	44.63	44.49
S+N/N per orientation (dB)			36.79		44.31		
		T4		T4			
C63.19-2011 Rating per orientation			T4			T4	

- 1. Power Configuration: Power Control Bits = "All Up"
- 2. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 3. Vocoder Configuration: RC1/SO3 (CDMA EVRC)
- 4. 'Radial' orientation refers to radial transverse.
- 5. Speech Signal: ITU-T P.50 Artificial Voice
- 6. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 20 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 38 of 115

Table 8-26
Raw Data Results for GSM

			suits 101		ır Band			
	Volume		Axial			Radial		
		128	190	251	128	190	251	
ABM1, dBA/m		7.41	7.45	7.40	0.28	0.28	0.29	
ABM2, dBA/m		-15.41	-15.13	-14.67	-34.39	-34.53	-33.29	
Ambient Noise, dBA/m		-63.40	-63.40	-63.40	-63.26	-63.26	-63.26	
Freq. Response Margin (dB)		1.36	1.33	1.33	N/A	N/A	N/A	
S+N/N (dB)	Maximum	22.82	22.58	22.07	34.67	34.81	33.58	
S+N/N per orientation (dB)			22.07			33.58		
C63.19-2011 Rating per orientation			Т3			T4		
	Volume		PCS I			Band		
	VOIGITIO		Axial			Radial		
		512	661	810	512	661	810	
ABM1, dBA/m		7.43	7.40	7.49	0.30	0.34	0.30	
ABM2, dBA/m		-20.53	-20.62	-20.87	-39.38	-38.99	-39.29	
Ambient Noise, dBA/m		-63.40	-63.40	-63.40	-63.26	-63.26	-63.26	
Freq. Response Margin (dB)		1.49	1.46	1.49	N/A	N/A	N/A	
S+N/N (dB)	Maximum	27.96	28.02	28.36	39.68	39.33	39.59	
S+N/N per orientation (dB)			27.96		39.33			
C63.19-2011 Rating per orientation			Т3			T4		
T-coil Coordinates (cm)	[x,y] from bottom left		2.8, 2.6 2.6, 3.3					

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 3. Vocoder Configuration: EFR (GSM);
- 4. 'Radial' orientation refers to radial transverse.
- 5. Speech Signal: ITU-T P.50 Artificial Voice
- 6. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dags 20 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 39 of 115

Table 8-27
Raw Data Results for GSM – Camera Module accessory

	Volume				ır Band		
			Axial		Radial		
		128	190	251	128	190	251
ABM1, dBA/m		6.93	7.02	6.94	-0.10	-0.06	-0.05
ABM2, dBA/m		-19.50	-19.15	-18.98	-34.88	-34.33	-34.34
Ambient Noise, dBA/m		-62.75	-62.75	-62.75	-62.88	-62.88	-62.88
Freq. Response Margin (dB)		1.12	1.12	1.10	N/A	N/A	N/A
S+N/N (dB)	Maximum	26.43	26.17	25.92	34.78	34.27	34.29
S+N/N per orientation (dB)			25.92		34.27		
C63.19-2011 Rating per orientation			Т3			T4	
	Volume	PCS I			Band		
	Volumo		Axial		Radial		
		512	661	810	512	661	810
ABM1, dBA/m		6.93	6.92	6.95	-0.20	-0.01	-0.04
ABM2, dBA/m		-25.99	-25.92	-25.85	-41.35	-41.19	-41.35
Ambient Noise, dBA/m		-62.75	-62.75	-62.75	-62.88	-62.88	-62.88
Freq. Response Margin (dB)		1.26	1.25	1.21	N/A	N/A	N/A
S+N/N (dB)	Maximum	32.92	32.84	32.80	41.15	41.18	41.31
S+N/N per orientation (dB)			32.80		41.15		
C63.19-2011 Rating per orientation			T4		T4		
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6 2.6, 3.3					

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 3. Vocoder Configuration: EFR (GSM);
- 4. 'Radial' orientation refers to radial transverse.
- 5. Speech Signal: ITU-T P.50 Artificial Voice
- 6. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 40 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 40 of 115

Table 8-28
Raw Data Results for UMTS

	Volume			Cellula	ır Band		
			Axial			Radial	
A DAMA I I DAM		4132	4183	4233	4132	4183	4233
ABM1, dBA/m		4.51	4.52	4.49	-2.75	-2.75	-2.73
ABM2, dBA/m		-48.28	-47.59	-48.14	-61.94	-62.37	-62.48
Ambient Noise, dBA/m		-63.40	-63.40	-63.40	-63.26	-63.26	-63.26
Freq. Response Margin (dB)		1.80	1.82	1.81	N/A	N/A	N/A
S+N/N (dB)	Maximum	52.79	52.11	52.63	59.19	59.62	59.75
S+N/N per orientation (dB)			52.11			59.19	
C63.19-2011 Rating per orientation			T4			T4	
	Volume	PCS Band					
	VOIGITIO	Axial			Radial		
		9262	9400	9538	9262	9400	9538
ABM1, dBA/m		4.57	4.53	4.55	-2.73	-2.73	-2.73
ABM2, dBA/m		-47.87	-47.23	-47.70	-62.05	-62.36	-62.17
Ambient Noise, dBA/m		-63.40	-63.40	-63.40	-63.26	-63.26	-63.26
Freq. Response Margin (dB)		1.82	1.81	1.80	N/A	N/A	N/A
S+N/N (dB)	Maximum	52.44	51.76	52.25	59.32	59.63	59.44
S+N/N per orientation (dB)			51.76			59.32	
C63.19-2011 Rating per orientation		T4		T4			
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6 2.6, 3.3					

- 1. Power Configuration: TPC="All 1s";
- 2. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 3. Vocoder Configuration: AMR 12.2 kbps (UMTS);
- 4. 'Radial' orientation refers to radial transverse.
- 5. Speech Signal: ITU-T P.50 Artificial Voice
- 6. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 41 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 41 of 115

Table 8-29 Raw Data Results for UMTS - Camera Module accessory

Naw Data	Results to	I UNITS	- Calliel	a Wiodule	e access	Ory	
	Volume			Cellula	r Band		
	VOIGITIC		Axial		Radial		
		4132	4183	4233	4132	4183	4233
ABM1, dBA/m		3.92	4.50	4.13	-3.22	-3.17	-3.18
ABM2, dBA/m		-51.27	-50.81	-50.67	-61.85	-61.37	-61.42
Ambient Noise, dBA/m		-62.75	-62.75	-62.75	-62.88	-62.88	-62.88
Freq. Response Margin (dB)		1.83	1.67	1.82	N/A	N/A	N/A
S+N/N (dB)	Maximum	55.19	55.31	54.80	58.63	58.20	58.24
S+N/N per orientation (dB)			54.80		58.20		
C63.19-2011 Rating per orientation			T4			T4	
	Volume	PCS I			Band		
	Volunio		Axial		Radial		
		9262	9400	9538	9262	9400	9538
ABM1, dBA/m		4.15	4.14	4.14	-3.21	-3.22	-3.19
ABM2, dBA/m		-50.43	-50.26	-50.81	-61.51	-62.01	-61.94
Ambient Noise, dBA/m		-62.75	-62.75	-62.75	-62.88	-62.88	-62.88
Freq. Response Margin (dB)	N.A i	1.83	1.83	1.82	N/A	N/A	N/A
S+N/N (dB)	Maximum	54.58	54.40	54.95	58.30	58.79	58.75
S+N/N per orientation (dB)			54.40		58.30		
C63.19-2011 Rating per		T4		T4			
orientation							

- 1. Power Configuration: TPC="All 1s";
- 2. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 3. Vocoder Configuration: AMR 12.2 kbps (UMTS);4. 'Radial' orientation refers to radial transverse.
- 5. Speech Signal: ITU-T P.50 Artificial Voice
- 6. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 40 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 42 of 115

Table 8-30 Raw Data Results for LTE B12 (1.4MHz and 3MHz BW's)

Raw Data Results for LTE B12 (1.4MHz and 3MHz BW's)				
	Volume	1.4MHz BW		
	Volumo	Axial	Radial	
		23095	23095	
ABM1, dBA/m		7.15	-0.41	
ABM2, dBA/m		-35.59	-53.42	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.79	N/A	
S+N/N (dB)		42.74	53.01	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	ЗМН	z BW	
	Volario	Axial	Radial	
		23095	23095	
ABM1, dBA/m		7.16	-0.34	
ABM2, dBA/m		-36.44	-53.75	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.83	N/A	
S+N/N (dB)		43.60	53.41	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- Vocoder Configuration: NB AMR 12.2kbps
 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 42 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 43 of 115

Table 8-31
Raw Data Results for LTE B12 (5MHz and 10MHz BW's)

Naw Data	Nosults 10	TETE B12 (SWIEZ and 10)	1112 D11 3)
	Volume	5MHz BW	
	VOIGITIO	Axial	Radial
		23095	23095
ABM1, dBA/m		7.22	-0.39
ABM2, dBA/m		-38.54	-54.77
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.83	N/A
S+N/N (dB)		45.76	54.38
C63.19-2011 Rating per orientation		T4	T4
	Volume	10MHz BW	
	, 0.0	Axial	Radial
		23095	23095
ABM1, dBA/m		7.15	-0.39
ABM2, dBA/m		-36.95	-53.97
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.83	N/A
S+N/N (dB)		44.10	53.58
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 44 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 44 of 115

Table 8-32 Raw Data Results for LTE B17 (5MHz and 10MHz BW's)

Raw Data Results for LTE B17 (5MHz and 10MHz BW's)				
	Volume	5MHz BW		
		Axial	Radial	
		23790	23790	
ABM1, dBA/m		6.25	-1.12	
ABM2, dBA/m		-36.64	-55.44	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.74	N/A	
S+N/N (dB)		42.89	54.32	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	10MH	lz BW	
	Volario	Axial	Radial	
		23790	23790	
ABM1, dBA/m		6.54	-1.20	
ABM2, dBA/m		-35.48	-53.02	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.83	N/A	
S+N/N (dB)		42.02	51.82	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- Vocoder Configuration: NB AMR 12.2kbps
 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 45 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 45 of 115

Table 8-33 Raw Data Results for LTE B13 (5MHz and 10MHz BW's)

Naw Data	i toodito io	LIE BIS (SWINZ allu TUI	III IZ DVV 3)
	Volume	5MH:	z BW
		Axial	Radial
		23230	23230
ABM1, dBA/m		7.06	-0.40
ABM2, dBA/m		-36.89	-55.12
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.89	N/A
S+N/N (dB)		43.95	54.72
C63.19-2011 Rating per orientation		T4	T4
	Volume	10MHz BW	
		Axial	Radial
		23230	23230
ABM1, dBA/m		7.09	-0.29
ABM2, dBA/m		-35.52	-54.04
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.70	N/A
S+N/N (dB)		42.61	53.75
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 46 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 46 of 115

Table 8-34
Raw Data Results for LTE B5 (1.4MHz and 3MHz BW's)

Taw Data	ixesuits io	I LIE 65 (1.4WITZ allu 3W	1112 DVV 3)
	Volume	1.4MH	Hz BW
		Axial	Radial
		20525	20525
ABM1, dBA/m		7.17	-0.45
ABM2, dBA/m		-36.00	-53.38
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.82	N/A
S+N/N (dB)		43.17	52.93
C63.19-2011 Rating per orientation		T4	T4
	Volume	3MHz BW	
	Volumo	Axial	Radial
		20525	20525
ABM1, dBA/m		7.18	-0.36
ABM2, dBA/m		-37.32	-53.49
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.73	N/A
S+N/N (dB)		44.50	53.13
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 47 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 47 of 115

Table 8-35
Raw Data Results for LTE B5 (5MHz and 10MHz BW's)

Itaw Data	recounts re	TETE BS (SWITZ and TOW	1112 15 17 3/
	Volume	5MH:	z BW
		Axial	Radial
		20525	20525
ABM1, dBA/m		7.21	-0.41
ABM2, dBA/m		-39.19	-55.73
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.78	N/A
S+N/N (dB)		46.40	55.32
C63.19-2011 Rating per orientation		T4	T4
	Volume	10MHz BW	
	Volumo	Axial	Radial
		20525	20525
ABM1, dBA/m		7.15	-0.37
ABM2, dBA/m		-37.91	-54.36
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.73	N/A
S+N/N (dB)		45.06	53.99
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 40 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 48 of 115

Table 8-36
Raw Data Results for LTE B4 (1.4MHz and 3MHz BW's)

Naw Data	iveanita io	r LIE B4 (1.4MHZ and 3M	IIIZ DVV S)
	Volume	1.4MF	lz BW
	Volunto	Axial	Radial
		20175	20175
ABM1, dBA/m		6.96	-0.41
ABM2, dBA/m		-35.96	-54.01
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.75	N/A
S+N/N (dB)		42.92	53.60
C63.19-2011 Rating per orientation		T4	T4
	Volume	3MHz BW	
	Volario	Axial	Radial
		20175	20175
ABM1, dBA/m		6.89	-0.45
ABM2, dBA/m		-37.10	-54.14
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.73	N/A
S+N/N (dB)		43.99	53.69
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 40 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 49 of 115

Table 8-37
Raw Data Results for LTE B4 (5MHz and 10MHz BW's)

		TETE D+ (SWITZ and TOW	= = 5,
	Volume	5MH:	z BW
	VOIGITIC	Axial	Radial
		20175	20175
ABM1, dBA/m		6.96	-0.41
ABM2, dBA/m		-38.32	-55.28
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.73	N/A
S+N/N (dB)		45.28	54.87
C63.19-2011 Rating per orientation		T4	T4
	Volume	10MHz BW	
	Volamo	Axial	Radial
		20175	20175
ABM1, dBA/m		7.01	-0.35
ABM2, dBA/m		-35.71	-53.69
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.83	N/A
S+N/N (dB)		42.72	53.34
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 50 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 50 of 115

Table 8-38
Raw Data Results for LTE B4 (15MHz and 20MHz BW's)

Naw Data	veguita io	TETE 64 (15MINZ and 20M	
	Volume	15MF	łz BW
	VOIGITIO	Axial	Radial
		20175	20175
ABM1, dBA/m		7.01	-0.43
ABM2, dBA/m		-35.78	-54.23
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.82	N/A
S+N/N (dB)		42.79	53.80
C63.19-2011 Rating per orientation		T4	T4
	Volume	20MHz BW	
	Volume	Axial	Radial
		20175	20175
ABM1, dBA/m		7.03	-0.40
ABM2, dBA/m		-35.91	-54.68
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.73	N/A
S+N/N (dB)		42.94	54.28
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 51 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 51 of 115

Table 8-39
Raw Data Results for LTE B2 (1.4MHz and 3MHz BW's)

Tun butu	1 too anto 10	I LIE BZ (1.4WITZ allu SIV	1112 DVV 3)
	Volume	1.4MH	Hz BW
	Volunto	Axial	Radial
		18900	18900
ABM1, dBA/m		7.09	-0.33
ABM2, dBA/m		-34.50	-53.44
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.80	N/A
S+N/N (dB)		41.59	53.11
C63.19-2011 Rating per orientation		T4	T4
	Volume	3MHz BW	
	Volumo	Axial	Radial
		18900	18900
ABM1, dBA/m		7.04	-0.41
ABM2, dBA/m		-35.13	-55.33
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.83	N/A
S+N/N (dB)		42.17	54.92
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 50 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 52 of 115

Table 8-40 Raw Data Results for LTE B2 (5MHz and 10MHz BW's)

Naw Bata	. vocalto it	TELE BZ (SIVIEZ ATIO TOIV	
	Volume	5MH.	z BW
	Volunto	Axial	Radial
		18900	18900
ABM1, dBA/m		7.09	-0.44
ABM2, dBA/m		-36.96	-55.15
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.80	N/A
S+N/N (dB)		44.05	54.71
C63.19-2011 Rating per orientation		T4	T4
	Volume	10MHz BW	
	Volumo	Axial	Radial
		18900	18900
ABM1, dBA/m		7.14	-0.39
ABM2, dBA/m		-34.91	-53.86
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.78	N/A
S+N/N (dB)		42.05	53.47
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo F2 of 11F
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 53 of 115

Table 8-41
Raw Data Results for LTE B2 (15MHz and 20MHz BW's)

Naw Data	iveanita io	LIE BZ (15WINZ aliu ZVI	11112 1511 3/
	Volume	15MH	lz BW
	Volumo	Axial	Radial
		18900	18900
ABM1, dBA/m		7.21	-0.33
ABM2, dBA/m		-34.31	-53.52
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.83	N/A
S+N/N (dB)		41.52	53.19
C63.19-2011 Rating per orientation		T4	T4
	Volume	20MHz BW	
	Volumo	Axial	Radial
		18900	18900
ABM1, dBA/m		7.00	-0.41
ABM2, dBA/m		-34.32	-54.66
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.77	N/A
S+N/N (dB)		41.32	54.25
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.
- 8. The worst case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 2 at 20MHz is the worst case for the Axial probe orientation. Please see Table 8-47 for additional tests on the low and high channels for the Axial and Radial probe orientations.

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 54 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 54 of 115

Table 8-42
Raw Data Results for LTE B25 (1.4MHz and 3MHz BW's)

INAW Data I	งออนแอ 101	LIE 625 (1.4WITZ and 3	11112 D11 3)	
	Volume	1.4MH	Hz BW	
	Volunio	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.20	-0.35	
ABM2, dBA/m		-36.03	-53.06	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.79	N/A	
S+N/N (dB)		43.23	52.71	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	3MHz BW		
	Volume	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.28	-0.41	
ABM2, dBA/m		-37.86	-54.30	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.84	N/A	
S+N/N (dB)		45.14	53.89	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo FF of 11F
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 55 of 115

Table 8-43
Raw Data Results for LTE B25 (5MHz and 10MHz BW's)

Naw Data	vesuits 10	TETE B25 (SWINZ and TUN	III IZ 1544 3)	
	Volume	5MH:	zBW	
	7 0 10	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.14	-0.40	
ABM2, dBA/m		-38.89	-53.06	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.90	N/A	
S+N/N (dB)		46.03	52.66	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	10MHz BW		
	Volamo	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.14	-0.40	
ABM2, dBA/m		-37.27	-51.71	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.70	N/A	
S+N/N (dB)		44.41	51.31	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.
- 8. The worst case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 25 at 10MHz bandwidth is the worst case for the Radial probe orientation. Please see Table 8-47 for additional tests on the low and high channels for the Axial and Radial probe orientations.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 56 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 50 of 115

Table 8-44
Raw Data Results for LTE B25 (15MHz and 20MHz BW's)

ixaw Dala i	veguita ioi	LIE BZ5 (15MITZ aliu Zu	1711 12 D 11 3)
	Volume	15MF	łz BW
	VOIGITIO	Axial	Radial
		26365	26365
ABM1, dBA/m		7.19	-0.35
ABM2, dBA/m		-38.57	-53.08
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.84	N/A
S+N/N (dB)		45.76	52.73
C63.19-2011 Rating per orientation		T4	T4
	Volume	20MF	łz BW
	Volume	Axial	Radial
		26365	26365
ABM1, dBA/m		7.17	-0.40
ABM2, dBA/m		-39.46	-53.57
Ambient Noise, dBA/m		-63.40	-63.26
Freq. Response Margin (dB)	Maximum	1.83	N/A
S+N/N (dB)		46.63	53.17
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 57 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 57 Of 115

Table 8-45
Raw Data Results for LTE B7 (5MHz and 10MHz BW's)

i Naw Data	rasults It	TETE BI (SWITZ allu TUN		
	Volume	5MH:	z BW	
	Volunto	Axial	Radial	
		20525	20525	
ABM1, dBA/m		7.05	-0.35	
ABM2, dBA/m		-39.82	-54.62	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.84	N/A	
S+N/N (dB)		46.87	54.27	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	10MH	BW	
	Voidino	Axial	Radial	
		20525	20525	
ABM1, dBA/m		7.16	-0.43	
ABM2, dBA/m		-36.77	-51.94	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.82	N/A	
S+N/N (dB)		43.93	51.51	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 50 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 58 of 115

Table 8-46
Raw Data Results for LTE B7 (15MHz and 20MHz BW's)

Naw Dala	results io	TETE B7 (15MHz and 20M	III IZ DVV S)	
	Volume	15MH	lz BW	
	Volunto	Axial	Radial	
		20525	20525	
ABM1, dBA/m		7.05	-0.43	
ABM2, dBA/m		-37.34	-52.60	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.84	N/A	
S+N/N (dB)		44.39	52.17	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	20MHz BW		
	Volario	Axial	Radial	
		20525	20525	
ABM1, dBA/m		7.00	-0.46	
ABM2, dBA/m		-35.12	-55.41	
Ambient Noise, dBA/m		-63.40	-63.26	
Freq. Response Margin (dB)	Maximum	1.80	N/A	
S+N/N (dB)		42.12	54.95	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo F0 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 59 of 115

Table 8-47 Raw Data Results for Worst Case LTE Band/BW Combinations by Probe Orientation

		Band 2		Band 25			
	Volume		20MHz			10 MHz	
			Axial			Radial	
		18700	18900	19100	26090	26365	26640
ABM1, dBA/m		7.10	7.00	7.07	-0.47	-0.40	-0.50
ABM2, dBA/m		-33.19	-34.32	-35.77	-52.40	-51.71	-54.24
Ambient Noise, dBA/m		-63.40	-63.40	-63.40	-63.26	-63.26	-63.26
Freq. Response Margin (dB)		1.82	1.77	1.82	N/A	N/A	N/A
S+N/N (dB)	Maximum	40.29	41.32	42.84	51.93	51.31	53.74
S+N/N per orientation (dB)			40.29			51.31	
C63.19-2011 Rating per orientation			T4			T4	
T-coil Coordinates (cm)	[x,y] from bottom left		2.8, 2.6			2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (**Phone→Call Settings→More→Hearing aids**) as well as Noise Suppression mode (Phone-Call Settings-More-Noise Suppression) was set to ON for Frequency Response compliance.
- 8. The worst case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 2 at 20MHz bandwidth is the worst case for the Axial probe orientation. LTE Band 25 at 10MHz is the worst case for the Radial probe orientation.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 60 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 60 01 115

Table 8-48
Raw Data Results for LTE B12 (1.4MHz and 3MHz BW's) – Camera Module accessory

Raw Data Results for Lie	J 12 (1.41)	miz and Siviliz DVV S) - Co	ailiela Module accessory
	Volume	1.4MHz BW	
	VOIGITIO	Axial	Radial
		23095	23095
ABM1, dBA/m		7.11	-1.91
ABM2, dBA/m		-37.18	-49.79
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.83	N/A
S+N/N (dB)		44.29	47.88
C63.19-2011 Rating per orientation		T4	T4
	Volume	3MHz BW	
	Volume	Axial	Radial
		23095	23095
ABM1, dBA/m		7.07	-1.93
ABM2, dBA/m		-36.00	-51.40
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.86	N/A
S+N/N (dB)		43.07	49.47
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 61 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 61 of 115

Table 8-49
Raw Data Results for LTE B12 (5MHz and 10MHz BW's) – Camera Module accessory

Raw Data Results for LII	D 12 (31411	TE ATTU TUNITE BVV S) - Ca	amera wiodule accessory
	Volume	5MHz BW	
	VOIGITIO	Axial	Radial
		23095	23095
ABM1, dBA/m		7.04	-1.74
ABM2, dBA/m		-36.19	-51.41
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.85	N/A
S+N/N (dB)		43.23	49.67
C63.19-2011 Rating per orientation		T4	T4
	Volume	10MHz BW	
	Volume	Axial	Radial
		23095	23095
ABM1, dBA/m		7.14	-1.93
ABM2, dBA/m		-34.90	-49.92
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.75	N/A
S+N/N (dB)		42.04	47.99
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 60 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 62 of 115

Table 8-50

Raw Data Results for LTE B17 (5MHz and 10MHz BW's) – Camera Module accessory				
	Volume	5MHz BW		
	VOIGITIC	Axial	Radial	
		23790	23790	
ABM1, dBA/m		7.03	-1.84	
ABM2, dBA/m		-38.16	-50.98	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.79	N/A	
S+N/N (dB)		45.19	49.14	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	10MHz BW		
	Volumo	Axial	Radial	
		23790	23790	
ABM1, dBA/m		7.02	-1.81	
ABM2, dBA/m		-35.02	-51.03	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.91	N/A	
S+N/N (dB)		42.04	49.22	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- Vocoder Configuration: NB AMR 12.2kbps
 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 62 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 63 of 115

Table 8-51

Raw Data Results for LTI	•			
	Volume	5MHz BW		
	Volume	Axial	Radial	
		23230	23230	
ABM1, dBA/m		7.05	-1.83	
ABM2, dBA/m		-40.08	-53.62	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.79	N/A	
S+N/N (dB)		47.13	51.79	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	10MHz BW		
	VOIGITIO	Axial	Radial	
		23230	23230	
ABM1, dBA/m		7.05	-1.78	
A D M 2 - d D A /ma		1.00	-1.70	
ABM2, dBA/m		-38.21	-1.76 -52.38	
ABMZ, dBA/m Ambient Noise, dBA/m				
	Maximum	-38.21	-52.38	
Ambient Noise, dBA/m Freq. Response Margin	Maximum	-38.21 -62.75	-52.38 -62.88	
Ambient Noise, dBA/m Freq. Response Margin (dB)	Maximum	-38.21 -62.75 1.77	-52.38 -62.88 N/A	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- Vocoder Configuration: NB AMR 12.2kbps
 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 64 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 64 of 115

Table 8-52
Raw Data Results for LTE B5 (1.4MHz and 3MHz BW's) – Camera Module accessory

Raw Data Results for LI	E B5 (1.4W	Hz and 3MHz BW's) – Ca	imera Module accessory
	Volume	1.4MHz BW	
	Volunio	Axial	Radial
		20525	20525
ABM1, dBA/m		7.11	-1.97
ABM2, dBA/m		-37.92	-53.42
Ambient Noise, dBA/m	Maximum	-62.75	-62.88
Freq. Response Margin (dB)		1.82	N/A
S+N/N (dB)		45.03	51.45
C63.19-2011 Rating per orientation		T4	T4
	Volume	3MH:	z BW
	Volaino	Axial	Radial
		20525	20525
ABM1, dBA/m		7.09	-1.96
ABM2, dBA/m		-37.72	-53.45
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.78	N/A
S+N/N (dB)		44.81	51.49
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo GE of 11E
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 65 of 115

Table 8-53

Raw Data Results for LT	E B5 (5MH	<u> </u>	mera Module accessory
	Volume	5MHz BW	
	VOIGITIC	Axial	Radial
		20525	20525
ABM1, dBA/m		7.02	-1.79
ABM2, dBA/m		-37.64	-52.46
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.84	N/A
S+N/N (dB)		44.66	50.67
C63.19-2011 Rating per orientation		T4	T4
	Volume	10MHz BW	
	Volario	Axial	Radial
		20525	20525
ABM1, dBA/m		7.11	-1.79
ABM2, dBA/m		-36.78	-51.41
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.92	N/A
S+N/N (dB)		43.89	49.62
C63.19-2011 Rating per orientation		Т4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- Vocoder Configuration: NB AMR 12.2kbps
 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 66 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 66 of 115

Table 8-54
Raw Data Results for LTE B4 (1.4MHz and 3MHz BW's) – Camera Module accessory

Naw Data Nesults IOI LII	E D4 (1.4W	Hz and 3MHz BW's) – Ca	illiera wiodule accessory
	Volume	1.4MHz BW	
	VOIGITIO	Axial	Radial
		20175	20175
ABM1, dBA/m		7.04	-1.94
ABM2, dBA/m		-34.73	-51.28
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.82	N/A
S+N/N (dB)		41.77	49.34
C63.19-2011 Rating per orientation		T4	T4
	Volume	3MHz BW	
		Axial	Radial
		20175	20175
ABM1, dBA/m		7.08	-1.90
ABM2, dBA/m		-35.15	-50.77
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.85	N/A
S+N/N (dB)		42.23	48.87
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 67 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 67 of 115

Table 8-55

Raw Data Results for LTE B4 (5MHz and 10MHz BW's) - Camera Module accessory 5MHz BW Volume Radial Axial 20175 20175 ABM1, dBA/m 7.03 -1.85 ABM2, dBA/m -36.32 -50.80 -62.75 -62.88 Ambient Noise, dBA/m Freq. Response Margin 1.87 N/A Maximum (dB) S+N/N (dB) 43.35 48.95 C63.19-2011 Rating per **T4 T4** orientation 10MHz BW Volume Axial Radial 20175 20175 ABM1, dBA/m 7.14 -1.94 ABM2, dBA/m -34.59 -50.67 Ambient Noise, dBA/m -62.75 -62.88 Freq. Response Margin 1.78 N/A Maximum (dB) S+N/N (dB) 41.73 48.73 C63.19-2011 Rating per **T4 T4** orientation

Notes:

1. Power Configuration: TPC = "Max Power"

T-coil Coordinates (cm)

- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast

[x,y] from

bottom left

- Vocoder Configuration: NB AMR 12.2kbps
 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

2.8, 2.6

2.6, 3.3

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 60 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 68 of 115

Table 8-56
Raw Data Results for LTE B4 (15MHz and 20MHz BW's) – Camera Module accessory

Naw Data Results for ETI	15MHz BW			
	Volume	I DIVITIZ D VV		
	VOIGITIE	Axial	Radial	
		20175	20175	
ABM1, dBA/m		7.20	-1.99	
ABM2, dBA/m		-35.19	-52.06	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.85	N/A	
S+N/N (dB)		42.39	50.07	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	20MHz BW		
	Volume	Axial	Radial	
		20175	20175	
ABM1, dBA/m		7.03	-1.96	
ABM2, dBA/m		-36.63	-49.96	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.82	N/A	
S+N/N (dB)		43.66	48.00	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Daga 60 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 69 of 115

Table 8-57

Raw Data Results for LTE B2 (1.4MHz and 3MHz RW's) – Camera Module accessory

Raw Data Results for LI	E B2 (1.4N	Hz and 3MHz BW's) – Ca	imera Module accessory
	Volume	1.4MHz BW	
	VOIGITIO	Axial	Radial
		18900	18900
ABM1, dBA/m		7.14	-1.92
ABM2, dBA/m		-37.01	-52.03
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.87	N/A
S+N/N (dB)		44.15	50.11
C63.19-2011 Rating per orientation		T4	T4
	Volume	3MHz BW	
		Axial	Radial
		18900	18900
ABM1, dBA/m		7.17	-1.89
ABM2, dBA/m		-35.47	-51.98
Ambient Noise, dBA/m		-62.75	-62.88
Freq. Response Margin (dB)	Maximum	1.73	N/A
S+N/N (dB)		42.64	50.09
C63.19-2011 Rating per orientation		T4	T4
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Daga 70 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 70 of 115

Table 8-58 Raw Data Results for LTF B2 (5MHz and 10MHz BW's) - Camera Module accessory

Naw Data Nesults IOI LI		z and 10MHz BW's) – Ca	mera woudle accessory	
	Volume	5MHz BW		
	VOIGITIO	Axial	Radial	
		18900	18900	
ABM1, dBA/m		7.02	-1.82	
ABM2, dBA/m		-35.88	-49.96	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.76	N/A	
S+N/N (dB)		42.90	48.14	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	10MHz BW		
		Axial	Radial	
		18900	18900	
ABM1, dBA/m		7.12	-1.79	
ABM2, dBA/m		-34.23	-49.95	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.85	N/A	
S+N/N (dB)		41.35	48.16	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone-Call Settings-More-Noise Suppression) was set to ON for Frequency Response compliance.
- 8. The worst case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 2 at 10MHz is the worst case for the Axial probe orientation. Please see Table 8-65 for additional tests on the low and high channels for the Axial and Radial probe orientations.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 71 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 71 of 115

Table 8-59

Raw Data Results for LTE B2 (15MHz and 20MHz BW's) – Camera Module accessory

Raw Data Results for Lit	= BZ (15WI	Iz and 20MHz BW's) – Ca	amera wodule accessory	
	Volume	15MHz BW		
	Volumo	Axial	Radial	
		18900	18900	
ABM1, dBA/m		6.94	-2.00	
ABM2, dBA/m		-34.47	-49.69	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.76	N/A	
S+N/N (dB)		41.41	47.69	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	20MHz BW		
	Volume	Axial	Radial	
		18900	18900	
ABM1, dBA/m		7.15	-1.92	
ABM2, dBA/m		-36.58	-50.87	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.81	N/A	
S+N/N (dB)		43.73	48.95	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.
- 8. The worst case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 2 at 15MHz is the worst case for the Radial probe orientation. Please see Table 8-65 for additional tests on the low and high channels for the Axial and Radial probe orientations.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 70 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 72 of 115

Table 8-60
or LTE R25 (1 4MHz and 3MHz RW's) – Camera Module accessory

Raw Data Results for LTE	. D23 (1.4N	inz and Swinz BVV S) - C	amera wodule accessor	
	Volume	1.4MHz BW		
	VOIGITIO	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.04	-1.85	
ABM2, dBA/m		-35.50	-51.15	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.84	N/A	
S+N/N (dB)		42.54	49.30	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	3MHz BW		
	Volumo	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.04	-1.97	
ABM2, dBA/m		-35.29	-51.04	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.85	N/A	
S+N/N (dB)		42.33	49.07	
C63.19-2011 Rating per orientation		T4	T4	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 73 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		raye 73 01 113

Table 8-61
Raw Data Results for LTF B25 (5MHz and 10MHz BW's) – Camera Module accessory

Raw Data Results for LTI	= B25 (5MI	Hz and 10MHz BW's) - Ca	amera Module accessory	
	Volume	5MHz BW		
	Volunio	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.10	-1.81	
ABM2, dBA/m		-36.69	-51.29	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.89	N/A	
S+N/N (dB)		43.79	49.48	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	10MF	lz BW	
	Volamo	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.03	-1.80	
ABM2, dBA/m		-36.23	-50.99	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.82	N/A	
S+N/N (dB)		43.26	49.19	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 74 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 74 of 115

Table 8-62

aw Data Results for LTE B25 (15MHz and 20MHz BW's) - Camera Module accessory				
	Volume	15MHz BW		
	Volume	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.12	-1.92	
ABM2, dBA/m		-35.74	-51.50	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.81	N/A	
S+N/N (dB)		42.86	49.58	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	20MHz BW		
	VOIGITIO	Axial	Radial	
		26365	26365	
ABM1, dBA/m		7.15	-1.98	
ABM2, dBA/m		-35.80	-53.49	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.79	N/A	
S+N/N (dB)		42.95	51.51	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 75 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 75 of 115

Table 8-63

Raw Data Results for LT	E B7 (5MH	<u> </u>	mera Module accessory	
	Volume	5MHz BW		
	Volunic	Axial	Radial	
		21100	21100	
ABM1, dBA/m		7.06	-1.82	
ABM2, dBA/m		-36.62	-50.86	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.78	N/A	
S+N/N (dB)		43.68	49.04	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	Volumo		
	VOIGITIO	Axial	Radial	
		21100	21100	
ABM1, dBA/m		7.11	-1.77	
ABM2, dBA/m		-34.87	-50.76	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.85	N/A	
S+N/N (dB)		41.98	48.99	
C63.19-2011 Rating per orientation		Т4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- Vocoder Configuration: NB AMR 12.2kbps
 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 76 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 76 of 115

Table 8-64

Raw Data Results for LTE B7 (15MHz and 20MHz BW's) – Camera Module accessory				
	Volume	15MHz BW		
	Volume	Axial	Radial	
		21100	21100	
ABM1, dBA/m		7.18	-1.99	
ABM2, dBA/m		-35.59	-52.73	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.84	N/A	
S+N/N (dB)		42.77	50.74	
C63.19-2011 Rating per orientation		T4	T4	
	Volume	20MHz BW		
	Volume	Axial	Radial	
		21100	21100	
ABM1, dBA/m		7.09	-2.02	
ABM2, dBA/m		-36.84	-52.83	
Ambient Noise, dBA/m		-62.75	-62.88	
Freq. Response Margin (dB)	Maximum	1.84	N/A	
S+N/N (dB)		43.93	50.81	
C63.19-2011 Rating per orientation		T4	T4	
T-coil Coordinates (cm)	[x,y] from bottom left	2.8, 2.6	2.6, 3.3	

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- Vocoder Configuration: NB AMR 12.2kbps
 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- 7. Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 77 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 77 of 115


Table 8-65
Raw Data Results for Worst Case LTE Band/BW Combinations by Probe Orientation
Camera Module accessory

			Band 2		Band 2		
	Volume		10 MHz			15 MHz	
			Axial			Radial	
		18650	18900	19150	18675	18900	19125
ABM1, dBA/m		7.07	7.12	7.02	-2.00	-2.00	-2.01
ABM2, dBA/m		-34.42	-34.23	-35.75	-50.87	-49.69	-49.87
Ambient Noise, dBA/m		-62.75	-62.75	-62.75	-62.88	-62.88	-62.88
Freq. Response Margin (dB)		1.79	1.85	1.79	N/A	N/A	N/A
S+N/N (dB)	Maximum	41.49	41.35	42.77	48.87	47.69	47.86
S+N/N per orientation (dB)			41.35			47.69	
C63.19-2011 Rating per orientation			T4			T4	
T-coil Coordinates (cm)	[x,y] from bottom left		2.8, 2.6			2.6, 3.3	


- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Phone Condition: Mute on; Backlight on; Max Volume; Max Contrast
- 4. Vocoder Configuration: NB AMR 12.2kbps
- 5. 'Radial' orientation refers to radial transverse.
- 6. Speech Signal: ITU-T P.50 Artificial Voice
- Hearing-Aid Compatibility mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise Suppression) was set to ON for Frequency Response compliance.
- 8. The worst case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 2 at 10MHz bandwidth is the worst case for the Axial probe orientation. LTE Band 2 at 15MHz is the worst case for the Radial probe orientation.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 70 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 78 of 115

III. 1 kHz Vocoder Application Check



This model was verified to be within the linear region for ABM1 measurements at -18 dBm0 for CDMA. This measurement was taken in the axial configuration above the maximum location.

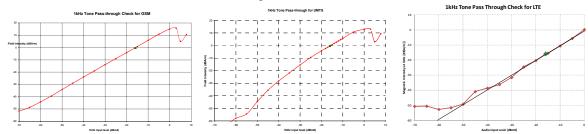

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE. This measurement was taken in the axial configuration above the maximum location.

IV. T-Coil Validation Test Results

Table 8-66
Helmholtz Coil Validation Table of Results for 01/22/2016

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.661	PASS
Environmental Noise	< -58 dBA/m	-63.40	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.814	PASS
Environmental Noise	< -58 dBA/m	-63.26	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dog 70 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 79 of 115

Table 8-67
Helmholtz Coil Validation Table of Results for 02/18/2016

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.818	PASS
Environmental Noise	< -58 dBA/m	-62.75	PASS
Frequency Response, from limits	> 0 dB	0.60	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.964	PASS
Environmental Noise	< -58 dBA/m	-62.88	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

V. ABM1 Magnetic Field Distribution Scan Overlays

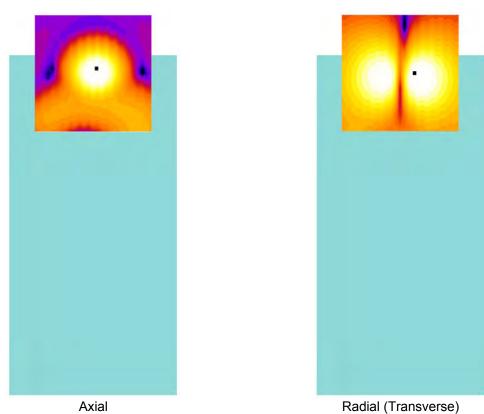


Figure 8-1
T-Coil Scan Overlay Magnetic Field Distributions

- 1. Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dags 90 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 80 of 115

9. MEASUREMENT UNCERTAINTY

Table 9-1
Uncertainty Estimation Table

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)						17.7%	0.71
Expanded uncertainty (k=2), 95% confidence level						35.3%	1.31

Notes:

- 1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 81 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 61 01 115

10. EQUIPMENT LIST

Table 10-1 Equipment List

	=qaipinont =iot						
Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number	
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	11/17/2015	Annual	11/17/2016	7BFNM32	
Listen	SoundConnect	Microphone Power Supply	11/13/2015	Annual	11/13/2016	PS2612	
Listen	SoundCheck	Acoustic Analyzer System	1/27/2015	Annual	1/27/2016	04-06-5876-SC2850	
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	11/17/2015	Annual	11/17/2016	23528889	
Rohde & Schwarz	CMW500	Radio Communication Tester	5/5/2015	Annual	5/5/2016	140144	
Rohde & Schwarz	CMU200	Base Station Simulator	3/23/2015	Annual	3/23/2016	836371/0079	
Rohde & Schwarz	CMU200	Base Station Simulator	12/2/2015	Annual	12/2/2016	833855/0010	
TEM		HAC System Controller with Software	N/A		N/A	N/A	
TEM		HAC Positioner	N/A		N/A	N/A	
TEM	Radial T-Coil Probe	Radial T-Coil Probe	11/17/2015	Annual	11/17/2016	TEM-1130	
TEM	Axial T-Coil Probe	Axial T-Coil Probe	11/17/2015	Annual	11/17/2016	TEM-1124	
TEM	Helmholtz Coil	Helmholtz Coil	12/22/2015	Annual	12/22/2016	SBI 1052	

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 82 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 62 01 115

11. TEST DATA

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 92 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 83 of 115




Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 11/17/2015
- Helmholtz Coil SN: SBI 1052; Calibrated: 11/17/2015

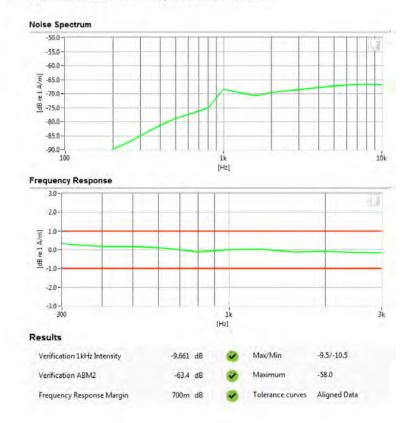

FCC ID: ZNFVS987	PETEST	PCTEST* HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 84 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 64 01 115




Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 11/17/2015
- Helmholtz Coil SN: SBI 1052; Calibrated: 12/22/2015

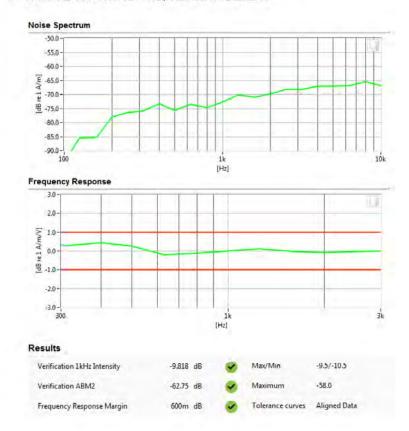

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 05 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 85 of 115




Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 11/17/2015
- Helmholtz Coil SN: SBI 1052; Calibrated: 12/22/2015

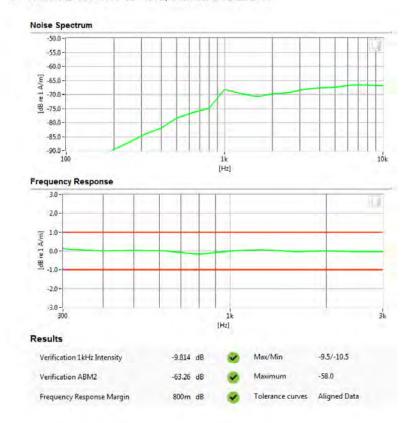

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 86 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 60 01 115




Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 11/17/2015
- Helmholtz Coil SN: SBI 1052; Calibrated: 12/22/2015

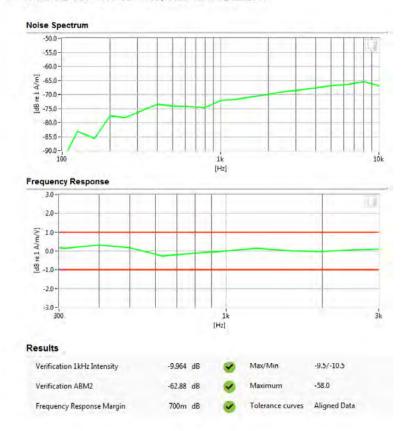

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 97 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 87 of 115



Type: Portable Handset Serial: 03753

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 11/17/2015

Test Configuration:

Mode: Cellular CDMA

Channel: 777

· Speech Signal: ITU-T P.50 Artificial Voice

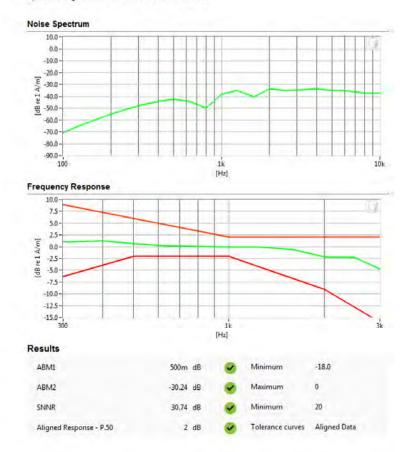

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 88 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 66 01 115



Type: Portable Handset Serial: 03753


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 11/17/2015

Test Configuration:

- Mode: PCS CDMA
- Channel: 25
- · Speech Signal: ITU-T P.50 Artificial Voice

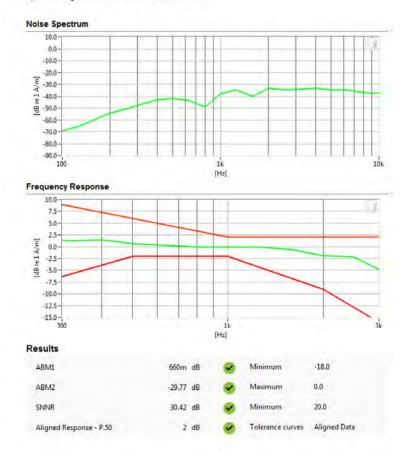

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dags 90 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 89 of 115



Type: Portable Handset Serial: 03753


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 11/17/2015

Test Configuration:

- Mode: GSM850
- Channel: 251
- · Speech Signal: ITU-T P.50 Artificial Voice

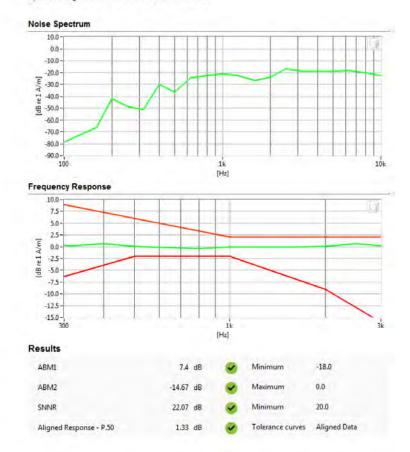

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 90 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Fage 90 01 115



Type: Portable Handset Serial: 03753


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 11/17/2015

Test Configuration:

- Mode: GSM1900
- Channel: 512
- · Speech Signal: ITU-T P.50 Artificial Voice

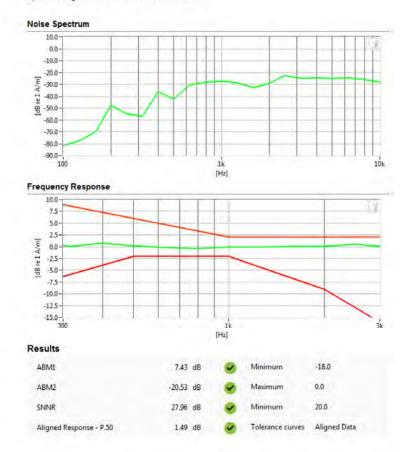

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 01 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 91 of 115



Type: Portable Handset Serial: 03753


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 11/17/2015

Test Configuration:

- . Mode: UMTS Band V
- Channel: 4183
- . Speech Signal: ITU-T P.50 Artificial Voice

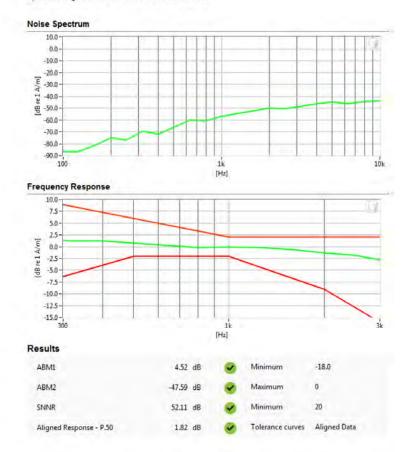

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 92 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Fage 92 01 115



Type: Portable Handset Serial: 03753

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 11/17/2015

Test Configuration:

Mode: UMTS Band II

Channel: 9400

. Speech Signal: ITU-T P.50 Artificial Voice

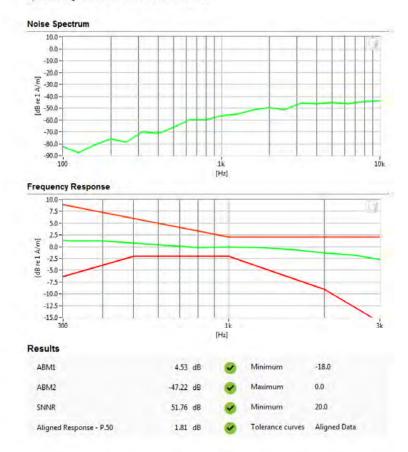

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 02 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 93 of 115



Type: Portable Handset Serial: 03753

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 11/17/2015

Test Configuration:

Mode: LTE Band 2Bandwidth: 20MHzChannel: 18700

Speech Signal: ITU-T P.50 Artificial Voice

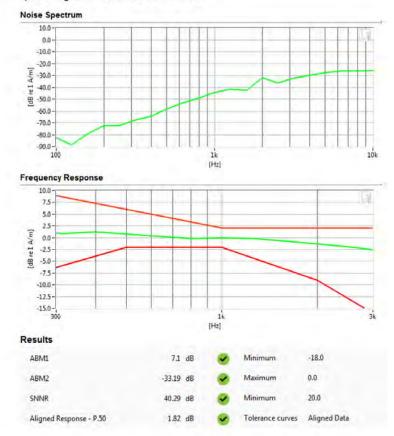

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 04 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 94 of 115



Type: Portable Handset Serial: 03753

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 11/17/2015

Test Configuration:

Mode: Cellular CDMA

Channel: 777

· Camera Module accessory installed

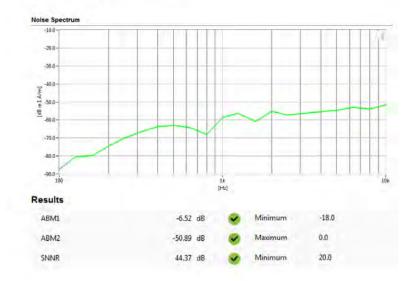

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 05 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 95 of 115



Type: Portable Handset Serial: 03753


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 11/17/2015

Test Configuration:

- Mode: PCS CDMA
- · Channel: 25

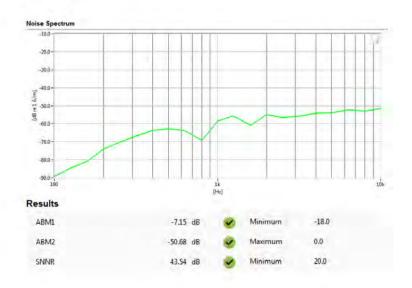

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dago 06 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 96 of 115



Type: Portable Handset Serial: 03753


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 11/17/2015

Test Configuration:

Mode: GSM850Channel: 251

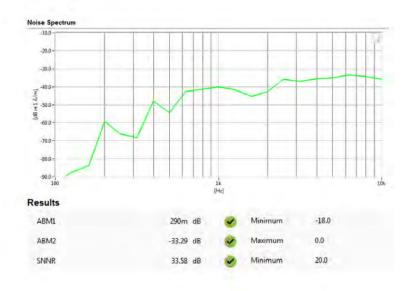

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 97 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 97 Of 115



Type: Portable Handset Serial: 03753


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 11/17/2015

Test Configuration:

Mode: GSM1900Channel: 661

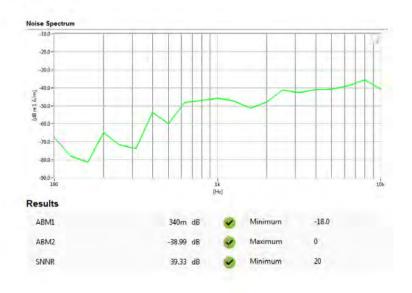

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dags 00 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 98 of 115



Type: Portable Handset Serial: 03753

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 11/17/2015

Test Configuration:

. Mode: UMTS Band V

Channel: 4183

· Camera Module accessory installed

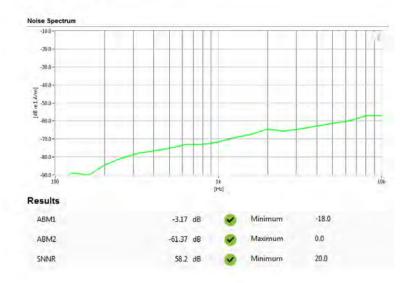

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 00 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 99 of 115



Type: Portable Handset Serial: 03753

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 11/17/2015

Test Configuration:

Mode: UMTS Band II

Channel: 9262

· Camera Module accessory installed

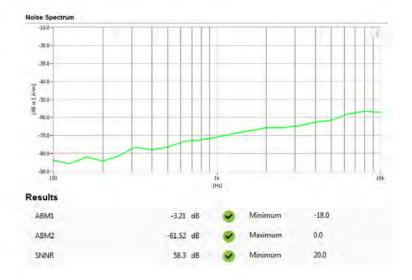

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dags 100 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 100 of 115



Type: Portable Handset Serial: 03753

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 11/17/2015

Test Configuration:

Mode: LTE Band 2Bandwidth: 15MHzChannel: 18900

· Camera Module accessory installed

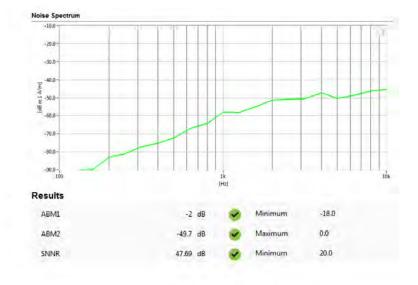

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dags 101 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 101 of 115

12. CALIBRATION CERTIFICATES

FCC ID: ZNFVS987	PETEST*	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Daga 100 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 102 of 115



Certificate of Calibration

for

AXIAL T COIL PROBE

Manufactured by:

TEM CONSULTING
AXIAL T COIL PROBE

Model No:

TEM-1124

Serial No: Calibration Recall No: TEM-1124 25880

Submitted By:

Customer:

ANDREW HARWELL

Company: Address:

PCTEST ENGINEERING LAB

6660-B DOBBIN ROAD

COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

AXIAL T C TEM

Upon receipt for Calibration, the instrument was found to be:

VASH 1/30/2015

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.

West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2008 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

17-Nov-15

FC

Certificate No:

25880 - 3

Felix Christopher (QA Mgr.)

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1

ISO/IEC 17025:2005



Calibration Lab. Cert. # 1533.01

West Caldwell Calibration uncompromised calibration Laboratories, Inc. 1575 State Route 96, Victor, NY 14564, U.S.A.

 FCC ID: ZNFVS987
 HAC (T-COIL) TEST REPORT
 Reviewed by: Quality Manager

 Filename:
 Test Dates:
 EUT Type:

 0Y1601180126-R3.ZNF
 01/22/2016 - 02/25/2016
 Portable Handset

Page 103 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

REV 3.1.M



ISO/IEC 17025: 2005

1575 State Route 96, Victor NY 14564

Calibration Lab. Cert. # 1533.01

REPORT OF CALIBRATION

for


TEM Consulting LP Axial T Coil Probe Model No.: Axial T Coil Probe

Serial No.: TEM-1124

Company: PC Test Engineering Lab.

I. D. No: XXXX

Calibration results:		Before data:	After data	:	
Probe Sensitivity measured wit	h Helmhol	tz Coil			
Helmholtz Coil;			Before & afte	er data same	:X
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Enviror	ıment:	
the current in the coils, in amperes.;	0.09	Α	Ambient Temperature:	21.7	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	28.1	% RH
Helmholtz Coil magnetic field;	6.05	A/m	Ambient Pressure:	100.8	kPa
			Calibration Date:	17-Nov-15	
Probe Sensitivity at	1000	Hz.	Re-calibration Due:	17-Nov-16	
was	-60.07	dBV/A/m	Report Number:	25880	-3
	0.992	mV/A/m	Control Number:	25880	
Probe resistance	902	Ohms			
The above listed instrument meets or	exceeds t	he tested manı	ifacturer's specifications.		
This Calibration is traceable through NIST test numbers		683/284413-14	-		
The expanded uncertainty of calibration: 0.30dB at 95% of	onfidence lev	el with a coverage fact	or of k=2.		

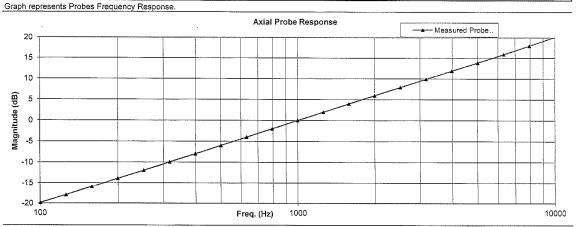

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Calibrated on WCCL system type 9700

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISO 17025

Cal. Date: 17-Nov-2015

Measurements performed by:

Felix Christopher

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 1 of 2

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 104 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		rage 104 01 115

HCATEMC_TEM-1124_Nov-17-2015

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

for

TEM Consulting LP Axial T Coil Probe

Model No.: Axial T Coil Probe

Serial No.: TEM-1124

Company: PC Test Engineering Lab.

Test	Function	Tolera	nce	Measured values			
				Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.07			
			dB				
2.0	Probe Level Linearity		6	6.06			
		Ref. (0 dB)	0	0.00			
			-6	-6.03			
			-12	-12.06			
			Hz				
3.0	Probe Frequency Response		100	-19.8			
			126	-18.0			
			158	-16.0			
			200	-13.9			
			251	-12.0			
			316	-9.9			
			398	-8.0			
			501	-6.0			
			631	-4.0			
			794	-2.0			
		Ref. (0 dB)	1000	0.0			
			1259	2.0			
			1585	4.0			
			1995	6.0			
			2512	7.9			
			3162	9.9			
			3981	11.9			
			5012	13.9			
			6310	15.9			
			7943	18.0			
			10000	20.1			

Instruments used for calibration	on:			Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N	36064102	1-Oct-2015	,287708	1-Oct-2016
HP	34401A	S/N	36102471	1-Oct-2015	,287708	1-Oct-2016
HP	33120A	S/N	36043716	1-Oct-2015	.287708	1-Oct-2016
B&K	2133	S/N	1583254	1-Oct-2015	683/284413-14	1-Oct-2016

Cal. Date: 17-Nov-2015

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: Felix Christopher

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

FCC ID: ZNFVS987	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dags 105 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 105 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

REV 3.1.M



Certificate of Calibration

RADIAL T COIL PROBE

Manufactured by:

TEM CONSULTING

Model No:

RADIAL T COIL PROBE

Serial No:

TEM-1130

Calibration Recall No:

25880

Submitted By:

Customer:

ANDREW HARWELL

Company: Address:

PCTEST ENGINEERING LAB

6660-B DOBBIN ROAD

COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

RADIAL T TEM

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.

West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2008 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

17-Nov-15

Certificate No:

25880 - 2

Felix Christopher (QA Mgr.)

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1

West Caldwell Calibration uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Calibration Lab. Cert. # 1533.01

Reviewed by: FCC ID: ZNFVS987 HAC (T-COIL) TEST REPORT Quality Manager **EUT Type:** Page 106 of 115 01/22/2016 - 02/25/2016 Portable Handset

© 2016 PCTEST Engineering Laboratory, Inc.



ISO/IEC 17025: 2005

Calibration Lab. Cert. # 1533.01

1575 State Route 96, Victor NY 14564

REPORT OF CALIBRATION

Model No.: Radial T Coil Probe


Serial No.: TEM-1130

Company: PC Test Engineering Lab.

TEM Consulting LP Radial T Coil Probe

I. D. No: XXXX

Calibration results:			Before data:	After data	:
Probe Sensitivity measured wit	h Helmhol	tz Coil			
Helmholtz Coil;			Before & after	er data same	:X
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Enviror	nment:	
the current in the coils, in amperes.;	0.09	Α	Ambient Temperature:	21.7	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	28.1	% RH
Helmholtz Coil magnetic field;	5.98	A/m	Ambient Pressure:	100.8	kPa
			Calibration Date:	17-Nov-15	
Probe Sensitivity at	1000	Hz.	Re-calibration Due:	17-Nov-16	
was	-60.41	dBV/A/m	Report Number:	25880	-2
	0.954	mV/A/m	Control Number:	25880	
Probe resistance	903	Ohms			
The above listed instrument meets or	exceeds t	the tested man	ufacturer's specifications	•	
This Calibration is traceable through NIST test numbers	s:	683/284413-14			
The expanded uncertainty of calibration: 0.30dB at 95% or	onfidence lev	el with a coverage fact	or of k=2.		
Graph represents Probes Frequency Response.					

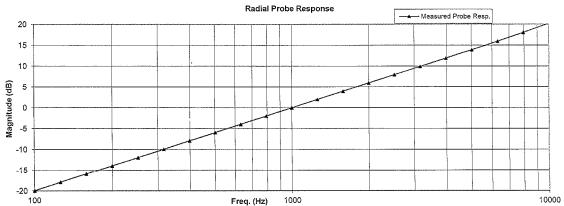

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure:

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISO 17025

Cal. Date: 17-Nov-2015

Measurements performed by:

Calibrated on WCCL system type 9700

Felix Christopher

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 1 of 2

FCC ID: ZNFVS987	PETEST	HAC (T-COIL) TEST REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Page 107 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 107 01 115

HCRTEMC_TEM-1130_Nov-17-2015

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe

Model No.: Radial T Coil Probe

Serial No.: TEM-1130

Company: PC Test Engineering Lab.

Function	Tolera	nce	Measured values			
			Before	Out	Remarks	
Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.41			
		dB				
Probe Level Linearity		6	6.05			
	Ref. (0 dB)	0	0.00			
		-6	-6.03			
		-12	-12.05			
		Hz				
3.0 Probe Frequency Response		100	-20.0			
		126	-17.9			
		158	-15.9		,	
		200	-13.9			
		251	-11.9			
		316	-10.0			
		398	-8.0			
		501	-6.0			
		631	-4.0			
		794	-2.0			
	Ref. (0 dB)	1000	0.0			
		1259	2.0			
			4.0			
		3162	9.9			
		3981	11.9			
		5012	13.9			
		6310	15.9		1	
		7943	18.0			
		10000	20.2			
	Probe Sensitivity at	Probe Sensitivity at 1000 Hz. Probe Level Linearity Ref. (0 dB) Probe Frequency Response	Probe Sensitivity at 1000 Hz. dBV/A/m Probe Level Linearity 6 Ref. (0 dB) 0 -6 -12 Probe Frequency Response 100 126 158 200 251 316 398 501 631 794 Ref. (0 dB) 1000 1259 1585 1995 2512 3162 3981 5012 6310 7943	Probe Sensitivity at 1000 Hz. dBV/A/m -60.41 Probe Level Linearity Ref. (0 dB) 0 0.00 -6 -6.03 -12 -12.05 Probe Frequency Response Hz Probe Frequency Response Probe Frequency Response Ref. (0 dB) 0 -20.0 126 -17.9 158 -15.9 200 -13.9 251 -11.9 316 -10.0 398 -8.0 501 -6.0 631 -4.0 794 -2.0 Ref. (0 dB) 1000 0.0 1259 2.0 Ref. (0 dB) 1995 6.0 1995 6.	Probe Sensitivity at 1000 Hz. dBV/A/m -60.41 Probe Level Linearity Ref. (0 dB) R	

Instruments used for calibration:			Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N 36064102	1-Oct-2015	,287708	1-Oct-2016
HP	34401A ·	S/N 36102471	1-Oct-2015	,287708	1-Oct-2016
HP	33120A	S/N 36043716	1-Oct-2015	,287708	1-Oct-2016
B&K	2133	S/N 1583254	1-Oct-2015	683/284413-14	1-Oct-2016

Cal. Date: 17-Nov-2015 Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: Felix Christopher

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

FCC ID: ZNFVS987	PCTEST	HAC (T-COIL) TEST REPORT	LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogg 100 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 108 of 115

© 2016 PCTEST Engineering Laboratory, Inc.

REV 3.1.M

13. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Daga 100 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 109 of 115

14. REFERENCES

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- 2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v04," October 31, 2013
- FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v01r01," October 31, 2013
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- 11. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, "U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- 12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dags 110 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 110 of 115

- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- 20. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFVS987	HAC (T-COIL) TEST REPORT		LG	Reviewed by: Quality Manager
Filename:	Test Dates:	EUT Type:		Dogo 111 of 115
0Y1601180126-R3.ZNF	01/22/2016 - 02/25/2016	Portable Handset		Page 111 of 115