

7.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

Frequency range : 9 kHz ~ 30 MHz

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

Frequency range : 30 MHz ~ 10 GHz, 10 GHz ~ 25 GHz

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

7.4. Test Results

7.4.1. Radiated Emissions

9 kHz ~ 25 GHz Data (Modulation : GFSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2388.69	H	Y	PK	53.31	2.76	N/A	N/A	56.07	74.00	17.93
2388.69	H	Y	AV	53.31	2.76	-24.79	N/A	31.28	54.00	22.72
4804.40	V	Y	PK	49.85	1.63	N/A	N/A	51.48	74.00	22.52
4804.40	V	Y	AV	49.85	1.63	-24.79	N/A	26.69	54.00	27.31

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.27	V	Y	PK	50.32	1.61	N/A	N/A	51.93	74.00	22.07
4882.27	V	Y	AV	50.32	1.61	-24.79	N/A	27.14	54.00	26.86

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.69	H	Y	PK	53.12	3.26	N/A	N/A	56.38	74.00	17.62
2483.69	H	Y	AV	53.12	3.26	-24.79	N/A	31.59	54.00	22.41
4959.98	V	Y	PK	50.44	1.75	N/A	N/A	52.19	74.00	21.81
4959.98	V	Y	AV	50.44	1.75	-24.79	N/A	27.40	54.00	26.60

▪ Note.

- The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{-9.54 \text{ dB}}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- D.C.F Calculation. (D.C.F = Duty Cycle Correction Factor)
- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20 \text{ minimum hopping channels}$, where T = pulse width = **2.88 ms**
- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 100 / (2.88 \times 20) = 1.74 \approx 2$
- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$
- D.C.F = $20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = \underline{-24.79 \text{ dB}}$
- Sample Calculation.
Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

9 kHz ~ 25 GHz Data (Modulation : $\pi/4$ DQPSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.64	H	X	PK	51.73	2.77	N/A	N/A	54.50	74.00	19.50
2389.64	H	X	AV	51.73	2.77	-24.79	N/A	29.71	54.00	24.29
4803.53	V	Y	PK	49.94	1.63	N/A	N/A	51.57	74.00	22.43
4803.53	V	Y	AV	49.94	1.63	-24.79	N/A	26.78	54.00	27.22

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.71	V	Y	PK	50.08	1.61	N/A	N/A	51.69	74.00	22.31
4881.71	V	Y	AV	50.08	1.61	-24.79	N/A	26.90	54.00	27.10

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.04	H	X	PK	52.12	3.27	N/A	N/A	55.39	74.00	18.61
2484.04	H	X	AV	52.12	3.27	-24.79	N/A	30.60	54.00	23.40
4960.17	V	Y	PK	50.02	1.75	N/A	N/A	51.77	74.00	22.23
4960.17	V	Y	AV	50.02	1.75	-24.79	N/A	26.98	54.00	27.02

▪ Note.

- The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{-9.54 \text{ dB}}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- D.C.F Calculation. (D.C.F = Duty Cycle Correction Factor)
- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20$ minimum hopping channels, where T = pulse width = **2.88 ms**
- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 100 / (2.88 \times 20) = 1.74 \approx 2$
- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$
- D.C.F = $20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = \underline{-24.79 \text{ dB}}$
- Sample Calculation.
Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

9 kHz ~ 25 GHz Data (Modulation : 8DPSK)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.84	H	X	PK	51.28	2.77	N/A	N/A	54.05	74.00	19.95
2389.84	H	X	AV	51.28	2.77	-24.79	N/A	29.26	54.00	24.74
4803.78	V	Y	PK	49.71	1.63	N/A	N/A	51.34	74.00	22.66
4803.78	V	Y	AV	49.71	1.63	-24.79	N/A	26.55	54.00	27.45

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.17	V	Y	PK	50.12	1.61	N/A	N/A	51.73	74.00	22.27
4882.17	V	Y	AV	50.12	1.61	-24.79	N/A	26.94	54.00	27.06

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.77	H	X	PK	54.07	3.26	N/A	N/A	57.33	74.00	16.67
2483.77	H	X	AV	54.07	3.26	-24.79	N/A	32.54	54.00	21.46
4959.59	V	Y	PK	49.89	1.75	N/A	N/A	51.64	74.00	22.36
4959.59	V	Y	AV	49.89	1.75	-24.79	N/A	26.85	54.00	27.15


▪ Note.

- The radiated emissions were investigated 9 kHz to 25 GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- D.C.F Calculation. (D.C.F = Duty Cycle Correction Factor)
- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20$ minimum hopping channels, where T = pulse width = **2.88 ms**
- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 100 / (2.88 \times 20) = 1.74 \approx 2$
- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$
- D.C.F = $20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(5.76 / 100) = -24.79 \text{ dB}$
- Sample Calculation.
Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

7.4.2. Conducted Spurious Emissions


Low Band-edge

Lowest Channel & Modulation : GFSK


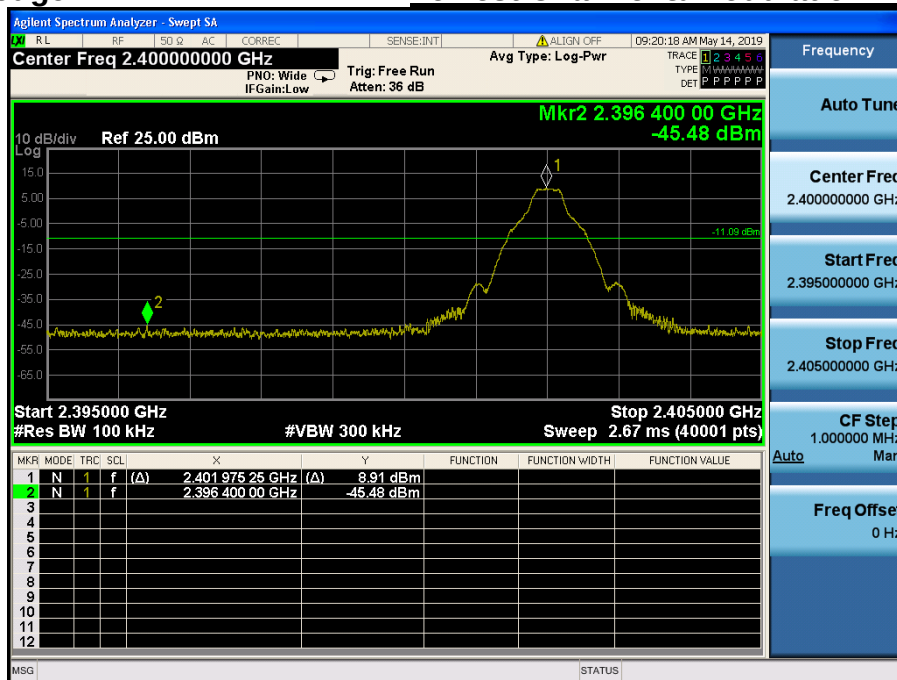



Low Band-edge

Hopping mode & Modulation : GFSK

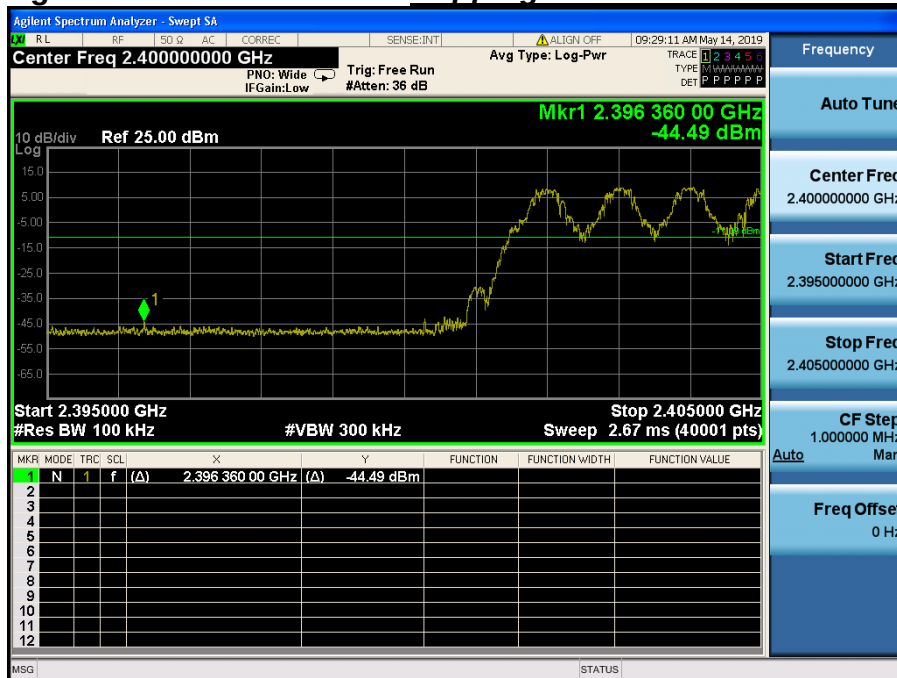


Conducted Spurious Emissions Lowest Channel & Modulation : GFSK

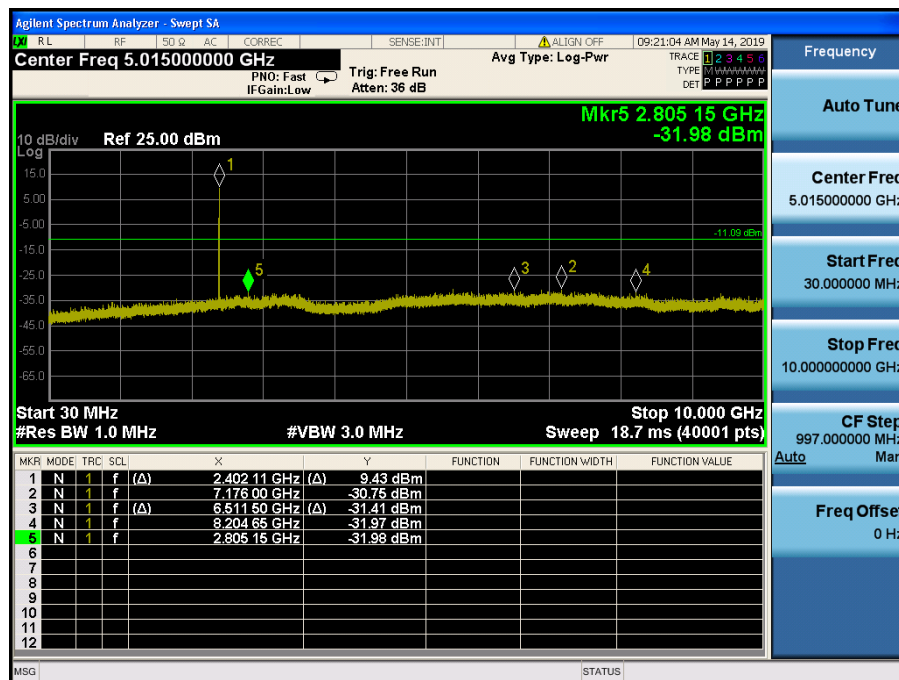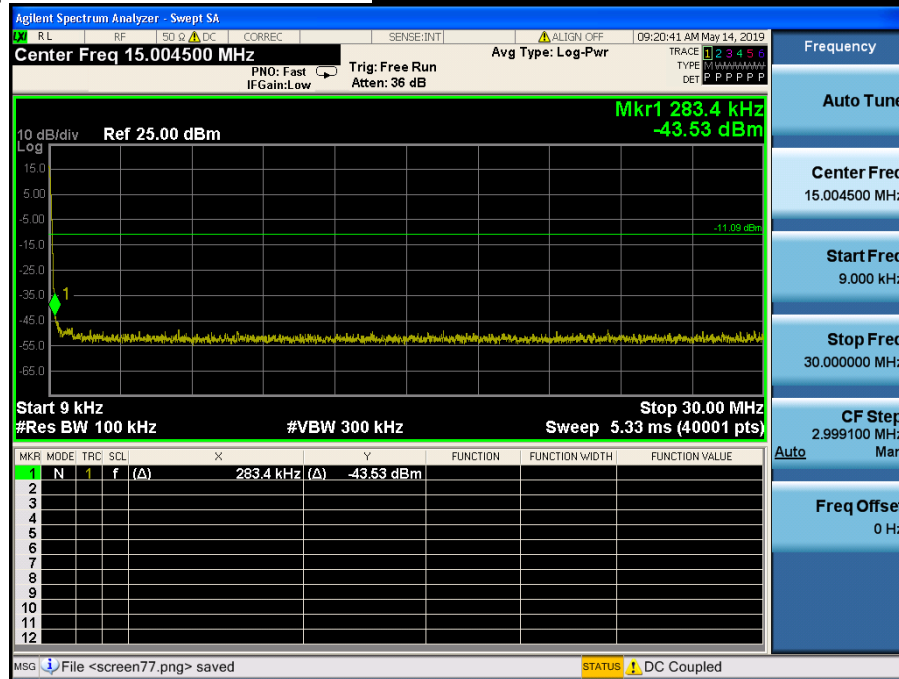

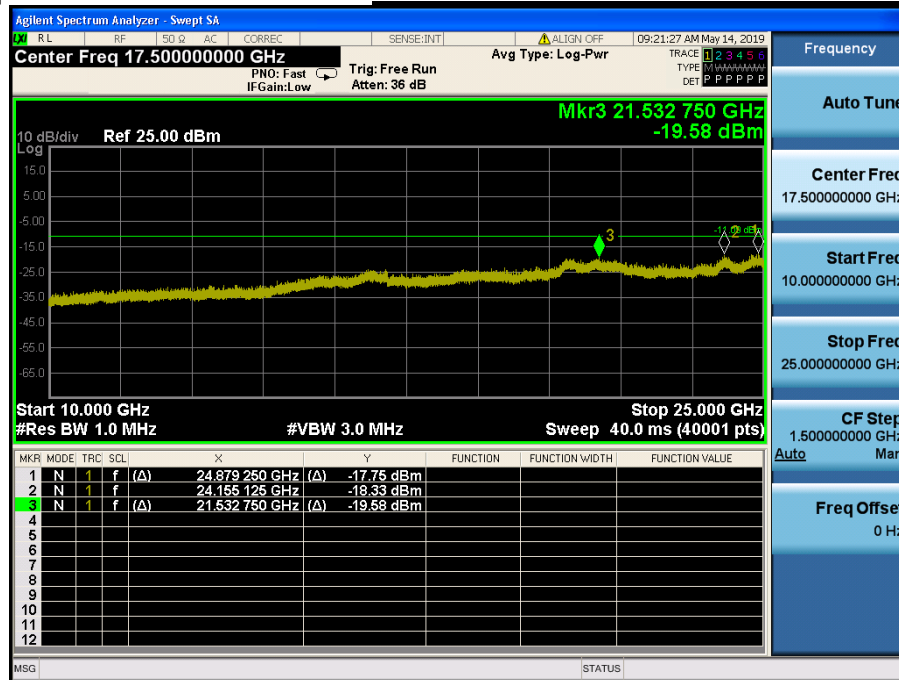Conducted Spurious Emissions ***Lowest Channel & Modulation : GFSK***


Reference for limit

Middle Channel & Modulation : GFSK

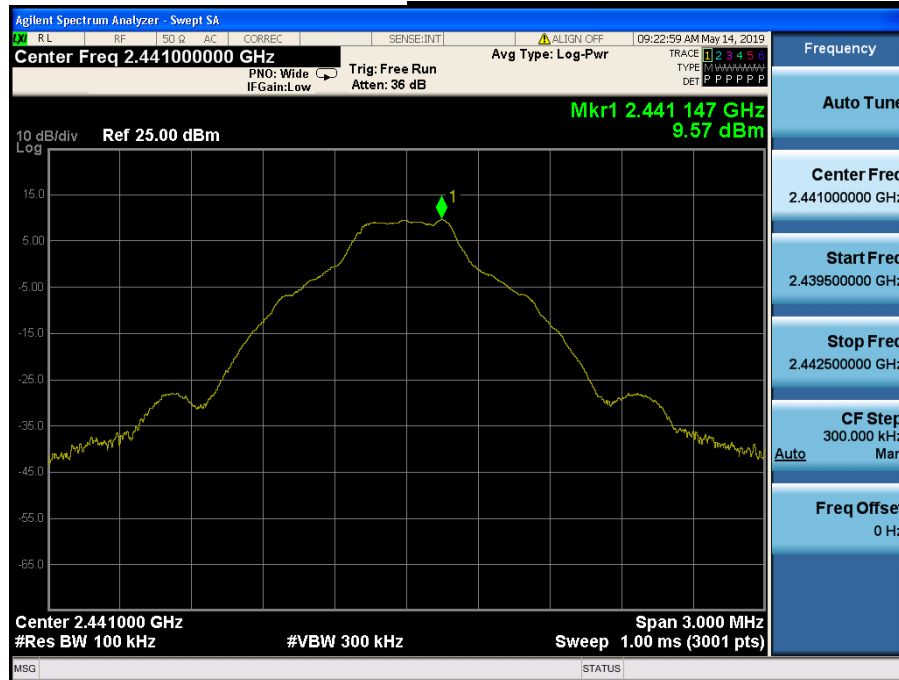


Conducted Spurious Emissions


Middle Channel & Modulation : GFSK

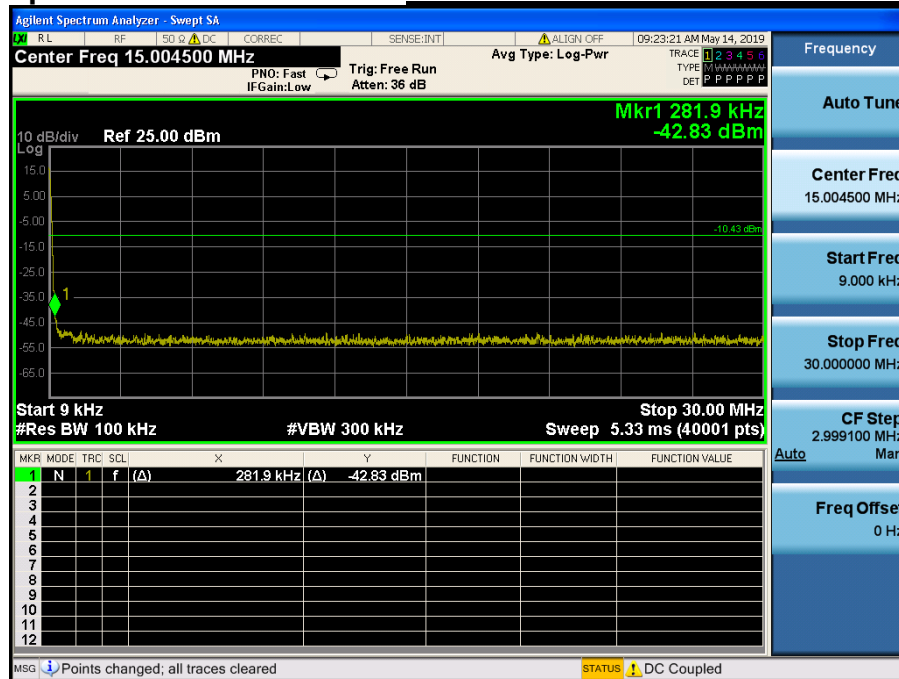

Conducted Spurious Emissions

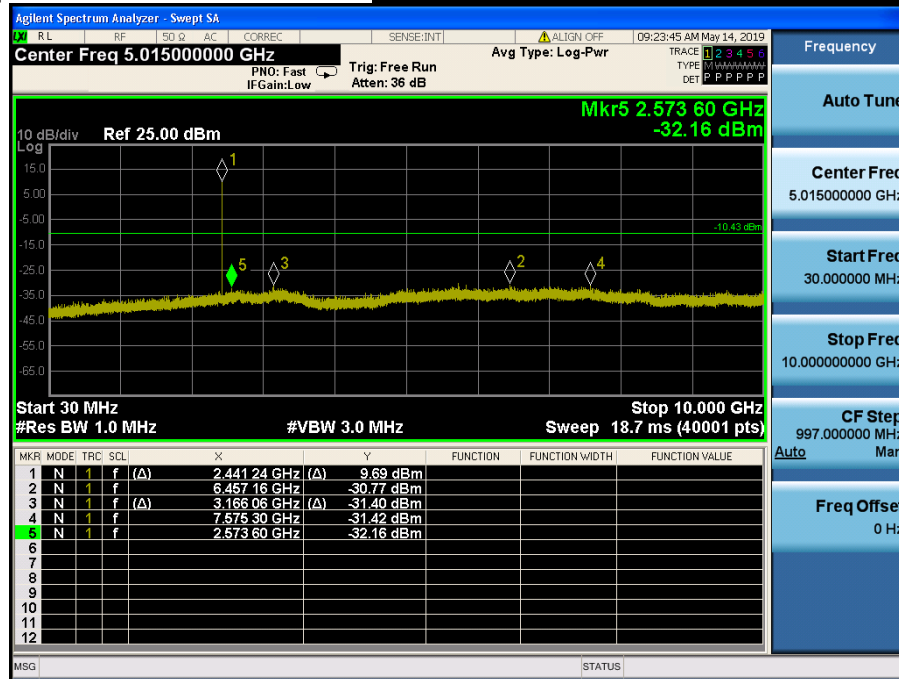Middle Channel & Modulation : GFSK



High Band-edge

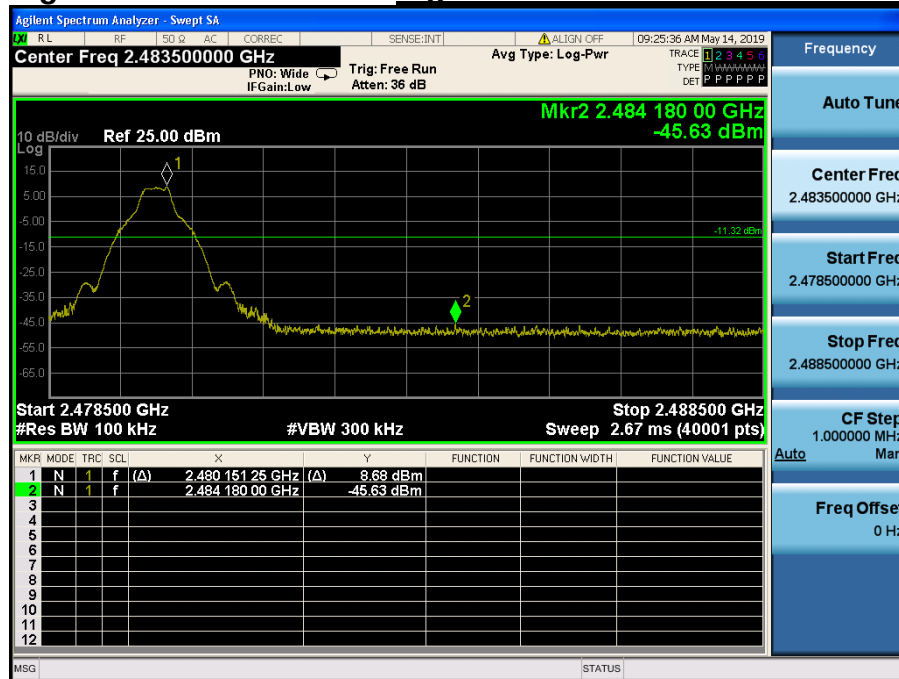Highest Channel & Modulation : GFSK


High Band-edge

Hopping mode & Modulation : GFSK


Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*

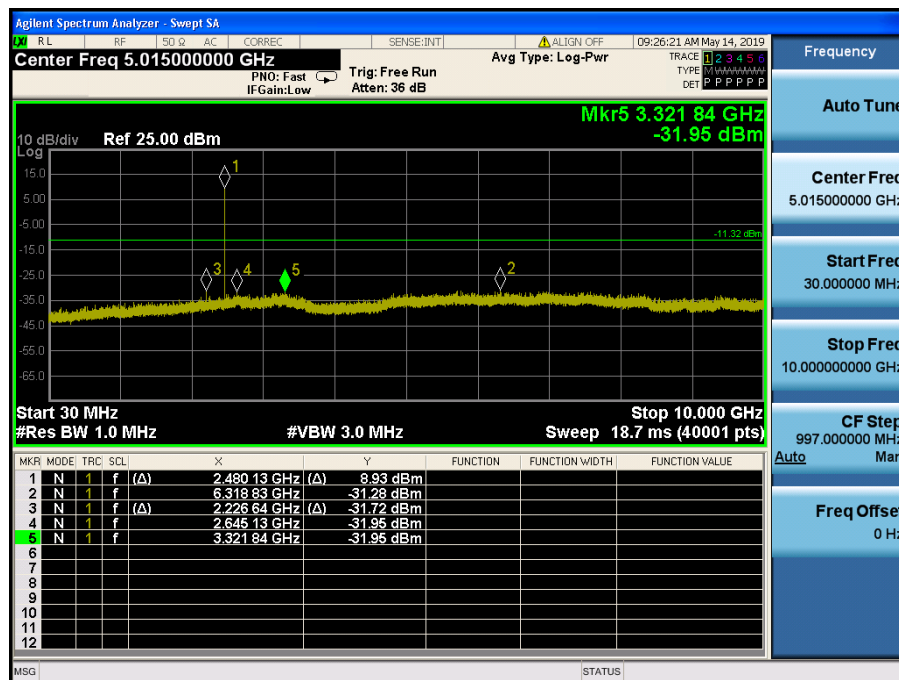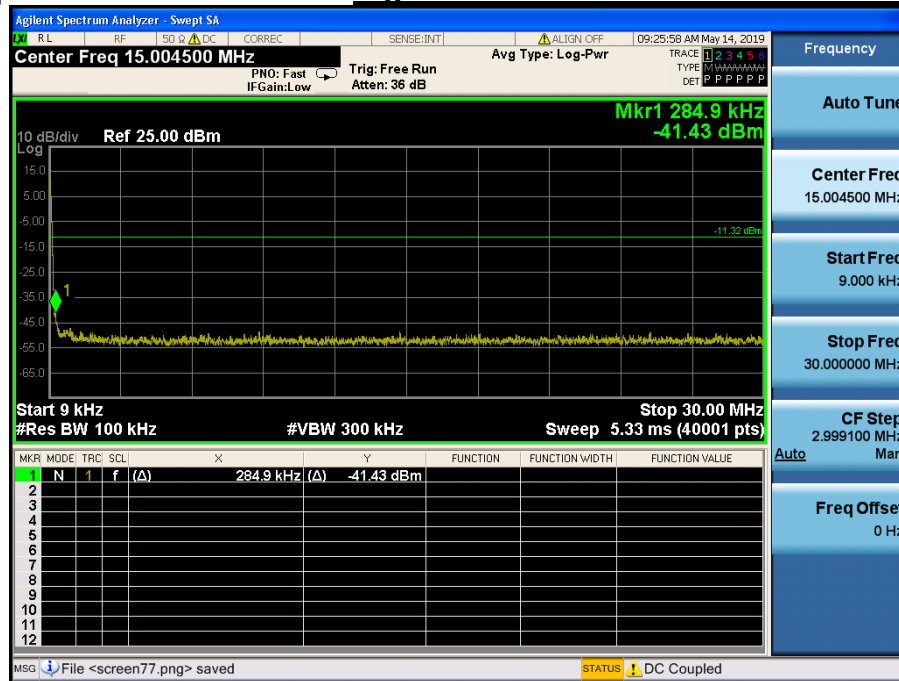


Conducted Spurious Emissions Highest Channel & Modulation : GFSK

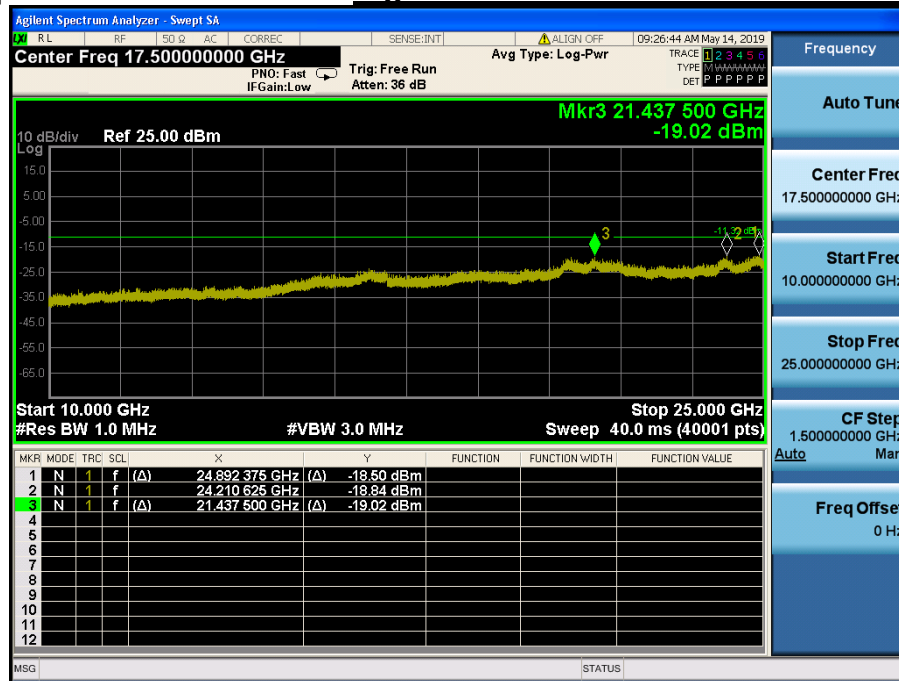



Low Band-edge

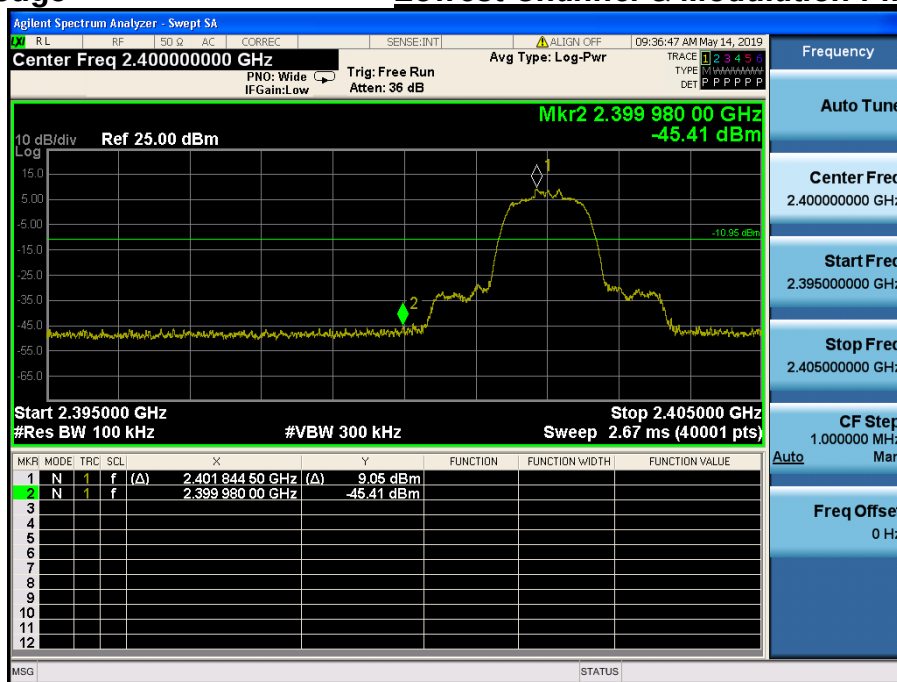Lowest Channel & Modulation : $\pi/4$ DQPSK


Low Band-edge

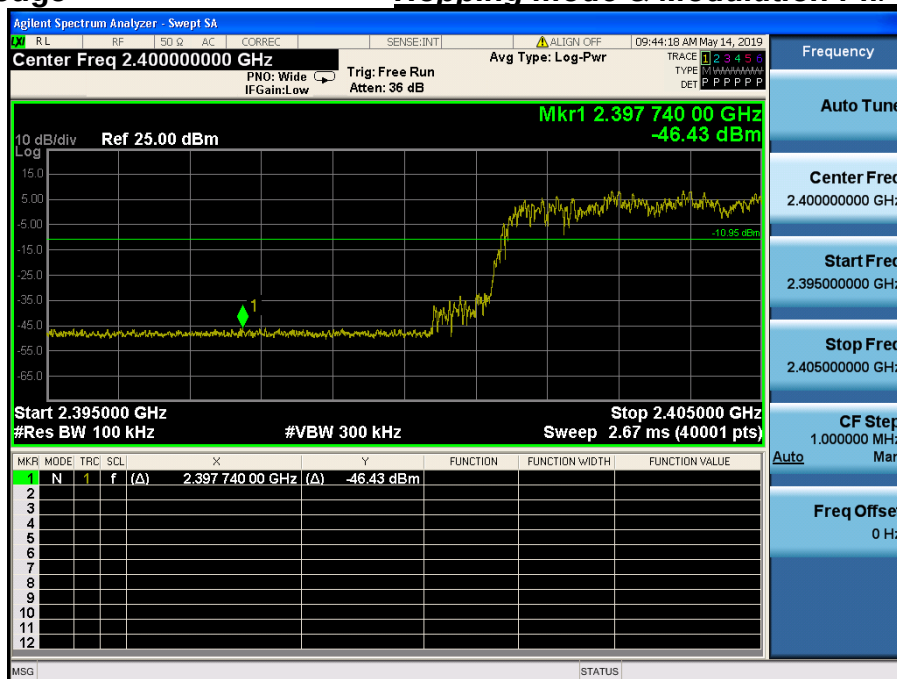Hopping mode & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions *Lowest Channel & Modulation : $\pi/4$ DQPSK*

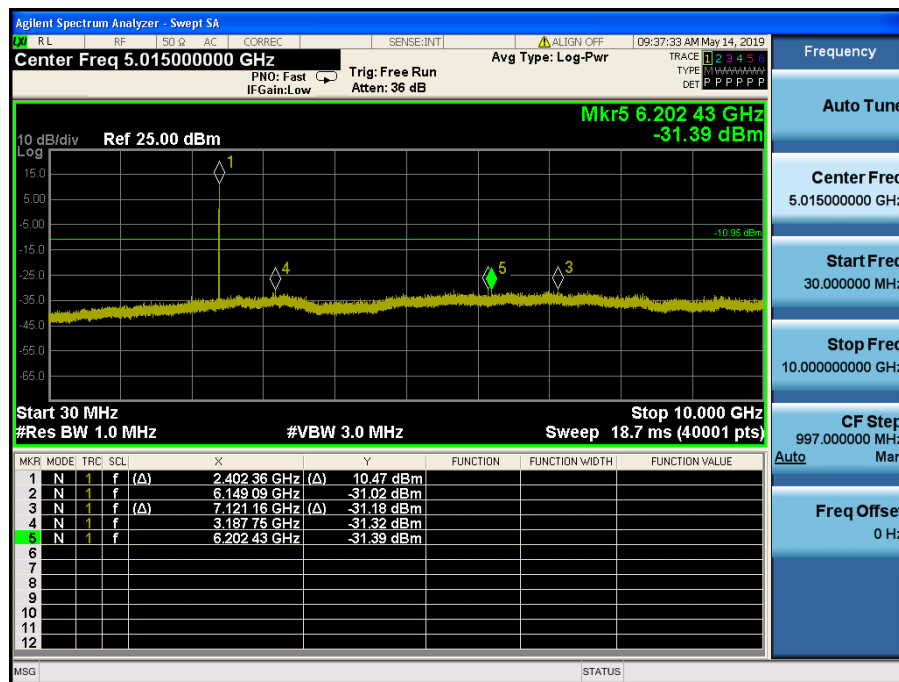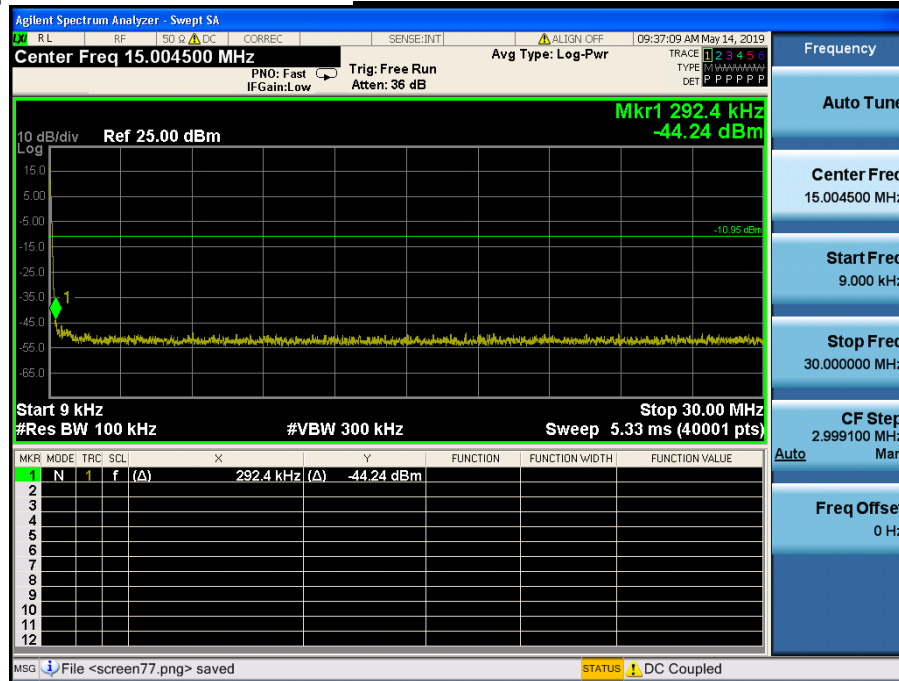


Conducted Spurious Emissions *Lowest Channel & Modulation : $\pi/4$ DQPSK*

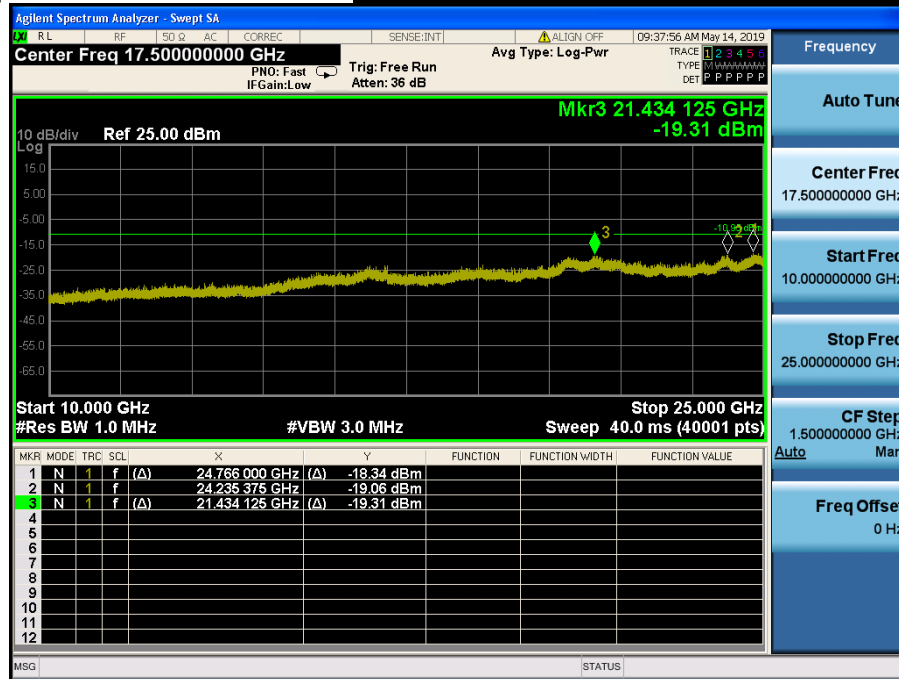


Reference for limit



Middle Channel & Modulation : $\pi/4$ DQPSK

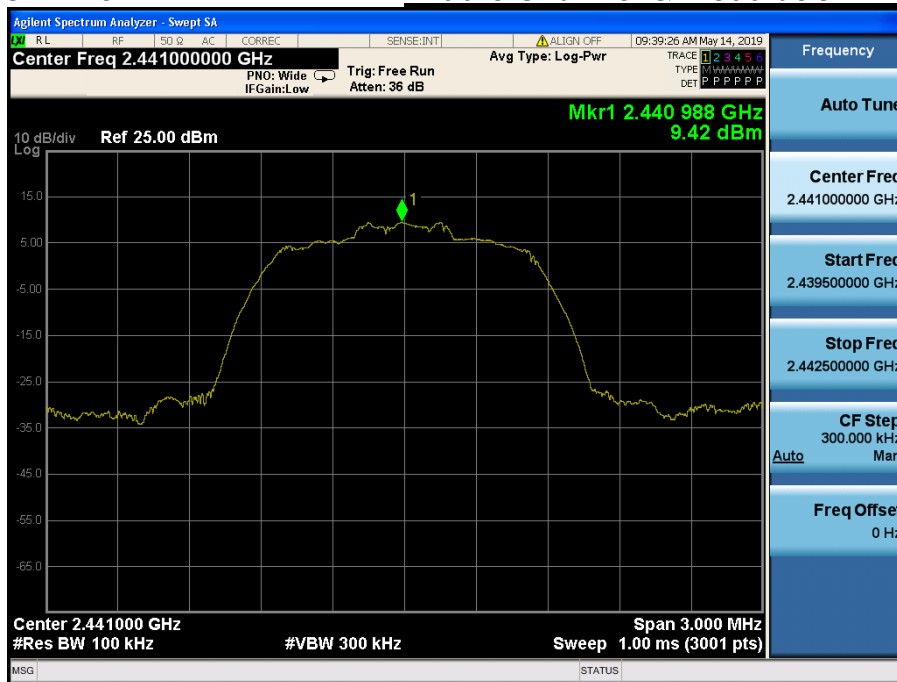


Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ DQPSK

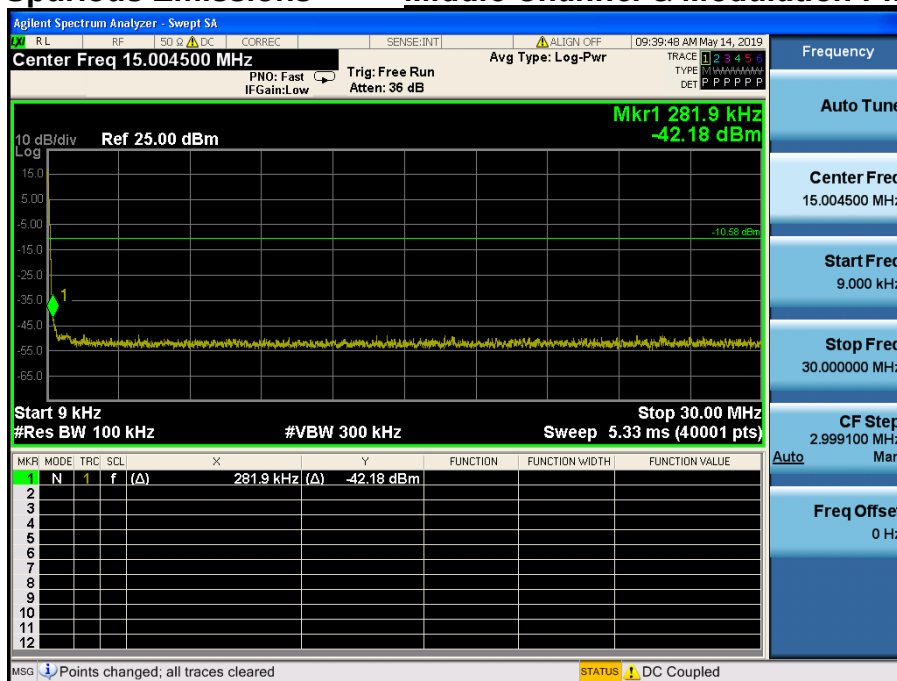


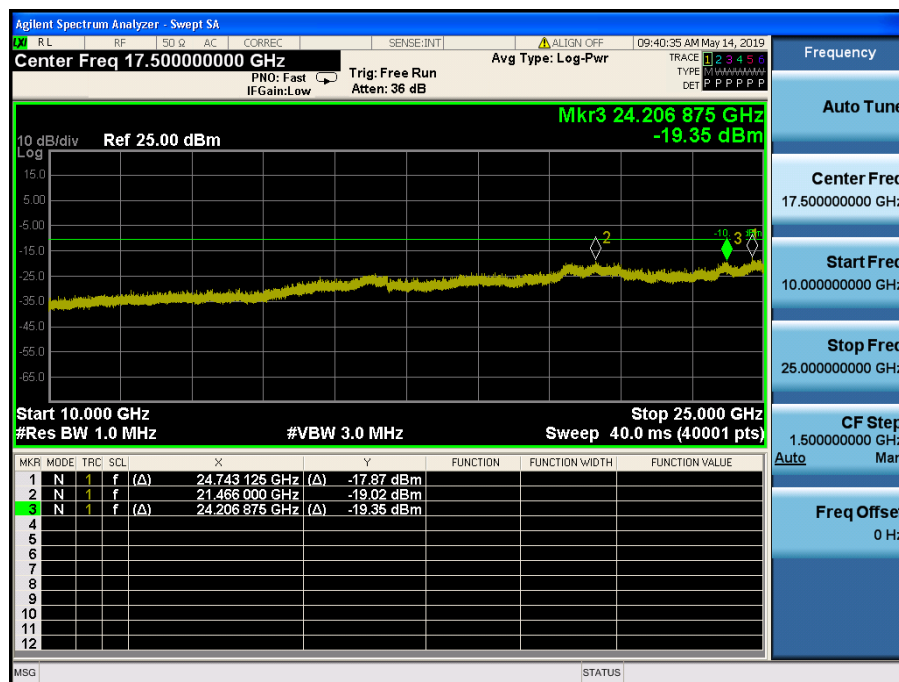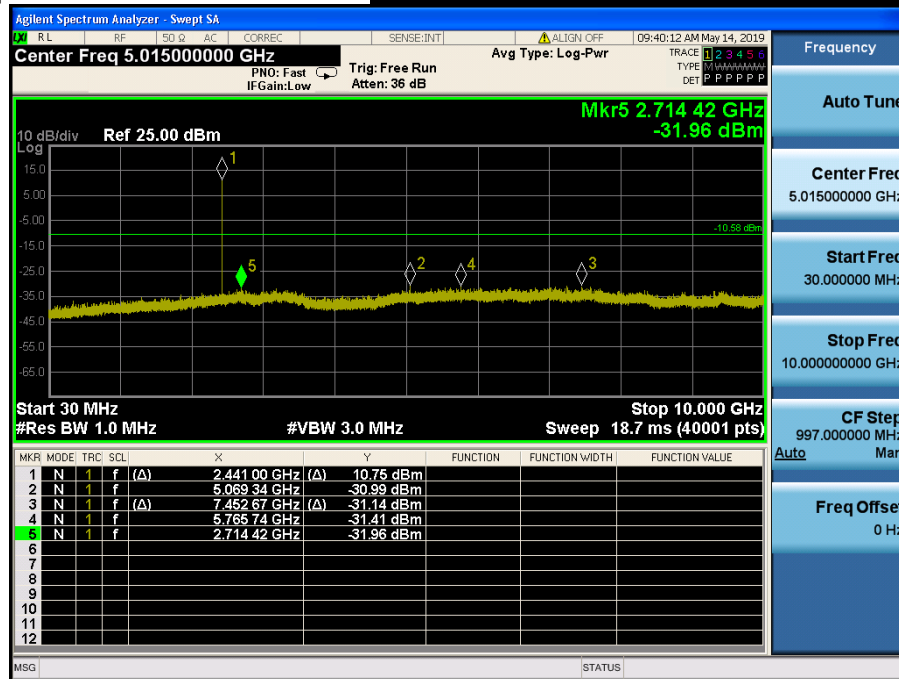Conducted Spurious Emissions *Middle Channel & Modulation : $\pi/4$ DQPSK*

High Band-edge


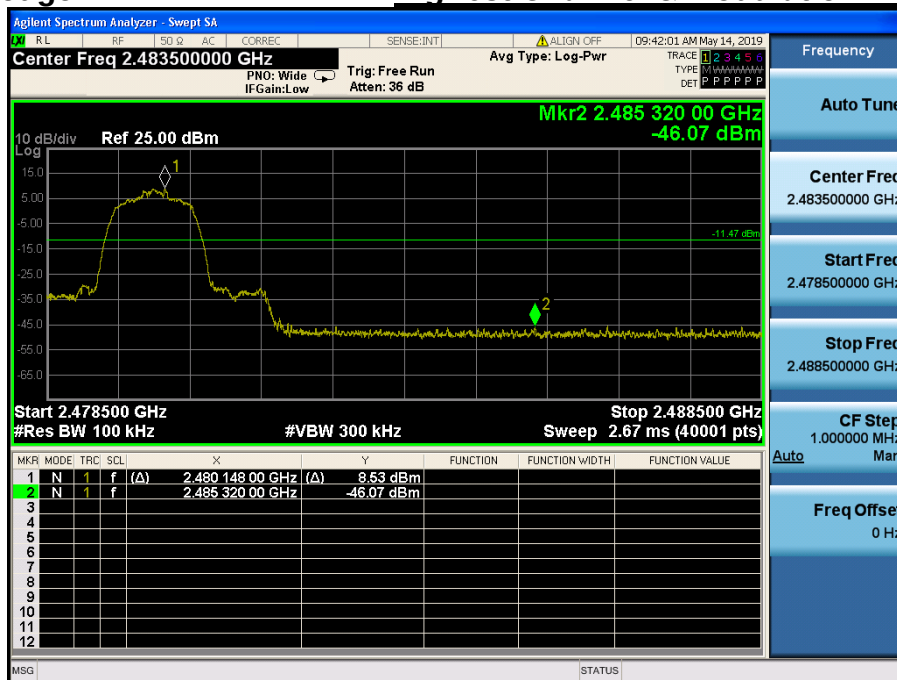
Highest Channel & Modulation : $\pi/4$ DQPSK

High Band-edge

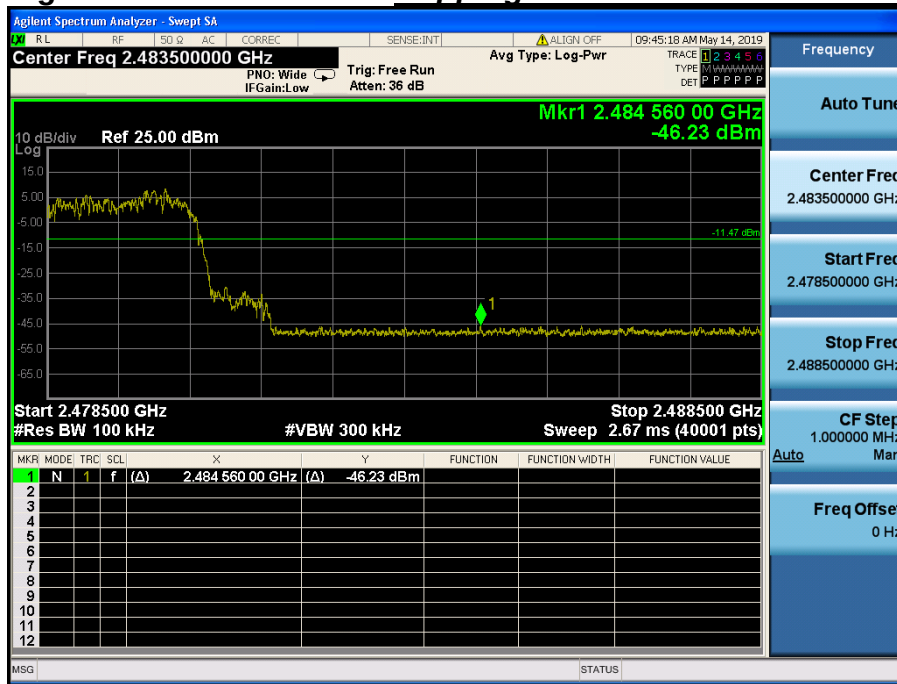
Hopping mode & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

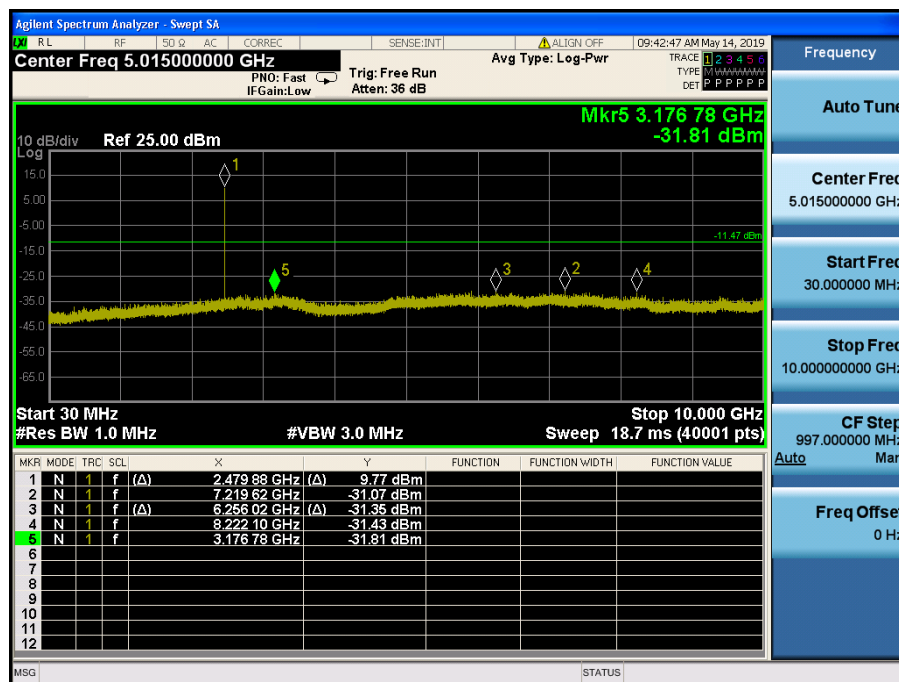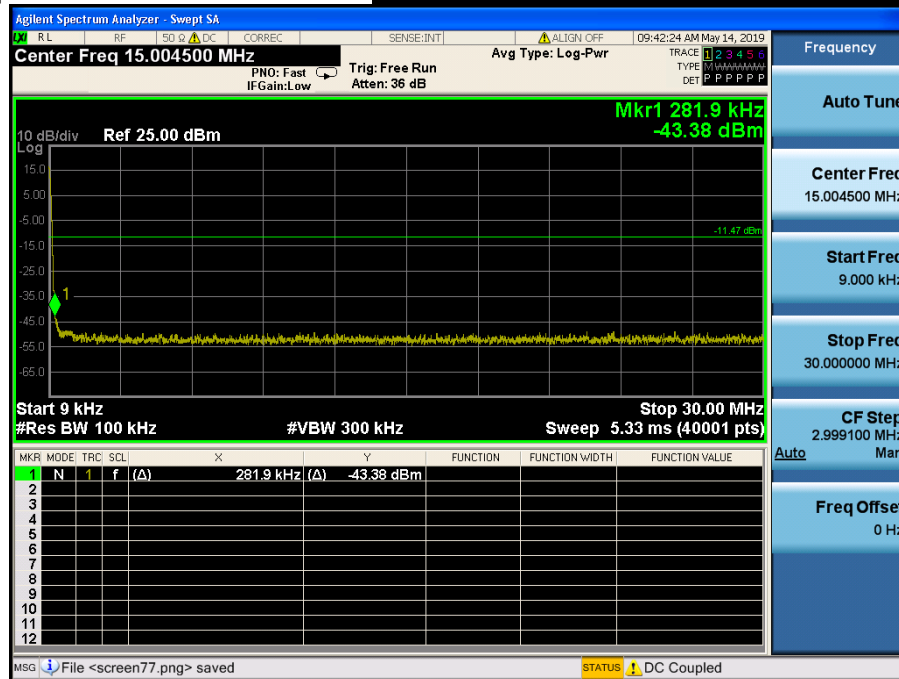


Conducted Spurious Emissions *Highest Channel & Modulation : $\pi/4$ DQPSK*

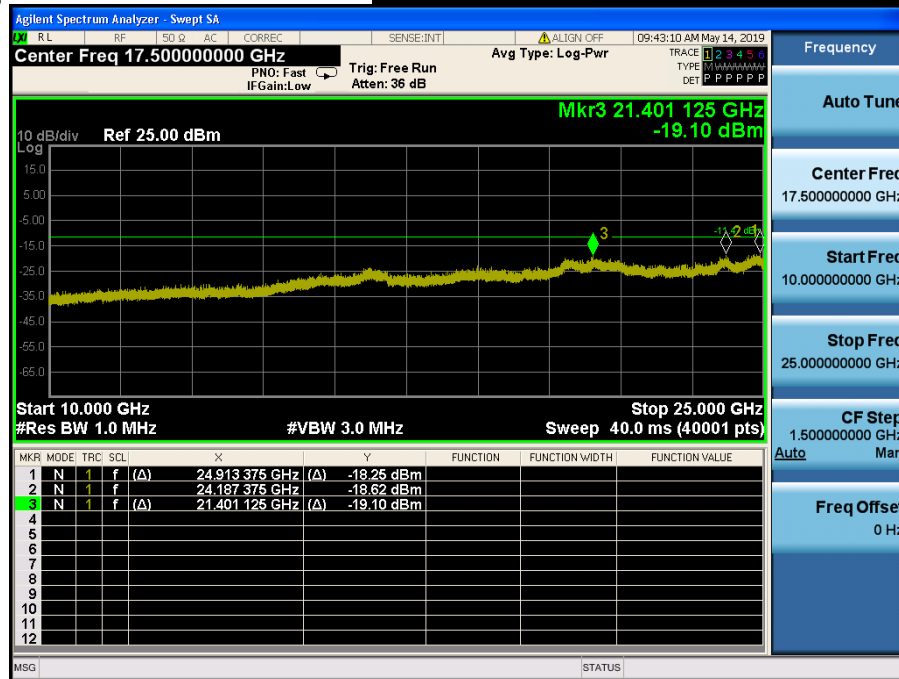


Low Band-edge

Lowest Channel & Modulation : 8DPSK


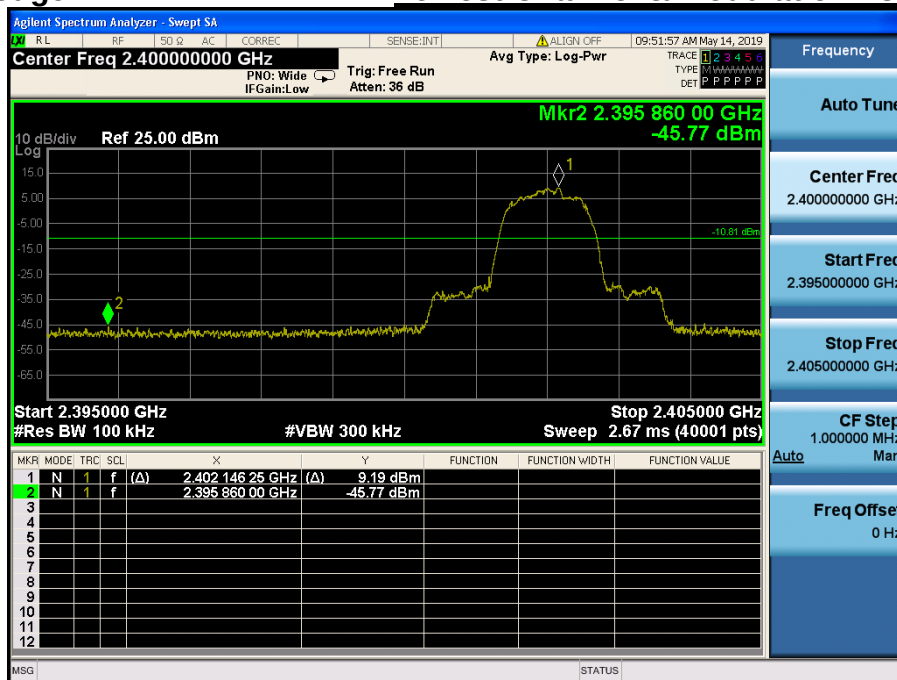


Low Band-edge


Hopping mode & Modulation : 8DPSK

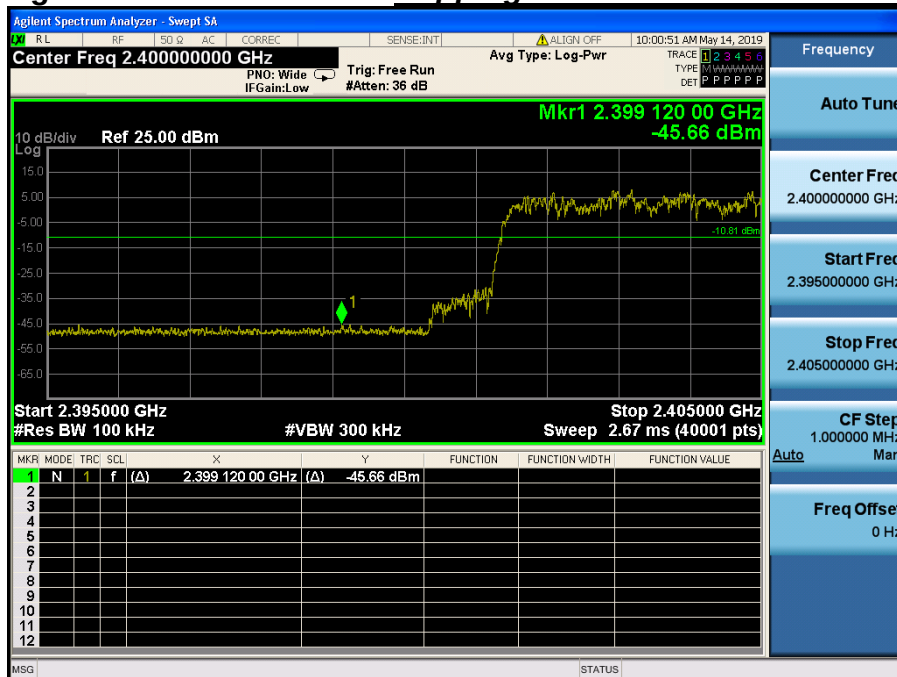

Conducted Spurious Emissions

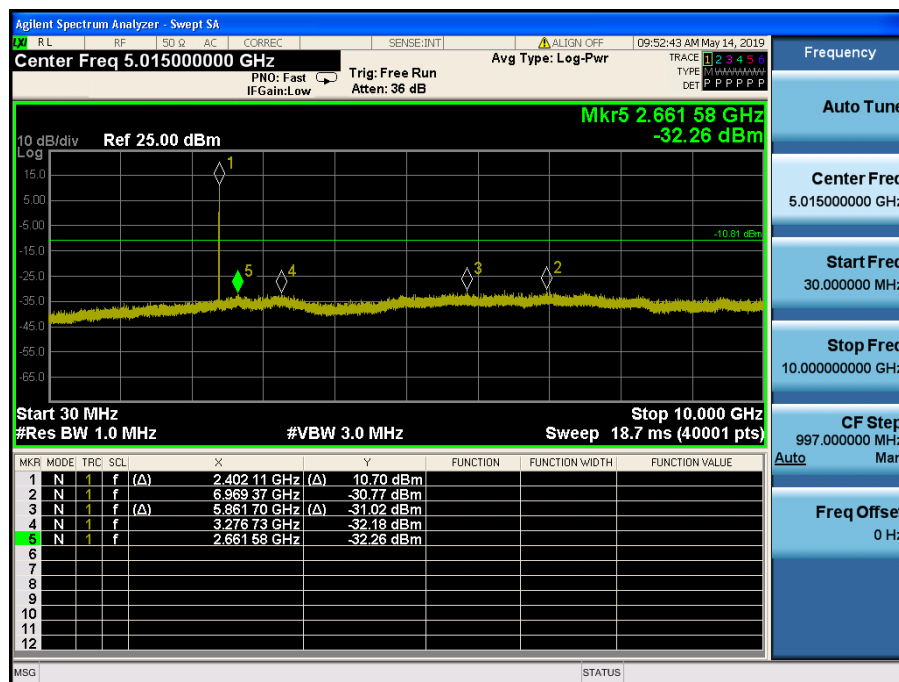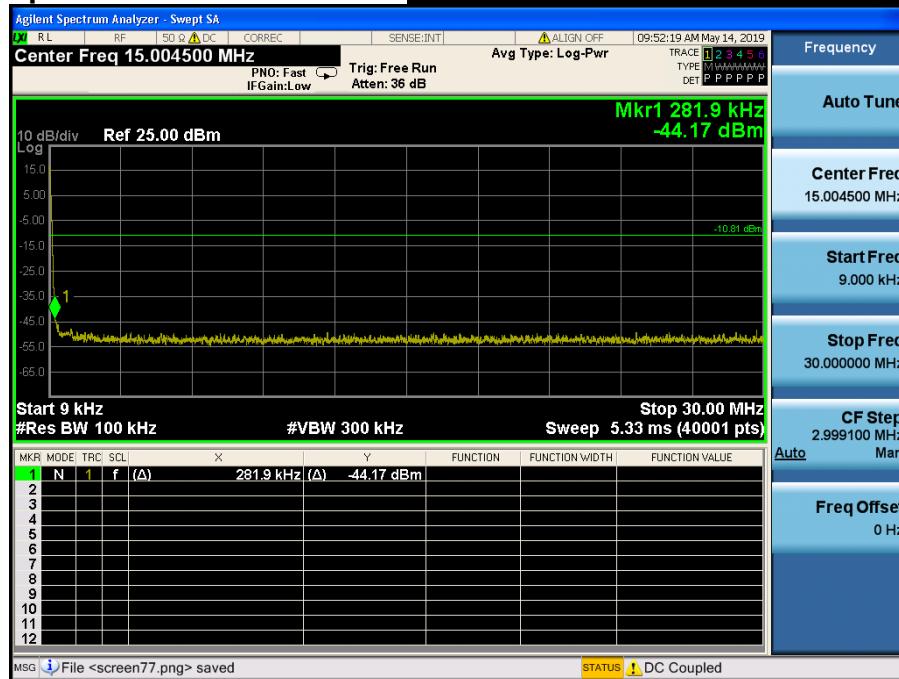
Lowest Channel & Modulation : 8DPSK

Conducted Spurious Emissions Lowest Channel & Modulation : 8DPSK

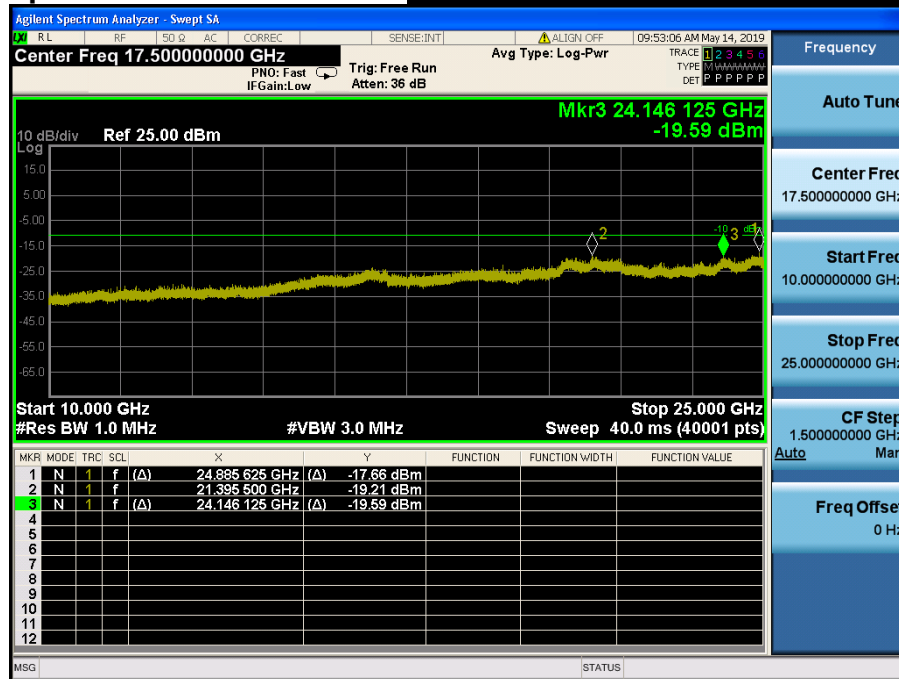


Reference for limit

Middle Channel & Modulation : 8DPSK

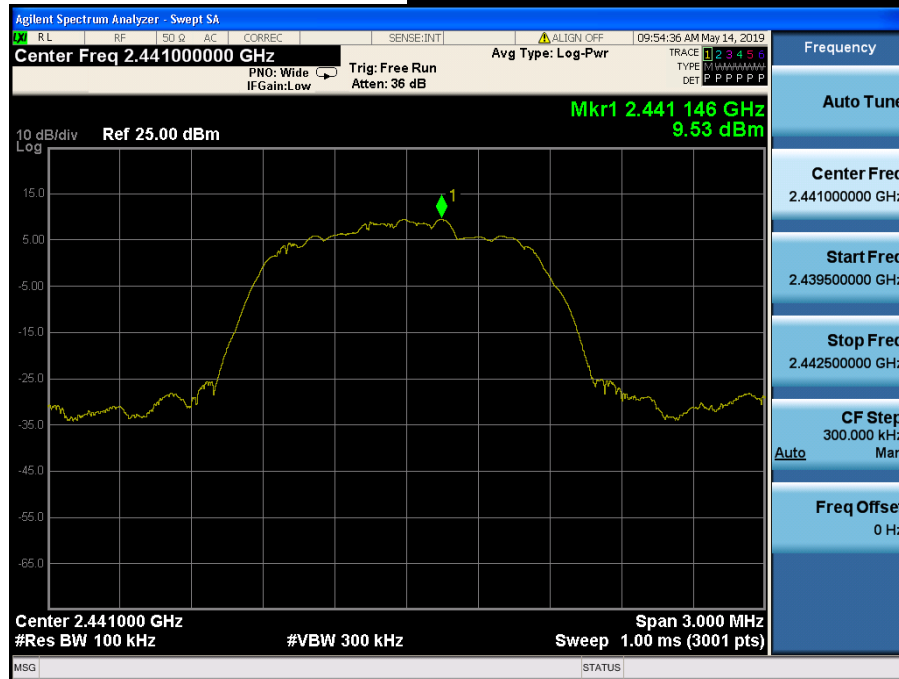



Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

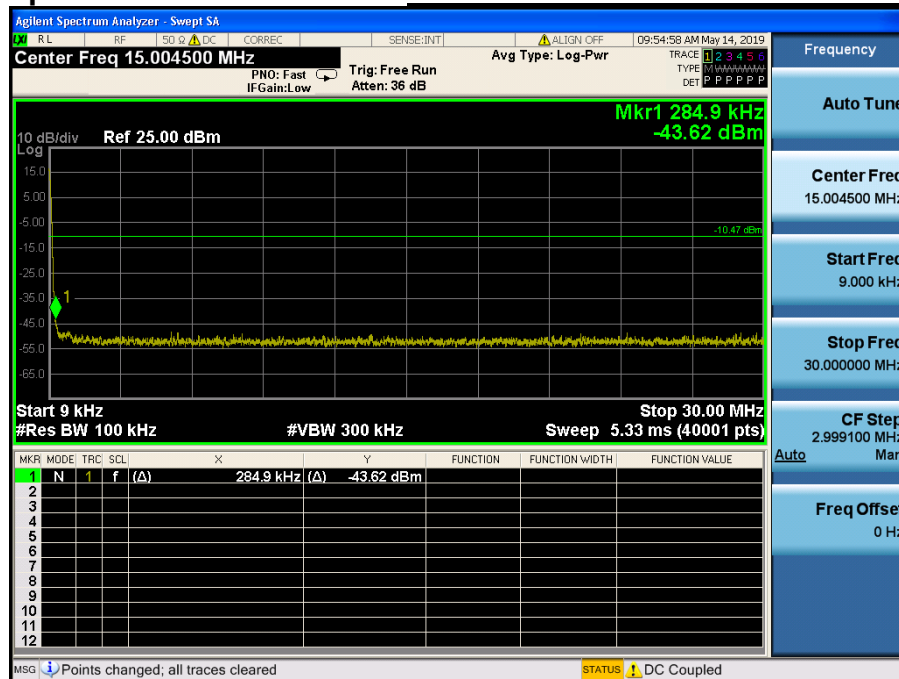


Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

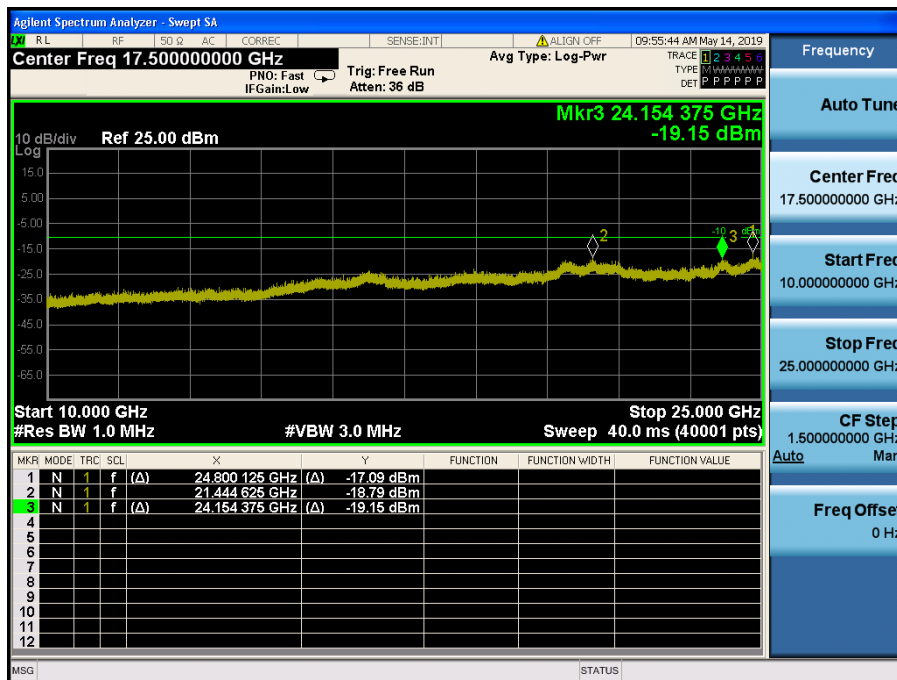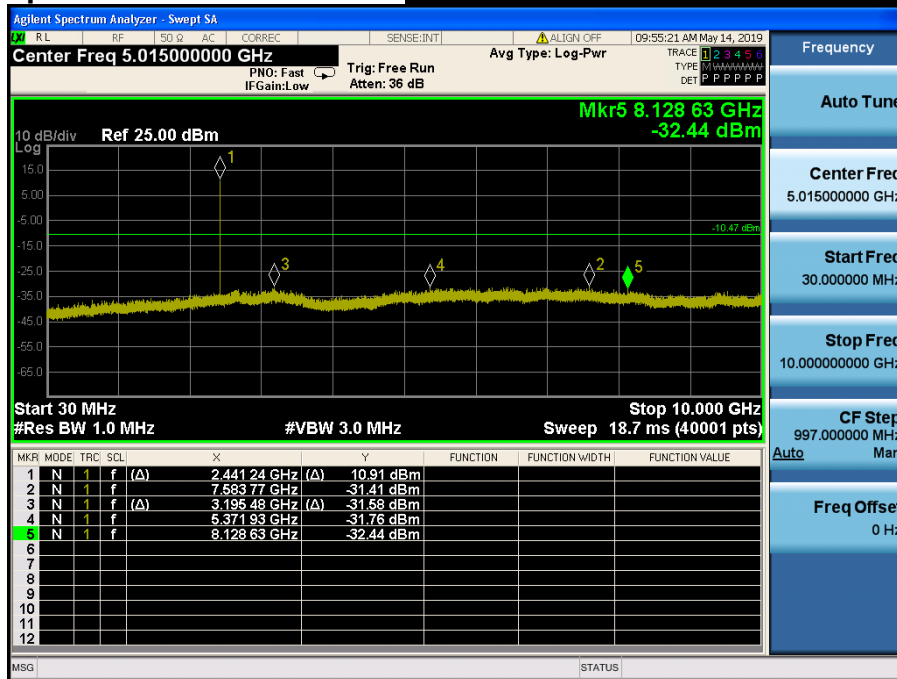

High Band-edge


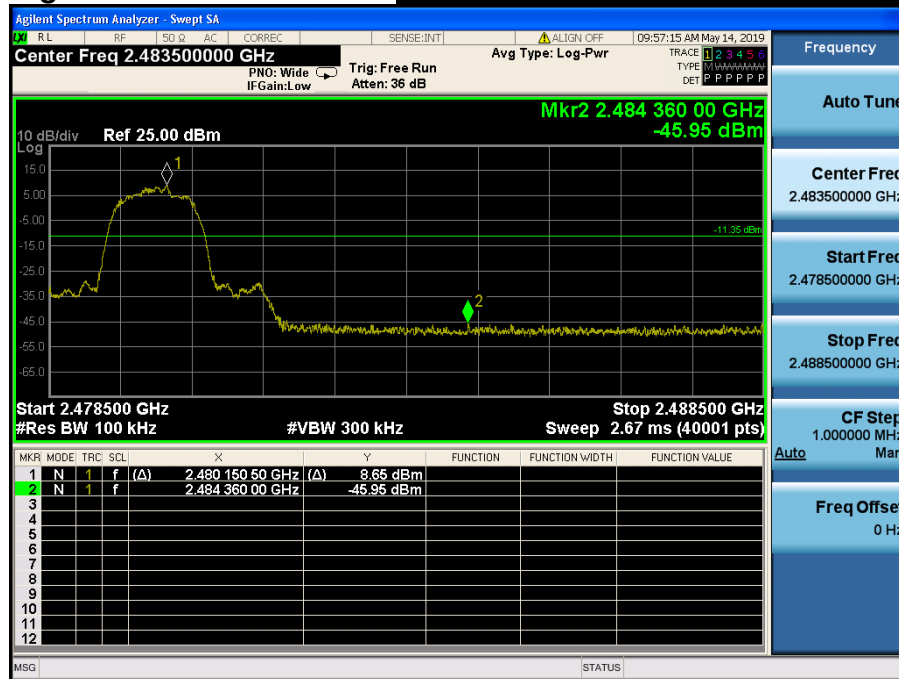
Highest Channel & Modulation : 8DPSK

High Band-edge

Hopping mode & Modulation : 8DPSK


Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

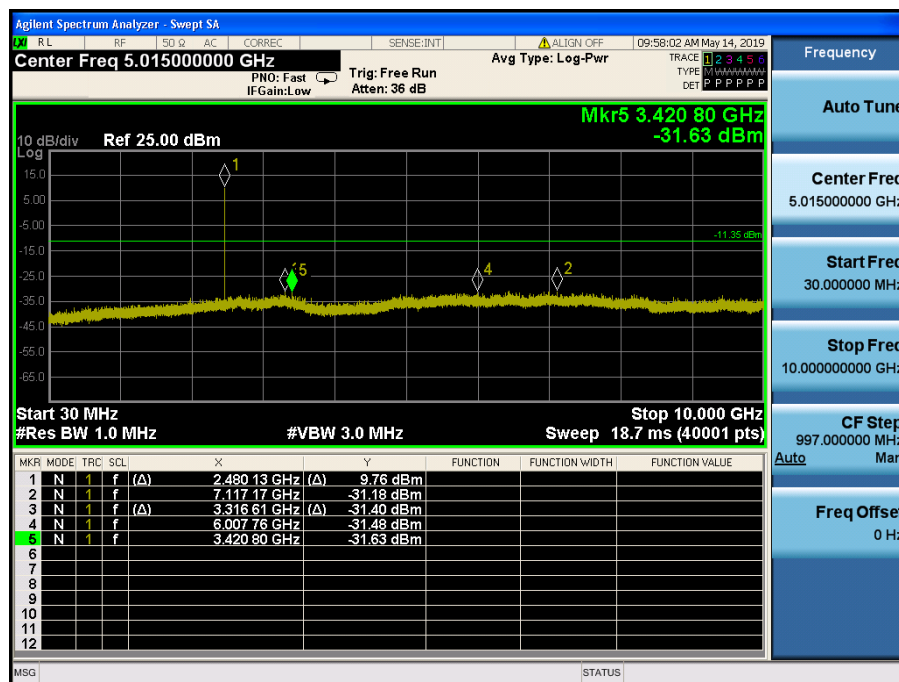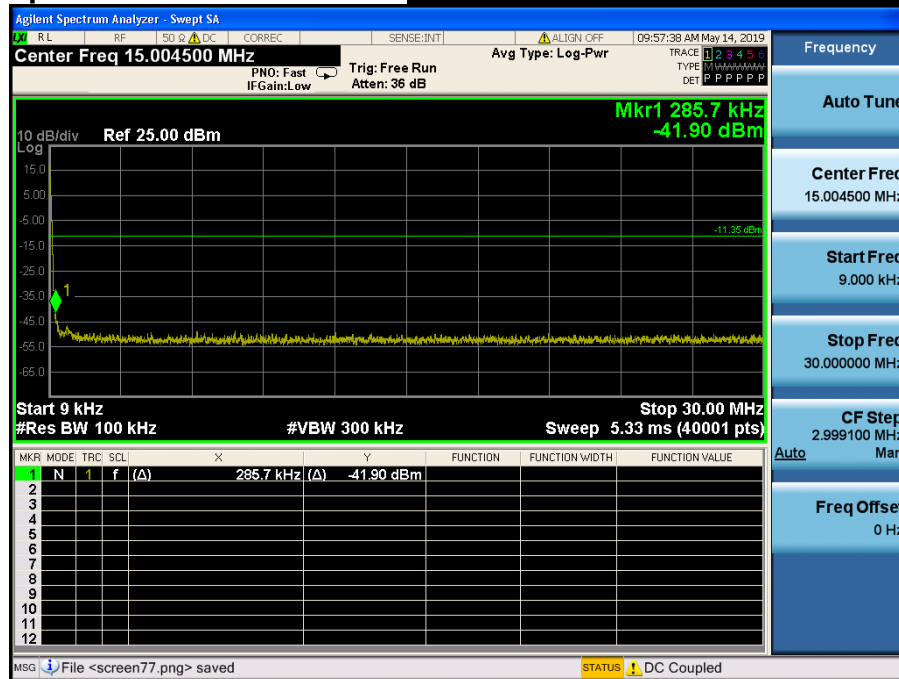

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

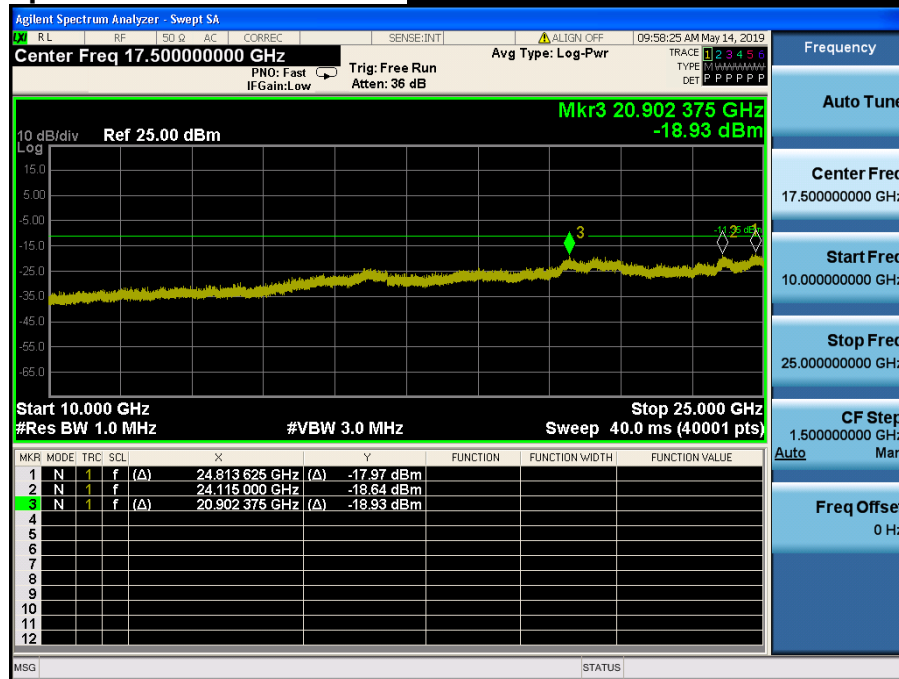

8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

See test photographs for the actual connections between EUT and support equipment.

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4 Test Results

AC Line Conducted Emissions (Graph)

Results of Conducted Emission

DTNC

Date 2019-05-10

Order No.

LM-X320EMW

Reference No.

Model No.

Power Supply

120 V, 60 Hz

Serial No.

Temp/Humi.

23 °C / 35 %


Test Condition

BT

Operator

Jae Hyuk Bang

Memo

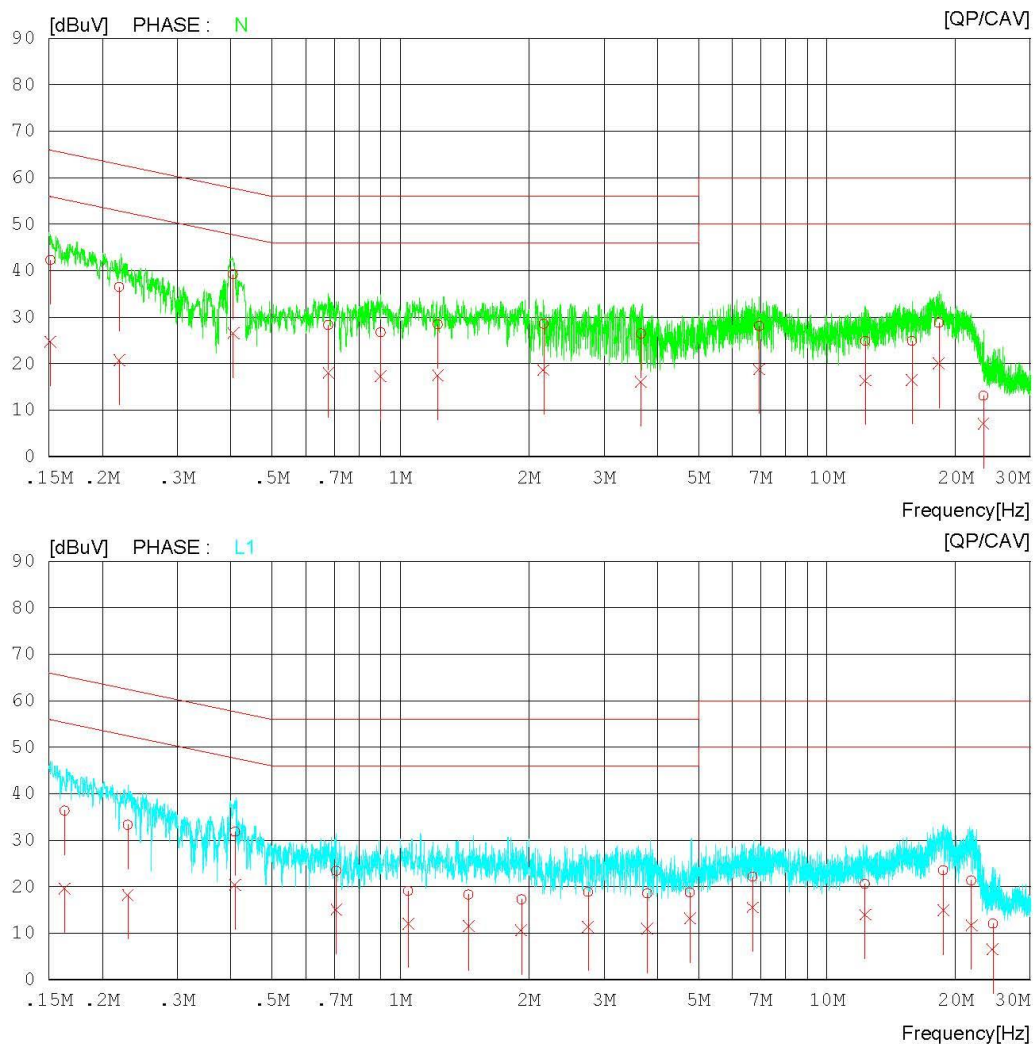LIMIT : FCC P15.207 QP
FCC P15.207 AV

AC Line Conducted Emissions (List) = Modulation : GFSK

Results of Conducted Emission

DTNC

Date 2019-05-10

Order No.
Model No. LM-X320EMW
Serial No.
Test Condition BT

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 35 %
Operator Jae Hyuk Bang

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.15117	32.33	14.73	9.94	42.27	24.67	65.94	55.94	23.67	31.27	N
2	0.21925	26.57	10.80	9.94	36.51	20.74	62.85	52.85	26.34	32.11	N
3	0.40538	29.23	16.63	9.95	39.18	26.58	57.74	47.74	18.56	21.16	N
4	0.67851	18.32	8.08	9.97	28.29	18.05	56.00	46.00	27.71	27.95	N
5	0.89816	16.78	7.37	9.97	26.75	17.34	56.00	46.00	29.25	28.66	N
6	1.22380	18.45	7.47	9.99	28.44	17.46	56.00	46.00	27.56	28.54	N
7	2.16520	18.46	8.60	10.03	28.49	18.63	56.00	46.00	27.51	27.37	N
8	3.66320	16.33	5.96	10.10	26.43	16.06	56.00	46.00	29.57	29.94	N
9	6.92840	17.87	8.54	10.22	28.09	18.76	60.00	50.00	31.91	31.24	N
10	12.28600	14.48	5.95	10.41	24.89	16.36	60.00	50.00	35.11	33.64	N
11	15.81280	14.43	6.03	10.49	24.92	16.52	60.00	50.00	35.08	33.48	N
12	18.28880	18.19	9.50	10.53	28.72	20.03	60.00	50.00	31.28	29.97	N
13	23.26520	2.43	-3.48	10.62	13.05	7.14	60.00	50.00	46.95	42.86	N
14	0.16326	26.40	9.59	9.94	36.34	19.53	65.30	55.30	28.96	35.77	L1
15	0.22948	23.33	8.28	9.94	33.27	18.22	62.47	52.47	29.20	34.25	L1
16	0.40973	21.84	10.37	9.95	31.79	20.32	57.65	47.65	25.86	27.33	L1
17	0.70709	13.36	5.08	9.96	23.32	15.04	56.00	46.00	32.68	30.96	L1
18	1.04400	9.08	2.10	9.97	19.05	12.07	56.00	46.00	36.95	33.93	L1
19	1.44480	8.27	1.49	9.99	18.26	11.48	56.00	46.00	37.74	34.52	L1
20	1.92040	7.15	0.57	10.03	17.18	10.60	56.00	46.00	38.82	35.40	L1
21	2.75120	8.77	1.28	10.06	18.83	11.34	56.00	46.00	37.17	34.66	L1
22	3.78920	8.42	0.78	10.11	18.53	10.89	56.00	46.00	37.47	35.11	L1
23	4.77140	8.58	3.04	10.16	18.74	13.20	56.00	46.00	37.26	32.80	L1
24	6.68980	11.94	5.30	10.22	22.16	15.52	60.00	50.00	37.84	34.48	L1
25	12.27280	10.15	3.55	10.39	20.54	13.94	60.00	50.00	39.46	36.06	L1
26	18.74040	12.96	4.39	10.51	23.47	14.90	60.00	50.00	36.53	35.10	L1
27	21.80960	10.80	1.07	10.57	21.37	11.64	60.00	50.00	38.63	38.36	L1
28	24.46440	1.42	-4.10	10.62	12.04	6.52	60.00	50.00	47.96	43.48	L1

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: **Comply**

**The antenna is attached on the device by means of unique coupling method (Spring Tension).
Therefore this E.U.T Complies with the requirement of §15.203**


- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.
--


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

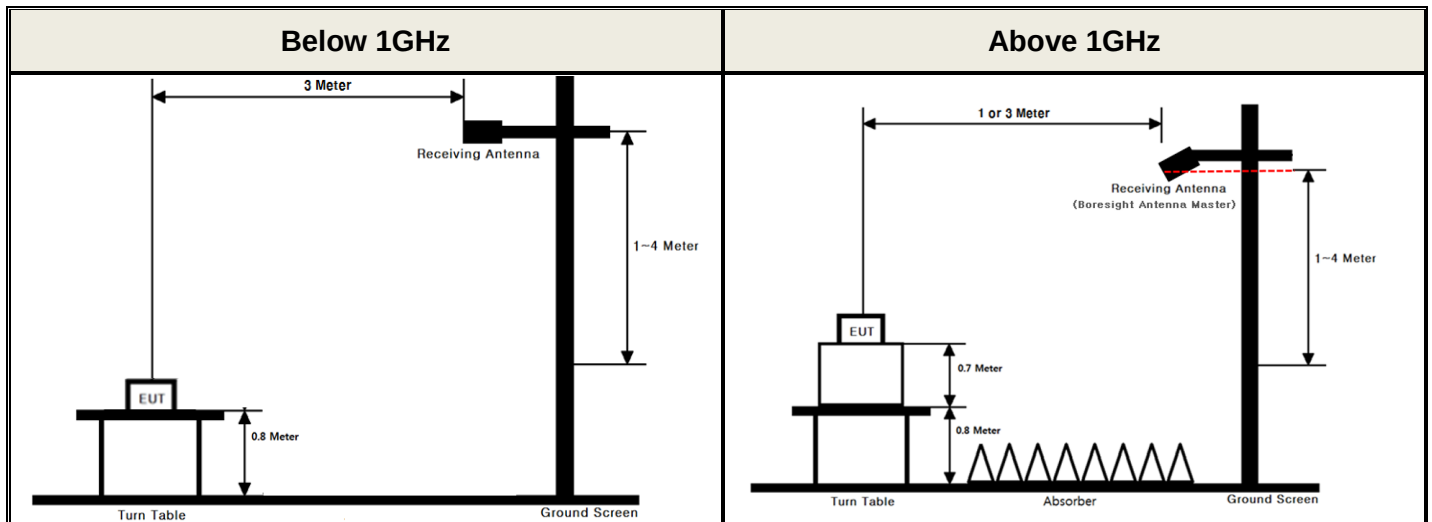

▪ Conducted Measurement

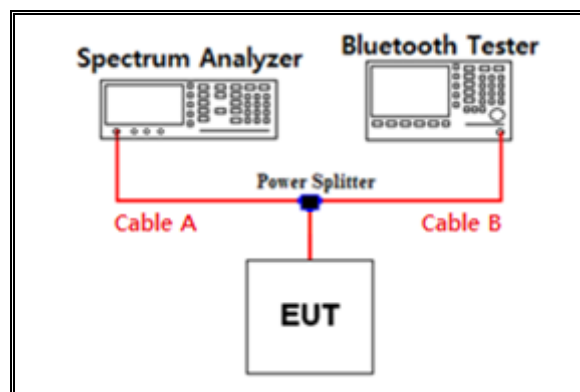

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	6.20	15	10.55
1	6.90	20	10.96
2.402 & 2.440 & 2.480	7.57	25	11.37
5	8.36	-	-
10	9.05	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.


Path loss (S/A's Correction factor) = Cable A + Power splitter

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest & Y & Hor

Detector Mode : PK

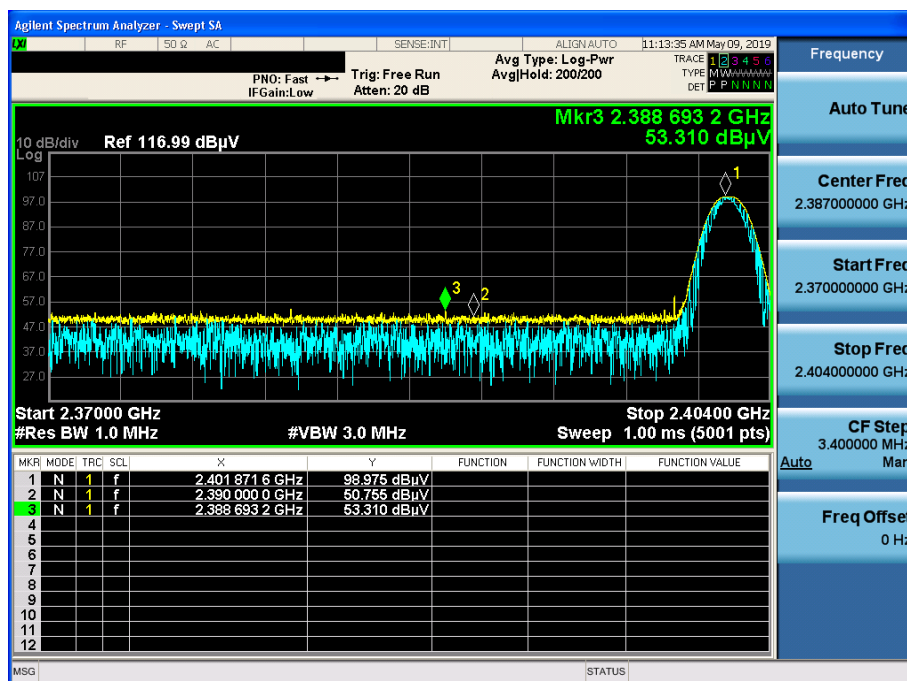


GFSK & Highest & Y & Hor

Detector Mode : PK

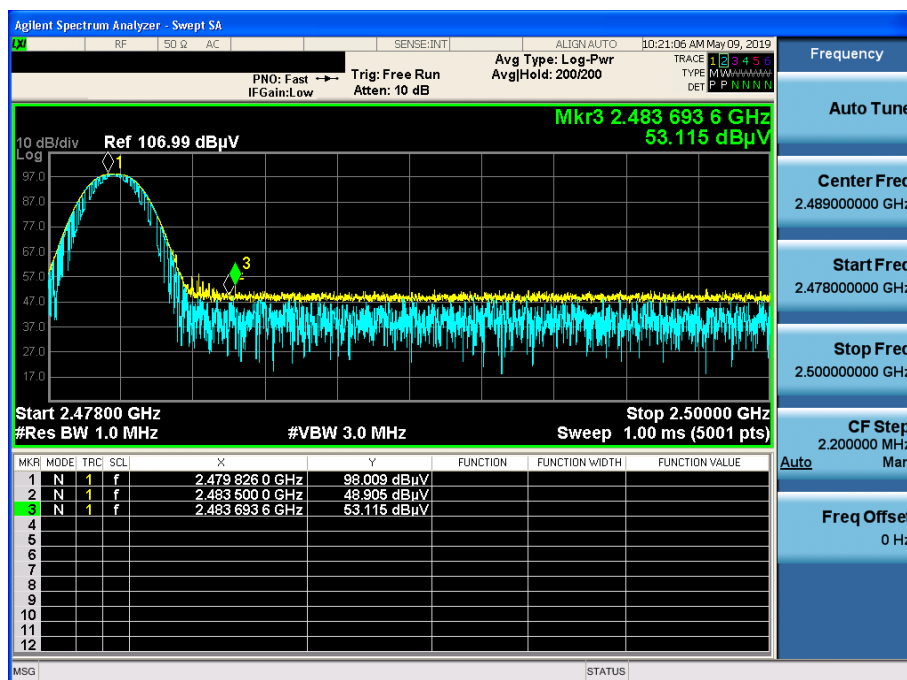


π /4DQPSK & Lowest & X & Hor

Detector Mode : PK

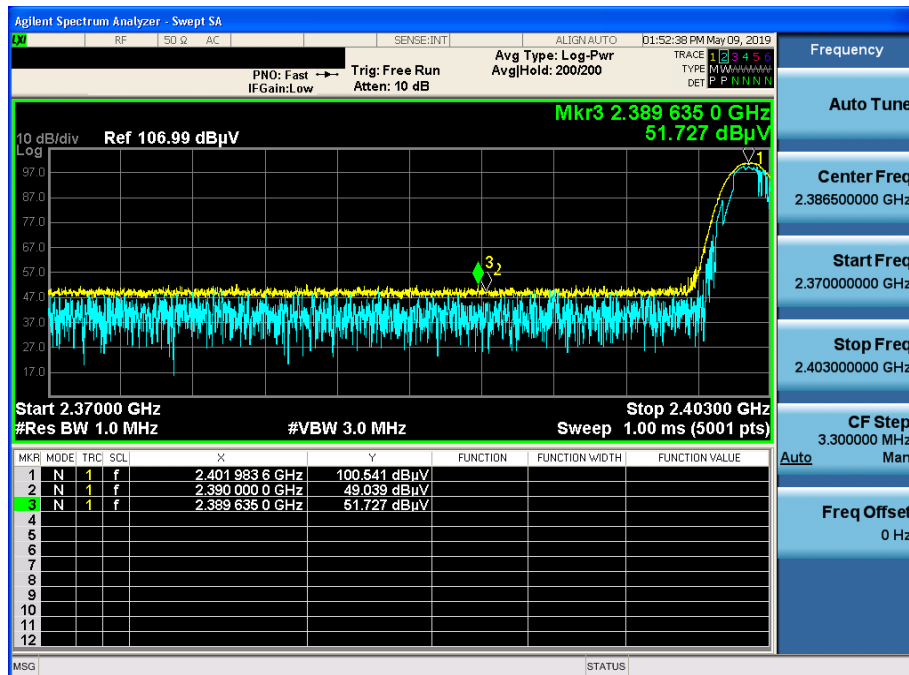
 π /4DQPSK & Highest & X & Hor

Detector Mode : PK

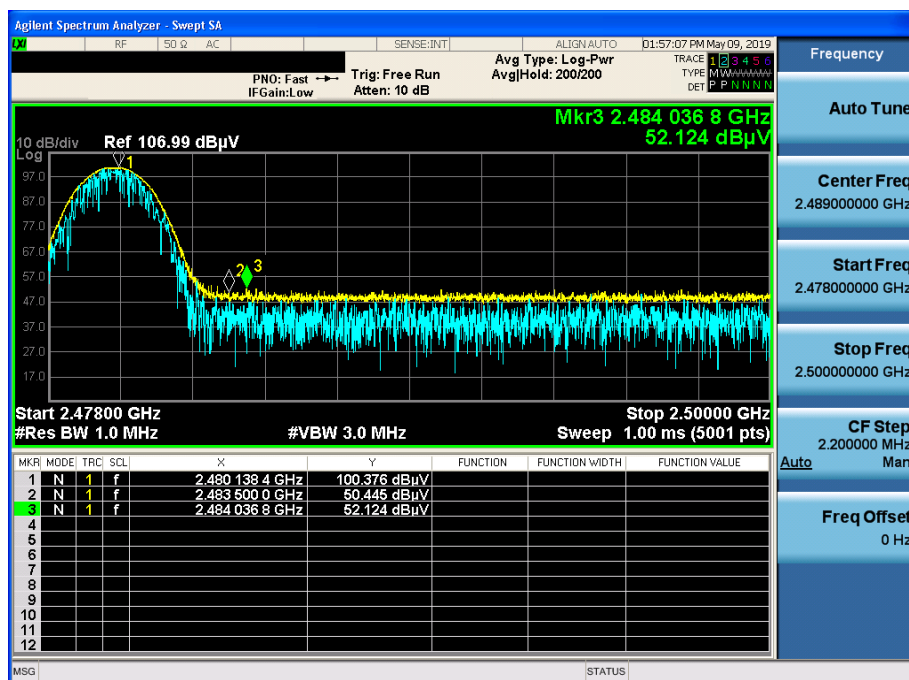


8DPSK & Lowest & X & Hor

Detector Mode : PK

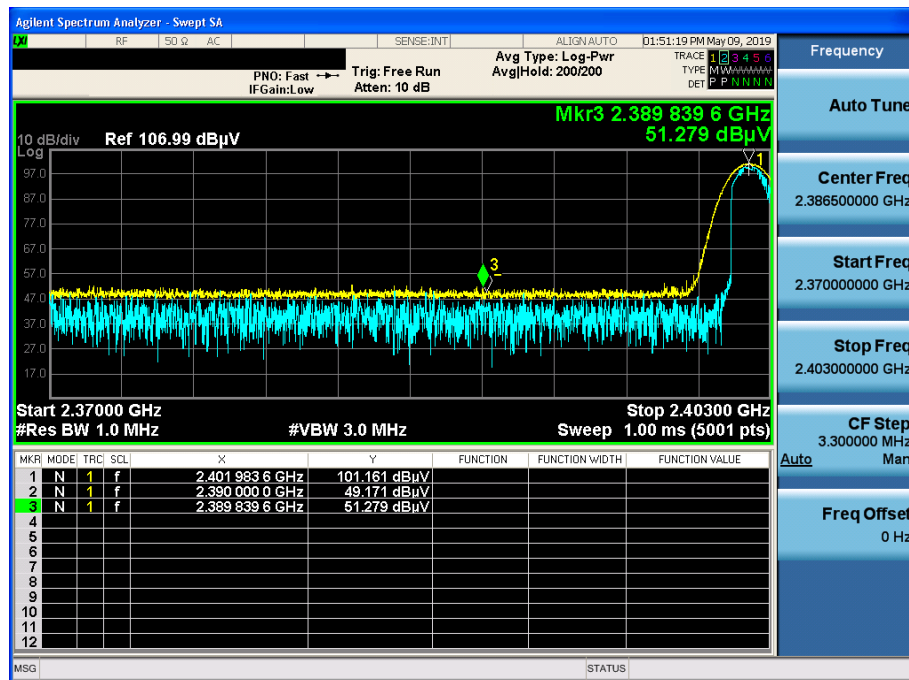

8DPSK & Highest & X & Hor

Detector Mode : PK

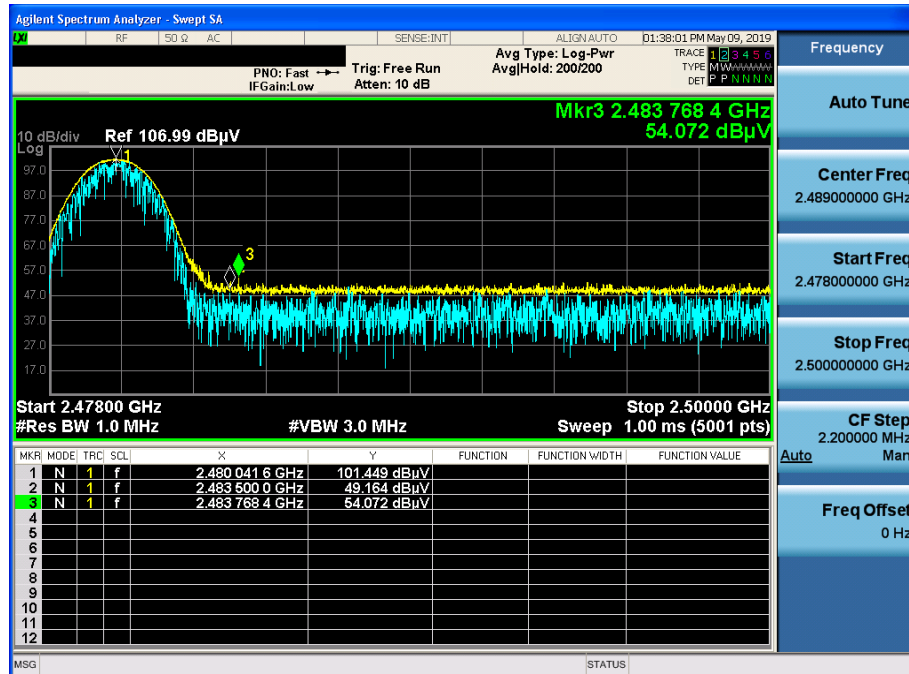

8DPSK & Middle & Y & Ver

Detector Mode : PK

