

ESTD. 2009  CALIFORNIA

R.C.K.

RETRO CLASSIC COMPACT KEYBOARD

Keyboard
Model: MK-RCK-W-01

USER GUIDE



AZIO R.C.K.

00

RETRO CLASSIC COMPACT KEYBOARD

Vintage Inspired Compact Bluetooth Mechanical Keyboard

Designed for a premium computing experience.

The contemporary home and office consist of many premium decors and collectibles. There is, however, something missing to tie it all together. Azio has set out to fill this void, aiming at designing a centerpiece keyboard with properties comprising of high-quality materials, timeless appearance and intuitive usability. Introducing the Azio Retro Compact Keyboard, a premium mechanical keyboard designed for the modern lifestyle.


**THANK YOU FOR PURCHASING THE AZIO RETRO COMPACT &
WELCOME TO THE AZIO FAMILY!**

01

PRODUCT BASICS

Package Contents

- (A) AZIO RCK Compact Keyboard
- (B) Mac & PC Layout Replacement Keycaps
- (C) Palm Rest
- (D) Interchangeable Feet
- (E) USB Type-C Cable
- (F) Dust Brush
- (G) User Guide
- (H) Warranty Card

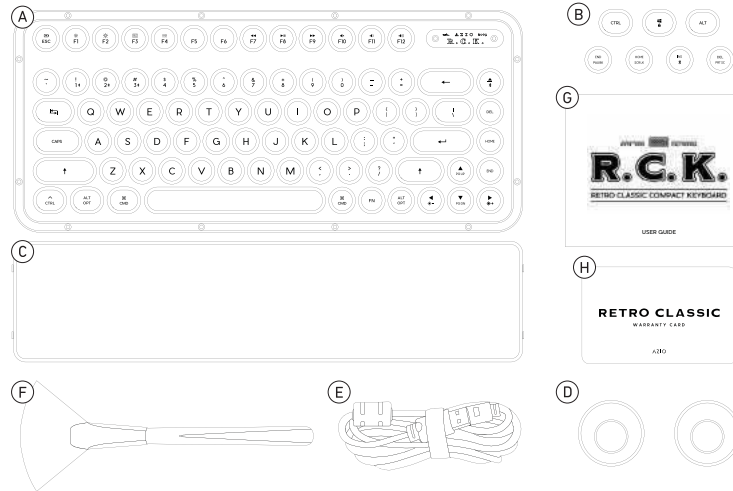

Specifications

- Model: MK-RCK-W-01 / MK-RCK-L-02 / MK-RCK-L-03 / MK-RCK-L-04
- Interface: Dual Bluetooth & USB
- Mechanical Switch: AZIO Typelit Mechanical Switch (by Kaith), Tactile & Clicky Feedback
- Number of Keys: 81
- N-Key Rollover: 6-Keys rollover
- Backlight: White Backlight (Gunmetal, Artisan, Elwood), Orange Backlight (Posh)
- Battery: 5,000 mAh
- Rechargeable: Yes (USB Type-C Port)
- OS Support: macOS, iOS, Windows, Android
- Dimensions (LxWxH): 327.80 x 143.20 x 42.04 mm / 12.9 x 5.6 x 1.7 inches
- Weight: 2.45 lbs / 1111 g

System Requirements

Bluetooth Mode

- Device with Bluetooth 2.0 or later
- PC: Windows 7 or later
- Mac: macOS X 10.6 Snow Leopard or later
- iOS: All iPads / iPhone 3GS or later / iPod Touch 3rd gen or later
- Android: 5.0 Lollipop or later

USB Mode

- Computer with available USB port
- PC: Windows 7 or newer
- Mac: macOS X 10.6 Snow Leopard or newer

02

PRODUCT FEATURES



Works on PC, Mac, iPad, Android

Supports both Windows and Mac keyboard layouts. Included are 18 key caps corresponding to Windows and macOS. Select your desired OS and replace the key caps accordingly.



Tactile. Clicky. Backlit.

The mechanical keys are tuned to be tactile and "clicky", reminiscent of the vintage typewriter. Each mechanical switch is customized so that the backlight LED is in the center of each key, allowing the keyboard to illuminate evenly and beautifully.



Genuine & Luxurious

Genuine top plate. Leather and wood has always been associated with high-end customized goods and exclusiveness. It reflects taste, craftsmanship, and culture while emitting a unique charm that inspires.



Dual USB & Bluetooth Interfaces

Connect via Bluetooth or USB. When USB mode is selected, simply connect the included Type-C cable to the computer and type away.

**Matching Palm Rest**

A matching palm rest utilizing the same premium material and design language is included.

**Pillar-Style Feet**

Two sets of interchangeable feet with different heights are included to enhance the ergonomics of your typing position.

**Long Usage Time**

Built-in is a high-capacity 5,000 mAh lithium-ion rechargeable battery. With the backlight off, usage time is up to 9 months. With the backlight on, about 1 to 2 months depending on backlight intensity.

**USB-C Charging Port**

Charging the keyboard is simplified with USB Type-C port. Unlike older USB ports, the connector doesn't have to be inserted in only one direction.

03

SETUP

Setting Up

The RCK keyboard is a very versatile keyboard that supports Mac/iOS/PC/Android and can be connected wirelessly via Bluetooth or wired via USB. The operating system selection and interface mode switches are both located on the rear side of the keyboard.

Pairing the Keyboard in Bluetooth Mode

1. Switch the keyboard to BT mode. The mode switch is located on the back side of the keyboard.
 2. Select which bluetooth module to connect to by holding down (FN) key and 1, 2, or 3 key together. For example, if wanting to pair with bluetooth module 1, holding down (FN) key and 1 key. Once successfully entered bluetooth module 1, The (⌘) key will flash quickly as connection establishing indication for 5 times then go away. For first time connection, the default module is set at bluetooth module 1.
 3. Put the keyboard in Pairing Mode by holding down (FN) key and the (⌘) key. This key is the INS key in PC layout or EJECT key in Mac layout. Hold down these two keys for a few seconds until the keyboard backlight goes from a quick flash to a slow continuous flash. The keyboard is now in Pairing Mode.
 4. On your Mac, navigate to 'System Preferences' and select 'Keyboard'. Next, click on 'Set Up Bluetooth Keyboard'. For Windows 10, go to Bluetooth Settings and select 'Add Bluetooth or other device'.
 5. Once the setup wizard finds 'AZIO Retro Classic BT', click on 'Pair'.
 6. Once pairing is successfully completed, the keyboard backlight will stop flashing. The keyboard is now ready for use.
-

Battery Power Level

To check the battery power level of the keyboard, press FN+ESC key. The LEDs ranging from F1 to F10 will light up, each key indicating 10% of total power. So if all 10 keys light up, this indicate the keyboard battery is 100% full.

3 Device Multi-Pairing

This keyboard supports pairing of up to 3 Bluetooth devices simultaneously via combination keys "FN+1", "FN+2" and "FN+3". The default device is "FN+1". To change, simply short-press combination keys "FN+2" or "FN+3" and follow the previous procedures to pair with other devices. To switch between the 3 paired devices, short-press combination keys "FN+1", "FN+2", or "FN+3". If there is a previous connection already established, the Bluetooth key will flash quickly for 3~5 seconds as it attempts to reconnect to the device and stop flashing once reconnected.

IMPORTANT: When switching the keyboard to USB mode and back to Bluetooth mode, the keyboard will default back to the last active paired device. Switch to another paired device by pressing FN+1, FN+2, or FN+3.

Charging the Keyboard

When the battery is less than 20%, the ESC key will start blinking in red. Plug the included USB cable into the keyboard and a USB port or a USB charger. The same LED will stop blinking and light up a steady red, indicating the keyboard is charging. Once fully charged, the red LED will turn off. Charging a completely drained battery to full on a USB 3.0 port will take approximately 6 hours due to its large power capacity. Actual charging time may vary depending on the power output of the charging source. The keyboard can be charged in any mode - BT, USB, or OFF mode.


Battery Life

This keyboard uses an industry leading 5,000mAh Li-ion rechargeable battery which will only be used in Bluetooth mode. With the backlight off, the keyboard can last for up to 9 months on a single charge. With the backlight on, depending on intensity, can last for up to 2 months on a single charge. Under Bluetooth mode, the keyboard backlight will turn off after 5 minutes of inactivity to conserve battery. After an hour of inactivity, the keyboard will enter sleep mode. Press any key to wake up the keyboard and reestablish connection. The keyboard backlight may flash during re-connection and stop flashing once connection is reestablished.

04

MODES

Device Layout - Back

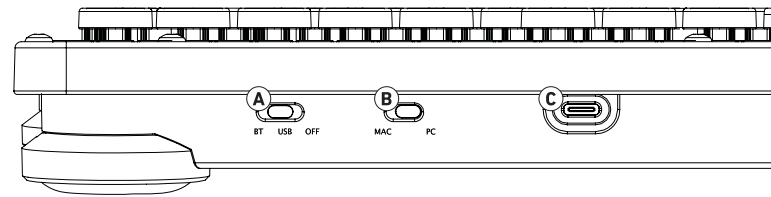

- A** Interface Mode **B** MAC/iOS/PC/Android Mode **C** USB/Charging Port

MAC/PC Modes

1. PC mode



2. MAC mode






By default, the keyboard will be in PC/Android mode. To change it to Mac/iOS mode, please toggle the switch to "MAC/iOS" position. Once in Mac mode, replace the PC key caps with the included Mac key caps according to the diagram on the DEVICE LAYOUT section.

05

MODES & INDICATOR

Interface Modes

-  **BT:** Bluetooth mode allows you to connect the keyboard to your computer wirelessly. In BT mode, the backlight will automatically turn off after 5 minutes of inactivity to conserve battery.
-  **USB:** In USB mode, please connect the included USB Type-C cable to the keyboard and your computer. The red LED on ESC key may light up, indicating the keyboard is simultaneously charging. In USB mode, the keyboard will not go into battery saver mode.
-  **OFF:** In OFF mode, all circuitry will be off. This is ideal if the keyboard will not be used for an extended duration of time. Please note that the keyboard can still be charged while in OFF mode.


IMPORTANT: When switching the keyboard to USB mode and back to Bluetooth mode, the keyboard will default back to the device paired with the "FN+1" slot.

LED Indicator Abbreviations







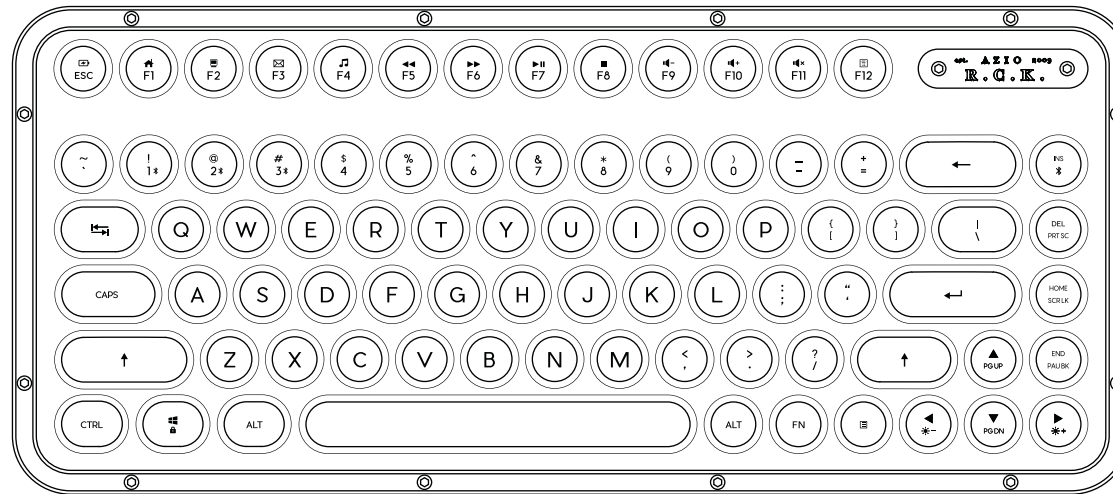









- CAPS:** Steady White Light = Caps Lock
- ESC:** Blinking Red light = Low on battery
Steady Red light = Keyboard charging
- BACKLIGHT:** Fast Blinking light = Bluetooth Reconnecting
Slow Blinking Blue Light = Bluetooth in Pairing Mode

06

LAYOUT PC MODE




06







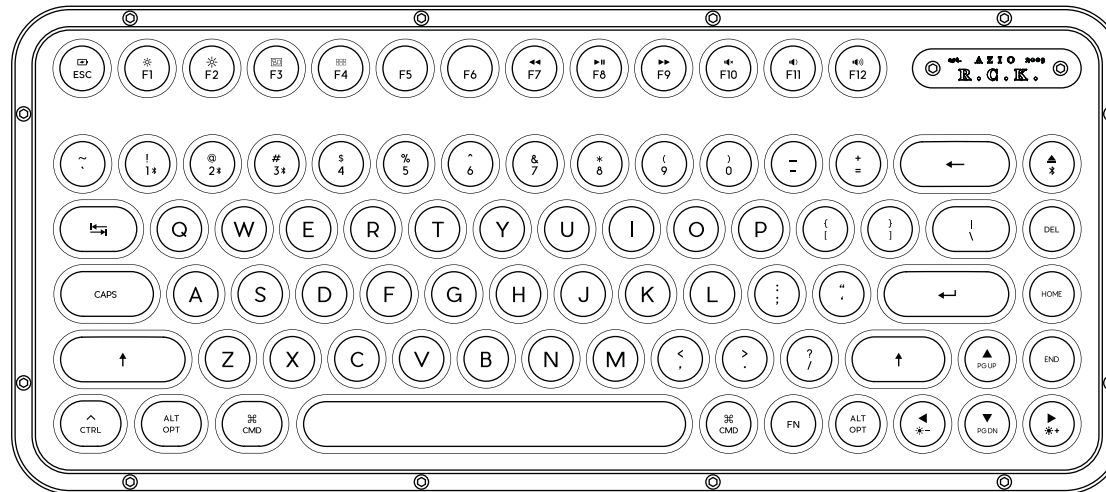






	(FN) + (F1) Homepage		(FN) + (F9) Volume -
	(FN) + (F2) File Explorer		(FN) + (F10) Volume +
	(FN) + (F3) E-Mail		(FN) + (F11) Mute
	(FN) + (F4) Media Player		(FN) + (F12) Calculator
	(FN) + (F5) Previous Track		(FN) + (Win) Windows Key Lock
	(FN) + (F6) Next Track		(FN) + (RIGHT) Backlight Brightness +
	(FN) + (F7) Play/Pause		(FN) + (LEFT) Backlight Brightness -
	(FN) + (F8) Stop		(FN) + (INS) Enter BT Pairing Mode

07

LAYOUT MAC MODE



07

	(FN) + (F1) Screen Brightness -		(FN) + (F10) Mute
	(FN) + (F2) Screen Brightness +		(FN) + (F11) Volume -
	(FN) + (F3) Exposé		(FN) + (F12) Volume +
	(FN) + (F4) Dashboard		(FN) + (EJECT) Enter BT Pairing Mode
	(FN) + (F7) Previous Track		(FN) + (RIGHT) Backlight Brightness +
	(FN) + (F8) Play/Pause		(FN) + (LEFT) Backlight Brightness -
	(FN) + (F9) Next Track		

08

SUPPORT & WARRANTY

Here's How To Reach Us

By phone: 866.468.1198

By email: support@aziocorp.com

On FB: www.facebook.com/aziocorp

**Multilingual instruction guide is available for download at
www.aziocorp.com > Support > Retro Classic RCK**



Azio Corporation warrants only to the original purchaser of this product, when purchased from an Azio authorized reseller or distributor, that this product will be free from defects in material and workmanship under normal use and service for the length of the warranty period after purchase. Azio reserves the right, before having any obligation under this warranty, to inspect the damaged Azio product. Initial shipping costs of sending the Azio product to the Azio service center in Los Angeles, California, for inspection shall be borne solely by the purchaser. In order to keep this warranty in effect, the product must not have been mishandled or misused in any way.

This warranty does not cover any damage due to accidents, misuse, abuse or negligence. Please retain the dated sales receipt as evidence of the original purchaser & date of purchase. You will need it for any warranty services. In order to claim under this warranty, purchaser must contact Azio and obtain an RMA # which is to be used within 15 days of issuance and must present acceptable proof of original ownership (such as original receipt) for the product. Azio, at its option, shall repair or replace the defective unit covered by this warranty. This warranty is non-transferable and does not apply to any purchaser who bought the product from a reseller or distributor not authorized by Azio, including but not limited to purchases from internet auction sites. This warranty does not affect any other legal rights you may have by operation of the law. Contact Azio through email, chat, or through one of the technical support numbers listed for warranty service procedures.

No AZIO supplier, dealer, agent, or employee is authorized to alter or extend the terms of this Limited Warranty or to make any representation whatsoever. AZIO reserves the right to amend the terms of this Limited Warranty at any time without notice.

Help Resources.

Before lodging a claim on the Limited Warranty, please review the online help resources at [aziocorp.com / support](http://aziocorp.com/support). If the Product is still not functioning properly after making use of these resources, please contact AZIO through [aziocorp.com / support](http://aziocorp.com/support) or your authorized distributor or dealer. You may be required to assist with the diagnosis process to verify and ascertain any issues which you may be facing with the Product. Service options, parts availability and response times may vary depending on the country in which the Limited Warranty claim is lodged.

How to make a Limited Warranty claim.

IF YOU PURCHASED THE PRODUCT FROM A AZIO RESELLER, PLEASE CONTACT THE AZIO RESELLER IN REGARDS TO YOUR LIMITED WARRANTY CLAIM.

If you are unable to return the Product to the AZIO reseller for whatever reason, or if you have purchased the Product directly from AZIO at aziocorp.com, then please follow the steps below:

- a. Go to aziocorp.com/email to obtain a return Merchandise Authorization Number ("RMA Number").
- b. Note the RMA Number in a visible place on the outside of the Product's package.
- c. Enclose a Valid Proof of Purchase inside the product's package. Please visit [aziocorp.com /warranty](http://aziocorp.com/warranty) for examples of a Valid Proof of Purchase.

d. Send the Product to the following address:

AZIO CORP
19977 Harrison Ave, City of Industry, California 91789

DO NOT SEND AZIO ANY PRODUCT WITHOUT A VALID RMA NUMBER.

We advise that you select a method of shipping that is traceable (e.g. UPS, DHL FedEx). Any expense of claiming under this Limited Warranty will be borne by the person making the claim (including any shipping and handling charges in returning the product to AZIO, as well as any applicable customs, duties or taxes in relation to the claim). If the Product is validly returned under the terms of this Limited Warranty, AZIO will be responsible for postage expenses for shipping the Product back to you (but not any customs charges, duties, or taxes). You are responsible for ensuring that the Product is properly packaged and will bear the full risk of loss or damage for any Product that is returned improperly packaged. Risk of loss or damage in the returned Product only passes to AZIO when the Product is received by AZIO and AZIO shall not be responsible for items lost in transit to us. In the event that the procedure herein is not followed, AZIO reserves the right to accept the delivery of the product on such terms that it may determine at its sole discretion.

Returns Not Covered by this Limited Warranty.

If AZIO receives a Product from you that does not meet the requirements of this Limited Warranty, including (but not limited to) a Product that (a) lacks a valid RMA Number, (b) is not accompanied by a valid Proof of Purchase, (c) is no longer covered under the Warranty Period, or (d) does not have a defect covered by this Limited Warranty, you may be responsible for an assessment fee, return shipping and handling fees, and other reasonable fees as may be required by AZIO prior to the Product being returned to you.

General.

This Limited Warranty applies only to the original purchaser of the product and is non-transferable. No AZIO reseller, agent, distributor, or employee is authorized to make any modification, extension or addition to this held to be illegal or unenforceable the legality or enforceability of the remaining terms shall not be affected or impaired.