



# FCC Report (Bluetooth)

Product Name	:	Car Kit Bluetooth Module
Trade mark	:	Shinwa
Model No.	:	BT-MC88-12
FCC ID	:	ZWY88112
Report Number	:	BLA-EMC-201903-A31-01
Date of sample receipt	:	March 13, 2019
Date of Test:	:	March 13, 2019–March 30, 2019
Date of Issue	:	March 31, 2019
Test standard	:	FCC CFR Title 47 Part 15 Subpart C Section
		15.247
Test result	:	PASS

Prepared for: Shinwa industries(China)ltd. No. 26, HuiFeng West 2 Road, Zhongkai High-Tech Park, Huizhou, **Guangdong**, China

Prepared by:

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. **IOT Test Centre of BlueAsia** No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China TEL: +86-755-28682673 FAX: +86-755-28682673

Compiled by: Eason Approved by: Emen - G



Review by: Sweet licen





### 2 Version

Version No.	Date	Description	
00	March 31, 2019	Original	

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Page 2 of 37



### Page

1	COV	/ER PAGEFCC REPORT (BLUETOOTH)	1
2	VER	SION	2
3	CON	ITENTS	3
4	TES	T SUMMARY	4
5	GEN		5
	5.1 5.2 5.3 5.4 5.5 5.6	GENERAL DESCRIPTION OF EUT TEST MODE TEST FACILITY TEST LOCATION OTHER INFORMATION REQUESTED BY THE CUSTOMER DESCRIPTION OF SUPPORT UNITS	7 7 7 7 7
6	TES	T INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	
	7.1 7.2 7.3 7.4 7.5 7.6 7.7 7.8 7.9 7.9 7.9 7.10 7.10 7.10	<ul> <li>Radiated Emission Method</li> <li>SPURIOUS EMISSION</li> <li>Conducted Emission Method</li> <li>Radiated Emission Method</li> </ul>	.11 .14 .15 .16 .17 .18 .19 .20 .21 .23 .23 .24
8	TES	Т SETUP PHOTO	.32
9	EUT	CONSTRUCTIONAL DETAILS	.34
1(	) APPE	NDIX	.37

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(iii)	Pass
Dwell Time	15.247 (a)(iii)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(a)(1)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according ANSI C63.10:2013

#### **Measurement Uncertainty**

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 5 General Information

### 5.1 General Description of EUT

•	
Product Name:	Car Kit Bluetooth Module
Model No.:	BT-MC88-12
Test Model No:	BT-MC88-12
	re identical in the same PCB layout, interior structure and electrical circuits. ame for commercial purpose.
Serial No.:	N/A
Sample(s) Status	Engineer sample
Hardware:	V1.0
Software:	V1.0
Operation Frequency:	2402MHz-2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, π/4-DQPSK, 8-DPSK
Antenna Type:	PCB Antenna
Antenna gain:	0.259 dBi
Power supply:	DC 3.3V

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data., DH1, DH3, DH5 all have been tested, only worse case is reported.

### 5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • FCC — Designation No.: CN1252

*Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd* has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

### •ISED — CAB identifier No.: CN0028

*Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd* has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

### 5.4 Test Location

All tests were performed at:

All tests were performed at:

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673 No tests were sub-contracted.

### 5.5 Other Information Requested by the Customer

#### None.

### 5.6 Description of Support Units

Manufacturer Description		Model	Serial Number
Lenovo	Notebook computer	E470C	PF-10FB5C

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### Page 8 of 37

### 6 Test Instruments list

Radi	Radiated Emission:							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	3m SAC	SKET	9m*6 m*6m	966	06-10-2018	06-09-2023		
2	Broadband Antenna	SCHWARZBECK	VULB9168	00836 P:00227	07-14-2018	07-13-2019		
3	Horn Antenna	SCHWARZBECK	9120D	01892 P:00331	07-14-2018	07-13-2019		
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A		
5	Pre-amplifier	SKET	N/A	N/A	07-19-2018	07-18-2019		
6	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2018	05-23-2019		
7	EMI Test Receiver	Rohde & Schwarz	ESR7	101199	03-21-2018	03-20-2019		
8	Controller	SKET	N/A	N/A	N/A	N/A		
9	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2018	05-23-2019		
10	Signal Generator	Agilent	E8257D	MY44320250	05-24-2018	05-23-2019		

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### Page 9 of 37

Conducted Emission						
ltem	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMI Test Receiver	Rohde & Schwarz	ESPI3	101082	06-10-2018	06-09-2019
2	LISN	CHASE	MN2050D	1447	12-18-2018	12-17-2019
3	LISN	Rohde & Schwarz	ENV216	3560.6550.15	07-19-2018	07-18-2019
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2018	07-18-2019
	-					

					(mm-dd-yy)	(mm-dd-yy)
1	Spectrum Analyzer	Agilent	N9030A	MY50510123	05-24-2018	05-23-2019
2	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2018	05-23-2019
3 I	MXA Signal Analyzer	Agilent	N9020A	MY49100060	12-18-2018	12-17-2019
4	Vector Signal Generator	Agilent	N5182A	MY49060650	12-18-2018	12-17-2019
5	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2018	05-23-2019
6	Signal Generator	Agilent	E8257D	MY44320250	05-24-2018	05-23-2019
7	Power Sensor	D.A.R.E	RPR3006W	17100015SNO27	05-24-2018	05-23-2019
8	Power Sensor	D.A.R.E	RPR3006W	17100015SNO28	05-24-2018	05-23-2019
9	DC Power Supply	LODESTAR	LP305DE	N/A	07-19-2018	07-18-2019
10 T	Femperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2018	07-18-2019

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7 Test results and Measurement Data

### 7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)						
15.203 requirement:							
responsible party shall be us antenna that uses a unique	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.						
15.247(c) (1)(i) requiremen	it:						
operations may employ tran	2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point smitting antennas with directional gain greater than 6dBi provided the power of the intentional radiator is reduced by 1 dB for every 3 dB that the na exceeds 6dBi.						
E.U.T Antenna:							
The antenna is PCB antenna	, the best case gain of the antenna is 0.259dBi						
	-ANT 4 5 6 7						

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



#### Test Requirement: FCC Part15 C Section 15.207 Test Method: ANSI C63.10:2013 Test Frequency Range: 150KHz to 30MHz Class / Severity: Class B RBW=9KHz, VBW=30KHz, Sweep time=auto Receiver setup: Limit (dBuV) Limit: Frequency range (MHz) Quasi-peak Average 0.15-0.5 66 to 56\* 56 to 46\* 0.5-5 56 46 5-30 60 50 Decreases with the logarithm of the frequency. Test setup: Reference Plane LISN LISN 80cm 40cm Filter — AC power ΔUΧ E.U.T Equipment EMI Receiver Test table/Insulation plane Remark E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m Test procedure: 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. Refer to section 6.0 for details Test Instruments: Test mode: Refer to section 5.2 for details Test results: PASS

### 7.2 Conducted Emissions

#### Measurement data:

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### Line:

EUT:	Car Kit Bluetooth Module	Probe:	L1
Model:	BT-MC88-12	Power Source:	AC120V/60Hz
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%H):	26°C/60%RH		

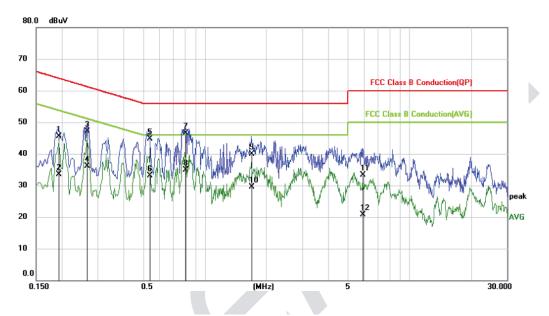

	No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
	1	0.1940	35.44	10.05	45.49	63.86	-18.37	QP
	2	0.1940	23.39	10.05	33.44	53.86	-20.42	AVG
Ň	3	0.2660	37.03	10.00	47.03	61.24	-14.21	QP
	4	0.2660	26.16	10.00	36.16	51.24	-15.08	AVG
	5	0.5380	34.50	10.20	44.70	56.00	-11.30	QP
	6	0.5380	22.98	10.20	33.18	46.00	-12.82	AVG
Ì	7 *	0.8059	36.33	10.09	46.42	56.00	-9.58	QP
	8	0.8059	24.73	10.09	34.82	46.00	-11.18	AVG
•	9	1.6980	29.88	10.00	39.88	56.00	-16.12	QP
	10	1.6980	19.43	10.00	29.43	46.00	-16.57	AVG
	11	5.9140	23.40	9.95	33.35	60.00	-26.65	QP
	12	5.9140	10.72	9.95	20.67	50.00	-29.33	AVG

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China


Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Page 12 of 37



### Neutral:

EUT:	Car Kit Bluetooth Module	Probe:	N
Model:	BT-MC88-12	Power Source:	AC120V/60Hz
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%H):	26℃/60%RH		

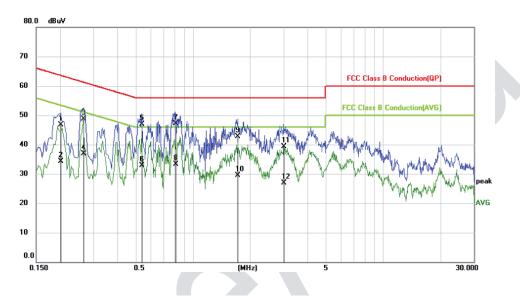

	No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
	1	0.2020	36.68	9.93	46.61	63.53	-16.92	QP
	2	0.2020	24.42	9.93	34.35	53.53	-19.18	AVG
	3	0.2660	38.82	9.95	48.77	61.24	-12.47	QP
	4	0.2660	26.90	9.95	36.85	51.24	-14.39	AVG
	5	0.5380	36.90	10.04	46.94	56.00	-9.06	QP
	6	0.5380	22.91	10.04	32.95	46.00	-13.05	AVG
K	7 *	0.8100	37.15	9.93	47.08	56.00	-8.92	QP
	8	0.8100	23.43	9.93	33.36	46.00	-12.64	AVG
	9	1.7180	32.80	9.83	42.63	56.00	-13.37	QP
	10	1.7180	19.60	9.83	29.43	46.00	-16.57	AVG
	11	3.0059	29.46	9.79	39.25	56.00	-16.75	QP
	12	3.0059	17.15	9.79	26.94	46.00	-19.06	AVG

#### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.

2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

3. Final Level =Receiver Read level +Correct Factor

4. Correct Factor = LISN Factor + Cable Loss

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



#### FCC Part15 C Section 15.247 (b)(3) Test Requirement: ANSI C63.10:2013 Test Method: Limit: 21dBm(for GFSK),21dBm(for EDR) Test setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** Refer to section 6.0 for details **Test Instruments:** Refer to section 5.2 for details Test mode: Pass Test results:

### 7.3 Conducted Peak Output Power

### **Measurement Data**

Reference to the AppendixC: Maximum conducted output power


Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7.4 20dB Emission Bandwidth

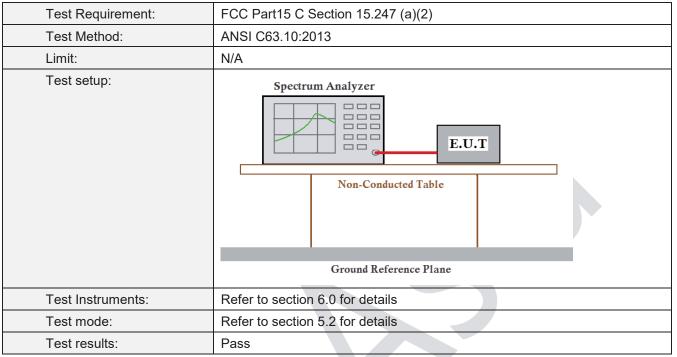

### **Measurement Data**

Reference to the AppendixA: 20dBEmission Bandwidth

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7.5 Carrier Frequencies Separation

•	•				
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)				
Test Method:	ANSI C63.10:2013				
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak				
Limit:	GFSK: 20dB bandwidth Pi/4QPSK & 8-DPSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

### Measurement Data

Reference to the AppendixD: Carrier frequency separation

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



#### Test Requirement: FCC Part15 C Section 15.247 (a)(1) Test Method: ANSI C63.10:2013 RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Receiver setup: Detector=Peak 15 channels Limit: Test setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** Test Instruments: Refer to section 6.0 for details Test mode: Refer to section 5.2 for details Test results: Pass

### 7.6 Hopping Channel Number

### Measurement Data:

Reference to the AppendixF: Number of hopping channels

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2013			
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak			
Limit:	0.4 Second			
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			

### Measurement Data

Reference to the AppendixE: Time of occupancy

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7.8 Pseudorandom Frequency Hopping Sequence FCC Part15 C Section 15.247 (a)(1) requirement: **Test Requirement:** Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. **EUT Pseudorandom Frequency Hopping Sequence** The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) Linear Feedback Shift Register for Generation of the PRBS sequence An example of Pseudorandom Frequency Hopping Sequence as follow: 24 62 64 78 1 73 75 77 Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7.9 Band Edge

### 7.9.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)				
Test Method:	ANSI C63.10:2013				
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

### Measurement Data

Reference to the AppendixG:Band edge measurements

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C S	Section 15 209	and 15 205			
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	All restriction ba 2483.5MHz to 2	and have been			2390MHz,	
Test site:	Measurement D	)istance: 3m				
Receiver setup:	Frequency Above 1GHz	Detector Peak	RBW 1MHz	VBW 3MHz	Remark Peak Value	
	Above IGHZ	Peak	1MHz	10Hz	Average Value	
Limit:	Freque	Frequency		m @3m)	Remark	
	Above 1	IGHz	54.0 74.0		Average Value Peak Value	
Test setup:	Tum Table <150cm>		m >+ Test Antenna < 1m 4m >	1		
Test Procedure:	<ul> <li>ground at a 3 determine the determine the 2. The EUT was antenna, whi tower.</li> <li>3. The antenna ground to dethorizontal an measurement</li> <li>4. For each sus and then the and the rota to maximum reas</li> <li>5. The test-rece Bandwidth with</li> <li>6. If the emission limit specified EUT would b margin would</li> </ul>	B meter cambe e position of the s set 3 meters ch was mount height is varie termine the m d vertical polant. spected emission antenna was table was turn ading. eiver system with Maximum I on level of the d, then testing	er. The table were highest rade a away from the ed on the top ed from one me aximum value rizations of the ion, the EUT were tuned to heigh ed from 0 deg was set to Pea Hold Mode. EUT in peak could be stop therwise the e one by one us	vas rotated iation. le interferen of a variab heter to foun e of the field e antenna a was arrange hts from 1 m grees to 360 k Detect Fu mode was oped and th missions the sing peak, o	le-height antenna r meters above the d strength. Both are set to make the ed to its worst case neter to 4 meters D degrees to find the unction and Specified 10dB lower than the e peak values of the nat did not have 10dB quasi-peak or	
Test Instruments:	Refer to section	-				
Test mode:	Refer to section	5.2 for details	6			
Test results:	Pass					

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Remark:

1. During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.

Which it is worse case.								
Test channel:			Lowe	est				
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
2310.00	55.53	-14.56	40.97	74.00	-33.03	Horizontal		
2390.00	55.99	-14.19	41.80	74.00	-32.20	Horizontal		
2310.00	55.08	-14.85	40.23	74.00	-33.77	Vertical		
2390.00	54.71	-14.52	40.19	74.00	-33.81	Vertical		
Average value	:		<u>.</u>					
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
2310.00	41.16	-14.56	26.60	54.00	-27.40	Horizontal		
2390.00	41.60	-14.19	27.41	54.00	-26.59	Horizontal		
2310.00	41.15	-14.85	26.30	54.00	-27.70	Vertical		
2390.00	41.47	-14.52	26.95	54.00	-27.05	Vertical		

Test channel: Highest								
			High	esi				
Peak value:	•				1			
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
2483.50	66.30	-13.66	52.64	74.00	-21.36	Horizontal		
2500.00	60.13	-13.57	45.56	74.00	-27.44	Horizontal		
2483.50	64.14	-14.05	50.09	74.00	-23.91	Vertical		
2500.00	66.34	-13.97	52.37	74.00	-21.63	Vertical		
Average value	:		<u>.</u>	-	-			
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
2483.50	43.96	-13.66	30.30	54.00	-23.70	Horizontal		
2500.00	42.23	-13.57	28.66	54.00	-25.34	Horizontal		
2483.50	42.59	-14.05	28.54	54.00	-25.46	Vertical		
2500.00	41.42	-13.97	27.45	54.00	-26.55	Vertical		

Remark:

1. Final Level =Receiver Read level + Correct factor

2. The emission levels of other frequencies are very lower than the limit and not show in test report.

3. Correct factor= Antenna Factor + Cable Loss – Preamplifier Factor

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7.10 Spurious Emission

### 7.10.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10:2013						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test results:	Pass						

### Measurement Data

Reference to the AppendixH:Conducted SpuriousEmission

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



### 7.10.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section	on 15	5.209						
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	9kHz to 25GHz								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Frequency De			W	VBW	r	Value	
	9KHz-150KHz	P۴	K,AV,QP	200	Hz	600Hz	Z	PK,AV,QP	
	150KHz-30MHz	P٢	K,AV,QP	9Kł	Ηz	30KH	z	PK,AV,QP	
	30MHz-1GHz	Qı	uasi-peak	120k	Ήz	300KH	łz	Quasi-peak	
	Above 1GHz		Peak	1MI	Ηz	3MHz	z	Peak	
	Above TGHZ		Peak	1Mł	Ηz	10Hz	-	Average	
Limit: (Spurious Emissions)	Frequency		Limit (uV	//m)	V	/alue	N	Measurement Distance	
	0.009MHz-0.490M	Hz	2400/F(k	(Hz)		QP		300m	
	0.490MHz-1.705M	Hz	24000/F(KHz)		QP		30m		
	1.705MHz-30MH	1.705MHz-30MHz				QP		30m	
	30MHz-88MHz		100			QP			
	88MHz-216MHz	88MHz-216MHz 150		QP					
	216MHz-960MH	z	200			QP		3m	
	960MHz-1GHz		500			QP		UIII	
	Above 1GHz		500		Average				
	VIDOVC VOINZ		5000		F	Peak			
Limit: (band edge)	Emissions radiated of harmonics, shall be fundamental or to the whichever is the less	atten e ger	uated by at neral radiate	least 5	50 dĖ	3 below t	he l	level of the	
$\mathbf{S}$									


Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Page 25 of 37

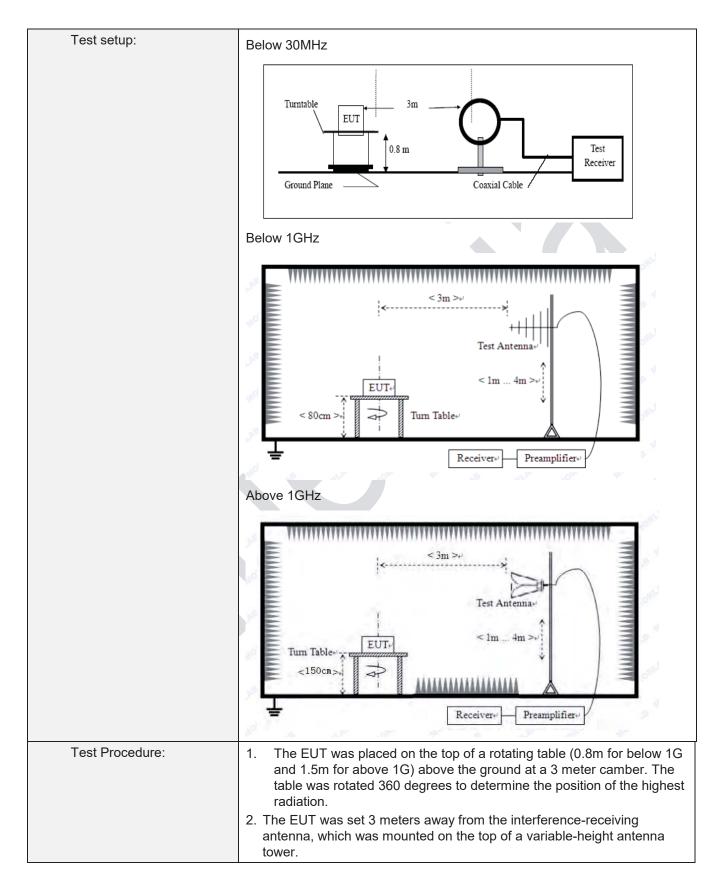

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



	<ol> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Measurement data:

Remark:

- 1. During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

### 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



#### Below 1GHz

EUT:	Car Kit Bluetooth Module	Polarziation:	Horizontal
Model:	BT-MC88-12	Power Source:	DC3.3V
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%H):	26°C/60%RH		

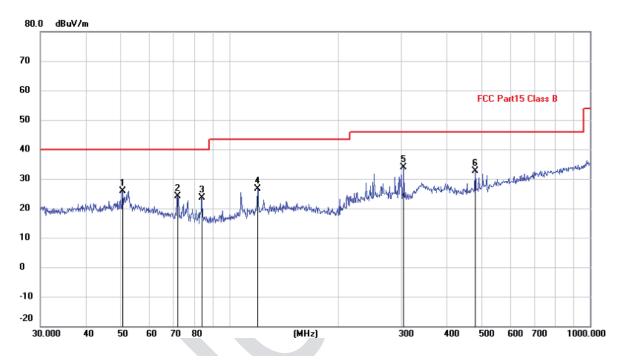

	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
9	1		50.5860	11.94	13.92	25.86	40.00	-14.14	QP
-	2		72.0843	13.79	10.45	24.24	40.00	-15.76	QP
-	3		83.8156	14.34	9.19	23.53	40.00	-16.47	QP
-	4		119.8556	14.23	12.37	26.60	43.50	-16.90	QP
	5	*	304.6099	20.34	13.59	33.93	46.00	-12.07	QP
	6		480.5276	14.31	18.41	32.72	46.00	-13.28	QP

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China


Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

Page 27 of 37



Page	28	of	37
i ugo	20		01

EUT:	Car Kit Bluetooth Module	Polarziation:	Vertical
Model:	BT-MC88-12	Power Source:	DC3.3V
Mode:	BT mode	Test by:	Eason
Temp./Hum.(%H):	26℃/60%RH		

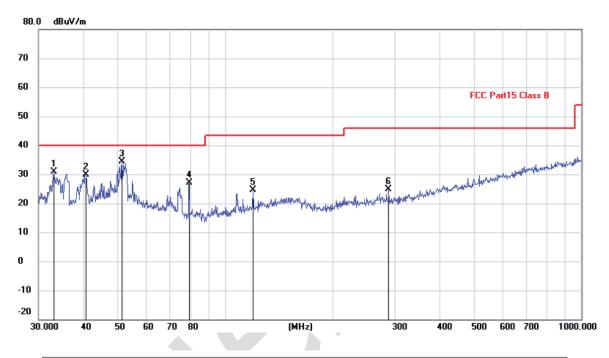

-	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
-			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	1		33.0950	18.60	12.32	30.92	40.00	-9.08	QP
-	2		40.7016	16.22	13.73	29.95	40.00	-10.05	QP
	3	*	51.4807	20.62	13.82	34.44	40.00	-5.56	QP
	4		79.2426	17.93	9.14	27.07	40.00	-12.93	QP
-	5		119.8556	12.14	12.37	24.51	43.50	-18.99	QP
-	6		287.9904	11.71	13.18	24.89	46.00	-21.11	QP

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



#### Above 1GHz

#### Test channel: Lowest Peak value: Over Correct factor Level Frequency Read Level Limit Line Limit Polarization (MHz) (dBuV) (dB/m)(dBuV/m) (dBuV/m) (dB) 4804.00 67.94 -7.43 60.51 74.00 -13.49 Vertical 7206.00 63.32 74.00 -13.10 Vertical -2.42 60.90 9608.00 60.02 -2.38 57.64 74.00 -16.36 Vertical \* 12010.00 74.00 Vertical \* 14412.00 74.00 Vertical 4804.00 64.18 -7.43 56.75 74.00 -17.25 Horizontal 7206.00 61.17 -2.42 58.75 74.00 -15.25 Horizontal 9608.00 59.85 -2.38 57.47 74.00 -16.53 Horizontal \* 12010.00 74.00 Horizontal \* 14412.00 74.00 Horizontal

#### Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	54.57	-7.43	47.14	54.00	-6.86	Vertical
7206.00	46.61	-2.42	44.19	54.00	-9.81	Vertical
9608.00	43.33	-2.38	40.95	54.00	-13.05	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	51.44	-7.43	44.01	54.00	-9.99	Horizontal
7206.00	45.58	-2.42	43.16	54.00	-10.84	Horizontal
9608.00	42.29	-2.38	39.91	54.00	-14.09	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Correct factor
- 2. Correct factor = Antenna Factor + Cable Loss Preamplifier Factor
- 3. "\*", means this data is the too weak instrument of signal is unable to test.
- 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Horizontal

Test channe	Test channel: Middle								
Peak value:									
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization			
4882.00	69.51	-7.49	62.02	74.00	-11.98	Vertical			
7323.00	63.64	-2.40	61.24	74.00	-12.76	Vertical			
9764.00	60.18	-2.38	57.80	74.00	-16.20	Vertical			
12205.00	*			74.00		Vertical			
14646.00	*			74.00		Vertical			
4882.00	68.27	-7.49	60.78	74.00	-13.22	Horizontal			
7323.00	65.51	-2.40	63.11	74.00	-10.89	Horizontal			
9764.00	59.84	-2.38	57.46	74.00	-16.54	Horizontal			
12205.00	*			74.00		Horizontal			
14646.00	*			74.00		Horizontal			
Average val	ue:								
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization			
4882.00	52.61	-7.49	45.12	54.00	-8.88	Vertical			
7323.00	46.58	-2.40	44.18	54.00	-9.82	Vertical			
9764.00	44.02	-2.38	41.64	54.00	-12.36	Vertical			
12205.00	*			54.00		Vertical			
14646.00	*			54.00		Vertical			
4882.00	55.57	-7.49	48.08	54.00	-5.92	Horizontal			
7323.00	43.18	-2.40	40.78	54.00	-13.22	Horizontal			
9764.00	44.42	-2.38	42.04	54.00	-11.96	Horizontal			
12205.00	*			54.00		Horizontal			

Remark:

14646.00

1. Final Level =Receiver Read level + Correct facto

\*

2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

3. "\*", means this data is the too weak instrument of signal is unable to test.

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

54.00

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Test channel:				Highest		
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	70.54	-7.47	63.07	74.00	-10.98	Vertical
7440.00	65.32	-2.45	62.87	74.00	-11.13	Vertical
9920.00	60.16	-2.37	57.79	74.00	-16.21	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	65.55	-7.47	58.08	74.00	-15.92	Horizontal
7440.00	62.71	-2.45	60.26	74.00	-13.74	Horizontal
9920.00	58.66	-2.37	56.29	74.00	-17.71	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal

#### Average value:

/ Worugo Vale						
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	49.98	-7.47	42.51	54.00	-11.49	Vertical
7440.00	45.62	-2.45	43.17	54.00	-10.83	Vertical
9920.00	43.71	-2.37	41.34	54.00	-12.66	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	49.34	-7.47	41.87	54.00	-12.13	Horizontal
7440.00	46.16	-2.45	43.71	54.00	-10.29	Horizontal
9920.00	43.79	-2.37	41.42	54.00	-12.58	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

#### Remark:

1. Final Level =Receiver Read level + Correct factor

2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

3. "\*", means this data is the too weak instrument of signal is unable to test.

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China




Page 32 of 37

### 8 Test Setup Photo

Radiated Emission

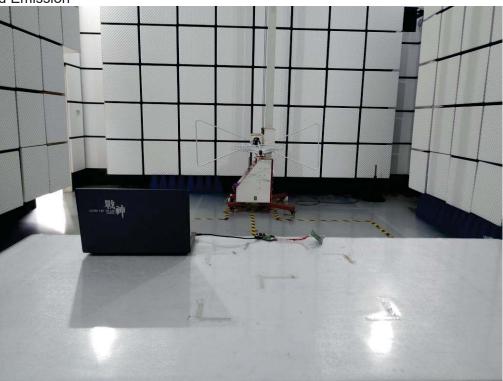

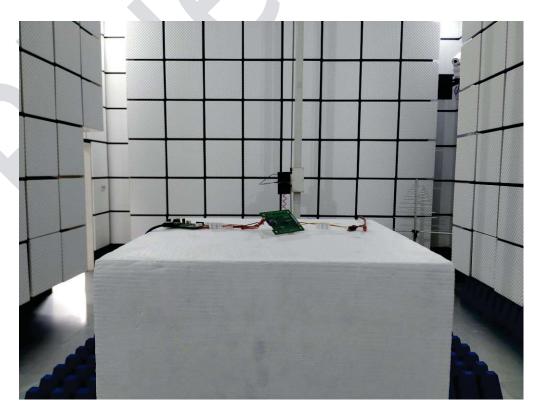

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Page 33 of 37

**Conducted Emission** 





Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673



### Page 34 of 37

### 9 EUT Constructional Details

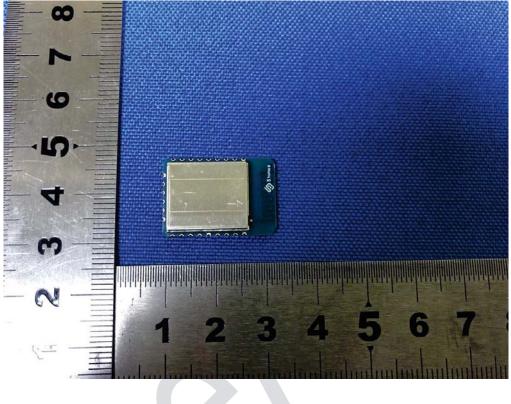

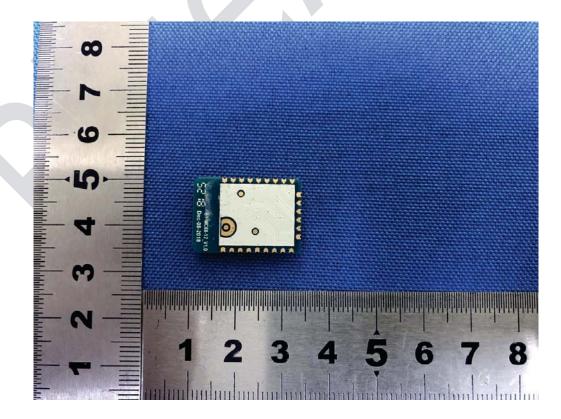


Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673



Page 35 of 37

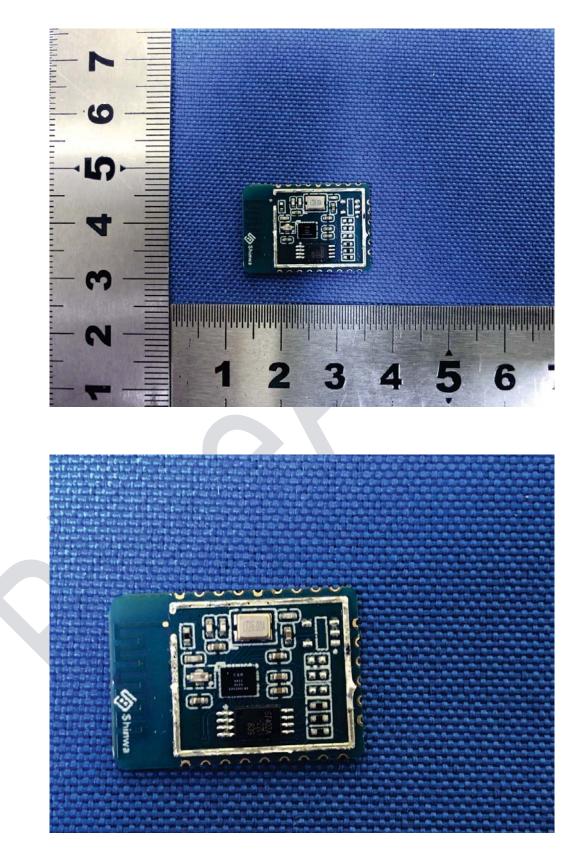


Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673



Page 36 of 37

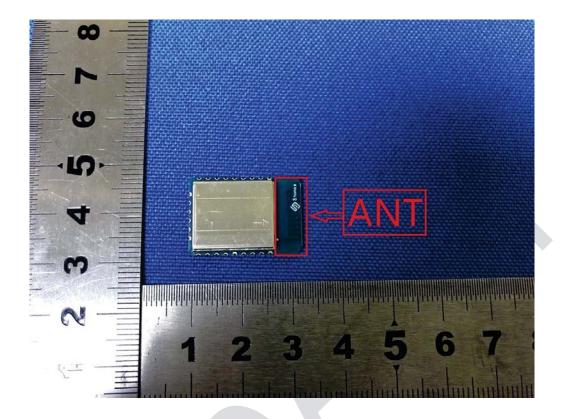

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd. IOT Test Centre of BlueAsia, No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673



Page 37 of 37

### **10** Appendix

Refer to the following attachments.

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

Qianhai BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

## AppendixA: 20dBEmission Bandwidth

### Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.101	2401.448	2402.549		PASS
		2441	1.101	2440.430	2441.531		PASS
		2480	1.098	2479.430	2480.528		PASS
2DH1	Ant1	2402	1.359	2401.295	2402.654		PASS
		2441	1.365	2440.292	2441.657		PASS
		2480	1.371	2479.289	2480.660		PASS
3DH1	Ant1	2402	1.344	2401.307	2402.651		PASS
		2441	1.341	2440.304	2441.645		PASS
		2480	1.338	2479.307	2480.645		PASS

### **Test Graphs**



