

# RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
<b>Product Name:</b>	Smart IR Remote with Temperature & Humidity Sensor
<b>Test Model:</b>	S09
<b>Sample ID:</b>	202401-0002-2#
Environmental Conditions	
<b>Temperature:</b>	24°C
<b>Relative Humidity:</b>	50%
<b>Test Voltage:</b>	DC 5V
<b>Test Engineer:</b>	Zhouzhen
Note: For a more detailed features description, please refer to the report TBR-C-202401-0002-2 The report only show the worst case data.	




## Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1Mbps	2402	Ant1	67.2	1.73	2.38
NVNT	BLE 1Mbps	2440	Ant1	68	1.67	2.35
NVNT	BLE 1Mbps	2480	Ant1	67.2	1.73	2.38

Test Graphs


Duty Cycle NVNT BLE 1Mbps 2402MHz Ant1

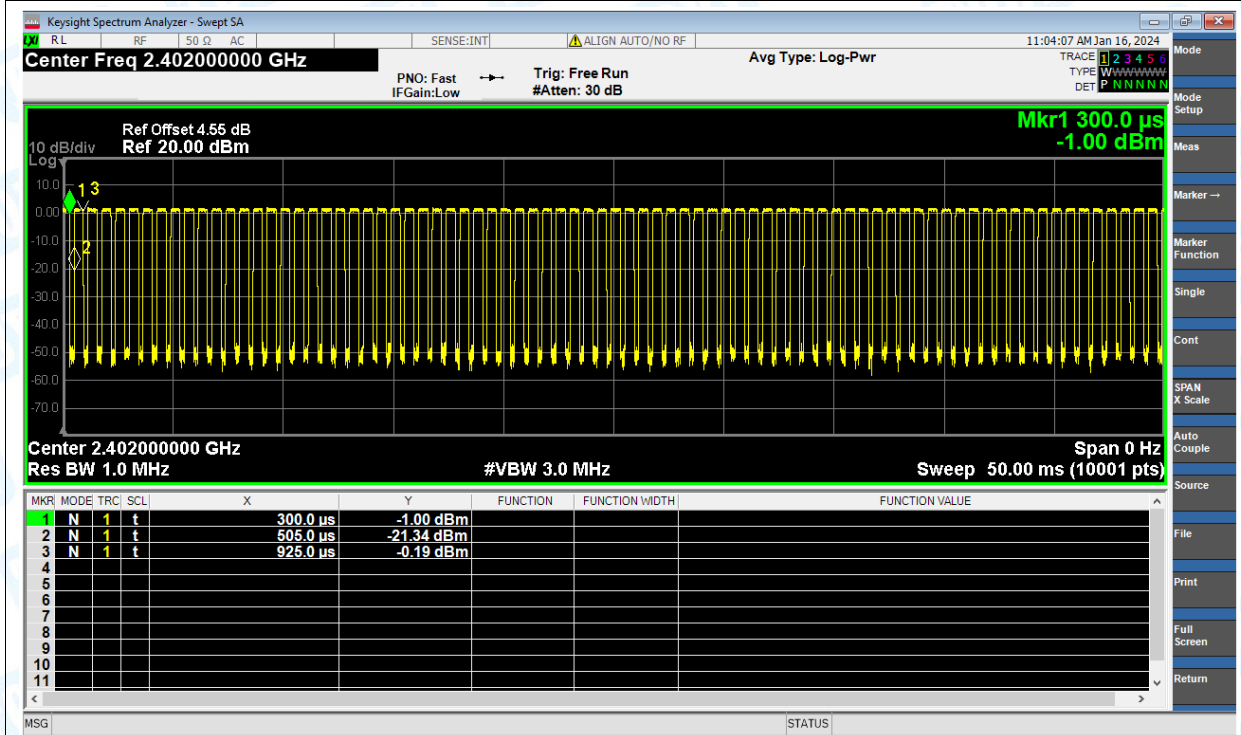

Duty Cycle NVNT BLE 1Mbps 2440MHz Ant1

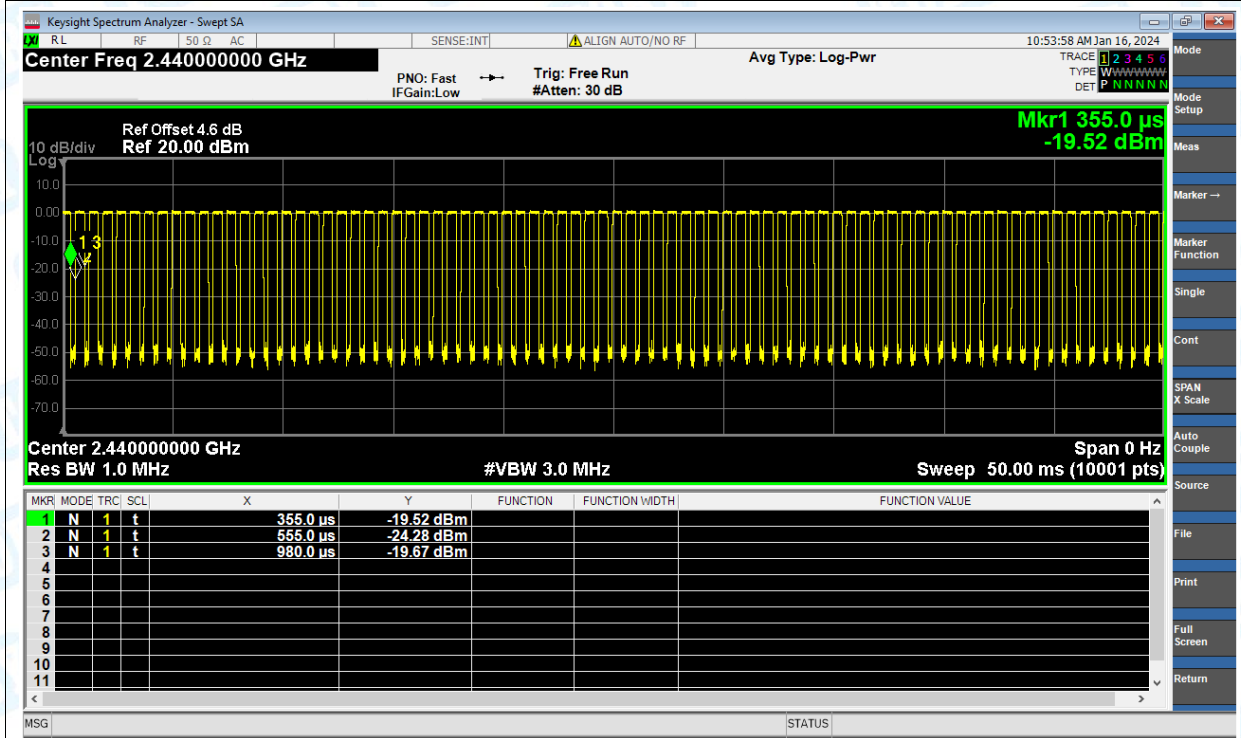



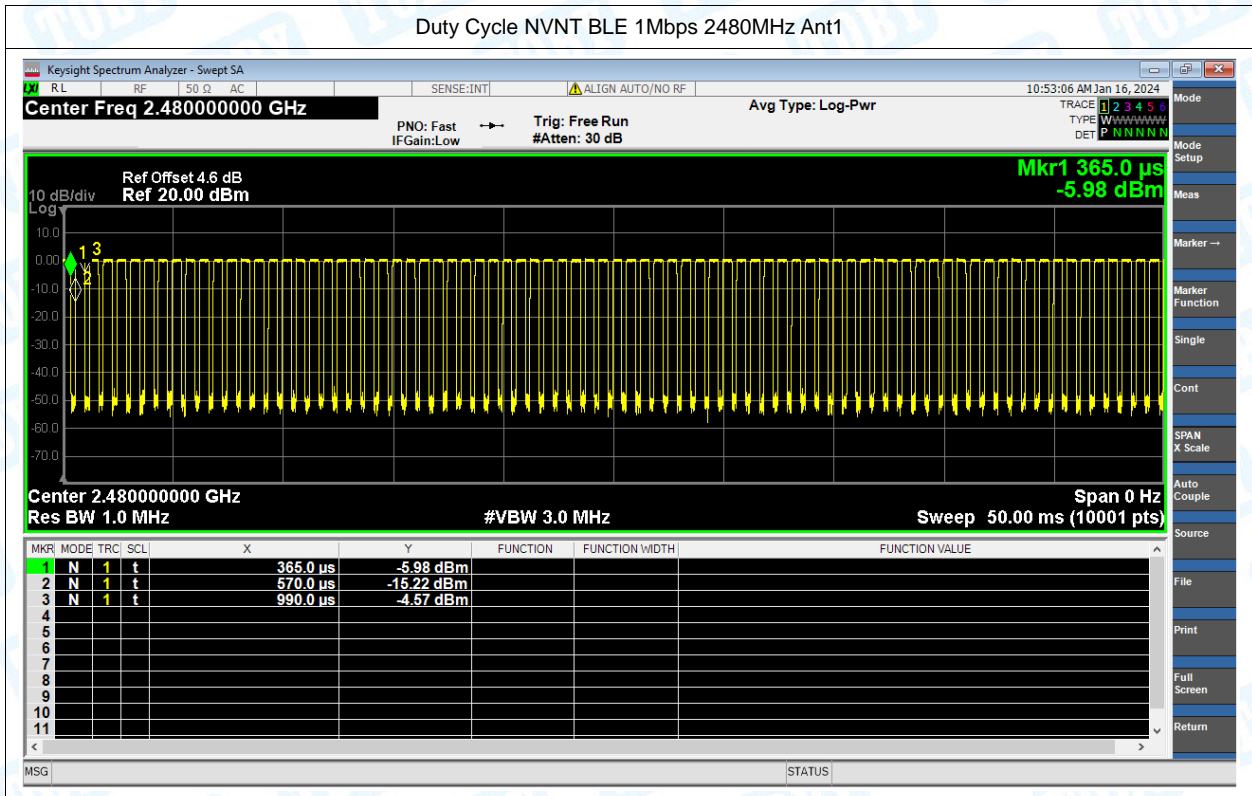


## Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	1.85	30	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.984	30	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.92	30	Pass





Test Graphs

Power NVNT BLE 1Mbps 2402MHz Ant1

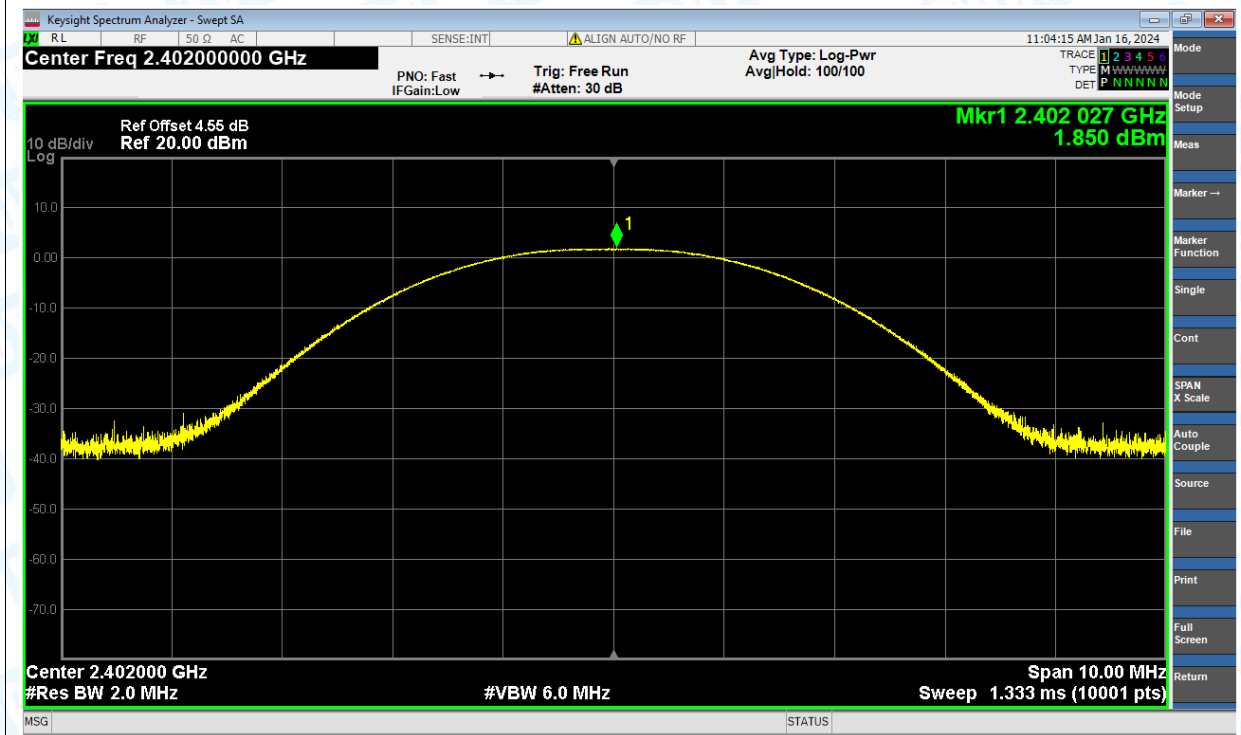

Power NVNT BLE 1Mbps 2440MHz Ant1

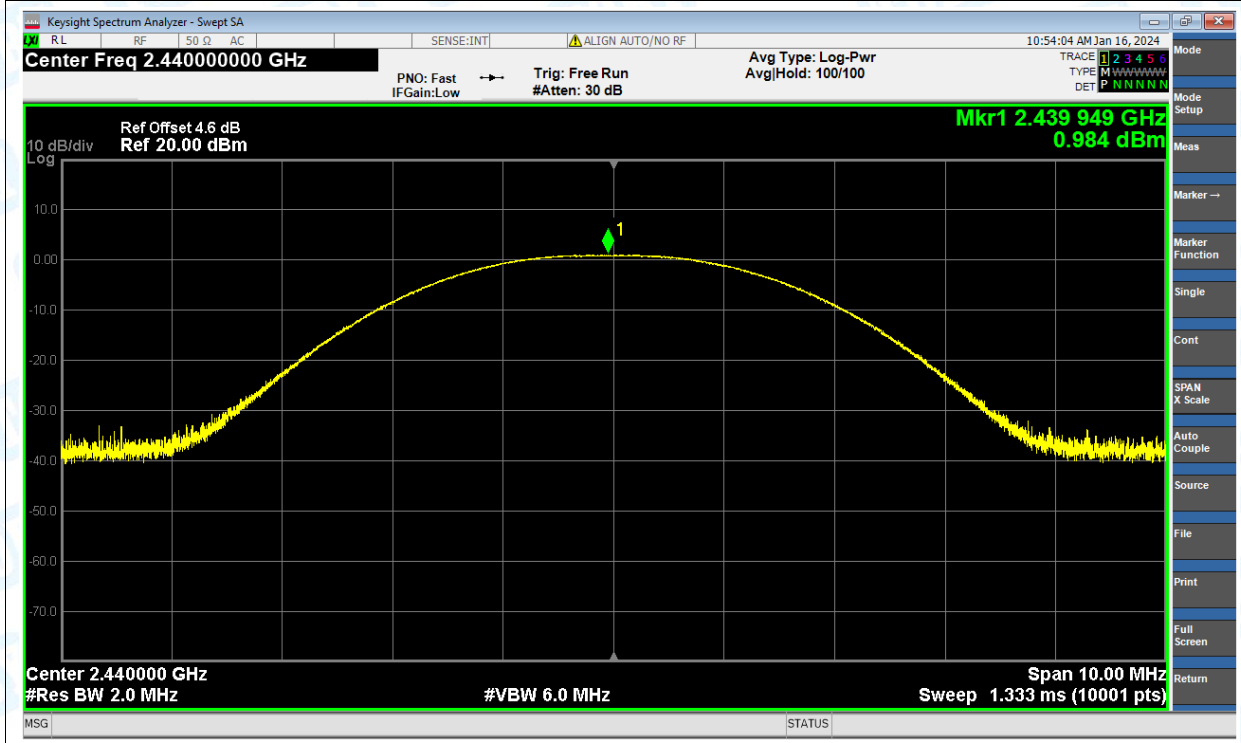

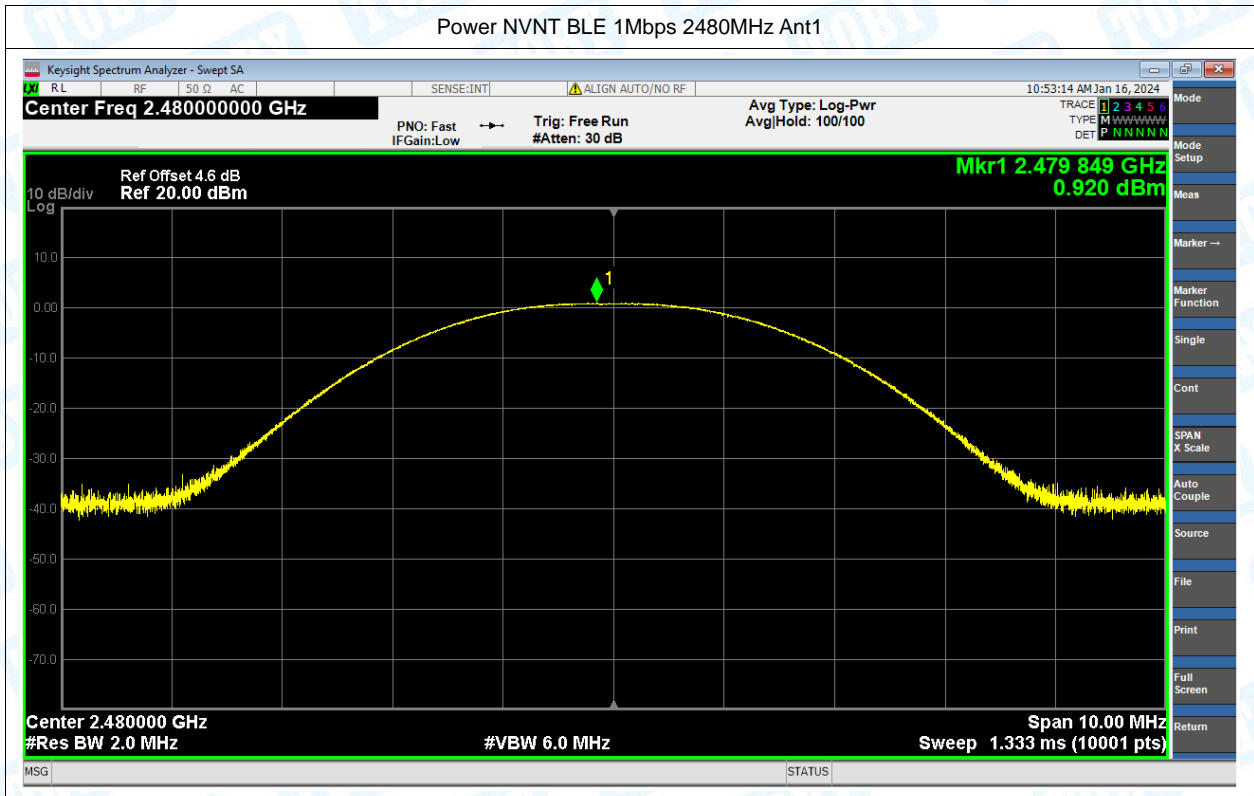




## -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2440	Ant1	0.66	0.5	Pass
NVNT	BLE 1Mbps	2480	Ant1	0.65	0.5	Pass





Test Graphs

-6dB Bandwidth NVNT BLE 1Mbps 2402MHz Ant1

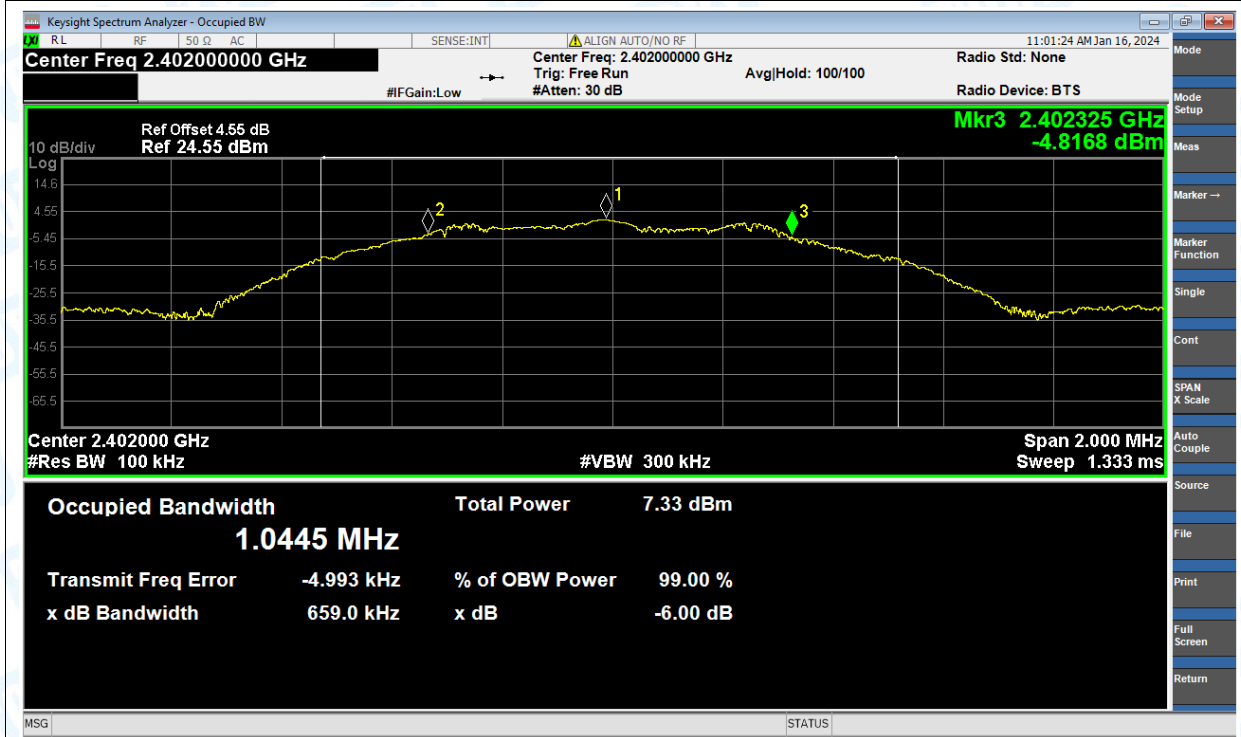

-6dB Bandwidth NVNT BLE 1Mbps 2440MHz Ant1

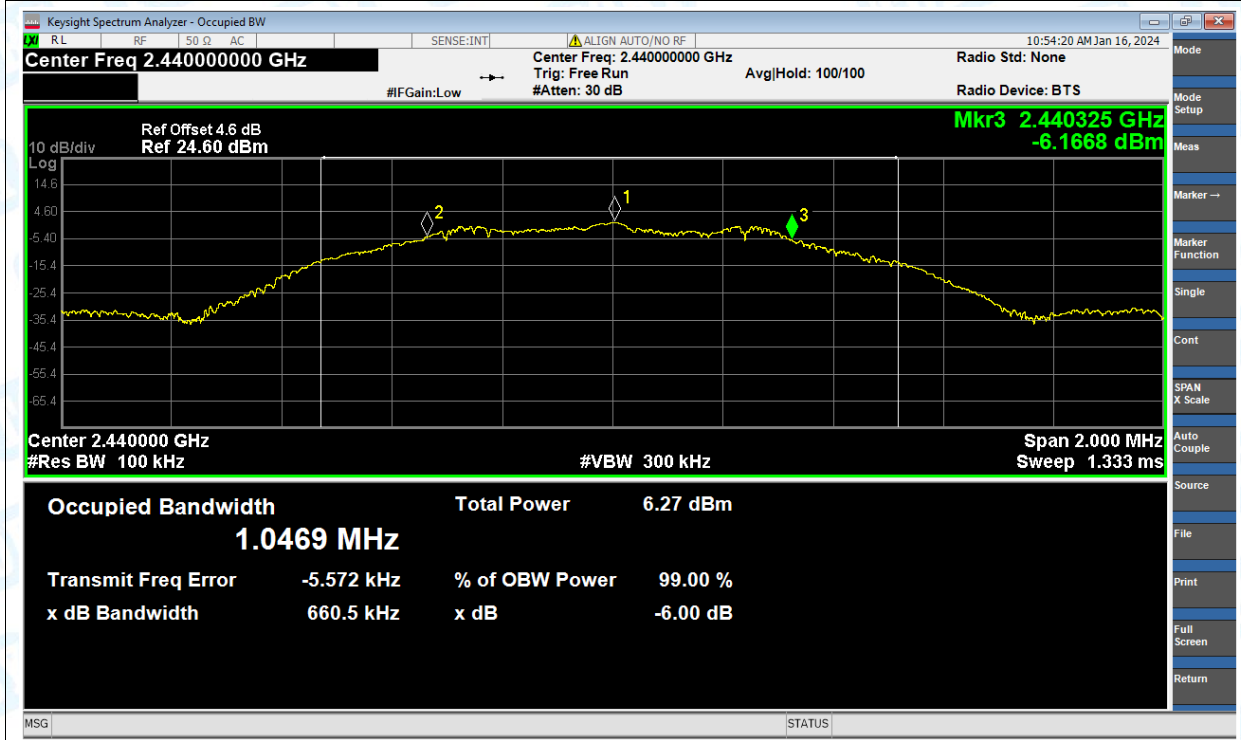

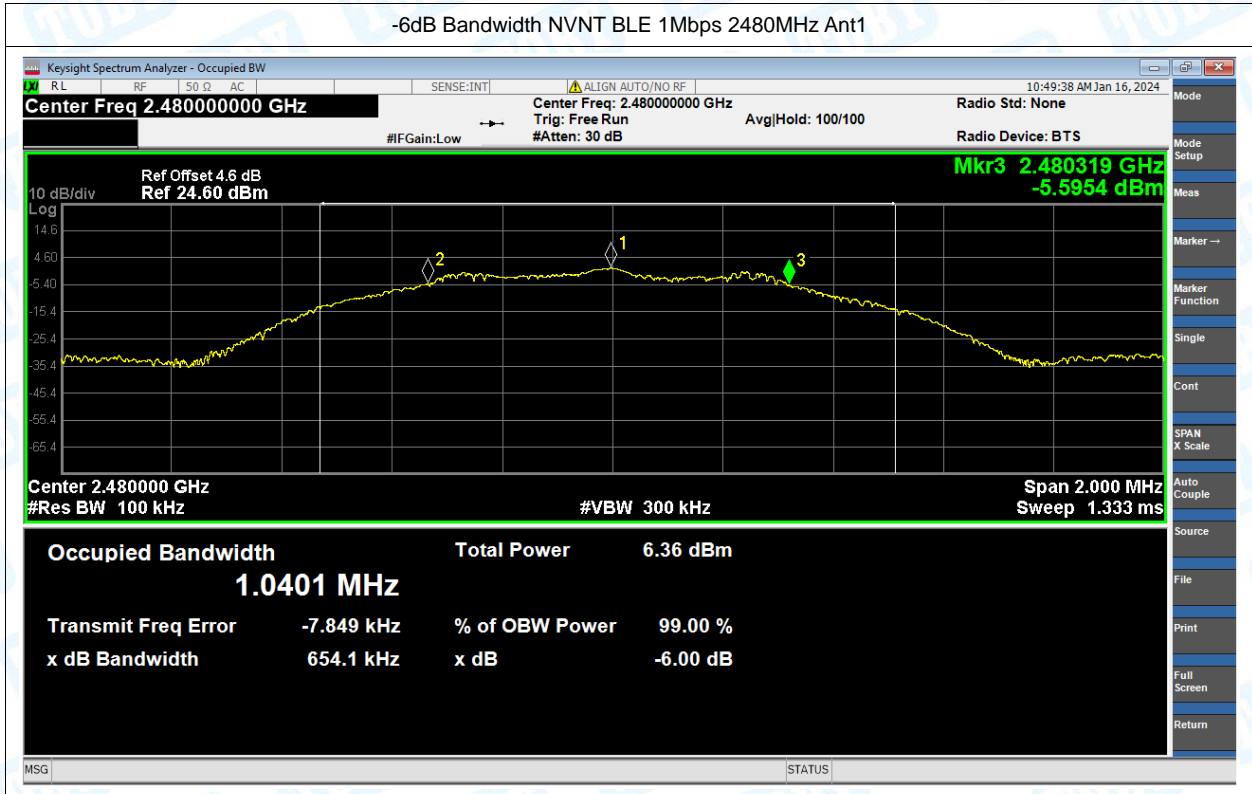




## Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1Mbps	2402	Ant1	1.024
NVNT	BLE 1Mbps	2440	Ant1	1.03
NVNT	BLE 1Mbps	2480	Ant1	1.023

Test Graphs


OBW NVNT BLE 1Mbps 2402MHz Ant1

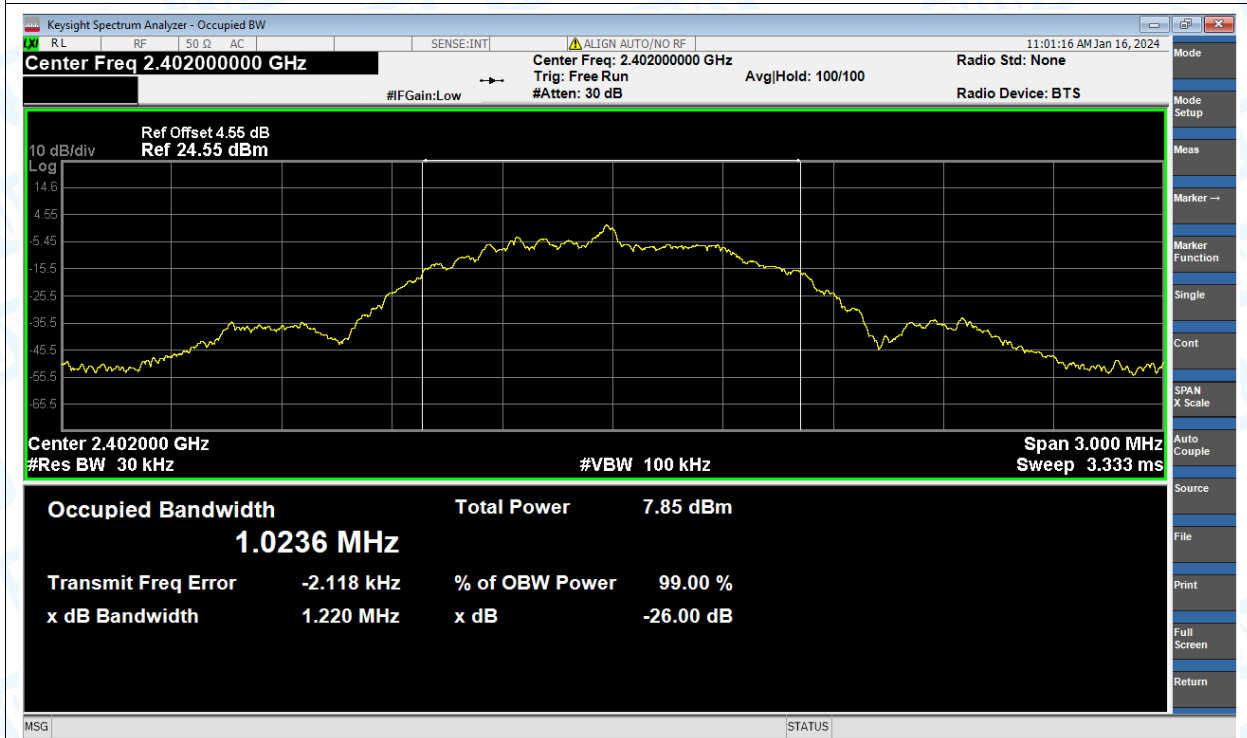

OBW NVNT BLE 1Mbps 2440MHz Ant1

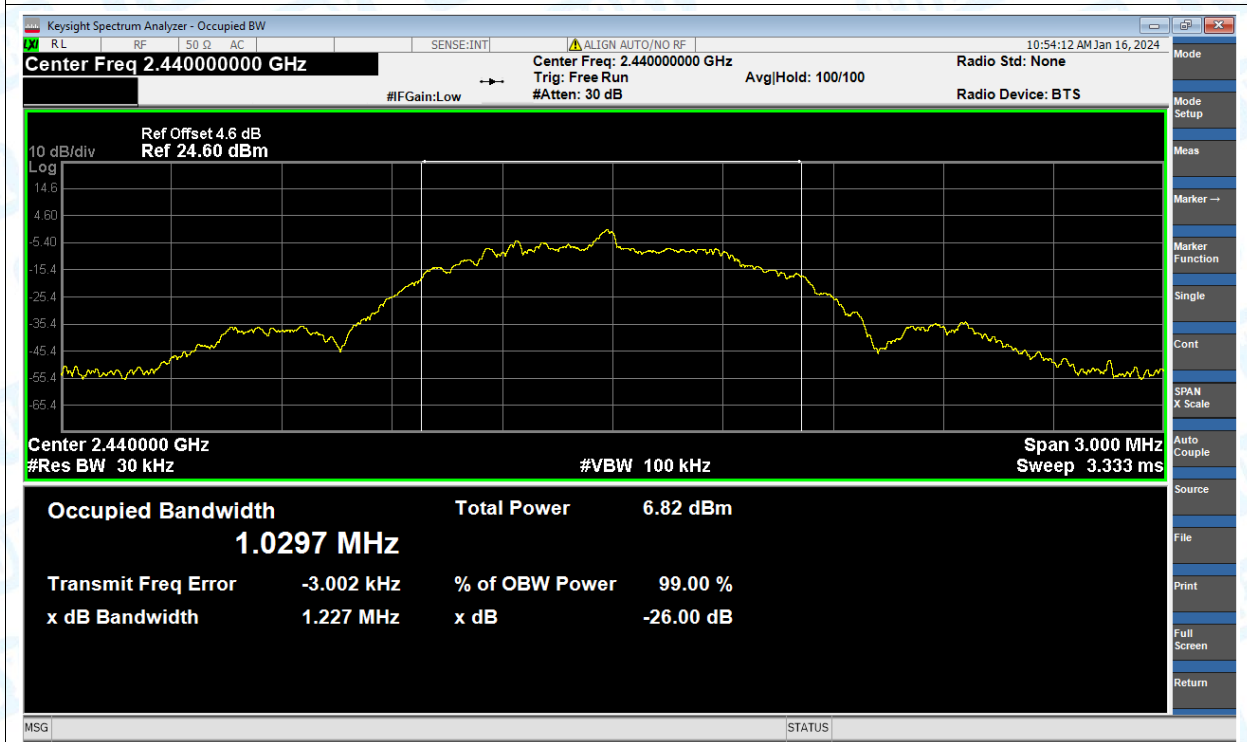



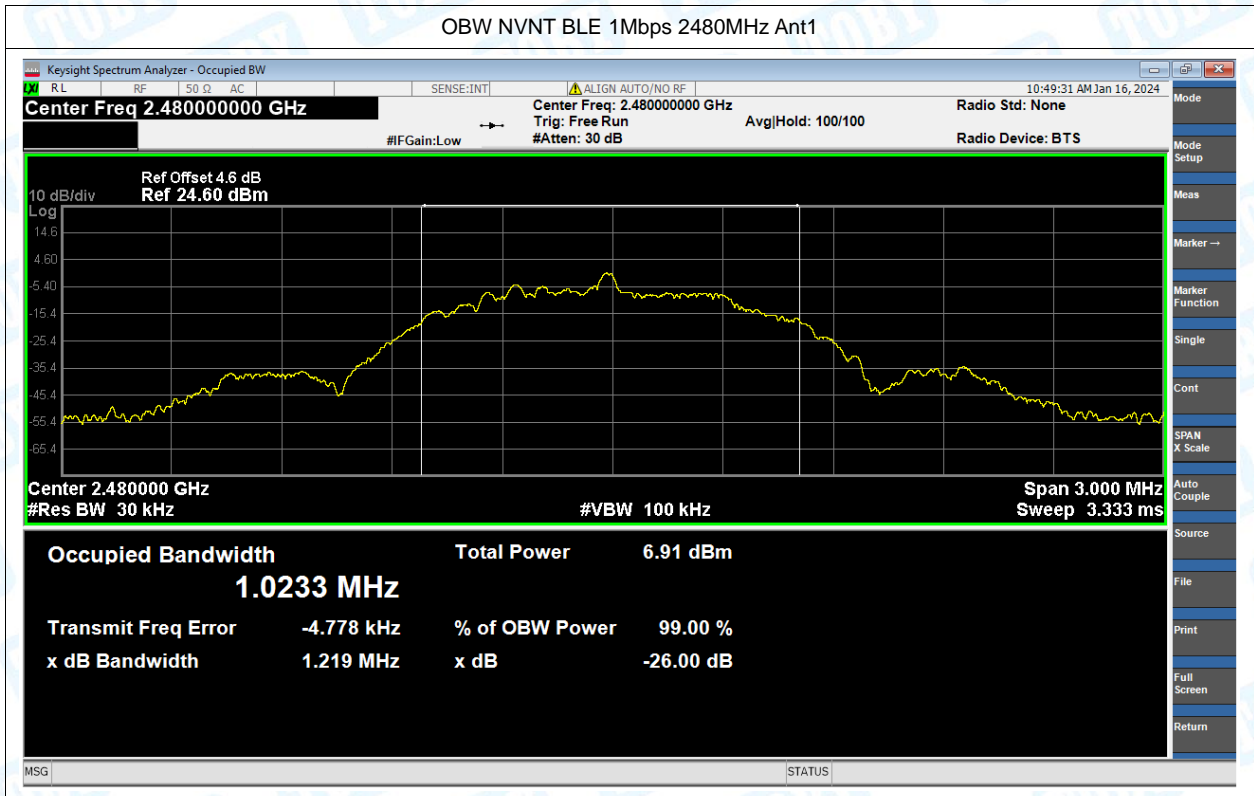


## Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-11.58	8	Pass
NVNT	BLE 1Mbps	2440	Ant1	-12.873	8	Pass
NVNT	BLE 1Mbps	2480	Ant1	-12.713	8	Pass





Test Graphs

PSD NVNT BLE 1Mbps 2402MHz Ant1

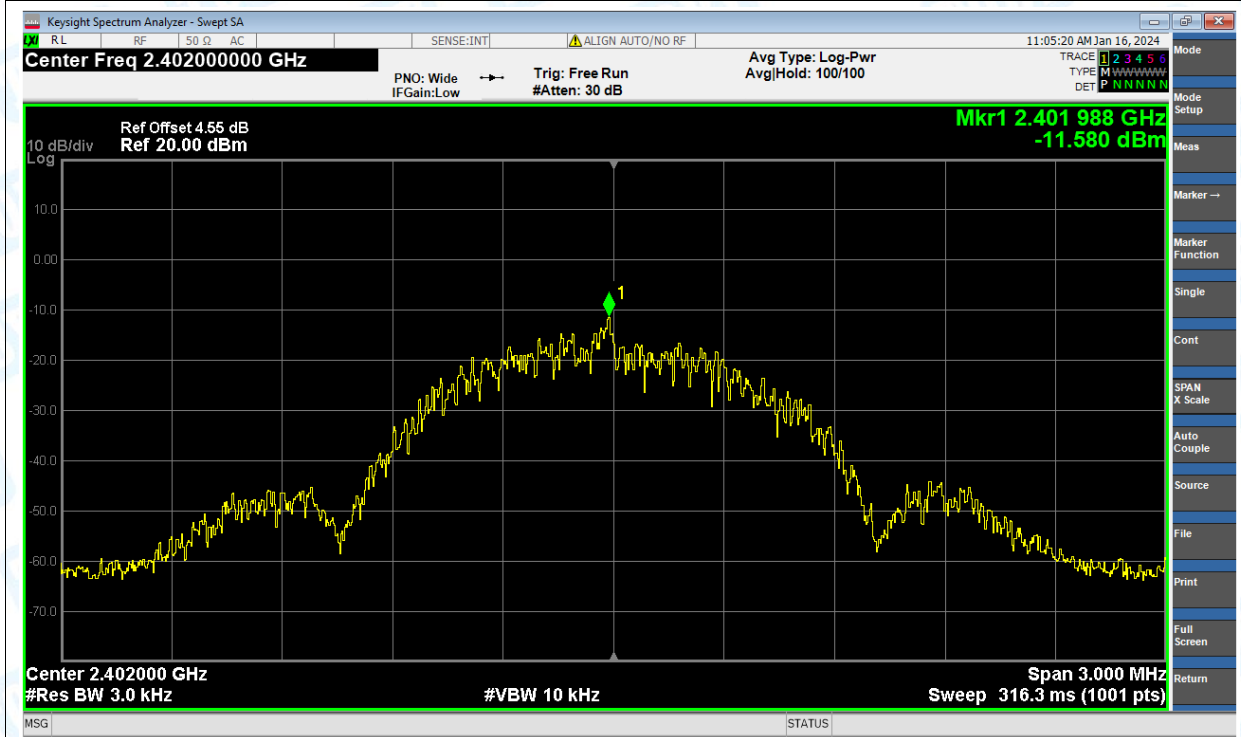

PSD NVNT BLE 1Mbps 2440MHz Ant1

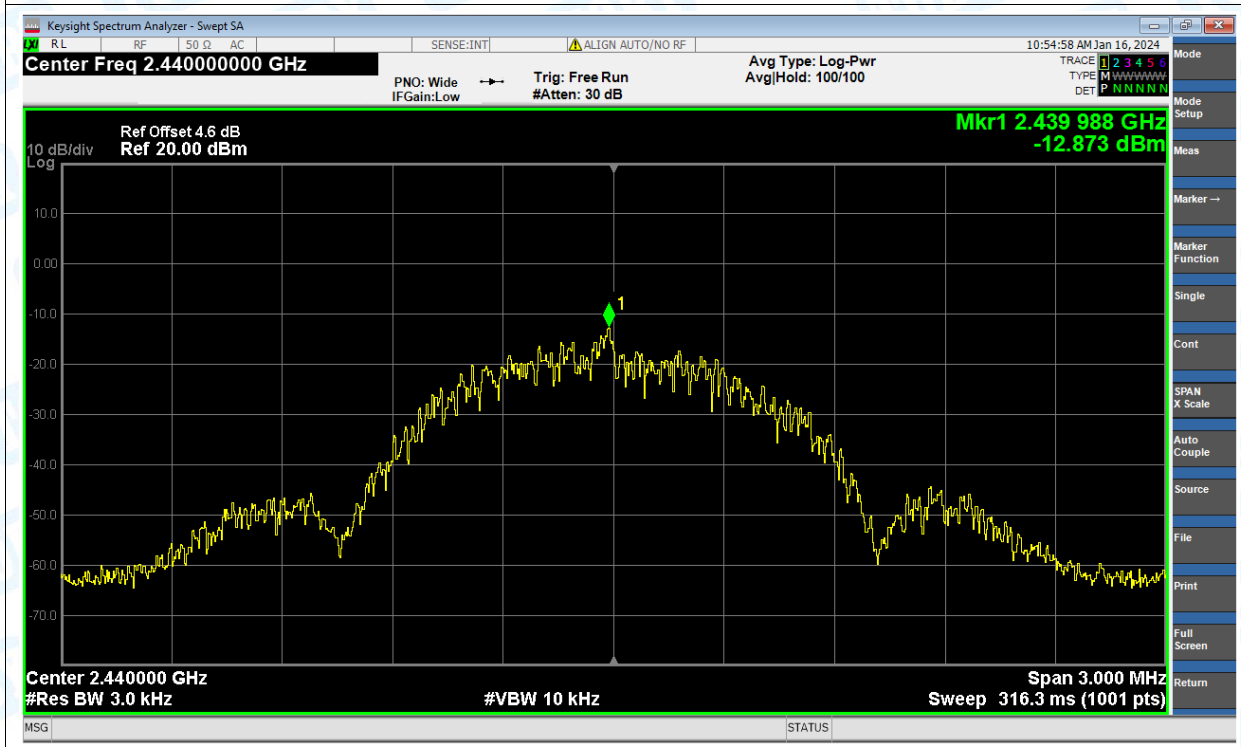

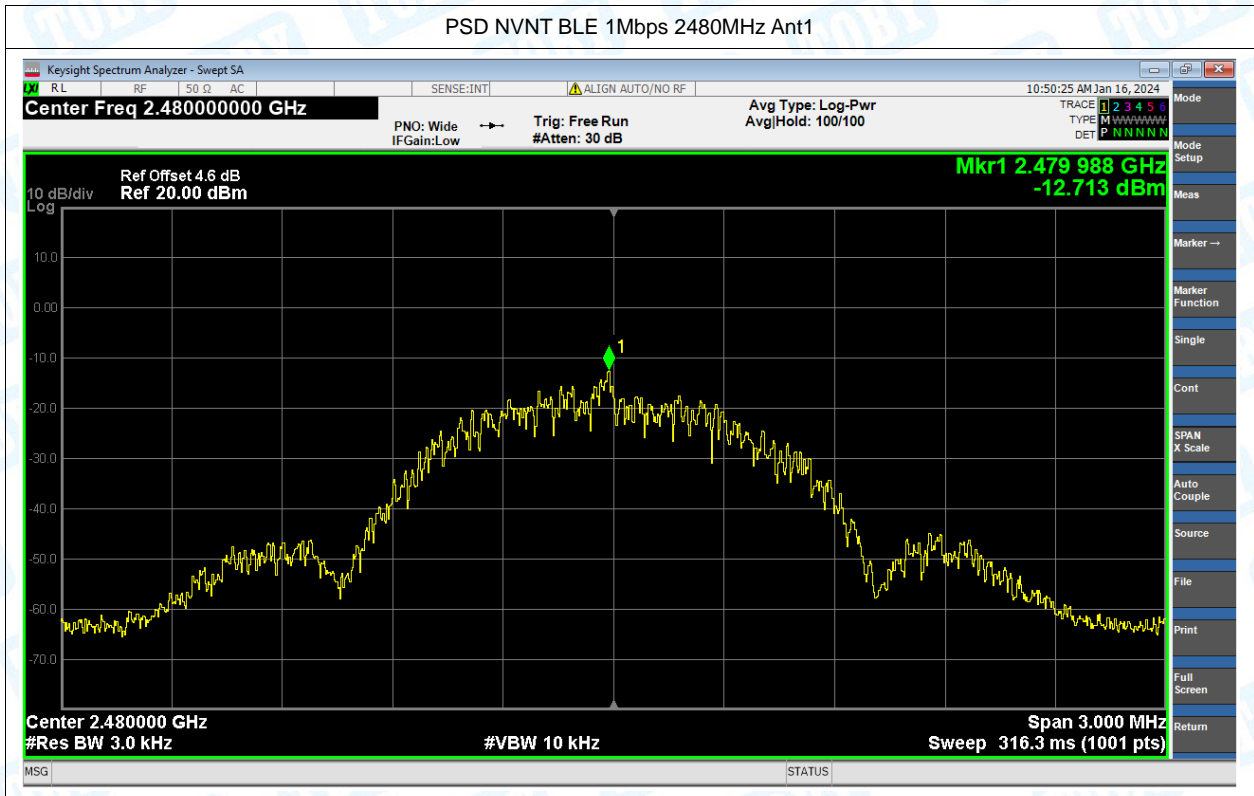




## Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-52.38	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-49.41	-20	Pass

Test Graphs



Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Ref

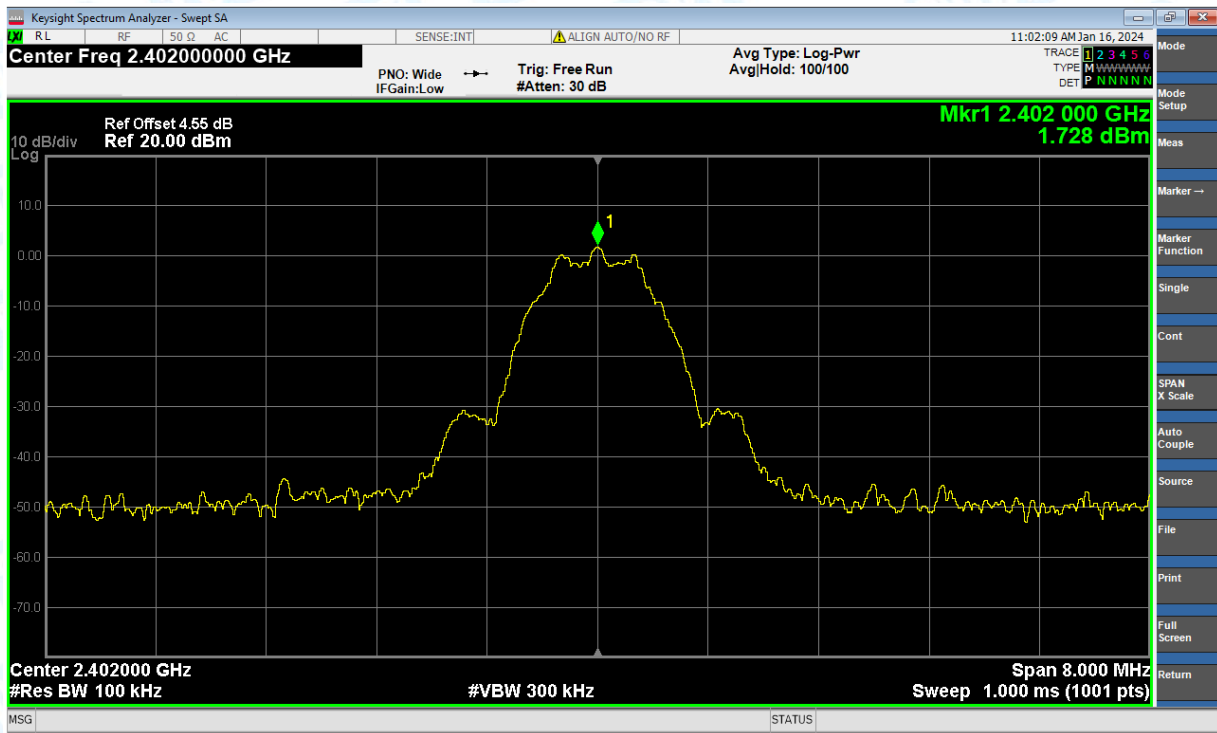

Band Edge NVNT BLE 1Mbps 2402MHz Ant1 Emission

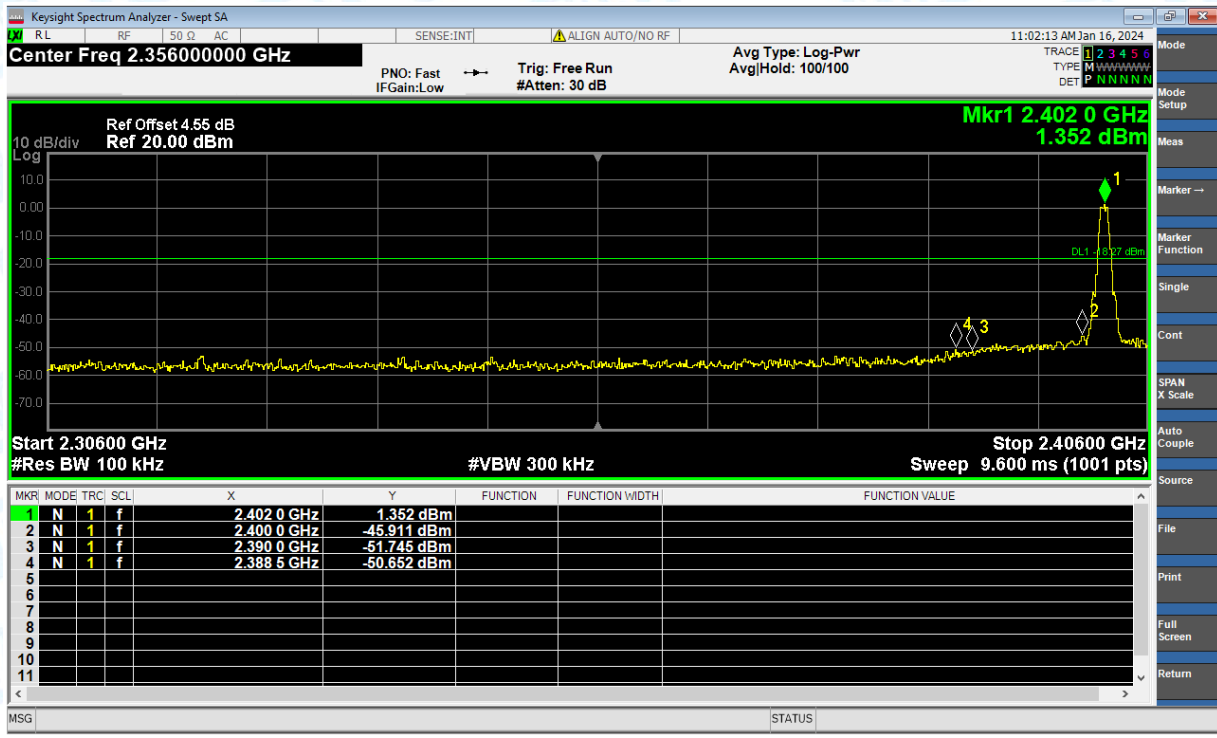



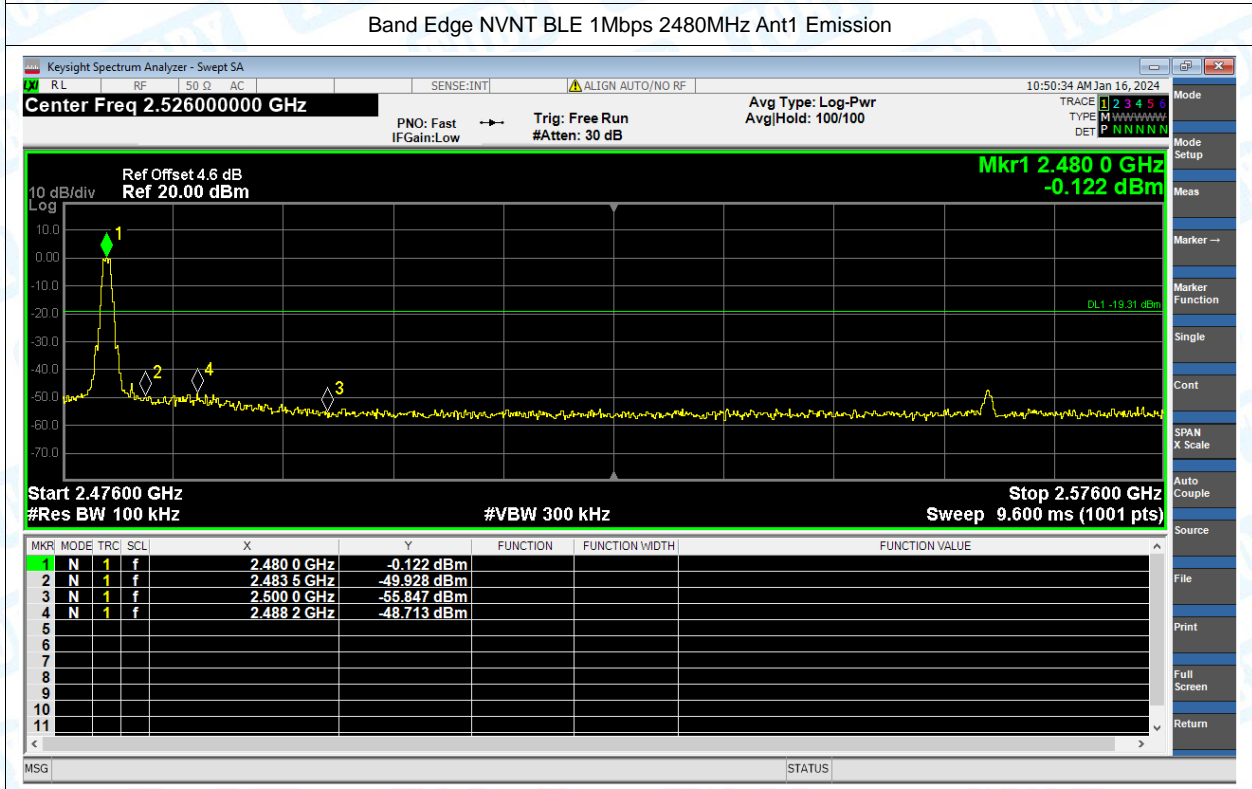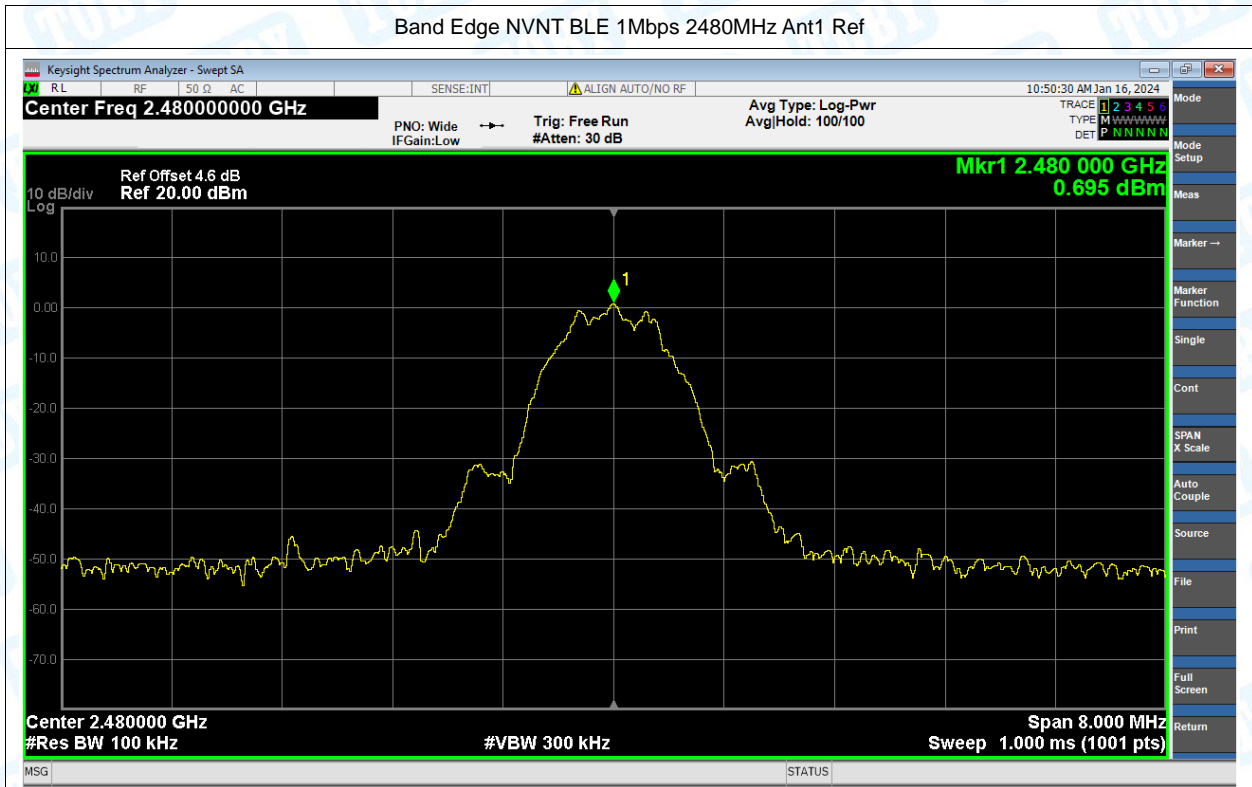


## Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-41.82	-20	Pass
NVNT	BLE 1Mbps	2440	Ant1	-39.74	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	-40.22	-20	Pass






Test Graphs

Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Ref


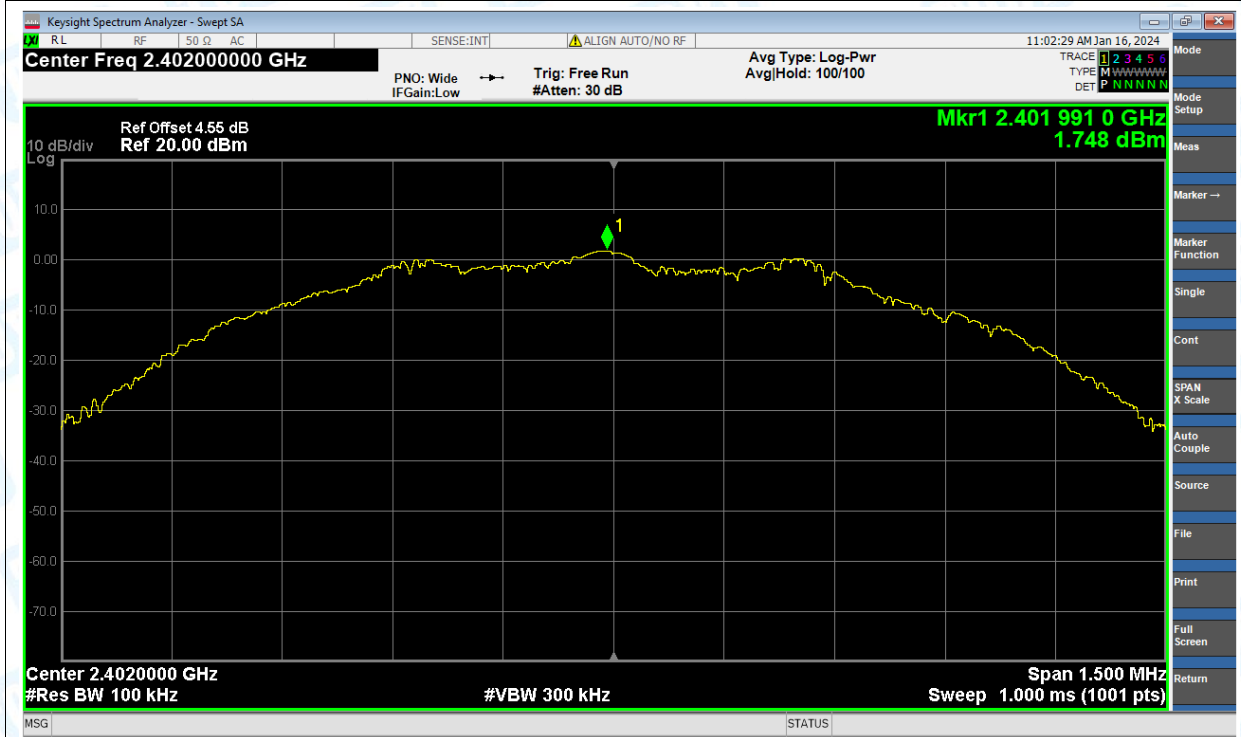


Tx. Spurious NVNT BLE 1Mbps 2402MHz Ant1 Emission

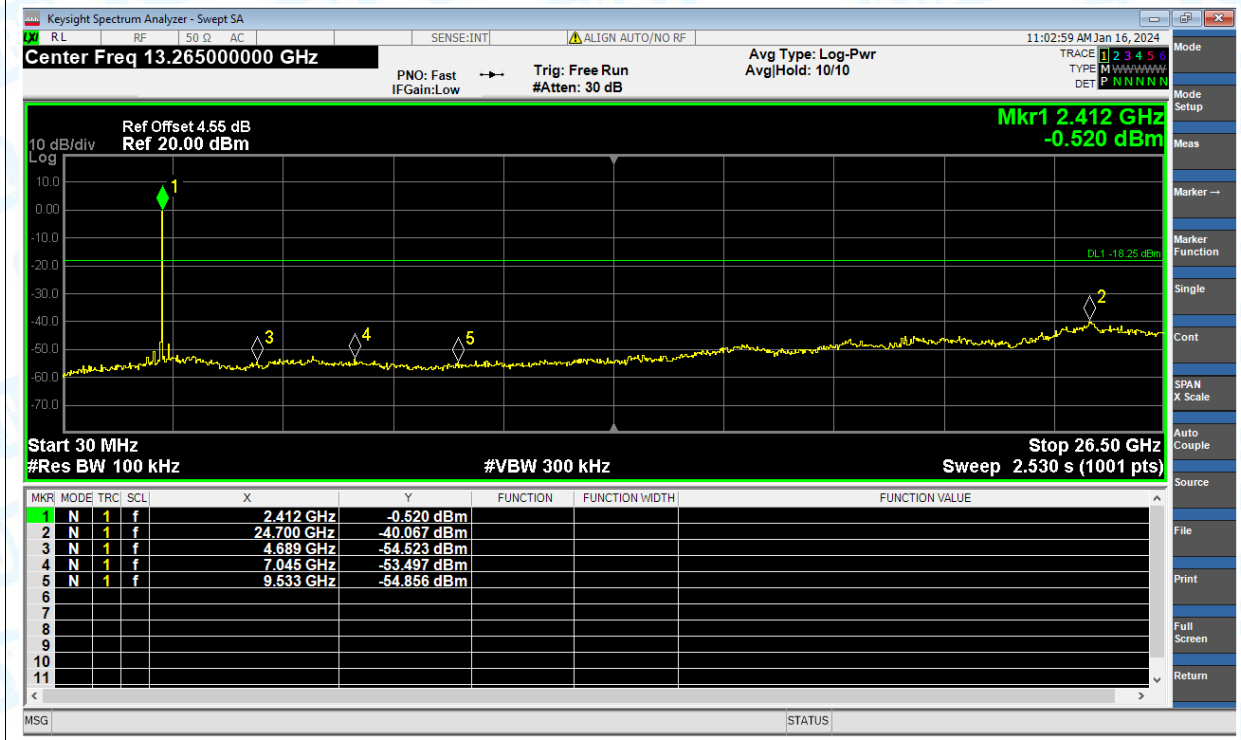

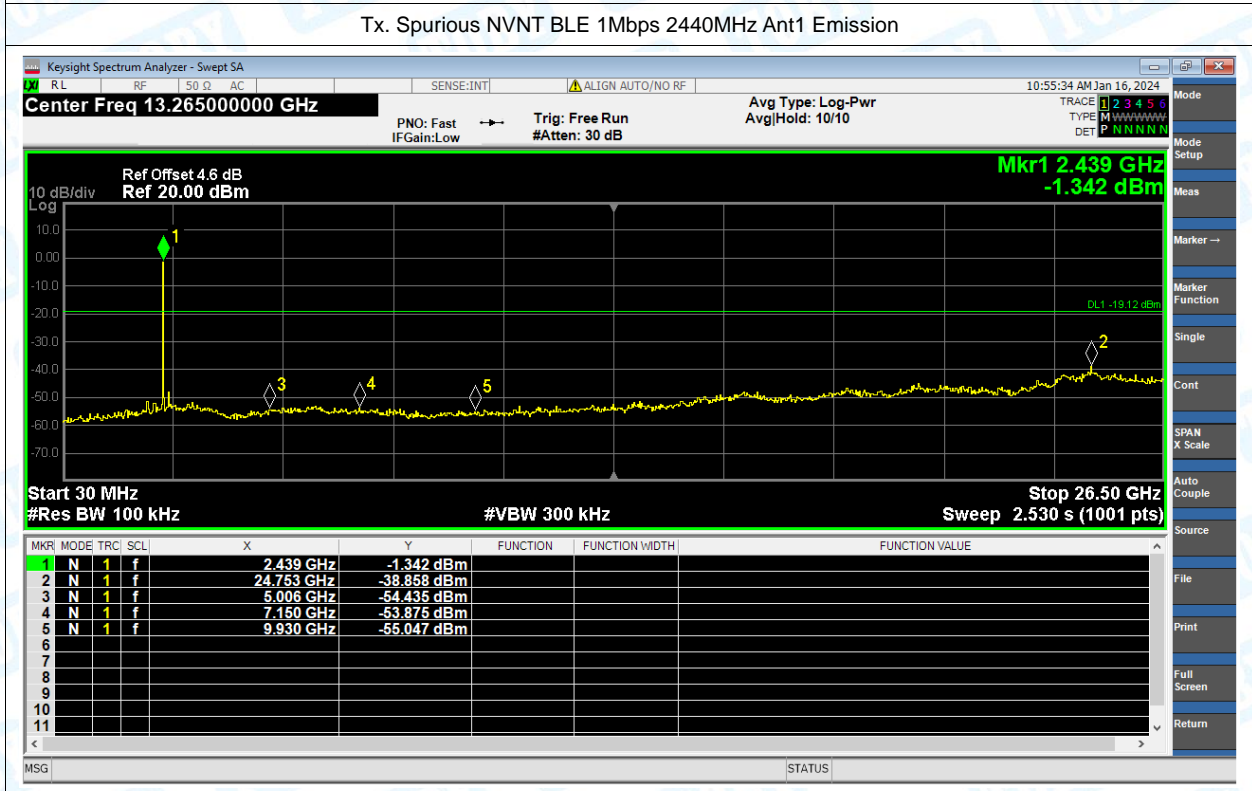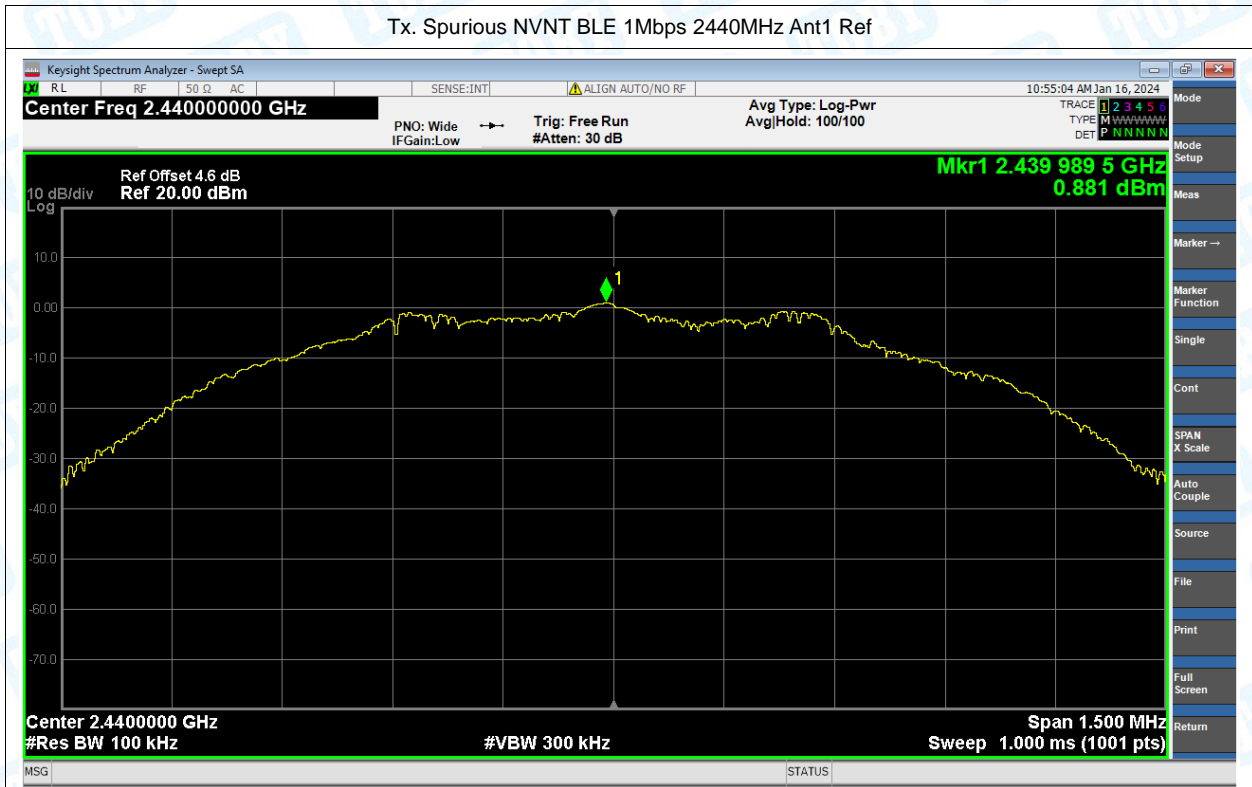



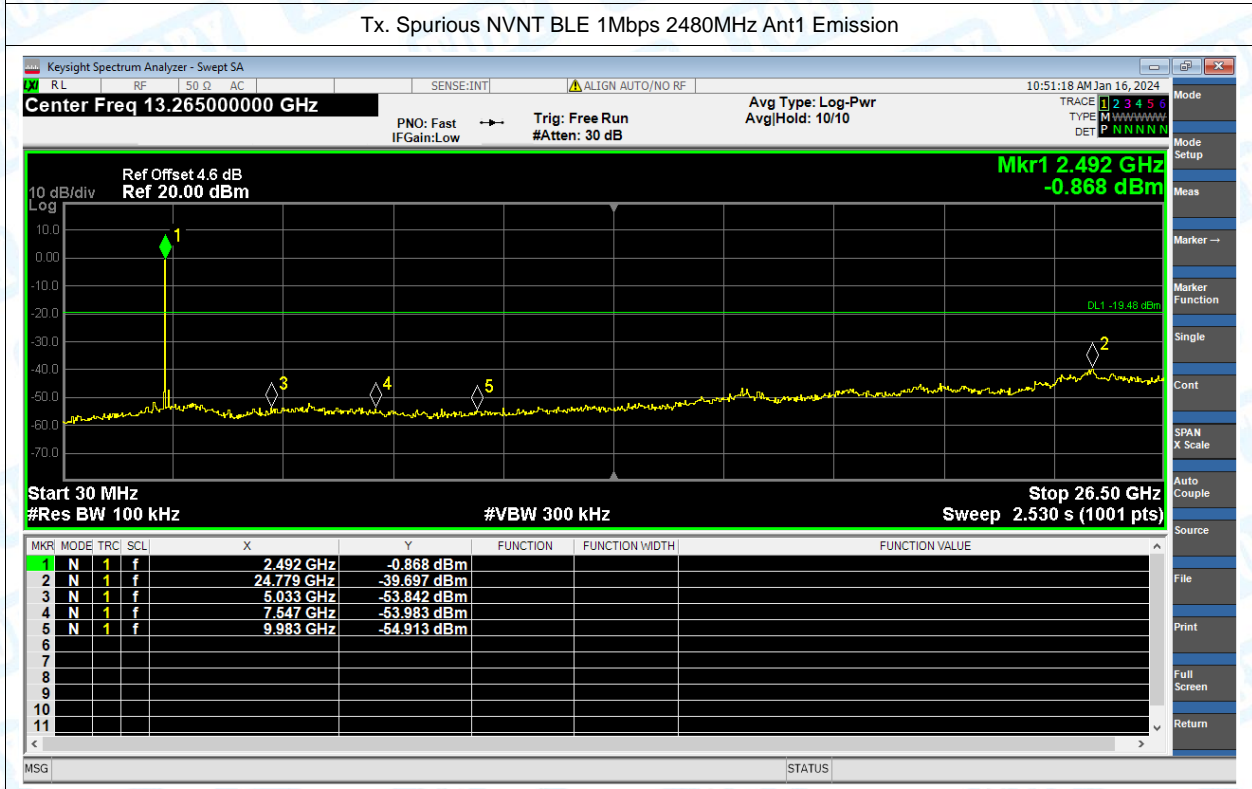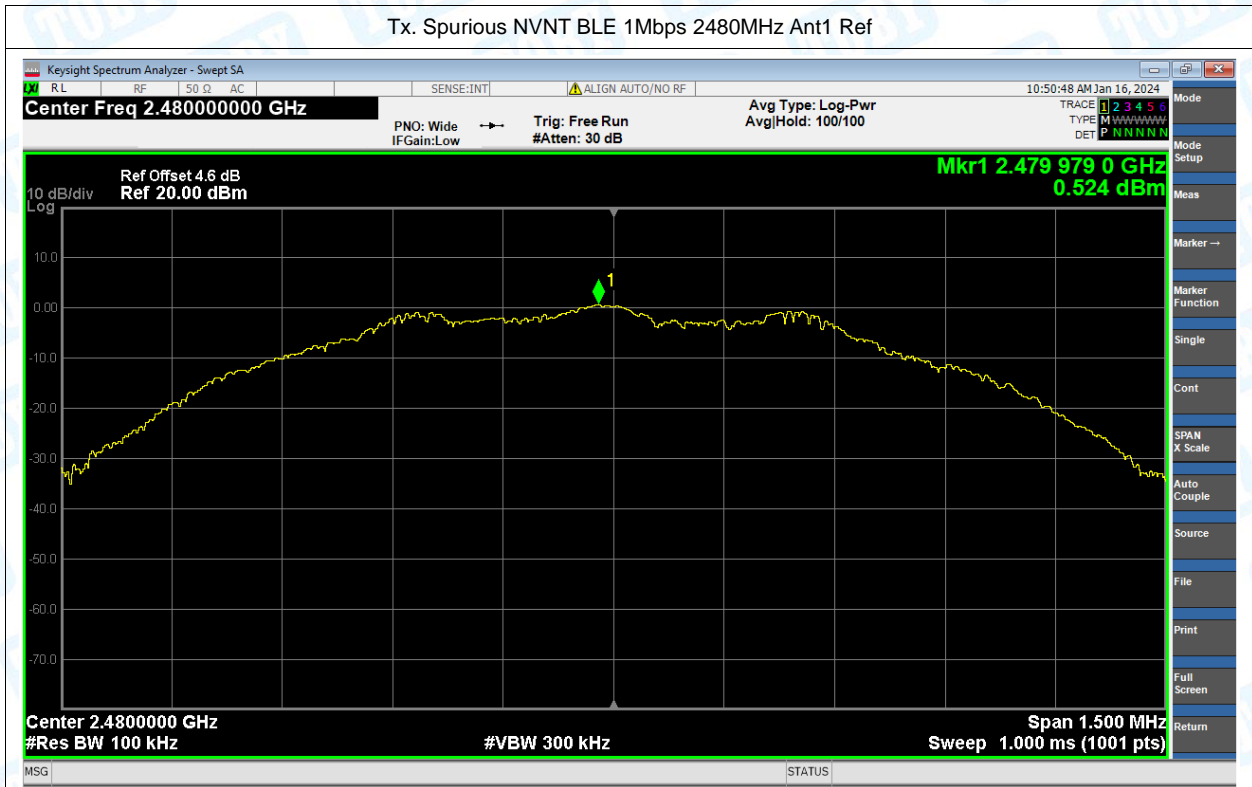


## Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2310	-47.95	2	-	49.31	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2310	-57.22	2	1.69	41.73	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2386.512	-41.25	2	-	56.01	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2389.68	-49.78	2	1.69	49.17	Average	54	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-42.35	2	-	54.91	Peak	74	Pass
NVNT	BLE 1Mbps	2402	Ant1	2390	-51.31	2	1.69	47.64	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-42.07	2	-	55.19	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2483.5	-50.87	2	1.76	48.15	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2485.504	-38.23	2	-	59.03	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2484.544	-49.28	2	1.76	49.74	Average	54	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-46.54	2	-	50.72	Peak	74	Pass
NVNT	BLE 1Mbps	2480	Ant1	2500	-53.67	2	1.76	45.35	Average	54	Pass




Test Graphs


Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Peak

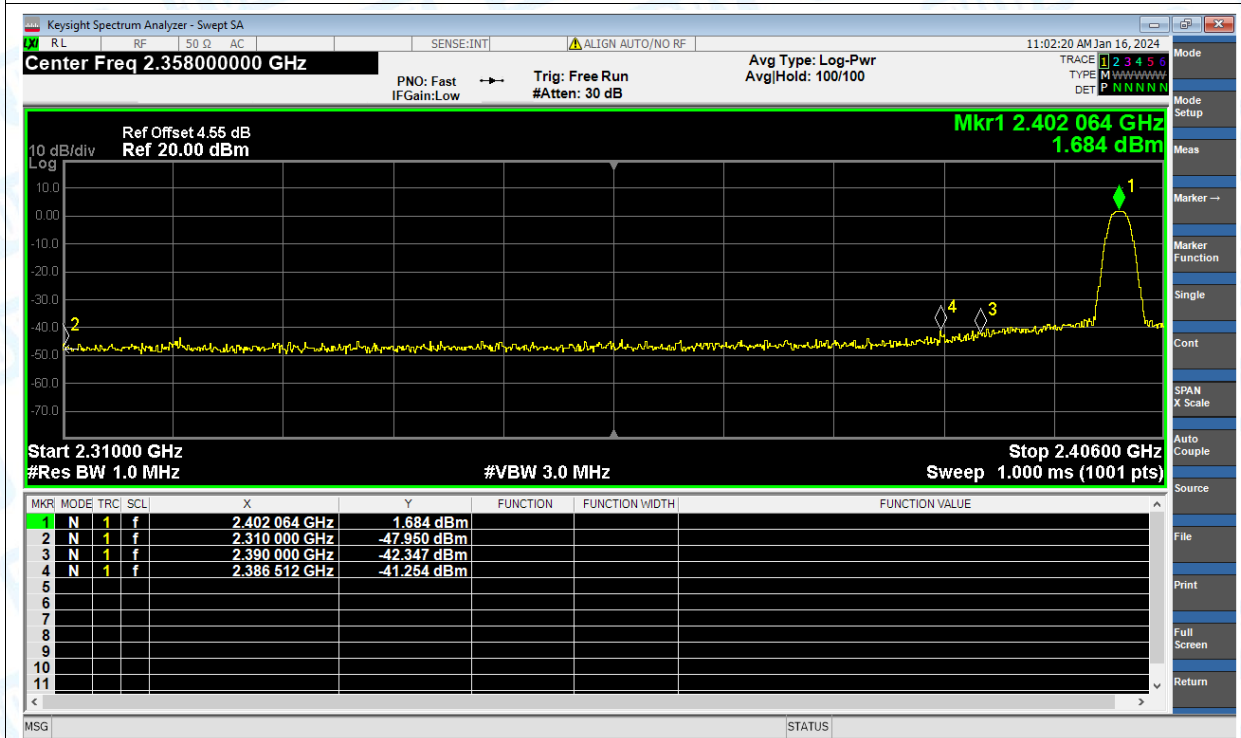

Restrict Band NVNT BLE 1Mbps 2402MHz Ant1 Average

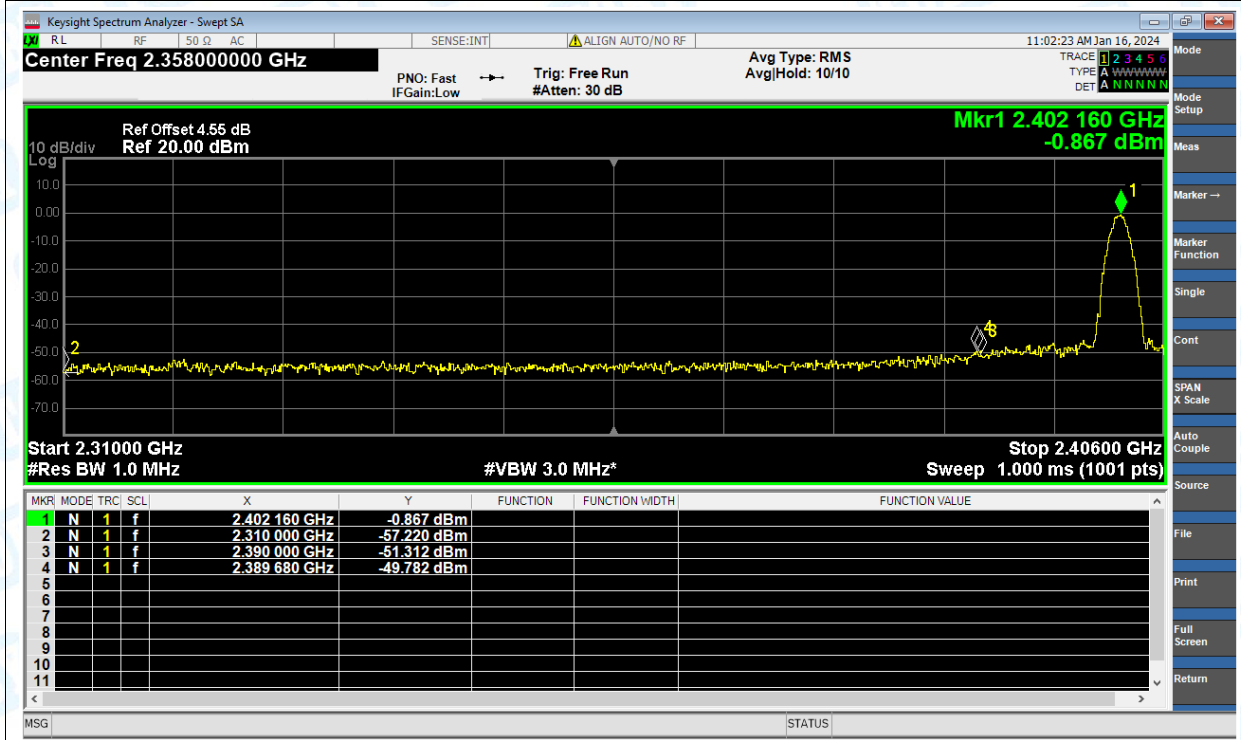

Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Peak

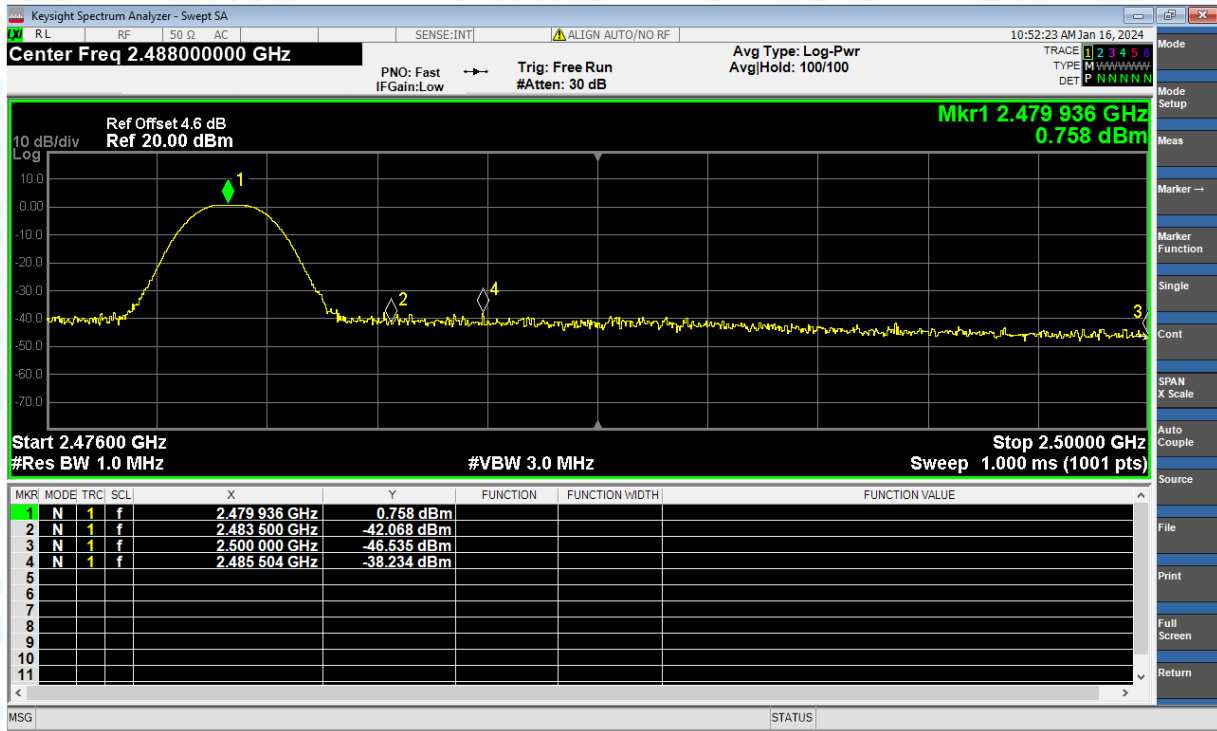

Restrict Band NVNT BLE 1Mbps 2480MHz Ant1 Average

