


1. Phone Overview

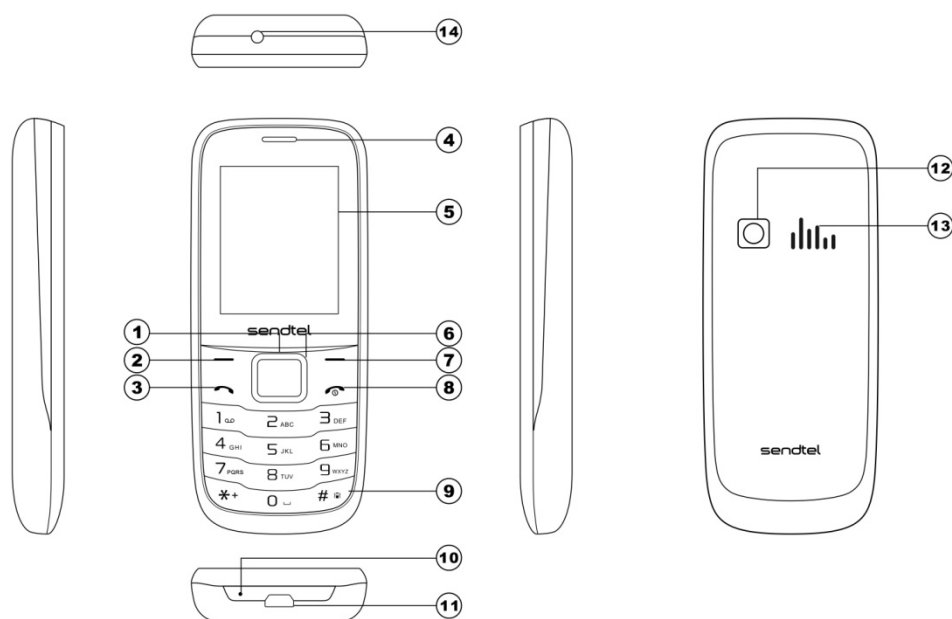

1	Center key	8	Ending/Power key
2	Left soft key	9	Keypad
3	Dial/Answer key	10	Microphone
4	Earpiece	11	Charge/Headset port
5	Display	12	Camera
6	Navigation key	13	Speaker
7	Right soft key	14	Torch


2. Getting started

2.1 Installing the SIM Cards, T-flash card and battery.


- 1) Remove the back cover and lift the battery away.




- 2) Insert the SIM card into the SIM card slot lightly with the corner cutting of the card aligning to the notch of the slot and the gold plate of the card facing downward, till it cannot be pushed further in.



- 3) To install the T-Flash card, open its latch, place its indented side downward, insert the card into the card slot, and then close the latch.



- 4) With the metallic contacts of the battery facing the metallic contacts in the battery slot, press the battery down until it locks into place, then fix its back cover.



2.2 Linking to the Network

After the SIM card and the mobile phone are successfully unlocked, the mobile phone automatically searches for an available network.

3. Input methods

This mobile phone provides multiple input methods, including English input in both upper and lower case, and numeric input method.

- 1) Press * key to switch between input methods.
- 2) Press the # key to enter the Select symbol interface and select a symbol you want.

4. Using the Menus

4.1 Mundo Tigo

Mundo Tigo is the tool kit of SIM card. This phone supports the service function .The specific items are depended on SIM card and network. Service menu will be auto added to the phone menu when supported by network and SIM card.

4.2 *111#

You can sent request to *111# .

4.3 Names

The mobile phone can store at least 300 phone numbers.

4.4 Call logs

Through this function, you can view a list of missed calls, dialed calls and received calls , call time etc.

4.5 Multimedia

Camera

Use this function to take picture.

Image

Use this function to preview photos.

Video

Use this function to record video files.

Video player

Use this function to play video files.

Recorder

Use this function to record audio files.

FM radio

You can use the application as a traditional FM radio with automatic tuning and saved channels.

My file

The phone supports the T-Flash card. You can use the file manager to conveniently manage various directories and files on the T-Flash card.

4.6 Messages

Through this function, you can write message, view inbox、 outbox etc, If the short message memory is full, a blinking message icon appears on the top of the screen.

4.7 Audio player

Use this function to play audio files.

4.8 Tools

Torch

Select on or off as per your requirement. Long press Right soft key to switch on or off in the standby interface.

Calculator

The calculator can add, subtract, multiply and divide.

Calendar

Once you enter this menu, there is a monthly-view calendar for you to view the date; you can go to any day you want.

Alarm

You can activate one, or multiple as needed. For each alarm clock, the ringing date and the ringing time can be set.

World clock

This function allows you to check the standard time in different areas of the world.

Stopwatch

You can into stopwatch

Bluetooth

With Bluetooth, you can make a wireless connection to other compatible devices, such as mobile phones, computers, headsets and car kits. You can use the Bluetooth to send images,

video clips, music, sound clips and notes, and transfer files from your compatible pc.

4.9 Settings

Dual- SIM

Dual-SIM refers to two SIM card slots, and the two cards can be used as standby at the same time or set one of them to display on the idle screen ,You can activate flight mode.

Profile

The mobile phone has multiple user profiles to suit user's requirements.

Phone Settings

- 1) **Date & time:** set the date format, time format, and detail time of the location.
- 2) **Language:** Select the display language for the mobile phone.
- 3) **Shortcut settings:** Customize the shortcut functions of the Up, Down, Left, and Right direction keys.
- 4) **Schedule power on/off:** Set the time when the mobile phone will be automatically powered on and off.

Call settings

Through this function, you can set call divert、 call waiting、 call barring etc.

Display

You can set wallpaper, Backlight , Keypad light time through this function.

Security settings

- 1) **PIN:** PIN code is the personal identification number for SIM card. Default password set by network operator should be 1234. If activated the power-on PIN code, then you have to input the PIN password each time you switch on the phone.
- 2) **Phone locked:** Secured by phone password, the phone will be protected from other unauthorized users. After activated this function, you should input password each time you switch on the phone. The defaulted password is 0000.
- 3) **Privacy:** In this menu, you can set password-protected on the need of menu, For the menu open the private protection, need to input a phone password when you entered.
- 4) **Auto keypad lock:** After activating this function, the phone will be locked automatically after a particular time, so as to avoid error operations

Network selection

You can set Network selection mode .

Restore Factory Settings

Use this function to restore factory settings. The preset password is 0000.

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the

following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

SAR Information Statement

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radiofrequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. * Tests for SAR are conducted with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output. Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government adopted requirement for safe exposure. The tests are performed in positions and locations (e.g., at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this model phone when tested for use at the ear is **1.054W/Kg** and when worn on the body, as described in this user guide, is **0.982 W/Kg**(Body-worn measurements differ among phone models, depending upon available accessories and FCC requirements). The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RFexposure guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/fccid> after searching on

FCC ID: **ZYPDRACO2** Additional information on Specific Absorption Rates (SAR) can be found on the Cellular Telecommunications Industry Association (CTIA) web-site at <http://www.wow-com.com>. * In the United States and Canada, the SAR limit for mobile phones used by the public is 1.6 watts/kg (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements.

Body-worn Operation

This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of 15mm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.