




RSE_ANT B_ 802.11ax(80)_HE0(Full)_6465

1 GHz - 18 GHz

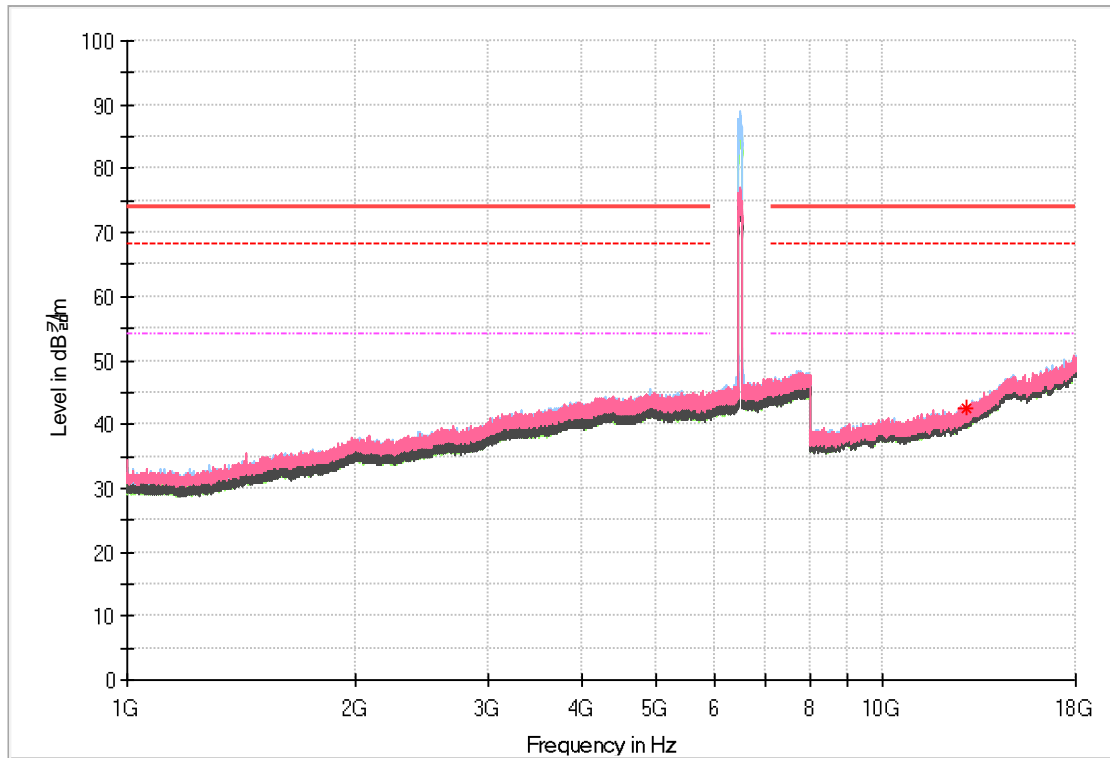

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
12930.31	27.68	42.38	-	-	-	200	H	87	14.70	25.82	68.20	-	-


Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



RSE_ANT B_ 802.11ax(80)_HE0(Full)_6625

1 GHz - 18 GHz

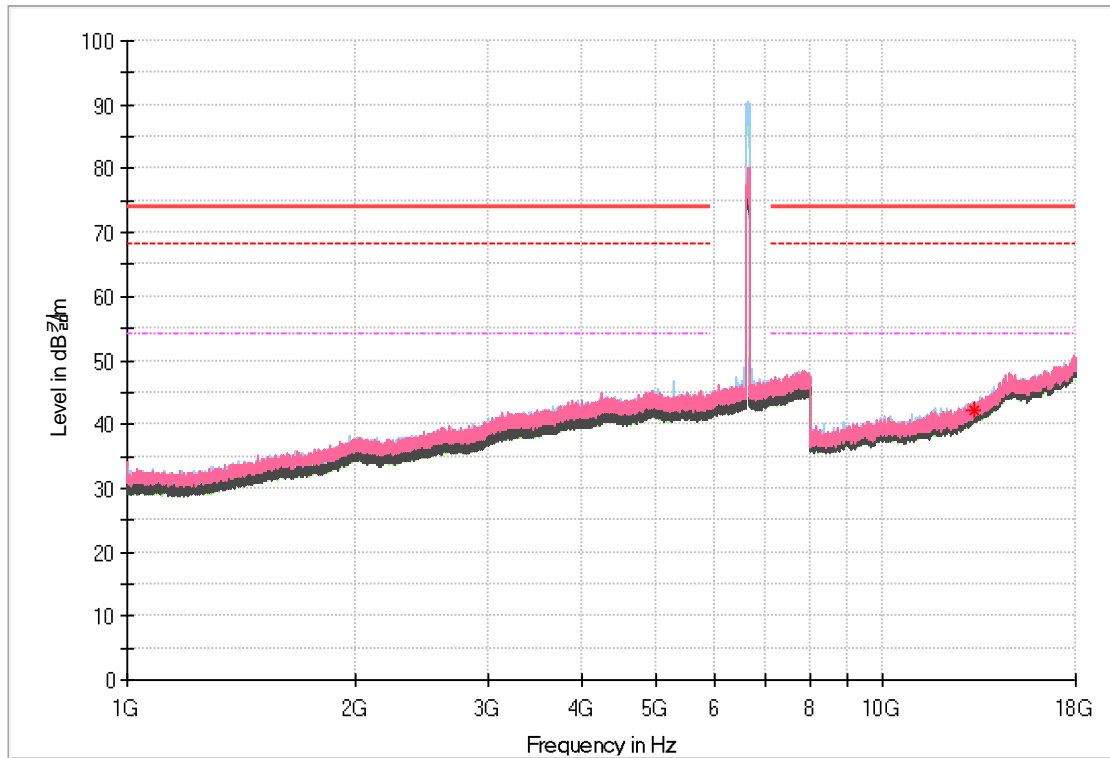

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
13250.00	26.85	42.35	-	-	-	300	V	226	15.50	31.65	74.00	-	-


Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



RSE_ANT B_ 802.11ax(80)_HE0(Full)_7025

1 GHz - 18 GHz

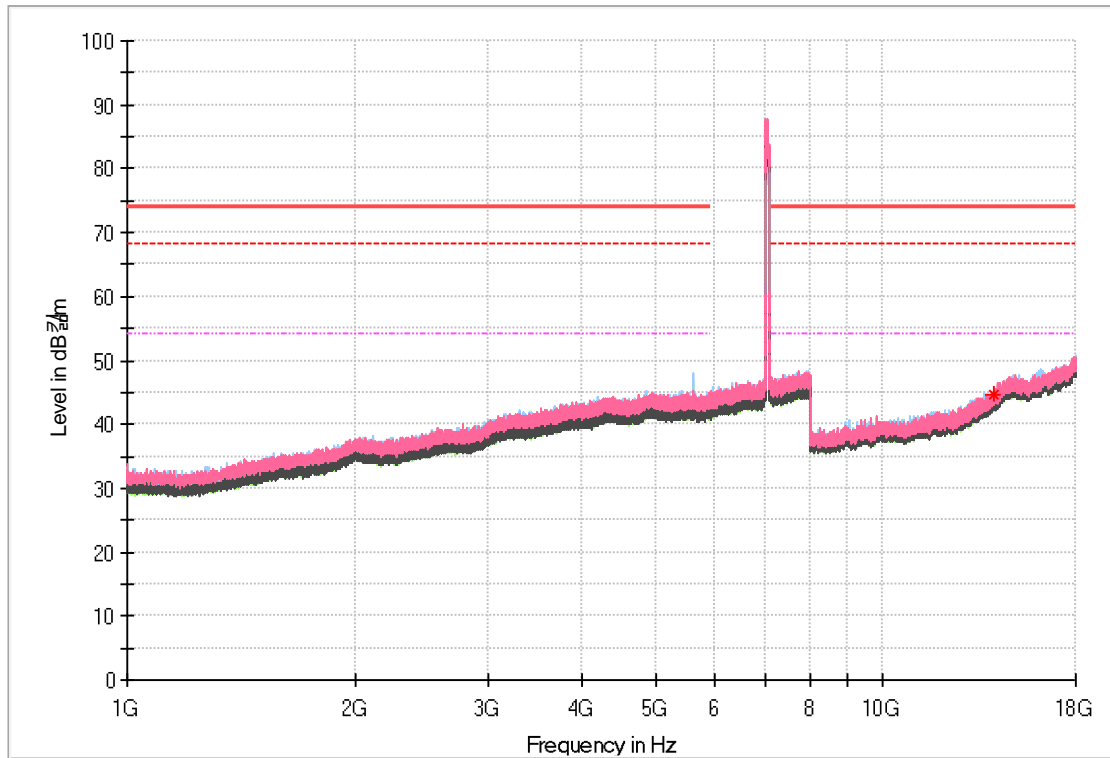

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
14 050.63	26.86	44.56	-	-	-	200	H	91	17.70	23.64	68.20	-	-


Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



RSE_ANT B_ 802.11ax(160)_HE0(Full)_6025

1 GHz - 18 GHz

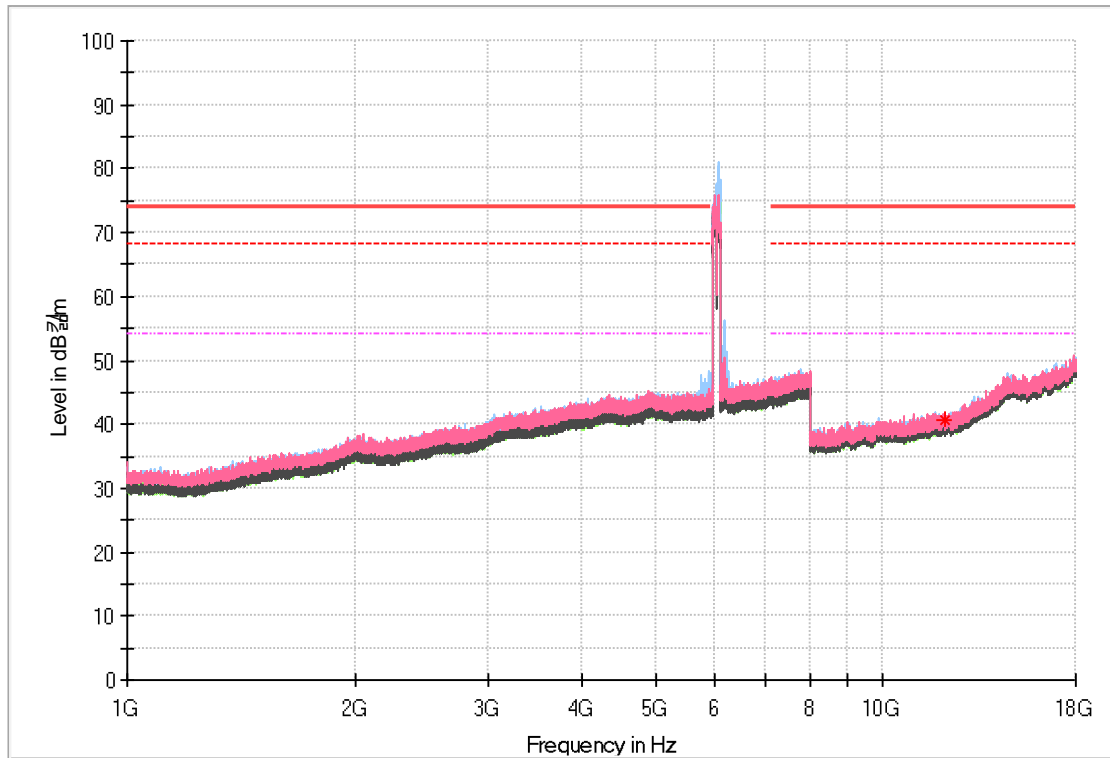

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
12 050.00	26.77	40.57	-	-	-	200	H	0	13.80	33.43	74.00	-	-


Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



RSE_ANT B_ 802.11ax(160)_HE0(Full)_6505

1 GHz - 18 GHz

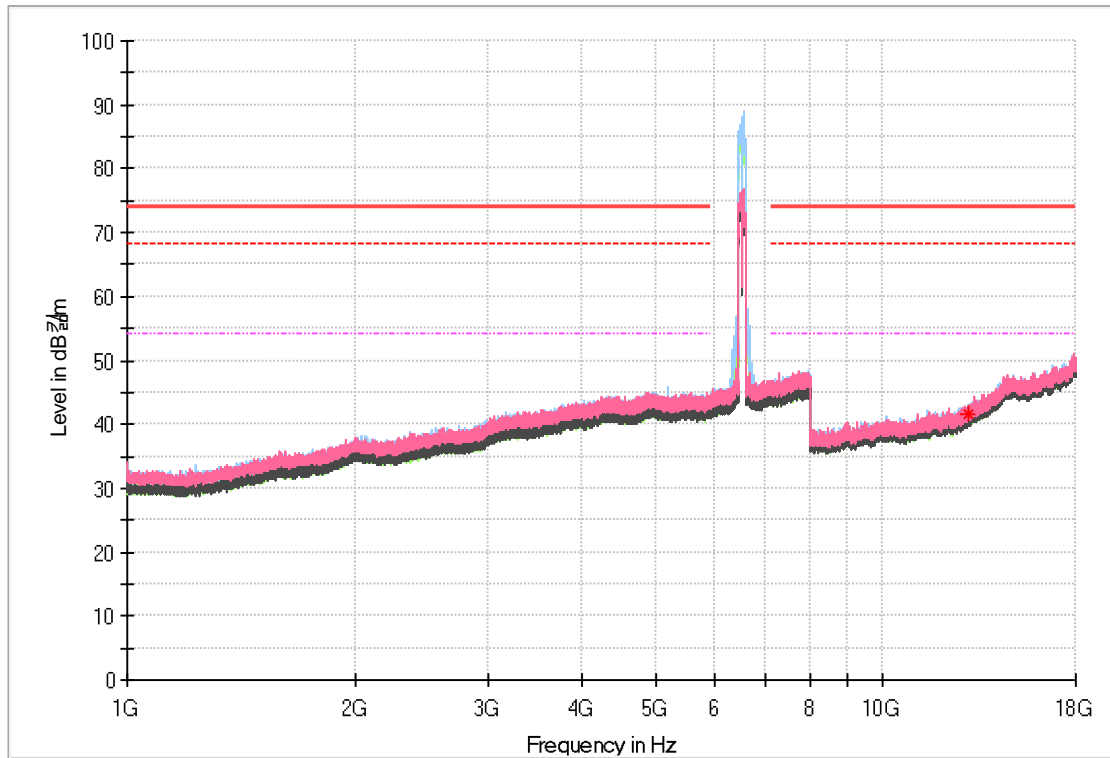

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
13010.00	26.78	41.68	-	-	-	200	V	228	14.90	26.52	68.20	-	-


Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



RSE_ANT B_ 802.11ax(160)_HE0(Full)_6665

1 GHz - 18 GHz

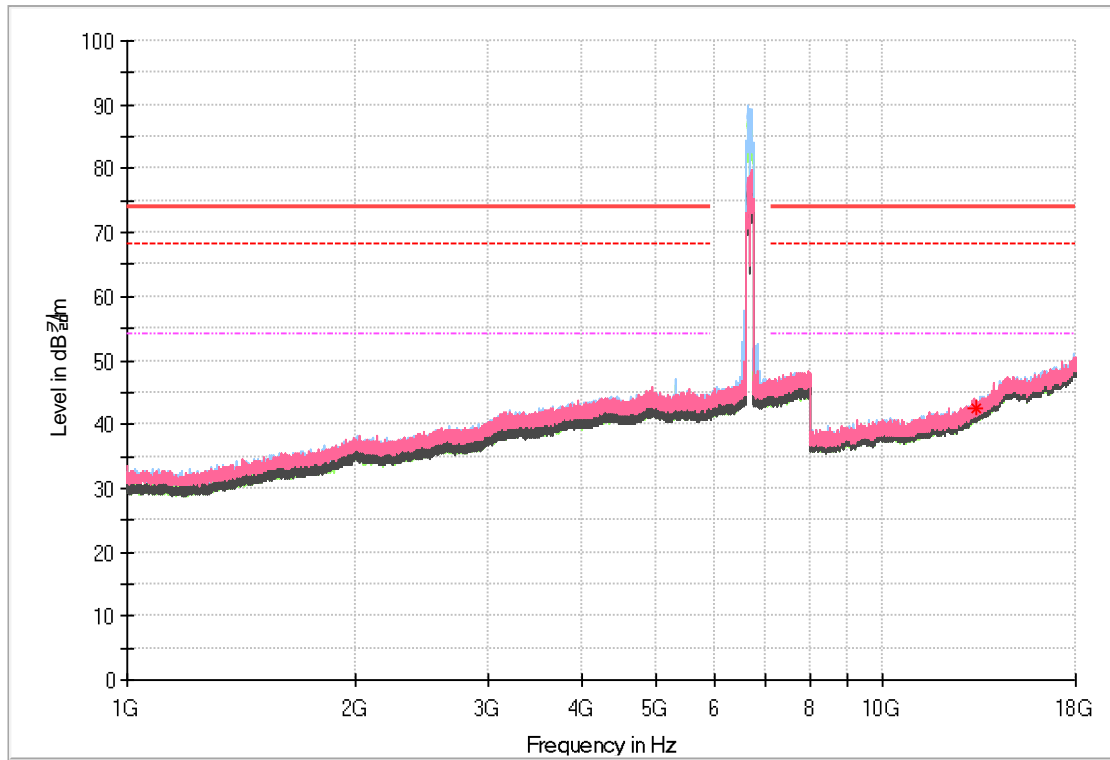

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
13 330.00	26.81	42.51	-	-	-	300	H	22	15.70	31.49	74.00	-	-


Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



RSE_ANT B_ 802.11ax(160)_HE0(Full)_6985

1 GHz - 18 GHz

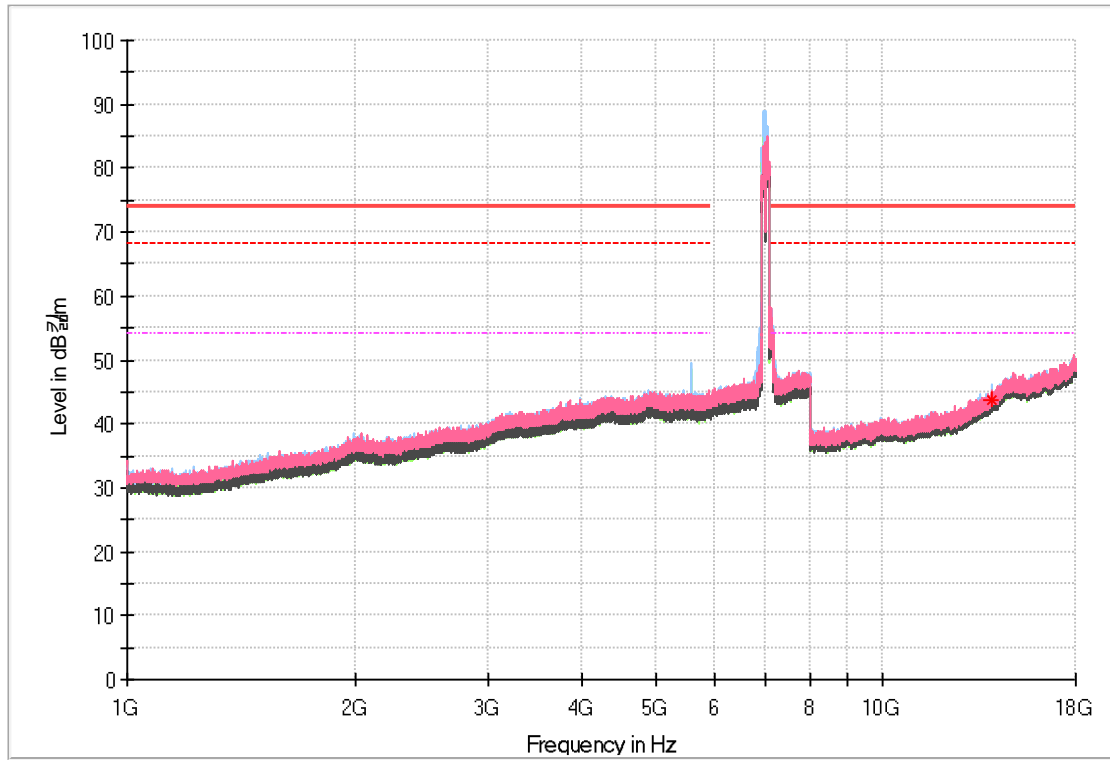

Frequency [MHz]	Peak Reading Value [dBμV]	Peak Result [dBμV/m]	AVG Reading Value [dBμV]	AVG Result [dBμV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBμV/m]	AVG Margin [dB]	AVG Limit [dBμV/m]
13970.00	26.37	43.87	-	-	-	200	V	28	17.50	24.33	68.20	-	-

Remarks


1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)



3.2.5.4 Radiated Spurious Emission (Above 18 GHz)

5 GHz UNII band

RSE_ANT B_ 802.11ax(20)_HE0(106/53)_5745

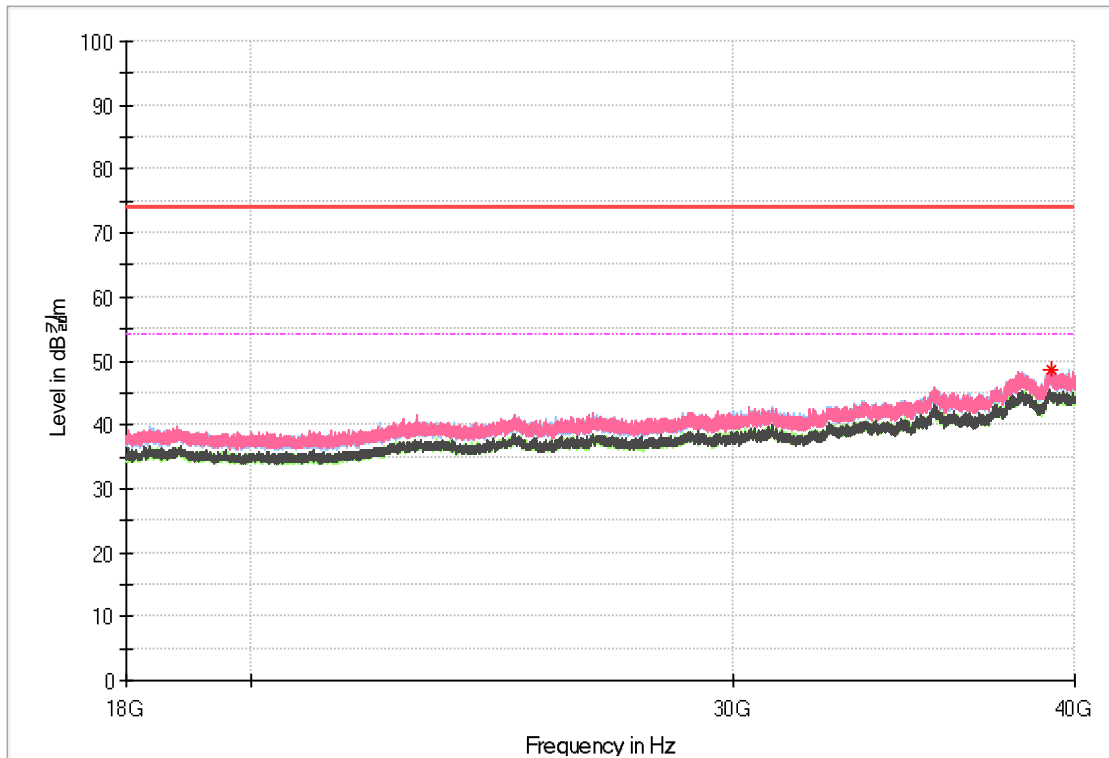

Frequency [MHz]	Peak Reading Value [dBμV]	Peak Result [dBμV/m]	AVG Reading Value [dBμV]	AVG Result [dBμV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBμV/m]	AVG Margin [dB]	AVG Limit [dBμV/m]
39 221.06	38.64	48.64	-	-	-	300	H	224	10.00	19.56	68.20	-	-


Remarks

1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)



6 GHz UNII band

RSE_MIMO_ 802.11ax(160)_HE0(Full)_6025

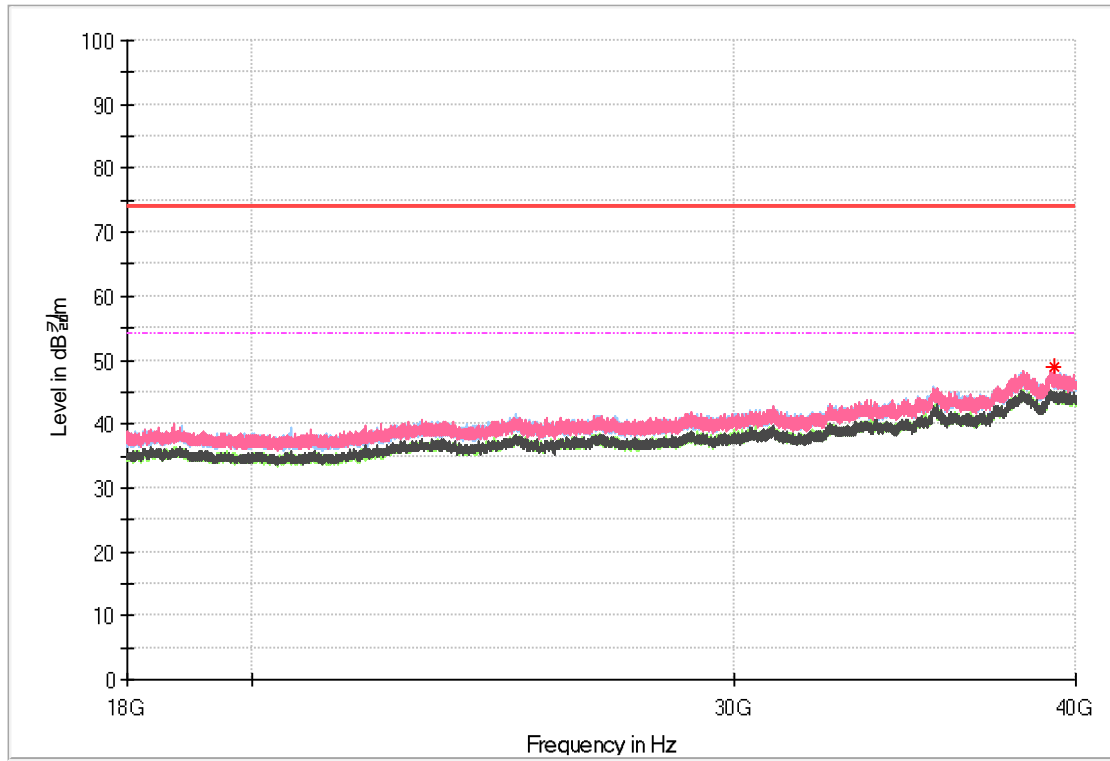


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
39 264.38	38.90	48.80	-	-	-	200	H	305	9.90	19.40	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)

3.2.5.5 Restricted Band Edge

5 GHz UNII band

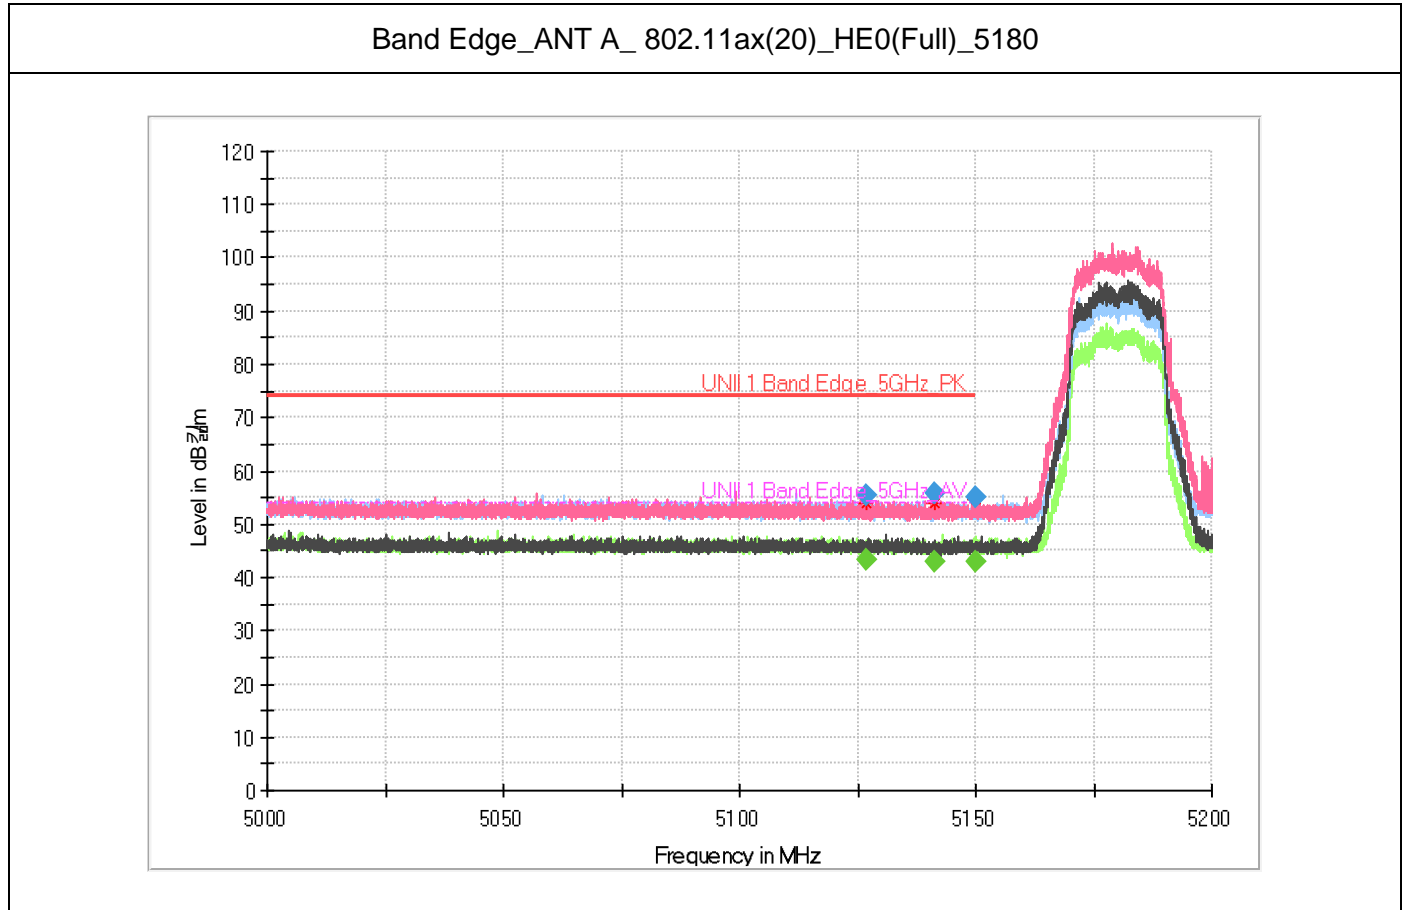


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 126.88	-	-	30.76	43.16	-	291	V	99	12.40	-	-	10.84	54.00
5 126.88	43.14	55.54	-	-	-	291	V	99	12.40	18.46	74.00	-	-
5 141.26	43.40	55.70	-	-	-	250	H	70	12.30	18.30	74.00	-	-
5 141.26	-	-	30.74	43.04	-	250	H	70	12.30	-	-	10.96	54.00
5 149.88	42.59	54.89	-	-	-	290	H	207	12.30	19.11	74.00	-	-
5 149.88	-	-	30.72	43.02	-	290	H	352	12.30	-	-	10.98	54.00

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11a_6 Mbps_5320

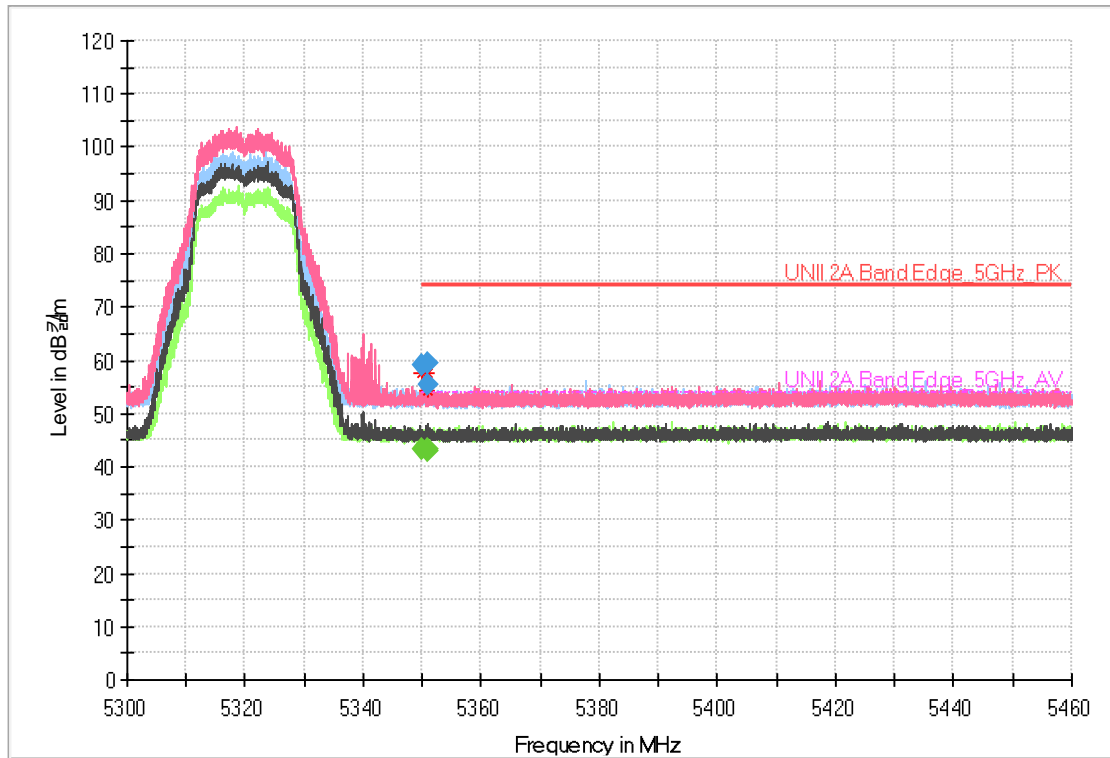


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 350.02	-	-	30.71	43.41	-	259	V	90	12.70	-	-	10.59	54.00
5 350.02	46.43	59.13	-	-	-	259	V	90	12.70	14.87	74.00	-	-
5 350.75	42.72	55.42	-	-	-	305	H	207	12.70	18.58	74.00	-	-
5 350.75	-	-	30.38	43.08	-	305	H	207	12.70	-	-	10.92	54.00
5 350.91	46.64	59.34	-	-	-	250	V	85	12.70	14.66	74.00	-	-
5 350.91	-	-	30.78	43.48	-	250	V	85	12.70	-	-	10.52	54.00

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11a_6 Mbps_5500

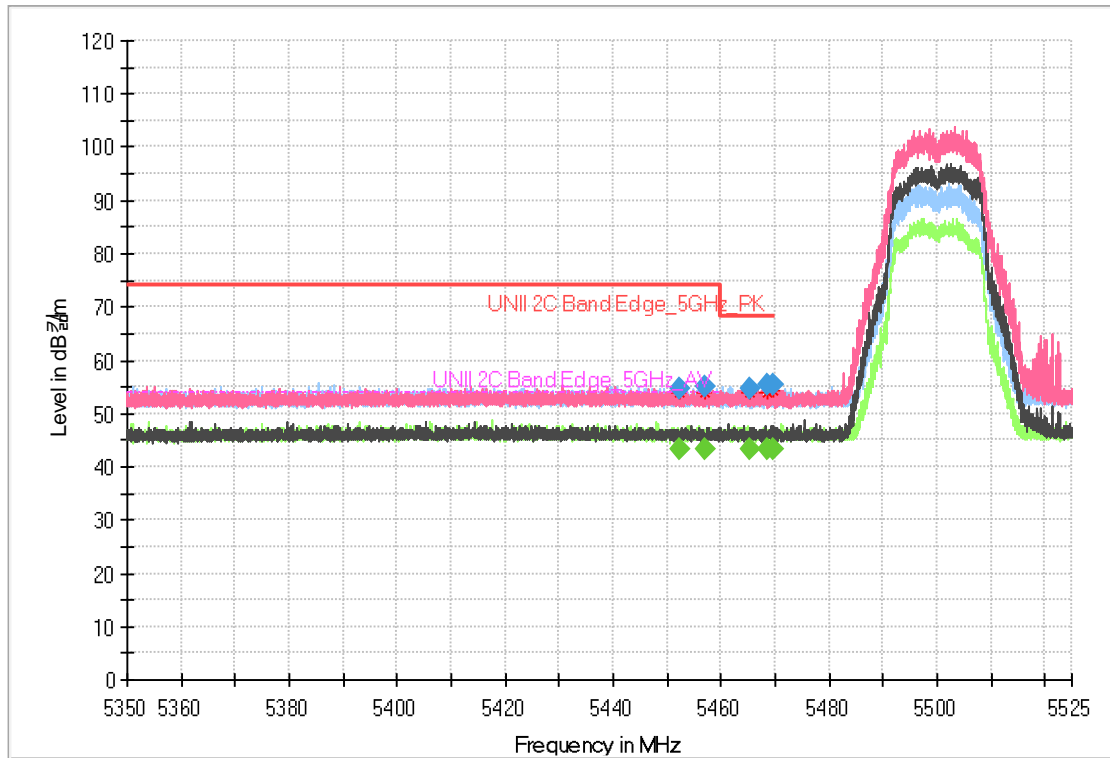


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 452.22	-	-	30.35	43.25	-	334	V	141	12.90	-	-	10.75	54.00
5 452.22	41.81	54.71	-	-	-	334	V	141	12.90	19.29	74.00	-	-
5 457.03	42.15	55.05	-	-	-	150	H	324	12.90	18.95	74.00	-	-
5 457.03	-	-	30.31	43.21	-	150	H	324	12.90	-	-	10.79	54.00
5 465.43	41.87	54.77	-	-	-	250	H	286	12.90	13.43	68.20	-	-
5 468.46	42.34	55.24	-	-	-	189	V	241	12.90	12.96	68.20	-	-
5 469.79	42.65	55.55	-	-	-	350	H	240	12.90	12.65	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11a_6 Mbps_5700

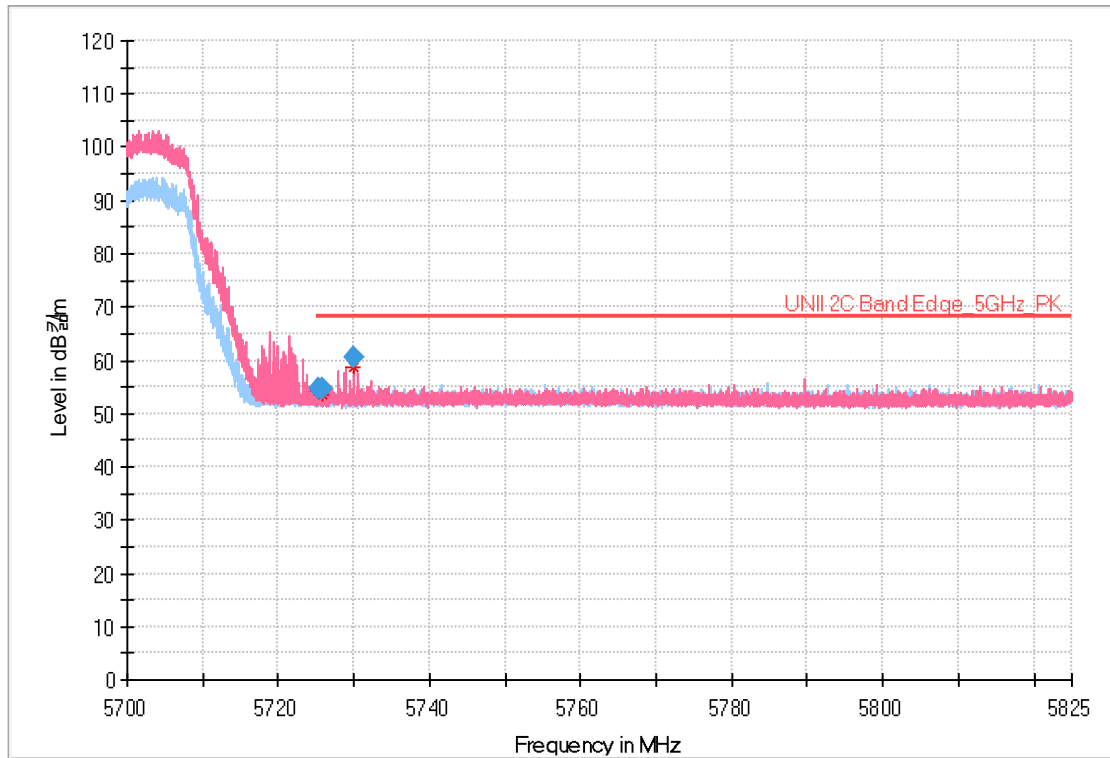


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 725.19	41.81	54.81	-	-	-	188	H	21	13.00	13.39	68.20	-	-
5 725.81	41.76	54.76	-	-	-	174	H	247	13.00	13.44	68.20	-	-
5 729.99	47.42	60.42	-	-	-	250	V	75	13.00	7.78	68.20	-	-

Remarks

1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)

Band Edge_ANT A_ 802.11ax(20)_HE0(26/0)_5745

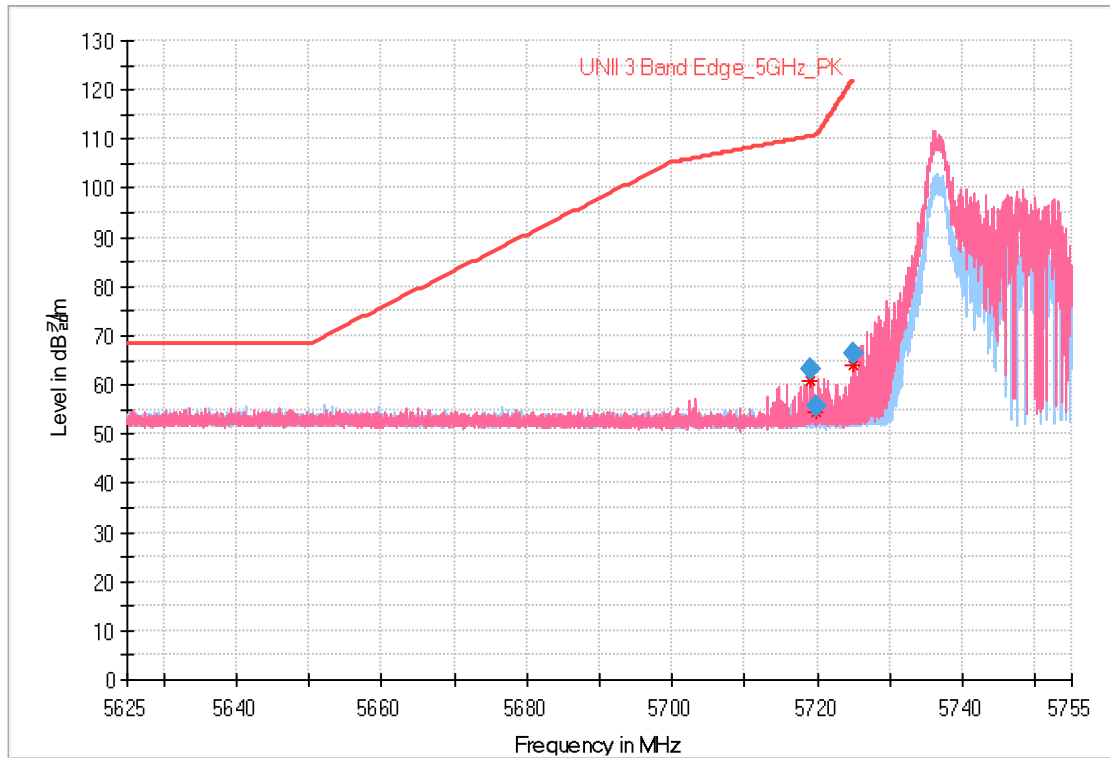


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 718.89	50.16	63.16	-	-	-	216	V	74	13.00	47.33	110.49	-	-
5 719.80	42.49	55.49	-	-	-	331	H	118	13.00	55.25	110.74	-	-
5 724.93	53.36	66.36	-	-	-	200	V	72	13.00	55.68	122.04	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)

Band Edge_ANT A_ 802.11a_6 Mbps_5825

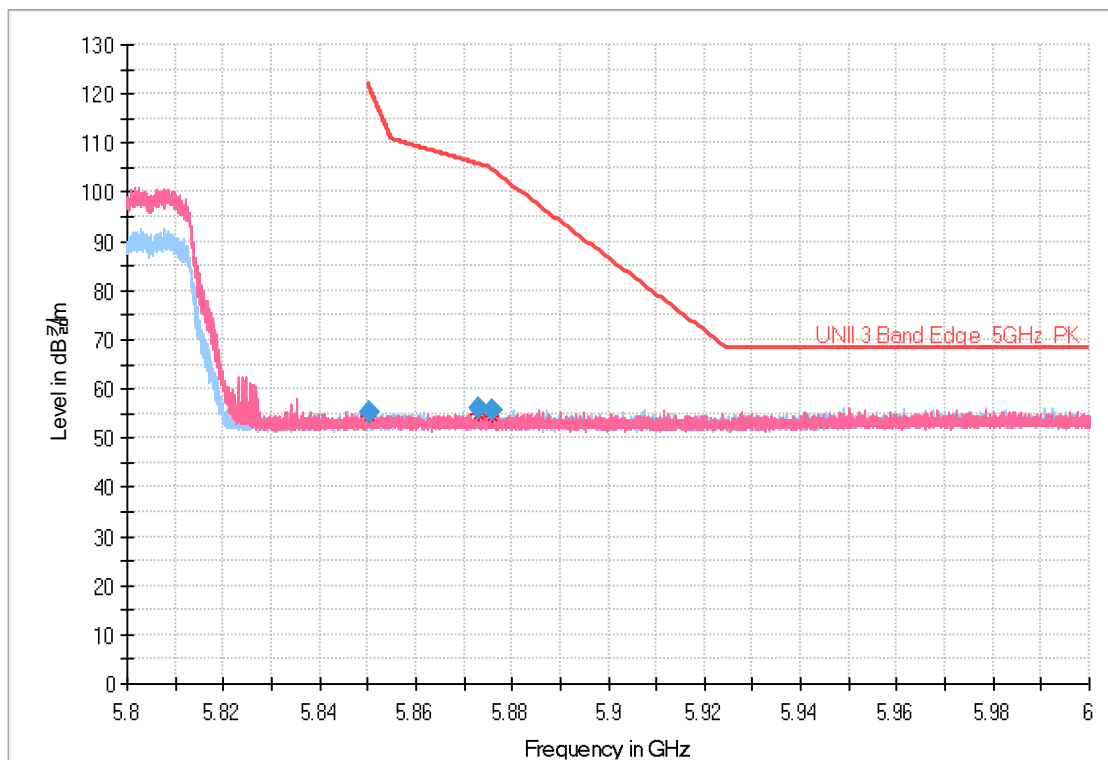


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5850.24	41.86	55.26	-	-	-	350	V	29	13.40	66.39	121.65	-	-
5873.10	42.38	55.88	-	-	-	305	V	144	13.50	49.85	105.73	-	-
5875.72	42.05	55.55	-	-	-	159	H	232	13.50	49.12	104.67	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(40)_HE0(242/61)_5190

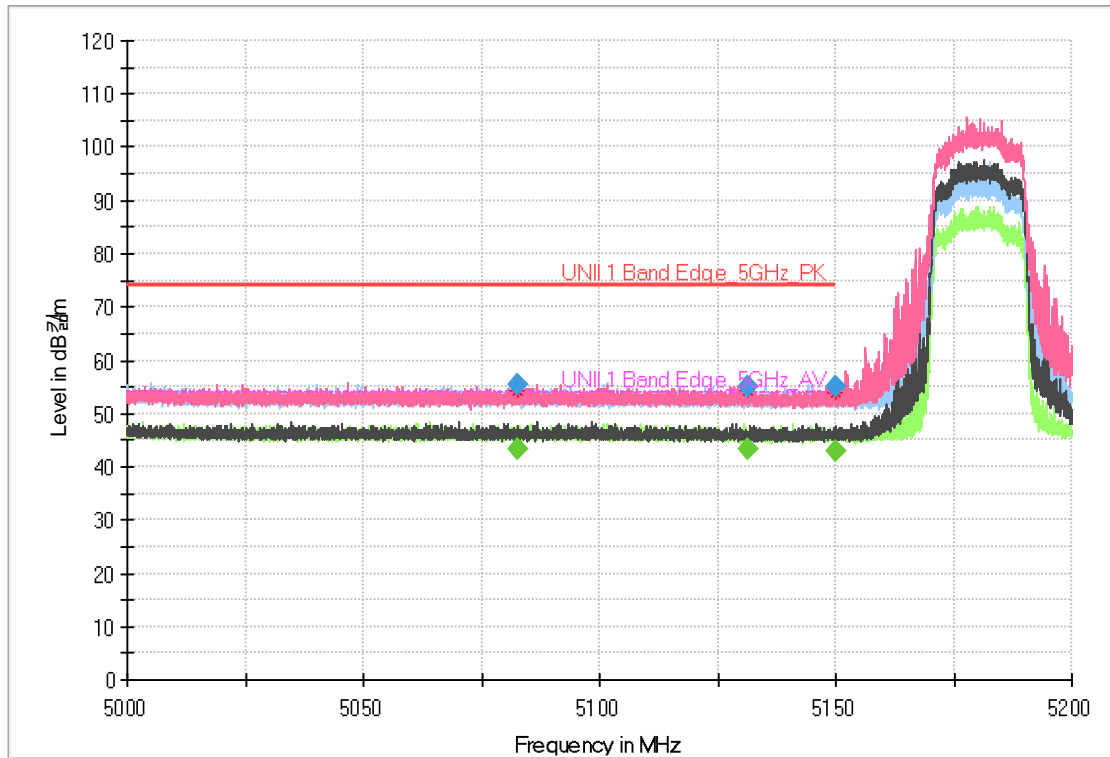


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 082.80	-	-	30.83	43.33	-	250	V	211	12.50	-	-	10.67	54.00
5 082.80	42.82	55.32	-	-	-	250	V	211	12.50	18.68	74.00	-	-
5 131.20	42.65	55.05	-	-	-	226	H	162	12.40	18.95	74.00	-	-
5 131.20	-	-	30.74	43.14	-	226	H	162	12.40	-	-	10.86	54.00
5 150.00	42.64	54.94	-	-	-	245	V	352	12.30	19.06	74.00	-	-
5 150.00	-	-	30.73	43.03	-	245	V	352	12.30	-	-	10.97	54.00

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(40)_HE0(242/62)_5310

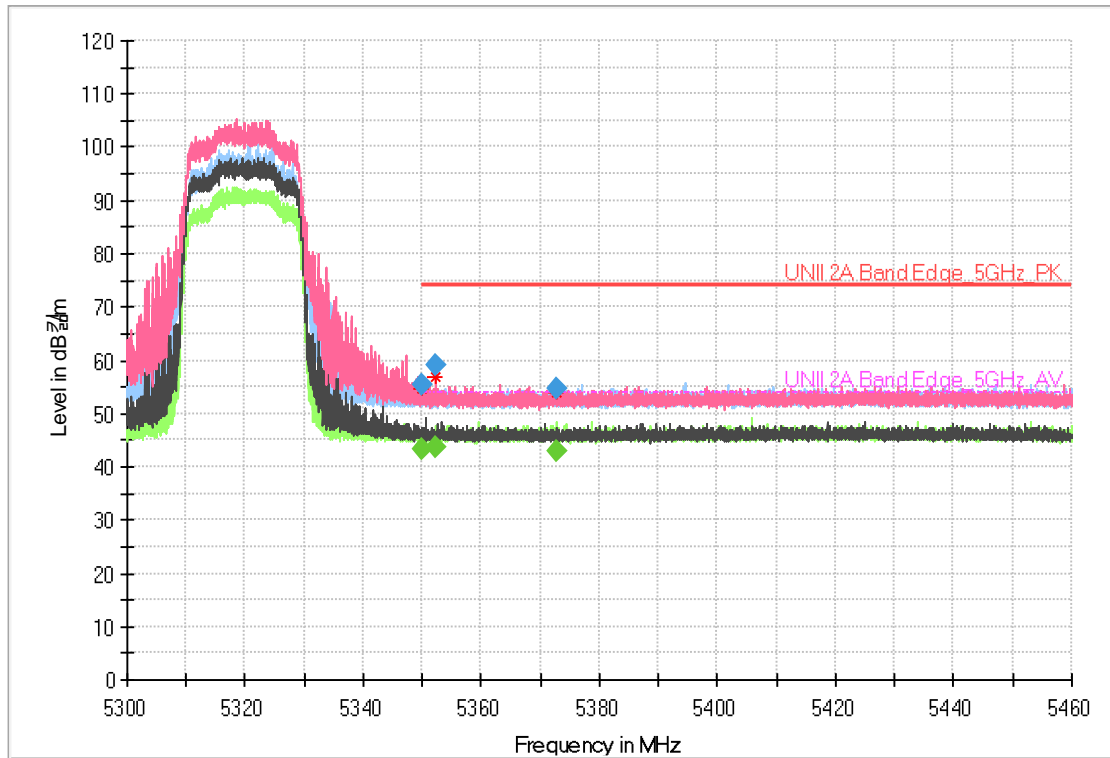


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 350.00	42.83	55.53	-	-	-	164	V	237	12.70	18.47	74.00	-	-
5 350.00	-	-	30.53	43.23	-	164	V	237	12.70	-	-	10.77	54.00
5 352.13	46.51	59.21	-	-	-	250	V	86	12.70	14.79	74.00	-	-
5 352.13	-	-	30.96	43.66	-	250	V	86	12.70	-	-	10.34	54.00
5 372.58	-	-	30.28	42.98	-	186	H	184	12.70	-	-	11.02	54.00
5 372.58	42.15	54.85	-	-	-	186	H	184	12.70	19.15	74.00	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(40)_HE0(242/61)_5510

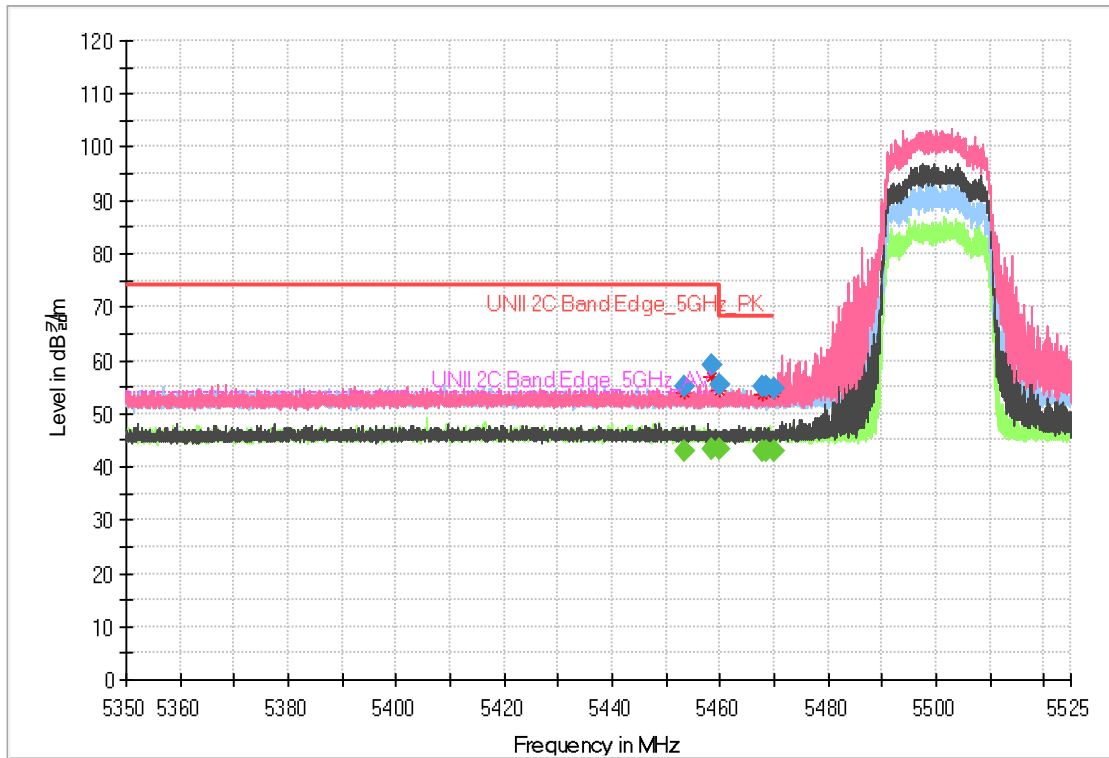


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 453.55	42.21	55.11	-	-	-	336	H	126	12.90	18.89	74.00	-	-
5 453.55	-	-	30.17	43.07	-	336	H	126	12.90	-	-	10.93	54.00
5 458.64	-	-	30.53	43.43	-	264	V	68	12.90	-	-	10.57	54.00
5 458.64	46.17	59.07	-	-	-	264	V	68	12.90	14.93	74.00	-	-
5 459.99	42.50	55.40	-	-	-	346	V	114	12.90	18.60	74.00	-	-
5 459.99	-	-	30.22	43.12	-	346	V	114	12.90	-	-	10.88	54.00
5 467.86	42.13	55.03	-	-	-	251	V	0	12.90	13.17	68.20	-	-
5 468.48	42.25	55.15	-	-	-	328	H	350	12.90	13.05	68.20	-	-
5 470.00	41.85	54.75	-	-	-	274	H	313	12.90	13.45	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(40)_HE0(Full)_5670

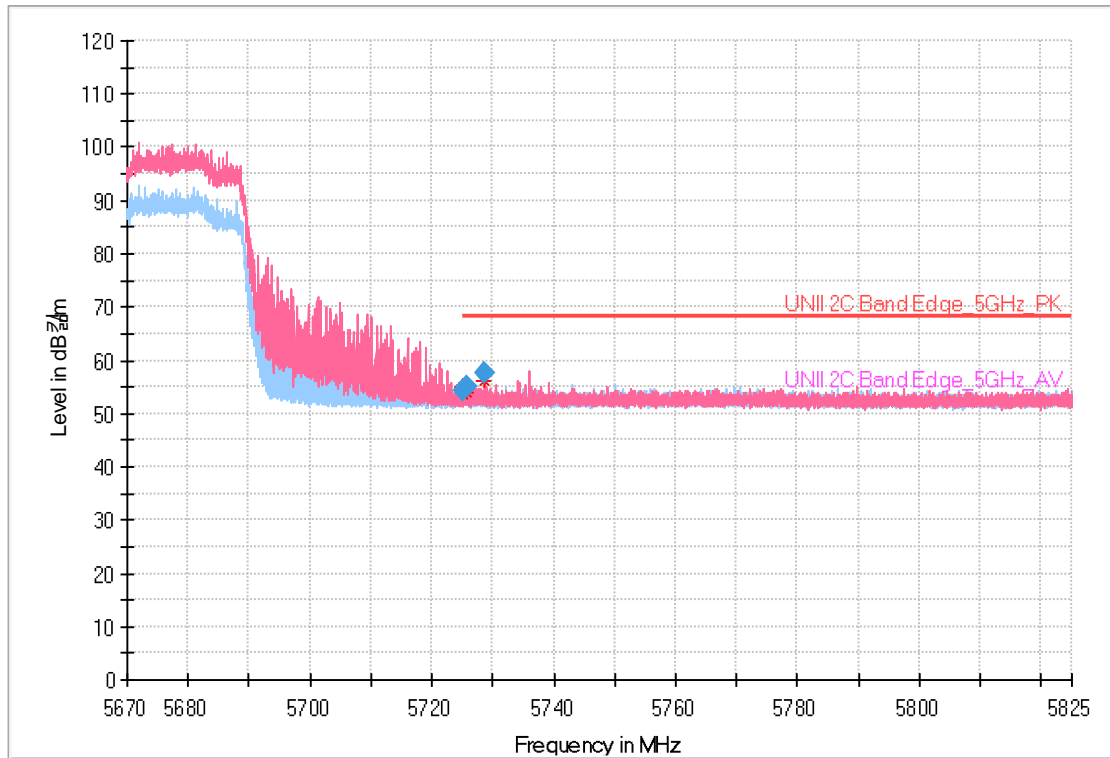


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5.725.01	41.45	54.45	-	-	-	252	V	201	13.00	13.75	68.20	-	-
5.725.77	42.04	55.04	-	-	-	184	H	171	13.00	13.16	68.20	-	-
5.728.64	44.68	57.68	-	-	-	174	V	89	13.00	10.52	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11n(40)_HT0_5755

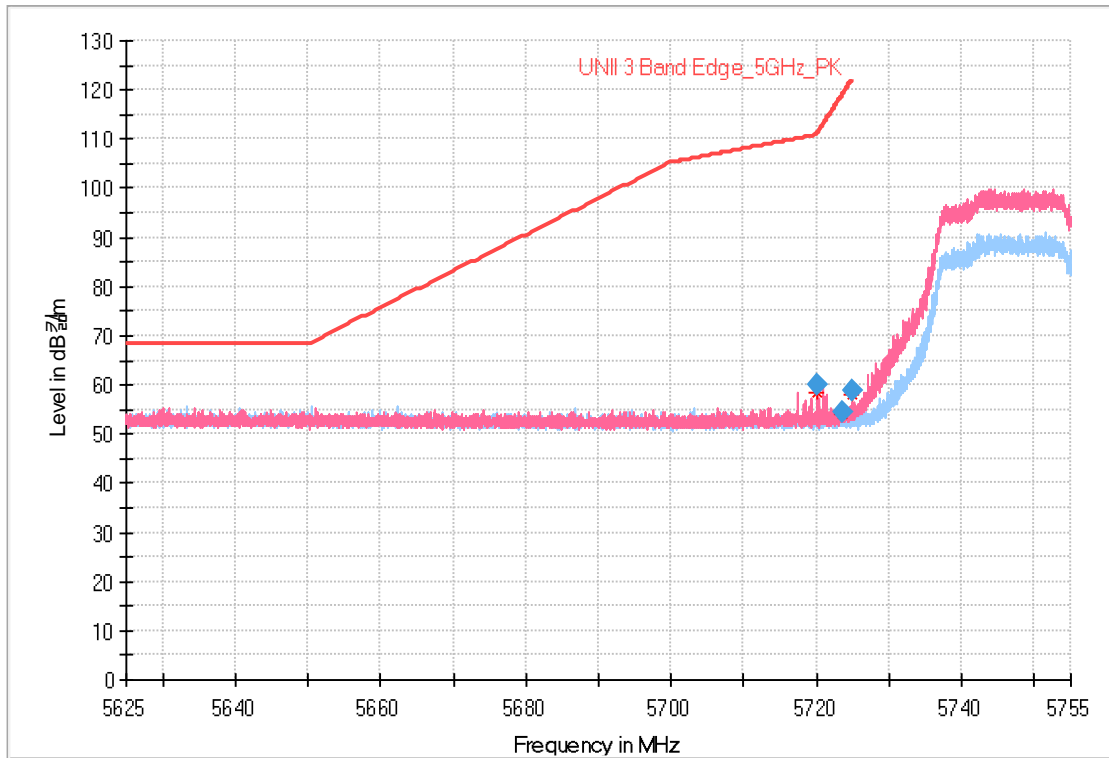


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 720.06	46.93	59.93	-	-	-	290	V	350	13.00	51.00	110.93	-	-
5 723.50	41.43	54.43	-	-	-	159	H	333	13.00	64.35	118.78	-	-
5 724.96	45.96	58.96	-	-	-	213	V	76	13.00	63.14	122.10	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)

Band Edge_ANT A_ 802.11ax(40)_HE0(Full)_5795

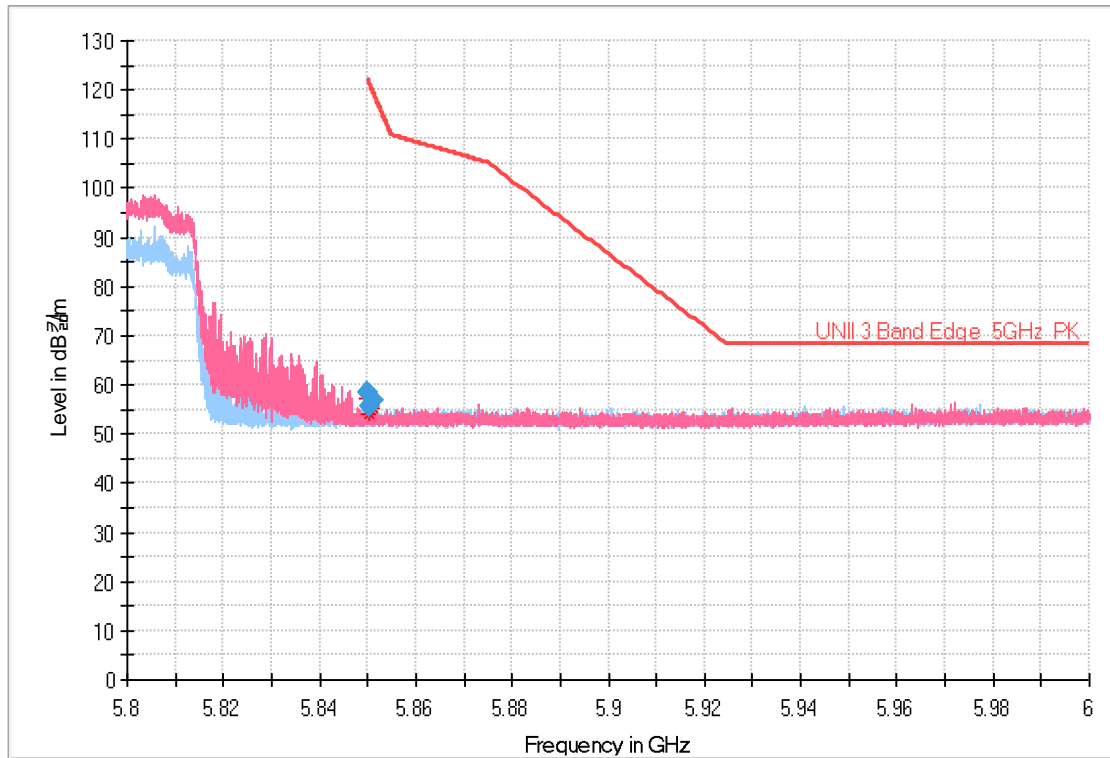


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 850.00	44.93	58.33	-	-	-	198	V	84	13.40	63.87	122.20	-	-
5 850.12	42.10	55.50	-	-	-	250	H	86	13.40	66.43	121.93	-	-
5 851.18	43.46	56.86	-	-	-	250	V	101	13.40	62.65	119.51	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(80)_HE0(484/65)_5210

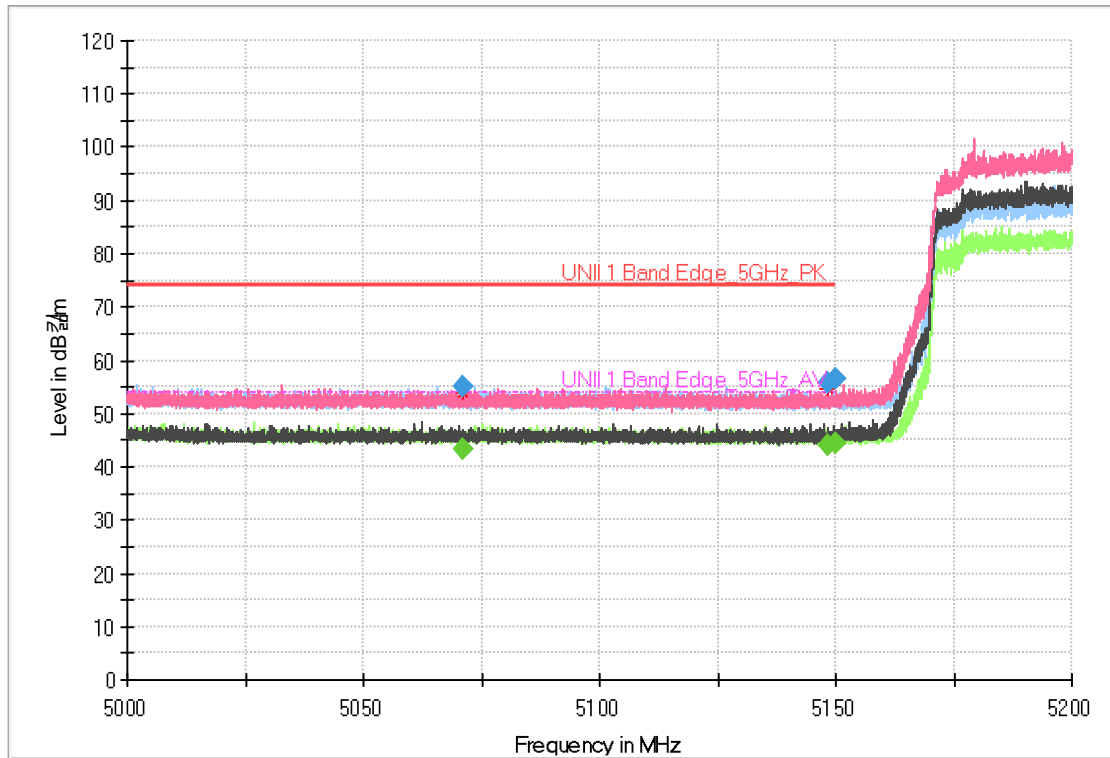


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 071.18	-	-	30.66	43.16	-	350	H	29	12.50	-	-	10.84	54.00
5 071.18	42.56	55.06	-	-	-	350	H	29	12.50	18.94	74.00	-	-
5 148.52	43.65	55.95	-	-	-	314	V	273	12.30	18.05	74.00	-	-
5 148.52	-	-	31.76	44.06	-	314	V	273	12.30	-	-	9.94	54.00
5 150.00	44.18	56.48	-	-	-	262	V	64	12.30	17.52	74.00	-	-
5 150.00	-	-	31.94	44.24	-	262	V	64	12.30	-	-	9.76	54.00

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(80)_HE0(Full)_5290

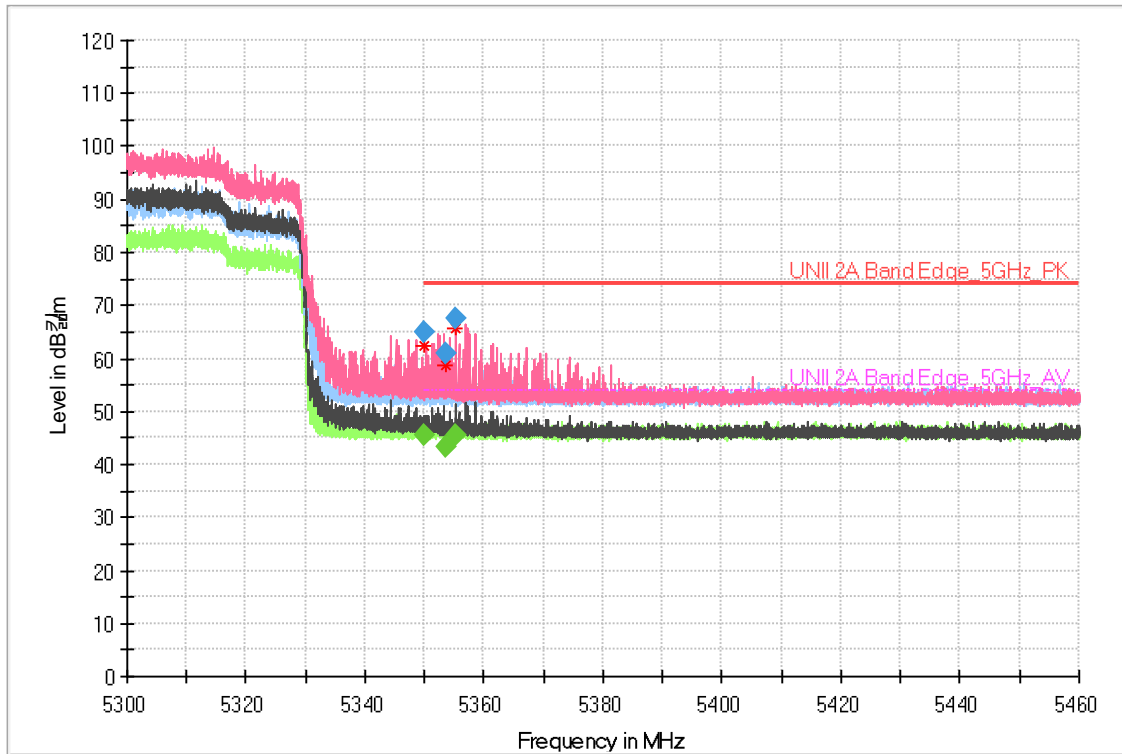


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 350.03	52.41	65.11	-	-	-	151	V	56	12.70	8.89	74.00	-	-
5 350.03	-	-	32.66	45.36	-	151	V	56	12.70	-	-	8.64	54.00
5 353.46	48.22	60.92	-	-	-	314	H	2	12.70	13.08	74.00	-	-
5 353.46	-	-	30.72	43.42	-	314	H	2	12.70	-	-	10.58	54.00
5 355.26	-	-	32.62	45.32	-	215	V	66	12.70	-	-	8.68	54.00
5 355.26	54.65	67.35	-	-	-	215	V	66	12.70	6.65	74.00	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(80)_HE0(484/65)_5530

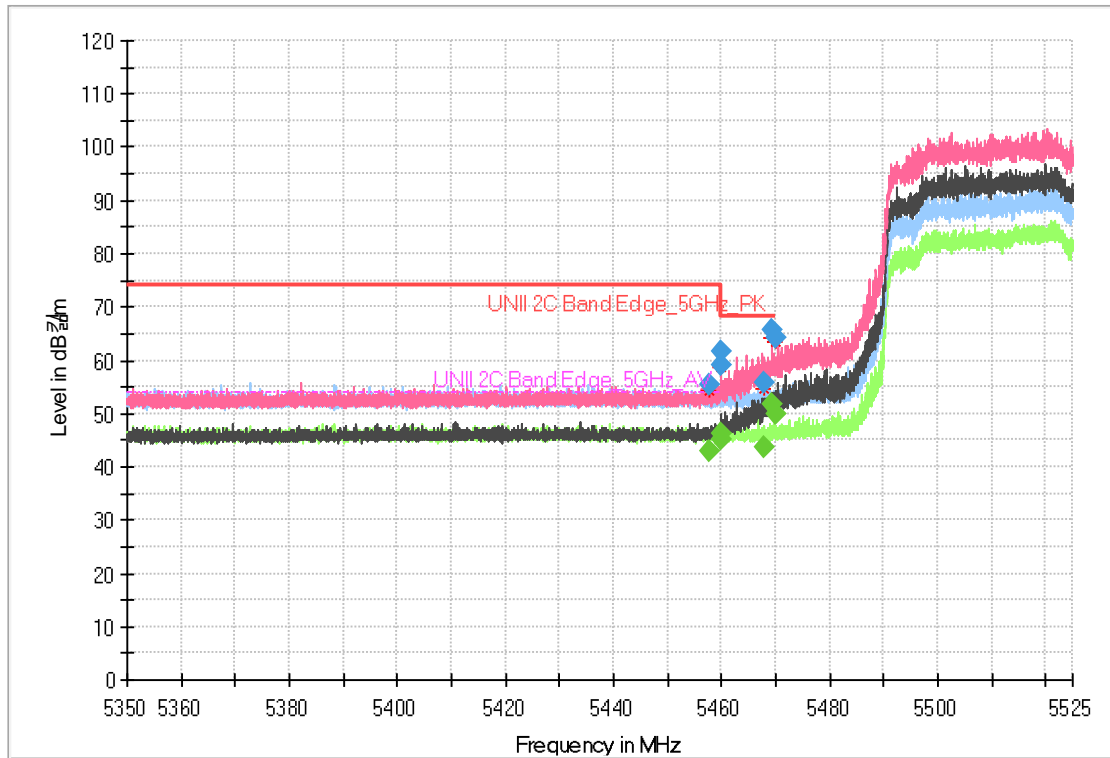


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 457.66	-	-	30.19	43.09	-	184	H	203	12.90	-	-	10.91	54.00
5 457.66	42.42	55.32	-	-	-	184	H	203	12.90	18.68	74.00	-	-
5 459.76	-	-	33.22	46.12	-	287	V	70	12.90	-	-	7.88	54.00
5 459.76	48.77	61.67	-	-	-	287	V	70	12.90	12.33	74.00	-	-
5 459.99	-	-	32.10	45.00	-	250	V	98	12.90	-	-	9.00	54.00
5 459.99	46.25	59.15	-	-	-	250	V	98	12.90	14.85	74.00	-	-
5 467.85	42.95	55.85	-	-	-	308	H	1	12.90	12.35	68.20	-	-
5 469.40	52.78	65.68	-	-	-	287	V	70	12.90	2.52	68.20	-	-
5 470.00	51.21	64.11	-	-	-	226	V	85	12.90	4.09	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(80)_HE0(Full)_5610

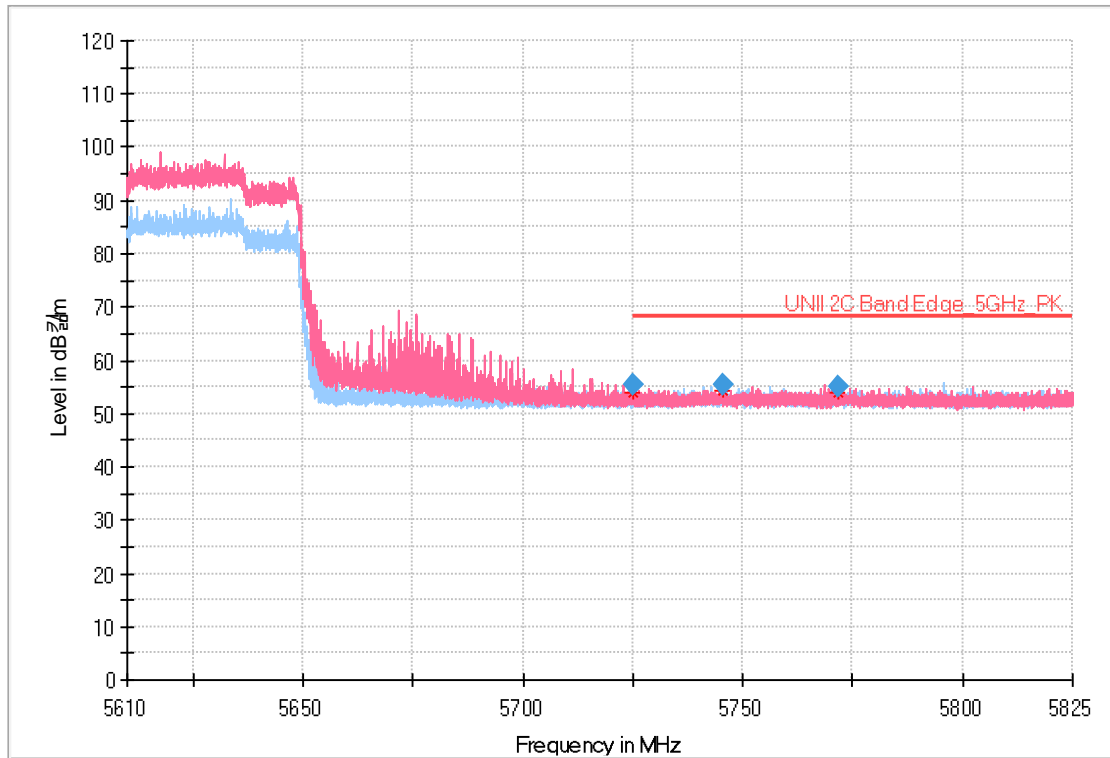


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 725.00	42.30	55.30	-	-	-	226	V	176	13.00	12.90	68.20	-	-
5 745.60	42.20	55.30	-	-	-	274	H	167	13.10	12.90	68.20	-	-
5 771.66	41.79	54.89	-	-	-	313	V	224	13.10	13.31	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(80)_HE0(484/65)_5775_1

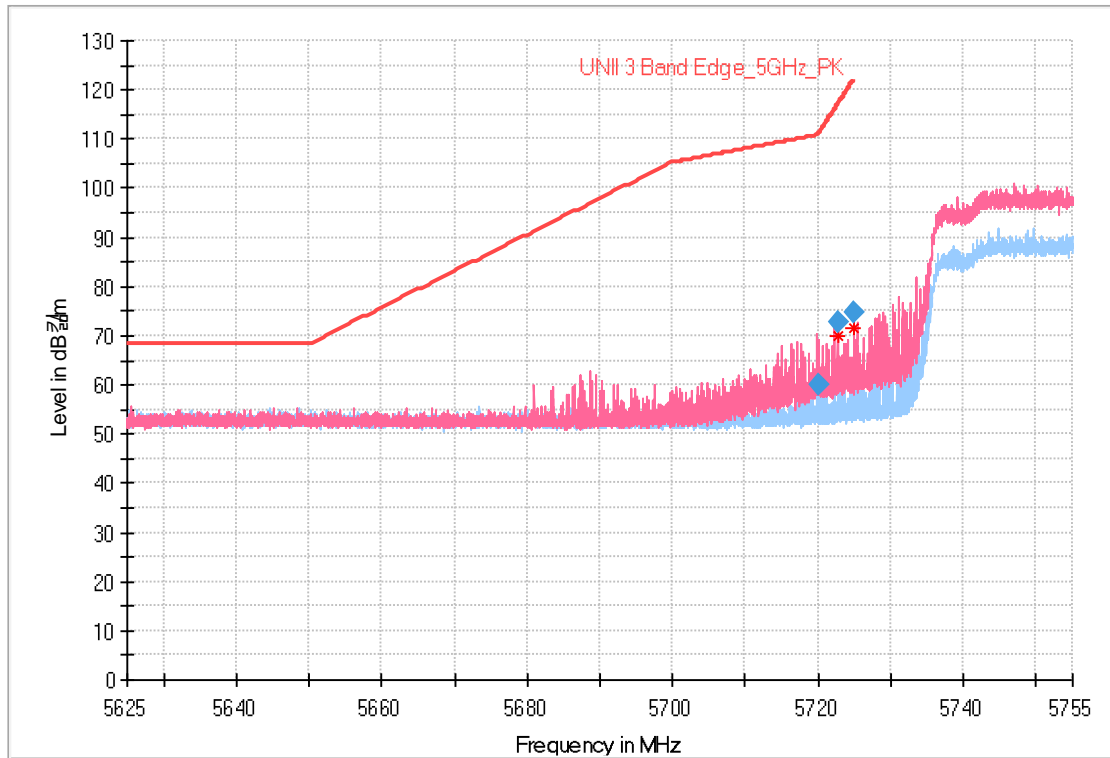


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 720.02	47.12	60.12	-	-	-	260	H	16	13.00	50.72	110.84	-	-
5 722.64	59.88	72.88	-	-	-	150	V	67	13.00	43.95	116.83	-	-
5 724.98	61.65	74.65	-	-	-	202	V	73	13.00	47.51	122.16	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(80)_HE0(484/65)_5775_2

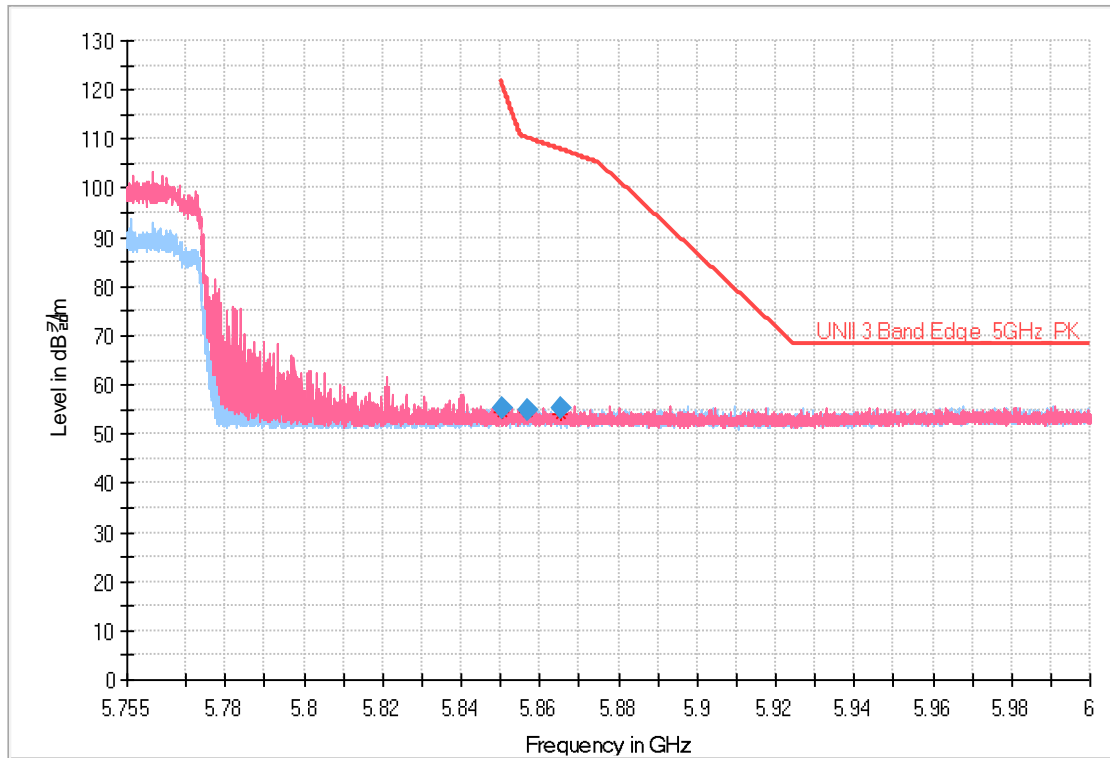


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5850.53	41.76	55.16	-	-	-	350	V	26	13.40	65.84	121.00	-	-
5857.07	41.56	55.06	-	-	-	250	H	279	13.50	55.16	110.22	-	-
5865.10	41.80	55.30	-	-	-	263	V	214	13.50	52.67	107.97	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)

Band Edge_ANT A_ 802.11ax(80)_HE0(Full)_5775_3

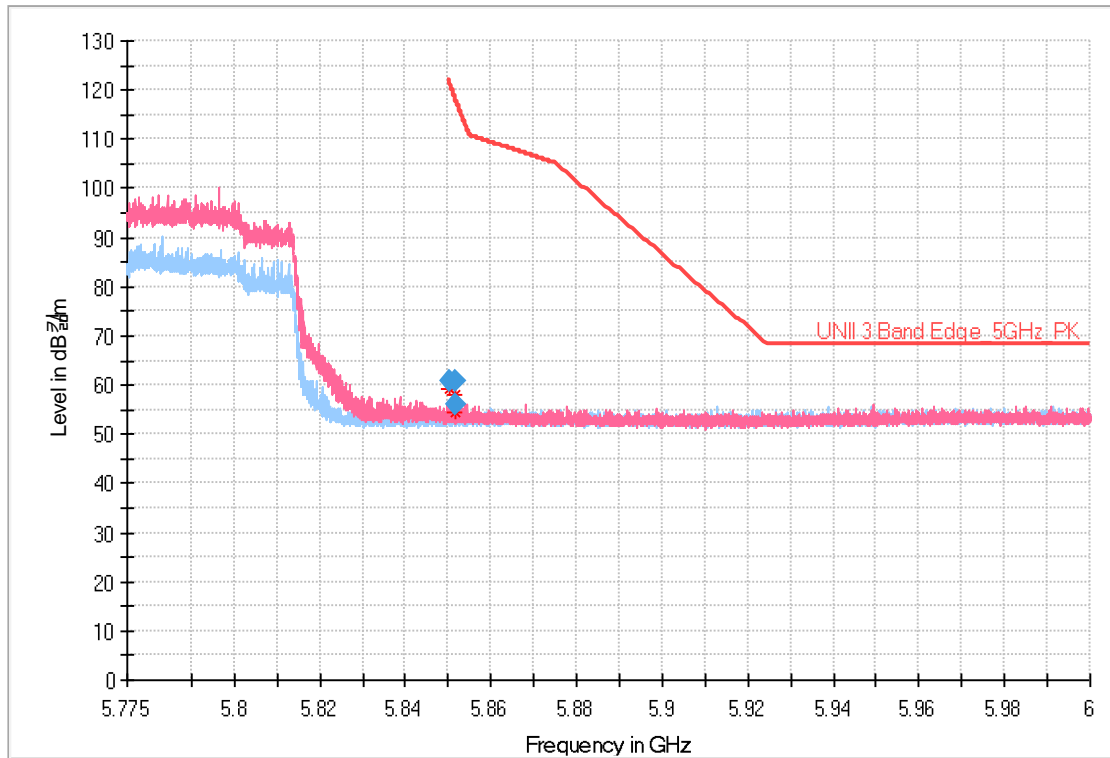


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 850.20	47.40	60.80	-	-	-	264	V	256	13.40	60.96	121.76	-	-
5 851.57	47.42	60.82	-	-	-	151	V	96	13.40	57.81	118.63	-	-
5 851.68	42.50	55.90	-	-	-	252	H	354	13.40	62.47	118.37	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(160)_HE0(996/67)_5250_1

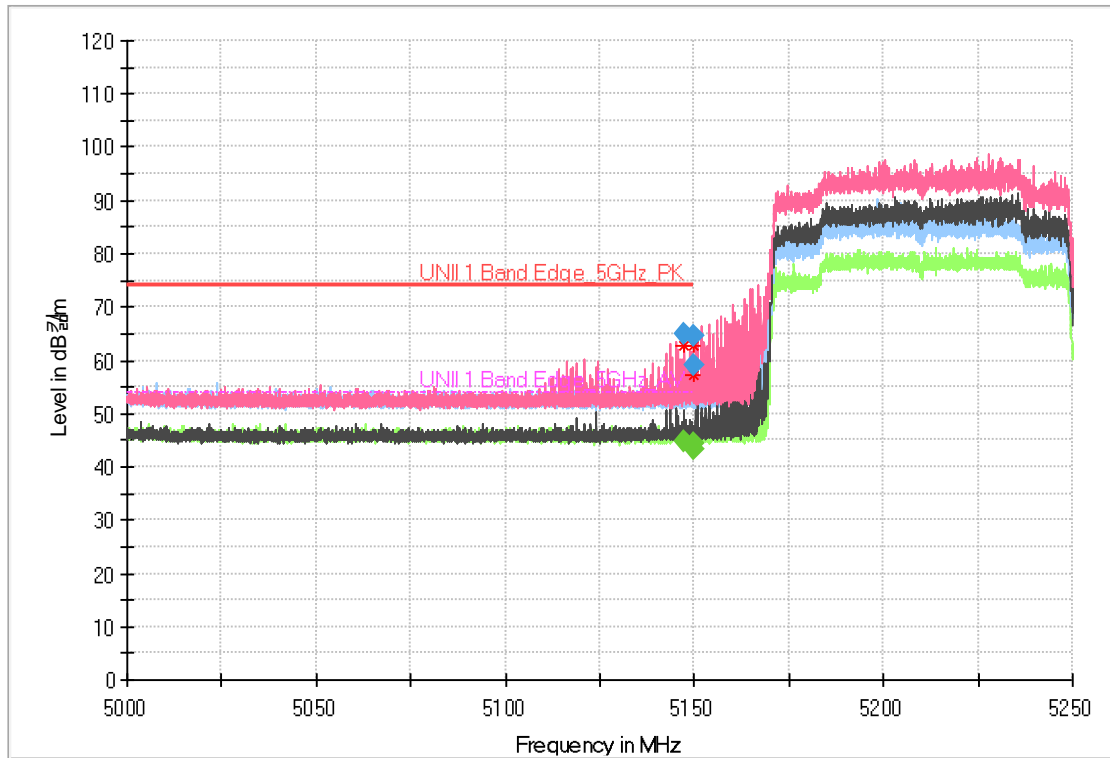


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 147.13	52.52	64.82	-	-	-	200	V	110	12.30	9.18	74.00	-	-
5 147.13	-	-	32.30	44.60	-	200	V	110	12.30	-	-	9.40	54.00
5 149.58	52.31	64.61	-	-	-	176	V	272	12.30	9.39	74.00	-	-
5 149.58	-	-	32.23	44.53	-	176	V	272	12.30	-	-	9.47	54.00
5 149.75	-	-	30.91	43.21	-	350	H	35	12.30	-	-	10.79	54.00
5 149.75	46.91	59.21	-	-	-	350	H	35	12.30	14.79	74.00	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(160)_HE0(996/67)_5250_2

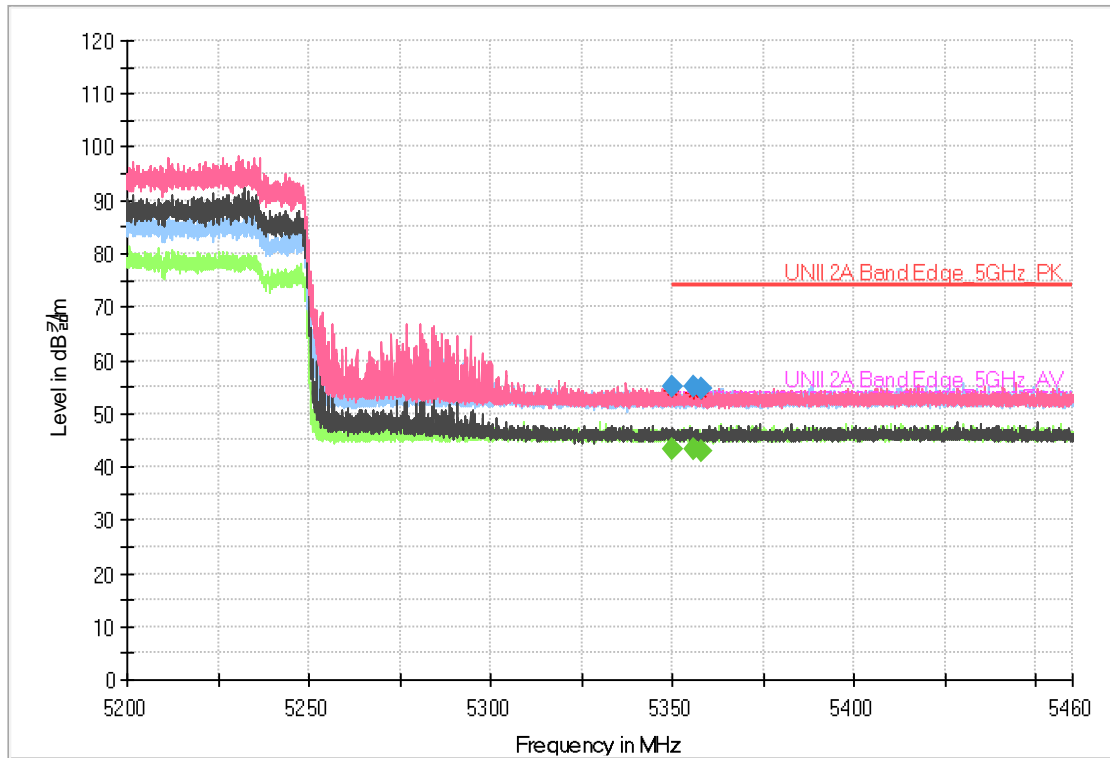


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 350.07	-	-	30.42	43.12	-	274	V	28	12.70	-	-	10.88	54.00
5 350.07	42.22	54.92	-	-	-	274	V	28	12.70	19.08	74.00	-	-
5 355.61	42.30	55.00	-	-	-	331	H	1	12.70	19.00	74.00	-	-
5 355.61	-	-	30.45	43.15	-	331	H	1	12.70	-	-	10.85	54.00
5 357.92	42.14	54.84	-	-	-	226	V	294	12.70	19.16	74.00	-	-
5 357.92	-	-	30.34	43.04	-	226	V	294	12.70	-	-	10.96	54.00

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(160)_HE0(Full)_5250_3

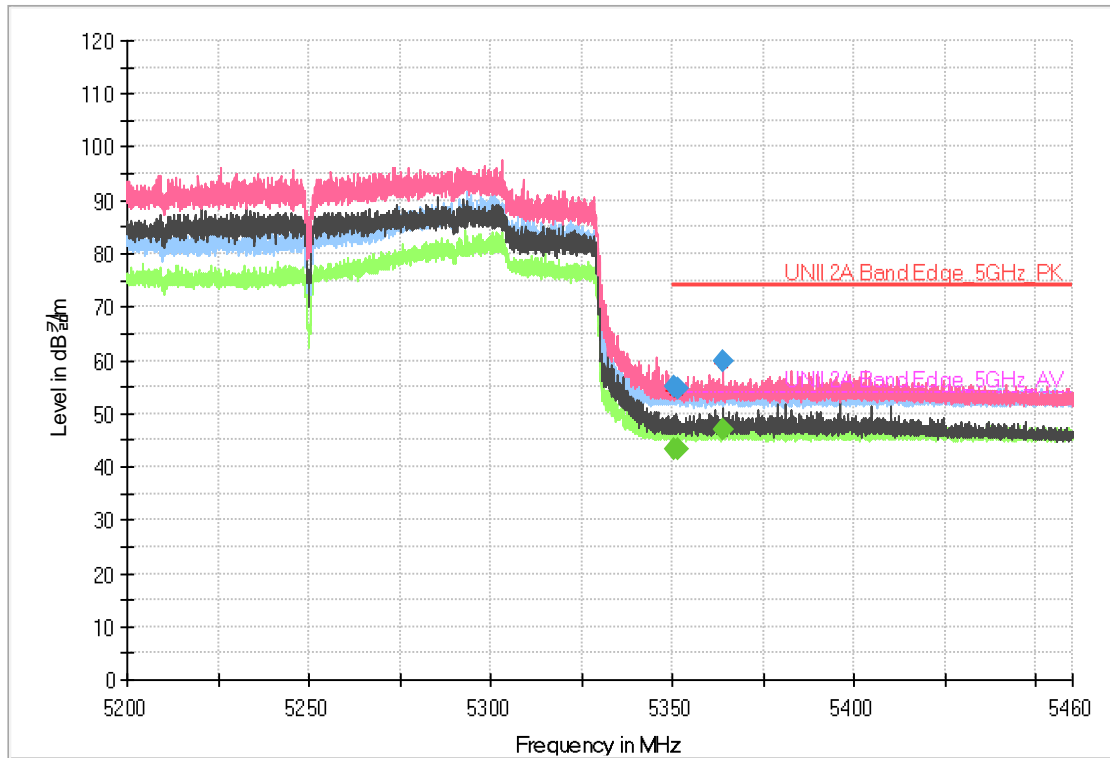


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 350.20	-	-	30.69	43.39	-	314	V	352	12.70	-	-	10.61	54.00
5 350.20	42.39	55.09	-	-	-	314	V	352	12.70	18.91	74.00	-	-
5 351.32	42.16	54.86	-	-	-	263	H	322	12.70	19.14	74.00	-	-
5 351.32	-	-	30.51	43.21	-	263	H	322	12.70	-	-	10.79	54.00
5 364.03	46.93	59.63	-	-	-	187	V	359	12.70	14.37	74.00	-	-
5 364.03	-	-	34.44	47.14	-	187	V	359	12.70	-	-	6.86	54.00

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(160)_HE0(996/S67)_5570_1

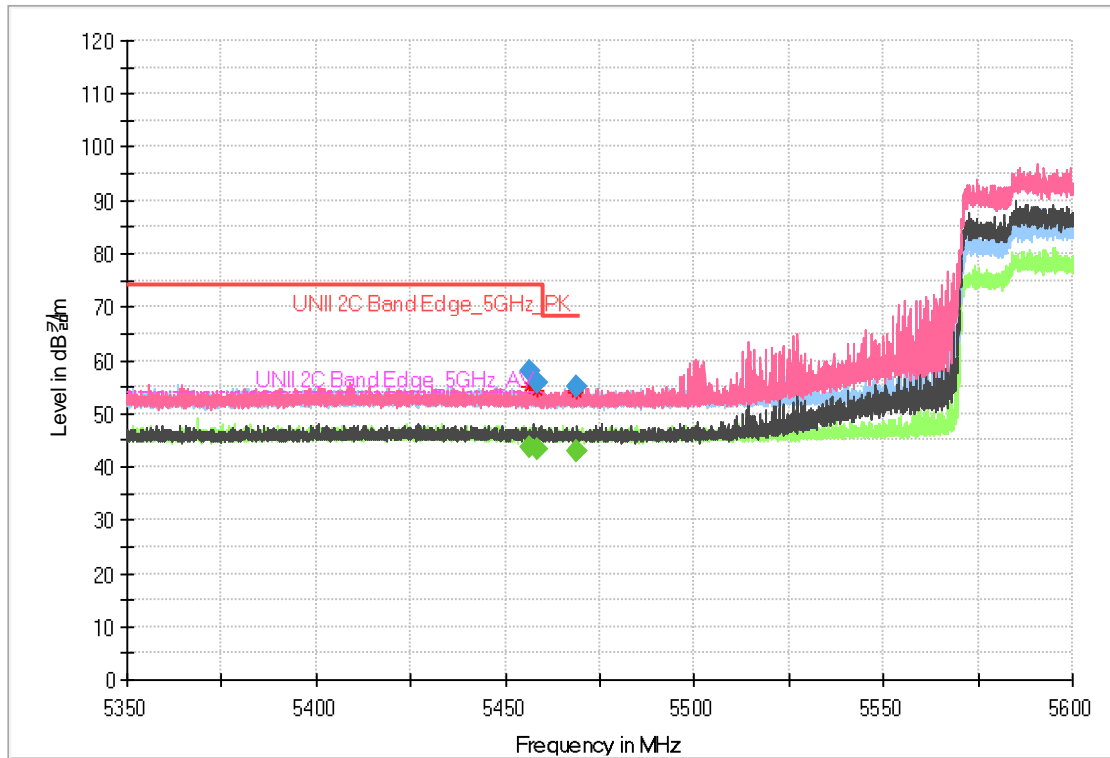


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 456.60	44.96	57.86	-	-	-	172	V	112	12.90	16.14	74.00	-	-
5 456.60	-	-	30.66	43.56	-	172	V	112	12.90	-	-	10.44	54.00
5 458.53	-	-	30.24	43.14	-	250	H	359	12.90	-	-	10.86	54.00
5 458.53	43.01	55.91	-	-	-	250	H	359	12.90	18.09	74.00	-	-
5 468.80	42.15	55.05	-	-	-	250	V	7	12.90	13.15	68.20	-	-
5 468.95	42.09	54.99	-	-	-	342	H	186	12.90	13.21	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(160)_HE0(996/S67)_5570_2

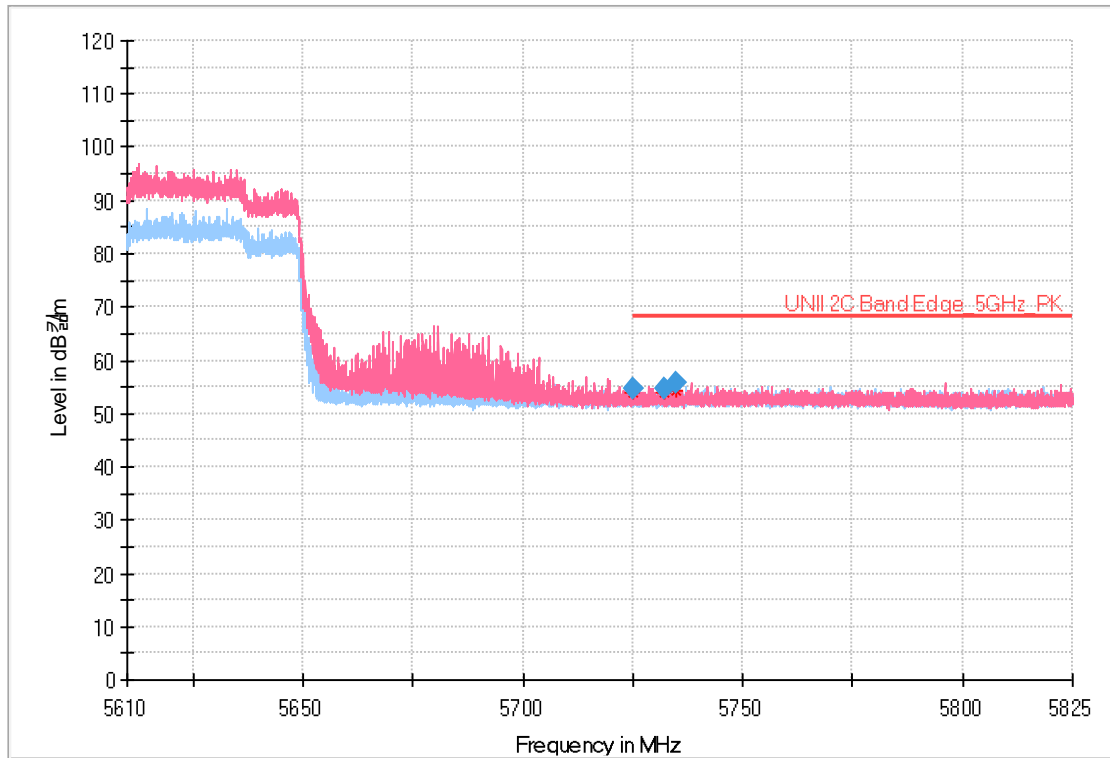


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 725.18	41.55	54.55	-	-	-	150	V	182	13.00	13.65	68.20	-	-
5 732.06	41.76	54.76	-	-	-	273	H	115	13.00	13.44	68.20	-	-
5 734.64	42.62	55.62	-	-	-	151	V	71	13.00	12.58	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT A_ 802.11ax(160)_HE0(Full)_5570_3

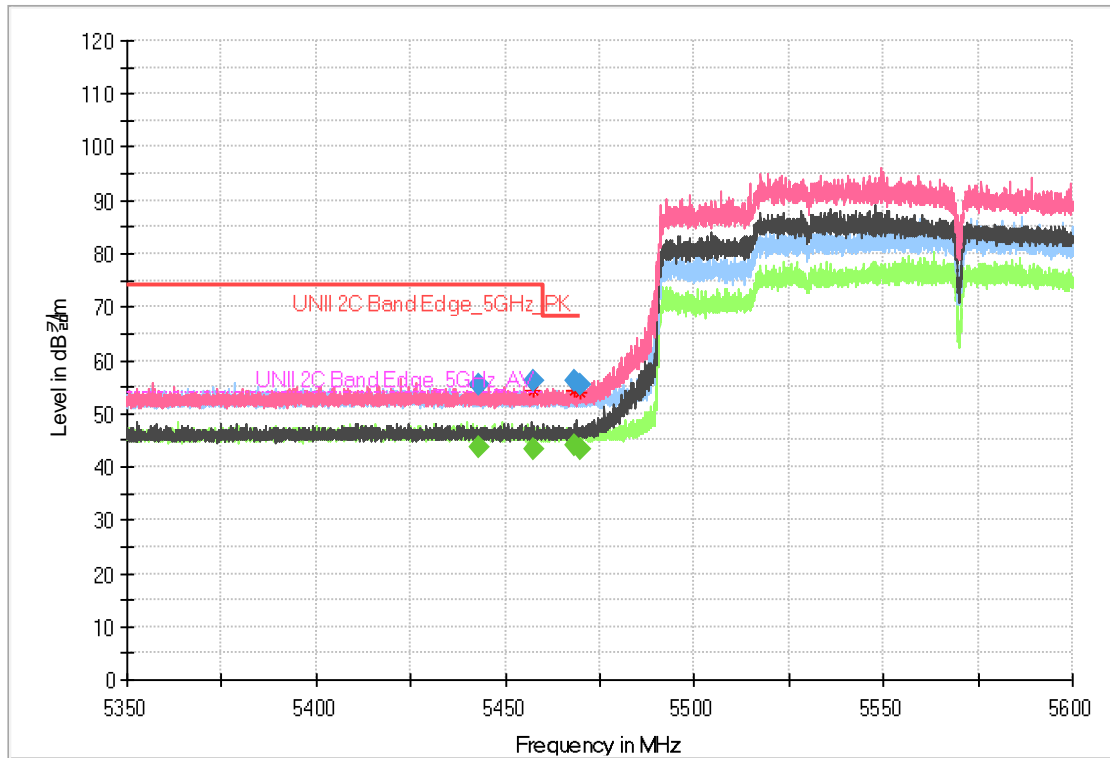


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 443.15	-	-	30.65	43.55	-	345	V	56	12.90	-	-	10.45	54.00
5 443.15	42.43	55.33	-	-	-	345	V	56	12.90	18.67	74.00	-	-
5 457.60	43.20	56.10	-	-	-	227	H	283	12.90	17.90	74.00	-	-
5 457.60	-	-	30.27	43.17	-	227	H	283	12.90	-	-	10.83	54.00
5 468.38	43.14	56.04	-	-	-	150	V	280	12.90	12.16	68.20	-	-
5 469.75	42.42	55.32	-	-	-	350	H	328	12.90	12.88	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT B_ 802.11a_6 Mbps_5180

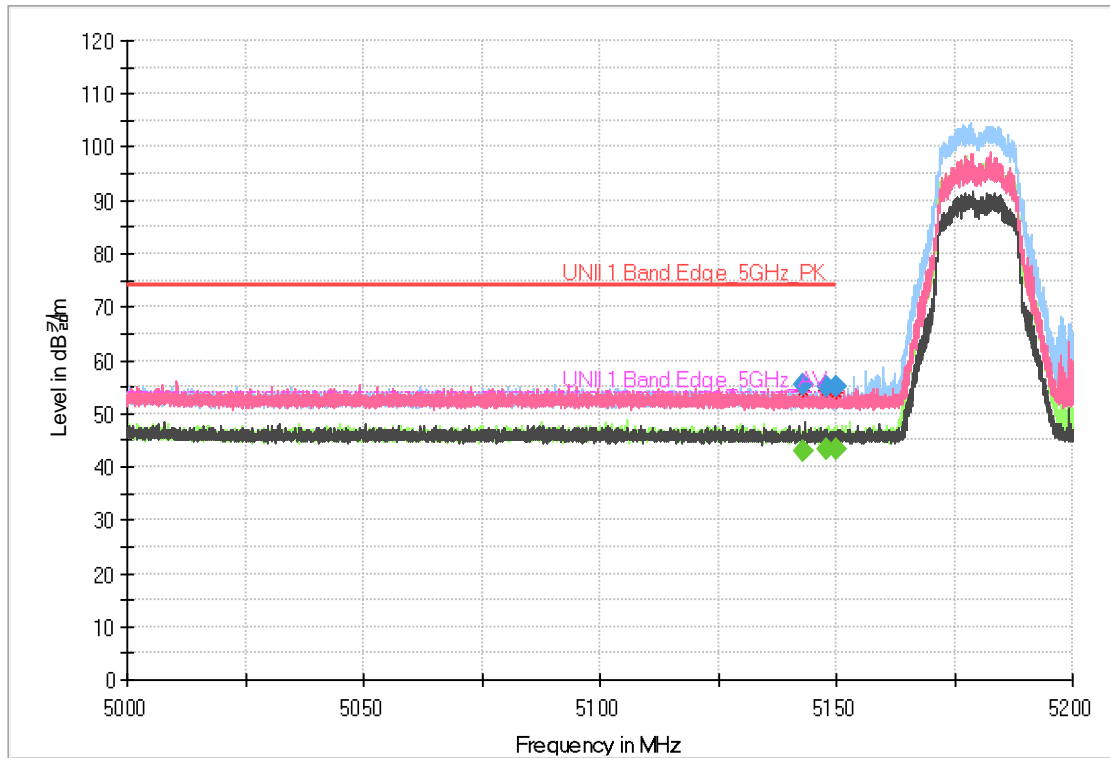


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 143.08	43.14	55.44	-	-	-	173	V	112	12.30	18.56	74.00	-	-
5 143.08	-	-	30.76	43.06	-	173	V	112	12.30	-	-	10.94	54.00
5 147.96	-	-	31.03	43.33	-	188	H	350	12.30	-	-	10.67	54.00
5 147.96	42.74	55.04	-	-	-	188	H	350	12.30	18.96	74.00	-	-
5 149.92	42.65	54.95	-	-	-	250	H	69	12.30	19.05	74.00	-	-
5 149.92	-	-	30.93	43.23	-	250	H	69	12.30	-	-	10.77	54.00

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT B_ 802.11a_6 Mbps_5320

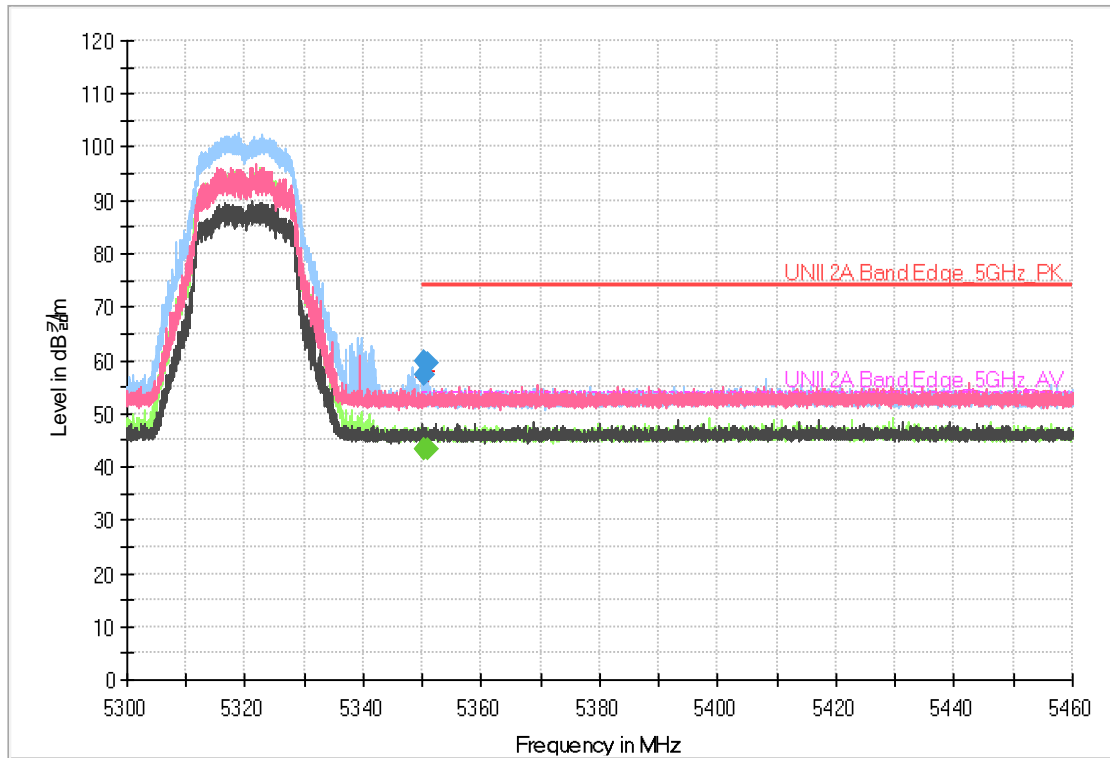


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 350.14	-	-	30.69	43.39	-	197	H	114	12.70	-	-	10.61	54.00
5 350.14	47.08	59.78	-	-	-	197	H	114	12.70	14.22	74.00	-	-
5 350.24	44.68	57.38	-	-	-	290	V	168	12.70	16.62	74.00	-	-
5 350.24	-	-	30.52	43.22	-	290	V	168	12.70	-	-	10.78	54.00
5 350.86	46.57	59.27	-	-	-	184	H	217	12.70	14.73	74.00	-	-
5 350.86	-	-	30.69	43.39	-	184	H	217	12.70	-	-	10.61	54.00

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge_ANT B_ 802.11a_6 Mbps_5500

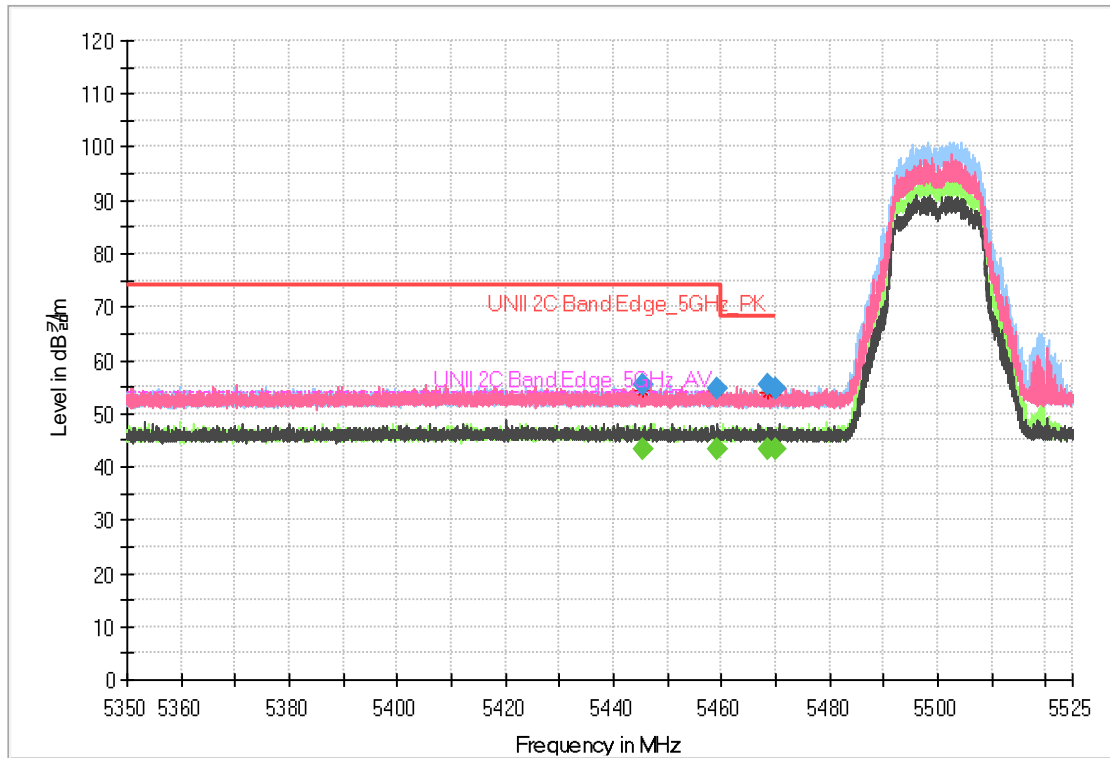

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 445.45	-	-	30.40	43.30	-	163	V	10	12.90	-	-	10.70	54.00
5 445.45	42.65	55.55	-	-	-	163	V	10	12.90	18.45	74.00	-	-
5 459.11	41.79	54.69	-	-	-	153	H	99	12.90	19.31	74.00	-	-
5 459.11	-	-	30.38	43.28	-	153	H	99	12.90	-	-	10.72	54.00
5 468.65	42.62	55.52	-	-	-	172	V	10	12.90	12.68	68.20	-	-
5 469.96	41.90	54.80	-	-	-	310	H	337	12.90	13.40	68.20	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)