

FCC 2G3G REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

January 22, 2021

Location:

HCT CO., LTD.,

Address:

129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2101-FC096

FCC ID: A3LSMA325F

APPLICANT: SAMSUNG Electronics Co., Ltd.

According to the Evaluation report, all of the data contained herein is reused from the reference
FCC ID : A3LSMA325M report.

Model(s): SM-A325F/DS
Additional Model(s): SM-A325F
EUT Type: Mobile Phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §22, §24, §2

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	245 KGXW	0.657	28.18
GSM850 EDGE			251 KG7W	0.183	22.62
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M17F9W	0.094	19.73
Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	248 KGXW	0.480	26.81
GSM1900 EDGE			249 KG7W	0.119	20.74
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M16F9W	0.109	20.36

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2101-FC096

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2101-FC096	January 22, 2021	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.9 WORST CASE(CONDUCTED TEST)	16
3.10 WORST CASE(RADIATED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 EFFECTIVE RADIATED POWER.....	23
8.2 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.3 RADIATED SPURIOUS EMISSIONS	25
8.4 PEAK-TO-AVERAGE RATIO.....	29
8.5 OCCUPIED BANDWIDTH	30
8.6 CONDUCTED SPURIOUS EMISSIONS	31
8.7 BAND EDGE	31
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
9. TEST PLOTS.....	40
10. ANNEX A_ TEST SETUP PHOTO.....	112

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA325F
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §2
EUT Type:	Mobile Phone
Model(s):	SM-A325F/DS
Additional Model(s):	SM-A325F
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900)
Date(s) of Tests:	December 16, 2020 ~ January 12, 2021
Serial number:	R38NB02HBGE

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven
by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

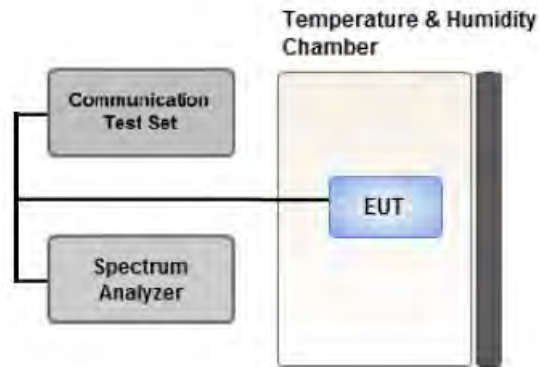

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

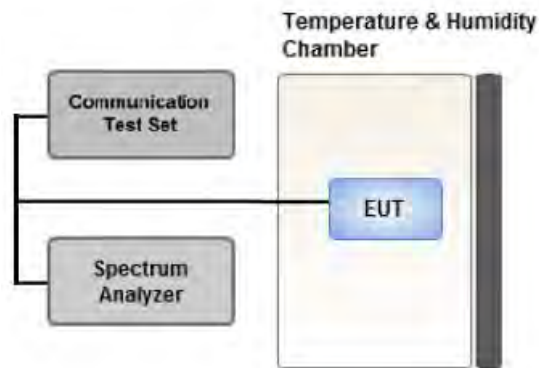

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 - 5\%$ of the expected OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

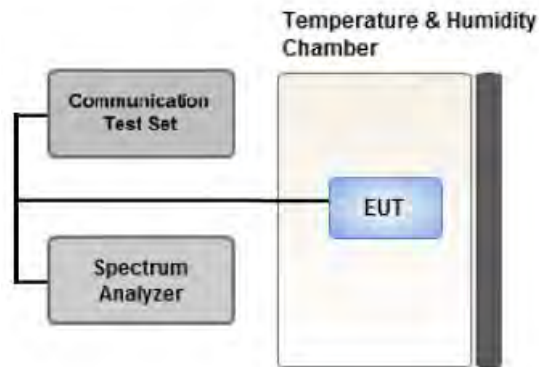

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 BAND EDGE

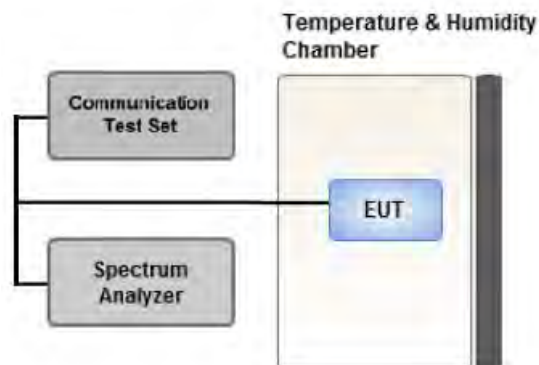

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

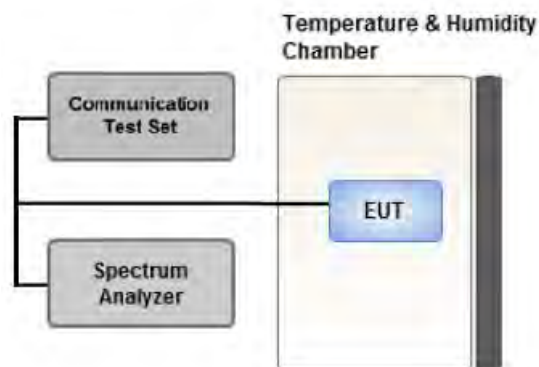

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-A325F/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-A325F/DS)

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, Mid, High
Band Edge	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	GSM : Voice WCDMA : QPSK(RMC)	Low, Mid, High

[Test Channel]

	UplinkChannel			
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B5)
Low	128	512	9262	4132
Mid	190	661	9400	4183
High	251	810	9538	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-A325F/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-A325F/DS)

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z WCDMA B5 : Z	Low, Mid, High

[Worst case_2G]

Test Description	Mod	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : X GSM1900 : Z	Low, Mid, High
	EDGE(1 TX Slot)	GSM850 : X GSM1900 : Z	GSM 850 : Low GSM1900 : Low
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : X GSM1900 : Y	Low, Mid, High

[Test Channel]

	UplinkChannel			
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B5)
Low	128	512	9262	4132
Mid	190	661	9400	4183
High	251	810	9538	4233

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93008124	03/18/2020	Annual	03/18/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2020	Annual	10/14/2021
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/26/2020	Annual	08/26/2021
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/12/2019	Biennial	03/12/2021
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/07/2021	Annual	01/07/2022
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a),	$< 43 + 10 \times \log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d),	$< 13 \text{ dB}$	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 22.355	$< 2.5 \text{ ppm}$	PASS
	§24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	$< 7 \text{ Watts max. ERP}$	PASS
Equivalent Isotropic Radiated Power	§24.232(c),	$< 2 \text{ Watts max. EIRP}$ $< 1 \text{ Watts max. EIRP}$	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a)	$< 43 + 10 \times \log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	128	824.2	-23.58	39.82	-10.25	1.39	H	< 7.00	0.657	28.18
	190	836.6	-24.33	39.60	-10.19	1.41	H		0.631	28.00
	251	848.8	-25.26	38.98	-10.14	1.42	H		0.553	27.42
EDGE	128	824.2	-29.14	34.26	-10.25	1.39	H		0.183	22.62

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-32.20	31.37	-10.24	1.40	H	< 7.00	0.094	19.73
	4183	836.6	-32.95	30.98	-10.19	1.41	H		0.087	19.38
	4233	846.6	-33.13	30.87	-10.15	1.42	H		0.085	19.30

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
GSM1900	512	1850.2	-15.26	18.82	10.10	2.11	V	< 2.00	0.480	26.81
	661	1880.0	-15.78	18.77	10.15	2.15	V		0.475	26.77
	810	1909.8	-15.87	18.67	10.23	2.15	V		0.473	26.75
EDGE	512	1850.2	-21.33	12.75	10.10	2.11	V		0.119	20.74

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-21.81	12.27	10.10	2.11	V	< 2.00	0.106	20.26
	9400	1880.0	-22.19	12.36	10.15	2.15	V		0.109	20.36
	9538	1907.6	-22.56	11.98	10.23	2.15	V		0.101	20.06

8.3 RADIATED SPURIOUS EMISSIONS

MODULATION SIGNAL: GSM850

DISTANCE: 3 meters

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1 648.40	-52.04	9.50	-61.65	1.99	H	-54.14	-13.00
	2 472.60	-49.52	10.60	-53.65	2.47	H	-45.52	-13.00
	3 296.80	-57.66	12.25	-58.75	2.89	H	-49.38	-13.00
190 (836.6)	1 673.20	-48.75	9.65	-58.52	2.01	V	-50.88	-13.00
	2 509.80	-48.16	10.75	-51.88	2.50	H	-43.63	-13.00
	3 346.40	-57.34	12.48	-58.32	2.92	H	-48.77	-13.00
251 (848.8)	1 697.60	-45.45	9.80	-54.97	2.04	V	-47.21	-13.00
	2 546.40	-49.39	10.88	-52.67	2.52	V	-44.31	-13.00
	3 395.20	-57.61	12.68	-58.67	2.94	H	-48.93	-13.00

MODULATION SIGNAL: GSM1900

DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
512 (1850.2)	3 700.40	-55.19	12.40	-59.26	3.08	V	-49.94	-13.00
	5 550.60	-55.23	13.10	-53.20	3.81	H	-43.91	-13.00
	7 400.80	-56.11	11.10	-46.15	4.44	H	-39.49	-13.00
661 (1880.0)	3 760.00	-50.98	12.48	-54.85	3.10	H	-45.47	-13.00
	5 640.00	-55.69	13.30	-53.52	3.85	H	-44.07	-13.00
	7 520.00	-56.35	11.30	-45.78	4.46	V	-38.94	-13.00
810 (1909.8)	3 819.60	-47.67	12.40	-52.10	3.14	H	-42.84	-13.00
	5 729.40	-55.65	13.35	-52.99	3.87	H	-43.51	-13.00
	7 639.20	-56.14	11.65	-45.61	4.47	V	-38.43	-13.00

▣ MODULATION SIGNAL: WCDMA850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
4,132 (826.4)	1 652.80	-53.34	9.50	-62.95	1.99	H	-55.44	-13.00
	2 479.20	-55.99	10.60	-60.26	2.48	V	-52.14	-13.00
	3 305.60	-57.70	12.33	-58.78	2.90	H	-49.35	-13.00
4,183 (836.6)	1 673.20	-52.56	9.65	-62.33	2.01	V	-54.69	-13.00
	2 509.80	-55.08	10.75	-58.80	2.50	V	-50.55	-13.00
	3 346.40	-56.61	12.48	-57.59	2.92	H	-48.04	-13.00
4,233 (846.6)	1 693.20	-52.07	9.73	-61.75	2.03	H	-54.05	-13.00
	2 539.80	-55.83	10.85	-59.36	2.51	V	-51.02	-13.00
	3 386.40	-58.19	12.63	-59.27	2.94	H	-49.58	-13.00

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3 704.80	-54.97	12.40	-59.04	3.08	H	-49.72	-13.00
	5 557.20	-56.92	13.15	-55.11	3.82	H	-45.78	-13.00
	7 409.60	-56.11	11.13	-45.93	4.45	V	-39.25	-13.00
9400 (1880.0)	3 760.00	-53.81	12.48	-57.68	3.10	H	-48.30	-13.00
	5 640.00	-56.29	13.30	-54.12	3.85	V	-44.67	-13.00
	7 520.00	-57.62	11.30	-47.05	4.46	H	-40.21	-13.00
9538 (1907.6)	3 815.20	-54.48	12.40	-58.87	3.14	V	-49.60	-13.00
	5 722.80	-56.32	13.35	-53.35	3.88	H	-43.88	-13.00
	7 630.40	-57.24	11.60	-46.91	4.48	V	-39.79	-13.00

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)			
GSM1900	661	30.045	20.74	4.6160	0.5475	9.26	0.05	13	Pass
GSM1900 EDGE	661	28.636	15.87	4.616	0.5475	9.26	3.50		
WCDMA1900	9400	CCDF Procedure					3.19		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 55 ~ 61.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R_{(dB)} = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

$$\text{Duty cycle Factor} = 10 \times \log (1/X), \quad X = T_{xOn} / T_{xTotal}$$

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	245.04
	190	836.60	242.65
	251	848.80	244.06
GSM850 EDGE	128	824.20	248.47
	190	836.60	251.07
	251	848.80	251.11
GSM1900	512	1,850.20	247.92
	661	1,880.00	247.45
	810	1,909.80	245.12
GSM1900 EDGE	512	1,850.20	248.69
	661	1,880.00	241.05
	810	1,909.80	246.37
WCDMA850	4132	826.40	4.1451
	4183	836.60	4.1659
	4233	846.60	4.1452
WCDMA1900	9262	1852.40	4.1620
	9400	1880.00	4.1570
	9538	1907.60	4.1374

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 41 ~ 54.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	3.6945	27.976	-57.83	-29.849	-13.00
	190	3.6910	27.976	-57.15	-29.177	
	251	3.0509	27.976	-57.63	-29.653	
GSM1900	512	19.52574	29.489	-52.875	-23.386	
	661	19.54099	29.489	-52.670	-23.181	
	810	18.97122	29.489	-53.283	-23.794	
WCDMA850	4132	2.4801	27.976	-76.786	-48.810	
	4183	2.5075	27.976	-76.383	-48.407	
	4233	2.5375	27.976	-76.007	-48.031	
WCDMA1900	9262	18.9000	29.489	-72.903	-43.414	
	9400	18.9267	29.489	-72.754	-43.265	
	9538	18.9037	29.489	-72.808	-43.319	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 94 ~ 111.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 62 ~ 93.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: GSM850
 OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 190
 REFERENCE VOLTAGE: 3.86 VDC
 DEVIATION LIMIT: $\pm 0.00025\%$ or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	836 600 008	0.0	0.000 000	0.0000
100%		-30	836 600 016	8.8	0.000 001	0.0105
100%		-20	836 599 999	-8.8	-0.000 001	-0.0105
100%		-10	836 600 001	-6.6	-0.000 001	-0.0079
100%		0	836 600 002	-5.5	-0.000 001	-0.0066
100%		+10	836 600 000	-8.0	-0.000 001	-0.0095
100%		+30	836 600 015	7.2	0.000 001	0.0086
100%		+40	836 600 015	7.0	0.000 001	0.0083
100%		+50	836 600 016	8.6	0.000 001	0.0102
Batt. Endpoint	3.400	+20	836 600 015	7.9	0.000 001	0.0095

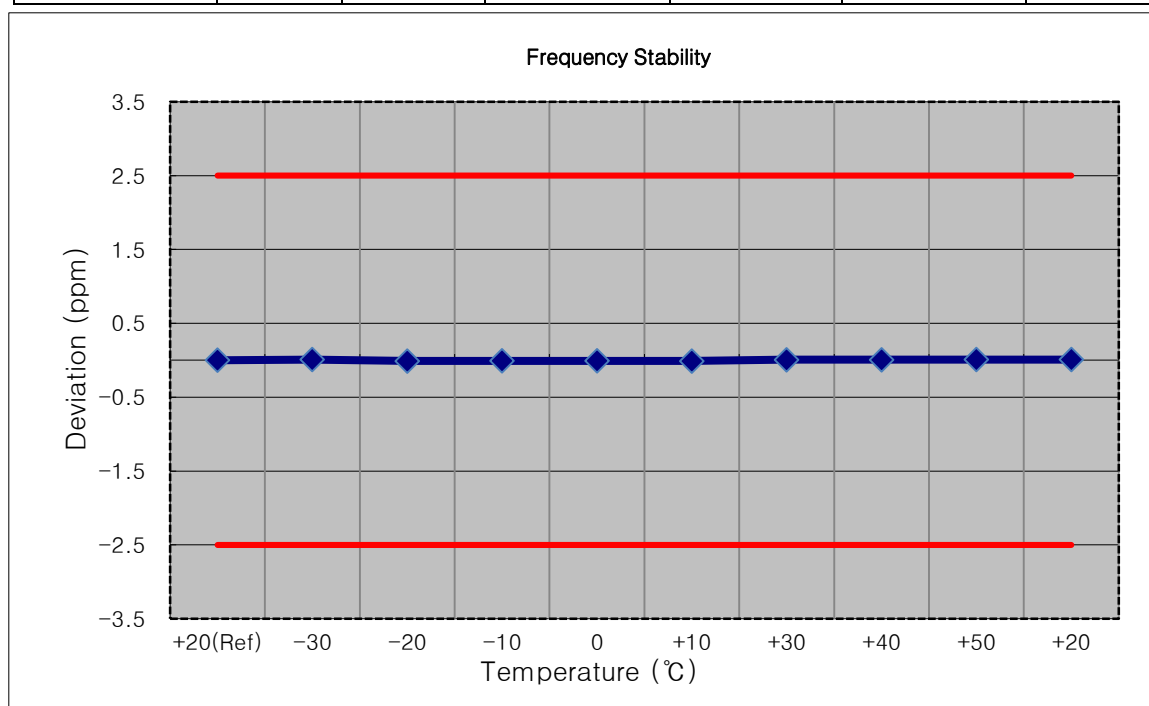


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1850,200,000 Hz
- ▣ CHANNEL: 512
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1850 200 027	0.0	0.000 000	0.0000
100%		-30	1850 200 053	25.8	0.000 001	0.0139
100%		-20	1850 200 054	27.2	0.000 001	0.0147
100%		-10	1850 200 053	26.2	0.000 001	0.0142
100%		0	1850 200 058	30.8	0.000 002	0.0166
100%		+10	1850 200 051	23.5	0.000 001	0.0127
100%		+30	1850 200 051	24.3	0.000 001	0.0131
100%		+40	1850 200 053	26.2	0.000 001	0.0142
100%		+50	1850 200 051	23.7	0.000 001	0.0128
Batt. Endpoint	3.400	+20	1850 200 053	25.5	0.000 001	0.0138

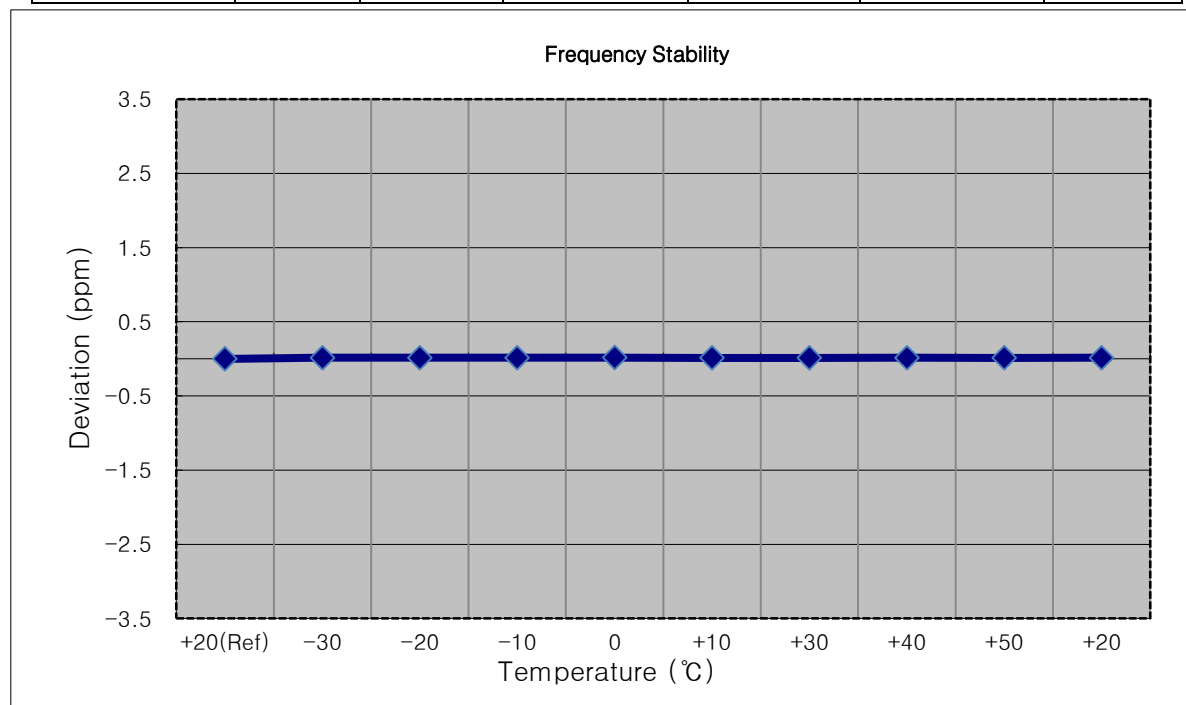


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1880 000 023	0.0	0.000 000	0.000
100%		-30	1880 000 049	25.9	0.000 001	0.014
100%		-20	1880 000 040	16.5	0.000 001	0.009
100%		-10	1880 000 043	20.3	0.000 001	0.011
100%		0	1880 000 044	21.1	0.000 001	0.011
100%		+10	1880 000 046	22.5	0.000 001	0.012
100%		+30	1880 000 041	18.3	0.000 001	0.010
100%		+40	1880 000 045	21.8	0.000 001	0.012
100%		+50	1880 000 041	18.2	0.000 001	0.010
Batt. Endpoint	3.400	+20	1880 000 043	19.5	0.000 001	0.010

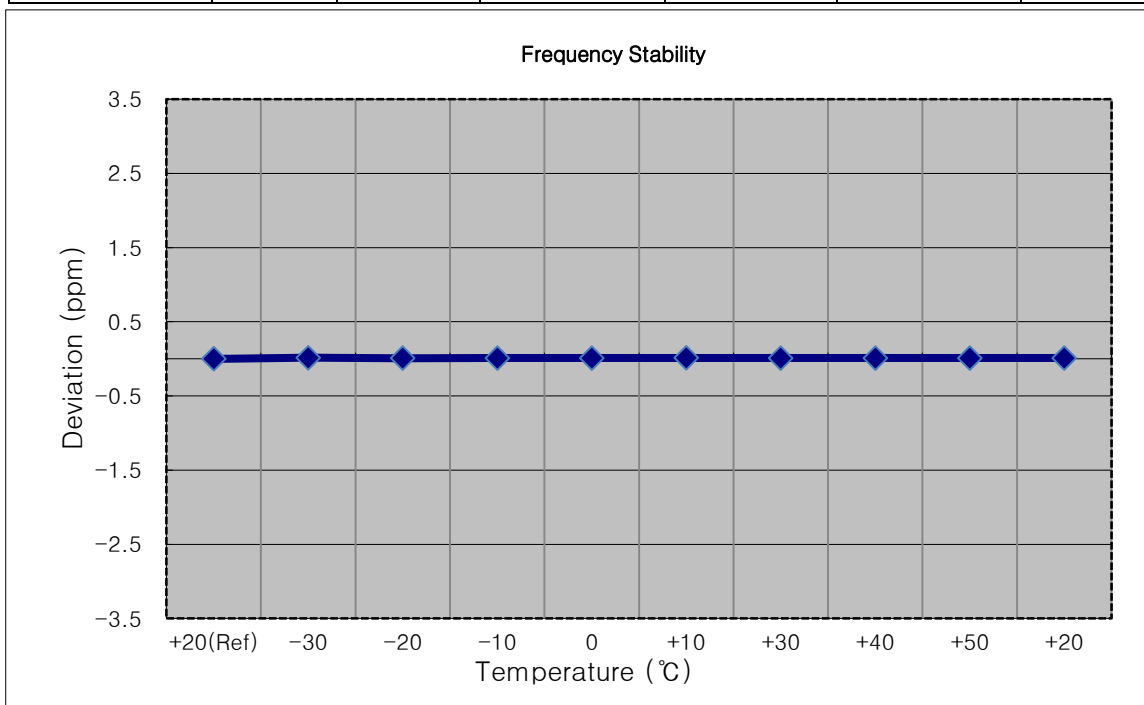


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1909,800,000 Hz
- ▣ CHANNEL: 810
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1909 800 021	0.0	0.000 000	0.000
100%		-30	1909 800 031	10.4	0.000 001	0.005
100%		-20	1909 800 034	13.6	0.000 001	0.007
100%		-10	1909 800 036	15.3	0.000 001	0.008
100%		0	1909 800 034	12.9	0.000 001	0.007
100%		+10	1909 800 026	5.6	0.000 000	0.003
100%		+30	1909 800 027	6.6	0.000 000	0.003
100%		+40	1909 800 028	6.8	0.000 000	0.004
100%		+50	1909 800 010	-10.9	-0.000 001	-0.006
Batt. Endpoint	3.400	+20	1909 800 010	-10.3	-0.000 001	-0.005

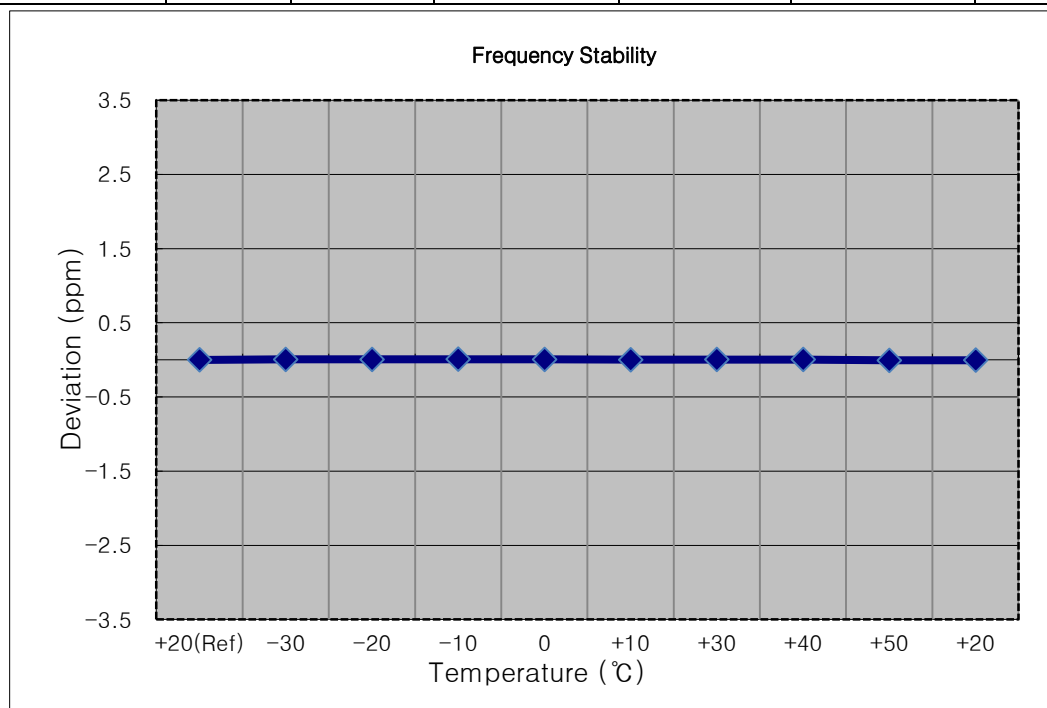


☐ Mode: WCDMA850
☐ OPERATING FREQUENCY: 836,600,000 Hz
☐ CHANNEL: 4183
☐ REFERENCE VOLTAGE: 3.86 VDC
☐ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	836 599 988	0.0	0.000 000	0.0000
100%		-30	836 599 973	-14.9	-0.000 002	-0.0178
100%		-20	836 599 980	-7.7	-0.000 001	-0.0093
100%		-10	836 599 982	-5.6	-0.000 001	-0.0067
100%		0	836 599 985	-2.8	0.000 000	-0.0034
100%		+10	836 599 983	-5.3	-0.000 001	-0.0063
100%		+30	836 599 980	-8.0	-0.000 001	-0.0095
100%		+40	836 599 981	-6.7	-0.000 001	-0.0080
100%		+50	836 599 979	-8.4	-0.000 001	-0.0101
Batt. Endpoint	3.400	+20	836 599 979	-9.0	-0.000 001	-0.0107

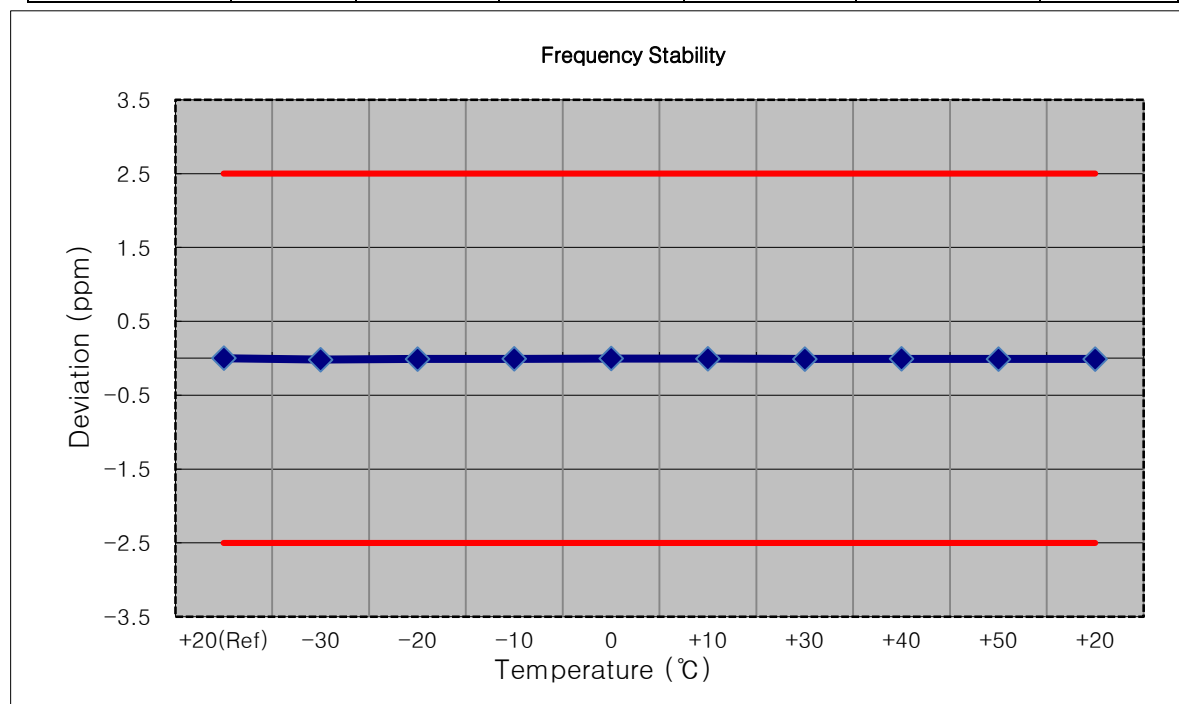


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,852,400,000 Hz
- ▣ CHANNEL: 9262
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1852 399 988	0.0	0.000 000	0.0000
100%		-30	1852 399 973	-14.4	-0.000 001	-0.0078
100%		-20	1852 399 975	-12.4	-0.000 001	-0.0067
100%		-10	1852 399 976	-12.1	-0.000 001	-0.0065
100%		0	1852 399 977	-11.1	-0.000 001	-0.0060
100%		+10	1852 399 971	-17.2	-0.000 001	-0.0093
100%		+30	1852 399 975	-12.9	-0.000 001	-0.0069
100%		+40	1852 399 972	-15.3	-0.000 001	-0.0083
100%		+50	1852 399 971	-16.8	-0.000 001	-0.0091
Batt. Endpoint	3.400	+20	1852 399 971	-17.1	-0.000 001	-0.0093

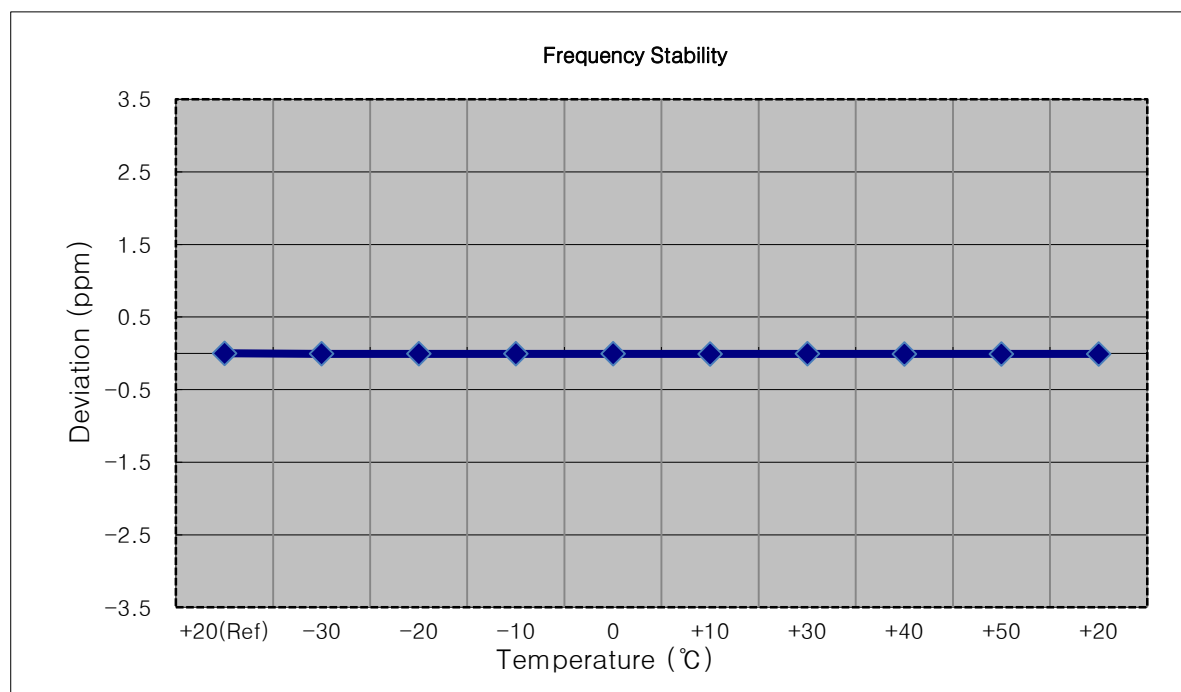


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1879 999 984	0.0	0.000 000	0.0000
100%		-30	1879 999 970	-13.9	-0.000 001	-0.0074
100%		-20	1879 999 968	-16.0	-0.000 001	-0.0085
100%		-10	1879 999 975	-9.0	0.000 000	-0.0048
100%		0	1879 999 973	-10.1	-0.000 001	-0.0054
100%		+10	1879 999 970	-13.2	-0.000 001	-0.0070
100%		+30	1879 999 968	-15.5	-0.000 001	-0.0082
100%		+40	1879 999 972	-12.0	-0.000 001	-0.0064
100%		+50	1879 999 978	-6.0	0.000 000	-0.0032
Batt. Endpoint	3.400	+20	1879 999 968	-15.8	-0.000 001	-0.0084

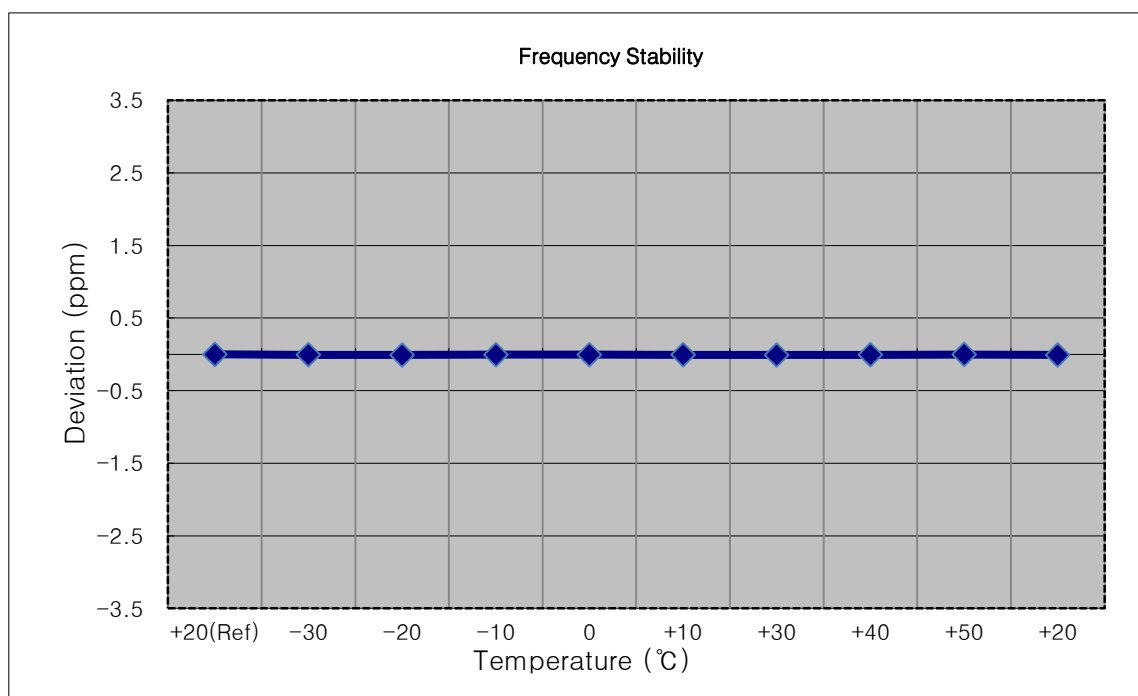


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,907,600,000 Hz
- ▣ CHANNEL: 9538
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1907 599 983	0.0	0.000 000	0.0000
100%		-30	1907 599 967	-16.0	-0.000 001	-0.0084
100%		-20	1907 599 966	-16.8	-0.000 001	-0.0088
100%		-10	1907 599 971	-12.2	-0.000 001	-0.0064
100%		0	1907 599 970	-13.3	-0.000 001	-0.0070
100%		+10	1907 599 974	-8.9	0.000 000	-0.0047
100%		+30	1907 599 980	-3.4	0.000 000	-0.0018
100%		+40	1907 599 974	-9.1	0.000 000	-0.0048
100%		+50	1907 599 969	-14.3	-0.000 001	-0.0075
Batt. Endpoint	3.400	+20	1907 599 975	-7.7	0.000 000	-0.0040

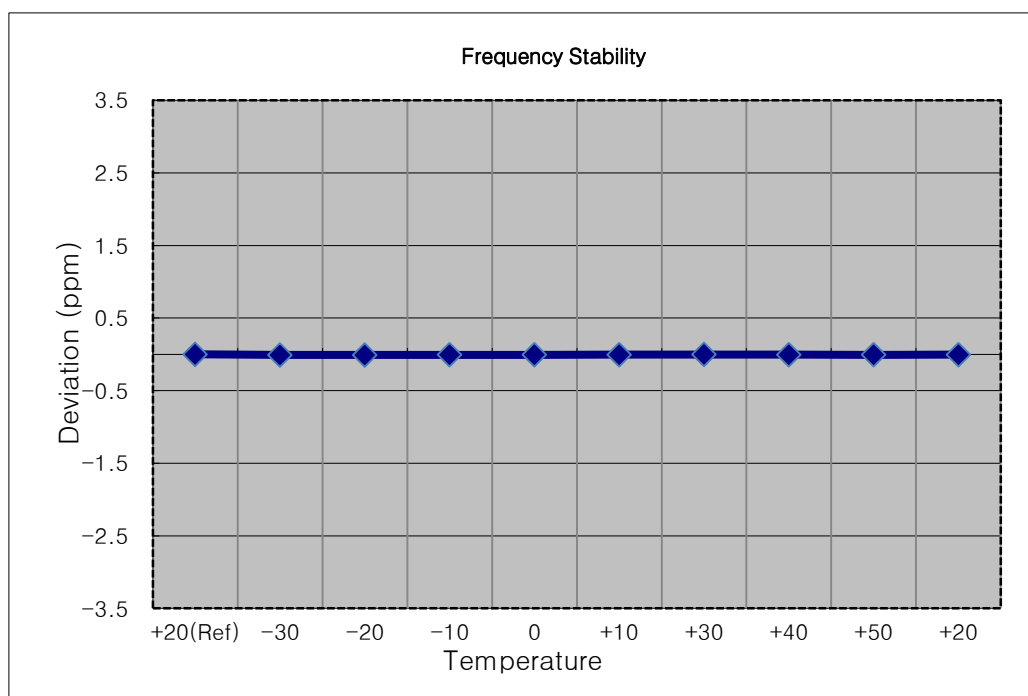


9. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

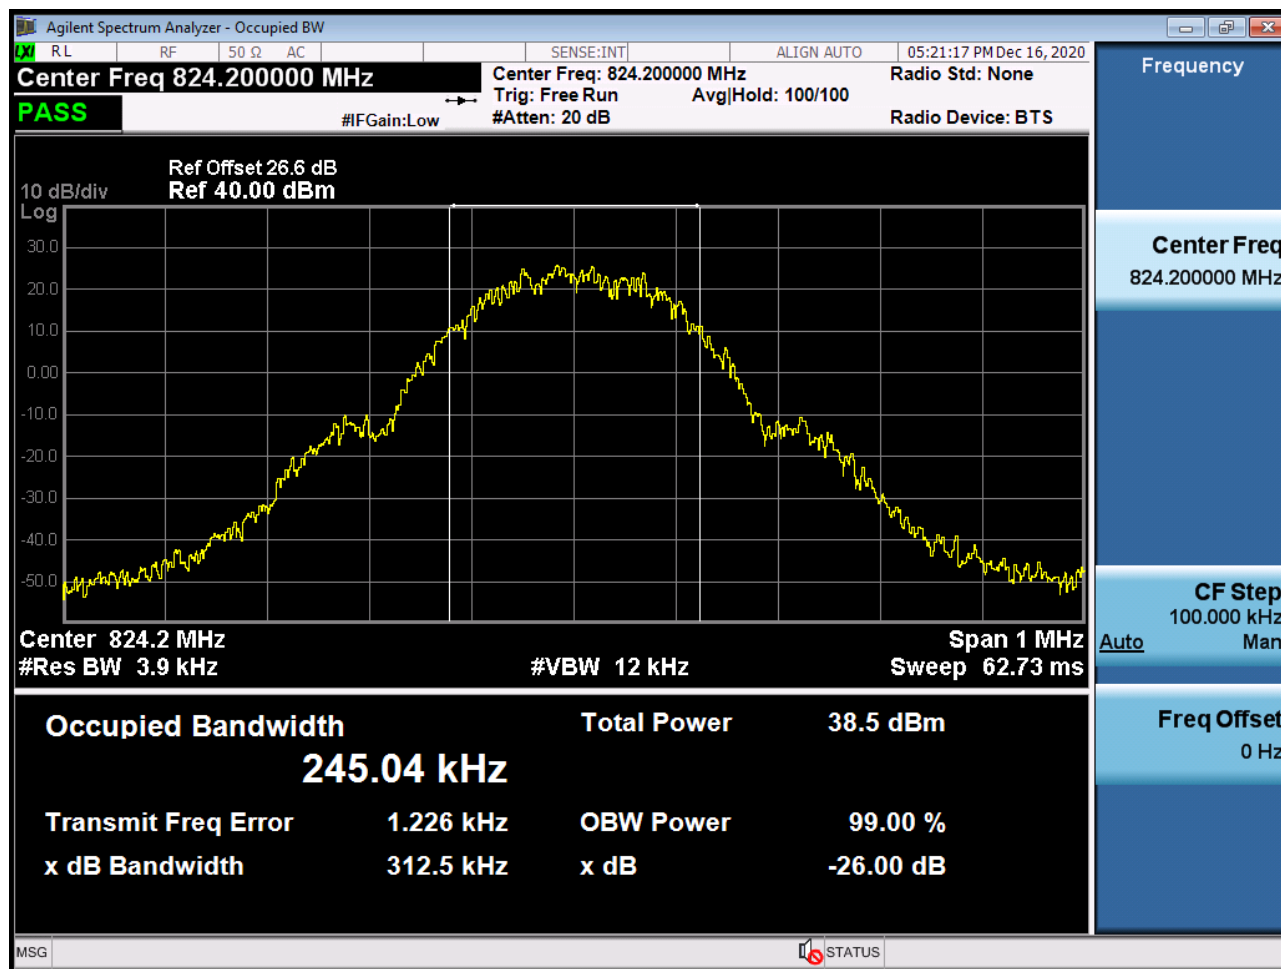


■ GSM850 MODE (190 CH.) Occupied Bandwidth

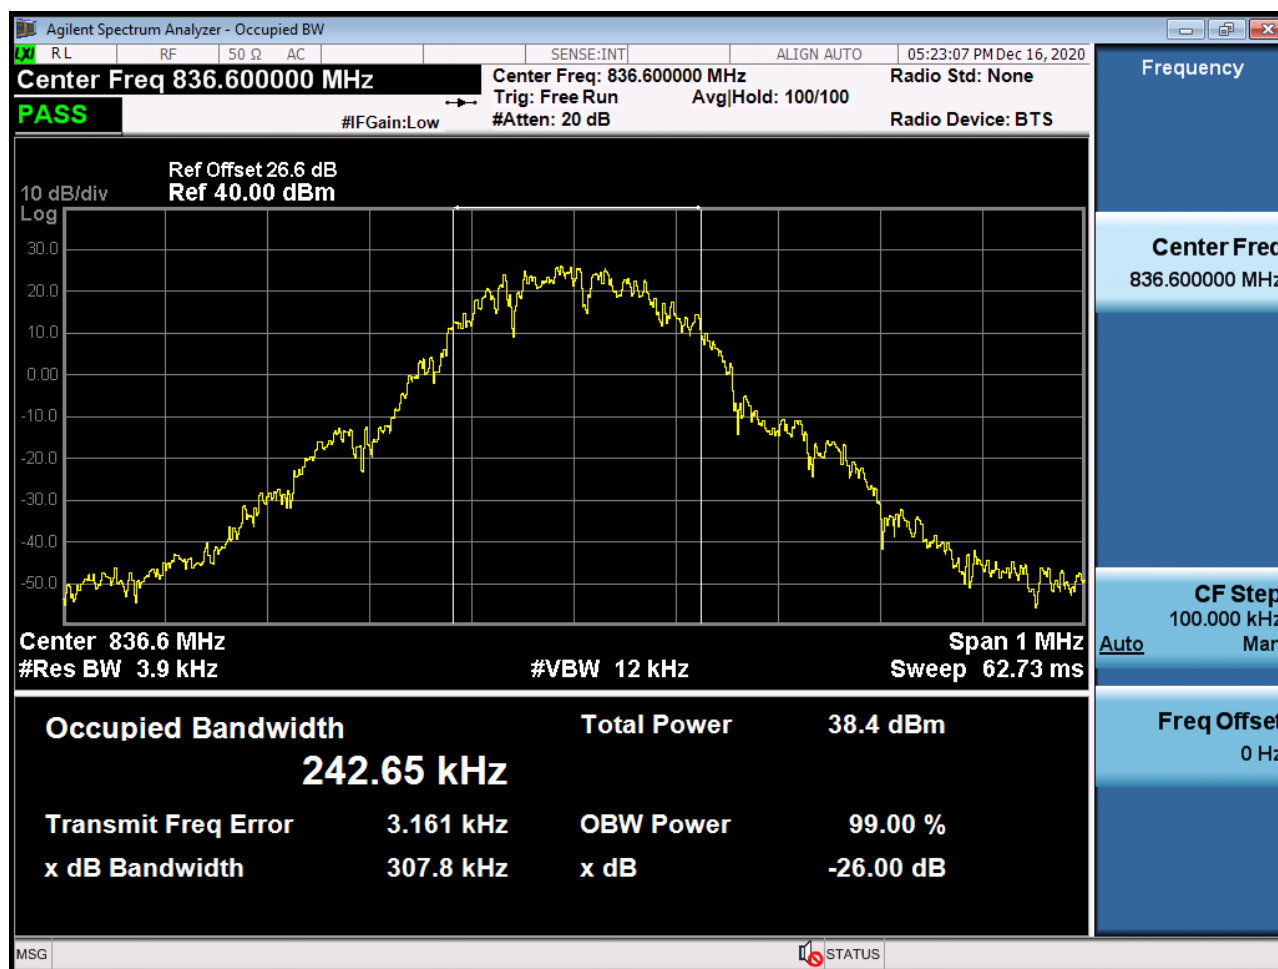


■ GSM850 MODE (251 CH.) Occupied Bandwidth

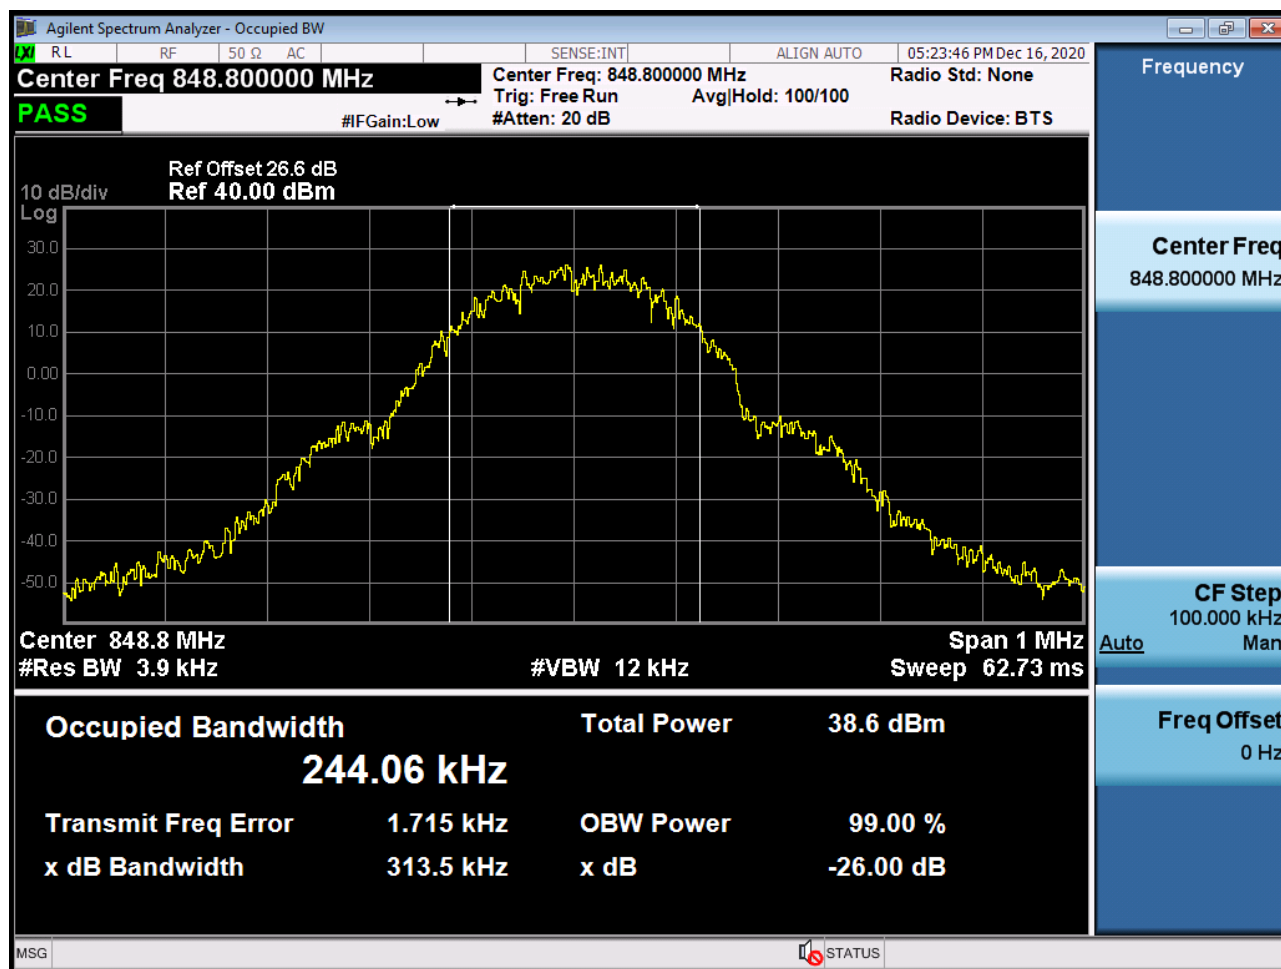


■ GSM850 EDGE (251 CH.) Occupied Bandwidth

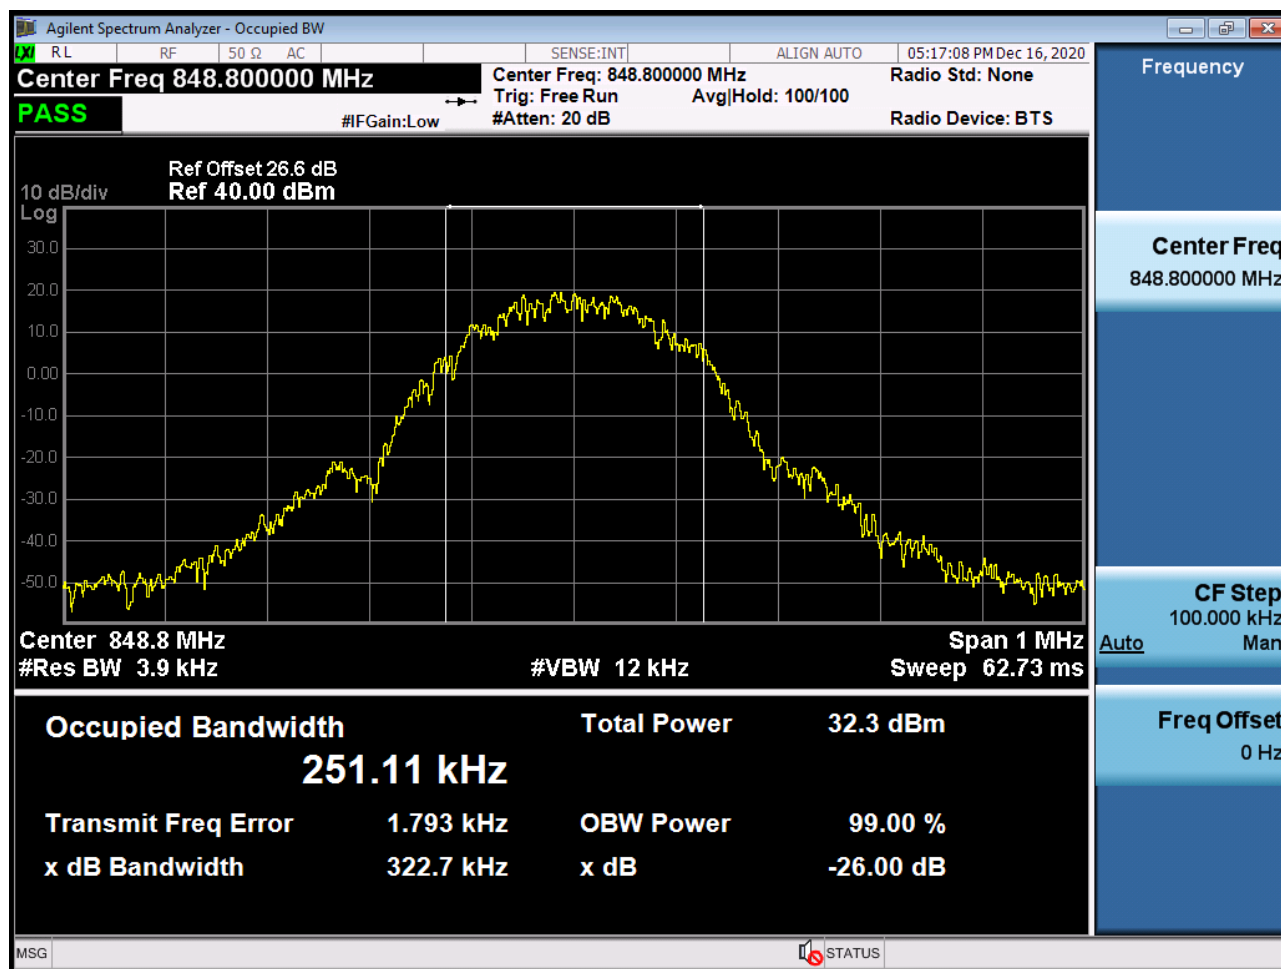


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

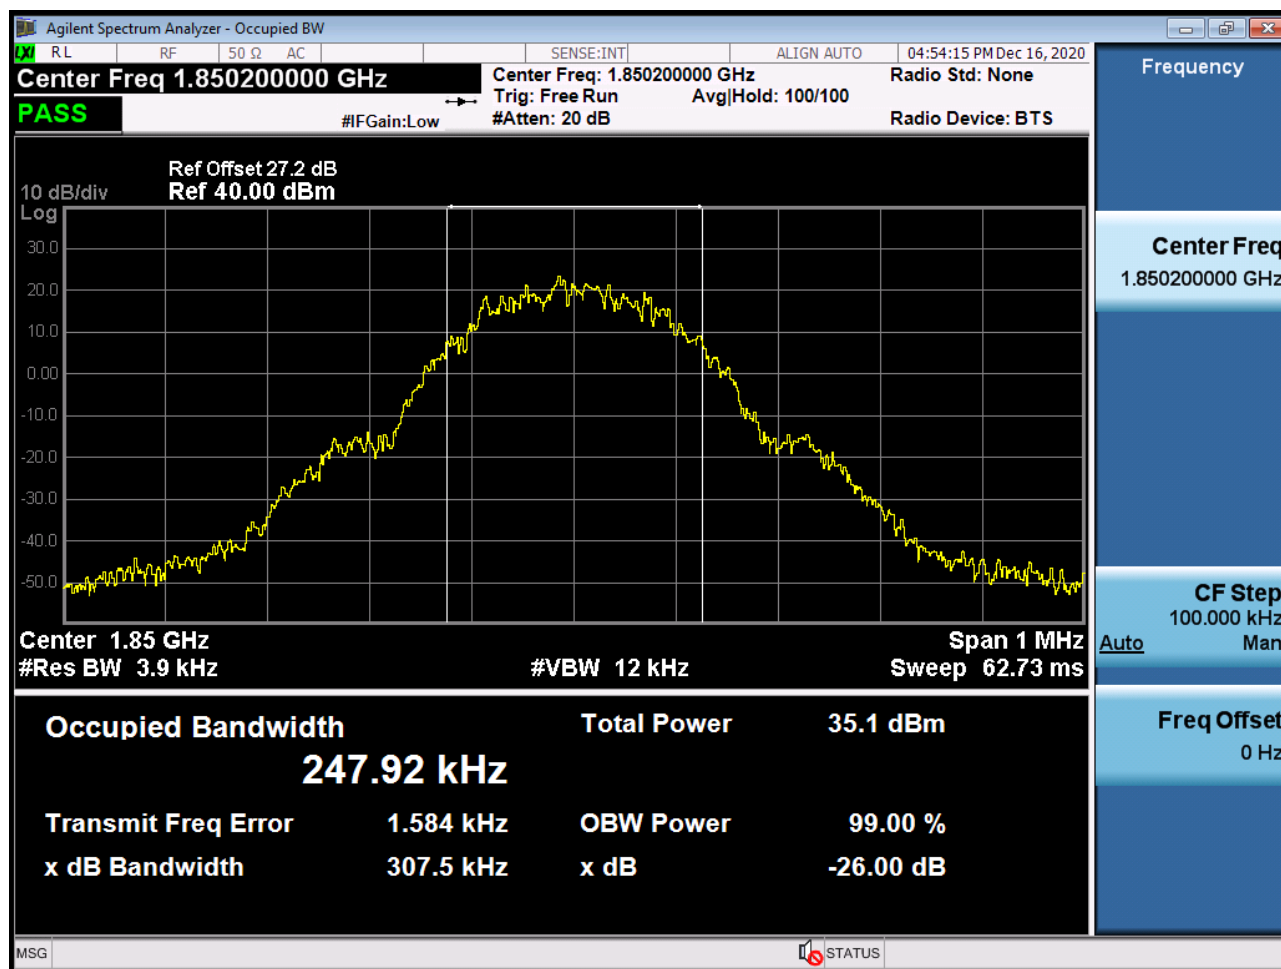


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

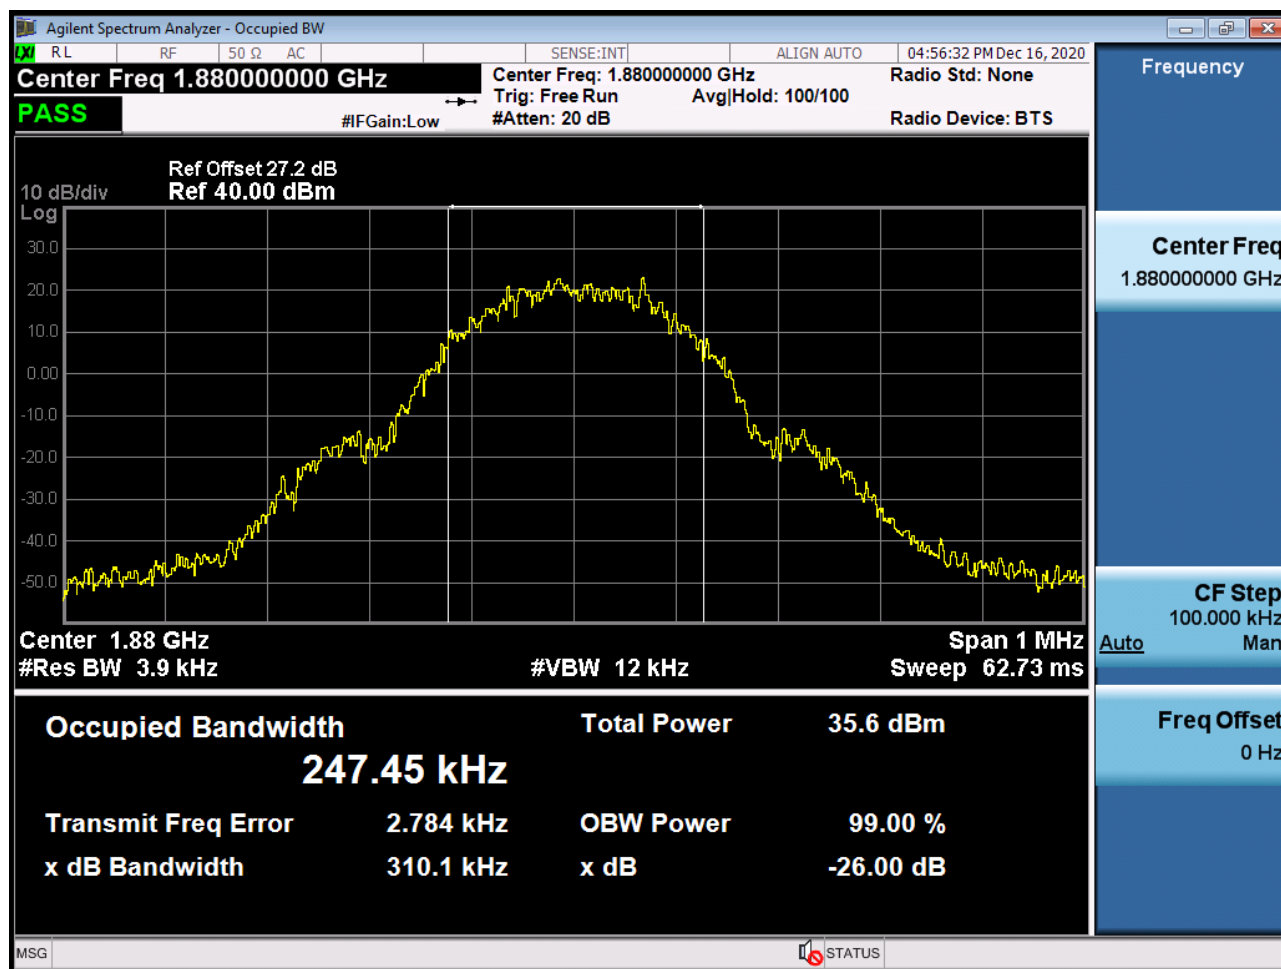


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

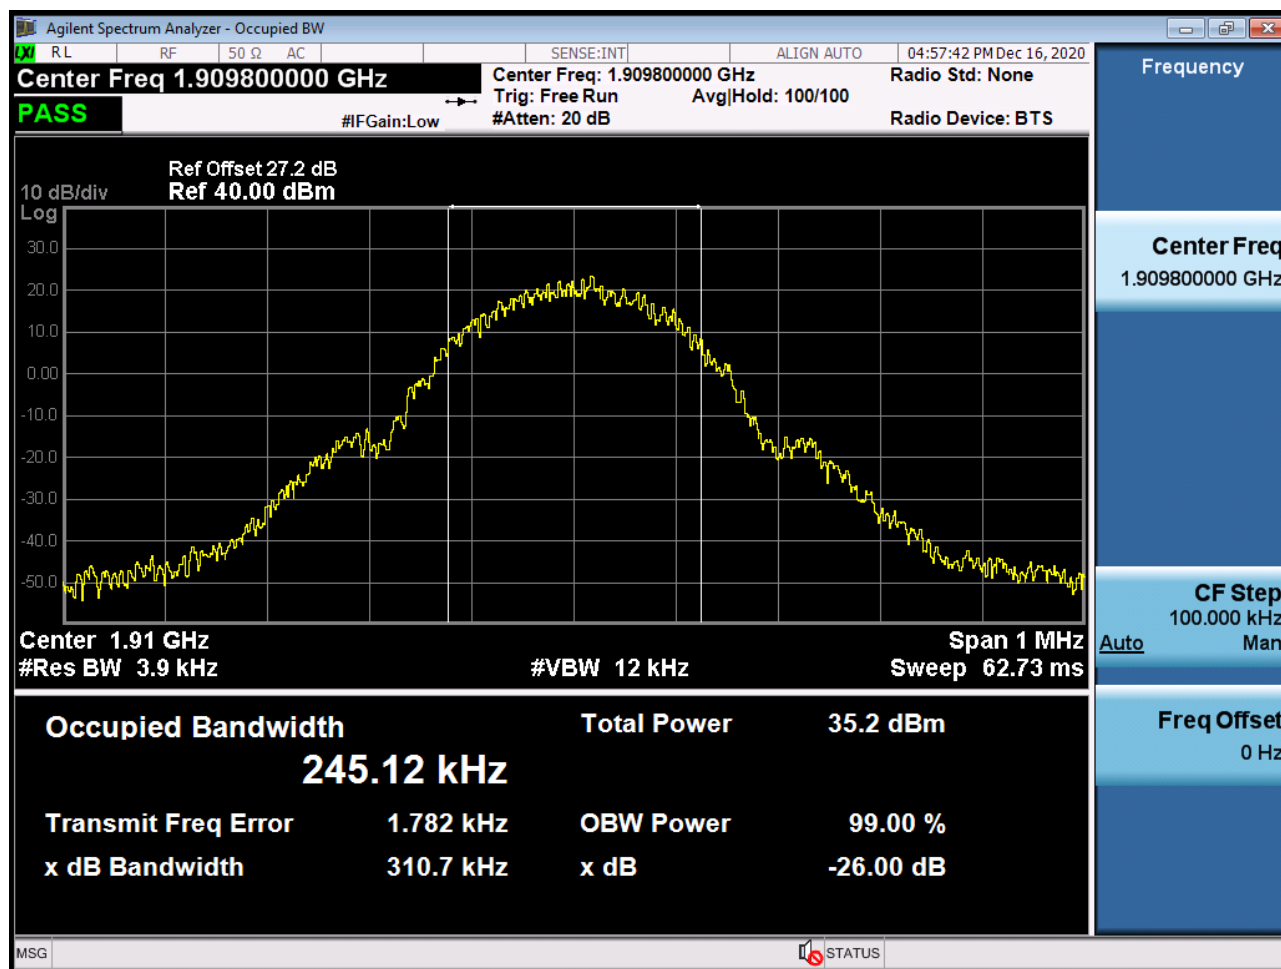


■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

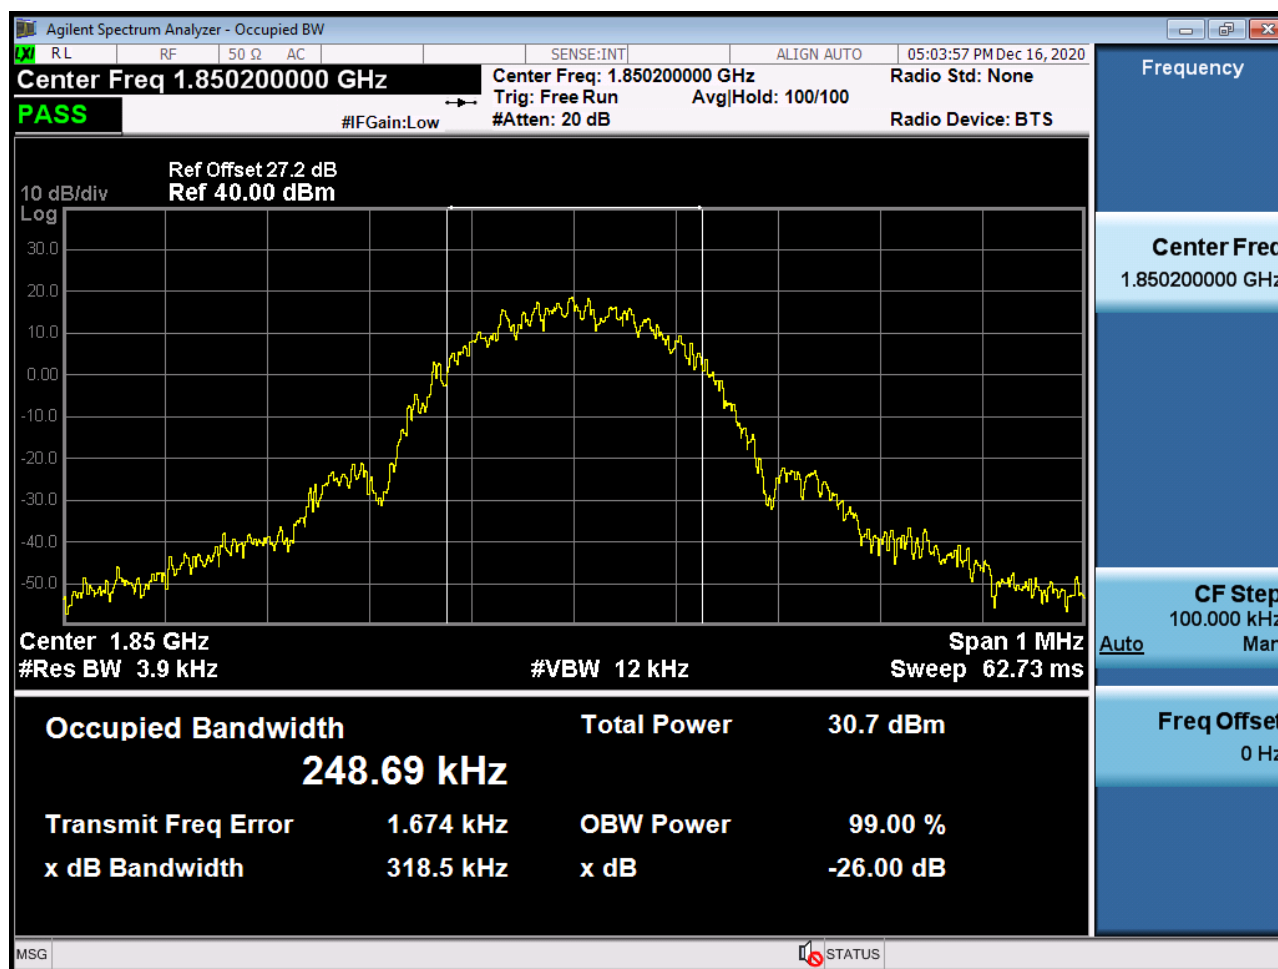


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

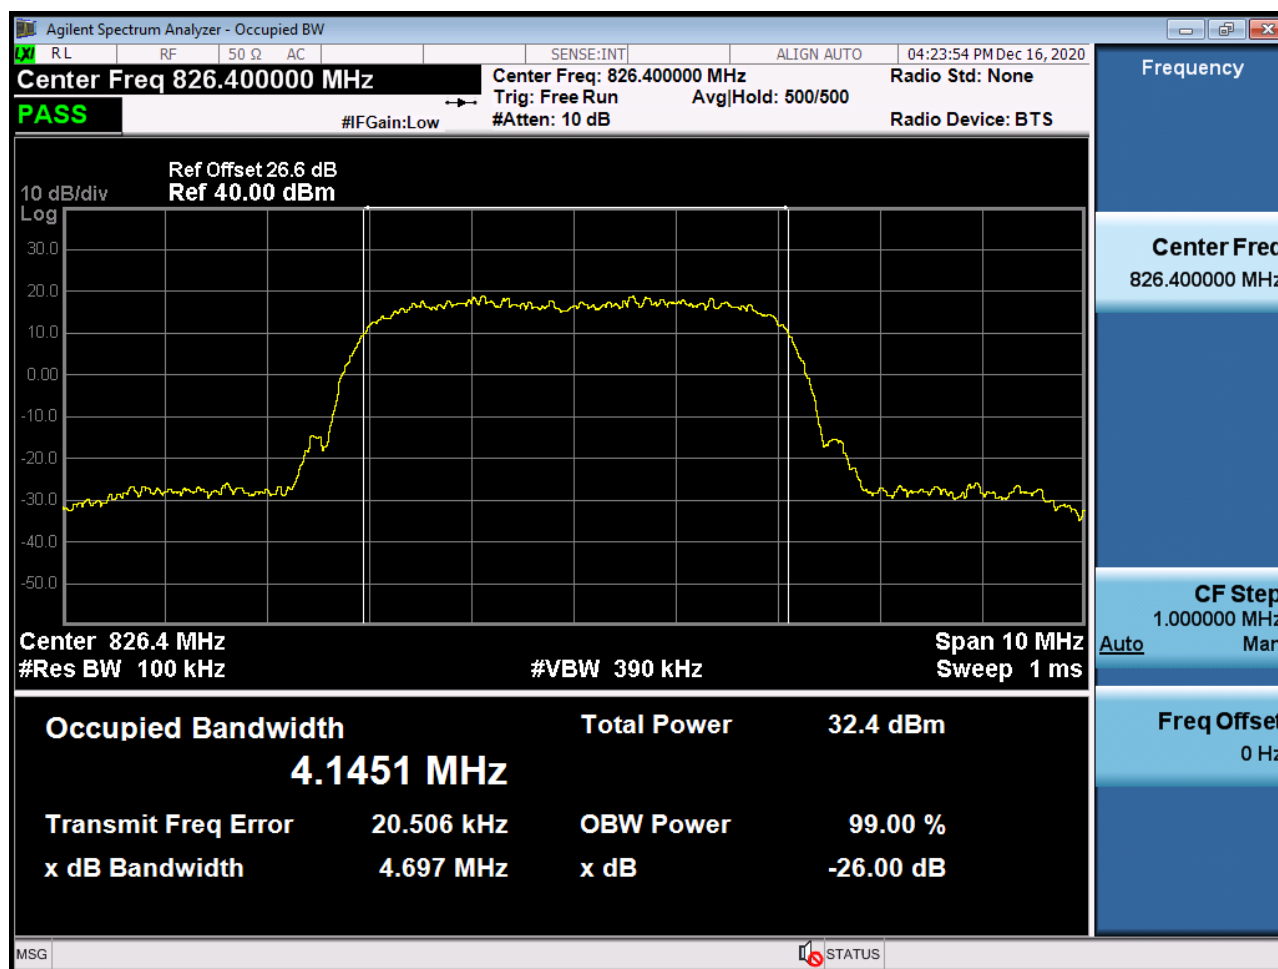


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

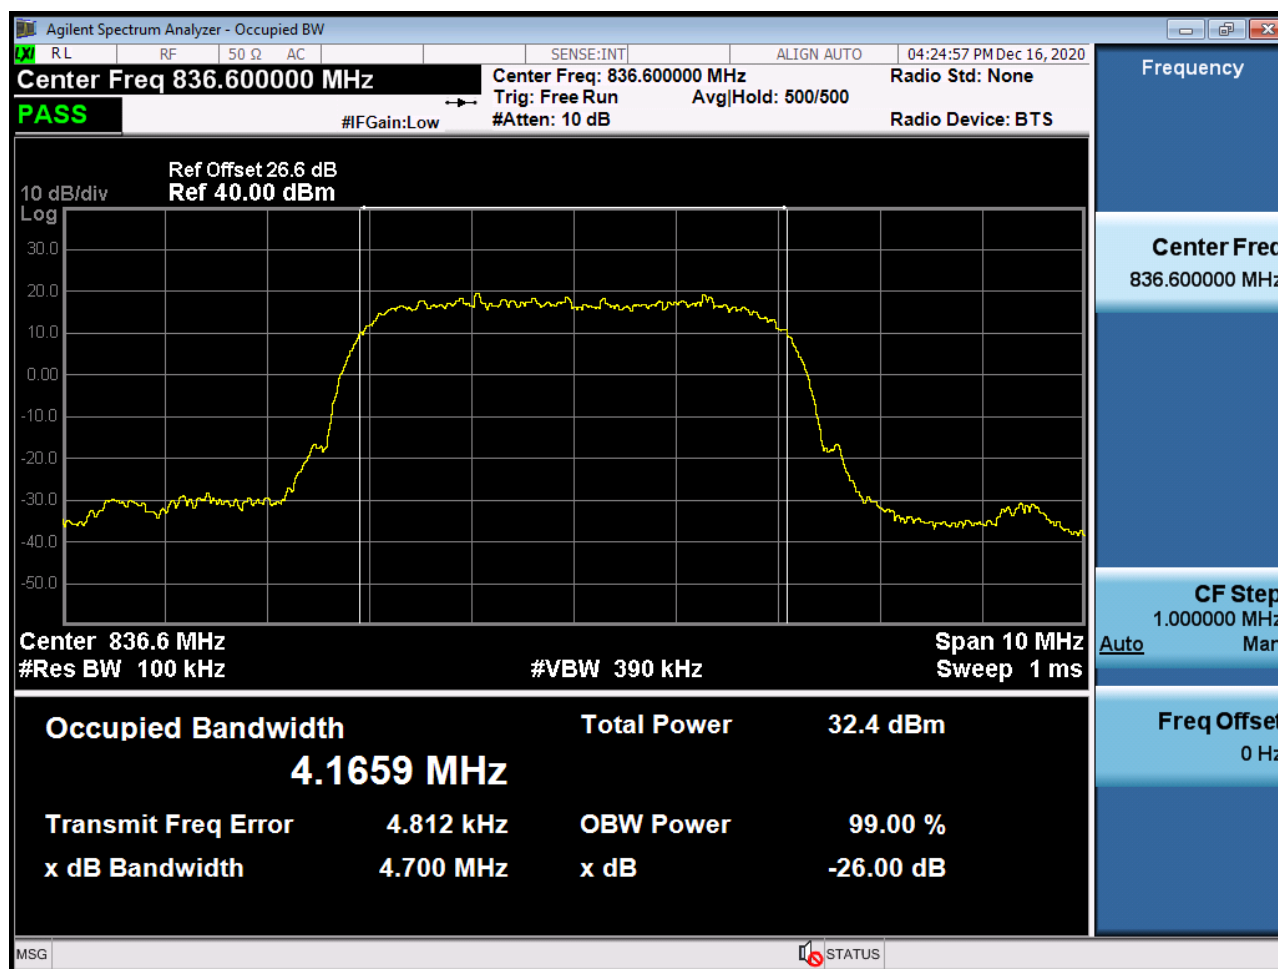


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

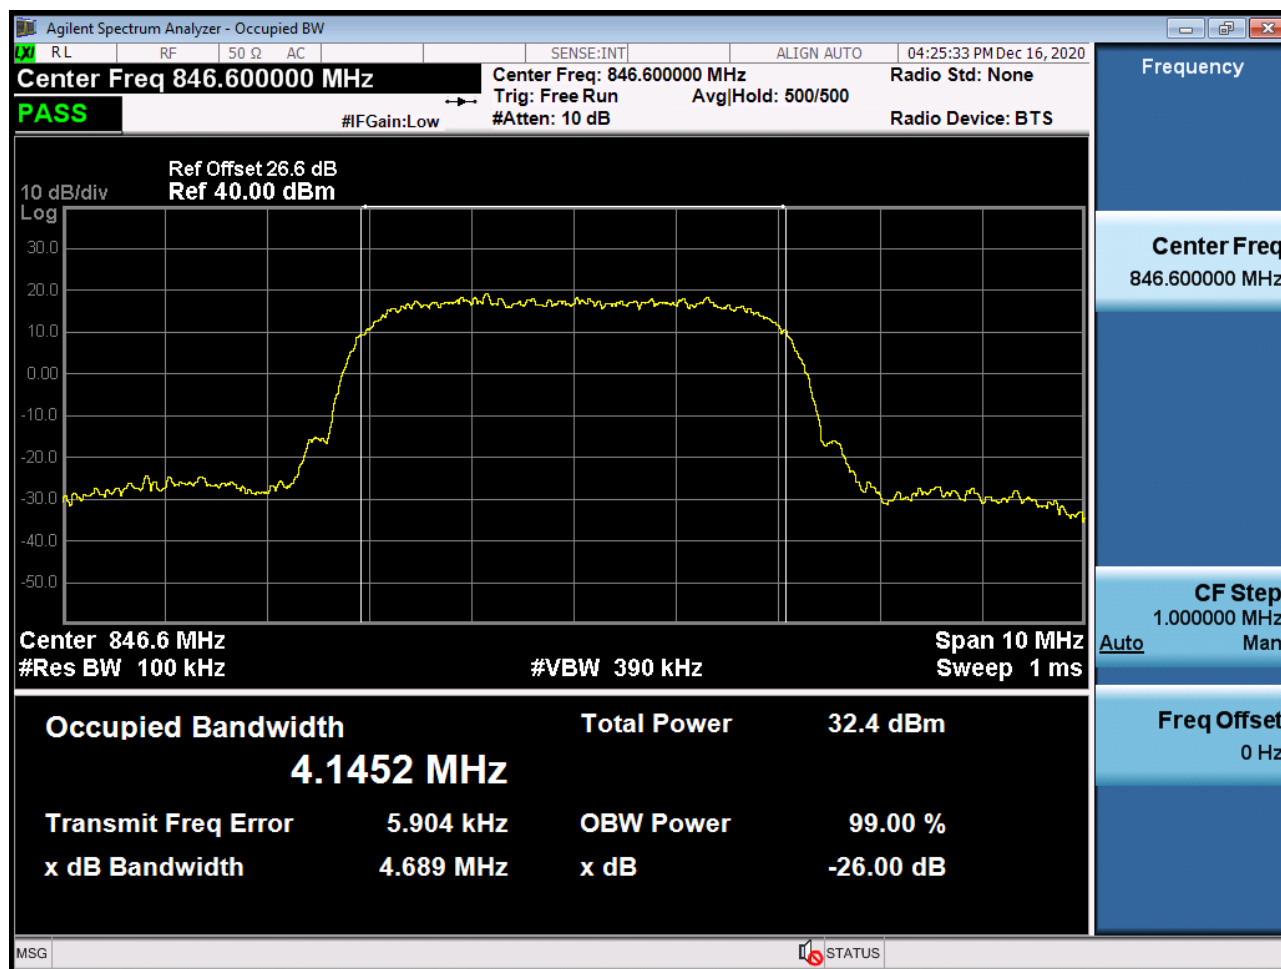


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

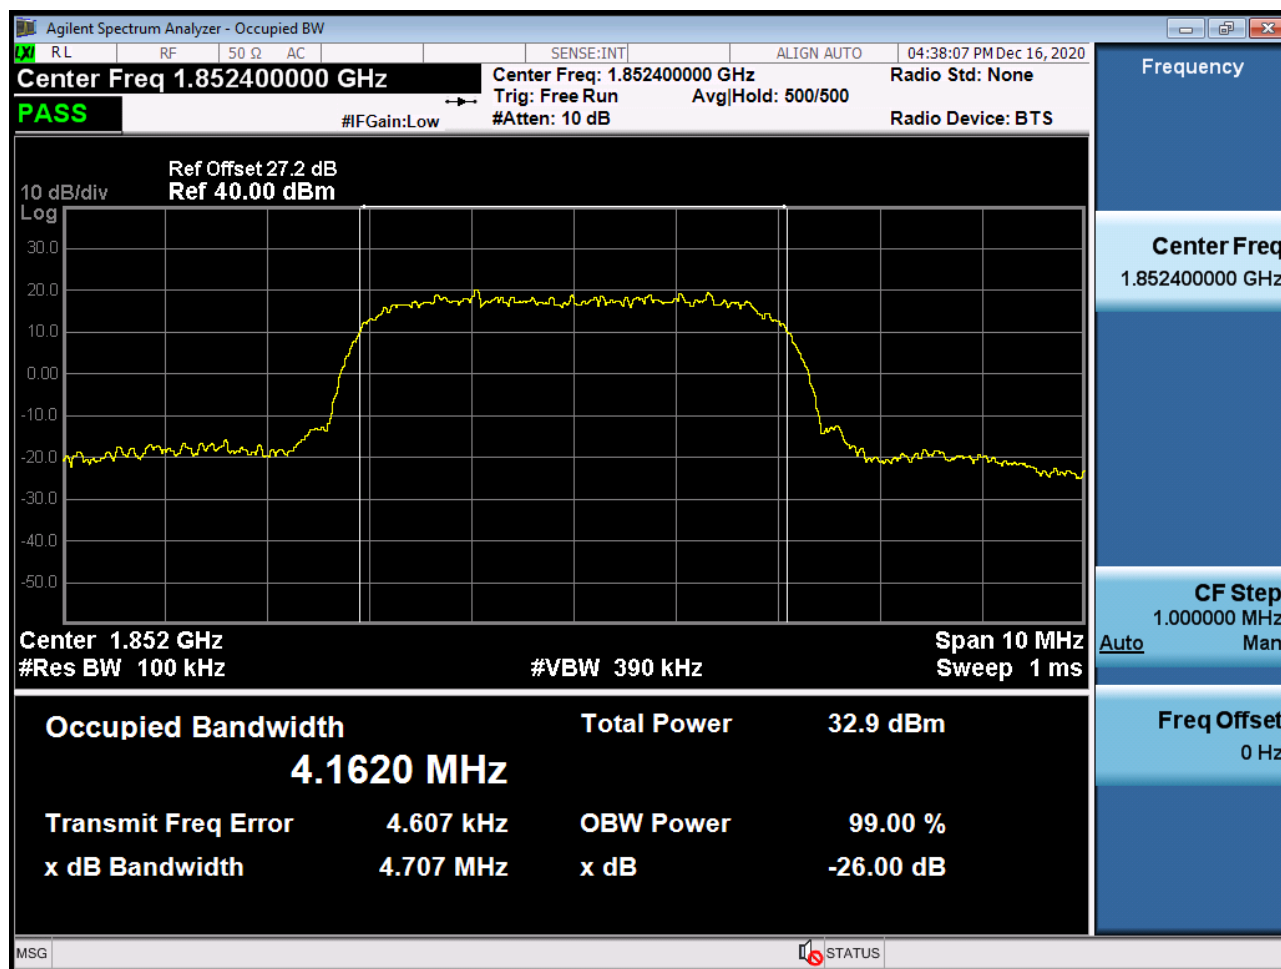

■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

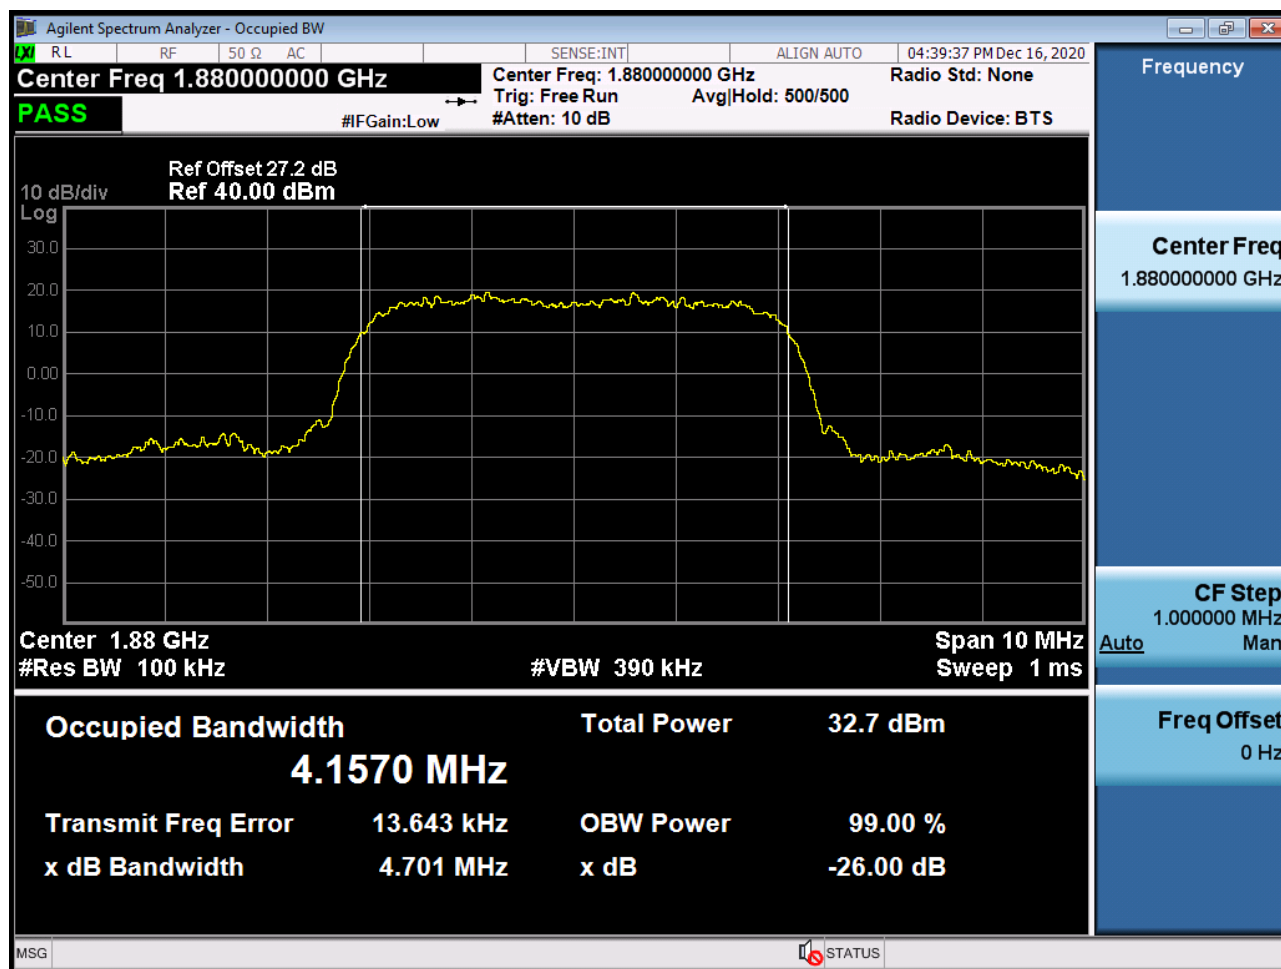


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

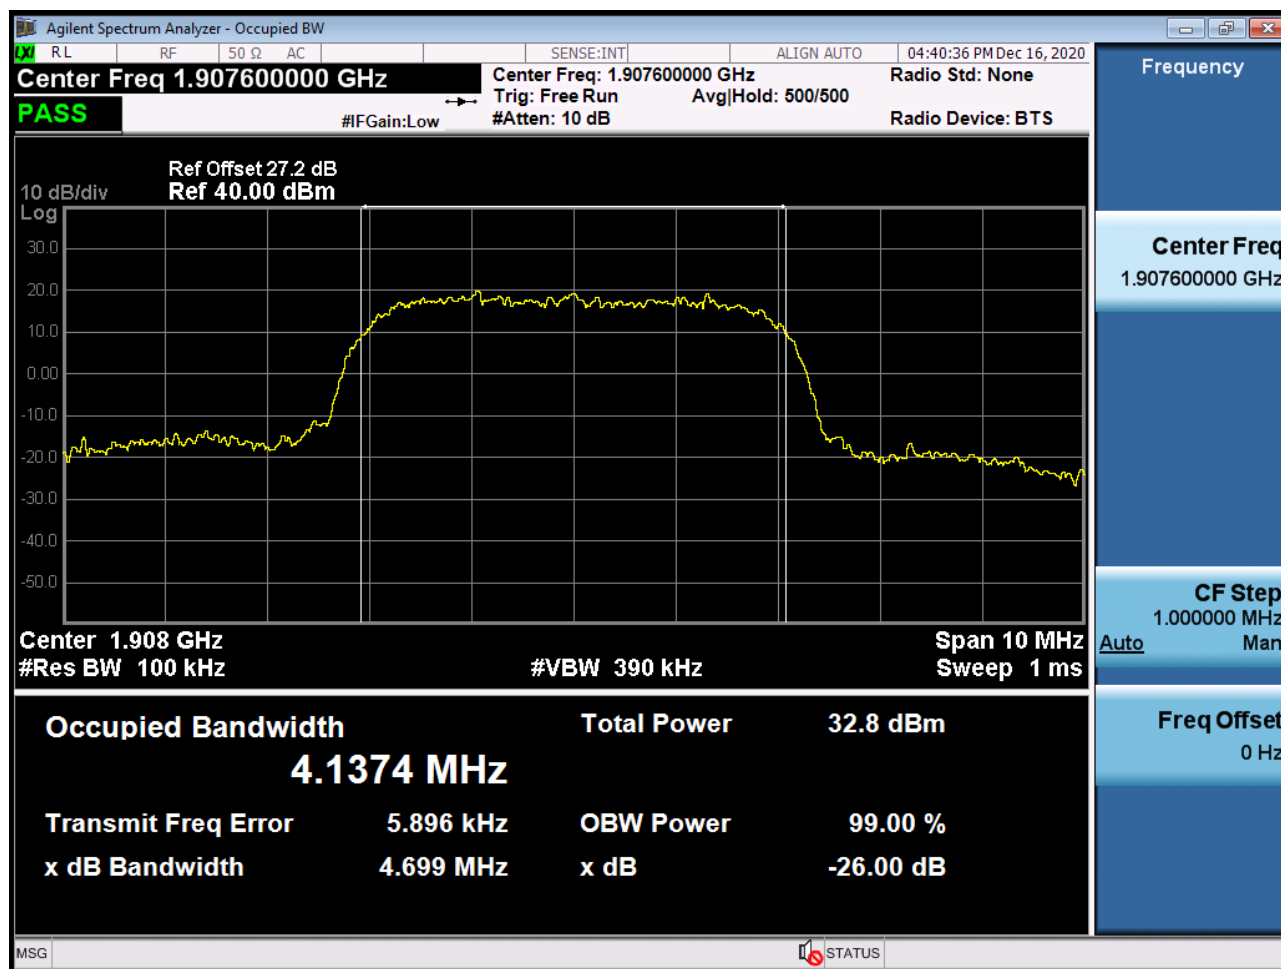


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{PK}




■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

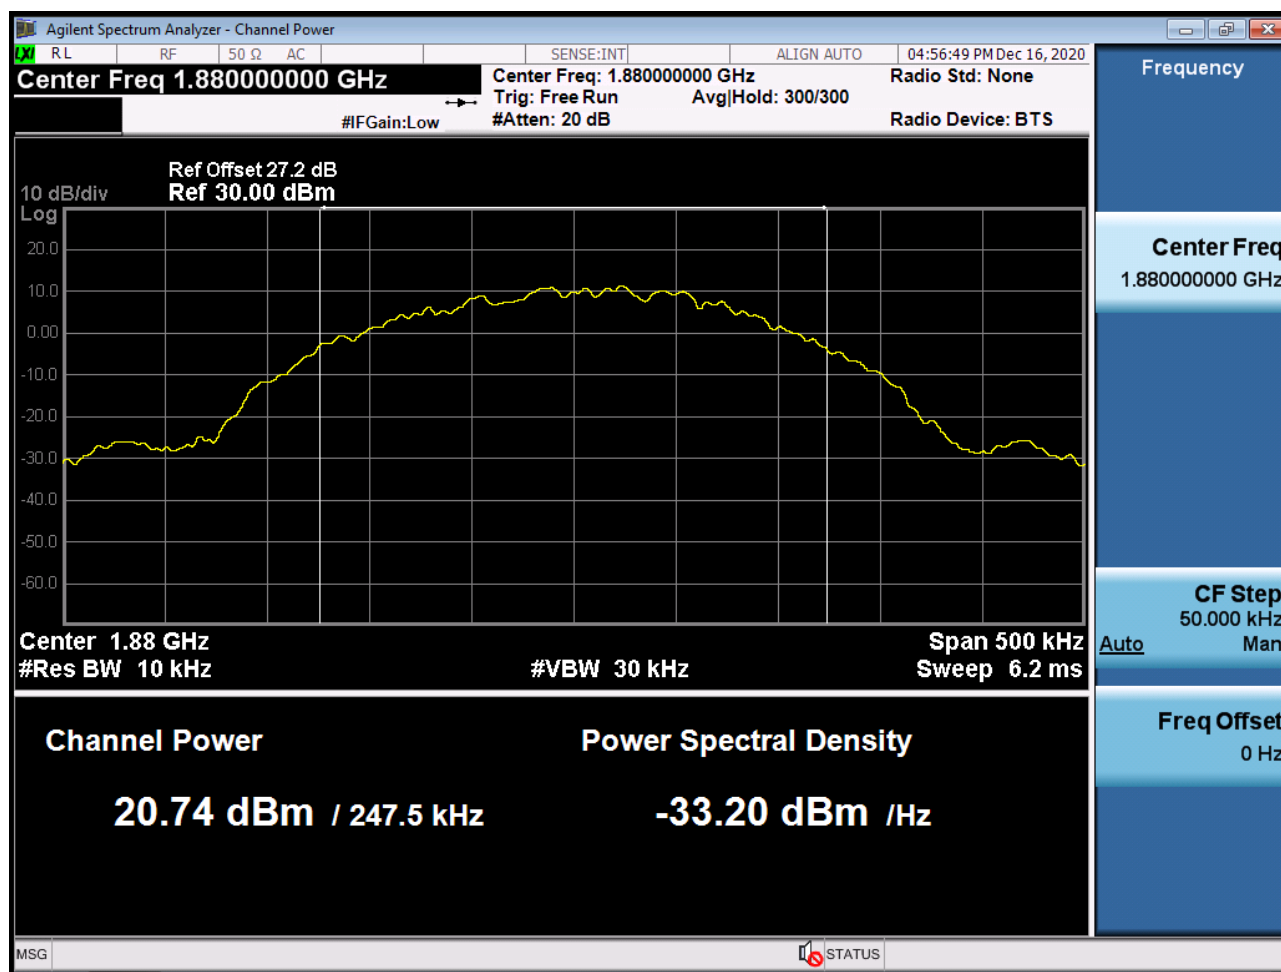

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

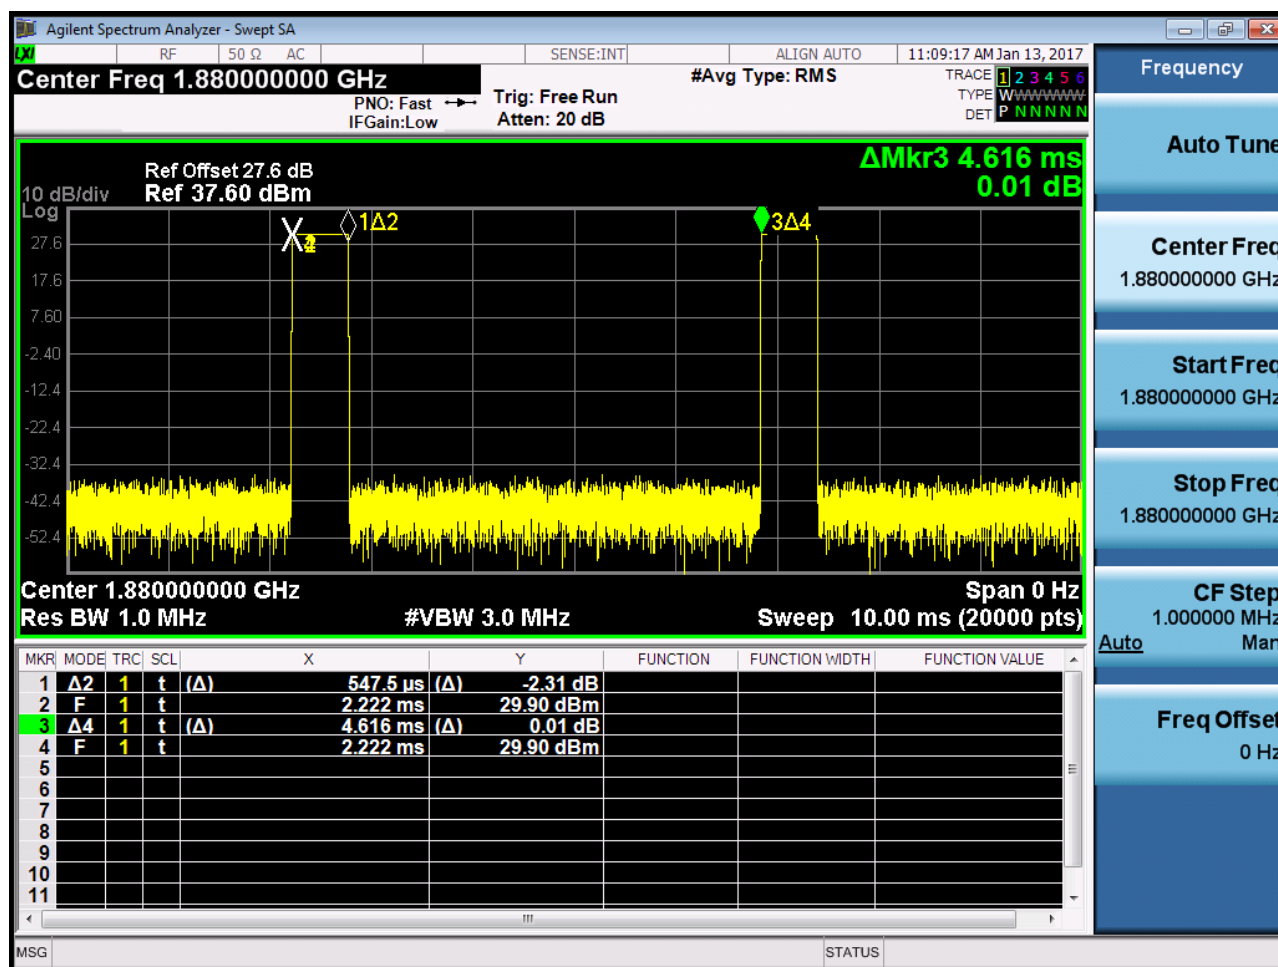


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

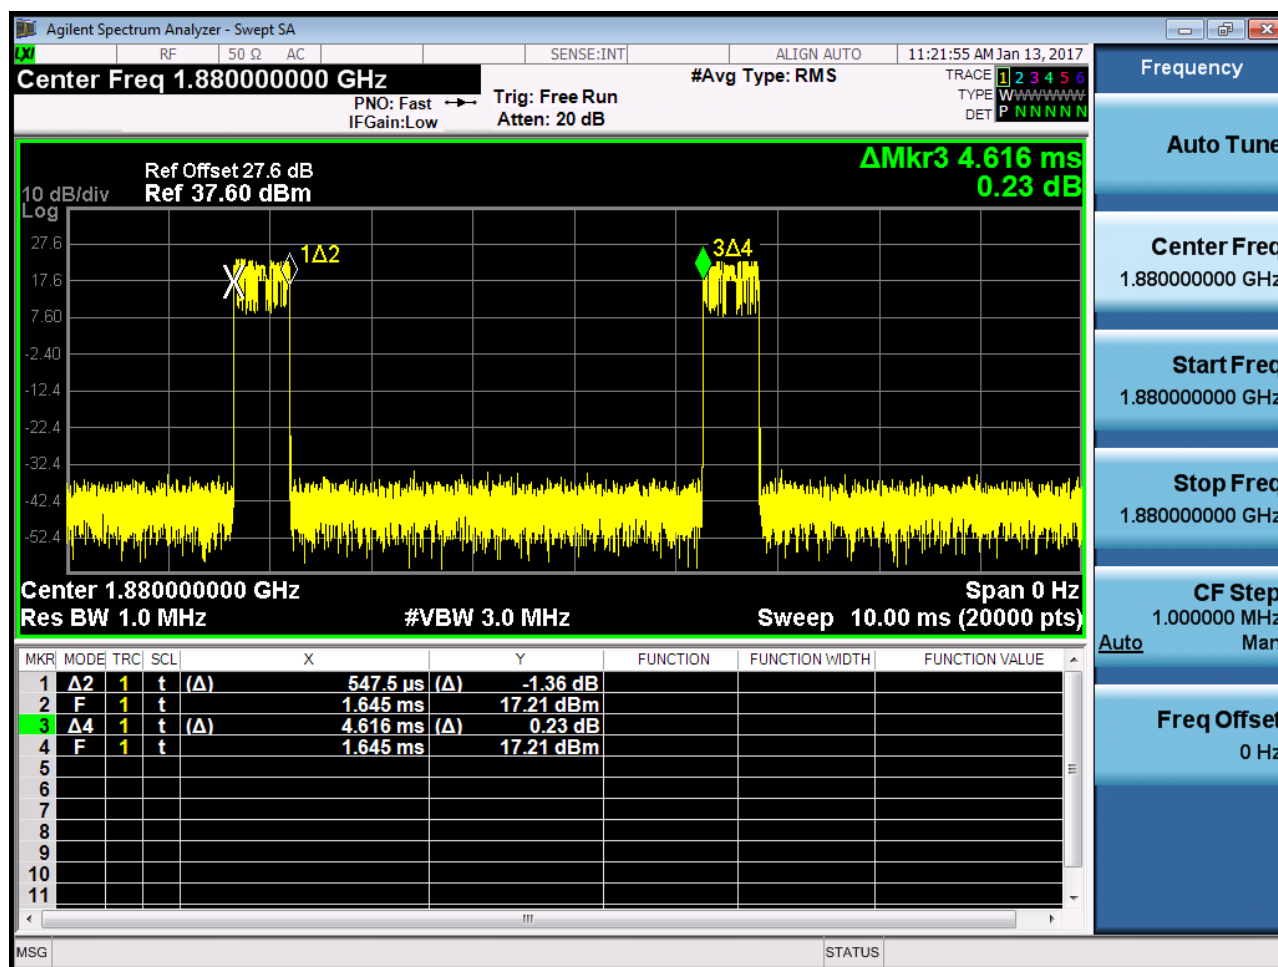


HCT CO.,LTD.


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

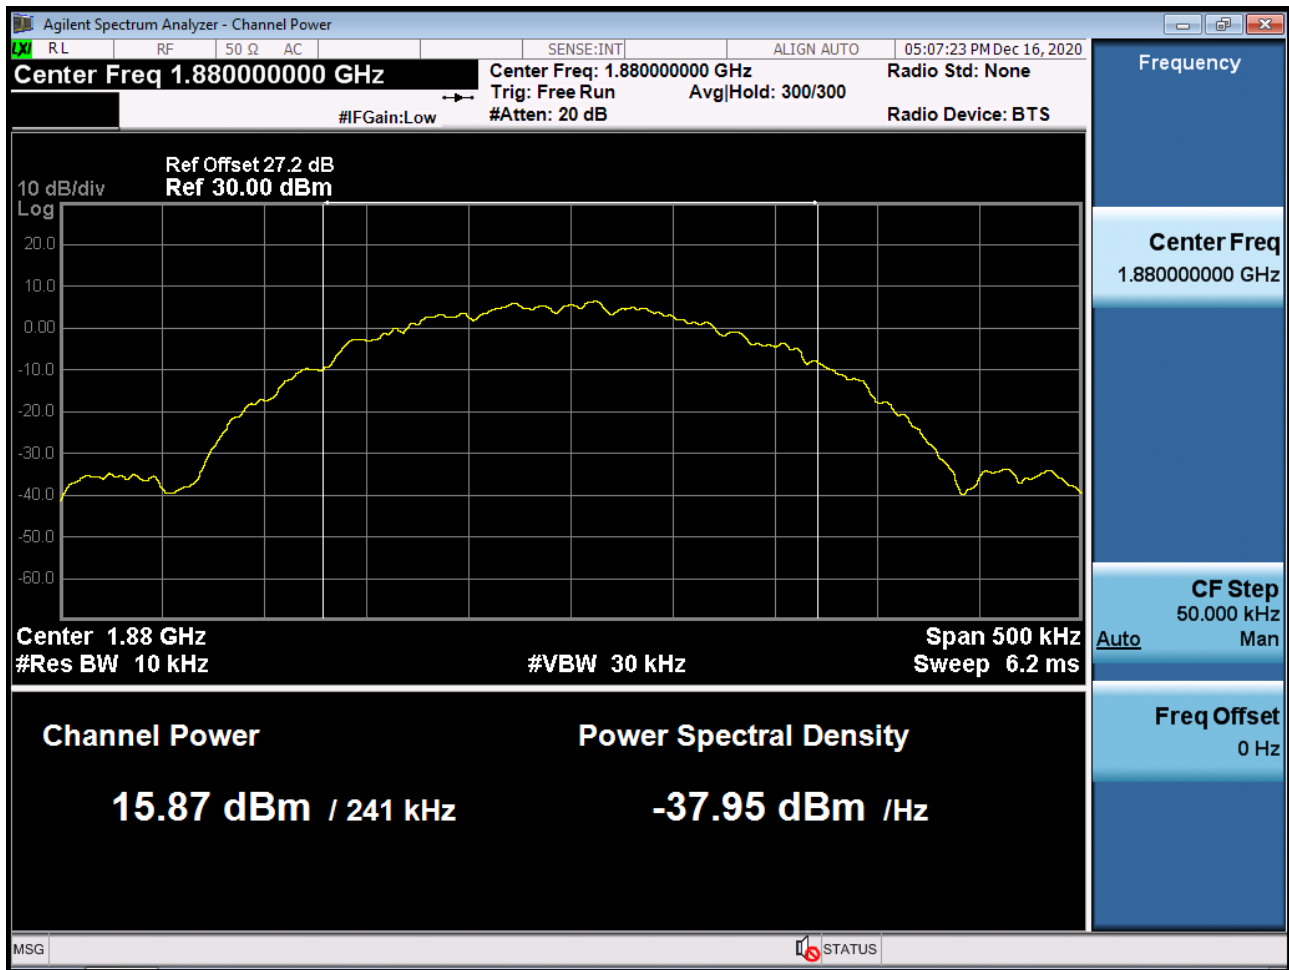


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

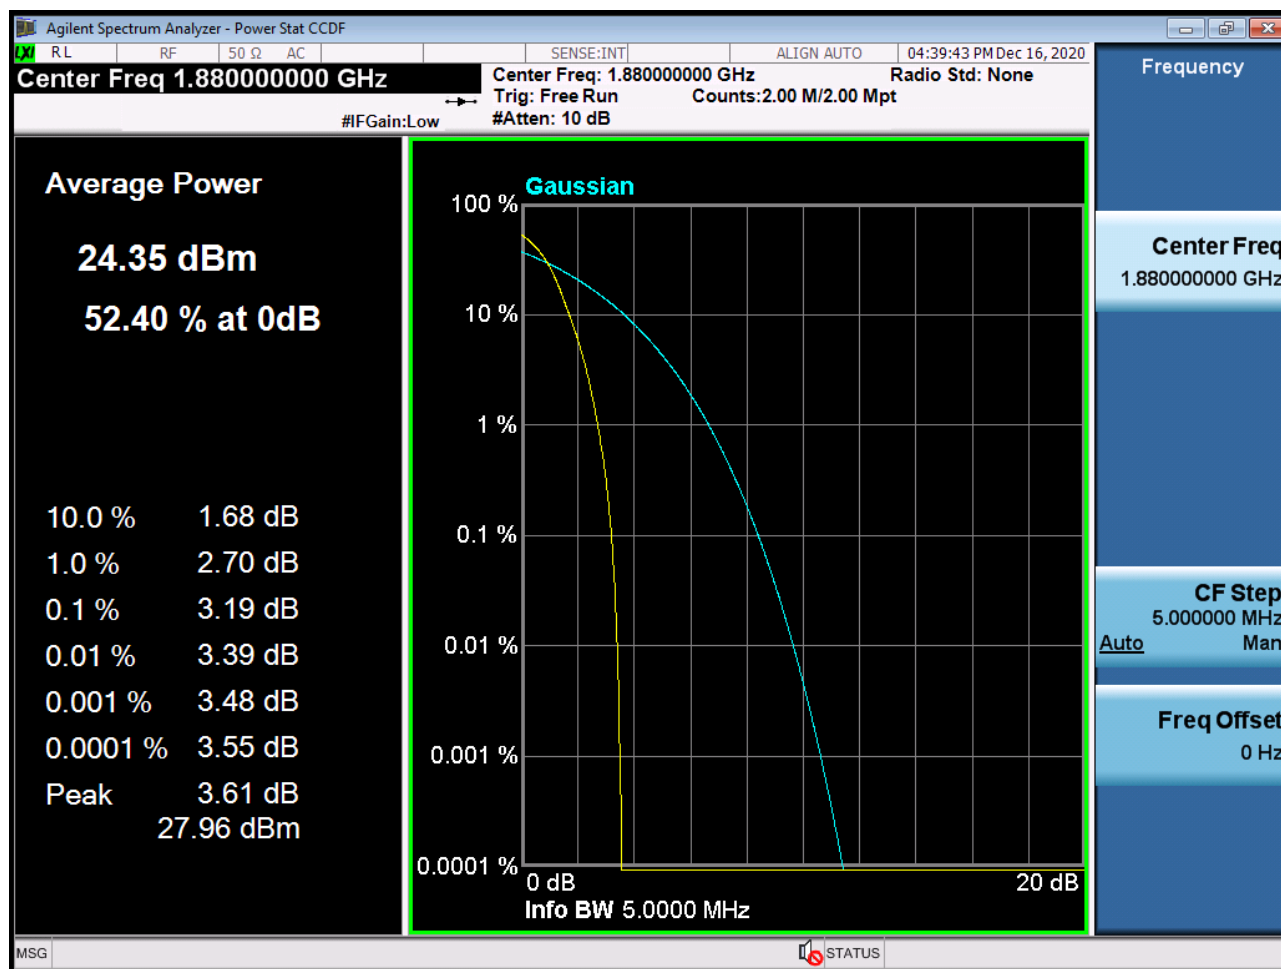


■ GSM850 MODE (128 CH.) Block Edge 1

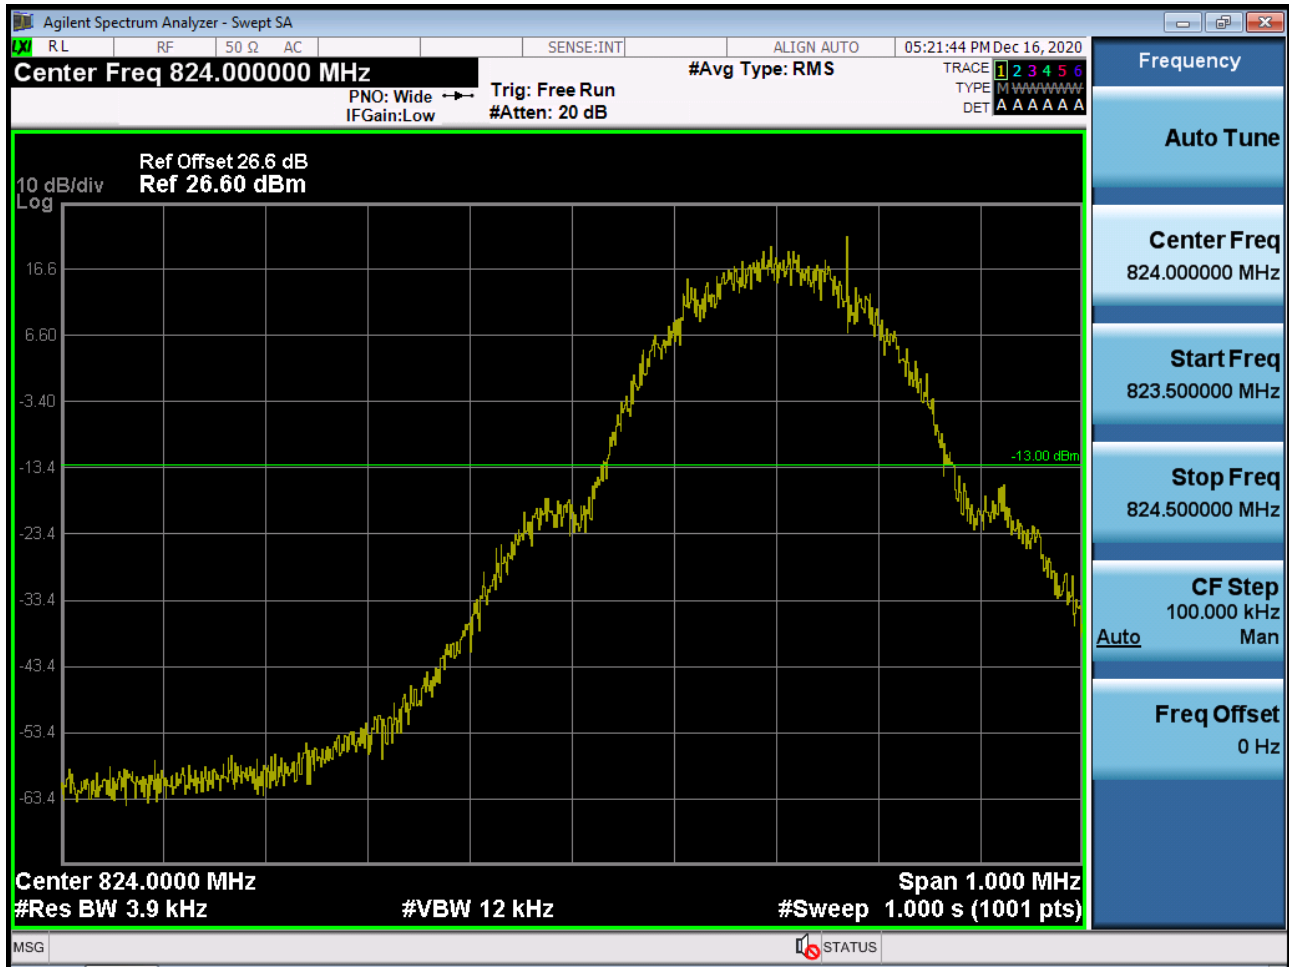

■ GSM850 MODE (128 CH.) Block Edge 2

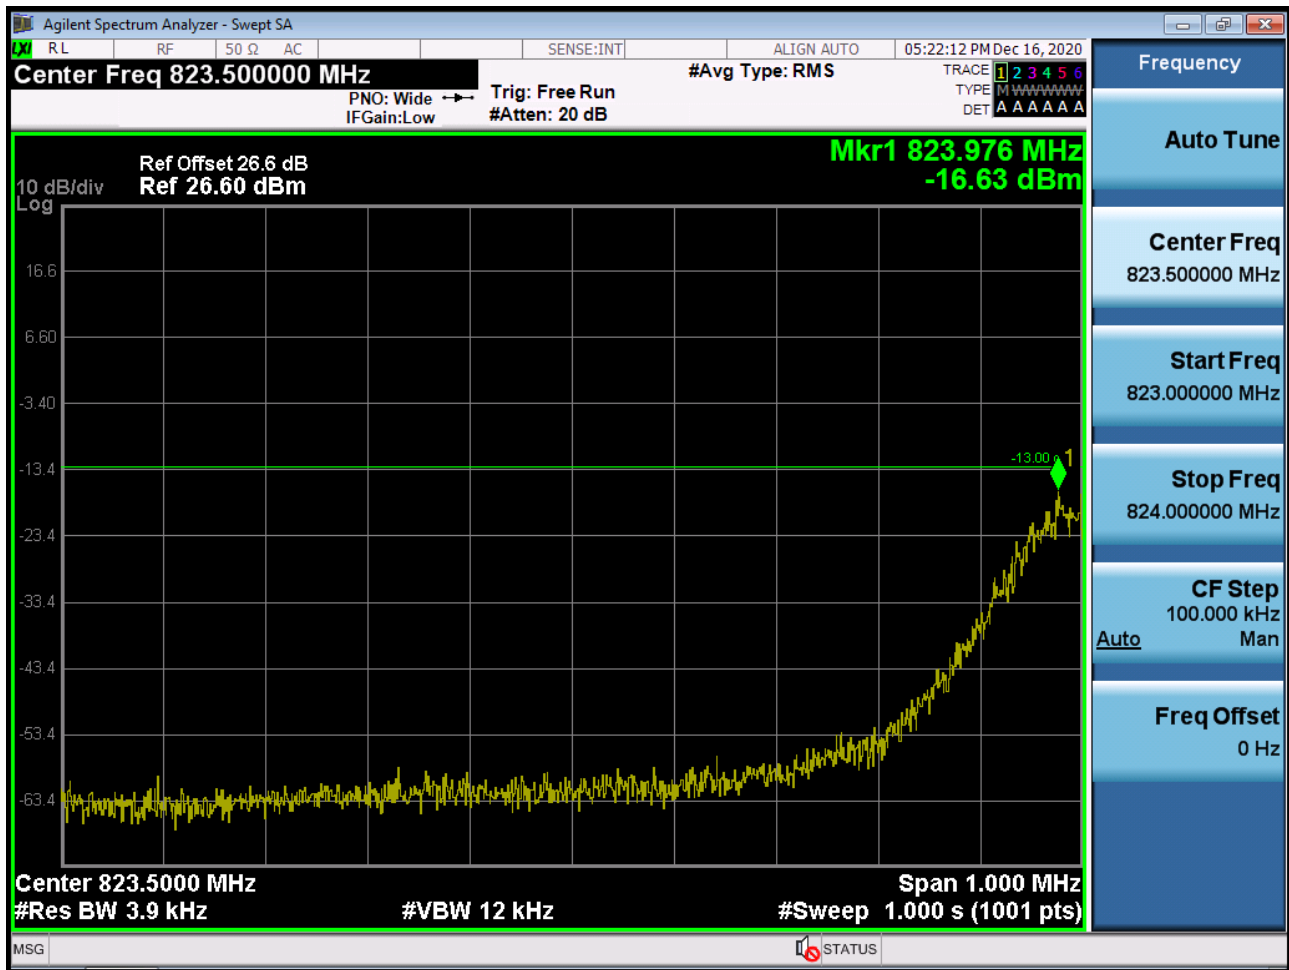

■ GSM850 MODE (128 CH.) Block Edge 3

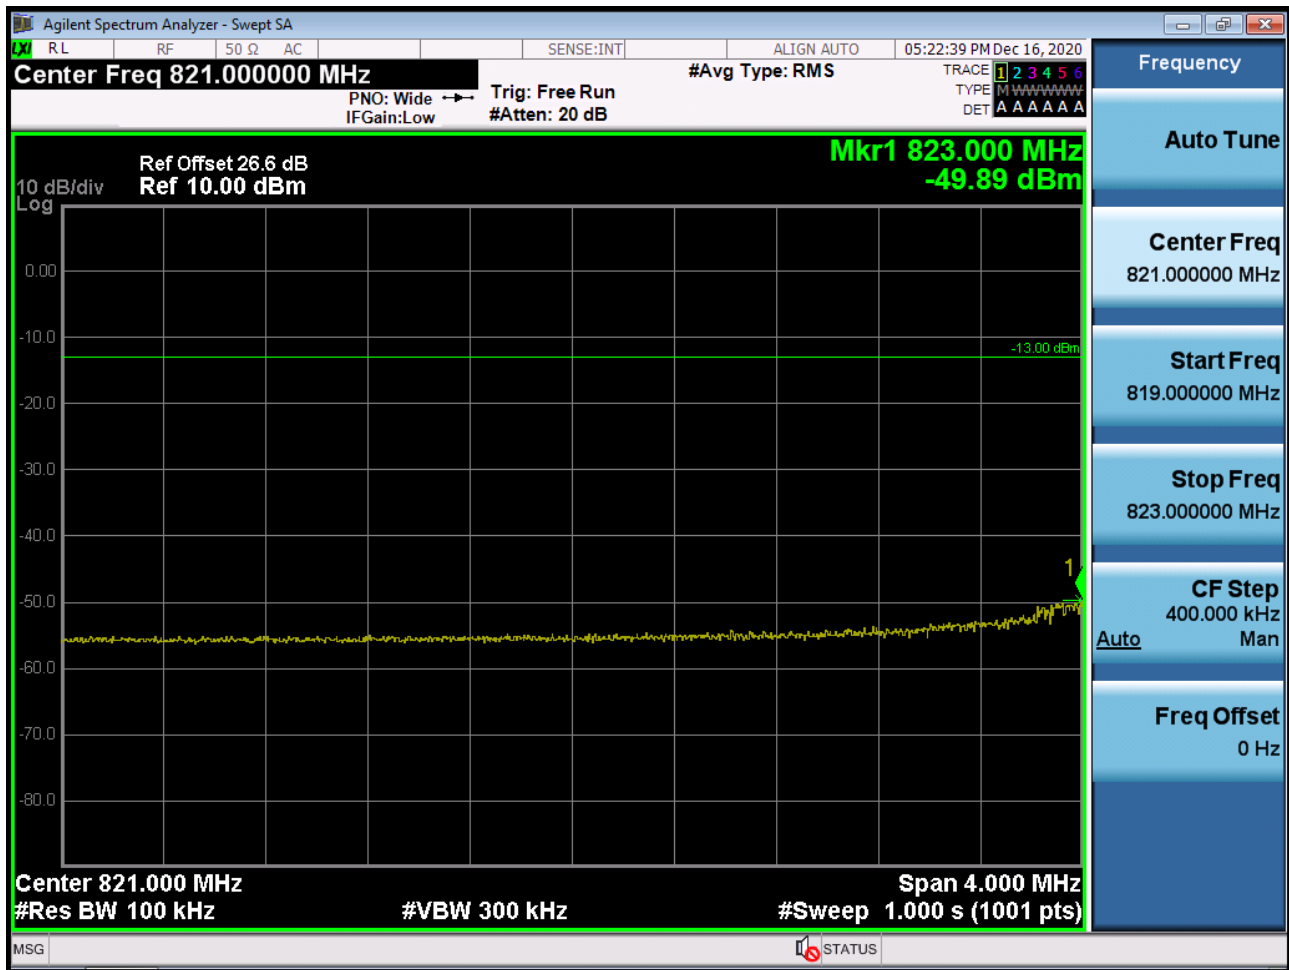

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 05:24:16 PM Dec 16, 2020

Center Freq 849.000000 MHz #Avg Type: RMS

PNO: Wide Trg: Free Run
IFGain:Low #Atten: 20 dB

TRACE 1 2 3 4 5 6
TYPE M
DET A A A A A A

10 dB/div
Log

Ref Offset 26.6 dB
Ref 26.60 dBm

-13.00 dBm

RMS

Center 849.0000 MHz **Span 1.000 MHz**
#Res BW 3.9 kHz **#VBW 12 kHz** **#Sweep 1.000 s (1001 pts)**

MSG STATUS

Frequency

Auto Tune

Center Freq
849.000000 MHz

Start Freq
848.500000 MHz


Stop Freq
849.500000 MHz

CF Step
100.000 kHz
Man

Auto


Freq Offset
0 Hz

■ GSM850 MODE (251 CH.) Block Edge 2

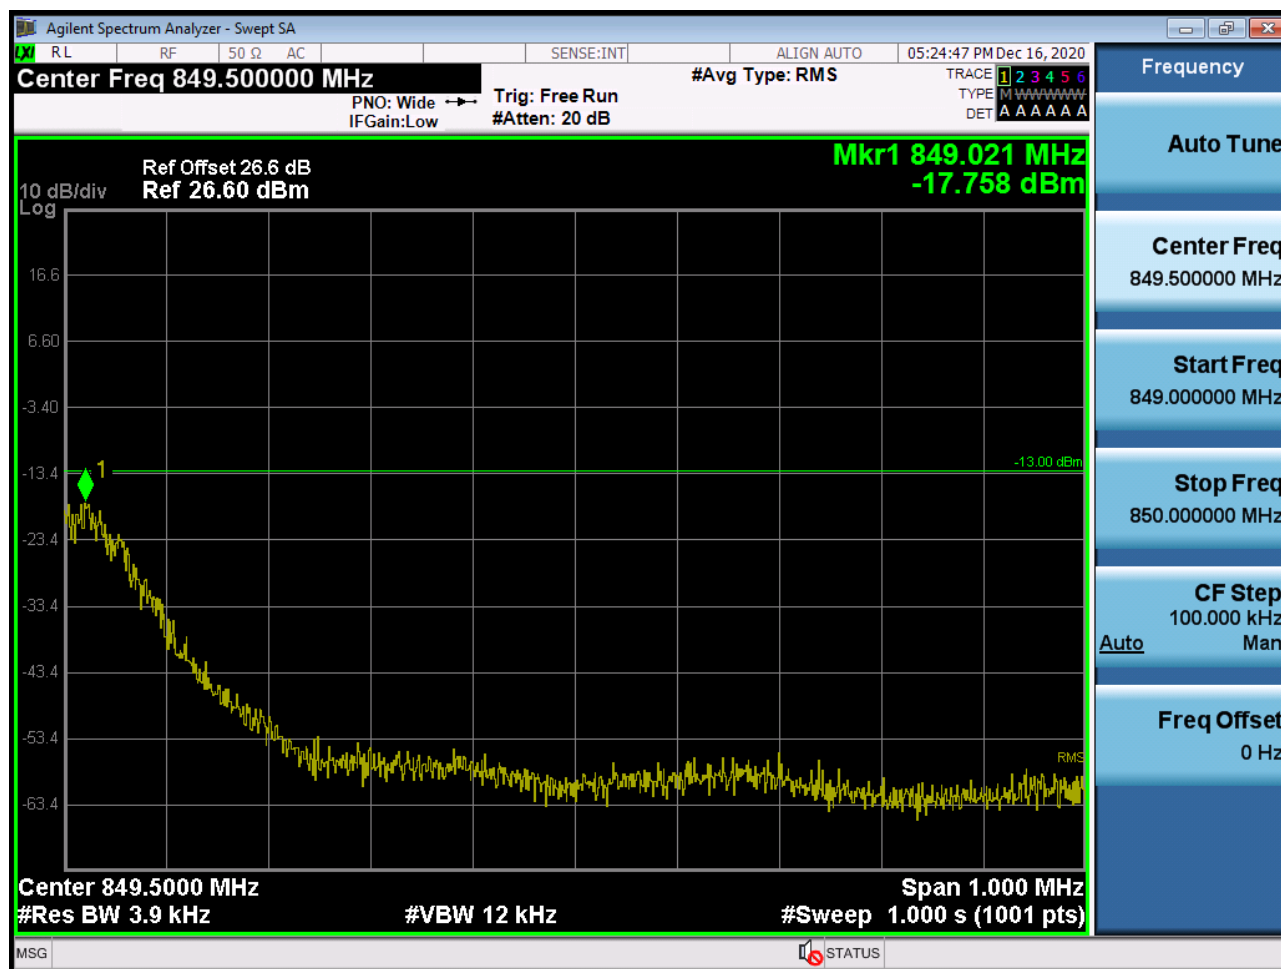

HCT CO.,LTD.

■ EDGE MODE (128 CH.) Block Edge 1

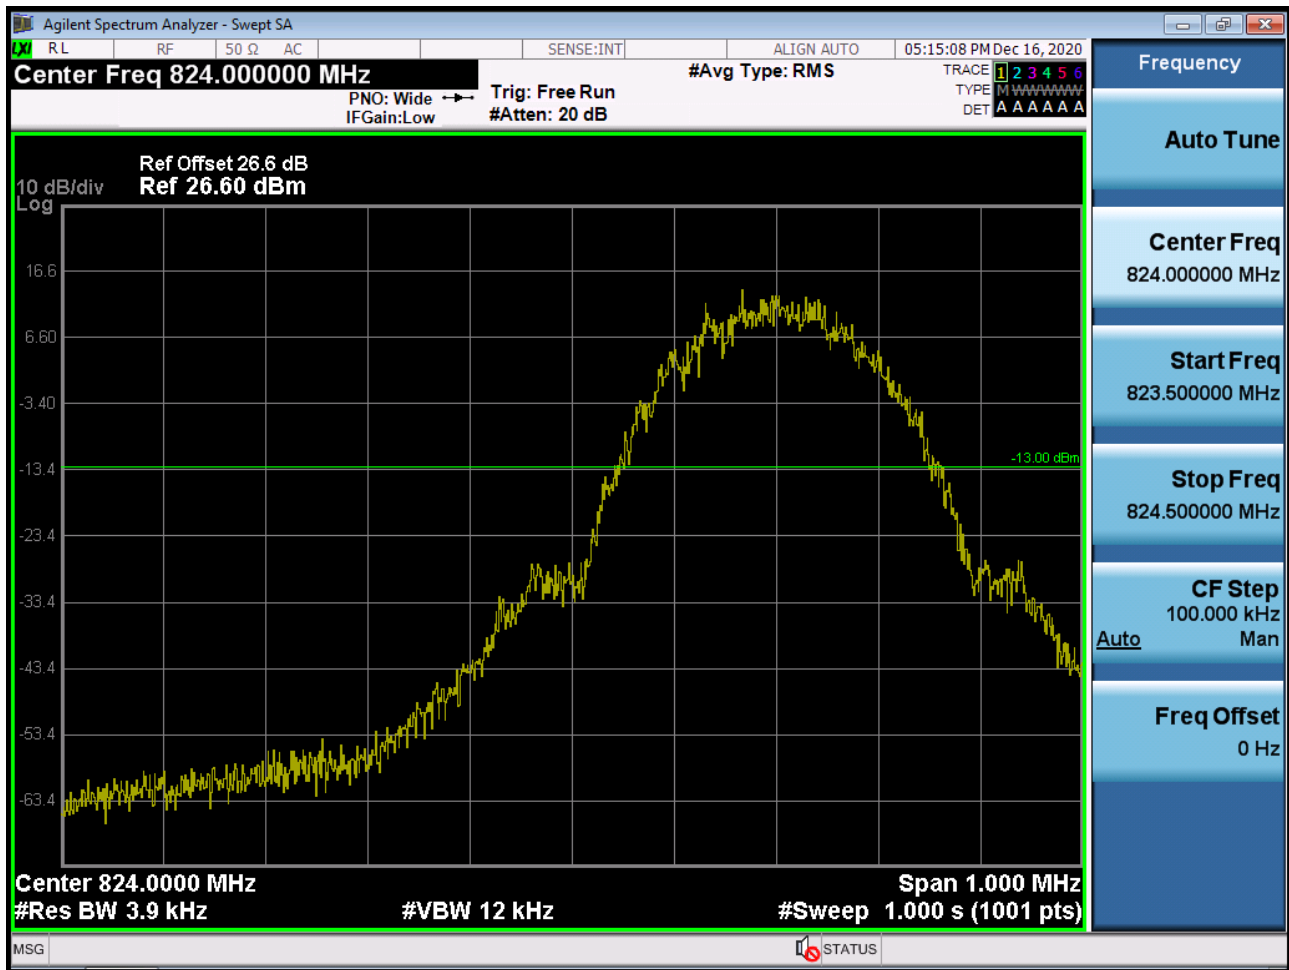

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 05:15:35 PM Dec 16, 2020

Center Freq 823.500000 MHz #Avg Type: RMS

PNO: Wide Trig: Free Run
IFGain:Low #Atten: 20 dB

TRACE 1 2 3 4 5 6
TYPE M
DET A A A A A A

10 dB/div
Log Ref Offset 26.6 dB
Ref 26.60 dBm


Mkr1 823.983 MHz
-27.48 dBm

Center 823.5000 MHz Span 1.000 MHz
#Res BW 3.9 kHz #VBW 12 kHz #Sweep 1.000 s (1001 pts)

MSG STATUS

Frequency
Auto Tune
Center Freq
823.500000 MHz
Start Freq
823.000000 MHz
Stop Freq
824.000000 MHz
CF Step
100.000 kHz
Auto
Freq Offset
0 Hz

■ EDGE MODE (128 CH.) Block Edge 3

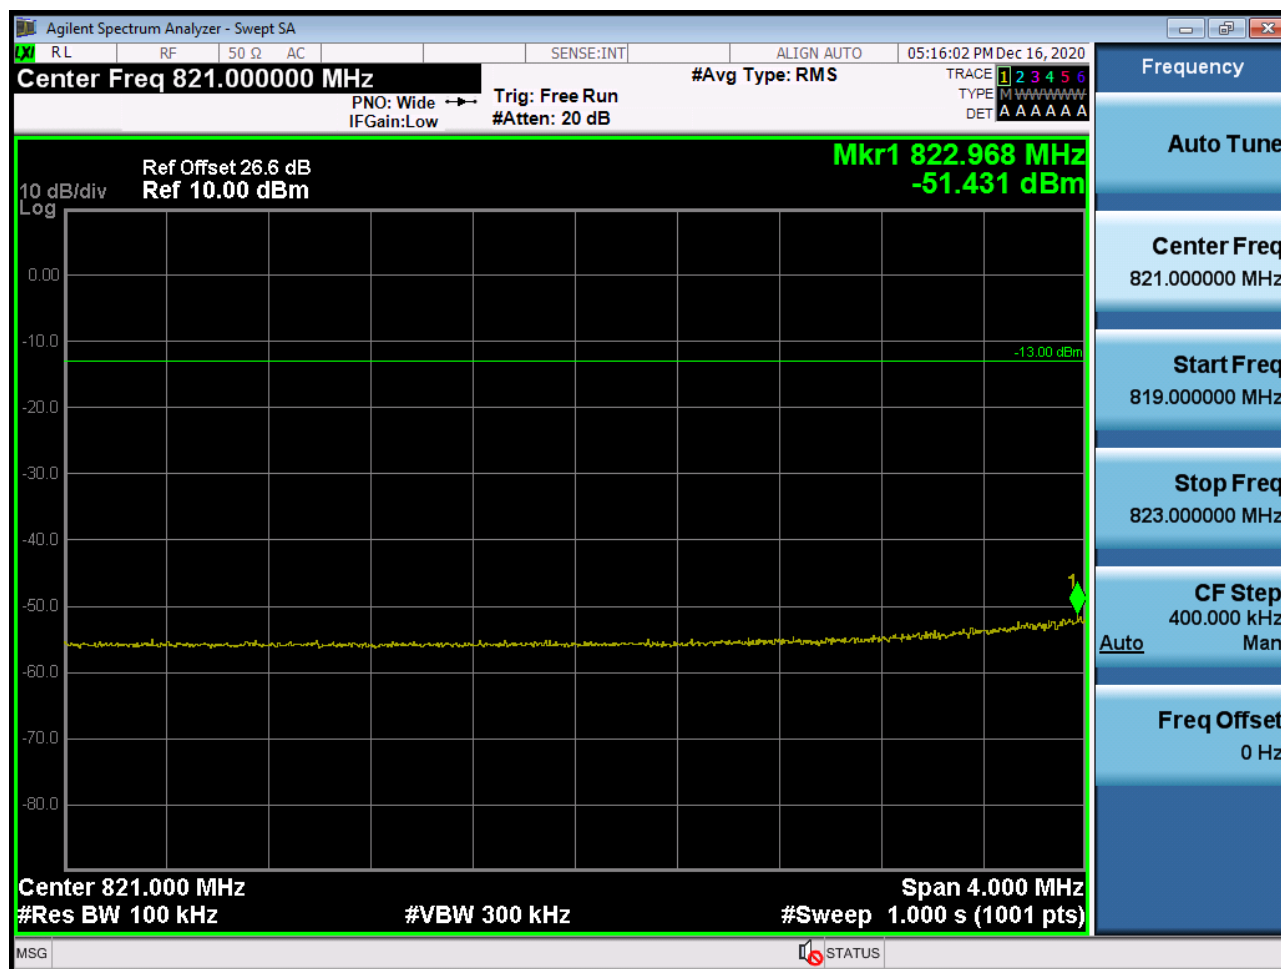

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 05:17:38 PM Dec 16, 2020

Center Freq 849.000000 MHz #Avg Type: RMS

PNO: Wide Trig: Free Run
IFGain:Low #Atten: 20 dB

TRACE 1 2 3 4 5 6
TYPE M W W W W W W W
DET A A A A A A

10 dB/div
Log


Ref Offset 26.6 dB
Ref 26.60 dBm

-13.00 dBm


RMS

Center 849.0000 MHz **Span 1.000 MHz**
#Res BW 3.9 kHz **#VBW 12 kHz** **#Sweep 1.000 s (1001 pts)**


■ EDGE MODE (251 CH.) Block Edge 2

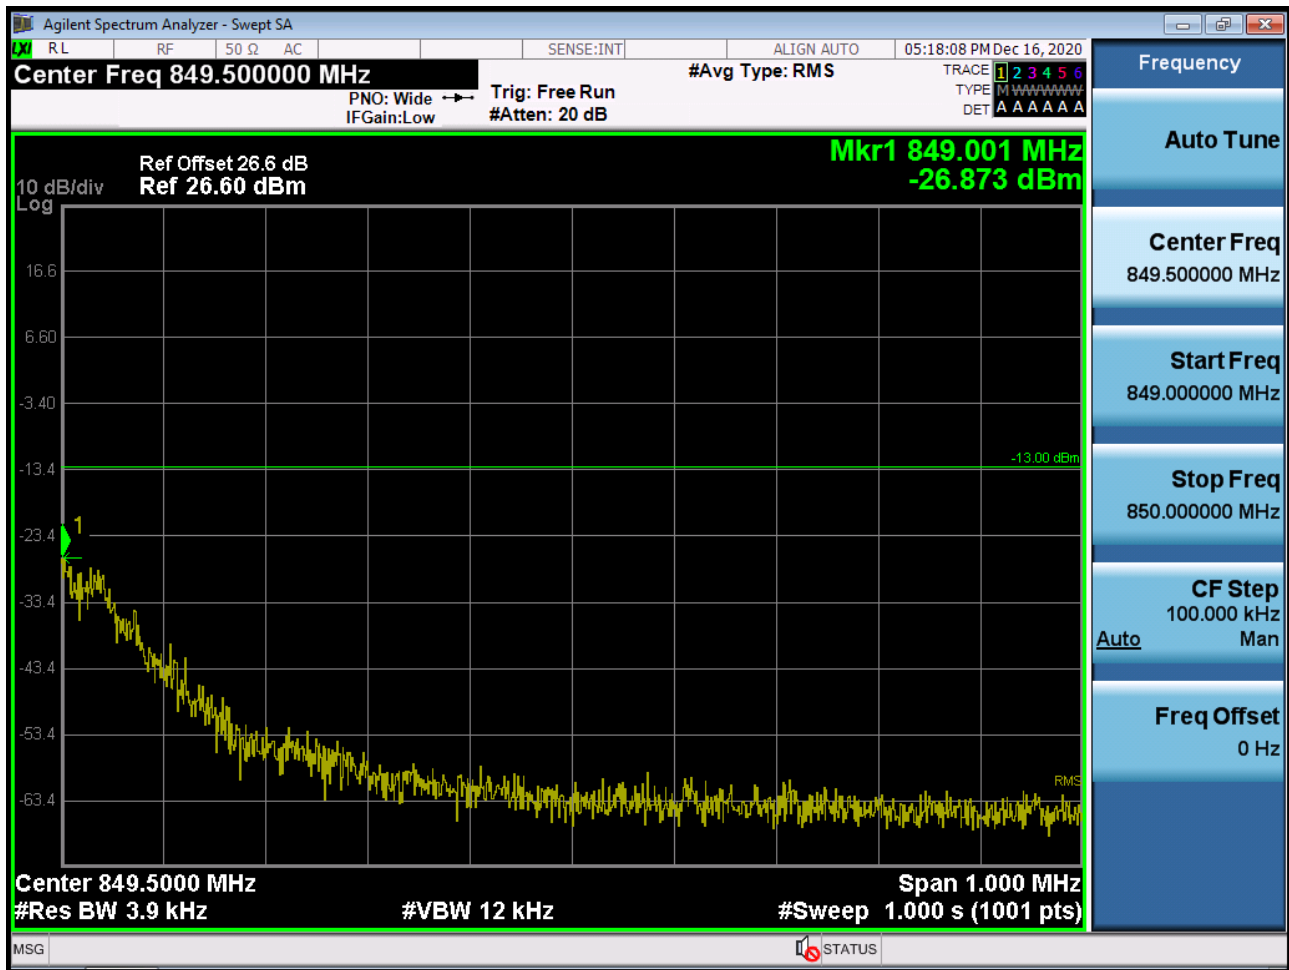

■ EDGE MODE (251 CH.) Block Edge 3

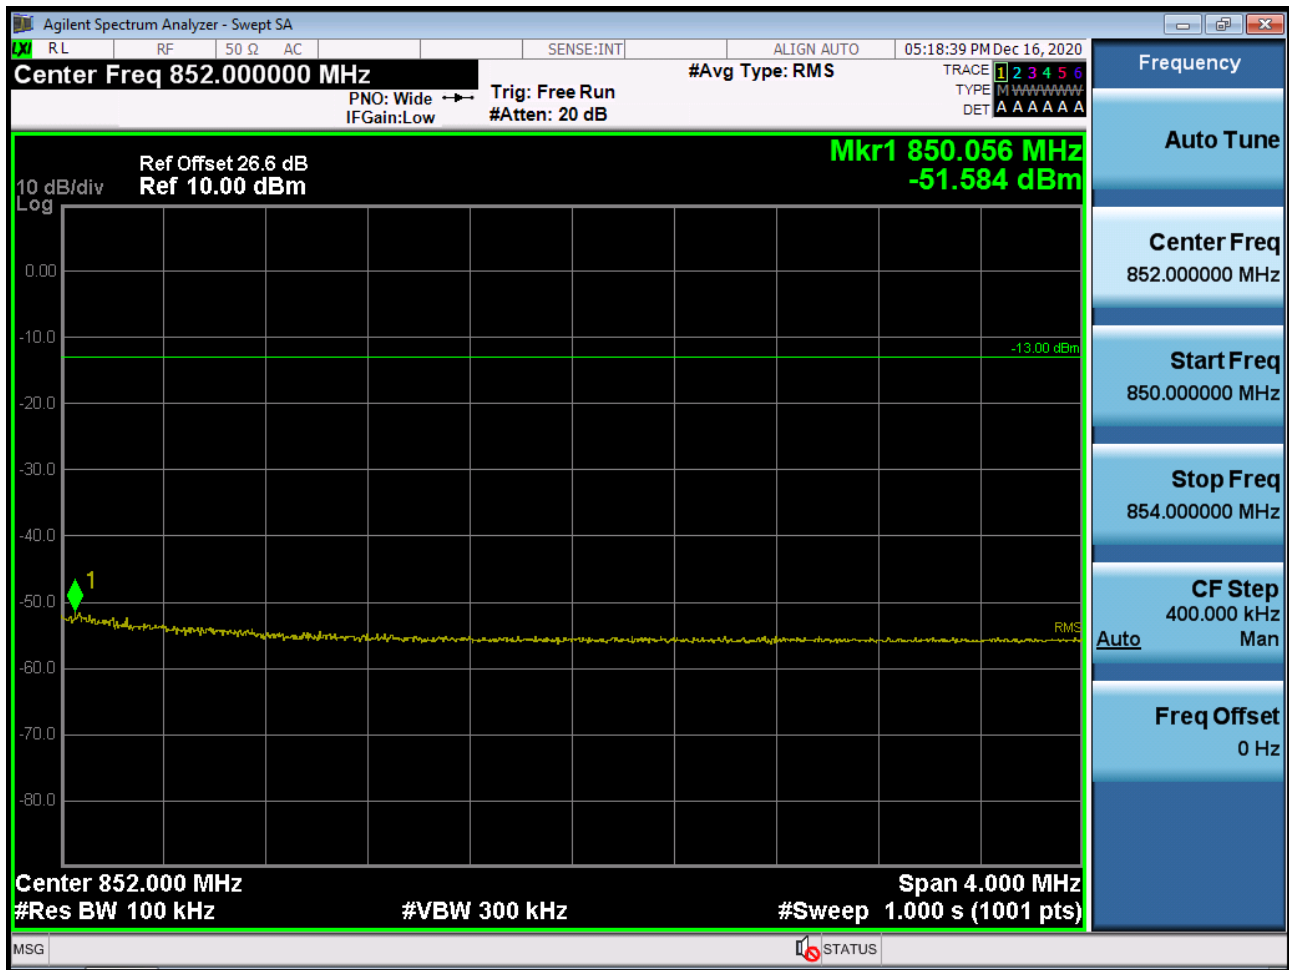

■ GSM1900 MODE (512 CH.) Block Edge 1

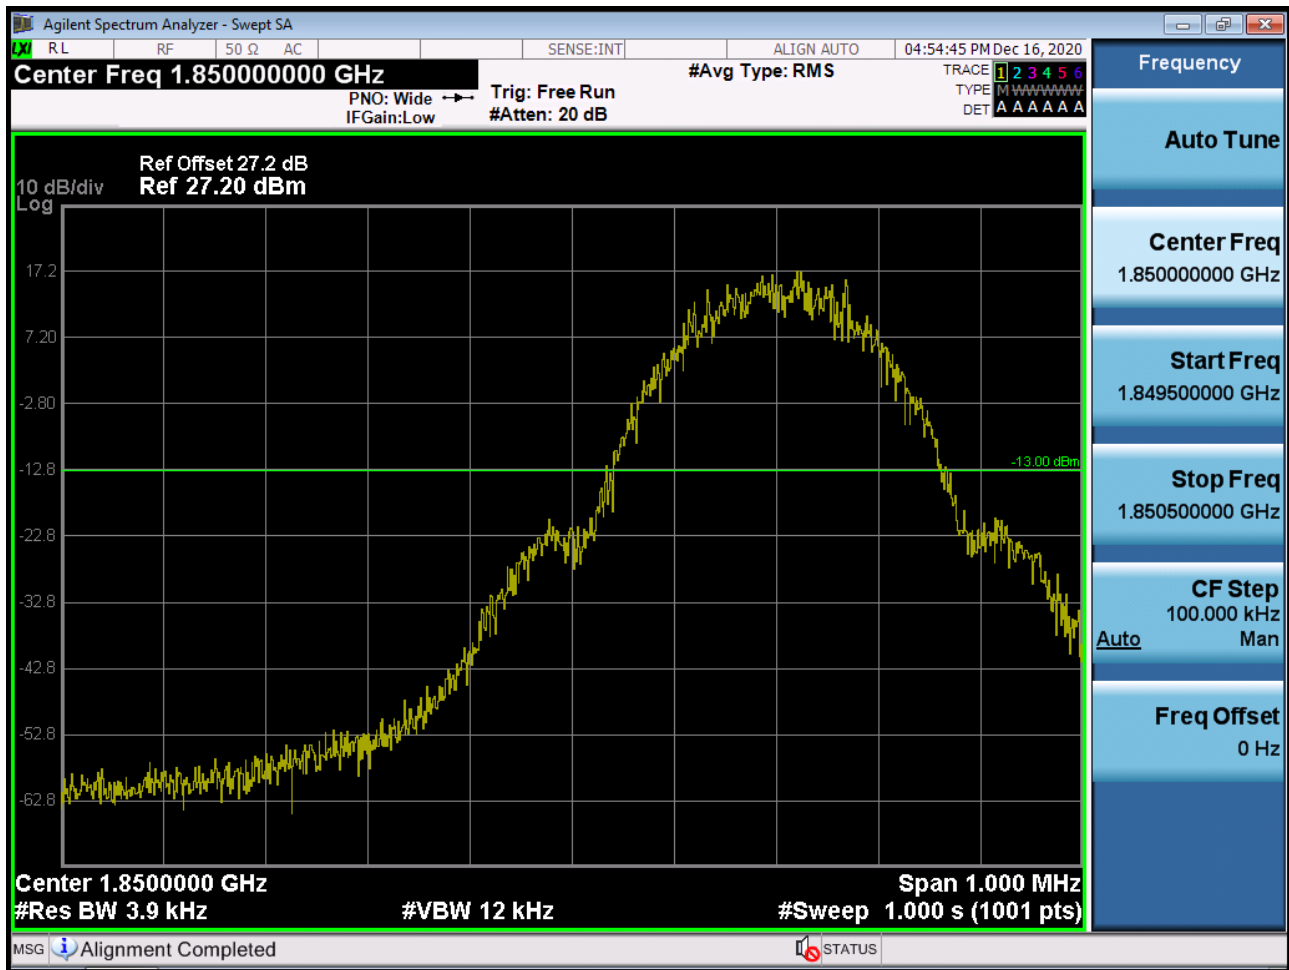

HCT CO.,LTD.


■ GSM1900 MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -51.17 dBm + 10 dB = -41.17 dBm

■ GSM1900 MODE (810 CH.) Block Edge 1

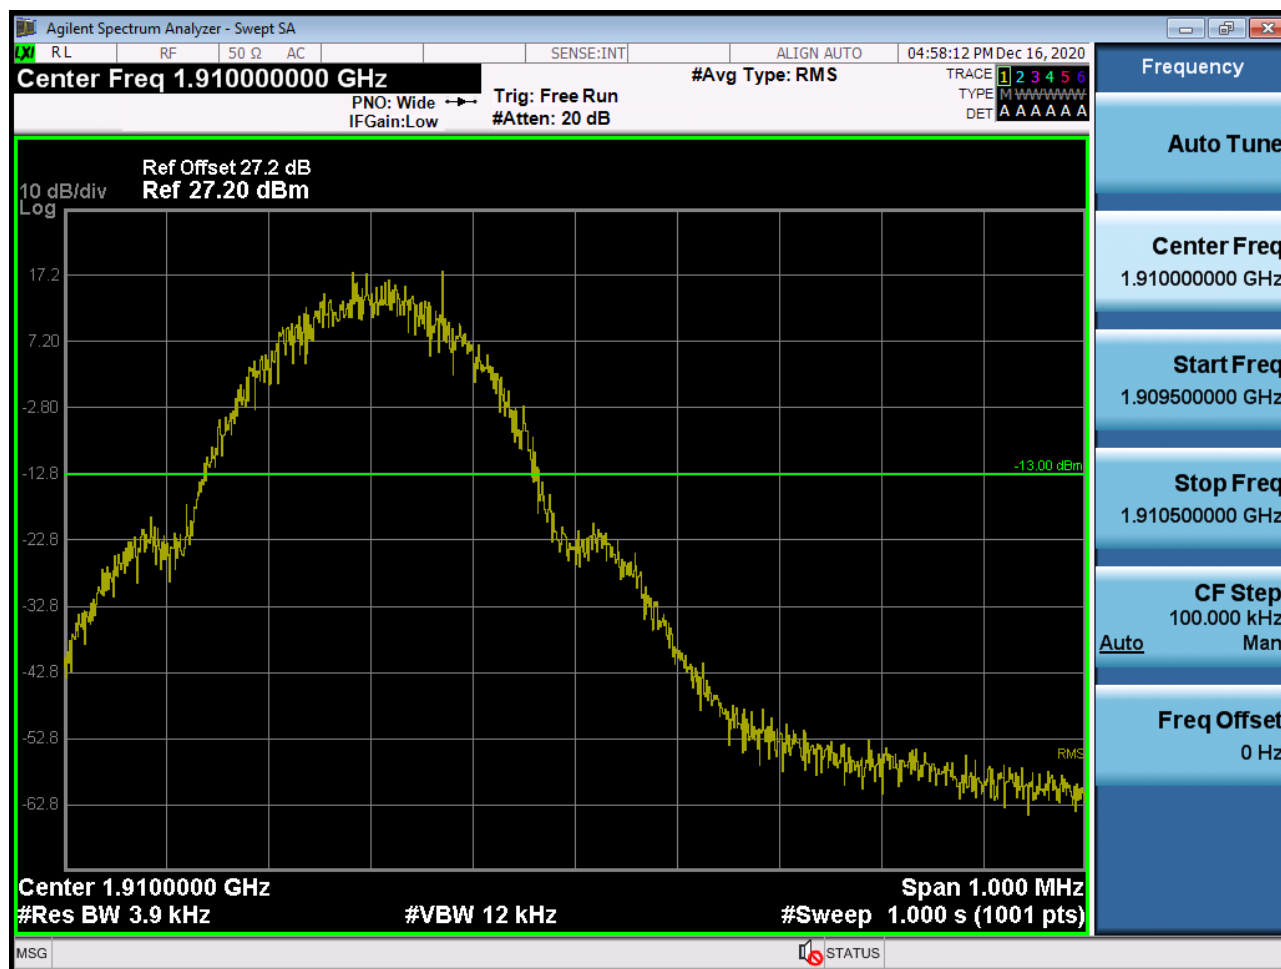

■ GSM1900 MODE (810 CH.) Block Edge 2

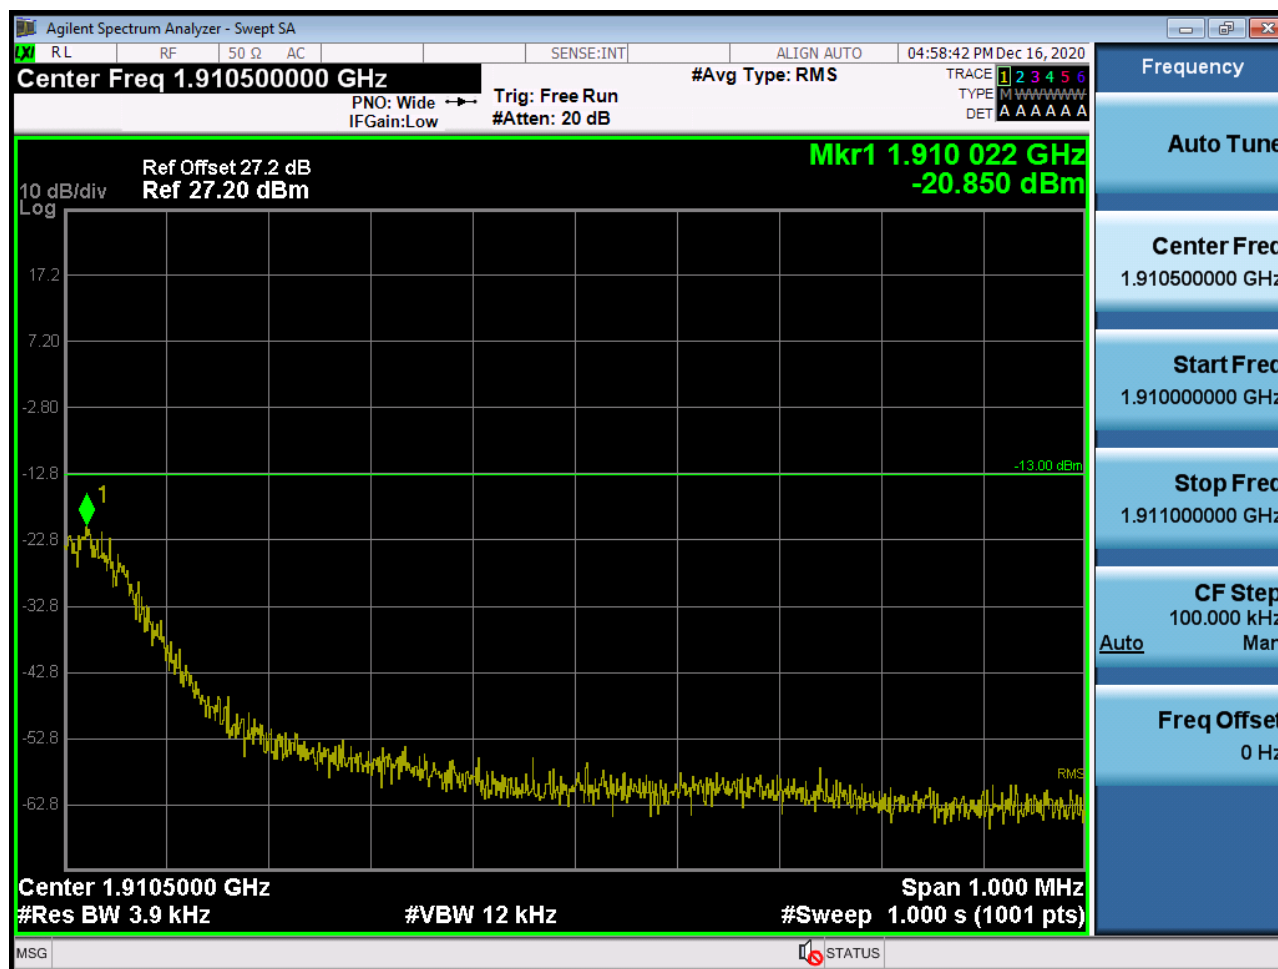

■ GSM1900 MODE (810 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -49.355 dBm + 10 dB = -39.355 dBm

HCT CO., LTD.

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 05:04:52 PM Dec 16, 2020

Center Freq 1.849500000 GHz #Avg Type: RMS

PNO: Wide Trg: Free Run
IFGain:Low #Atten: 20 dB

TRACE 1 2 3 4 5 6
TYPE M
DET A A A A A A

Ref Offset 27.2 dB
Ref 27.20 dBm

10 dB/div
Log

Mkr1 1.849 980 GHz
-27.60 dBm

-13.00 dBm

Center 1.8495000 GHz
#Res BW 3.9 kHz

#VBW 12 kHz

Span 1.000 MHz
#Sweep 1.000 s (1001 pts)

MSG STATUS

Frequency

Auto Tune

Center Freq
1.849500000 GHz

Start Freq
1.849000000 GHz

Stop Freq
1.850000000 GHz

CF Step
100.000 kHz
Auto Man

Freq Offset
0 Hz


■ EDGE MODE (512 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.82 dBm + 10 dB = -40.82 dBm

■ EDGE MODE (810 CH.) Block Edge 1

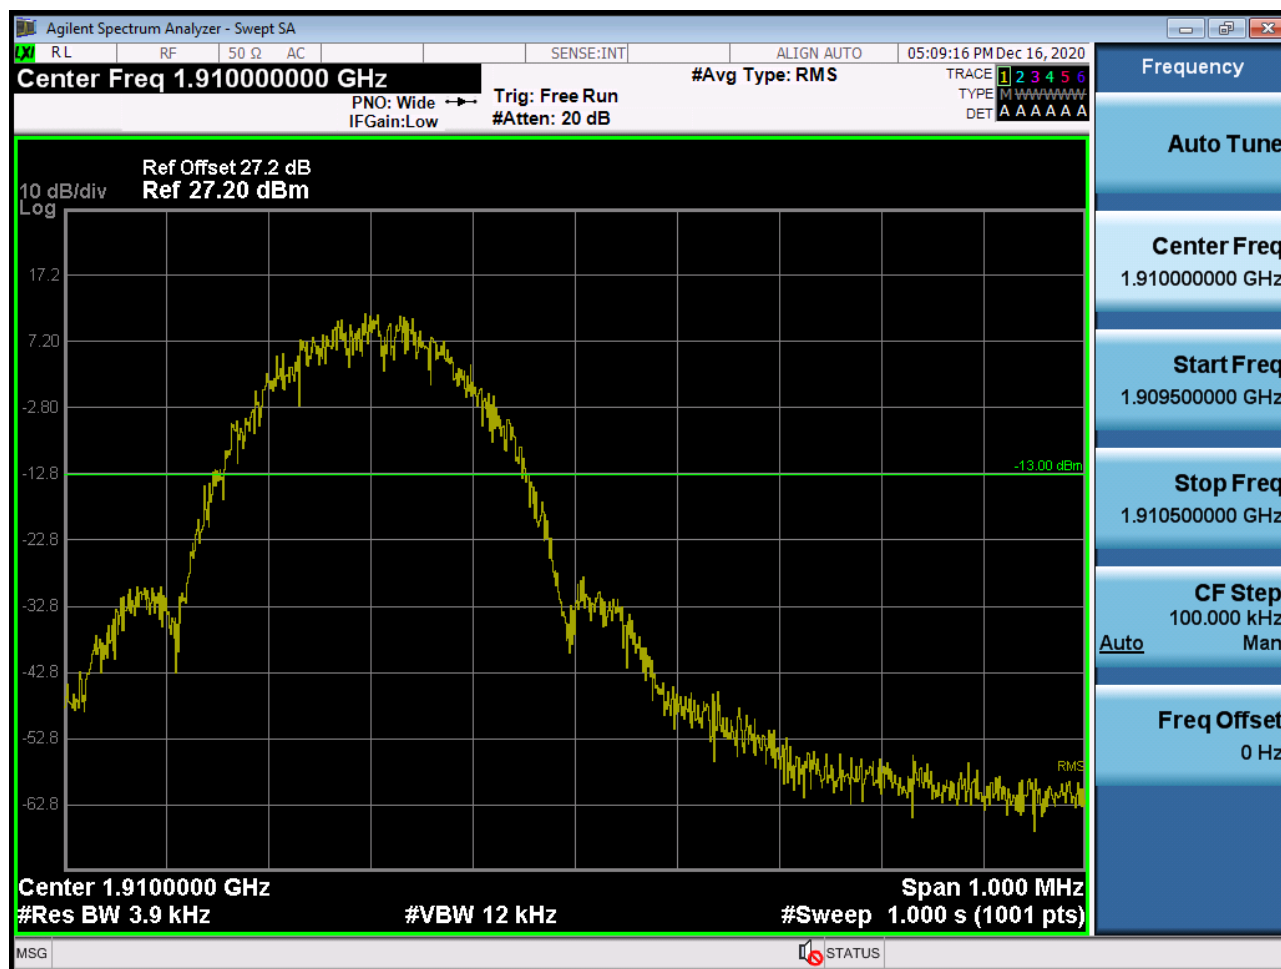

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 05:09:46 PM Dec 16, 2020

Center Freq 1.91050000 GHz #Avg Type: RMS

PNO: Wide Trig: Free Run
IFGain:Low #Atten: 20 dB

TRACE 1 2 3 4 5 6
TYPE M
DET A A A A A A

10 dB/div
Log

Ref Offset 27.2 dB
Ref 27.20 dBm

**Mkr1 1.910 025 GHz
-28.983 dBm**

The spectrum analyzer display shows a signal at 1.910025 GHz with a power level of -28.983 dBm. The trace is labeled 'Mkr1'. The display includes a grid and various measurement parameters.

Center 1.9105000 GHz
#Res BW 3.9 kHz

#VBW 12 kHz

Span 1.000 MHz
#Sweep 1.000 s (1001 pts)

MSG STATUS

Frequency

Auto Tune

Center Freq
1.91050000 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91100000 GHz

CF Step
100.000 kHz
Auto Man

Freq Offset
0 Hz

■ EDGE MODE (810 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.919 dBm + 10 dB = -40.919 dBm

HCT CO.,LTD.

■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span




■ WCDMA1900 MODE (9538 CH.) Block Edge




■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span




■ GSM850 MODE (128 CH.) Conducted Spurious Emissions

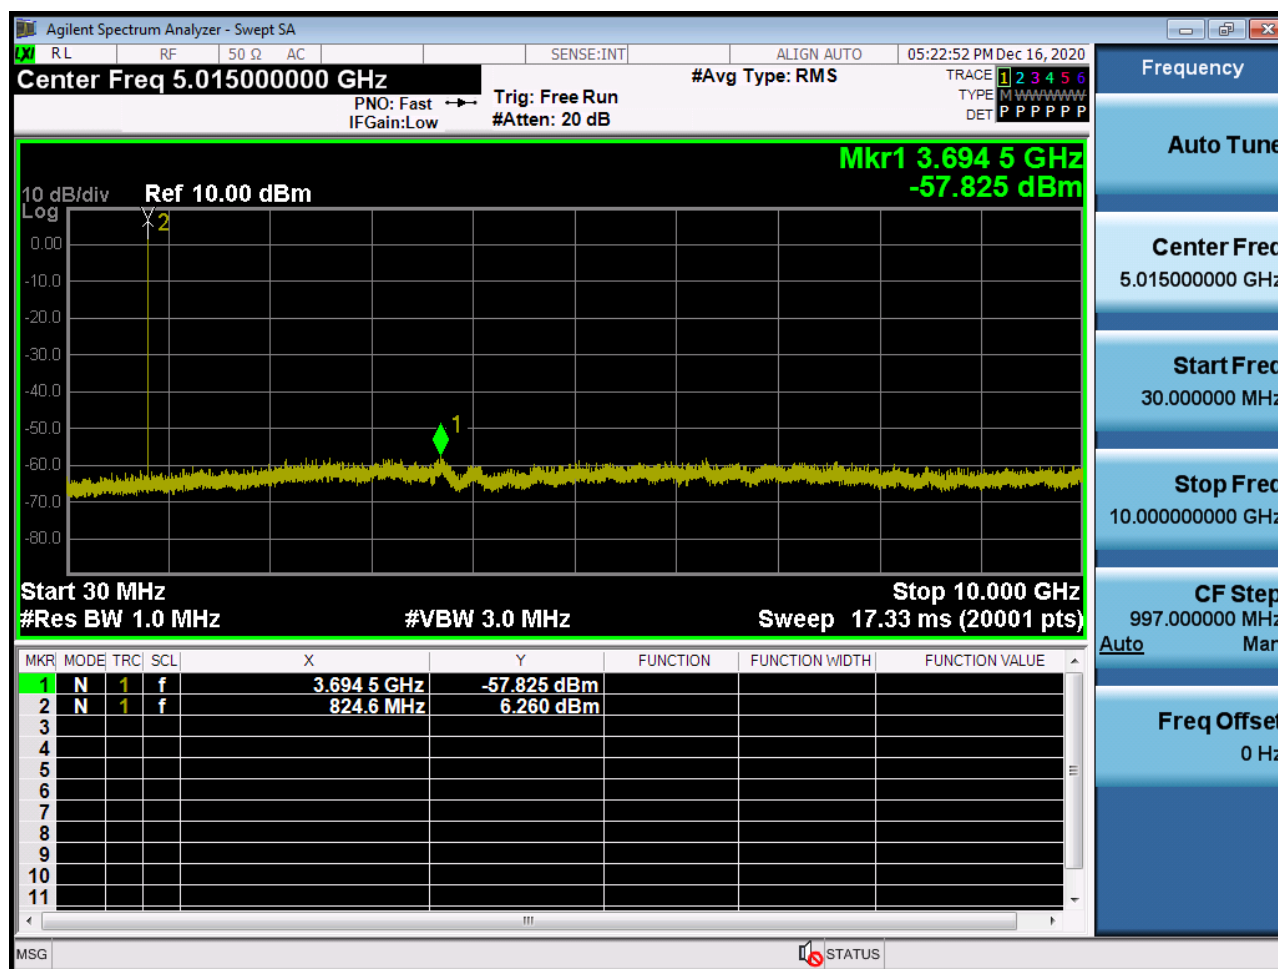


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions

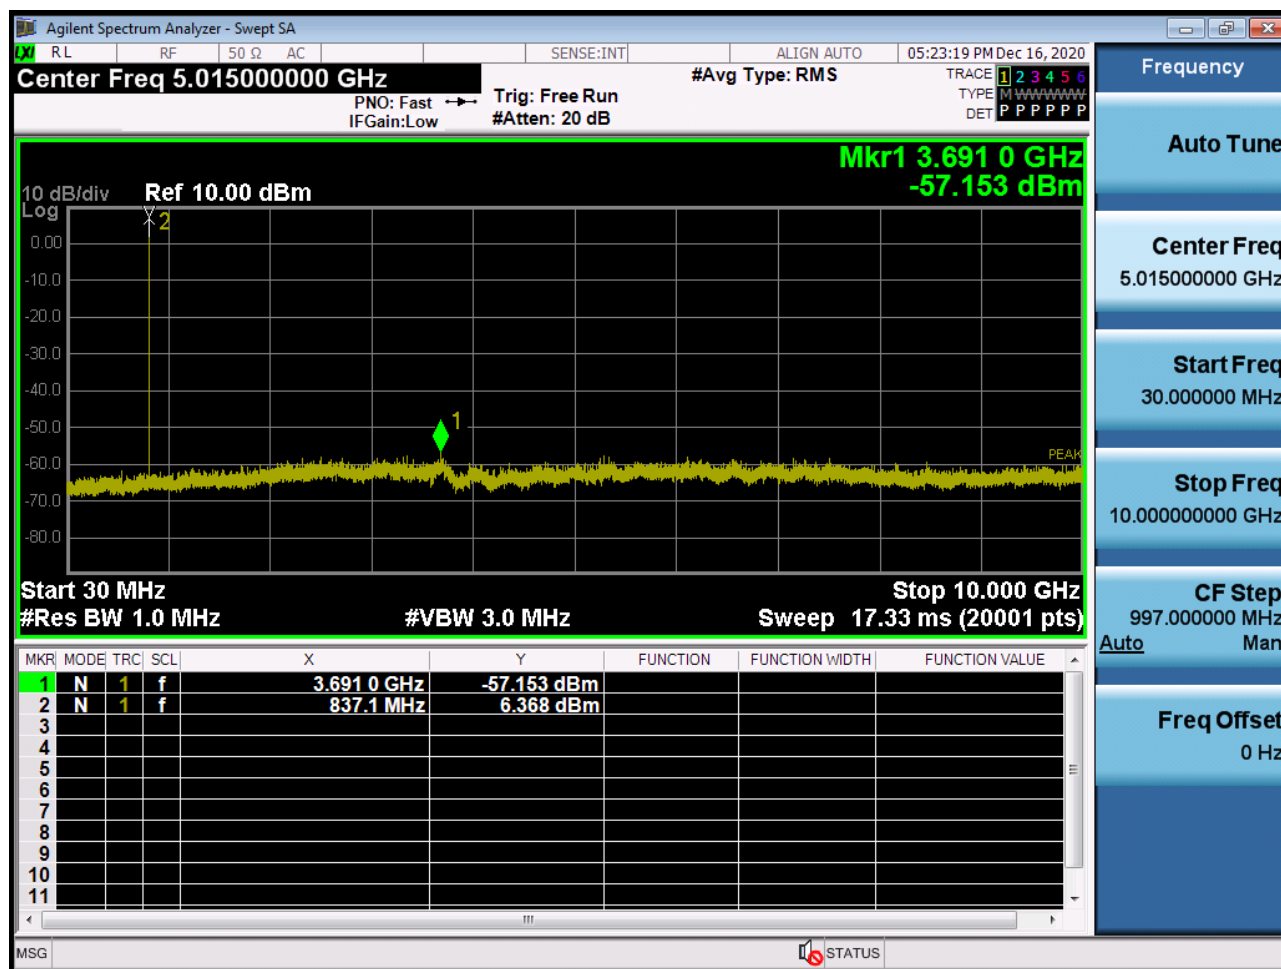


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

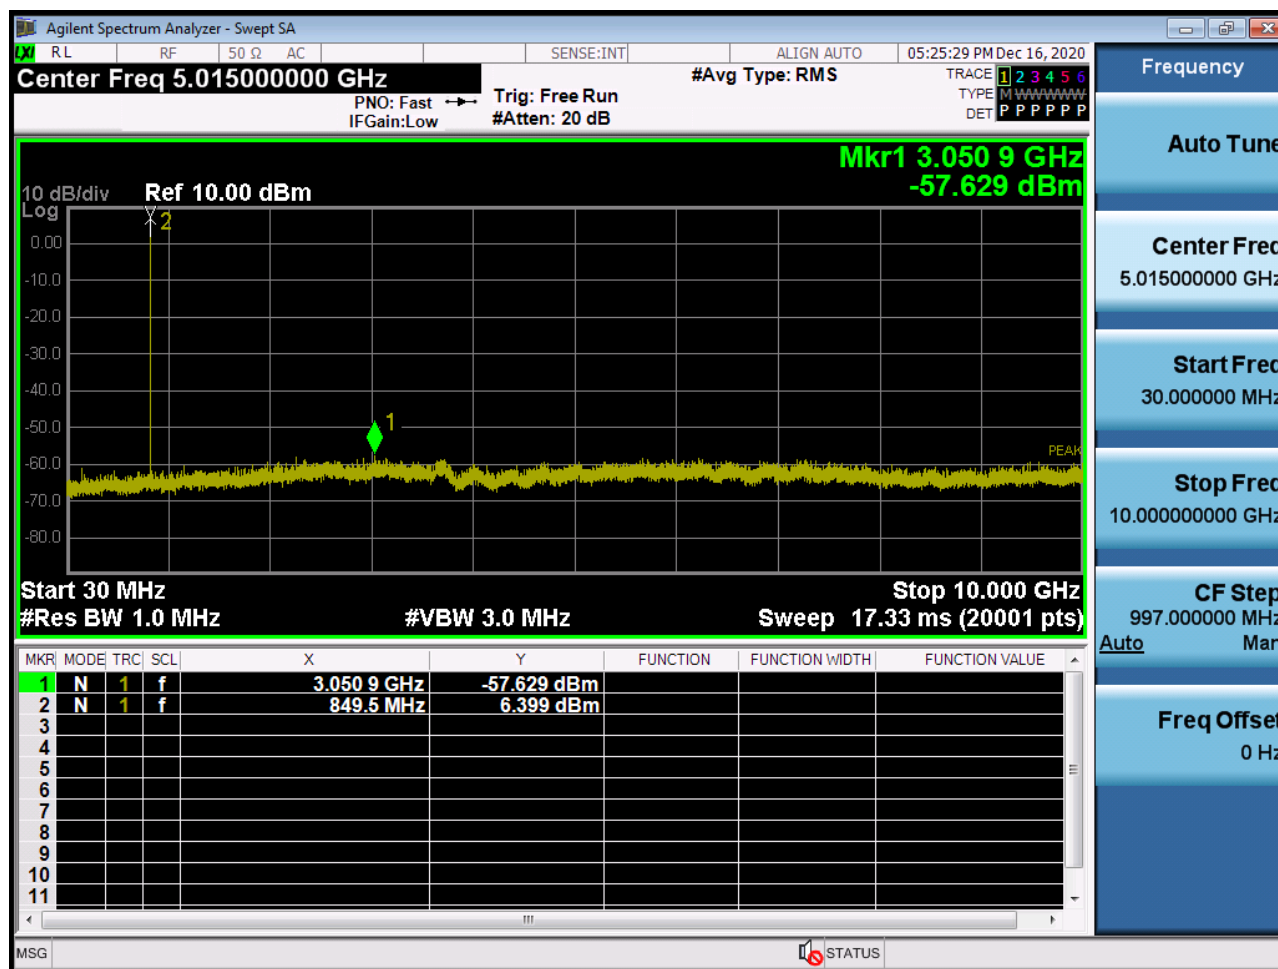


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

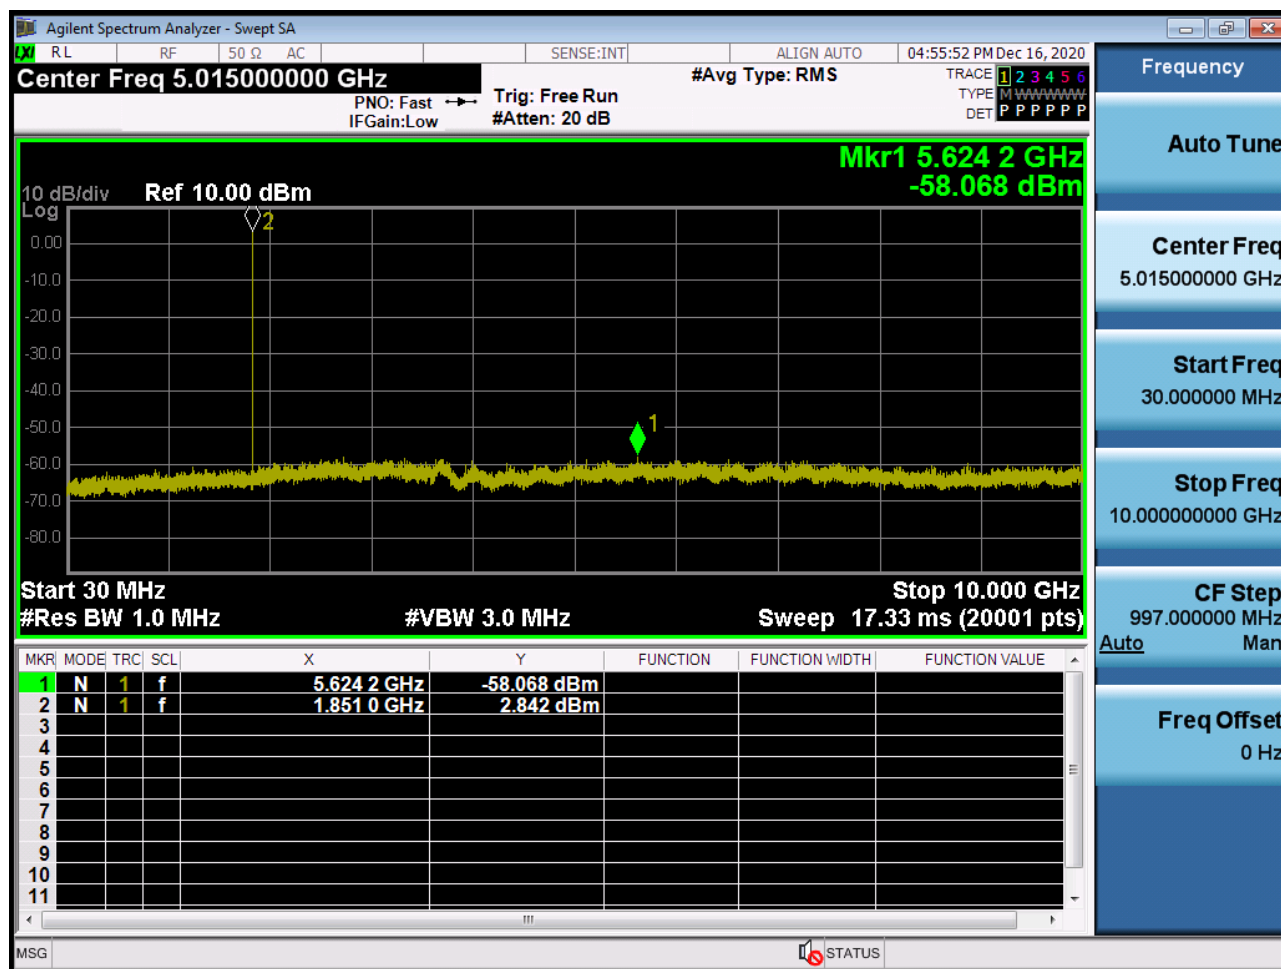


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

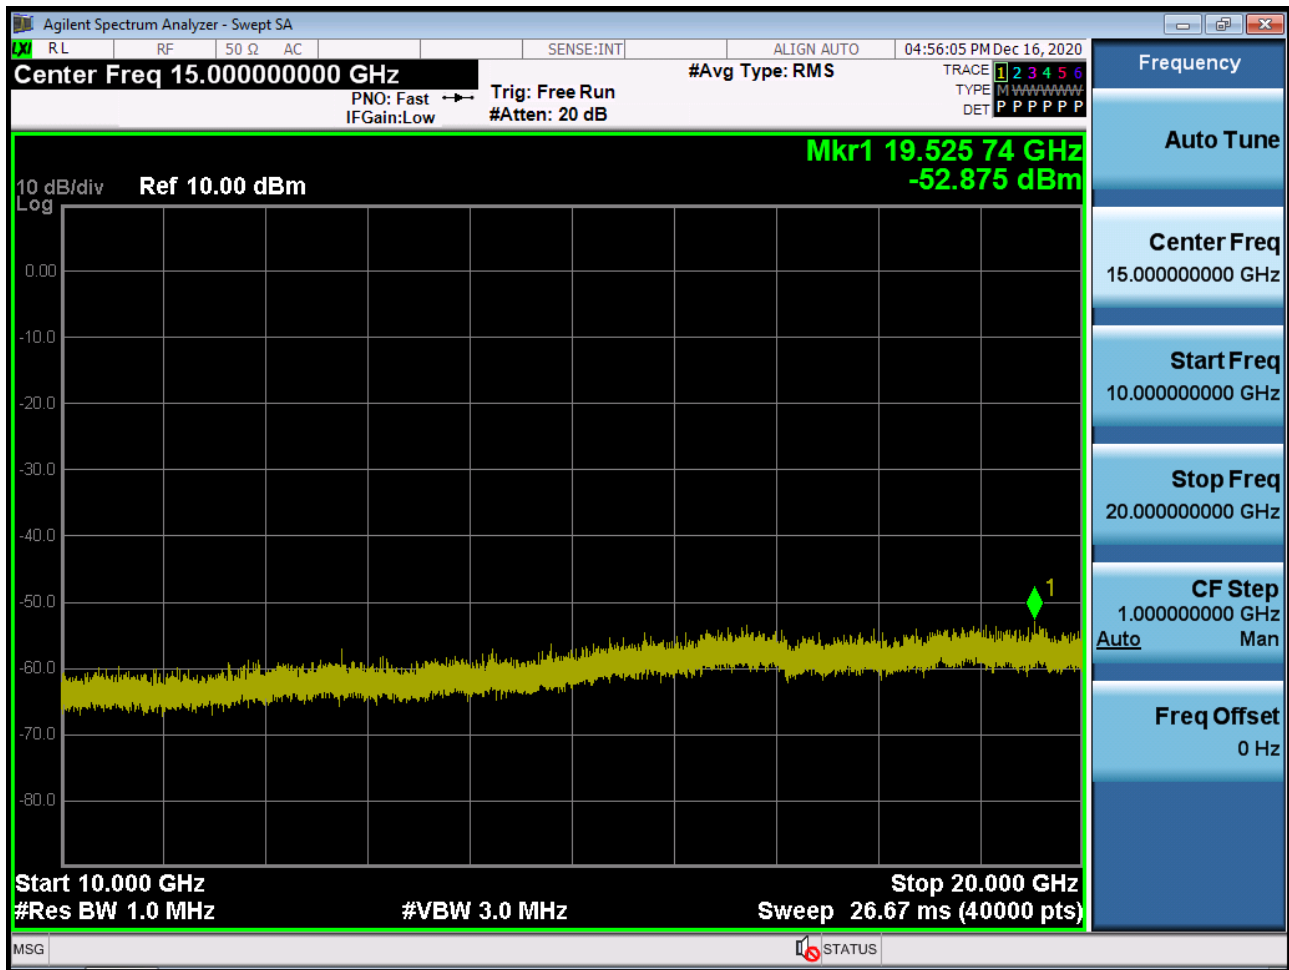


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

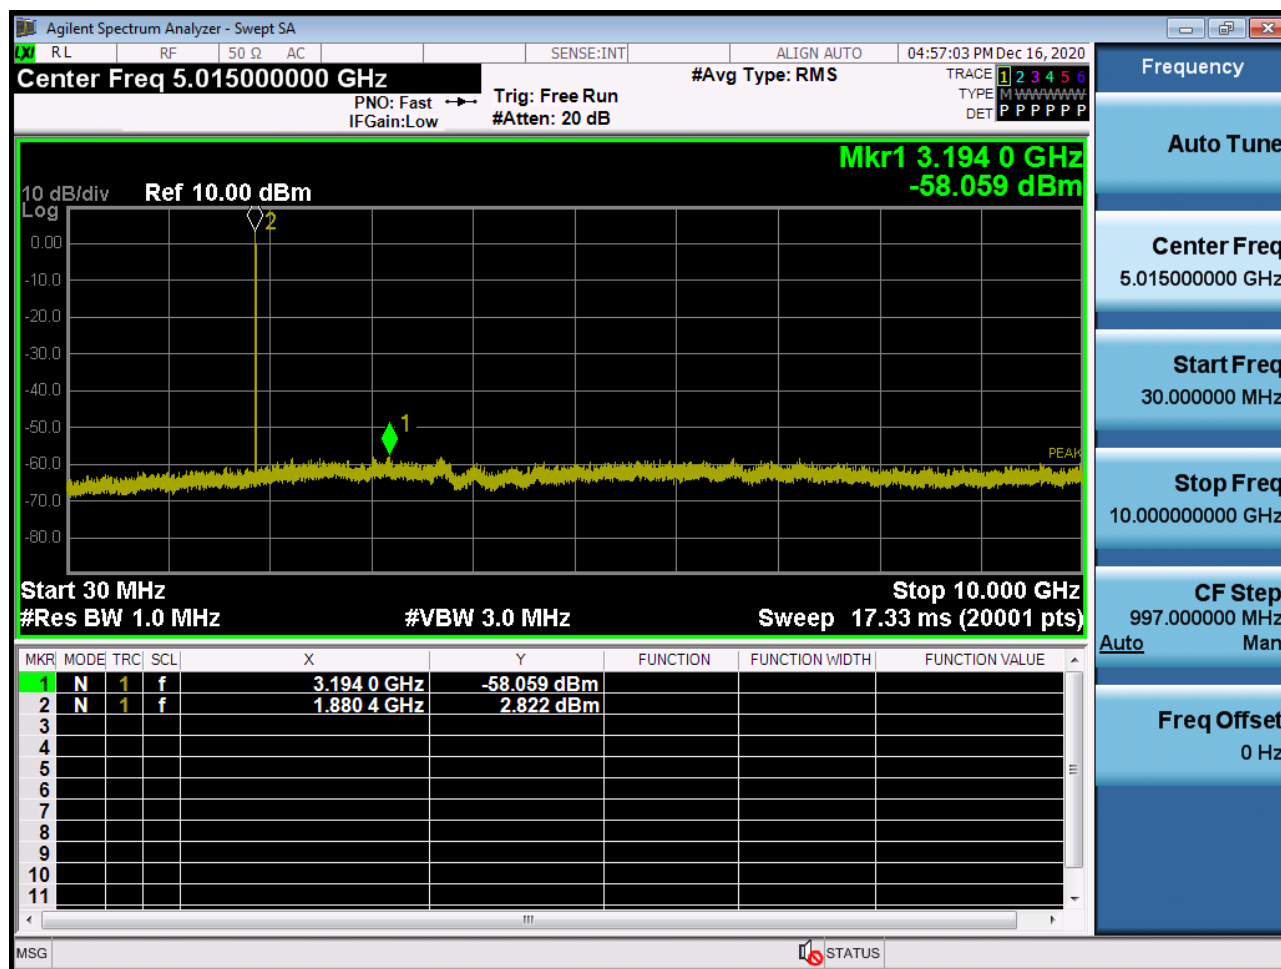


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

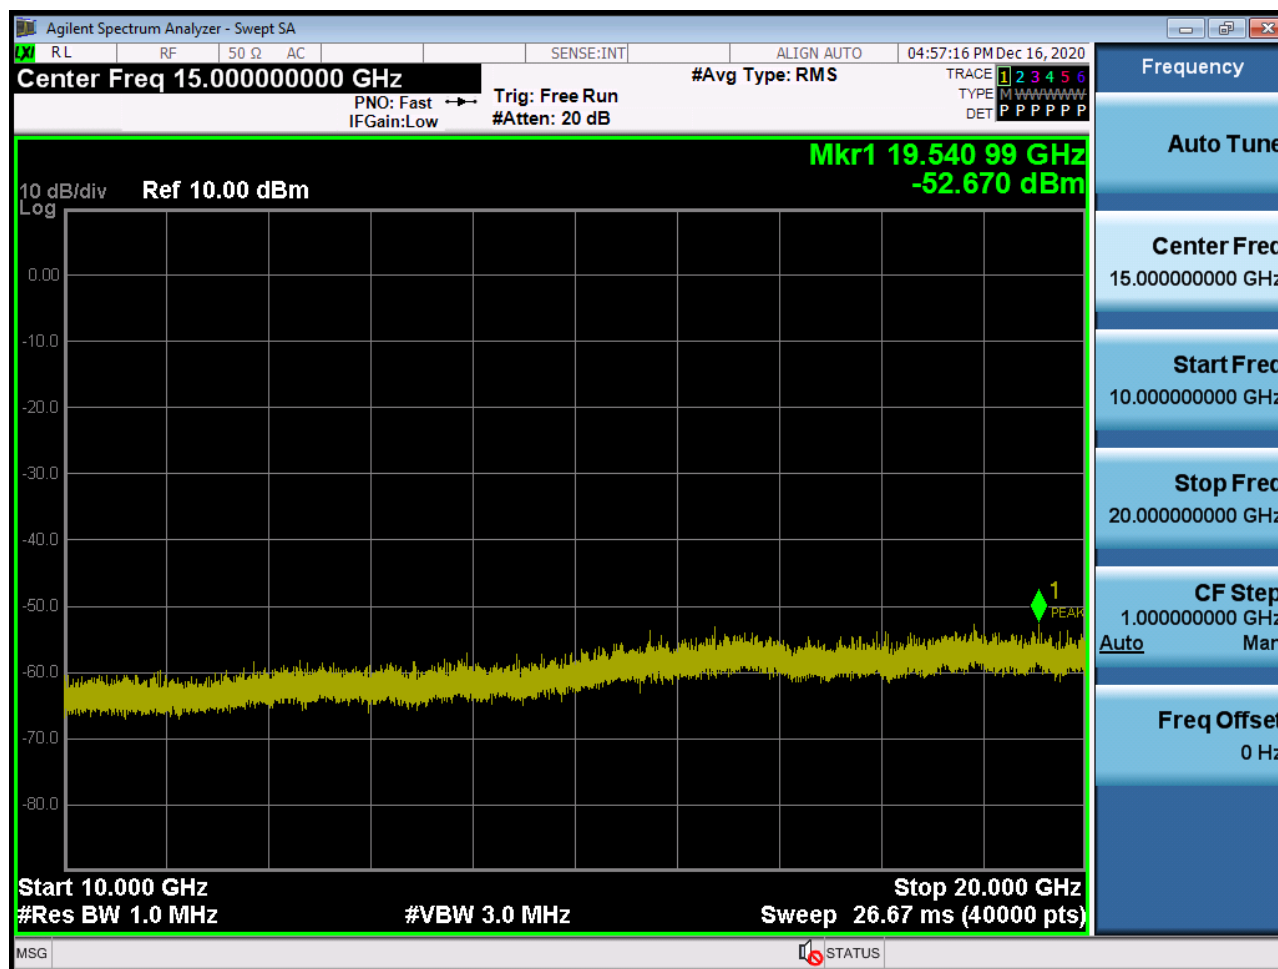


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

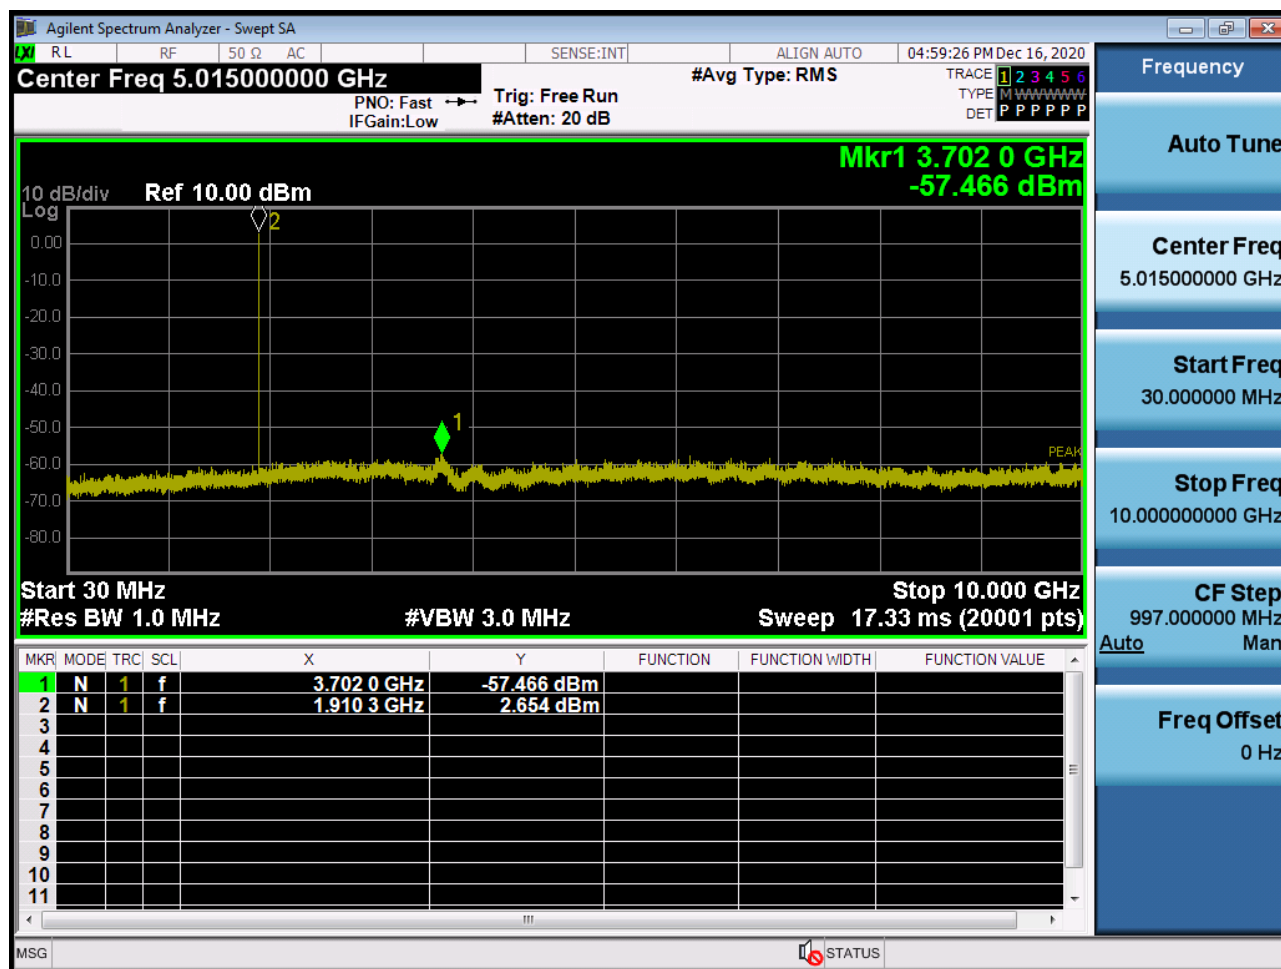


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

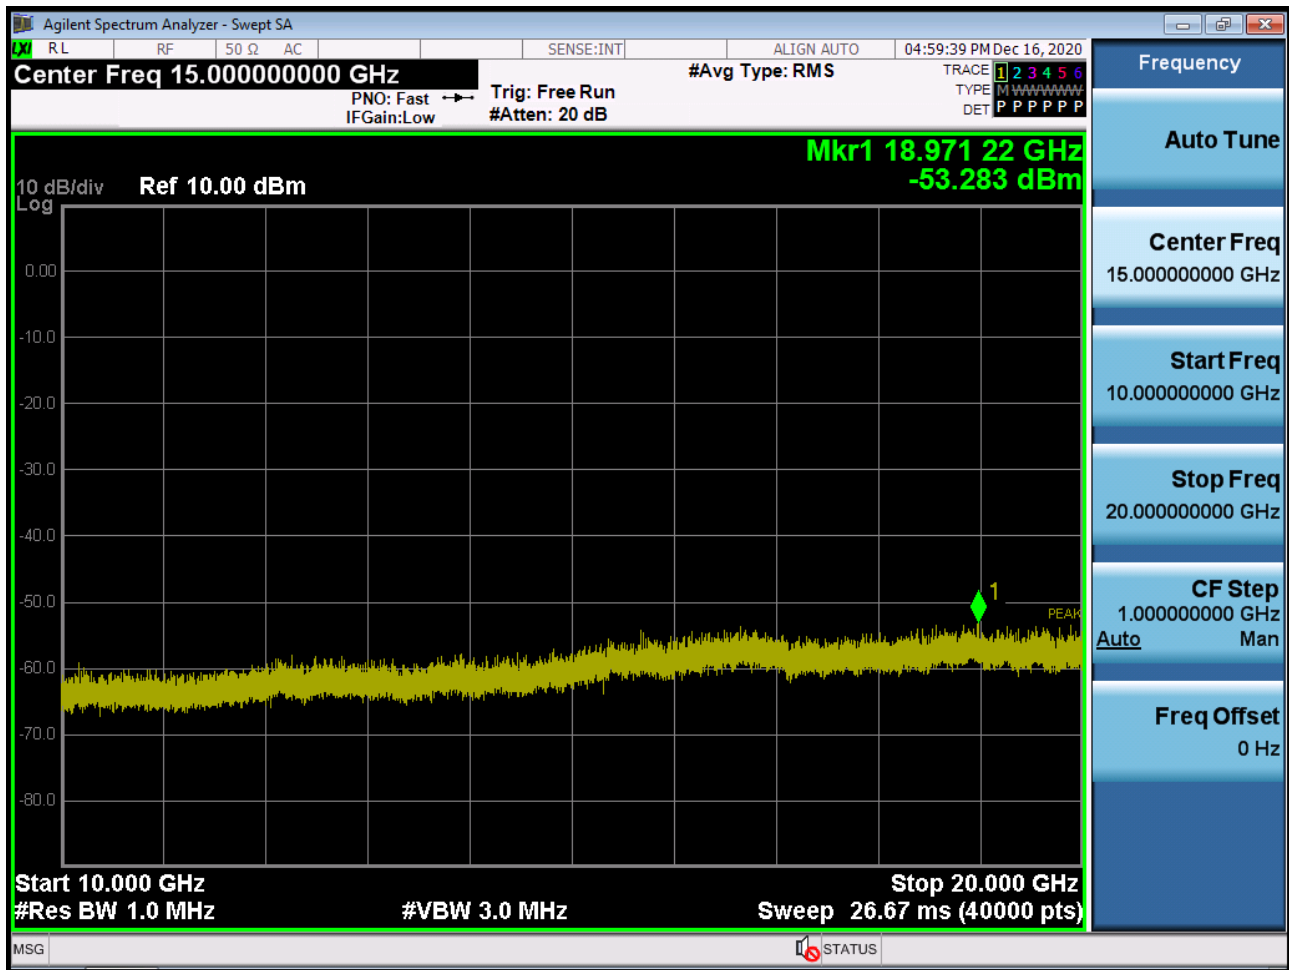


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

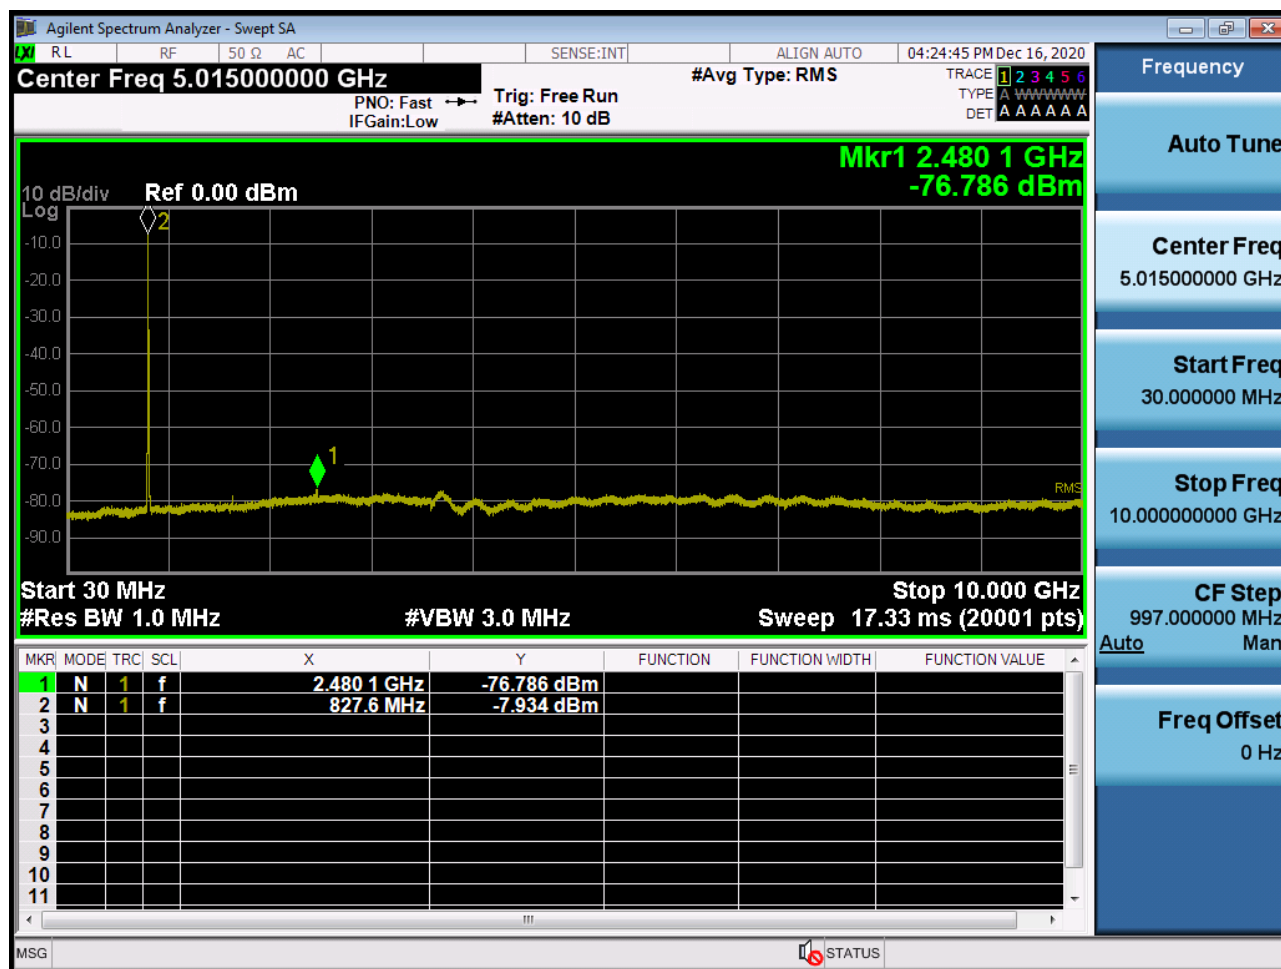


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

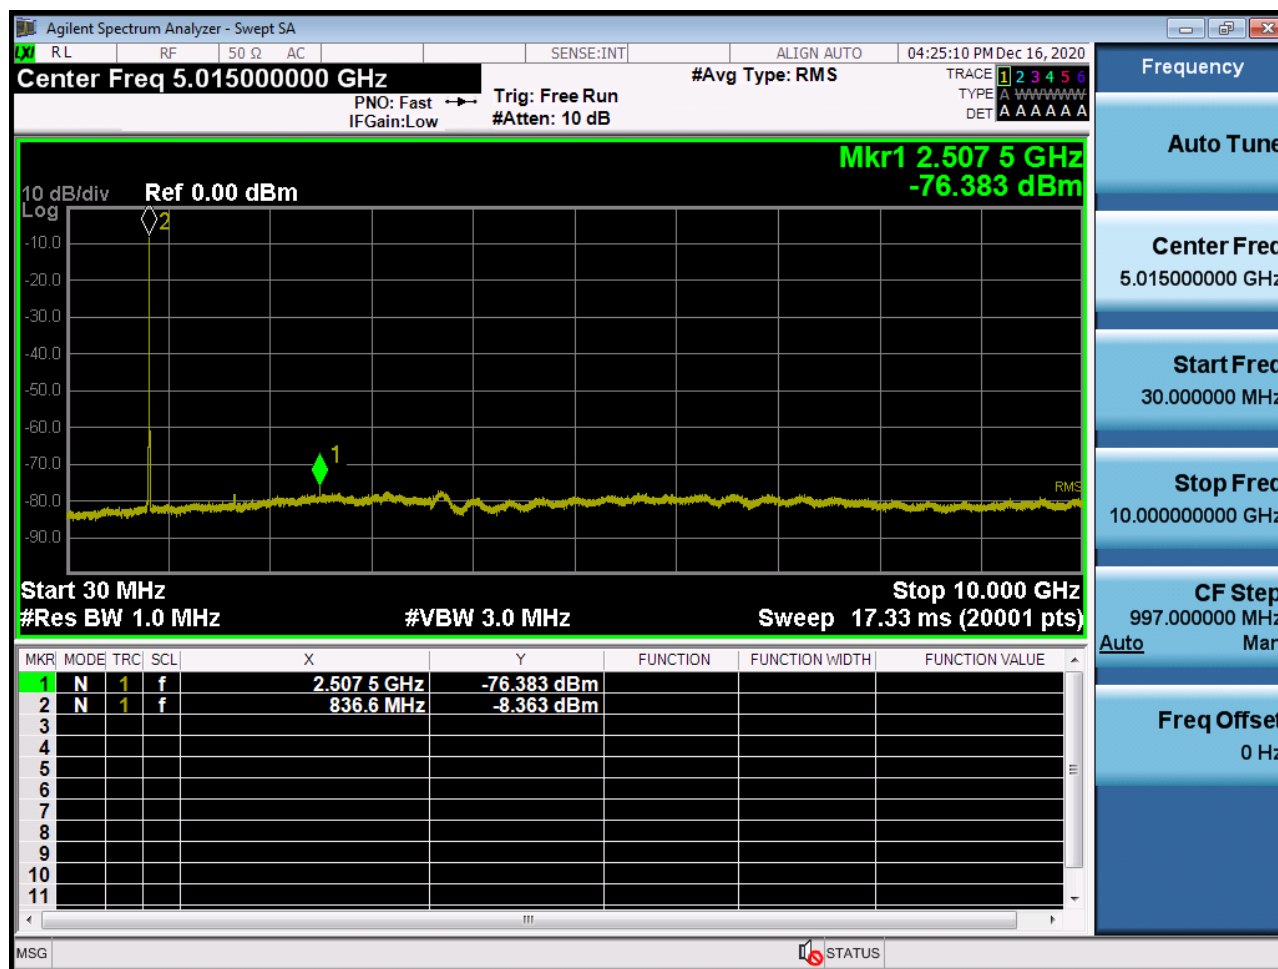

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

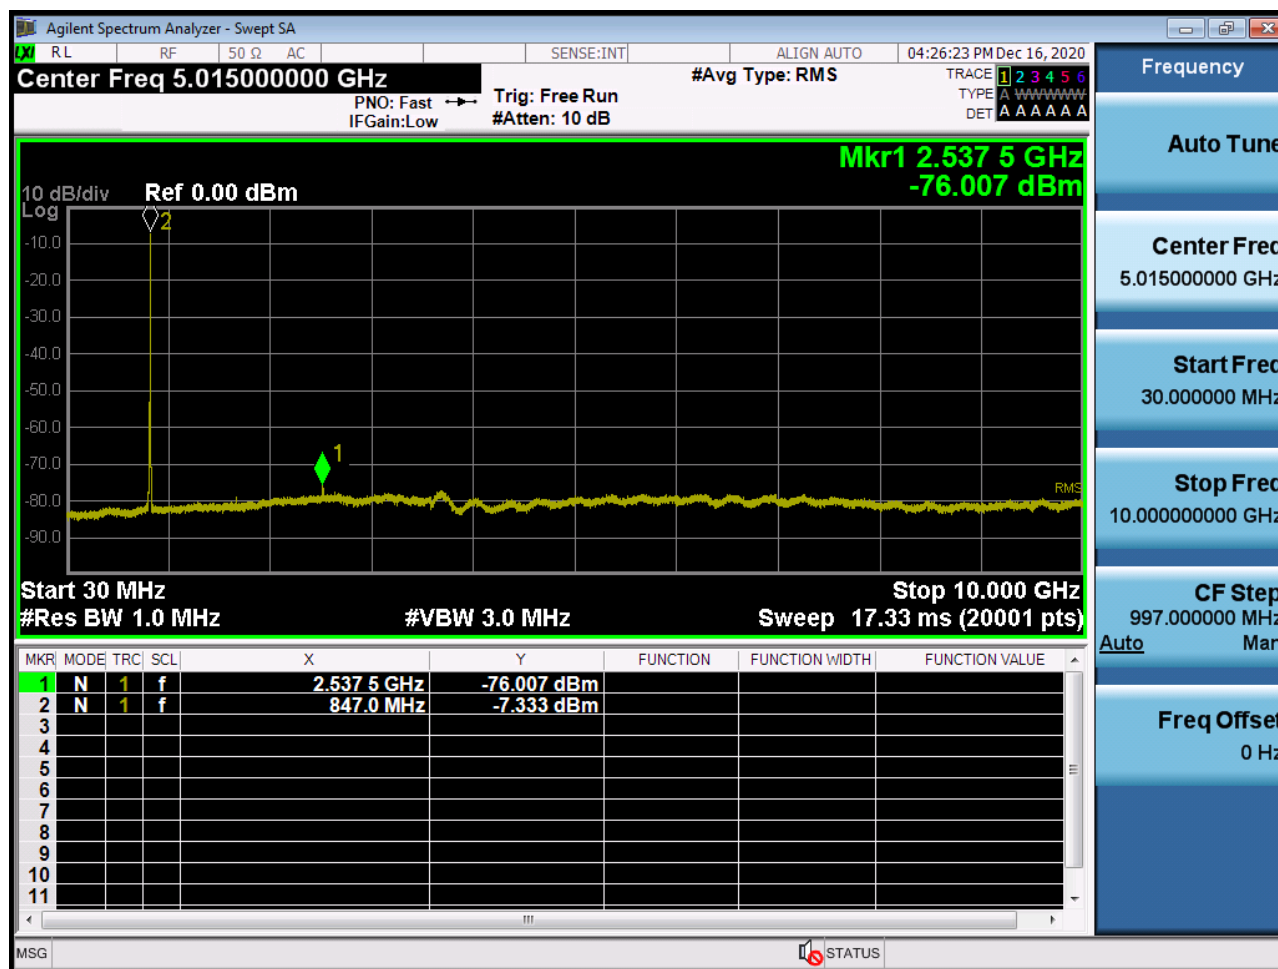


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

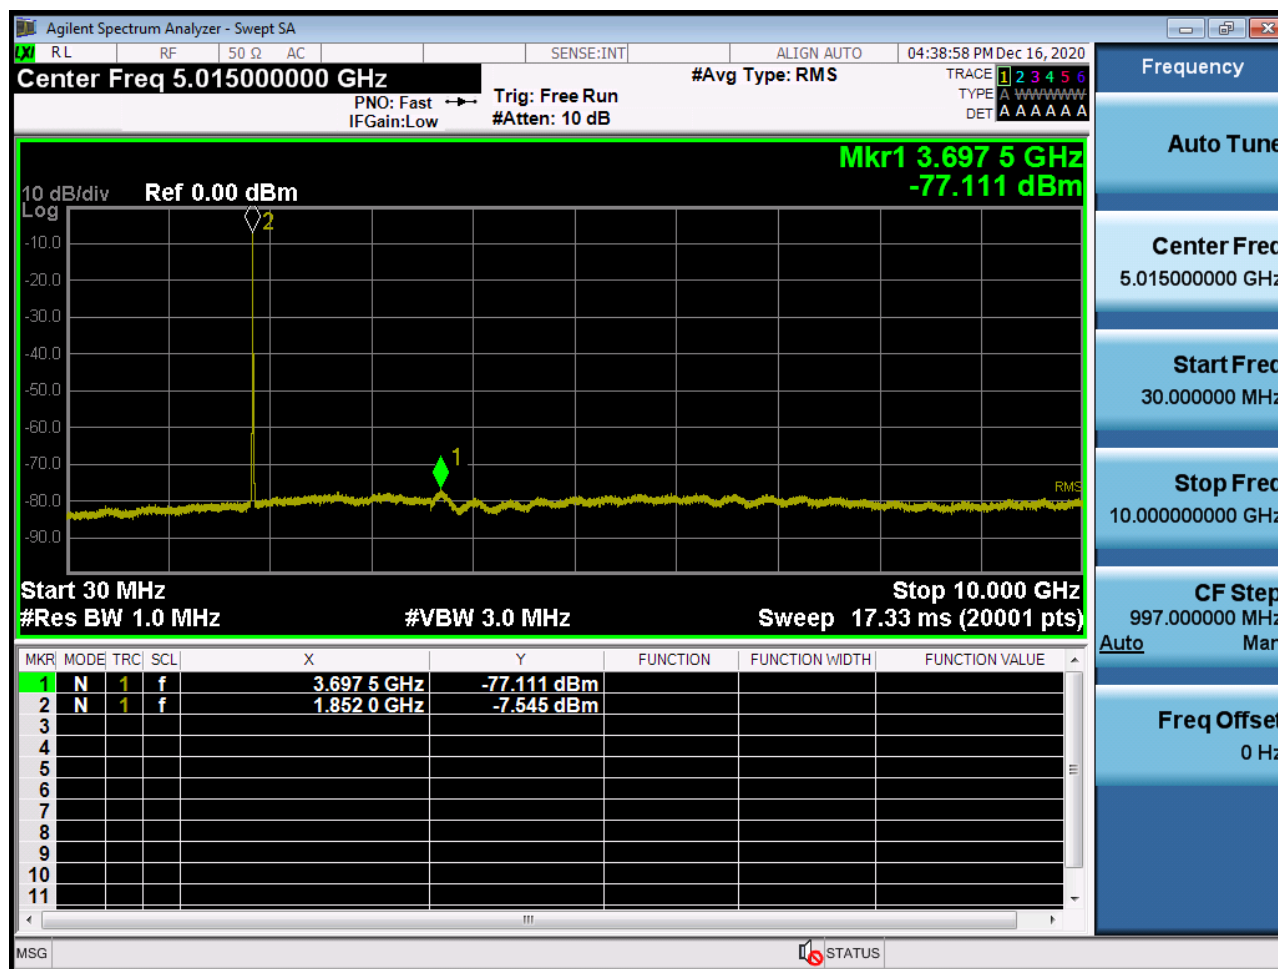

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

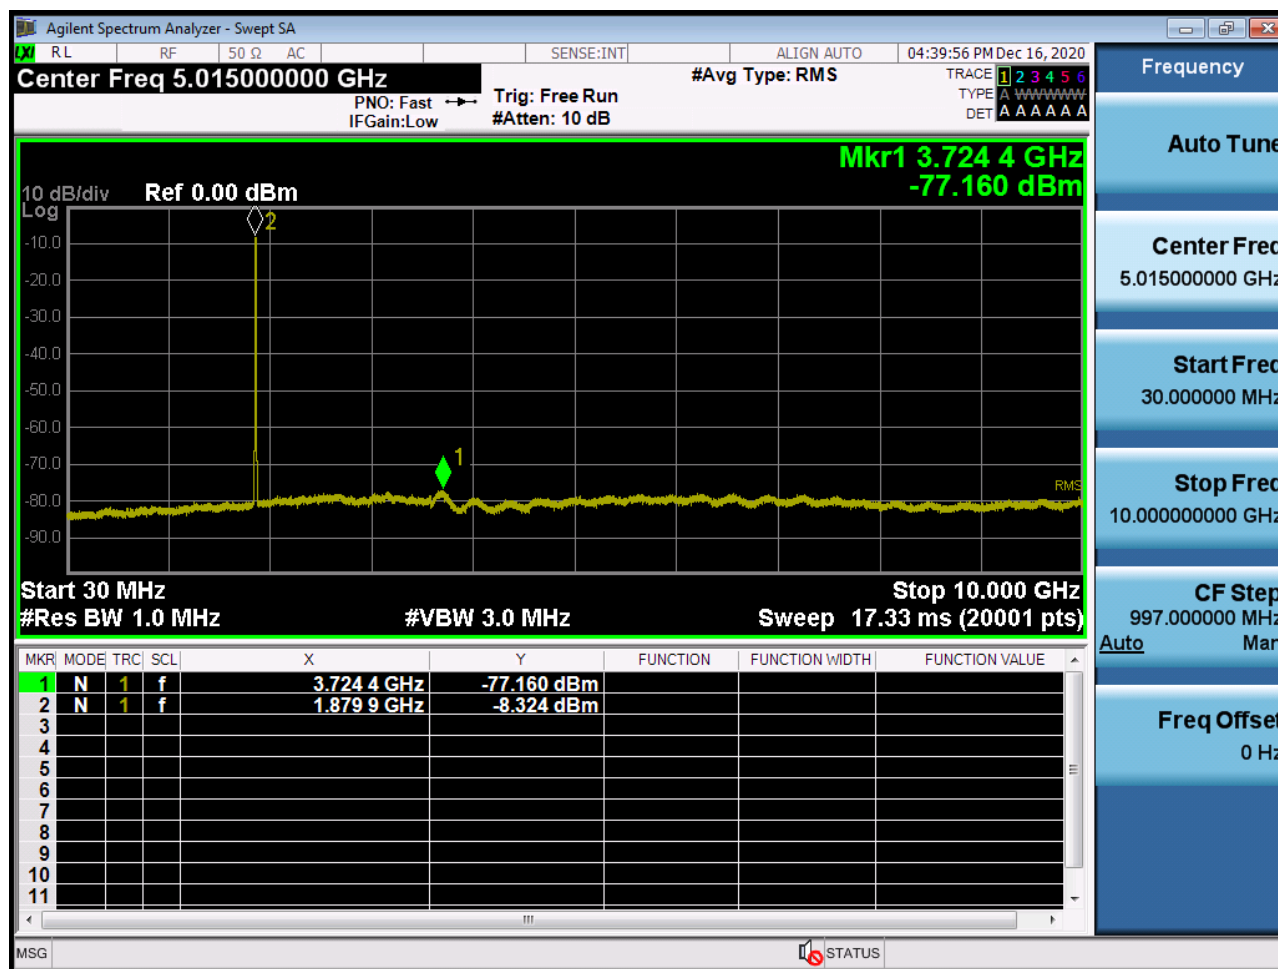


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2



■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

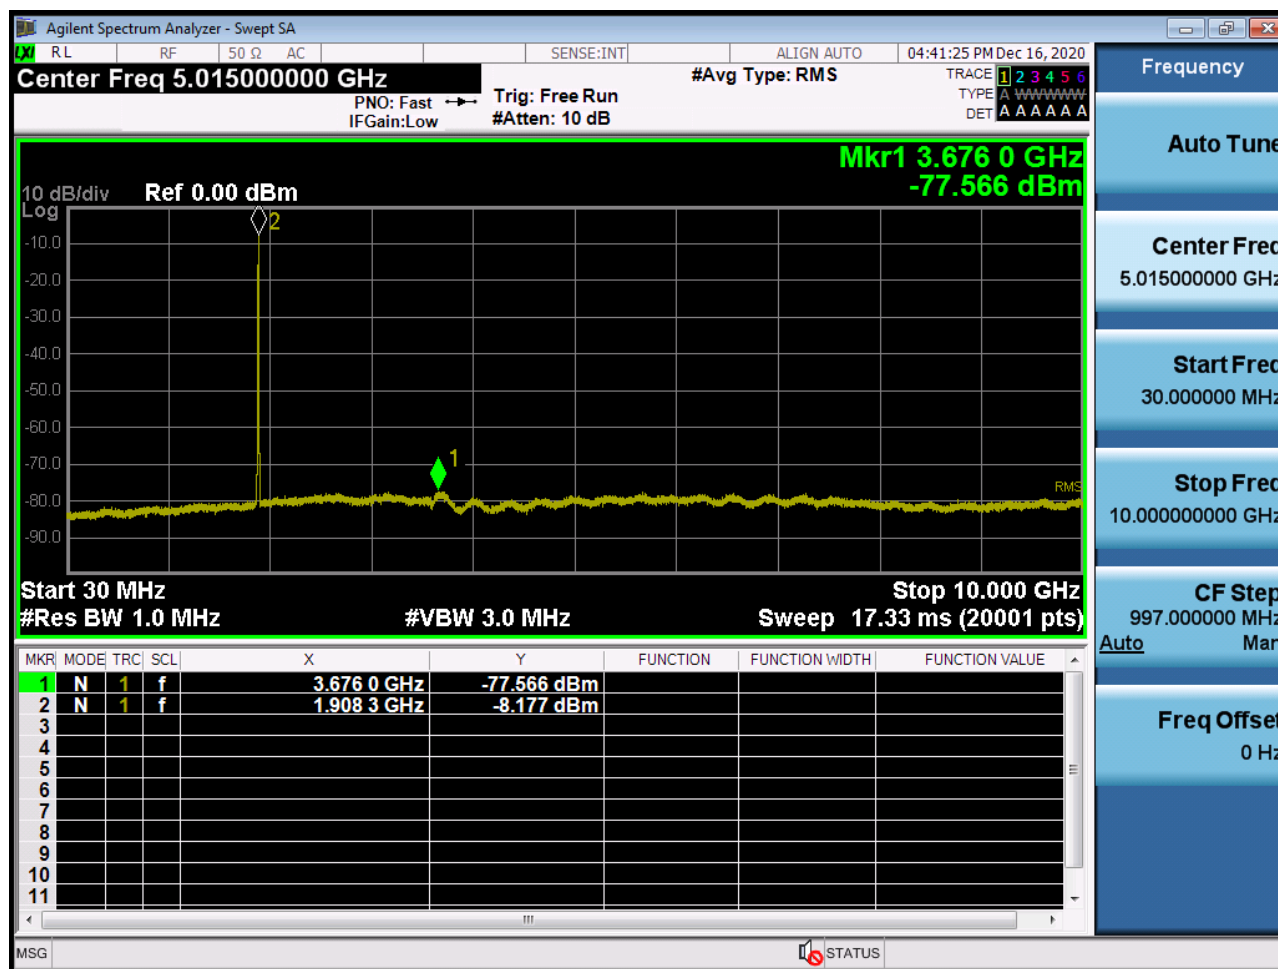

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

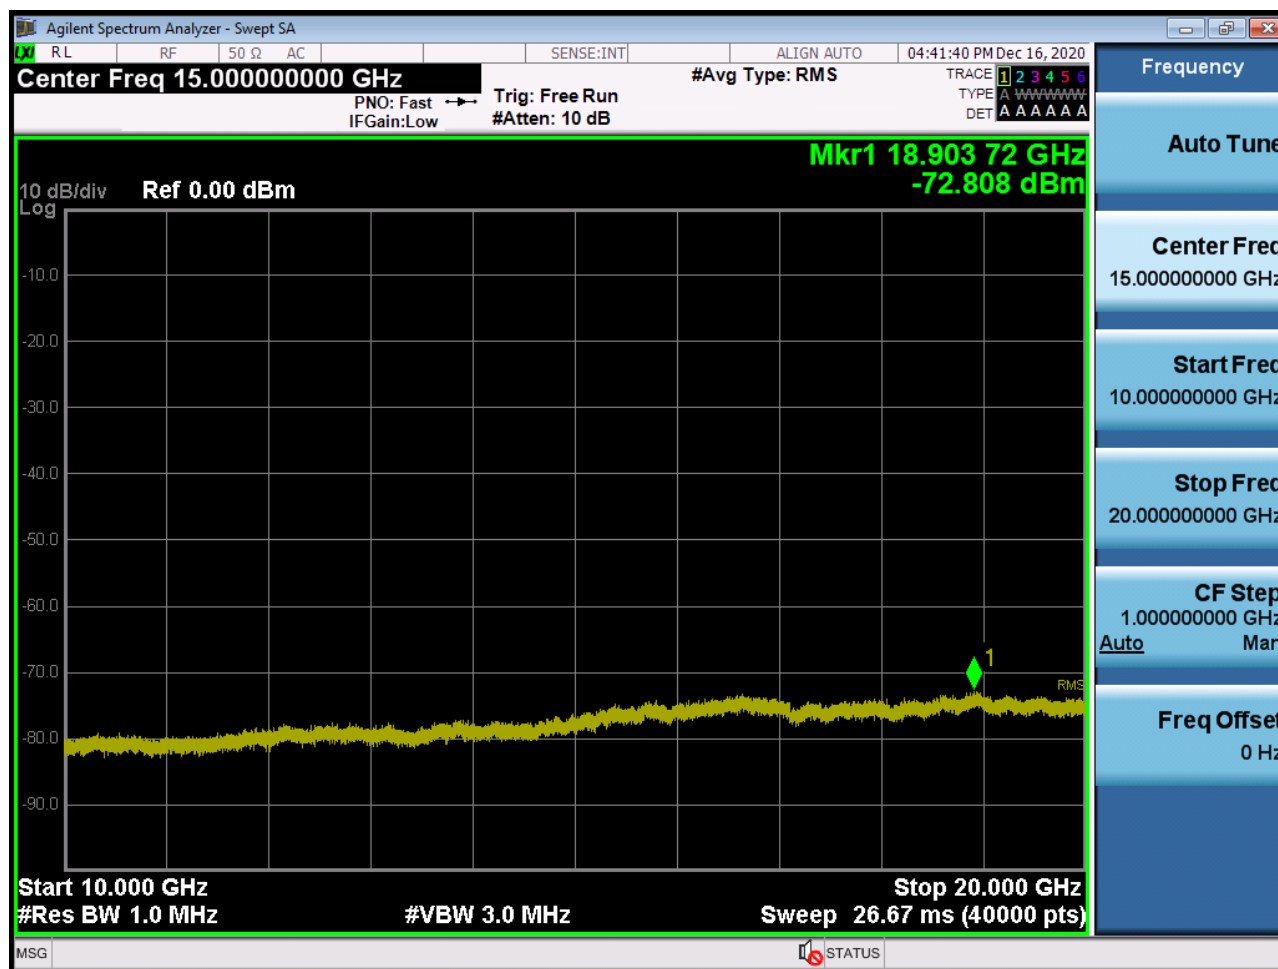

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2101-FC096-P