RF Test Data for 2.4G WiFi (Conducted Measurements)

General Description of EUT	
Product Name:	WiFi Temperature & Humidity Sensor
Test Model:	TH08
Sample ID:	202312-0065-3-2#
Environmental Conditions	
Temperature:	24℃
Relative Humidity:	50%
Test Voltage:	DC 4.5V
Test Engineer:	Yanzhenming
Note: For a more detailed features description, please refer to the report TBR-C-202312-0065-41 The report only show the worst case data.	

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	19.37	7.13	0.12
NVNT	b	2437	Ant1	19.38	7.13	0.12
NVNT	b	2462	Ant1	19.34	7.14	0.12
NVNT	g	2412	Ant1	10.01	10	0.71
NVNT	g	2437	Ant1	10.01	10	0.71
NVNT	g	2462	Ant1	10.01	10	0.71
NVNT	n(HT20)	2412	Ant1	9.95	10.02	0.77
NVNT	n(HT20)	2437	Ant1	10.03	9.99	0.76
NVNT	n(HT20)	2462	Ant1	10.03	9.99	0.76
NVNT	n(HT40)	2422	Ant1	9.94	10.03	1.54
NVNT	n(HT40)	2437	Ant1	10.02	9.99	1.53
NVNT	n(HT40)	2452	Ant1	9.95	10.02	1.54

Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

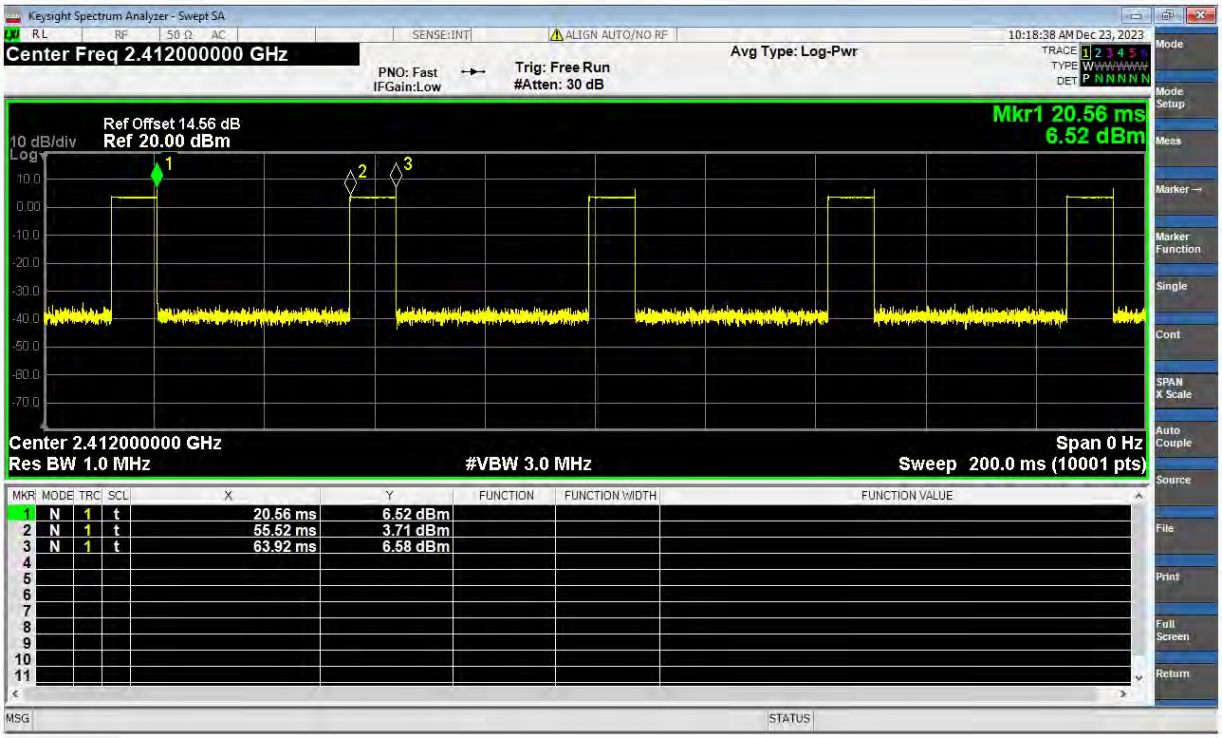

Duty Cycle NVNT b 2437MHz Ant1

Duty Cycle NVNT b 2462MHz Ant1

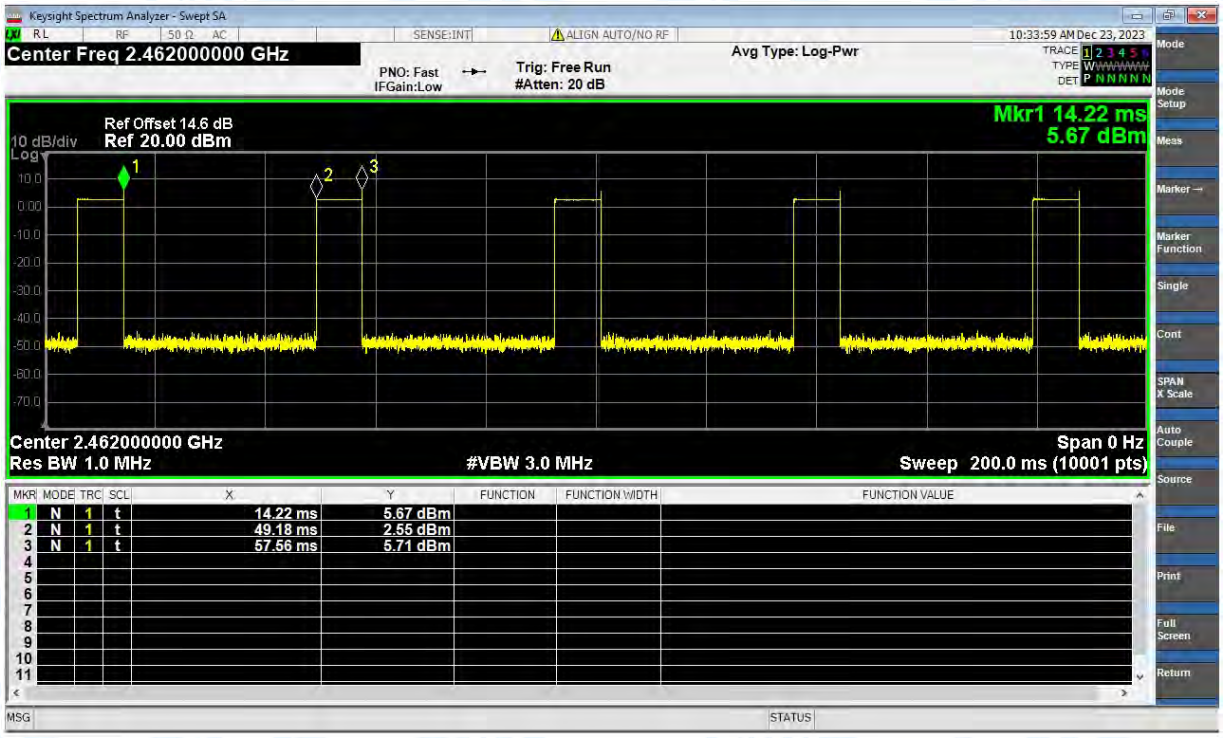

Duty Cycle NVNT g 2412MHz Ant1

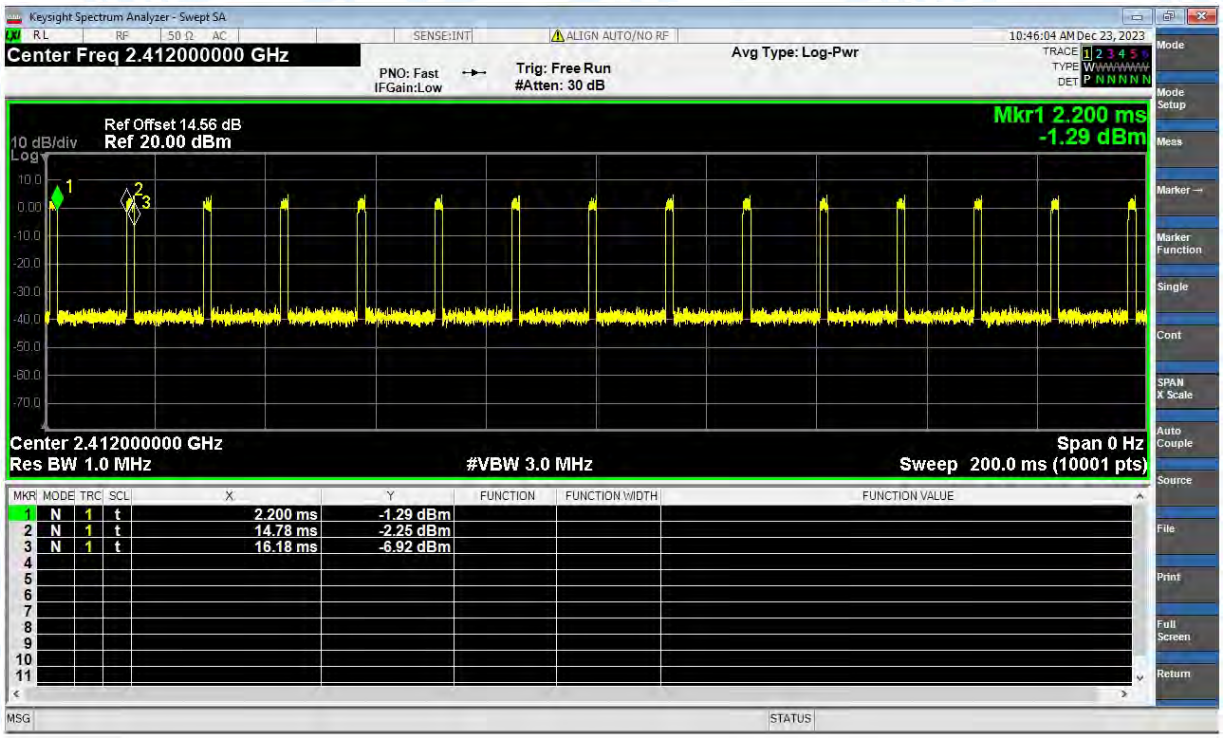

Duty Cycle NVNT g 2437MHz Ant1

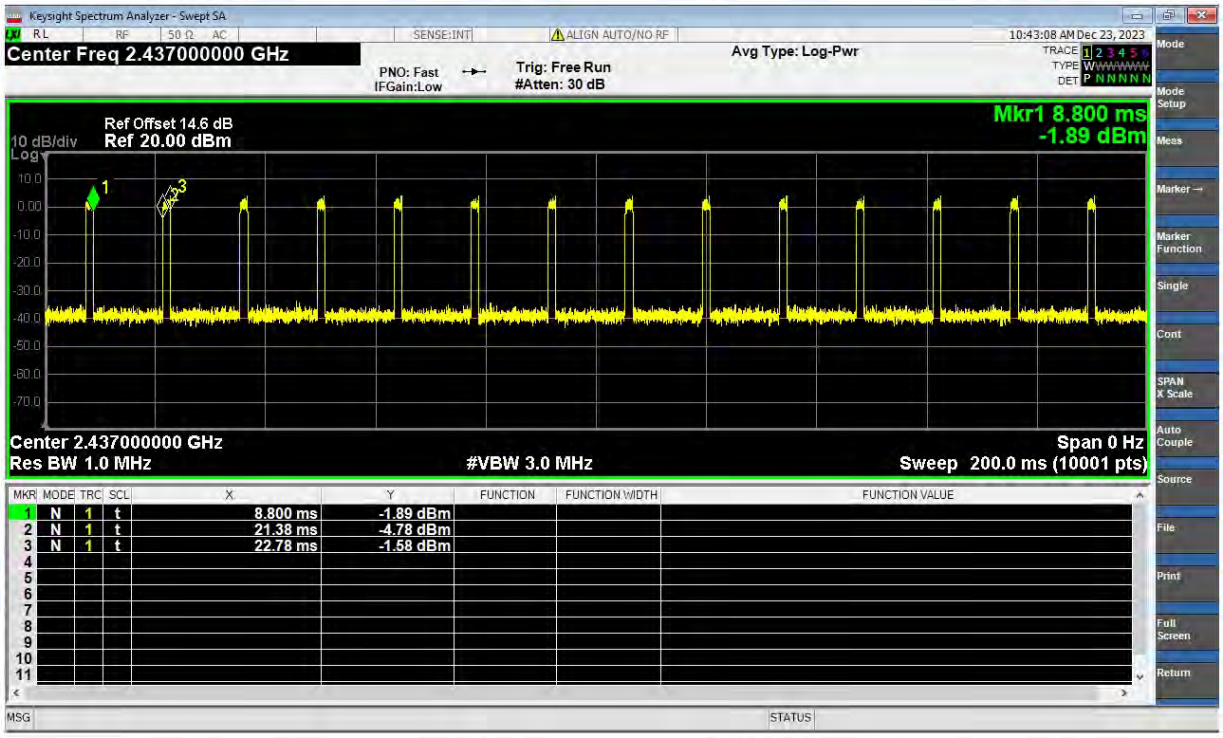

Duty Cycle NVNT g 2462MHz Ant1

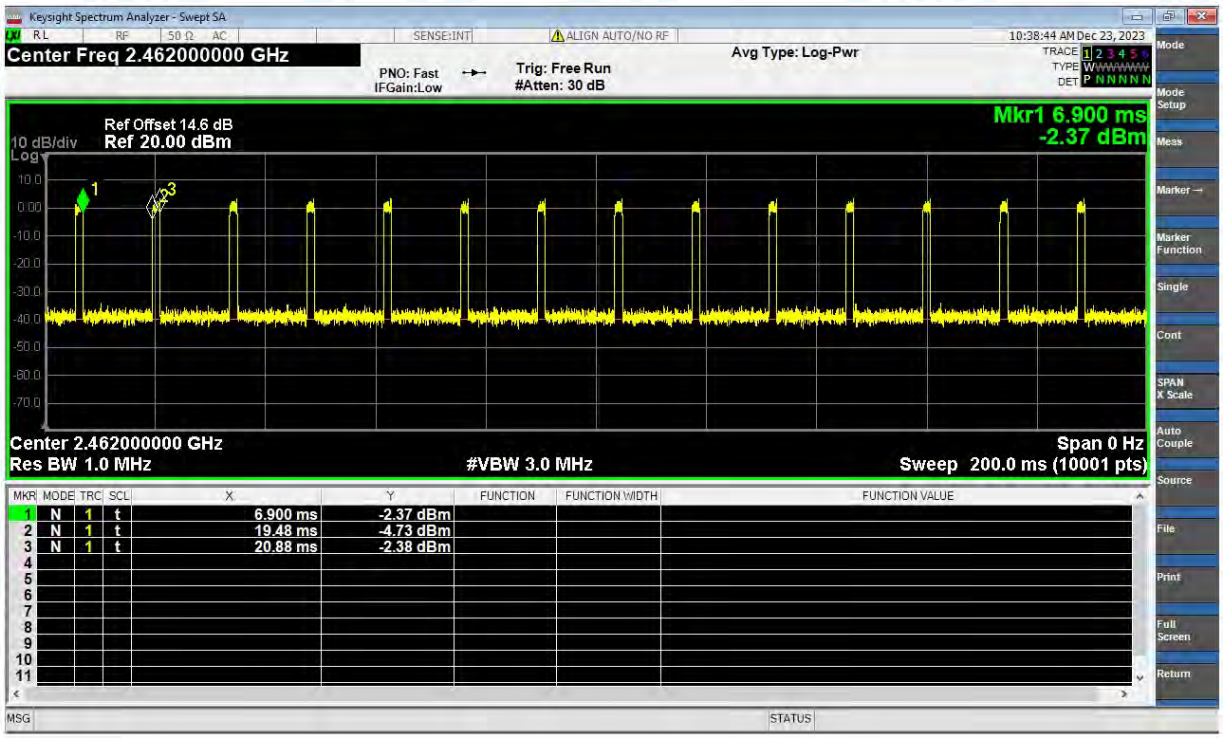

Duty Cycle NVNT n(HT20) 2412MHz Ant1

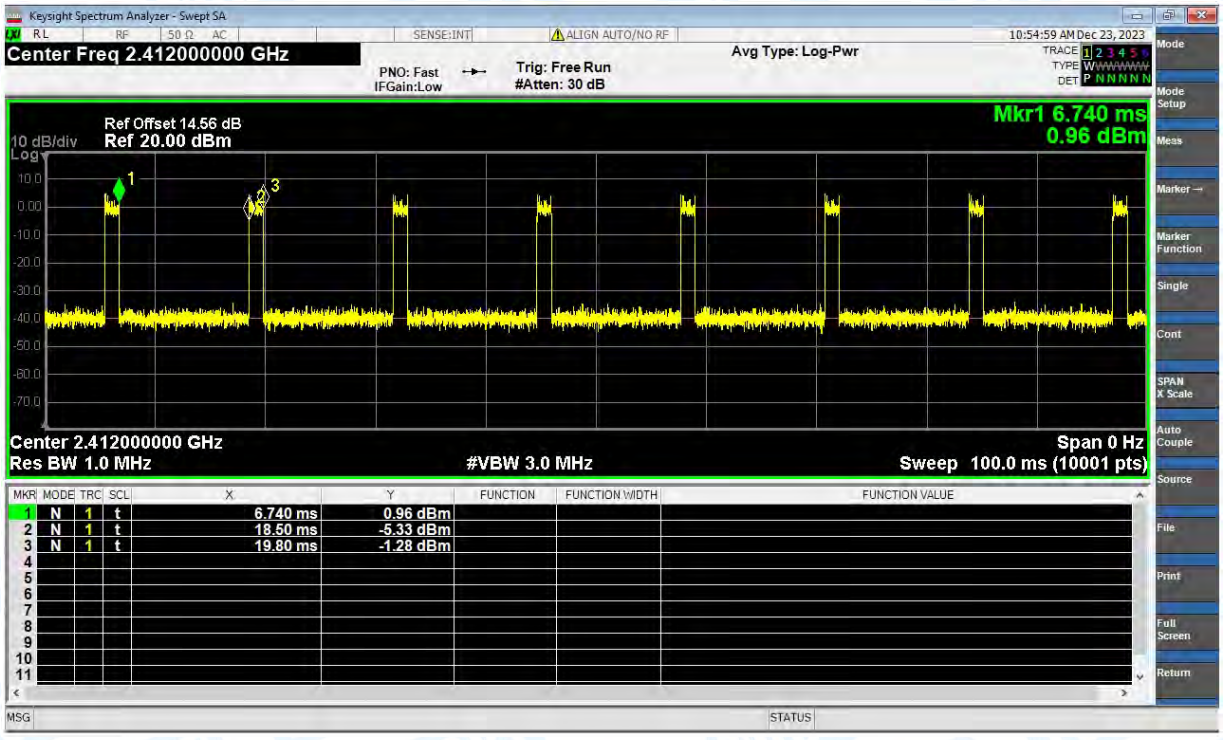

Duty Cycle NVNT n(HT20) 2437MHz Ant1

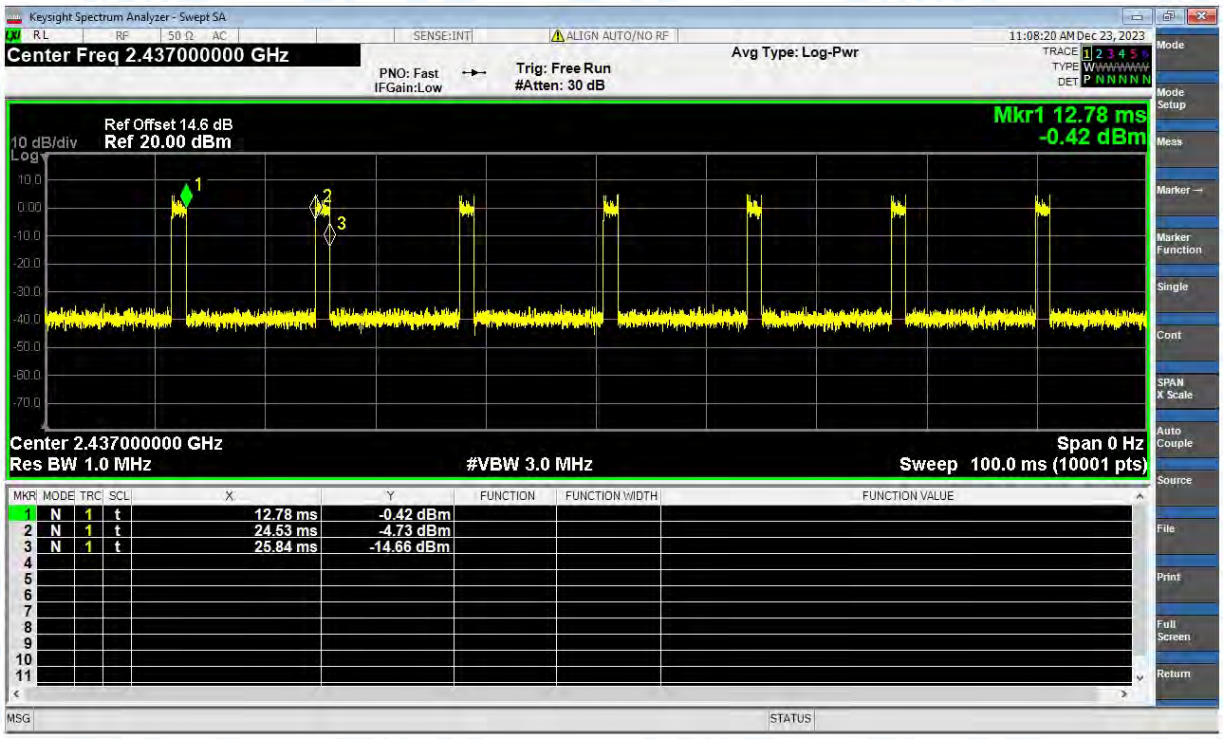

Duty Cycle NVNT n(HT20) 2462MHz Ant1

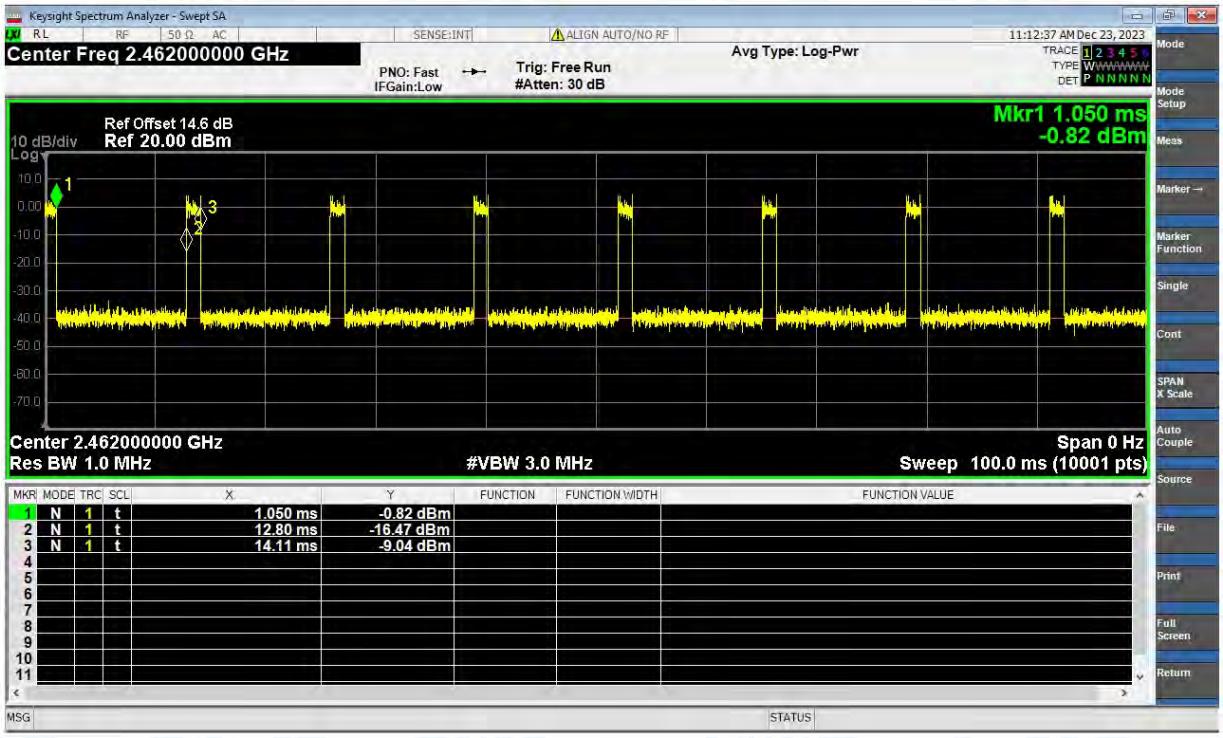

Duty Cycle NVNT n(HT40) 2422MHz Ant1

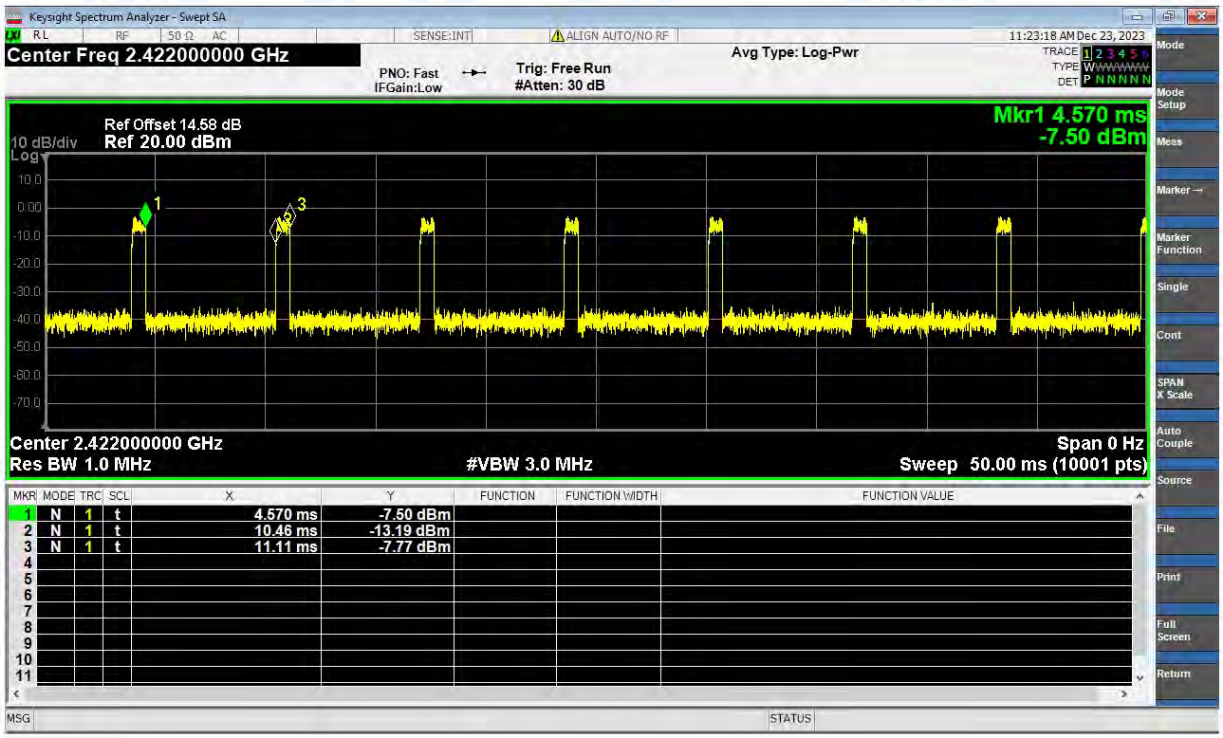

Duty Cycle NVNT n(HT40) 2437MHz Ant1

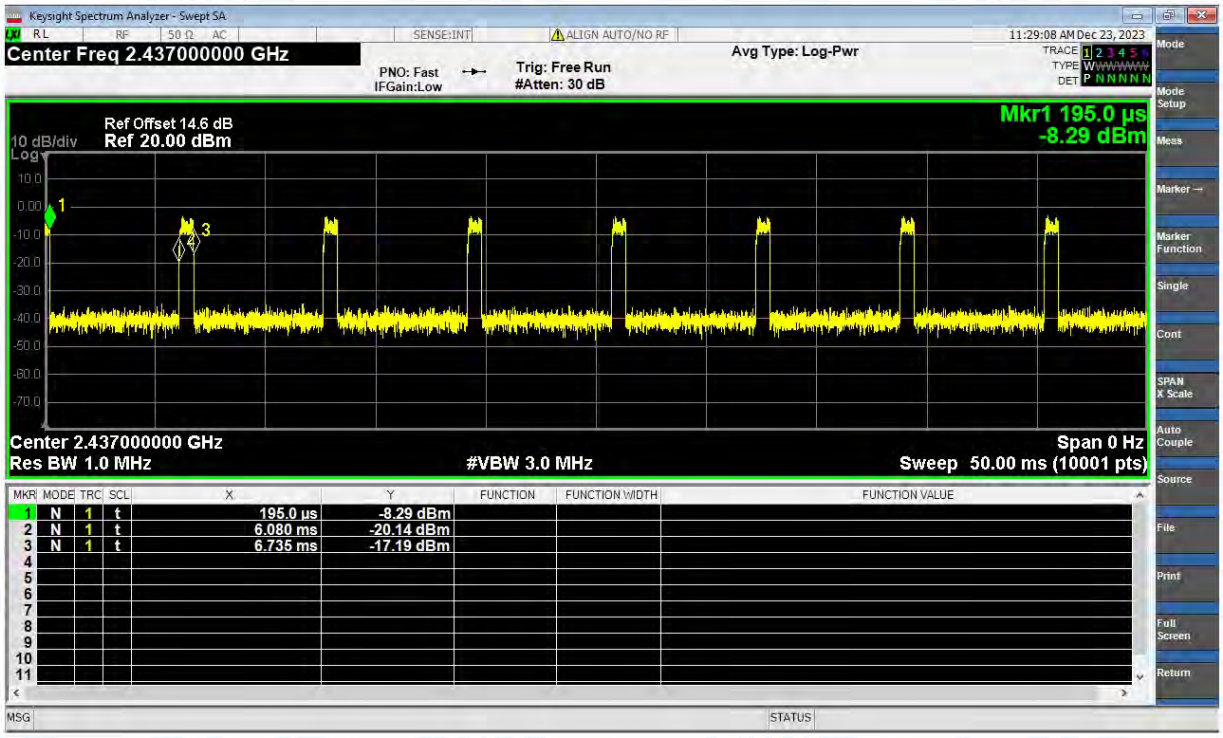

Duty Cycle NVNT n(HT40) 2452MHz Ant1

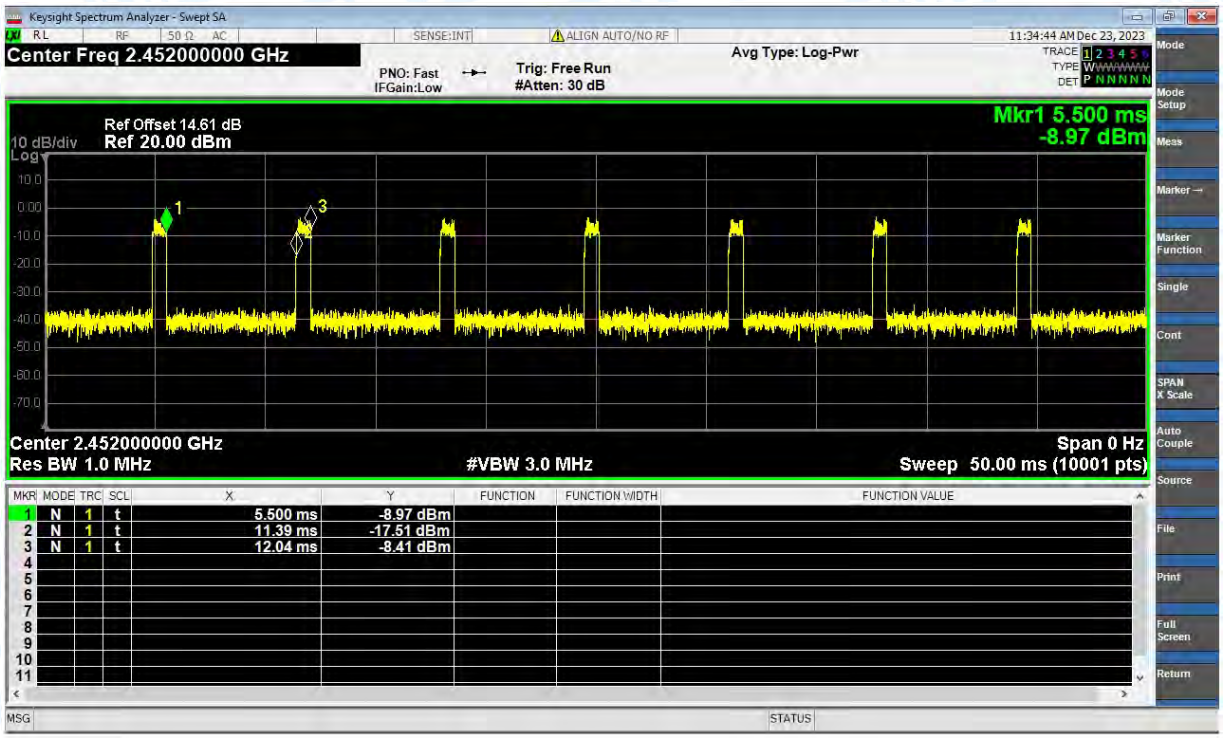

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	9.3	7.13	16.43	30	Pass
NVNT	b	2437	Ant1	8.82	7.13	15.95	30	Pass
NVNT	b	2462	Ant1	8.17	7.14	15.31	30	Pass
NVNT	g	2412	Ant1	6.38	10	16.38	30	Pass
NVNT	g	2437	Ant1	5.71	10	15.71	30	Pass
NVNT	g	2462	Ant1	5.03	10	15.03	30	Pass
NVNT	n(HT20)	2412	Ant1	4.93	10.02	14.95	30	Pass
NVNT	n(HT20)	2437	Ant1	5.68	9.99	15.67	30	Pass
NVNT	n(HT20)	2462	Ant1	5.08	9.99	15.07	30	Pass
NVNT	n(HT40)	2422	Ant1	4.97	10.03	15	30	Pass
NVNT	n(HT40)	2437	Ant1	4.43	9.99	14.42	30	Pass
NVNT	n(HT40)	2452	Ant1	4.32	10.02	14.34	30	Pass

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.61	0.5	Pass
NVNT	b	2437	Ant1	11.54	0.5	Pass
NVNT	b	2462	Ant1	11.52	0.5	Pass
NVNT	g	2412	Ant1	17.45	0.5	Pass
NVNT	g	2437	Ant1	16.33	0.5	Pass
NVNT	g	2462	Ant1	17.26	0.5	Pass
NVNT	n(HT20)	2412	Ant1	18.15	0.5	Pass
NVNT	n(HT20)	2437	Ant1	18.09	0.5	Pass
NVNT	n(HT20)	2462	Ant1	17.58	0.5	Pass
NVNT	n(HT40)	2422	Ant1	35.04	0.5	Pass
NVNT	n(HT40)	2437	Ant1	35.27	0.5	Pass
NVNT	n(HT40)	2452	Ant1	35.64	0.5	Pass

Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1

-6dB Bandwidth NVNT b 2437MHz Ant1

-6dB Bandwidth NVNT b 2462MHz Ant1

-6dB Bandwidth NVNT g 2412MHz Ant1

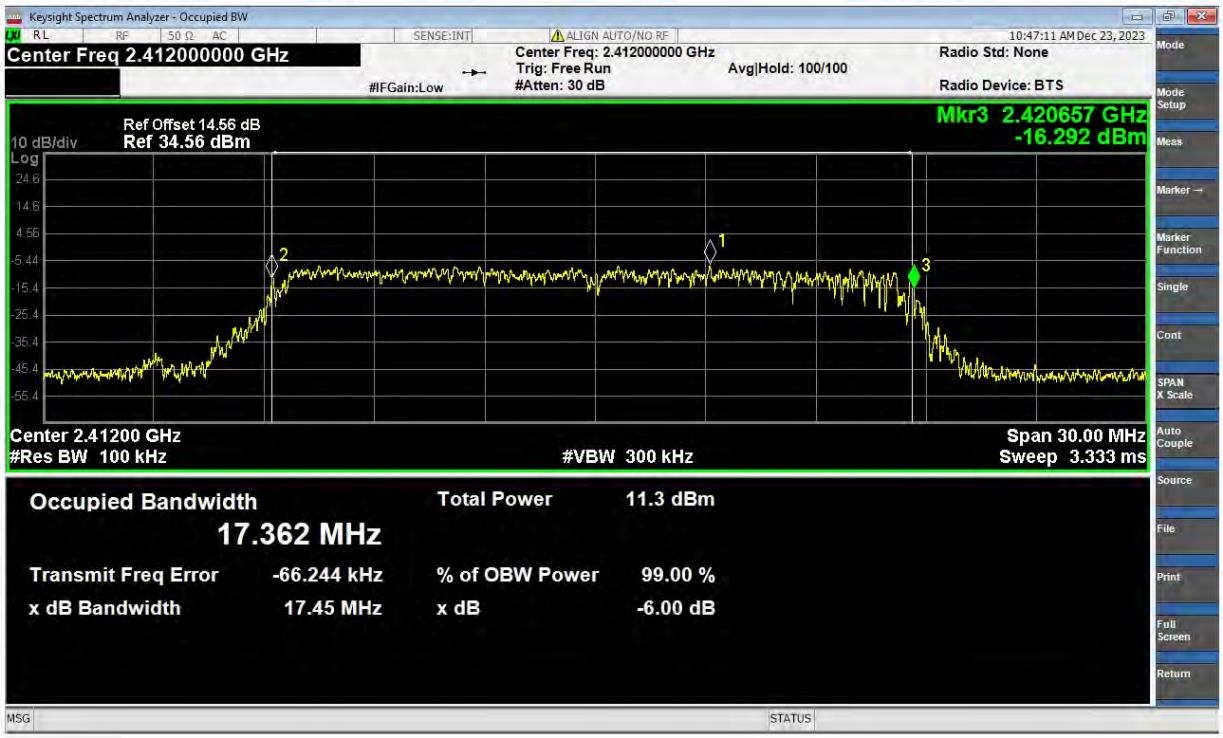

-6dB Bandwidth NVNT g 2437MHz Ant1

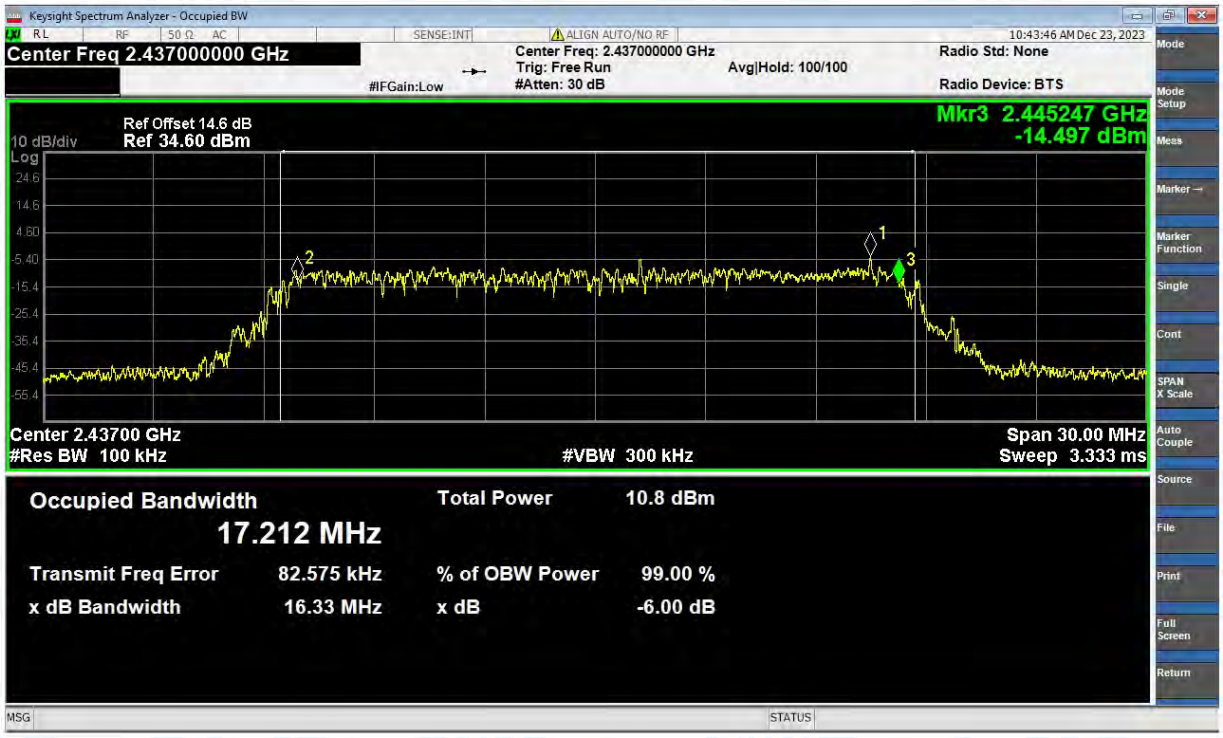

-6dB Bandwidth NVNT g 2462MHz Ant1

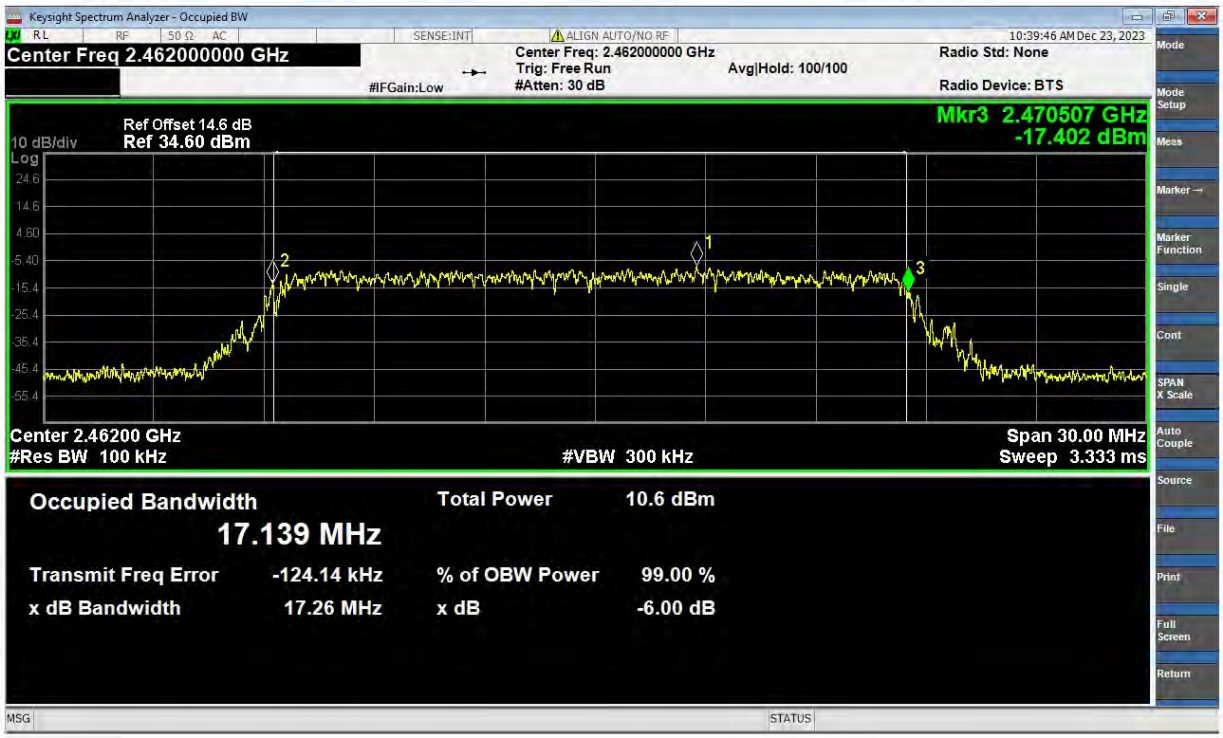

-6dB Bandwidth NVNT n(HT20) 2412MHz Ant1

-6dB Bandwidth NVNT n(HT20) 2437MHz Ant1

-6dB Bandwidth NVNT n(HT20) 2462MHz Ant1

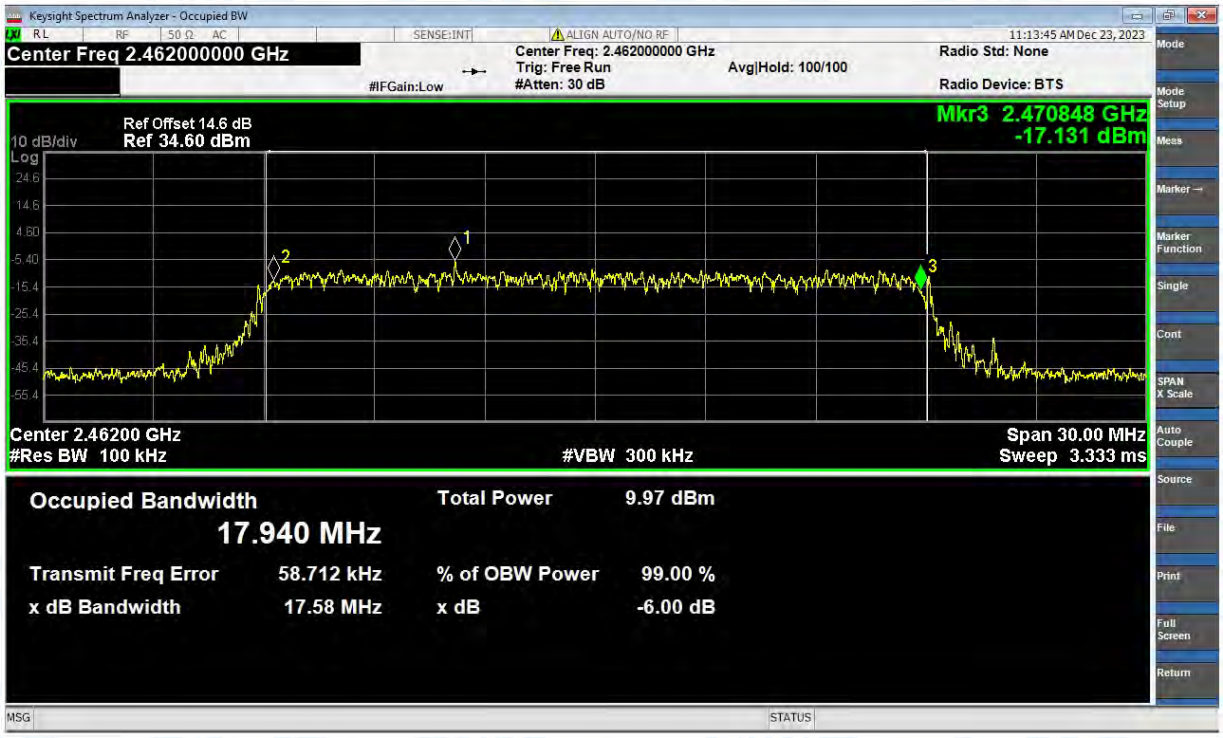

-6dB Bandwidth NVNT n(HT40) 2422MHz Ant1

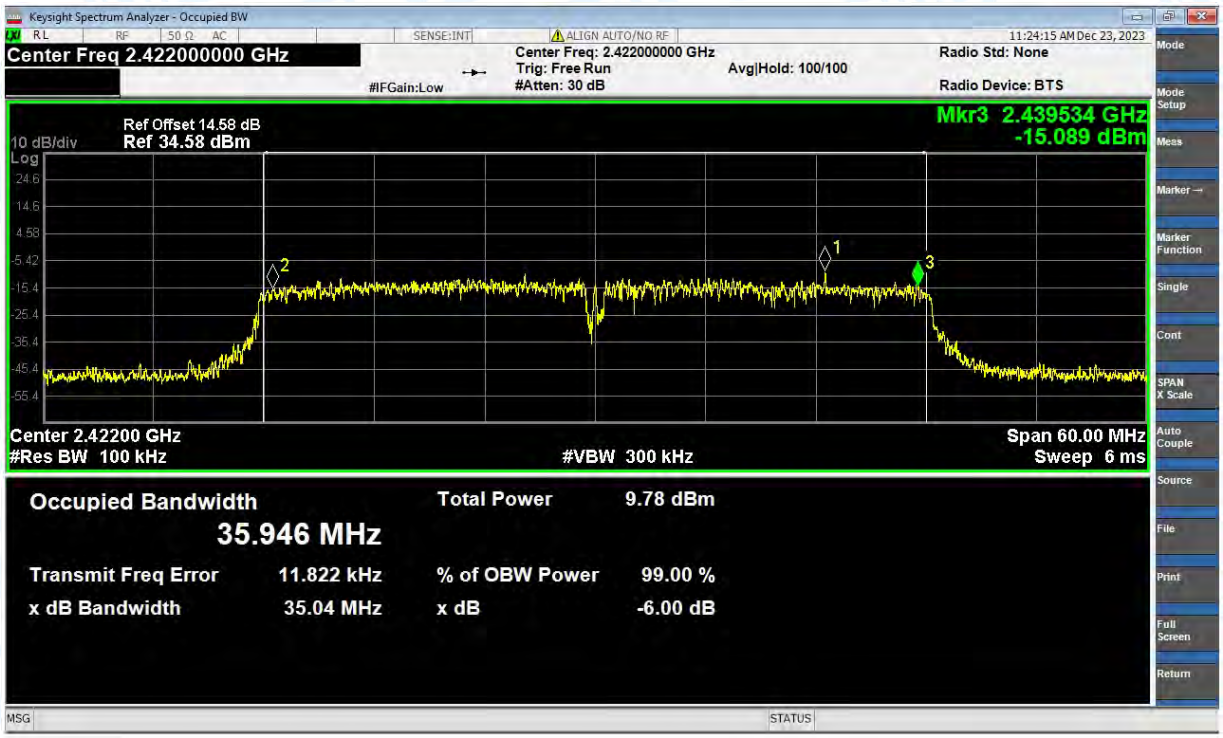

-6dB Bandwidth NVNT n(HT40) 2437MHz Ant1

-6dB Bandwidth NVNT n(HT40) 2452MHz Ant1

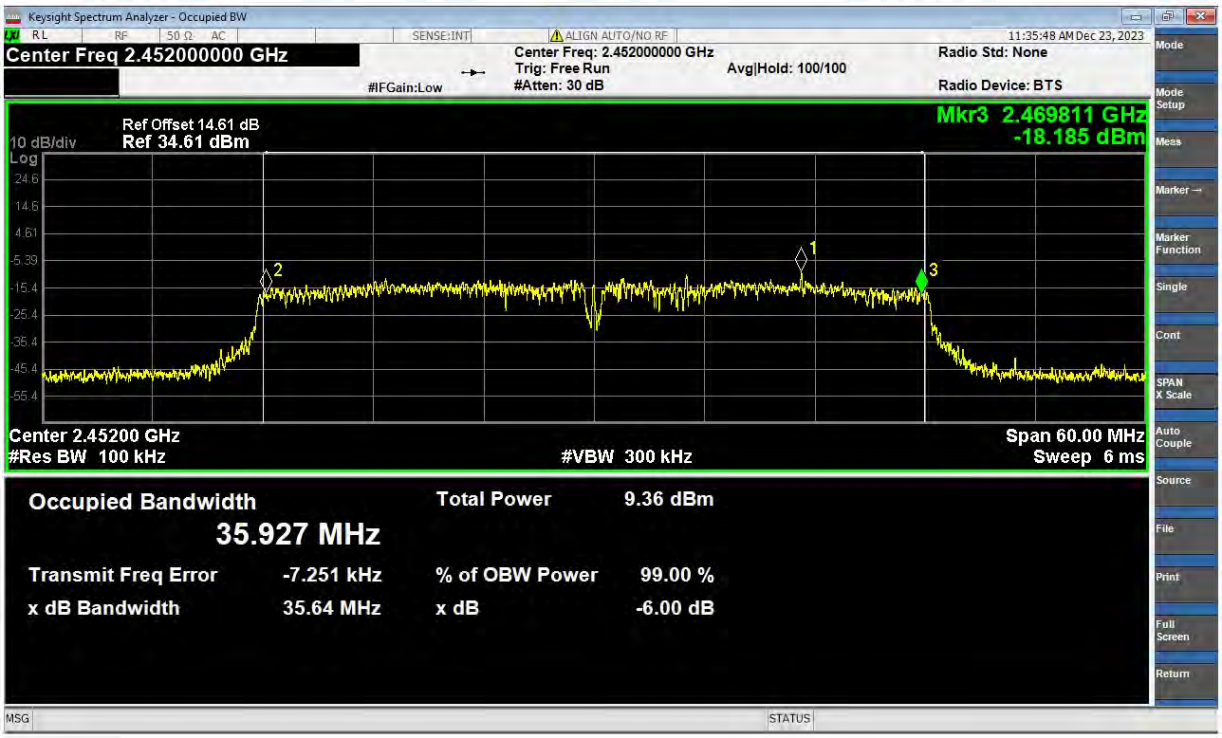

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	15.254
NVNT	b	2437	Ant1	15.312
NVNT	b	2462	Ant1	15.284
NVNT	g	2412	Ant1	17.032
NVNT	g	2437	Ant1	17.311
NVNT	g	2462	Ant1	17.299
NVNT	n(HT20)	2412	Ant1	18.094
NVNT	n(HT20)	2437	Ant1	18.153
NVNT	n(HT20)	2462	Ant1	17.987
NVNT	n(HT40)	2422	Ant1	35.907
NVNT	n(HT40)	2437	Ant1	36.008
NVNT	n(HT40)	2452	Ant1	35.918

Test Graphs
OBW NVNT b 2412MHz Ant1

OBW NVNT b 2437MHz Ant1

OBW NVNT b 2462MHz Ant1

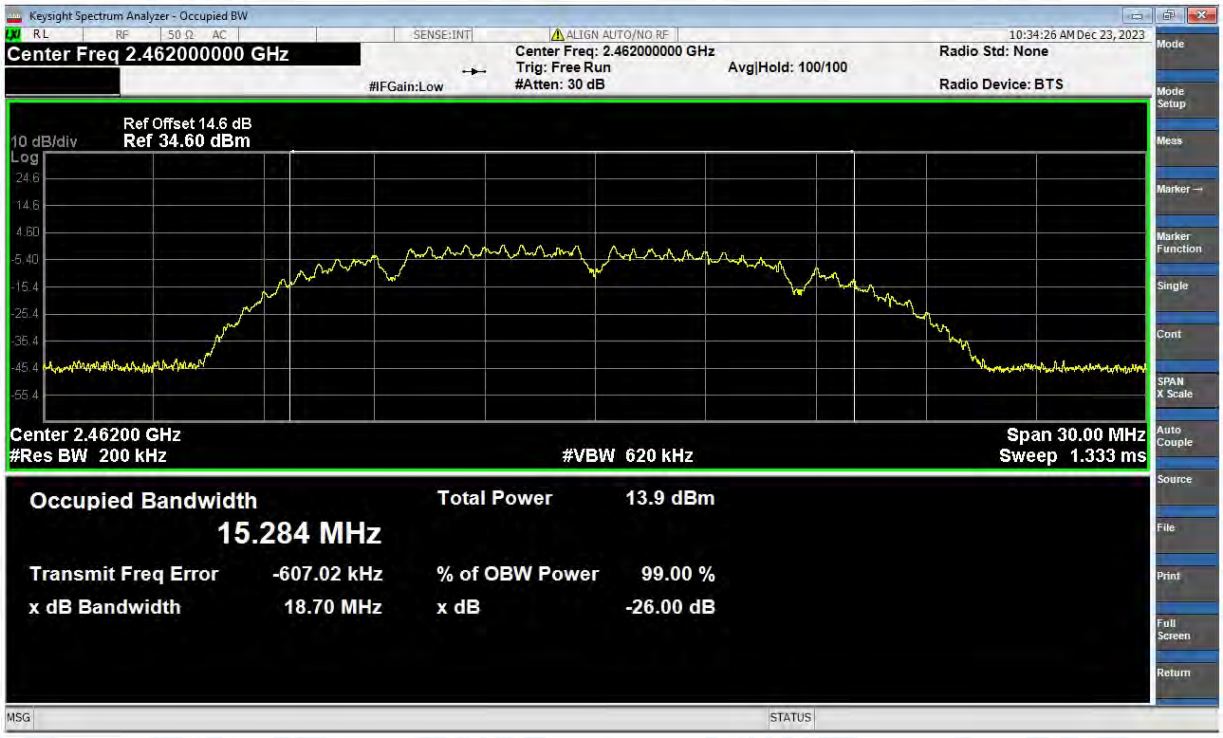

OBW NVNT g 2412MHz Ant1

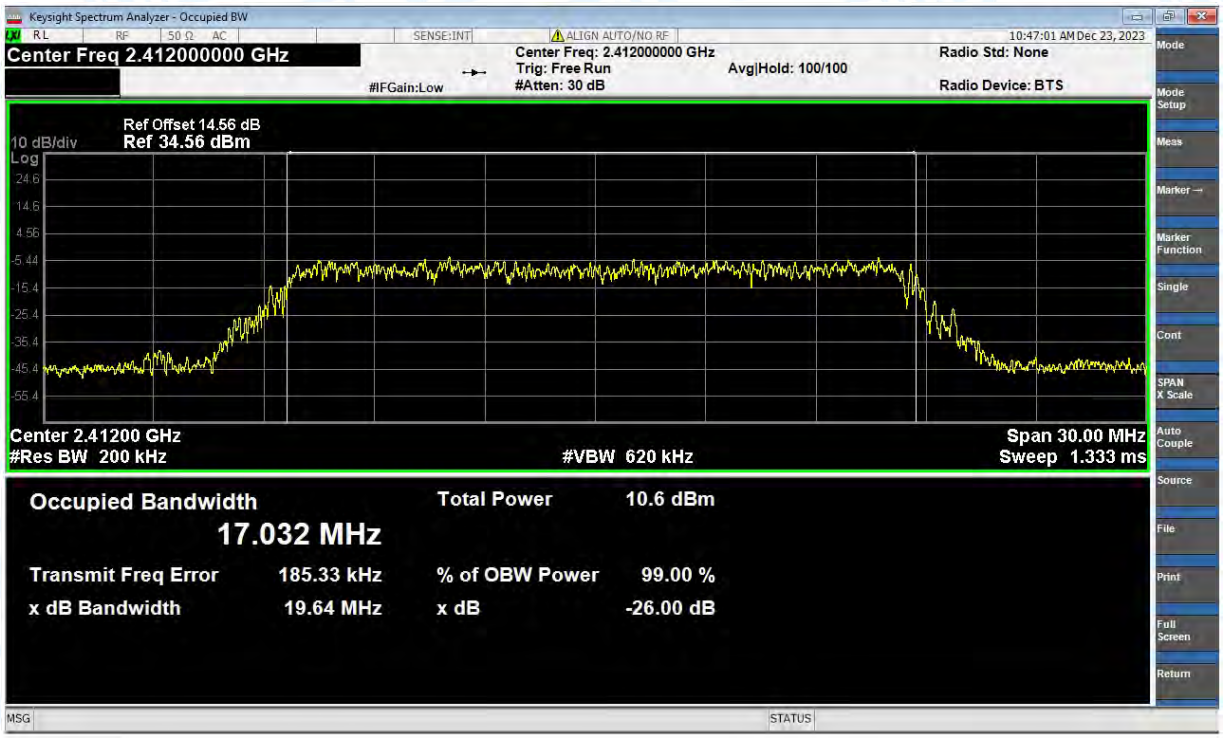

OBW NVNT g 2437MHz Ant1

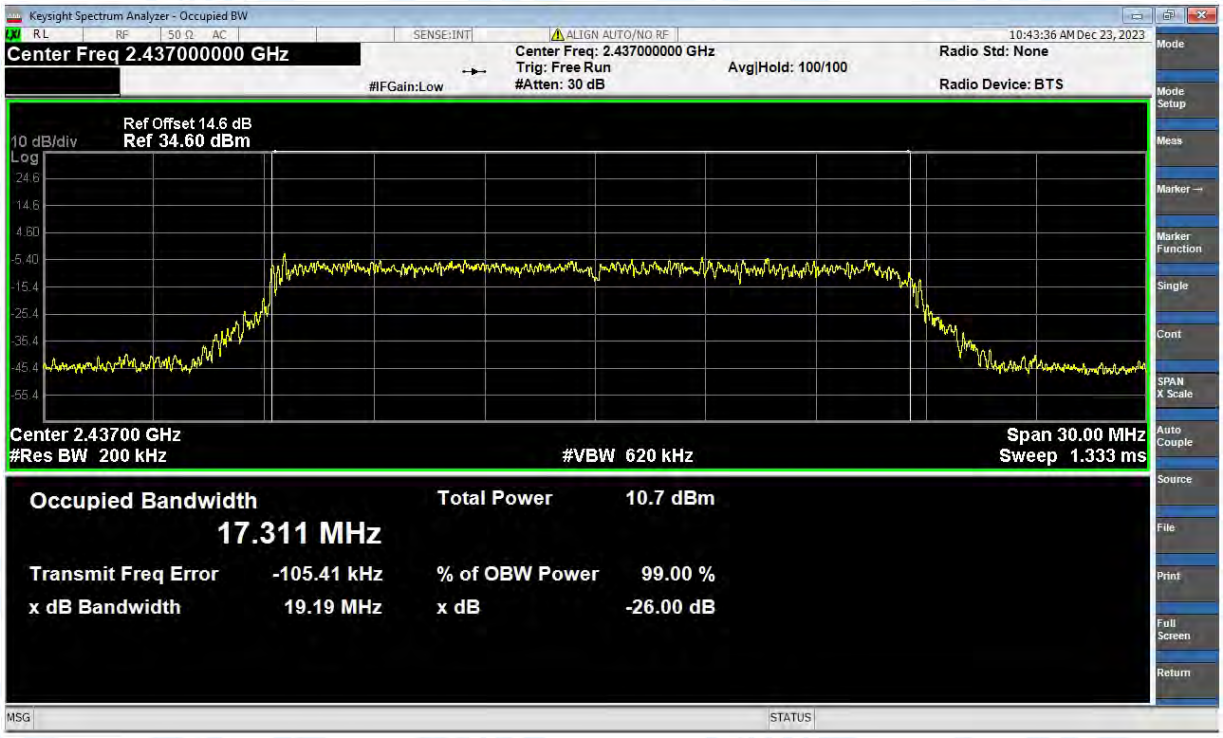

OBW NVNT g 2462MHz Ant1

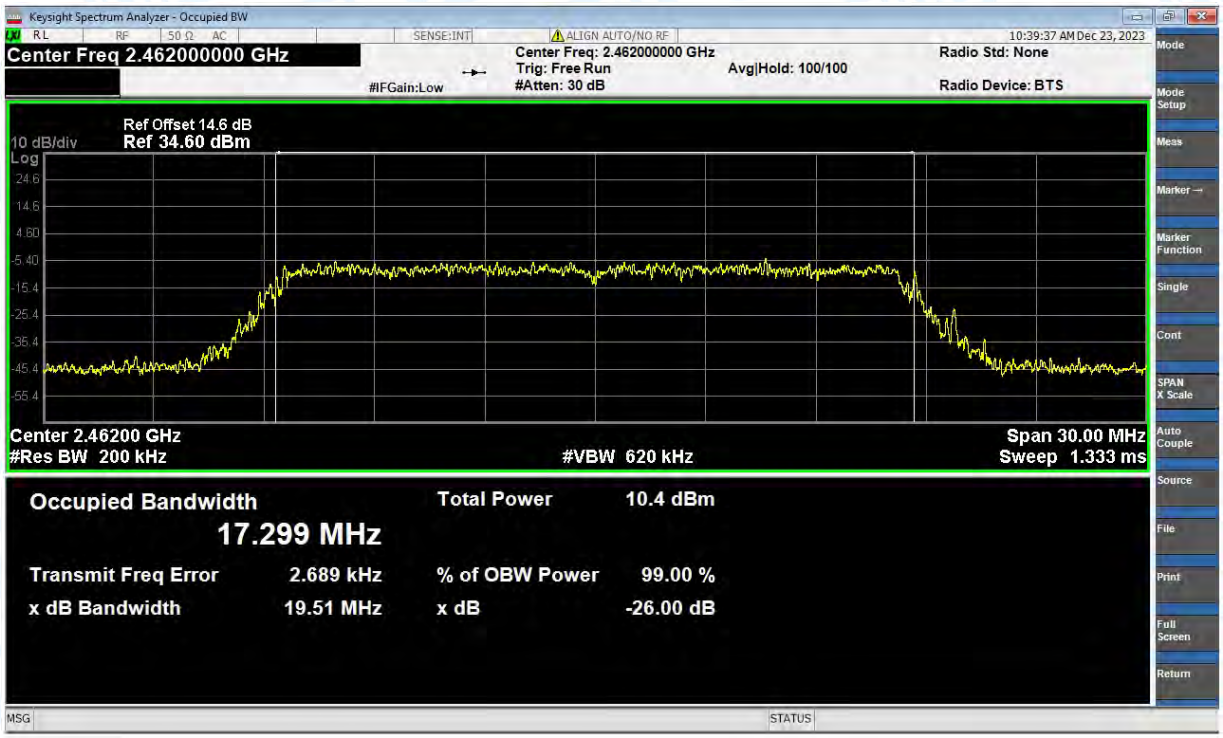

OBW NVNT n(HT20) 2412MHz Ant1

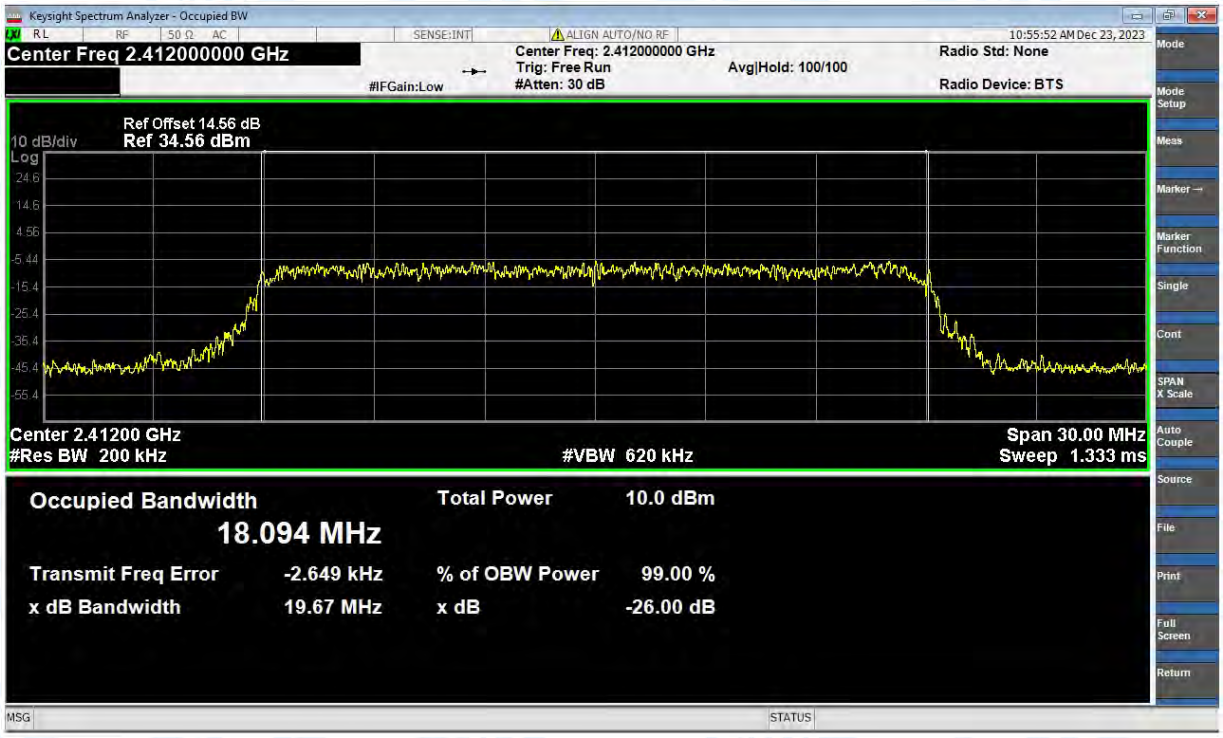

OBW NVNT n(HT20) 2437MHz Ant1

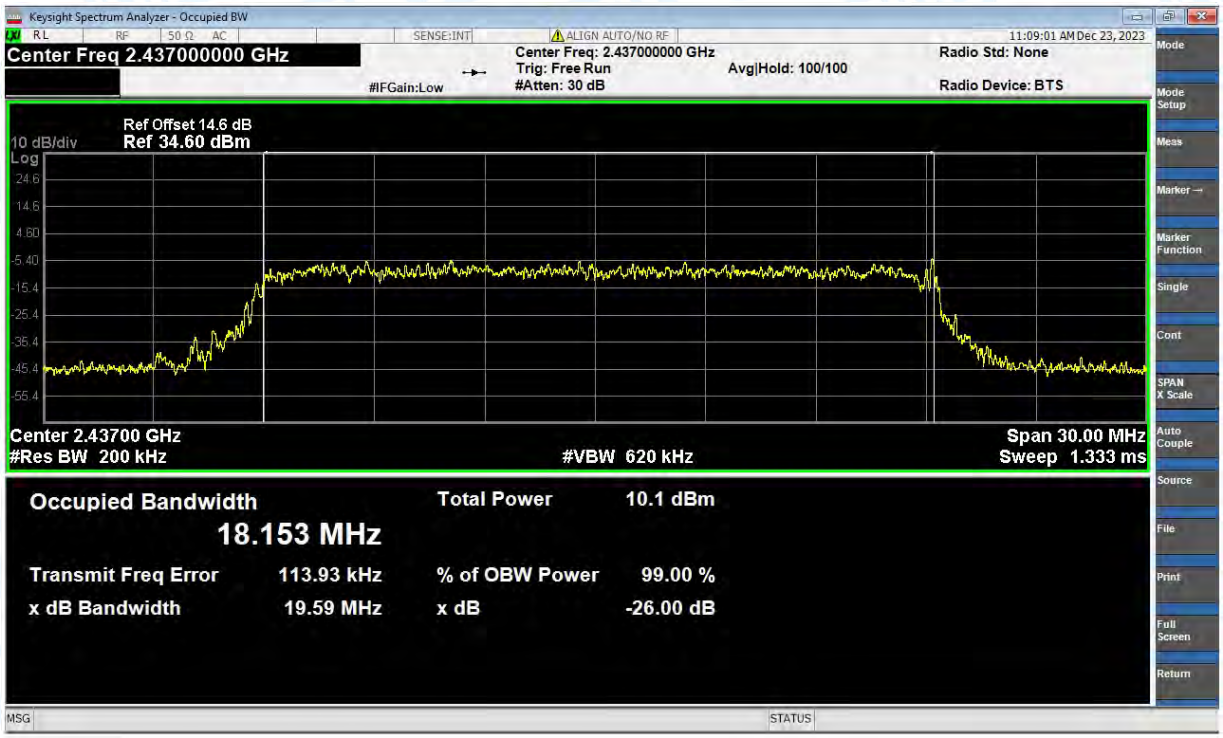

OBW NVNT n(HT20) 2462MHz Ant1

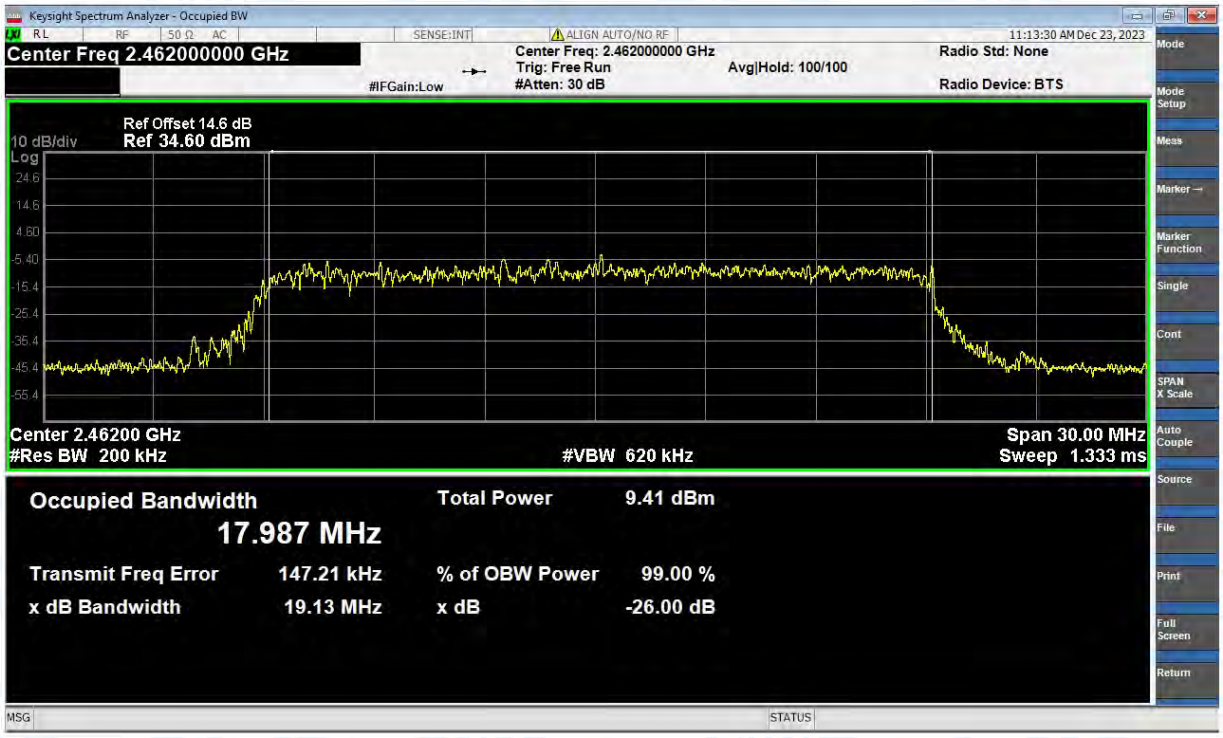

OBW NVNT n(HT40) 2422MHz Ant1

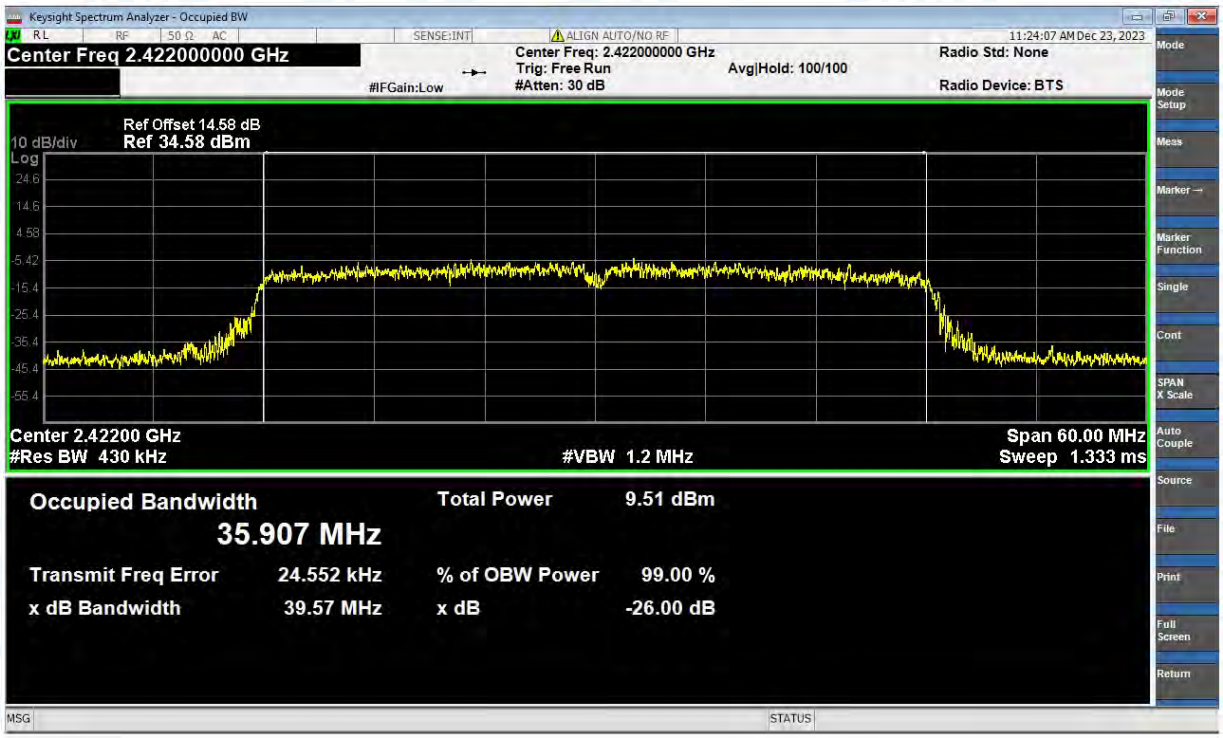

OBW NVNT n(HT40) 2437MHz Ant1

OBW NVNT n(HT40) 2452MHz Ant1

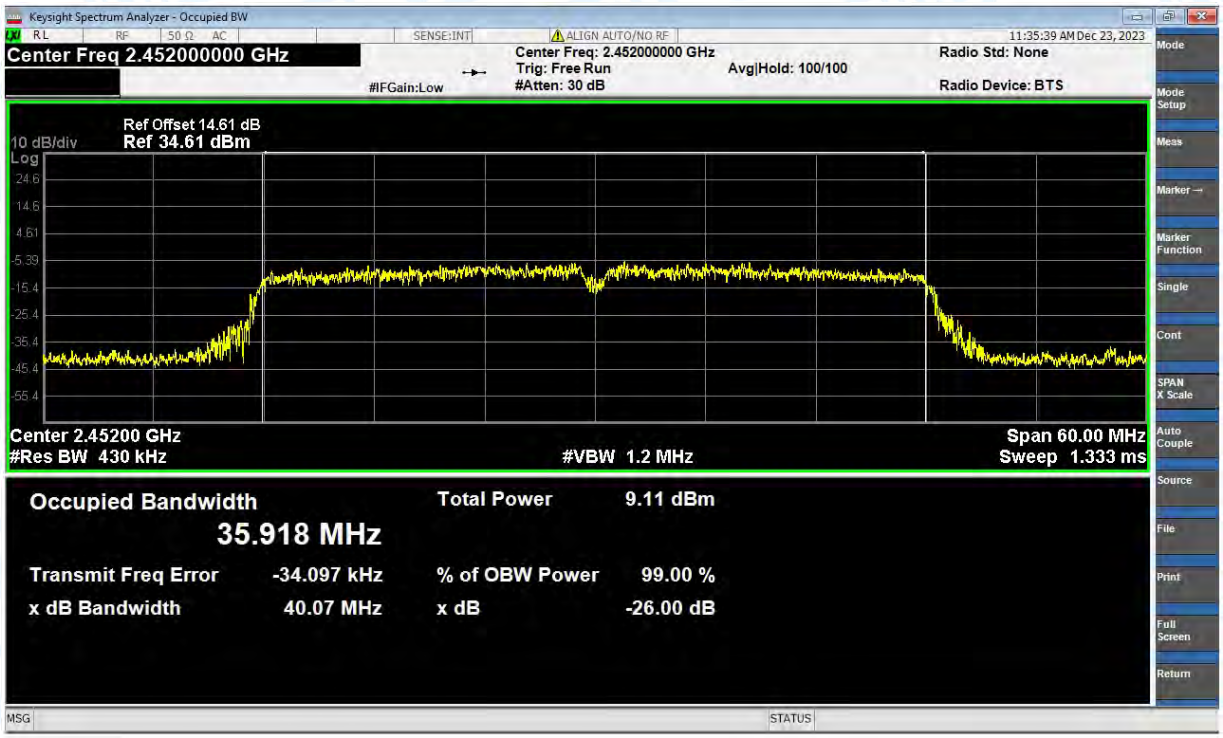

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-28.052	8	Pass
NVNT	b	2437	Ant1	-28.529	8	Pass
NVNT	b	2462	Ant1	-28.515	8	Pass
NVNT	g	2412	Ant1	-34.255	8	Pass
NVNT	g	2437	Ant1	-36.534	8	Pass
NVNT	g	2462	Ant1	-35.603	8	Pass
NVNT	n(HT20)	2412	Ant1	-36.665	8	Pass
NVNT	n(HT20)	2437	Ant1	-33.532	8	Pass
NVNT	n(HT20)	2462	Ant1	-31.911	8	Pass
NVNT	n(HT40)	2422	Ant1	-37.625	8	Pass
NVNT	n(HT40)	2437	Ant1	-39.713	8	Pass
NVNT	n(HT40)	2452	Ant1	-40.364	8	Pass
The Duty Cycle Factor is compensated in the graph.						

Test Graphs
PSD NVNT b 2412MHz Ant1

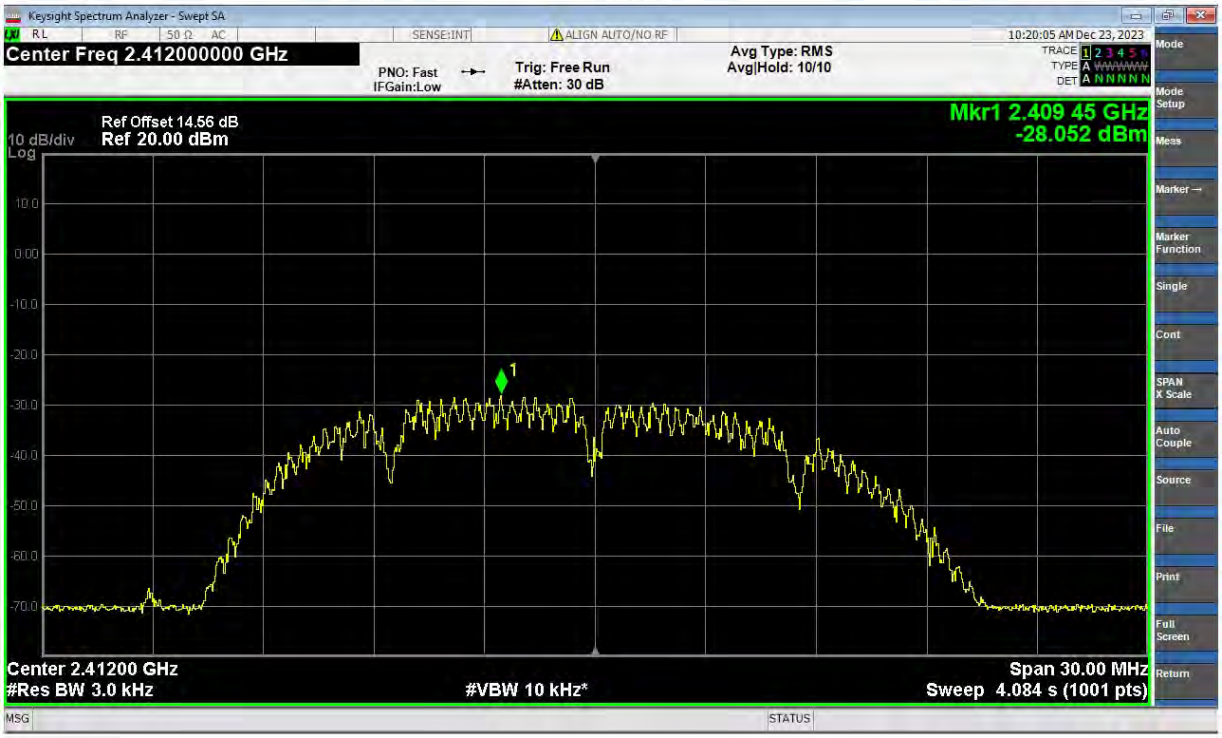

PSD NVNT b 2437MHz Ant1

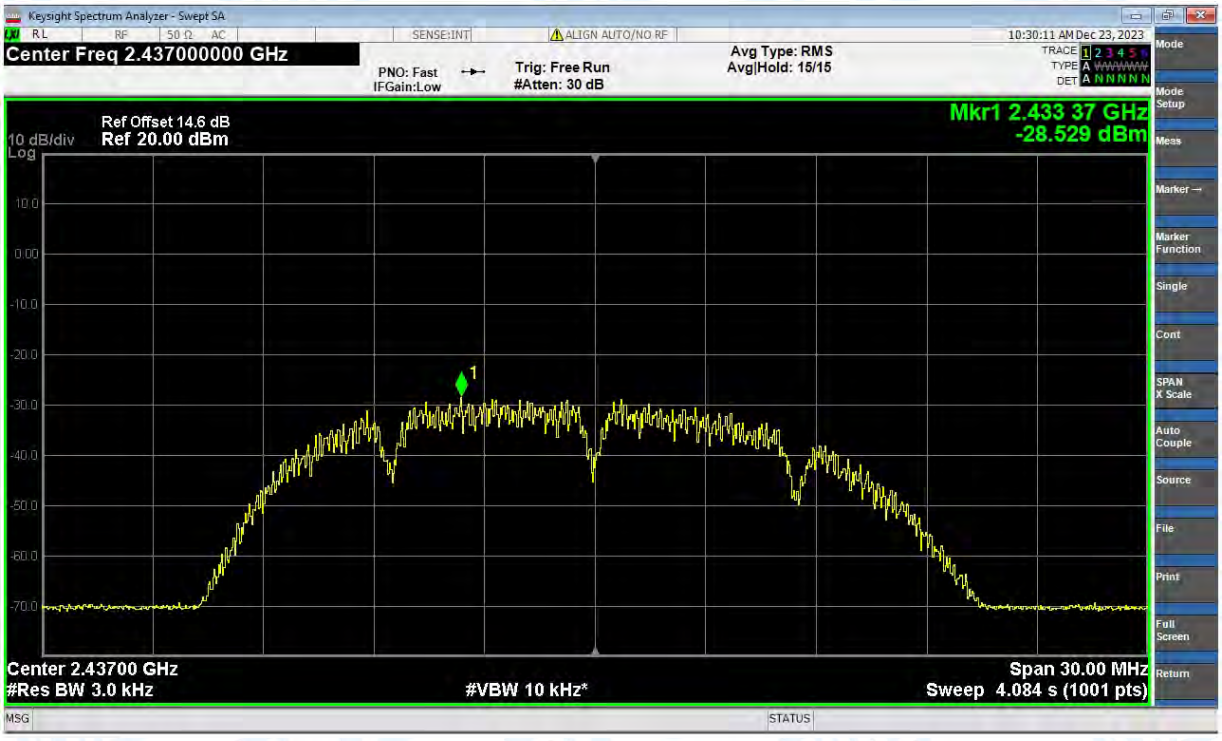

PSD NVNT b 2462MHz Ant1

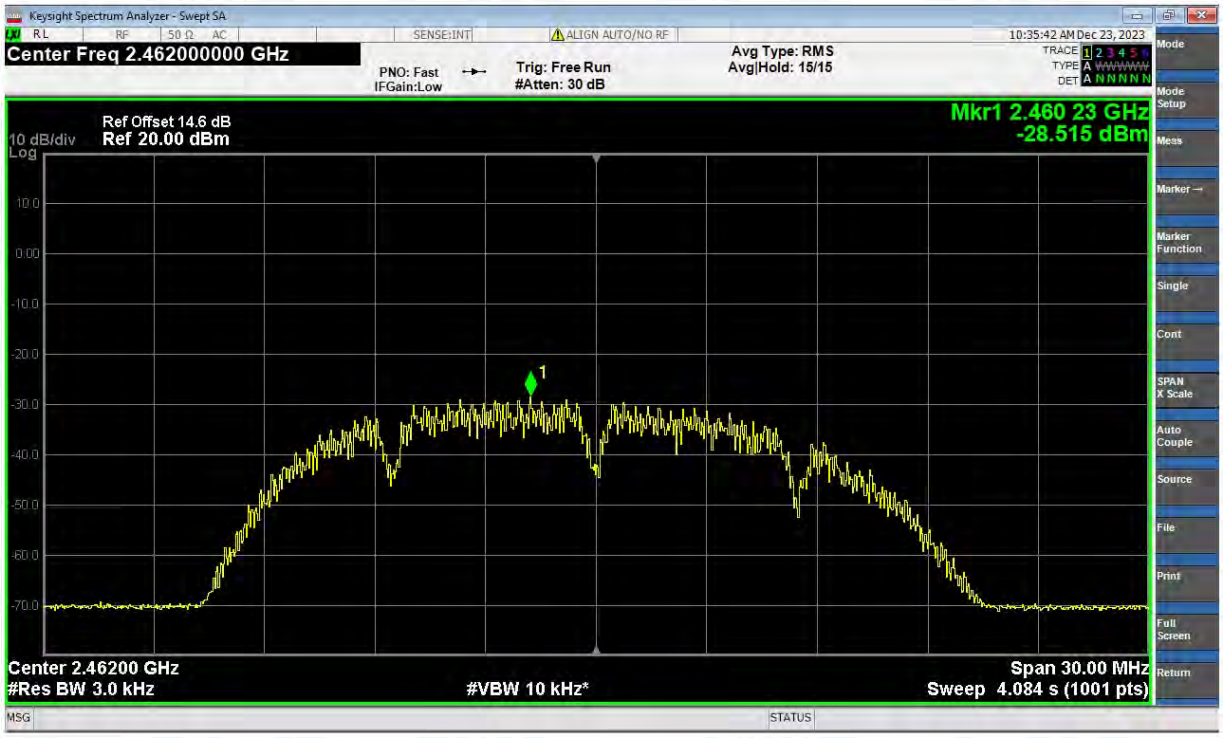

PSD NVNT g 2412MHz Ant1

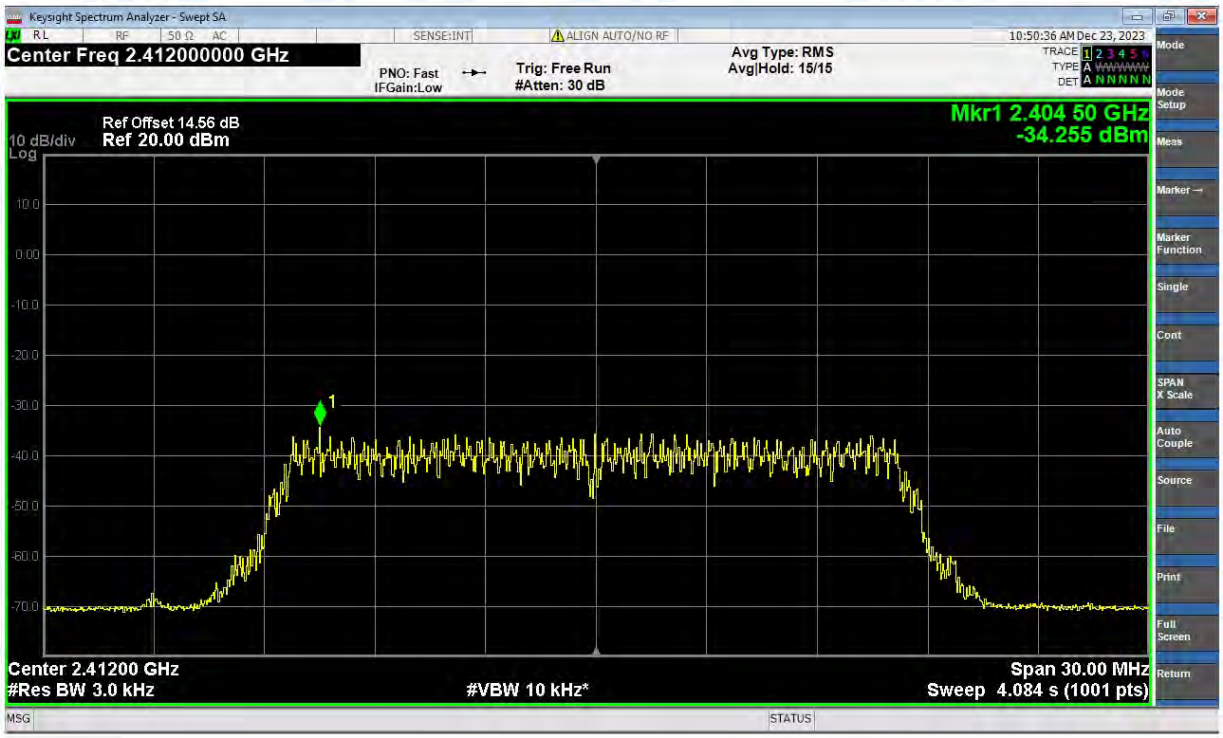

PSD NVNT g 2437MHz Ant1

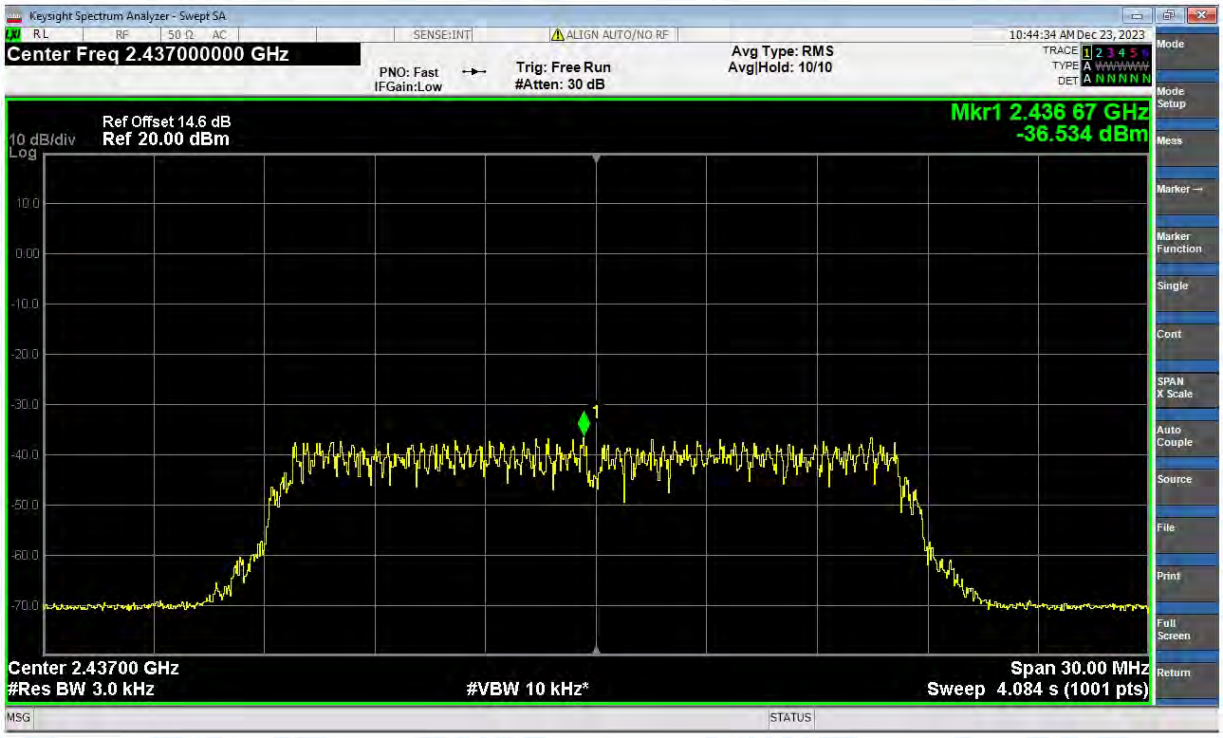

PSD NVNT g 2462MHz Ant1

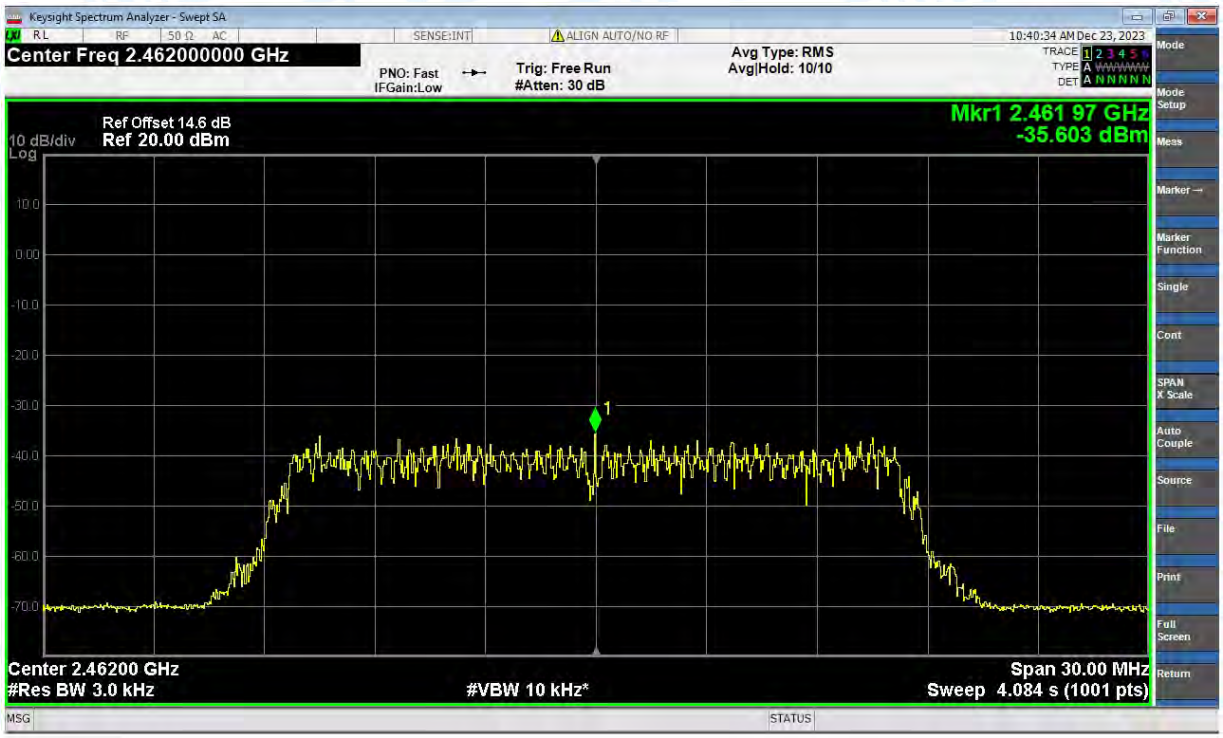

PSD NVNT n(HT20) 2412MHz Ant1

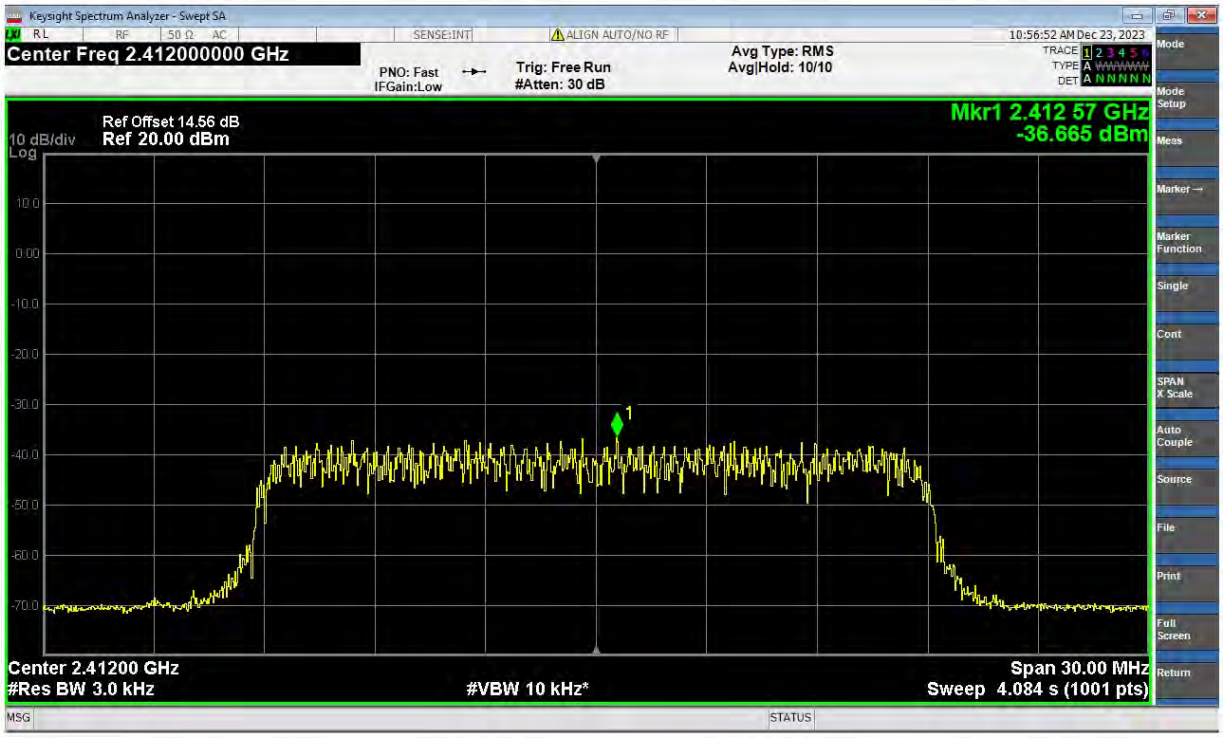

PSD NVNT n(HT20) 2437MHz Ant1

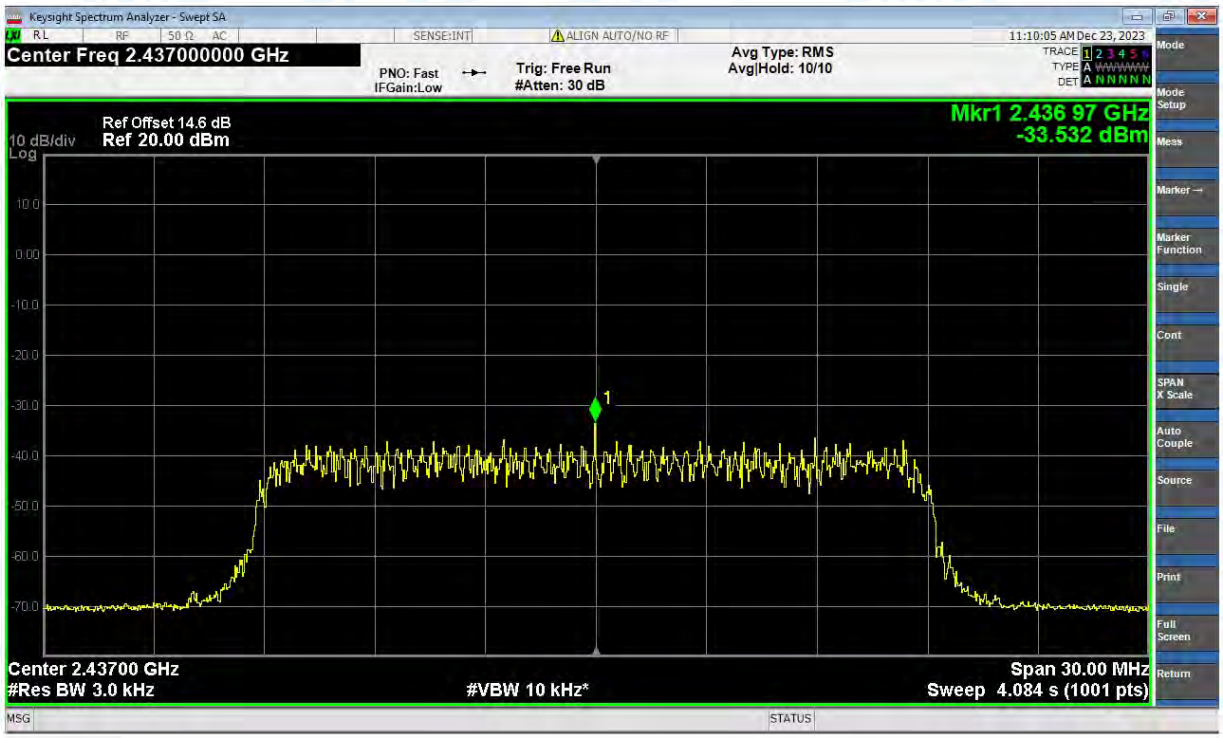

PSD NVNT n(HT20) 2462MHz Ant1

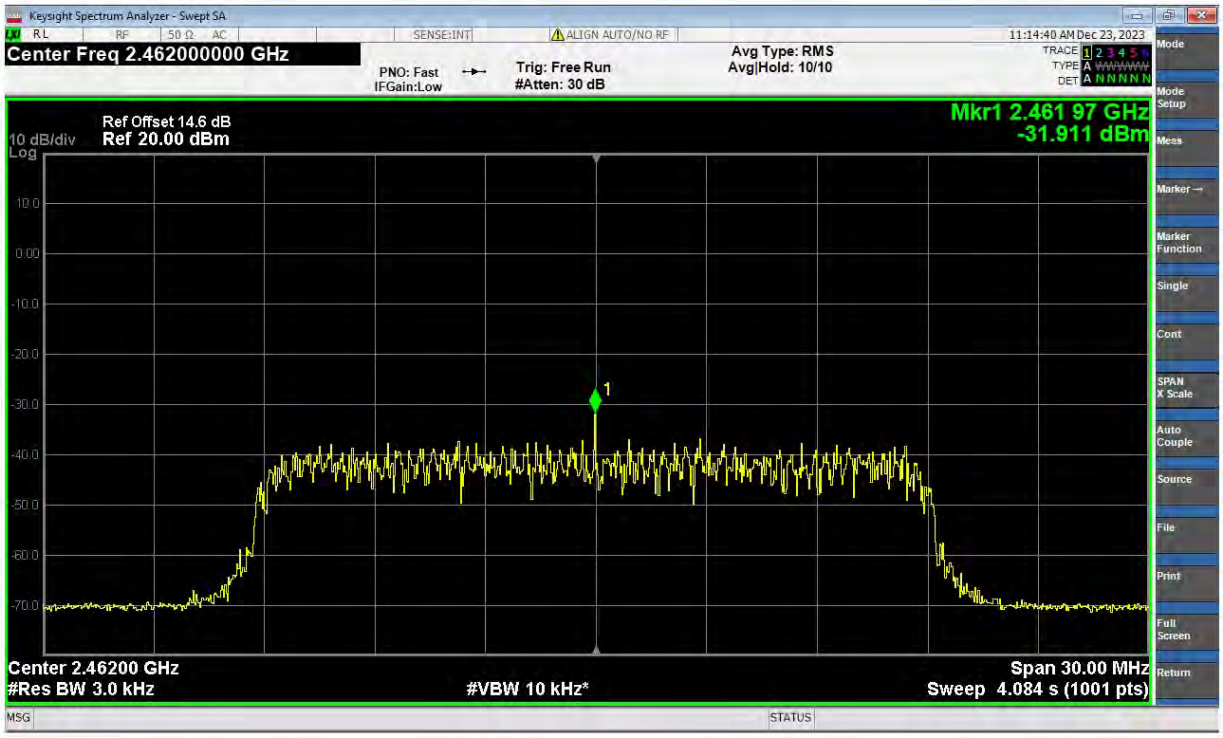

PSD NVNT n(HT40) 2422MHz Ant1

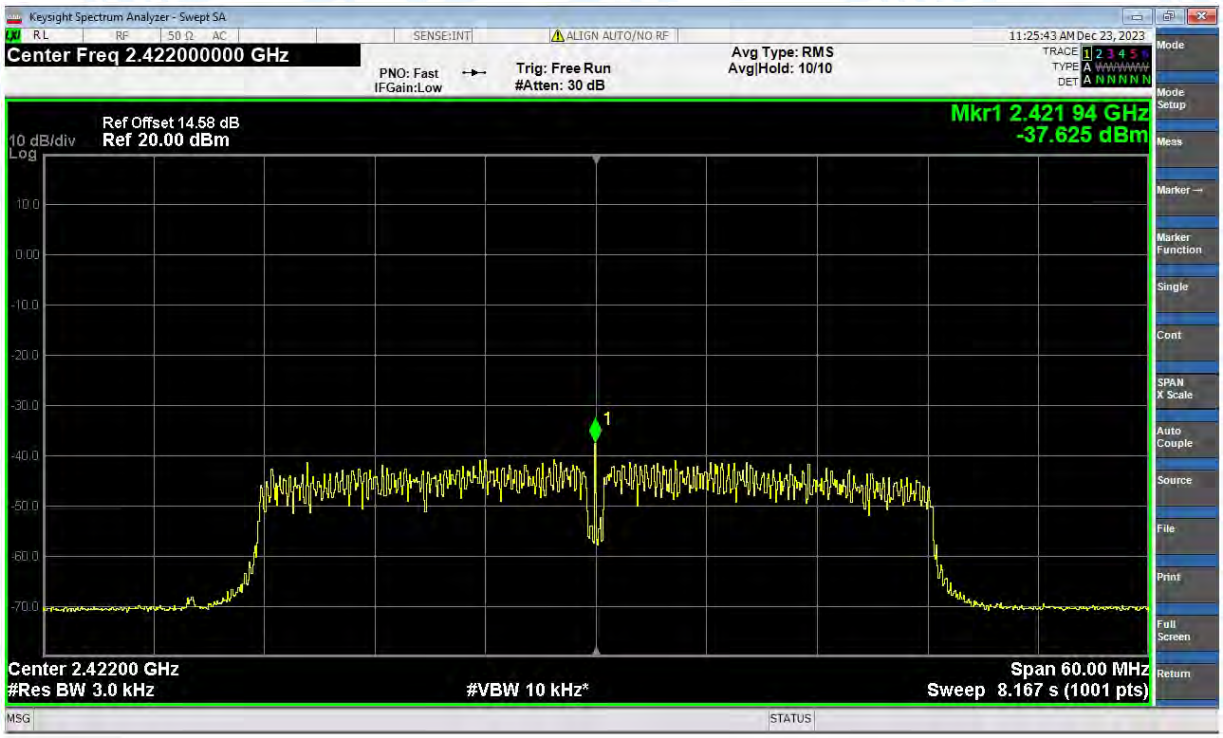

PSD NVNT n(HT40) 2437MHz Ant1

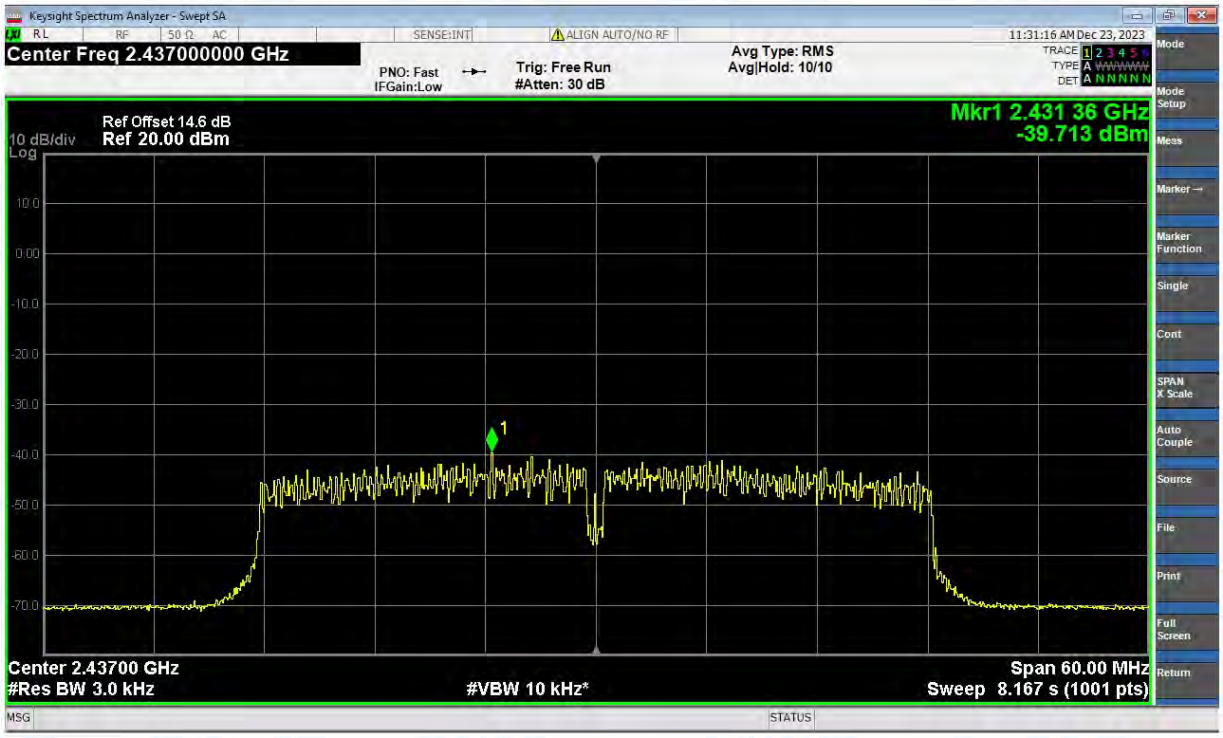

PSD NVNT n(HT40) 2452MHz Ant1

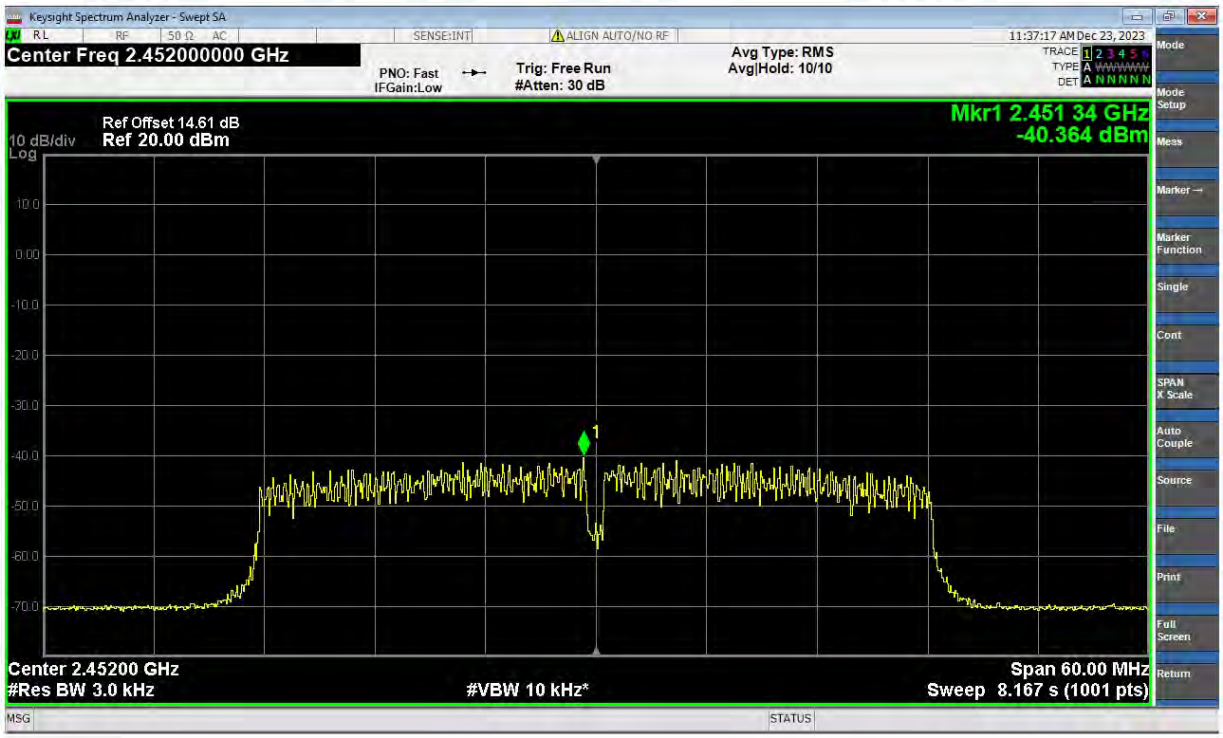

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-43.86	-30	Pass
NVNT	b	2462	Ant1	-42.96	-30	Pass
NVNT	g	2412	Ant1	-40.87	-30	Pass
NVNT	g	2462	Ant1	-38.81	-30	Pass
NVNT	n(HT20)	2412	Ant1	-36.05	-30	Pass
NVNT	n(HT20)	2462	Ant1	-40.06	-30	Pass
NVNT	n(HT40)	2422	Ant1	-35.81	-30	Pass
NVNT	n(HT40)	2452	Ant1	-34.75	-30	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref

Band Edge NVNT b 2412MHz Ant1 Emission

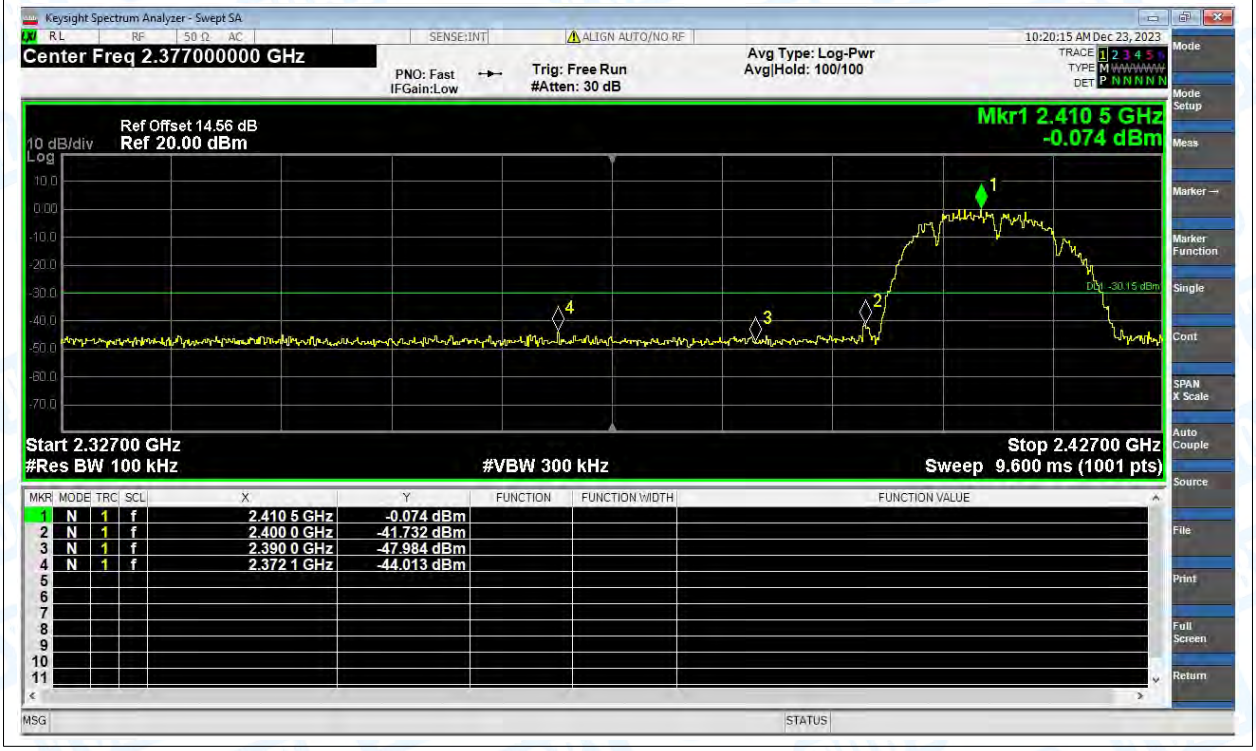

Band Edge NVNT b 2462MHz Ant1 Ref

Band Edge NVNT b 2462MHz Ant1 Emission

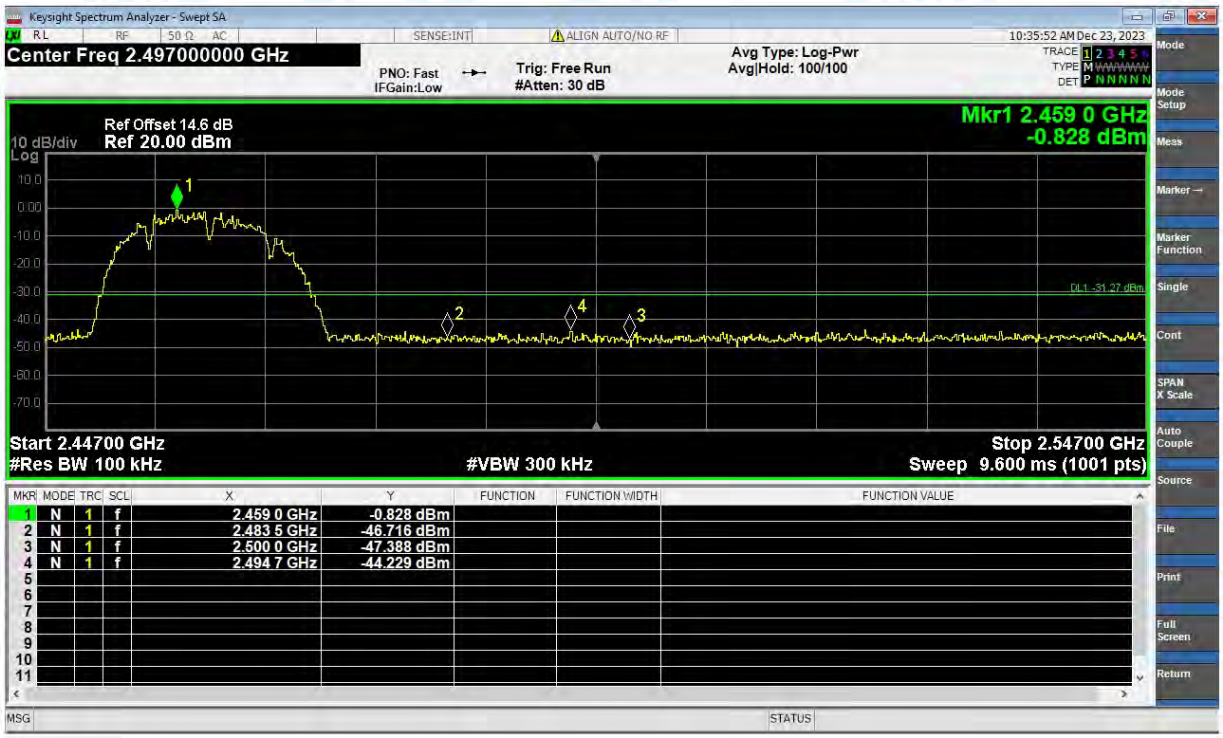

Band Edge NVNT g 2412MHz Ant1 Ref

Band Edge NVNT g 2412MHz Ant1 Emission

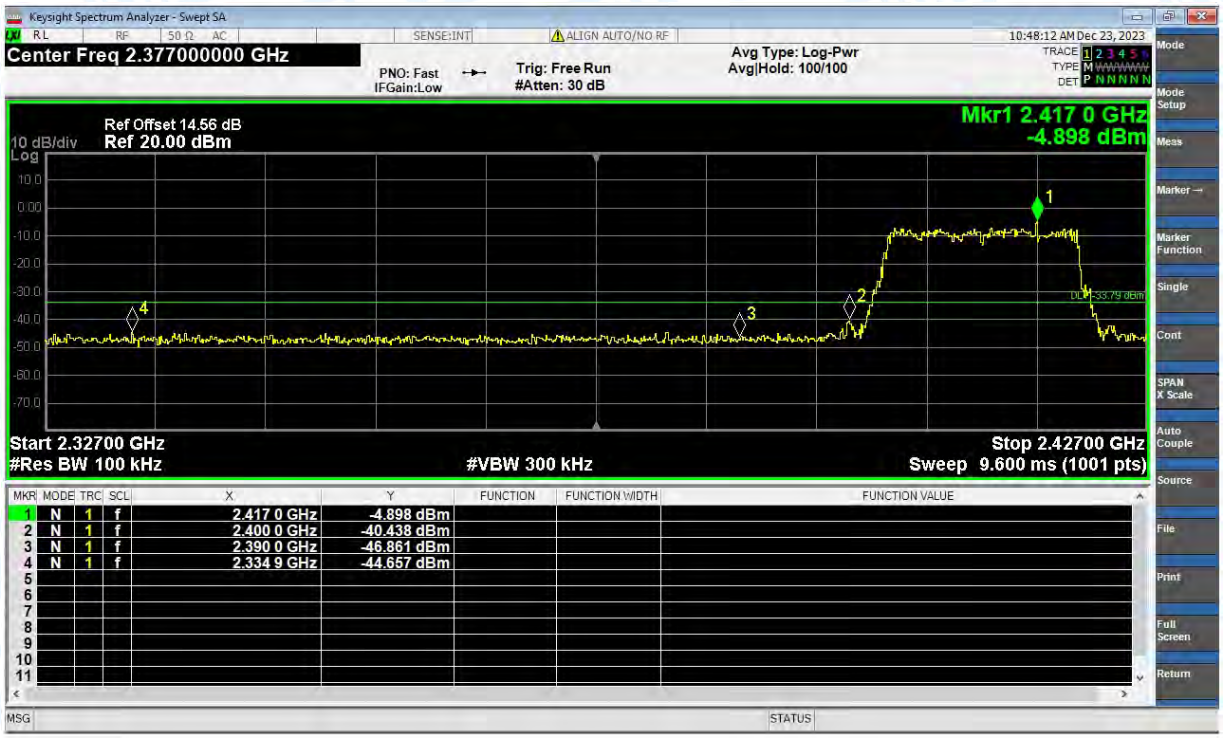

Band Edge NVNT g 2462MHz Ant1 Ref

Band Edge NVNT g 2462MHz Ant1 Emission