

FCC LTE REPORT

Class II Permissive Change

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

March 11, 2022

Location:

HCT CO., LTD.,

Address:

129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2203-FC019

FCC ID:

A3LSMA736B

APPLICANT:

SAMSUNG Electronics Co., Ltd.

Model(s): SM-A736B/DS
Additional Model(s): SM-A736B
EUT Type: Mobile phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §24, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M12G7D	QPSK	0.082	19.12
		1M12W7D	16QAM	0.071	18.51
		1M11W7D	64QAM	0.058	17.64
		1M12W7D	256QAM	0.026	14.14
LTE – Band2 (3)	1851.5 - 1908.5	2M76G7D	QPSK	0.089	19.49
		2M77W7D	16QAM	0.073	18.66
		2M77W7D	64QAM	0.062	17.92
		2M75W7D	256QAM	0.027	14.36
LTE – Band2 (5)	1852.5 - 1907.5	4M52G7D	QPSK	0.089	19.48
		4M52W7D	16QAM	0.075	18.76
		4M52W7D	64QAM	0.061	17.85
		4M52W7D	256QAM	0.030	14.74
LTE – Band2 (10)	1855.0 - 1905.0	9M02G7D	QPSK	0.086	19.36
		9M02W7D	16QAM	0.073	18.62
		9M04W7D	64QAM	0.059	17.68
		9M01W7D	256QAM	0.026	14.22
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.077	18.89
		13M4W7D	16QAM	0.066	18.20
		13M5W7D	64QAM	0.060	17.80
		13M5W7D	256QAM	0.023	13.64
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.079	18.96
		18M0W7D	16QAM	0.066	18.20
		18M0W7D	64QAM	0.061	17.84
		17M9W7D	256QAM	0.026	14.19

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2203-FC019

REVIEWED BY



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2203-FC019	March 11, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.9 WORST CASE(RADIATED TEST)	16
3.10 WORST CASE(CONDUCTED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	23
8.2 RADIATED SPURIOUS EMISSIONS	26
8.3 PEAK-TO-AVERAGE RATIO.....	27
8.4 OCCUPIED BANDWIDTH	28
8.5 CONDUCTED SPURIOUS EMISSIONS	29
8.6 BAND EDGE	30
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	31
9. TEST PLOTS.....	49
10. APPENDIX A_ TEST SETUP PHOTO	170

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA736B
Application Type:	Class II Permissive Change
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§24, §2
EUT Type:	Mobile phone
Model(s):	SM-A736B/DS
Additional Model(s):	SM-A736B
Tx Frequency:	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
Date(s) of Tests:	March 07, 2022 ~ March 11, 2022
Serial number:	Radiated: R3CRB0BP4PA Conducted: 5a1ad468cf347ece

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

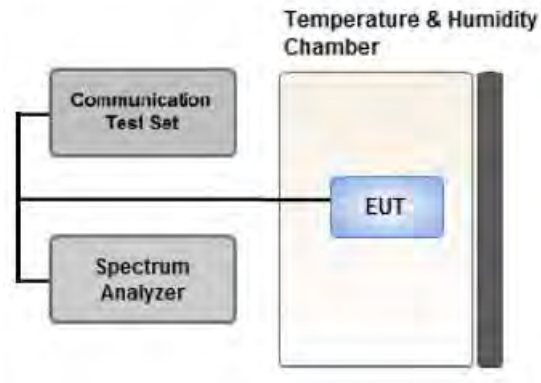

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

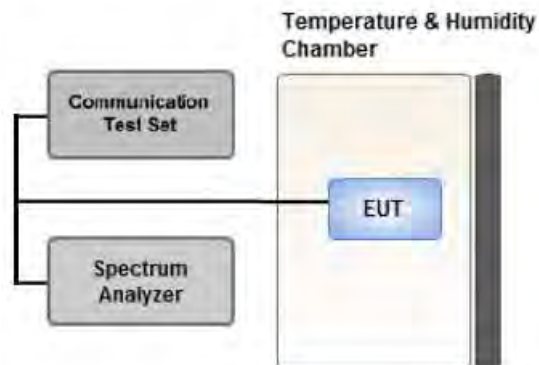

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

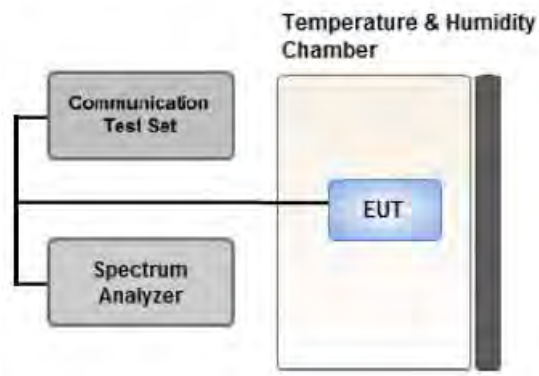

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.7 BAND EDGE

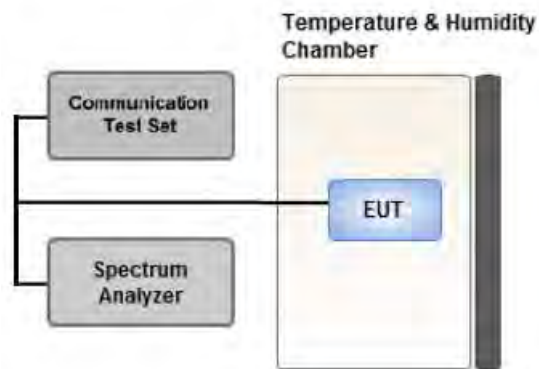

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

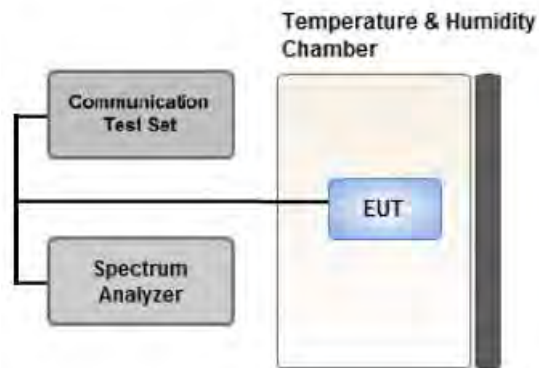

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location. There has no significant emission raised.
- WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- The test results below are reported for Sub2 Antenna.
- SM-A736B/DS & additional models were tested and the worst case results are reported.
(Worst case : SM-A736B/DS)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

3.10 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
			Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

- All modes of operation were investigated and the worst case configuration results are reported.

- The test results below are reported for Sub2 Antenna.

- SM-A736B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-A736B/DS)

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	05/30/2022	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	05/30/2022	Biennial
Horn Antenna(1~18GHz)	BBHA 9120D	Schwarzbeck	02289	05/08/2022	Biennial
Horn Antenna(1~18GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	05/04/2022	Biennial
Horn Antenna(15~40GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15~40GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Loop Antenna(9kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	05/18/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/22/2023	Biennial
High Pass Filter	WHKX10-900-1000-15000-40SS	Wainwright Instruments	15	06/15/2022	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	145	06/15/2022	Annual
High Pass Filter	WHNX6-4740-6000-26500-40CC	Wainwright Instruments	11	06/15/2022	Annual
LOW NOISE AMP (100 MHz ~ 18GHz)	CBLU1183540B-01	CERNEX	26822	06/15/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	09/15/2022	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Signal Analyzer(10Hz~26.5GHz)	N9020A	Agilent	MY51110063	04/22/2022	Annual
ATTENUATOR(20dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10Hz~40GHz)	FSV40	REOHDE & SCHWARZ	101436	02/25/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287700	05/25/2022	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/26/2022	Annual
SIGNAL GENERATOR (100kHz~40GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5Hz~40.0GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/27/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d)	$< 13 \text{ dB}$	PASS
Frequency stability / variation of ambient temperature	§24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§24.232(c)	$< 2 \text{ Watts max. EIRP}$	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1850.7	LTE B2/ 1.4 MHz	QPSK	-22.55	11.17	10.10	2.15	V	< 2.00	0.082	19.12
		16-QAM	-23.16	10.56	10.10	2.15	V		0.071	18.51
		64-QAM	-24.03	9.69	10.10	2.15	V		0.058	17.64
		256-QAM	-27.53	6.19	10.10	2.15	V		0.026	14.14
1880.0		QPSK	-22.69	10.50	9.98	2.25	V		0.067	18.23
		16-QAM	-23.41	9.78	9.98	2.25	V		0.056	17.51
		64-QAM	-23.85	9.34	9.98	2.25	V		0.051	17.07
		256-QAM	-27.74	5.45	9.98	2.25	V		0.021	13.18
1909.3		QPSK	-23.64	10.15	9.88	2.17	V		0.061	17.86
		16-QAM	-24.23	9.56	9.88	2.17	V		0.053	17.27
		64-QAM	-24.68	9.11	9.88	2.17	V		0.048	16.82
		256-QAM	-28.28	5.51	9.88	2.17	V		0.021	13.22

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1851.5	LTE B2/ 3 MHz	QPSK	-22.18	11.54	10.10	2.15	V	< 2.00	0.089	19.49
		16-QAM	-23.01	10.71	10.10	2.15	V		0.073	18.66
		64-QAM	-24.08	9.64	10.10	2.15	V		0.057	17.59
		256-QAM	-27.66	6.06	10.10	2.15	V		0.025	14.01
1880.0		QPSK	-21.73	11.46	9.98	2.25	V		0.083	19.19
		16-QAM	-22.43	10.76	9.98	2.25	V		0.071	18.49
		64-QAM	-23.00	10.19	9.98	2.25	V		0.062	17.92
		256-QAM	-26.56	6.63	9.98	2.25	V		0.027	14.36
1908.5		QPSK	-23.27	10.52	9.88	2.17	V		0.067	18.23
		16-QAM	-23.87	9.92	9.88	2.17	V		0.058	17.63
		64-QAM	-24.26	9.53	9.88	2.17	V		0.053	17.24
		256-QAM	-27.99	5.80	9.88	2.17	V		0.022	13.51

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-22.19	11.53	10.10	2.15	V	< 2.00	0.089	19.48
		16-QAM	-22.91	10.81	10.10	2.15	V		0.075	18.76
		64-QAM	-23.82	9.90	10.10	2.15	V		0.061	17.85
		256-QAM	-26.93	6.79	10.10	2.15	V		0.030	14.74
1880.0		QPSK	-21.85	11.34	9.98	2.25	V		0.081	19.07
		16-QAM	-22.57	10.62	9.98	2.25	V		0.068	18.35
		64-QAM	-23.08	10.11	9.98	2.25	V		0.061	17.84
		256-QAM	-26.82	6.37	9.98	2.25	V		0.026	14.10
1907.5		QPSK	-23.33	10.46	9.88	2.17	V		0.066	18.17
		16-QAM	-24.13	9.66	9.88	2.17	V		0.055	17.37
		64-QAM	-24.70	9.09	9.88	2.17	V		0.048	16.80
		256-QAM	-28.58	5.21	9.88	2.17	V		0.020	12.92

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-21.96	11.45	10.08	2.17	V	< 2.00	0.086	19.36
		16-QAM	-22.70	10.71	10.08	2.17	V		0.073	18.62
		64-QAM	-23.77	9.64	10.08	2.17	V		0.057	17.55
		256-QAM	-27.10	6.31	10.08	2.17	V		0.026	14.22
1880.0		QPSK	-21.97	11.22	9.98	2.25	V		0.079	18.95
		16-QAM	-22.69	10.50	9.98	2.25	V		0.067	18.23
		64-QAM	-23.24	9.95	9.98	2.25	V		0.059	17.68
		256-QAM	-27.22	5.97	9.98	2.25	V		0.023	13.70
1905.0		QPSK	-23.21	10.51	9.89	2.19	V		0.066	18.21
		16-QAM	-23.95	9.77	9.89	2.19	V		0.056	17.47
		64-QAM	-25.10	8.62	9.89	2.19	V		0.043	16.32
		256-QAM	-27.81	5.91	9.89	2.19	V		0.023	13.61

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1857.5	LTE B2/ 15 MHz	QPSK	-22.53	10.72	10.06	2.17	V	< 2.00	0.073	18.61
		16-QAM	-23.29	9.96	10.06	2.17	V		0.061	17.85
		64-QAM	-23.77	9.48	10.06	2.17	V		0.055	17.37
		256-QAM	-27.75	5.50	10.06	2.17	V		0.022	13.39
1880.0		QPSK	-22.03	11.16	9.98	2.25	V		0.077	18.89
		16-QAM	-22.72	10.47	9.98	2.25	V		0.066	18.20
		64-QAM	-23.12	10.07	9.98	2.25	V		0.060	17.80
		256-QAM	-27.28	5.91	9.98	2.25	V		0.023	13.64
1902.5		QPSK	-23.15	10.49	9.90	2.20	V		0.066	18.19
		16-QAM	-23.84	9.80	9.90	2.20	V		0.056	17.50
		64-QAM	-24.54	9.10	9.90	2.20	V		0.048	16.80
		256-QAM	-28.05	5.59	9.90	2.20	V		0.021	13.29

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1860.0	LTE B2/ 20 MHz	QPSK	-22.42	10.67	10.06	2.19	V	< 2.00	0.072	18.54
		16-QAM	-23.15	9.94	10.06	2.19	V		0.060	17.81
		64-QAM	-23.63	9.46	10.06	2.19	V		0.054	17.33
		256-QAM	-27.39	5.70	10.06	2.19	V		0.023	13.57
1880.0		QPSK	-21.96	11.23	9.98	2.25	V		0.079	18.96
		16-QAM	-22.72	10.47	9.98	2.25	V		0.066	18.20
		64-QAM	-23.08	10.11	9.98	2.25	V		0.061	17.84
		256-QAM	-26.73	6.46	9.98	2.25	V		0.026	14.19
1900.0		QPSK	-22.79	10.85	9.90	2.20	V		0.072	18.55
		16-QAM	-23.52	10.12	9.90	2.20	V		0.061	17.82
		64-QAM	-23.99	9.65	9.90	2.20	V		0.054	17.35
		256-QAM	-27.85	5.79	9.90	2.20	V		0.022	13.49

8.2 RADIATED SPURIOUS EMISSIONS

- OPERATING FREQUENCY: 1907.5 MHz
 □ MEASURED OUTPUT POWER: 19.49 dBm = 0.089 W
 □ MODE: LTE B2
 □ MODULATION SIGNAL: 3 MHz QPSK
 □ DISTANCE: 3 meters
 □ LIMIT: $43 + 10 \log_{10}(W) =$ 32.49 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18615 (1851.5)	3 703.00	-53.17	11.70	-54.32	3.12	V	-45.74	65.22
	5 554.50	-53.36	12.09	-48.28	3.86	H	-40.04	59.53
	7 406.00	-57.26	11.22	-42.09	4.43	H	-35.30	54.79
	9 257.50	-53.60	11.24	-38.87	5.03	H	-32.66	52.14
18900 (1880.0)	3 760.00	-53.81	11.64	-54.04	3.16	V	-45.56	65.05
	5 640.00	-50.73	12.00	-44.55	3.93	V	-36.48	55.97
	7 520.00	-57.26	11.54	-42.81	4.51	H	-35.78	55.26
	9 400.00	-54.06	11.20	-39.27	5.18	H	-33.25	52.74
19185 (1908.5)	3 817.00	-56.53	11.32	-56.20	3.17	H	-48.05	67.54
	5 725.50	-51.46	11.75	-45.71	3.91	H	-37.87	57.36
	7 634.00	-58.30	11.60	-44.24	4.55	H	-37.19	56.68
	9 542.50	-57.69	11.28	-41.80	5.14	H	-35.66	55.15

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	4.57
			16-QAM	6	0	5.31
			64-QAM	6	0	5.92
			256-QAM	6	0	5.97
	3 MHz		QPSK	15	0	4.61
			16-QAM	15	0	5.26
			64-QAM	15	0	5.91
			256-QAM	15	0	5.91
	5 MHz		QPSK	25	0	4.68
			16-QAM	25	0	5.47
			64-QAM	25	0	6.14
			256-QAM	25	0	6.17
	10 MHz		QPSK	50	0	4.77
			16-QAM	50	0	5.53
			64-QAM	50	0	6.23
			256-QAM	50	0	6.23
	15 MHz		QPSK	75	0	4.79
			16-QAM	75	0	5.55
			64-QAM	75	0	6.29
			256-QAM	75	0	6.28
	20 MHz		QPSK	100	0	4.82
			16-QAM	100	0	5.60
			64-QAM	100	0	6.28
			256-QAM	100	0	6.28

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 110 ~ 133.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.1169
			16-QAM	6	0	1.1150
			64-QAM	6	0	1.1082
			256-QAM	6	0	1.1181
	3 MHz		QPSK	15	0	2.7604
			16-QAM	15	0	2.7678
			64-QAM	15	0	2.7665
			256-QAM	15	0	2.7529
	5 MHz		QPSK	25	0	4.5195
			16-QAM	25	0	4.5196
			64-QAM	25	0	4.5212
			256-QAM	25	0	4.5145
	10 MHz		QPSK	50	0	9.0192
			16-QAM	50	0	9.0231
			64-QAM	50	0	9.0383
			256-QAM	50	0	9.0090
	15 MHz		QPSK	75	0	13.501
			16-QAM	75	0	13.440
			64-QAM	75	0	13.465
			256-QAM	75	0	13.523
	20 MHz		QPSK	100	0	17.947
			16-QAM	100	0	17.990
			64-QAM	100	0	17.979
			256-QAM	100	0	17.938

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 86 ~ 109.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7010	29.076	-61.565	-32.489	-13.00
		1880.0	3.7598	29.076	-56.474	-27.398	
		1909.3	3.8201	29.076	-54.043	-24.967	
	3	1851.5	3.7010	29.076	-61.677	-32.601	
		1880.0	3.7583	29.076	-56.686	-27.610	
		1908.5	3.8201	29.076	-56.443	-27.367	
	5	1852.5	3.7015	29.076	-62.472	-33.396	
		1880.0	3.7563	29.076	-56.202	-27.126	
		1907.5	3.8201	29.076	-55.406	-26.330	
	10	1855.0	3.7020	29.076	-62.336	-33.260	
		1880.0	3.7518	29.076	-58.093	-29.017	
		1905.0	3.8196	29.076	-54.441	-25.365	
	15	1857.5	3.7024	29.076	-64.302	-35.226	
		1880.0	3.7473	29.076	-57.395	-28.319	
		1902.5	3.8191	29.076	-54.457	-25.381	
	20	1860.0	3.7029	29.076	-63.230	-34.154	
		1880.0	3.7428	29.076	-57.805	-28.729	
		1900.0	3.8186	29.076	-53.171	-24.095	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 134 ~ 169.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	26.370
1 – 5	29.076
5 – 10	29.691
10 – 15	30.216
15 – 20	30.589
Above 20(26.5)	31.231


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 50 ~ 85.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE B2
 OPERATING FREQUENCY: 1850,700,000 Hz
 CHANNEL: 18607 (1.4 MHz)
 REFERENCE VOLTAGE: 3.860 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1850 700 011	0.0	0.000 000	0.000
100 %		-30	1850 700 013	2.0	0.000 000	0.001
100 %		-20	1850 700 016	5.1	0.000 000	0.003
100 %		-10	1850 700 021	9.8	0.000 001	0.005
100 %		0	1850 700 009	-2.0	0.000 000	-0.001
100 %		+10	1850 700 020	8.8	0.000 000	0.005
100 %		+30	1850 700 018	7.3	0.000 000	0.004
100 %		+40	1850 700 014	3.4	0.000 000	0.002
100 %		+50	1850 700 012	0.6	0.000 000	0.000
Batt. Endpoint	3.550	+20	1850 700 014	3.1	0.000 000	0.002

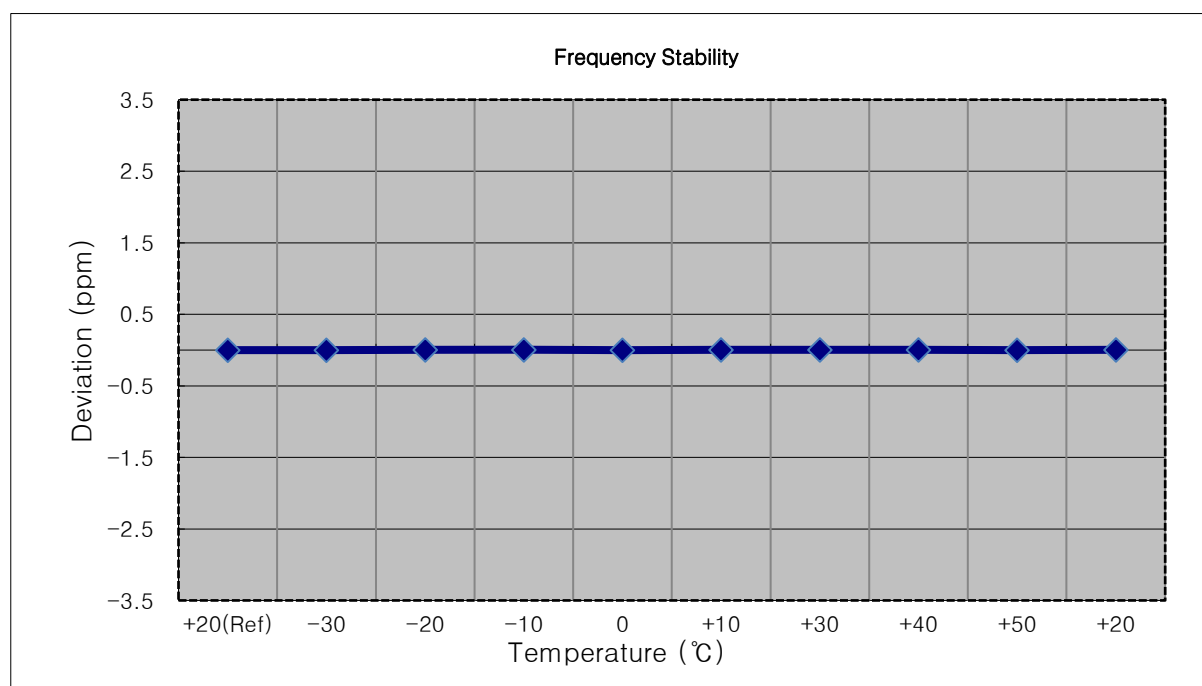


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1851 500 008	0.0	0.000 000	0.000
100 %		-30	1851 500 021	13.6	0.000 001	0.007
100 %		-20	1851 500 020	12.5	0.000 001	0.007
100 %		-10	1851 500 018	10.4	0.000 001	0.006
100 %		0	1851 500 022	14.6	0.000 001	0.008
100 %		+10	1851 500 022	14.9	0.000 001	0.008
100 %		+30	1851 500 010	2.6	0.000 000	0.001
100 %		+40	1851 500 011	3.1	0.000 000	0.002
100 %		+50	1851 500 009	1.2	0.000 000	0.001
Batt. Endpoint	3.550	+20	1851 500 016	8.4	0.000 000	0.005

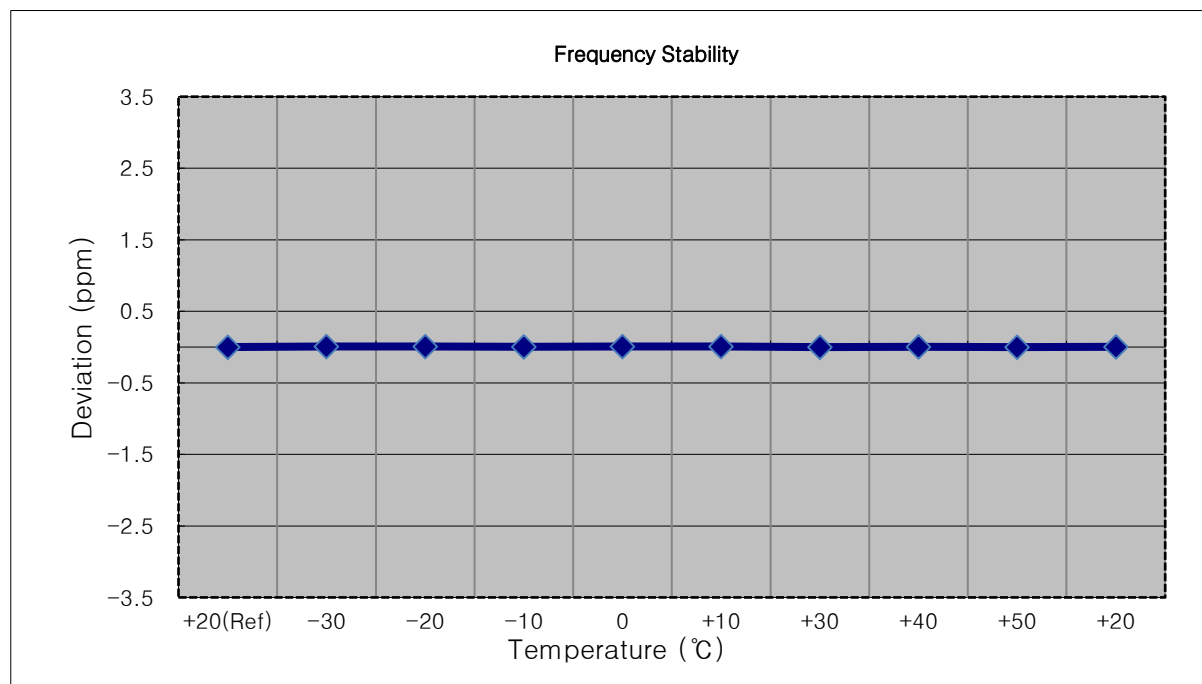


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1852 500 003	0.0	0.000 000	0.000
100 %		-30	1852 500 001	-1.9	0.000 000	-0.001
100 %		-20	1852 500 008	4.9	0.000 000	0.003
100 %		-10	1852 500 005	2.2	0.000 000	0.001
100 %		0	1852 500 018	14.7	0.000 001	0.008
100 %		+10	1852 500 017	14.6	0.000 001	0.008
100 %		+30	1852 500 001	-1.4	0.000 000	-0.001
100 %		+40	1852 500 004	1.0	0.000 000	0.001
100 %		+50	1852 500 006	2.9	0.000 000	0.002
Batt. Endpoint	3.550	+20	1852 500 009	5.9	0.000 000	0.003

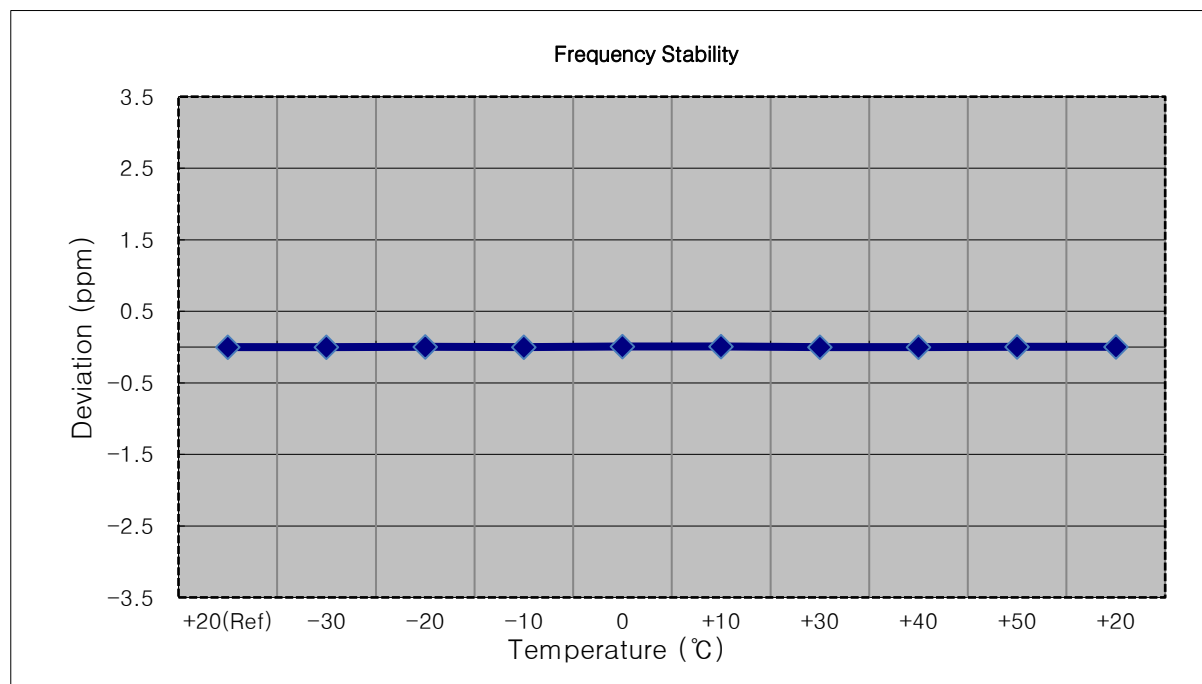


- ☐ MODE: LTE B2
☐ OPERATING FREQUENCY: 1855,000,000 Hz
☐ CHANNEL: 18650 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1855 000 006	0.0	0.000 000	0.000
100 %		-30	1855 000 017	11.0	0.000 001	0.006
100 %		-20	1855 000 014	7.7	0.000 000	0.004
100 %		-10	1855 000 007	0.9	0.000 000	0.000
100 %		0	1855 000 015	8.4	0.000 000	0.005
100 %		+10	1855 000 013	7.2	0.000 000	0.004
100 %		+30	1855 000 020	13.9	0.000 001	0.007
100 %		+40	1855 000 021	14.7	0.000 001	0.008
100 %		+50	1855 000 013	6.7	0.000 000	0.004
Batt. Endpoint	3.550	+20	1855 000 005	-1.4	0.000 000	-0.001

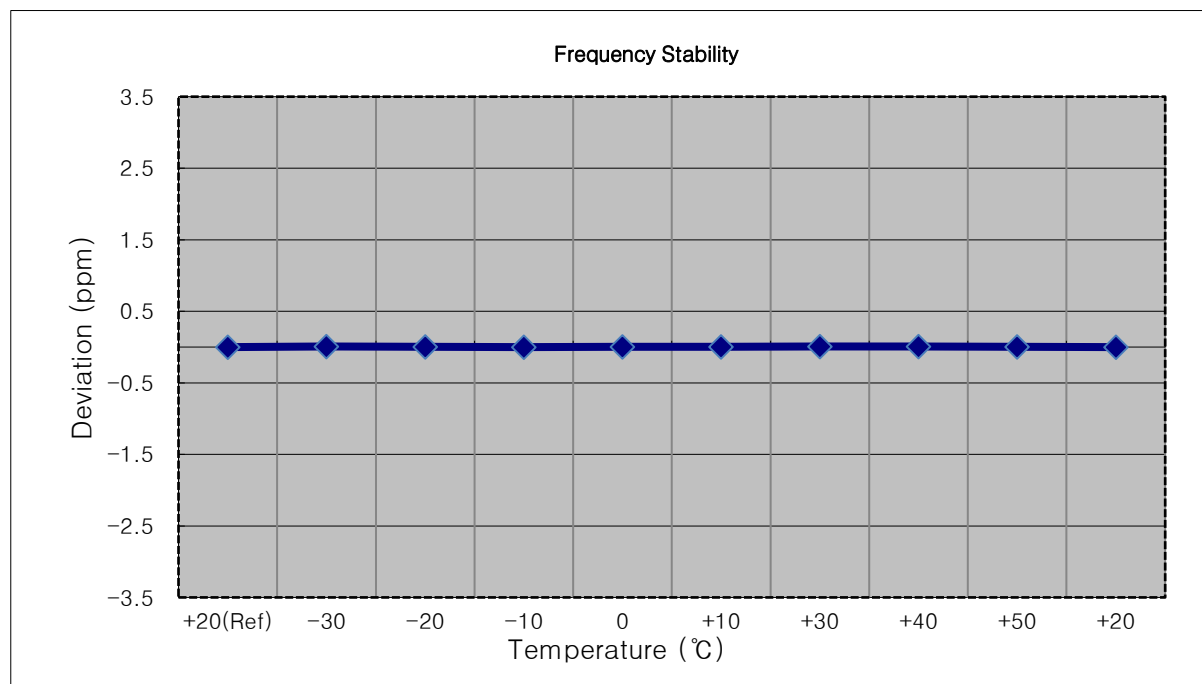


☐ MODE: LTE B2
☐ OPERATING FREQUENCY: 1857,500,000 Hz
☐ CHANNEL: 18675 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1857 500 009	0.0	0.000 000	0.000
100 %		-30	1857 500 021	11.8	0.000 001	0.006
100 %		-20	1857 500 016	6.6	0.000 000	0.004
100 %		-10	1857 500 017	7.8	0.000 000	0.004
100 %		0	1857 500 017	8.0	0.000 000	0.004
100 %		+10	1857 500 025	15.7	0.000 001	0.008
100 %		+30	1857 500 021	11.7	0.000 001	0.006
100 %		+40	1857 500 009	0.0	0.000 000	0.000
100 %		+50	1857 500 012	2.7	0.000 000	0.001
Batt. Endpoint	3.550	+20	1857 500 009	-0.6	0.000 000	0.000

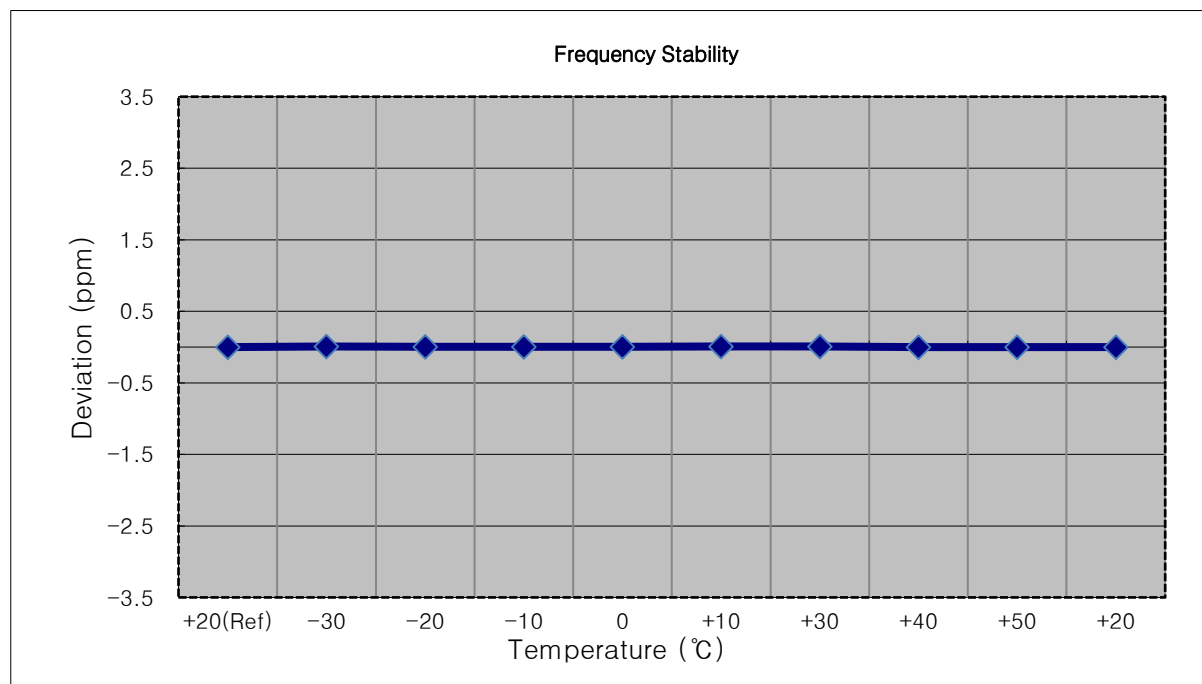


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1860 000 014	0.0	0.000 000	0.000
100 %		-30	1860 000 014	-0.5	0.000 000	0.000
100 %		-20	1860 000 019	5.3	0.000 000	0.003
100 %		-10	1860 000 024	10.2	0.000 001	0.005
100 %		0	1860 000 012	-1.8	0.000 000	-0.001
100 %		+10	1860 000 022	7.7	0.000 000	0.004
100 %		+30	1860 000 023	9.5	0.000 001	0.005
100 %		+40	1860 000 017	2.7	0.000 000	0.001
100 %		+50	1860 000 016	2.4	0.000 000	0.001
Batt. Endpoint	3.550	+20	1860 000 026	12.2	0.000 001	0.007

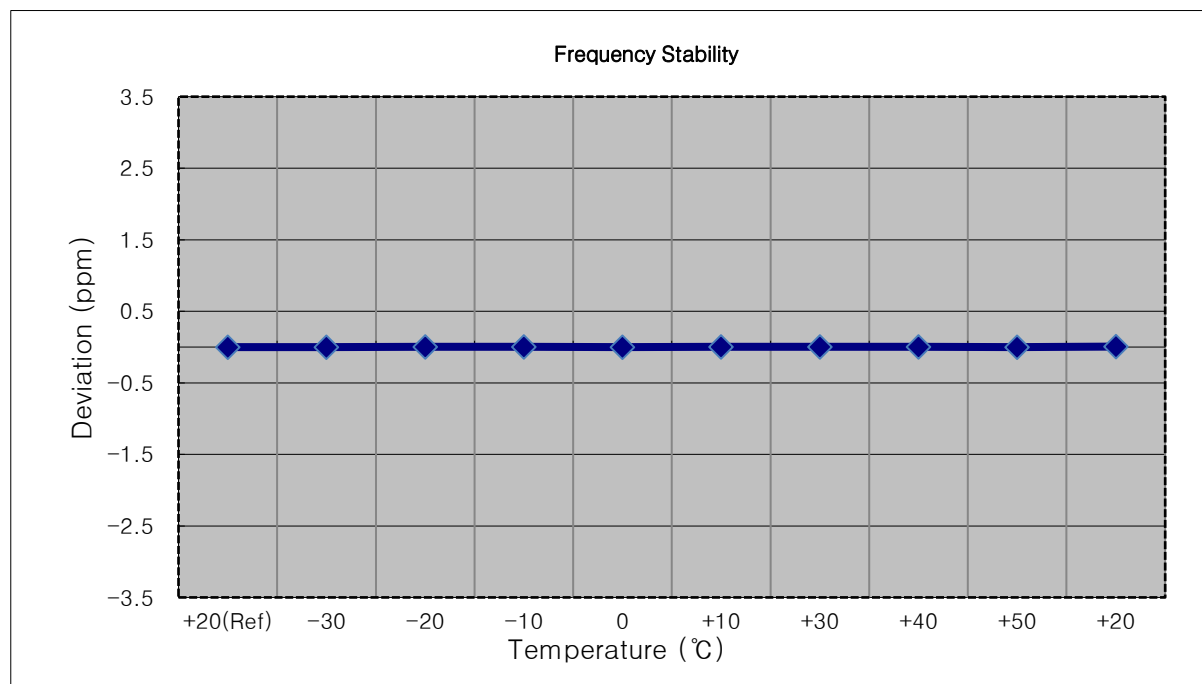


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 008	0.0	0.000 000	0.000
100 %		-30	1880 000 012	4.4	0.000 000	0.002
100 %		-20	1880 000 017	8.8	0.000 000	0.005
100 %		-10	1880 000 012	4.0	0.000 000	0.002
100 %		0	1880 000 010	2.3	0.000 000	0.001
100 %		+10	1880 000 016	8.7	0.000 000	0.005
100 %		+30	1880 000 010	2.0	0.000 000	0.001
100 %		+40	1880 000 017	9.2	0.000 000	0.005
100 %		+50	1880 000 023	15.0	0.000 001	0.008
Batt. Endpoint	3.550	+20	1880 000 008	0.0	0.000 000	0.000

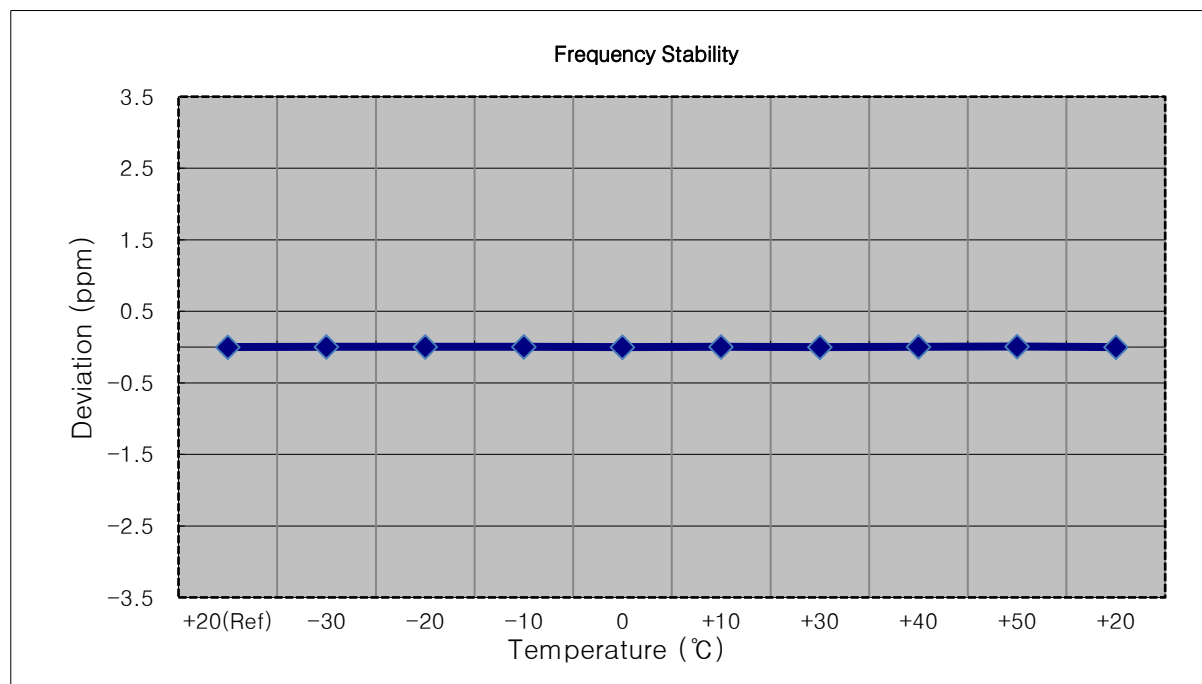


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 014	10.6	0.000 001	0.006
100 %		-20	1880 000 010	6.4	0.000 000	0.003
100 %		-10	1880 000 019	15.7	0.000 001	0.008
100 %		0	1880 000 018	14.5	0.000 001	0.008
100 %		+10	1880 000 009	5.5	0.000 000	0.003
100 %		+30	1880 000 007	3.4	0.000 000	0.002
100 %		+40	1880 000 015	11.5	0.000 001	0.006
100 %		+50	1880 000 013	10.1	0.000 001	0.005
Batt. Endpoint	3.550	+20	1880 000 007	4.2	0.000 000	0.002

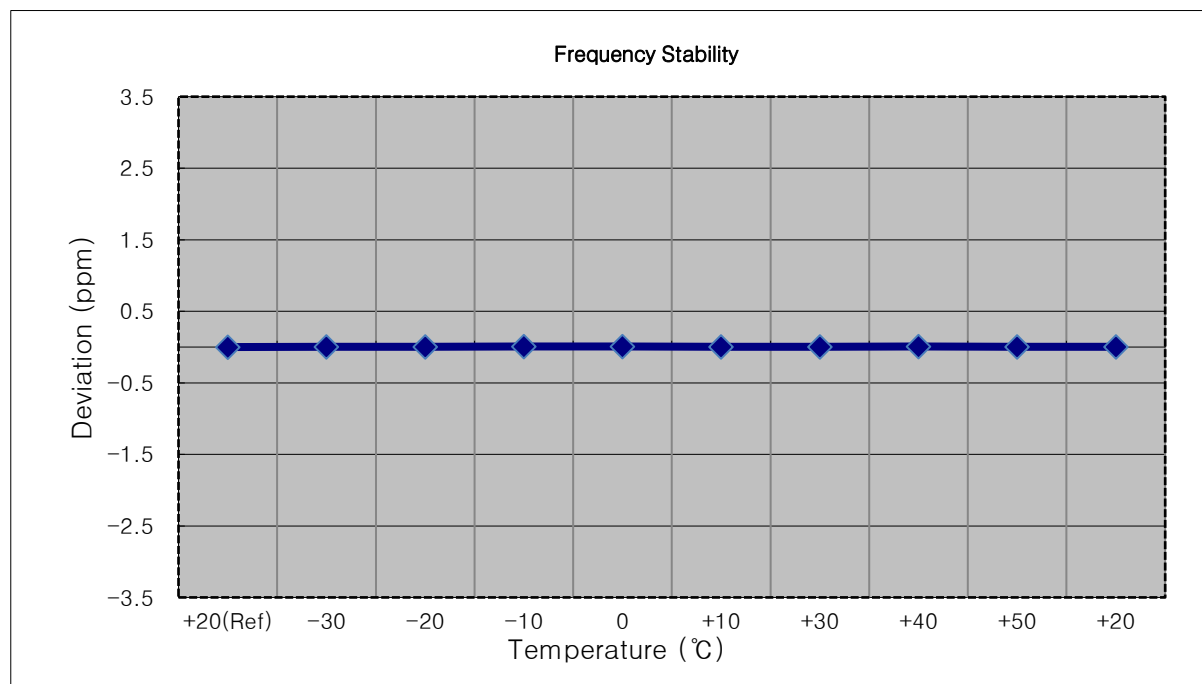


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1879 999 998	0.0	0.000 000	0.000
100 %		-30	1880 000 008	9.5	0.000 001	0.005
100 %		-20	1880 000 004	5.7	0.000 000	0.003
100 %		-10	1880 000 003	4.8	0.000 000	0.003
100 %		0	1880 000 005	6.8	0.000 000	0.004
100 %		+10	1880 000 013	14.5	0.000 001	0.008
100 %		+30	1880 000 005	6.1	0.000 000	0.003
100 %		+40	1880 000 006	7.2	0.000 000	0.004
100 %		+50	1880 000 006	8.0	0.000 000	0.004
Batt. Endpoint	3.550	+20	1880 000 013	14.9	0.000 001	0.008

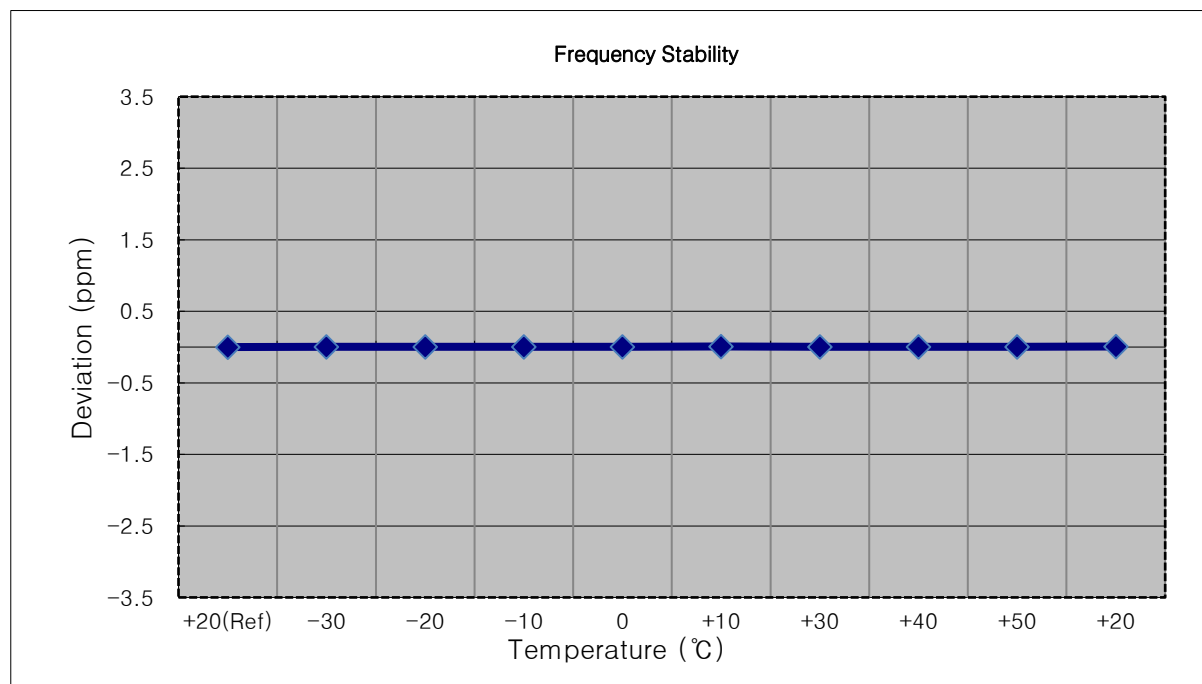


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 007	0.0	0.000 000	0.000
100 %		-30	1880 000 022	15.4	0.000 001	0.008
100 %		-20	1880 000 009	2.0	0.000 000	0.001
100 %		-10	1880 000 014	7.4	0.000 000	0.004
100 %		0	1880 000 019	11.9	0.000 001	0.006
100 %		+10	1880 000 015	8.3	0.000 000	0.004
100 %		+30	1880 000 012	5.1	0.000 000	0.003
100 %		+40	1880 000 007	0.5	0.000 000	0.000
100 %		+50	1880 000 011	3.9	0.000 000	0.002
Batt. Endpoint	3.550	+20	1880 000 021	13.9	0.000 001	0.007

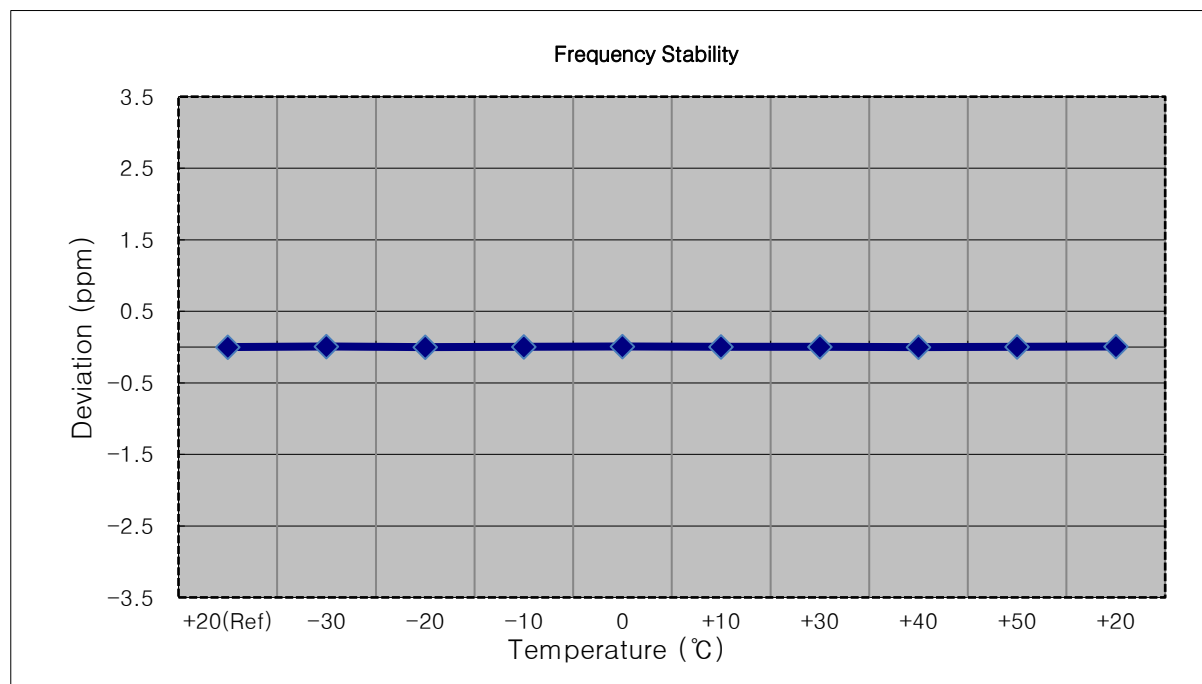


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 016	0.0	0.000 000	0.000
100 %		-30	1880 000 020	4.4	0.000 000	0.002
100 %		-20	1880 000 022	6.7	0.000 000	0.004
100 %		-10	1880 000 014	-1.3	0.000 000	-0.001
100 %		0	1880 000 019	2.9	0.000 000	0.002
100 %		+10	1880 000 016	0.0	0.000 000	0.000
100 %		+30	1880 000 022	6.7	0.000 000	0.004
100 %		+40	1880 000 017	1.2	0.000 000	0.001
100 %		+50	1880 000 016	0.6	0.000 000	0.000
Batt. Endpoint	3.550	+20	1880 000 017	1.4	0.000 000	0.001

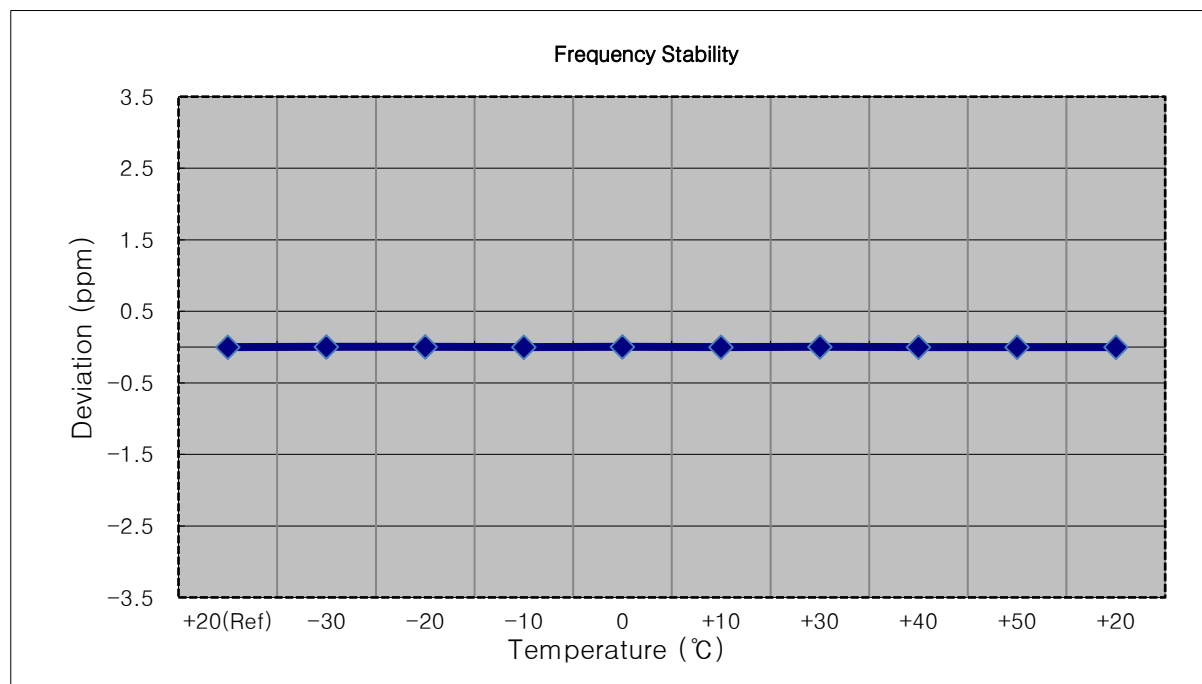


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1879 999 998	0.0	0.000 000	0.000
100 %		-30	1880 000 006	7.6	0.000 000	0.004
100 %		-20	1880 000 003	4.7	0.000 000	0.002
100 %		-10	1880 000 001	2.9	0.000 000	0.002
100 %		0	1880 000 003	4.5	0.000 000	0.002
100 %		+10	1880 000 005	6.6	0.000 000	0.004
100 %		+30	1879 999 999	0.8	0.000 000	0.000
100 %		+40	1879 999 998	-0.2	0.000 000	0.000
100 %		+50	1880 000 010	11.6	0.000 001	0.006
Batt. Endpoint	3.550	+20	1880 000 014	15.5	0.000 001	0.008

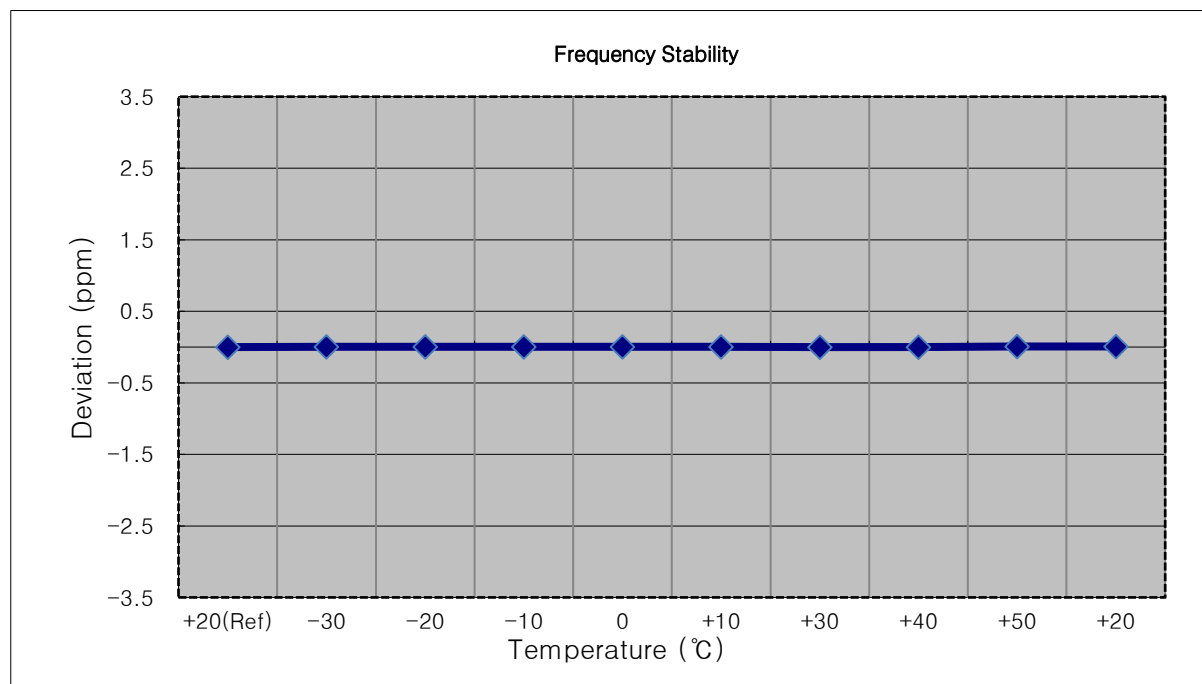


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1909 300 012	0.0	0.000 000	0.000
100 %		-30	1909 300 013	1.6	0.000 000	0.001
100 %		-20	1909 300 010	-2.1	0.000 000	-0.001
100 %		-10	1909 300 023	11.4	0.000 001	0.006
100 %		0	1909 300 012	-0.2	0.000 000	0.000
100 %		+10	1909 300 019	7.4	0.000 000	0.004
100 %		+30	1909 300 020	8.2	0.000 000	0.004
100 %		+40	1909 300 011	-1.1	0.000 000	-0.001
100 %		+50	1909 300 017	4.9	0.000 000	0.003
Batt. Endpoint	3.550	+20	1909 300 014	1.7	0.000 000	0.001

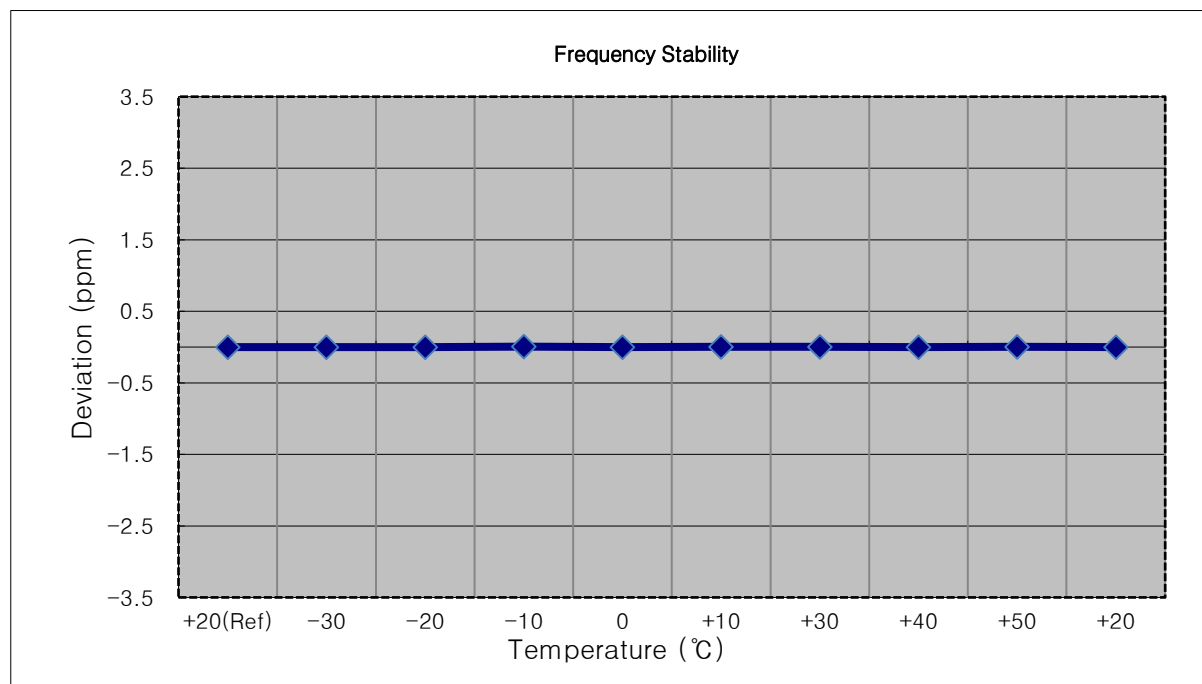


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1908 500 007	0.0	0.000 000	0.000
100 %		-30	1908 500 014	7.5	0.000 000	0.004
100 %		-20	1908 500 021	14.5	0.000 001	0.008
100 %		-10	1908 500 010	3.2	0.000 000	0.002
100 %		0	1908 500 011	4.3	0.000 000	0.002
100 %		+10	1908 500 021	14.6	0.000 001	0.008
100 %		+30	1908 500 022	15.6	0.000 001	0.008
100 %		+40	1908 500 005	-1.6	0.000 000	-0.001
100 %		+50	1908 500 006	-0.5	0.000 000	0.000
Batt. Endpoint	3.550	+20	1908 500 007	0.8	0.000 000	0.000

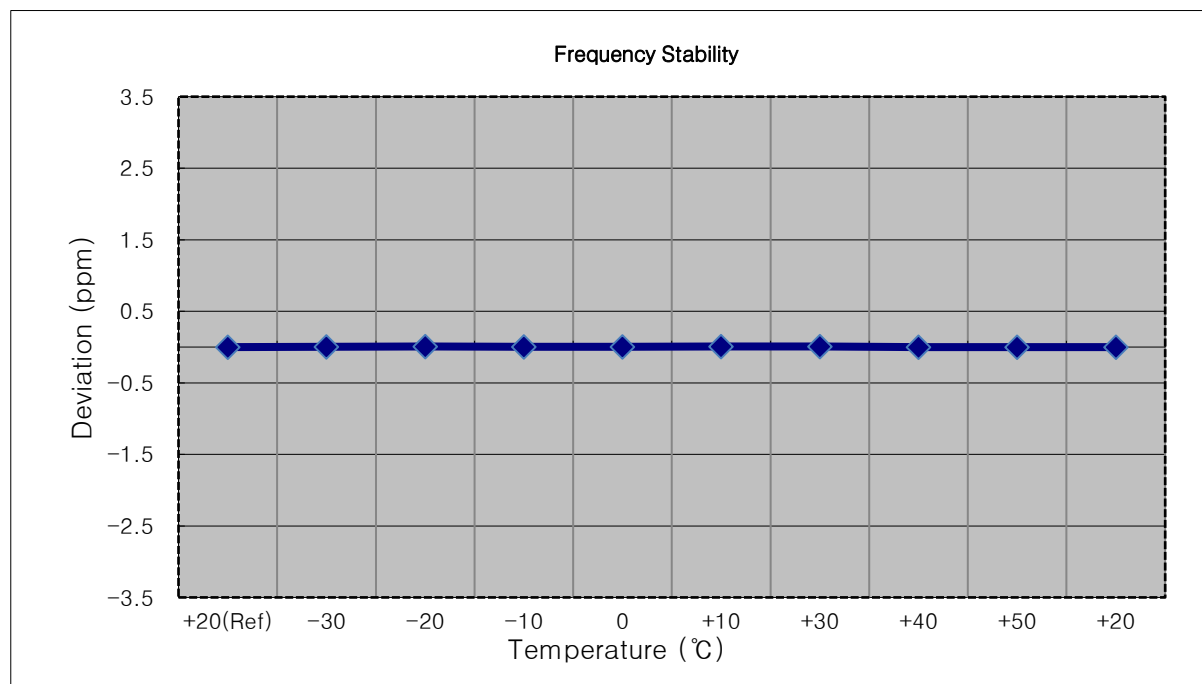


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1907 500 008	0.0	0.000 000	0.000
100 %		-30	1907 500 007	-0.3	0.000 000	0.000
100 %		-20	1907 500 018	10.4	0.000 001	0.005
100 %		-10	1907 500 022	14.7	0.000 001	0.008
100 %		0	1907 500 022	14.7	0.000 001	0.008
100 %		+10	1907 500 009	1.5	0.000 000	0.001
100 %		+30	1907 500 014	6.1	0.000 000	0.003
100 %		+40	1907 500 008	-0.2	0.000 000	0.000
100 %		+50	1907 500 023	15.3	0.000 001	0.008
Batt. Endpoint	3.550	+20	1907 500 007	-0.3	0.000 000	0.000

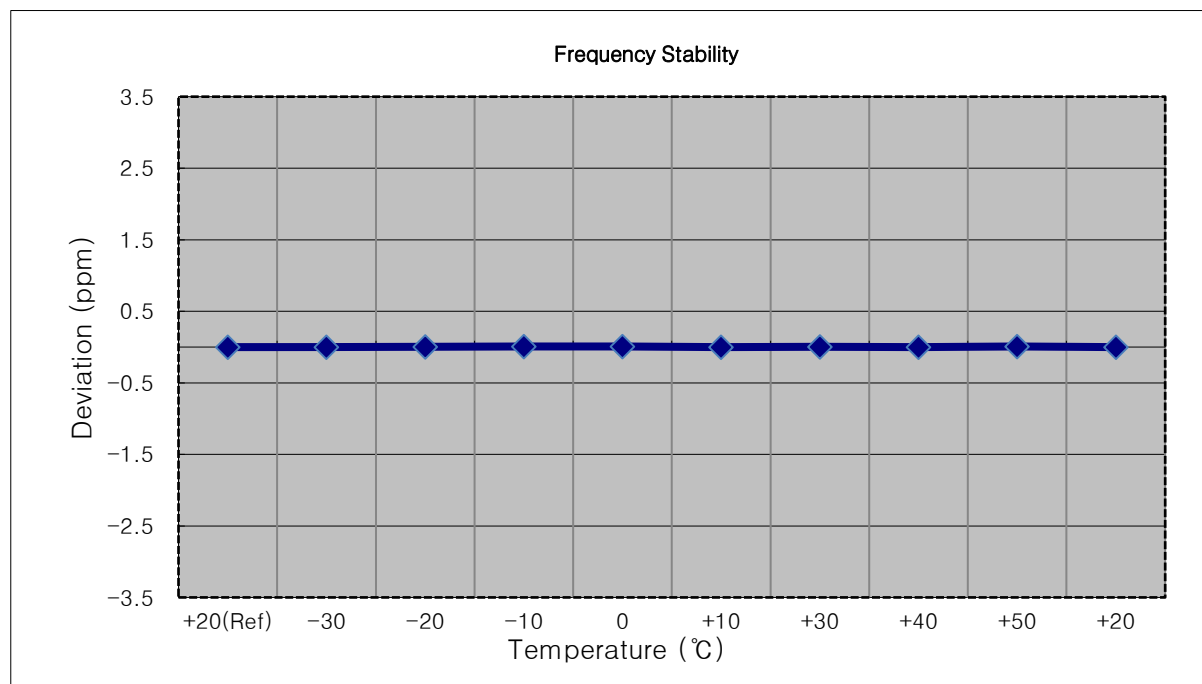


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1905 000 000	0.0	0.000 000	0.000
100 %		-30	1905 000 009	8.9	0.000 000	0.005
100 %		-20	1905 000 009	8.9	0.000 000	0.005
100 %		-10	1904 999 998	-1.7	0.000 000	-0.001
100 %		0	1905 000 004	4.2	0.000 000	0.002
100 %		+10	1905 000 013	13.3	0.000 001	0.007
100 %		+30	1905 000 009	8.6	0.000 000	0.004
100 %		+40	1904 999 998	-1.6	0.000 000	-0.001
100 %		+50	1904 999 999	-1.2	0.000 000	-0.001
Batt. Endpoint	3.550	+20	1905 000 003	3.2	0.000 000	0.002

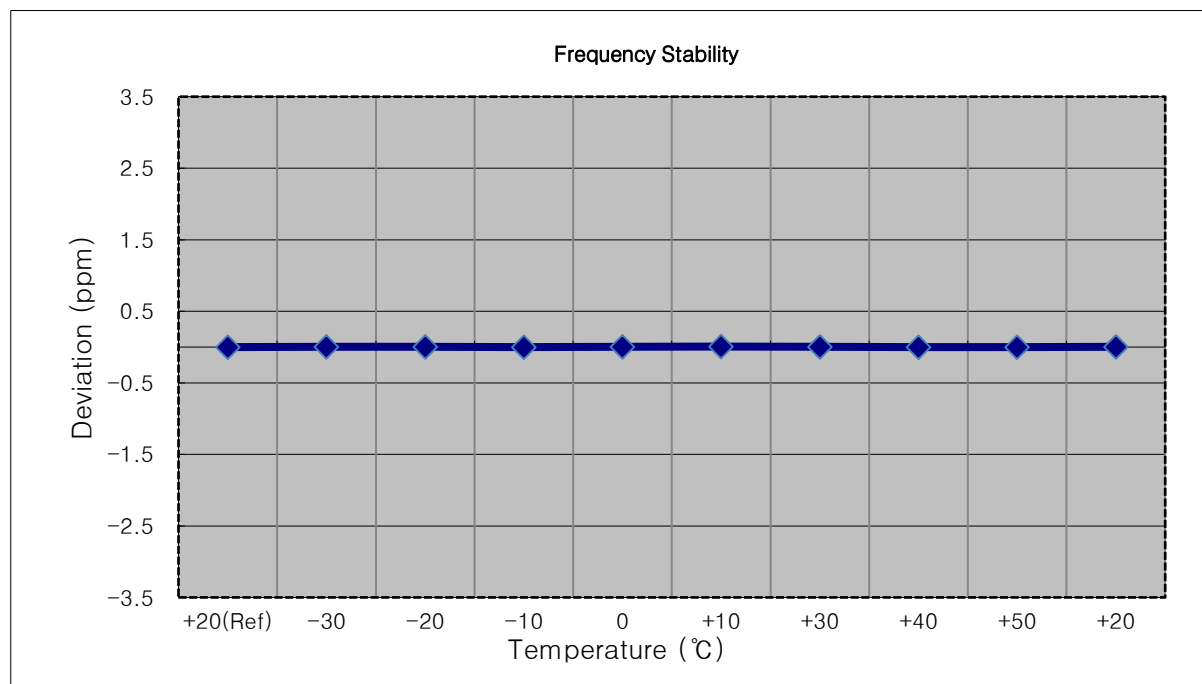


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1902 500 014	0.0	0.000 000	0.000
100 %		-30	1902 500 013	-0.7	0.000 000	0.000
100 %		-20	1902 500 029	15.1	0.000 001	0.008
100 %		-10	1902 500 022	7.9	0.000 000	0.004
100 %		0	1902 500 025	10.6	0.000 001	0.006
100 %		+10	1902 500 013	-1.0	0.000 000	-0.001
100 %		+30	1902 500 024	9.9	0.000 001	0.005
100 %		+40	1902 500 018	4.4	0.000 000	0.002
100 %		+50	1902 500 020	6.1	0.000 000	0.003
Batt. Endpoint	3.550	+20	1902 500 013	-1.1	0.000 000	-0.001

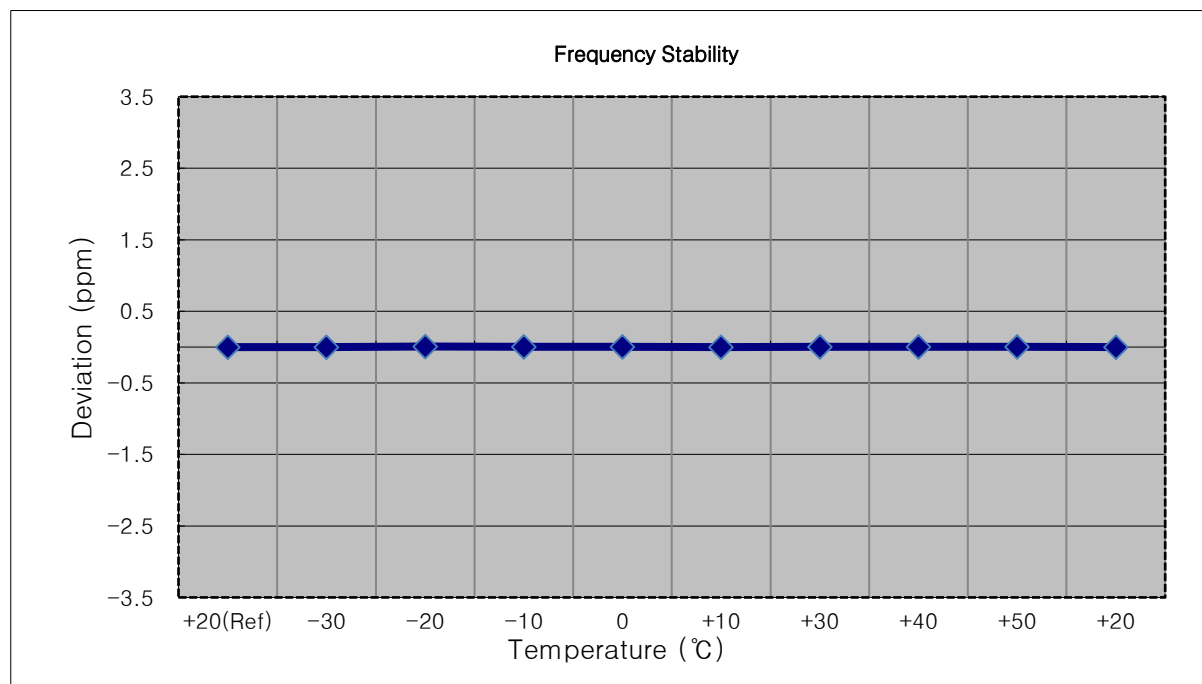

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1900 000 002	0.0	0.000 000	0.000
100 %		-30	1900 000 005	3.0	0.000 000	0.002
100 %		-20	1900 000 000	-1.8	0.000 000	-0.001
100 %		-10	1900 000 013	11.0	0.000 001	0.006
100 %		0	1900 000 001	-1.1	0.000 000	-0.001
100 %		+10	1900 000 016	13.7	0.000 001	0.007
100 %		+30	1900 000 005	3.4	0.000 000	0.002
100 %		+40	1900 000 015	12.9	0.000 001	0.007
100 %		+50	1900 000 002	0.1	0.000 000	0.000
Batt. Endpoint	3.550	+20	1900 000 002	-0.3	0.000 000	0.000

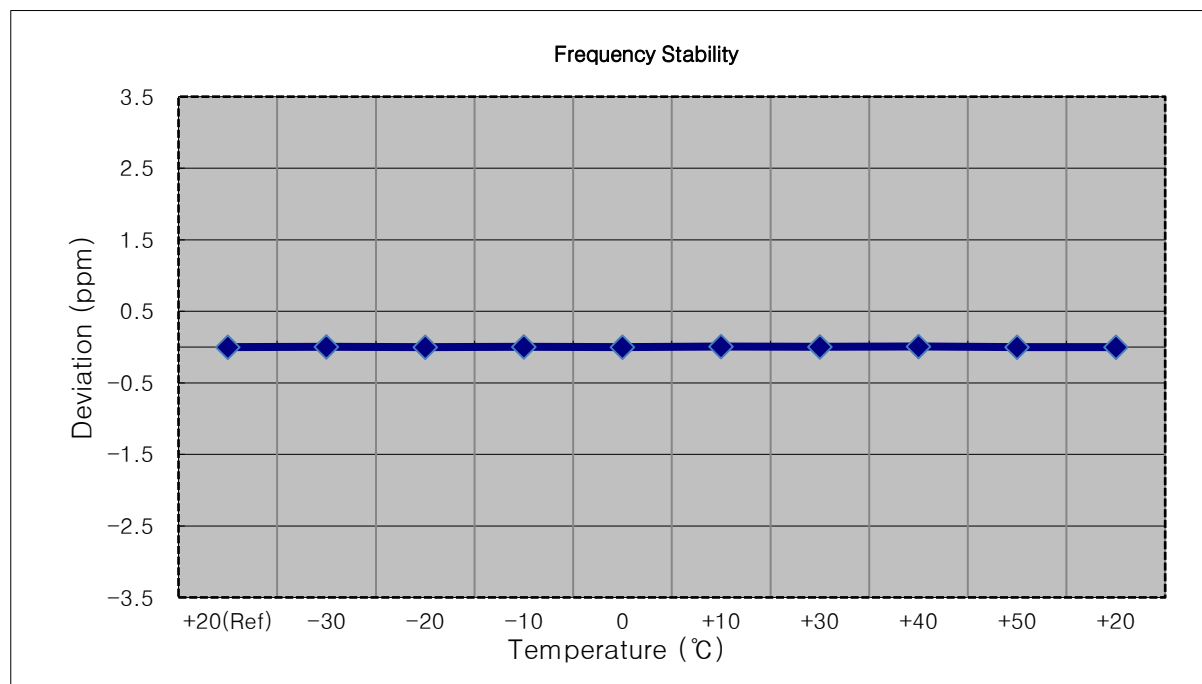

9. TEST PLOTS

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(2)



BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB

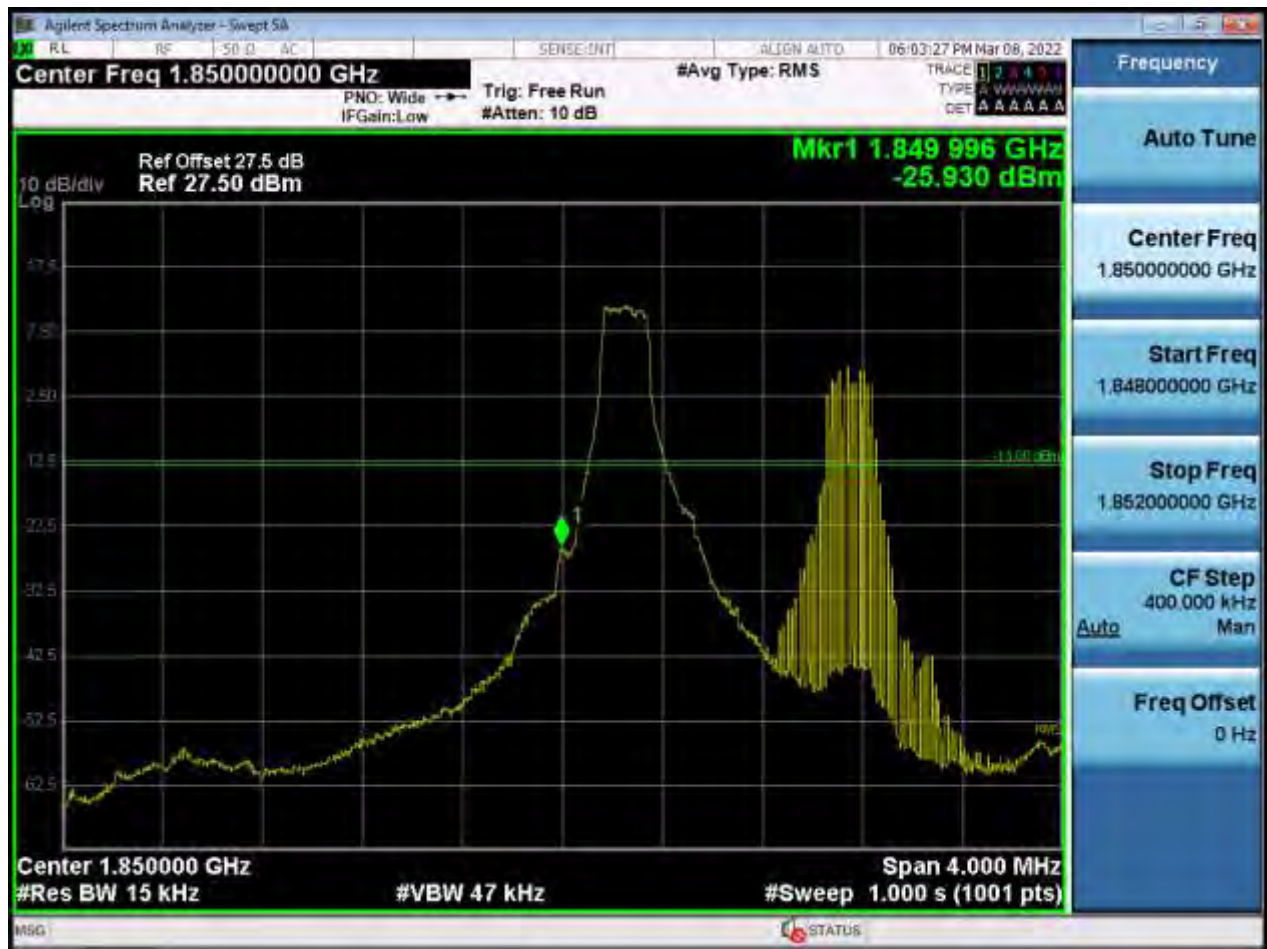


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB



BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

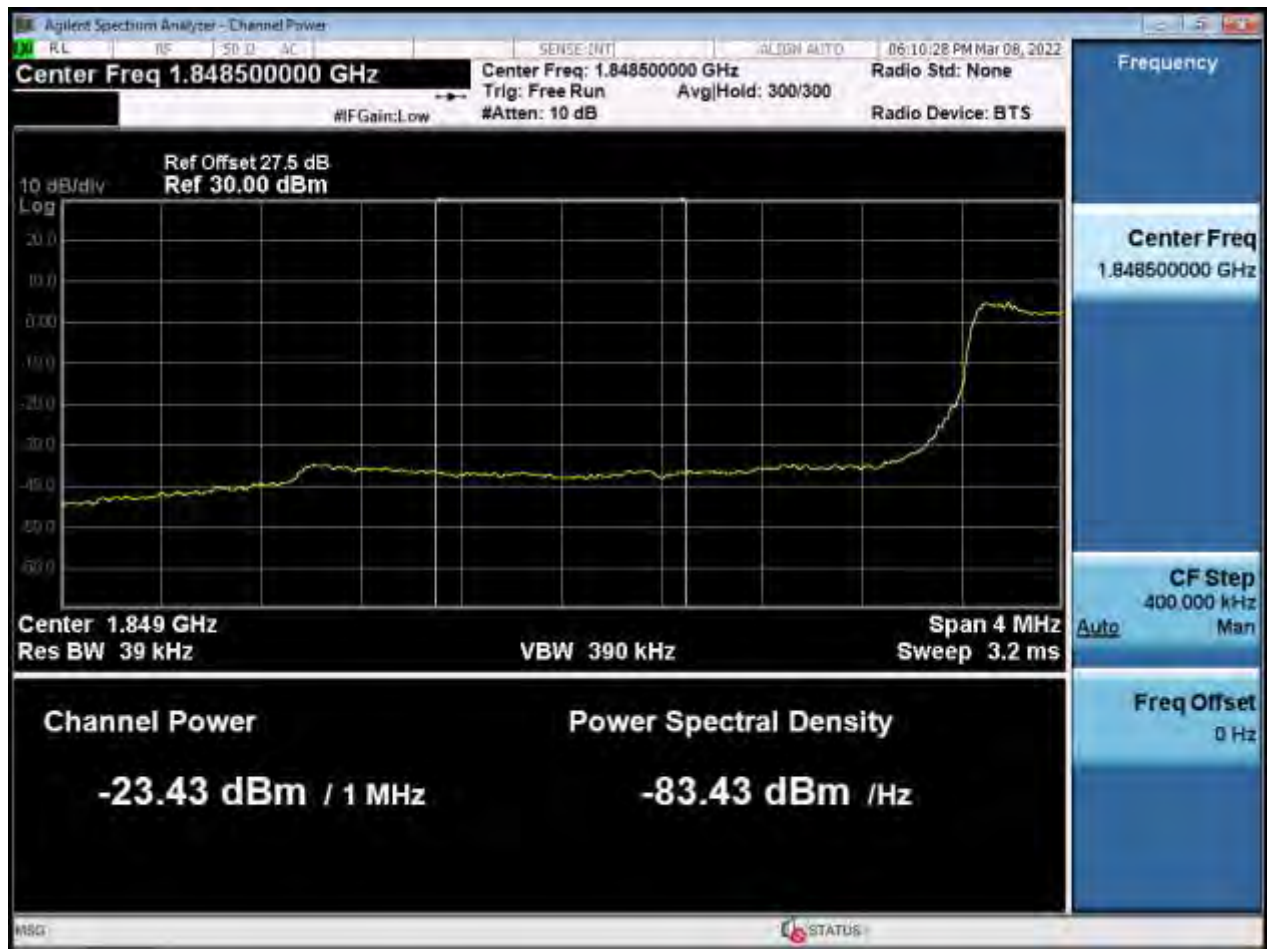


BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2)

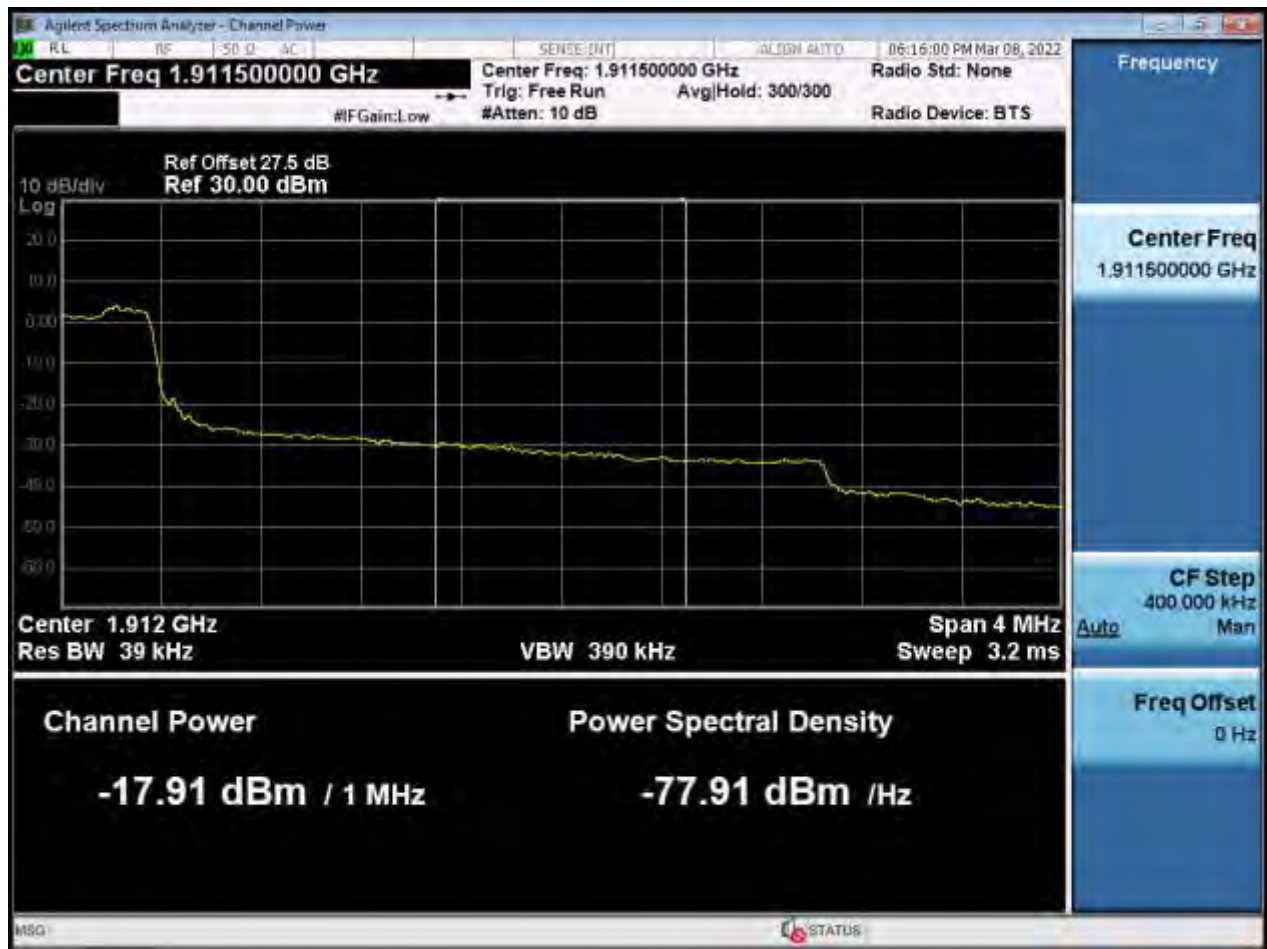

BW3 M_BandEdge_Lowest Channel_QPSK_1RB

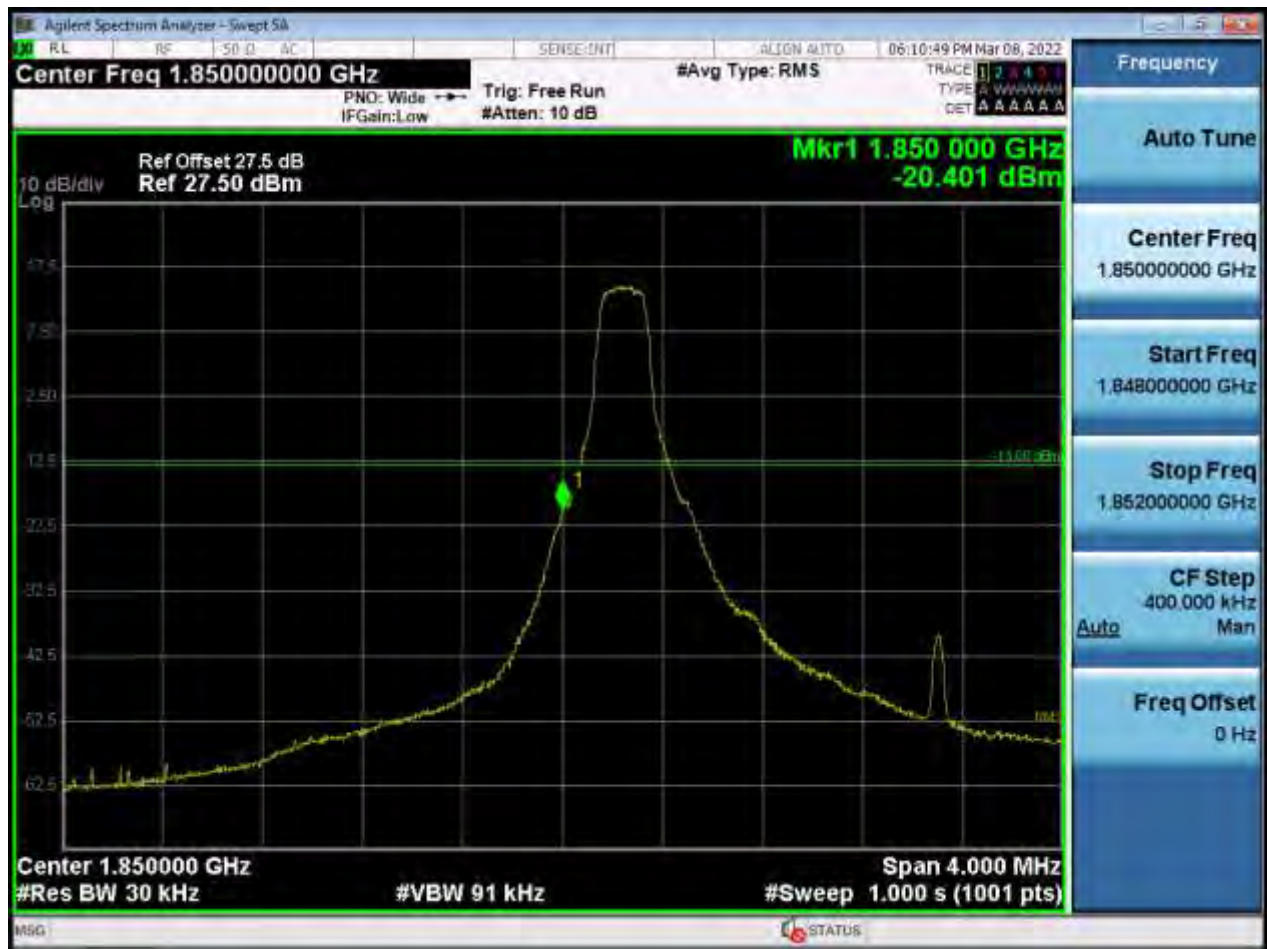


BW3 M_BandEdge_Highest Channel_QPSK_1RB

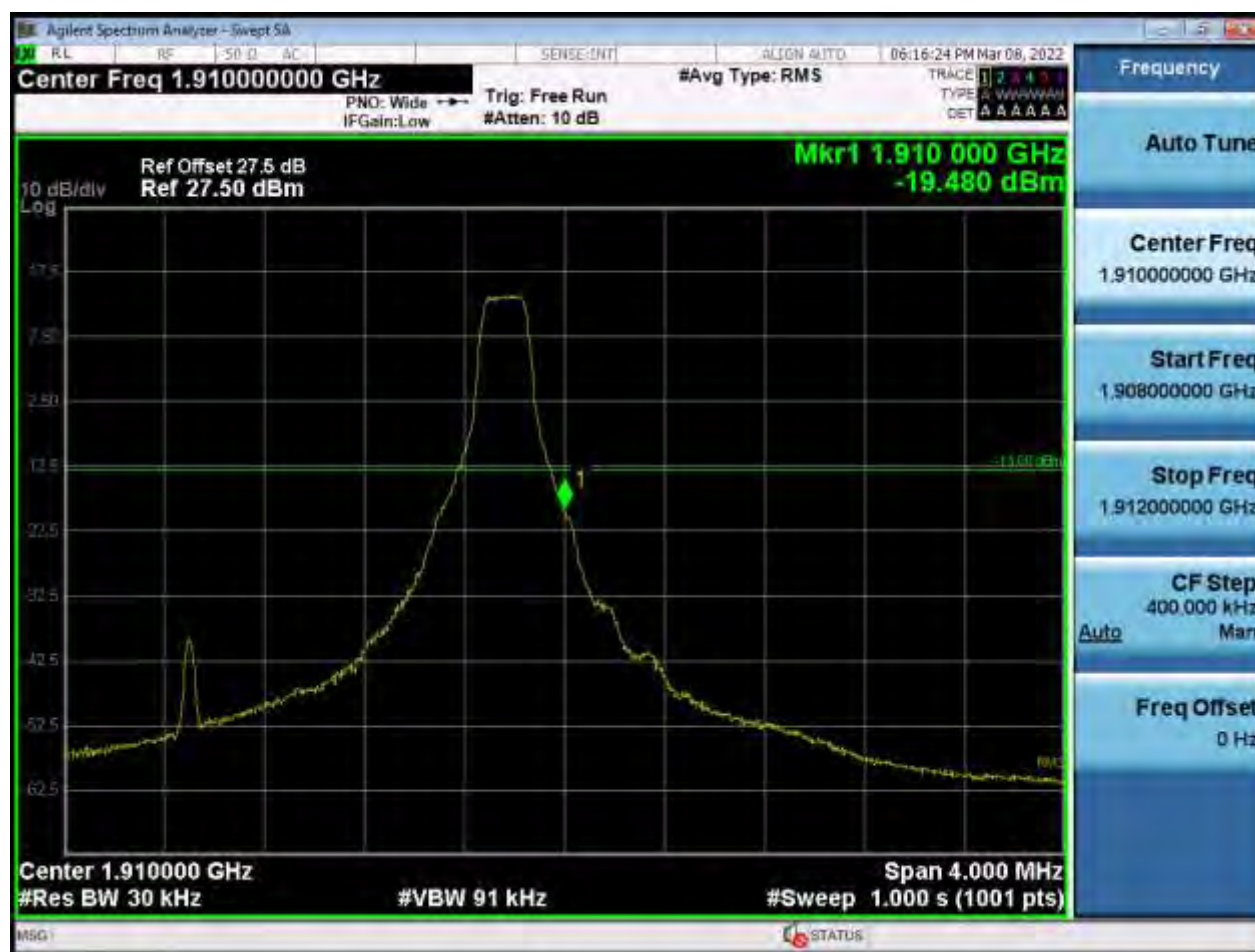

BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

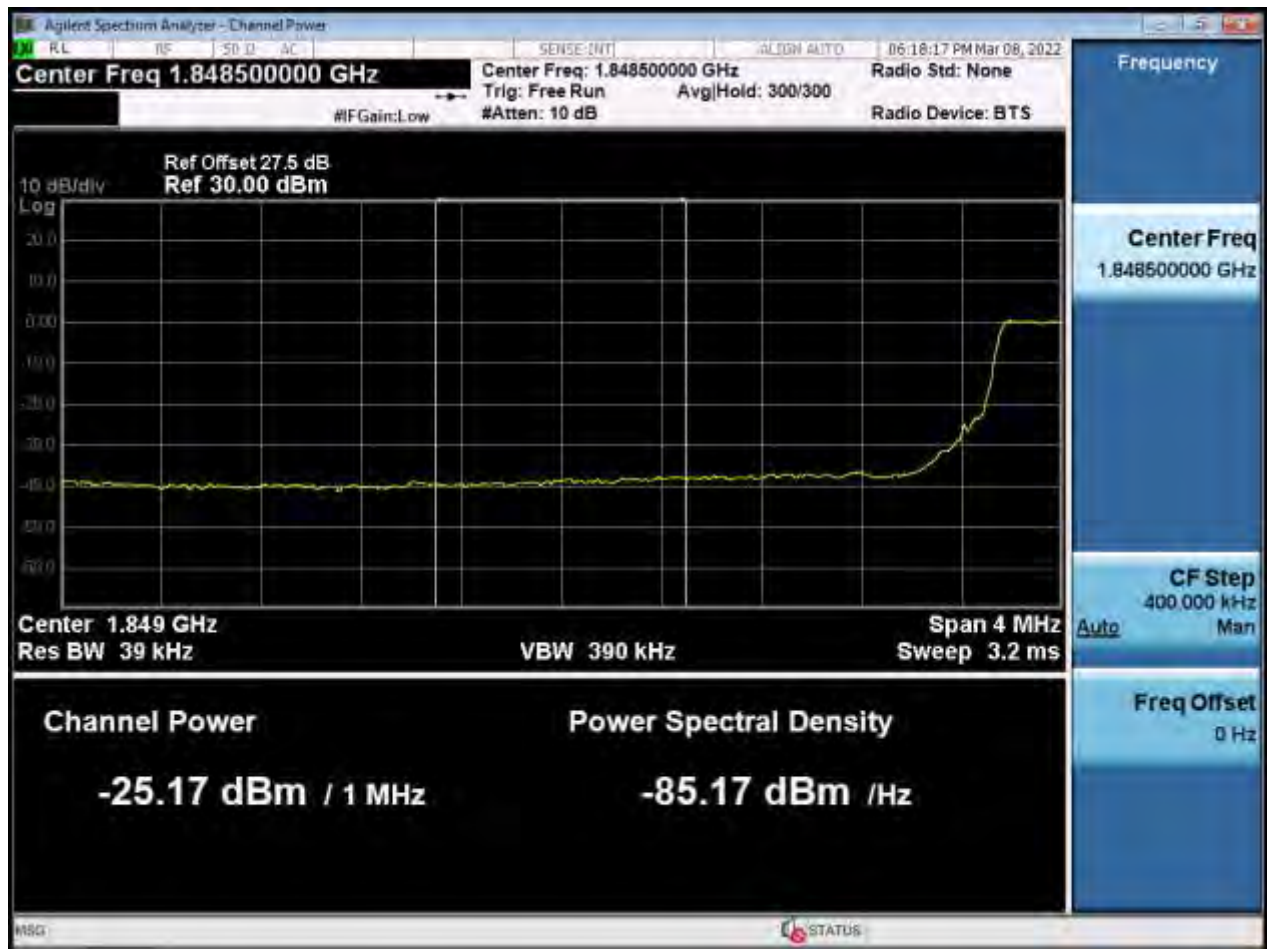

BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2)

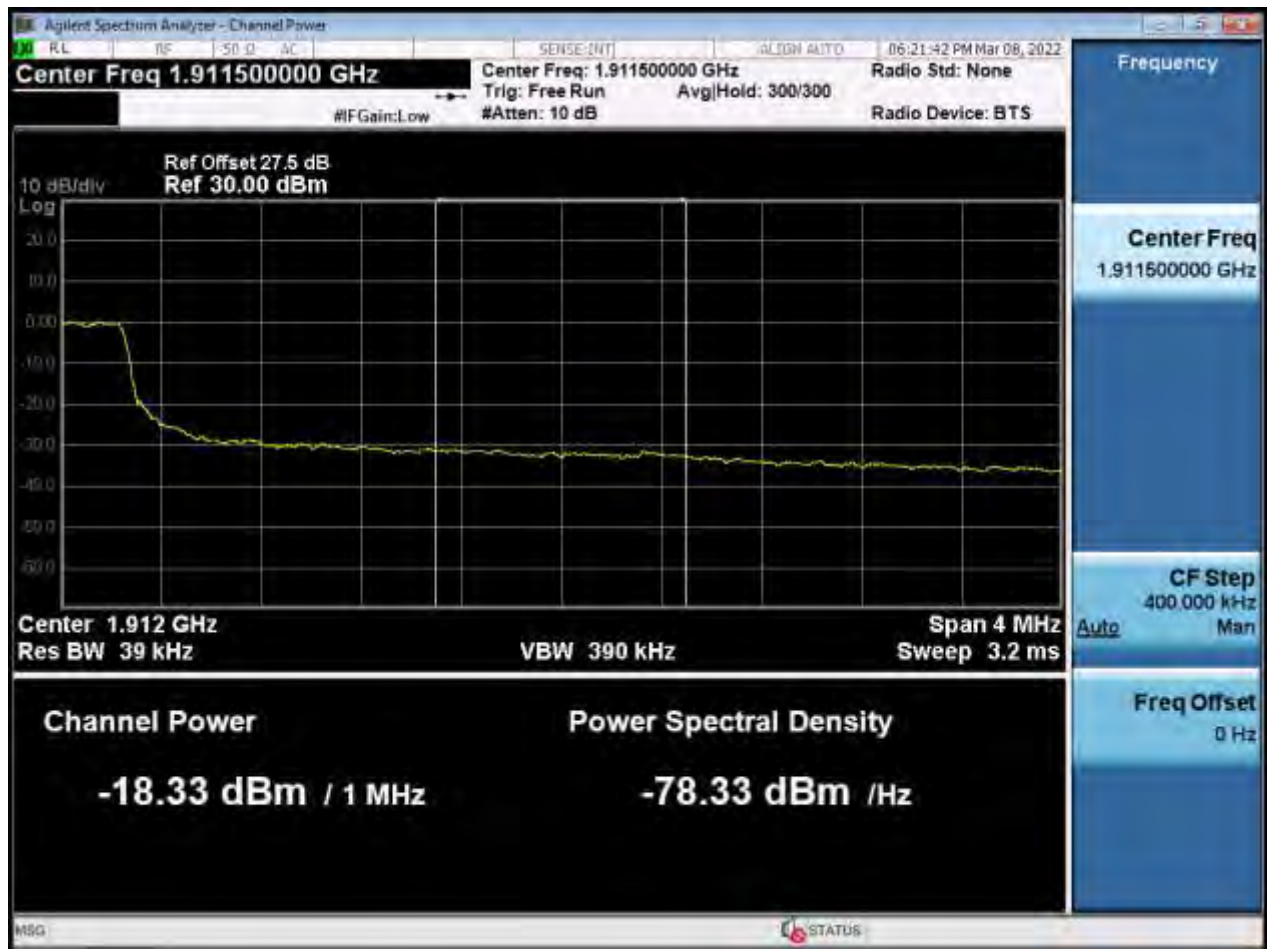

BW5 M_BandEdge_Lowest Channel_QPSK_1RB




BW5 M_BandEdge_Highest Channel_QPSK_1RB



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

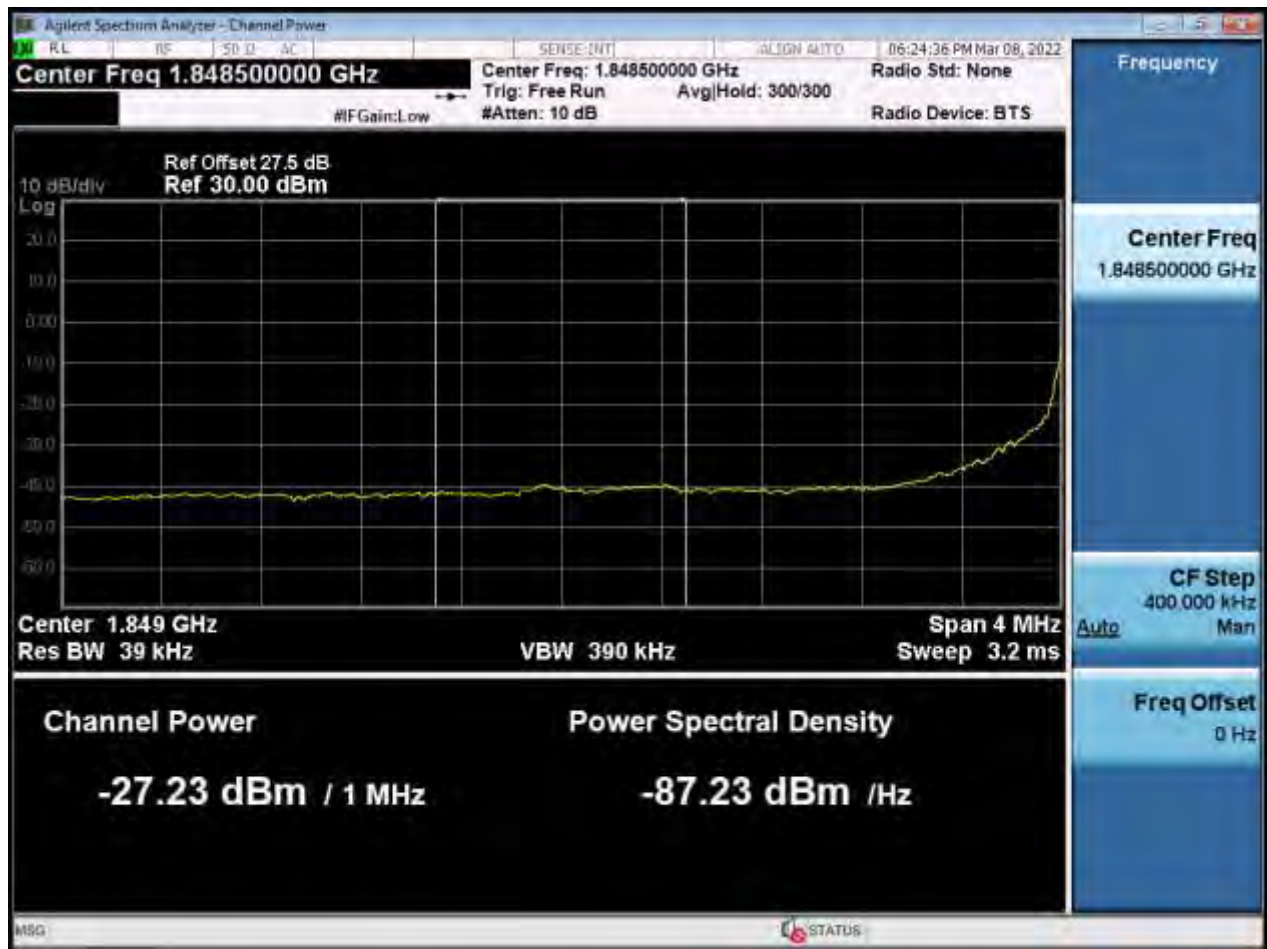

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2)



The screenshot displays the Agilent Spectrum Analyzer interface. The main plot shows a signal at 1.85 GHz with a peak level of -35.686 dBm. The plot is set to a 10 dB/div scale and a 4.000 MHz span. The center frequency is 1.850000000 GHz. The resolution bandwidth (Res BW) is 100 kHz, and the video bandwidth (VBW) is 300 kHz. The sweep time is 1.000 s (1001 pts). The plot is labeled with 'Mkr1 1.850 000 GHz -35.686 dBm' and 'Ref Offset 27.5 dB Ref 27.50 dBm'. The plot is also labeled with 'Center Freq 1.850000000 GHz' and '#Avg Type: RMS'. The plot is also labeled with 'PNO: Wide', 'IFGain: Low', 'Trig: Free Run', and '#Atten: 10 dB'. The plot is also labeled with 'SENSE: INT', 'ALIGN: AUTO', and '06:24:57 PM Mar 08, 2022'. The plot is also labeled with 'TRACE 1', 'TYPE: WWWW', and 'DET: AAAAAA'. The plot is also labeled with 'Auto Tune', 'Center Freq 1.850000000 GHz', 'Start Freq 1.848000000 GHz', 'Stop Freq 1.852000000 GHz', 'CF Step 400.000 kHz', 'Auto', 'Freq Offset 0 Hz', 'Span 4.000 MHz', '#Res BW 100 kHz', '#VBW 300 kHz', and '#Sweep 1.000 s (1001 pts)'.


BW10 M_BandEdge_Highest Channel_QPSK_1RB



BW15 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

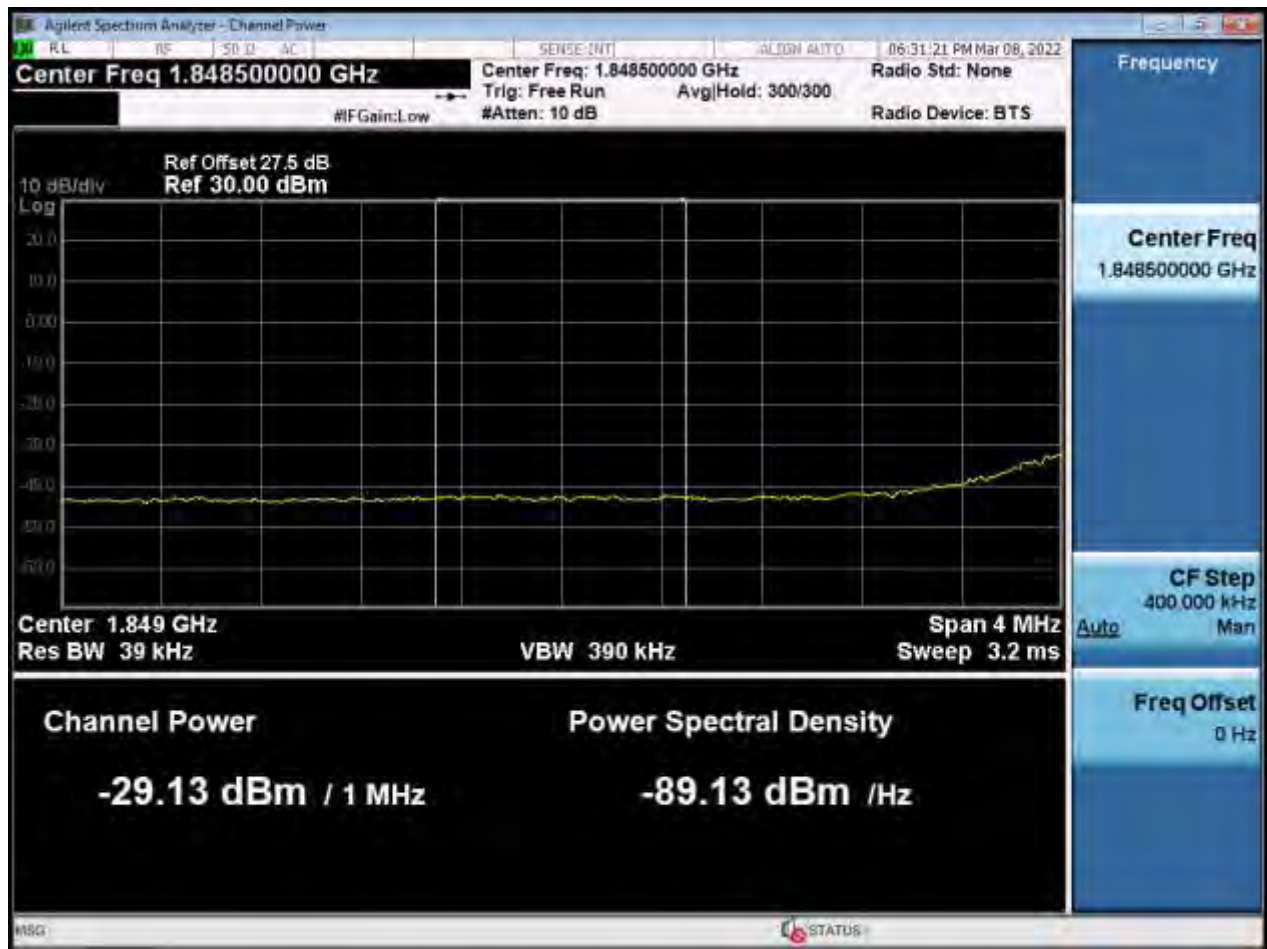

BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2)



BW15 M_BandEdge_Lowest Channel_QPSK_1RB



BW15 M_BandEdge_Highest Channel_QPSK_1RB



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2)

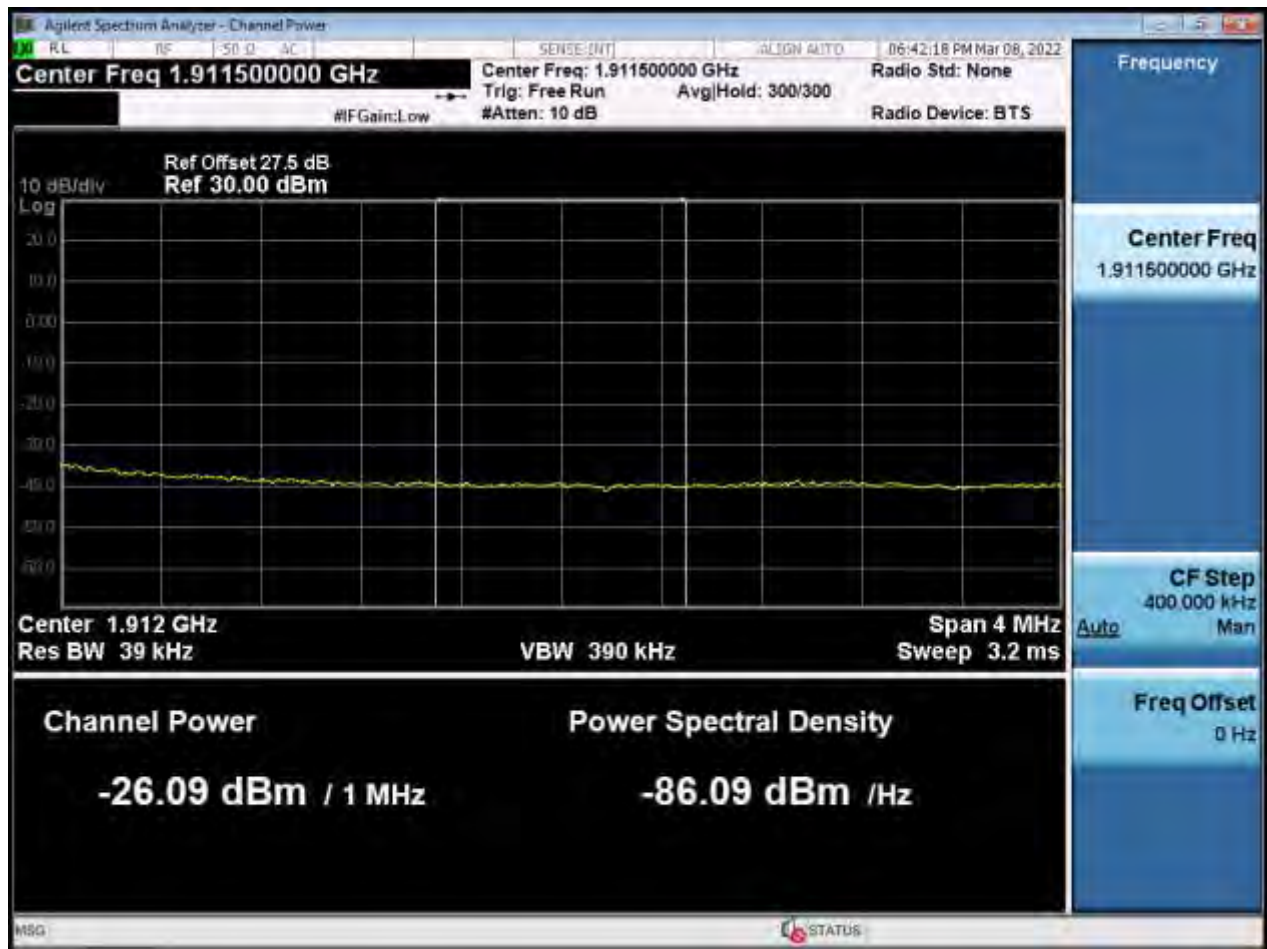


BW20 M_BandEdge_Lowest Channel_QPSK_1RB



BW20 M_BandEdge_Highest Channel_QPSK_1RB



BW1.4 M_OBW_Middle Channel_QPSK_FullRB

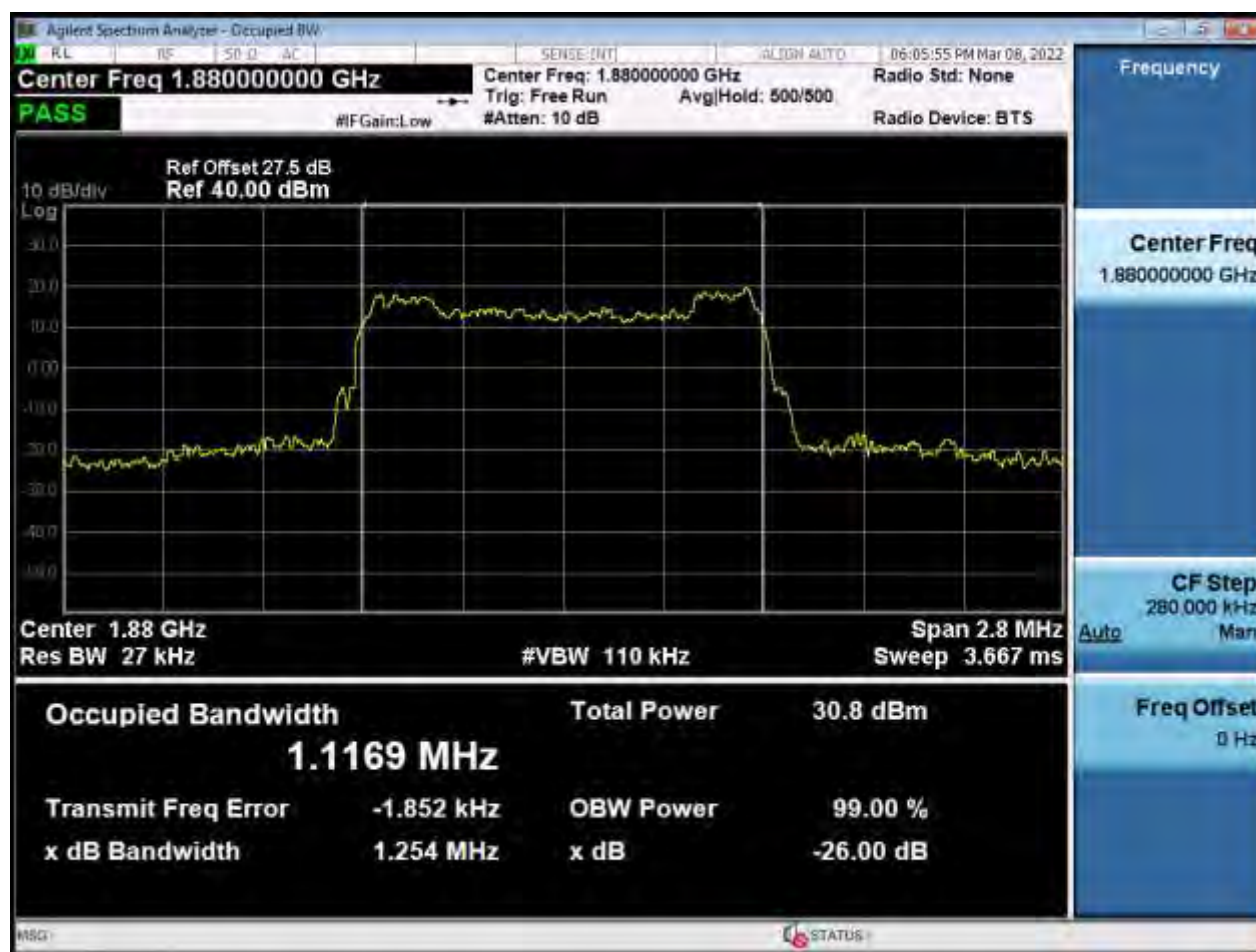

BW1.4 M_OBW_Middle Channel_16QAM_FullIRB




BW1.4 M_OBW_Middle Channel_64QAM_FullIRB




BW1.4 M_OBW_Middle Channel_256QAM_FullRB




BW3 M_OBW_Middle Channel_QPSK_FullRB

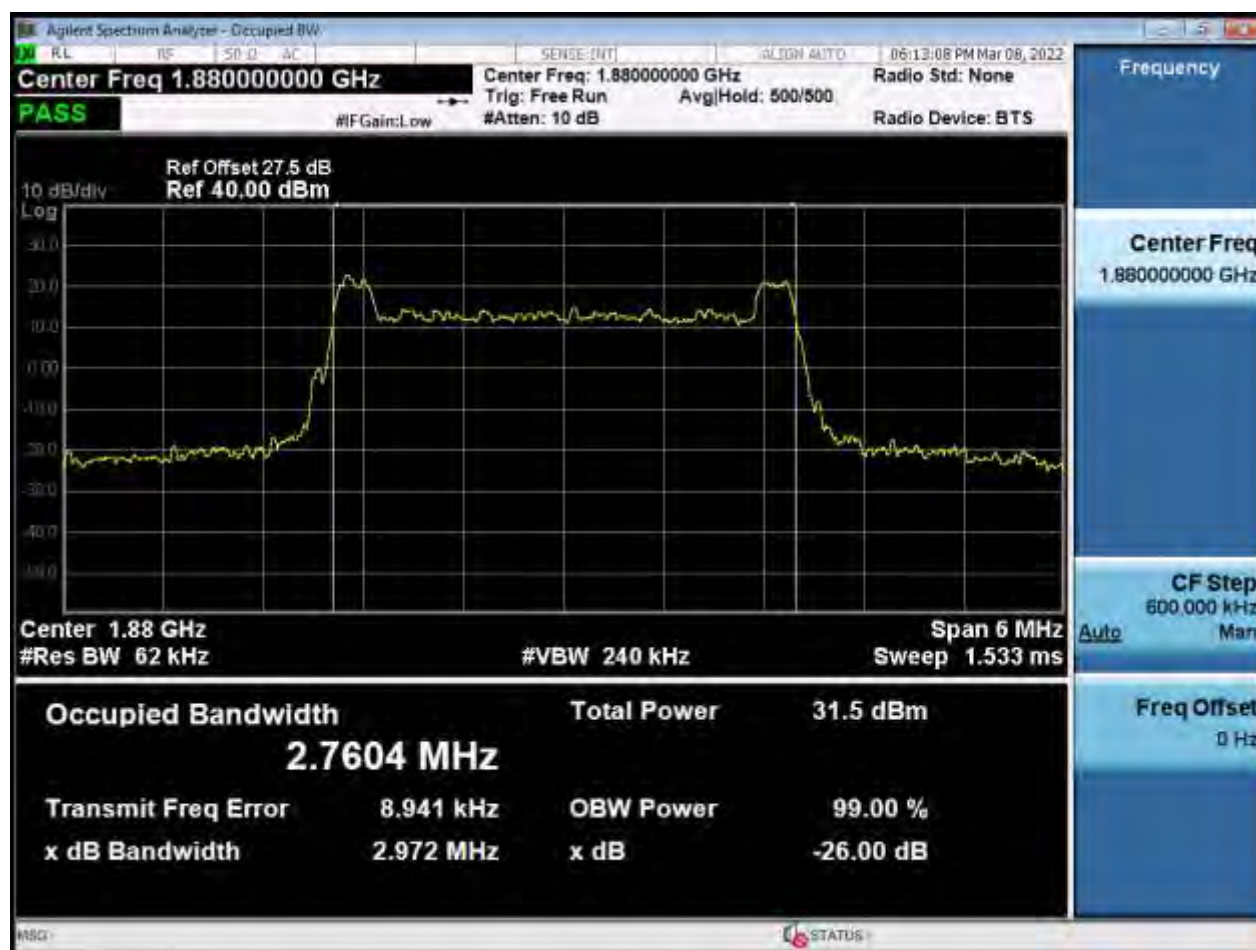


BW3 M_OBW_Middle Channel_16QAM_FullRB

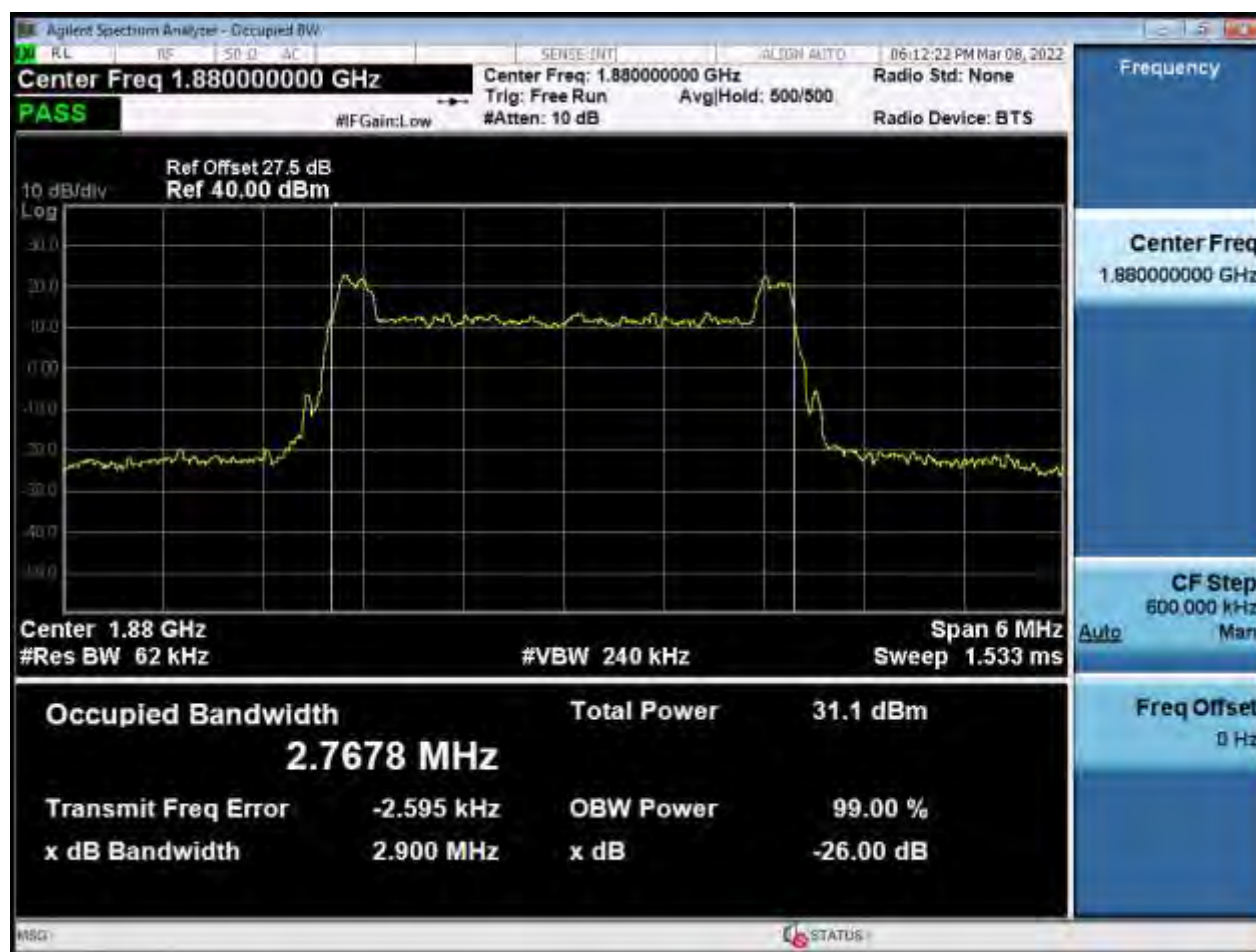

BW3 M_OBW_Middle Channel_64QAM_FullRB

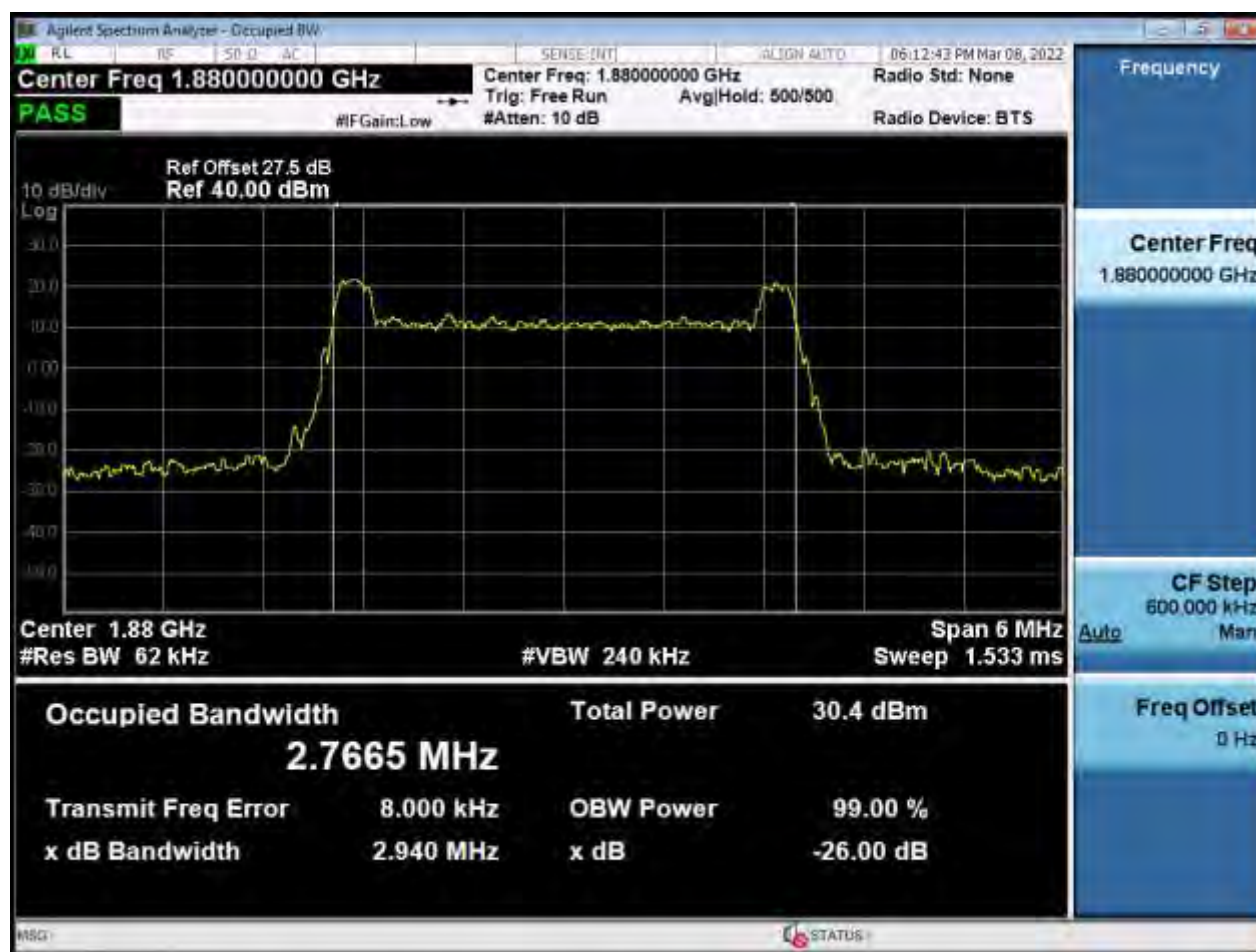


BW3 M_OBW_Middle Channel_256QAM_FullIRB

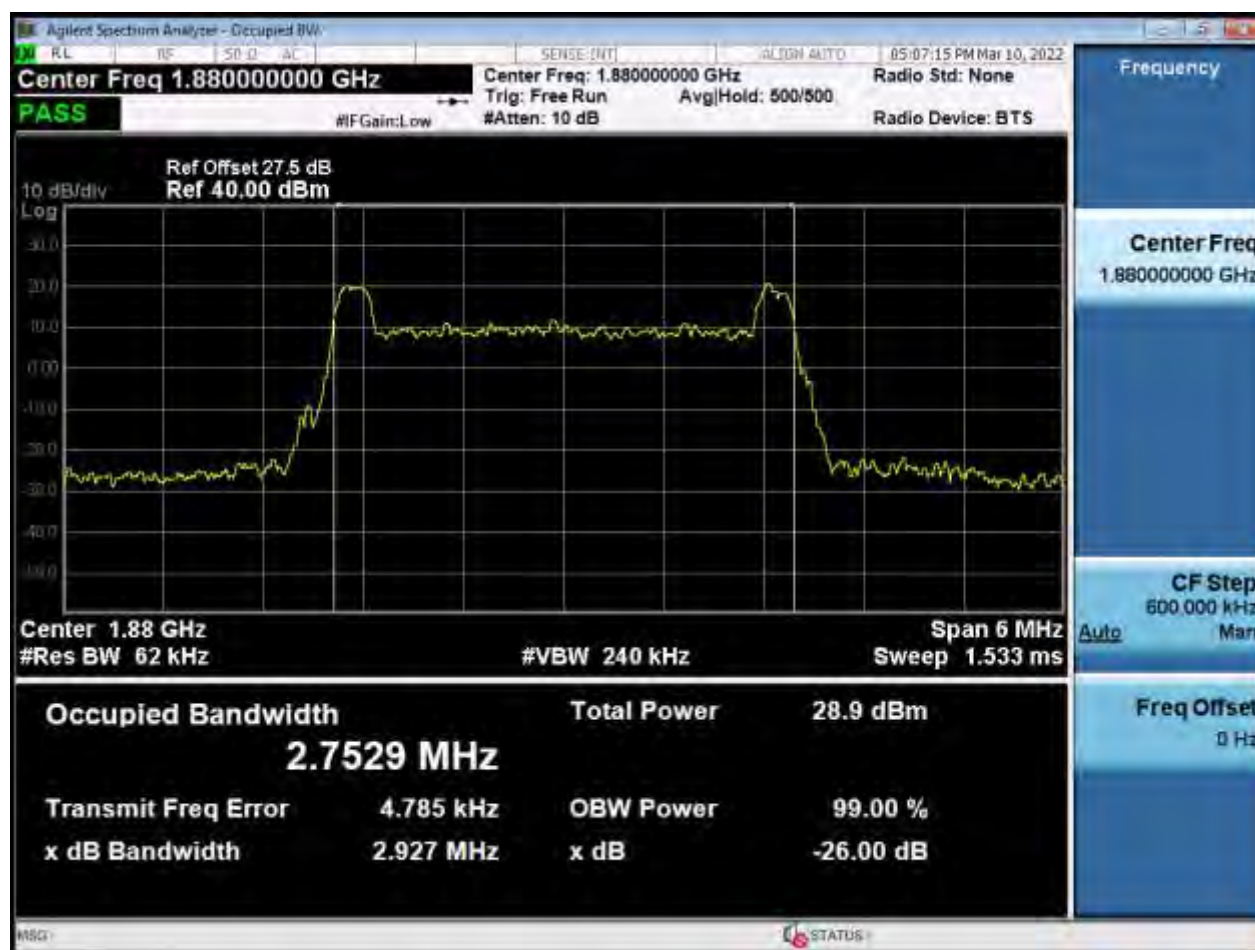


BW5 M_OBW_Middle Channel_QPSK_FullRB




BW5 M_OBW_Middle Channel_16QAM_FullRB

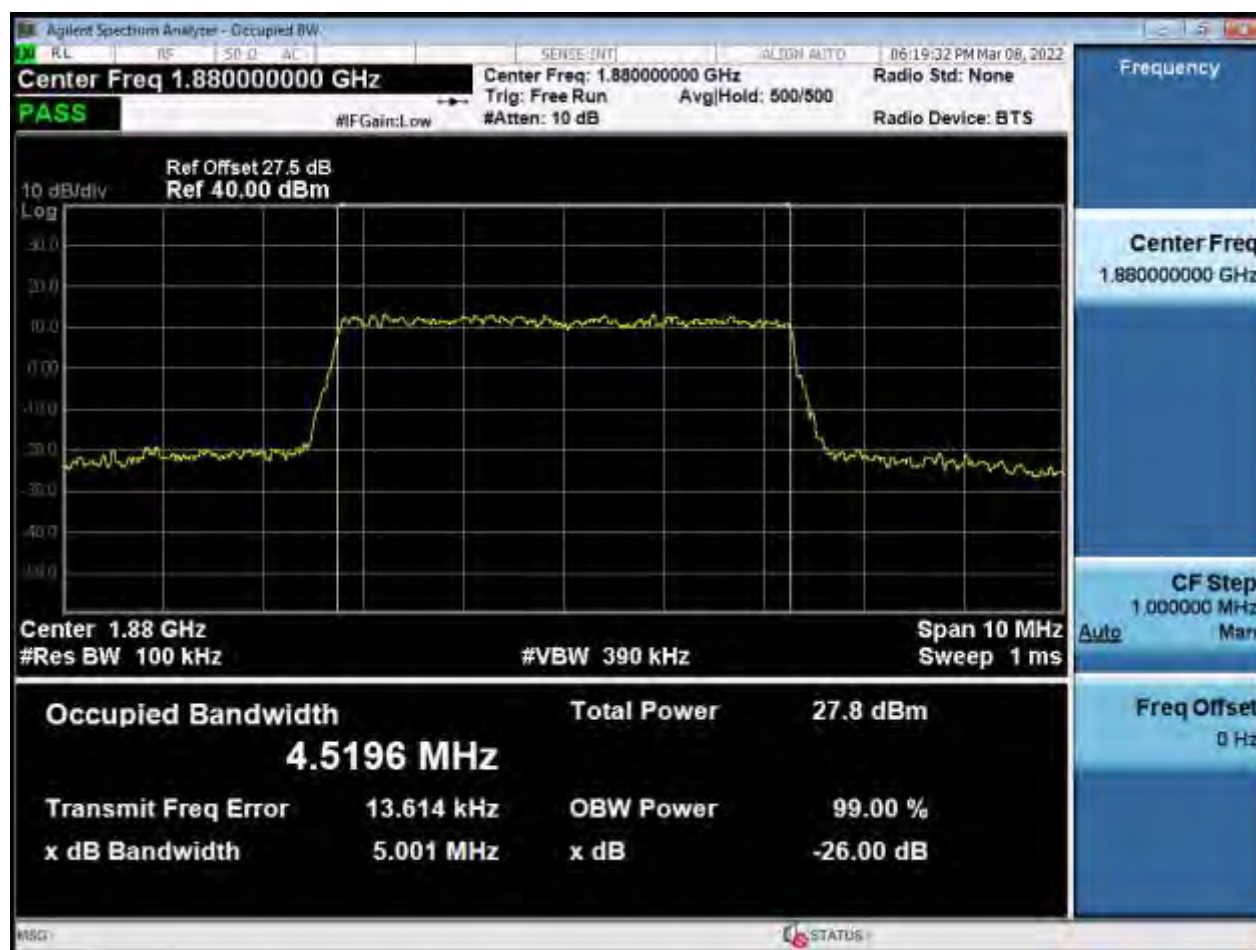

BW5 M_OBW_Middle Channel_64QAM_FullRB

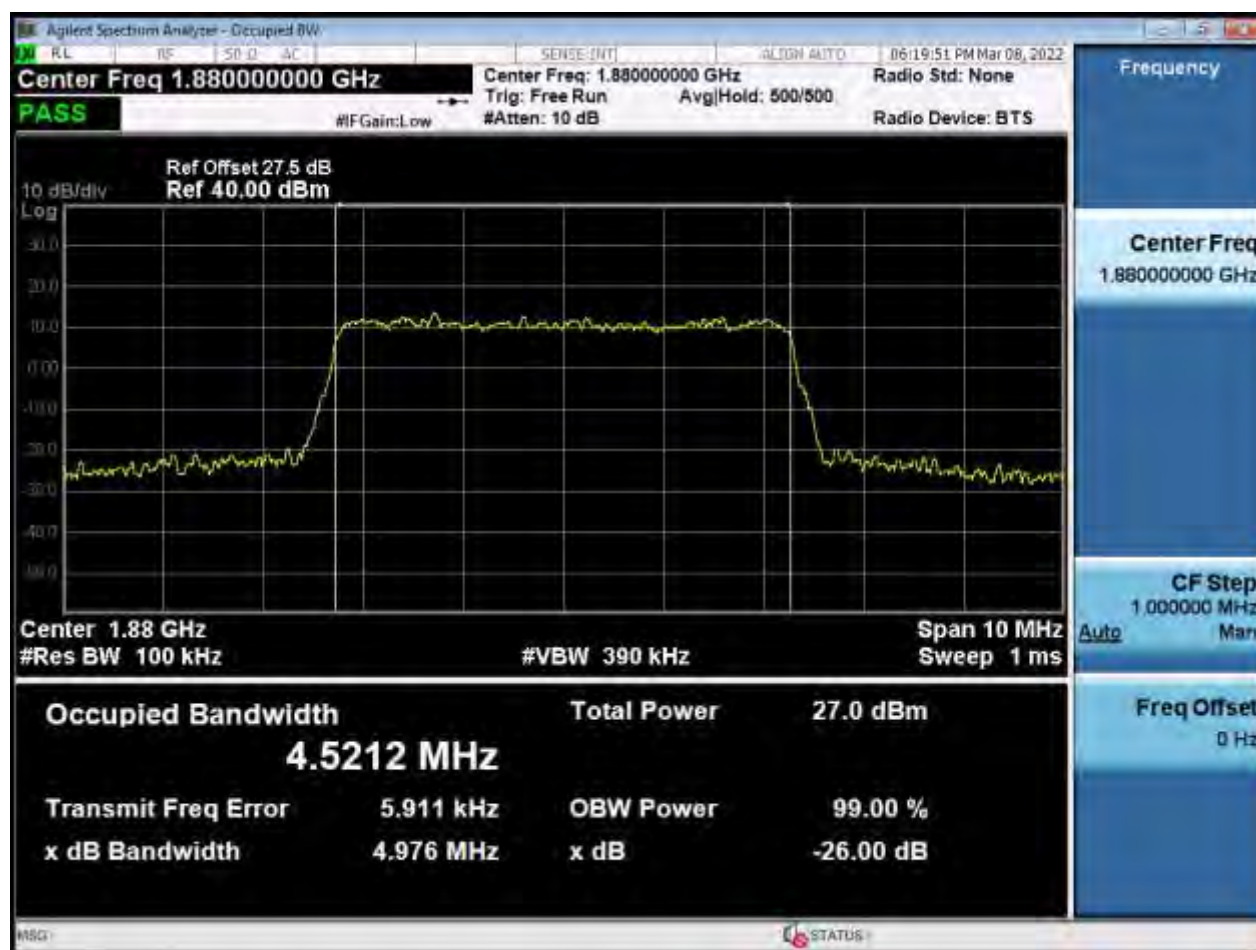


BW5 M_OBW_Middle Channel_256QAM_FullIRB

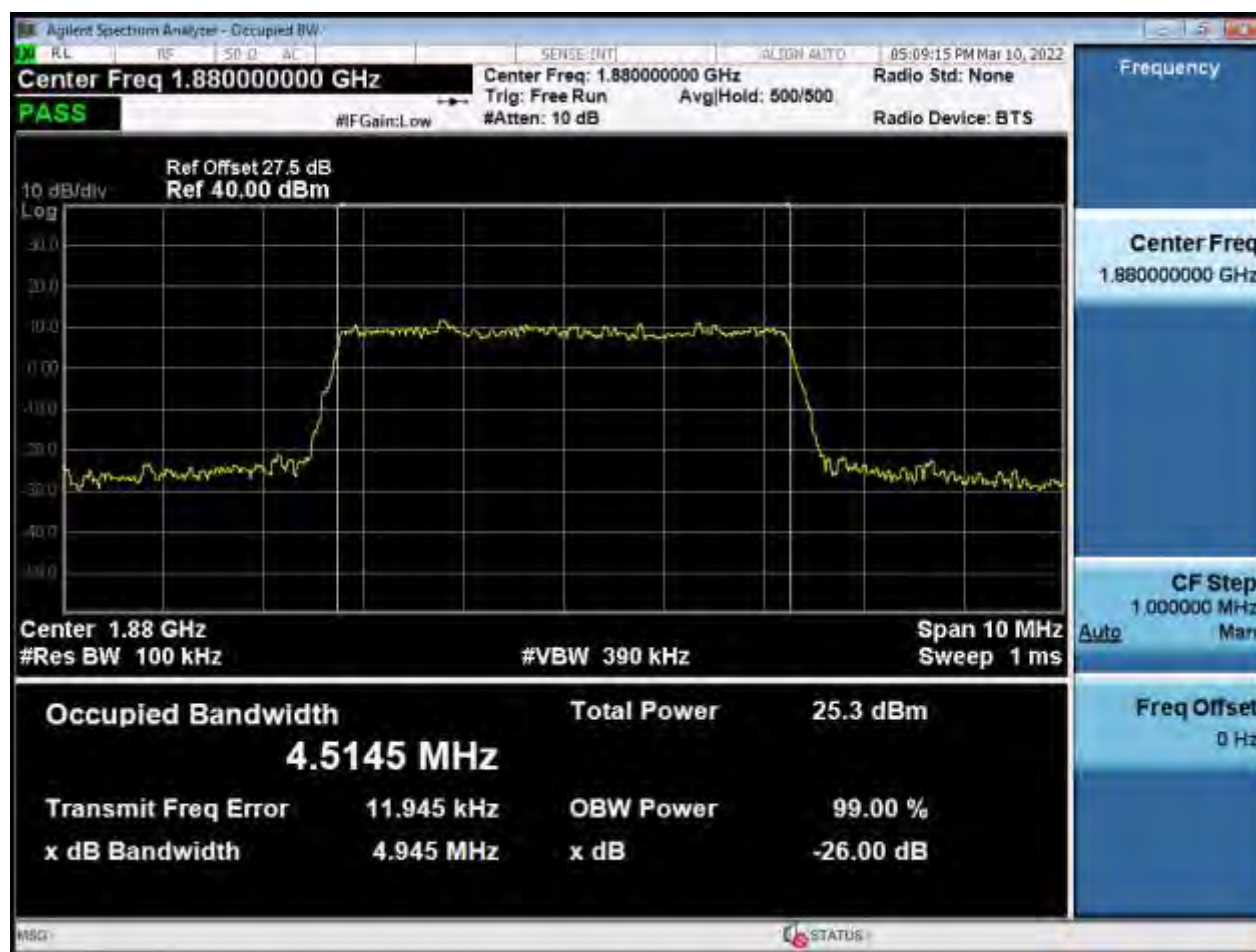


BW10 M_OBW_Middle Channel_QPSK_FullRB




BW10 M_OBW_Middle Channel_16QAM_FullIRB

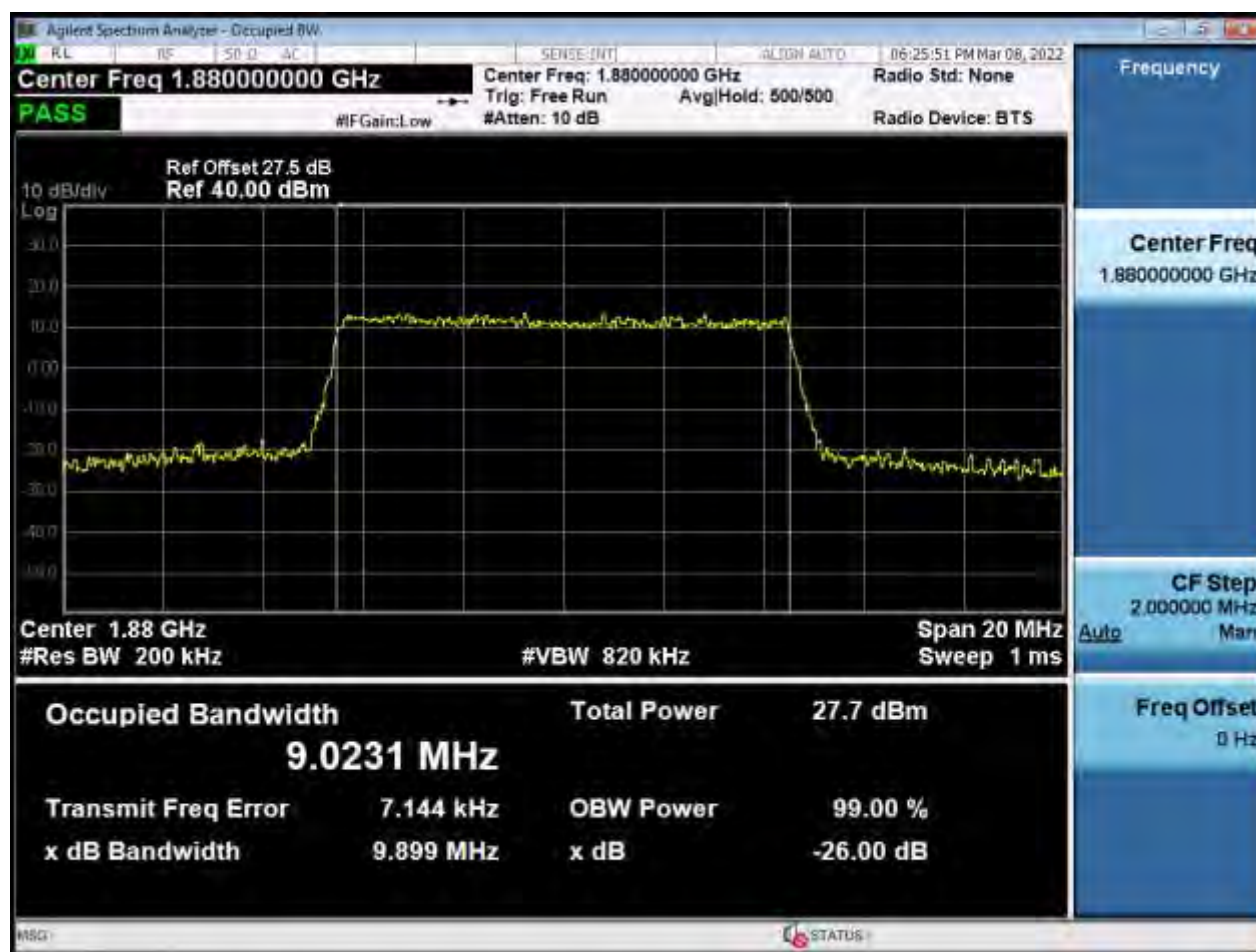


BW10 M_OBW_Middle Channel_64QAM_FullIRB

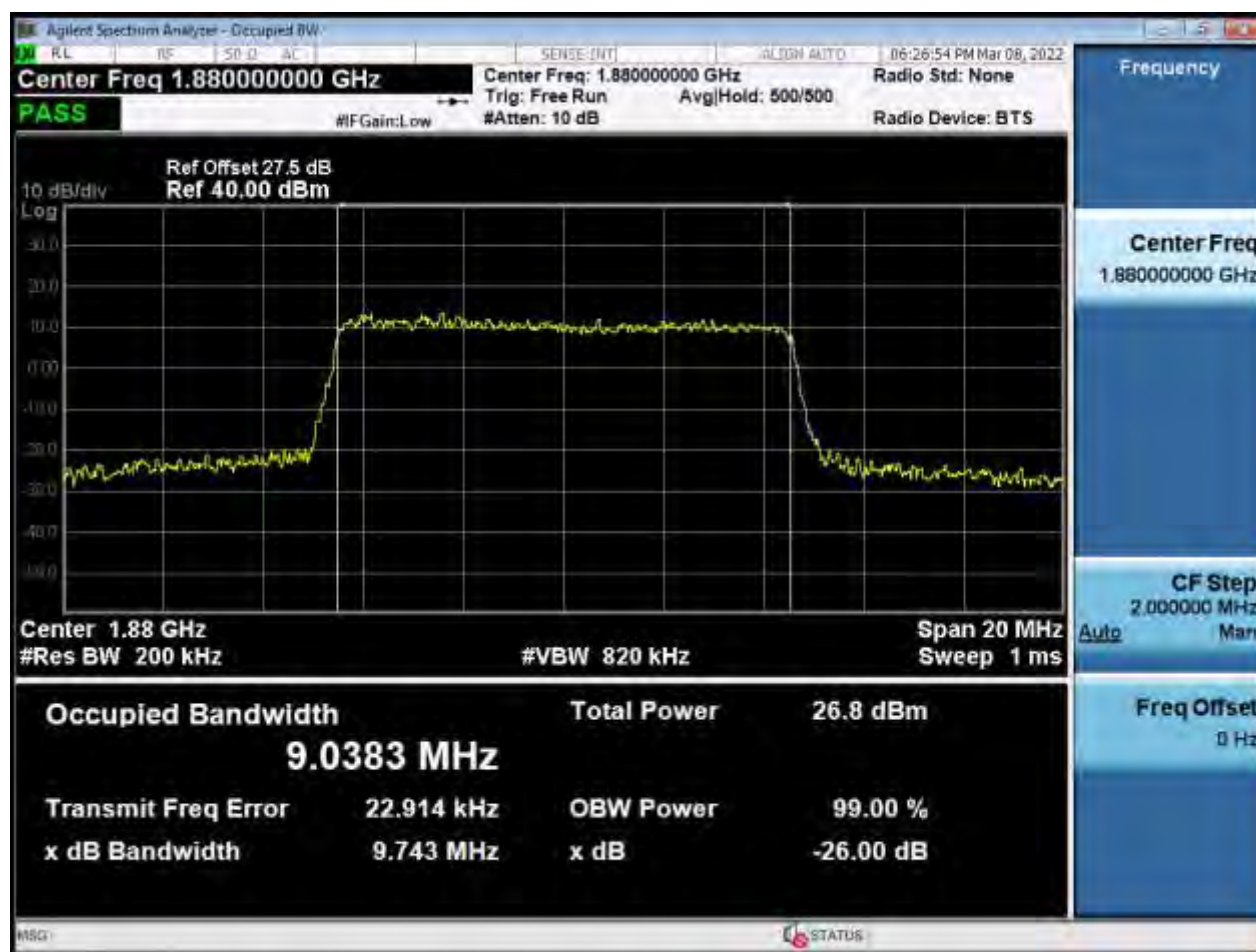


BW10 M_OBW_Middle Channel_256QAM_FullRB

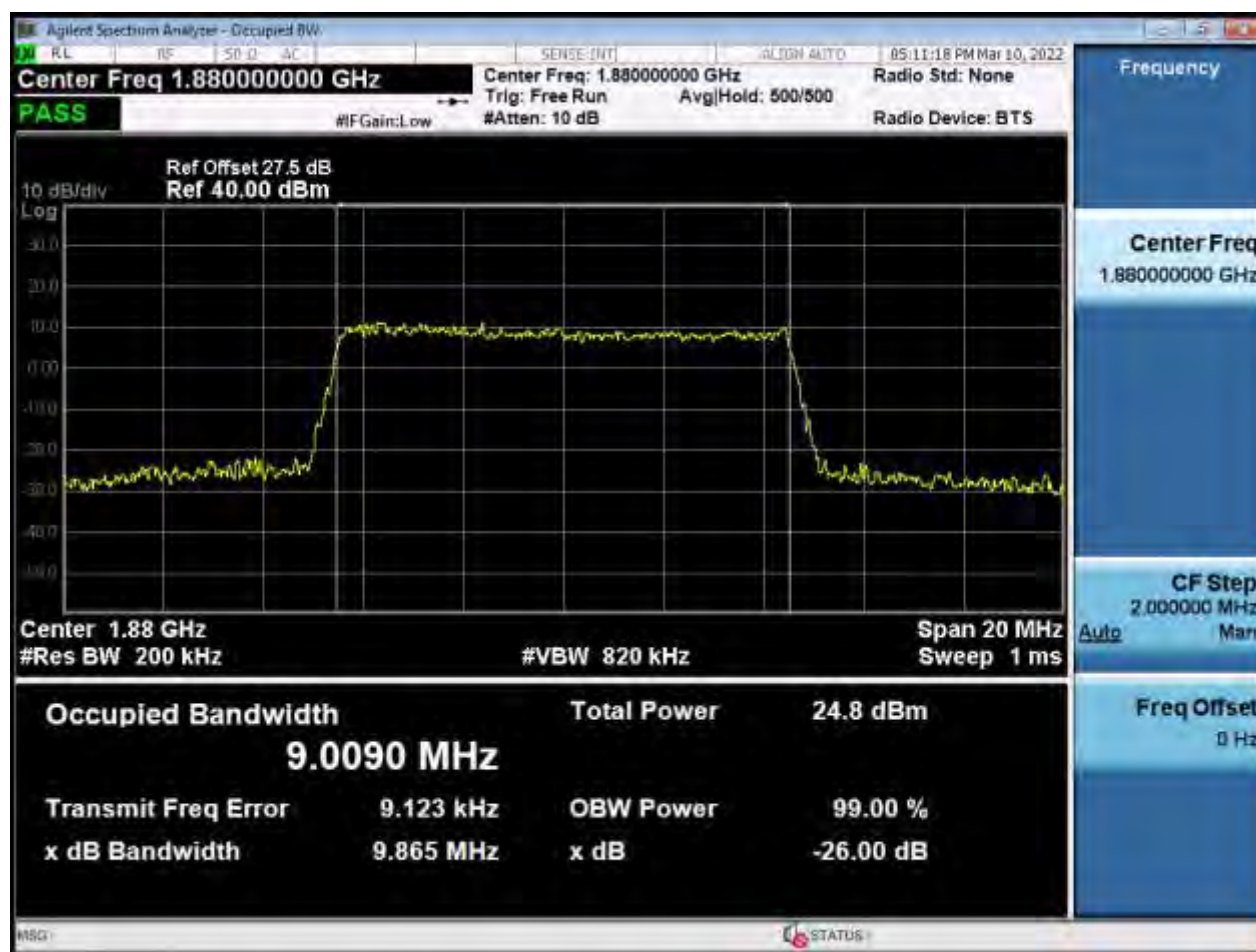


BW15 M_OBW_Middle Channel_QPSK_FullRB

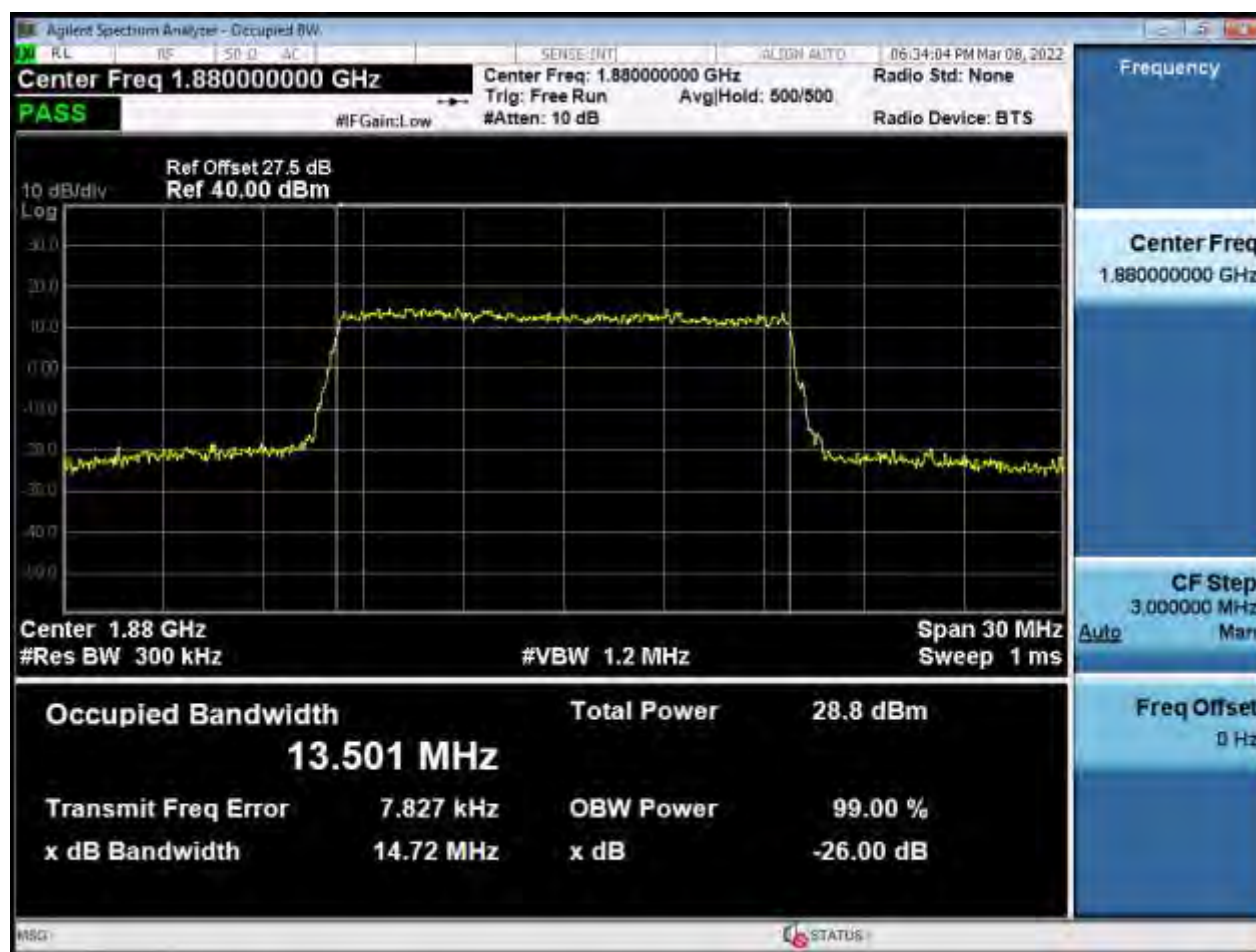


BW15 M_OBW_Middle Channel_16QAM_FullIRB

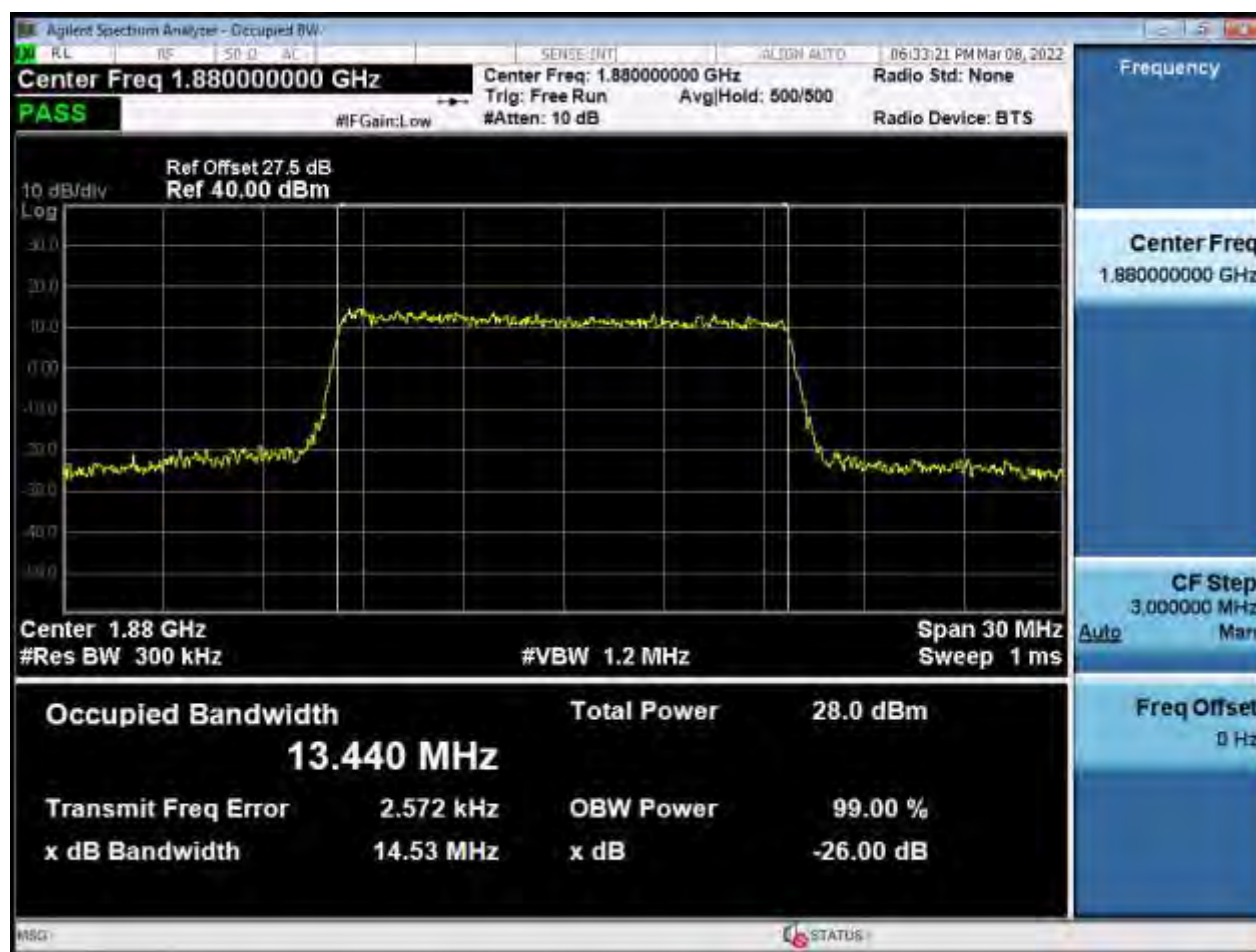


BW15 M_OBW_Middle Channel_64QAM_FullIRB

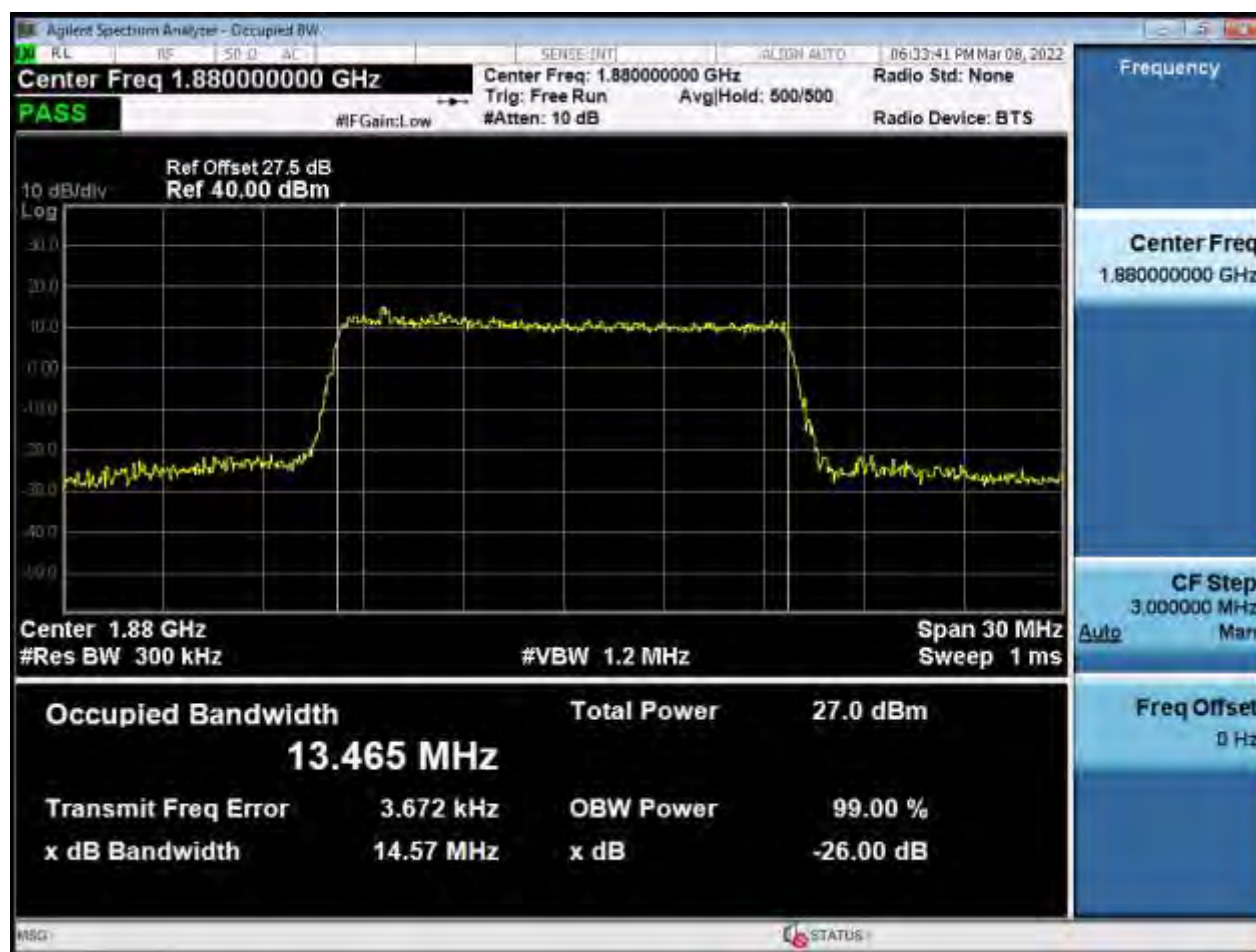


BW15 M_OBW_Middle Channel_256QAM_FullRB

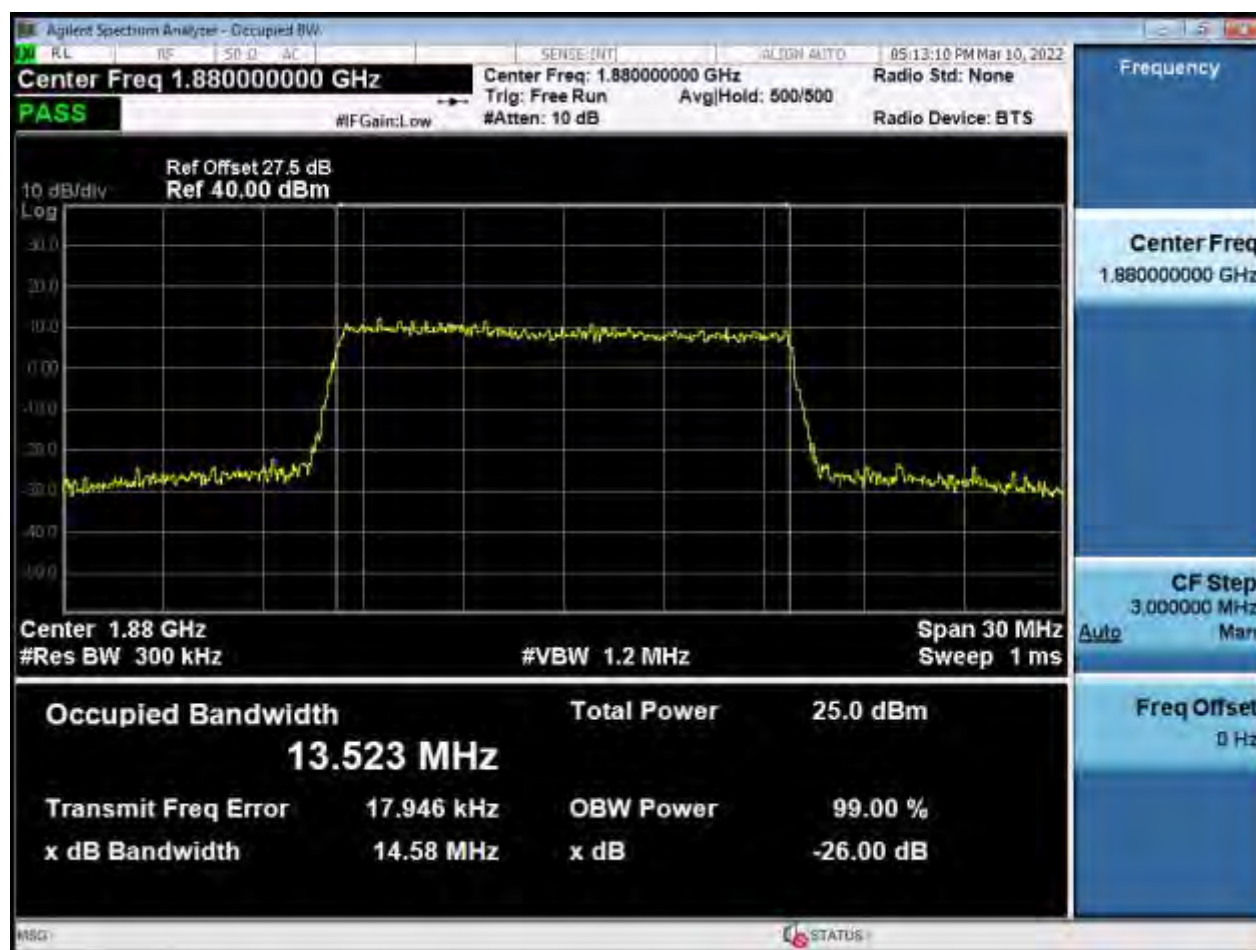

BW20 M_OBW_Middle Channel_QPSK_FullRB

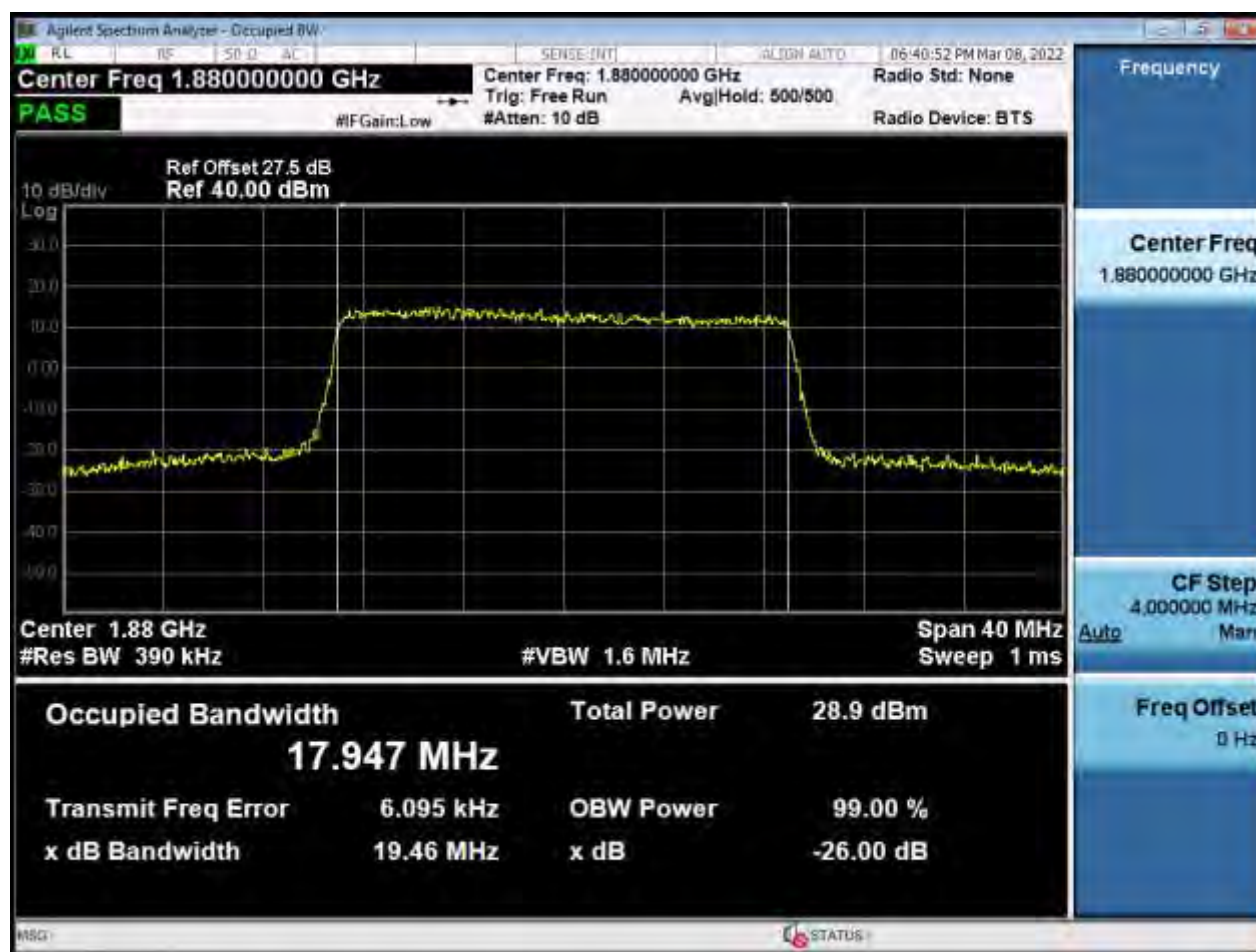


BW20 M_OBW_Middle Channel_16QAM_FullIRB

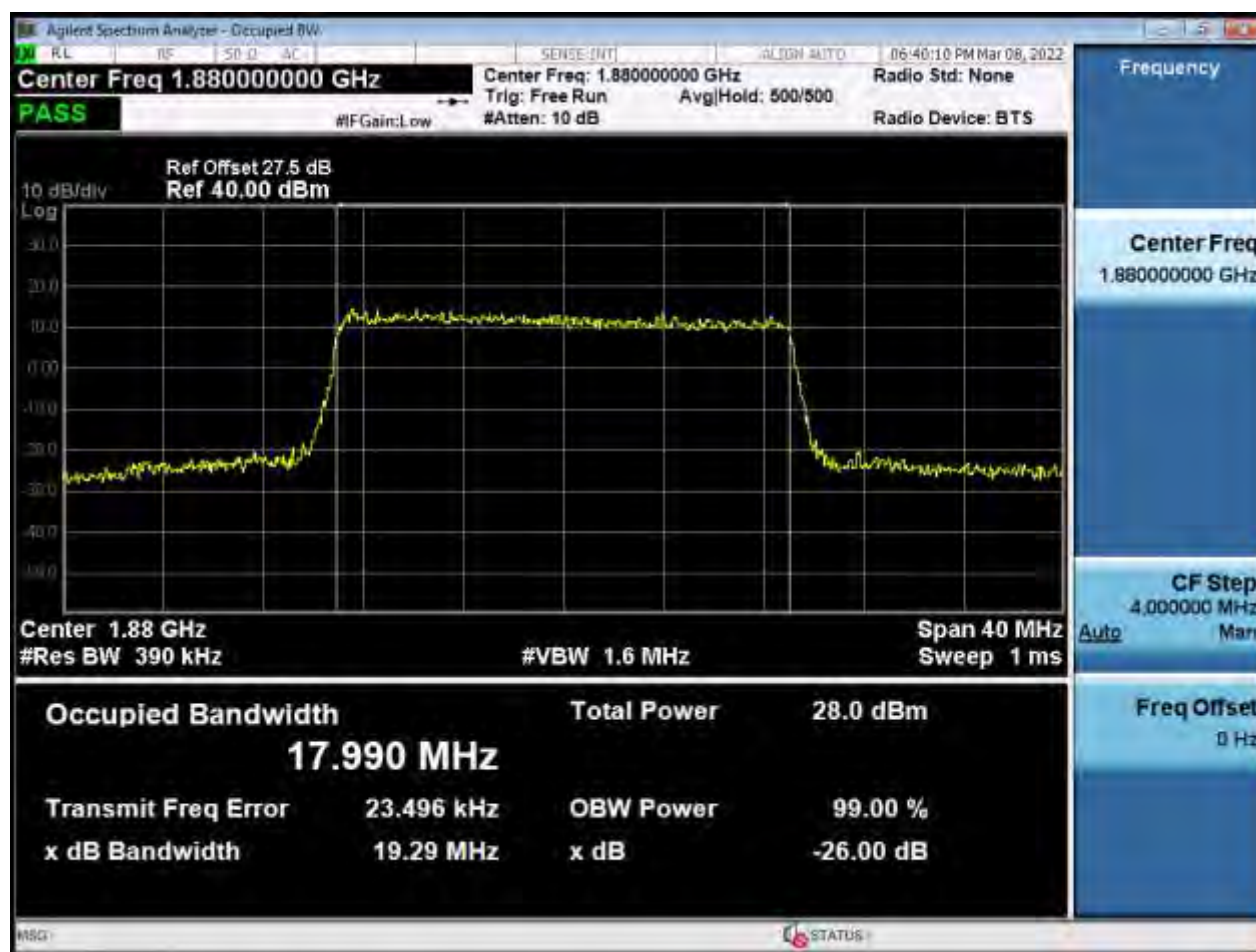

BW20 M_OBW_Middle Channel_64QAM_FullIRB



BW20 M_OBW_Middle Channel_256QAM_FullRB

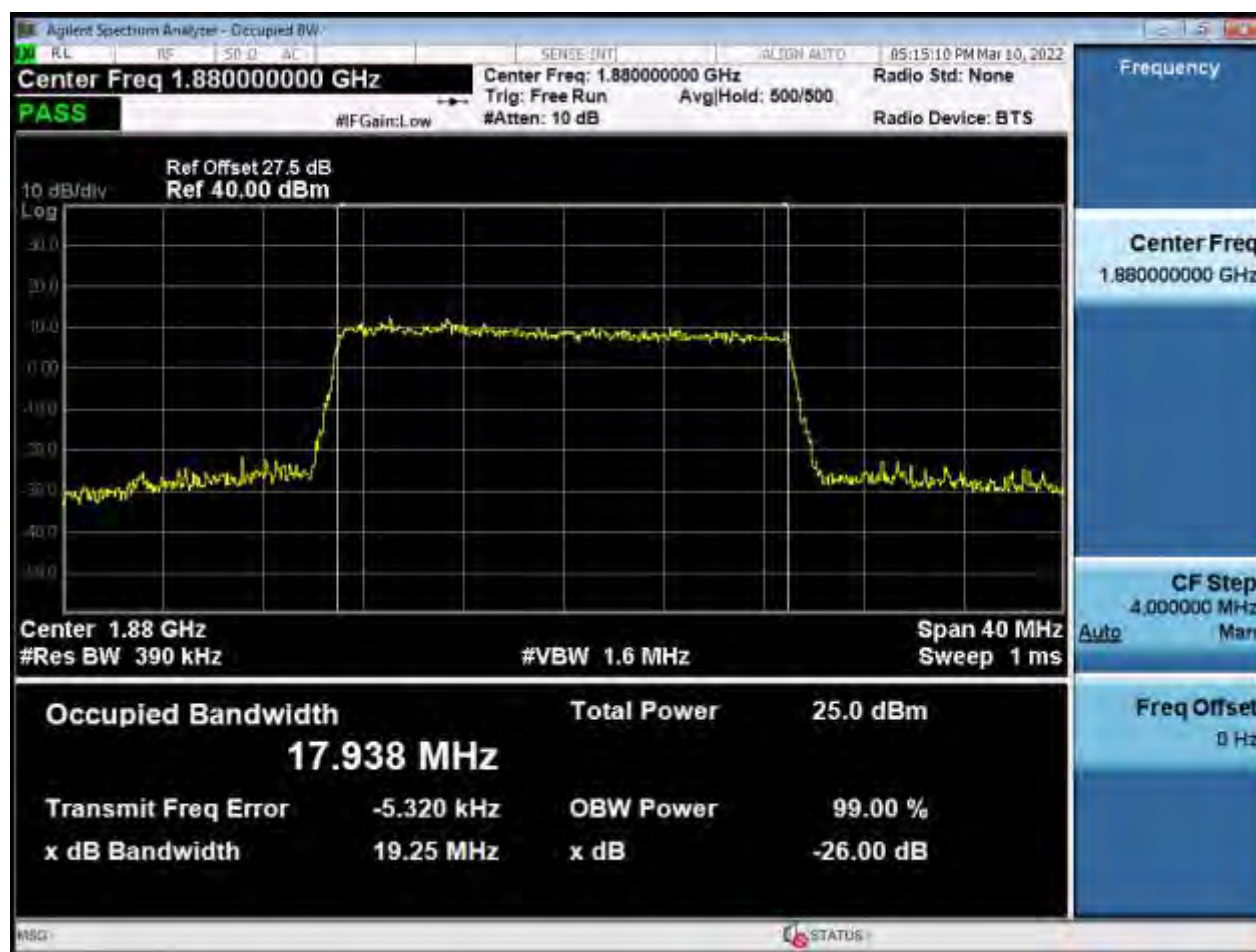

BW1.4 M_PAR_Middle Channel_QPSK_FullRB



BW1.4 M_PAR_Middle Channel_16QAM_FullRB



BW1.4 M_PAR_Middle Channel_64QAM_FullRB



BW1.4 M_PAR_Middle Channel_256QAM_FullRB



BW3 M_PAR_Middle Channel_QPSK_FullRB



BW3 M_PAR_Middle Channel_16QAM_FullRB



BW3 M_PAR_Middle Channel_64QAM_FullRB



BW3 M_PAR_Middle Channel_256QAM_FullRB



BW5 M_PAR_Middle Channel_QPSK_FullRB



BW5 M_PAR_Middle Channel_16QAM_FullRB



BW5 M_PAR_Middle Channel_64QAM_FullRB



BW5 M_PAR_Middle Channel_256QAM_FullRB



BW10 M_PAR_Middle Channelz_QPSK_FullRB



BW10 M_PAR_Middle Channel_16QAM_FullRB



BW10 M_PAR_Middle Channel_64QAM_FullRB



BW10 M_PAR_Middle Channel_256QAM_FullIRB




BW15 M_PAR_Middle Channel_QPSK_FullRB



BW15 M_PAR_Middle Channel_16QAM_FullRB



BW15 M_PAR_Middle Channel_64QAM_FullRB

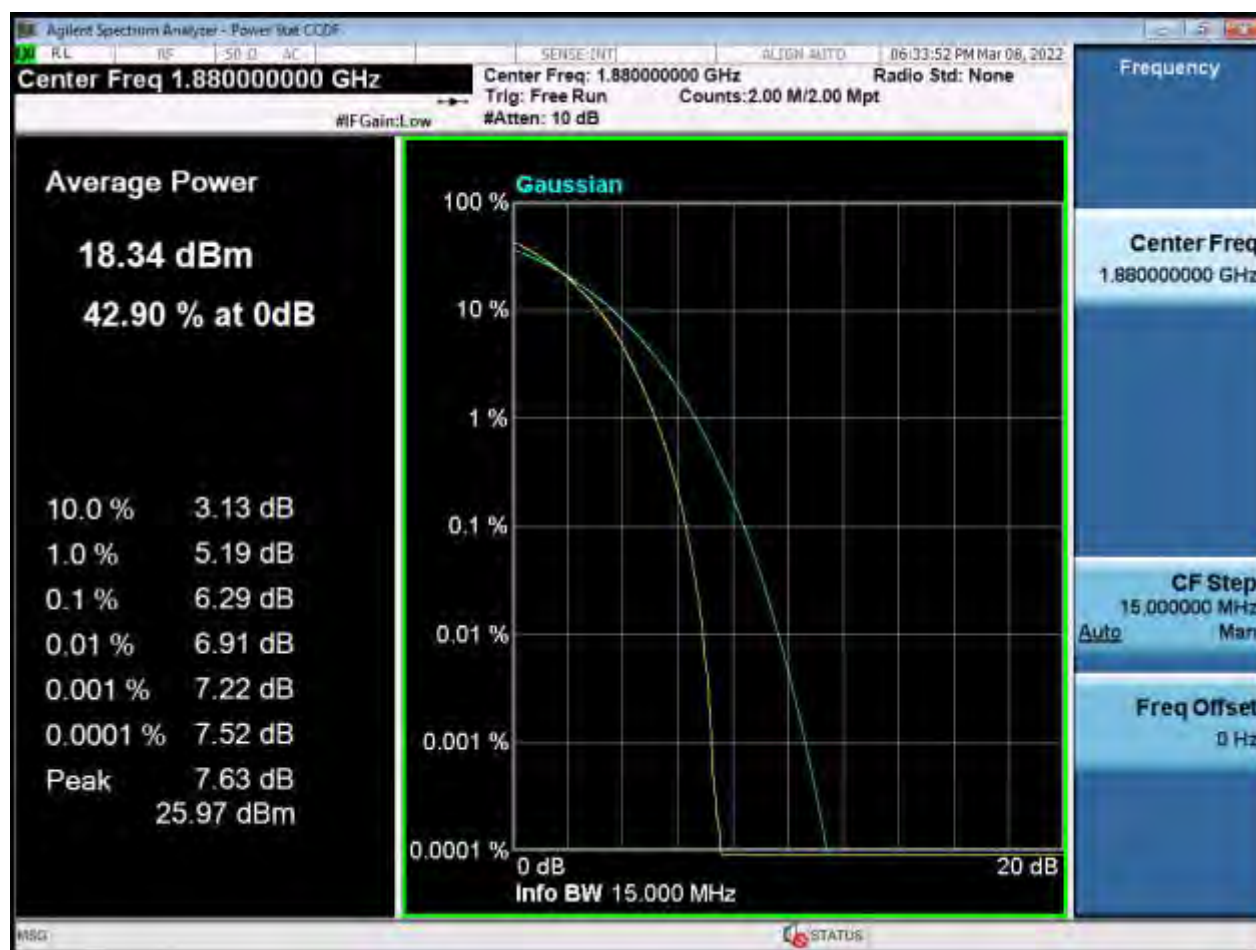

BW15 M_PAR_Middle Channel_256QAM_FullIRB



BW20 M_PAR_Middle Channel_QPSK_FullRB




BW20 M_PAR_Middle Channel_16QAM_FullRB




BW20 M_PAR_Middle Channel_64QAM_FullRB




BW20 M_PAR_Middle Channel_256QAM_FullIRB

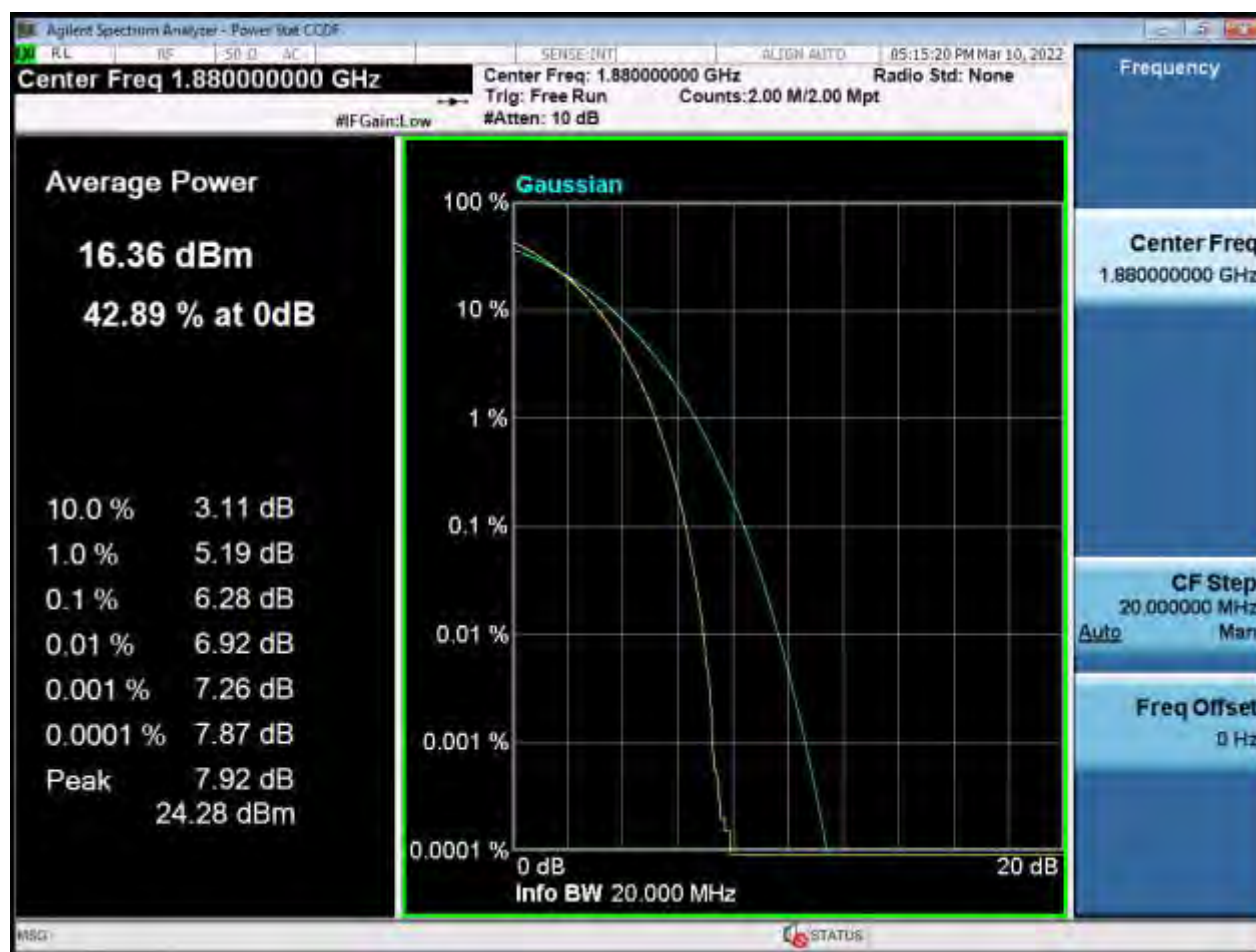


BW1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

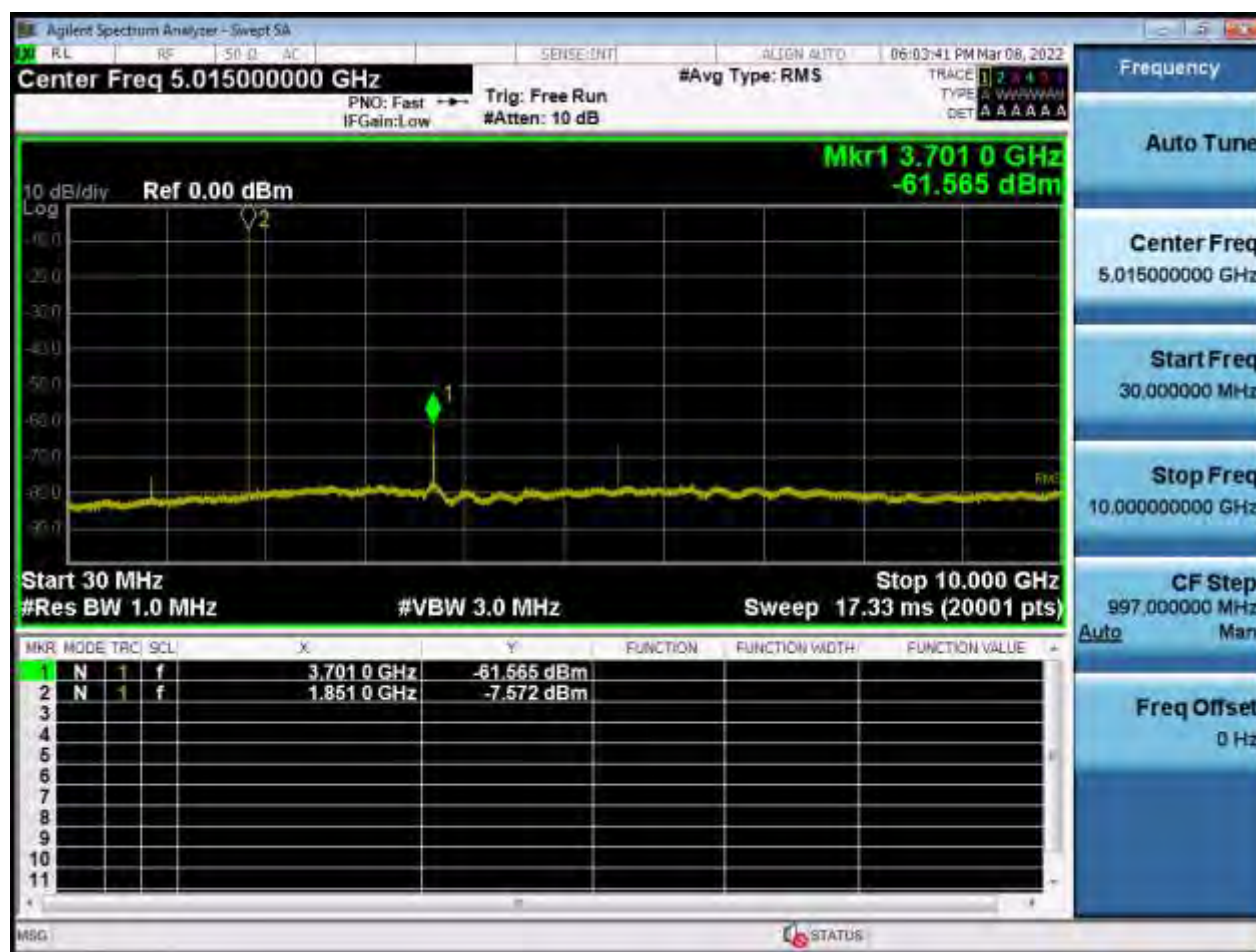


BW1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

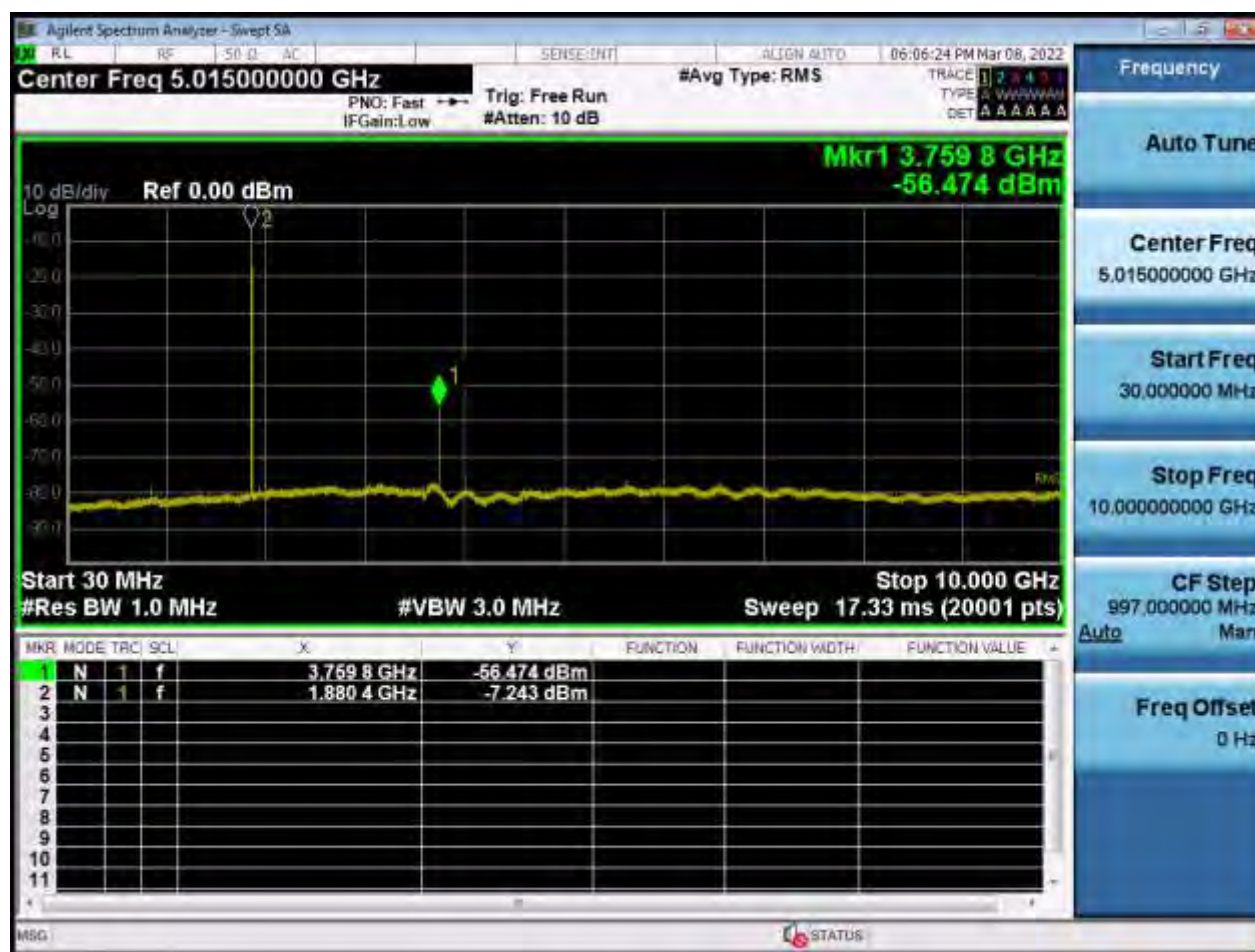


BW1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

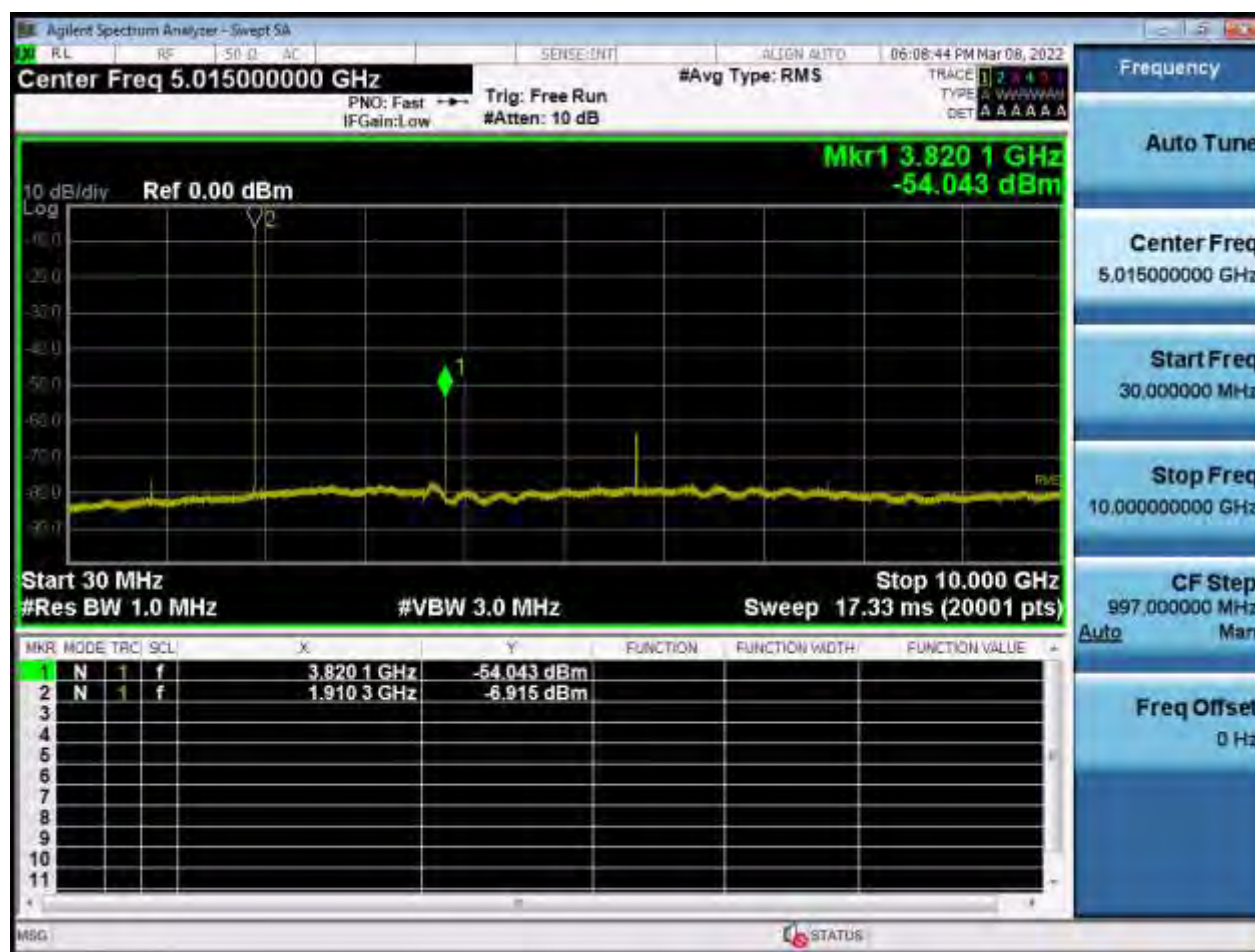


BW3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

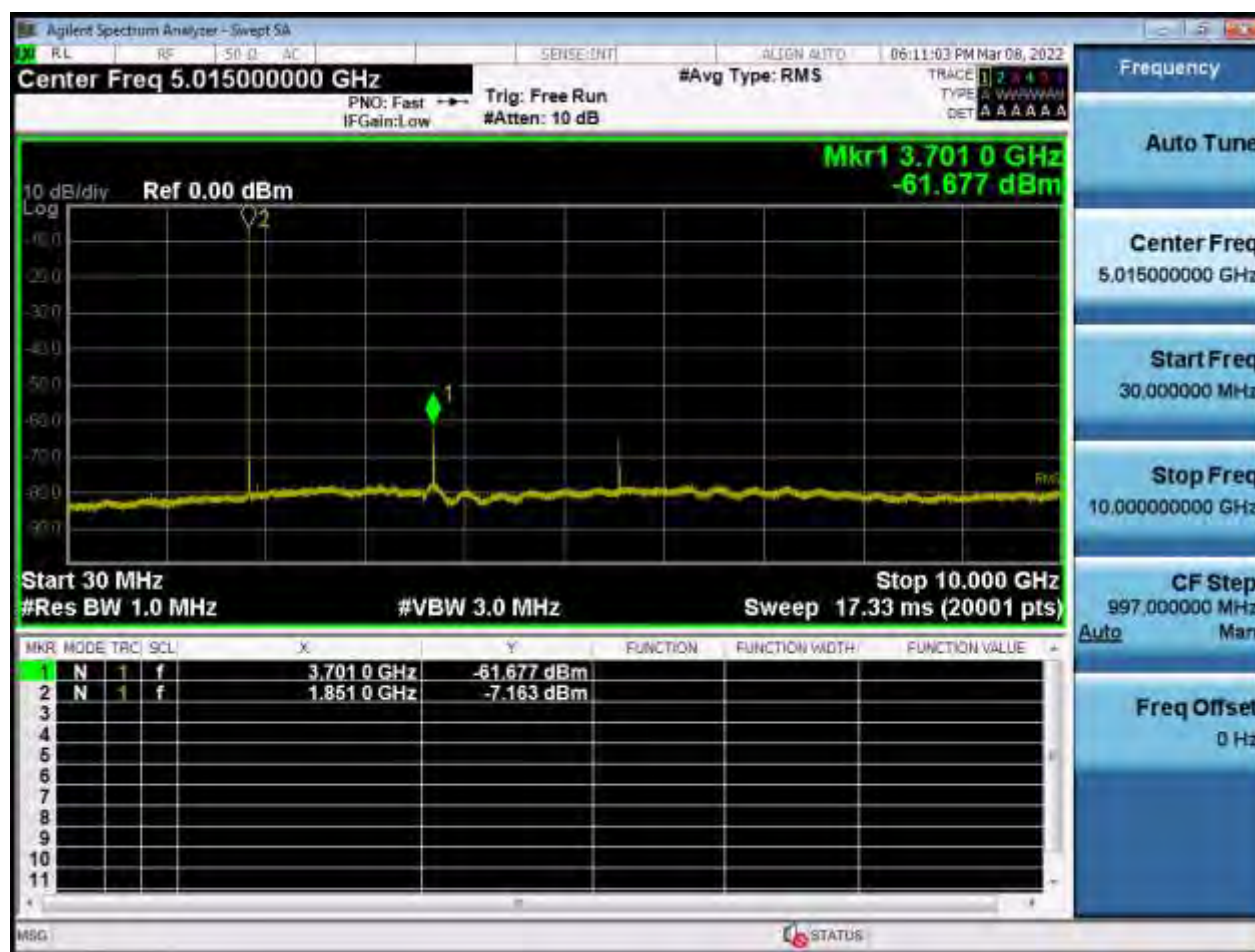


BW3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

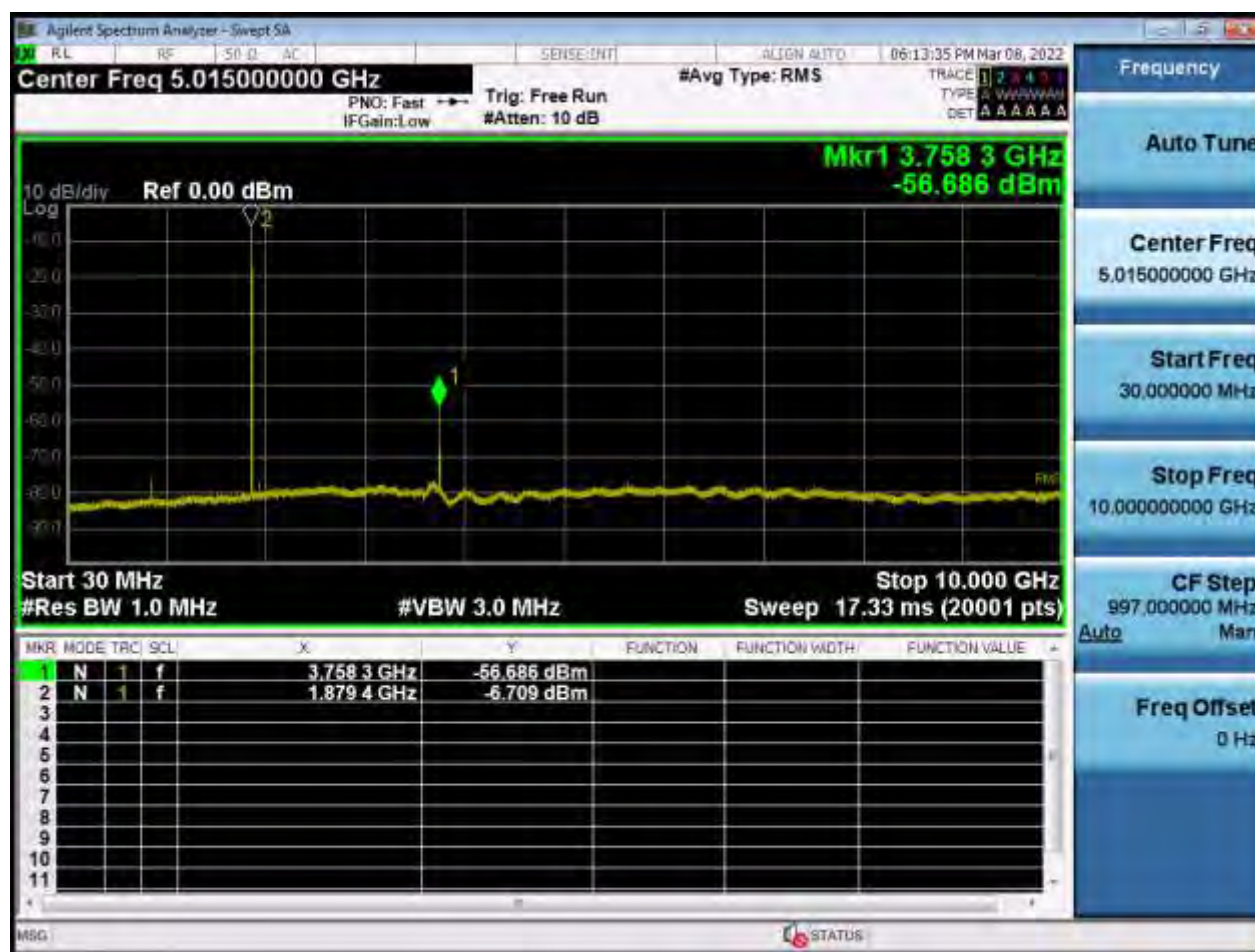


BW3 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

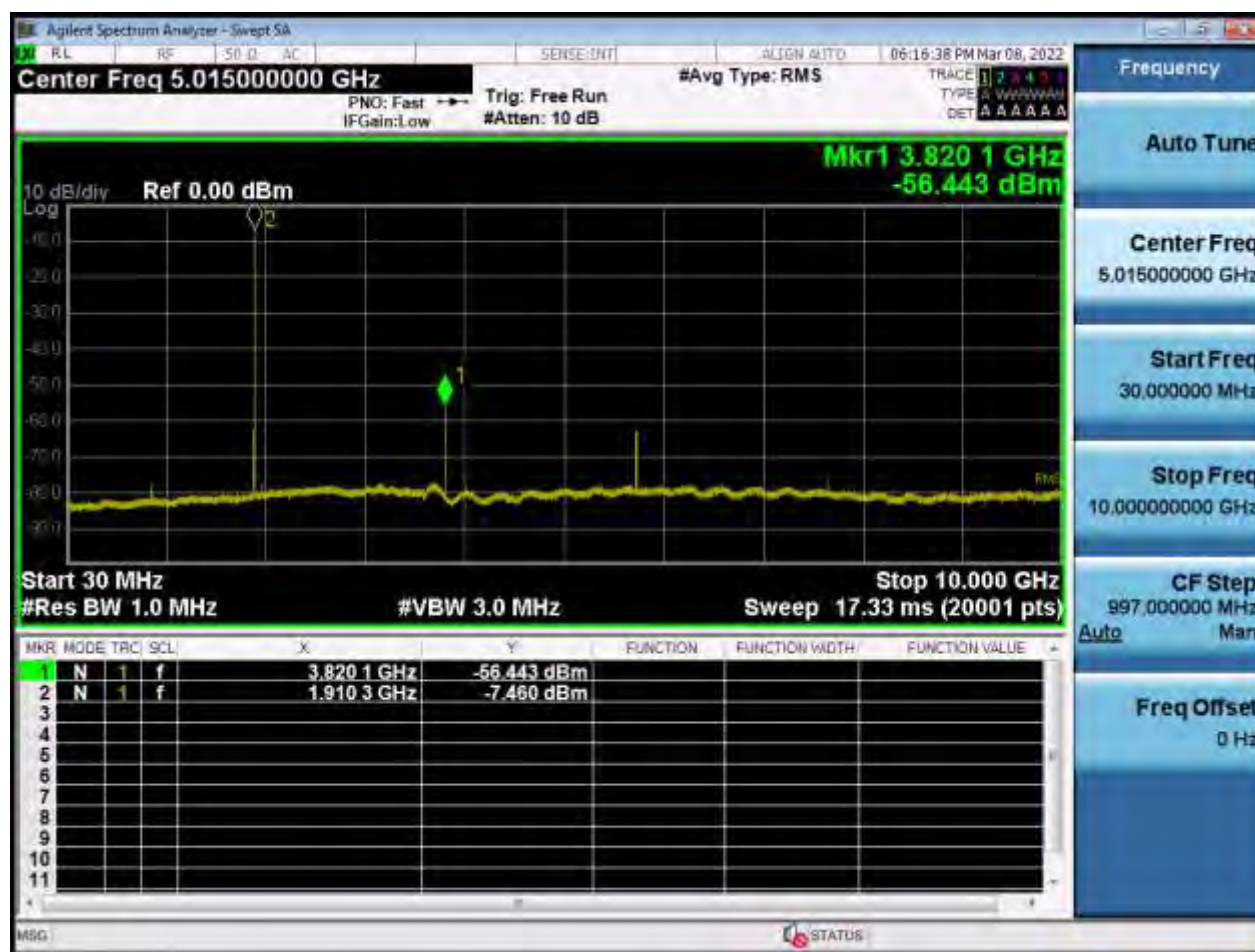


BW5 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

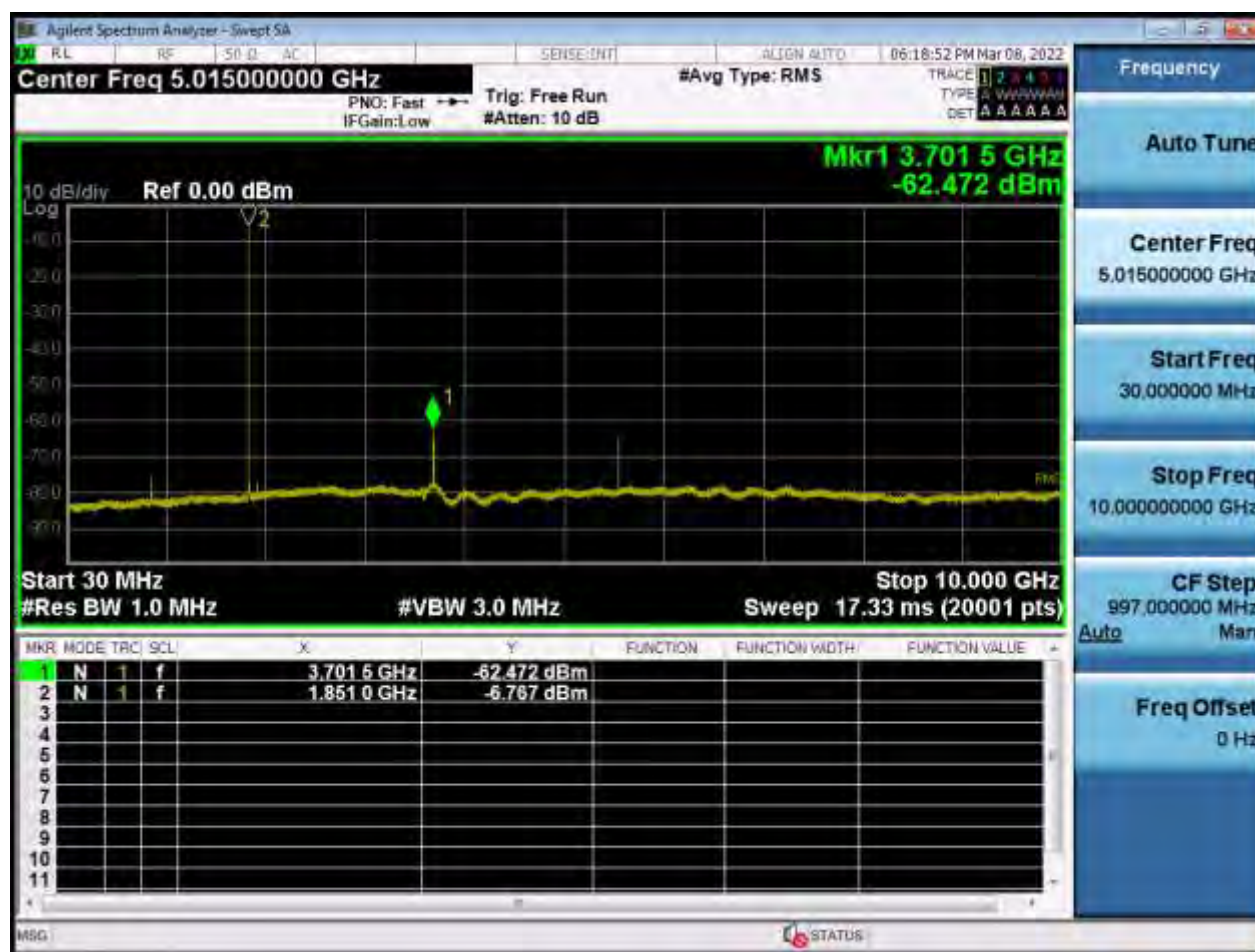


BW5 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

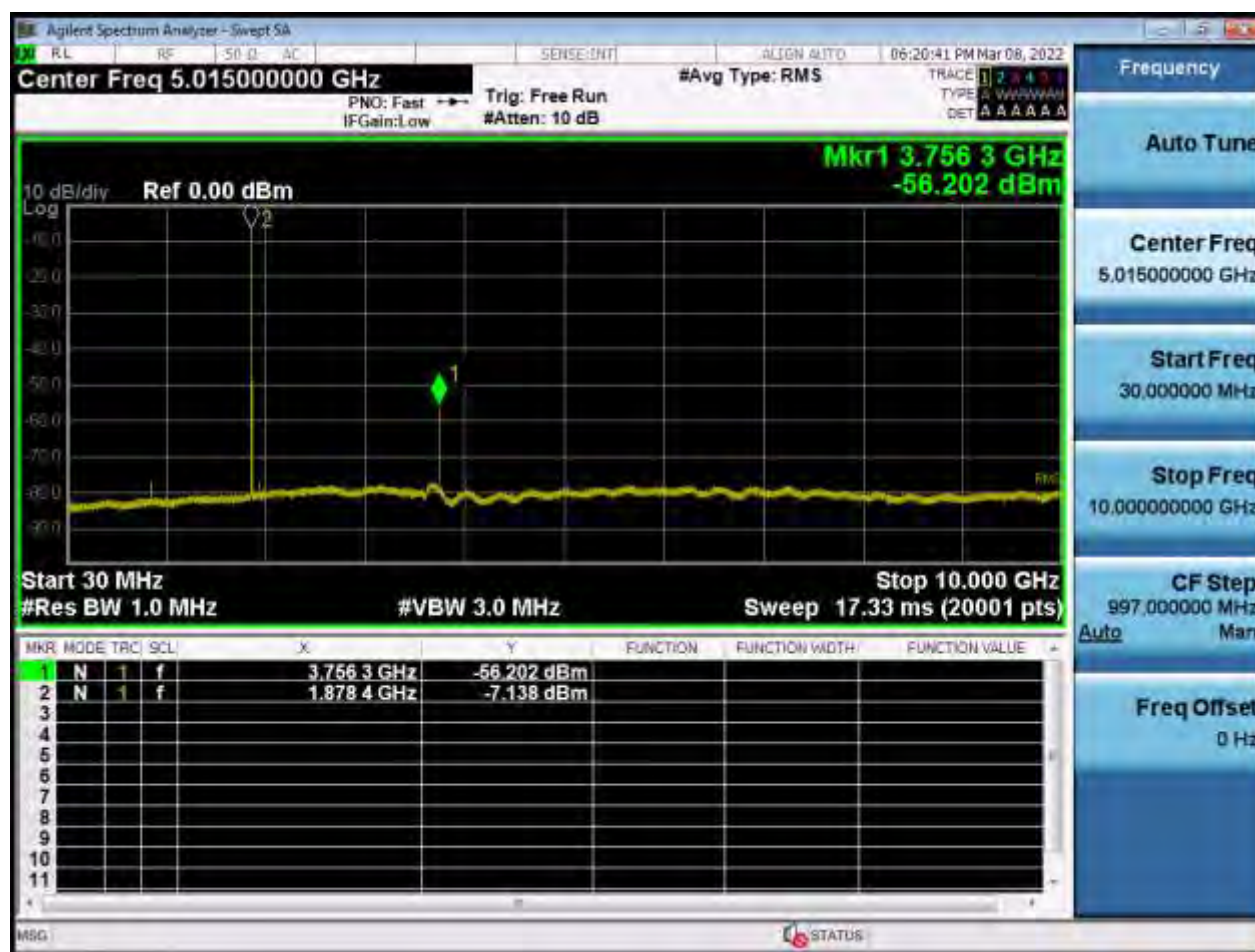


BW5 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

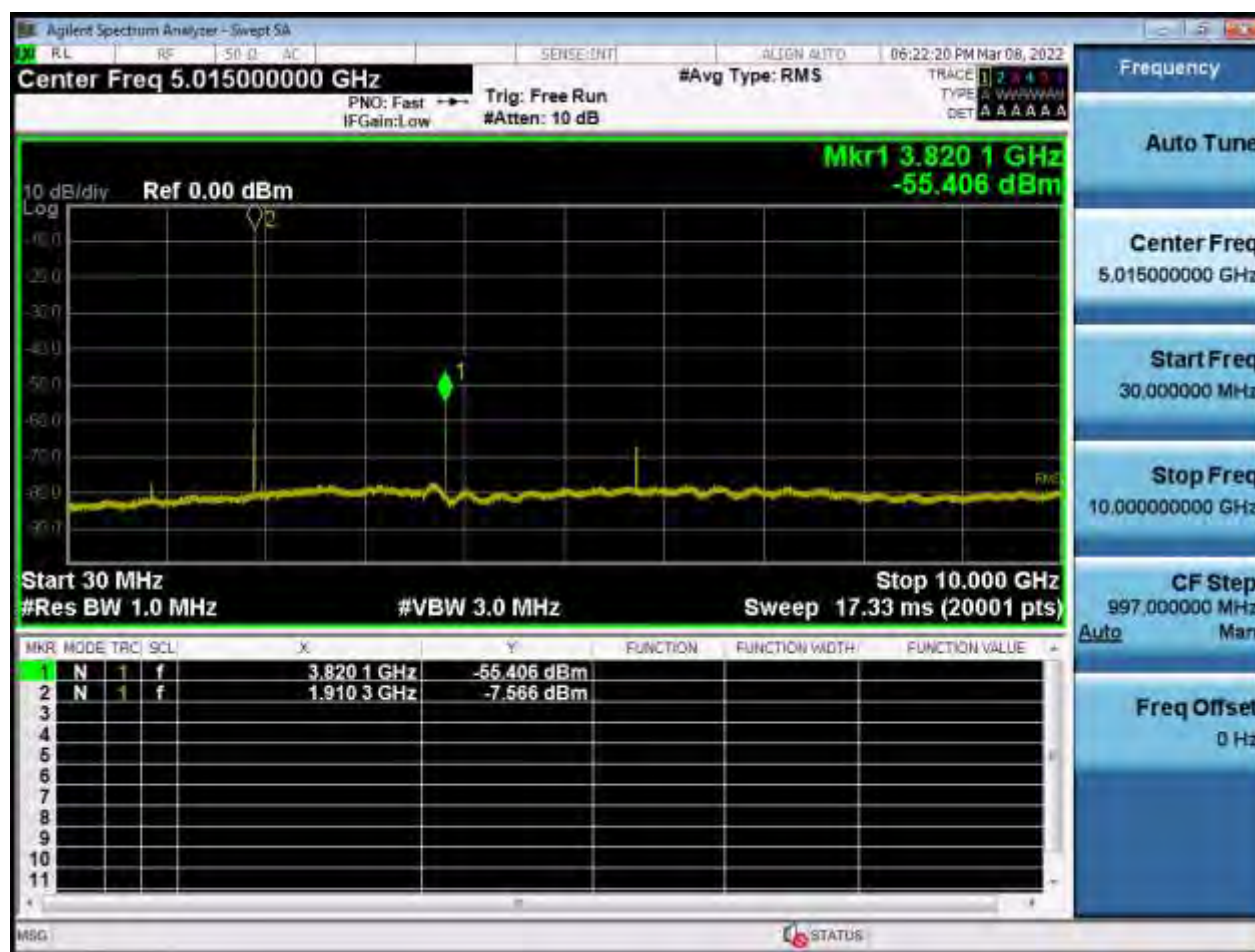


BW10 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

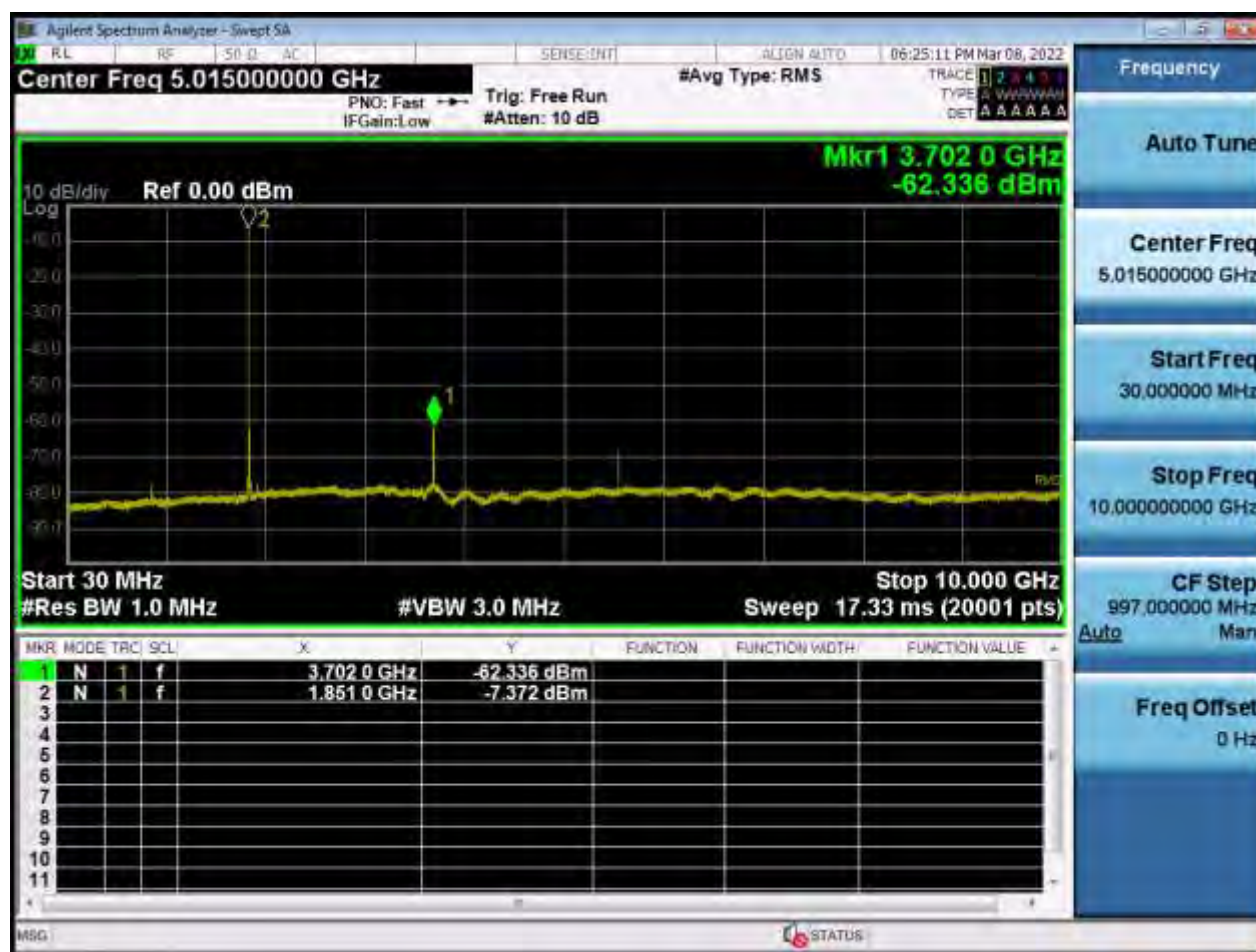


BW10 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

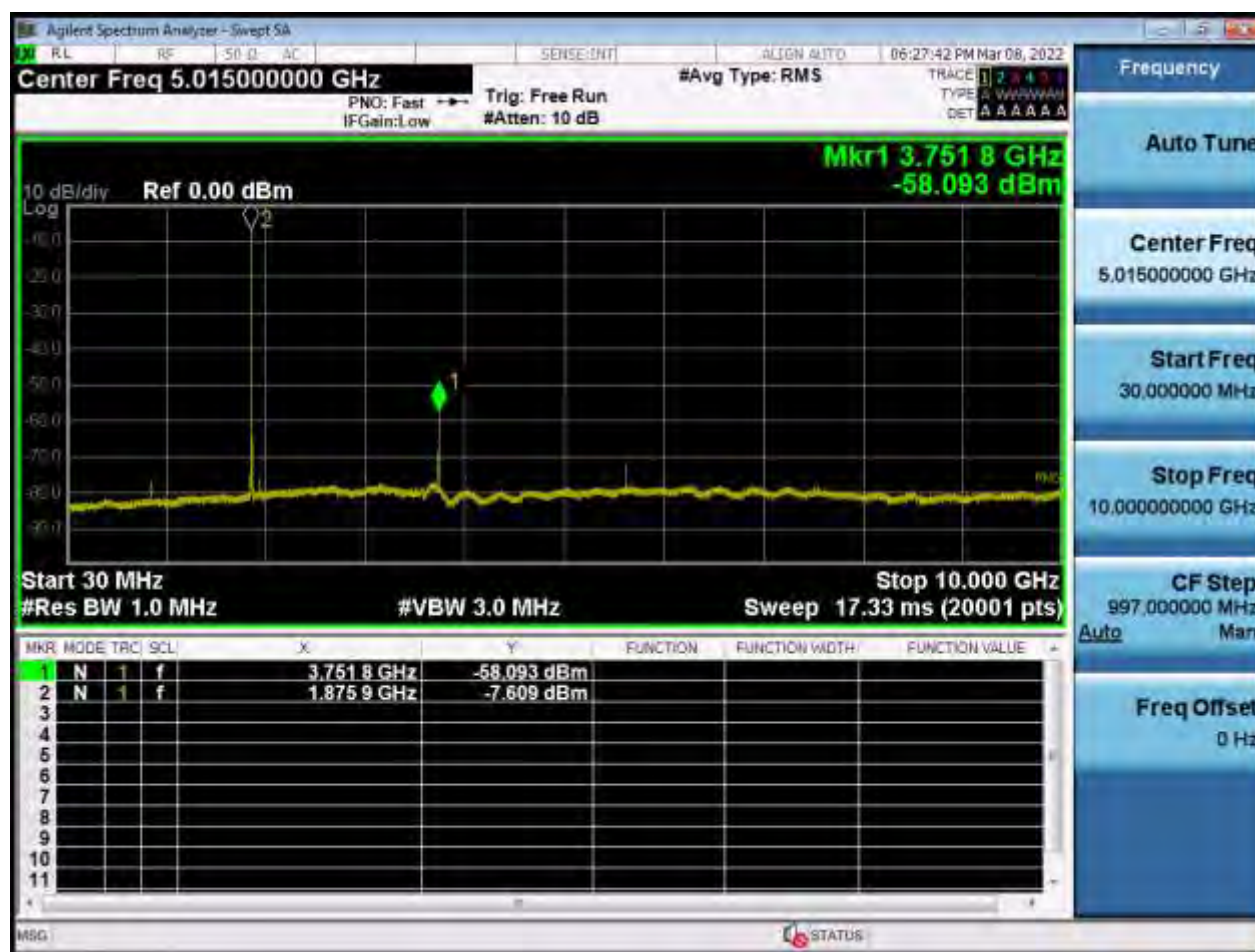


BW10 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

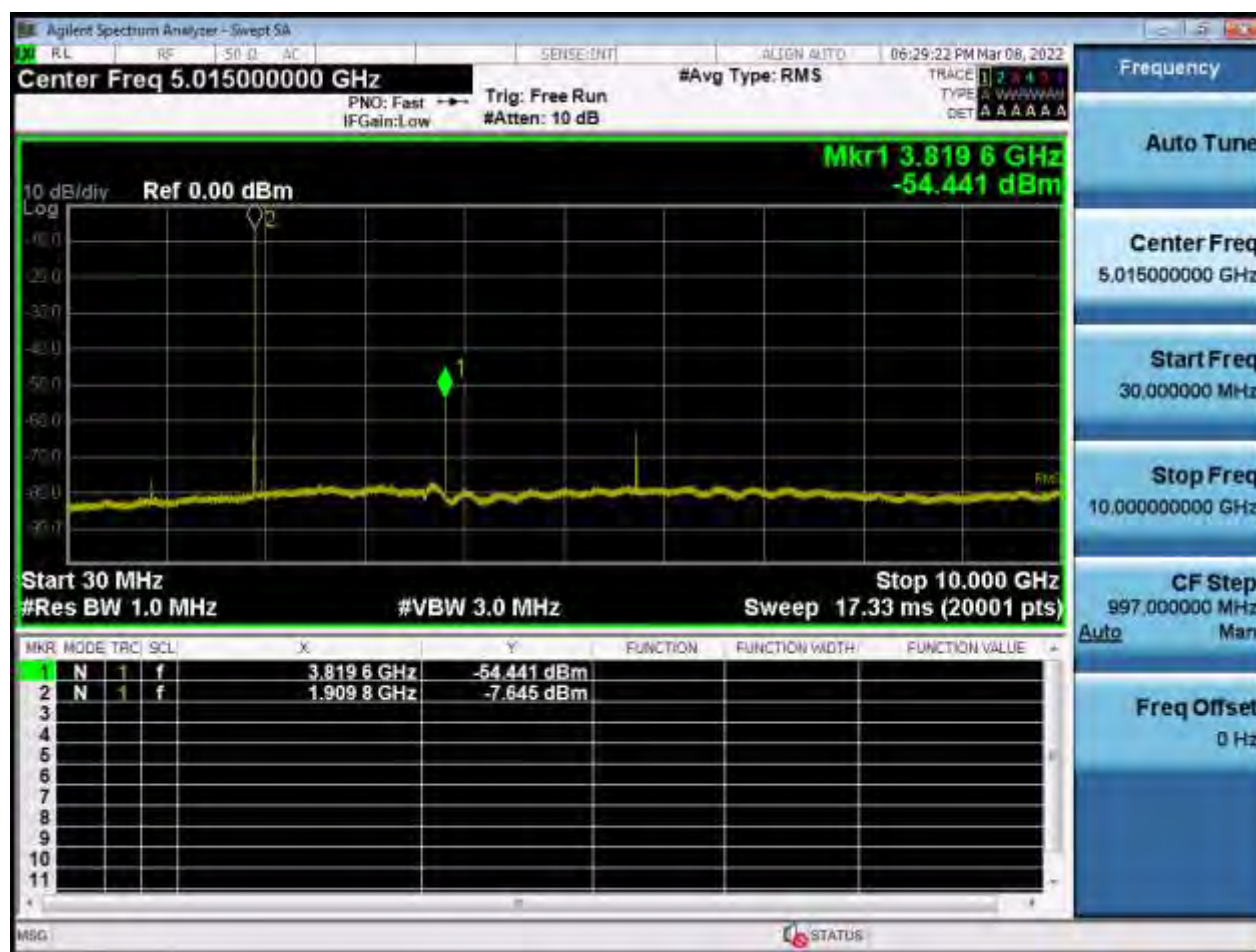


BW15 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

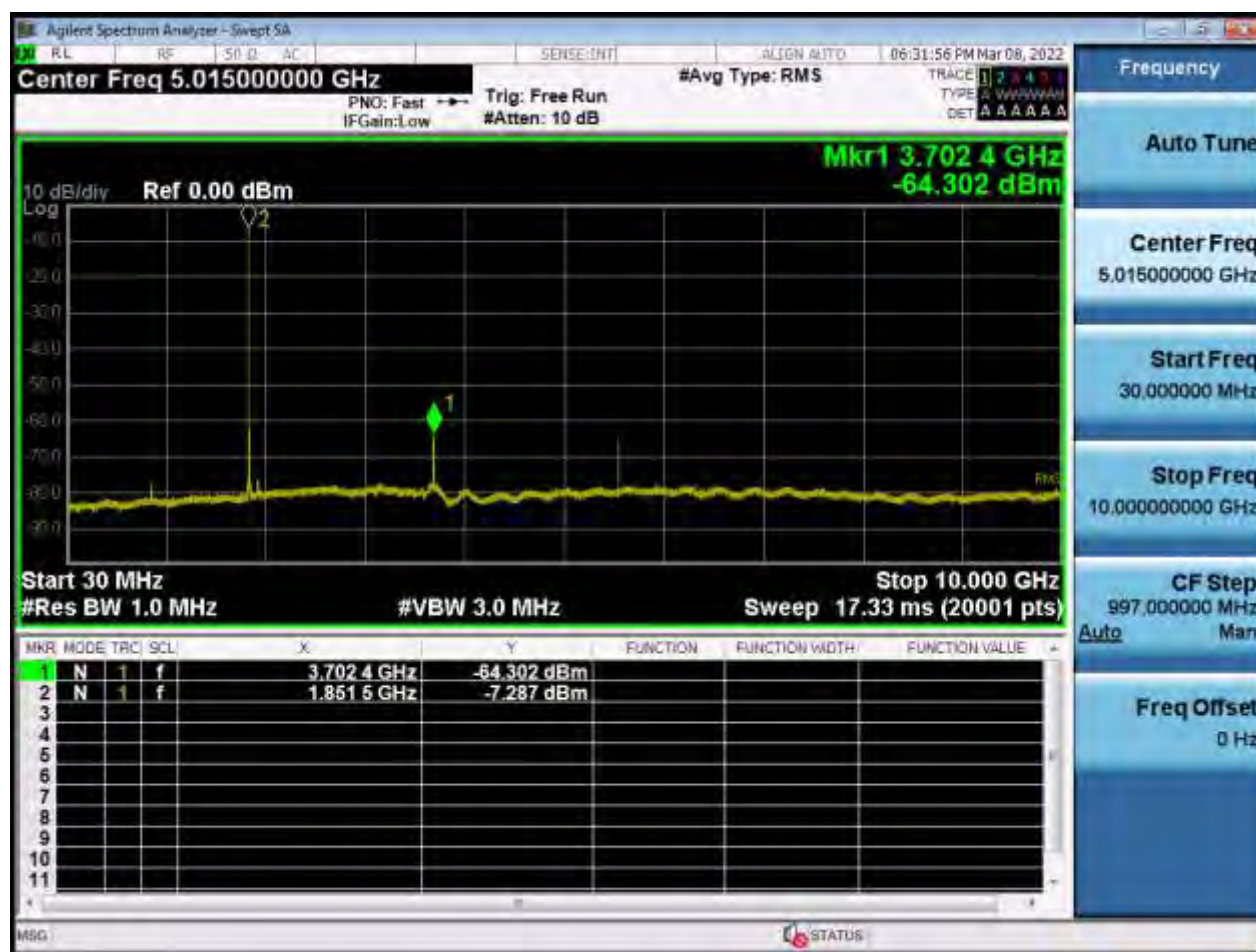


BW15 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

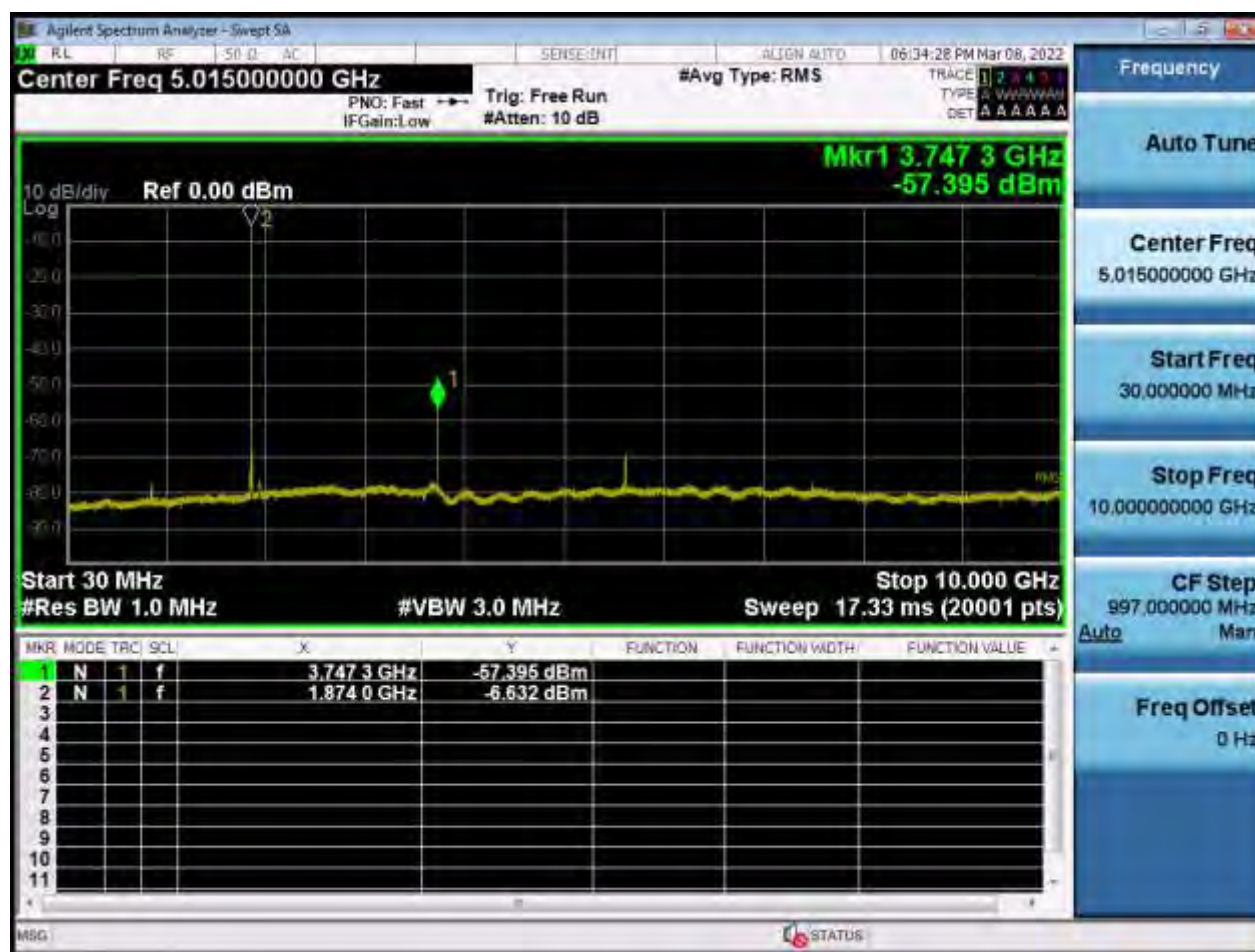


BW15 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

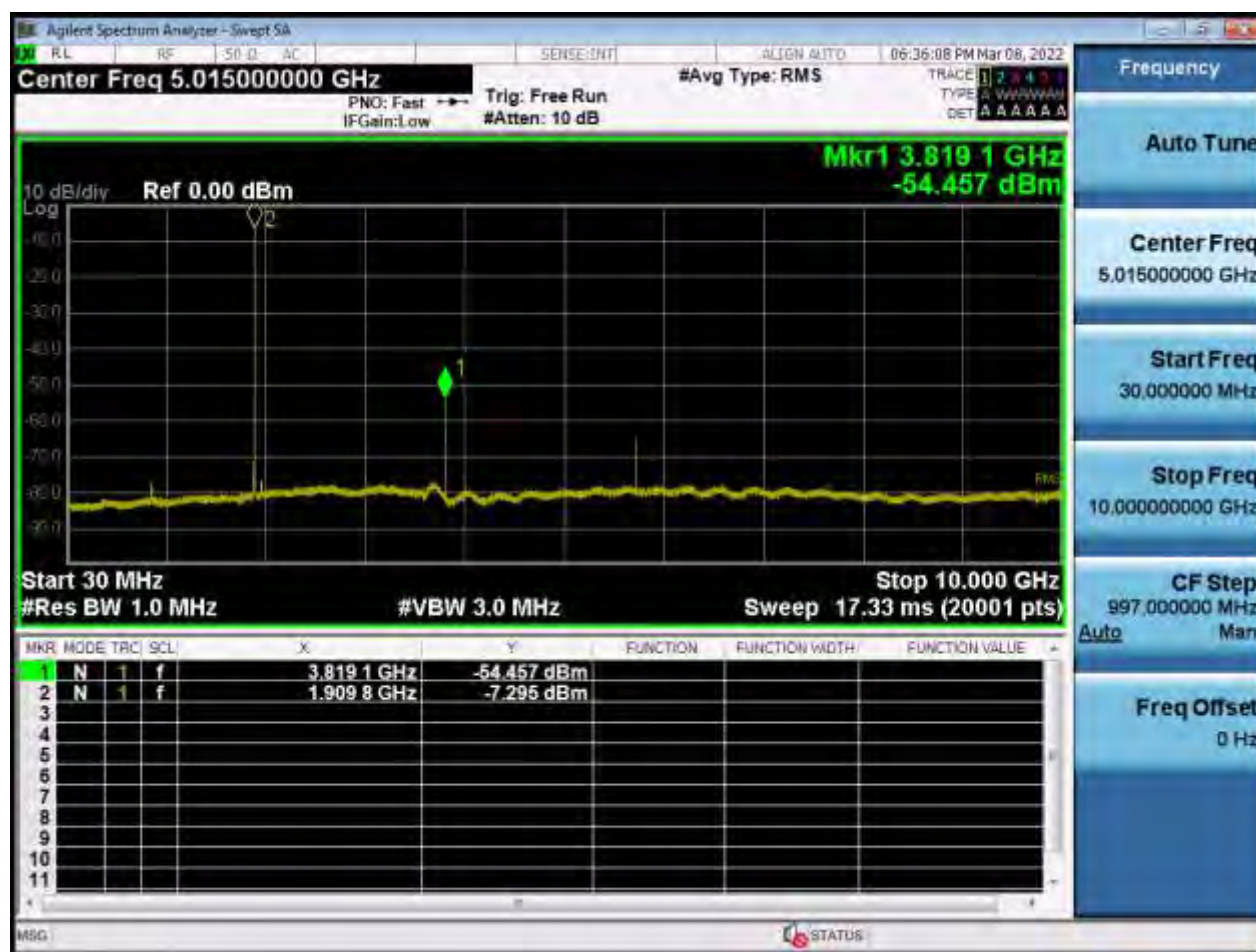


BW20 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

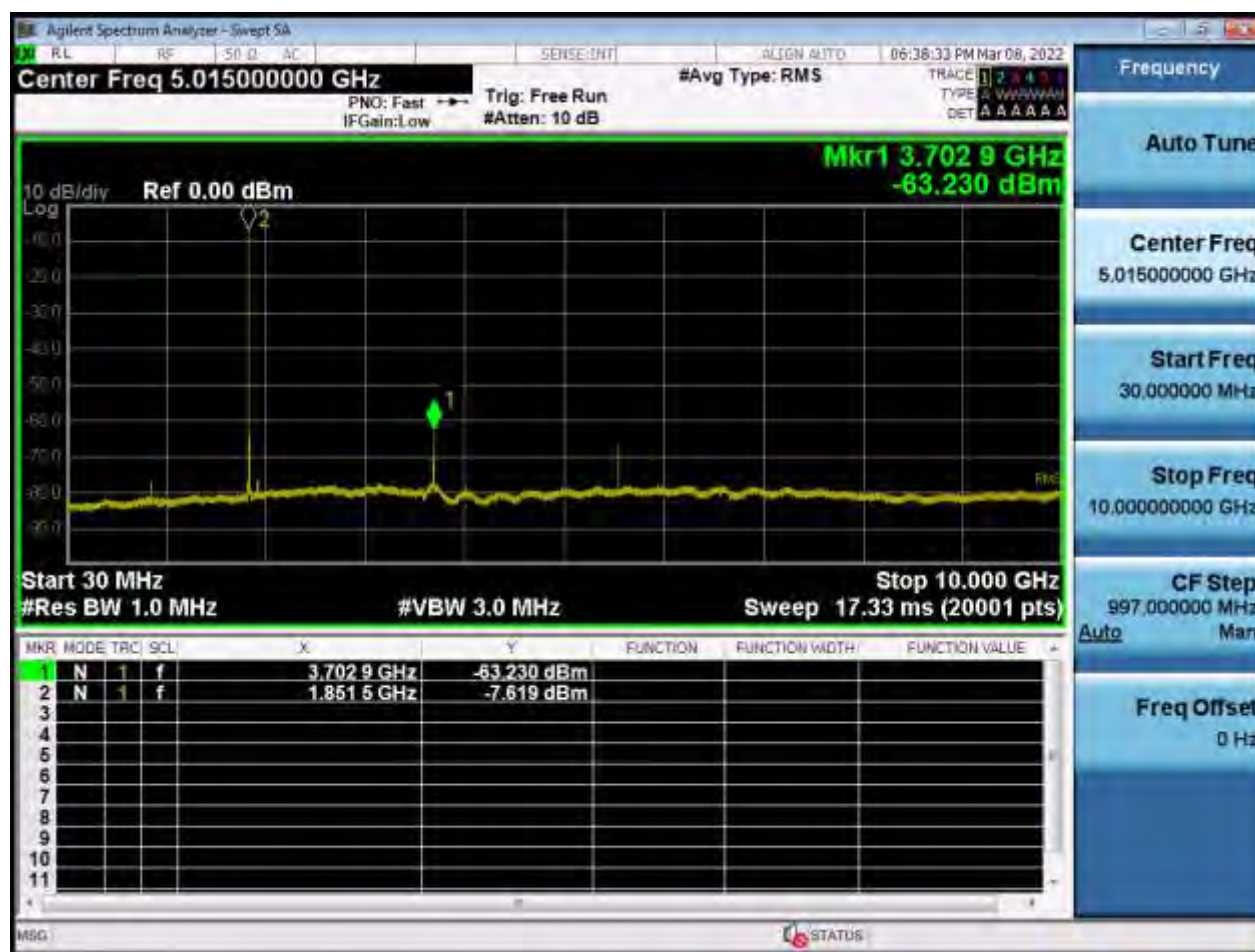

BW20 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

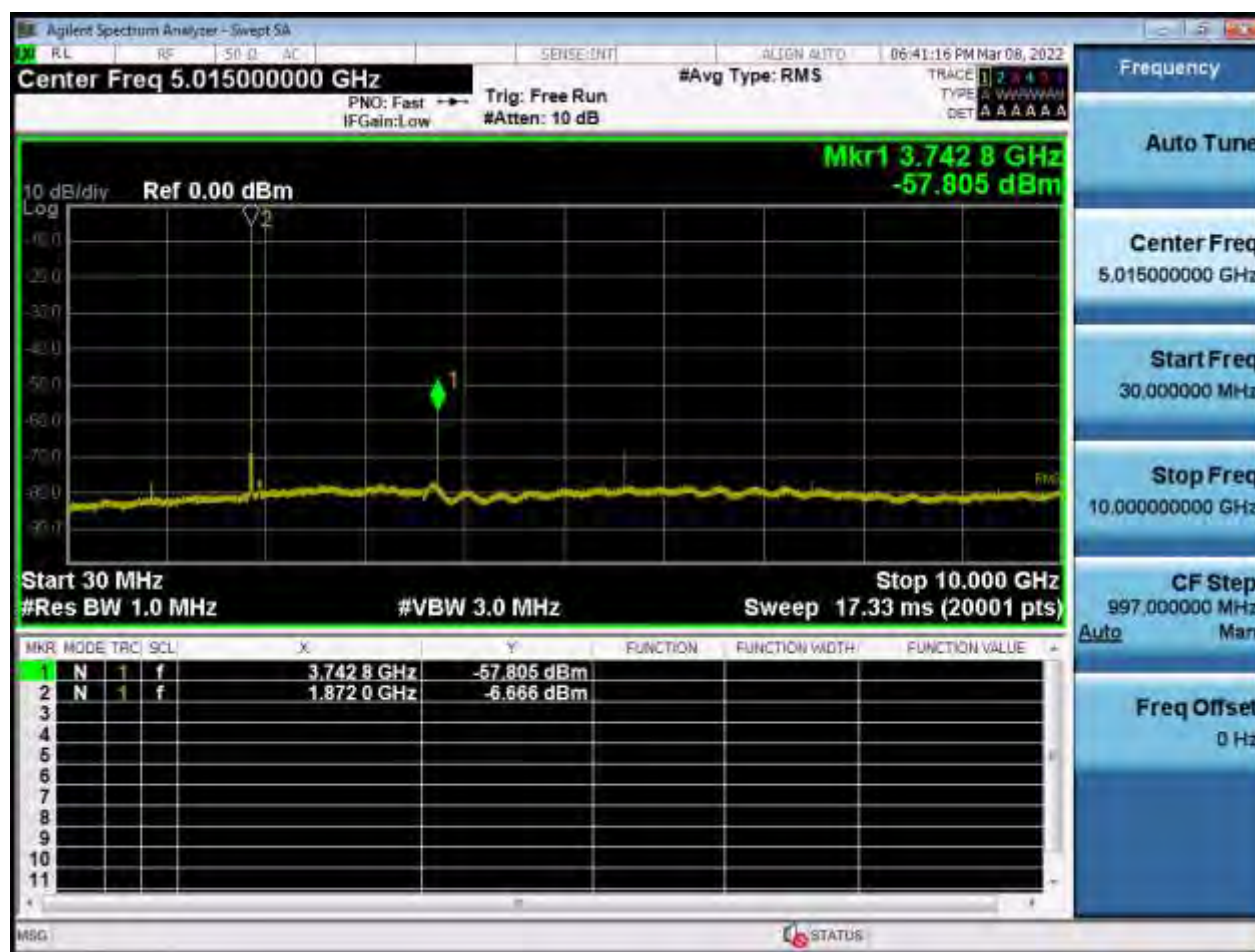

BW20 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

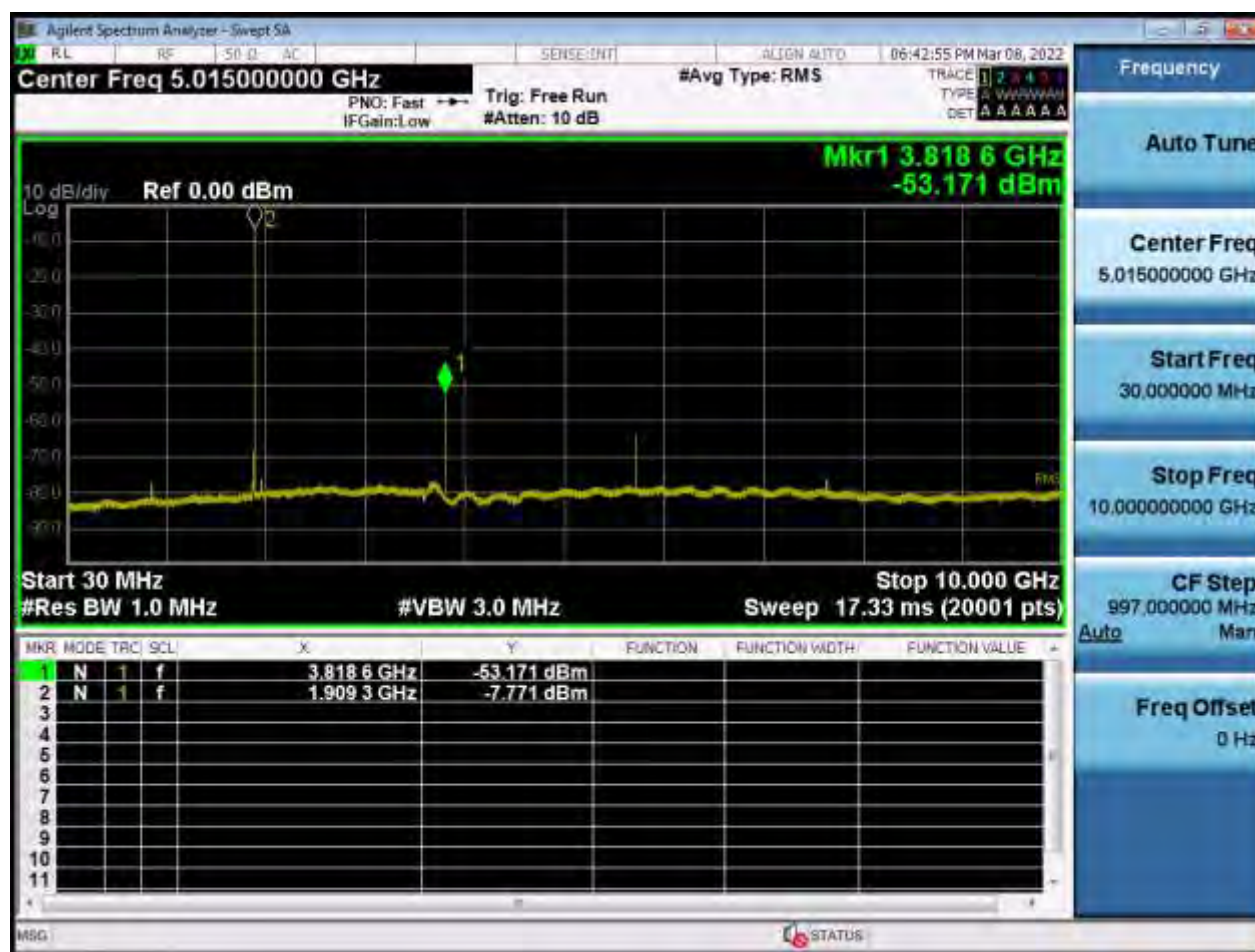

BW1.4 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW1.4 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB



BW1.4 M_CSE(10 G-26.5 G)_Highest Channel_QPSK_1RB



BW3 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW3 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB



BW3 M_CSE(10 G-26.5 G)_Highest Channel_QPSK_1RB



BW5 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW5 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB



BW5 M_CSE(10 G-26.5 G)_Highest Channel_QPSK_1RB



BW10 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW10 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB



BW10 M_CSE(10 G-26.5 G)_Highest Channel_QPSK_1RB



BW15 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW15 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB



BW15 M_CSE(10 G-26.5 G)_Highest Channel_QPSK_1RB



BW20 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW20 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB



BW20 M_CSE(10 G-26.5 G)_Highest Channel_QPSK_1RB



10. APPENDIX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2203-FC019-P