

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
December 07, 2021

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2110-FC079-R1

FCC ID: A3LSMX808U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-X808U
EUT Type: Tablet
FCC Classification: PCS Licensed Transmitter (PCB)
FCC Rule Part(s): §27, §2

-Lower Ant-

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M12G7D	QPSK	0.133	21.23
		1M12W7D	16QAM	0.112	20.49
		1M11W7D	64QAM	0.091	19.60
		1M12W7D	256QAM	0.046	16.67
LTE – Band66/4 (3)	1711.5 – 1778.5	2M76G7D	QPSK	0.107	20.30
		2M76W7D	16QAM	0.093	19.68
		2M77W7D	64QAM	0.075	18.76
		2M69W7D	256QAM	0.038	15.80
LTE – Band66/4 (5)	1712.5 – 1777.5	4M51G7D	QPSK	0.112	20.50
		4M51W7D	16QAM	0.091	19.61
		4M51W7D	64QAM	0.072	18.60
		4M51W7D	256QAM	0.037	15.63
LTE – Band66/4 (10)	1715.0 – 1775.0	9M01G7D	QPSK	0.107	20.31
		9M01W7D	16QAM	0.092	19.66
		9M01W7D	64QAM	0.076	18.80
		9M00W7D	256QAM	0.040	16.03
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.122	20.87
		13M5W7D	16QAM	0.096	19.83
		13M5W7D	64QAM	0.075	18.77
		13M5W7D	256QAM	0.039	15.92
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.104	20.16
		18M0W7D	16QAM	0.088	19.44
		18M0W7D	64QAM	0.072	18.55
		18M0W7D	256QAM	0.039	15.86

-Upper Ant-

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M10G7D	QPSK	0.246	23.91
		1M10W7D	16QAM	0.206	23.14
		1M10W7D	64QAM	0.160	22.05
		1M10W7D	256QAM	0.079	18.95
LTE – Band66/4 (3)	1711.5 – 1778.5	2M72G7D	QPSK	0.244	23.87
		2M71W7D	16QAM	0.204	23.09
		2M72W7D	64QAM	0.160	22.05
		2M72W7D	256QAM	0.078	18.94
LTE – Band66/4 (5)	1712.5 – 1777.5	4M50G7D	QPSK	0.249	23.97
		4M52W7D	16QAM	0.208	23.18
		4M51W7D	64QAM	0.161	22.07
		4M52W7D	256QAM	0.079	18.98
LTE – Band66/4 (10)	1715.0 – 1775.0	9M01G7D	QPSK	0.228	23.57
		9M02W7D	16QAM	0.188	22.75
		9M03W7D	64QAM	0.146	21.65
		9M01W7D	256QAM	0.072	18.59
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.244	23.88
		13M5W7D	16QAM	0.202	23.06
		13M5W7D	64QAM	0.158	21.98
		13M5W7D	256QAM	0.076	18.80
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.242	23.84
		18M0W7D	16QAM	0.198	22.97
		18M0W7D	64QAM	0.155	21.91
		18M0W7D	256QAM	0.071	18.49

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2110-FC079-R1

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2110-FC079	November 24, 2021	- First Approval Report
HCT-RF-2110-FC079-R1	December 07, 2021	- Revised the 3.9 & 3.10 Section. - Revised the 8.1 Section. (Limit)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	7
2. INTRODUCTION.....	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER	10
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO	12
3.5 OCCUPIED BANDWIDTH.....	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.7 BAND EDGE	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	17
3.9 WORST CASE(RADIATED TEST).....	18
3.10 WORST CASE(CONDUCTED TEST)	19
4. LIST OF TEST EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA	25
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	25
8.1.1 Lower	25
8.1.2 Upper.....	28
8.2 RADIATED SPURIOUS EMISSIONS	31
8.2.1 Lower	31
8.2.2 Upper.....	32
8.3 PEAK-TO-AVERAGE RATIO	33
8.3.1 Lower	33
8.3.2 Upper.....	34
8.4 OCCUPIED BANDWIDTH.....	35
8.4.1 Lower	35
8.4.2 Upper.....	36
8.5 CONDUCTED SPURIOUS EMISSIONS	37
8.5.1 Lower	37
8.5.2 Upper.....	38

8.6 BAND EDGE	39
8.6.1 Lower	39
8.6.2 Upper.....	39
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	40
8.7.1 Lower	40
8.7.2 Upper.....	58
9. TEST PLOTS	76
10. ANNEX A_ TEST SETUP PHOTO	317

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX808U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
EUT Type:	Tablet
Model(s):	SM-X808U
Tx Frequency:	1710.7 MHz – 1779.3 MHz (LTE – Band 66/4 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66/4 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66/4 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66/4 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66/4 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66/4 (20 MHz))
Date(s) of Tests:	September 17, 2021 ~ November 16, 2021
Serial number:	Radiated: R32R9001N1N(Upper Ant), R32R9003GPK(Lower Ant) Conducted: R32R9001H5N(Upper Ant), R32R9003GNA(Lower Ant)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), WIFI 6E, Bluetooth, BT LE, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

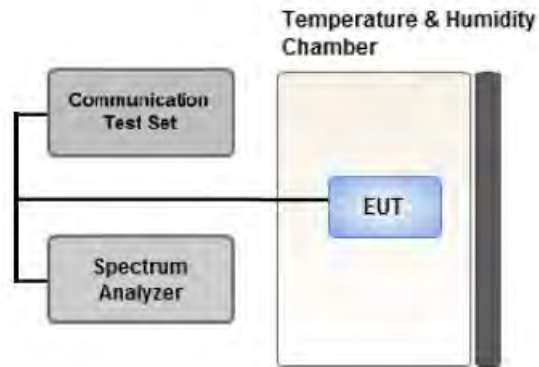

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

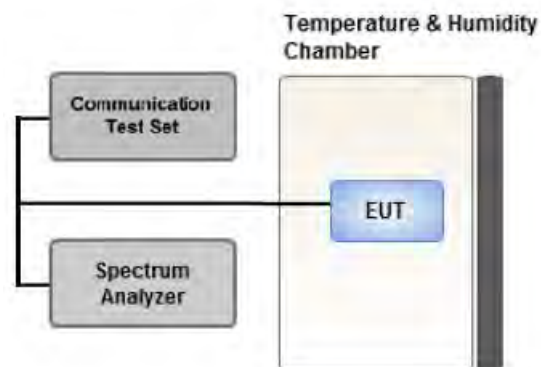

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

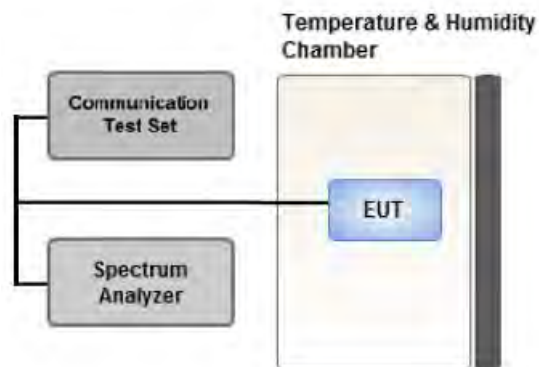

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 BAND EDGE

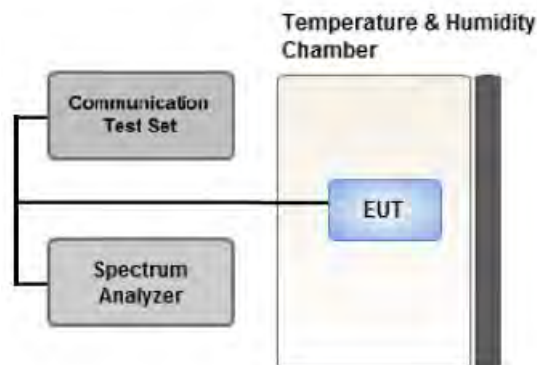

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

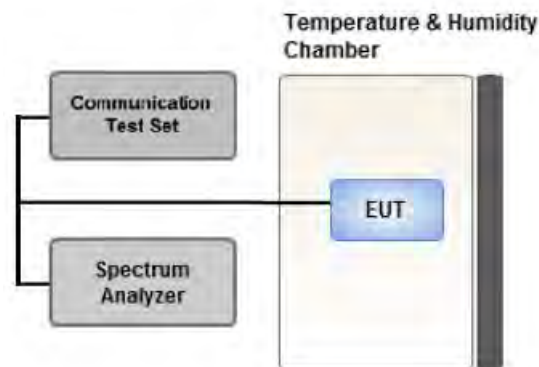

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 1.4 MHz(Lower Ant),5 MHz(Upper Ant))
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- The test results below, the lower antenna is the Sub1 antenna, and the upper antenna is the Main 1 antenna.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 4 as well as Band 66.

- All modes of operation were investigated and the worst case configuration results are reported.
- Mode : Stand alone, Stand alone + External accessories (Earphone, keyboard, AC adapter, etc)
- Worst case : Stand alone

[Lower Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

[Upper Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- The test results below, the lower antenna is the Sub1 antenna, and the upper antenna is the Main 1 antenna.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 4 as well as Band 66.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	02/11/2022	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/07/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
132322	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

8.1.1 Lower Ant

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B66/ B4 1.4 MHz	QPSK	-20.58	12.28	9.76	2.08	H	< 1.00	0.099	19.96
		16-QAM	-21.19	11.67	9.76	2.08	H		0.086	19.35
		64-QAM	-22.01	10.85	9.76	2.08	H		0.071	18.53
		256-QAM	-25.04	7.82	9.76	2.08	H		0.036	15.50
1745.0		QPSK	-19.88	13.25	9.97	1.99	H		0.133	21.23
		16-QAM	-20.62	12.51	9.97	1.99	H		0.112	20.49
		64-QAM	-21.51	11.62	9.97	1.99	H		0.091	19.60
		256-QAM	-24.44	8.69	9.97	1.99	H		0.046	16.67
1779.3		QPSK	-20.97	12.17	10.12	2.15	H		0.103	20.14
		16-QAM	-21.79	11.35	10.12	2.15	H		0.086	19.32
		64-QAM	-22.67	10.47	10.12	2.15	H		0.070	18.44
		256-QAM	-25.63	7.51	10.12	2.15	H		0.035	15.48

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B66/ B4 3 MHz	QPSK	-20.28	12.58	9.76	2.08	H	< 1.00	0.106	20.26
		16-QAM	-21.28	11.58	9.76	2.08	H		0.084	19.26
		64-QAM	-22.29	10.57	9.76	2.08	H		0.067	18.25
		256-QAM	-25.31	7.55	9.76	2.08	H		0.033	15.23
1745.0		QPSK	-20.81	12.32	9.97	1.99	H		0.107	20.30
		16-QAM	-21.43	11.70	9.97	1.99	H		0.093	19.68
		64-QAM	-22.35	10.78	9.97	1.99	H		0.075	18.76
		256-QAM	-25.31	7.82	9.97	1.99	H		0.038	15.80
1778.5		QPSK	-21.26	11.88	10.12	2.15	H		0.097	19.85
		16-QAM	-21.85	11.29	10.12	2.15	H		0.084	19.26
		64-QAM	-22.67	10.47	10.12	2.15	H		0.070	18.44
		256-QAM	-25.51	7.63	10.12	2.15	H		0.036	15.60

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B66/ B4 5 MHz	QPSK	-20.72	12.14	9.76	2.08	H	< 1.00	0.096	19.82
		16-QAM	-21.34	11.52	9.76	2.08	H		0.083	19.20
		64-QAM	-22.13	10.73	9.76	2.08	H		0.069	18.41
		256-QAM	-25.15	7.71	9.76	2.08	H		0.035	15.39
1745.0		QPSK	-20.61	12.52	9.97	1.99	H		0.112	20.50
		16-QAM	-21.50	11.63	9.97	1.99	H		0.091	19.61
		64-QAM	-22.51	10.62	9.97	1.99	H		0.072	18.60
		256-QAM	-25.48	7.65	9.97	1.99	H		0.037	15.63
1777.5		QPSK	-21.63	11.51	10.12	2.15	H		0.089	19.48
		16-QAM	-22.39	10.75	10.12	2.15	H		0.074	18.72
		64-QAM	-23.35	9.79	10.12	2.15	H		0.060	17.76
		256-QAM	-26.27	6.87	10.12	2.15	H		0.030	14.84

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B66/ B4 10 MHz	QPSK	-20.68	12.34	9.79	2.07	H	< 1.00	0.101	20.06
		16-QAM	-21.71	11.31	9.79	2.07	H		0.080	19.03
		64-QAM	-22.76	10.26	9.79	2.07	H		0.063	17.98
		256-QAM	-25.76	7.26	9.79	2.07	H		0.031	14.98
1745.0		QPSK	-20.80	12.33	9.97	1.99	H		0.107	20.31
		16-QAM	-21.45	11.68	9.97	1.99	H		0.092	19.66
		64-QAM	-22.31	10.82	9.97	1.99	H		0.076	18.80
		256-QAM	-25.08	8.05	9.97	1.99	H		0.040	16.03
1775.0		QPSK	-21.37	11.86	10.10	2.14	H		0.096	19.82
		16-QAM	-21.97	11.26	10.10	2.14	H		0.084	19.22
		64-QAM	-22.81	10.42	10.10	2.14	H		0.069	18.38
		256-QAM	-25.65	7.58	10.10	2.14	H		0.036	15.54

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B66/ B4 15 MHz	QPSK	-20.81	12.18	9.82	2.07	H	< 1.00	0.098	19.93
		16-QAM	-21.37	11.62	9.82	2.07	H		0.086	19.37
		64-QAM	-22.17	10.82	9.82	2.07	H		0.072	18.57
		256-QAM	-24.83	8.16	9.82	2.07	H		0.039	15.91
1745.0		QPSK	-20.81	12.32	9.97	1.99	H		0.107	20.30
		16-QAM	-21.73	11.40	9.97	1.99	H		0.087	19.38
		64-QAM	-22.82	10.31	9.97	1.99	H		0.067	18.29
		256-QAM	-25.74	7.39	9.97	1.99	H		0.034	15.37
1772.5		QPSK	-20.40	12.92	10.08	2.13	H		0.122	20.87
		16-QAM	-21.44	11.88	10.08	2.13	H		0.096	19.83
		64-QAM	-22.50	10.82	10.08	2.13	H		0.075	18.77
		256-QAM	-25.35	7.97	10.08	2.13	H		0.039	15.92

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B66/ B4 20 MHz	QPSK	-20.78	12.39	9.82	2.05	H	< 1.00	0.104	20.16
		16-QAM	-21.66	11.51	9.82	2.05	H		0.085	19.28
		64-QAM	-22.63	10.54	9.82	2.05	H		0.068	18.31
		256-QAM	-25.88	7.29	9.82	2.05	H		0.032	15.06
1745.0		QPSK	-21.17	11.96	9.97	1.99	H		0.099	19.94
		16-QAM	-21.85	11.28	9.97	1.99	H		0.084	19.26
		64-QAM	-22.73	10.40	9.97	1.99	H		0.069	18.38
		256-QAM	-25.60	7.53	9.97	1.99	H		0.036	15.51
1770.0		QPSK	-21.18	12.14	10.08	2.13	H		0.102	20.09
		16-QAM	-21.83	11.49	10.08	2.13	H		0.088	19.44
		64-QAM	-22.72	10.60	10.08	2.13	H		0.072	18.55
		256-QAM	-25.41	7.91	10.08	2.13	H		0.039	15.86

8.1.2 Upper Ant

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B66/ B4 1.4 MHz	QPSK	-19.18	14.61	10.04	2.05	H	< 1.00	0.182	22.60
		16-QAM	-19.87	13.92	10.04	2.05	H		0.155	21.91
		64-QAM	-20.72	13.07	10.04	2.05	H		0.127	21.06
		256-QAM	-23.81	9.98	10.04	2.05	H		0.063	17.97
1745.0		QPSK	-17.93	15.79	10.18	2.06	H		0.246	23.91
		16-QAM	-18.70	15.02	10.18	2.06	H		0.206	23.14
		64-QAM	-19.79	13.93	10.18	2.06	H		0.160	22.05
		256-QAM	-22.89	10.83	10.18	2.06	H		0.079	18.95
1779.3		QPSK	-18.12	15.56	10.26	2.07	H		0.237	23.75
		16-QAM	-18.88	14.80	10.26	2.07	H		0.199	22.99
		64-QAM	-20.00	13.68	10.26	2.07	H		0.154	21.87
		256-QAM	-23.09	10.59	10.26	2.07	H		0.076	18.78

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B66/ B4 3 MHz	QPSK	-19.10	14.69	10.04	2.05	H	< 1.00	0.185	22.68
		16-QAM	-19.79	14.00	10.04	2.05	H		0.158	21.99
		64-QAM	-20.67	13.12	10.04	2.05	H		0.129	21.11
		256-QAM	-23.77	10.02	10.04	2.05	H		0.063	18.01
1745.0		QPSK	-17.97	15.75	10.18	2.06	H		0.244	23.87
		16-QAM	-18.75	14.97	10.18	2.06	H		0.204	23.09
		64-QAM	-19.79	13.93	10.18	2.06	H		0.160	22.05
		256-QAM	-22.90	10.82	10.18	2.06	H		0.078	18.94
1778.5		QPSK	-18.08	15.60	10.26	2.07	H		0.239	23.79
		16-QAM	-18.83	14.85	10.26	2.07	H		0.202	23.04
		64-QAM	-19.91	13.77	10.26	2.07	H		0.157	21.96
		256-QAM	-23.03	10.65	10.26	2.07	H		0.077	18.84

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B66/ B4 5 MHz	QPSK	-19.02	14.77	10.04	2.05	H	< 1.00	0.189	22.76
		16-QAM	-19.73	14.06	10.04	2.05	H		0.160	22.05
		64-QAM	-20.65	13.14	10.04	2.05	H		0.130	21.13
		256-QAM	-23.78	10.01	10.04	2.05	H		0.063	18.00
1745.0		QPSK	-17.87	15.85	10.18	2.06	H		0.249	23.97
		16-QAM	-18.66	15.06	10.18	2.06	H		0.208	23.18
		64-QAM	-19.77	13.95	10.18	2.06	H		0.161	22.07
		256-QAM	-22.86	10.86	10.18	2.06	H		0.079	18.98
1777.5		QPSK	-18.03	15.65	10.26	2.07	H		0.242	23.84
		16-QAM	-18.80	14.88	10.26	2.07	H		0.203	23.07
		64-QAM	-19.88	13.80	10.26	2.07	H		0.158	21.99
		256-QAM	-22.99	10.69	10.26	2.07	H		0.077	18.88

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B66/ B4 10 MHz	QPSK	-19.14	14.61	10.06	2.05	H	< 1.00	0.183	22.62
		16-QAM	-19.85	13.90	10.06	2.05	H		0.155	21.91
		64-QAM	-20.94	12.81	10.06	2.05	H		0.121	20.82
		256-QAM	-24.02	9.73	10.06	2.05	H		0.059	17.74
1745.0		QPSK	-18.27	15.45	10.18	2.06	H		0.228	23.57
		16-QAM	-19.09	14.63	10.18	2.06	H		0.188	22.75
		64-QAM	-20.19	13.53	10.18	2.06	H		0.146	21.65
		256-QAM	-23.25	10.47	10.18	2.06	H		0.072	18.59
1775.0		QPSK	-18.39	15.30	10.25	2.07	H		0.223	23.48
		16-QAM	-19.17	14.52	10.25	2.07	H		0.186	22.70
		64-QAM	-20.23	13.46	10.25	2.07	H		0.146	21.64
		256-QAM	-23.31	10.38	10.25	2.07	H		0.072	18.56

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B66/ B4 15 MHz	QPSK	-19.08	14.63	10.08	2.05	H	< 1.00	0.185	22.66
		16-QAM	-19.77	13.94	10.08	2.05	H		0.158	21.97
		64-QAM	-20.82	12.89	10.08	2.05	H		0.124	20.92
		256-QAM	-23.93	9.78	10.08	2.05	H		0.060	17.81
1745.0		QPSK	-18.14	15.58	10.18	2.06	H		0.234	23.70
		16-QAM	-18.89	14.83	10.18	2.06	H		0.197	22.95
		64-QAM	-19.96	13.76	10.18	2.06	H		0.154	21.88
		256-QAM	-23.04	10.68	10.18	2.06	H		0.076	18.80
1772.5		QPSK	-17.98	15.71	10.24	2.07	H		0.244	23.88
		16-QAM	-18.80	14.89	10.24	2.07	H		0.202	23.06
		64-QAM	-19.88	13.81	10.24	2.07	H		0.158	21.98
		256-QAM	-23.16	10.53	10.24	2.07	H		0.074	18.70

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B66/ B4 20 MHz	QPSK	-19.17	14.54	10.08	2.05	H	< 1.00	0.181	22.57
		16-QAM	-20.06	13.65	10.08	2.05	H		0.147	21.68
		64-QAM	-21.11	12.60	10.08	2.05	H		0.116	20.63
		256-QAM	-24.18	9.53	10.08	2.05	H		0.057	17.56
1745.0		QPSK	-18.44	15.28	10.18	2.06	H		0.219	23.40
		16-QAM	-19.26	14.46	10.18	2.06	H		0.181	22.58
		64-QAM	-20.32	13.40	10.18	2.06	H		0.142	21.52
		256-QAM	-23.38	10.34	10.18	2.06	H		0.070	18.46
1770.0		QPSK	-18.02	15.67	10.24	2.07	H		0.242	23.84
		16-QAM	-18.89	14.80	10.24	2.07	H		0.198	22.97
		64-QAM	-19.95	13.74	10.24	2.07	H		0.155	21.91
		256-QAM	-23.37	10.32	10.24	2.07	H		0.071	18.49

8.2 RADIATED SPURIOUS EMISSIONS

8.2.1 Lower Ant

- ▣ OPERATING FREQUENCY: 1745.0 MHz
- ▣ MEASURED OUTPUT POWER: 21.23 dBm = 0.133 W
- ▣ MODE: LTE B66 / B4
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 34.23 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
131979 (1710.7)	3 421.40	-51.90	11.30	-53.37	2.99	V	-45.06	66.28
	5 132.10	-55.33	11.32	-49.41	3.78	H	-41.87	63.10
	6 842.80	-60.73	11.18	-49.13	4.30	V	-42.25	63.48
132322 (1745.0)	3 490.00	-52.63	11.46	-53.94	3.05	V	-45.53	66.75
	5 235.00	-55.59	11.57	-50.28	3.79	H	-42.50	63.73
	6 980.00	-61.41	11.16	-49.18	4.51	H	-42.53	63.76
132665 (1779.3)	3 558.60	-51.50	11.74	-53.33	3.10	V	-44.69	65.91
	5 337.90	-54.20	11.78	-49.37	3.78	H	-41.37	62.59
	7 117.20	-62.19	10.92	-47.89	4.34	H	-41.31	62.54

8.2.2 Upper Ant

- ▣ OPERATING FREQUENCY: 1745.0 MHz
- ▣ MEASURED OUTPUT POWER: 23.97 dBm = 0.249 W
- ▣ MODE: LTE B66 / B4
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 36.97 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
131997 (1712.5)	3 425.00	-51.72	12.55	-58.31	2.96	V	-48.71	72.68
	5 137.50	-56.19	12.28	-53.51	3.66	H	-44.89	68.86
	6 850.00	-55.39	12.00	-48.66	4.25	V	-40.91	64.88
132322 (1745.0)	3,490.00	-51.57	12.42	-57.67	2.97	V	-48.22	72.13
	5,235.00	-56.73	12.71	-55.93	3.70	V	-46.91	70.82
	6,980.00	-56.09	11.52	-47.91	4.28	V	-40.67	64.58
132647 (1777.5)	3,555.00	-51.86	12.39	-57.65	3.02	H	-48.27	72.24
	5,332.50	-55.79	13.00	-55.09	3.73	V	-45.82	69.79
	7,110.00	-55.62	10.88	-46.47	4.34	V	-39.93	63.90

8.3 PEAK-TO-AVERAGE RATIO

8.3.1 Lower Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	5.05
			16-QAM			5.80
			64-QAM			6.40
			256-QAM			6.76
	3 MHz		QPSK	15		5.02
			16-QAM			5.80
			64-QAM			6.43
			256-QAM			6.77
	5 MHz		QPSK	25		5.14
			16-QAM			5.99
			64-QAM			6.38
			256-QAM			6.77
	10 MHz		QPSK	50		5.28
			16-QAM			6.06
			64-QAM			6.40
			256-QAM			6.75
	15 MHz		QPSK	75		5.21
			16-QAM			6.05
			64-QAM			6.39
			256-QAM			6.75
	20 MHz		QPSK	100		5.25
			16-QAM			6.08
			64-QAM			6.35
			256-QAM			6.76

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 197 ~ 220.

8.3.2 Upper Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	5.47
			16-QAM			6.24
			64-QAM			6.76
			256-QAM			6.98
	3 MHz		QPSK	15		5.37
			16-QAM			6.26
			64-QAM			6.71
			256-QAM			6.97
	5 MHz		QPSK	25		5.45
			16-QAM			6.27
			64-QAM			6.68
			256-QAM			6.94
	10 MHz		QPSK	50		5.52
			16-QAM			6.27
			64-QAM			6.69
			256-QAM			6.93
	15 MHz		QPSK	75		5.47
			16-QAM			6.27
			64-QAM			6.68
			256-QAM			6.94
	20 MHz		QPSK	100		5.42
			16-QAM			6.27
			64-QAM			6.67
			256-QAM			6.93

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 221 ~ 244.

8.4 OCCUPIED BANDWIDTH

8.4.1 Lower Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.1238
			16-QAM			1.1187
			64-QAM			1.1122
			256-QAM			1.1203
	3 MHz		QPSK	15		2.7593
			16-QAM			2.7577
			64-QAM			2.7671
			256-QAM			2.6914
	5 MHz		QPSK	25		4.5136
			16-QAM			4.5140
			64-QAM			4.5140
			256-QAM			4.5128
	10 MHz		QPSK	50		9.0054
			16-QAM			9.0072
			64-QAM			9.0134
			256-QAM			9.0006
	15 MHz		QPSK	75		13.468
			16-QAM			13.478
			64-QAM			13.500
			256-QAM			13.481
	20 MHz		QPSK	100		17.961
			16-QAM			18.019
			64-QAM			18.042
			256-QAM			17.956

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 149 ~ 172.

8.4.2 Upper Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0987
			16-QAM			1.0969
			64-QAM			1.0996
			256-QAM			1.0980
	3 MHz		QPSK	15		2.7149
			16-QAM			2.7097
			64-QAM			2.7175
			256-QAM			2.7157
	5 MHz		QPSK	25		4.5020
			16-QAM			4.5210
			64-QAM			4.5052
			256-QAM			4.5229
	10 MHz		QPSK	50		9.0129
			16-QAM			9.0234
			64-QAM			9.0305
			256-QAM			9.0077
	15 MHz		QPSK	75		13.500
			16-QAM			13.492
			64-QAM			13.475
			256-QAM			13.501
	20 MHz		QPSK	100		18.013
			16-QAM			17.949
			64-QAM			17.972
			256-QAM			17.979

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 173 ~ 196.

8.5 CONDUCTED SPURIOUS EMISSIONS

8.5.1 Lower Ant

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.4203	31.200	-67.272	-36.072	-13.00
		1745.0	1.8525	31.200	-75.977	-44.777	
		1779.3	2.1790	31.200	-72.583	-41.383	
	3	1711.5	2.1117	31.200	-78.512	-47.312	
		1745.0	2.1451	31.200	-79.696	-48.496	
		1778.5	4.0230	31.200	-79.517	-48.317	
	5	1712.5	3.7563	31.200	-79.718	-48.518	
		1745.0	8.2572	31.815	-80.221	-48.406	
		1777.5	3.7722	31.200	-79.169	-47.969	
	10	1715.0	3.7897	31.200	-79.084	-47.884	
		1745.0	5.4786	31.815	-80.237	-48.422	
		1775.0	3.5589	31.200	-78.842	-47.642	
	15	1717.5	4.0434	31.200	-78.740	-47.540	
		1745.0	2.4801	31.200	-78.553	-47.353	
		1772.5	3.8221	31.200	-78.985	-47.785	
	20	1720.0	3.4223	31.200	-67.090	-35.890	
		1745.0	1.8515	31.200	-75.361	-44.161	
		1770.0	3.5579	31.200	-62.905	-31.705	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 245 ~ 280.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.294
1 – 5	31.200
5 – 10	31.815
10 – 15	32.340
15 – 20	32.713
Above 20(26.5)	33.355

8.5.2 Upper Ant

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.4213	27.976	-73.793	-45.817	-13.00
		1745.0	3.4896	27.976	-73.831	-45.855	
		1779.3	3.5604	27.976	-73.968	-45.992	
	3	1711.5	3.4213	27.976	-73.685	-45.709	
		1745.0	3.4881	27.976	-73.463	-45.487	
		1778.5	3.5604	27.976	-74.484	-46.508	
	5	1712.5	3.4213	27.976	-74.121	-46.145	
		1745.0	3.4861	27.976	-73.590	-45.614	
		1777.5	3.5599	27.976	-75.396	-47.420	
	10	1715.0	3.4218	27.976	-73.758	-45.782	
		1745.0	3.4821	27.976	-74.398	-46.422	
		1775.0	3.5594	27.976	-74.834	-46.858	
	15	1717.5	3.4223	27.976	-74.459	-46.483	
		1745.0	3.4771	27.976	-74.490	-46.514	
		1772.5	3.5589	27.976	-74.417	-46.441	
	20	1720.0	3.4228	27.976	-73.896	-45.920	
		1745.0	3.4726	27.976	-73.648	-45.672	
		1770.0	3.5584	27.976	-74.883	-46.907	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 281 ~ 316.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

8.6 BAND EDGE

8.6.1 Lower Ant

- Plots of the EUT's Band Edge are shown Page 77 ~ 112.

8.6.2 Upper Ant


- Plots of the EUT's Band Edge are shown Page 113 ~ 148.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

8.7.1 Lower Ant


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1710 700 002	0.0	0.000 000	0.000
100 %		-30	1710 700 005	2.9	0.000 000	0.002
100 %		-20	1710 700 007	4.5	0.000 000	0.003
100 %		-10	1710 700 005	3.1	0.000 000	0.002
100 %		0	1710 699 998	-3.9	0.000 000	-0.002
100 %		+10	1710 699 997	-5.2	0.000 000	-0.003
100 %		+30	1710 699 998	-4.8	0.000 000	-0.003
100 %		+40	1710 699 998	-3.9	0.000 000	-0.002
100 %		+50	1710 699 999	-3.0	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1710 699 997	-5.6	0.000 000	-0.003

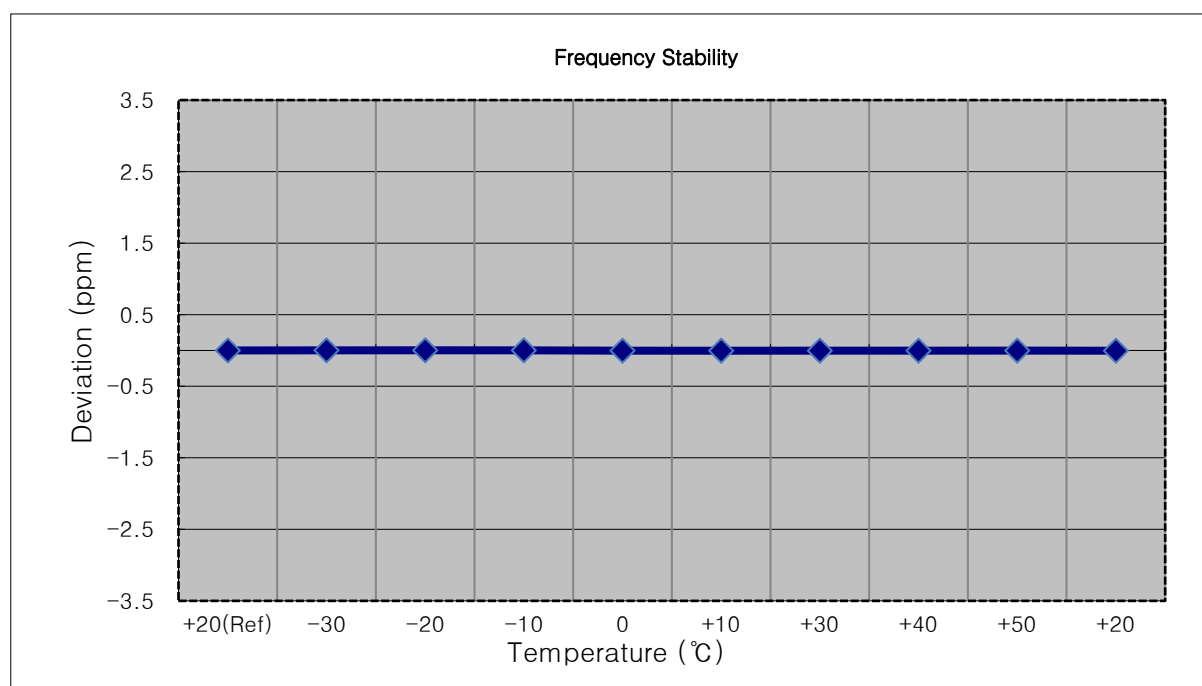


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1711 499 999	0.0	0.000 000	0.000
100 %		-30	1711 500 003	4.0	0.000 000	0.002
100 %		-20	1711 500 003	4.6	0.000 000	0.003
100 %		-10	1711 500 002	3.1	0.000 000	0.002
100 %		0	1711 500 002	3.7	0.000 000	0.002
100 %		+10	1711 499 996	-2.7	0.000 000	-0.002
100 %		+30	1711 500 002	3.9	0.000 000	0.002
100 %		+40	1711 499 994	-4.8	0.000 000	-0.003
100 %		+50	1711 499 996	-2.7	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1711 499 994	-4.6	0.000 000	-0.003

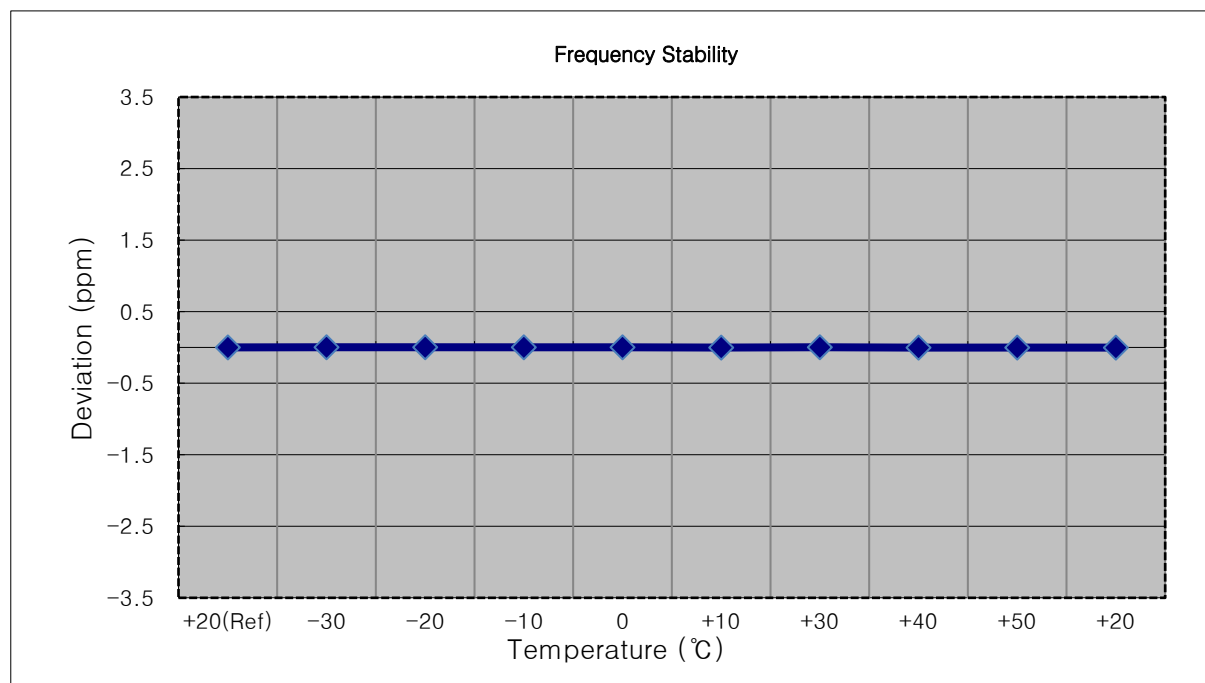


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1712 499 997	0.0	0.000 000	0.000
100 %		-30	1712 500 009	11.7	0.000 001	0.007
100 %		-20	1712 500 003	5.8	0.000 000	0.003
100 %		-10	1712 500 011	14.0	0.000 001	0.008
100 %		0	1712 500 004	7.1	0.000 000	0.004
100 %		+10	1712 500 004	6.9	0.000 000	0.004
100 %		+30	1712 500 003	5.9	0.000 000	0.003
100 %		+40	1712 500 008	10.5	0.000 001	0.006
100 %		+50	1712 500 002	5.3	0.000 000	0.003
Batt. Endpoint	3.400	+20	1712 500 009	12.3	0.000 001	0.007

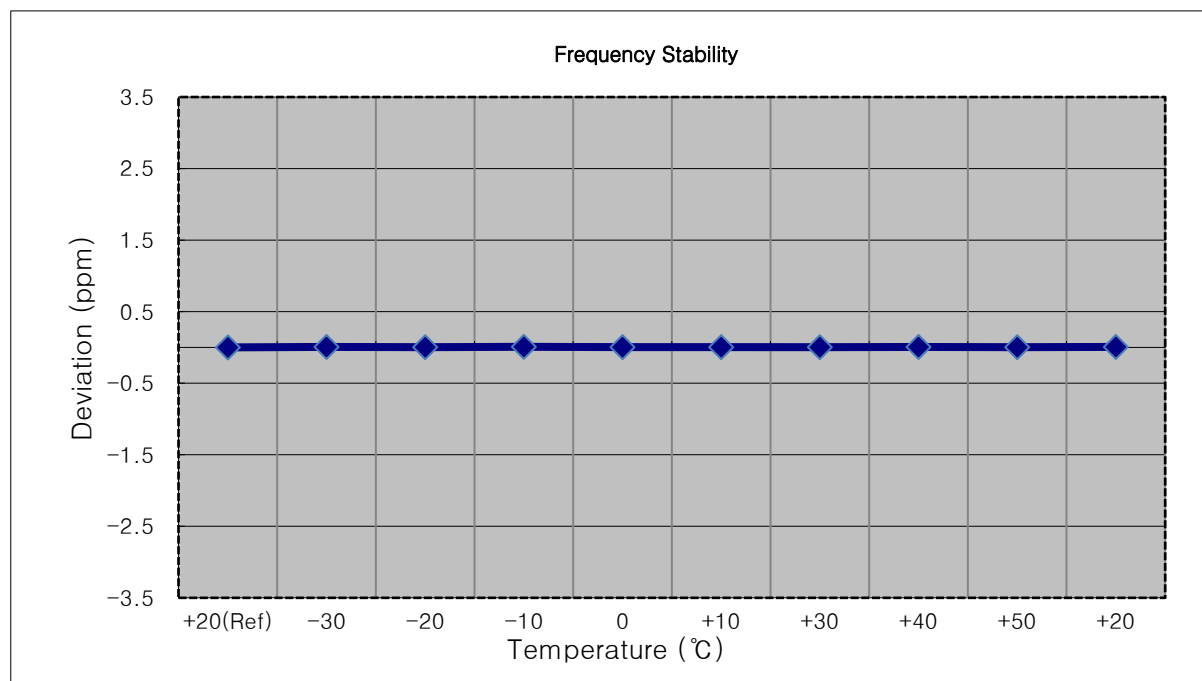


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1715,000,000 Hz
☐ CHANNEL: 132022 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1714 999 997	0.0	0.000 000	0.000
100 %		-30	1715 000 004	7.3	0.000 000	0.004
100 %		-20	1715 000 011	14.7	0.000 001	0.009
100 %		-10	1715 000 006	9.3	0.000 001	0.005
100 %		0	1715 000 001	4.2	0.000 000	0.002
100 %		+10	1715 000 004	7.5	0.000 000	0.004
100 %		+30	1715 000 006	8.9	0.000 001	0.005
100 %		+40	1715 000 011	14.2	0.000 001	0.008
100 %		+50	1715 000 012	15.3	0.000 001	0.009
Batt. Endpoint	3.400	+20	1715 000 007	9.9	0.000 001	0.006

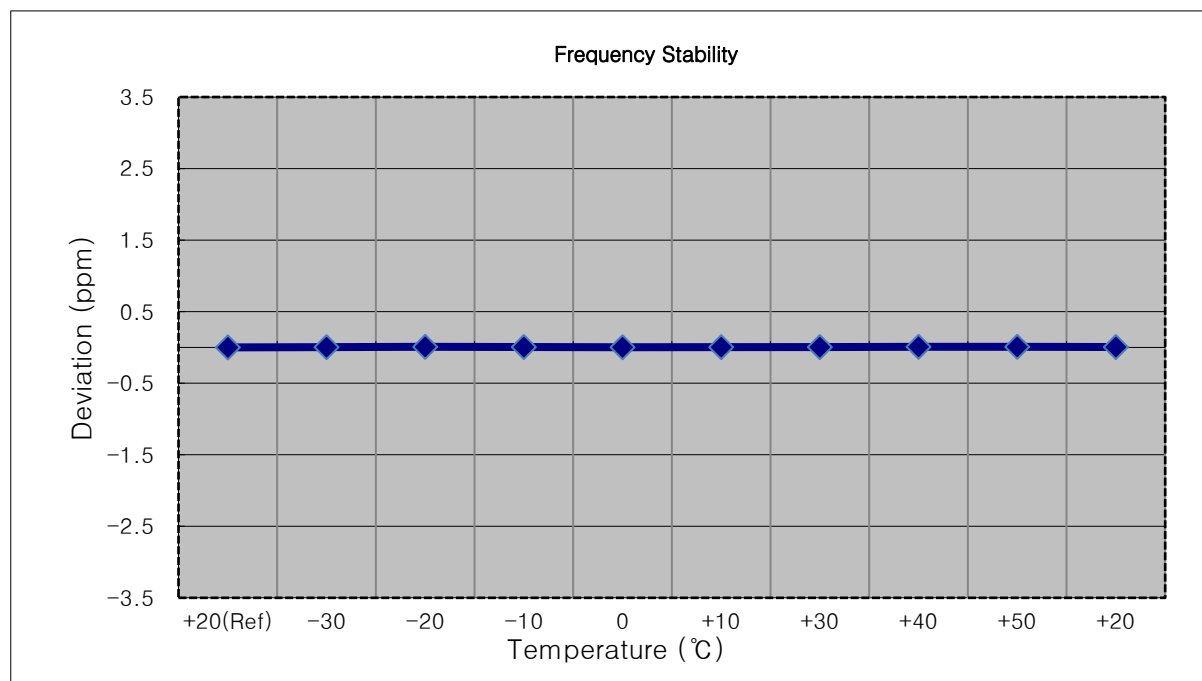


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1717,500,000 Hz
☐ CHANNEL: 132047 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1717 499 997	0.0	0.000 000	0.000
100 %		-30	1717 500 004	6.9	0.000 000	0.004
100 %		-20	1717 500 012	14.7	0.000 001	0.009
100 %		-10	1717 500 012	15.1	0.000 001	0.009
100 %		0	1717 500 005	7.9	0.000 000	0.005
100 %		+10	1717 500 010	12.3	0.000 001	0.007
100 %		+30	1717 500 002	5.0	0.000 000	0.003
100 %		+40	1717 500 006	9.2	0.000 001	0.005
100 %		+50	1717 500 007	9.7	0.000 001	0.006
Batt. Endpoint	3.400	+20	1717 500 013	15.7	0.000 001	0.009

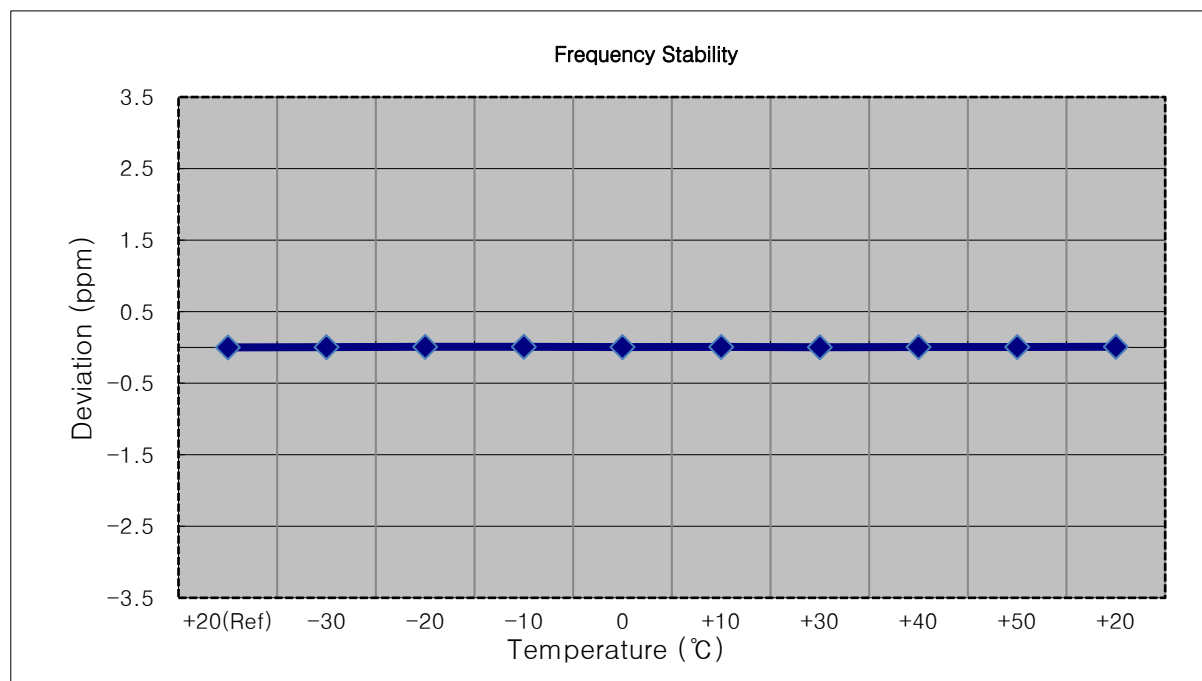


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1720 000 005	0.0	0.000 000	0.000
100 %		-30	1720 000 012	7.2	0.000 000	0.004
100 %		-20	1720 000 013	8.1	0.000 000	0.005
100 %		-10	1720 000 018	13.6	0.000 001	0.008
100 %		0	1720 000 016	11.5	0.000 001	0.007
100 %		+10	1720 000 011	6.7	0.000 000	0.004
100 %		+30	1720 000 012	7.0	0.000 000	0.004
100 %		+40	1720 000 018	13.5	0.000 001	0.008
100 %		+50	1720 000 016	11.1	0.000 001	0.006
Batt. Endpoint	3.400	+20	1720 000 017	12.4	0.000 001	0.007

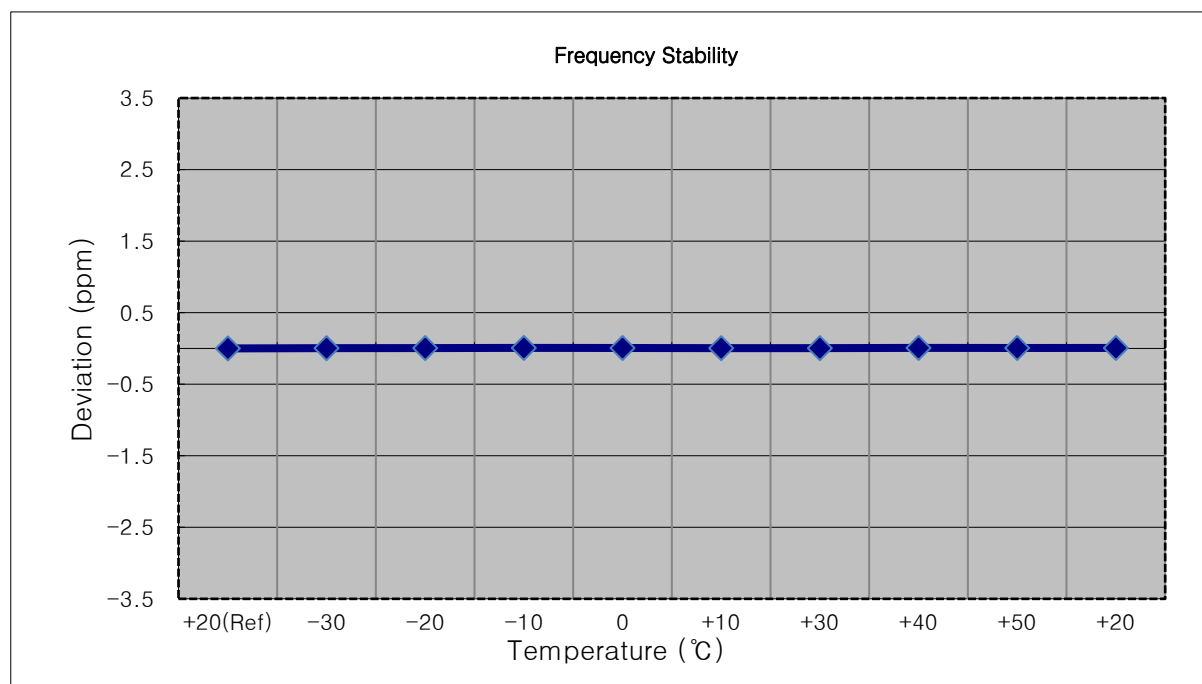


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 998	0.0	0.000 000	0.000
100 %		-30	1744 999 995	-2.8	0.000 000	-0.002
100 %		-20	1745 000 001	2.9	0.000 000	0.002
100 %		-10	1744 999 991	-7.5	0.000 000	-0.004
100 %		0	1745 000 002	3.6	0.000 000	0.002
100 %		+10	1745 000 001	3.1	0.000 000	0.002
100 %		+30	1744 999 995	-3.3	0.000 000	-0.002
100 %		+40	1744 999 994	-4.6	0.000 000	-0.003
100 %		+50	1744 999 995	-3.4	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1745 000 002	3.5	0.000 000	0.002

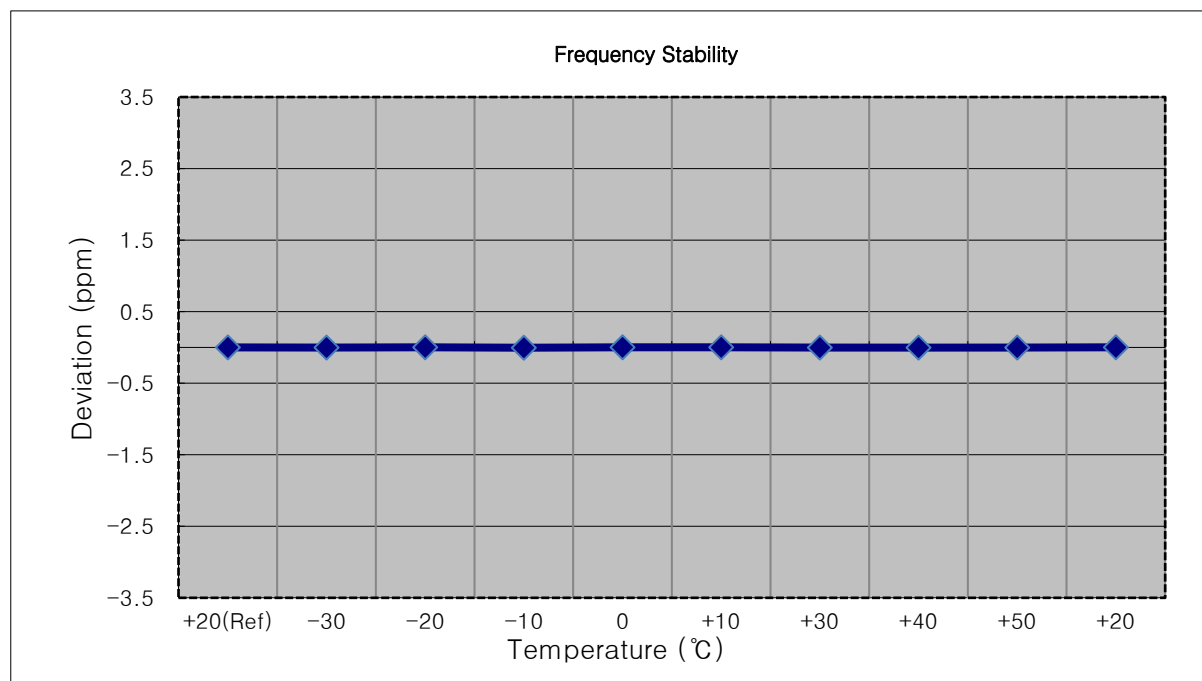


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1745 000 000	2.9	0.000 000	0.002
100 %		-20	1744 999 994	-3.3	0.000 000	-0.002
100 %		-10	1744 999 994	-3.6	0.000 000	-0.002
100 %		0	1745 000 000	2.3	0.000 000	0.001
100 %		+10	1745 000 002	4.3	0.000 000	0.002
100 %		+30	1744 999 993	-4.4	0.000 000	-0.003
100 %		+40	1745 000 000	2.9	0.000 000	0.002
100 %		+50	1744 999 992	-5.7	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1744 999 995	-1.9	0.000 000	-0.001

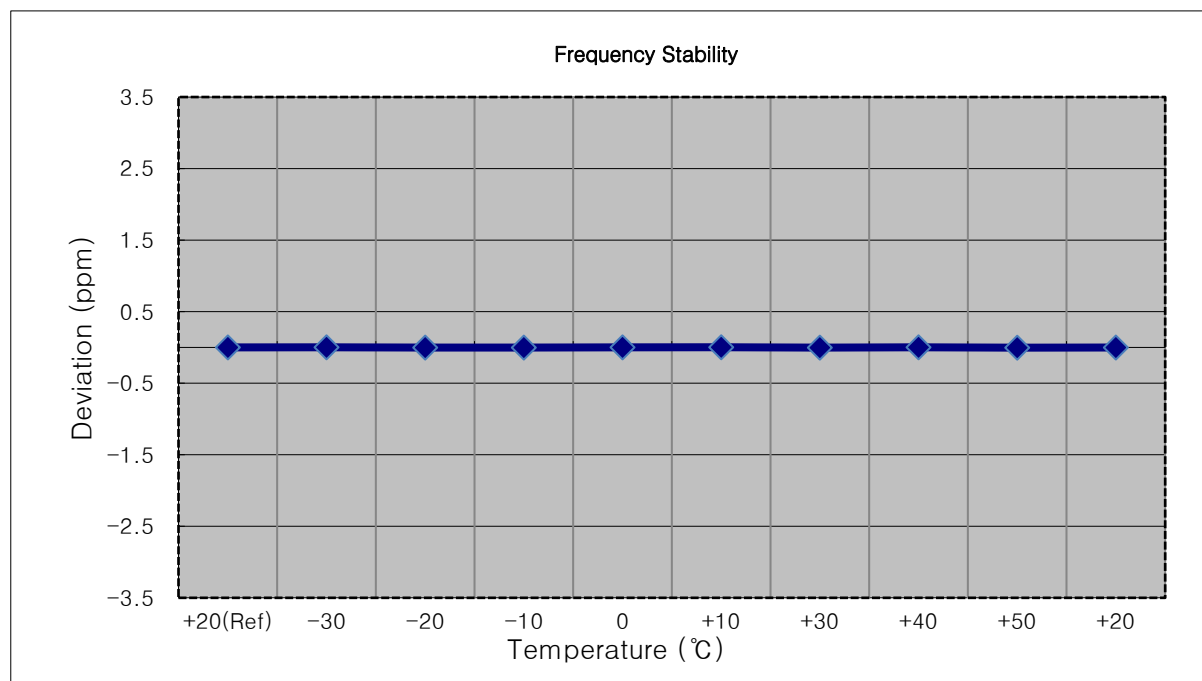


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1745,000,000 Hz
☐ CHANNEL: 132322 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1745 000 008	10.9	0.000 001	0.006
100 %		-20	1745 000 006	9.2	0.000 001	0.005
100 %		-10	1745 000 013	15.8	0.000 001	0.009
100 %		0	1745 000 005	7.9	0.000 000	0.005
100 %		+10	1745 000 012	15.0	0.000 001	0.009
100 %		+30	1745 000 013	15.6	0.000 001	0.009
100 %		+40	1745 000 003	6.0	0.000 000	0.003
100 %		+50	1745 000 008	11.3	0.000 001	0.006
Batt. Endpoint	3.400	+20	1745 000 010	12.4	0.000 001	0.007

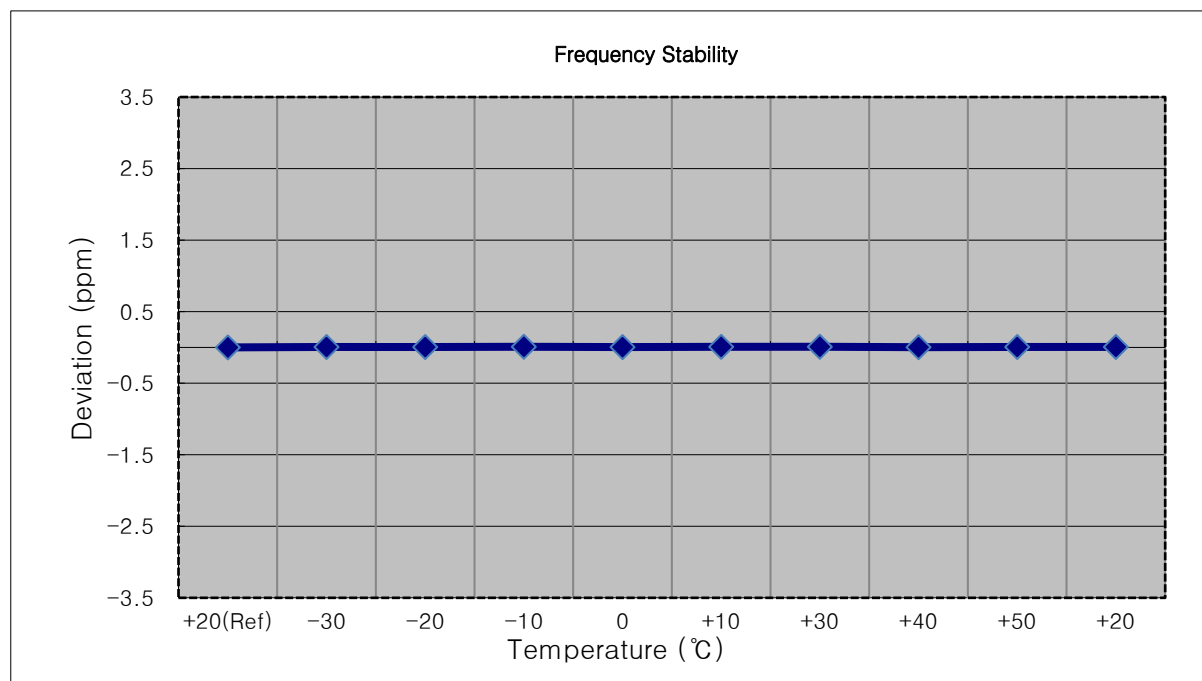


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1745 000 015	12.2	0.000 001	0.007
100 %		-20	1745 000 017	14.4	0.000 001	0.008
100 %		-10	1745 000 014	11.2	0.000 001	0.006
100 %		0	1745 000 012	8.9	0.000 001	0.005
100 %		+10	1745 000 007	4.1	0.000 000	0.002
100 %		+30	1745 000 008	4.6	0.000 000	0.003
100 %		+40	1745 000 015	12.0	0.000 001	0.007
100 %		+50	1745 000 007	4.2	0.000 000	0.002
Batt. Endpoint	3.400	+20	1745 000 014	11.1	0.000 001	0.006

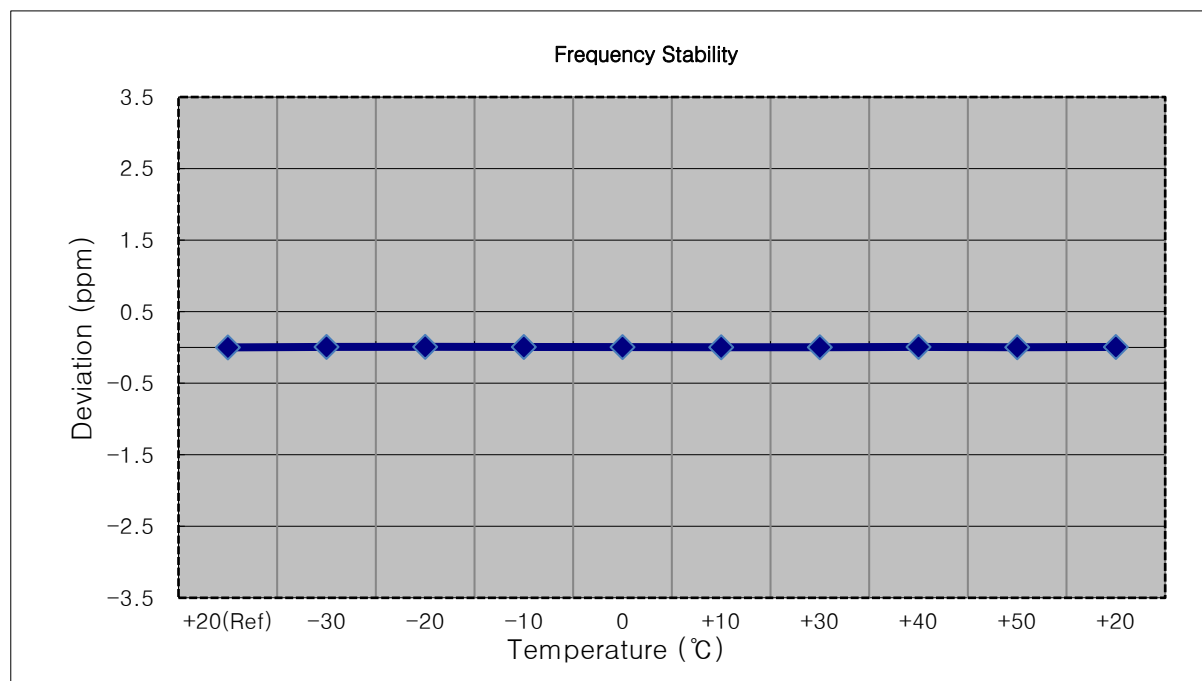


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1745,000,000 Hz
☐ CHANNEL: 132322 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 998	0.0	0.000 000	0.000
100 %		-30	1745 000 010	12.2	0.000 001	0.007
100 %		-20	1745 000 009	11.4	0.000 001	0.007
100 %		-10	1745 000 013	15.4	0.000 001	0.009
100 %		0	1745 000 007	9.6	0.000 001	0.005
100 %		+10	1745 000 002	4.2	0.000 000	0.002
100 %		+30	1745 000 013	15.3	0.000 001	0.009
100 %		+40	1745 000 013	15.0	0.000 001	0.009
100 %		+50	1745 000 013	15.5	0.000 001	0.009
Batt. Endpoint	3.400	+20	1745 000 013	15.8	0.000 001	0.009

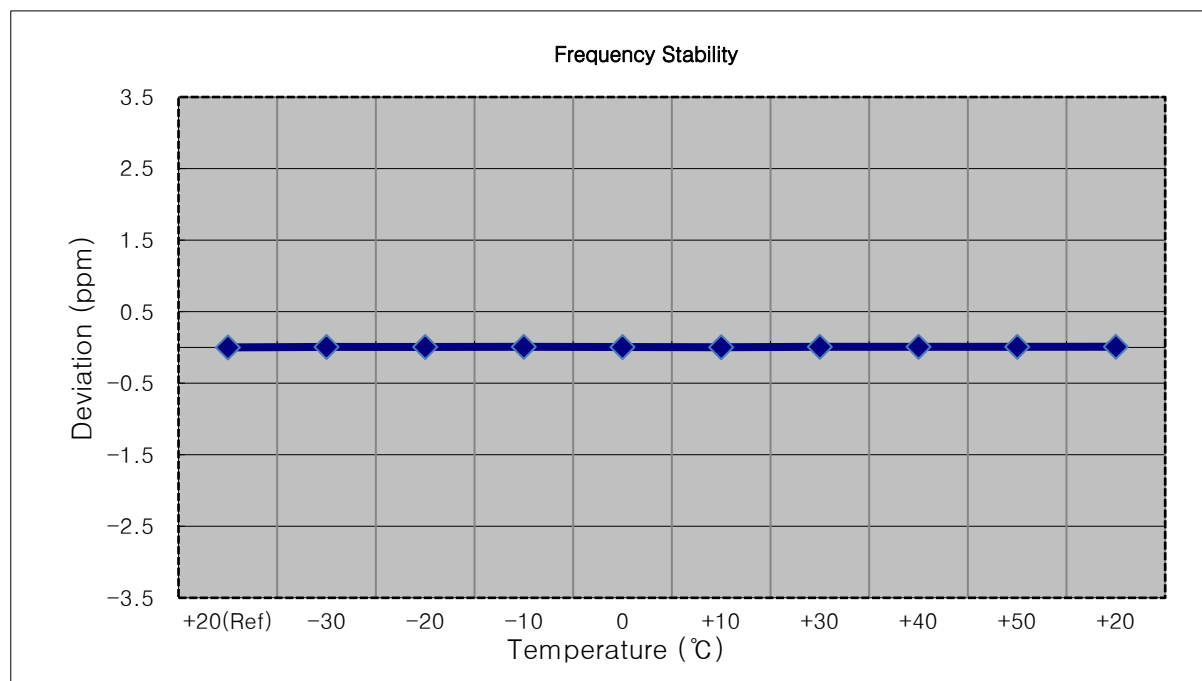


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1745,000,000 Hz
☐ CHANNEL: 132322 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 998	0.0	0.000 000	0.000
100 %		-30	1745 000 003	5.2	0.000 000	0.003
100 %		-20	1745 000 012	14.3	0.000 001	0.008
100 %		-10	1745 000 006	8.4	0.000 000	0.005
100 %		0	1745 000 004	6.8	0.000 000	0.004
100 %		+10	1745 000 003	5.4	0.000 000	0.003
100 %		+30	1745 000 007	9.7	0.000 001	0.006
100 %		+40	1745 000 003	5.4	0.000 000	0.003
100 %		+50	1745 000 008	10.1	0.000 001	0.006
Batt. Endpoint	3.400	+20	1745 000 002	4.4	0.000 000	0.003

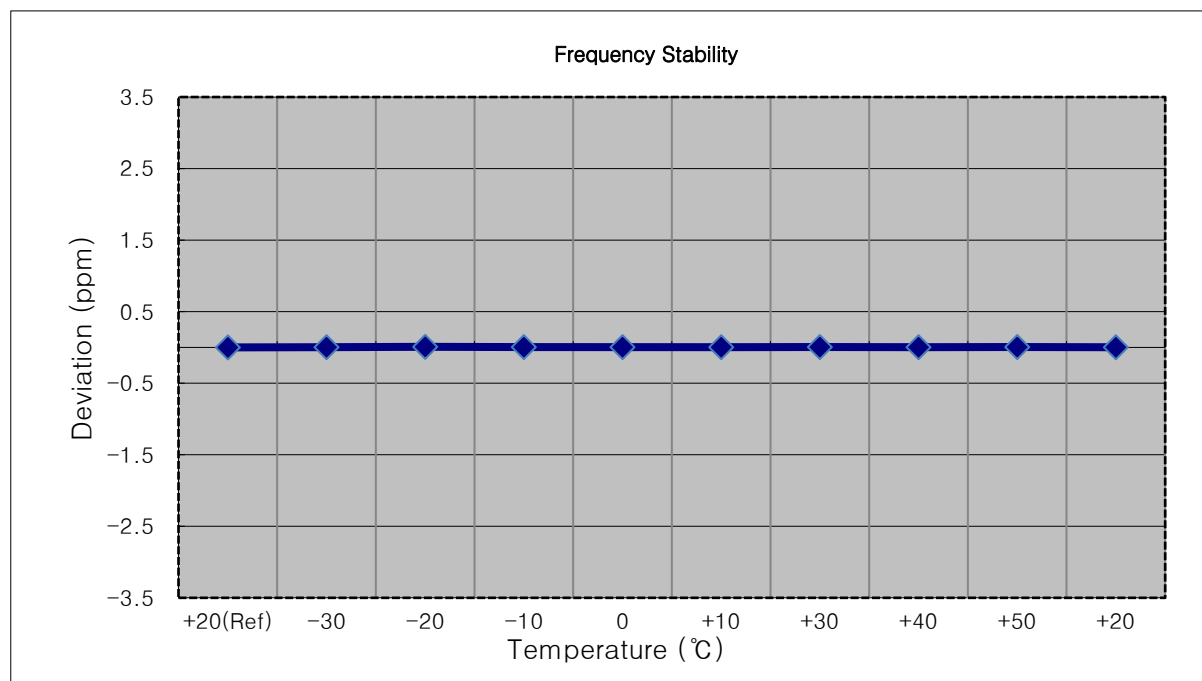


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1779 300 009	0.0	0.000 000	0.000
100 %		-30	1779 300 015	6.1	0.000 000	0.003
100 %		-20	1779 300 006	-2.5	0.000 000	-0.001
100 %		-10	1779 300 004	-4.4	0.000 000	-0.002
100 %		0	1779 300 012	2.9	0.000 000	0.002
100 %		+10	1779 300 016	7.0	0.000 000	0.004
100 %		+30	1779 300 014	5.7	0.000 000	0.003
100 %		+40	1779 300 006	-2.6	0.000 000	-0.001
100 %		+50	1779 300 012	3.8	0.000 000	0.002
Batt. Endpoint	3.400	+20	1779 300 004	-5.1	0.000 000	-0.003

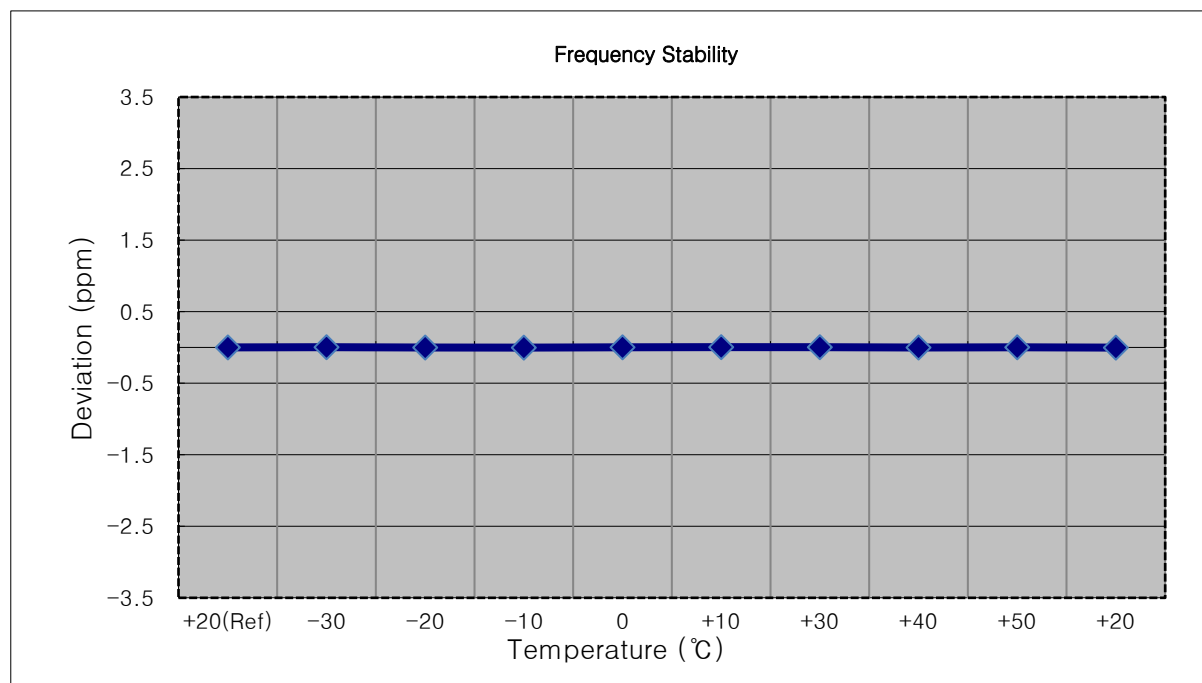


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1778,500,000 Hz
☐ CHANNEL: 132657 (3 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1778 500 009	0.0	0.000 000	0.000
100 %		-30	1778 500 016	6.2	0.000 000	0.003
100 %		-20	1778 500 018	8.7	0.000 000	0.005
100 %		-10	1778 500 022	12.3	0.000 001	0.007
100 %		0	1778 500 017	7.6	0.000 000	0.004
100 %		+10	1778 500 015	6.1	0.000 000	0.003
100 %		+30	1778 500 018	8.6	0.000 000	0.005
100 %		+40	1778 500 019	9.2	0.000 001	0.005
100 %		+50	1778 500 000	-9.2	-0.000 001	-0.005
Batt. Endpoint	3.400	+20	1778 499 999	-10.2	-0.000 001	-0.006

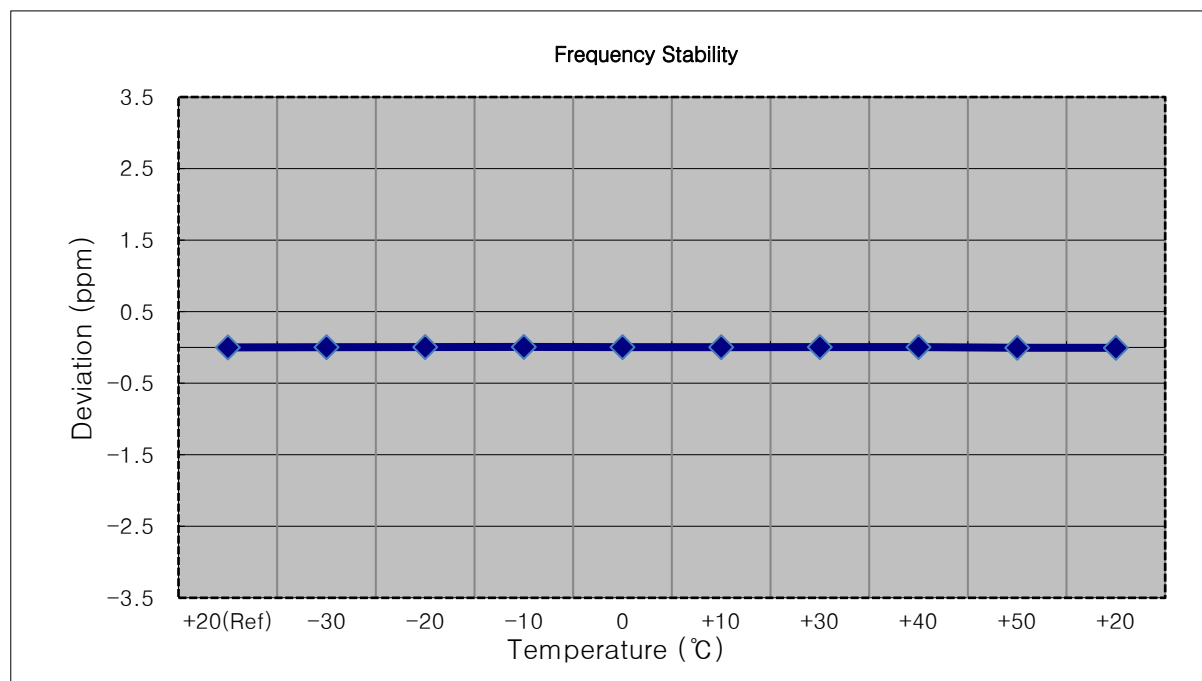


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1777,500,000 Hz
☐ CHANNEL: 132647 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1777 499 999	0.0	0.000 000	0.000
100 %		-30	1777 500 010	11.0	0.000 001	0.006
100 %		-20	1777 500 012	12.9	0.000 001	0.007
100 %		-10	1777 500 004	5.3	0.000 000	0.003
100 %		0	1777 500 008	8.8	0.000 000	0.005
100 %		+10	1777 500 005	6.2	0.000 000	0.004
100 %		+30	1777 500 012	13.3	0.000 001	0.007
100 %		+40	1777 500 014	15.5	0.000 001	0.009
100 %		+50	1777 500 010	11.2	0.000 001	0.006
Batt. Endpoint	3.400	+20	1777 500 010	10.8	0.000 001	0.006

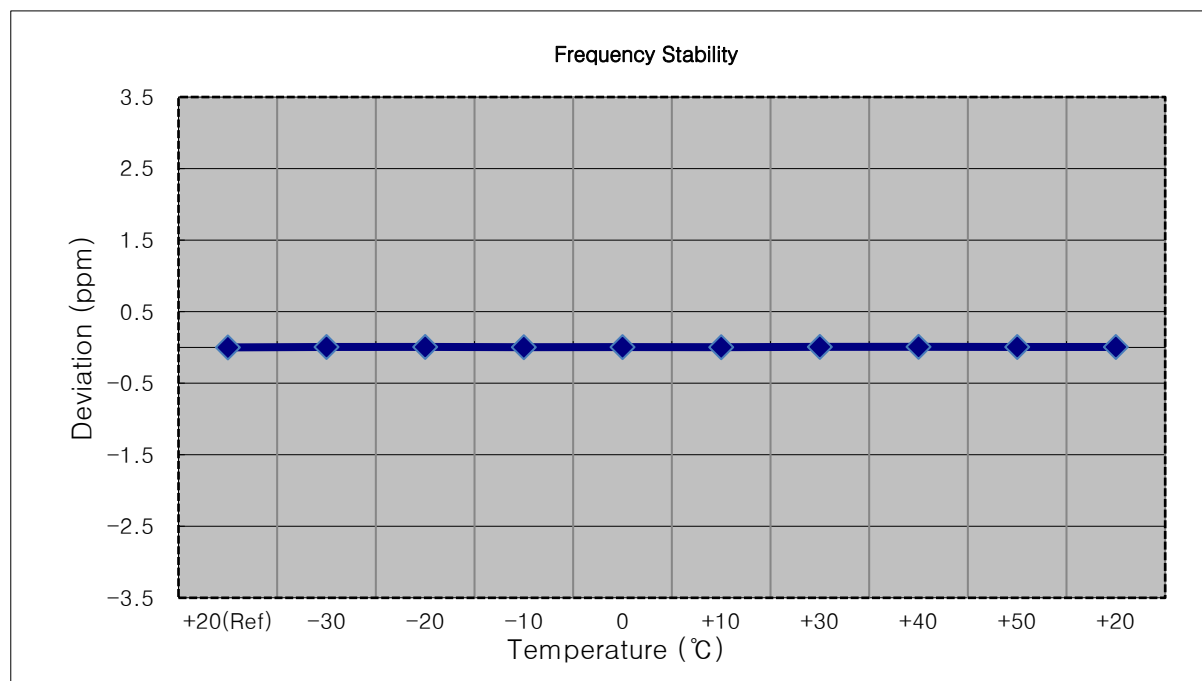


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1774 999 997	0.0	0.000 000	0.000
100 %		-30	1775 000 008	10.7	0.000 001	0.006
100 %		-20	1775 000 007	9.7	0.000 001	0.005
100 %		-10	1775 000 010	12.4	0.000 001	0.007
100 %		0	1775 000 009	11.5	0.000 001	0.006
100 %		+10	1775 000 004	6.2	0.000 000	0.003
100 %		+30	1775 000 012	14.9	0.000 001	0.008
100 %		+40	1775 000 005	7.5	0.000 000	0.004
100 %		+50	1775 000 009	12.0	0.000 001	0.007
Batt. Endpoint	3.400	+20	1775 000 003	5.7	0.000 000	0.003

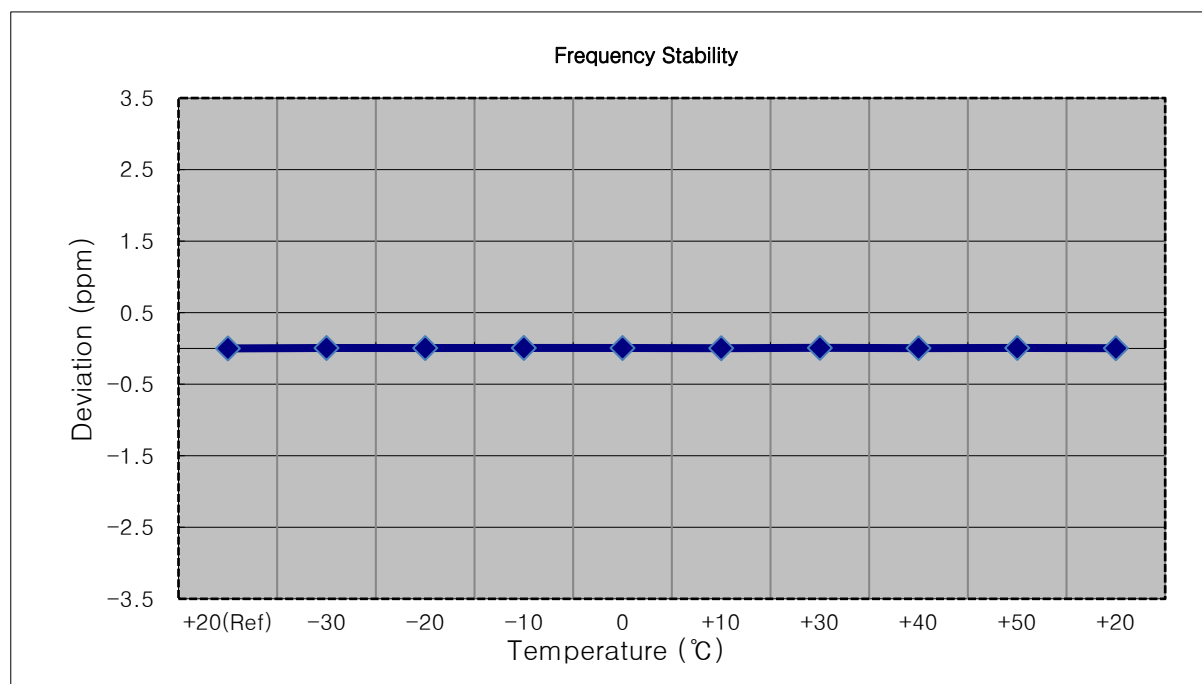


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1772 499 993	0.0	0.000 000	0.000
100 %		-30	1772 500 007	14.3	0.000 001	0.008
100 %		-20	1772 499 998	4.7	0.000 000	0.003
100 %		-10	1772 500 001	7.6	0.000 000	0.004
100 %		0	1772 500 001	7.9	0.000 000	0.004
100 %		+10	1772 500 003	10.0	0.000 001	0.006
100 %		+30	1772 499 998	5.0	0.000 000	0.003
100 %		+40	1772 500 000	6.9	0.000 000	0.004
100 %		+50	1772 500 003	9.7	0.000 001	0.005
Batt. Endpoint	3.400	+20	1772 500 000	6.8	0.000 000	0.004

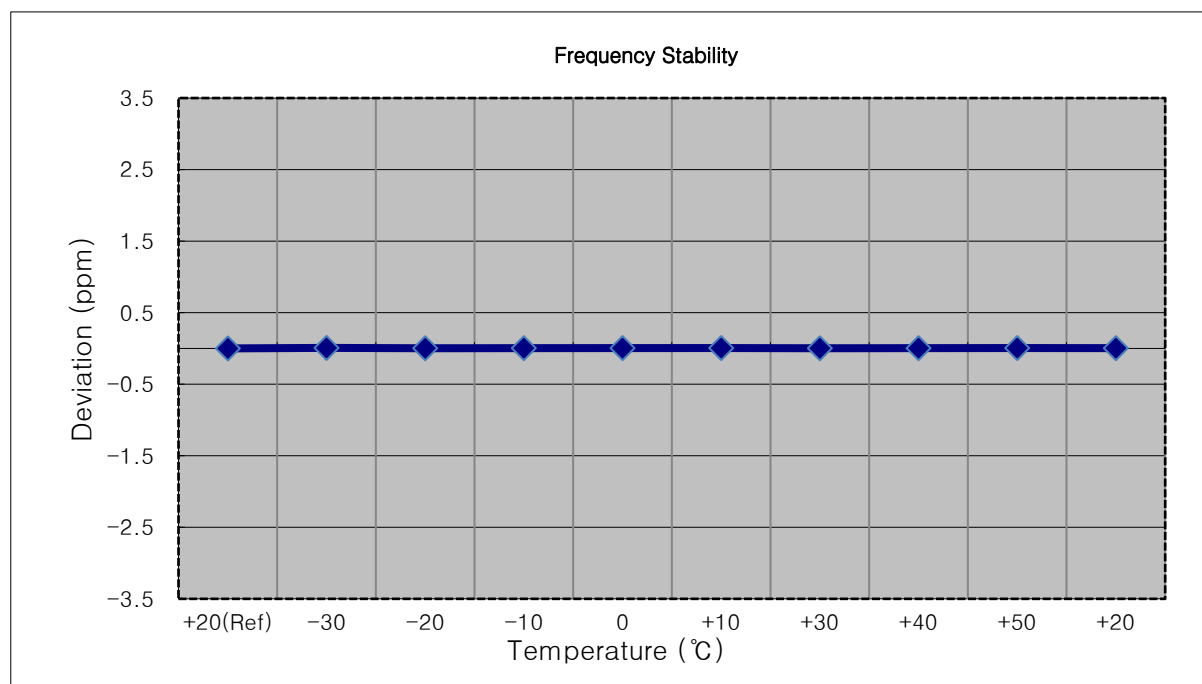

- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1770,000,000 Hz
☐ CHANNEL: 132572 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1769 999 994	0.0	0.000 000	0.000
100 %		-30	1770 000 007	12.5	0.000 001	0.007
100 %		-20	1770 000 010	15.5	0.000 001	0.009
100 %		-10	1770 000 004	9.5	0.000 001	0.005
100 %		0	1770 000 000	5.4	0.000 000	0.003
100 %		+10	1770 000 004	10.0	0.000 001	0.006
100 %		+30	1770 000 008	14.2	0.000 001	0.008
100 %		+40	1770 000 002	7.9	0.000 000	0.004
100 %		+50	1770 000 010	15.6	0.000 001	0.009
Batt. Endpoint	3.400	+20	1769 999 999	4.4	0.000 000	0.003

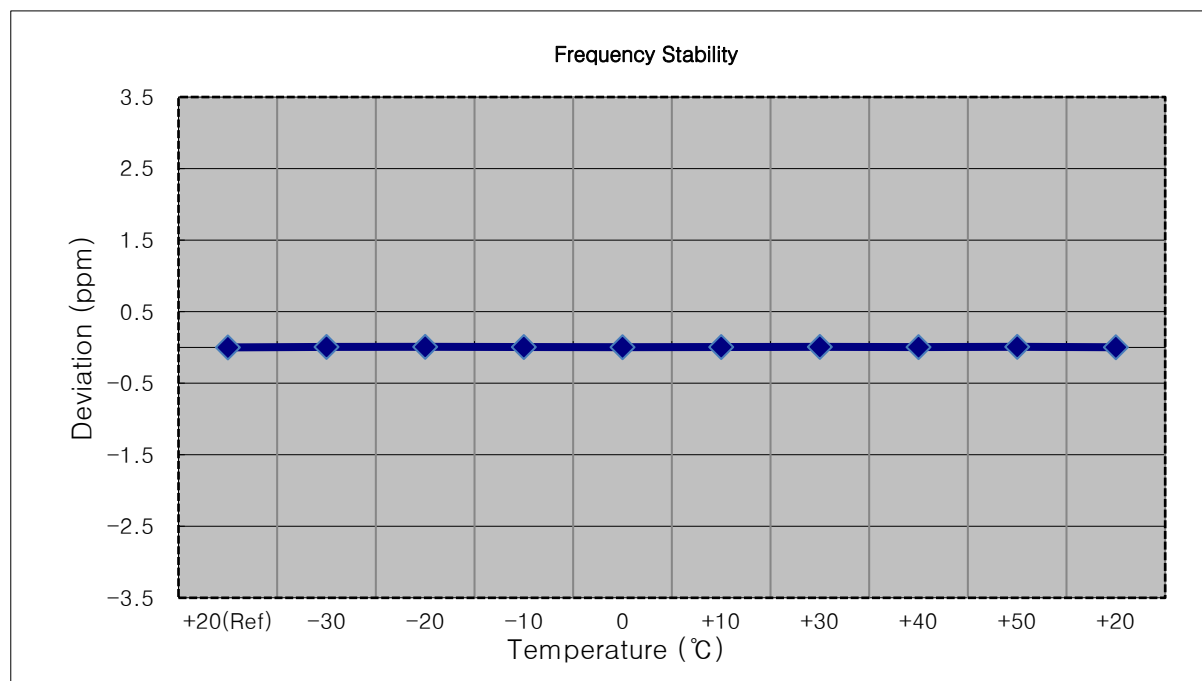

8.7.2 Upper Ant


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1710 700 004	0.0	0.000 000	0.000
100 %		-30	1710 700 001	-3.0	0.000 000	-0.002
100 %		-20	1710 700 008	3.7	0.000 000	0.002
100 %		-10	1710 700 007	3.3	0.000 000	0.002
100 %		0	1710 700 008	4.4	0.000 000	0.003
100 %		+10	1710 700 001	-2.8	0.000 000	-0.002
100 %		+30	1710 700 002	-2.1	0.000 000	-0.001
100 %		+40	1710 700 006	2.2	0.000 000	0.001
100 %		+50	1710 700 001	-3.0	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1710 700 006	2.2	0.000 000	0.001

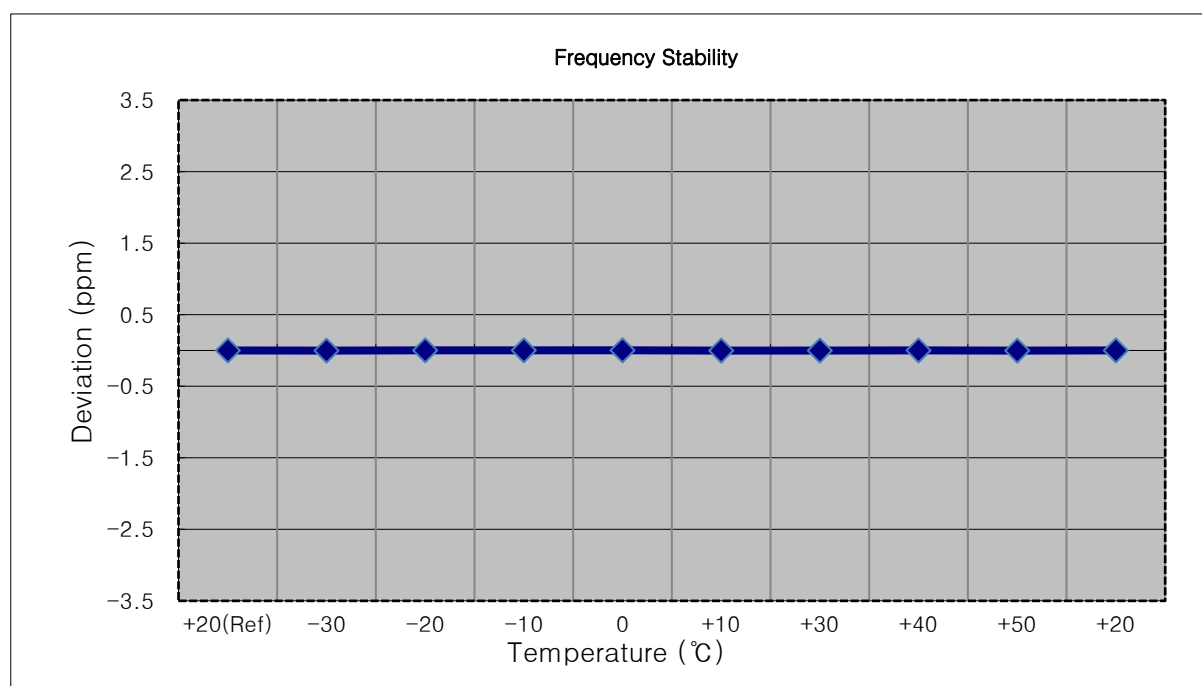


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1711,500,000 Hz
☐ CHANNEL: 131987 (3 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1711 499 997	0.0	0.000 000	0.000
100 %		-30	1711 499 994	-3.0	0.000 000	-0.002
100 %		-20	1711 500 000	2.8	0.000 000	0.002
100 %		-10	1711 500 003	5.5	0.000 000	0.003
100 %		0	1711 500 002	4.9	0.000 000	0.003
100 %		+10	1711 500 003	5.4	0.000 000	0.003
100 %		+30	1711 499 995	-2.7	0.000 000	-0.002
100 %		+40	1711 500 005	7.3	0.000 000	0.004
100 %		+50	1711 500 003	5.9	0.000 000	0.003
Batt. Endpoint	3.400	+20	1711 499 995	-2.6	0.000 000	-0.002

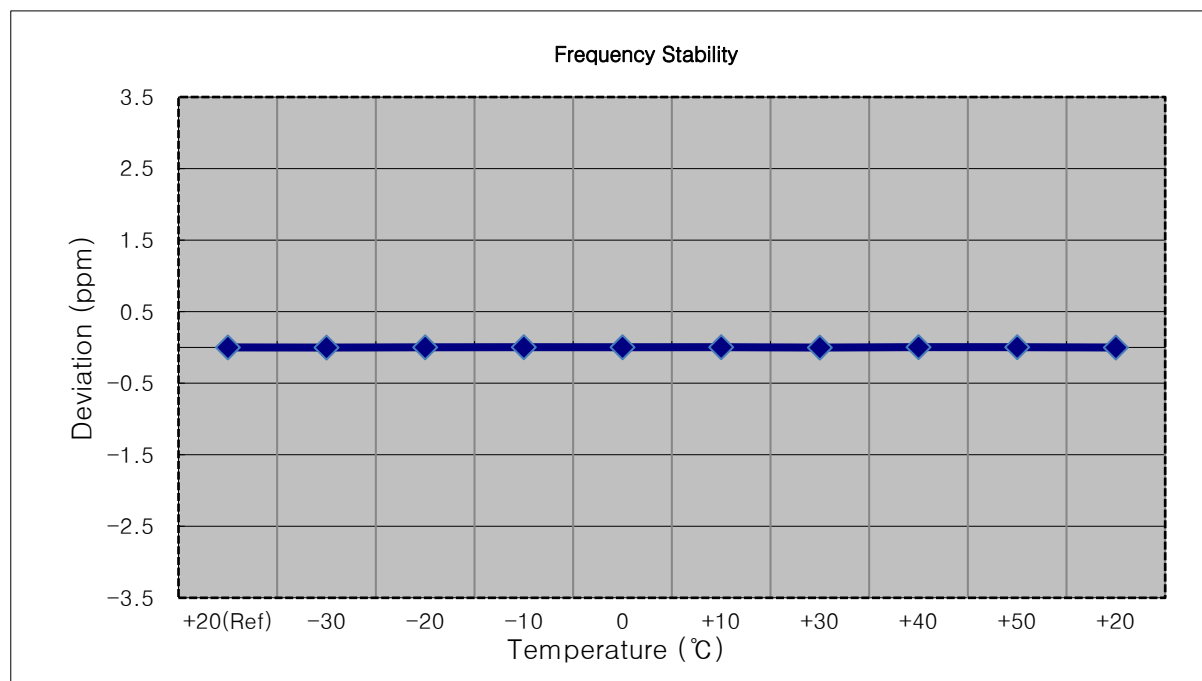


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1712,500,000 Hz
☐ CHANNEL: 131997 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1712 499 998	0.0	0.000 000	0.000
100 %		-30	1712 500 002	3.6	0.000 000	0.002
100 %		-20	1712 499 995	-2.5	0.000 000	-0.001
100 %		-10	1712 499 994	-4.0	0.000 000	-0.002
100 %		0	1712 499 996	-2.1	0.000 000	-0.001
100 %		+10	1712 499 993	-5.0	0.000 000	-0.003
100 %		+30	1712 499 996	-2.3	0.000 000	-0.001
100 %		+40	1712 499 994	-3.6	0.000 000	-0.002
100 %		+50	1712 500 003	5.2	0.000 000	0.003
Batt. Endpoint	3.400	+20	1712 499 994	-3.6	0.000 000	-0.002

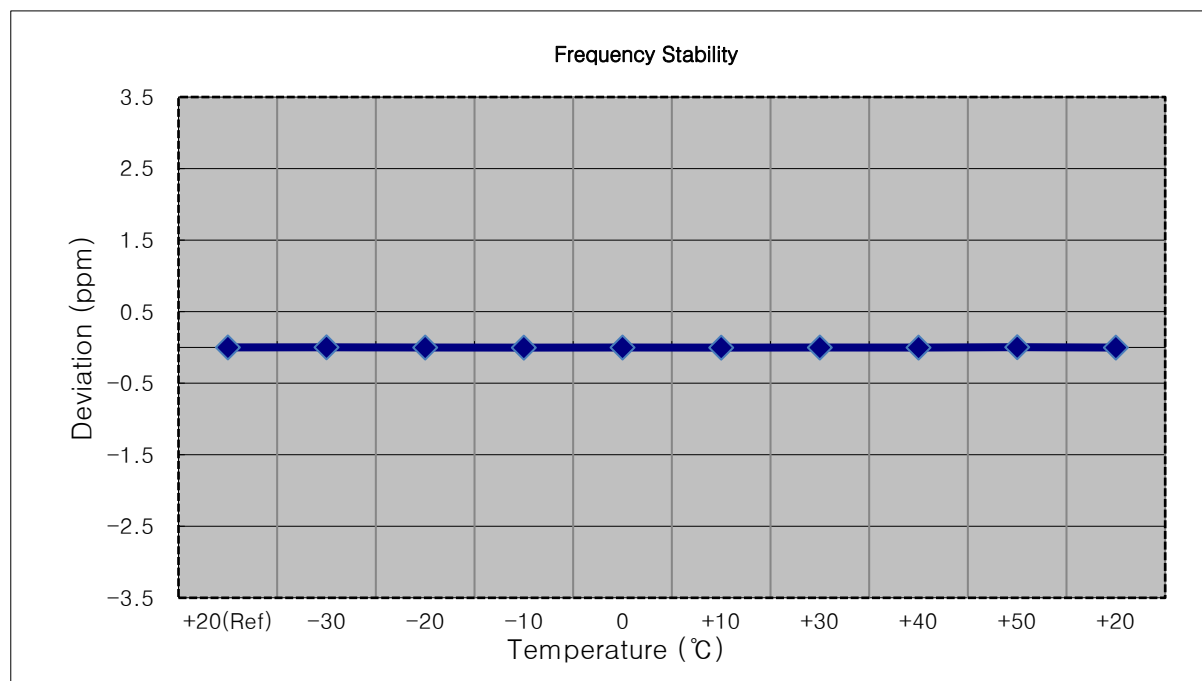


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1715,000,000 Hz
☐ CHANNEL: 132022 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1714 999 997	0.0	0.000 000	0.000
100 %		-30	1714 999 994	-3.2	0.000 000	-0.002
100 %		-20	1714 999 993	-4.1	0.000 000	-0.002
100 %		-10	1714 999 993	-4.0	0.000 000	-0.002
100 %		0	1714 999 999	2.1	0.000 000	0.001
100 %		+10	1714 999 992	-5.2	0.000 000	-0.003
100 %		+30	1714 999 999	2.7	0.000 000	0.002
100 %		+40	1714 999 993	-3.9	0.000 000	-0.002
100 %		+50	1714 999 994	-2.8	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1714 999 993	-3.5	0.000 000	-0.002

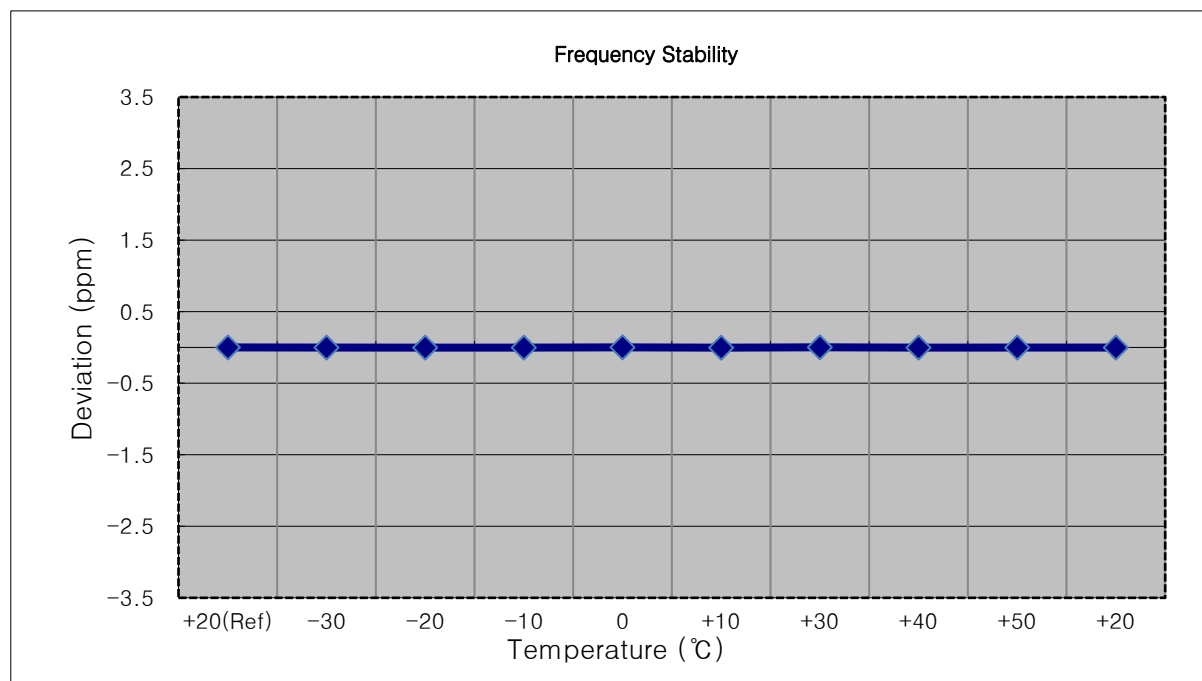


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1717 499 997	0.0	0.000 000	0.000
100 %		-30	1717 499 995	-2.4	0.000 000	-0.001
100 %		-20	1717 500 001	3.8	0.000 000	0.002
100 %		-10	1717 499 993	-3.8	0.000 000	-0.002
100 %		0	1717 499 999	2.2	0.000 000	0.001
100 %		+10	1717 499 992	-5.1	0.000 000	-0.003
100 %		+30	1717 499 992	-5.0	0.000 000	-0.003
100 %		+40	1717 499 999	1.6	0.000 000	0.001
100 %		+50	1717 499 994	-2.9	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1717 499 994	-3.3	0.000 000	-0.002

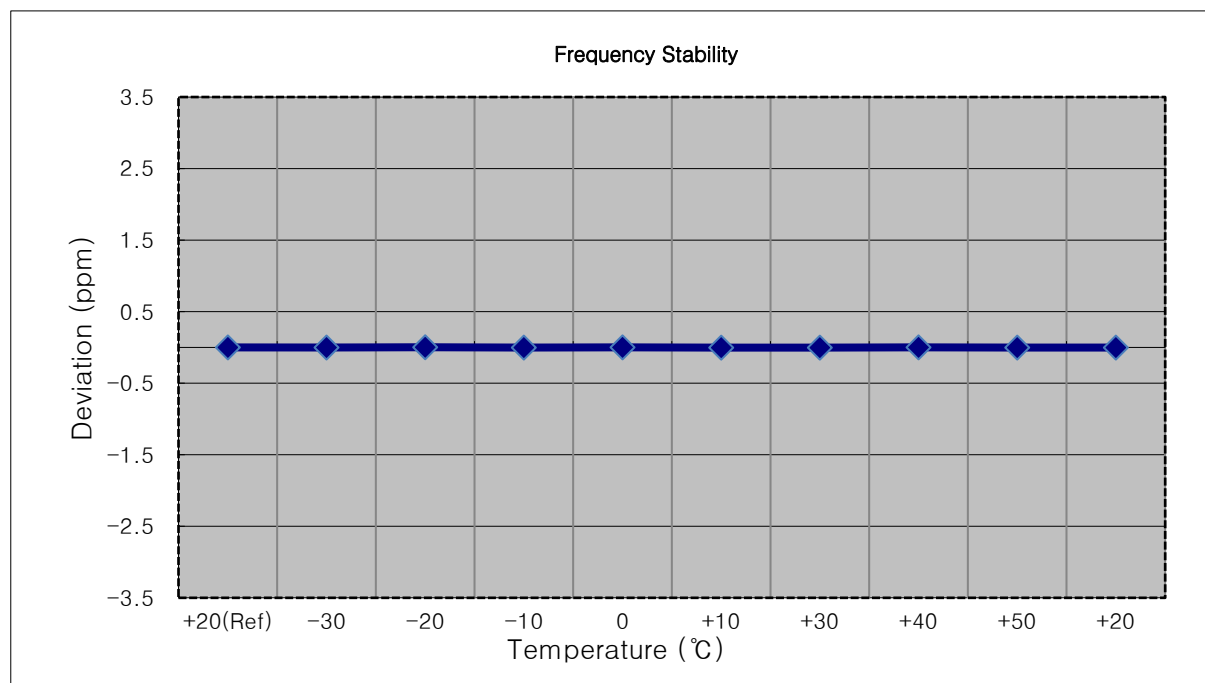


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1719 999 995	0.0	0.000 000	0.000
100 %		-30	1719 999 992	-3.4	0.000 000	-0.002
100 %		-20	1719 999 992	-3.8	0.000 000	-0.002
100 %		-10	1719 999 992	-3.3	0.000 000	-0.002
100 %		0	1719 999 999	3.3	0.000 000	0.002
100 %		+10	1719 999 998	2.2	0.000 000	0.001
100 %		+30	1719 999 994	-1.7	0.000 000	-0.001
100 %		+40	1719 999 991	-4.1	0.000 000	-0.002
100 %		+50	1719 999 993	-2.3	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1719 999 992	-2.9	0.000 000	-0.002

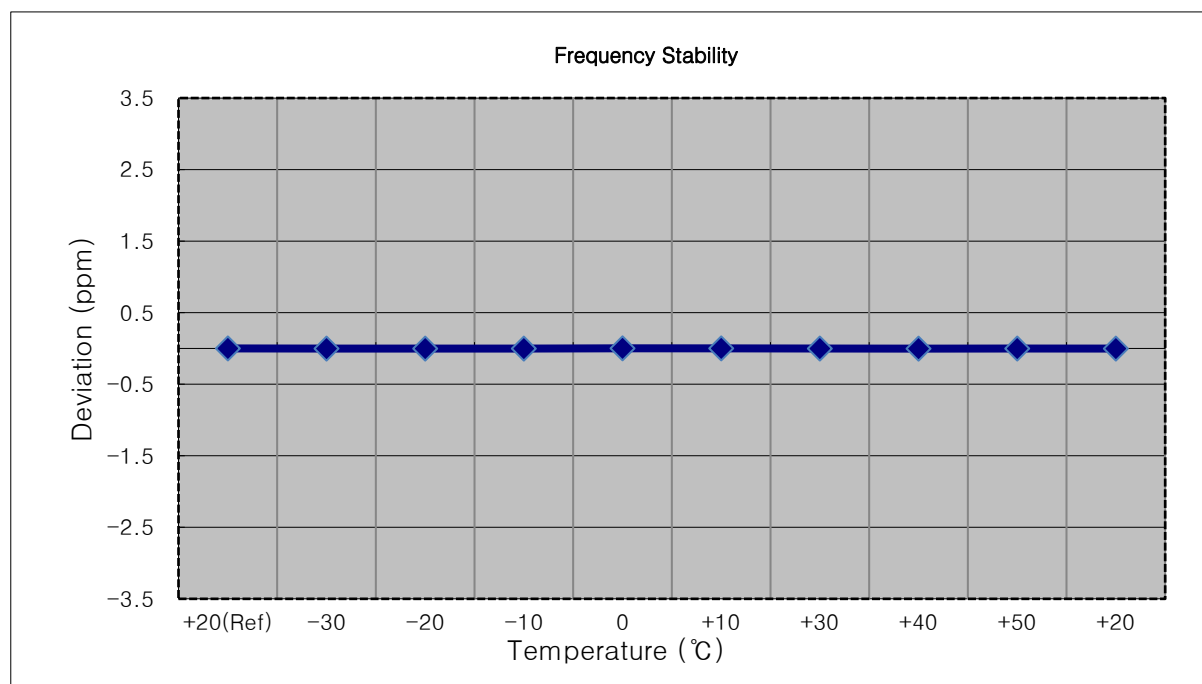


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 005	0.0	0.000 000	0.000
100 %		-30	1745 000 008	2.6	0.000 000	0.001
100 %		-20	1745 000 009	3.5	0.000 000	0.002
100 %		-10	1745 000 010	4.8	0.000 000	0.003
100 %		0	1745 000 010	4.3	0.000 000	0.002
100 %		+10	1745 000 002	-3.5	0.000 000	-0.002
100 %		+30	1745 000 010	4.7	0.000 000	0.003
100 %		+40	1745 000 008	2.9	0.000 000	0.002
100 %		+50	1745 000 009	3.6	0.000 000	0.002
Batt. Endpoint	3.400	+20	1745 000 009	3.3	0.000 000	0.002

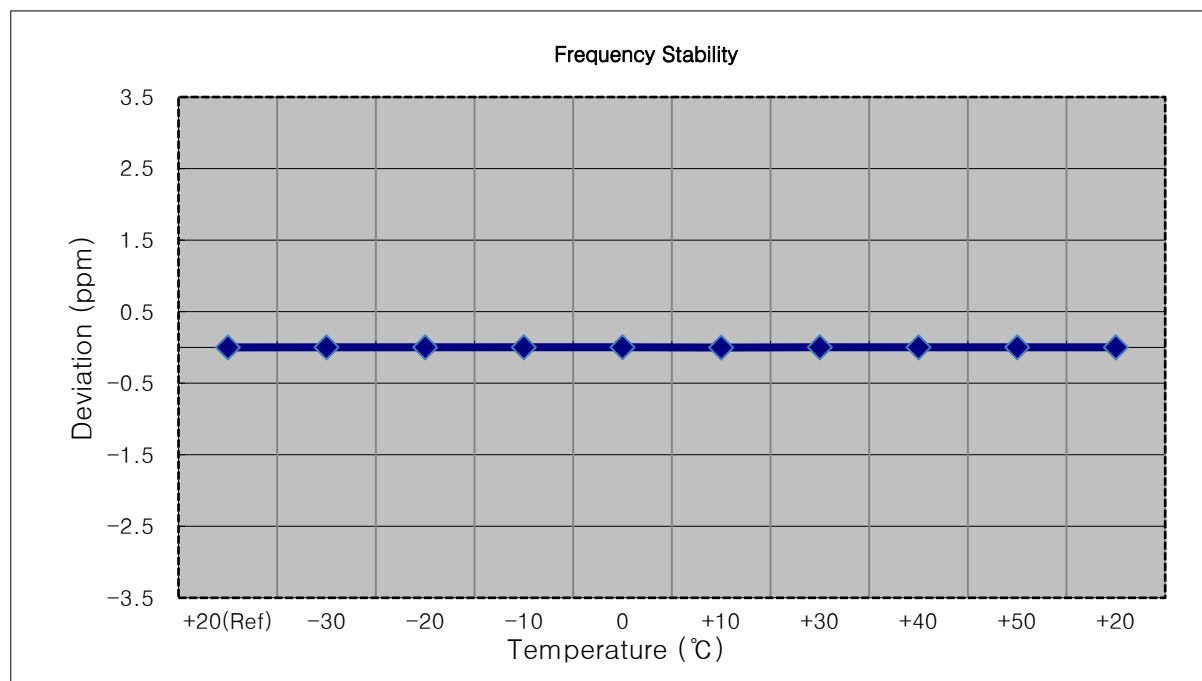


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100 %		-30	1745 000 003	6.8	0.000 000	0.004
100 %		-20	1744 999 999	3.1	0.000 000	0.002
100 %		-10	1744 999 991	-4.5	0.000 000	-0.003
100 %		0	1744 999 998	2.3	0.000 000	0.001
100 %		+10	1745 000 002	5.9	0.000 000	0.003
100 %		+30	1744 999 992	-3.7	0.000 000	-0.002
100 %		+40	1745 000 002	5.7	0.000 000	0.003
100 %		+50	1745 000 000	3.8	0.000 000	0.002
Batt. Endpoint	3.400	+20	1745 000 001	4.8	0.000 000	0.003

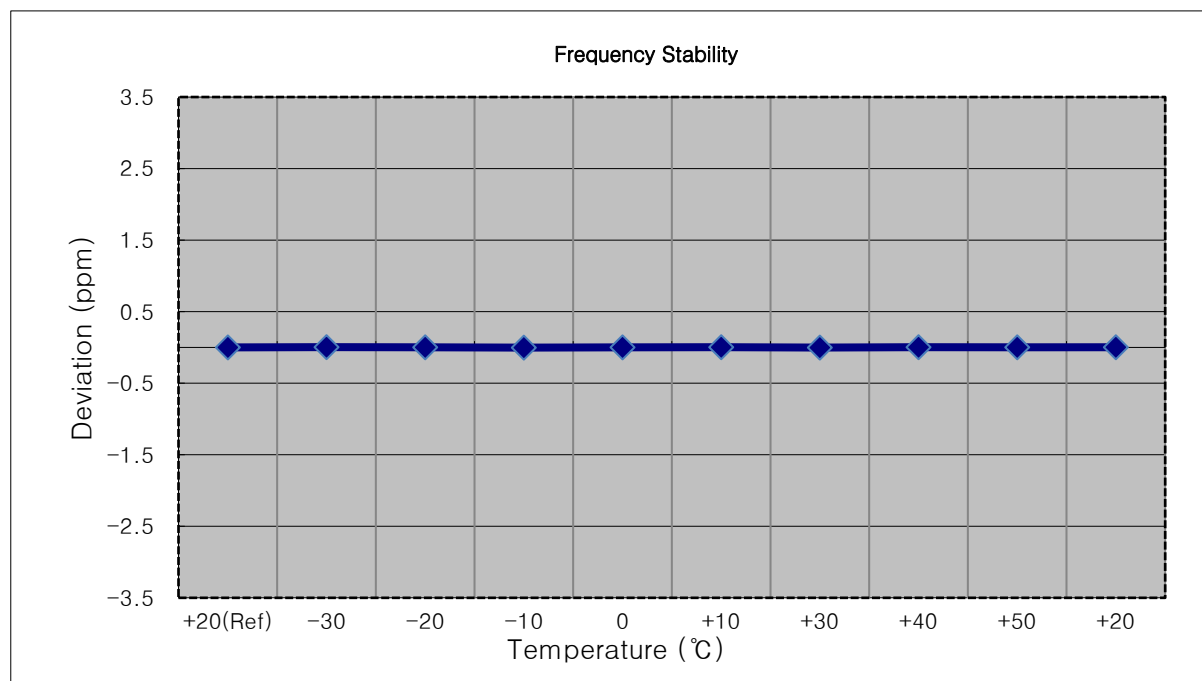


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1744 999 998	-5.3	0.000 000	-0.003
100 %		-20	1745 000 008	4.4	0.000 000	0.003
100 %		-10	1745 000 001	-3.0	0.000 000	-0.002
100 %		0	1745 000 001	-3.1	0.000 000	-0.002
100 %		+10	1745 000 001	-2.3	0.000 000	-0.001
100 %		+30	1745 000 001	-2.3	0.000 000	-0.001
100 %		+40	1744 999 999	-4.7	0.000 000	-0.003
100 %		+50	1744 999 999	-4.6	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1744 999 997	-6.3	0.000 000	-0.004

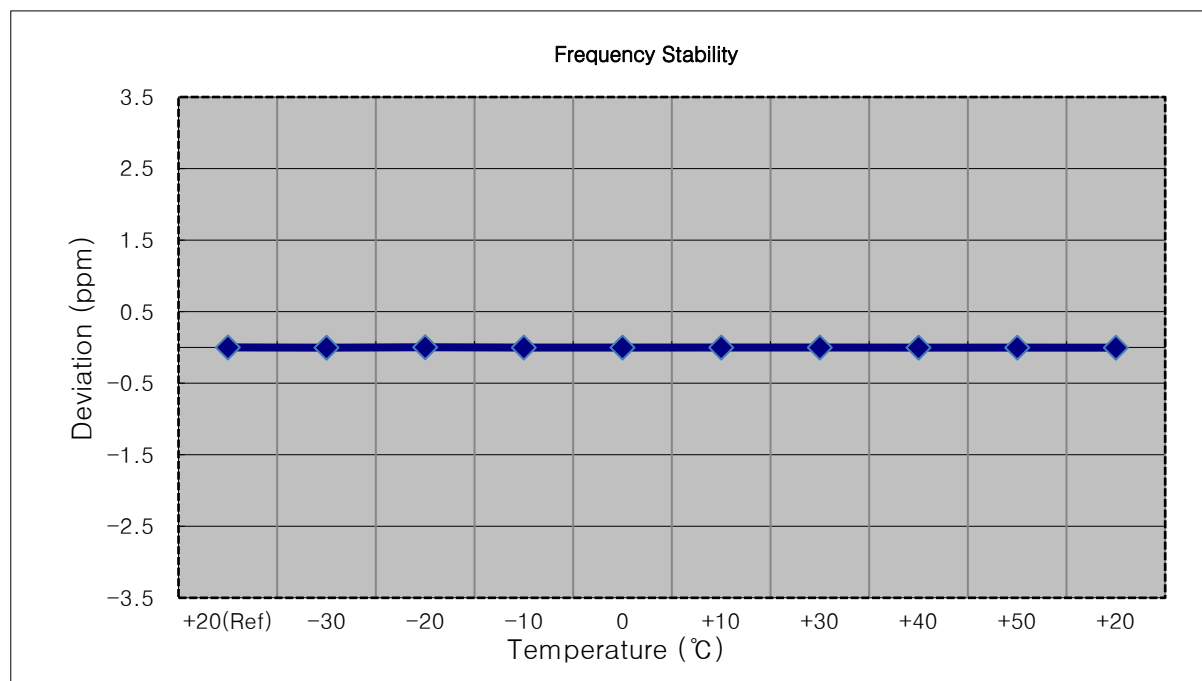


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 002	0.0	0.000 000	0.000
100 %		-30	1744 999 999	-3.0	0.000 000	-0.002
100 %		-20	1744 999 999	-2.9	0.000 000	-0.002
100 %		-10	1745 000 000	-1.6	0.000 000	-0.001
100 %		0	1744 999 996	-5.6	0.000 000	-0.003
100 %		+10	1744 999 999	-2.5	0.000 000	-0.001
100 %		+30	1744 999 999	-2.9	0.000 000	-0.002
100 %		+40	1745 000 005	3.4	0.000 000	0.002
100 %		+50	1744 999 999	-2.5	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1744 999 997	-4.5	0.000 000	-0.003

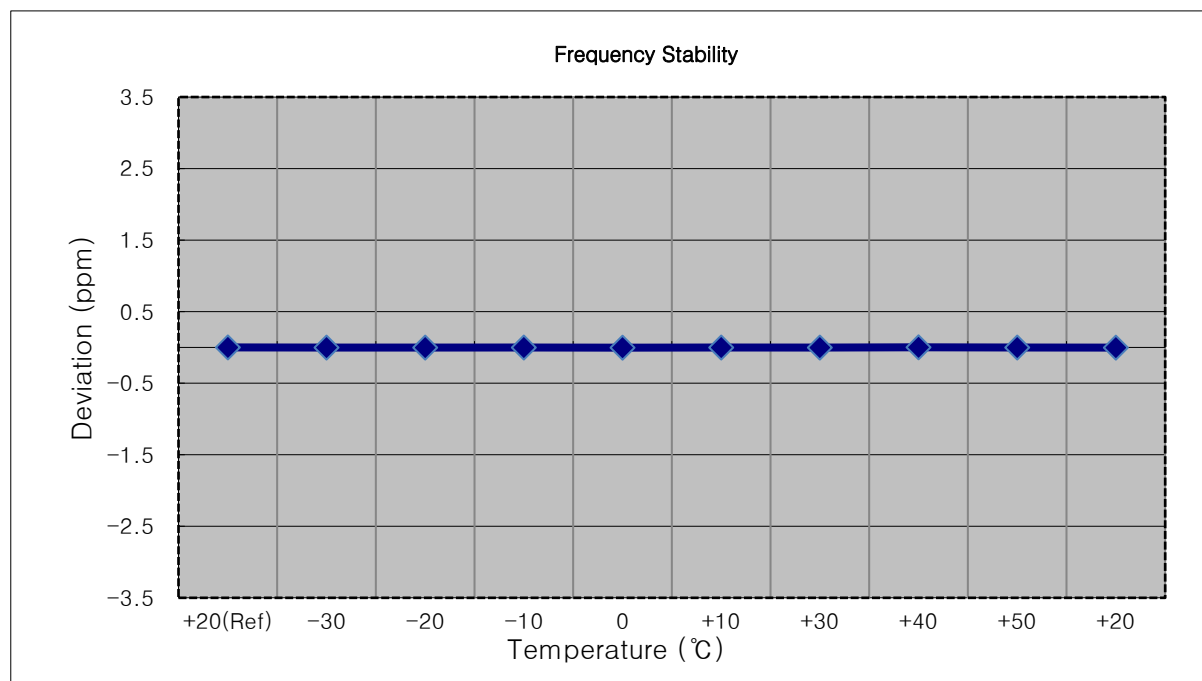


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100 %		-30	1744 999 999	2.5	0.000 000	0.001
100 %		-20	1744 999 992	-4.4	0.000 000	-0.003
100 %		-10	1744 999 998	1.8	0.000 000	0.001
100 %		0	1744 999 998	2.1	0.000 000	0.001
100 %		+10	1744 999 994	-1.9	0.000 000	-0.001
100 %		+30	1744 999 994	-2.6	0.000 000	-0.001
100 %		+40	1745 000 000	3.4	0.000 000	0.002
100 %		+50	1744 999 993	-3.1	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1744 999 993	-2.7	0.000 000	-0.002

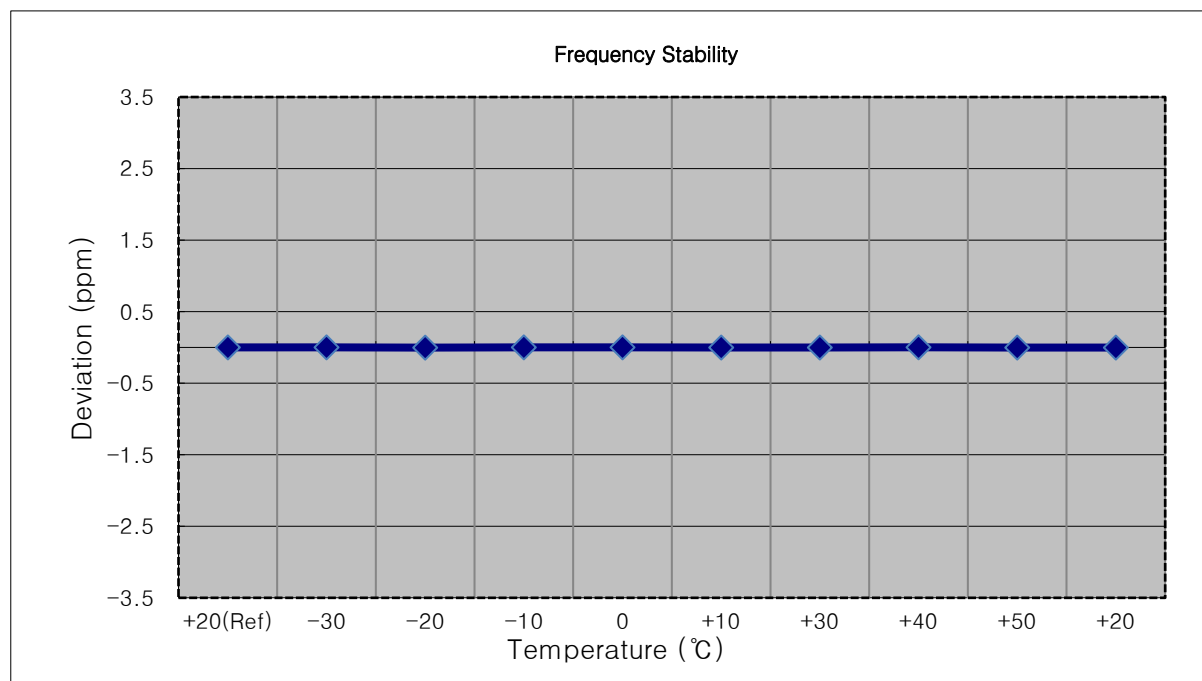


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100 %		-30	1744 999 993	-3.1	0.000 000	-0.002
100 %		-20	1744 999 999	3.6	0.000 000	0.002
100 %		-10	1744 999 993	-3.1	0.000 000	-0.002
100 %		0	1744 999 992	-4.1	0.000 000	-0.002
100 %		+10	1744 999 994	-2.0	0.000 000	-0.001
100 %		+30	1744 999 992	-3.2	0.000 000	-0.002
100 %		+40	1744 999 998	2.5	0.000 000	0.001
100 %		+50	1744 999 991	-4.7	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1744 999 998	2.3	0.000 000	0.001

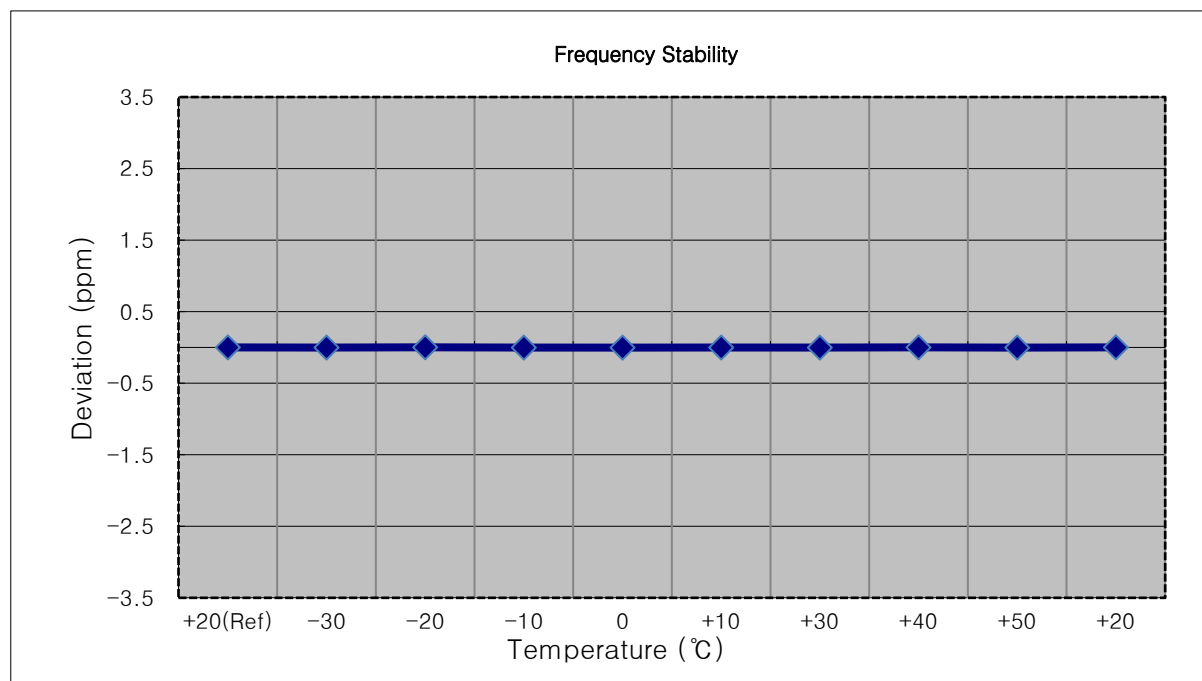


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1779 300 004	0.0	0.000 000	0.000
100 %		-30	1779 300 000	-4.3	0.000 000	-0.002
100 %		-20	1779 300 008	4.2	0.000 000	0.002
100 %		-10	1779 300 009	4.8	0.000 000	0.003
100 %		0	1779 300 000	-3.8	0.000 000	-0.002
100 %		+10	1779 300 002	-2.3	0.000 000	-0.001
100 %		+30	1779 300 009	5.3	0.000 000	0.003
100 %		+40	1779 300 009	4.8	0.000 000	0.003
100 %		+50	1779 300 000	-4.6	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1779 300 007	2.5	0.000 000	0.001

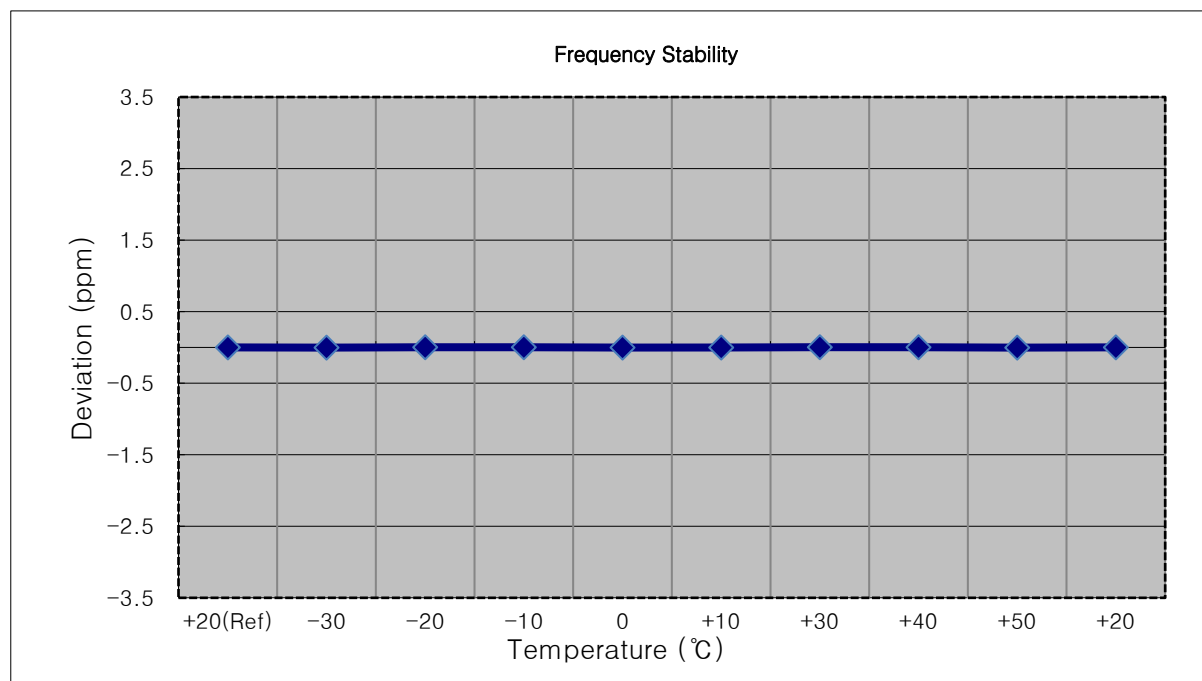


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1778,500,000 Hz
☐ CHANNEL: 132657 (3 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1778 500 007	0.0	0.000 000	0.000
100 %		-30	1778 500 001	-6.2	0.000 000	-0.003
100 %		-20	1778 499 997	-10.3	-0.000 001	-0.006
100 %		-10	1778 500 016	8.5	0.000 000	0.005
100 %		0	1778 500 014	7.2	0.000 000	0.004
100 %		+10	1778 499 998	-9.0	-0.000 001	-0.005
100 %		+30	1778 500 014	6.4	0.000 000	0.004
100 %		+40	1778 500 013	5.6	0.000 000	0.003
100 %		+50	1778 500 020	12.9	0.000 001	0.007
Batt. Endpoint	3.400	+20	1778 499 999	-7.9	0.000 000	-0.004

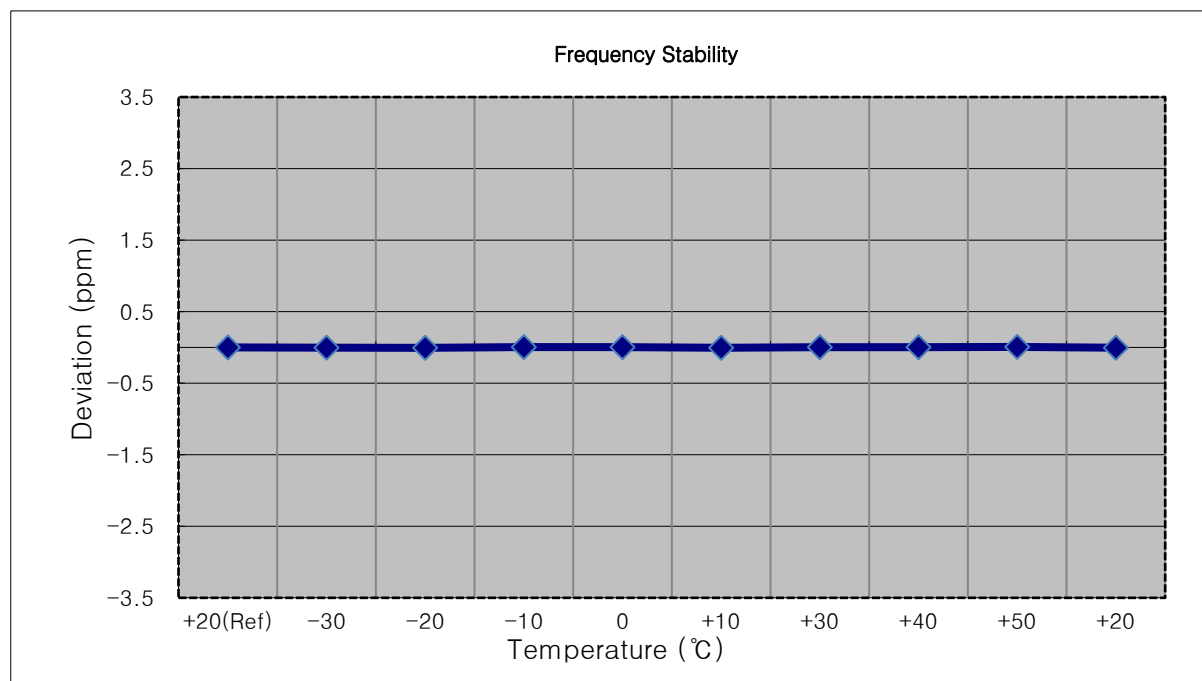


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1777 499 996	0.0	0.000 000	0.000
100 %		-30	1777 499 992	-4.1	0.000 000	-0.002
100 %		-20	1777 499 991	-4.6	0.000 000	-0.003
100 %		-10	1777 499 992	-3.9	0.000 000	-0.002
100 %		0	1777 499 990	-5.9	0.000 000	-0.003
100 %		+10	1777 499 990	-6.2	0.000 000	-0.003
100 %		+30	1777 499 989	-7.1	0.000 000	-0.004
100 %		+40	1777 499 992	-3.4	0.000 000	-0.002
100 %		+50	1777 499 992	-3.5	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1777 499 989	-6.9	0.000 000	-0.004

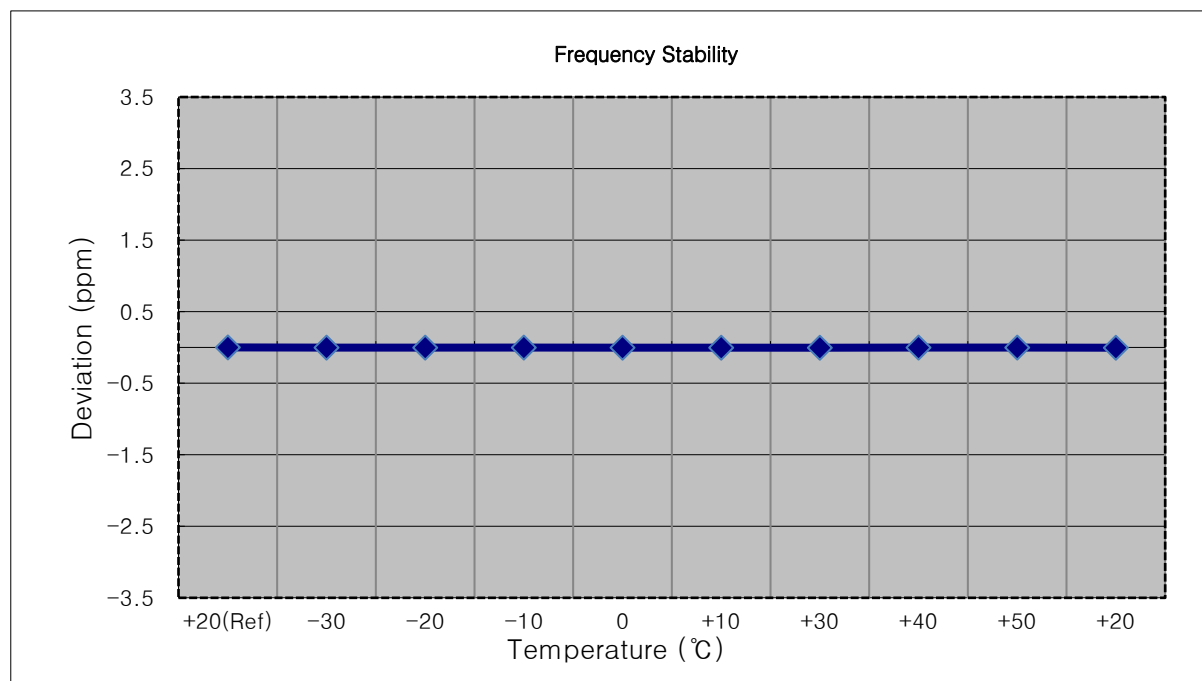


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1775,000,000 Hz
☐ CHANNEL: 132622 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1775 000 005	0.0	0.000 000	0.000
100 %		-30	1775 000 002	-2.8	0.000 000	-0.002
100 %		-20	1775 000 009	3.9	0.000 000	0.002
100 %		-10	1774 999 999	-5.9	0.000 000	-0.003
100 %		0	1775 000 008	2.4	0.000 000	0.001
100 %		+10	1775 000 000	-4.7	0.000 000	-0.003
100 %		+30	1775 000 000	-4.8	0.000 000	-0.003
100 %		+40	1775 000 009	4.2	0.000 000	0.002
100 %		+50	1775 000 001	-3.8	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1775 000 002	-3.3	0.000 000	-0.002

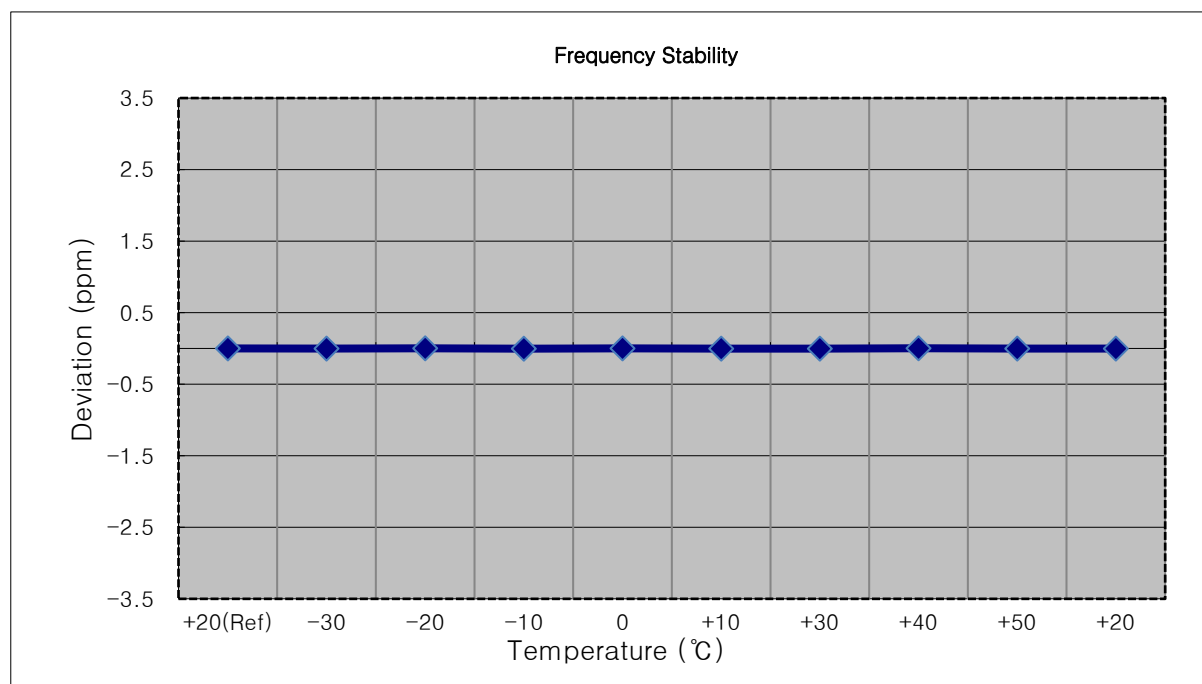


- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1772,500,000 Hz
☐ CHANNEL: 132597 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1772 499 991	0.0	0.000 000	0.000
100 %		-30	1772 499 982	-8.4	0.000 000	-0.005
100 %		-20	1772 499 980	-10.9	-0.000 001	-0.006
100 %		-10	1772 499 981	-9.4	-0.000 001	-0.005
100 %		0	1772 500 043	51.7	0.000 003	0.029
100 %		+10	1772 499 984	-7.2	0.000 000	-0.004
100 %		+30	1772 499 985	-6.3	0.000 000	-0.004
100 %		+40	1772 499 980	-11.2	-0.000 001	-0.006
100 %		+50	1772 499 982	-9.2	-0.000 001	-0.005
Batt. Endpoint	3.400	+20	1772 499 981	-10.0	-0.000 001	-0.006

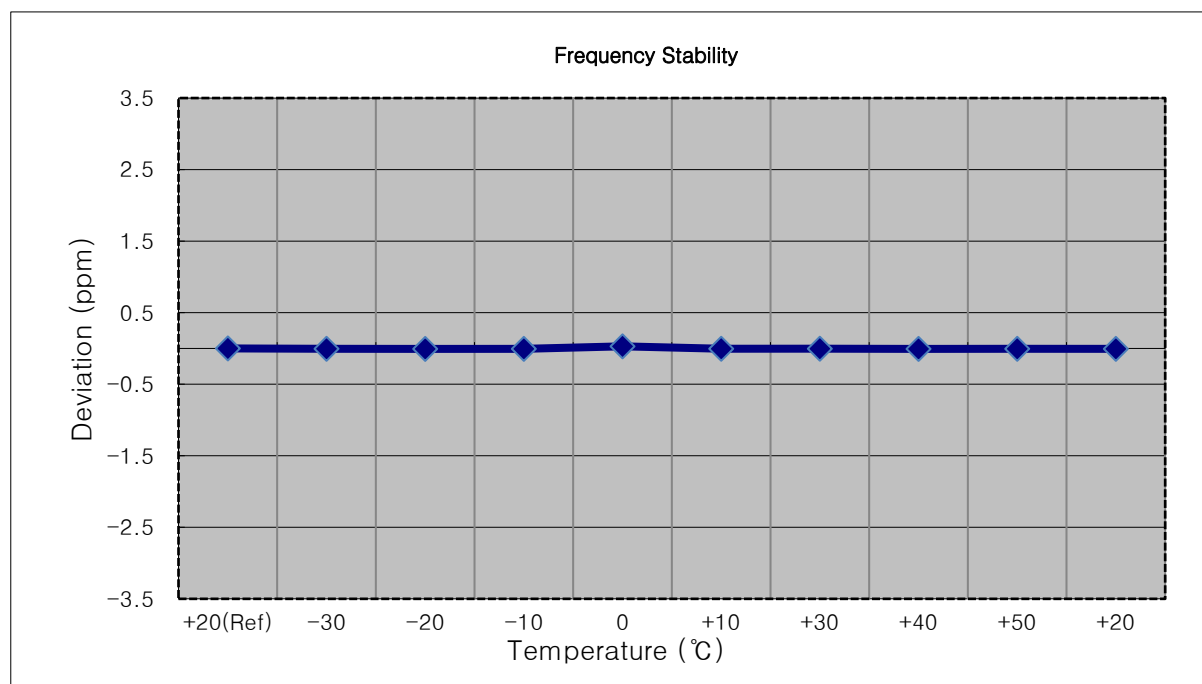

- ☐ MODE: LTE 66/4
☐ OPERATING FREQUENCY: 1770,000,000 Hz
☐ CHANNEL: 132572 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1769 999 990	0.0	0.000 000	0.000
100 %		-30	1769 999 985	-5.2	0.000 000	-0.003
100 %		-20	1769 999 983	-6.9	0.000 000	-0.004
100 %		-10	1769 999 985	-5.3	0.000 000	-0.003
100 %		0	1769 999 983	-7.5	0.000 000	-0.004
100 %		+10	1769 999 982	-8.4	0.000 000	-0.005
100 %		+30	1769 999 981	-9.0	-0.000 001	-0.005
100 %		+40	1769 999 984	-5.9	0.000 000	-0.003
100 %		+50	1769 999 984	-6.3	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1769 999 983	-7.1	0.000 000	-0.004

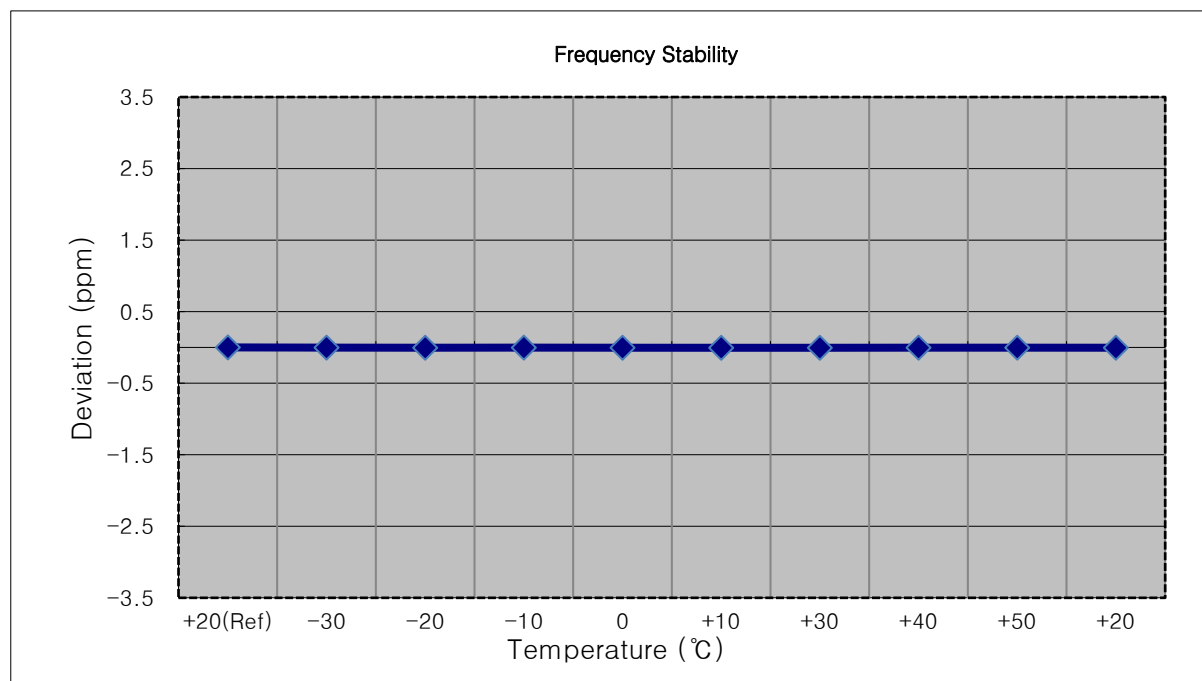

9. TEST PLOTS

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Lower)




BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Lower)



BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Lower)



BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Lower)

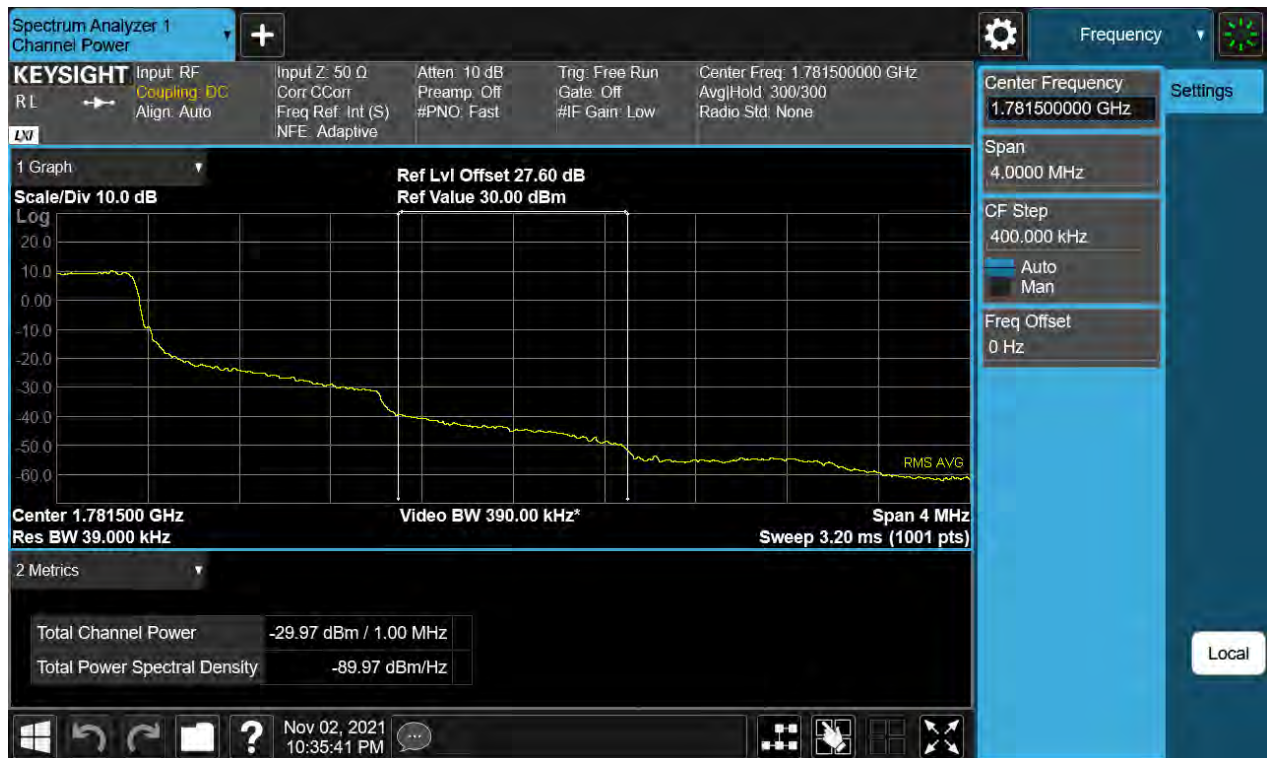

BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB(Lower)



BW1.4 M_BandEdge_Highest Channel_QPSK_1RB(Lower)



BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Lower)




BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2) (Lower)




BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Lower)



BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Lower)

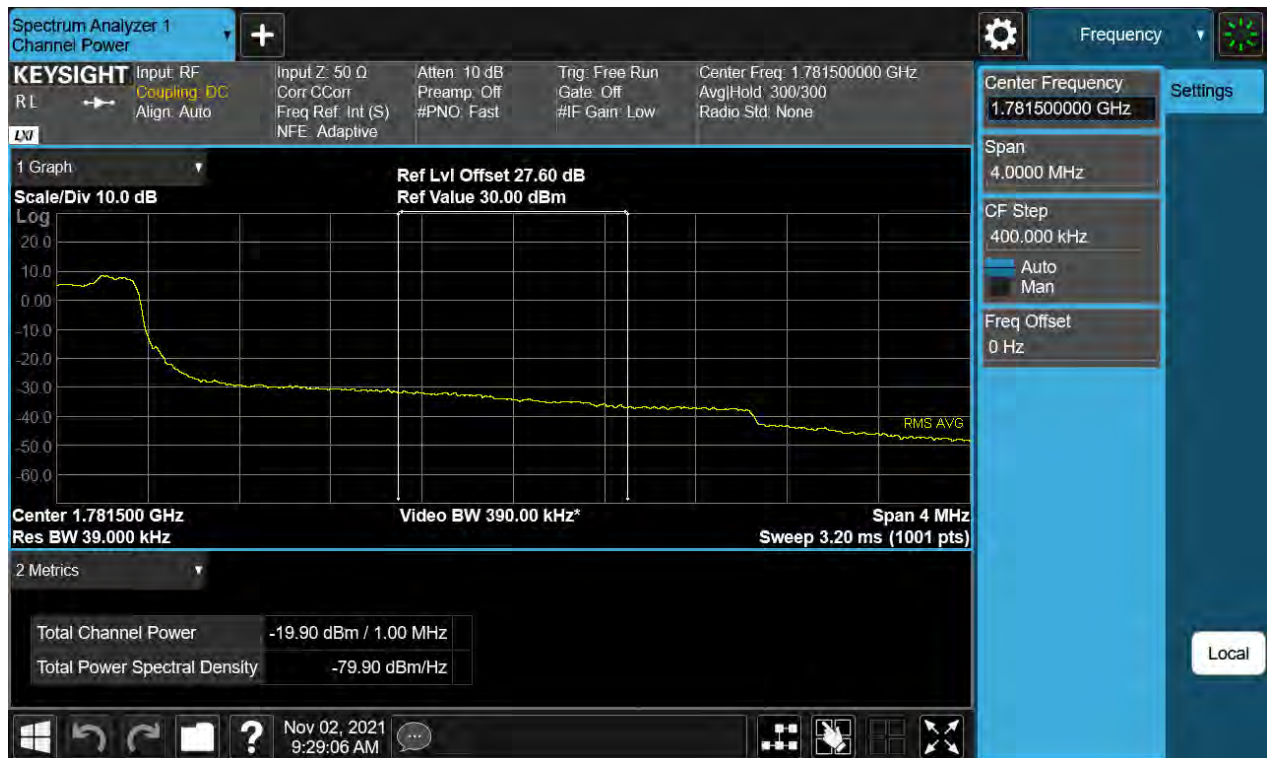

BW3 M_BandEdge_Lowest Channel_QPSK_1RB(Lower)

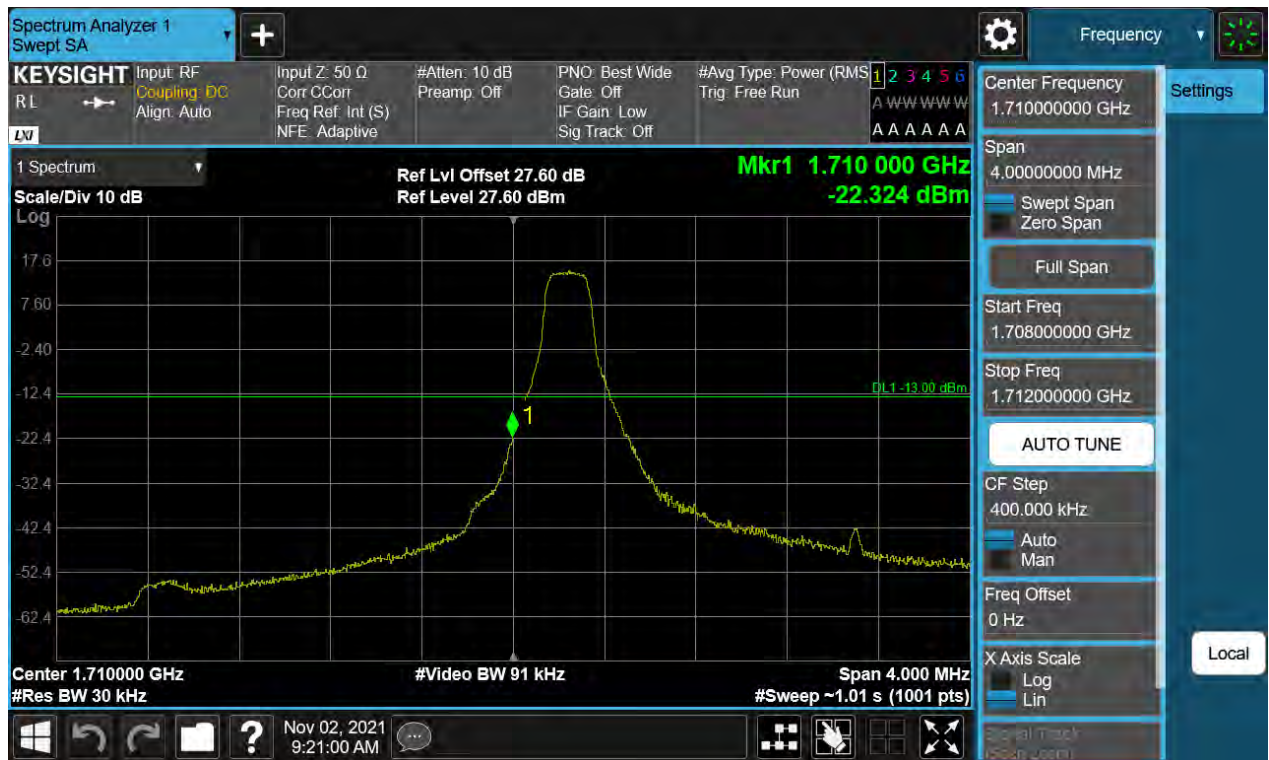


BW3 M_BandEdge_Highest Channel_QPSK_1RB(Lower)



BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1) (Lower)



BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Lower)

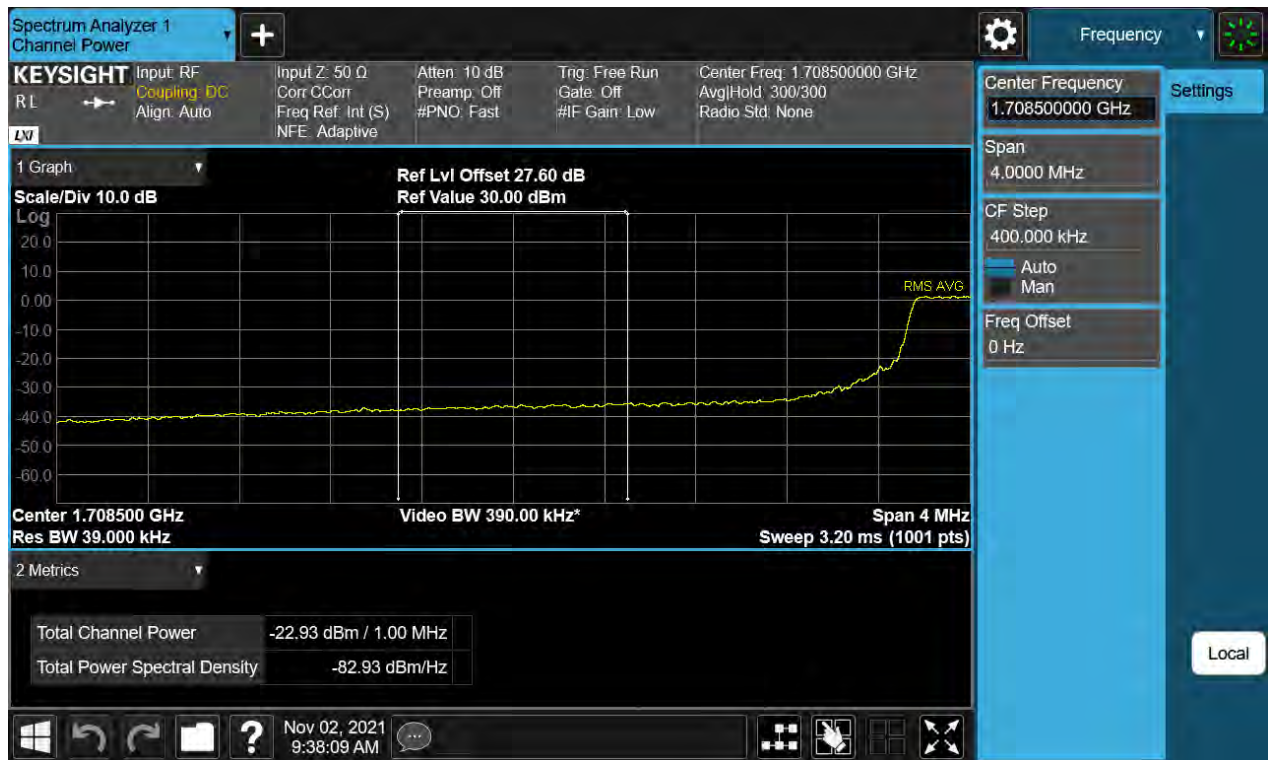


BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Lower)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Lower)



BW5 M_BandEdge_Lowest Channel_QPSK_1RB(Lower)

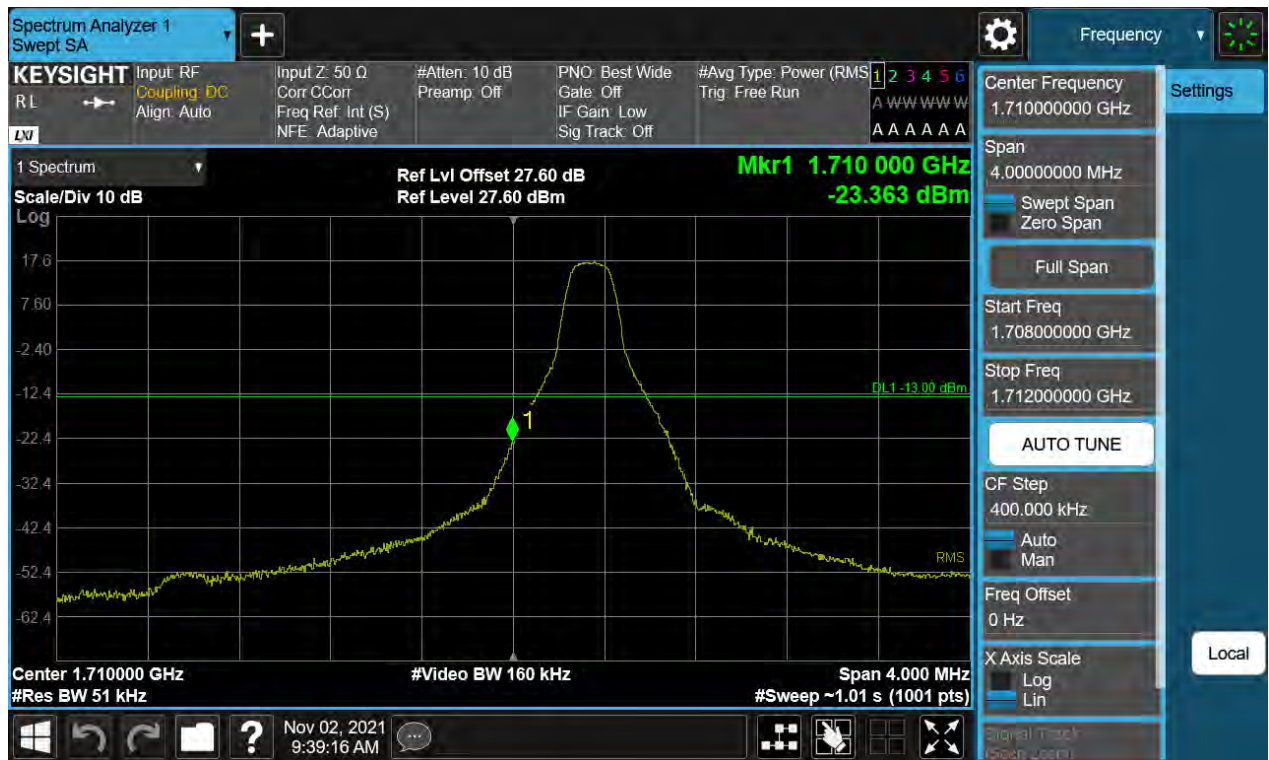


BW5 M_BandEdge_Highest Channel_QPSK_1RB(Lower)



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Lower)




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Lower)

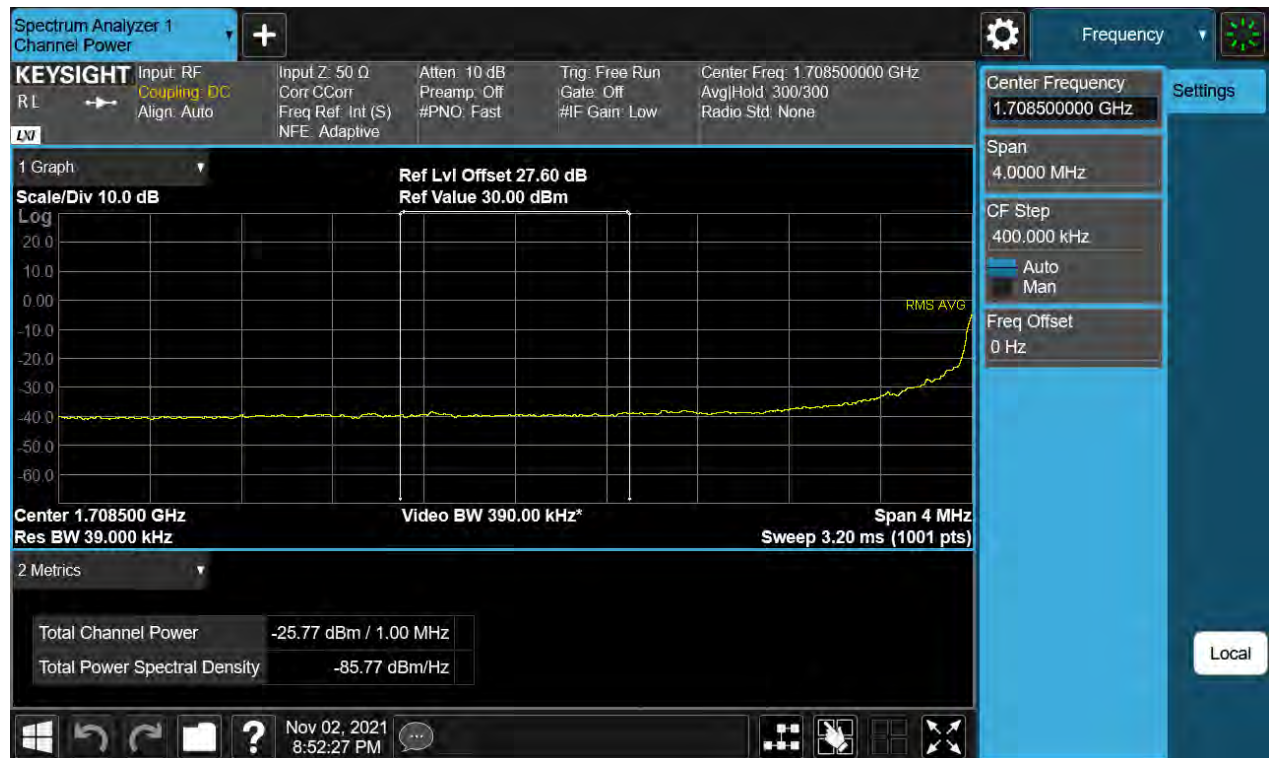

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Lower)




BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Lower)

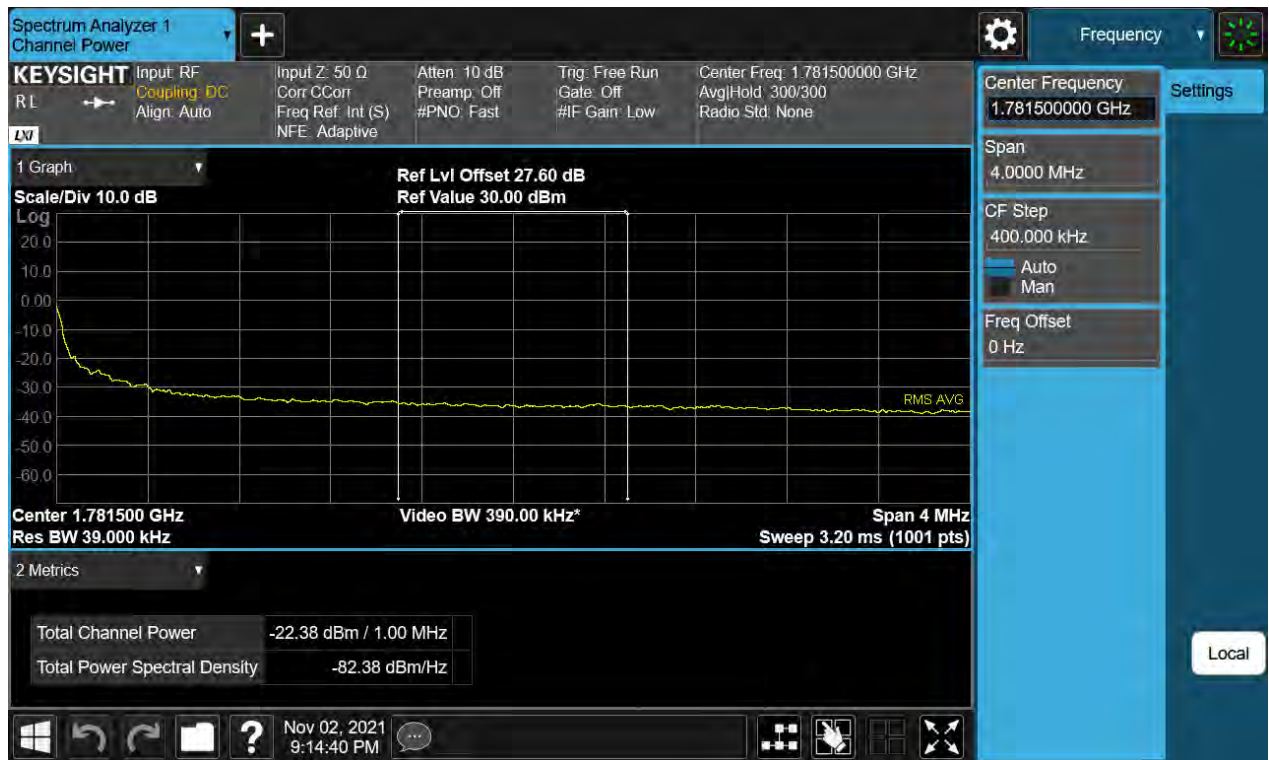

BW10 M_BandEdge_Lowest Channel_QPSK_1RB(Lower)




BW10 M_BandEdge_Highest Channel_QPSK_1RB(Lower)

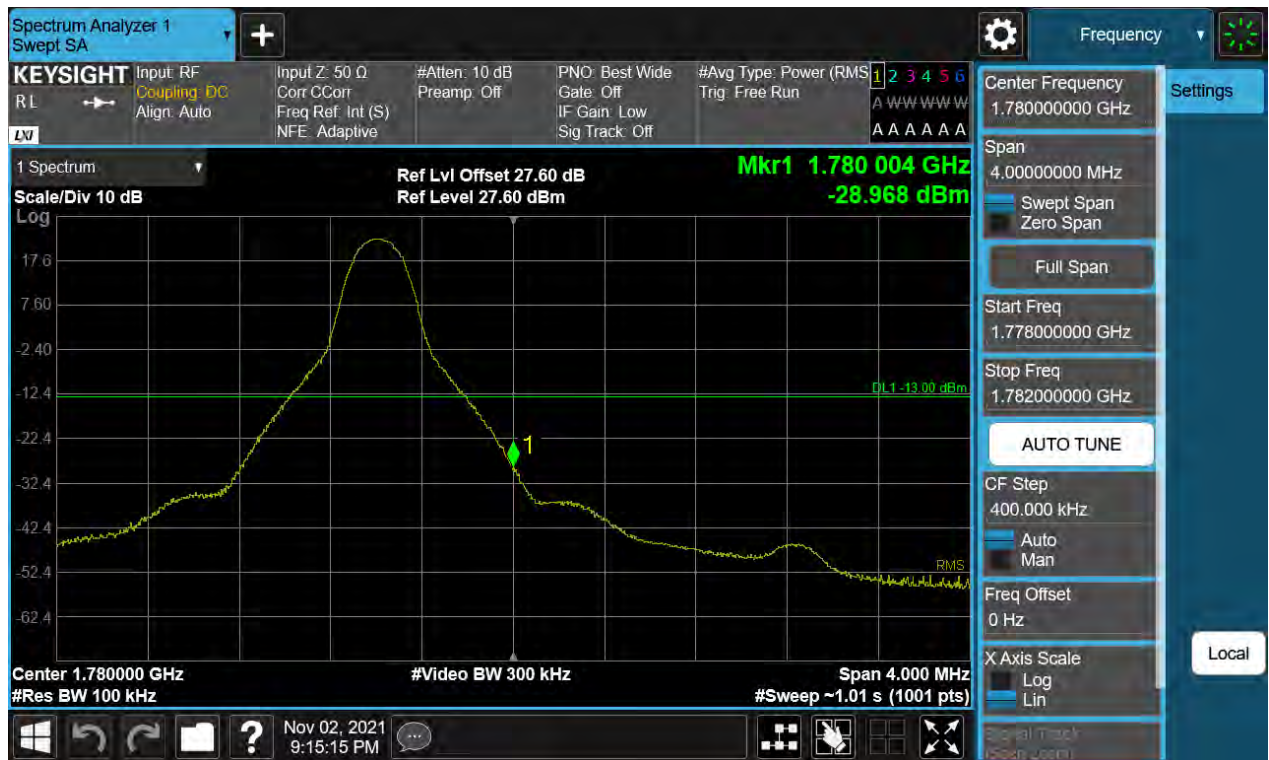

BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Lower)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Lower)

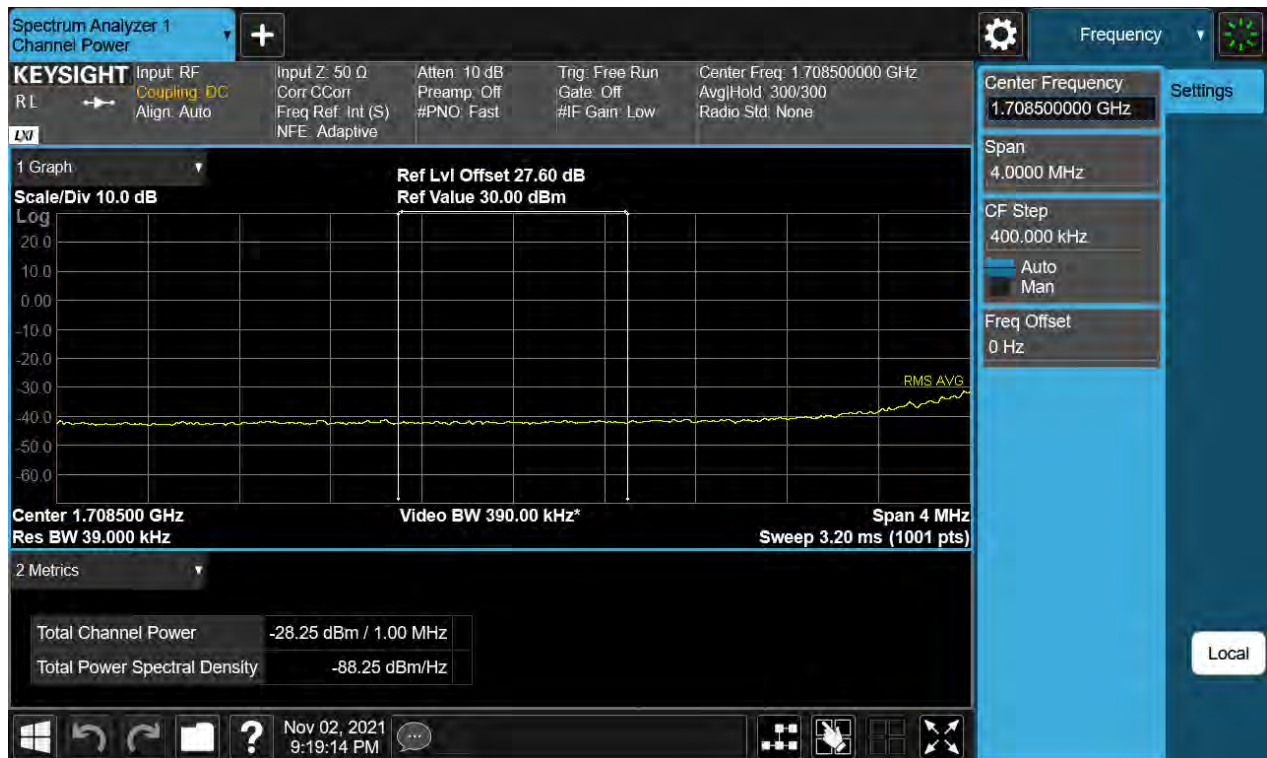

BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Lower)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Lower)



BW15 M_BandEdge_Lowest Channel_QPSK_1RB(Lower)



BW15 M_BandEdge_Highest Channel_QPSK_1RB(Lower)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Lower)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Lower)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Lower)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Lower)



BW20 M_BandEdge_Lowest Channel_QPSK_1RB(Lower)




BW20 M_BandEdge_Highest Channel_QPSK_1RB(Lower)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Upper)




BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Upper)

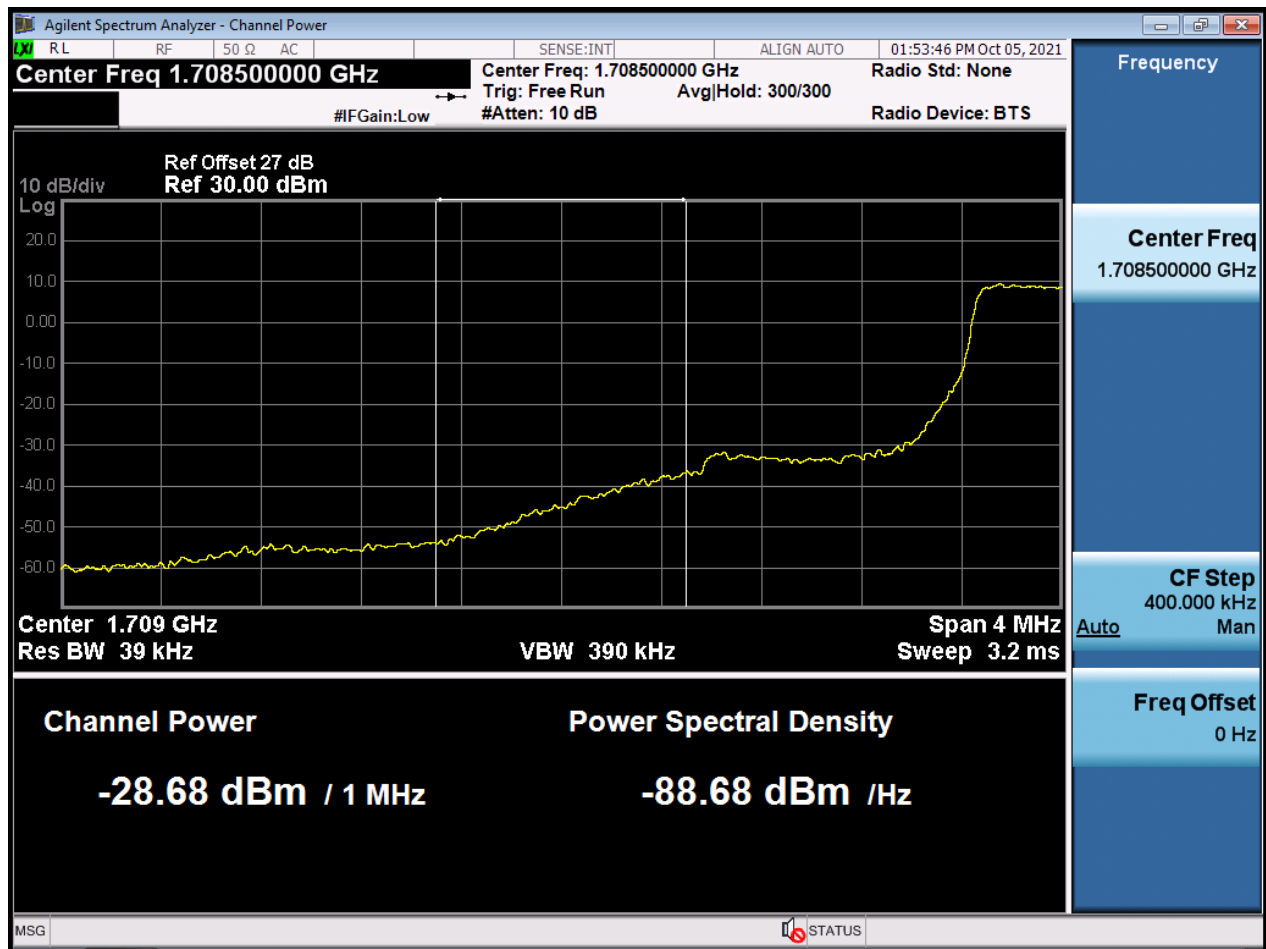


BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Upper)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Upper)

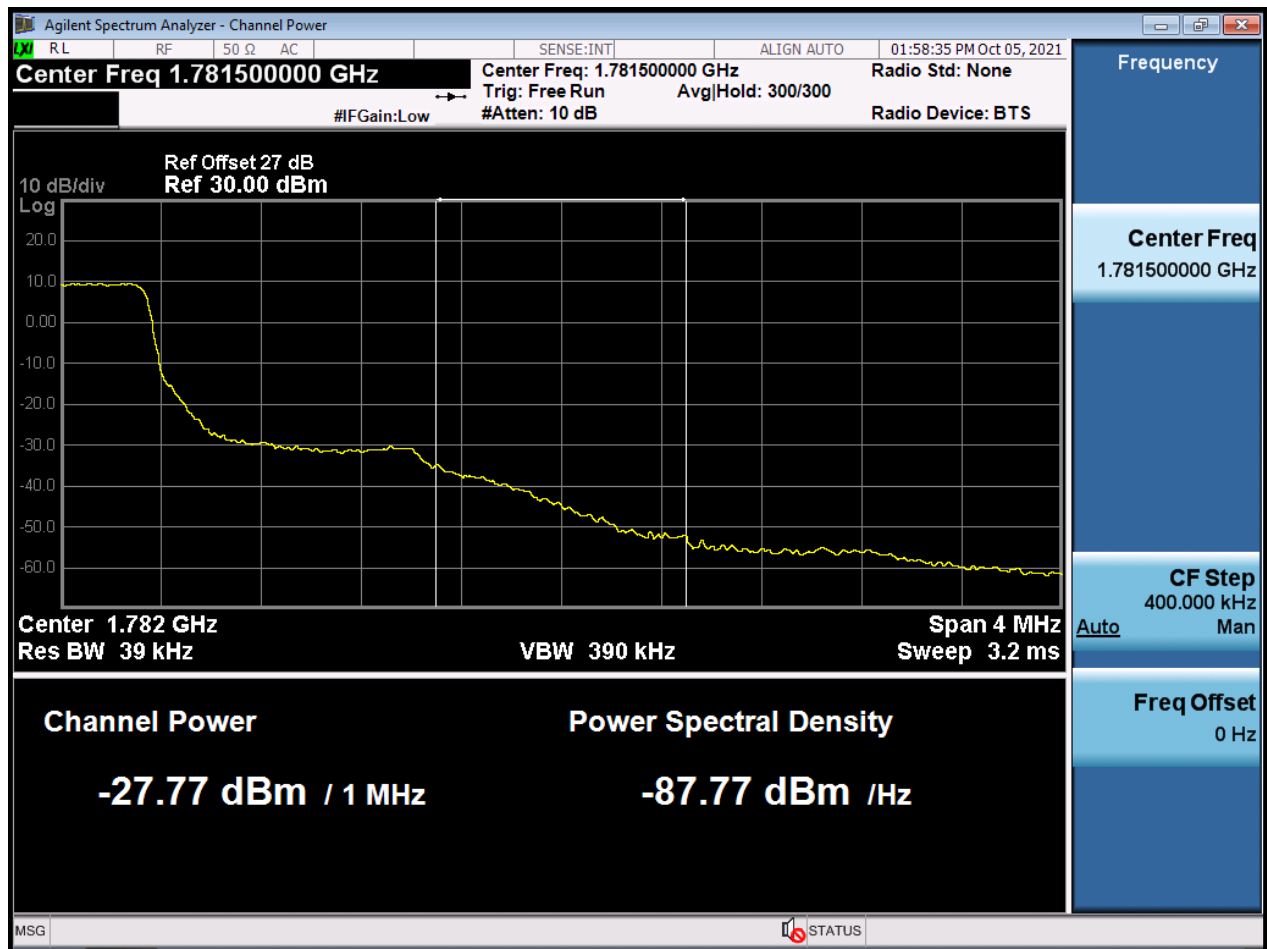

BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB(Upper)

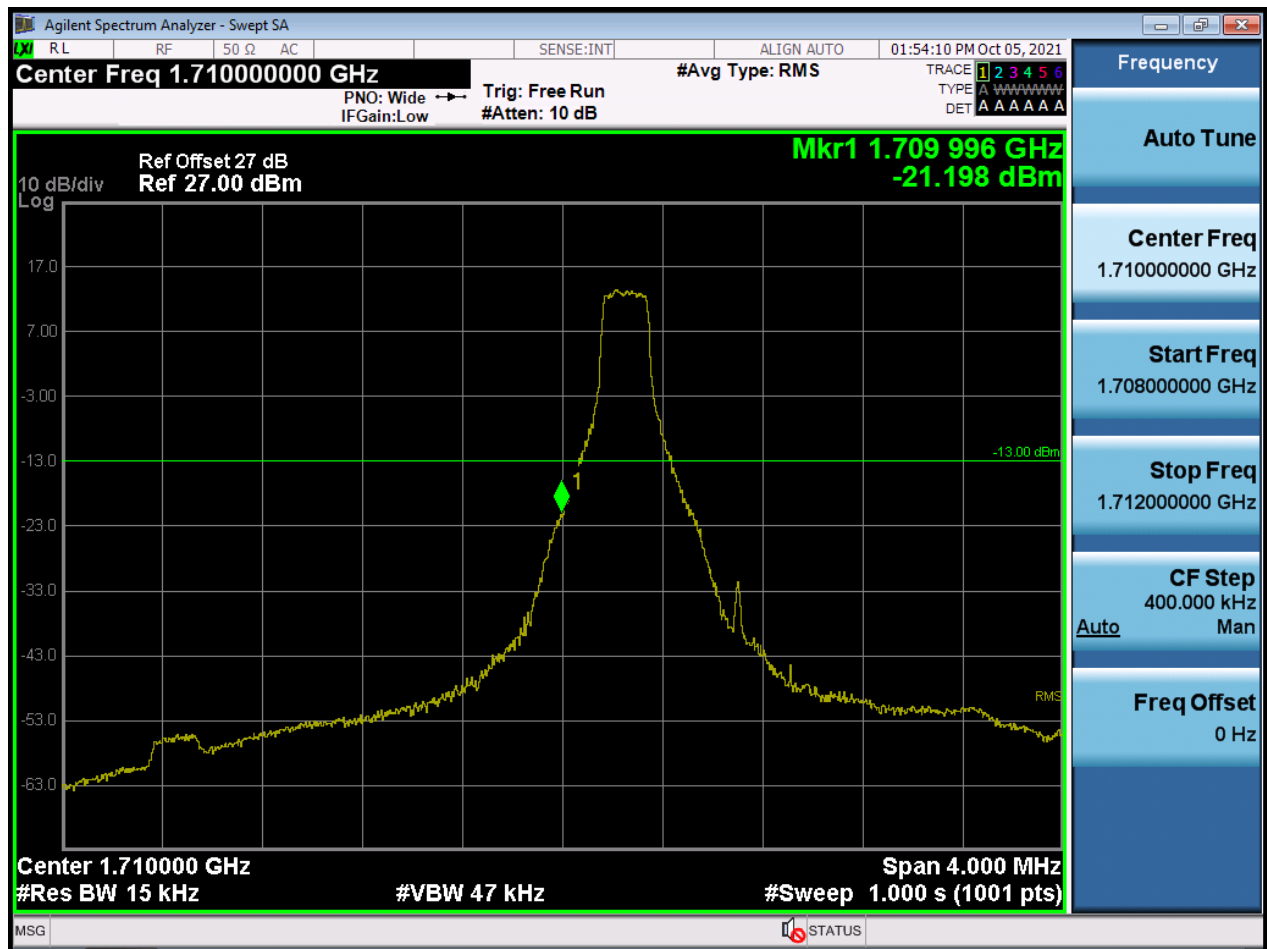


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB(Upper)

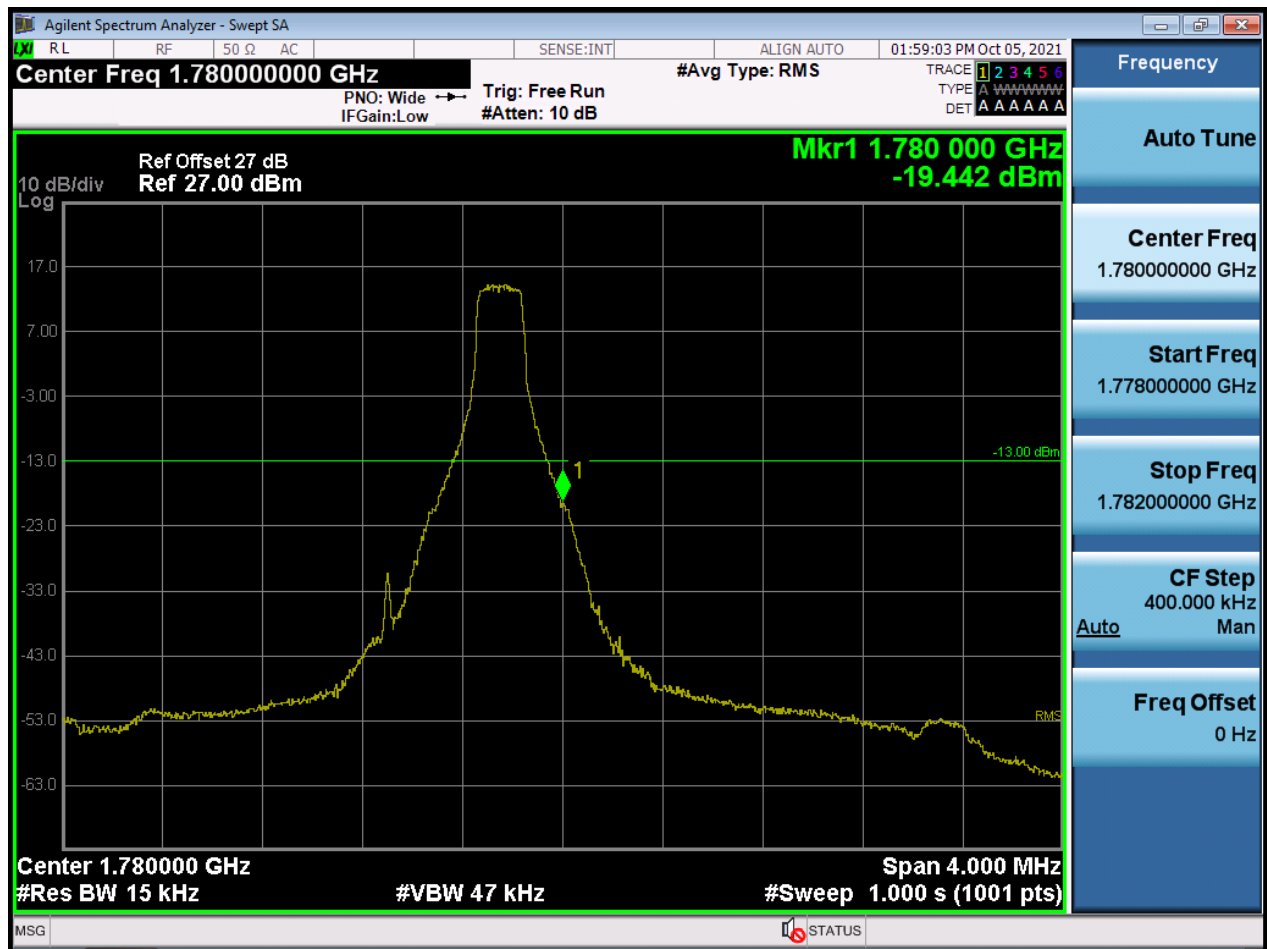

BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Upper)




BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Upper)

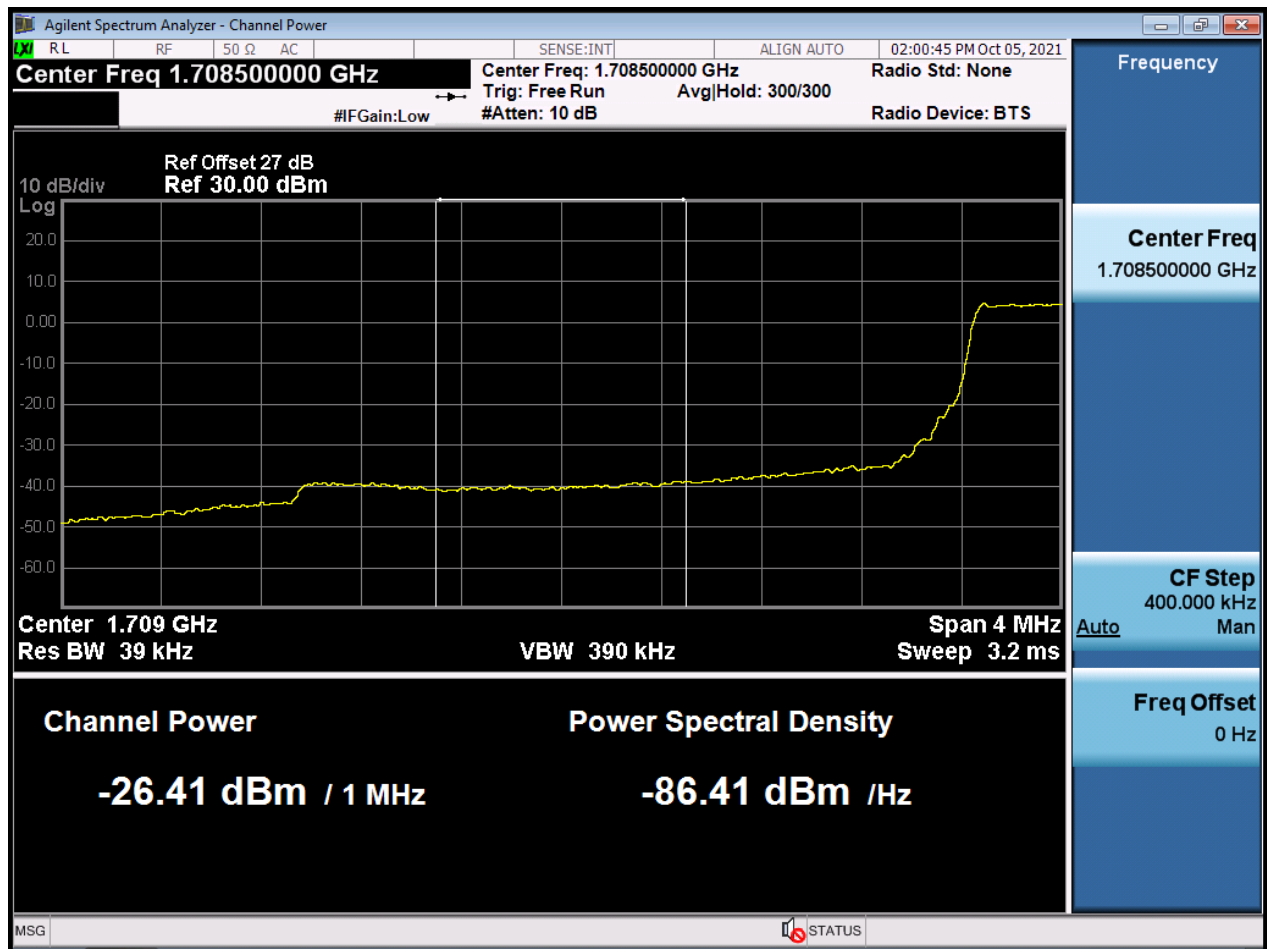


BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Upper)




BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Upper)

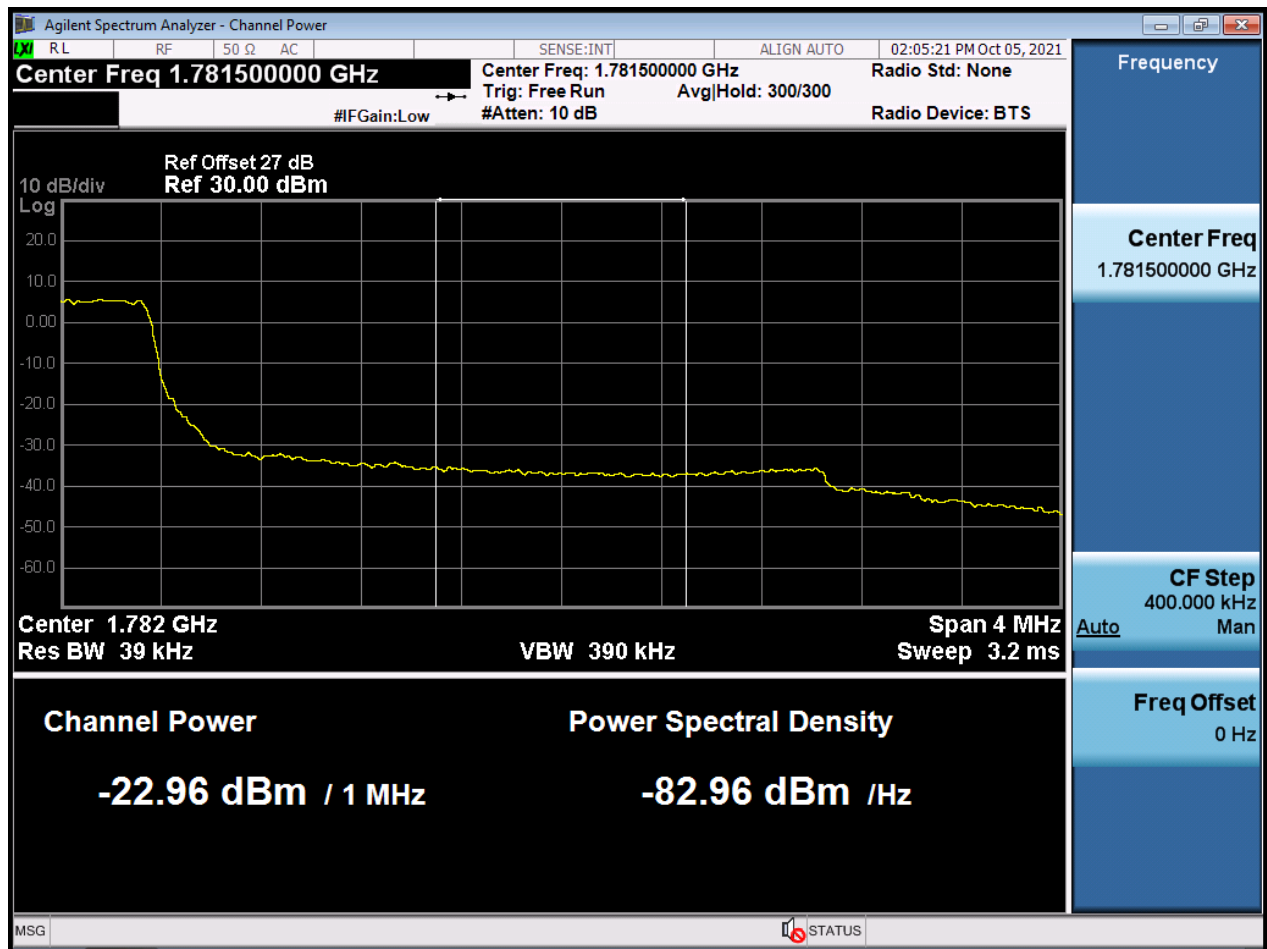

BW3 M_BandEdge_Lowest Channel_QPSK_1RB(Upper)

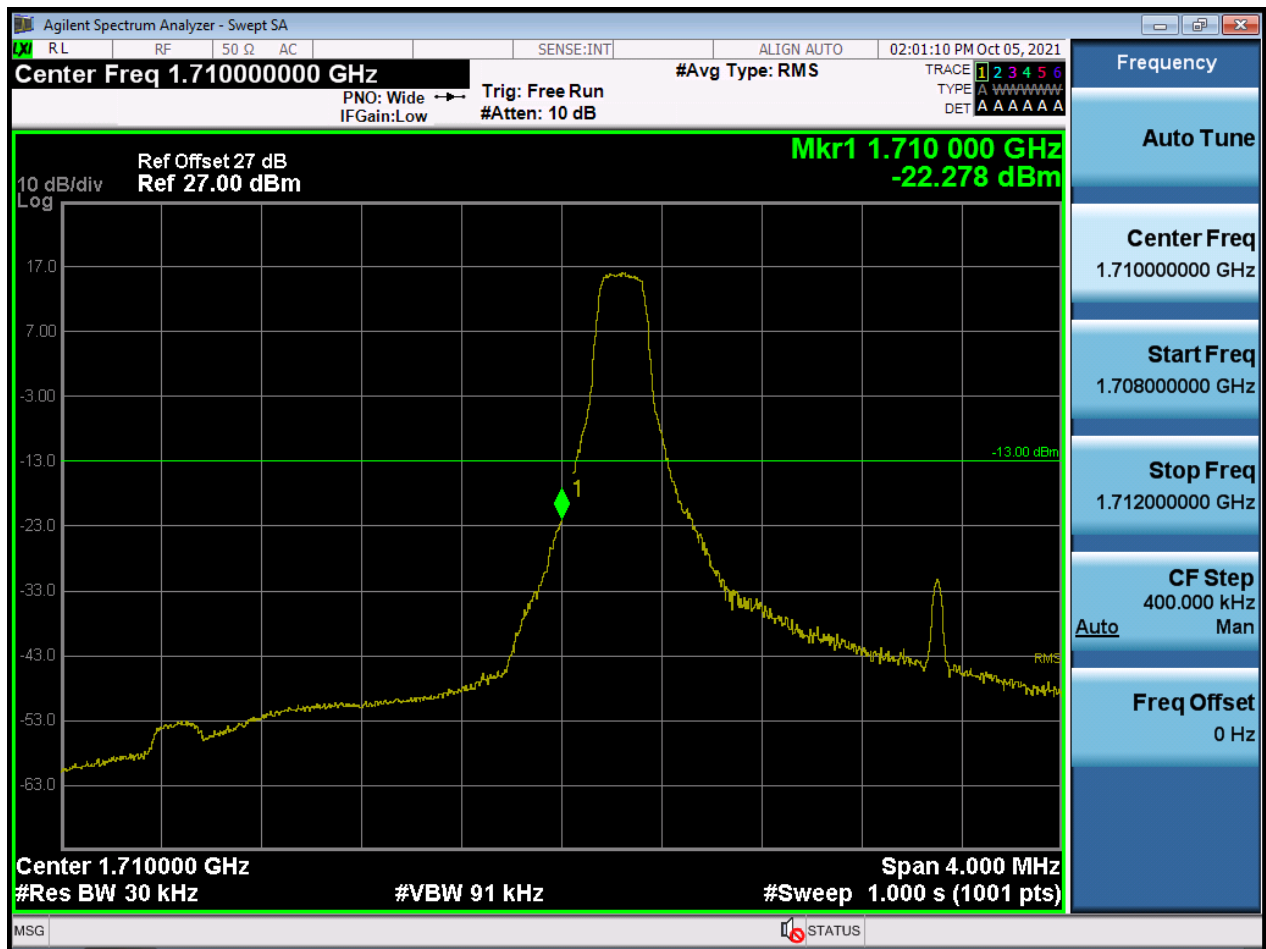


BW3 M_BandEdge_Highest Channel_QPSK_1RB(Upper)

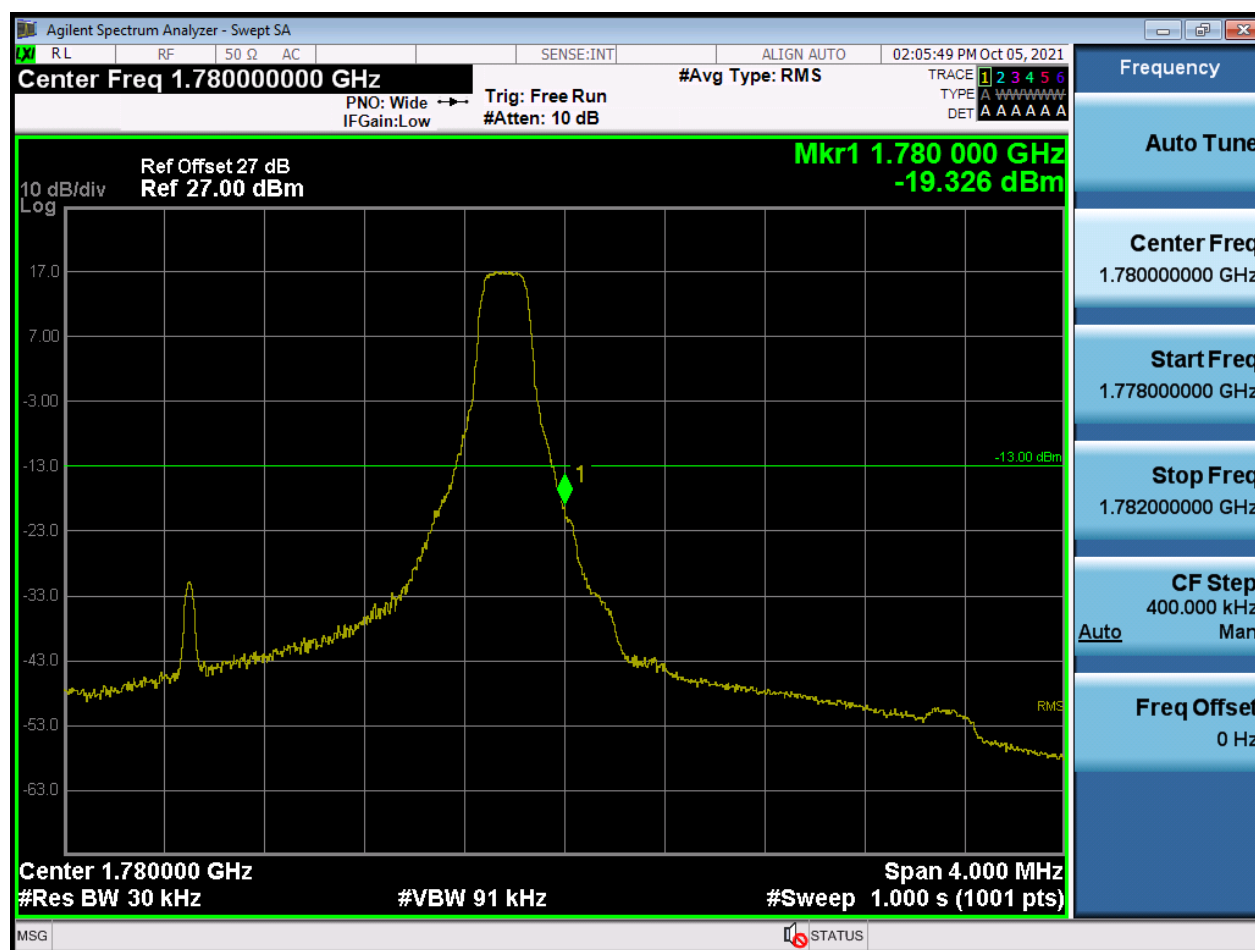

BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Upper)




BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Upper)

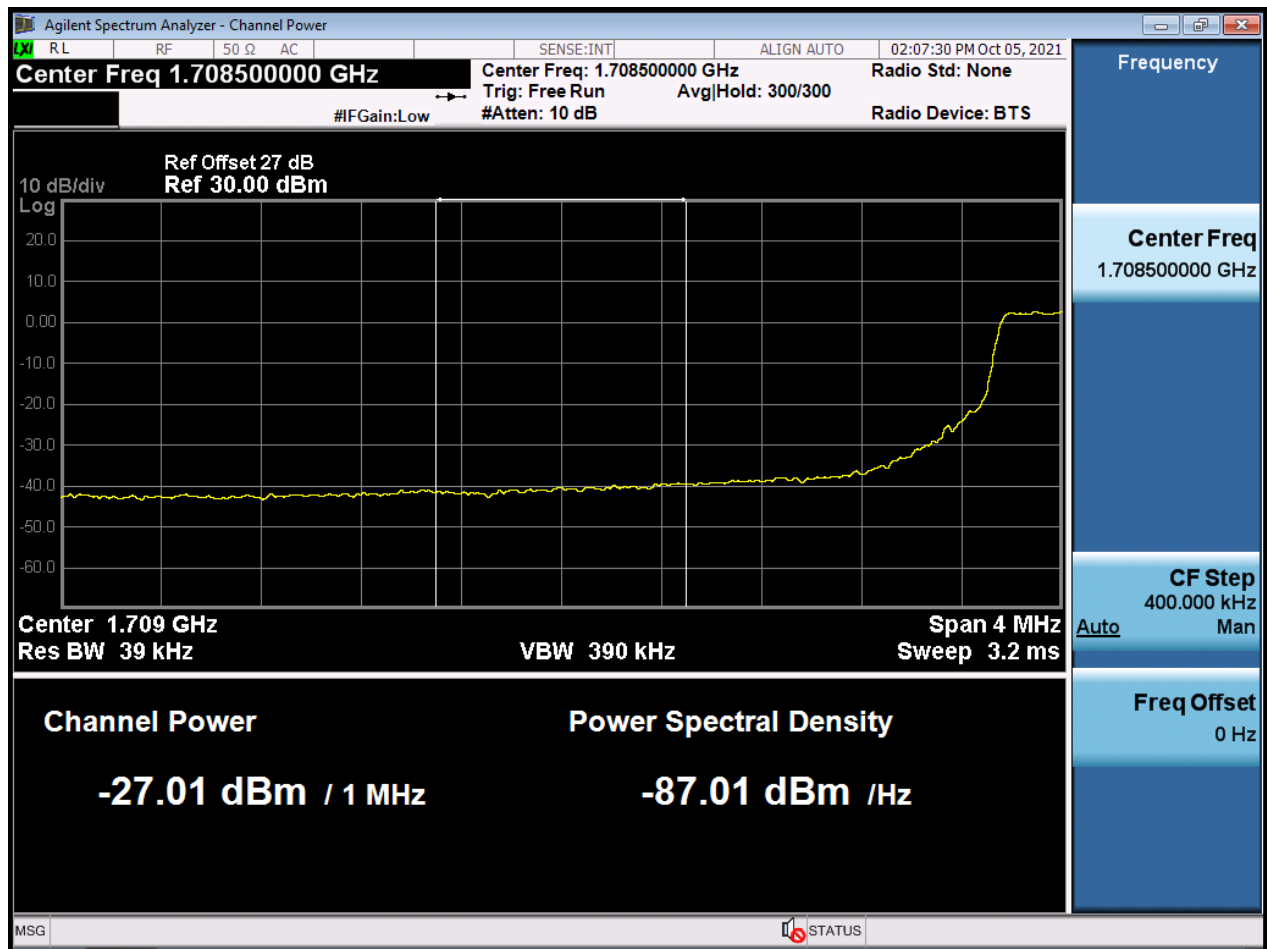


BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Upper)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Upper)

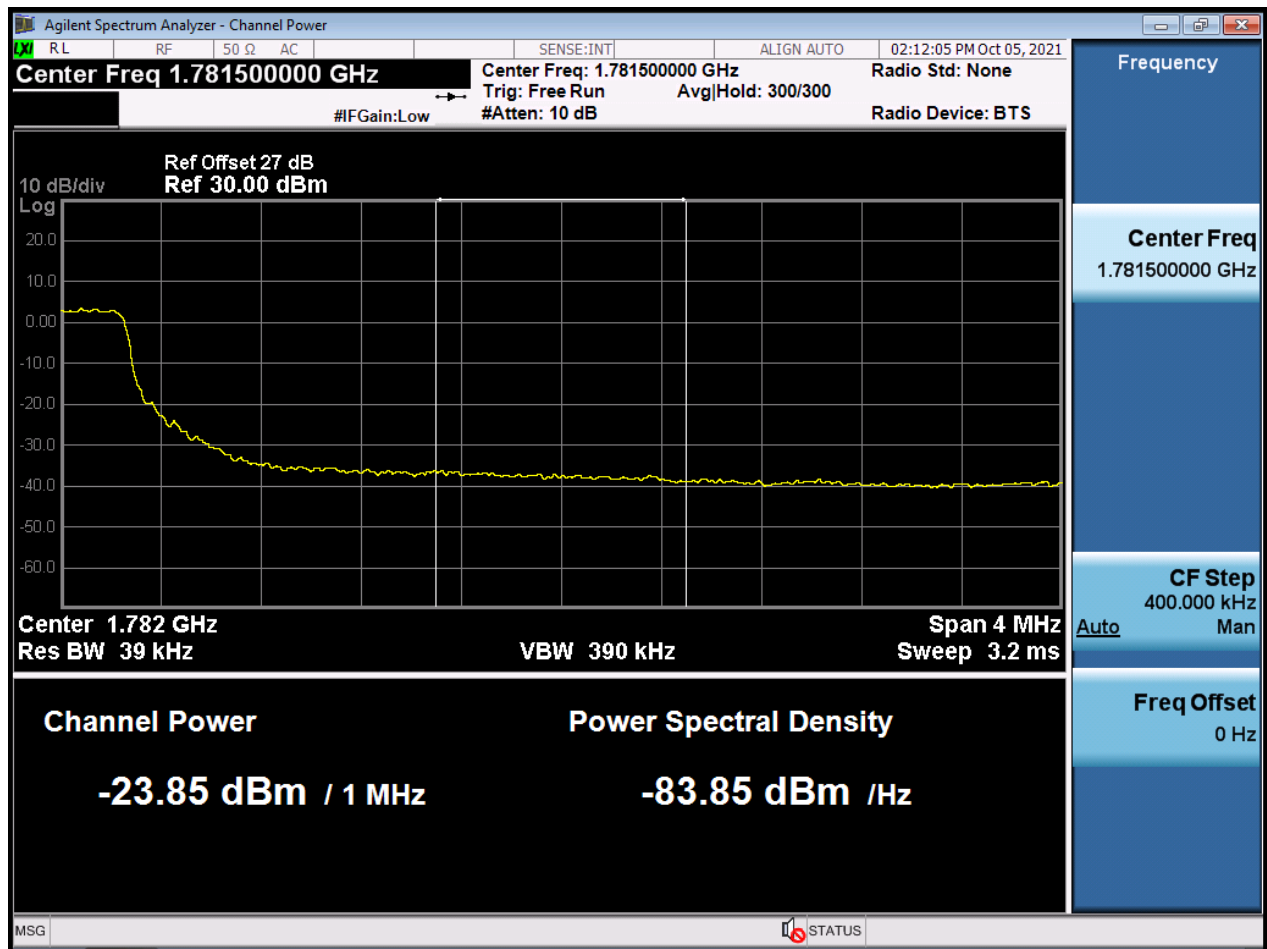

BW5 M_BandEdge_Lowest Channel_QPSK_1RB(Upper)

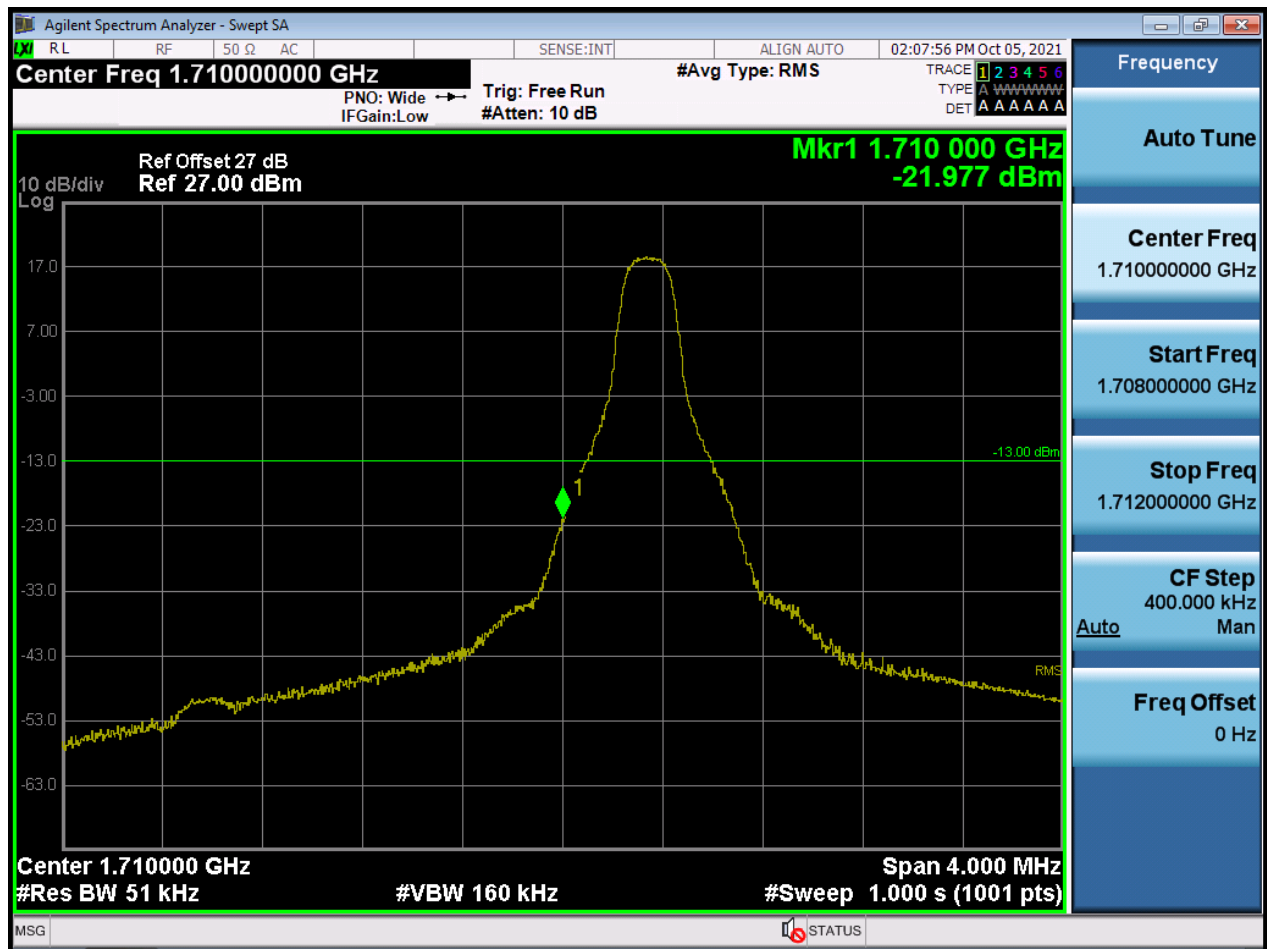


BW5 M_BandEdge_Highest Channel_QPSK_1RB(Upper)




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Upper)



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Upper)

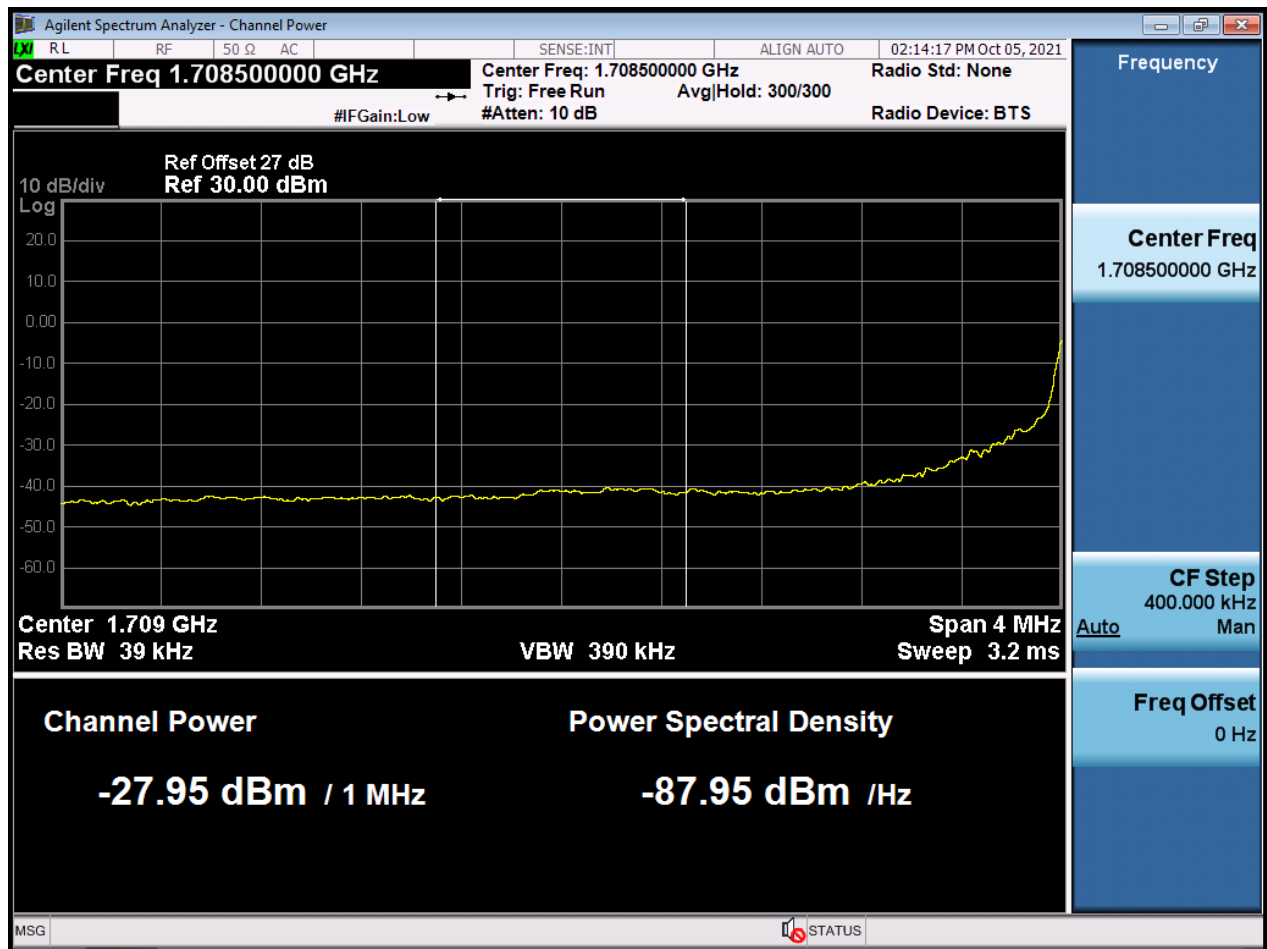

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Upper)

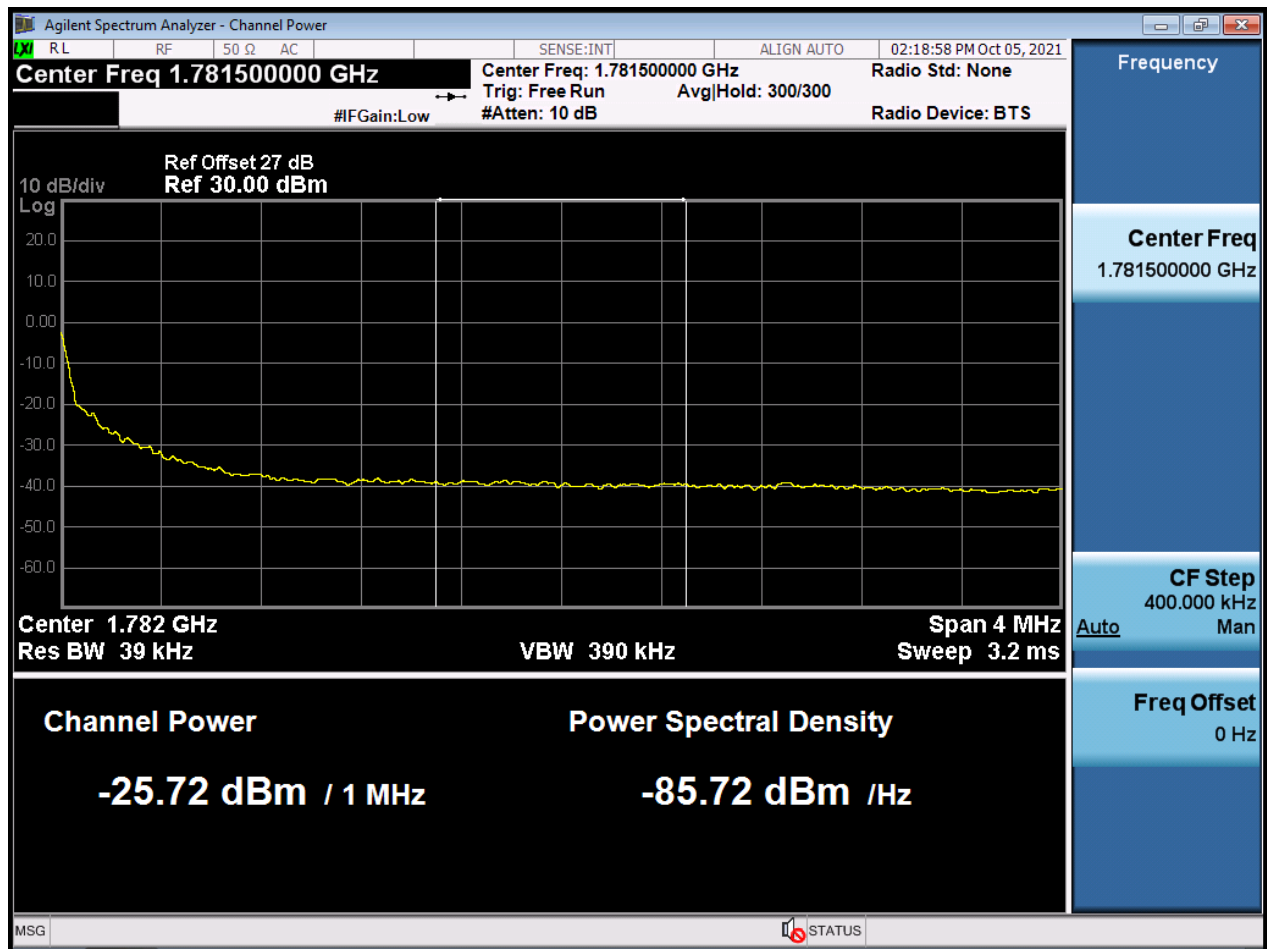

BW10 M_BandEdge_Lowest Channel_QPSK_1RB(Upper)




BW10 M_BandEdge_Highest Channel_QPSK_1RB(Upper)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Upper)




BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Upper)

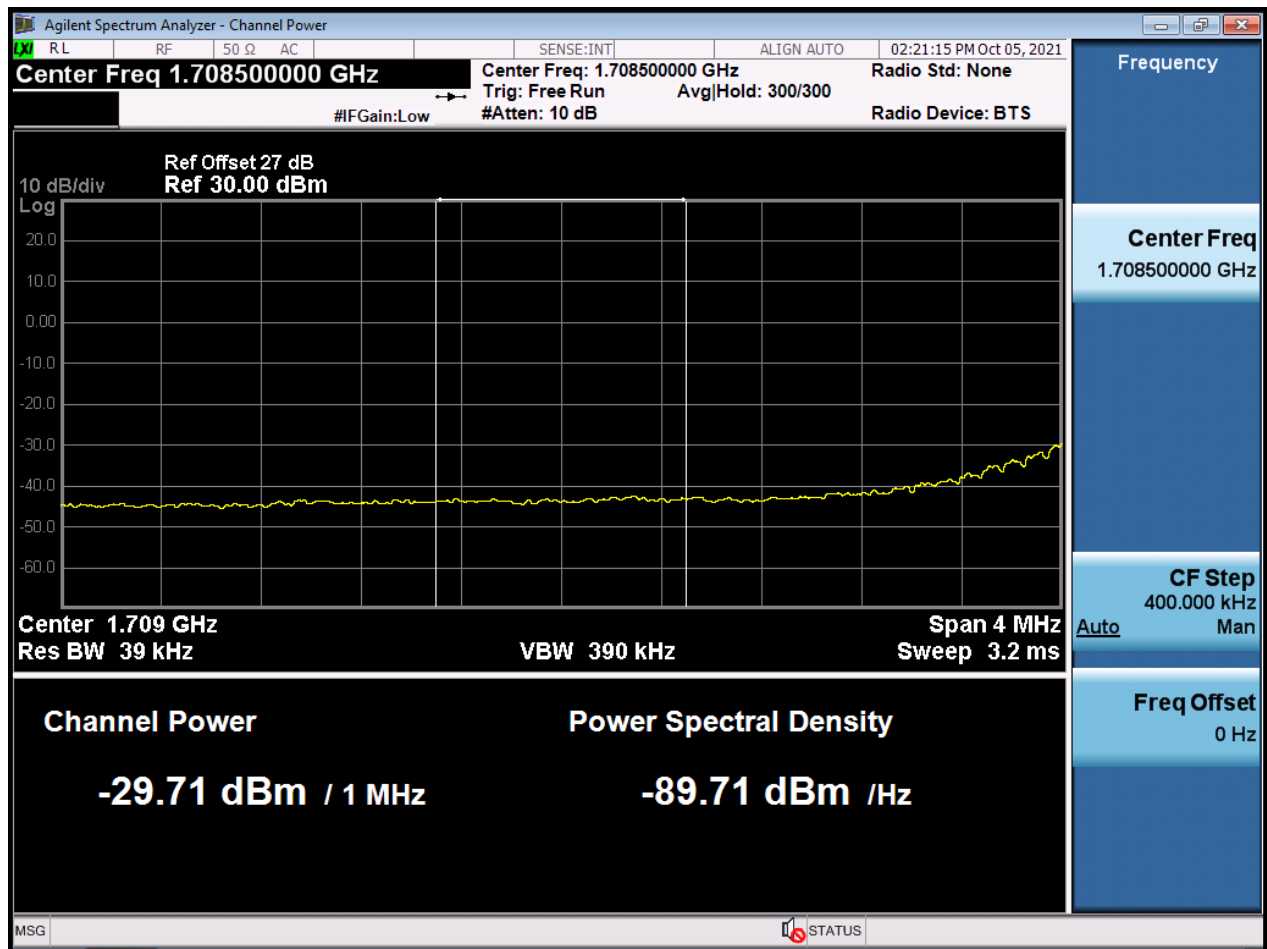

BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Upper)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Upper)

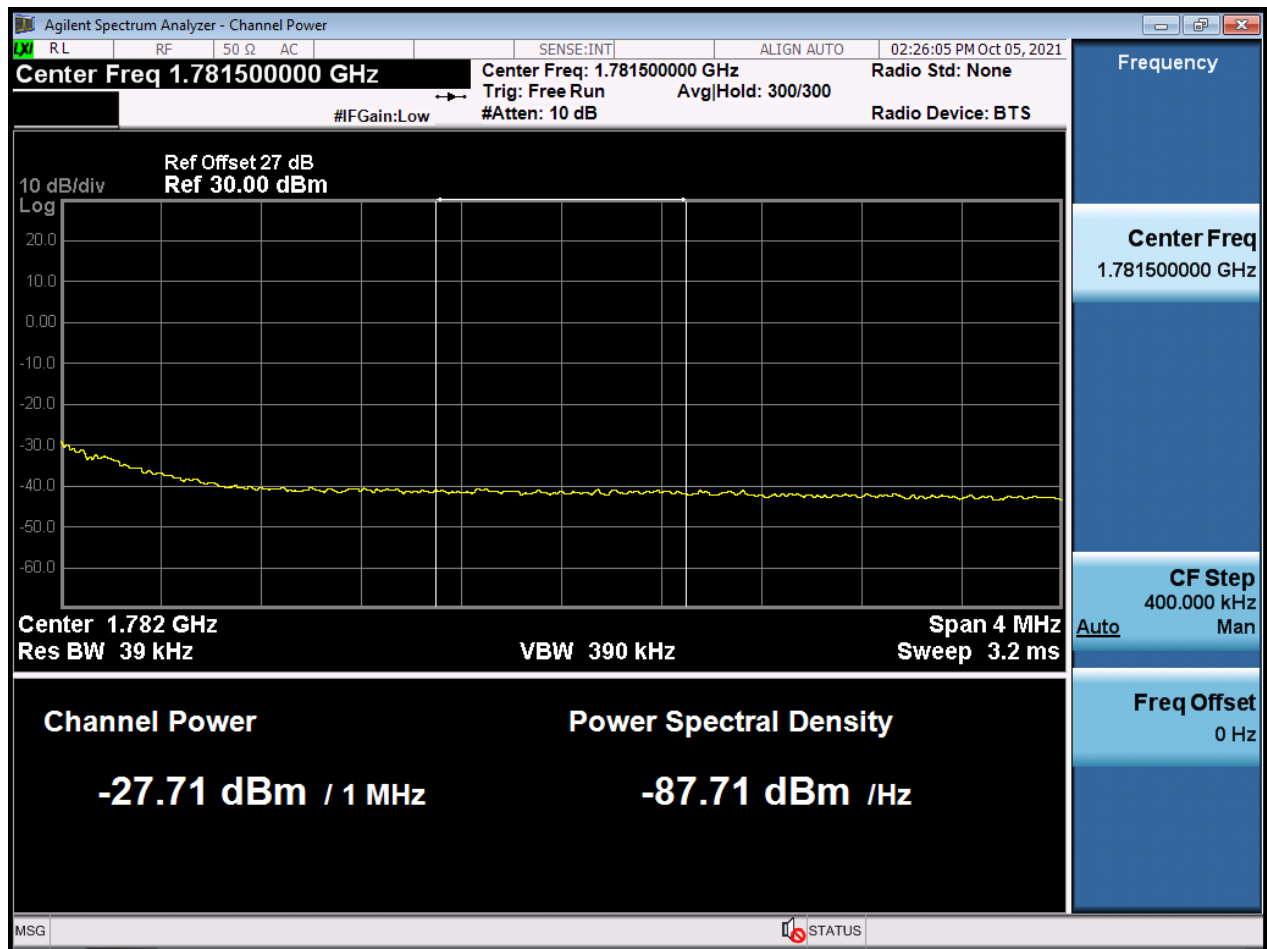

BW15 M_BandEdge_Lowest Channel_QPSK_1RB(Upper)




BW15 M_BandEdge_Highest Channel_QPSK_1RB(Upper)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Upper)




BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Upper)

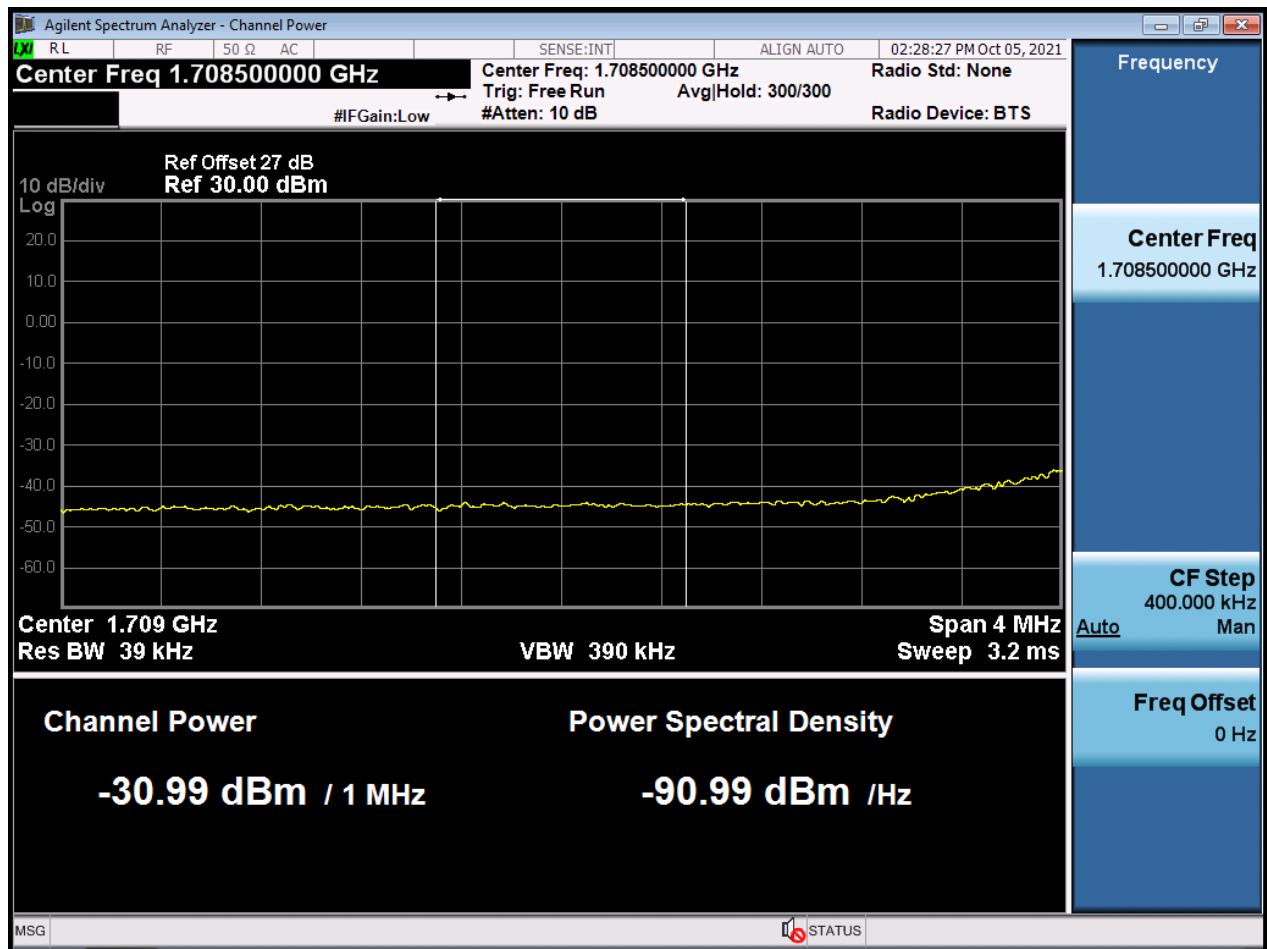

BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Upper)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Upper)

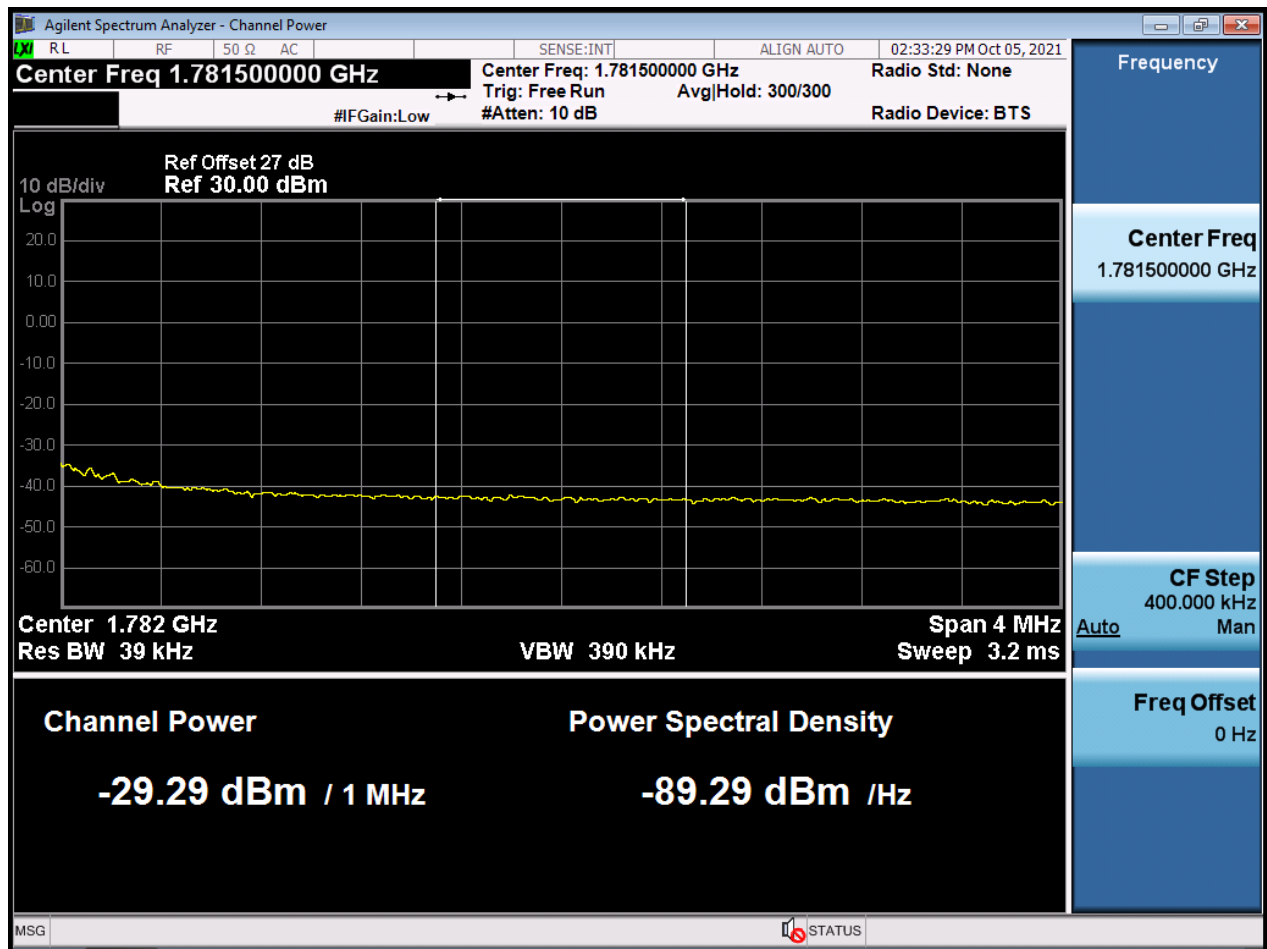

BW20 M_BandEdge_Lowest Channel_QPSK_1RB(Upper)




BW20 M_BandEdge_Highest Channel_QPSK_1RB(Upper)




BW1.4 M_OBW_Middle Channel_QPSK_FullIRB(Lower)



BW1.4 M_OBW_Middle Channel_16QAM_FullRB(Lower)

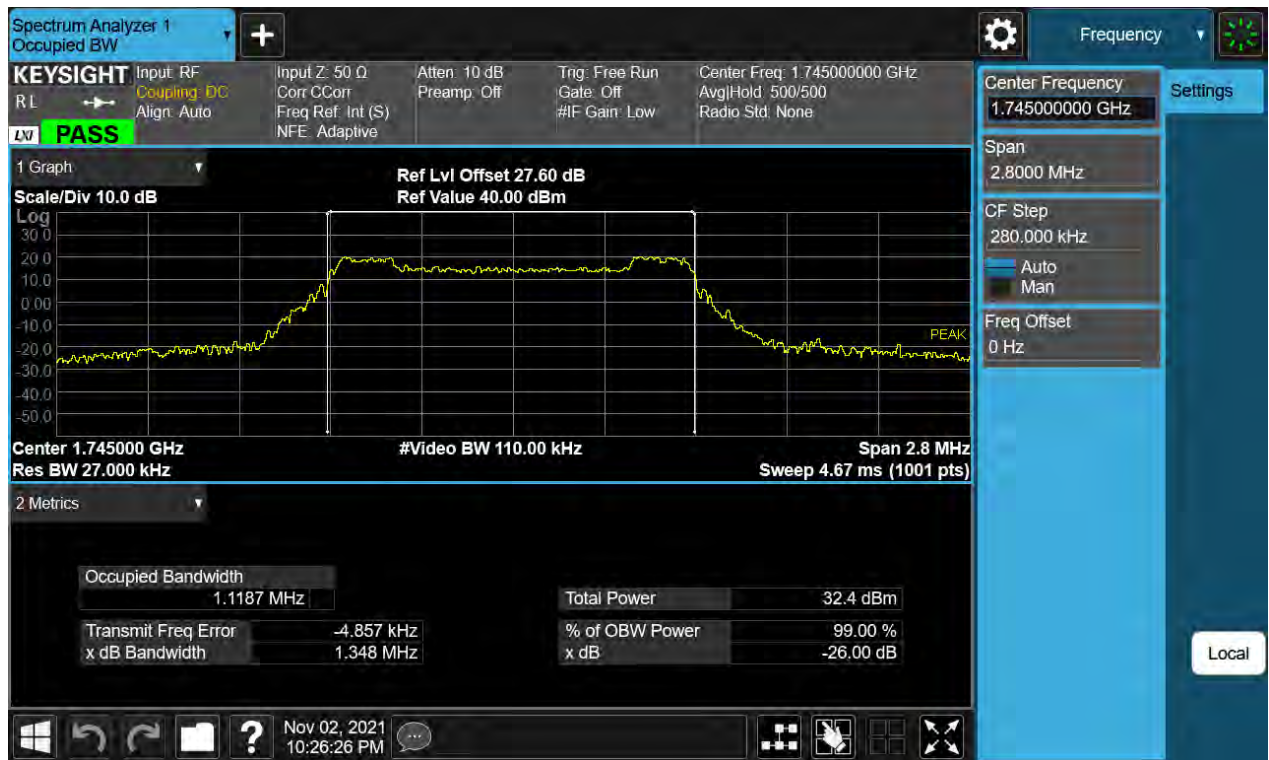

BW1.4 M_OBW_Middle Channel_64QAM_FullRB(Lower)

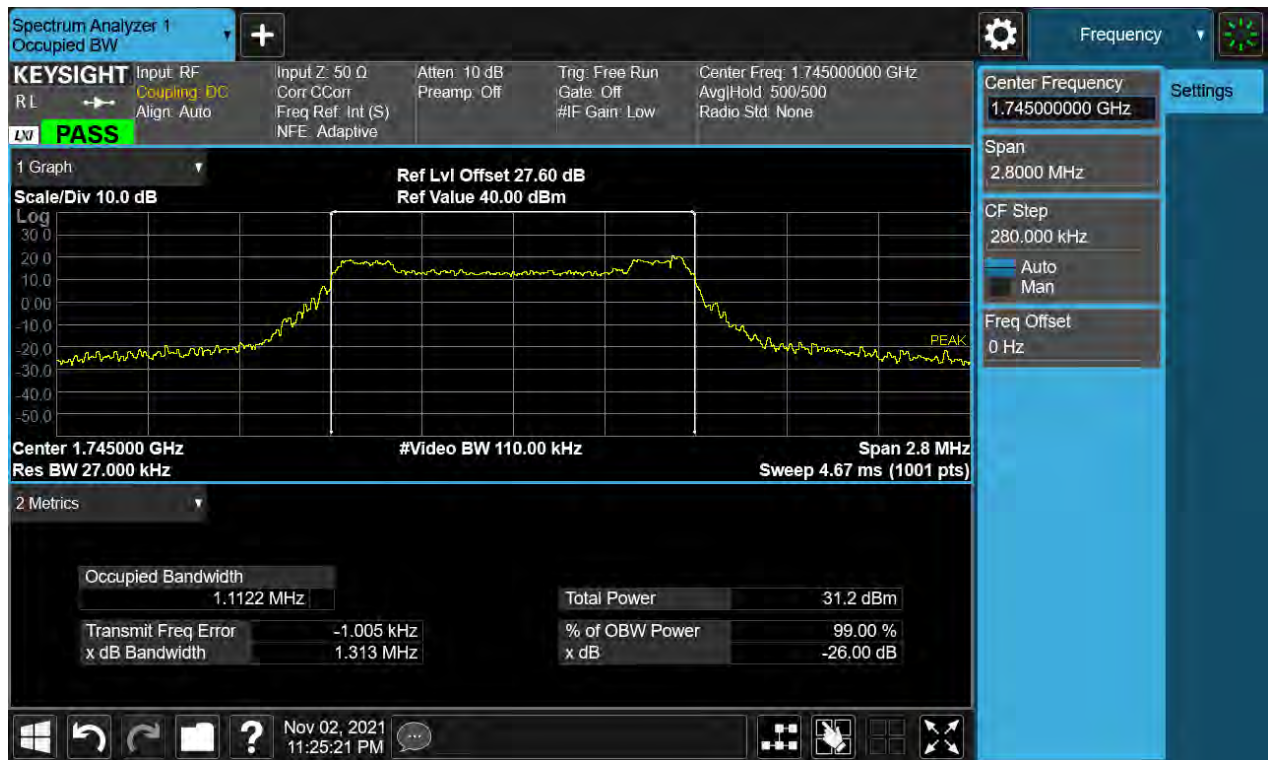


BW1.4 M_OBW_Middle Channel_256QAM_FullRB(Lower)




BW3 M_OBW_Middle Channel_QPSK_FullRB(Lower)




BW3 M_OBW_Middle Channel_16QAM_FullIRB(Lower)

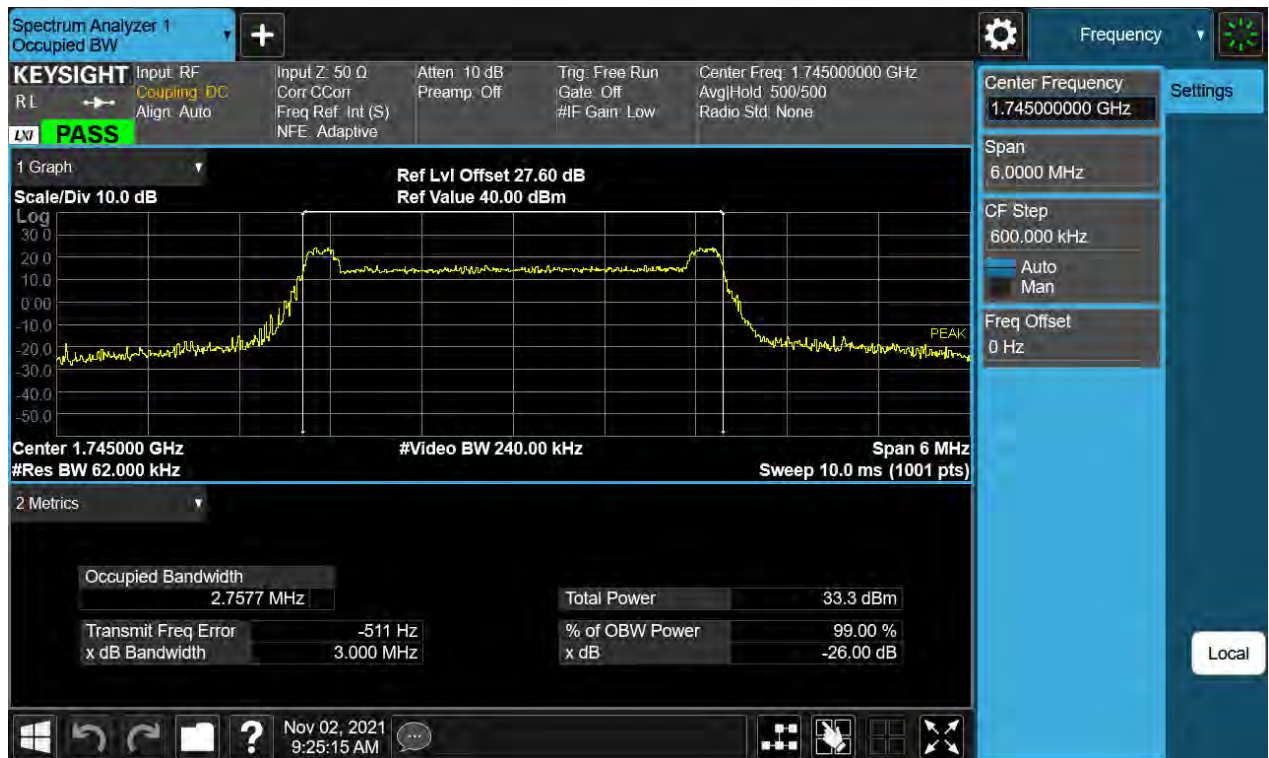


BW3 M_OBW_Middle Channel_64QAM_FullIRB(Lower)

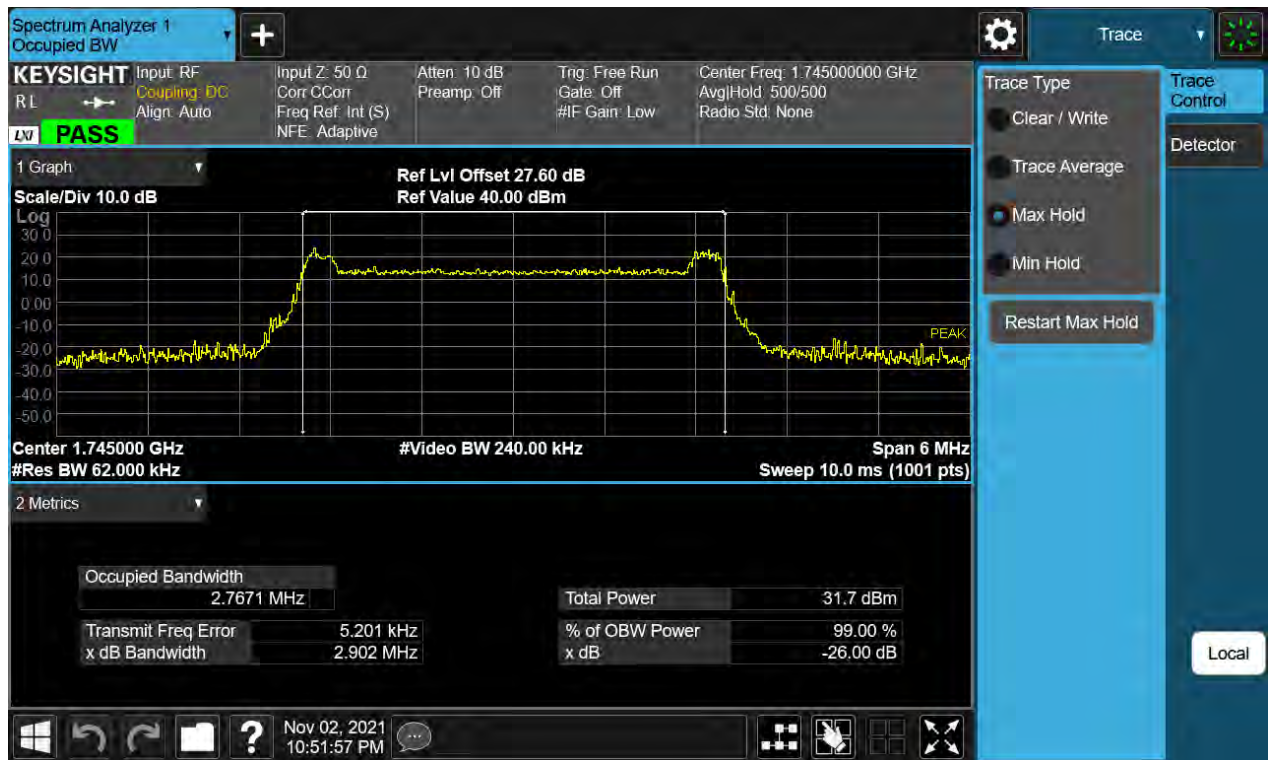


BW3 M_OBW_Middle Channel_256QAM_FullRB(Lower)

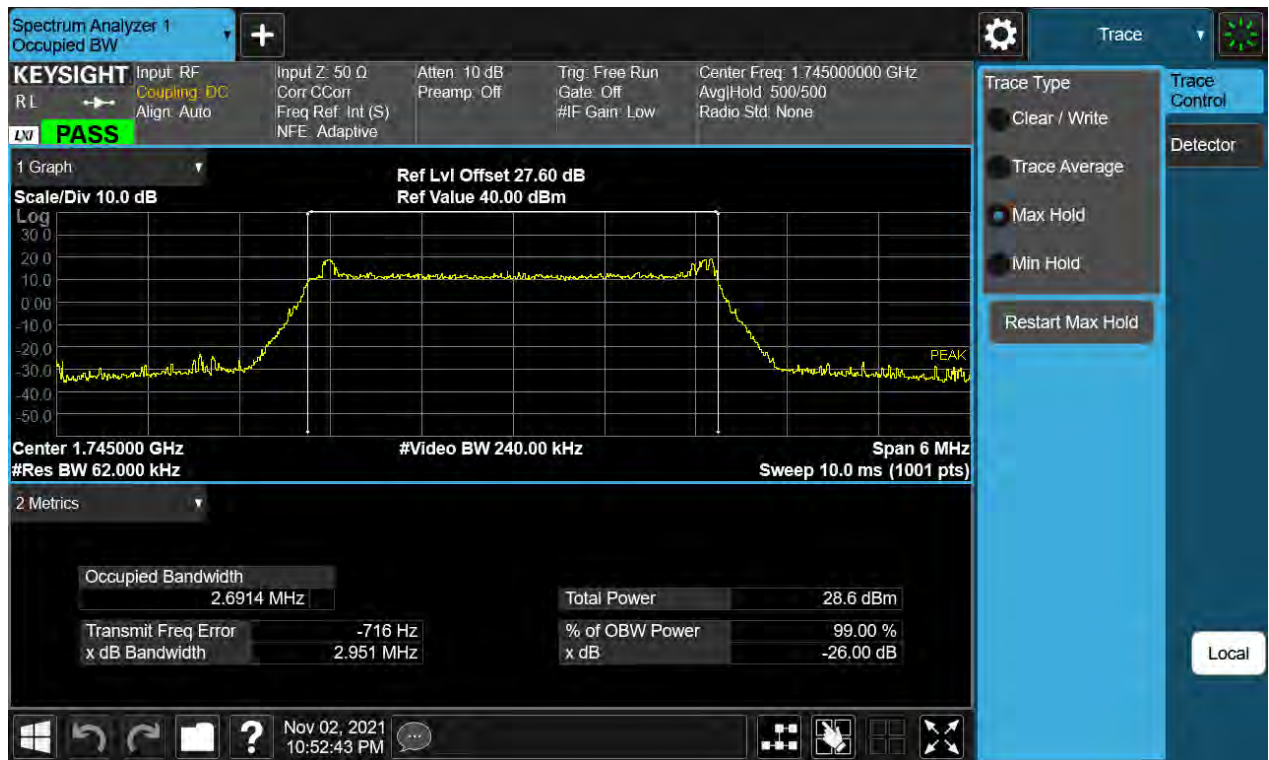


BW5 M_OBW_Middle Channel_QPSK_FullRB(Lower)

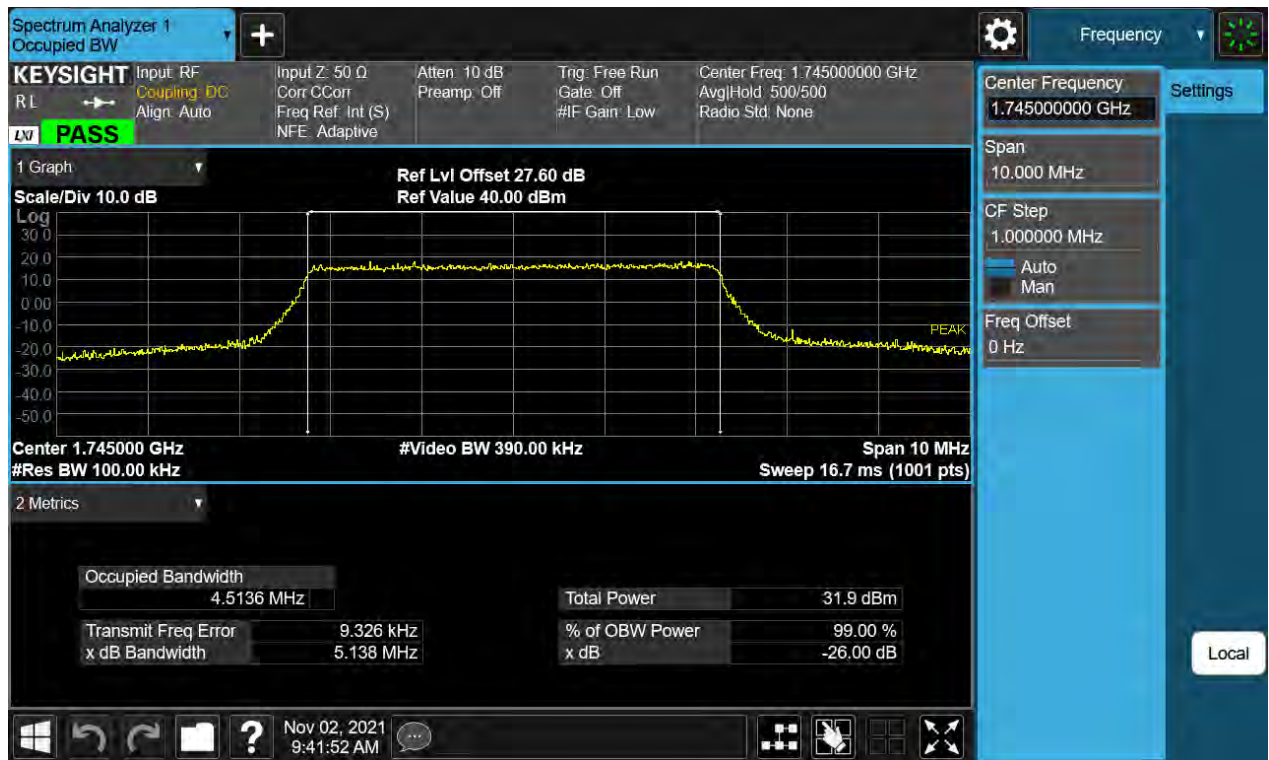


BW5 M_OBW_Middle Channel_16QAM_FullIRB(Lower)

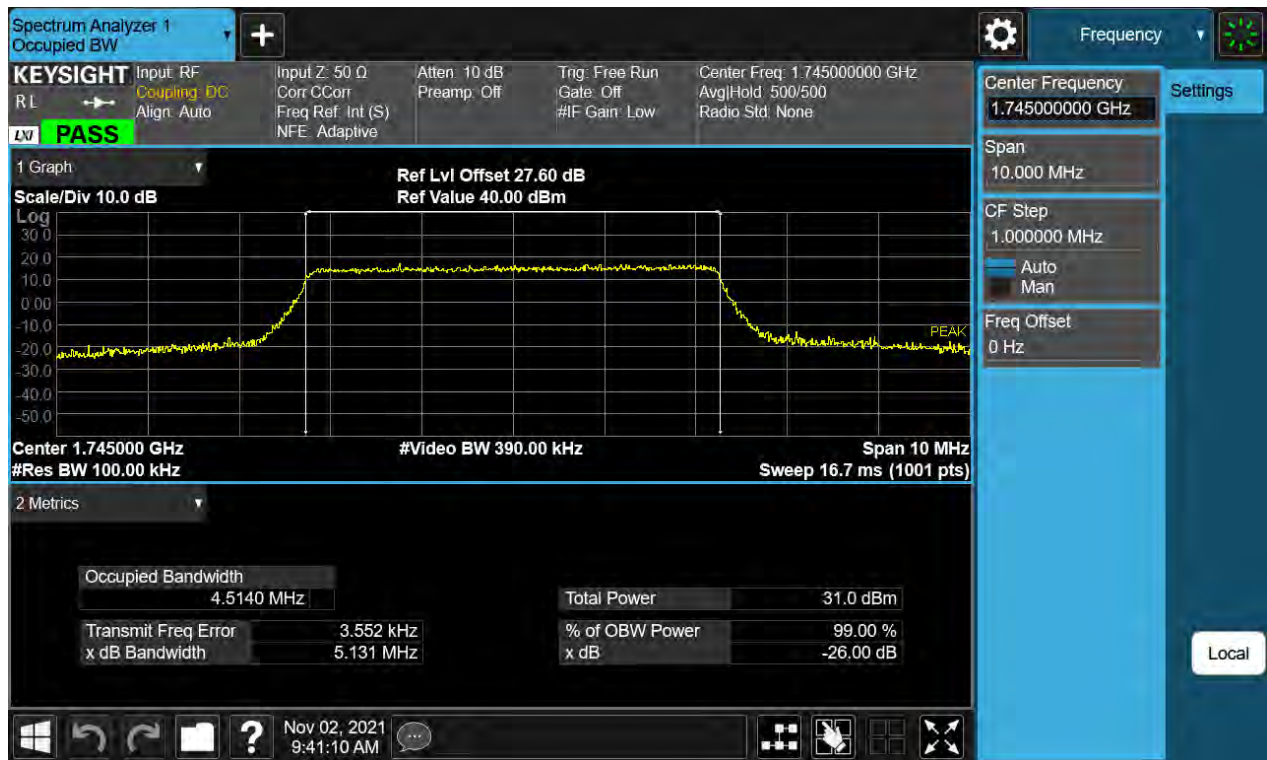

BW5 M_OBW_Middle Channel_64QAM_FullIRB(Lower)

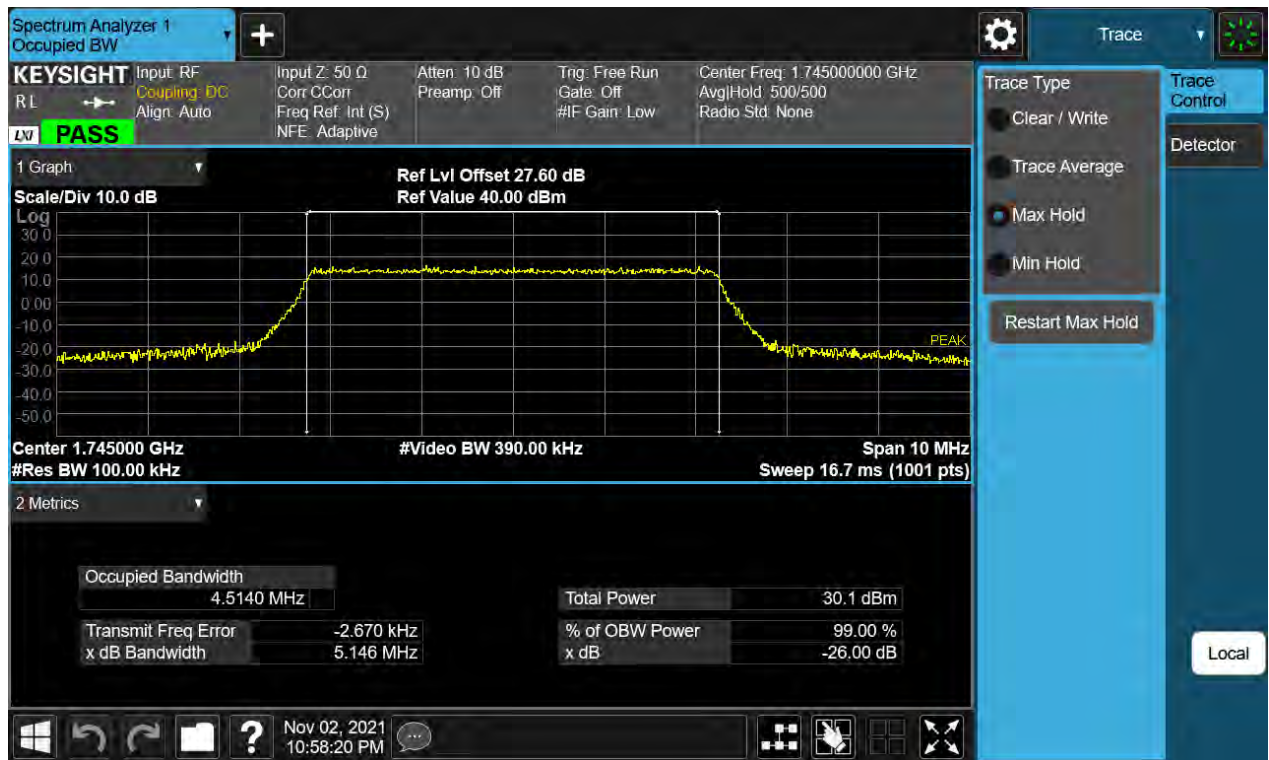

BW5 M_OBW_Middle Channel_256QAM_FullIRB(Lower)

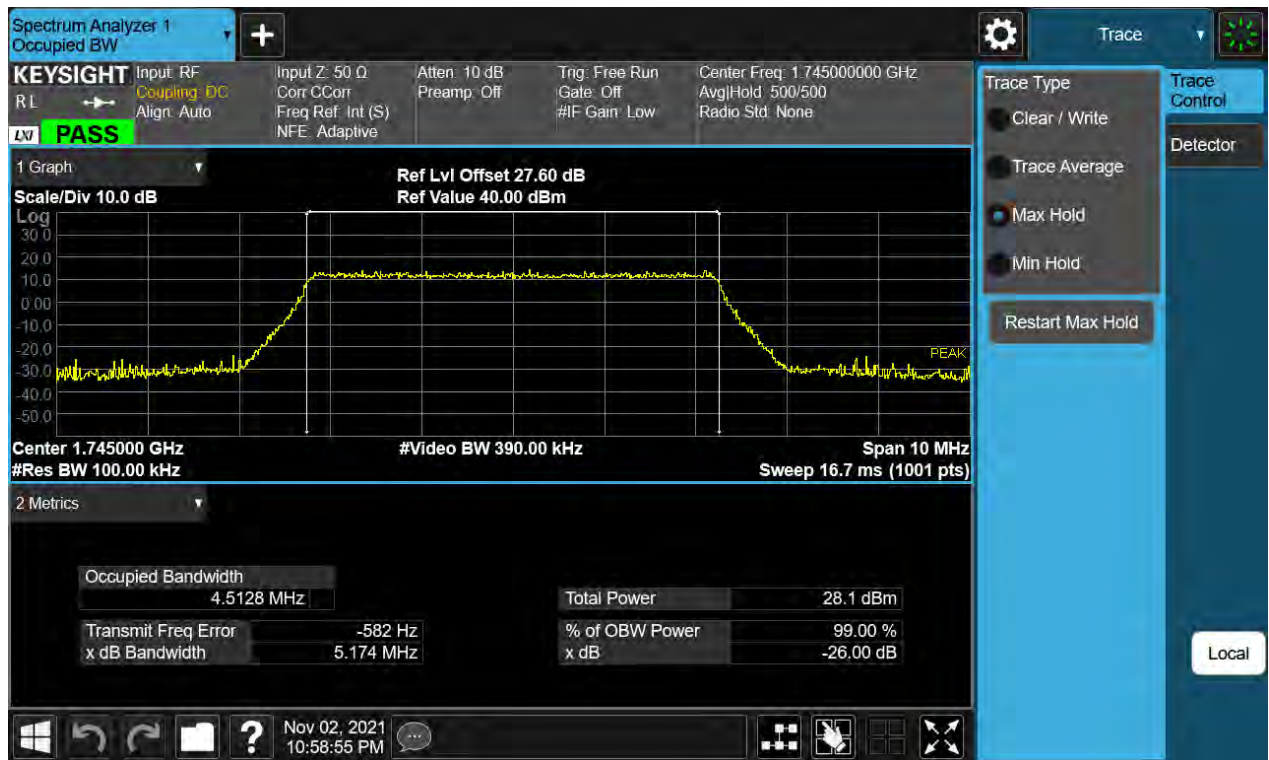


BW10 M_OBW_Middle Channel_QPSK_FullIRB(Lower)




BW10 M_OBW_Middle Channel_16QAM_FullIRB(Lower)



BW10 M_OBW_Middle Channel_64QAM_FullIRB(Lower)

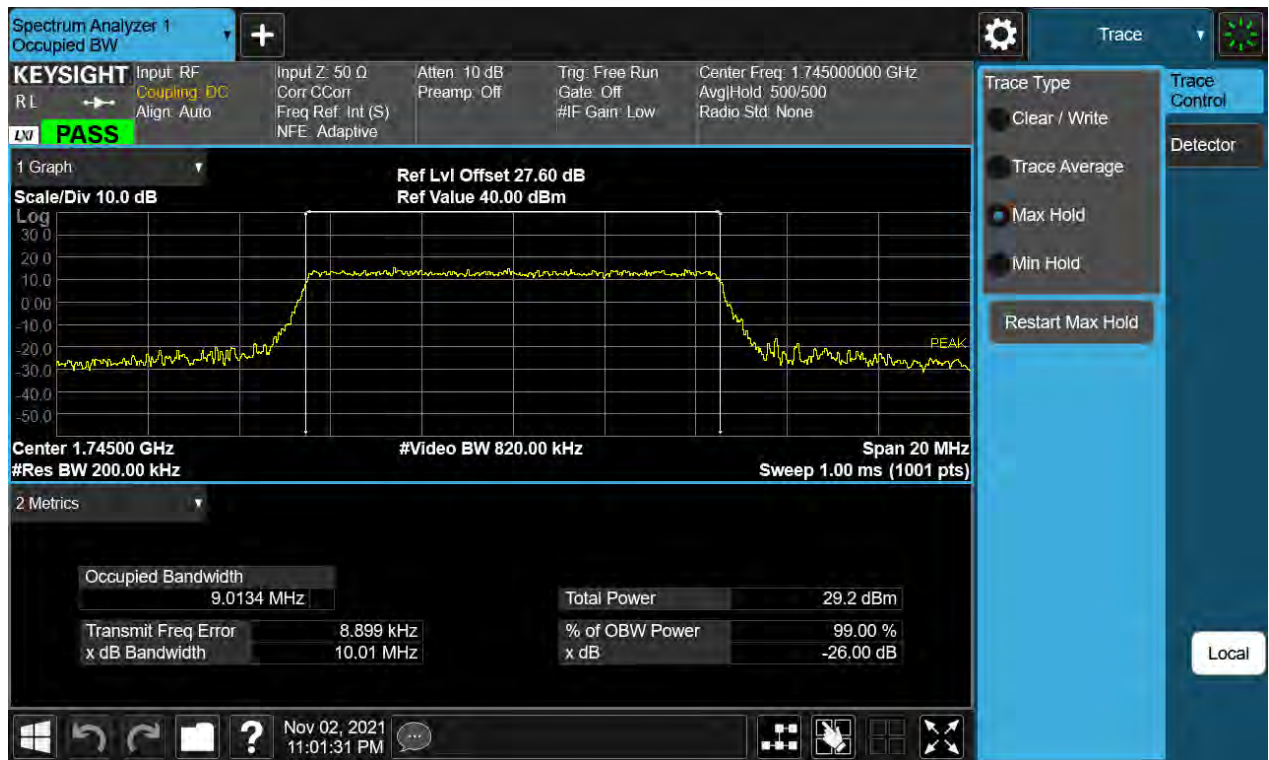

BW10 M_OBW_Middle Channel_256QAM_FullRB(Lower)

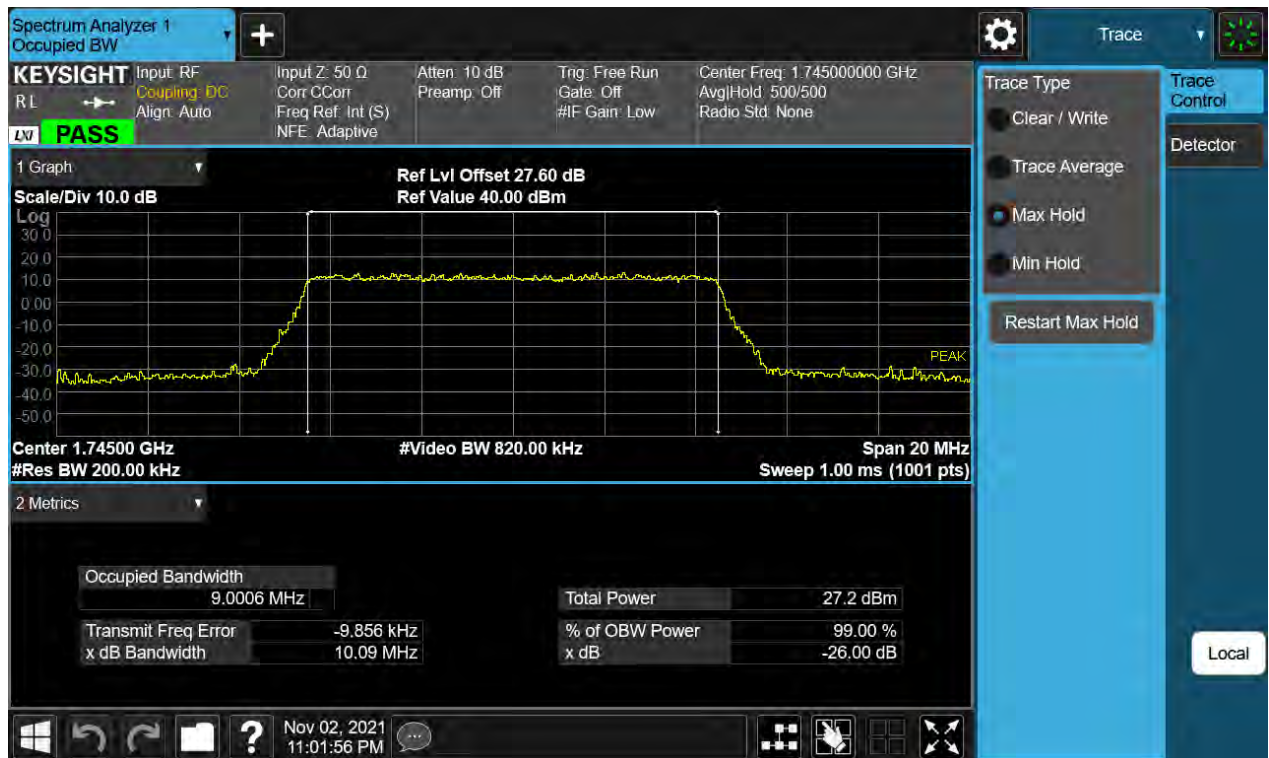


BW15 M_OBW_Middle Channel_QPSK_FullIRB(Lower)



BW15 M_OBW_Middle Channel_16QAM_FullIRB(Lower)



BW15 M_OBW_Middle Channel_64QAM_FullIRB(Lower)

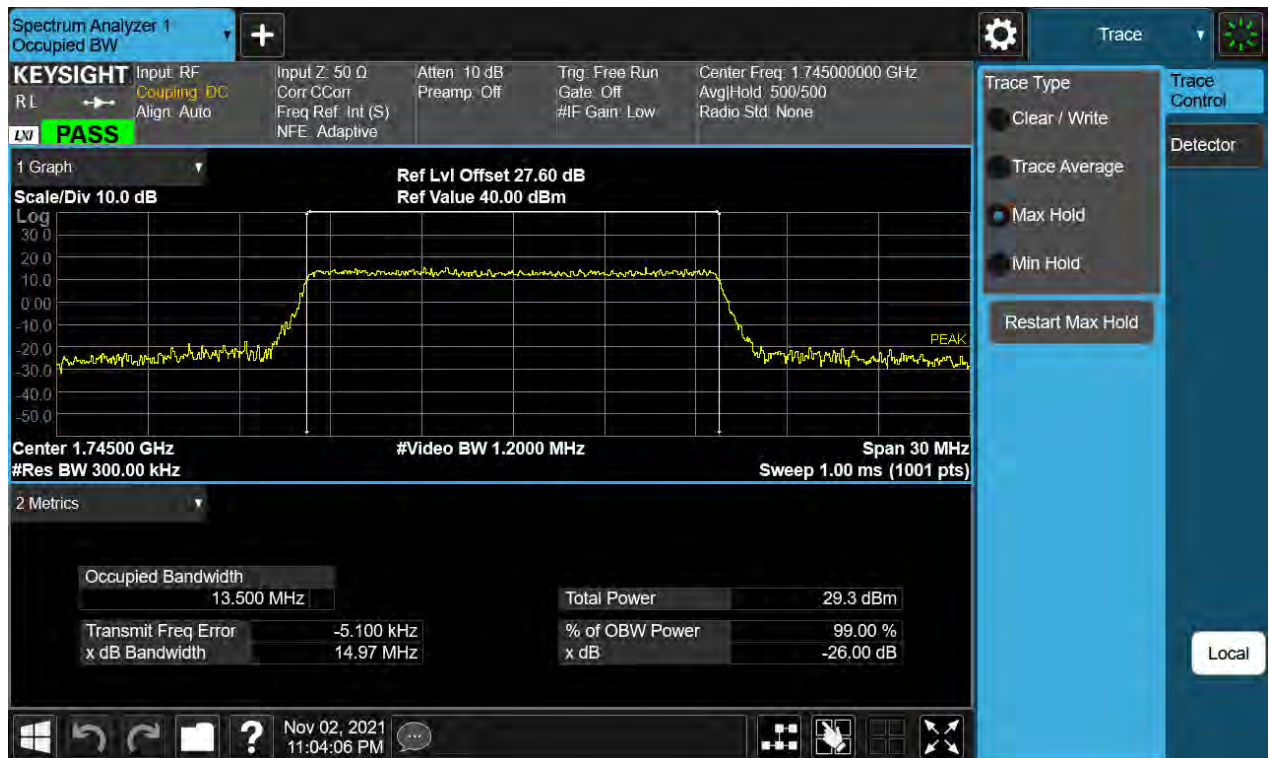

BW15 M_OBW_Middle Channel_256QAM_FullRB(Lower)

