

FCC Test Report (15.407)

Report No.: RF150514C27B

FCC ID: PY315100302

Test Model: D7800

Received Date: Jun. 25, 2015

Test Date: Jun. 25 ~ Sep. 08, 2015

Issued Date: Sep. 09, 2015

Applicant: NETGEAR INC.

Address: 350 East Plumeria Drive, San Jose, CA 95134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Lab Address: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	15
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Set Up	20
4.1.6 EUT Operating Conditions	20
4.1.7 Test Results	21
4.2 Conducted Emission Measurement	32
4.2.1 Limits of Conducted Emission Measurement	32
4.2.2 Test Instruments	32
4.2.3 Test Procedures	33
4.2.4 Deviation from Test Standard	33
4.2.5 Test Setup	33
4.2.6 EUT Operating Conditions	33
4.2.7 Test Results	34
4.3 Transmit Power Measurement	38
4.3.1 Limits of Transmit Power Measurement	38
4.3.2 Test Setup	38
4.3.3 Test Instruments	39
4.3.4 Test Procedure	39
4.3.5 Deviation from Test Standard	39
4.3.6 EUT Operating Conditions	39
4.3.7 Test Result	40
4.4 Peak Power Spectral Density Measurement	49
4.4.1 Limits of Peak Power Spectral Density Measurement	49
4.4.2 Test Setup	49
4.4.3 Test Instruments	49
4.4.4 Test Procedures	50
4.4.5 Deviation from Test Standard	50
4.4.6 EUT Operating Conditions	50
4.4.7 Test Results	51
4.5 Frequency Stability	61
4.5.1 Limits of Frequency Stability Measurement	61
4.5.2 Test Setup	61
4.5.3 Test Instruments	61
4.5.4 Test Procedure	61
4.5.5 Deviation from Test Standard	61
4.5.6 EUT Operating Condition	61

4.5.7 Test Results	62
4.6 6dB Bandwidth Measurement.....	63
4.6.1 Limits of 6dB Bandwidth Measurement.....	63
4.6.2 Test Setup.....	63
4.6.3 Test Instruments	63
4.6.4 Test Procedure	63
4.6.5 Deviation from Test Standard	63
4.6.6 EUT Operating Condition	63
4.6.7 Test Results	64
5 Pictures of Test Arrangements.....	70
Appendix – Information on the Testing Laboratories	71



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150514C27B	Original release	Sep. 09, 2015

1 Certificate of Conformity

Product: AC2600 WiFi VDSL/ADSL Modem Router

Brand: NETGEAR

Test Model: D7800

Sample Status: Engineering sample

Applicant: NETGEAR INC.

Test Date: Jun. 25 ~ Sep. 08, 2015

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :


Polly Chien / Specialist

Date:

Sep. 09, 2015

Approved by :



Ken Liu / Senior Manager

Date:

Sep. 09, 2015

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -12.13dB at 0.37428MHz.
15.407(b) (1/2/3/4/6)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5714.90MHz
15.407(a)(1/2 /3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
15.407(a)(1/2 /3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is RSMA not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports0	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC2600 WiFi VDSL/ADSL Modem Router
Brand	NETGEAR
Test Model	D7800
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	OFDM
Transfer Rate	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 600.0Mbps 802.11ac: up to 1300.0Mbps
Operating Frequency	5180 ~ 5240MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
Output Power	5180 ~ 5240MHz: CDD Mode: 998.214mW Beamforming_NSS1 Mode: 835.798mW Beamforming_NSS2 Mode: 992.692mW 5745 ~ 5825MHz: CDD Mode: 935.540mW Beamforming_NSS1 Mode: 697.829mW Beamforming_NSS2 Mode: 921.846mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Data Cable Supplied	N/A

Note:

1. This report is prepared for FCC class II permissive change. This report is issued as a supplementary report to BV ADT report no. RF150514C27-1. The difference compared with the original report is updating U-NII 1 & U-NII 3 band standard to new rule version. Due to devices where no increase in authorized power level in U-NII-1 band an attestation with description of software security must be provided, the EUT was tested for U-NII 3 band and presented in the test report.

2. The EUT incorporates a MIMO function. Physically, the EUT provides 4 completed transmitters and 4 receivers.

Band	Modulation Mode	Beamforming Mode	TX Function
5GHz	802.11a	Not Support	4TX
	802.11n (HT20)	Support	4TX
	802.11n (HT40)	Support	4TX
	802.11ac (VHT80)	Support	4TX

* For 802.11a, the EUT doesn't support Beamforming mode.

* The modulation and bandwidth are similar to 802.11n mode for HT20/40MHz and 802.11ac mode for VHT20/V40MHz, therefore investigated worst case to representative mode in the test report. (Final test mode refer section 3.2.1)

* For 5GHz band 802.11n and 802.11ac, after pre-tested two modes (with beamforming mode Nss=1 / 2 and CDD mode) found CDD mode was the worst, therefore chosen for final test for radiated emission and power line conducted emission test and presented in the test report.

3. The EUT uses following antennas.

Ant. Type	Connector Type	Antenna Gain (dBi)				
		2412MHz	2422MHz	2437MHz	2452MHz	2462MHz
Dipole	RSMA	0.21	0.41	0.41	0.21	0.11
		5180MHz	5190MHz	5200MHz	5210MHz	5230MHz
		0.61	0.71	0.71	0.81	0.91
		5240MHz	5745MHz	5755MHz	5775MHz	5785MHz
		0.91	1.61	1.51	1.51	1.51
		5795MHz	5825MHz			
		1.61	1.61			

4. The EUT consumes power from the following adapters.

Adapter 1	
Brand	NETGEAR
Model	MU42-3120350-A1
Part No.	332-10762-01 (LEI)
Input Power	100-240Vac, 50/60Hz, 1.5A
Output Power	12Vdc, 3.5A
Power Line	1.8m cable without core attached on adapter

Adapter 2	
Brand	NETGEAR
Model	2ABN042F NA
Part No.	332-10761-01 (CWT)
Input Power	100-240Vac, 50/60Hz, 1.3A
Output Power	12Vdc, 3.5A
Power Line	1.85m cable without core attached on adapter

3.2 Description of Test Modes

For 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Adapter 1
B	-	√	√	-	Adapter 2

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	15.0
A	802.11ac (VHT80)		155	155	OFDM	BPSK	130.0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	149 to 165	149	OFDM	BPSK	6.0	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	149 to 165	149	OFDM	BPSK	6.0	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (HT40)		151 to 159	151, 159	OFDM	BPSK	15.0
A	802.11ac (VHT80)		155	155	OFDM	BPSK	130.0

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25 deg. C, 64% RH	120 Vac, 60 Hz	Alan Wu
	20 deg. C, 70% RH	120 Vac, 60 Hz	Chris Lin
	20 deg. C, 70% RH	120 Vac, 60 Hz	Nick Chen
RE<1G	27 deg. C, 65% RH	120 Vac, 60 Hz	Alan Wu
PLC	24 deg. C, 64% RH	120 Vac, 60 Hz	Alan Wu
APCM	25 deg. C, 60% RH	120 Vac, 60 Hz	Antony Lee

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

If duty cycle of test signal is $< 98\%$, duty factor shall be considered.


CDD Mode

802.11a: Duty cycle = $2.055/2.142 = 0.959$, Duty factor = $10 * \log(1/0.959) = 0.18$

802.11n (HT20): Duty cycle = $2.058/2.135 = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$

802.11n (HT40): Duty cycle = $2.422/2.505 = 0.967$, Duty factor = $10 * \log(1/0.967) = 0.15$

802.11ac (VHT80): Duty cycle = $1.145/1.222 = 0.937$, Duty factor = $10 * \log(1/0.937) = 0.28$

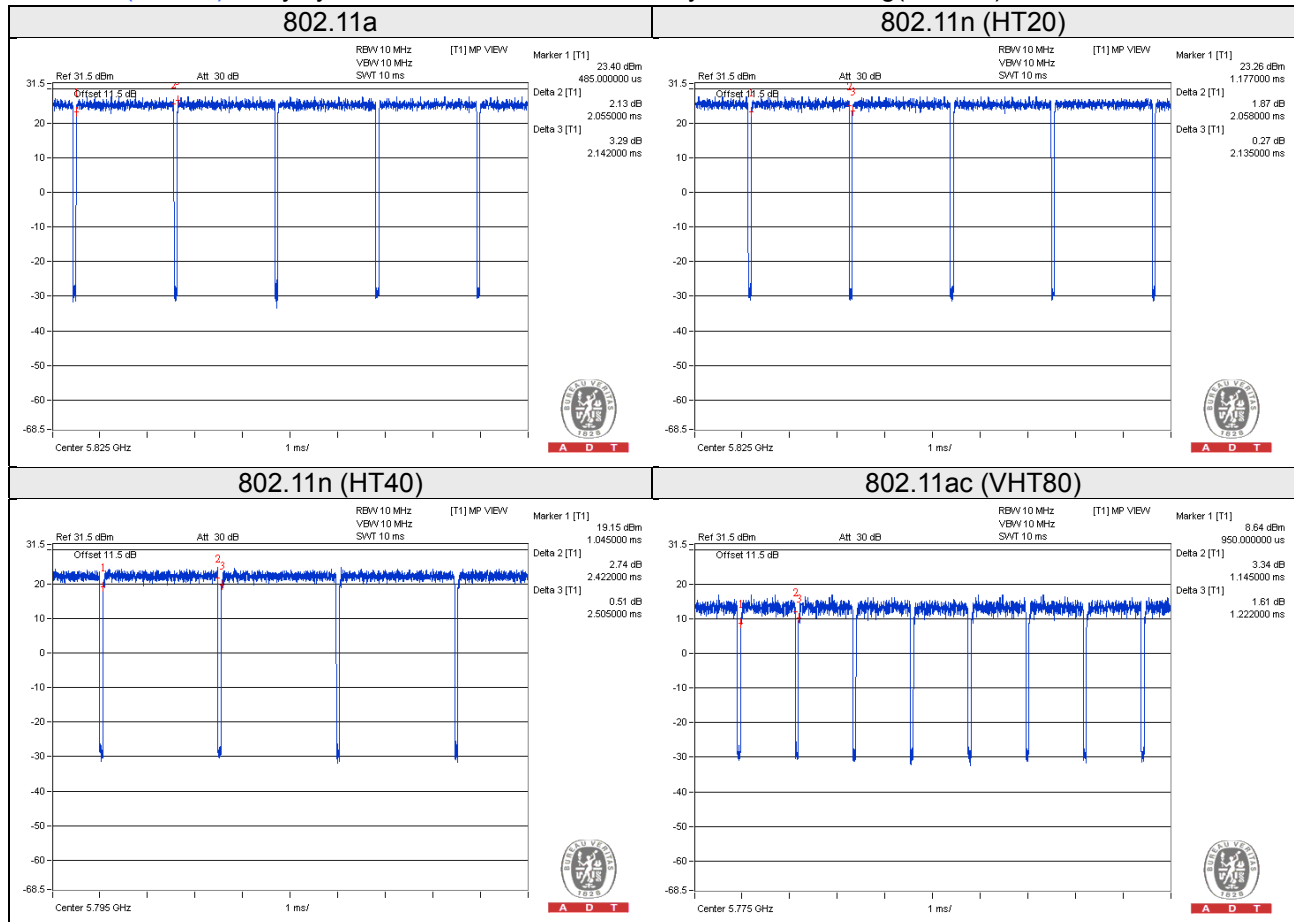


Beamforming_NSS1 Mode

802.11n (HT20): Duty cycle = $4.985/5.067 = 0.984 > 98\%$

802.11n (HT40): Duty cycle = $2.057/2.139 = 0.962$, Duty factor = $10 \cdot \log(1/0.962) = 0.17$

802.11ac (VHT80): Duty cycle = $1.137/1.220 = 0.932$, Duty factor = $10 \cdot \log(1/0.932) = 0.31$

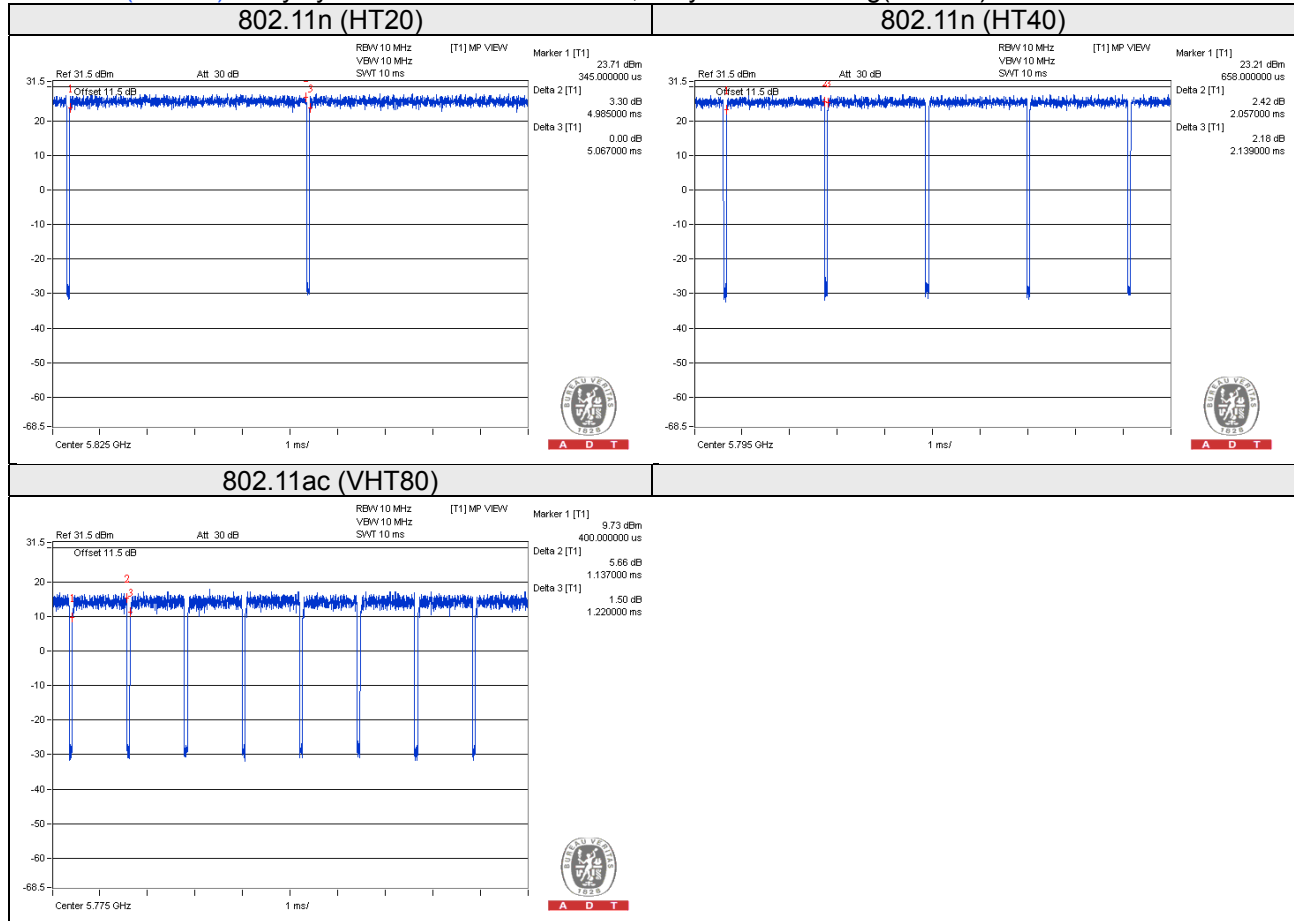

Beamforming_NSS2 Mode

802.11n (HT20): Duty cycle = $4.985/5.068 = 0.984 > 98\%$

802.11n (HT40): Duty cycle = $2.415/2.512 = 0.961$, Duty factor = $10 \cdot \log(1/0.961) = 0.17$

802.11ac (VHT80): Duty cycle = $1.132/1.215 = 0.932$, Duty factor = $10 \cdot \log(1/0.932) = 0.31$



3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5420	BPQ8MQ1	FCC DoC Approved	-
B.	USB HDD x 2	WD	WDBACY5000ABL	WX41A81P8576	FCC DoC Approved	-
		WD	WDBACY5000ABL-01	WX51C12T6215	FCC DoC Approved	-
C.	E-SATA HDD	Sarotech	FHD-354US	E80P048380919	FCC DoC Approved	-
D.	Load	NA	NA	NA	NA	-
E.	Load	NA	NA	NA	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ 45	1	3	N	0	-
2.	RJ 45	4	1.8	N	0	-
3.	USB	2	1.8	Y	0	-
4.	E-SATA	1	0.5	Y	0	-
5.	RJ 11	1	1.8	N	0	-

3.4.1 Configuration of System under Test

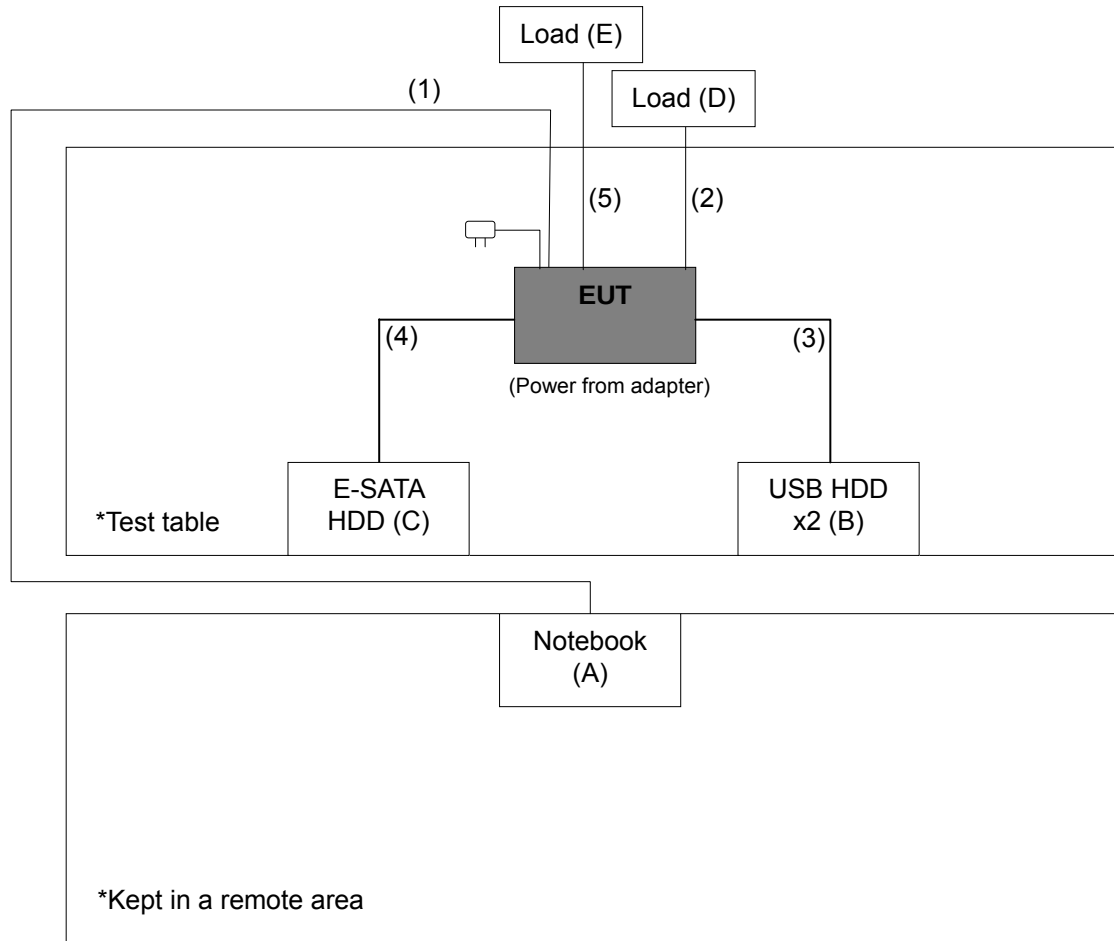

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of Unwanted Emission Out of The Restricted Bands

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBuV/m)	AV:54 (dBuV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2 (dBuV/m) ^{*1} PK:78.2 (dBuV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 06, 2014	Oct. 05, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Jul. 25, 2014 Jul. 08, 2015	Jul. 24, 2015 Jul. 07, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 06, 2015	Feb. 05, 2016
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 09, 2015	Feb. 08, 2016
Preamplifier Agilent	8449B	3008A01960	Aug. 09, 2014 Aug. 09, 2015	Aug. 08, 2015 Aug. 08, 2016
Preamplifier Agilent	8447D	2944A10631	Aug. 09, 2014 Aug. 09, 2015	Aug. 08, 2015 Aug. 08, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 09, 2014 Aug. 09, 2015	Aug. 08, 2015 Aug. 08, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 09, 2014 Aug. 09, 2015	Aug. 08, 2015 Aug. 08, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 09, 2014 Aug. 09, 2015	Aug. 08, 2015 Aug. 08, 2016
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2014	Oct. 17, 2015
High Speed Peak Power Meter	ML2495A	0824011	Jul. 26, 2014 Jul. 09, 2015	Jul. 25, 2015 Jul. 08, 2016
Power Sensor	MA2411B	0738171	Jul. 26, 2014 Jul. 09, 2015	Jul. 25, 2015 Jul. 08, 2016

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC7450F-4.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

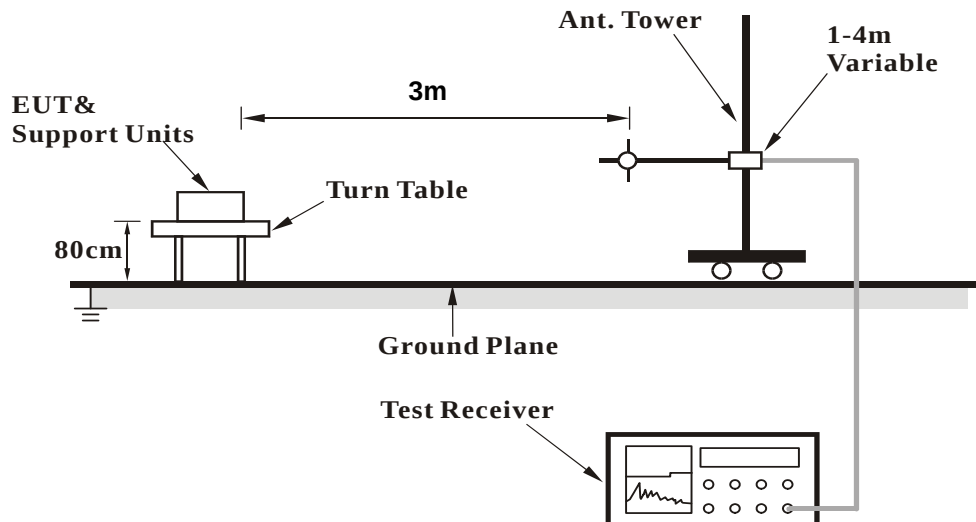

<Frequency Range above 1GHz>

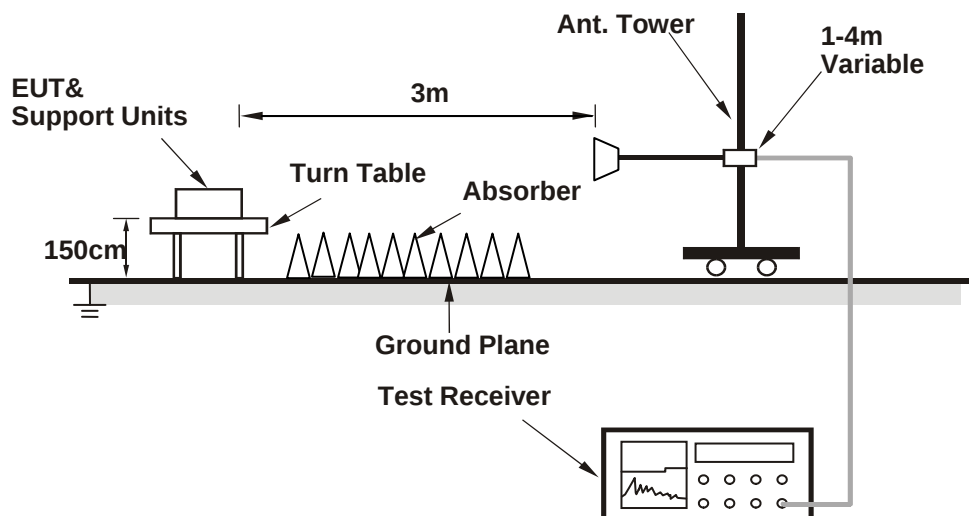

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	56.8 PK	74.0	-17.2	1.00 H	57	50.50	6.30
2	#5714.90	43.9 AV	54.0	-10.1	1.00 H	57	37.60	6.30
3	#5722.90	57.9 PK	78.2	-20.3	1.00 H	57	51.60	6.30
4	#5725.00	50.3 PK	78.2	-27.9	1.00 H	57	44.00	6.30
5	*5745.00	105.4 PK			1.00 H	57	65.10	40.30
6	*5745.00	95.4 AV			1.00 H	57	55.10	40.30
7	11490.00	58.6 PK	74.0	-15.4	1.00 H	14	41.40	17.20
8	11490.00	44.9 AV	54.0	-9.1	1.00 H	14	27.70	17.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	68.3 PK	74.0	-5.7	1.68 V	18	62.00	6.30
2	#5714.90	53.4 AV	54.0	-0.6	1.68 V	18	47.10	6.30
3	#5722.90	77.5 PK	78.2	-0.7	1.68 V	18	71.20	6.30
4	#5725.00	58.6 PK	78.2	-19.6	1.68 V	18	52.30	6.30
5	*5745.00	122.1 PK			1.68 V	18	81.80	40.30
6	*5745.00	112.1 AV			1.68 V	18	71.80	40.30
7	11490.00	58.9 PK	74.0	-15.1	1.75 V	331	41.70	17.20
8	11490.00	45.3 AV	54.0	-8.7	1.75 V	331	28.10	17.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	109.5 PK			1.00 H	289	69.10	40.40
2	*5785.00	99.9 AV			1.00 H	289	59.50	40.40
3	11570.00	61.0 PK	74.0	-13.0	1.03 H	260	43.70	17.30
4	11570.00	47.7 AV	54.0	-6.3	1.03 H	260	30.40	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	124.4 PK			1.87 V	341	84.00	40.40
2	*5785.00	113.6 AV			1.87 V	341	73.20	40.40
3	11570.00	65.8 PK	74.0	-8.2	1.00 V	25	48.50	17.30
4	11570.00	52.3 AV	54.0	-1.7	1.00 V	25	35.00	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	107.2 PK			1.00 H	53	66.70	40.50
2	*5825.00	97.0 AV			1.00 H	53	56.50	40.50
3	#5850.00	42.4 PK	78.2	-35.8	1.00 H	53	35.80	6.60
4	#5852.10	57.8 PK	78.2	-20.4	1.00 H	53	51.20	6.60
5	#5860.10	59.2 PK	74.0	-14.8	1.00 H	53	52.60	6.60
6	#5860.10	45.6 AV	54.0	-8.4	1.00 H	53	39.00	6.60
7	11650.00	59.9 PK	74.0	-14.1	1.00 H	6	42.20	17.70
8	11650.00	46.9 AV	54.0	-7.1	1.00 H	6	29.20	17.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	122.9 PK			2.06 V	171	82.40	40.50
2	*5825.00	112.7 AV			2.06 V	171	72.20	40.50
3	#5850.00	52.4 PK	78.2	-25.8	2.06 V	171	45.80	6.60
4	#5852.10	71.0 PK	78.2	-7.2	2.06 V	171	64.40	6.60
5	#5860.10	68.8 PK	74.0	-5.2	2.06 V	171	62.20	6.60
6	#5860.10	53.5 AV	54.0	-0.5	2.06 V	171	46.90	6.60
7	11650.00	63.6 PK	74.0	-10.4	1.90 V	354	45.90	17.70
8	11650.00	49.4 AV	54.0	-4.6	1.90 V	354	31.70	17.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	56.5 PK	74.0	-17.5	1.28 H	57	50.20	6.30
2	#5714.90	43.9 AV	54.0	-10.1	1.28 H	57	37.60	6.30
3	#5722.90	59.0 PK	78.2	-19.2	1.28 H	57	52.70	6.30
4	#5725.00	49.0 PK	78.2	-29.2	1.28 H	57	42.70	6.30
5	*5745.00	106.4 PK			1.28 H	57	66.10	40.30
6	*5745.00	95.2 AV			1.28 H	57	54.90	40.30
7	11490.00	58.7 PK	74.0	-15.3	1.00 H	6	41.50	17.20
8	11490.00	44.7 AV	54.0	-9.3	1.00 H	6	27.50	17.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	68.9 PK	74.0	-5.1	1.88 V	158	62.60	6.30
2	#5714.90	53.7 AV	54.0	-0.3	1.88 V	158	47.40	6.30
3	#5722.90	77.3 PK	78.2	-0.9	1.88 V	158	71.00	6.30
4	#5725.00	54.9 PK	78.2	-23.3	1.88 V	158	48.60	6.30
5	*5745.00	121.7 PK			1.88 V	158	81.40	40.30
6	*5745.00	111.2 AV			1.88 V	158	70.90	40.30
7	11490.00	59.1 PK	74.0	-14.9	1.74 V	344	41.90	17.20
8	11490.00	45.1 AV	54.0	-8.9	1.74 V	344	27.90	17.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	109.6 PK			1.00 H	290	69.20	40.40
2	*5785.00	98.4 AV			1.00 H	290	58.00	40.40
3	11570.00	60.8 PK	74.0	-13.2	1.08 H	258	43.50	17.30
4	11570.00	47.8 AV	54.0	-6.2	1.08 H	258	30.50	17.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	123.6 PK			1.87 V	340	83.20	40.40
2	*5785.00	111.5 AV			1.87 V	340	71.10	40.40
3	11570.00	64.4 PK	74.0	-9.6	2.35 V	29	47.10	17.30
4	11570.00	51.3 AV	54.0	-2.7	2.35 V	29	34.00	17.30

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	107.7 PK			1.00 H	54	67.20	40.50
2	*5825.00	96.3 AV			1.00 H	54	55.80	40.50
3	#5850.00	44.6 PK	78.2	-33.6	1.00 H	54	38.00	6.60
4	#5852.10	58.0 PK	78.2	-20.2	1.00 H	54	51.40	6.60
5	#5860.10	59.2 PK	74.0	-14.8	1.00 H	54	52.60	6.60
6	#5860.10	46.0 AV	54.0	-8.0	1.00 H	54	39.40	6.60
7	11650.00	59.9 PK	74.0	-14.1	1.00 H	9	42.20	17.70
8	11650.00	46.6 AV	54.0	-7.4	1.00 H	9	28.90	17.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	122.9 PK			1.73 V	4	82.40	40.50
2	*5825.00	112.3 AV			1.73 V	4	71.80	40.50
3	#5850.00	54.6 PK	78.2	-23.6	1.73 V	4	48.00	6.60
4	#5852.10	71.8 PK	78.2	-6.4	1.73 V	4	65.20	6.60
5	#5860.10	68.9 PK	74.0	-5.1	1.73 V	4	62.30	6.60
6	#5860.10	53.8 AV	54.0	-0.2	1.73 V	4	47.20	6.60
7	11650.00	61.1 PK	74.0	-12.9	1.80 V	22	43.40	17.70
8	11650.00	47.1 AV	54.0	-6.9	1.80 V	22	29.40	17.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	57.5 PK	74.0	-16.5	1.33 H	76	51.20	6.30
2	#5714.90	44.4 AV	54.0	-9.6	1.33 H	76	38.10	6.30
3	#5722.90	57.2 PK	78.2	-21.0	1.33 H	76	50.90	6.30
4	#5725.00	36.7 PK	78.2	-41.5	1.33 H	76	30.40	6.30
5	*5755.00	98.0 PK			1.33 H	76	57.70	40.30
6	*5755.00	88.6 AV			1.33 H	76	48.30	40.30
7	11510.00	58.4 PK	74.0	-15.6	1.00 H	14	41.30	17.10
8	11510.00	45.4 AV	54.0	-8.6	1.00 H	14	28.30	17.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	67.5 PK	74.0	-6.5	1.69 V	8	61.20	6.30
2	#5714.90	53.9 AV	54.0	-0.1	1.69 V	8	47.60	6.30
3	#5722.90	69.9 PK	78.2	-8.3	1.69 V	8	63.60	6.30
4	#5725.00	53.2 PK	78.2	-25.0	1.69 V	8	46.90	6.30
5	*5755.00	113.3 PK			1.69 V	8	73.00	40.30
6	*5755.00	103.6 AV			1.69 V	8	63.30	40.30
7	11510.00	58.6 PK	74.0	-15.4	1.75 V	23	41.50	17.10
8	11510.00	45.6 AV	54.0	-8.4	1.75 V	23	28.50	17.10

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	103.9 PK			1.00 H	56	63.50	40.40
2	*5795.00	93.9 AV			1.00 H	56	53.50	40.40
3	#5850.00	38.3 PK	78.2	-39.9	N/A H	N/A	31.70	6.60
4	#5852.10	58.0 PK	78.2	-20.2	1.00 H	56	51.40	6.60
5	#5860.10	56.8 PK	74.0	-17.2	1.00 H	56	50.20	6.60
6	#5860.10	44.4 AV	54.0	-9.6	1.00 H	56	37.80	6.60
7	11590.00	59.8 PK	74.0	-14.2	1.00 H	1	42.60	17.20
8	11590.00	46.8 AV	54.0	-7.2	1.00 H	1	29.60	17.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	119.6 PK			1.67 V	359	79.20	40.40
2	*5795.00	109.8 AV			1.67 V	359	69.40	40.40
3	#5850.00	52.2 PK	78.2	-26.0	1.67 V	359	45.60	6.60
4	#5852.10	69.8 PK	78.2	-8.4	1.67 V	359	63.20	6.60
5	#5860.10	69.1 PK	74.0	-4.9	1.67 V	359	62.50	6.60
6	#5860.10	53.7 AV	54.0	-0.3	1.67 V	359	47.10	6.60
7	11590.00	62.5 PK	74.0	-11.5	1.80 V	24	45.30	17.20
8	11590.00	48.2 AV	54.0	-5.8	1.80 V	24	31.00	17.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	59.0 PK	74.0	-15.0	1.00 H	55	52.70	6.30
2	#5714.90	44.5 AV	54.0	-9.5	1.00 H	55	38.20	6.30
3	#5722.90	59.5 PK	78.2	-18.7	1.00 H	55	53.20	6.30
4	#5725.00	37.1 PK	78.2	-41.1	1.00 H	55	30.80	6.30
5	*5775.00	94.1 PK			1.00 H	55	53.70	40.40
6	*5775.00	84.7 AV			1.00 H	55	44.30	40.40
7	11550.00	58.0 PK	74.0	-16.0	1.00 H	16	40.90	17.10
8	11550.00	44.7 AV	54.0	-9.3	1.00 H	16	27.60	17.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5714.90	70.1 PK	74.0	-3.9	1.65 V	1	63.80	6.30
2	#5714.90	53.4 AV	54.0	-0.6	1.65 V	1	47.10	6.30
3	#5722.90	73.7 PK	78.2	-4.5	1.65 V	1	67.40	6.30
4	#5725.00	46.8 PK	78.2	-31.4	1.65 V	1	40.50	6.30
5	*5775.00	109.8 PK			1.65 V	1	69.40	40.40
6	*5775.00	99.5 AV			1.65 V	1	59.10	40.40
7	11550.00	59.2 PK	74.0	-14.8	1.73 V	21	42.10	17.10
8	11550.00	45.4 AV	54.0	-8.6	1.73 V	21	28.30	17.10

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data: 802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	136.28	32.8 QP	43.5	-10.7	3.00 H	101	47.50	-14.70
2	287.66	36.8 QP	46.0	-9.2	1.25 H	128	49.60	-12.80
3	375.71	42.5 QP	46.0	-3.5	1.00 H	313	53.70	-11.20
4	414.51	41.2 QP	46.0	-4.8	1.75 H	23	51.80	-10.60
5	625.16	40.0 QP	46.0	-6.0	1.00 H	7	46.30	-6.30
6	875.40	39.0 QP	46.0	-7.0	1.50 H	314	41.20	-2.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.10	34.5 QP	40.0	-5.5	1.00 V	89	48.90	-14.40
2	287.66	38.2 QP	46.0	-7.8	1.50 V	237	51.00	-12.80
3	375.71	42.1 QP	46.0	-3.9	1.75 V	9	53.30	-11.20
4	625.06	40.0 QP	46.0	-6.0	1.00 V	39	46.30	-6.30
5	722.88	39.8 QP	46.0	-6.2	1.00 V	187	44.60	-4.80
6	875.40	42.0 QP	46.0	-4.0	2.00 V	72	44.20	-2.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	95.35	31.5 QP	43.5	-12.0	2.00 H	21	50.80	-19.30
2	237.27	35.7 QP	46.0	-10.3	1.50 H	23	50.90	-15.20
3	375.71	42.0 QP	46.0	-4.0	1.00 H	39	53.20	-11.20
4	625.16	40.0 QP	46.0	-6.0	1.25 H	167	46.30	-6.30
5	747.53	39.5 QP	46.0	-6.5	1.75 H	12	43.10	-3.60
6	875.40	42.4 QP	46.0	-3.6	1.00 H	8	44.60	-2.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.77	35.5 QP	40.0	-4.5	3.00 V	39	49.90	-14.40
2	287.66	35.2 QP	46.0	-10.8	2.00 V	259	48.00	-12.80
3	375.71	42.5 QP	46.0	-3.5	1.50 V	206	53.70	-11.20
4	625.16	40.5 QP	46.0	-5.5	1.00 V	29	46.80	-6.30
5	730.31	39.5 QP	46.0	-6.5	1.25 V	43	44.00	-4.50
6	875.40	41.5 QP	46.0	-4.5	2.00 V	93	43.70	-2.20

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Tested date: Sep. 08, 2015

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Apr. 27, 2015	Apr. 26, 2016
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 30, 2014	Dec. 29, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 21, 2015	Jul. 20, 2016
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2.

3. The VCCI Site Registration No. is C-2047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

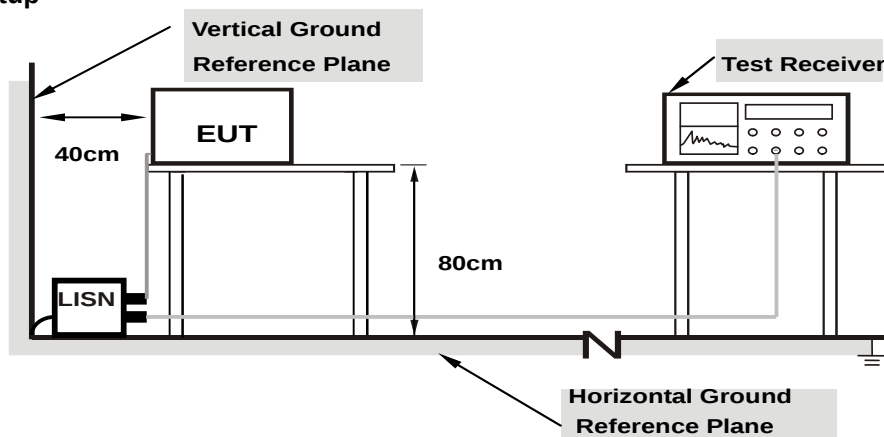

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16228	0.20	45.25	33.87	45.45	34.07	65.35	55.35	-19.90	-21.28
2	0.34277	0.20	38.78	33.63	38.98	33.83	59.14	49.14	-20.16	-15.31
3	2.41536	0.37	36.24	28.14	36.61	28.51	56.00	46.00	-19.39	-17.49
4	4.06708	0.43	34.34	24.08	34.77	24.51	56.00	46.00	-21.23	-21.49
5	6.13357	0.45	30.32	23.07	30.77	23.52	60.00	50.00	-29.23	-26.48
6	14.84897	0.58	34.25	29.29	34.83	29.87	60.00	50.00	-25.17	-20.13

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

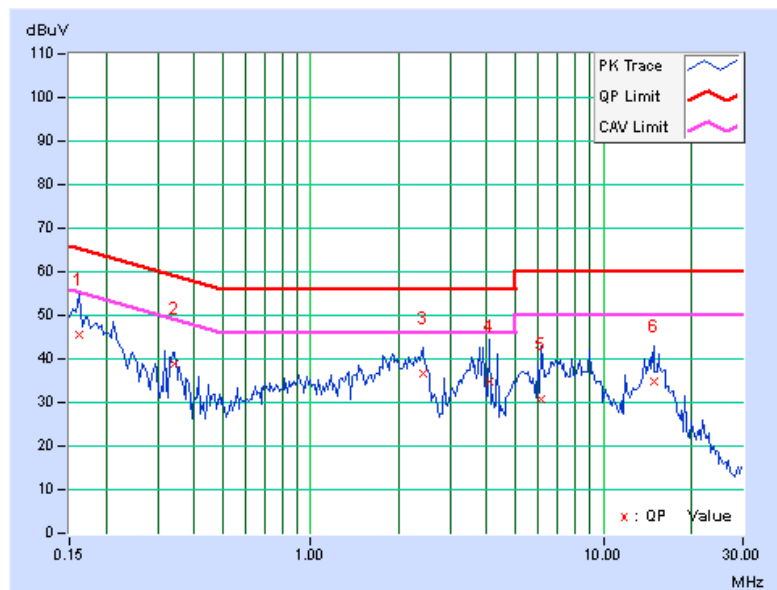


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16226	0.21	45.25	33.28	45.46	33.49	65.35	55.35	-19.89	-21.86
2	0.33874	0.24	40.12	36.08	40.36	36.32	59.23	49.23	-18.87	-12.91
3	2.14163	0.40	37.22	29.85	37.62	30.25	56.00	46.00	-18.38	-15.75
4	3.75458	0.45	34.09	27.85	34.54	28.30	56.00	46.00	-21.46	-17.70
5	9.21147	0.56	33.05	27.86	33.61	28.42	60.00	50.00	-26.39	-21.58
6	15.16587	0.71	33.25	28.45	33.96	29.16	60.00	50.00	-26.04	-20.84

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

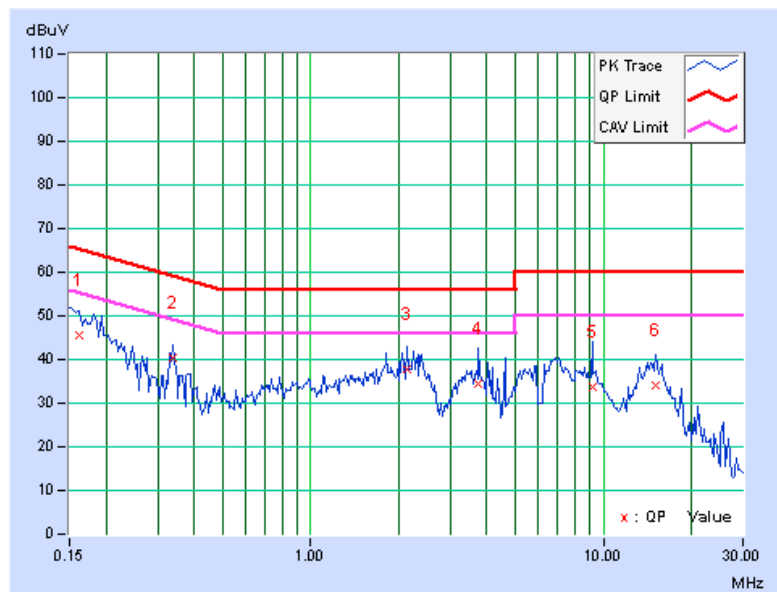


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16255	0.20	43.05	23.63	43.25	23.83	65.33	55.33	-22.09	-31.51
2	0.32321	0.20	44.52	36.05	44.72	36.25	59.62	49.62	-14.90	-13.37
3	0.37428	0.20	43.53	36.08	43.73	36.28	58.41	48.41	-14.68	-12.13
4	0.73978	0.26	34.28	22.87	34.54	23.13	56.00	46.00	-21.46	-22.87
5	0.95968	0.29	39.02	26.27	39.31	26.56	56.00	46.00	-16.69	-19.44
6	2.43487	0.38	35.08	27.48	35.46	27.86	56.00	46.00	-20.54	-18.14

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

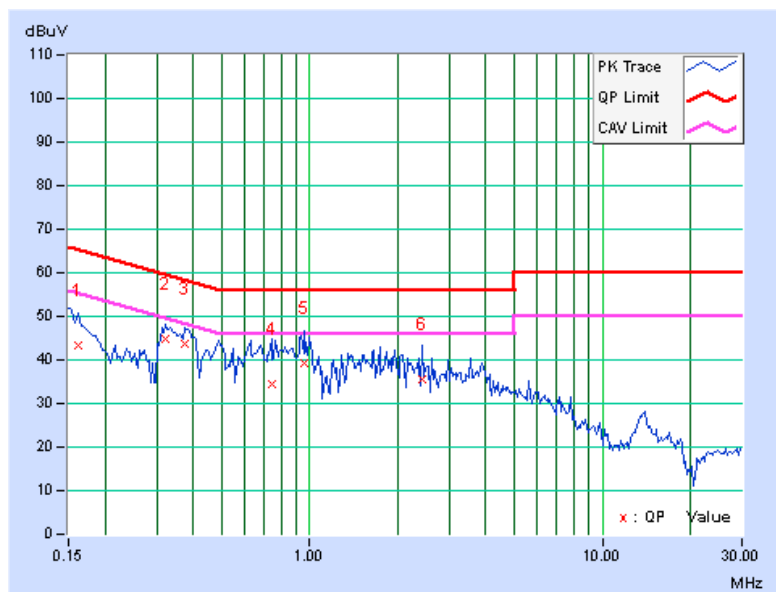


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15022	0.21	51.87	37.84	52.08	38.05	65.99	55.99	-13.91	-17.94
2	0.17425	0.21	43.25	28.63	43.46	28.84	64.76	54.76	-21.29	-25.91
3	0.32638	0.24	43.87	35.44	44.11	35.68	59.54	49.54	-15.43	-13.86
4	0.62752	0.27	37.08	26.77	37.35	27.04	56.00	46.00	-18.65	-18.96
5	0.74429	0.28	34.58	24.52	34.86	24.80	56.00	46.00	-21.14	-21.20
6	1.98992	0.40	36.64	29.29	37.04	29.69	56.00	46.00	-18.96	-16.31

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

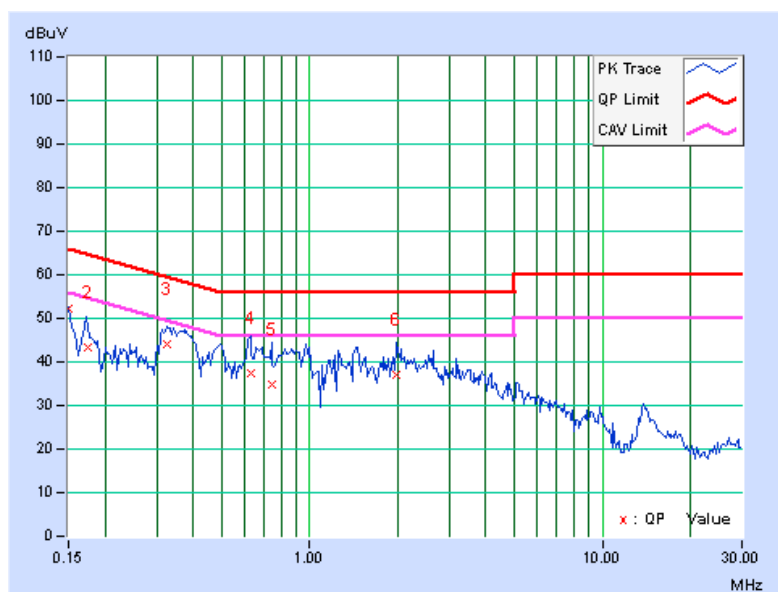

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1	-	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	-	Fixed point-to-point Access Point	1 Watt (30 dBm)
	-	Indoor Access Point	1 Watt (30 dBm)
	-	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	---		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	$\sqrt{\quad}$		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.


4.3.2 Test Setup

For Power Output Measurement


For 802.11a, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT20), 802.11ac (VHT40)

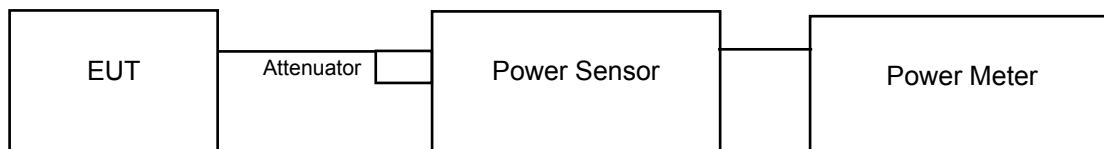

For 802.11ac (VHT80)



For Occupied Bandwidth



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

FOR AVERAGE POWER MEASUREMENT

For 802.11a, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT20), 802.11ac (VHT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW $\geq$ 3 MHz
- 5) Number of points in sweep $\geq$ 2 Span / RBW.
- 6) Sweep time $\leq$ (number of points in sweep) * T
- 7) Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- 8) Detector = RMS.
- 9) Trace mode = max hold.
- 10) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

FOR OCCUPIED BANDWIDTH

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300 kHz RBW and 1MHz VBW. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	20.27	21.23	21.21	21.54	513.844	27.11	30	Pass
157	5785	22.88	23.77	24.01	23.79	923.421	29.65	30	Pass
165	5825	20.03	21.15	21.62	21.33	512.052	27.09	30	Pass

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	20.25	21.54	21.50	21.66	536.295	27.29	30	Pass
157	5785	22.94	23.87	24.00	23.87	935.540	29.71	30	Pass
165	5825	19.84	21.28	21.73	21.50	520.849	27.17	30	Pass

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	15.95	16.21	16.15	16.09	162.992	22.12	30	Pass
159	5795	20.20	21.69	21.58	21.78	546.825	27.38	30	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	13.82	14.82	15.04	15.16	119.163	20.76	30	Pass

Beamforming_NSS1 Mode

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	19.95	20.78	20.92	21.18	473.344	26.75	28.37	Pass
157	5785	21.92	22.77	22.61	22.32	697.829	28.44	28.47	Pass
165	5825	20.93	22.25	22.59	22.52	651.961	28.14	28.37	Pass

Note:

5745MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.63-6) = 28.37\text{dBm}$.

5785MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.53-6) = 28.47\text{dBm}$.

5825MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.63-6) = 28.37\text{dBm}$.

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	15.42	16.39	16.54	16.85	171.884	22.35	28.47	Pass
159	5795	20.71	22.18	22.44	22.43	633.330	28.02	28.37	Pass

Note:

5755MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.53-6) = 28.47\text{dBm}$.

5795MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.63-6) = 28.37\text{dBm}$.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	14.77	15.90	16.01	16.32	151.654	21.81	28.47	Pass

Note:

5775MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(7.53-6) = 28.47\text{dBm}$.

Beamforming_NSS2 Mode

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	20.33	21.35	21.46	21.66	530.867	27.25	30	Pass
157	5785	22.91	23.75	23.93	23.84	921.846	29.65	30	Pass
165	5825	21.35	22.78	23.03	22.97	725.191	28.60	30	Pass

Note:

5745MHz: Directional gain = $1.61\text{dBi} + 10\log(4/2) = 4.62\text{dBi} < 6\text{dBi}$, so the power limit no need to reduced.

5785MHz: Directional gain = $1.51\text{dBi} + 10\log(4/2) = 4.52\text{dBi} < 6\text{dBi}$, so the power limit no need to reduced.

5825MHz: Directional gain = $1.61\text{dBi} + 10\log(4/2) = 4.62\text{dBi} < 6\text{dBi}$, so the power limit no need to reduced.

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	15.88	16.85	17.18	17.24	192.349	22.84	30	Pass
159	5795	21.21	22.67	22.87	22.92	706.583	28.49	30	Pass

Note:

5755MHz: Directional gain = $1.51\text{dBi} + 10\log(4/2) = 4.52\text{dBi} < 6\text{dBi}$, so the power limit no need to reduced.

5795MHz: Directional gain = $1.61\text{dBi} + 10\log(4/2) = 4.62\text{dBi} < 6\text{dBi}$, so the power limit no need to reduced.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	13.82	14.82	15.04	15.16	119.163	20.76	30	Pass

Note:

5775MHz: Directional gain = $1.51\text{dBi} + 10\log(4/2) = 4.52\text{dBi} < 6\text{dBi}$, so the power limit no need to reduced.

Occupied Bandwidth:

CDD Mode

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
149	5745	16.43	16.43	16.43	16.43
157	5785	16.44	17.16	16.92	16.56
165	5825	16.44	16.44	16.44	16.44

802.11n (HT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
149	5745	16.44	17.64	17.64	17.64
157	5785	16.44	16.68	18.00	17.64
165	5825	16.44	16.44	17.64	17.64

802.11n (HT40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
151	5755	36.24	36.24	36.24	36.24
159	5795	36.24	36.24	36.24	36.12


802.11ac (VHT80)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
155	5775	75.84	75.84	75.60	75.60


Spectrum Plot of Worst Value

802.11a

802.11n (HT20)

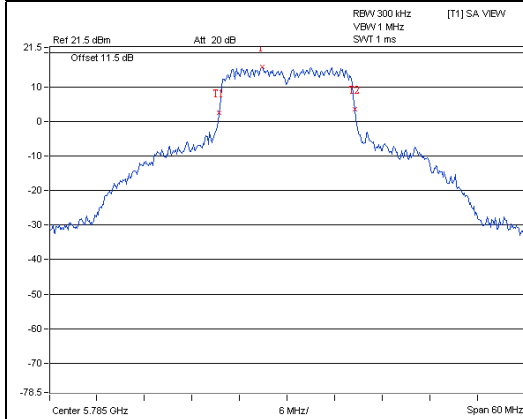


A D T

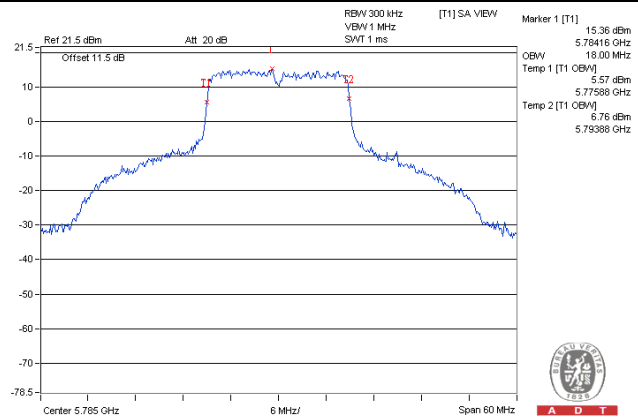


A D T

802.11n (HT40)

802.11ac (VHT80)

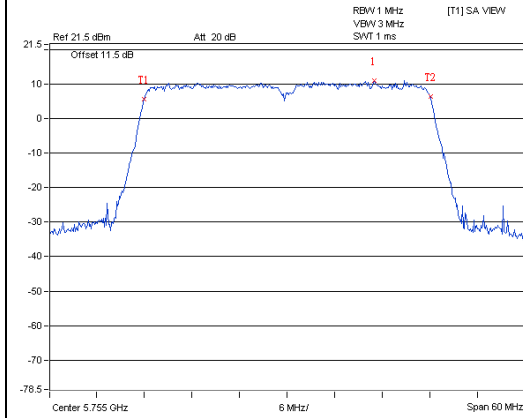

A D T

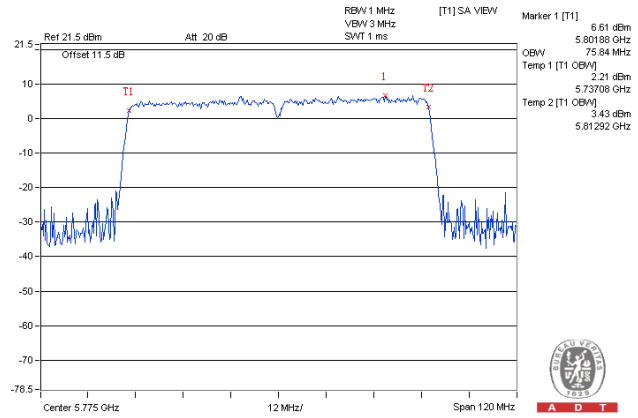

A D T

Beamforming_NSS1 Mode

802.11n (HT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
149	5745	17.65	17.65	17.65	17.57
157	5785	17.64	17.64	17.64	17.64
165	5825	17.64	17.64	17.64	17.64

802.11n (HT40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
151	5755	36.24	36.24	36.24	36.24
159	5795	36.24	36.36	36.36	36.24

802.11ac (VHT80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
155	5775	75.84	75.84	75.60	75.60




A D T

Spectrum Plot of Worst Value


802.11n (HT20)

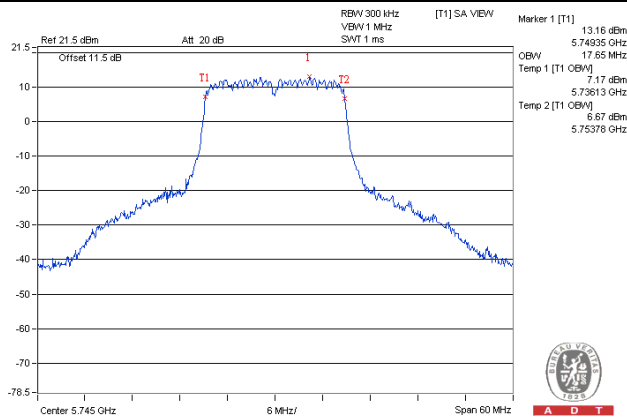

802.11n (HT40)

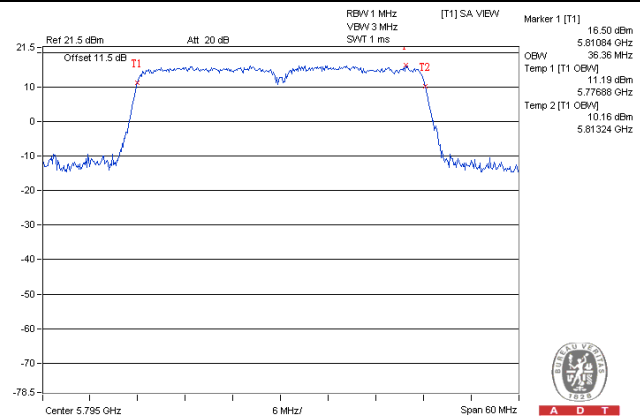

802.11ac (VHT80)

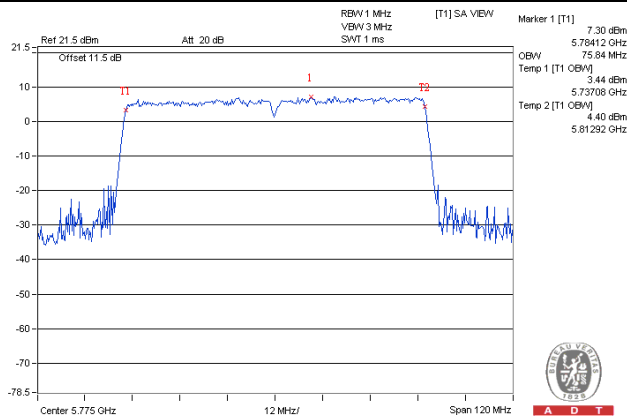

Beamforming_NSS2 Mode

802.11n (HT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
149	5745	17.74	17.74	17.65	17.57
157	5785	17.88	18.12	17.88	17.64
165	5825	17.64	17.88	17.88	17.64

802.11n (HT40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
151	5755	36.36	36.24	36.24	36.24
159	5795	36.48	36.48	36.36	36.24


802.11ac (VHT80)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
155	5775	75.84	75.84	75.60	75.60


Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

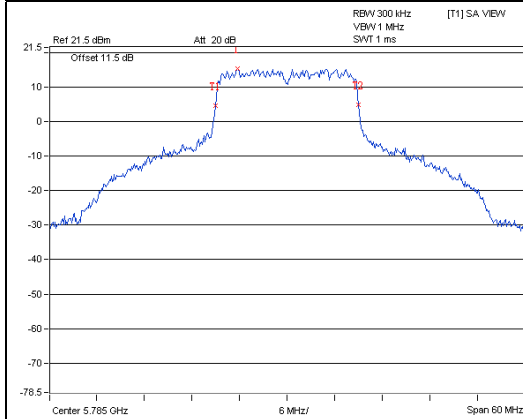


A D T

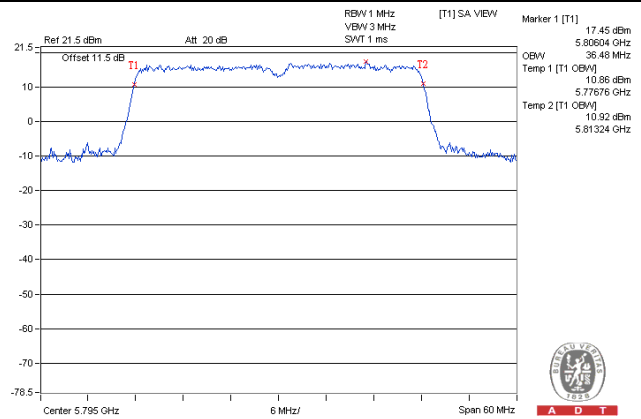

A D T

802.11ac (VHT80)

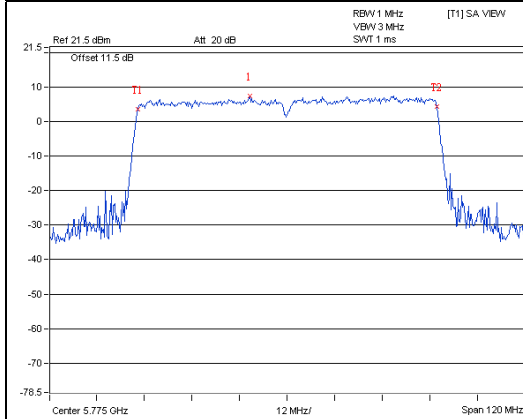


A D T

4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1	-	Outdoor Access Point	17dBm/ MHz
	-	Fixed point-to-point Access Point	
	-	Indoor Access Point	11dBm/ MHz
	-	Mobile and Portable client device	
U-NII-2A	---		11dBm/ MHz
U-NII-2C	---		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

For U-NII-3 band:

Duty cycle >98%

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value

Duty cycle <98%

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{kHz}/300\text{kHz})$
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value and add $10 \log (1/\text{duty cycle})$

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as item 4.3.6.

4.4.7 Test Results

For U-NII-3 Band

CDD Mode

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	0.62	2.84	6.02	0.18	9.04	28.37	Pass
	157	5785	0.72	2.94	6.02	0.18	9.14	28.47	Pass
	165	5825	0.74	2.96	6.02	0.18	9.16	28.37	Pass
1	149	5745	0.37	2.59	6.02	0.18	8.79	28.37	Pass
	157	5785	2.82	5.04	6.02	0.18	11.24	28.47	Pass
	165	5825	-0.64	1.58	6.02	0.18	7.78	28.37	Pass
2	149	5745	0.67	2.89	6.02	0.18	9.09	28.37	Pass
	157	5785	3.04	5.26	6.02	0.18	11.46	28.47	Pass
	165	5825	-0.04	2.18	6.02	0.18	8.38	28.37	Pass
3	149	5745	-0.18	2.04	6.02	0.18	8.24	28.37	Pass
	157	5785	1.90	4.12	6.02	0.18	10.32	28.47	Pass
	165	5825	-0.97	1.25	6.02	0.18	7.45	28.37	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5745MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (7.63 - 6) = 28.37\text{dBm}$.
5785MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (7.53 - 6) = 28.47\text{dBm}$.
5825MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (7.63 - 6) = 28.37\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	0.99	3.21	6.02	0.16	9.39	28.37	Pass
	157	5785	0.86	3.08	6.02	0.16	9.26	28.47	Pass
	165	5825	0.79	3.01	6.02	0.16	9.19	28.37	Pass
1	149	5745	-0.70	1.52	6.02	0.16	7.70	28.37	Pass
	157	5785	1.76	3.98	6.02	0.16	10.16	28.47	Pass
	165	5825	-0.56	1.66	6.02	0.16	7.84	28.37	Pass
2	149	5745	0.73	2.95	6.02	0.16	9.13	28.37	Pass
	157	5785	2.86	5.08	6.02	0.16	11.26	28.47	Pass
	165	5825	0.07	2.29	6.02	0.16	8.47	28.37	Pass
3	149	5745	-0.49	1.73	6.02	0.16	7.91	28.37	Pass
	157	5785	1.72	3.94	6.02	0.16	10.12	28.47	Pass
	165	5825	-0.88	1.34	6.02	0.16	7.52	28.37	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5745MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (7.63 - 6) = 28.37\text{dBm}$.
5785MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (7.53 - 6) = 28.47\text{dBm}$.
5825MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (7.63 - 6) = 28.37\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	151	5755	-8.19	-5.97	6.02	0.15	0.20	28.47	Pass
	159	5795	-2.93	-0.71	6.02	0.15	5.46	28.37	Pass
1	151	5755	-9.07	-6.85	6.02	0.15	-0.68	28.47	Pass
	159	5795	-3.87	-1.65	6.02	0.15	4.52	28.37	Pass
2	151	5755	-7.89	-5.67	6.02	0.15	0.50	28.47	Pass
	159	5795	-2.93	-0.71	6.02	0.15	5.46	28.37	Pass
3	151	5755	-8.69	-6.47	6.02	0.15	-0.30	28.47	Pass
	159	5795	-4.25	-2.03	6.02	0.15	4.14	28.37	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5755MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.53-6) = 28.47\text{dBm}$.
5795MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.63-6) = 28.37\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	155	5775	-12.90	-10.68	6.02	0.28	-4.38	28.47	Pass
1	155	5775	-14.27	-12.05	6.02	0.28	-5.75	28.47	Pass
2	155	5775	-13.08	-10.86	6.02	0.28	-4.56	28.47	Pass
3	155	5775	-13.52	-11.30	6.02	0.28	-5.00	28.47	Pass


Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5775MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.53-6) = 28.47\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.


Spectrum Plot of Worst Value

802.11a

802.11n (HT20)

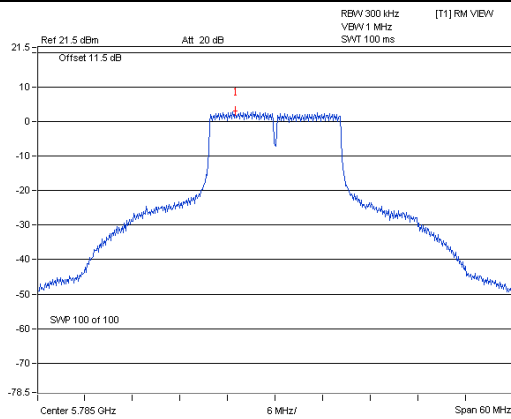


A D T

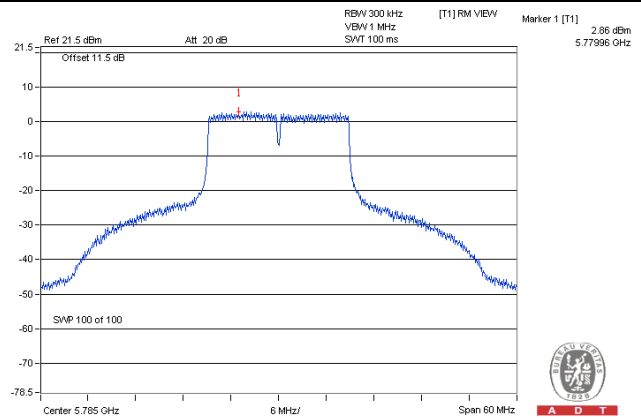


A D T

802.11n (HT40)

802.11ac (VHT80)

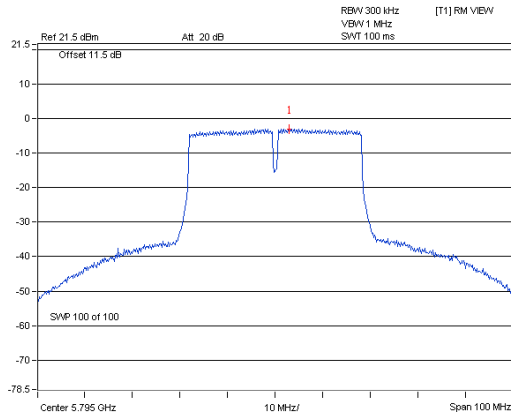

A D T

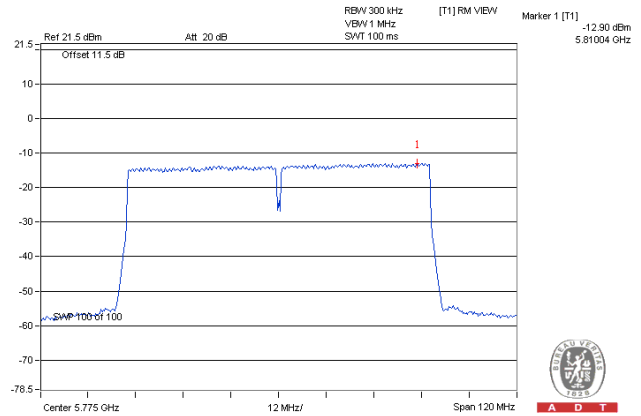

A D T

Beamforming_NSS1 Mode

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	0.14	2.36	6.02	-	8.38	28.37	Pass
	157	5785	1.57	3.79	6.02	-	9.81	28.47	Pass
	165	5825	1.53	3.75	6.02	-	9.77	28.37	Pass
1	149	5745	-0.14	2.08	6.02	-	8.10	28.37	Pass
	157	5785	1.52	3.74	6.02	-	9.76	28.47	Pass
	165	5825	1.64	3.86	6.02	-	9.88	28.37	Pass
2	149	5745	0.23	2.45	6.02	-	8.47	28.37	Pass
	157	5785	1.57	3.79	6.02	-	9.81	28.47	Pass
	165	5825	1.11	3.33	6.02	-	9.35	28.37	Pass
3	149	5745	-1.05	1.17	6.02	-	7.19	28.37	Pass
	157	5785	0.19	2.41	6.02	-	8.43	28.47	Pass
	165	5825	0.06	2.28	6.02	-	8.30	28.37	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5745MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.63-6) = 28.37\text{dBm}$.
5785MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.53-6) = 28.47\text{dBm}$.
5825MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.63-6) = 28.37\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	151	5755	-8.12	-5.90	6.02	0.17	0.29	28.47	Pass
	159	5795	0.59	2.81	6.02	0.17	9.00	28.37	Pass
1	151	5755	-8.01	-5.79	6.02	0.17	0.40	28.47	Pass
	159	5795	-2.35	-0.13	6.02	0.17	6.06	28.37	Pass
2	151	5755	-7.85	-5.63	6.02	0.17	0.56	28.47	Pass
	159	5795	-2.39	-0.17	6.02	0.17	6.02	28.37	Pass
3	151	5755	-8.82	-6.60	6.02	0.17	-0.41	28.47	Pass
	159	5795	-3.62	-1.40	6.02	0.17	4.79	28.37	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5755MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.53-6) = 28.47\text{dBm}$.
5795MHz: Directional gain = $1.61\text{dBi} + 10\log(4) = 7.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.63-6) = 28.37\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	155	5775	-11.88	-9.66	6.02	0.31	-3.33	28.47	Pass
1	155	5775	-12.32	-10.10	6.02	0.31	-3.77	28.47	Pass
2	155	5775	-12.10	-9.88	6.02	0.31	-3.55	28.47	Pass
3	155	5775	-12.64	-10.42	6.02	0.31	-4.09	28.47	Pass


Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5775MHz: Directional gain = $1.51\text{dBi} + 10\log(4) = 7.53\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.53-6) = 28.47\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.


Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

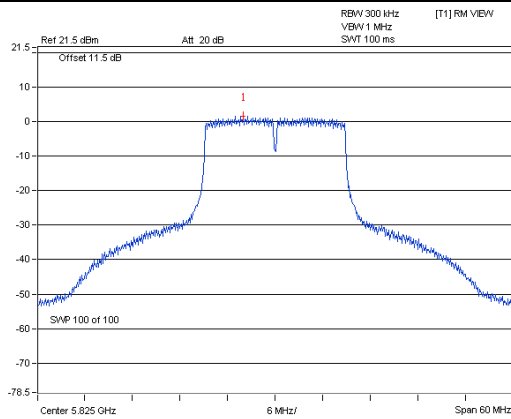


A D T

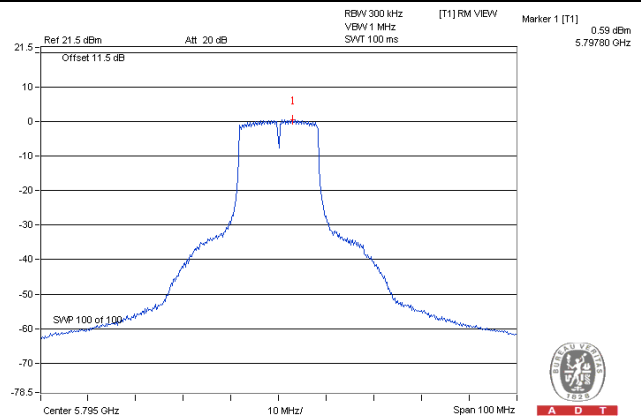

A D T

802.11ac (VHT80)

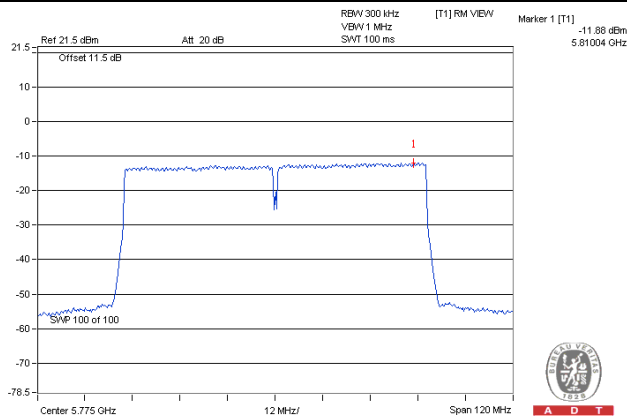

A D T

Beamforming_NSS2 Mode

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	1.06	3.28	6.02	-	9.30	30	Pass
	157	5785	2.34	4.56	6.02	-	10.58	30	Pass
	165	5825	1.95	4.17	6.02	-	10.19	30	Pass
1	149	5745	1.39	3.61	6.02	-	9.63	30	Pass
	157	5785	2.77	4.99	6.02	-	11.01	30	Pass
	165	5825	2.69	4.91	6.02	-	10.93	30	Pass
2	149	5745	1.73	3.95	6.02	-	9.97	30	Pass
	157	5785	3.09	5.31	6.02	-	11.33	30	Pass
	165	5825	2.27	4.49	6.02	-	10.51	30	Pass
3	149	5745	0.55	2.77	6.02	-	8.79	30	Pass
	157	5785	1.71	3.93	6.02	-	9.95	30	Pass
	165	5825	1.13	3.35	6.02	-	9.37	30	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5745MHz: Directional gain = $1.61\text{dBi} + 10\log(4/2) = 4.62\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduced.
5785MHz: Directional gain = $1.51\text{dBi} + 10\log(4/2) = 4.52\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduced.
5825MHz: Directional gain = $1.61\text{dBi} + 10\log(4/2) = 4.62\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	151	5755	-7.46	-5.24	6.02	0.17	0.95	30	Pass
	159	5795	-1.93	0.29	6.02	0.17	6.48	30	Pass
1	151	5755	-6.81	-4.59	6.02	0.17	1.60	30	Pass
	159	5795	-1.46	0.76	6.02	0.17	6.95	30	Pass
2	151	5755	-6.59	-4.37	6.02	0.17	1.82	30	Pass
	159	5795	-1.24	0.98	6.02	0.17	7.17	30	Pass
3	151	5755	-7.87	-5.65	6.02	0.17	0.54	30	Pass
	159	5795	-2.71	-0.49	6.02	0.17	5.70	30	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5755MHz: Directional gain = $1.51\text{dBi} + 10\log(4/2) = 4.52\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduced.
5795MHz: Directional gain = $1.61\text{dBi} + 10\log(4/2) = 4.62\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=4) dB	Duty Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	155	5775	-12.02	-9.80	6.02	0.31	-3.47	30	Pass
1	155	5775	-11.60	-9.38	6.02	0.31	-3.05	30	Pass
2	155	5775	-11.58	-9.36	6.02	0.31	-3.03	30	Pass
3	155	5775	-12.24	-10.02	6.02	0.31	-3.69	30	Pass


Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5775MHz: Directional gain = $1.51\text{dBi} + 10\log(4/2) = 4.52\text{dBi} < 6\text{dBi}$, so the power density limit no need to reduced.
- Refer to section 3.3 for duty cycle spectrum plot.


Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

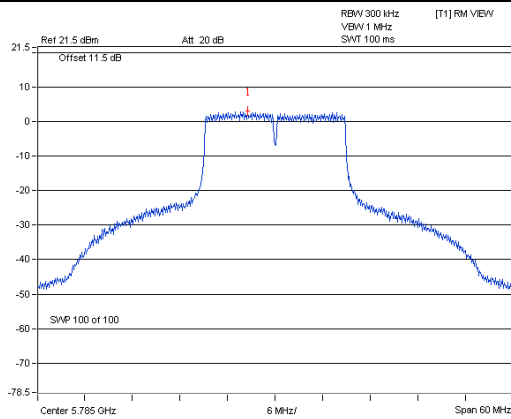


A D T

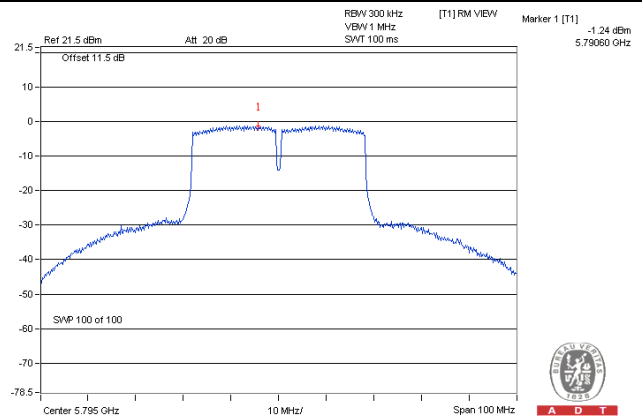

A D T

802.11ac (VHT80)

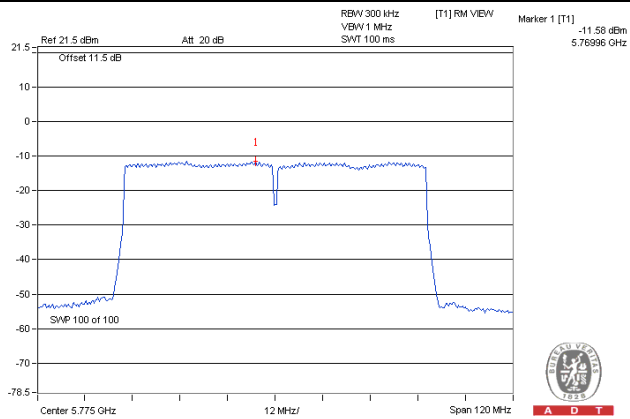


A D T

4.5 Frequency Stability

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

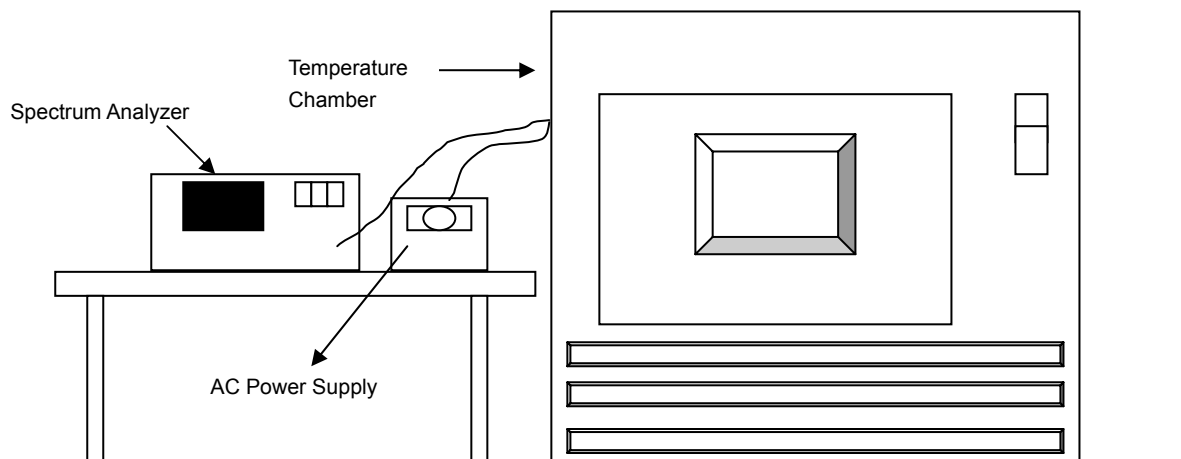

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5 and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5825MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5825.0099	0.00017	5825.012	0.00021	5825.009	0.00015	5825.0068	0.00012
40	120	5825.0183	0.00031	5825.0196	0.00034	5825.0171	0.00029	5825.0201	0.00035
30	120	5825.0072	0.00012	5825.0089	0.00015	5825.0122	0.00021	5825.0069	0.00012
20	120	5825.0149	0.00026	5825.0169	0.00029	5825.0162	0.00028	5825.017	0.00029
10	120	5824.9904	-0.00016	5824.9908	-0.00016	5824.9902	-0.00017	5824.9886	-0.00020
0	120	5825.0062	0.00011	5825.0055	0.00009	5825.0055	0.00009	5825.0059	0.00010


Frequency Stability Versus Temp.									
Operating Frequency: 5825MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5825.0144	0.00025	5825.0159	0.00027	5825.0169	0.00029	5825.0174	0.00030
	120	5825.0149	0.00026	5825.0169	0.00029	5825.0162	0.00028	5825.017	0.00029
	102	5825.0143	0.00025	5825.0168	0.00029	5825.0163	0.00028	5825.0162	0.00028

4.6 6dB Bandwidth Measurement

4.6.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.6.2 Test Setup

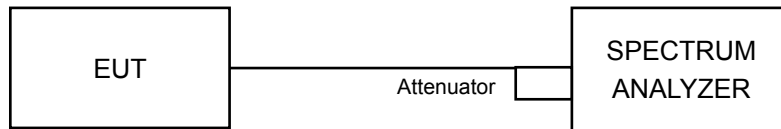

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

CDD Mode

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	16.35	16.31	16.36	16.35	0.5	Pass
157	5785	16.37	16.35	16.37	16.37	0.5	Pass
165	5825	16.37	16.38	16.40	16.38	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	16.38	17.20	17.60	17.22	0.5	Pass
157	5785	16.37	16.37	17.59	17.23	0.5	Pass
165	5825	16.37	16.37	17.63	17.58	0.5	Pass

802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	36.08	36.02	35.30	35.51	0.5	Pass
159	5795	35.88	35.25	35.30	35.85	0.5	Pass



802.11ac (VHT80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	76.03	76.43	76.44	76.01	0.5	Pass

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

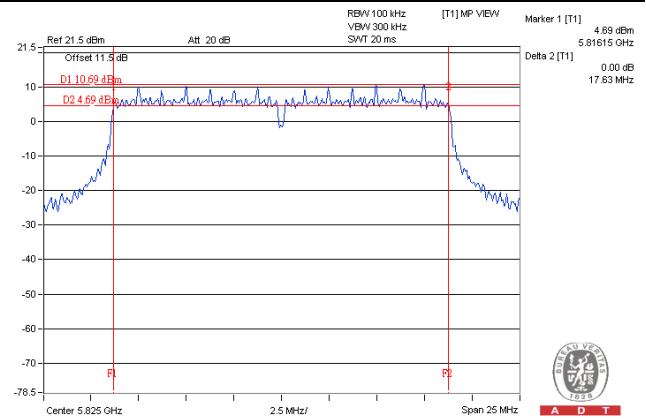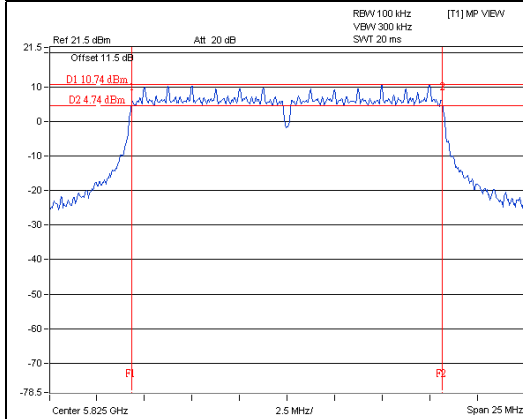

802.11n (HT40)

802.11ac (VHT80)

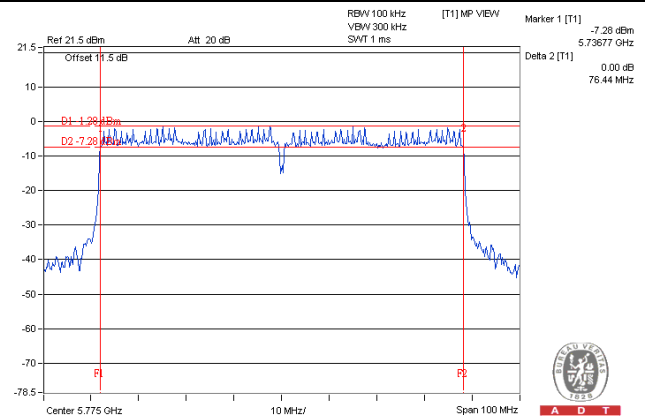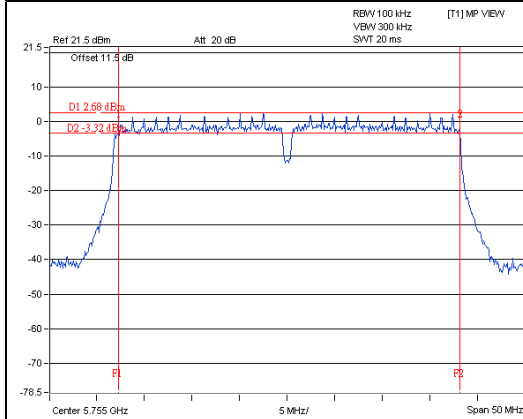

Beamforming_NSS1 Mode

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	17.21	17.58	17.29	17.60	0.5	Pass
157	5785	17.21	17.56	17.63	17.57	0.5	Pass
165	5825	17.22	16.97	17.63	17.57	0.5	Pass

802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	36.05	35.27	35.27	35.27	0.5	Pass
159	5795	35.40	35.79	35.25	35.40	0.5	Pass



802.11ac (VHT80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	76.04	76.43	76.43	75.99	0.5	Pass


Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

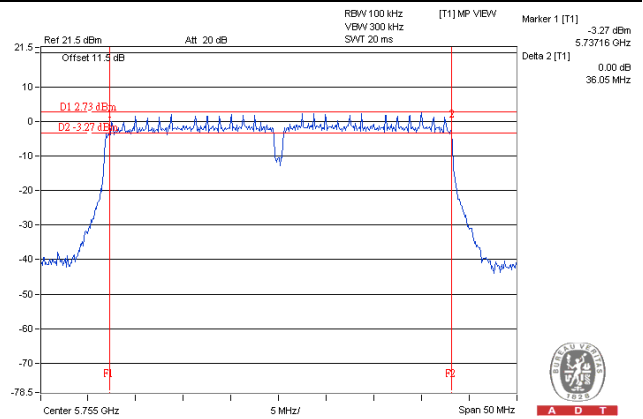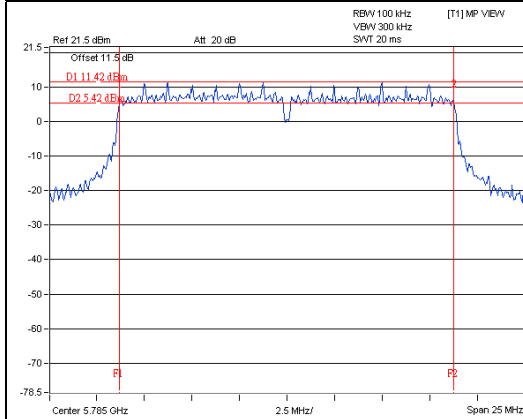

802.11ac (VHT80)

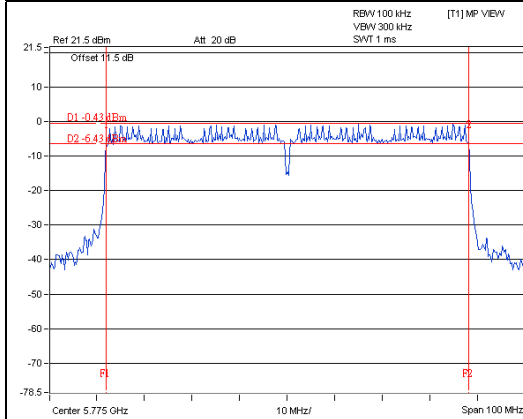

Beamforming_NSS2 Mode

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	17.58	17.22	17.34	17.20	0.5	Pass
157	5785	16.97	17.21	17.61	17.23	0.5	Pass
165	5825	17.58	16.63	17.61	17.57	0.5	Pass

802.11n (HT40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	36.40	35.35	35.46	35.99	0.5	Pass
159	5795	36.01	35.23	35.25	35.36	0.5	Pass


802.11ac (VHT80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	76.03	76.43	76.44	76.01	0.5	Pass


Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

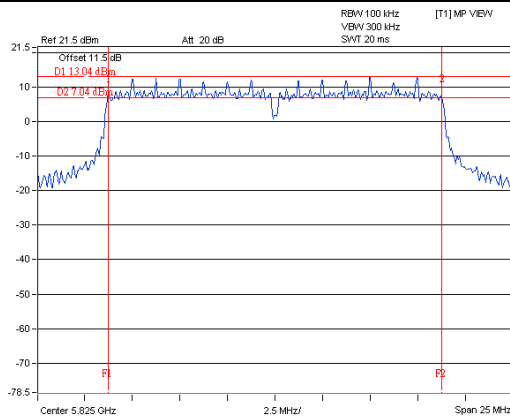


A D T

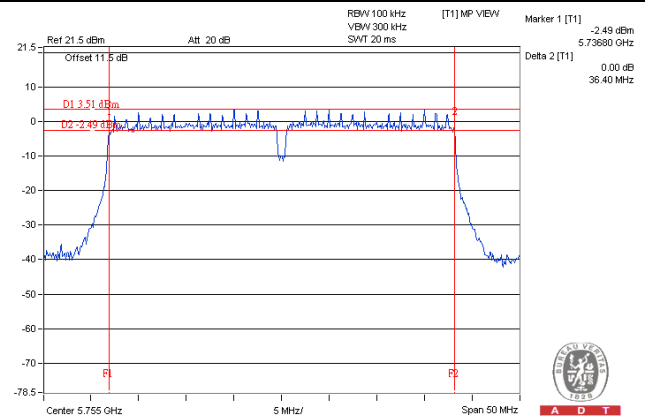

A D T

802.11ac (VHT80)

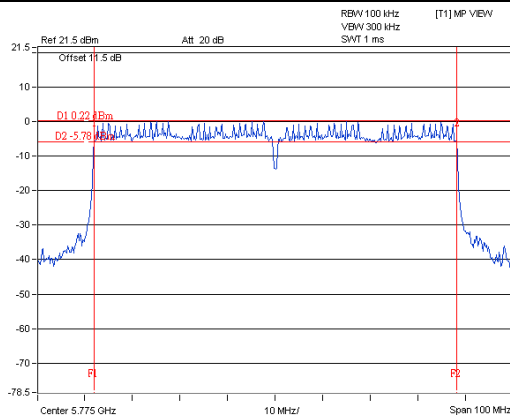

A D T

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---