

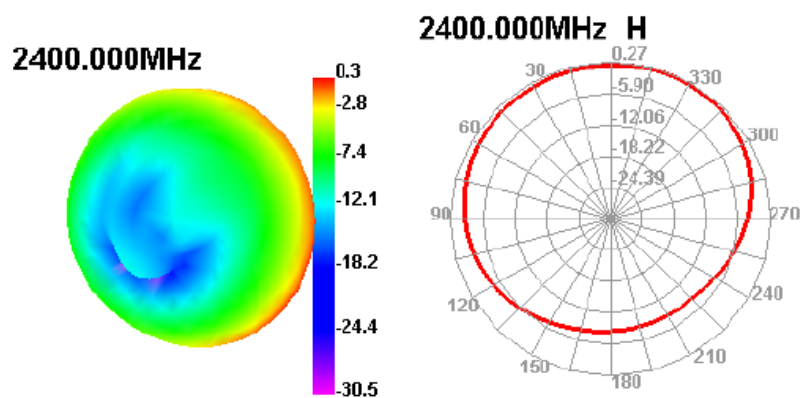



2.4G PCB Antenna Spe.

Electrical Specifications	
Frequency Range	2400–2500HZ
VSWR	≤ 2.0
GAIN	2.4G $\leq$ 2.2DBI
Radiation	OMNI
Polarizatin	LINEAR
Input Impedance	50 Ω
Mechanical Specifications	
Input connector	pcb
Working Temperature	-30°C~+80°C
Working Humidity	40~85%

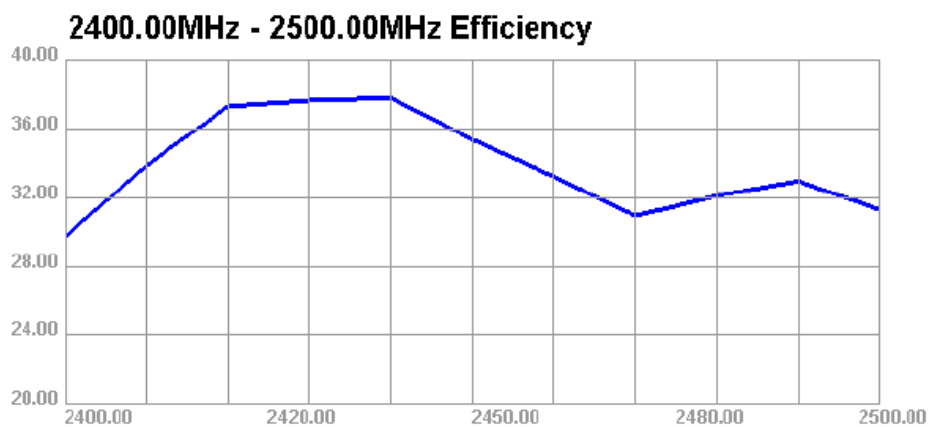

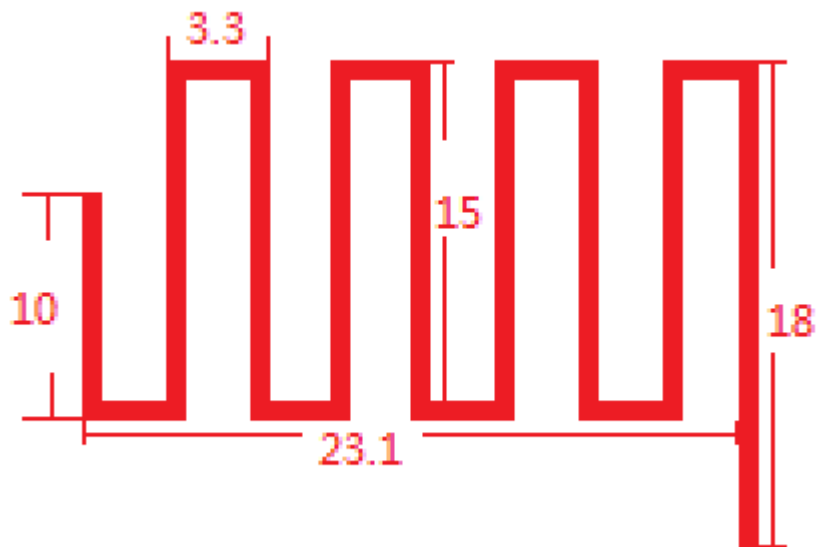


2400.000MHz E1

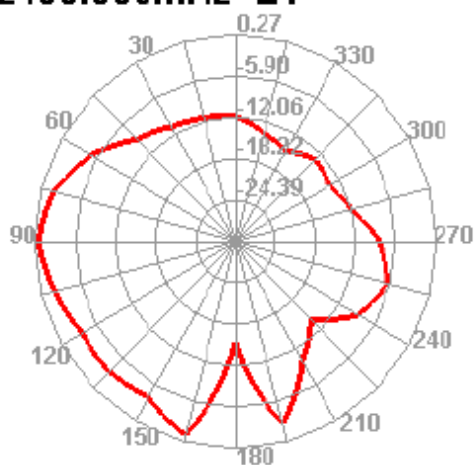


2400.000MHz E2




2450.000MHz

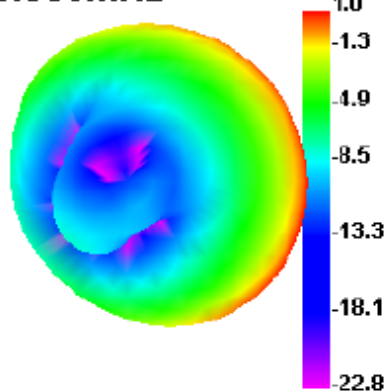


2450.000MHz H

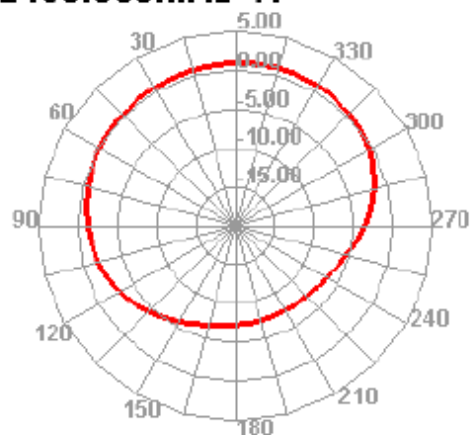


2450.000MHz E1

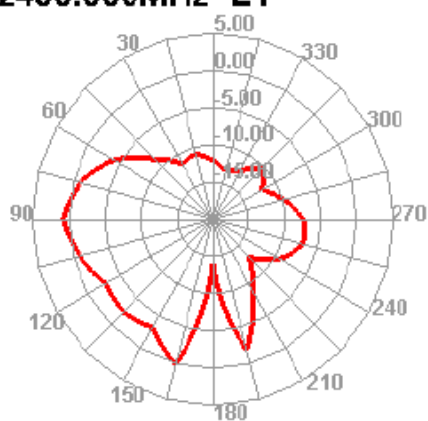


2450.000MHz E2

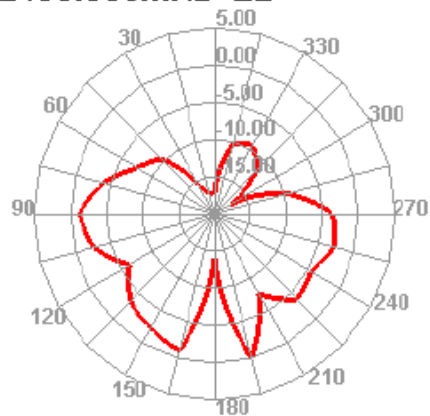


2500.000MHz

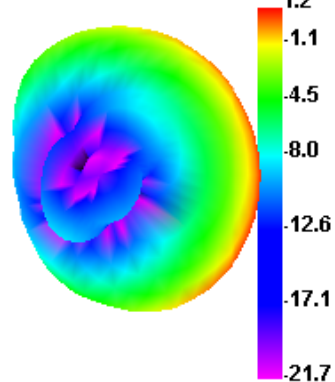

2500.000MHz H

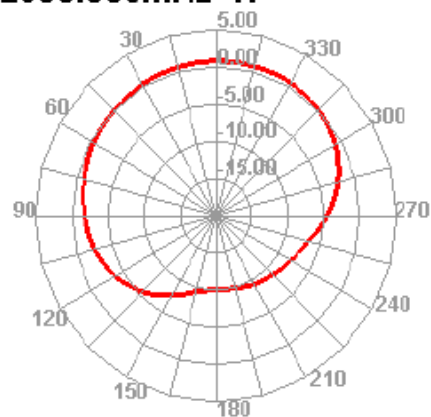

2500.000MHz E1

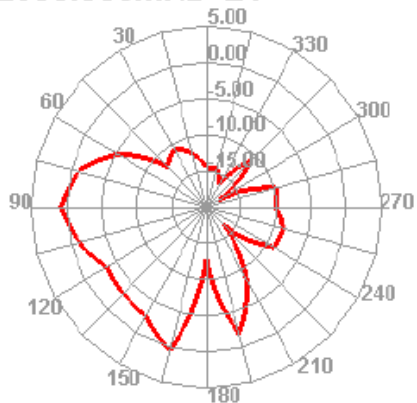

2500.000MHz E2

