



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

802.11a/g/n/ac WLAN + Bluetooth PCI-E Custom Combination Card

MODEL NUMBER: BCM943602CS

FCC ID: QDS-BRCM1080

REPORT NUMBER: 13U16561-66, Revision C

ISSUE DATE: JULY 22, 2014

Prepared for
BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	06/04/14	Initial Issue	F. Ibrahim
A	06/05/14	Revised section 5.3 Changed "DTS" to "UNII-3" throughout the report Revised 8.27.1 Revised the power and PSD limits to 30 dBm and 30 dBm/500 kHz for the portion of the straddle channel that lie in UNN-3 bands throughout the rpeort	F. Ibrahim
B	06/16/14	Removed Regression Data	F. Ibrahim
C	07/22/14	Added Regression Data in Appendix A and updated section 5.2	J. Wu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	9
2. TEST METHODOLOGY	10
3. FACILITIES AND ACCREDITATION	10
4. CALIBRATION AND UNCERTAINTY	10
4.1. MEASURING INSTRUMENT CALIBRATION	10
4.2. SAMPLE CALCULATION	10
4.3. MEASUREMENT UNCERTAINTY.....	11
5. EQUIPMENT UNDER TEST	12
5.1. DESCRIPTION OF EUT	12
5.2. MAXIMUM OUTPUT POWER.....	12
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	17
5.4. SOFTWARE AND FIRMWARE.....	17
5.5. WORST-CASE CONFIGURATION AND MODE.....	18
5.6. DESCRIPTION OF TEST SETUP.....	19
6. TEST AND MEASUREMENT EQUIPMENT	21
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	22
7.1. ON TIME AND DUTY CYCLE RESULTS.....	22
7.2. DUTY CYCLE PLOTS	23
7.3. MEASUREMENT METHODS	32
8. ANTENNA PORT TEST RESULTS	33
8.1. 802.11a LEGACY MODE IN THE 5.2 GHz BAND.....	33
8.1.1. OUTPUT POWER	33
8.2. 802.11n HT20 CDD 3TX MODE IN THE 5.2 GHz BAND	35
8.2.1. 26 dB BANDWIDTH.....	35
8.2.2. OUTPUT POWER AND PPSD	41
8.3. 802.11n HT20 STBC 3TX MODE IN THE 5.2 GHz BAND	48
8.3.1. 26 dB BANDWIDTH.....	48
8.3.2. OUTPUT POWER AND PPSD	54
8.4. 802.11n HT20 BF 3TX MODE IN THE 5.2GHz BAND	61
8.4.1. OUTPUT POWER AND PPSD	61
8.5. 802.11n HT40 1TX MODE IN THE 5.2 GHz BAND.....	68
8.5.1. OUTPUT POWER	68
8.6. 802.11n HT40 CDD 3TX MODE IN THE 5.2 GHz BAND	70
8.6.1. 26 dB BANDWIDTH.....	70
8.6.2. OUTPUT POWER AND PPSD	74

8.7.	802.11n HT40 BF 3TX MODE IN THE 5.2 GHz BAND	79
8.7.1.	26 dB BANDWIDTH.....	79
8.7.2.	OUTPUT POWER AND PPSD	83
8.8.	802.11ac VHT80 1TX MODE IN THE 5.2GHz BAND.....	88
8.8.1.	OUTPUT POWER	88
8.9.	802.11ac VHT80 CDD 3Tx MODE IN THE 5.2 GHz BAND.....	90
8.9.1.	26 dB BANDWIDTH.....	90
8.9.2.	OUTPUT POWER AND PPSD	93
8.10.	802.11ac VHT80 BF 3TX MODE IN THE 5.2 GHz BAND.....	97
8.10.1.	26 dB BANDWIDTH	97
8.10.2.	OUTPUT POWER AND PPSD	100
8.11.	802.11a LEGACY MODE IN THE 5.3GHz BAND	104
8.11.1.	26 dB BANDWIDTH	104
8.11.2.	99% BANDWIDTH	106
8.11.3.	OUTPUT POWER.....	108
8.12.	802.11n HT20 CDD 3TX MODE IN THE 5.3 GHz Band	110
8.12.1.	26 dB BANDWIDTH	110
8.12.2.	99% BANDWIDTH	116
8.12.3.	OUTPUT POWER AND PPSD	122
8.13.	802.11n HT20 STBC 3TX MODE IN TH 5.3 GHz Band.....	129
8.13.1.	26 dB BANDWIDTH	129
8.13.2.	99% BANDWIDTH	135
8.13.3.	OUTPUT POWER AND PPSD	141
8.14	802.11n HT20 BF MODE IN THE 5.3GHz BAND.....	148
8.14.1.	OUTPUT POWER AND PPSD	148
8.15.	802.11n HT40 1TX MODE IN THE 5.3GHz BAND	155
8.15.1.	OUTPUT POWER	155
8.16.	802.11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND.....	157
8.16.1.	26 dB BANDWIDTH	157
8.16.2.	99% BANDWIDTH	161
8.16.3.	OUTPUT POWER AND PPSD	165
8.17.	802.11n HT40 BF 3TX MODE IN THE 5.3 GHz BAND.....	170
8.17.1.	26 dB BANDWIDTH	170
8.17.2.	99% BANDWIDTH	174
8.17.3.	OUTPUT POWER AND PPSD	178
8.18.	802.11ac VHT80 1TX MODE IN THE 5.3GHz BAND	183
8.18.1.	OUTPUT POWER	183
8.19.	802.11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND.....	185
8.19.1.	26 dB BANDWIDTH	185
8.19.2.	99% BANDWIDTH	188
8.19.3.	OUTPUT POWER AND PPSD	191
8.20.	802.11ac VHT80 BF 3TX MODE IN THE 5.3 GHz BAND.....	195
8.20.1.	26 dB BANDWIDTH	195
8.20.2.	99% BANDWIDTH	198
8.20.3.	OUTPUT POWER AND PPSD	201
8.21.	802.11a LEGACY MODE IN THE 5.6GHz BAND	205

8.21.1.	26 dB BANDWIDTH	205
8.21.2.	99% BANDWIDTH	207
8.21.3.	OUTPUT POWER	209
8.22.	<i>802.11n HT20 CDD 3TX MODE IN THE 5.6 GHz BAND.....</i>	<i>211</i>
8.22.1.	26 dB BANDWIDTH	211
8.22.2.	99% BANDWIDTH	217
8.22.3.	OUTPUT POWER AND PPSD	223
8.23.	<i>802.11n HT20 STBC 3TX MODE IN THE 5.6 GHz BAND.....</i>	<i>230</i>
8.23.1.	26 dB BANDWIDTH	230
8.23.2.	99% BANDWIDTH	236
8.23.3.	OUTPUT POWER AND PPSD	242
8.24.	<i>802.11n HT20 BF 3TX MODE IN THE 5.6GHz BAND.....</i>	<i>249</i>
8.24.1.	OUTPUT POWER AND PPSD	249
8.25.	<i>802.11n HT20 CDD 3TX MODE 5.6 GHz BAND, CHANNEL 144</i>	<i>256</i>
8.25.1.	26 dB BANDWIDTH	256
8.25.2.	99% BANDWIDTH	259
8.25.3.	OUTPUT POWER AND PPSD	262
8.25.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	269
8.26.	<i>802.11n HT20 STBC 3TX MODE 5.6 GHz BAND, CHANNEL 144.....</i>	<i>270</i>
8.26.1.	26 dB BANDWIDTH	270
8.26.2.	99% BANDWIDTH	272
8.26.3.	OUTPUT POWER AND PPSD	275
8.26.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	282
8.27	<i>802.11n HT20 BF MODE IN THE 5.6GHz BAND, CHANNEL 144.....</i>	<i>283</i>
8.27.1.	OUTPUT POWER AND PPSD	283
8.27.2.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	290
8.28.	<i>802.11n HT40 1TX MODE IN THE 5.6GHz BAND</i>	<i>291</i>
8.28.1.	OUTPUT POWER	291
8.29.	<i>802.11n HT40 CDD 3TX MODE IN THE 5.6 GHz BAND.....</i>	<i>293</i>
8.29.1.	26 dB BANDWIDTH	293
8.29.2.	99% BANDWIDTH	299
8.29.3.	OUTPUT POWER AND PPSD	305
8.30.	<i>802.11n HT40 BF 3TX MODE IN THE 5.6 GHz BAND.....</i>	<i>312</i>
8.30.1.	26 dB BANDWIDTH	312
8.30.2.	99% BANDWIDTH	318
8.30.3.	OUTPUT POWER AND PPSD	324
8.31.	<i>802.11n HT40 CDD 3TX MODE 5.6 GHz BAND, CHANNEL 142</i>	<i>331</i>
8.31.1.	26 dB BANDWIDTH	331
8.31.2.	99% BANDWIDTH	334
8.31.3.	OUTPUT POWER AND PPSD	337
8.31.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	344
8.32.	<i>802.11n HT40 BF 3TX MODE 5.6 GHz BAND, CHANNEL 142.....</i>	<i>345</i>
8.32.1.	26 dB BANDWIDTH	345
8.32.2.	99% BANDWIDTH	348
8.32.3.	OUTPUT POWER AND PPSD	351
8.32.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	358
8.33.	<i>802.11ac VHT80 1TX MODE IN THE 5.6GHz BAND</i>	<i>359</i>

8.33.1.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	359
8.34.	802.11ac VHT80 CDD 3TX MODE IN THE 5.6 GHz BAND.....	361
8.34.1.	26 dB BANDWIDTH	361
8.34.2.	99% BANDWIDTH	365
8.34.3.	OUTPUT POWER AND PPSD	369
8.35.	802.11ac VHT80 BF 3TX MODE IN THE 5.6 GHz BAND.....	374
8.35.1.	26 dB BANDWIDTH	374
8.35.2.	99% BANDWIDTH	378
8.35.3.	OUTPUT POWER AND PPSD	382
8.36.	802.11ac VHT80 1TX MODE IN THE 5.6GHz BAND, CHANNEL 138	387
8.36.1.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	387
8.37.	802.11ac VHT80 CDD 3TX MODE 5.6 GHz BAND, CHANNEL 138	389
8.37.1.	26 dB BANDWIDTH	389
8.37.2.	99% BANDWIDTH	392
8.37.3.	OUTPUT POWER AND PPSD	395
8.37.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	402
8.38.	802.11ac VHT80 BF 3TX MODE 5.6 GHz BAND, CHANNEL 138.....	403
8.38.1.	26 dB BANDWIDTH	403
8.38.2.	99% BANDWIDTH	406
8.38.3.	OUTPUT POWER AND PPSD	409
8.38.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)	416
8.39.	802.11a 1TX MODE IN THE 5.8 GHz BAND.....	417
8.39.1.	OUTPUT POWER.....	417
8.40.	802.11n HT20 CDD 2TX MODE IN THE 5.8 GHz BAND.....	419
8.40.1.	OUTPUT POWER.....	419
8.41.	802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND.....	421
8.41.1.	6 dB BANDWIDTH	421
8.41.2.	OUTPUT POWER	427
8.41.3.	POWER SPECTRAL DENSITY.....	429
8.42.	802.11n HT20 BF 3TX MODE IN THE 5.8 GHz BAND.....	436
8.42.1.	OUTPUT POWER.....	436
8.42.2.	POWER SPECTRAL DENSITY.....	438
8.43.	802.11n HT40 1TX MODE IN THE 5.8 GHz BAND	445
8.43.1.	OUTPUT POWER.....	445
8.44.	802.11n HT40 CDD 2TX MODE IN THE 5.8 GHz BAND.....	447
8.44.1.	OUTPUT POWER	447
8.45.	802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND.....	449
8.45.1.	6 dB BANDWIDTH	449
8.45.2.	OUTPUT POWER	453
8.45.3.	POWER SPECTRAL DENSITY.....	455
8.46.	802.11n HT40 BF 2TX MODE IN THE 5.8 GHz BAND.....	460
8.46.1.	OUTPUT POWER.....	460
8.47	802.11n HT40 BF 3TX MODE IN THE 5.8 GHz BAND	462
8.47.1	6 dB BANDWIDTH.....	462
8.47.2	OUTPUT POWER	466
8.47.3	POWER SPECTRAL DENSITY	468

8.48	802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND.....	473
8.48.1	OUTPUT POWER	473
8.49	802.11AC VHT80 CDD 2TX MODE IN THE 5.8 GHz BAND.....	475
8.49.1	OUTPUT POWER	475
8.50	802.11ac VHT80 CDD 3TX MODE IN THE 5.8 GHz BAND.....	476
8.50.1	6 dB BANDWIDTH.....	476
8.50.2	OUTPUT POWER	479
8.50.3	POWER SPECTRAL DENSITY	481
8.51	802.11n HT80 BF 2TX MODE IN THE 5.8 GHz BAND	485
8.51.1	OUTPUT POWER	485
8.52	802.11ac VHT80 BF 3TX MODE IN THE 5.8 GHz BAND	487
8.52.1	6 dB BANDWIDTH.....	487
8.52.2	OUTPUT POWER	490
8.52.3	POWER SPECTRAL DENSITY	492
9	RADIATED TEST RESULTS.....	496
9.1	LIMITS AND PROCEDURE.....	496
9.2	TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.2 GHz BAND.....	497
9.3	TX ABOVE 1 GHz 802.11n HT20 CDD 3Tx MODE IN THE 5.2 GHz BAND	501
9.4	TX ABOVE 1 GHz 802.11n HT20 BF 3TX MODE IN THE 5.2 GHz BAND.....	511
9.5	TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.2 GHz BAND	521
9.6	TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.2 GHz BAND.....	525
9.7	TX ABOVE 1 GHz 802.11n HT40 BF 3TX MODE IN THE 5.2 GHz BAND.....	533
9.8	TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.2 GHz BAND	541
9.9	TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.2 GHz BAND	543
9.10	TX ABOVE 1 GHz 802.11ac VHT80 BF 3TX MODE IN THE 5.2 GHz BAND.....	547
9.11	TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.3 GHz BAND.....	551
9.12	TX ABOVE 1 GHz 802.11n HT20 3Tx CDD MODE IN THE 5.3 GHz BAND	555
9.13	TX ABOVE 1 GHz 802.11n HT20 3Tx BF MODE IN THE 5.3 GHz BAND	563
9.14	TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.3 GHz BAND	571
9.15	TX ABOVE 1 GHz 802.11n HT40 3Tx CDD MODE IN THE 5.3 GHz BAND	573
9.16	TX ABOVE 1 GHz 802.11n HT40 3Tx BF MODE IN THE 5.3 GHz BAND	579
9.17	TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.3 GHz BAND	585
9.18	TX ABOVE 1 GHz 802.11ac VHT80 3TX CDD MODE IN THE 5.3 GHz BAND	587
9.19	TX ABOVE 1 GHz 802.11ac VHT80 3TX BF MODE IN THE 5.3 GHz BAND.....	591
9.20	TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.6 GHz BAND.....	595
9.21	TX ABOVE 1 GHz 802.11n HT20 3Tx CDD MODE IN THE 5.6 GHz BAND	599
9.22	TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.8 GHz BAND.....	675
9.23	TX ABOVE 1 GHz 802.11n HT20 CDD 2TX MODE IN THE 5.8 GHz BAND.....	681
9.24	TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND.....	683

9.25	TX ABOVE 1 GHz 802.11n HT20 BF 3TX MODE IN THE 5.8 GHz BAND.....	697
9.26	TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.8 GHz BAND	709
9.27	TX ABOVE 1 GHz 802.11n HT40 CDD 2TX MODE IN THE 5.8 GHz BAND.....	711
9.28	TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND.....	713
9.29	TX ABOVE 1 GHz 802.11n HT40 BF 2TX MODE IN THE 5.8 GHz BAND.....	721
9.30	TX ABOVE 1 GHz 802.11n HT40 BF 3TX MODE IN THE 5.8 GHz BAND.....	723
9.31	TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND	731
9.32	TX ABOVE 1 GHz 802.11ac VHT80 CDD 2Tx MODE IN THE 5.8 GHz BAND	735
9.33	TX ABOVE 1 GHz 802.11ac VHT80 CDD 3Tx MODE IN THE 5.8 GHz BAND	739
9.34	TX ABOVE 1 GHz 802.11ac VHT80 BF 2TX MODE IN THE 5.8 GHz BAND.....	745
9.35	TX ABOVE 1 GHz 802.11ac VHT80 BF 3TX MODE IN THE 5.8 GHz BAND.....	749
9.36	WORST-CASE 18-26 GHz	755
9.37	WORST-CASE 26-40 GHz	756
9.38	WORST-CASE BELOW 1 GHz.....	757
10.	AC POWER LINE CONDUCTED EMISSIONS	758
11.	SETUP PHOTOS	761
12.	APPENDIX A REGRESSION DATA FOR DRIVER 7.16.27.0.....	765
12.1.	SOFTWARE AND FIRMWARE	765
12.2.	REGRESSION DATA FOR MODULE P374	766
12.2.1.	ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	766
12.2.2.	ANTENNA PORT TEST RESULTS	769
12.2.2.1.	802.11ac VHT80 CDD 3TX MODE IN THE 5.2 GHz BAND	769
12.2.2.2.	802.11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND	773
12.2.2.3.	802.11n HT40 CDD 3TX MODE IN THE 5.6 GHz BAND.....	777
12.2.2.4.	802.11ac VHT80 CDD 3TX MODE IN THE 5.6 GHz BAND	781
12.2.2.5.	802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND.....	792
12.2.2.6.	802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND.....	798
12.2.2.7.	802.11ac VHT80 CDD 3TX MODE IN THE 5.8 GHz BAND	804
12.2.3.	RADIATED TEST RESULTS.....	810
12.2.3.1.	TX ABOVE 1 GHz 802.11ac VHT80 CDD 3Tx MODE IN THE 5.2GHz BAND	811
12.2.3.2.	TX ABOVE 1 GHz 802.11ac VHT80 CDD 3Tx MODE IN THE 5.3GHz BAND	813
12.2.3.3.	TX ABOVE 1 GHz 802.11n HT40 CDD 3Tx MODE IN THE 5.6GHz BAND....	815
12.2.3.4.	TX ABOVE 1 GHz 802.11ac VHT80 CDD 3Tx MODE IN THE 5.6GHz BAND	817
12.2.3.5.	TX ABOVE 1 GHz 802.11n HT20 CDD 3Tx MODE IN THE 5.8GHz BAND....	821
12.2.3.6.	TX ABOVE 1 GHz 802.11n HT40 CDD 3Tx MODE IN THE 5.8GHz BAND....	823
12.2.3.7.	TX ABOVE 1 GHz 802.11ac VHT80 CDD 3Tx MODE IN THE 5.8GHz BAND	827

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

EUT DESCRIPTION: 802.11a/g/n/ac WLAN + Bluetooth PCI-E Custom Combination Card

MODEL: BCM943602CS

SERIAL NUMBER: 318 (Radiated Sample), P374 (Regression Sample)
333 and 339 (Conducted Samples)

DATE TESTED: February 24 – July 18, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 9	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



FRANK IBRAHIM
PROGRAM MANAGER
UL Verification Services Inc.

Tested By:



JOSEPH GOMEZ
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, ANSI C63.10-2009, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A	☐ Chamber D
☐ Chamber B	☐ Chamber E
☐ Chamber C	☐ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/g/n/ac WLAN + Bluetooth PCI-E Custom Combination Card.

The radio module is manufactured by Broadcom.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2 GHz BAND

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
5.2 GHz band, 1TX						
5180 - 5240	802.11a	18.37			18.37	68.71
5190 - 5230	802.11n HT40	18.55			18.55	71.61
5210	802.11n AC80	14.81			14.81	30.27
5.2 GHz band, 3TX						
5180 - 5240	802.11n HT20 CDD	15.31	15.21	15.18	20.00	100.11
5180 - 5240	802.11n HT20 STBC	18.41	18.48	18.84	23.35	216.37
5180 - 5240	802.11n HT20 BF	13.82	13.83	14.17	18.71	74.38
5190 - 5230	802.11n HT40 CDD	18.07	18.18	18.02	22.86	193.27
5190 - 5230	802.11n HT40 BF	14.25	13.65	14.34	18.86	76.95
5210	802.11ac VHT80 CDD	12.70	12.50	12.20	17.24	53.00
5210	802.11ac VHT80 TxBF	10.60	10.30	10.20	15.14	32.67

5.3 GHz BAND

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
5.3GHz band, 1TX						
5180 - 5240	802.11a LEGACY		20.17		20.17	103.99
5190 - 5230	802.11n HT40		15.08		15.08	32.21
5210	802.11ac VHT80		13.83		13.83	24.15
5.3 GHz band, 3TX						
5260 - 5320	802.11n HT20 CDD	16.47	16.63	16.32	21.25	133.24
5260 - 5320	802.11n HT20 STBC	18.65	18.51	18.32	23.27	212.16
5260 - 5320	802.11n HT20 BF	14.04	13.70	13.58	18.55	71.60
5270 - 5310	802.11n HT40 CDD	19.09	18.92	18.86	23.73	235.99
5270 - 5310	802.11n HT40 BF	14.33	14.28	14.22	19.05	80.32
5290	802.11ac VHT80 CDD	11.60	11.50	11.40	16.27	42.38
5290	802.11ac VHT80 BF	9.90	9.80	9.60	14.54	28.44

5.6 GHz BAND

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
5.6GHz band, 1TX						
5500-5700	802.11a LEGACY		17.01		17.01	50.23
5510-5670	802.11n HT40		18.11		18.11	64.71
5530	802.11ac VHT80		12.78		12.78	18.97
5690	802.11ac VHT80		16.30		16.30	42.66
5.6 GHz band, 3TX						
5500-5700	802.11n HT20 CDD	15.90	15.91	16.07	20.73	118.36
5500-5700	802.11n HT20 STBC	18.50	18.94	19.10	23.63	230.42
5500-5700	802.11n HT20 BF	14.82	14.64	14.81	19.53	89.72
5720	802.11n HT20 CDD	15.70	15.80	15.80	20.54	113.19
5720	802.11n HT20 STBC	18.75	18.76	18.79	23.54	225.83
5720	802.11n HT20 BF	15.70	15.80	15.80	20.54	113.19
5510-5670	802.11n HT40 CDD	19.00	19.10	19.00	23.80	240.15
5510-5670	802.11n HT40 BF	14.94	14.82	14.77	19.62	91.52
5710	802.11n HT40 CDD	16.45	16.42	16.44	21.21	132.07
5710	802.11n HT40 BF	15.08	15.25	15.00	19.88	97.33
5530	802.11ac VHT80 CDD	12.50	12.50	12.50	17.27	53.35
5530	802.11ac VHT80 BF	11.00	10.80	11.00	15.71	37.20
5610	802.11ac VHT80 CDD	18.40	18.30	18.00	23.01	199.89
5690	802.11ac VHT80 CDD	18.38	18.46	18.29	23.15	206.46
5690	802.11ac VHT80 BF	15.01	15.15	15.23	19.90	97.77

5.8 GHz BAND

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Total power (dBm)	Total power (mW)
5.8 GHz Band, 1Tx						
5745 - 5825	802.11a LEGACY 1TX		21.90		21.90	154.88
5755 - 5795	802.11n HT40 1TX		14.70		14.70	29.51
5775	802.11ac VHT80 1TX		14.70		14.70	29.51
5.8 GHz Band, 2Tx						
5745 - 5825	802.11n HT20 CDD 2TX	17.70	17.90		20.81	120.54
5755 - 5795	802.11n HT40 CDD 2TX	15.10	15.20		18.16	65.47
5755 - 5795	802.11n HT40 BF 2TX	15.51	15.38		18.46	70.08
5775	802.11ac VHT80 CDD 2TX	14.80	14.70		17.76	59.71
5775	802.11ac VHT80 BF 2TX	14.80	14.70		17.76	59.71
5.8 GHz Band, 3Tx						
5745 - 5825	802.11n HT20 CDD 3TX	21.50	21.20	21.10	26.04	401.90
5745 - 5825	802.11n HT20 BF 3TX	18.10	18.20	18.40	23.01	199.82
5755 - 5795	802.11n HT40 CDD 3TX	18.20	18.10	17.60	22.75	188.18
5755 - 5795	802.11n HT40 BF 3TX	18.50	18.40	18.30	23.17	207.59
5775	802.11ac VHT80 CDD 3TX	13.20	13.30	13.60	18.14	65.18
5775	802.11ac VHT80 BF 3TX	13.30	13.90	13.60	18.38	68.84

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)
5.6 GHz band, 3TX (Channels overlapping UNII and DTS bands)					
5720 (UNII portion)	802.11n HT20 CDD	11.68	11.74	11.85	16.75
5720 (DTS portion)	802.11n HT20 CDD	6.04	5.94	6.10	11.02
5720 (Whole signal)	802.11n HT20 CDD	12.73	12.75	12.87	17.78
5720 (UNII portion)	802.11n HT20 STBC	15.37	15.31	15.69	20.44
5720 (DTS portion)	802.11n HT20 STBC	10.17	9.95	9.74	14.94
5720 (Whole signal)	802.11n HT20 STBC	16.52	16.42	16.67	21.52
5720 (UNII portion)	802.11n HT20 BF	11.68	11.74	11.85	16.75
5720 (DTS portion)	802.11n HT20 BF	6.04	5.94	6.10	11.02
5720 (Whole signal)	802.11n HT20 BF	12.73	12.75	12.87	17.78
5710 (UNII portion)	802.11n HT40 CDD	15.43	15.54	15.89	20.87
5710 (DTS portion)	802.11n HT40 CDD	7.05	5.36	6.14	11.48
5710 (Whole signal)	802.11n HT40 CDD	16.02	15.94	16.33	21.34
5710 (UNII portion)	802.11n HT40 BF	11.78	11.87	12.06	17.15
5710 (DTS portion)	802.11n HT40 BF	2.77	1.04	1.71	7.14
5710 (Whole signal)	802.11n HT40 BF	12.29	12.21	12.44	17.56
5690 (UNII portion)	802.11ac VHT80 CDD	14.55	13.51	14.19	19.73
5690 (DTS portion)	802.11ac VHT80 CDD	1.44	0.83	0.80	6.65
5690 (Whole signal)	802.11ac VHT80 CDD	14.76	13.74	14.38	19.93
5690 (UNII portion)	802.11ac VHT80 BF	11.96	12.10	12.07	17.66
5690 (DTS portion)	802.11ac VHT80 BF	-1.85	-1.79	-1.86	3.79
5690 (Whole signal)	802.11ac VHT80 BF	12.14	12.27	12.24	17.84

List of test reduction (Non Beam-Forming modes)

Antenna Port Testing		
Band	Mode	Covered by
5 GHz bands	802.11a Legacy 1TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11a CDD 2TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11a CDD 3TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11n HT20 CDD/SDM/STBC 2TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11n HT40 1TX	802.11n HT40 CDD 3TX
5 GHz bands	802.11n HT40 CDD/SDM/STBC 2TX	802.11n HT40 CDD 3TX
5 GHz bands	802.11n HT40 STBC 3TX	802.11n HT40 CDD 3TX
5 GHz bands	802.11ac VHT80 1TX	802.11ac VHT80 CDD 3TX
5 GHz bands	802.11ac VHT80 CDD/SDM/STBC 2TX	802.11ac VHT80 CDD 3TX
5 GHz bands	802.11ac VHT80 STBC 3TX	802.11ac VHT80 CDD 3TX

Radiated Testing		
Band	Mode	Covered by
5 GHz bands	802.11a Legacy 1TX (Harmonics)	802.11n HT20 CDD 3TX (Harmonics)
5 GHz bands	802.11a CDD 2TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11a CDD 3TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11n HT20 CDD/SDM/STBC 2TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11n HT40 1TX (Harmonics)	802.11n HT40 CDD 3TX (Harmonics)
5 GHz bands	802.11n HT40 STBC 3TX	802.11n HT40 CDD 3TX
5 GHz bands	802.11ac VHT80 1TX (Harmonics)	802.11ac VHT80 CDD 3TX (Harmonics)
5 GHz bands	802.11ac VHT80 CDD/SDM/STBC 2TX	802.11ac VHT80 CDD 3TX
5 GHz bands	802.11ac VHT80 STBC 3TX	802.11ac VHT80 CDD 3TX

List of test reduction (Beam-Forming modes)

Antenna Port Testing		
Band	Mode	Covered by
5 GHz bands	802.11n HT40 BF 2Tx	802.11n HT40 BF 3Tx
5 GHz bands	802.11ac VHT80 BF 2Tx	802.11ac VHT80 BF 3Tx

Radiated Testing		
Band	Mode	Covered by
5 GHz bands	802.11a BF 2TX	802.11n HT20 BF 3Tx
5 GHz bands	802.11a BF 3TX	802.11n HT20 BF 3Tx
5 GHz bands	802.11n HT20 BF 2Tx	802.11n HT20 BF 3Tx
5 GHz bands	802.11n HT40 BF 2Tx	802.11n HT40 BF 3Tx
5 GHz bands	802.11ac VHT80 BF 2Tx	802.11ac VHT80 BF 3Tx

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The EUT utilizes the following antennas:

First set (used for testing) except for BT/BLE where we used 4.82 dBi worst case antenna.

Antenna Type	Model	Peak Gain @ 2412, 2422, 2432MHz	Peak Gain (5150 - 5250 MHz) @ 5200MHz	Peak Gain (5250 - 5350 MHz) @ 5320MHz	Peak Gain (5479 - 5725 MHz) @5500, 5700 MHz	Peak Gain (5725 - 5850MHz) @5785, 5805 MHz
802.11 abgn WLAN Antenna	613 -1143 WiFi 1	0.12	7.04	7.09	5.03	2.66
802.11 abgn WLAN Antenna	613 -1143 WiFi 2	5.3	6.7	7.06	6.66	5.93
802.11 abgn WLAN / BT Antenna	613 -1143 WiFi 3 & BlueTooth	4.69	3.79	3.58	3.94	6.04

Second set:

Antenna Type	Model	Peak gain @ 2412, 2422, 2432MHz,	Peak gain (5150- 5250MHz) @5200MHz	Peak gain (5250- 5350MHz) @5320MHz	Peak gain (5470- 5725MHz) @5500, 5700MHz	Peak gain (5725- 5850MHz) @5785, 5805MHz
802.11abgn WLAN Antenna	613-1631 Wi-Fi1	2.47	4.18	3.35	3.32	3.56
802.11abgn WLAN Antenna	613-1631 Wi-Fi2	2.64	4.22	3.44	2.41	3.68
802.11abgn WLAN Antenna	613-1631 Wi-Fi3 & Bluetooth	4.82	4.63	3.01	4.63	4.31

WiFi: For SISO radiated testing, the antenna with highest gain from set 1 was used as worst-case representative for other antennas. For MIMO radiated modes, the antennas from set 1 were used as worst-case representative for other modes.

BT/BLE: for radiated testing, the antenna from set 2 which has higher gain than the BT/BLE antenna in set 1 was used as worst-case representative for the other antenna.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Broadcom, rev. 7.16.27.0.

The test utility software used during testing was BCM Internal, rev. 7.16.RC27.0.

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was tested as an external module installed in a test jig board connected to a host Laptop PC.

EUT is for desktop applications; there is only one orientation for the antenna, the EUT was tested with normal antenna orientation.

Radiated emission below 1 GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Worst-Case data rates, as provided by the client, were as follows:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11a mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0
802.11ac VHT80MHz: MCS0.

For MIMO modes, the 3TX emission testing was considered as a worst case scenario and was performed at power levels, per transmit chain, greater than or equal to the maximum power in any 1TX mode.

For all modes with single chain, chain 0 (connector J0) was selected for the 5.2GHz band, and chain 1 (connector J1) was selected for the 5.3GHz and 5.6GHz bands per the software provided by the client. Based on feedback from the client, those chains were worst-case.

Based on client's input, there is no colocation among different radios.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Latitude E6400	2477655473	DoC
AC Adapter	Dell	DA90PE3-00	CN-0WTC00V-48661	DoC
Catalyst PCIe. Board	Enterprises Inc.	NA	NA	DoC
X29T Adaptor Board	Broadcom	BCM94331C5AD	NA	DoC
Laptop	Dell	Latitude E6400	6MYFMJ1	DoC
AC Adapter	Dell	PA2 /CF745	CN-0CF745-48661	DoC
Catalyst PCIe. Board	Enterprises Inc.	NA	NA	DoC
Laptop	Lenovo	G560	CB06427681	DoC
AC Adapter	Lenovo	Adp-65KH B	36001646	DoC

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US 115V	Un-Shielded	1.0m	NA
2	DC	1	19.5 Vdc	Un-Shielded	0.8m	NA

TEST SETUP

The EUT is attached to a jig board which is installed in the PCMCi slot of a host laptop computer during the tests. Test software exercised the radio card.

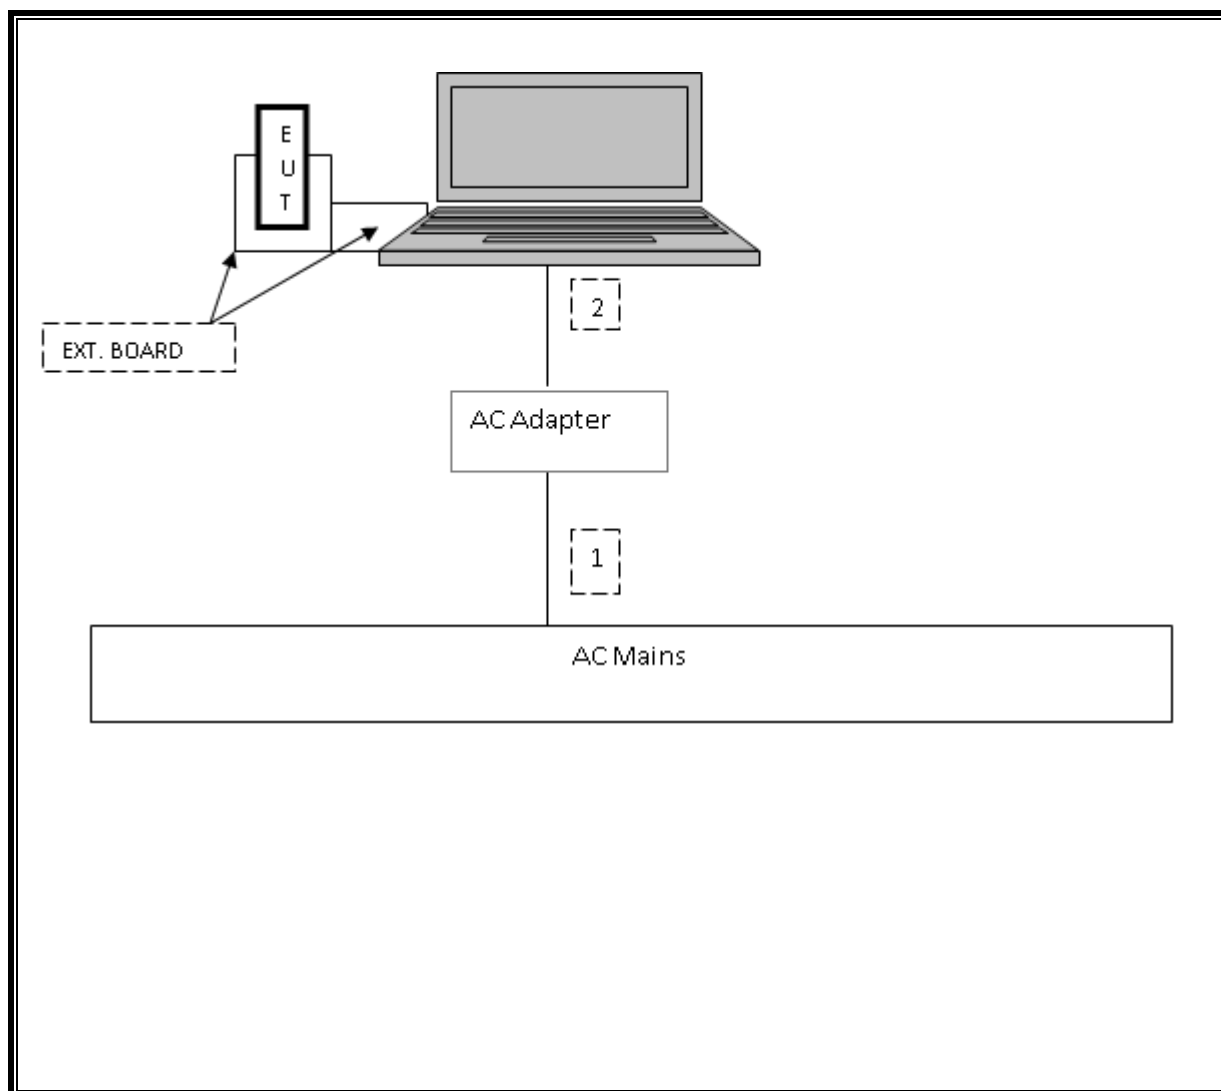SETUP DIAGRAM FOR TESTS

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4446A	C00996	05/22/13	05/22/14
Spectrum Analyzer, 40 GHz	Agilent	E4446A	T99	05/22/13	05/22/14
PXA Signal Analyzer	Agilent	N9030A	T339	12/10/13	12/10/14
Horn Antenna, 1GHz-18GHz	ETS Lindgren	3117	T119	01/06/14	01/06/15
Antenna, Horn, 18 GHz	EMCO	3115	C01218	01/18/14	01/18/15
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/13	11/14/14
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	C00981	06/28/13	06/28/14
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	C01016	08/22/13	08/22/14
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	10/19/13	10/19/14
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	08/20/13	08/20/14
Peak Power Meter	Agilent / HP	E9323A	F00051	10/04/13	10/04/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	01/16/14	01/16/15
5GHz Low Pass Filter	Micro-Tronics	LPS17541	F00219	06/26/13	06/26/14
3GHz High Pass Filter	Micro-Tronics	HPS17542	F00222	06/26/13	06/26/14
6GHz High Pass Filter	Micro-Tronics	HPM17543	F00224	06/26/13	06/26/14

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.



7.1. ON TIME AND DUTY CYCLE RESULTS



Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	D.C.C.F (dB)	1/B Minimum VBW (kHz)
802.11a Legacy	1.911	2.019	0.947	94.65%	0.24	0.523
802.11n HT20 CDD 3Tx	1.918	2.018	0.950	95.04%	0.22	0.521
802.11n HT20 STBC 3Tx	1.927	2.024	0.952	95.21%	0.21	0.519
802.11n HT20 BF 3Tx	0.638	1.434	0.445	44.49%	3.52	1.567
802.11n HT40 1Tx	0.935	1.042	0.897	89.73%	0.47	1.070
802.11n HT40 CDD 3Tx	0.942	1.05	0.897	89.71%	0.47	1.062
802.11n HT40 BF 3Tx	0.509	1.5110	0.337	33.69%	4.73	1.965
802.11ac VHT80 1Tx	0.4581	0.5590	0.819	81.95%	0.86	2.183
802.11ac VHT80 CDD 3Tx	0.458	0.557	0.822	82.23%	0.85	2.183
802.11ac VHT80 BF 3Tx	0.328	1.163	0.282	28.20%	5.50	3.049
802.11n HT20 CDD 3Tx_5.8GHz band	0.9467	1.0430	0.908	90.77%	0.42	1.056
802.11n HT40 CDD 3Tx_5.8GHz band	0.4600	0.5583	0.824	82.39%	0.84	2.174
802.11ac VHT80 CDD 3Tx_5.8GHz band	1.9180	2.0180	0.950	95.04%	0.22	0.521



Note:



The duty cycle correction factors of CDD modes were used for antenna port beam-forming testing, however, the duty cycle correction factors of beam-forming modes were used for radiated emissions of beam-forming modes.



7.2. DUTY CYCLE PLOTS

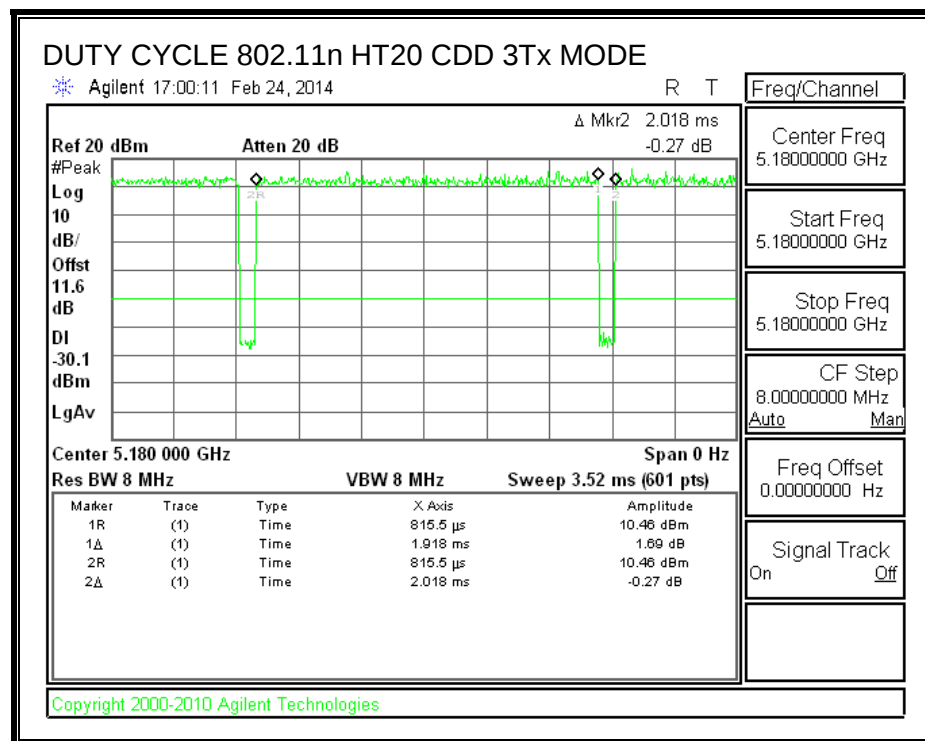
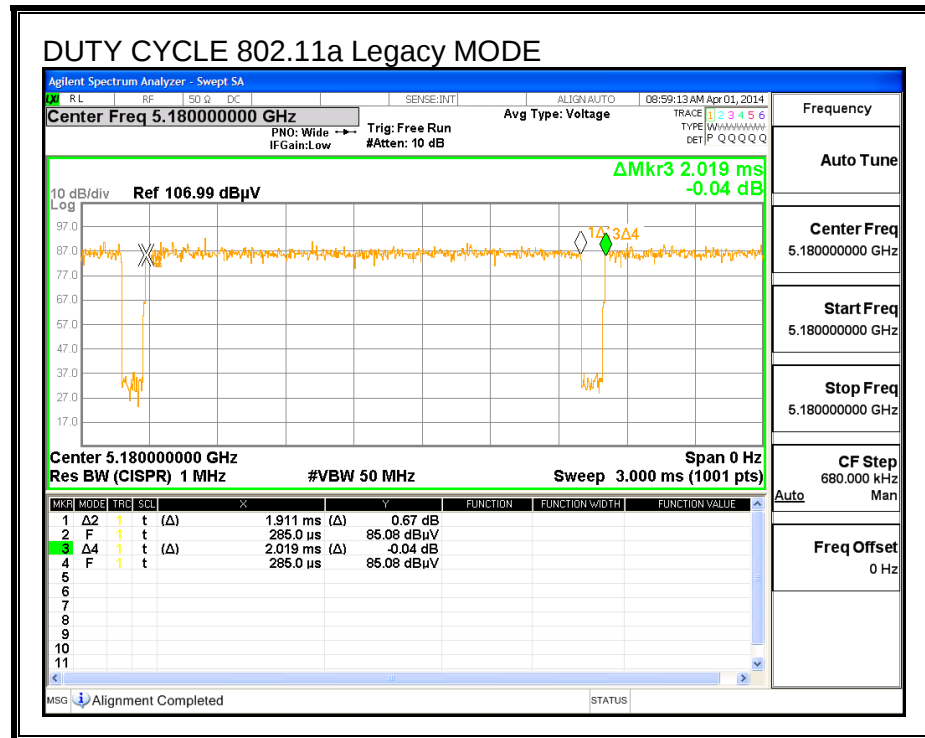


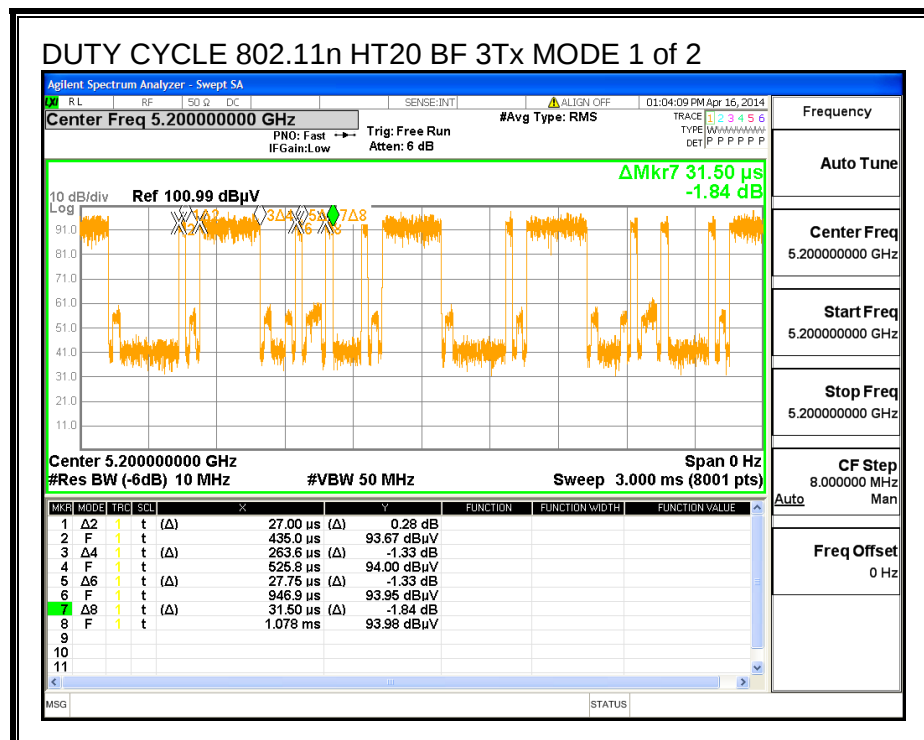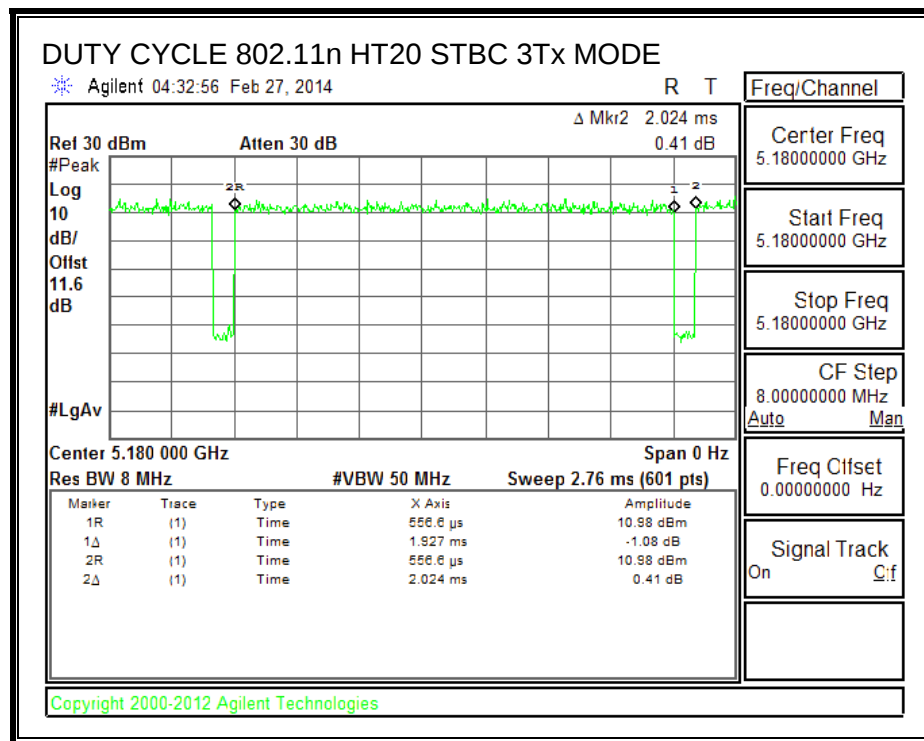


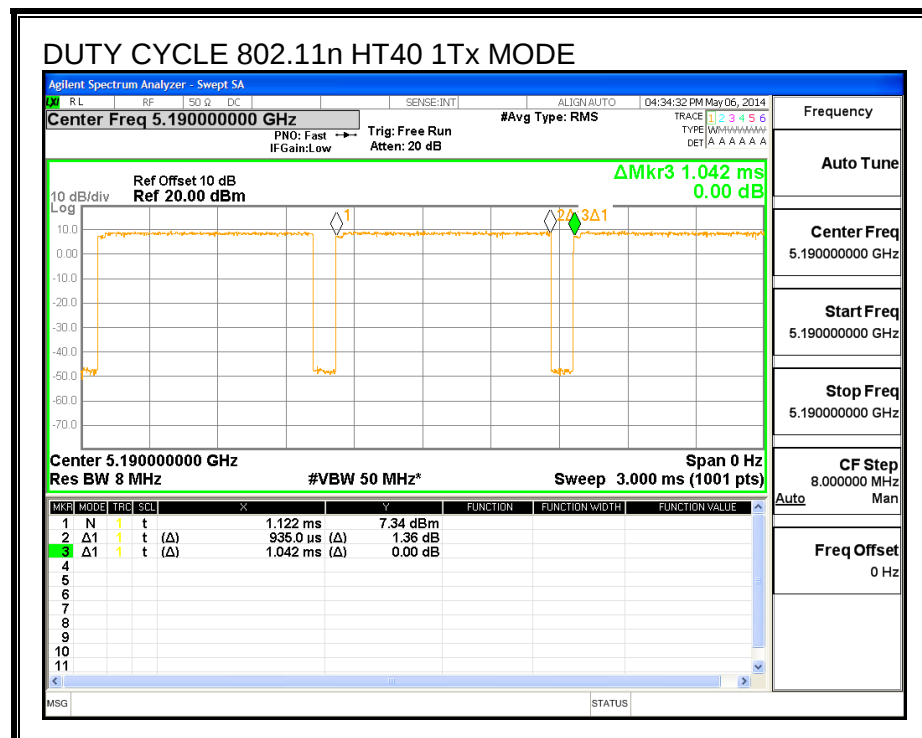
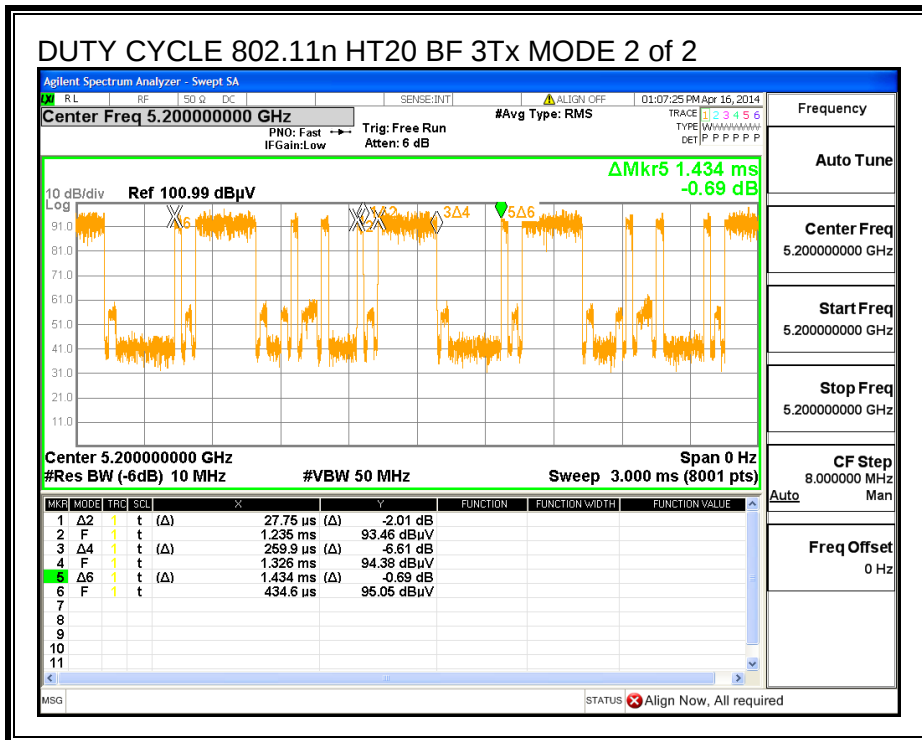


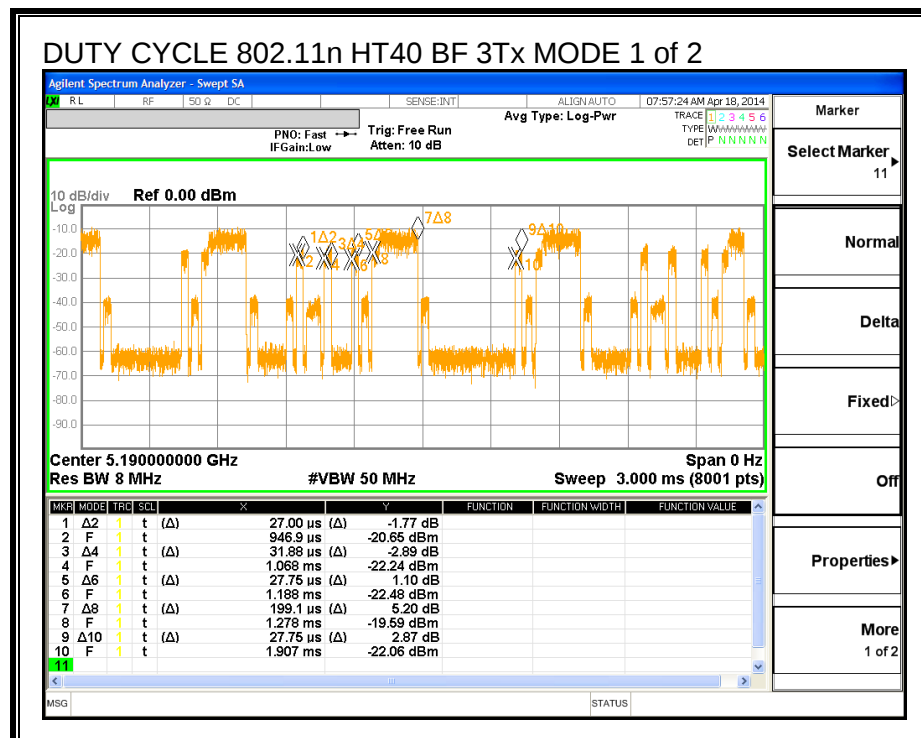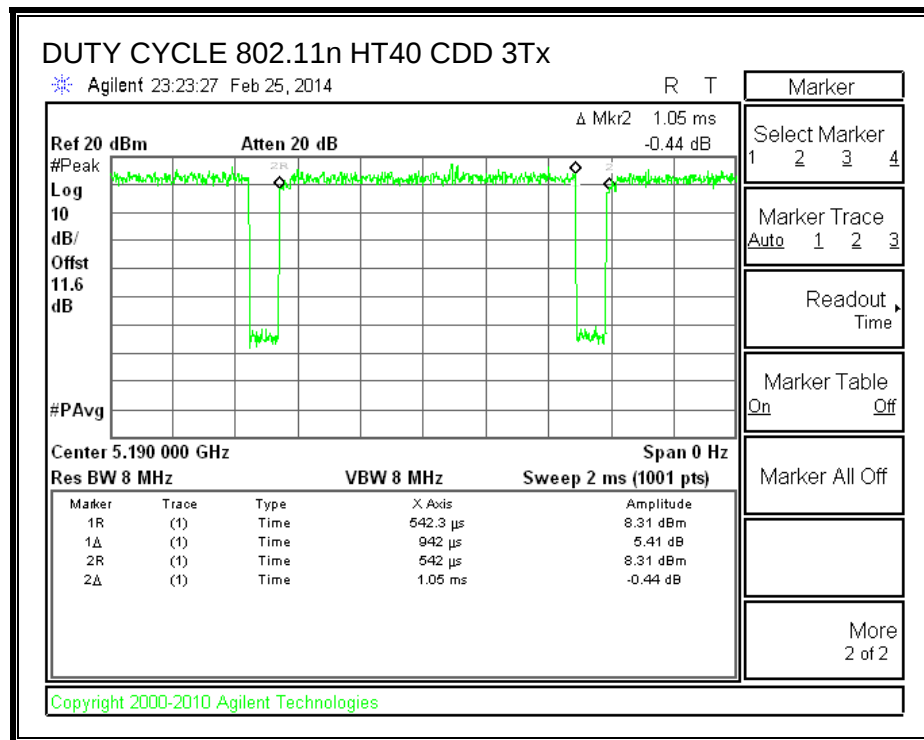


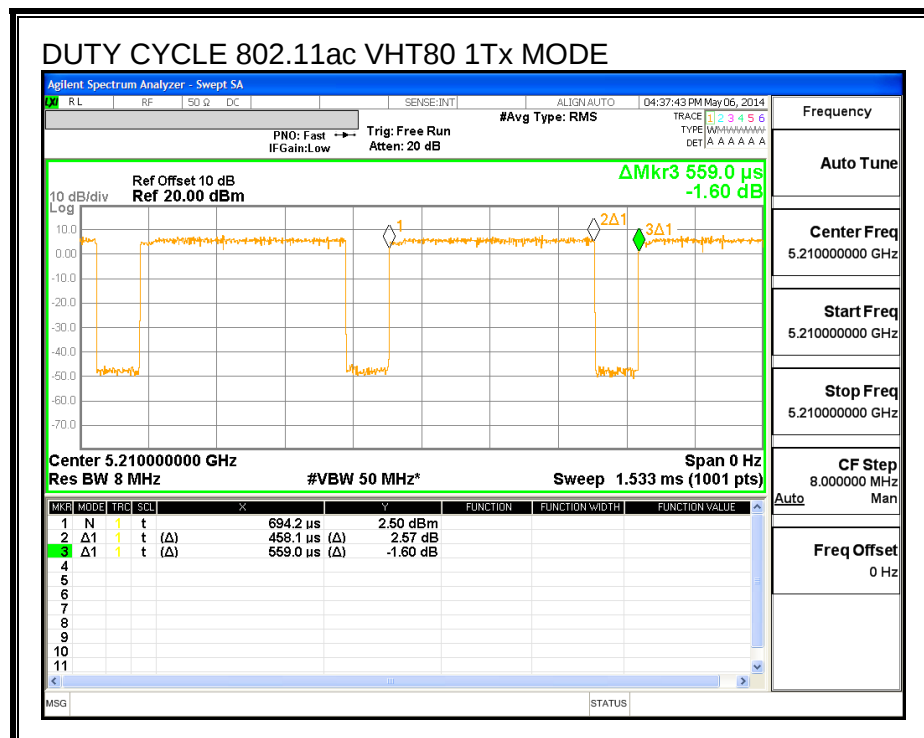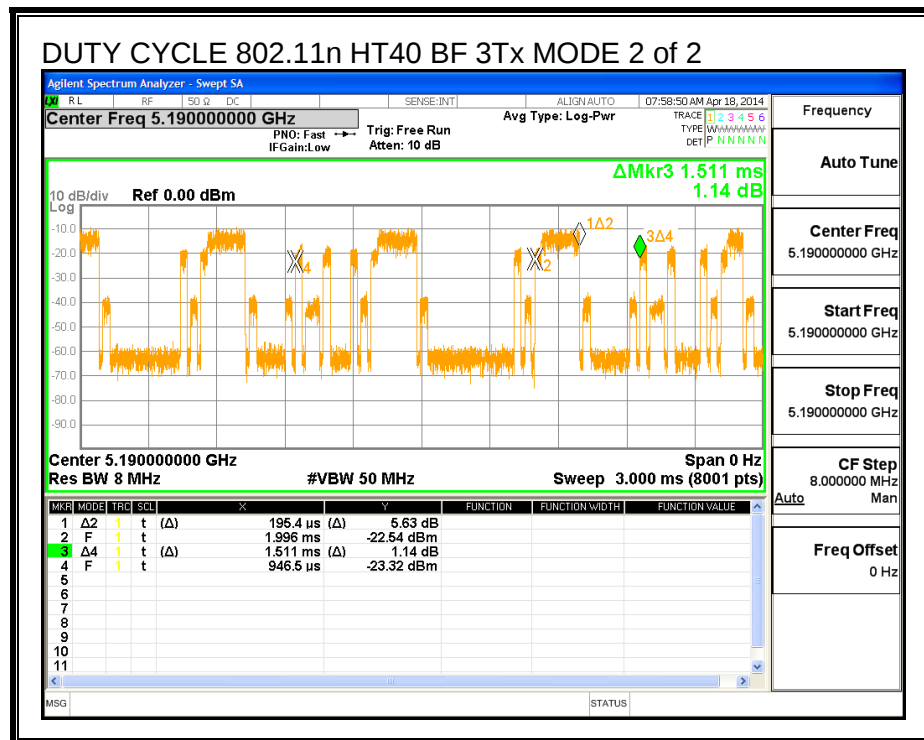

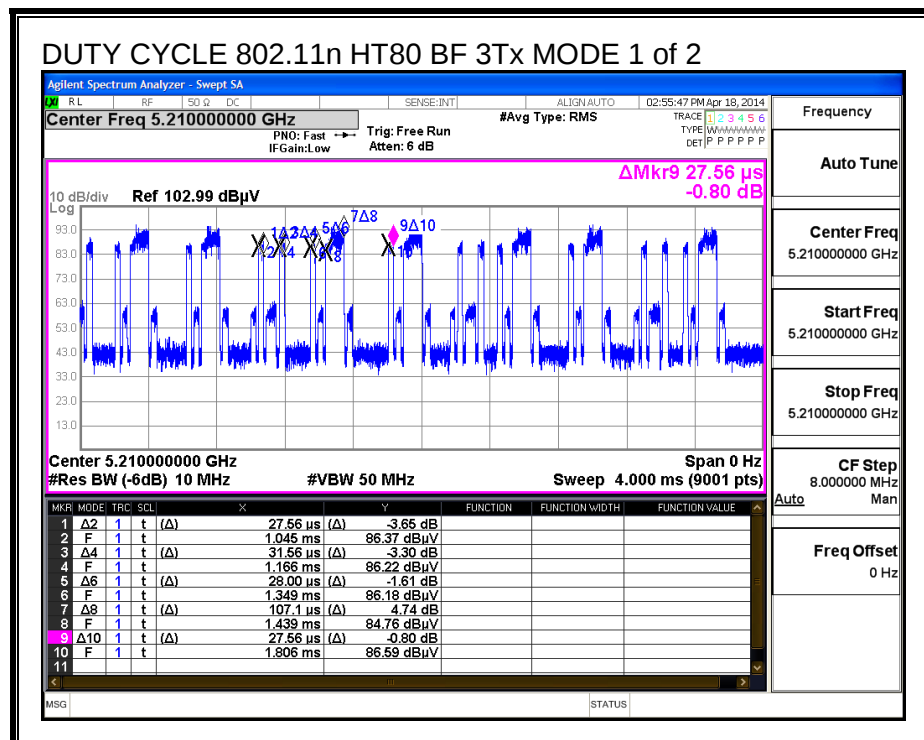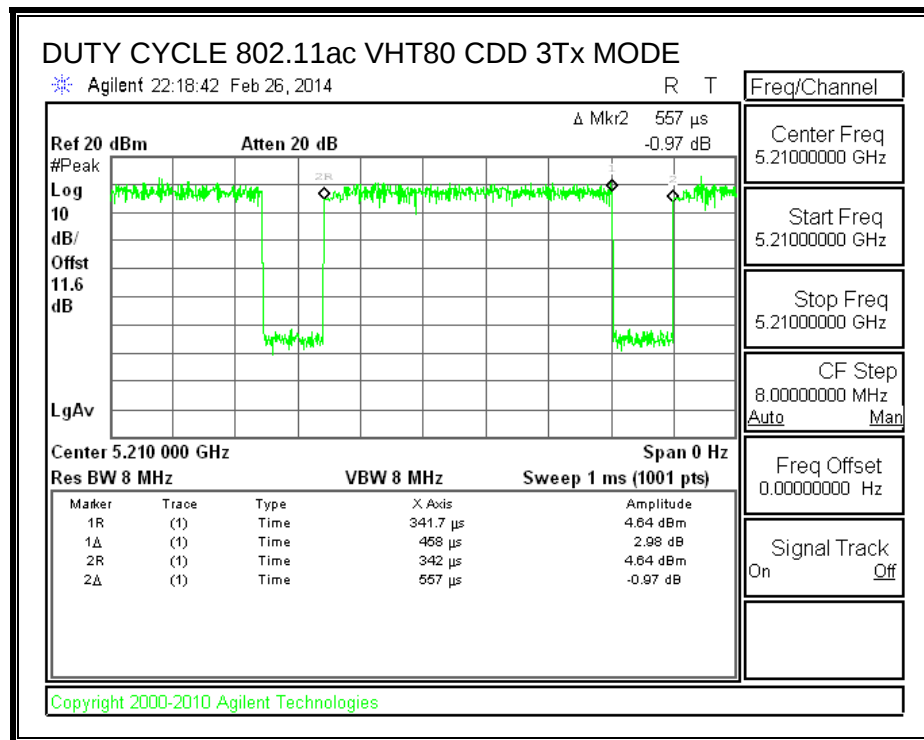

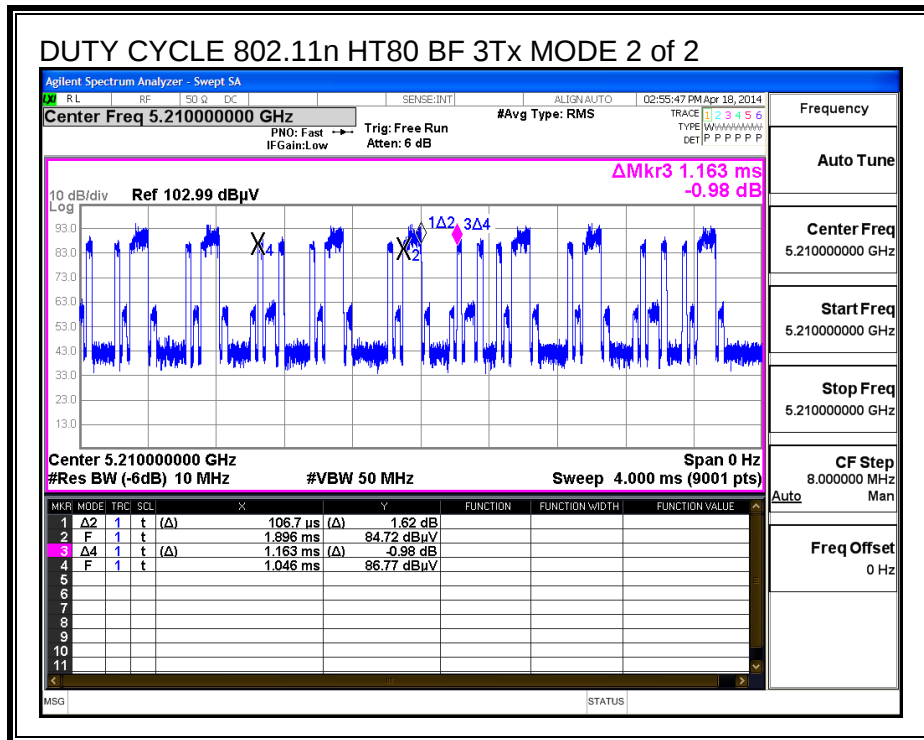

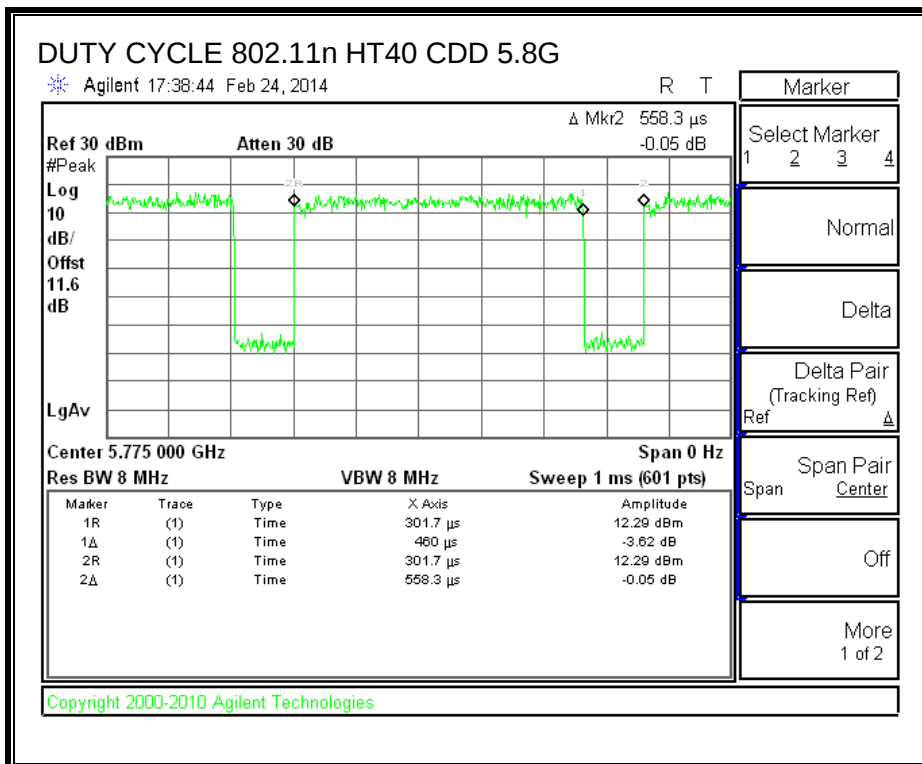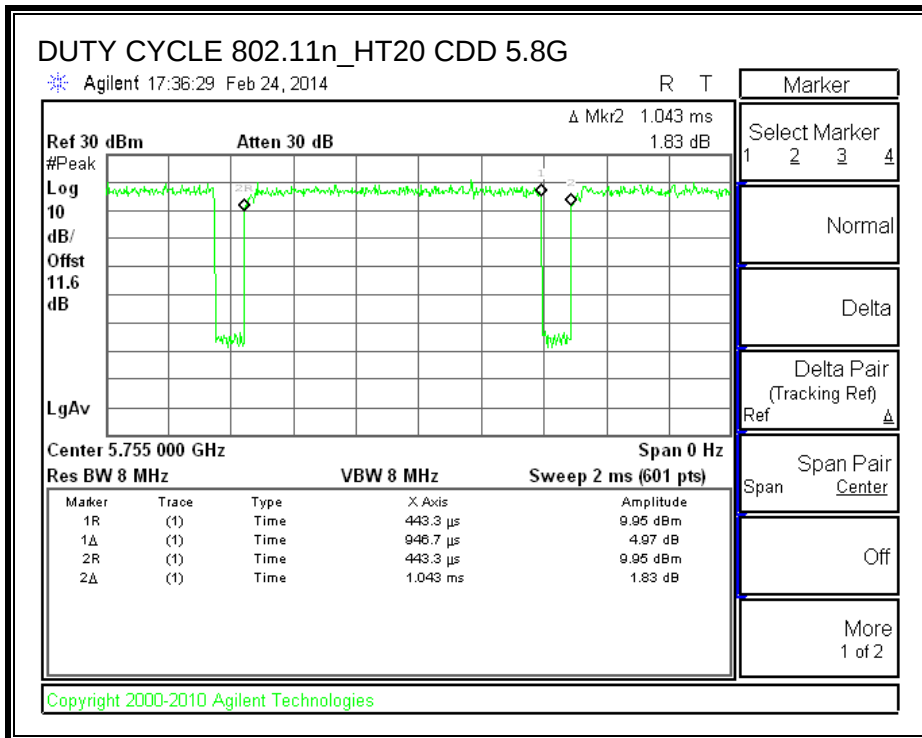

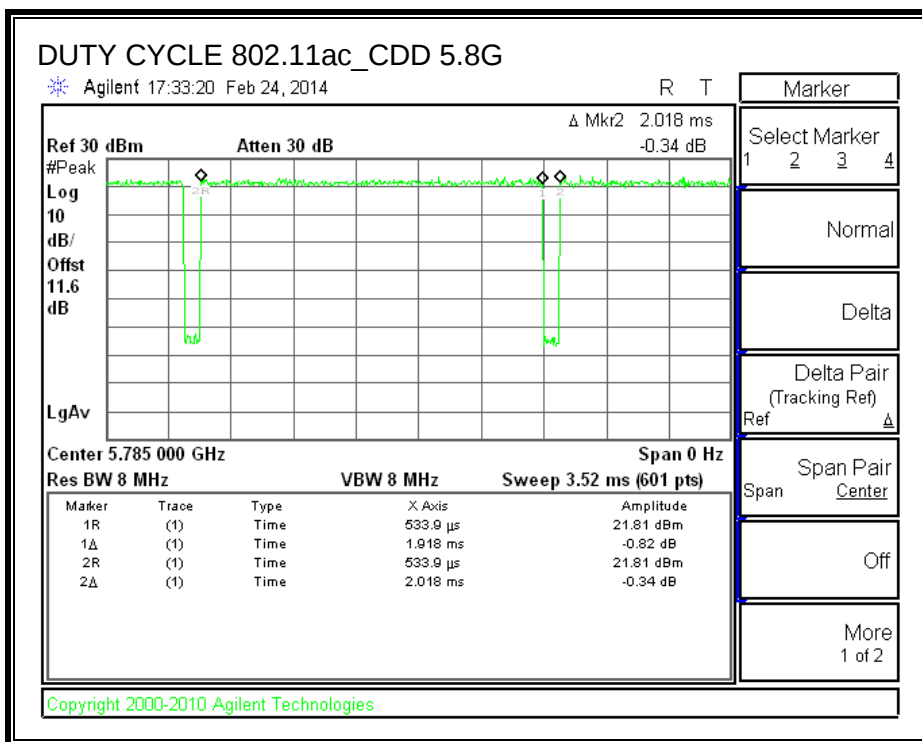

7.3. MEASUREMENT METHODS

26 dB Emission BW: KDB 789033 D02 DR02-41759, Section C.

99% Occupied BW: KDB 789033 D02 DR02-41759, Section D.

Conducted Output Power: KDB 789033 D02 DR02-41759, Section E.2.b (Method SA-1) and Section E.3.b

Power Spectral Density: KDB 789033 D02 DR02-41759, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 DR02-41759, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 DR02-41759, Sections G.3, G.4, and G.5.

8. ANTENNA PORT TEST RESULTS

8.1. 802.11a LEGACY MODE IN THE 5.2 GHz BAND

8.1.1. OUTPUT POWER

OUTPUT POWER

LIMITS

FCC §15.407 (a): (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)
Low	5180	7.04	22.96
Middle	5200	7.04	22.96
High	5240	7.04	22.96

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	5180	18.37			18.37	22.96	-4.59
Middle	5200	18.20			18.20	22.96	-4.76

Note: the power readings above are measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

8.2. 802.11n HT20 CDD 3TX MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.



RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5180	21.47	21.20	21.40
Mid	5200	21.40	21.27	21.40
High	5240	21.33	21.27	21.40


26 dB BANDWIDTH, Chain 0

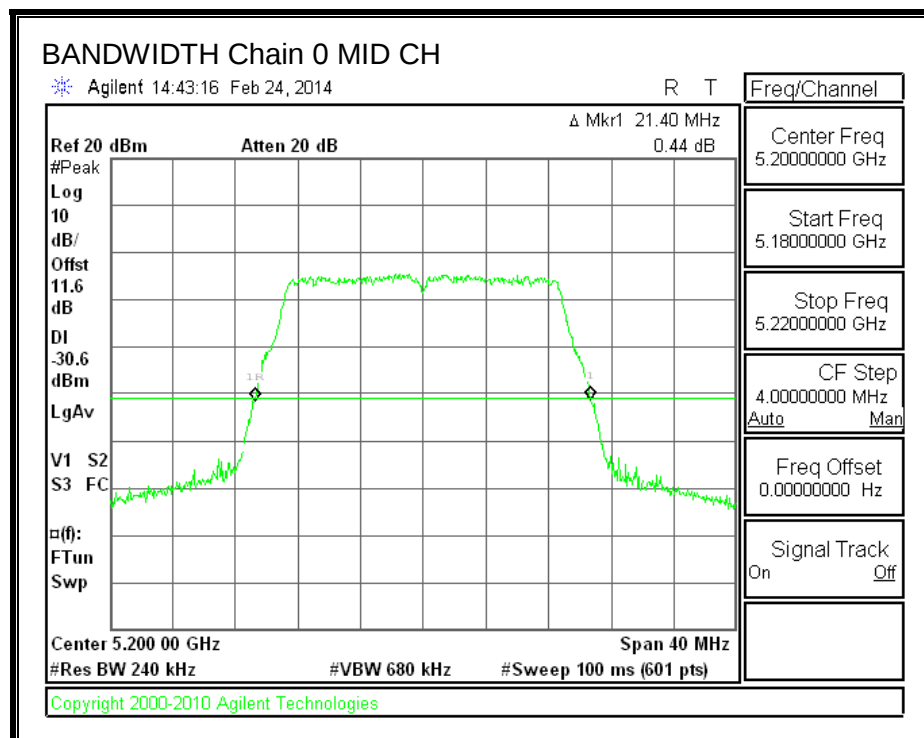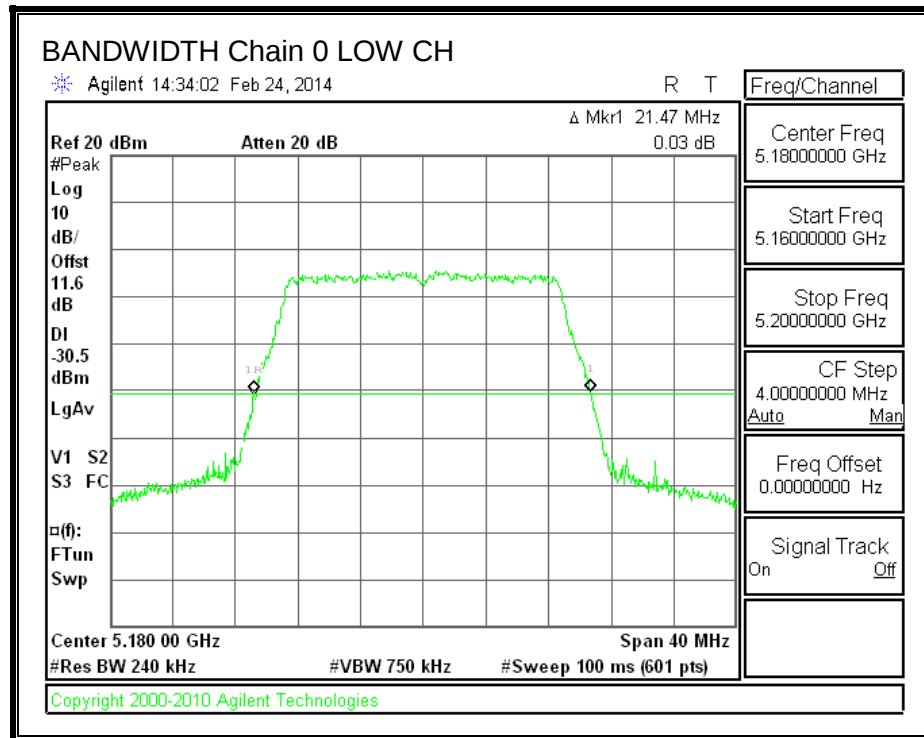

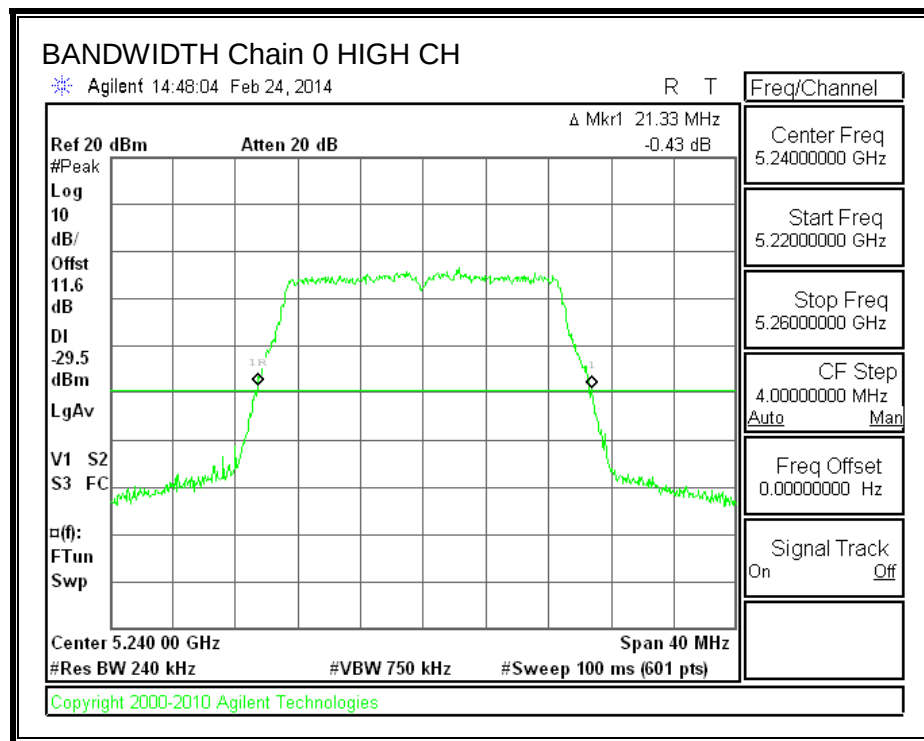

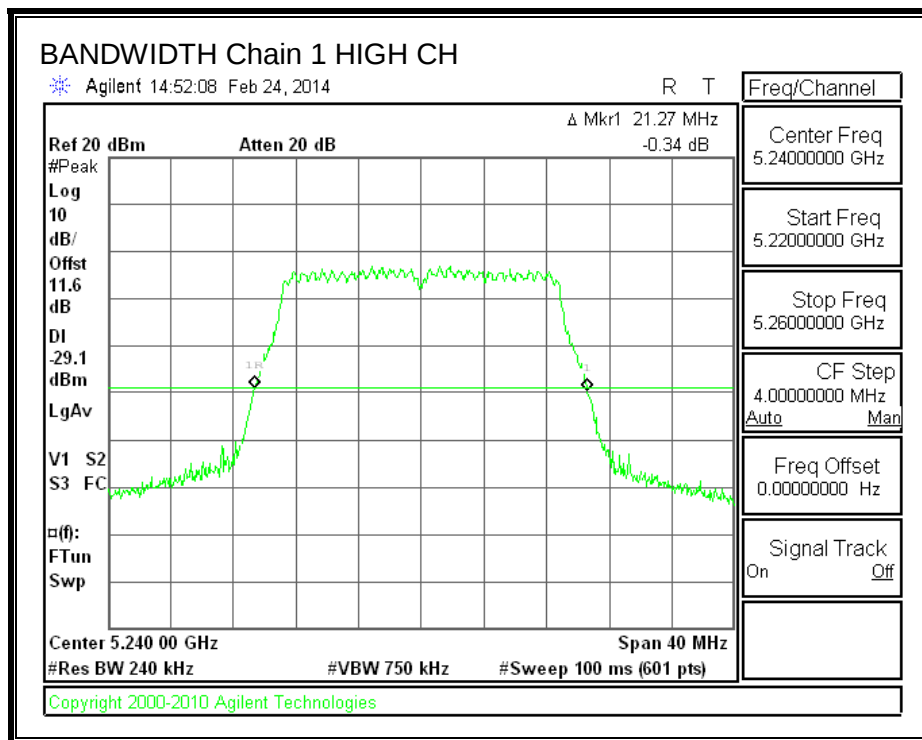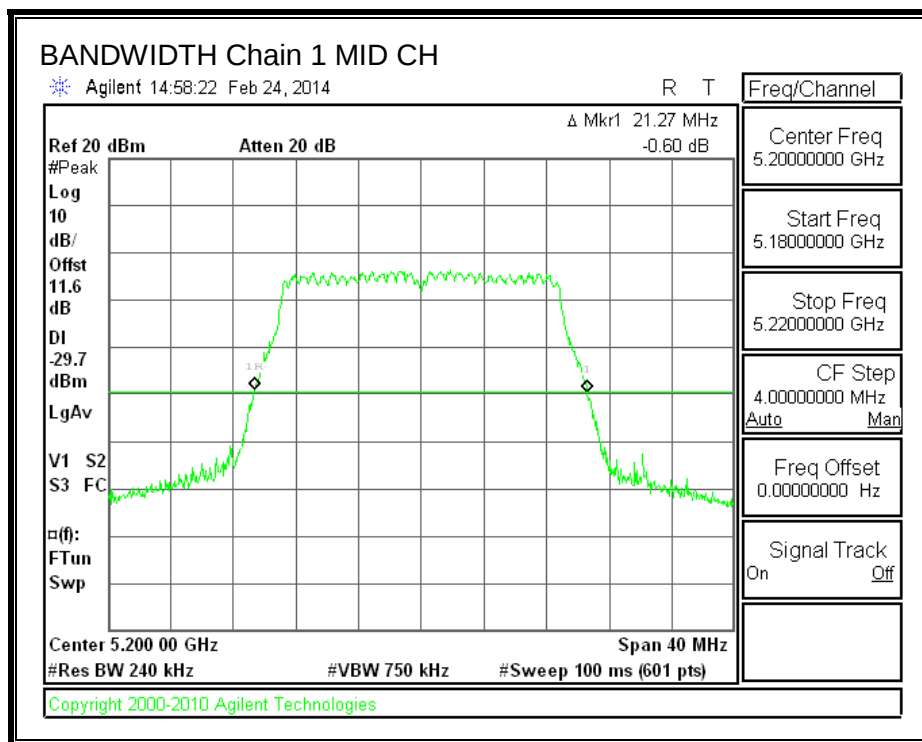

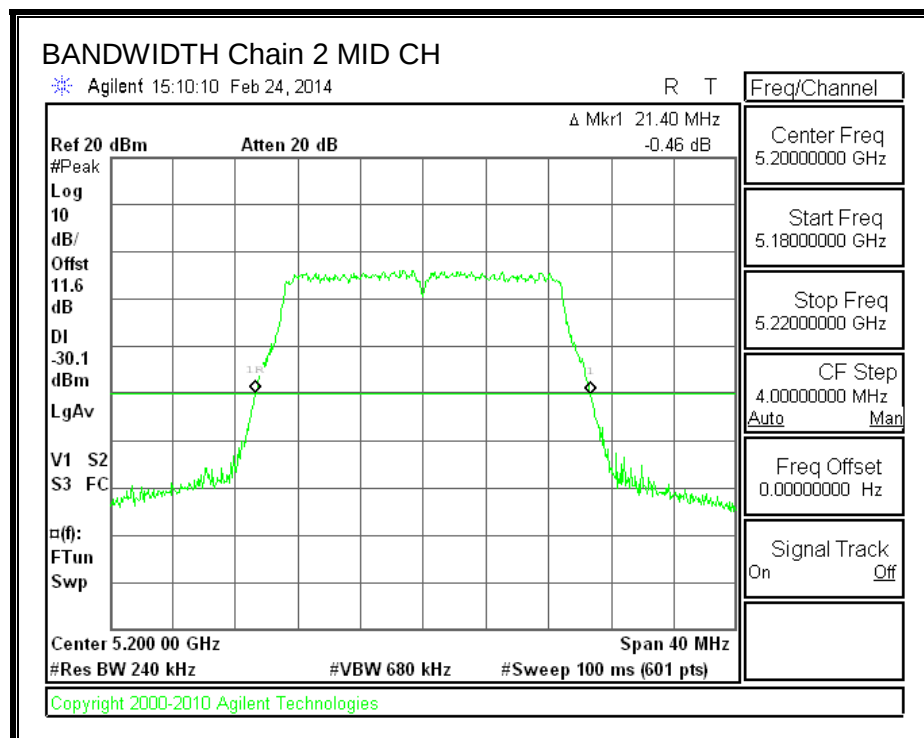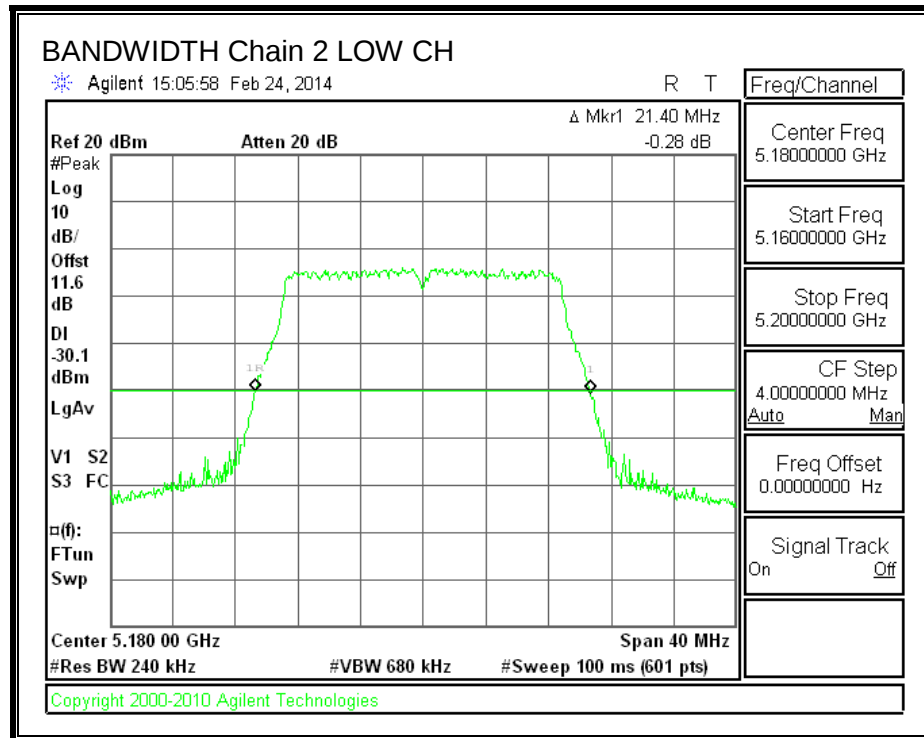

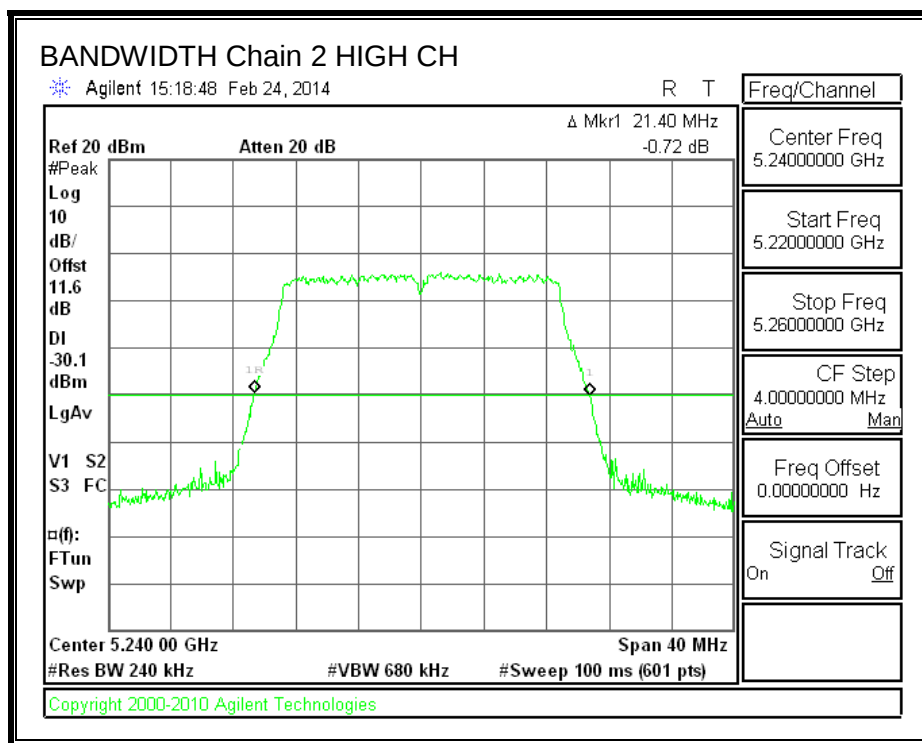

8.2.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For output power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
7.04	6.70	3.79	6.07

For PPSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
7.04	6.70	3.79	10.73

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSP (dBi)
Low	5180	N/A	N/A	6.07	10.73
Mid	5200	N/A	N/A	6.07	10.73
High	5240	N/A	N/A	6.07	10.73

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSP Limit (dBm)	IC PPSP Limit (dBm)	PPSP Limit (dBm)
Low	5180	23.93	N/A	N/A	23.93	6.27	N/A	N/A
Mid	5200	23.93	N/A	N/A	23.93	6.27	N/A	N/A
High	5240	23.93	N/A	N/A	23.93	6.27	N/A	N/A



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd PPSP
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.98	14.71	14.51	19.51	23.93	-4.42
Mid	5200	15.08	14.80	14.97	19.72	23.93	-4.21
High	5240	15.31	15.21	15.18	20.00	23.93	-3.93


PPSP Results



Channel	Frequency (MHz)	Chain 0 Meas PPSP (dBm)	Chain 1 Meas PPSP (dBm)	Chain 2 Meas PPSP (dBm)	Total Corr'd PPSP (dBm)	PPSP Limit (dBm)	PPSP Margin (dB)
Low	5180	1.04	0.97	0.90	5.96	6.27	-0.31
Mid	5200	1.21	1.07	1.05	6.10	6.27	-0.17
High	5240	1.23	1.14	1.12	6.15	6.27	-0.12

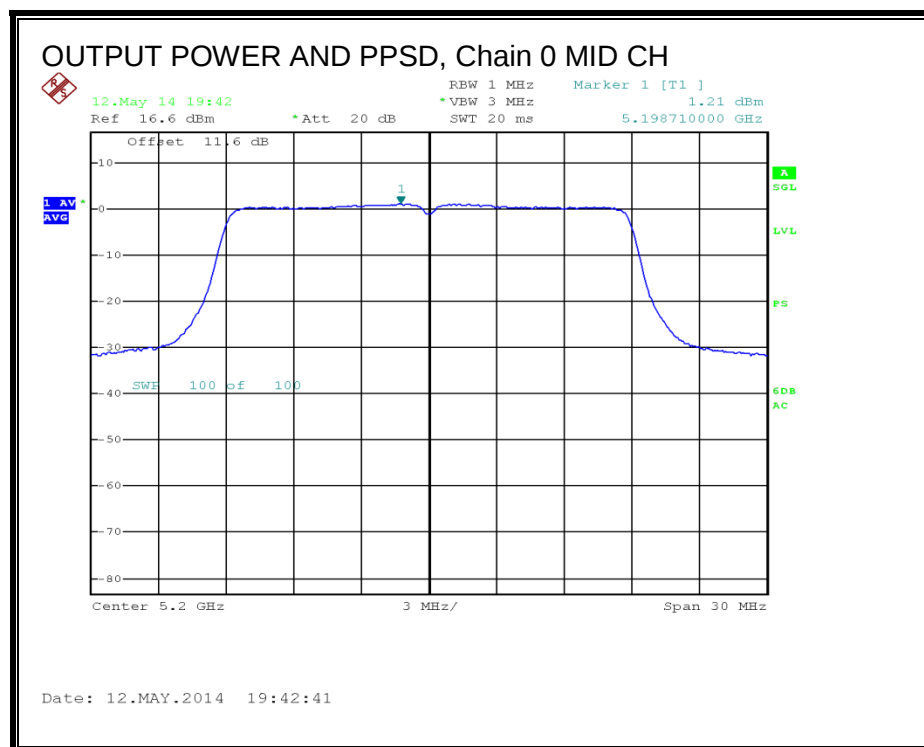
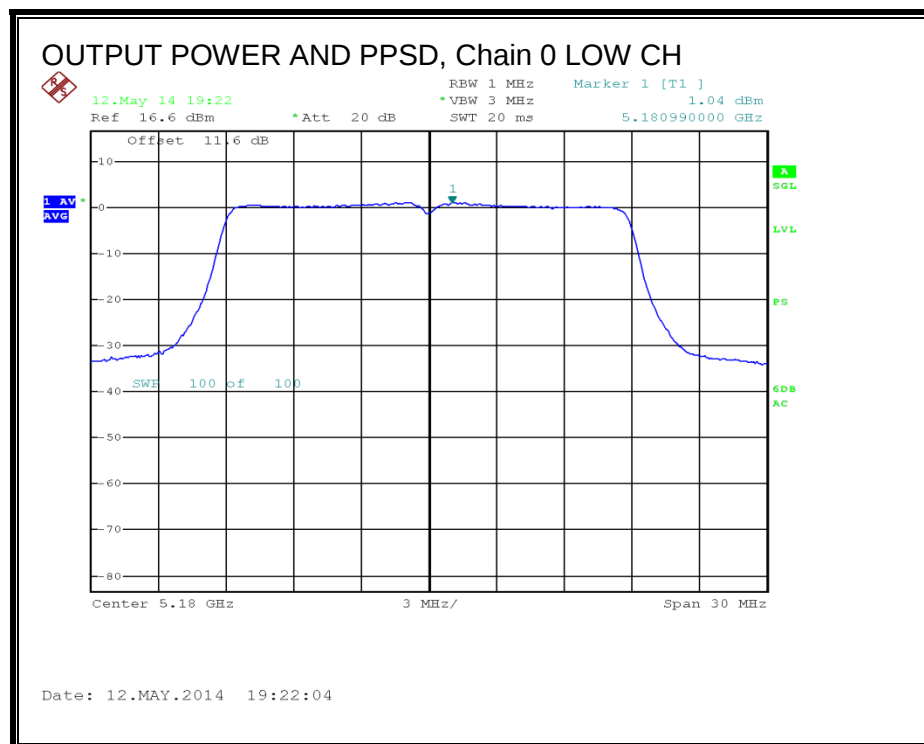
OUTPUT POWER AND PPSD, Chain 0

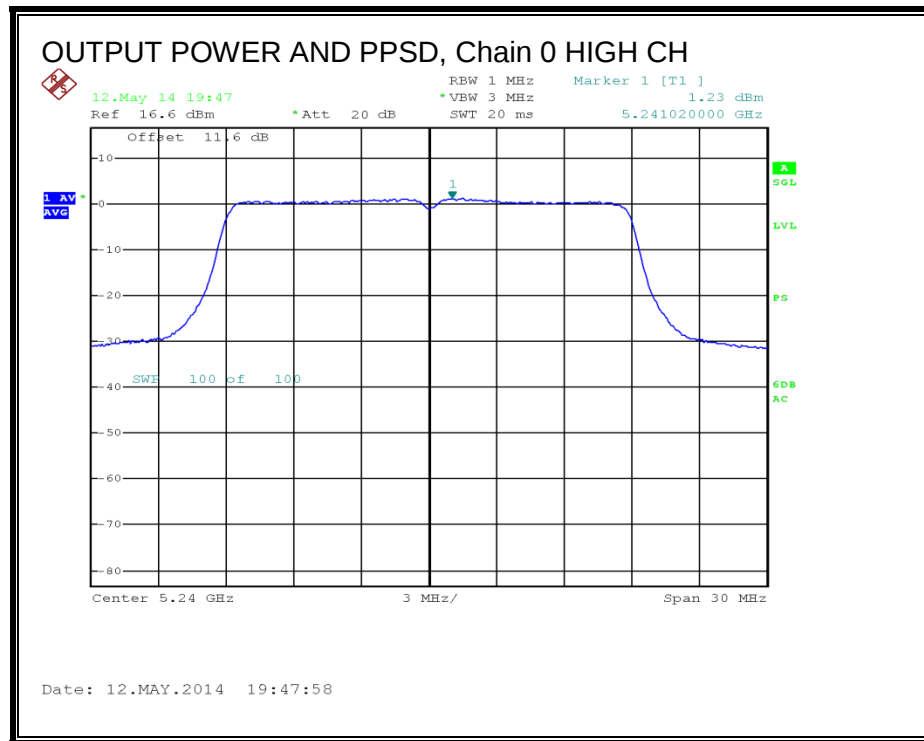


OUTPUT POWER AND PPSD, Chain 1

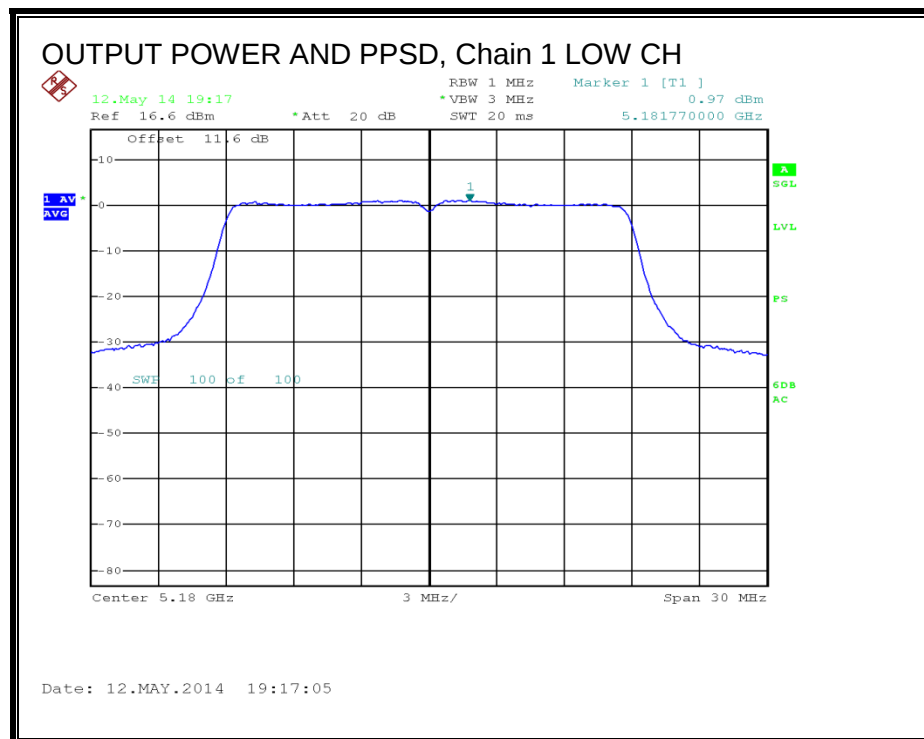

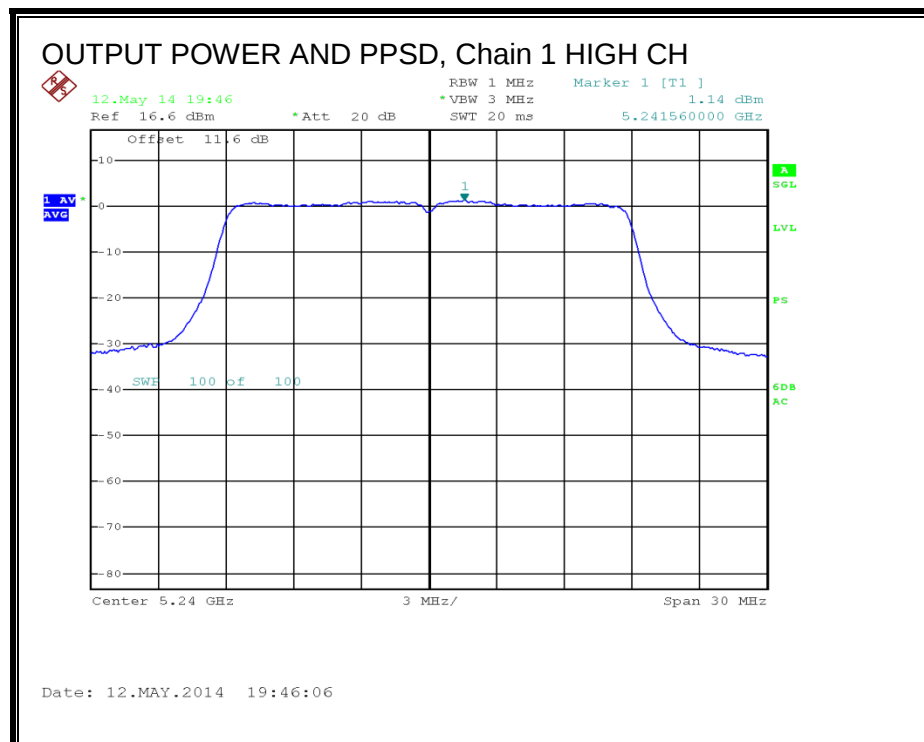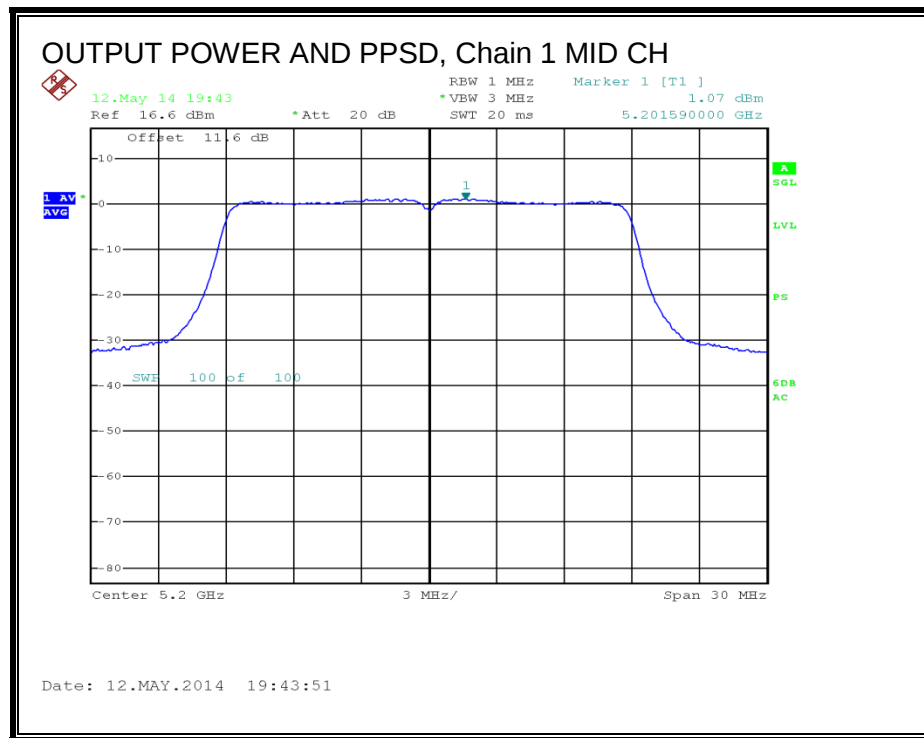

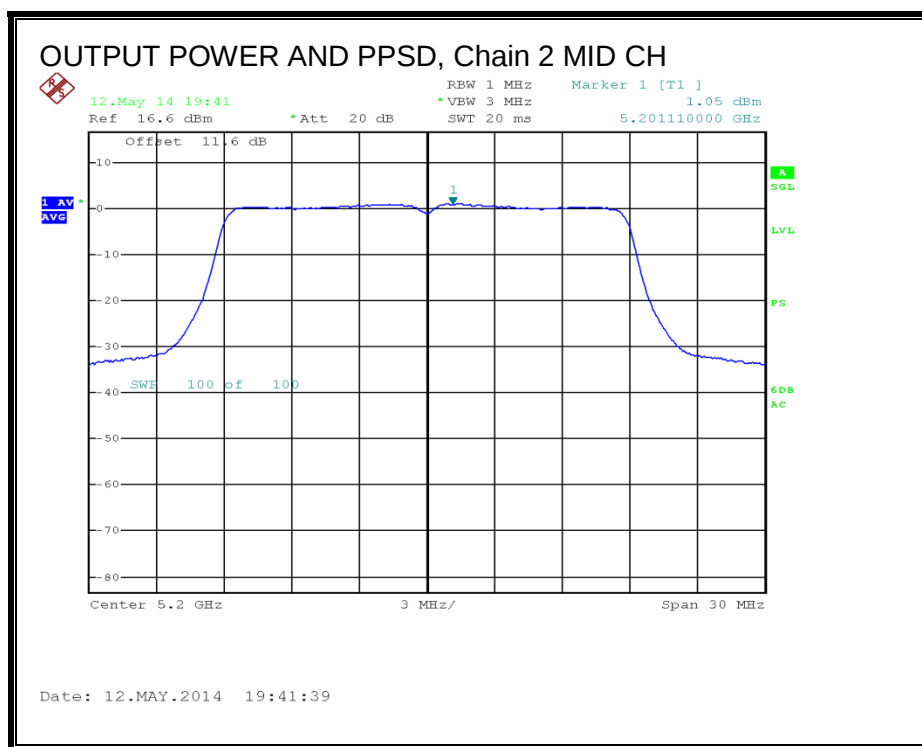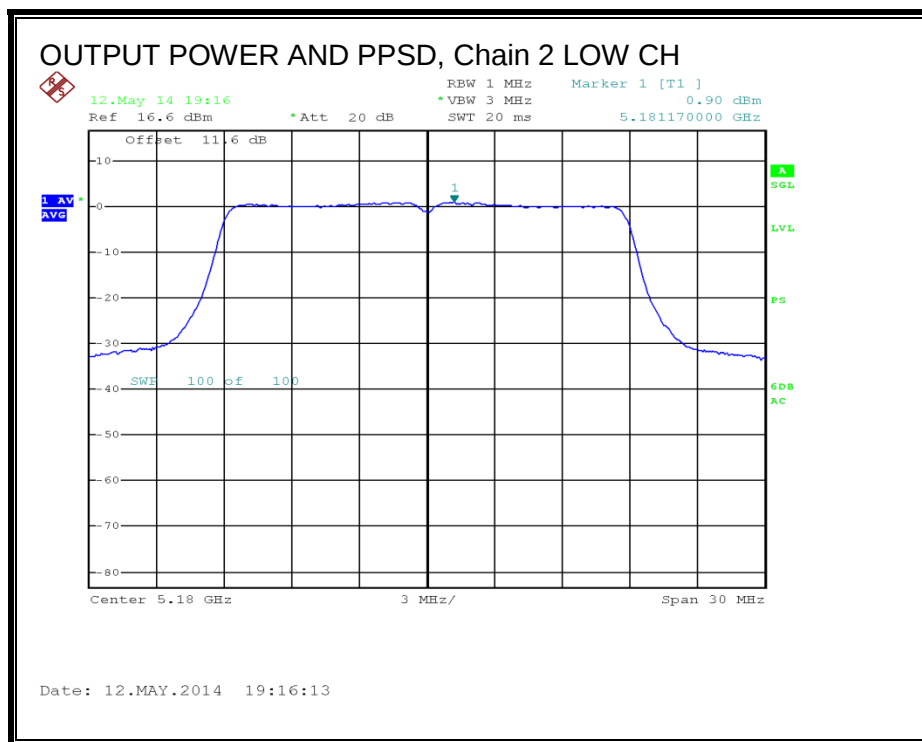OUTPUT POWER AND PPSD, Chain 2

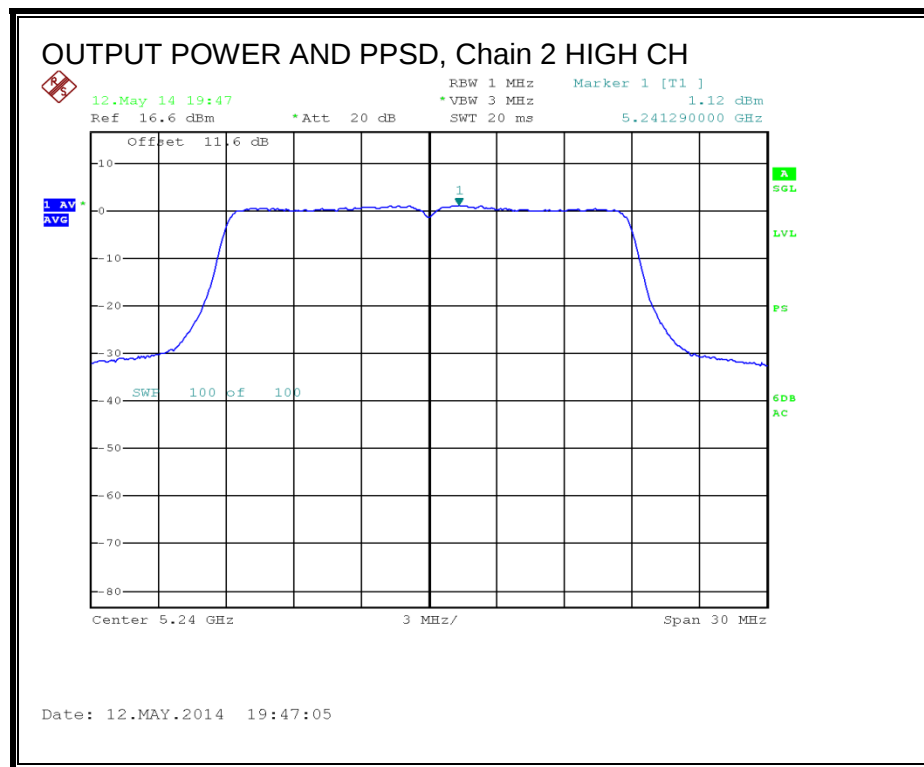

8.3. 802.11n HT20 STBC 3TX MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5180	21.40	21.27	21.07
Mid	5200	21.33	21.27	21.20
High	5240	21.47	21.33	21.27



26 dB BANDWIDTH, Chain 0

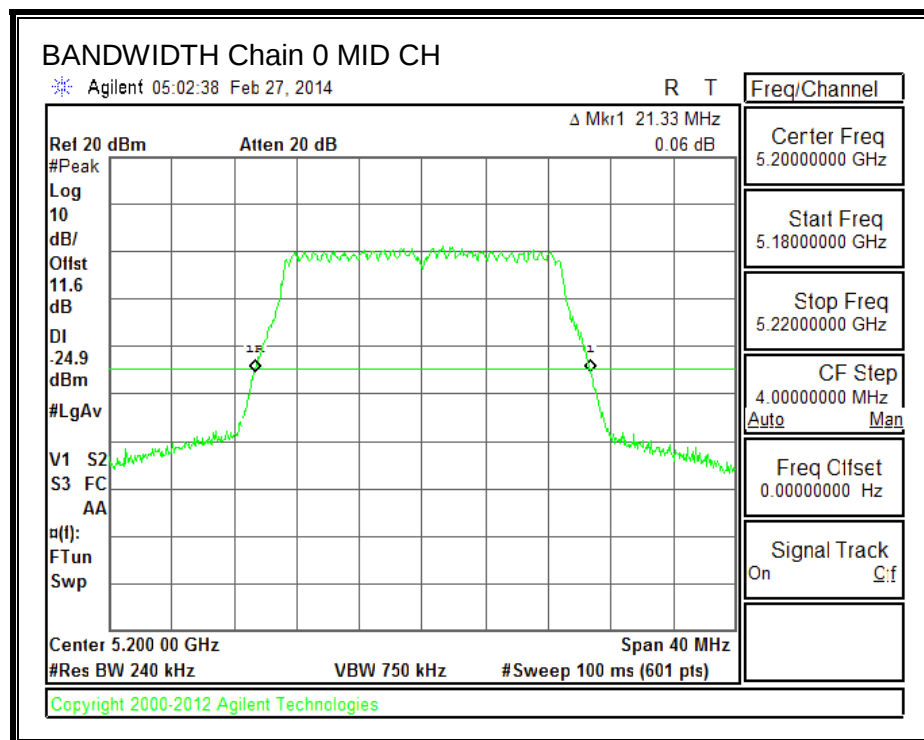
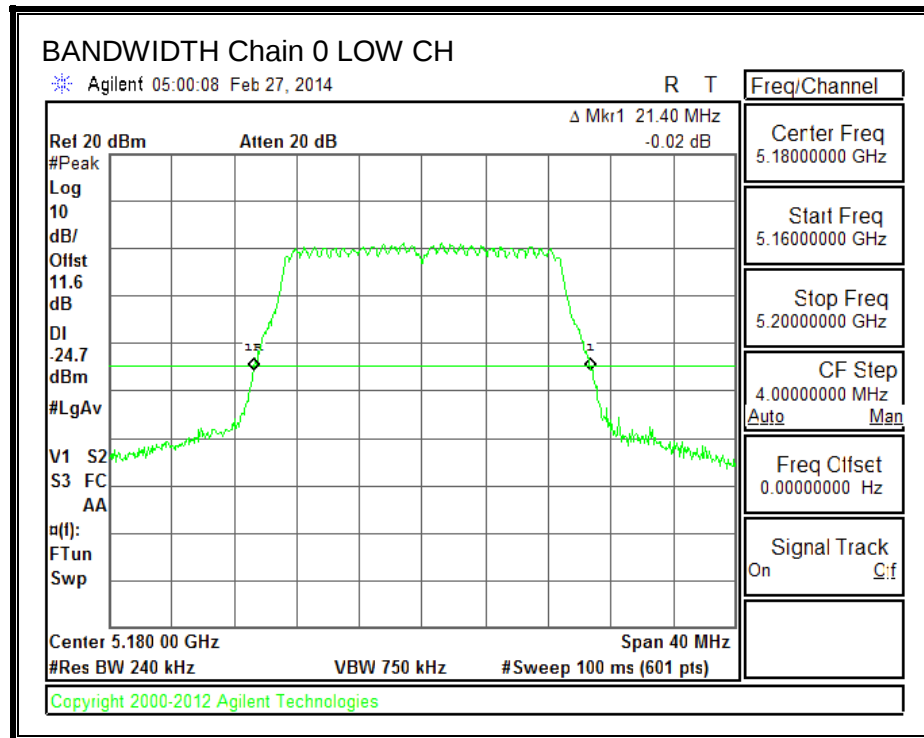


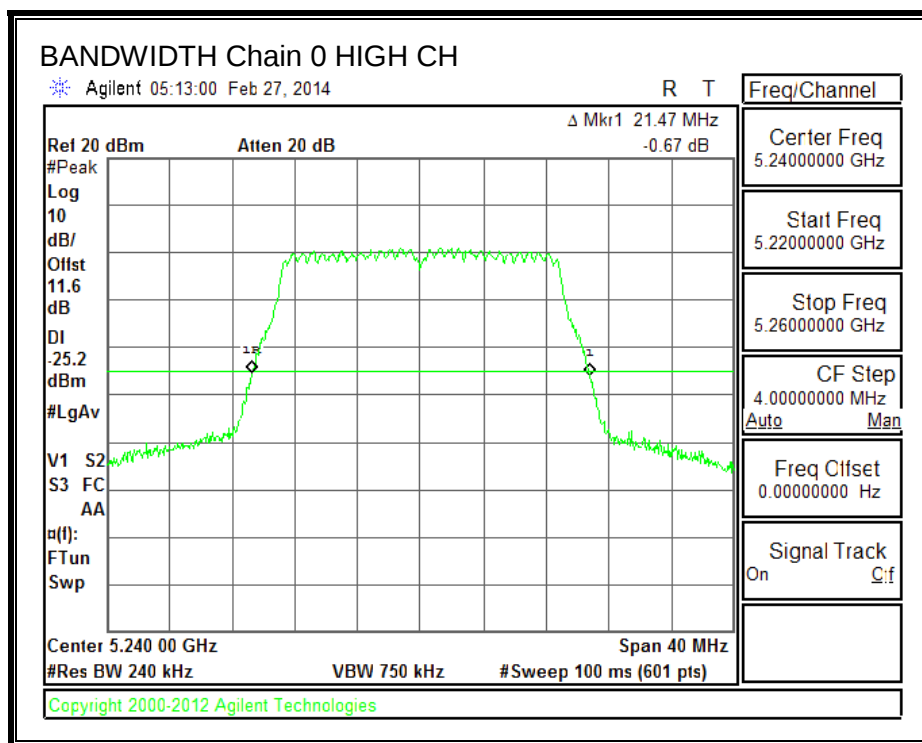


26 dB BANDWIDTH, Chain 1

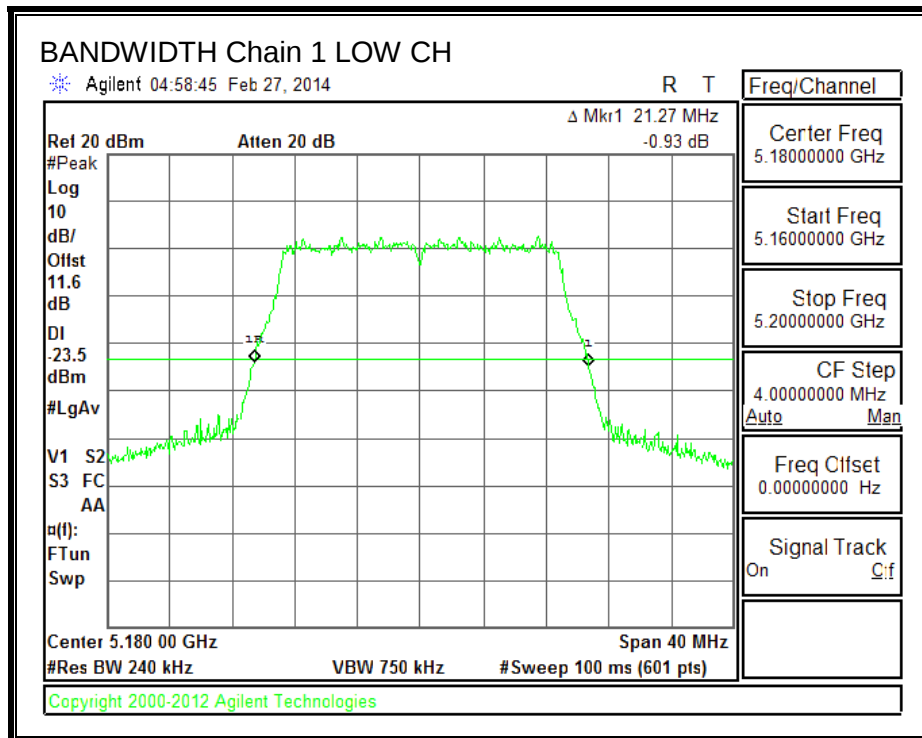

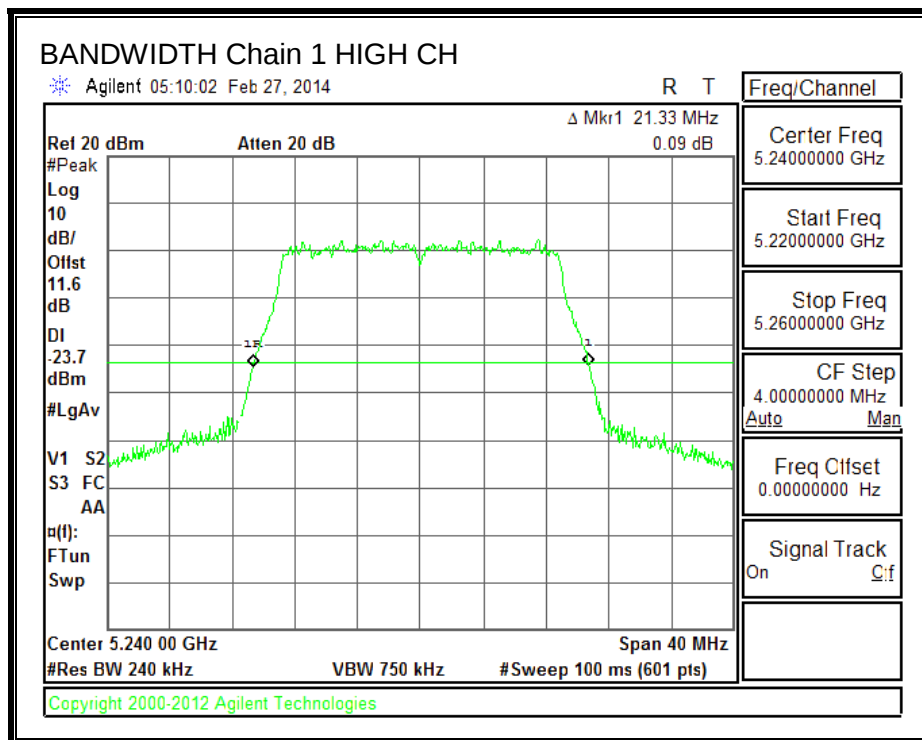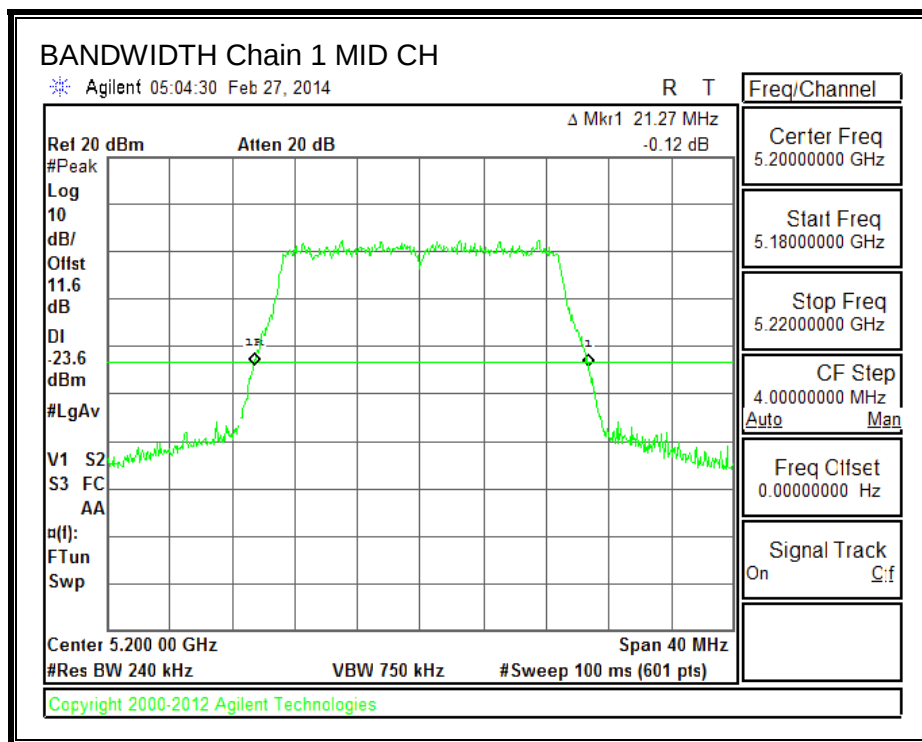

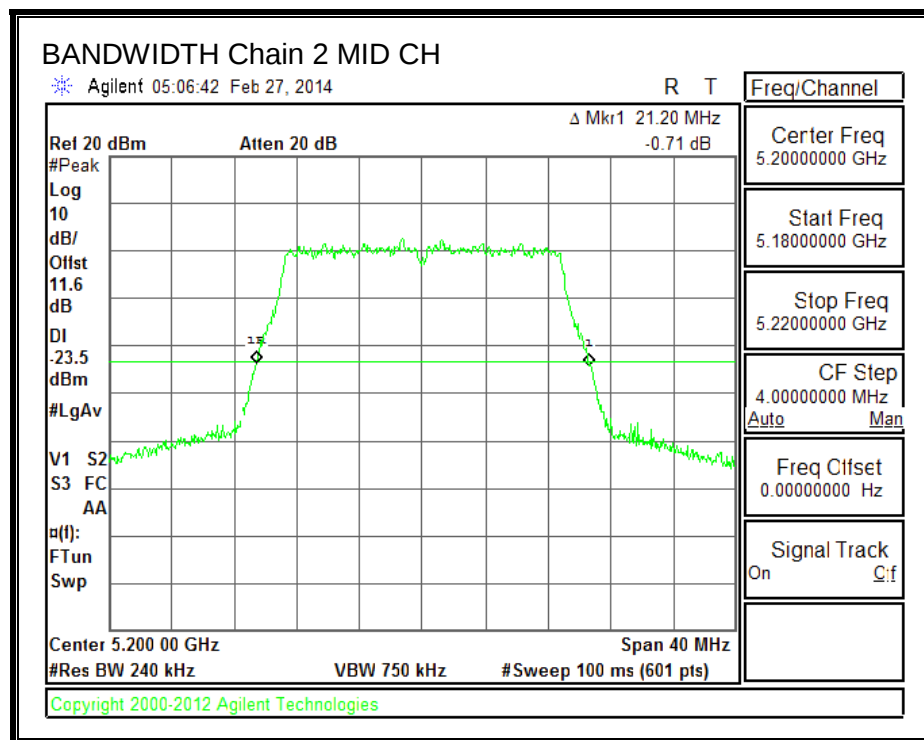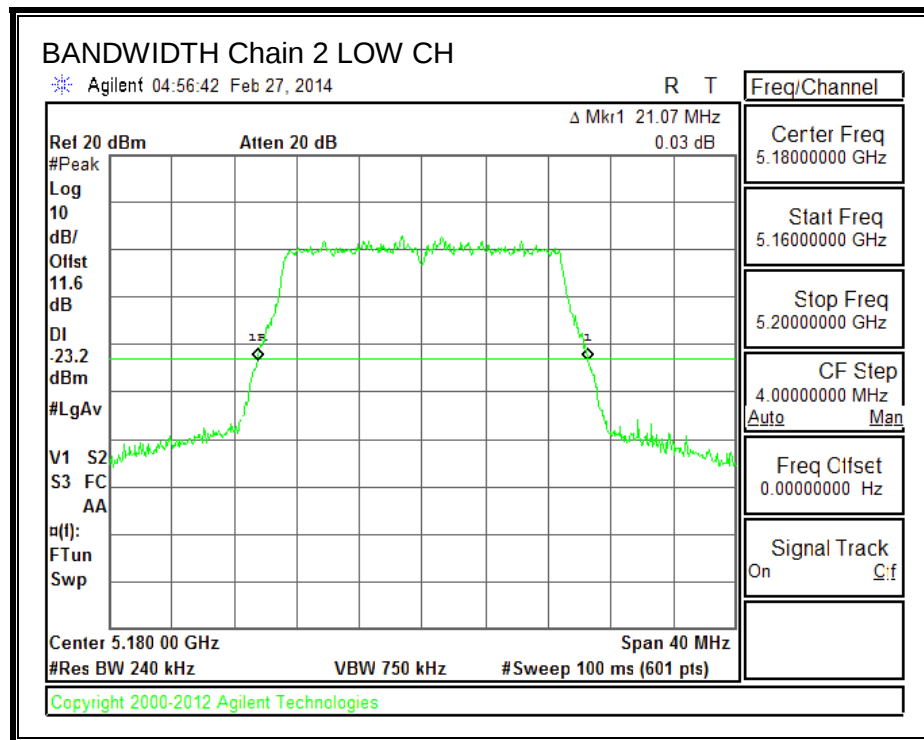26 dB BANDWIDTH, Chain 2

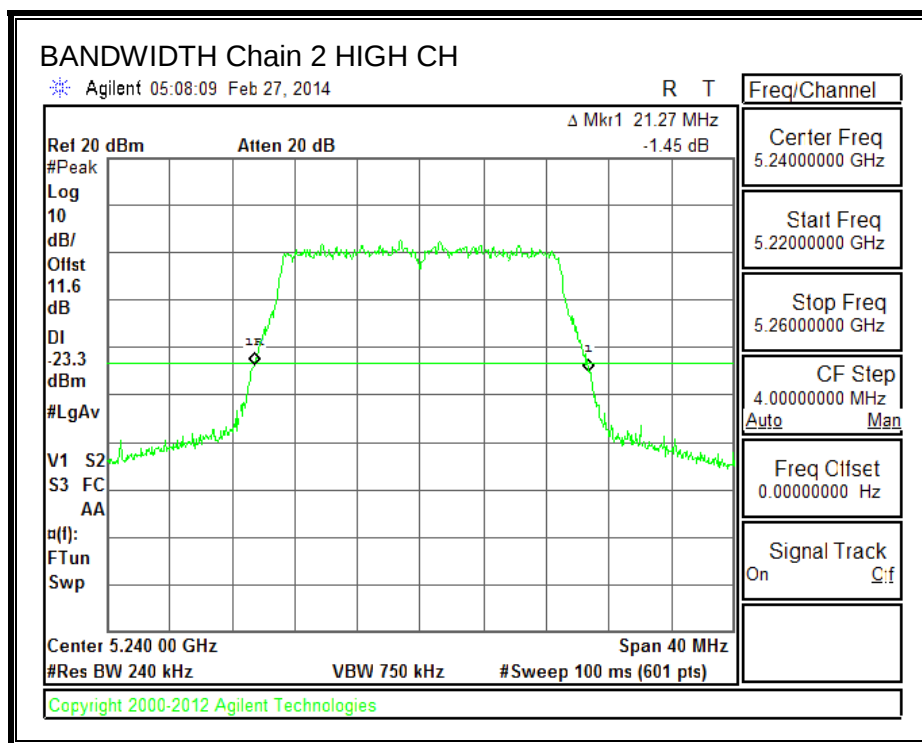

8.3.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For output power and PPSD, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
7.04	6.70	3.79	6.07

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5180	N/A	N/A	6.07	6.07
Mid	5200	N/A	N/A	6.07	6.07
High	5240	N/A	N/A	6.07	6.07

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	23.93	N/A	N/A	23.93	10.93	N/A	N/A
Mid	5200	23.93	N/A	N/A	23.93	10.93	N/A	N/A
High	5240	23.93	N/A	N/A	23.93	10.93	N/A	N/A



Duty Cycle CF (dB)	0.21	Included in Calculations of Corr'd PPSD
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	18.41	18.48	18.84	23.35	23.93	-0.58
Mid	5200	18.52	18.44	18.62	23.30	23.93	-0.63
High	5240	18.57	18.31	18.44	23.21	23.93	-0.72


PPSD Results



Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	4.72	4.35	4.24	9.42	10.93	-1.51
Mid	5200	4.29	4.14	4.01	9.13	10.93	-1.80
High	5240	4.32	3.59	3.47	8.79	10.93	-2.14

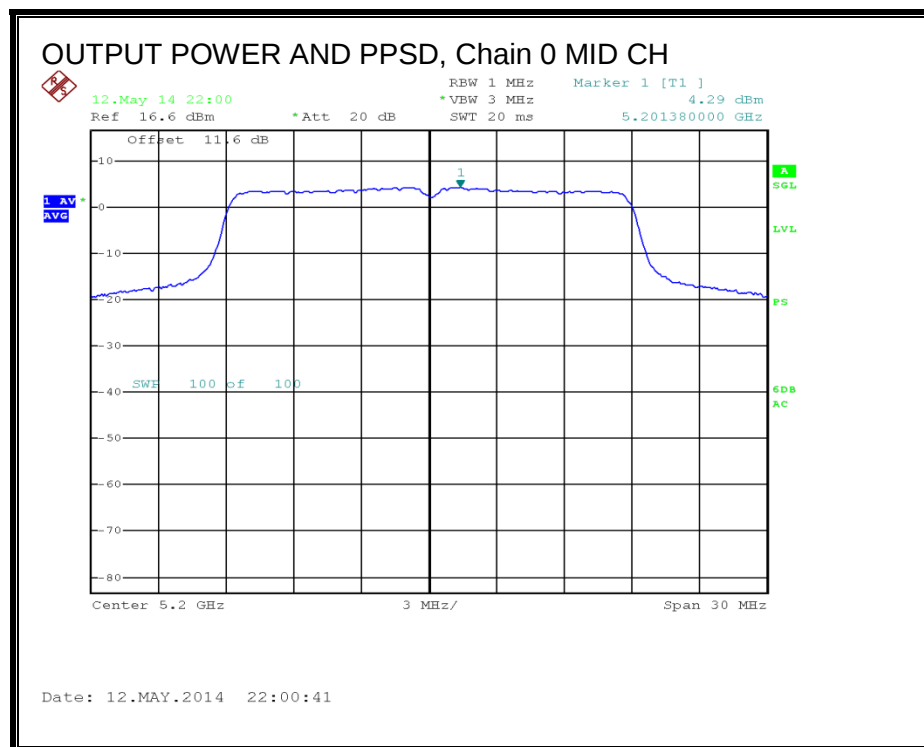
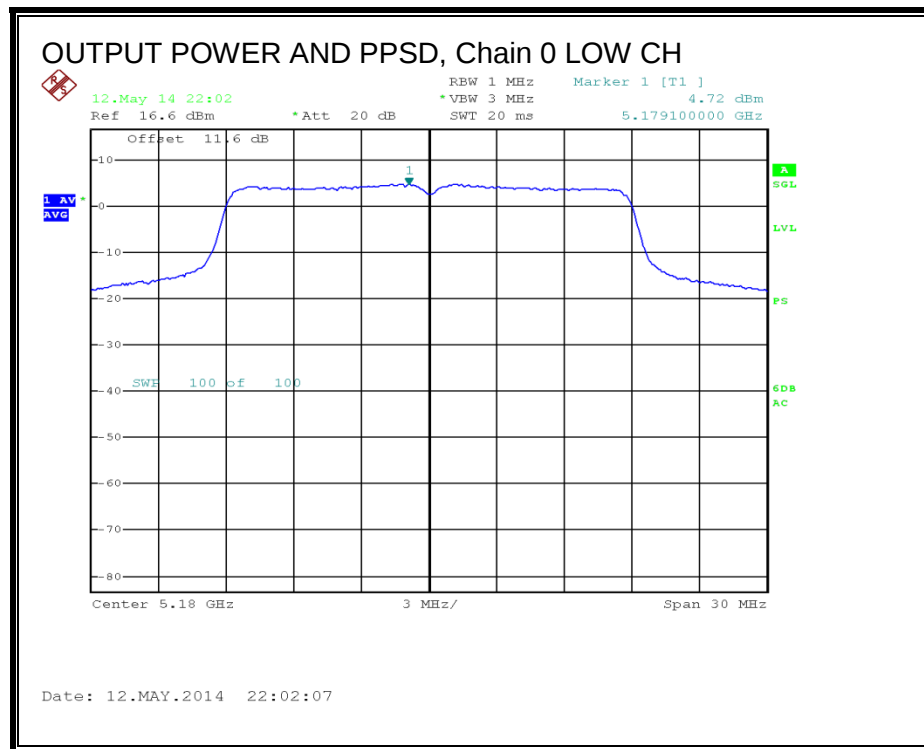
OUTPUT POWER AND PPSD, Chain 0

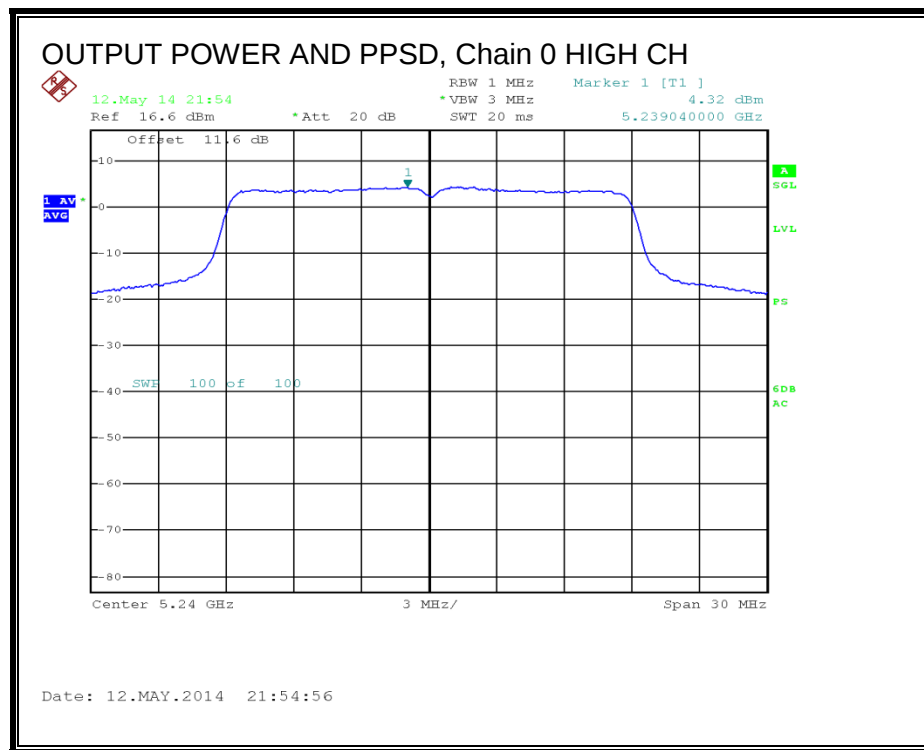


OUTPUT POWER AND PPSD, Chain 1

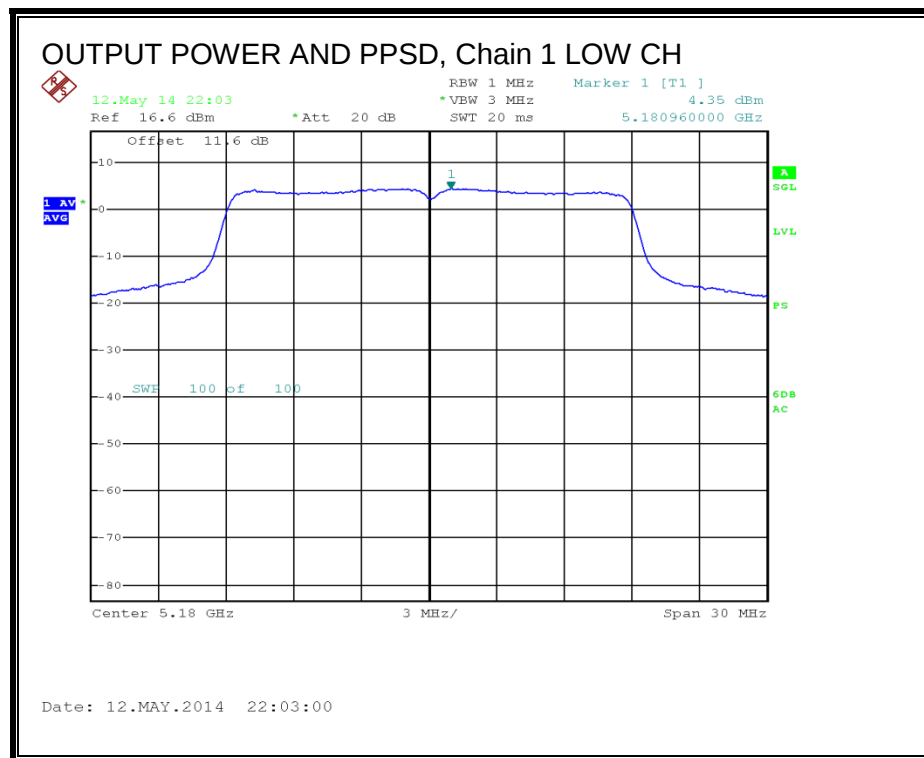

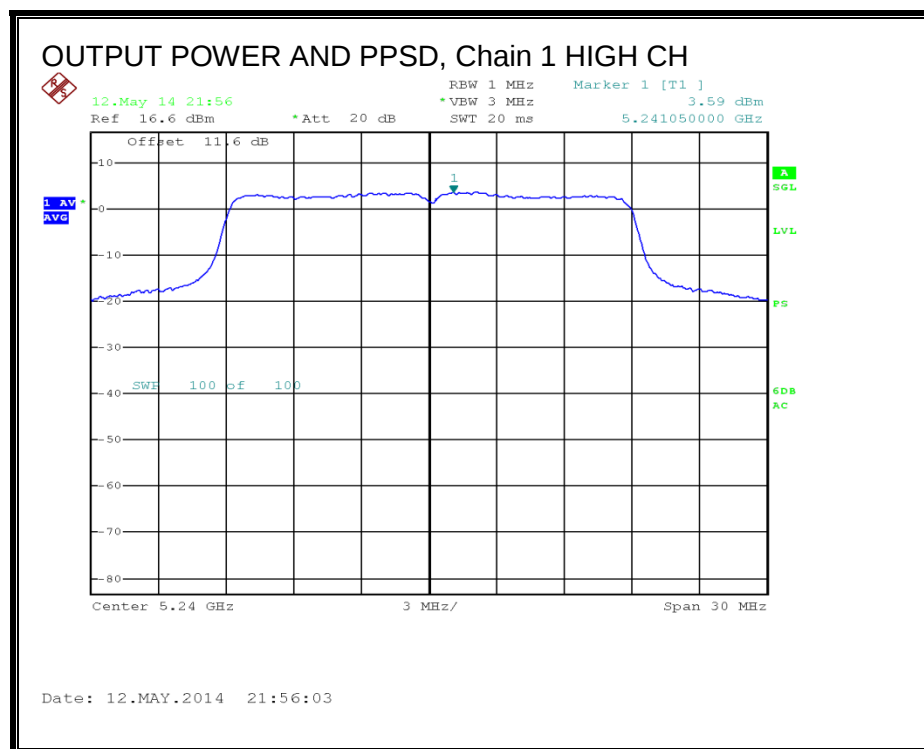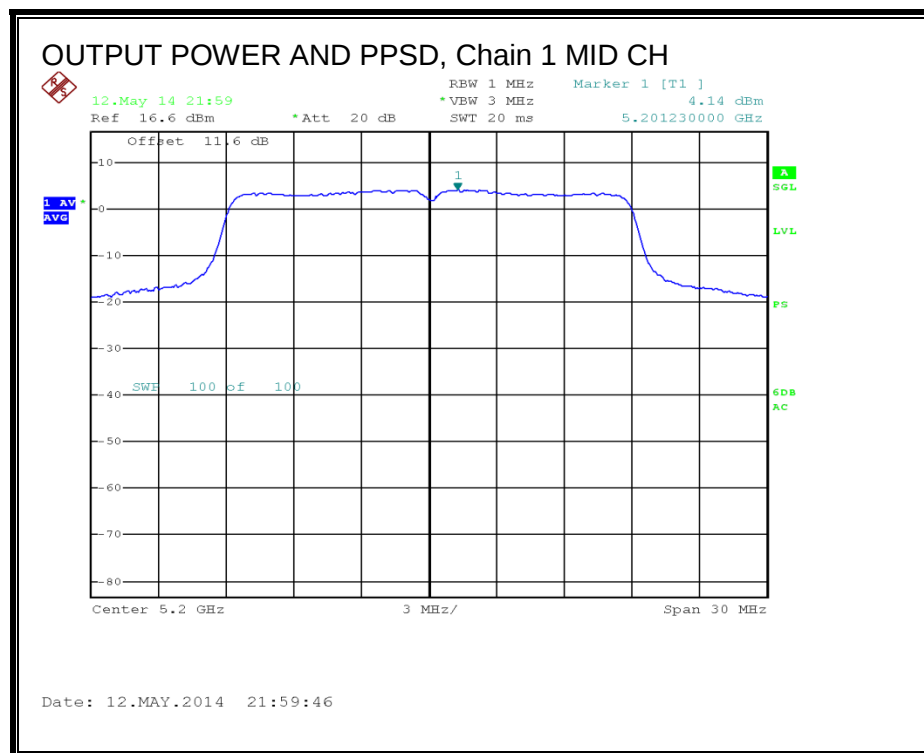

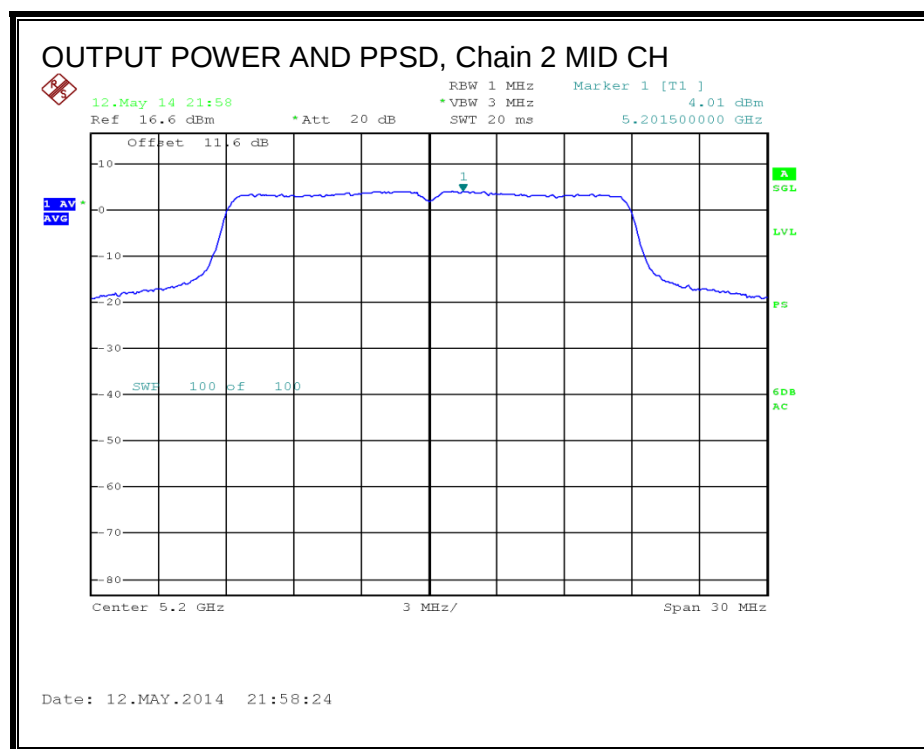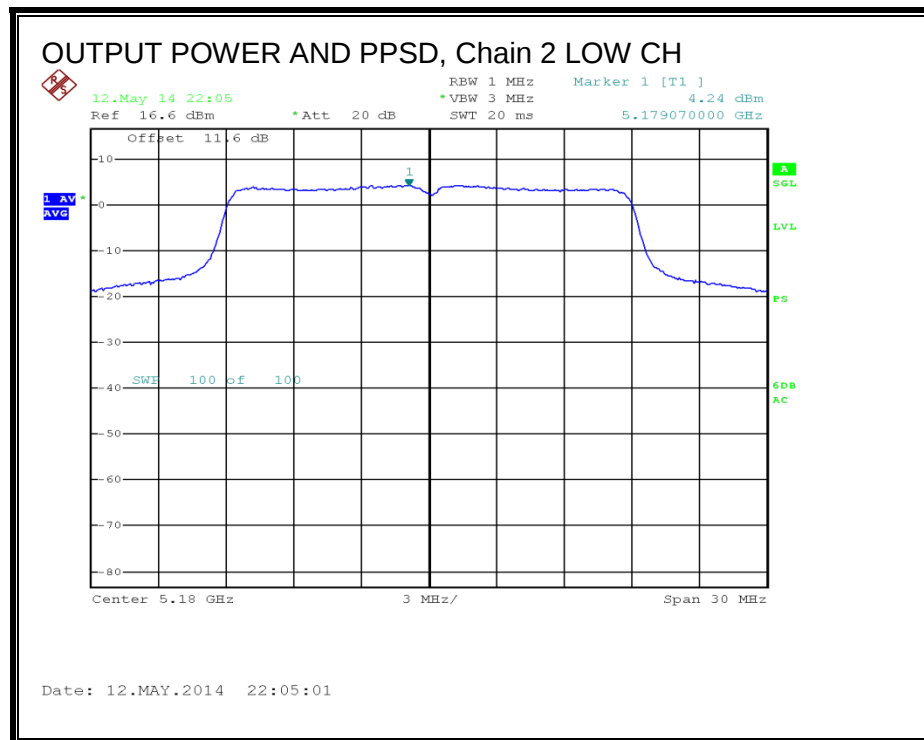OUTPUT POWER AND PPSD, Chain 2

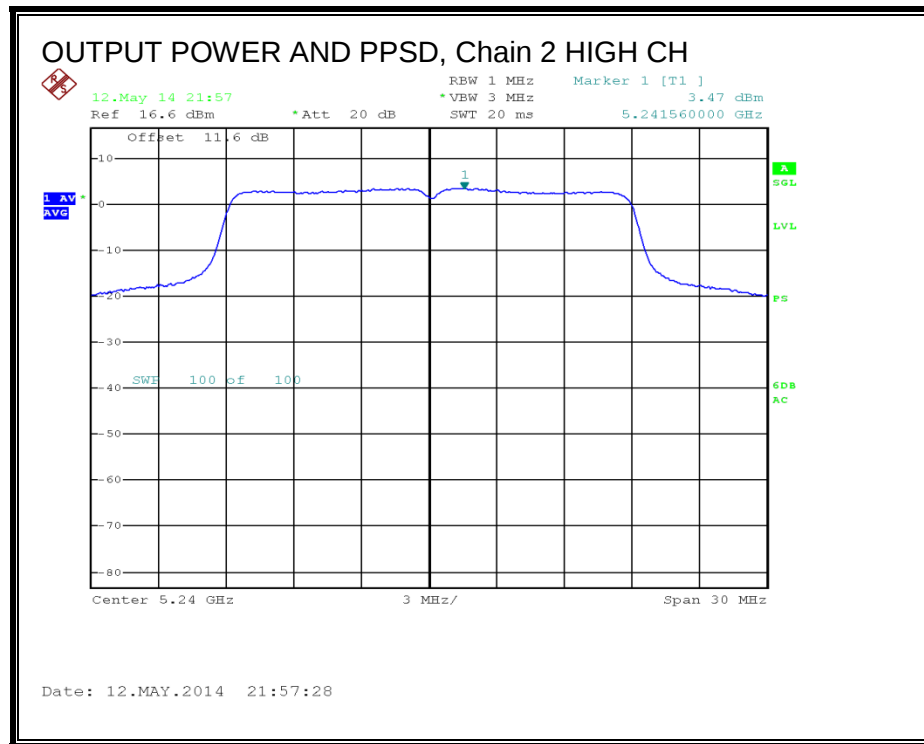

8.4. 802.11n HT20 BF 3TX MODE IN THE 5.2GHz BAND

8.4.1. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
7.04	6.70	3.79	10.73

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5180	N/A	N/A	10.73	10.73
Mid	5200	N/A	N/A	10.73	10.73
High	5240	N/A	N/A	10.73	10.73

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	19.27	N/A	N/A	19.27	6.27	N/A	N/A
Mid	5200	19.27	N/A	N/A	19.27	6.27	N/A	N/A
High	5240	19.27	N/A	N/A	19.27	6.27	N/A	N/A



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd PPSD
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.81	13.84	14.16	18.71	19.27	-0.56
Mid	5200	13.82	13.83	14.17	18.71	19.27	-0.56
High	5240	13.86	13.86	14.03	18.69	19.27	-0.58


PPSD Results



Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	-0.26	-0.18	0.26	4.94	6.27	-1.33
Mid	5200	-0.38	-0.42	0.01	4.73	6.27	-1.54
High	5240	-0.55	-0.68	-0.34	4.47	6.27	-1.80

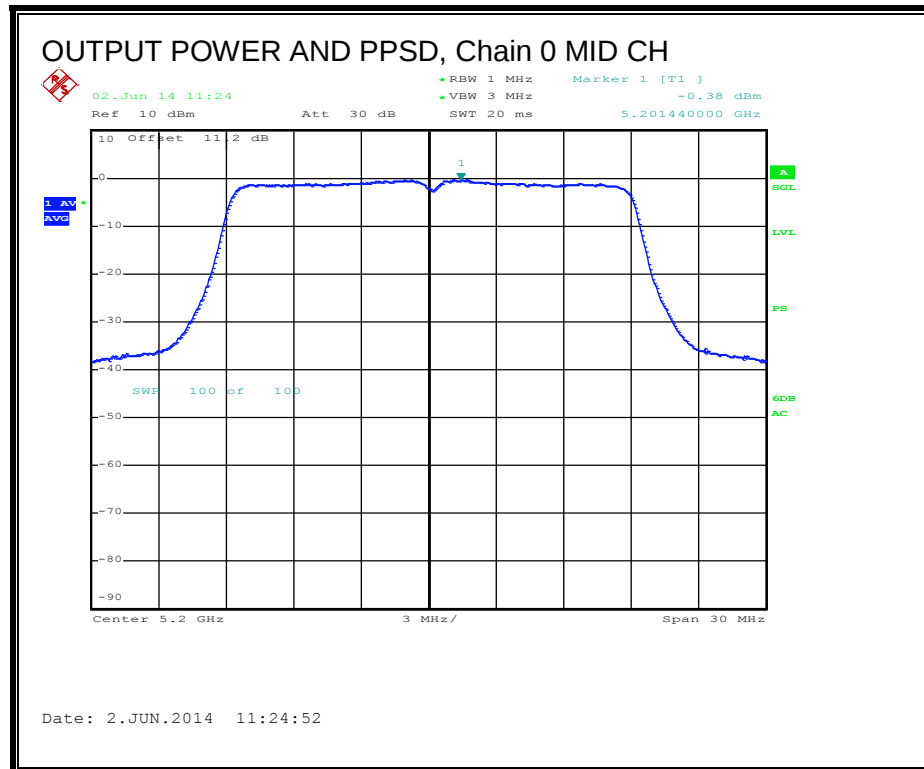
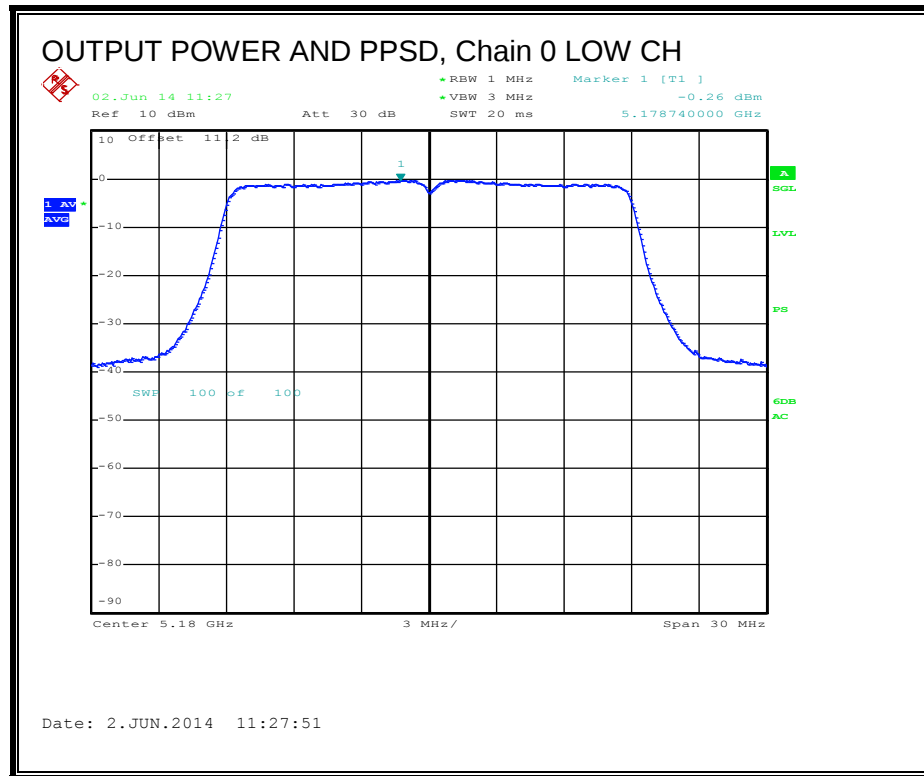
OUTPUT POWER AND PPSD, Chain 0

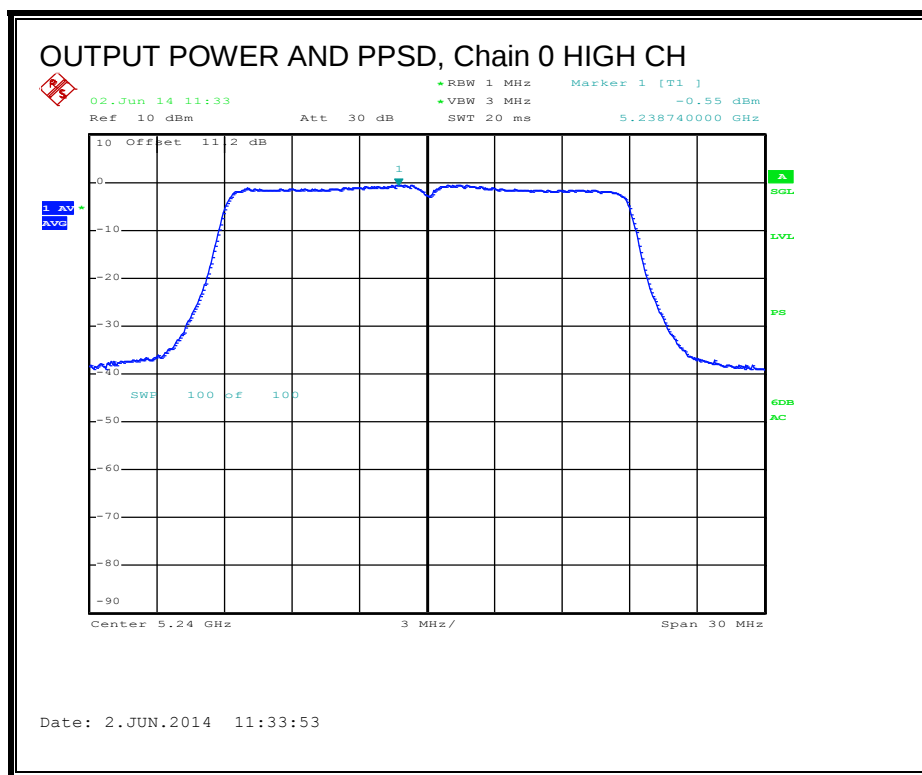


OUTPUT POWER AND PPSD, Chain 1

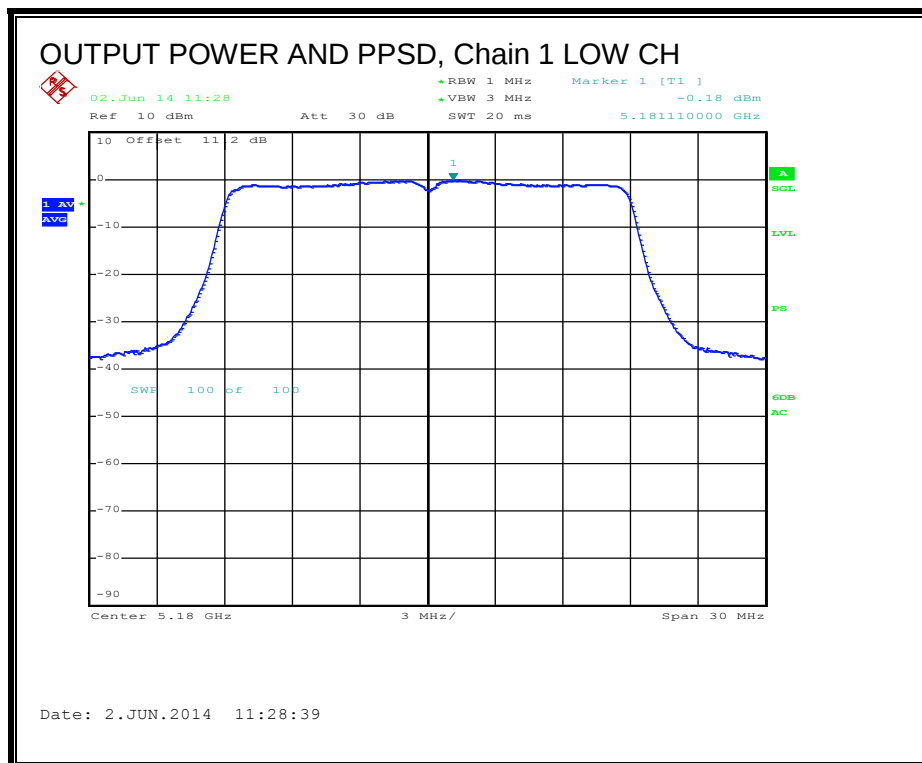

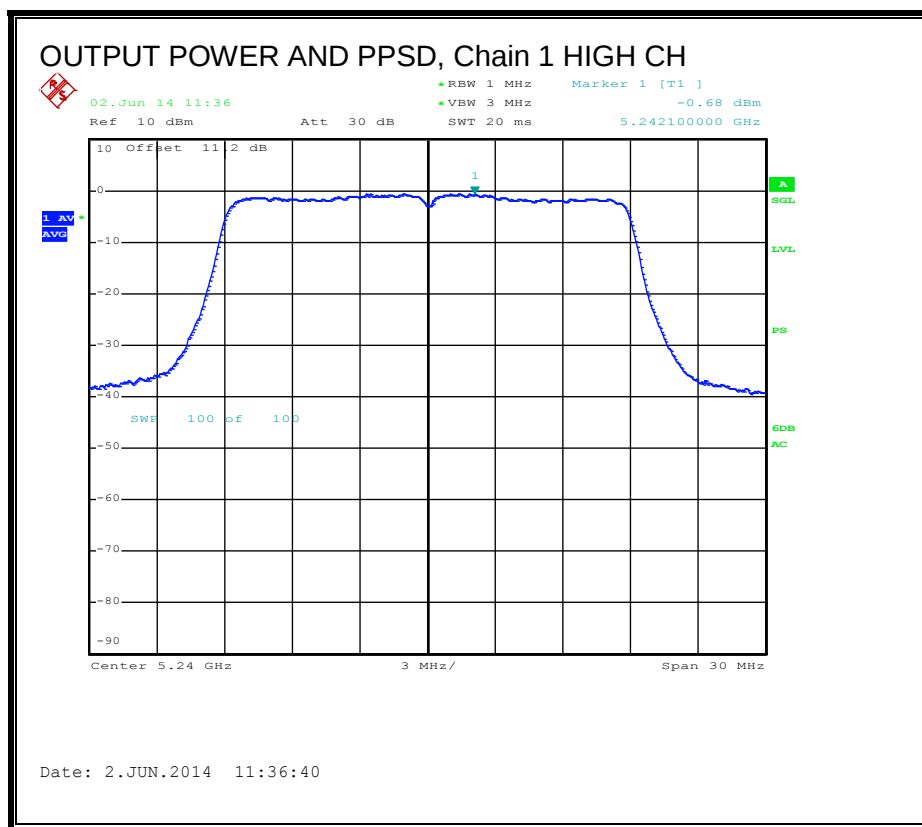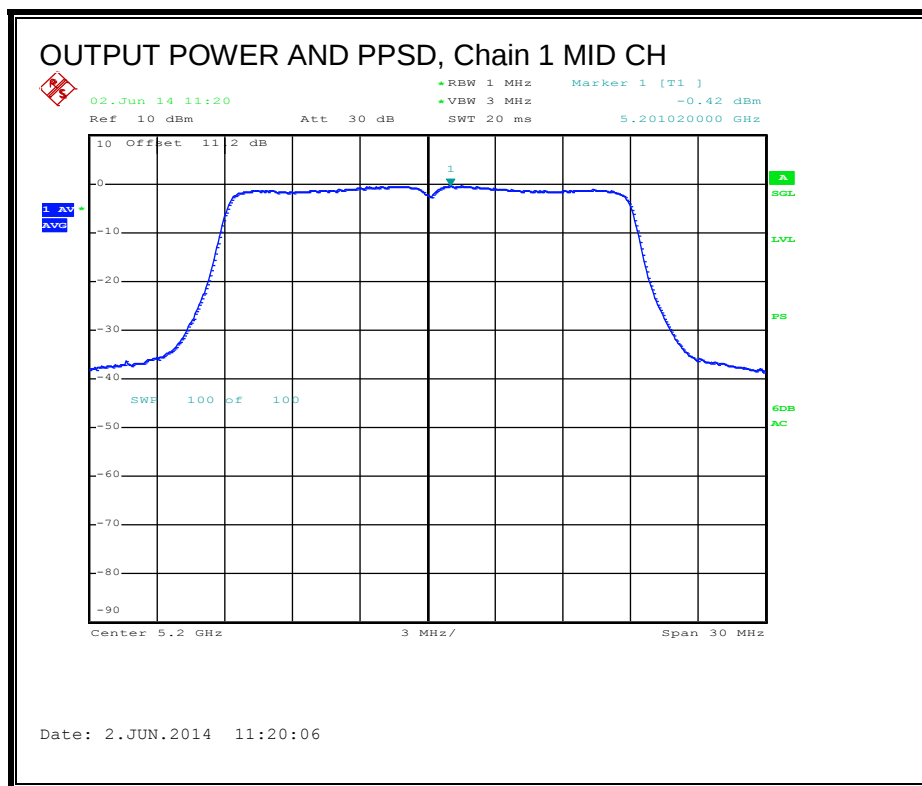

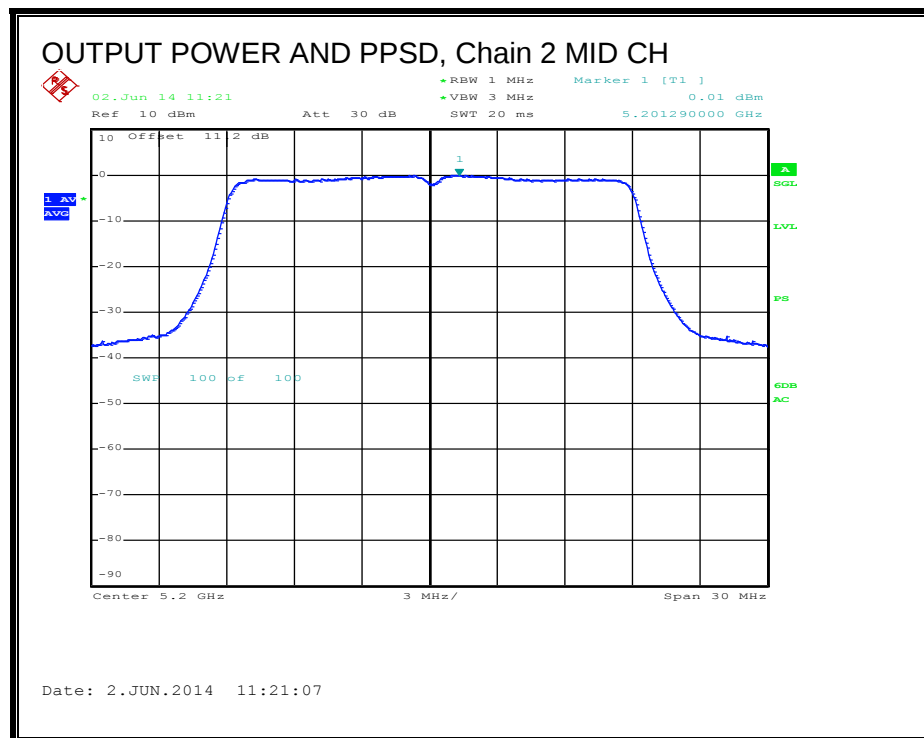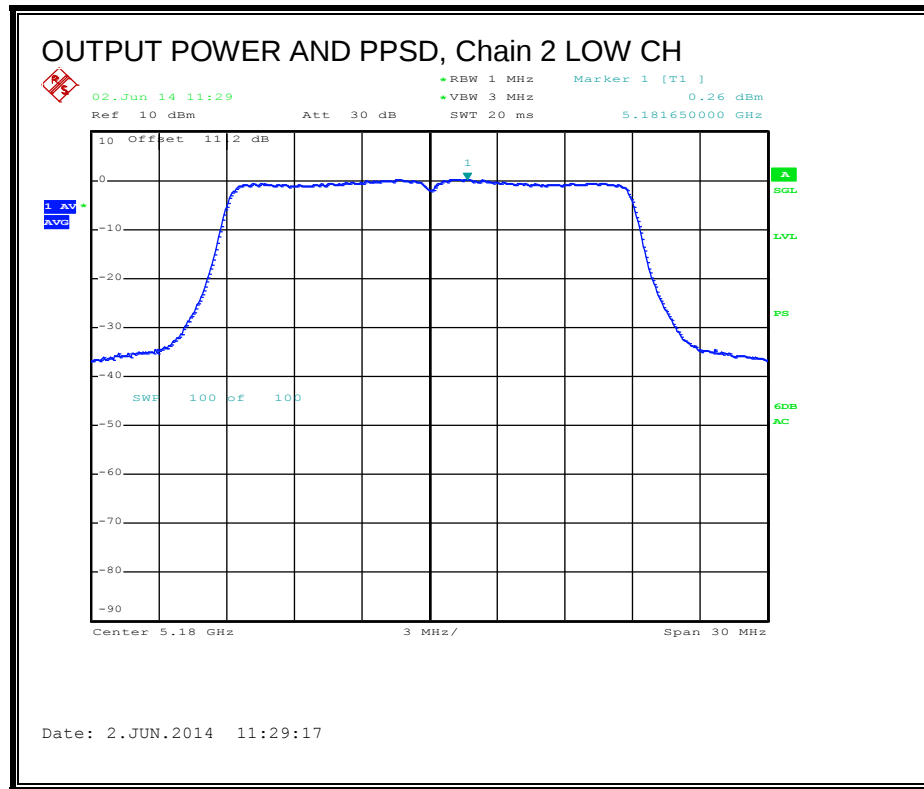OUTPUT POWER AND PPSD, Chain 2

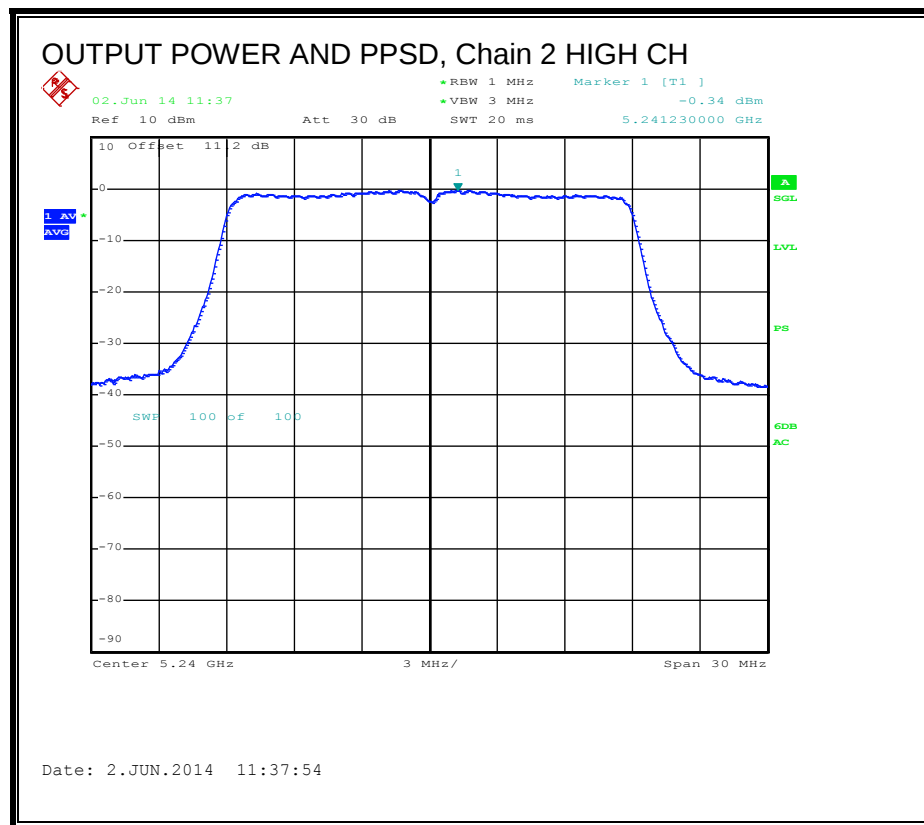

8.5. 802.11n HT40 1TX MODE IN THE 5.2 GHz BAND

8.5.1. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)
Low	5190	7.04	22.96
High	5230	7.04	22.96

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	5190	15.63			15.63	22.96	-7.33
High	5230	18.55			18.55	22.96	-4.41

Note: the power readings above are measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

8.6. 802.11n HT40 CDD 3TX MODE IN THE 5.2 GHz BAND



8.6.1. 26 dB BANDWIDTH

LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5190	40.30	39.80	39.80
High	5230	40.40	39.90	39.80

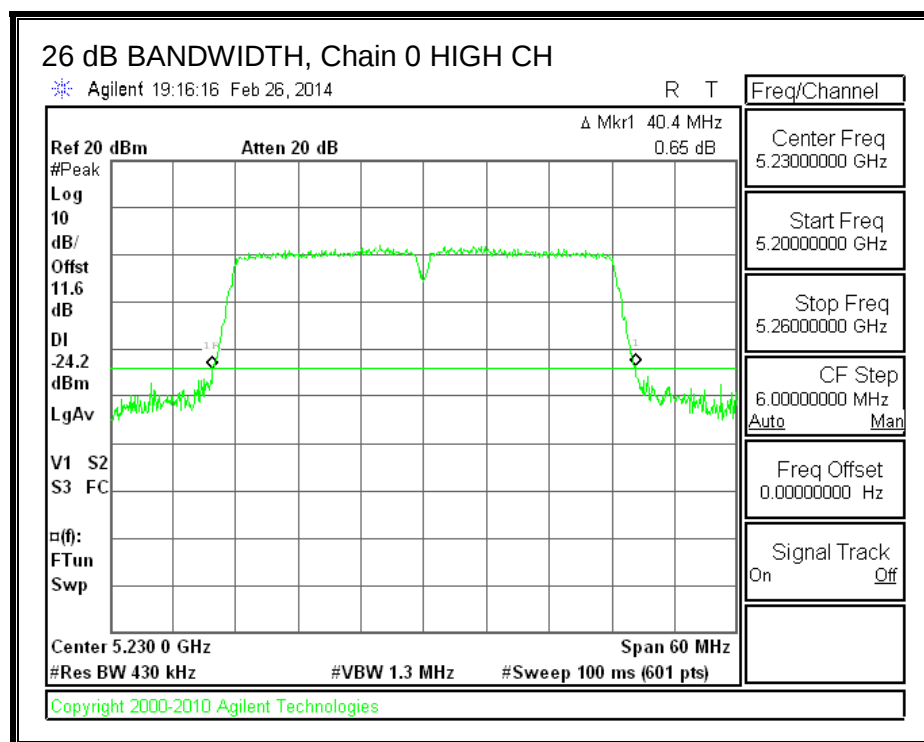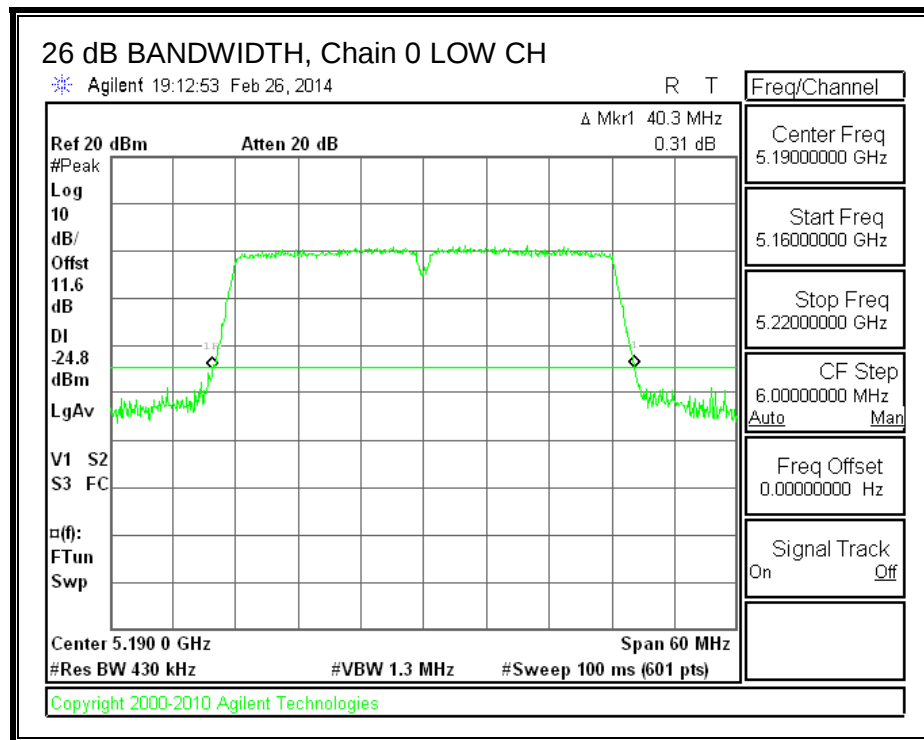26 dB BANDWIDTH, Chain 0

26 dB BANDWIDTH, Chain 1

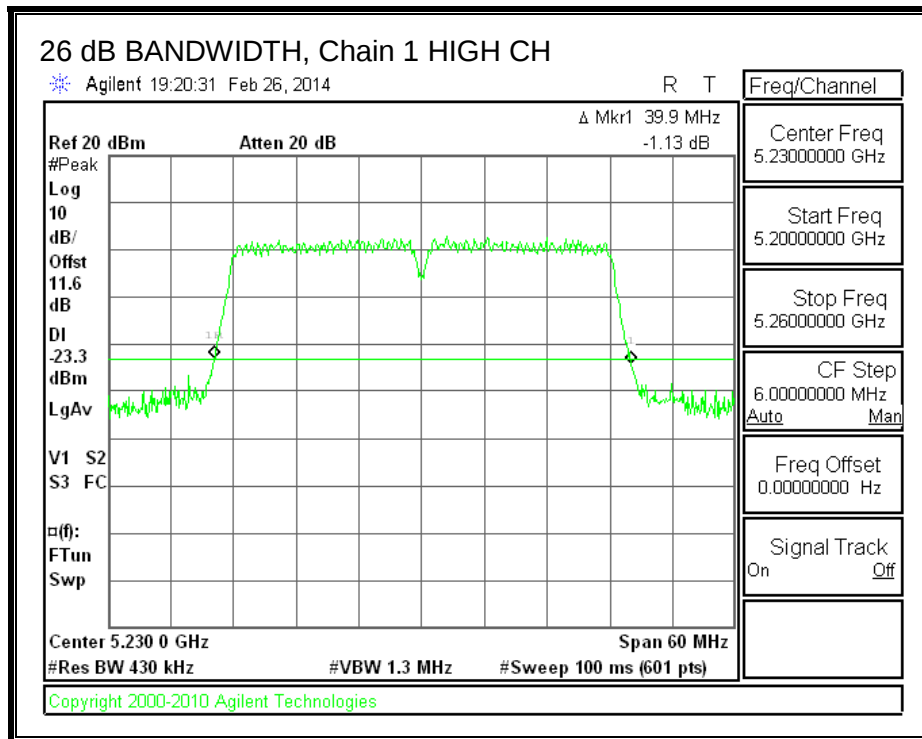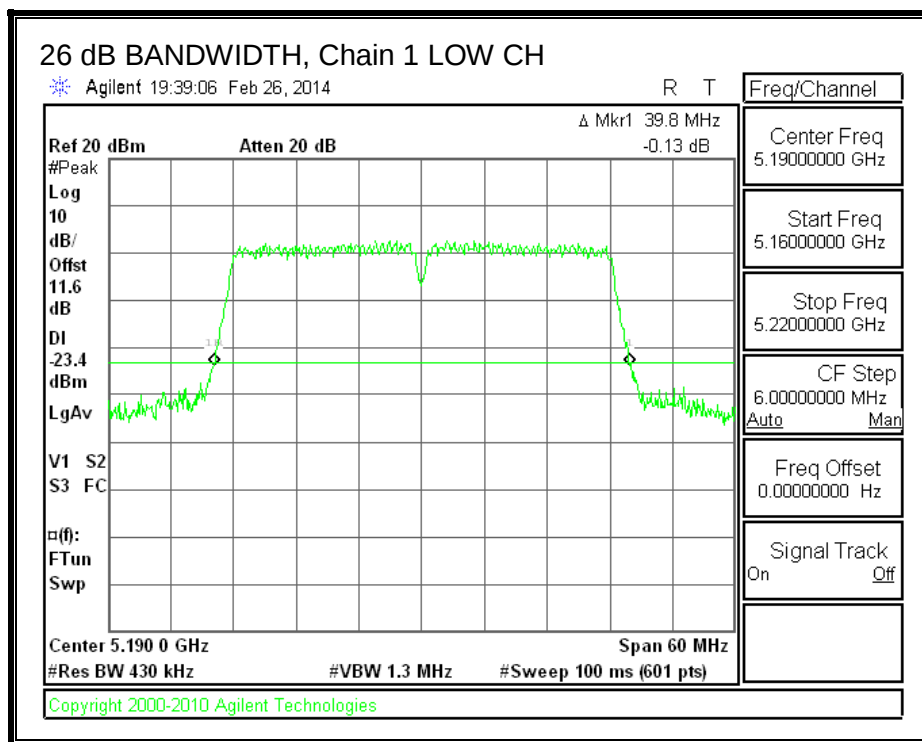

26 dB BANDWIDTH, Chain 2

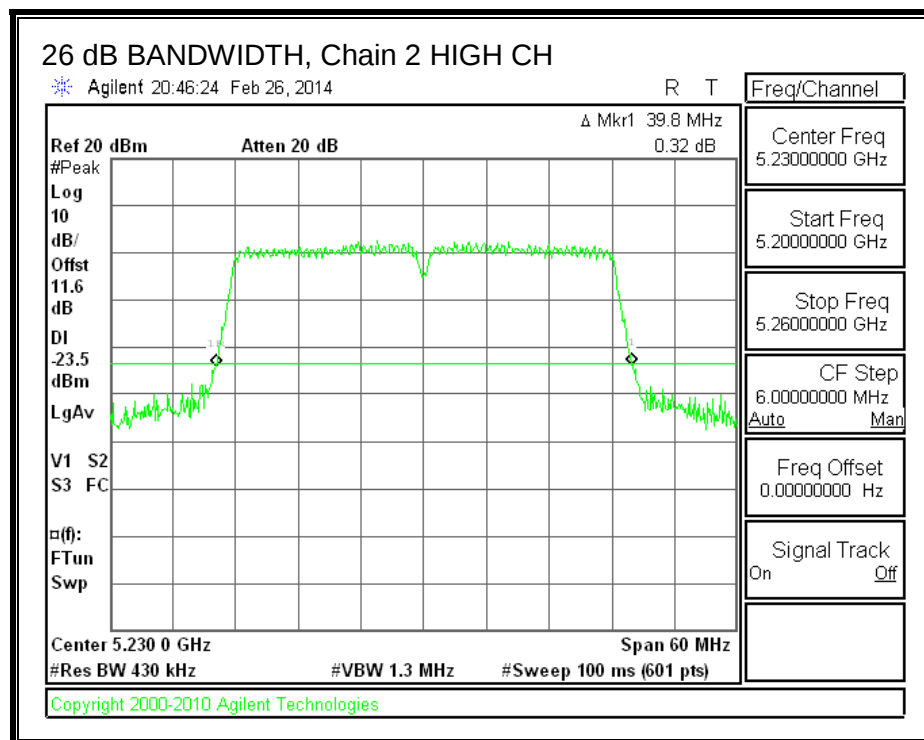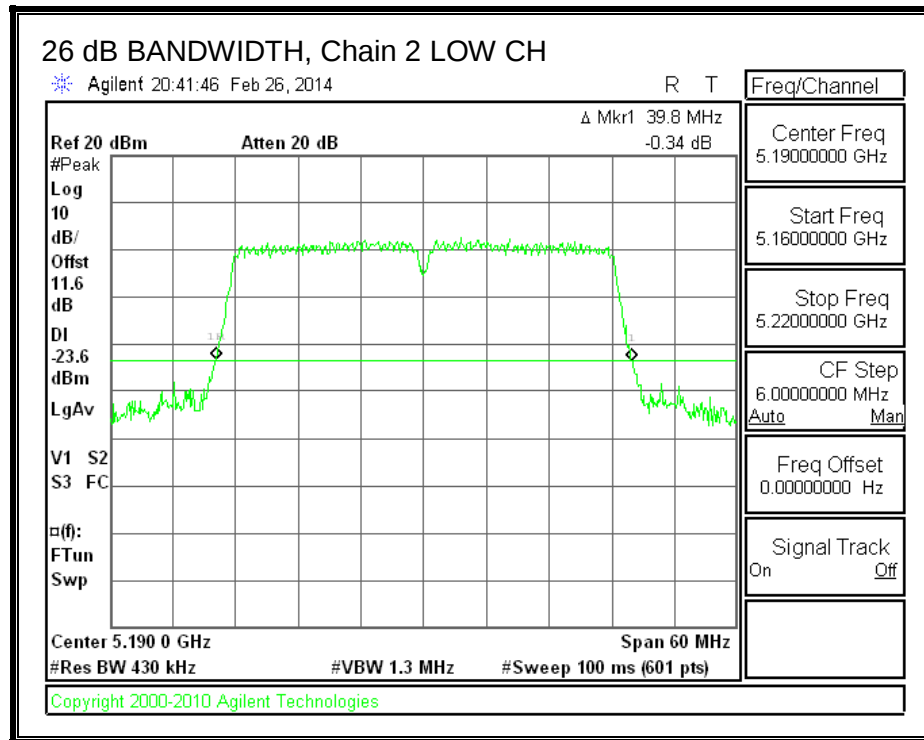

8.6.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For output power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
7.04	6.70	3.79	6.07

For PPSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
7.04	6.70	3.79	10.73

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5190	N/A	N/A	6.07	10.73
High	5230	N/A	N/A	6.07	10.73

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5190	23.93	N/A	N/A	23.93	6.27	N/A	N/A
High	5230	23.93	N/A	N/A	23.93	6.27	N/A	N/A



Duty Cycle CF (dB)	0.47	Included in Calculations of Corr'd PPSD
--------------------	------	---



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	12.77	12.58	12.61	17.43	23.93	-6.50
High	5230	18.07	18.18	18.02	22.86	23.93	-1.07

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	1.14	0.92	0.98	6.26	6.27	-0.01
High	5230	1.17	0.95	0.86	6.24	6.27	-0.03

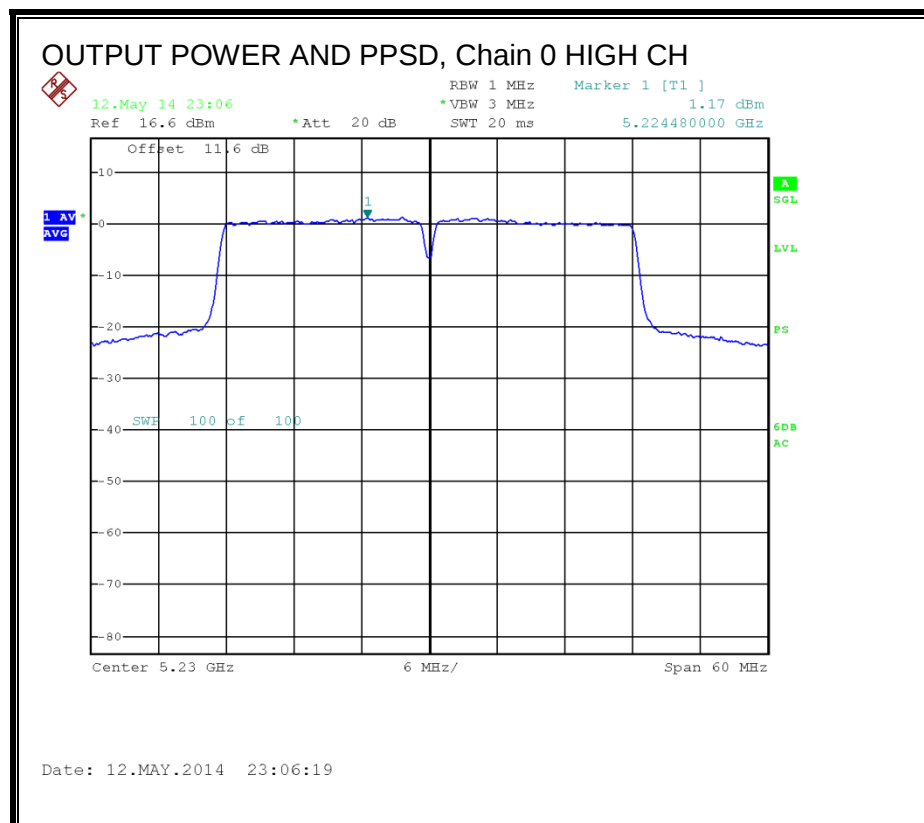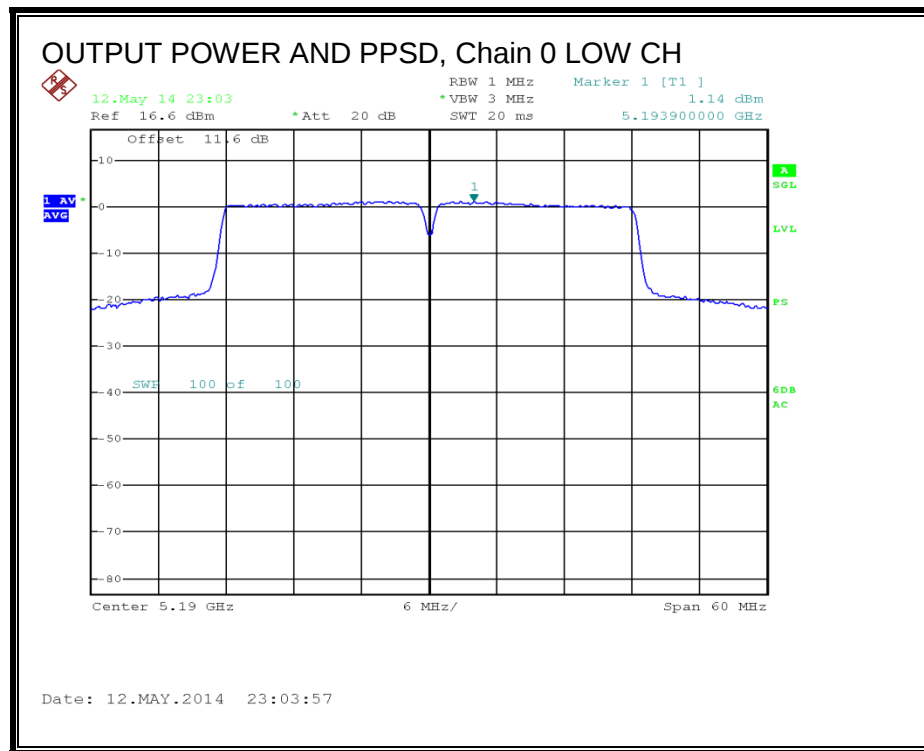OUTPUT POWER AND PPSD, Chain 0

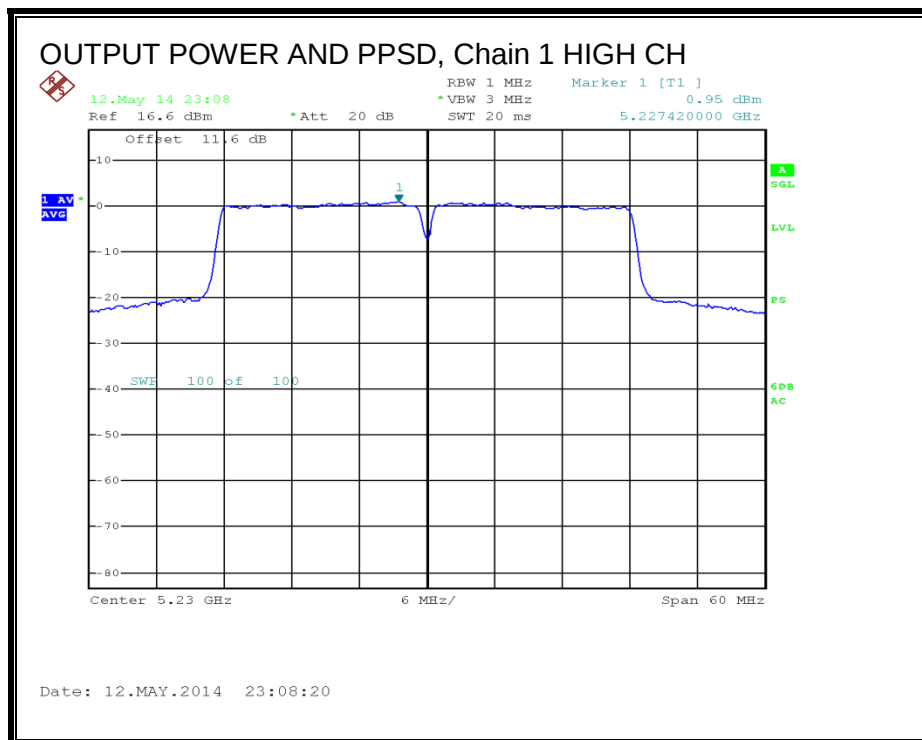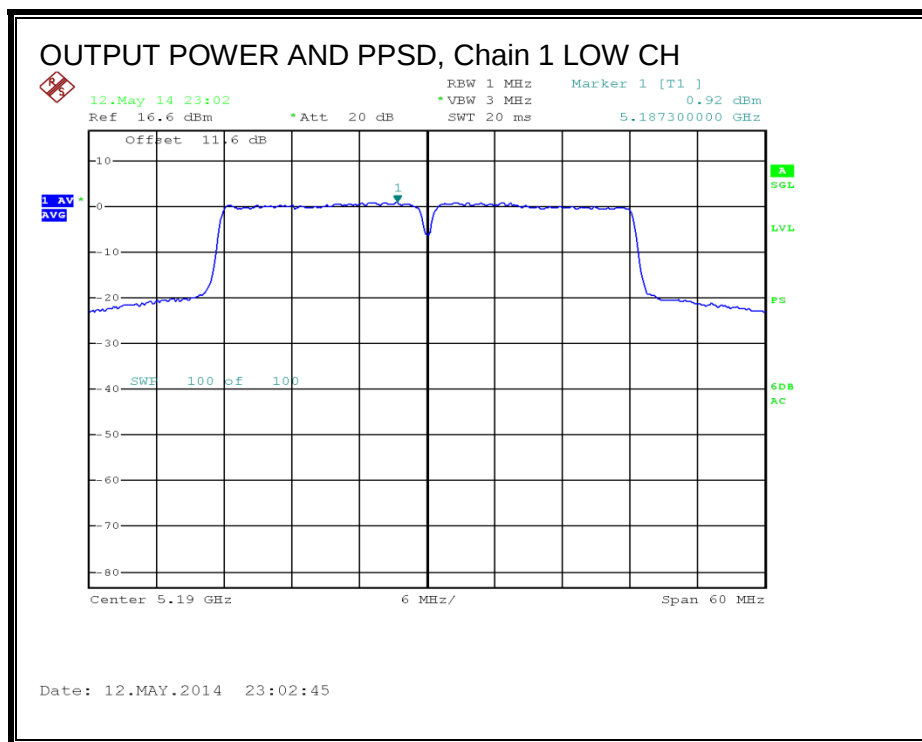OUTPUT POWER AND PPSD, Chain 1

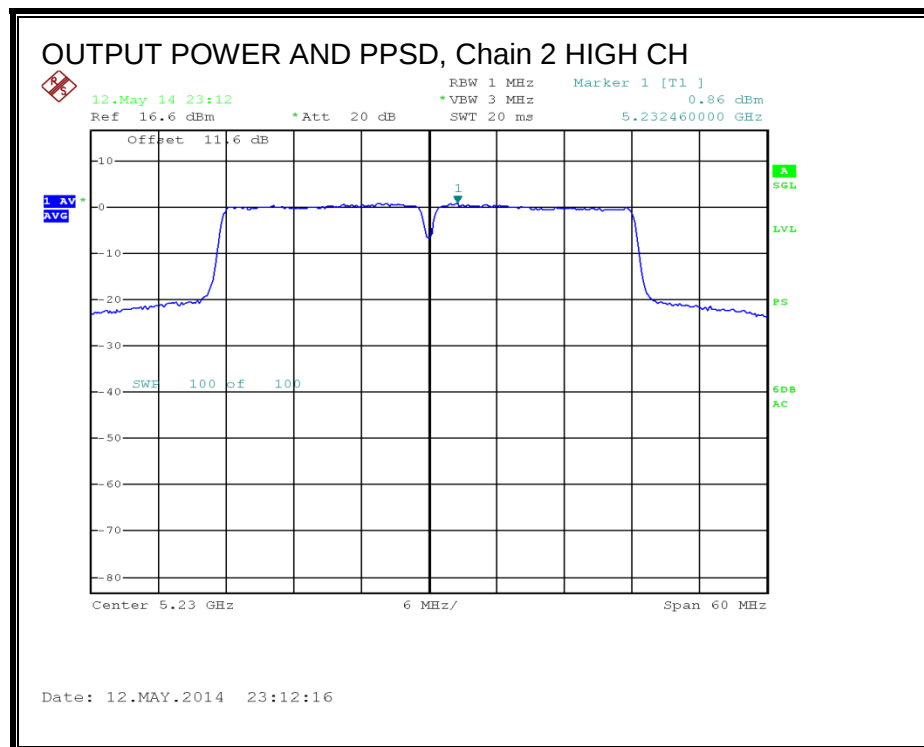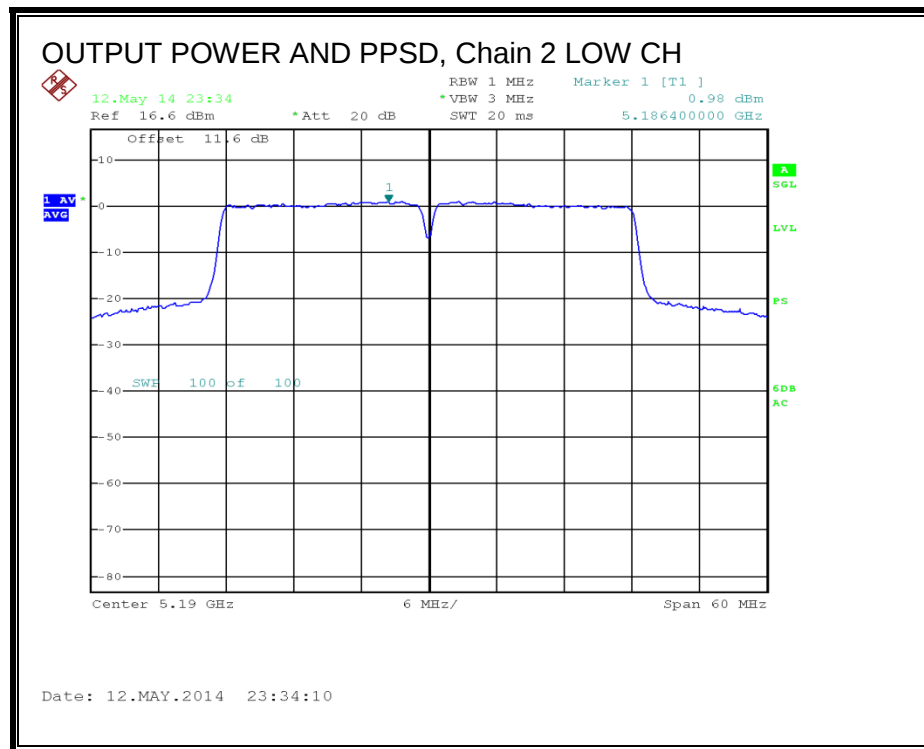OUTPUT POWER AND PPSD, Chain 2

8.7. 802.11n HT40 BF 3TX MODE IN THE 5.2 GHz BAND



8.7.1. 26 dB BANDWIDTH

LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5190	40.30	39.80	39.80
High	5230	40.40	39.90	39.80

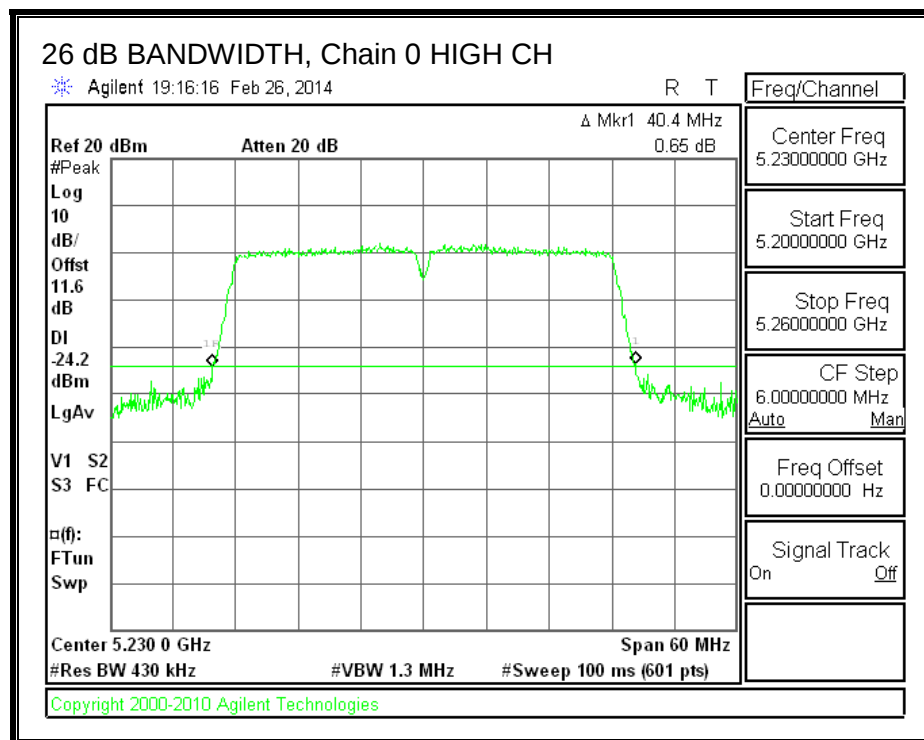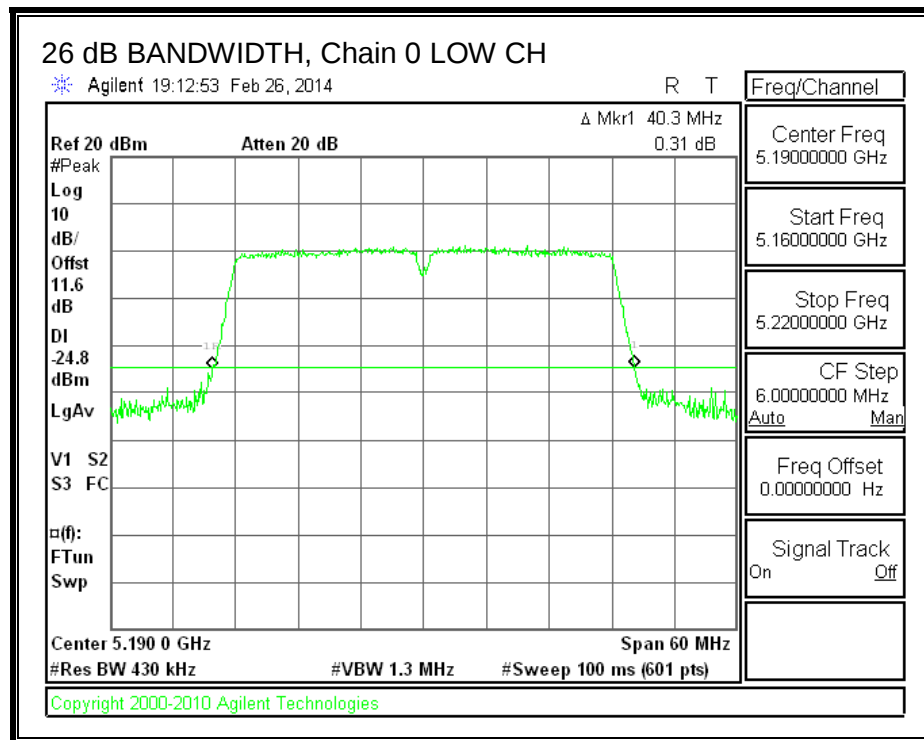26 dB BANDWIDTH, Chain 0

26 dB BANDWIDTH, Chain 1

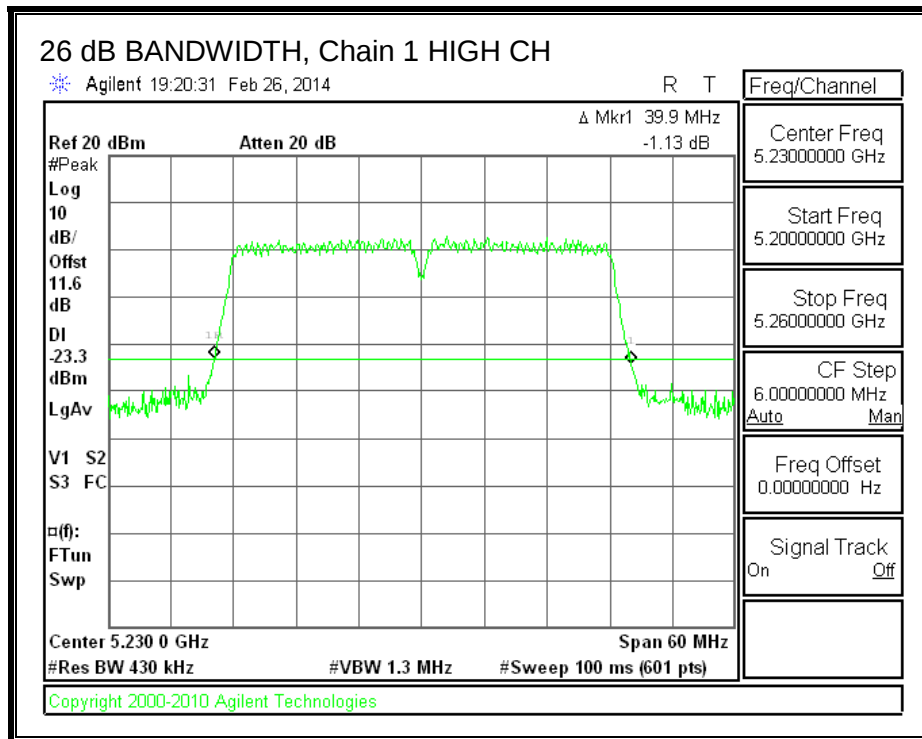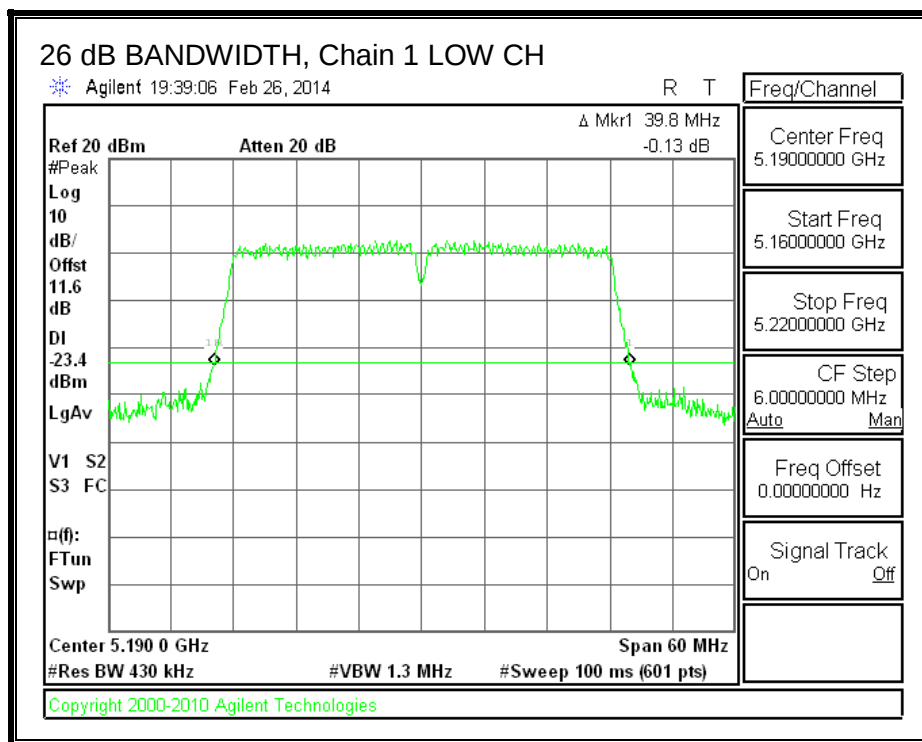

26 dB BANDWIDTH, Chain 2

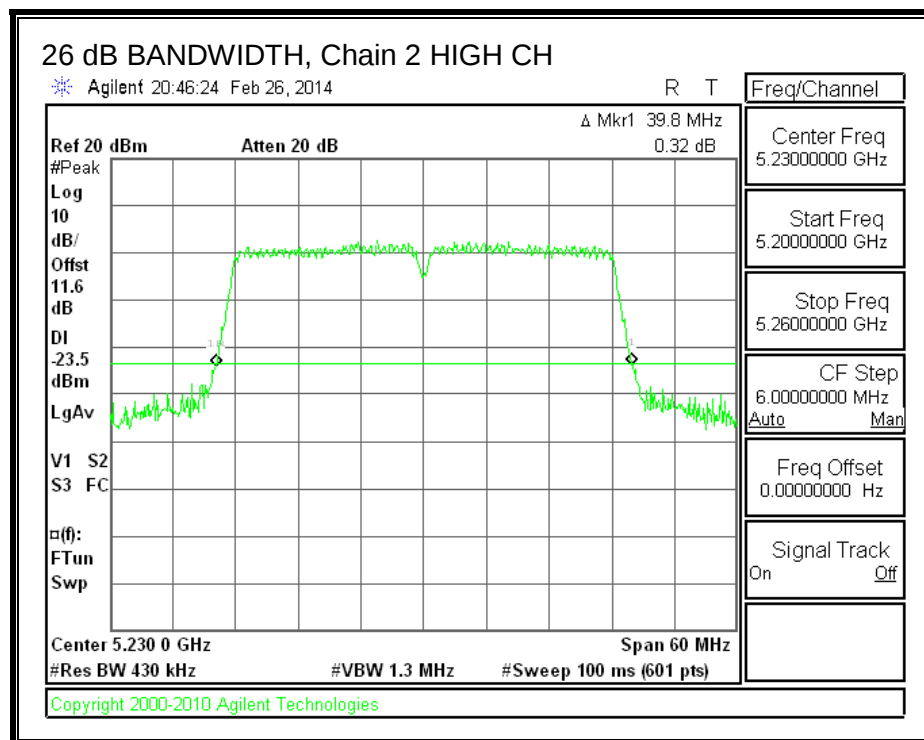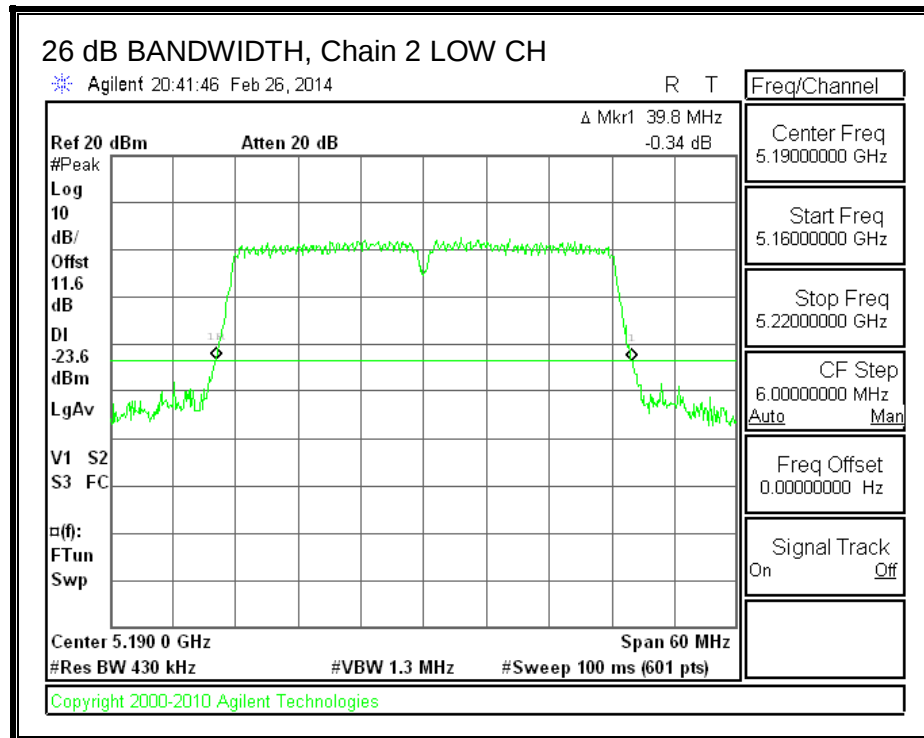

8.7.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
7.04	6.70	3.79	10.73

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5190	N/A	N/A	10.73
High	5230	N/A	N/A	10.73

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5190	19.27	N/A	N/A	19.27	6.27	N/A	N/A
High	5230	19.27	N/A	N/A	19.27	6.27	N/A	N/A



Duty Cycle CF (dB)	0.47	Included in Calculations of Corr'd Power & PPSP
--------------------	------	---



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.70	13.40	13.40	18.27	19.27	-1.00
High	5230	14.25	13.65	14.34	18.86	19.27	-0.41

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-3.57	-3.67	-3.80	1.56	6.27	-4.71
High	5230	-3.52	-3.62	-3.52	1.69	6.27	-4.58

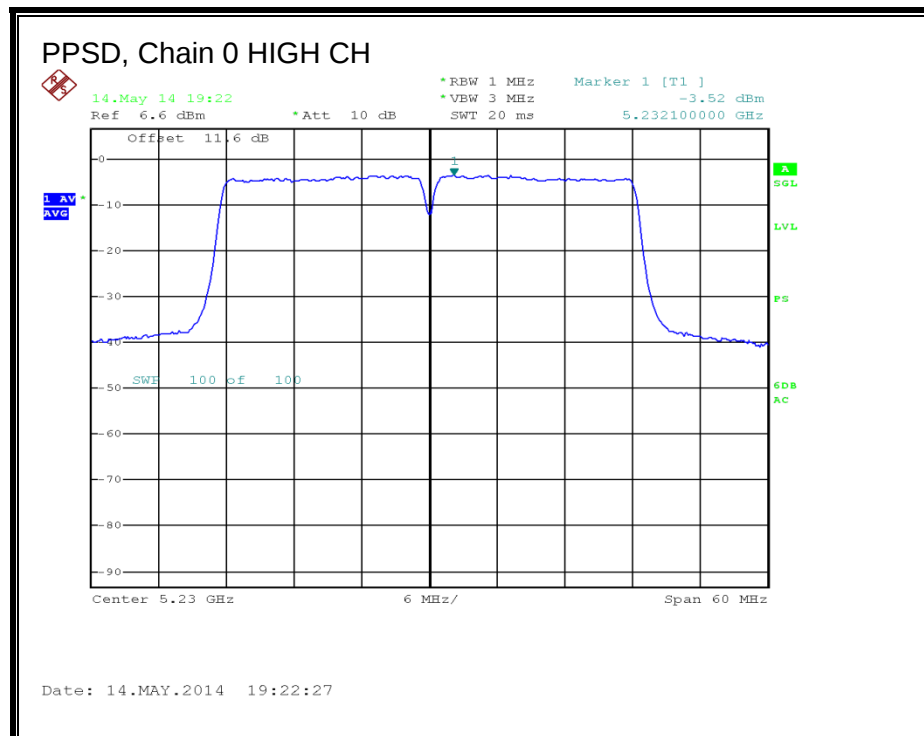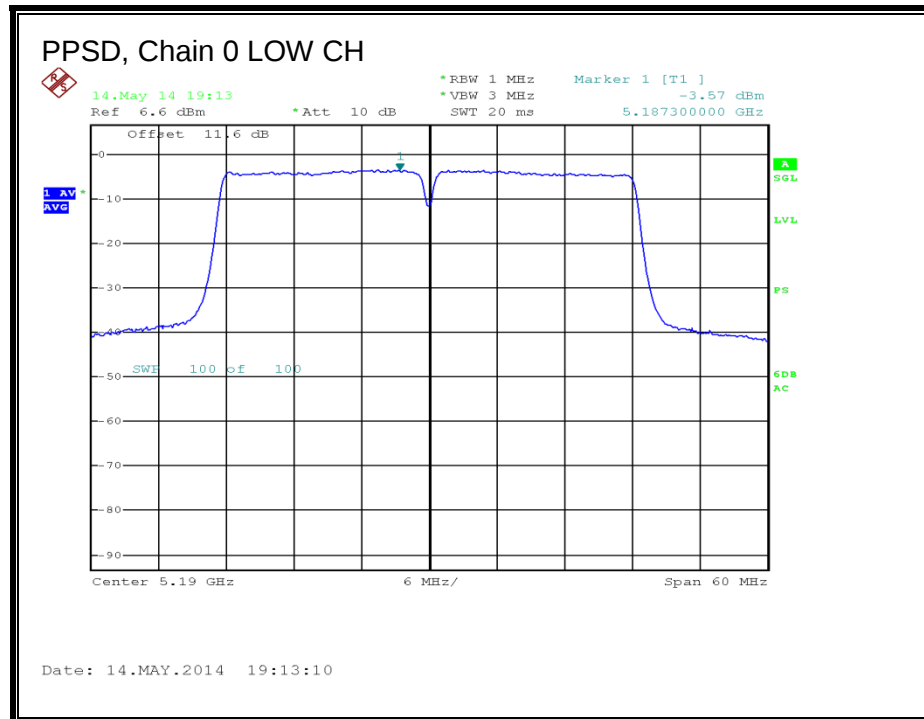OUTPUT POWER AND PPSD, Chain 0

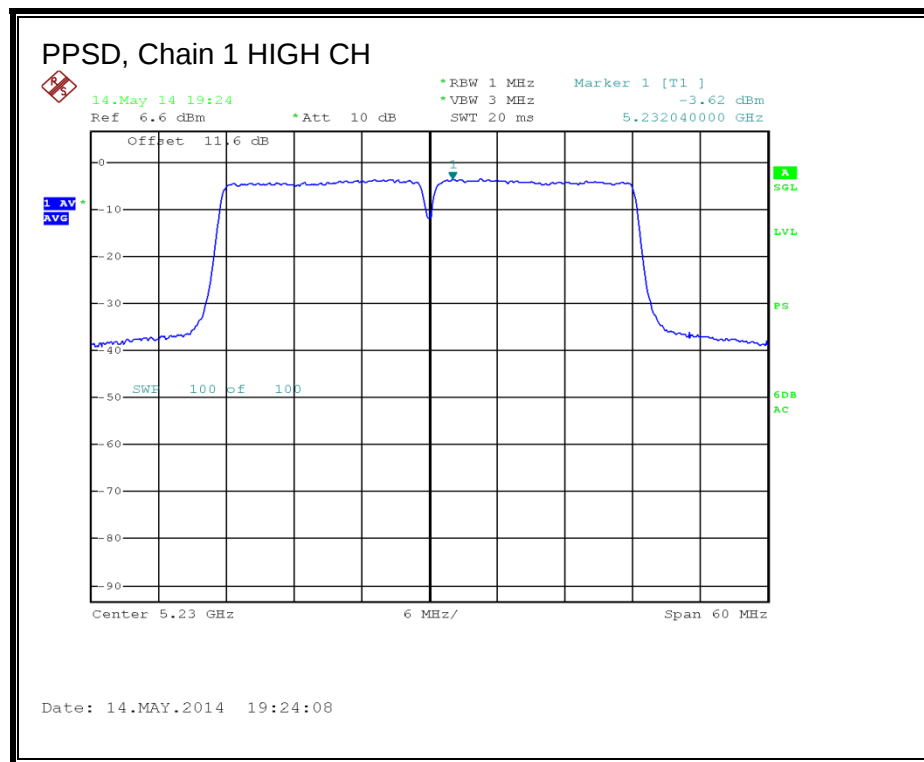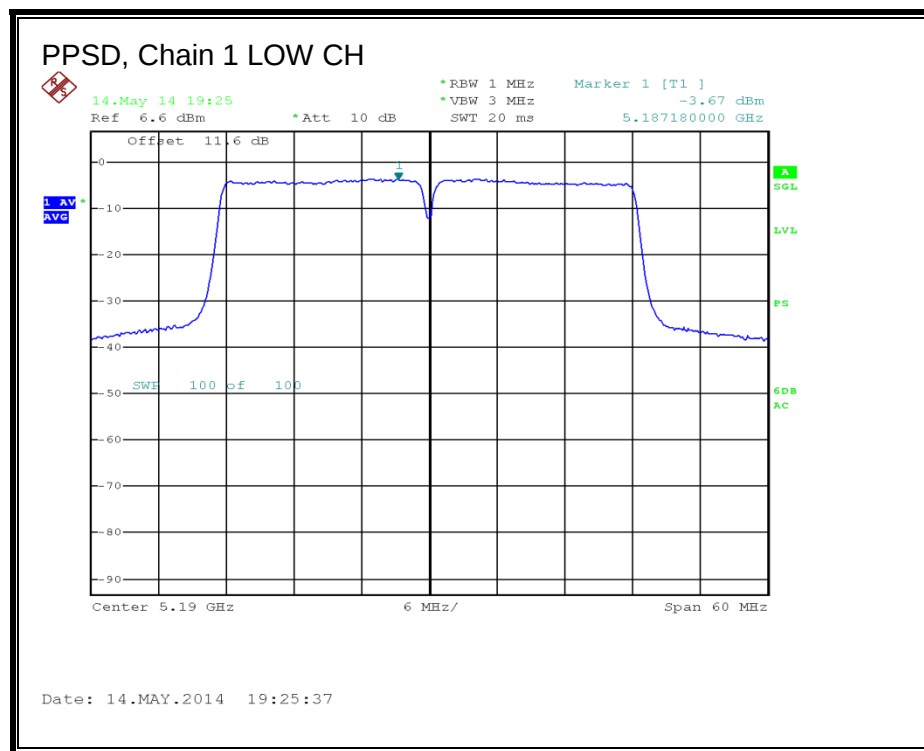OUTPUT POWER AND PPSD, Chain 1

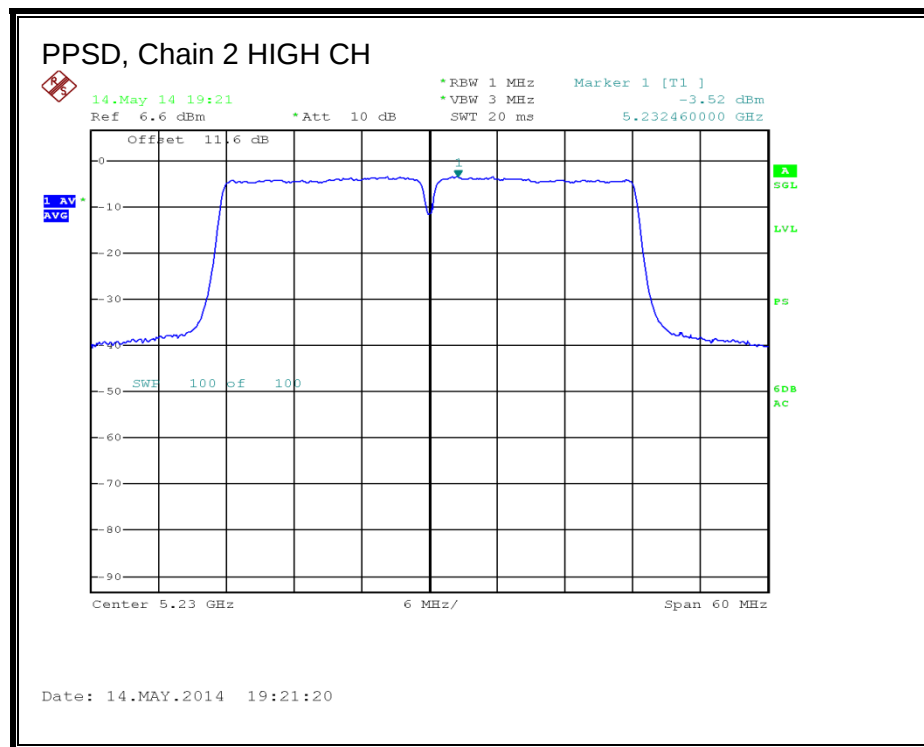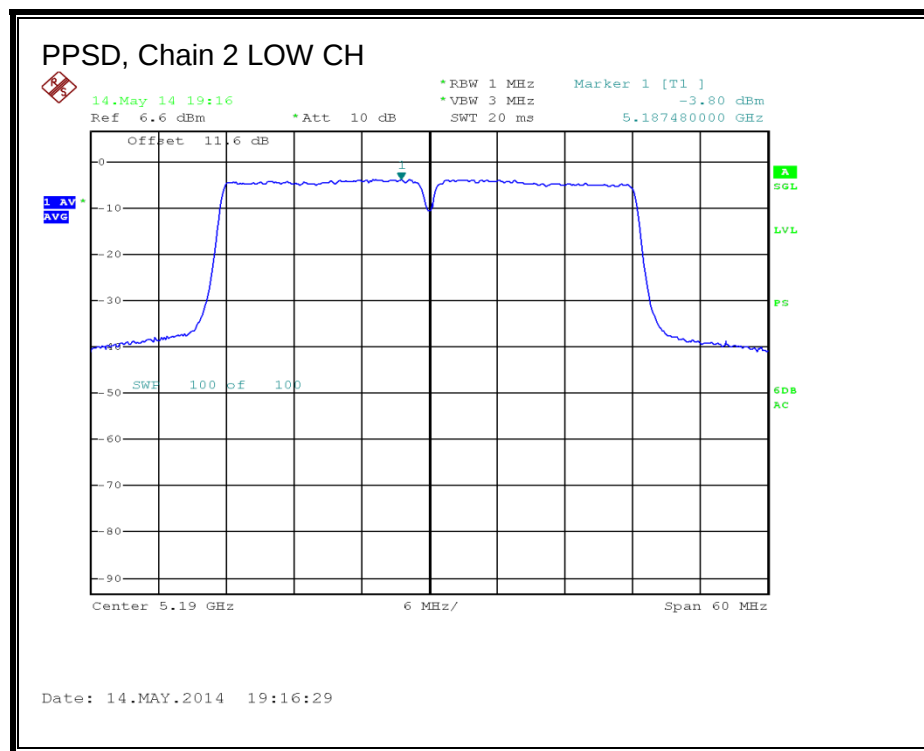OUTPUT POWER AND PPSD, Chain 2

8.8. 802.11ac VHT80 1TX MODE IN THE 5.2GHz BAND

8.8.1. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)
Low	5210	7.04	22.96

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	5210	14.81			14.81	22.96	-8.15

8.9. 802.11ac VHT80 CDD 3Tx MODE IN THE 5.2 GHz BAND



8.9.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Mid	5210	82.00	81.67	81.50

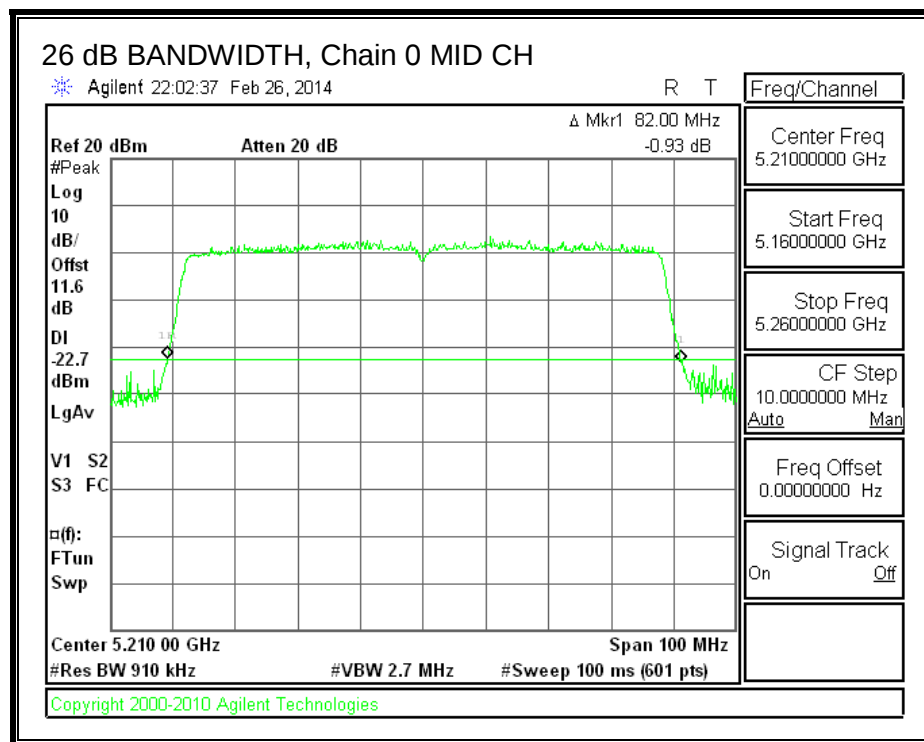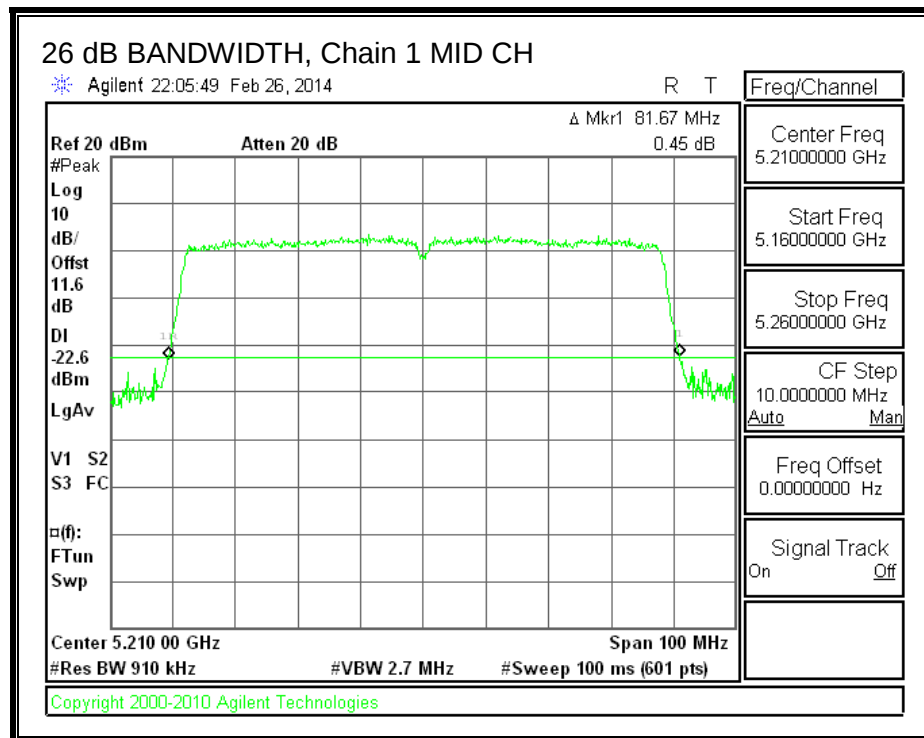26 dB BANDWIDTH, Chain 0**26 dB BANDWIDTH, Chain 1**

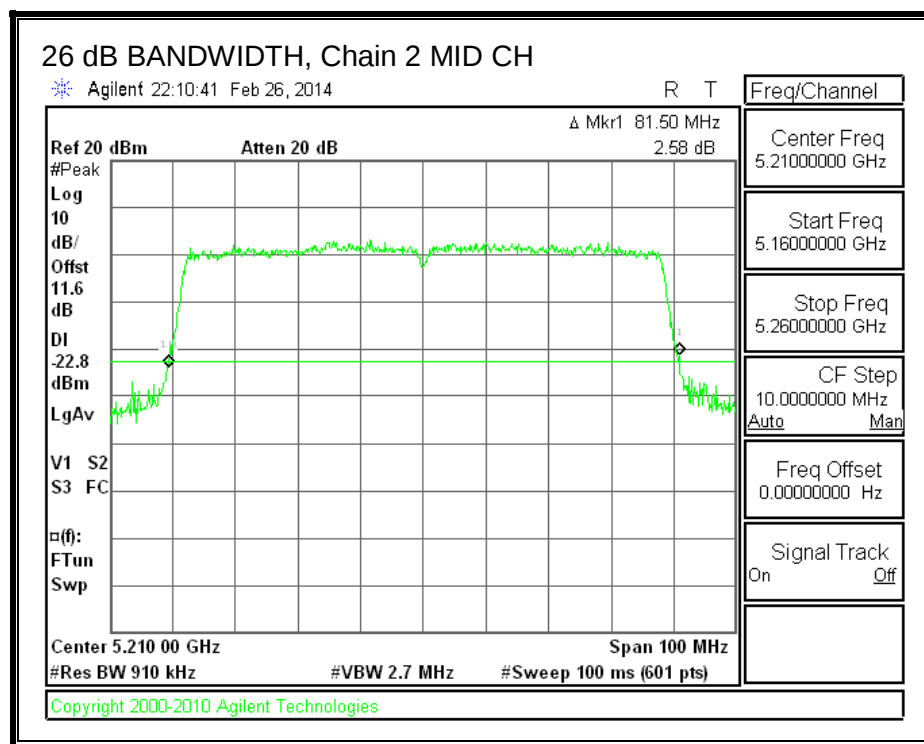26 dB BANDWIDTH, Chain 2

8.9.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

For output power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
7.04	6.70	3.79	6.07

For PPSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
7.04	6.70	3.79	10.73

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSP (dBi)
Mid	5210	N/A	N/A	6.07	10.73

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSP Limit (dBm)	IC PSD Limit (dBm)	PPSP Limit (dBm)
Mid	5210	23.93	N/A	N/A	23.93	6.27	N/A	N/A



Duty Cycle CF (dB)	0.85	Included in Calculations of Corr'd PPSP
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	11.30	10.74	11.01	15.79	23.93	-8.14

PPSP Results

Channel	Frequency (MHz)	Chain 0 Meas PPSP (dBm)	Chain 1 Meas PPSP (dBm)	Chain 2 Meas PPSP (dBm)	Total Corr'd PPSP (dBm)	PPSP Limit (dBm)	PPSP Margin (dB)
Mid	5210	-2.53	-1.84	-2.35	3.39	6.27	-2.88

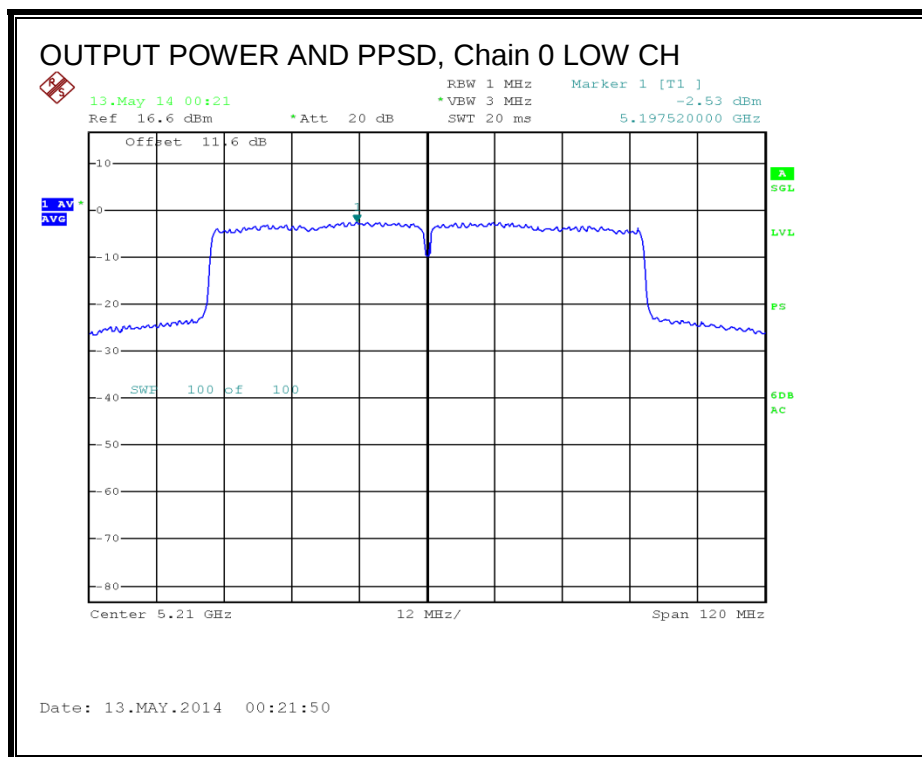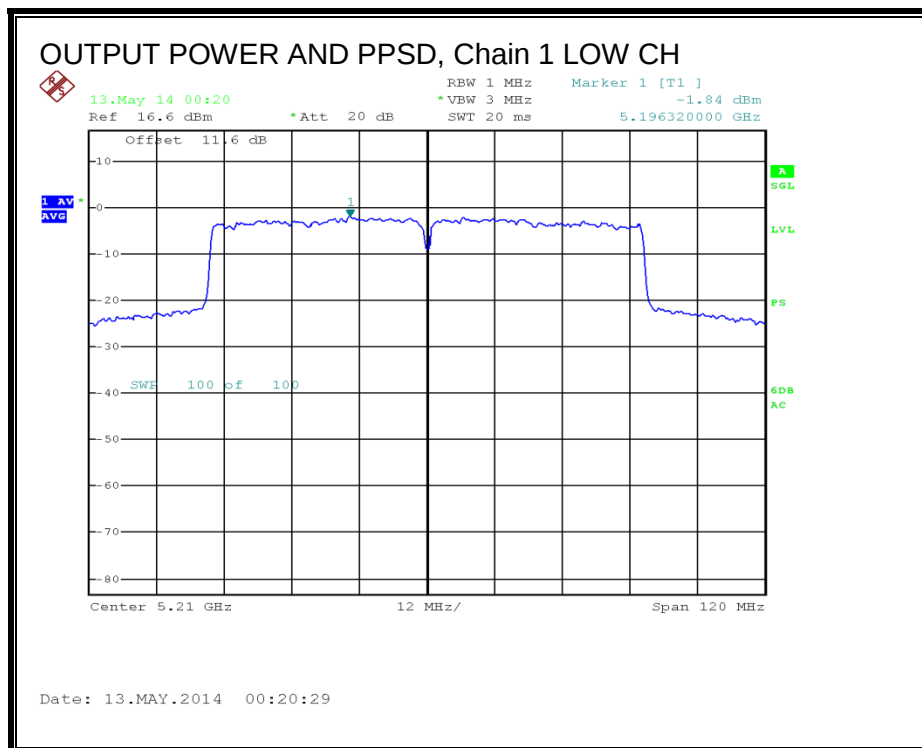OUTPUT POWER AND PPSD, Chain 0**OUTPUT POWER AND PPSD, Chain 1**

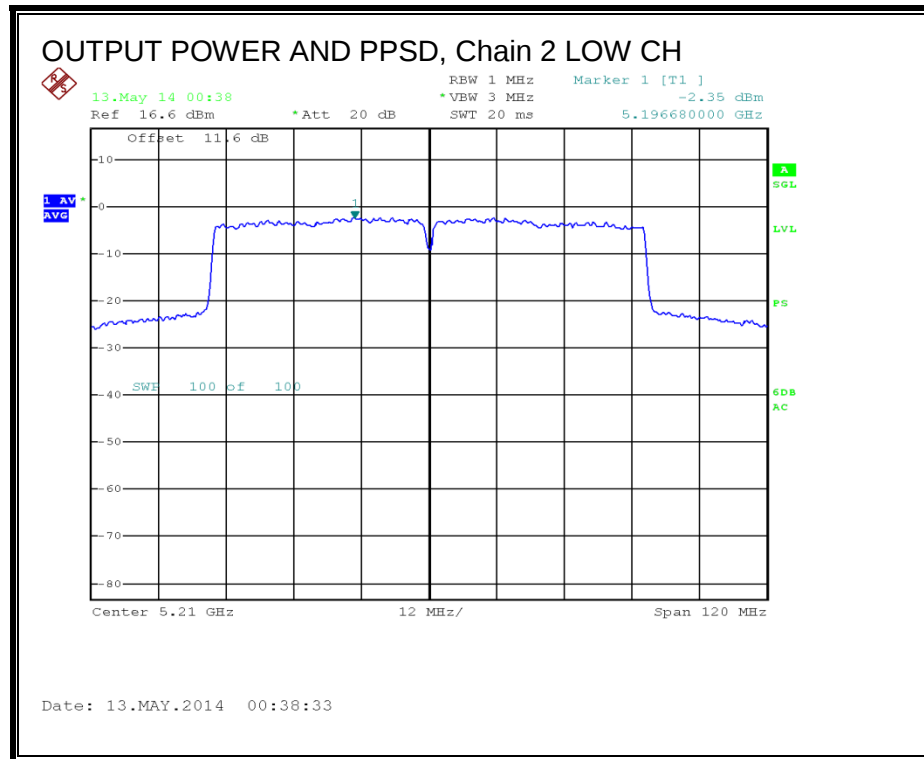OUTPUT POWER AND PPSD, Chain 2

8.10. **802.11ac VHT80 BF 3TX MODE IN THE 5.2 GHz BAND**



8.10.1. **26 dB BANDWIDTH**

LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Mid	5210	82.00	81.67	81.50

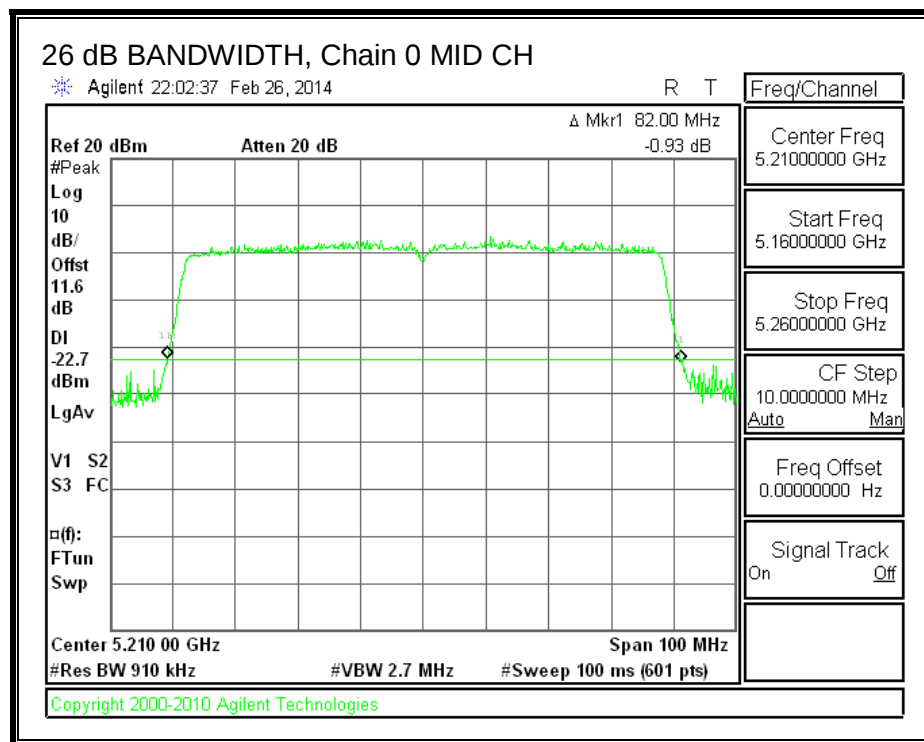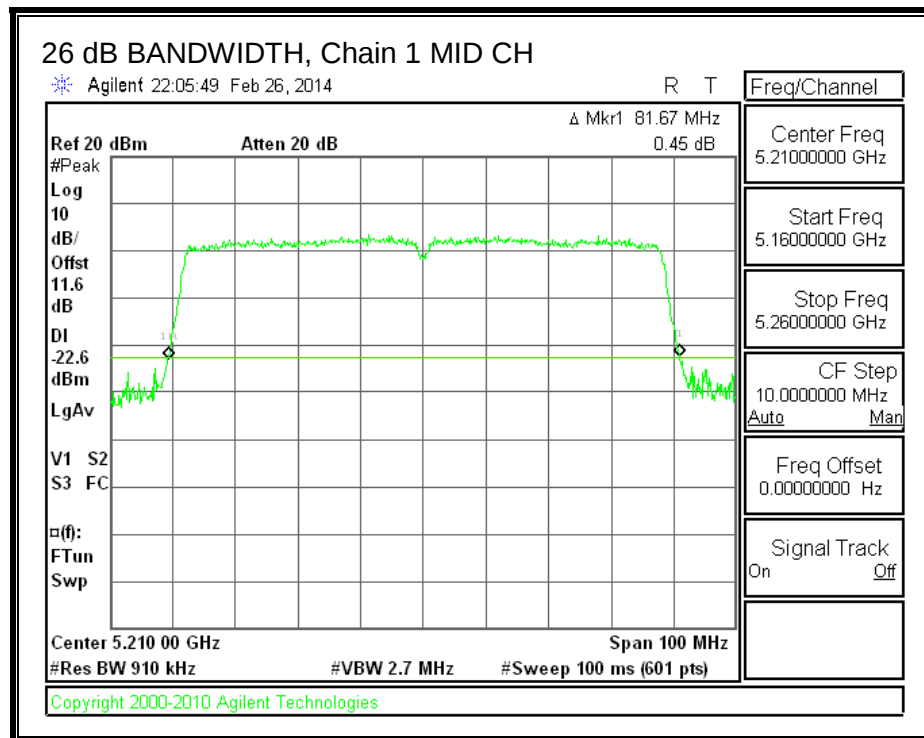26 dB BANDWIDTH, Chain 0**26 dB BANDWIDTH, Chain 1**

26 dB BANDWIDTH, Chain 2

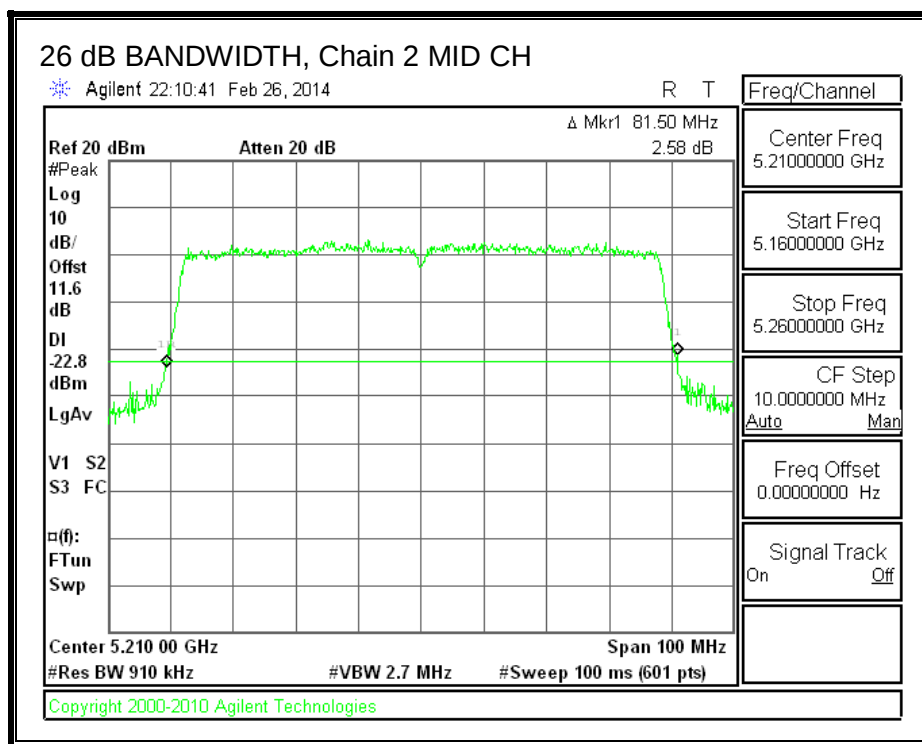

8.10.2. **OUTPUT POWER AND PPSD**

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
7.04	6.70	3.79	10.73