



承认书

SPECIFICATION FOR APPROVAL

客户 Customer: Qinsheng

品牌 Brand: Qiyuan

品名 Description: 2.4G Antenna

规格/型号

Specification

/part no: External Antenna/50 Ω /2.4-2.5GHz/3.0dBi@2.4
G/SMA90° Gold-Plated Male and Female Pin
/2.4G Black Wavy Antenna

日期 Date: 2023.10.28

备注 Remark: 承认签章后请回复一份（或复印件）给我司，其余由贵公司留作存档。如果在签章的承认书（或复印件）回复给我司之前，下了有关此规格产品的订单且又无特别说明，那么我司就确定贵司已完全承认了。Please return one specification or one copy of it with your chop and signature of approval and retain the others for your record. In the event of an order being placed for this part number before the chop and signed with specification (or copy) is returned and without special explanation, it will be assumed that full approval have been given.

客户签字盖章:

拟制/日期 CHECKED/DATE	审核/日期 AUDITOR/DATE	批准/日期 APPROVED/DATE



规格书

客户料号

Customer P/N: /

规格描述

Specification: External Antenna/50 Ω /2.4-2.5GHz/3.0dBi@2.4G
/SMA90° Gold-Plated Male and Female Pin/2.
4G Black Wavy Antenna

品名 Description: 2.4G Antenna

供应商 Supplier: Qiyuan

生产商 Producer: Qiyuan

备注 Remark:

承认签章后请回复一份（或复印件）给我司，其余由贵公司留作存档。如果在签章的承认书（或复印件）回复给我司之前，下了有关此规格产品的订单且又无特别说明，那么我司就确定贵司已完全承认了。Please return one specification or one copy of it with your chop and signature of approval and retain the others for your record. In the event of an order being placed for this part number before the chop and signed with specification (or copy) is returned and without special explanation, it will be assumed that full approval have been given.

拟制/日期 CHECKED/DATE	审核/日期 AUDITOR/DATE	批准/日期 APPROVED/DATE
Zhang Bingxiang 2023.10.28	Wu Qianjin 2023.10.28	Luo Daxun 2023.10.28



Address: 4th Floor, No. 3 Lianhu Kelian Road, Tangxia Town, Dongguan City **Website:** <http://www.qiyuandz.com/> 3

TEL: 0769- 82953575 **FAX:** 0769-82953543



Specification list

Antenna Picture	5
Electrical parameter	5
Mechanical parameters	5
Operating/ Storage Temperature	5
Structural drawings	6
Environmental and reliability testing	7
Test equipment	9
Measuring parameter	10



天线照片 (Picture) :



(The pictures are for reference only, please refer to the drawings)

电气参数 (Electrical parameters) :


Frequency 频率范围	2.4~2.5GHz
Impedance 特性阻抗	50Ω
S.W.R. 电压驻波比	≤2.0
Antenna Gain 增益	3.58dBi
Polarization 极化形式	vertical polarization
Return Loss 回波损耗	-9.2dB MAX

机械参数(Mechanical parameters):

Antenna Colour 天线颜色	Black
RF Cable Model 射频线型号	RG178, Brown
Connect Type 接口方式	SMA90° Male and Female Pin Gold Plated

工作/储存温度 (Operating/ Storage Temperature) :

Operating Temperature 工作温度	-40~85℃
Storage Temperature 储存温度	-40~85℃



1	ABS: Black
1	Male PIN SMA; Brass
QTY	REMARK

东莞市启元电子科技有限公司
Qiyuan Electronic technology Co., LTD



环境与可靠性试验(Environmental and reliability testing):

Environmental test

High and low temperature humidity test report						
Experimen tal project	High temperature, low temperature and constant humidity test					
Test sample Name plate	Glue stick Antenna			Test date	2023. 09. 25	
Quimente	Constant temperature and humidity test chamber network analyzer			Quantity	5PCS	
Inspecti on standd	1. 1. The metal surface coating has no peeling, cracking, wrinkling and other defects;The non-metal part should not be discolored, broken, deformed, degummed and other defects. 2 .Electrical test meets the design requirements; The voltage standing wave ratio test is qualified.					
Test name	experimental project	require	experiment al method	Actual test data	result	
					sample	decide
High temperatu e test	Temperature (℃)	+85±3	In accordance	+85	1	qualified
	Temperature stabilization time of	12	withGB2423.1	1. 2	2	qualified
	test sample (h)		-89 9		3	qualified
	Duration of test (h)	1	chapter	2. 3	4	qualified
	Recovery time (h)	1	To be carried	1	5	qualified
			out in the			
			prescribed			
			manner			
Low temperatu e test	Temperature (℃)	-40±3	n accordance	-40	1	qualified
	Temperature stabilization time of	1	withGB2423.1	1. 2	2	qualified
	test sample (h)		-89 Section 8		3	qualified
	Duration of test (h)	2	chapter	2. 4	4	qualified
	Recovery time (h)	1	Regulation of	1. 1	5	qualified
			the			
			methods			



salt spray test; salt fog test

Salt spray test report				
Experimental project	salt spray test; salt fog test			
Test sample Name plate	Glue stick Antenna	Test date	2023. 09. 25	
Quimente	salt spray corrosion test chamber	Quantity	5PCS	
Inspection standard	Put the test sample into the prepared salt solution test chamber and salt spray corrosion chamber for continuous spray test			
Salt solution concentration	52g/L	The pH of the salt solution: 6.5-7.2	test cycle: 24h	
Actual test data	55g/L	The pH of the salt solution: 6.8	test cycle: 26h	
Test standard; test criteria	According to GB/T10125 "artificial atmosphere corrosion test, salt spray test" test;Results according to the GB/T6461-2002 "Metal and other inorganic coating on metal substrate after corrosion test is the grade of samples and test pieces" rating.			
test results				
NO.	Corrosion rating	Actual test data	Evaluation of the results	备注
1	Rp/Ra=10/10vsB	Rp/Ra=10/10vsB	qualified	
2	Rp/Ra=10/10vsB	Rp/Ra=10/10vsB	qualified	
3	Rp/Ra=10/10vsB	Rp/Ra=10/10vsB	qualified	
4	Rp/Ra=10/10vsB	Rp/Ra=10/10vsB	qualified	
5	Rp/Ra=10/10vsB	Rp/Ra=10/10vsB	qualified	



测试设备(Test equipment)




安捷伦 E5071C 网络分析仪



HP 8594E 频谱分析仪



CMW-500

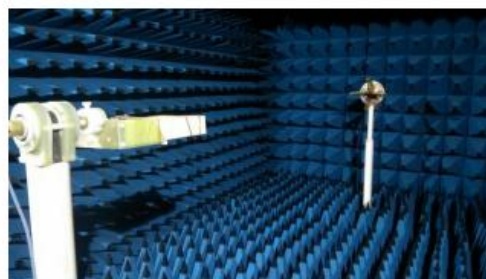


微波暗室



测试参数(Measuring parameter)

V.S.W.R&Return Loss

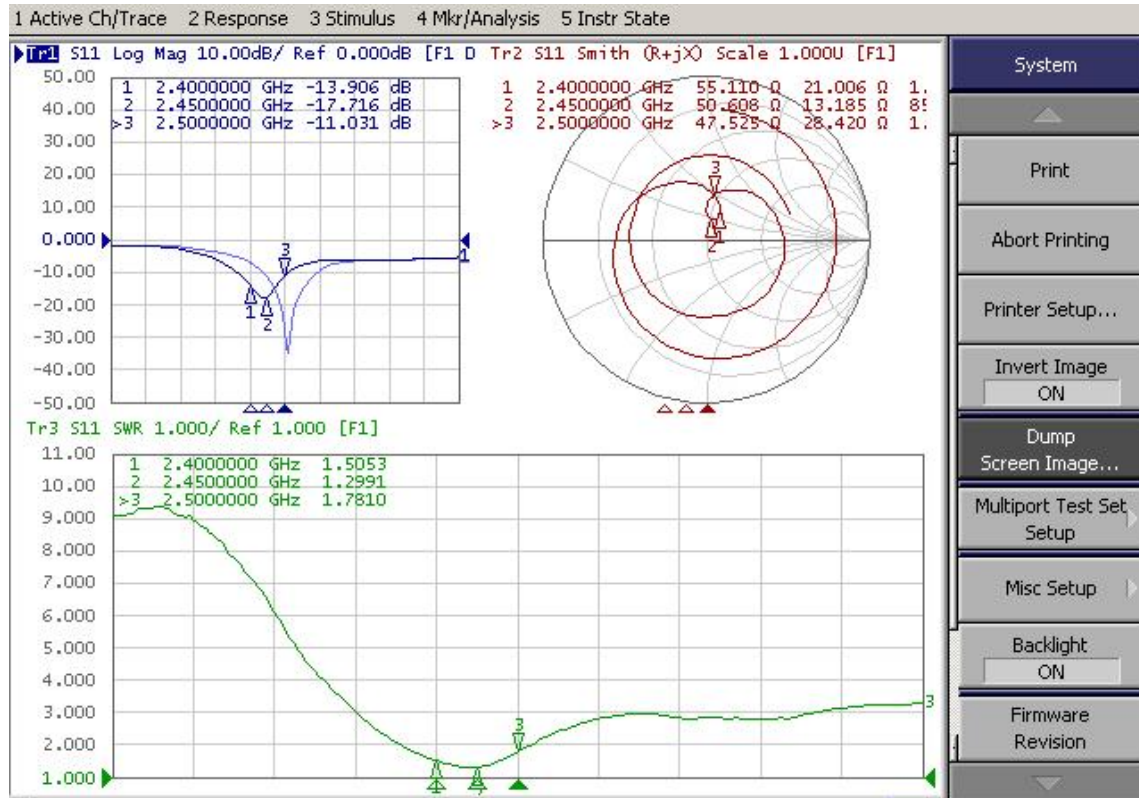

增益&效率(Gain&Efficiency)

FEITUKEJI											
Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Gain (dBi)	3.41	3.33	3.27	3.39	3.45	3.53	3.52	3.41	3.58	3.34	3.45
Efficiency (%)	65.72	68.41	69.44	68.68	69.10	70.02	71.74	68.89	69.35	67.20	66.89

2D、3D 场型图(2D、3D Radiation Patter)

