

FCC Radio Test Report

FCC ID: QISEVA-LX9

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1512C119
Equipment : Smart Phone
Model Name : EVA-L29
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Dec. 17, 2015
Date of Test : Dec. 17, 2015 ~ Feb. 15, 2016
Issued Date : Feb. 16, 2016
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 RADIATED EMISSION MEASUREMENT	12
4.1.1 RADIATED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS (9K TO 30MHz)	16
4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	16
4.1.9 TEST RESULTS (ABOVE 1000 MHz)	16
5 . MEASUREMENT INSTRUMENTS LIST	17
6 . EUT TEST PHOTOS	18
ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)	22
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	27
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	44

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1512C119	Original Issue.	Feb. 16, 2016

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : EVA-L29
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Dec. 17, 2015 ~ Feb. 15, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1512C119) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
15.407(a)	Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 .The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone	
Brand Name	HUAWEI	
Model Name	EVA-L29	
Mode Different	N/A	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	433.3Mbps
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO.,LTD. (2) DONGGUAN PHITEK ELECTRONICS CO.,LTD. (3) SHENZHEN HUNTKEY ELECTRONIC CO.,LTD. Model: HW-050200B01 (UK) HW-050200E01 (EU) HW-050200U01 (US) HW-050200A01 (AU) #2 Supplied from battery. Manufacturer: (1) Huawei Technologies Co., Ltd. Battery Model: HB366481ECW	
Power Rating	#1 I/P: ~100V-240V 50/60Hz 0.5A O/P: 5V $\equiv$ 2A #2 $\equiv$ +3.82V	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
-

Item	Mfr/Brand	Model.
USB Cable	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUDU01B-HC212-EH
	LUXSHARE-ICT Co., Ltd.	L99UC001-CS-H
	Chang Shu Honglin Technology Co.,Ltd.	130-26988
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	MEMD1632B580C00
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	1311-3291-3.5mm-229

3. Channel List:

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

802.11a 802.11n 20MHz 802.11ac 20MHz		802.11n 40MHz 802.11ac 40MHz		802.11ac 80MHz	
UNII-3		UNII-3		UNII-3	
\Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)

Note:

(1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

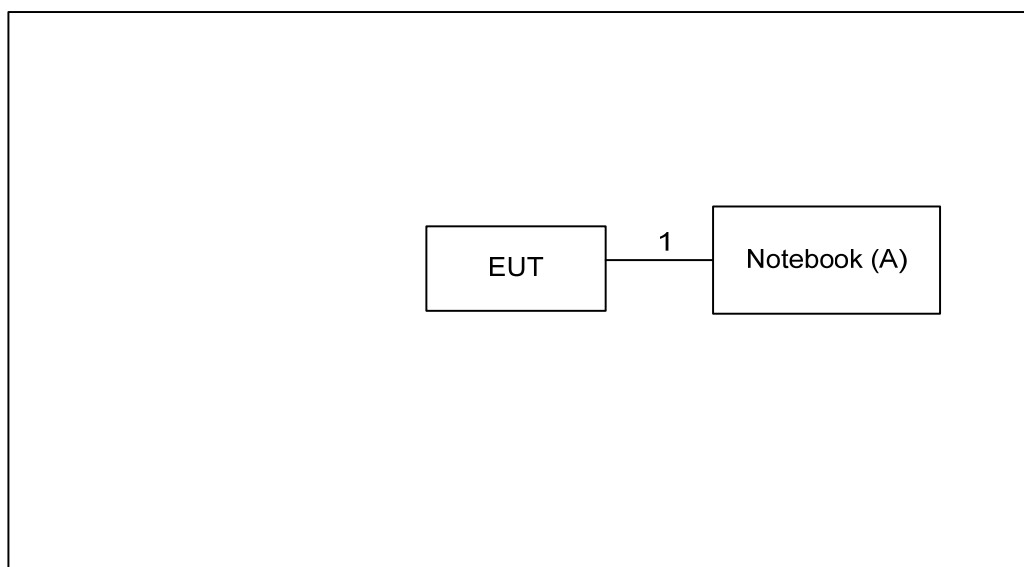

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook	DELL	INSPIRON 1420	DOC	JX193A01SDC2

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	0.5m	USB Cable

4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)	Equivalent Field Strength at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 2)
5250-5350	-27	68.3	74.3 (Note 2)
5470-5725	-27	68.3	74.3 (Note 2)
5725-5850	-27 (beyond 10MHz of the band edge)	68.3	74.3 (Note 2)
	-17 (within 10 MHz of band edge)	78.3	84.3 (Note 2)

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to

field strength: $E = \frac{1000000 \sqrt{30P}}{3}$ μV/m, where P is the eirp (Watts)

2. 20LOG d limit/d measure=20log 3/1.5=6dB.

4.1.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz) for band edge.
- The measuring distance of 1.5 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz) for Harmonic.
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD


No deviation

4.1.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 - 1000MHz

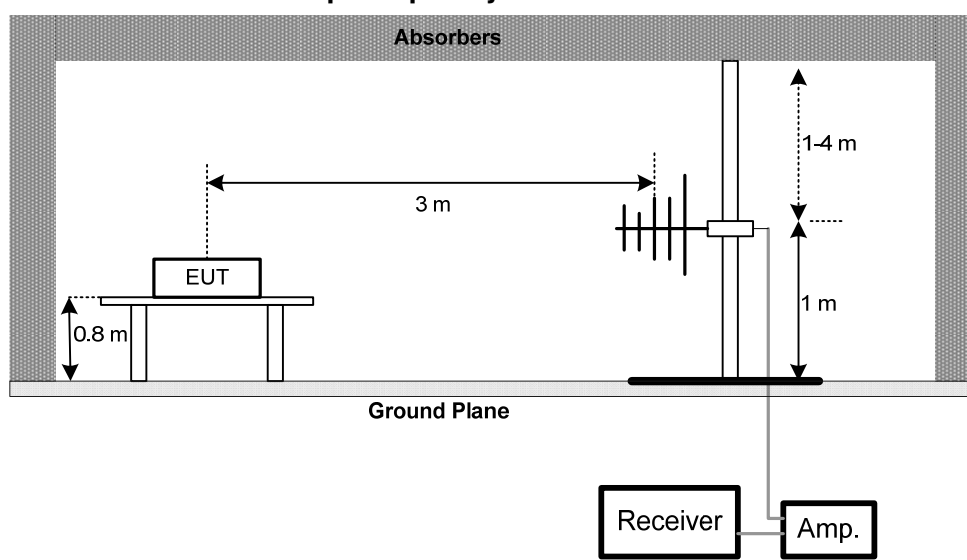


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz-Band edge

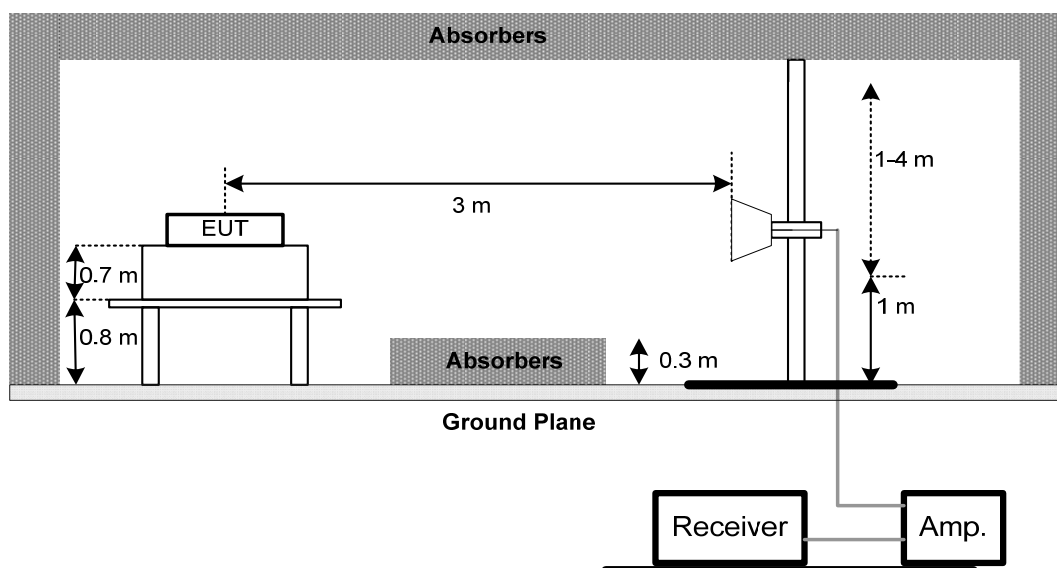

(C) Radiated Emission Test Set-Up Frequency Above 1 GHz-Harmonic

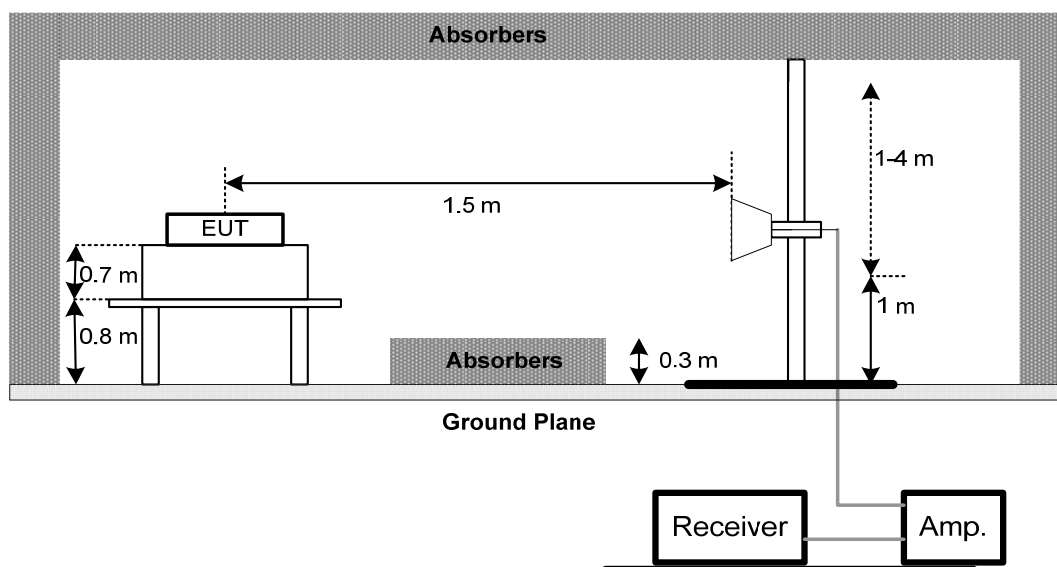

(D) Radiated emissions below 30MHz

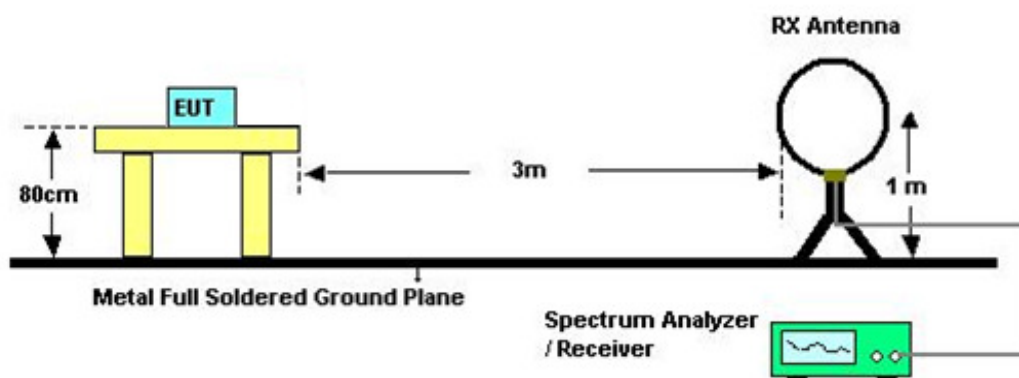

4.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.1.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

4.1.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (5) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (6) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST


Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Antenna	ETS	3115	00075789	Mar. 28, 2016
6	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
7	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
8	Test Cable	emci	EMC104-SM-S M-10000(1GHz-26.5GHz)	C-68	Jun. 28, 2016
9	Controller	CT	SC100	N/A	N/A
10	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016
13	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

6. EUT TEST PHOTOS


Radiated Measurement Photos

9KHz to 30MHz

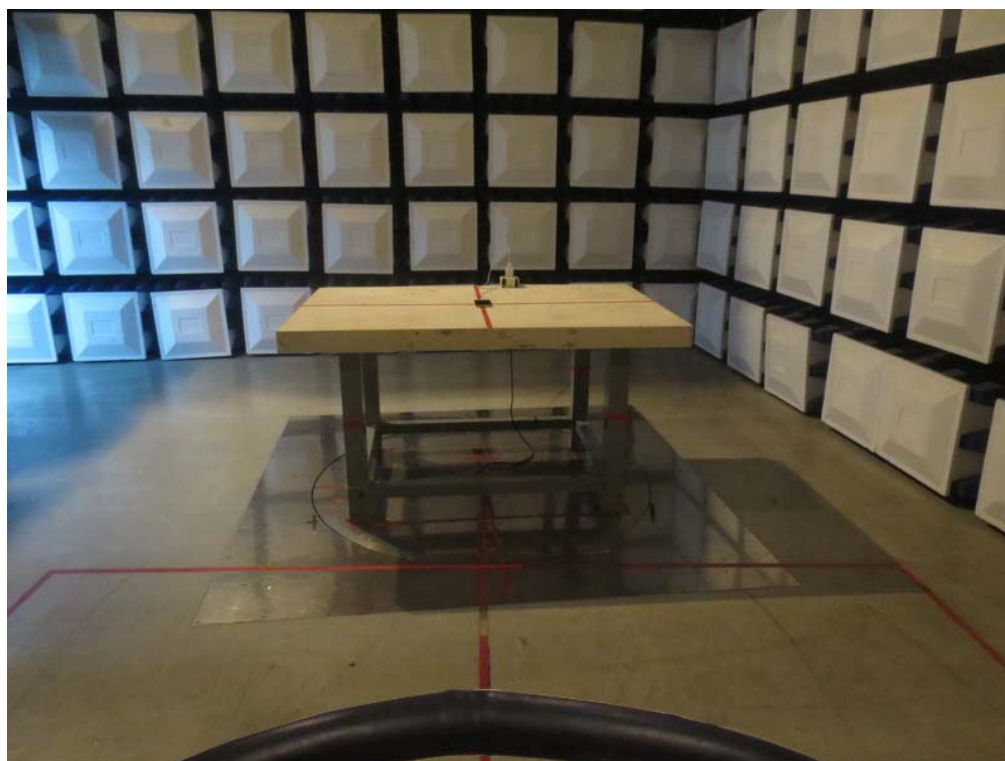

Radiated Measurement Photos

30MHz to 1000MHz

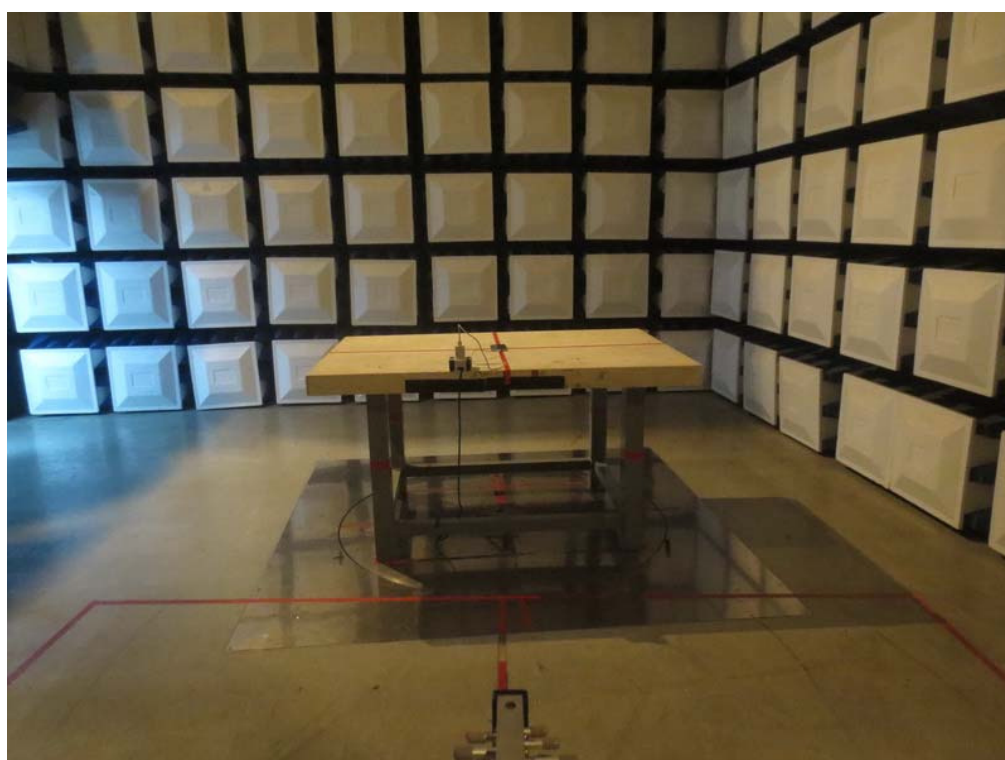



Radiated Measurement Photos

1GHz to 18G



Radiated Measurement Photos


18GHz to 40G

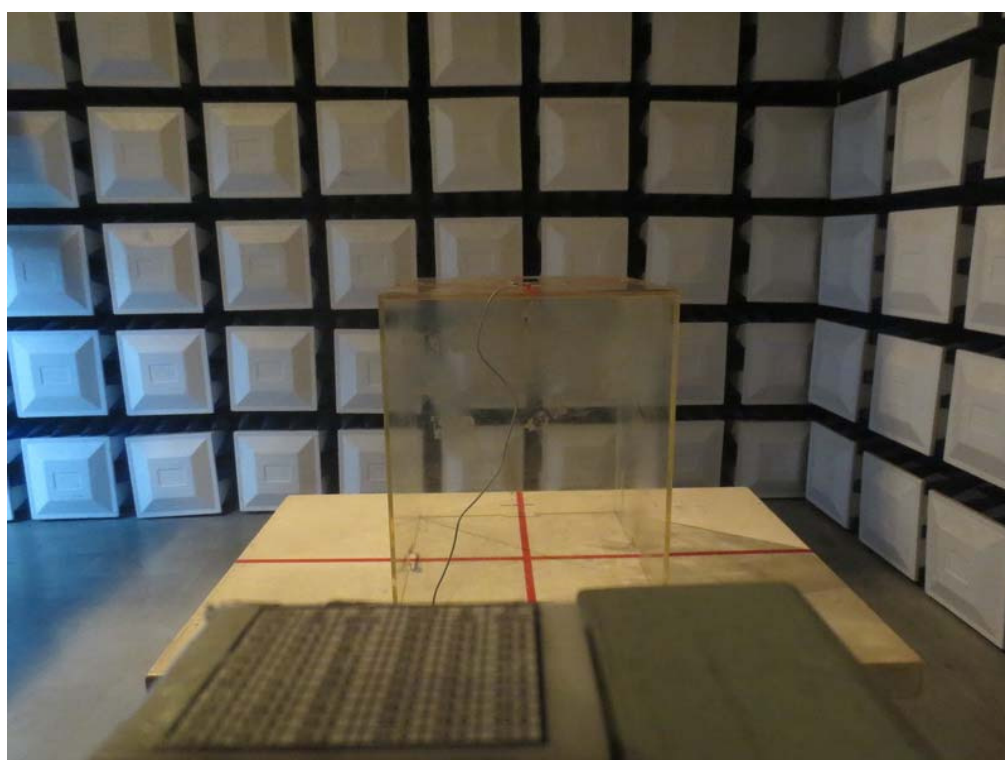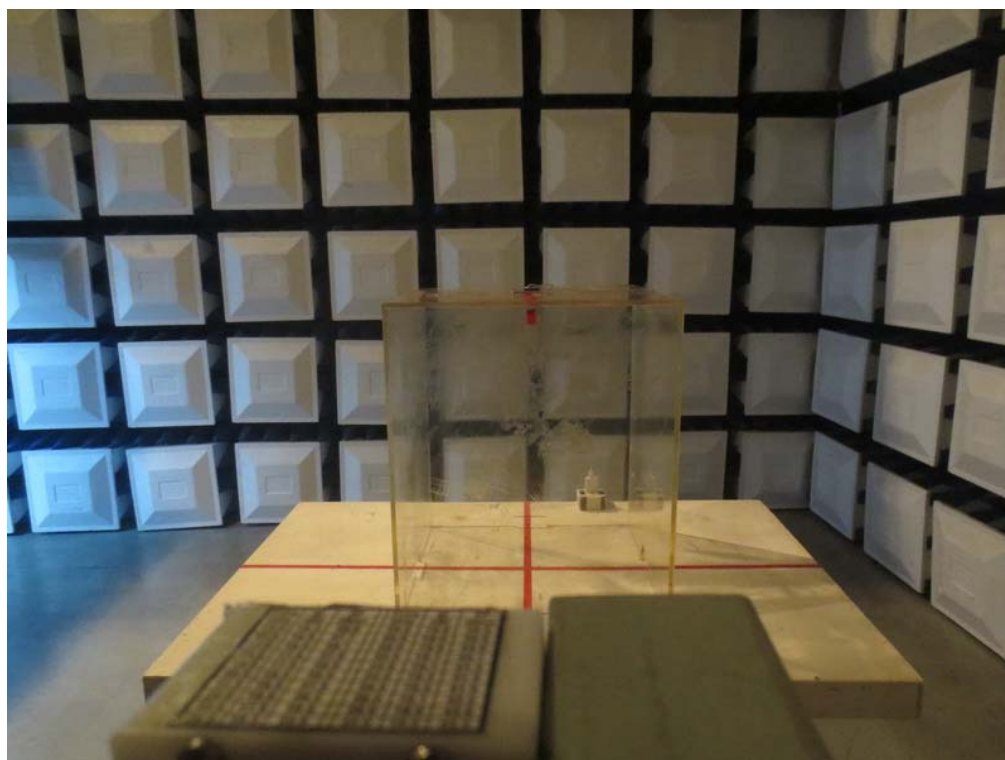

ATTACHMENT A - RADIATED EMISSION (9KHZ TO 30MHZ)


Test Mode: TX MODE

Ant0°

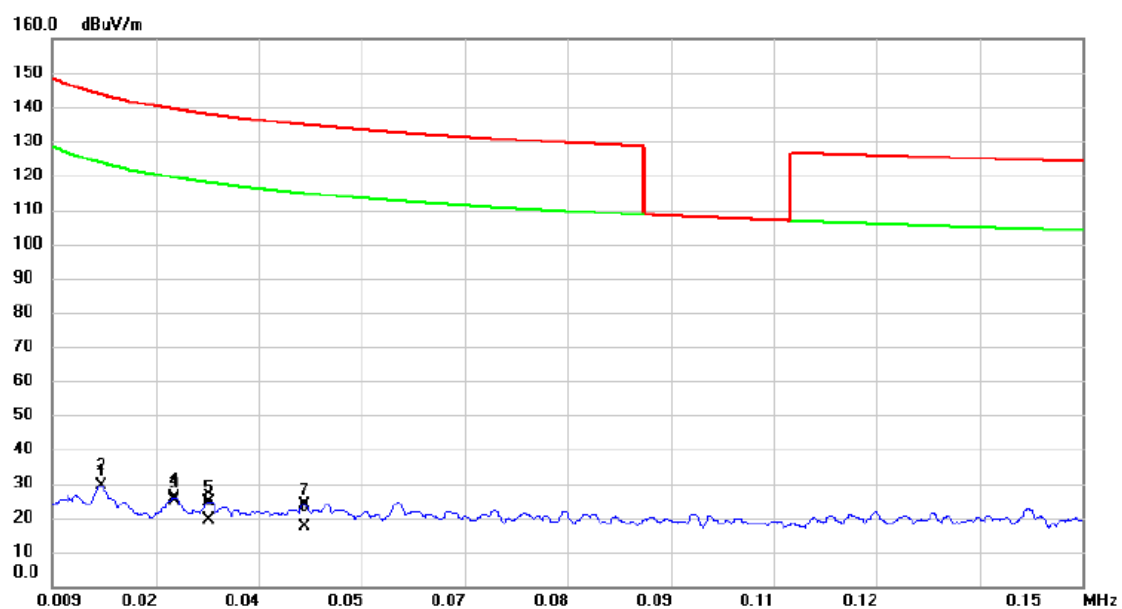


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.0156	29.46	0.00	29.46	143.7	-114.28	peak	
2		0.0156	29.24	0.00	29.24	123.7	-94.50	AVG	
3		0.0256	25.85	0.00	25.85	139.4	-113.59	peak	
4	*	0.0256	25.16	0.00	25.16	119.4	-94.28	AVG	
5		0.0304	24.77	0.00	24.77	137.9	-113.18	peak	
6		0.0304	19.23	0.00	19.23	117.9	-98.72	AVG	
7		0.0435	23.91	0.00	23.91	134.8	-110.93	peak	
8		0.0435	17.45	0.00	17.45	114.8	-97.39	AVG	

Ant90°

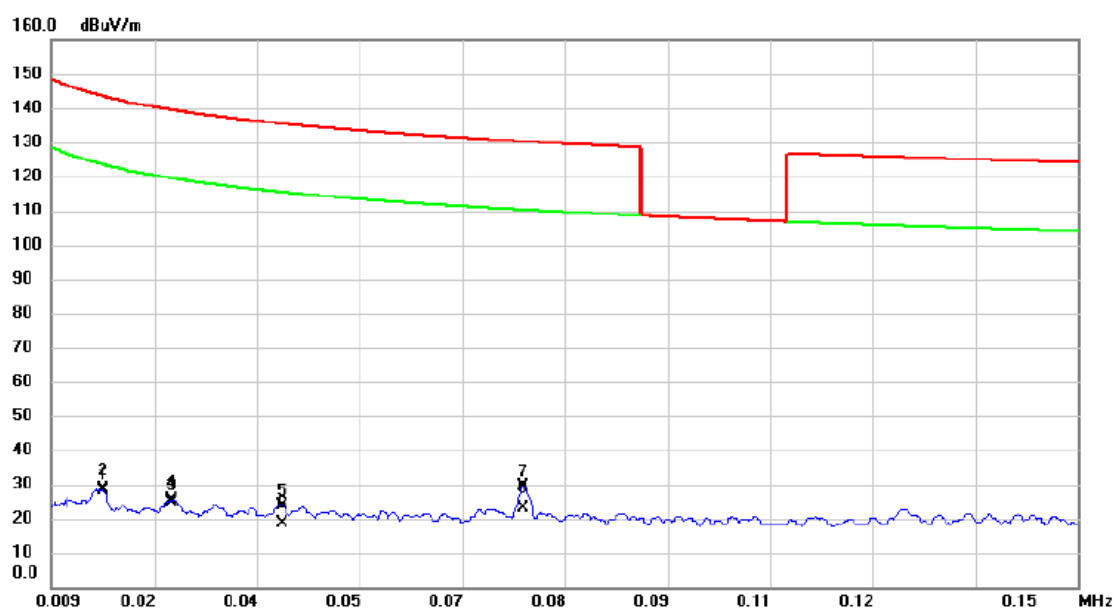


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.0160	28.49	0.00	28.49	143.5	-115.03	peak	
2		0.0160	28.05	0.00	28.05	123.5	-95.47	AVG	
3		0.0255	25.47	0.00	25.47	139.4	-114.00	peak	
4		0.0255	24.57	0.00	24.57	119.4	-94.90	AVG	
5		0.0406	23.71	0.00	23.71	135.4	-111.72	peak	
6		0.0406	18.42	0.00	18.42	115.4	-97.01	AVG	
7		0.0738	29.32	0.00	29.32	130.2	-100.92	peak	
8	*	0.0738	23.19	0.00	23.19	110.2	-87.05	AVG	

Ant0°

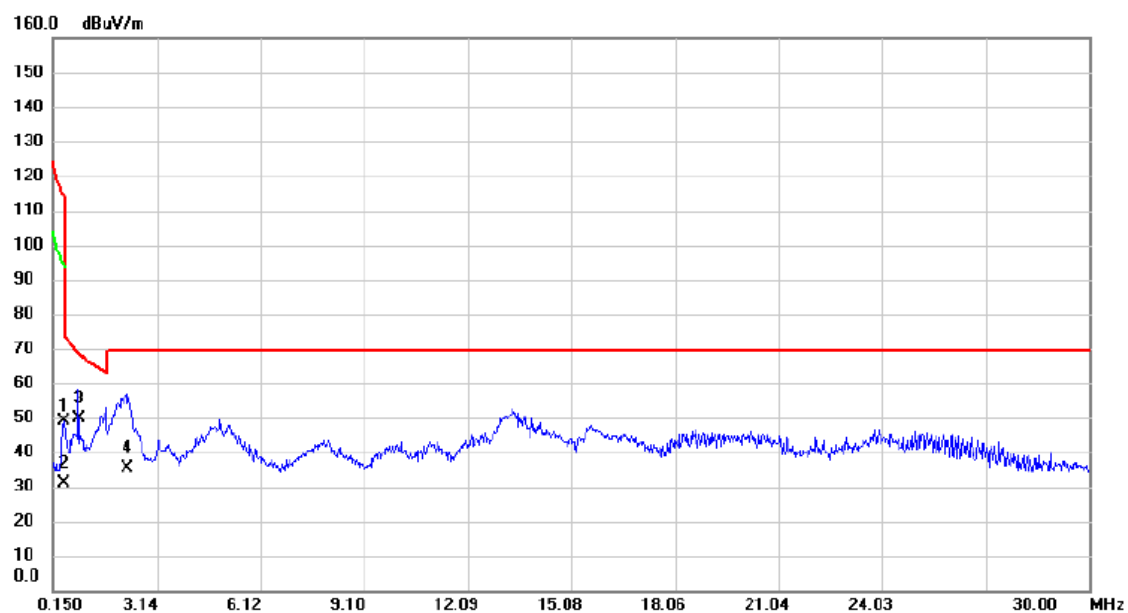

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.4485	49.19	0.00	49.19	114.5	-65.38	peak	
2		0.4485	30.90	0.00	30.90	94.57	-63.67	AVG	
3	*	0.8664	49.97	0.00	49.97	68.85	-18.88	QP	
4		2.2694	35.38	0.00	35.38	69.54	-34.16	QP	

Ant90°

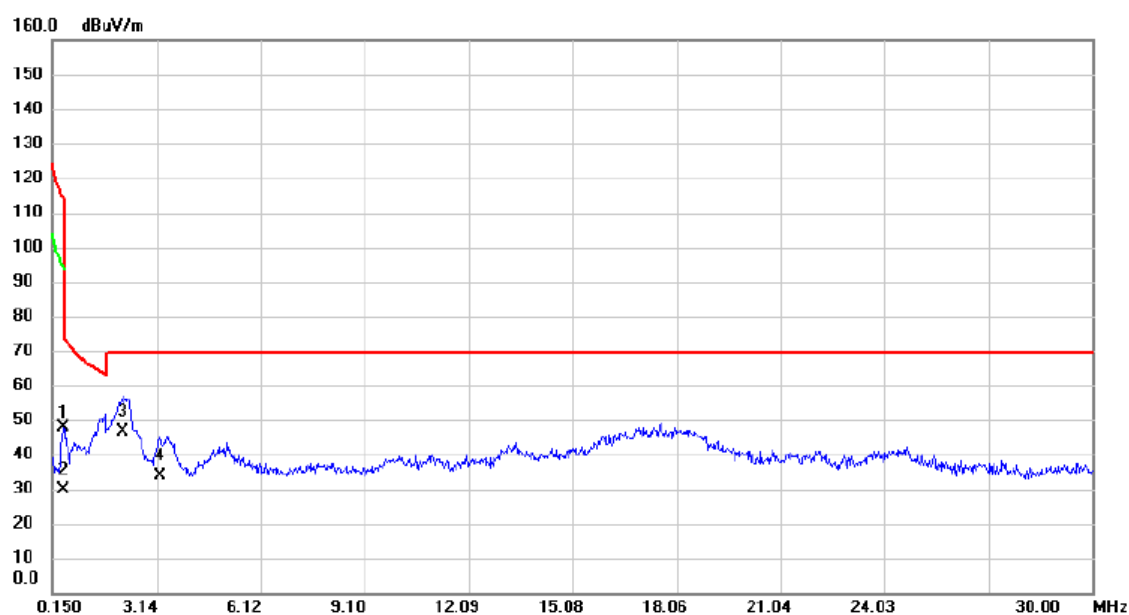


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.4485	47.63	0.00	47.63	114.57	-66.94	peak	
2		0.4485	29.90	0.00	29.90	94.57	-64.67	AVG	
3	*	2.1500	46.54	0.00	46.54	69.54	-23.00	QP	
4		3.2543	33.98	0.00	33.98	69.54	-35.56	QP	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz


Vertical

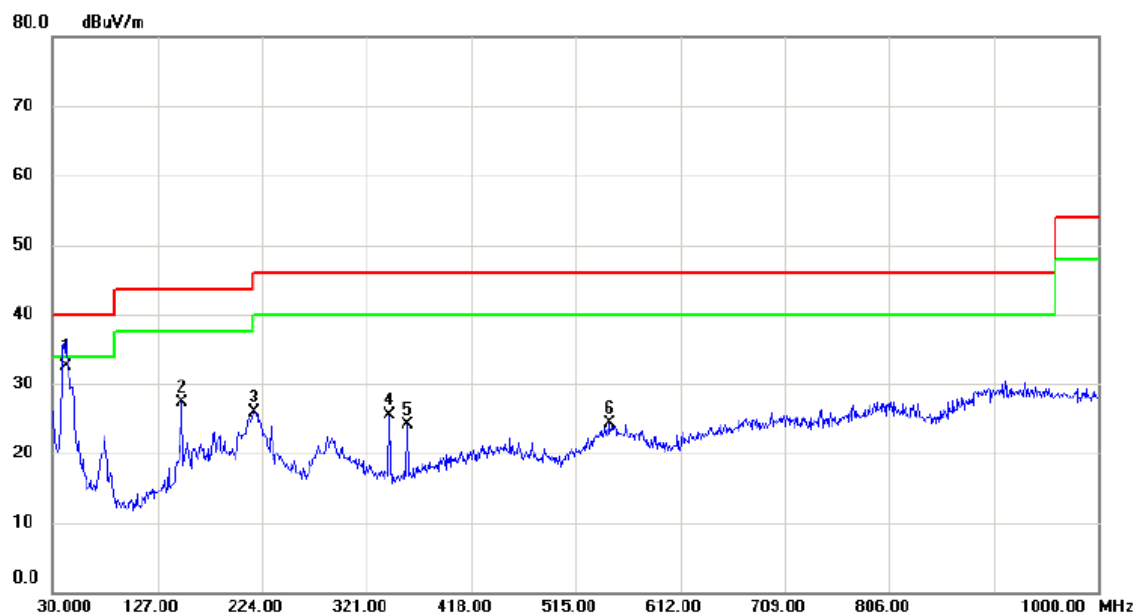

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	41.6400	46.31	-13.72	32.59	40.00	-7.41	QP	
2		149.3100	40.34	-13.08	27.26	43.50	-16.24	peak	
3		216.2400	40.41	-14.51	25.90	46.00	-20.10	peak	
4		342.3400	36.69	-11.21	25.48	46.00	-20.52	peak	
5		358.8300	35.11	-10.98	24.13	46.00	-21.87	peak	
6		546.0400	29.85	-5.52	24.33	46.00	-21.67	peak	


Test Mode: UNII-1/TX A Mode 5180MHz

Horizontal

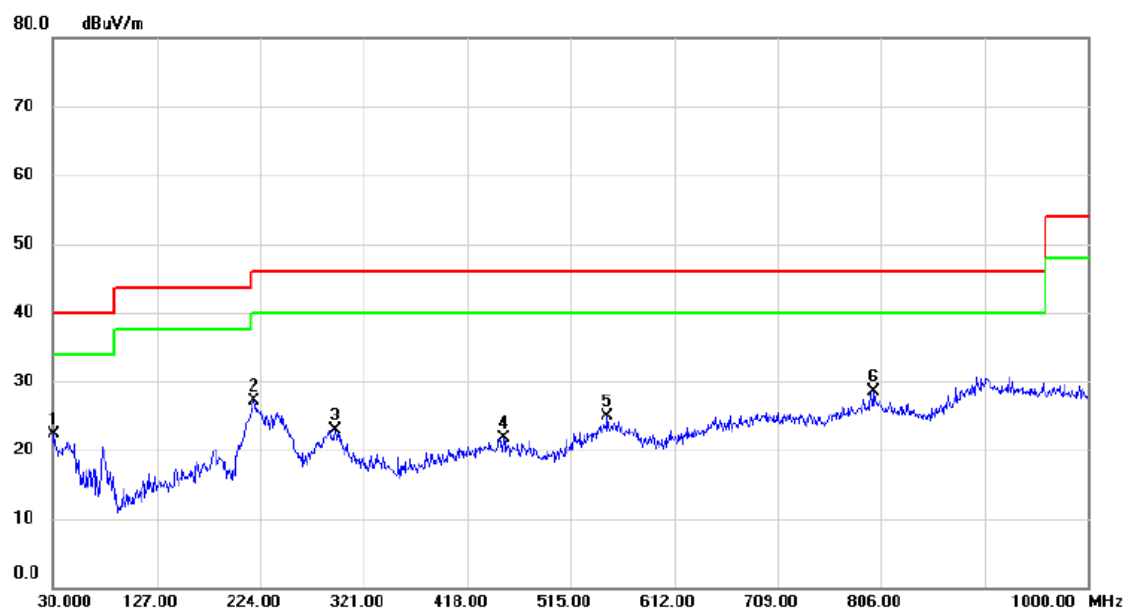

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.9700	36.99	-14.61	22.38	40.00	-17.62	peak	
2		218.1800	41.50	-14.40	27.10	46.00	-18.90	peak	
3		294.8100	33.74	-10.77	22.97	46.00	-23.03	peak	
4		451.9500	29.84	-8.13	21.71	46.00	-24.29	peak	
5		549.9200	30.06	-5.15	24.91	46.00	-21.09	peak	
6	*	799.2100	30.55	-2.11	28.44	46.00	-17.56	peak	


Test Mode: UNII-1/TX A Mode 5240MHz

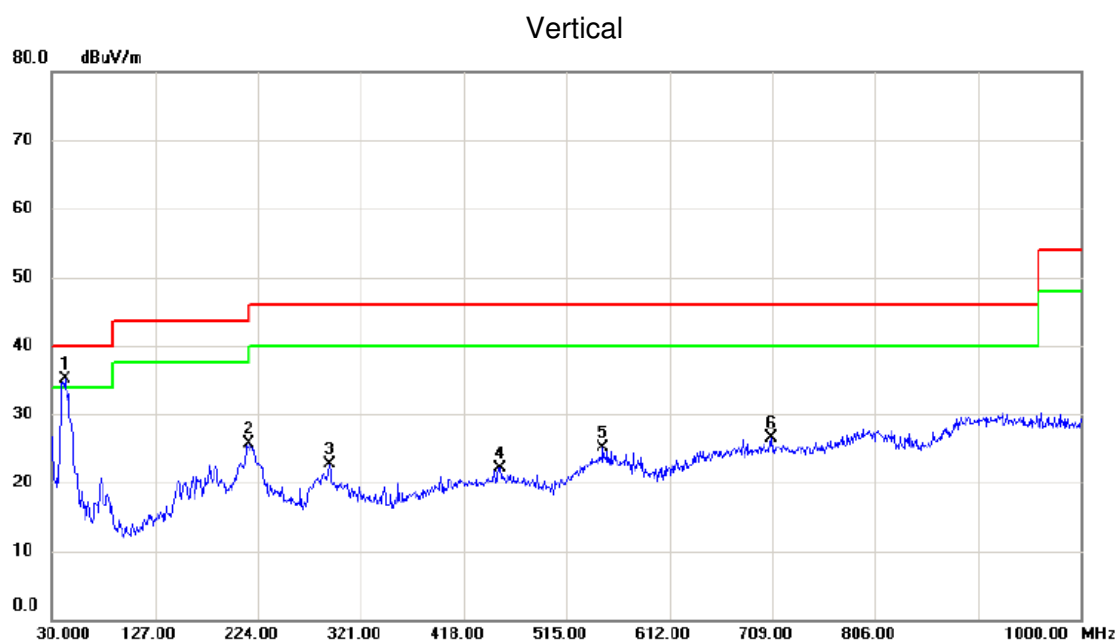

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	48.73	-13.62	35.11	40.00	-4.89	peak	
2		215.2700	40.32	-14.56	25.76	43.50	-17.74	peak	
3		291.9000	33.61	-10.91	22.70	46.00	-23.30	peak	
4		451.9500	30.28	-8.13	22.15	46.00	-23.85	peak	
5		549.9200	30.28	-5.15	25.13	46.00	-20.87	peak	
6		708.0300	30.80	-4.26	26.54	46.00	-19.46	peak	

Test Mode: UNII-1/TX A Mode 5240MHz


Horizontal

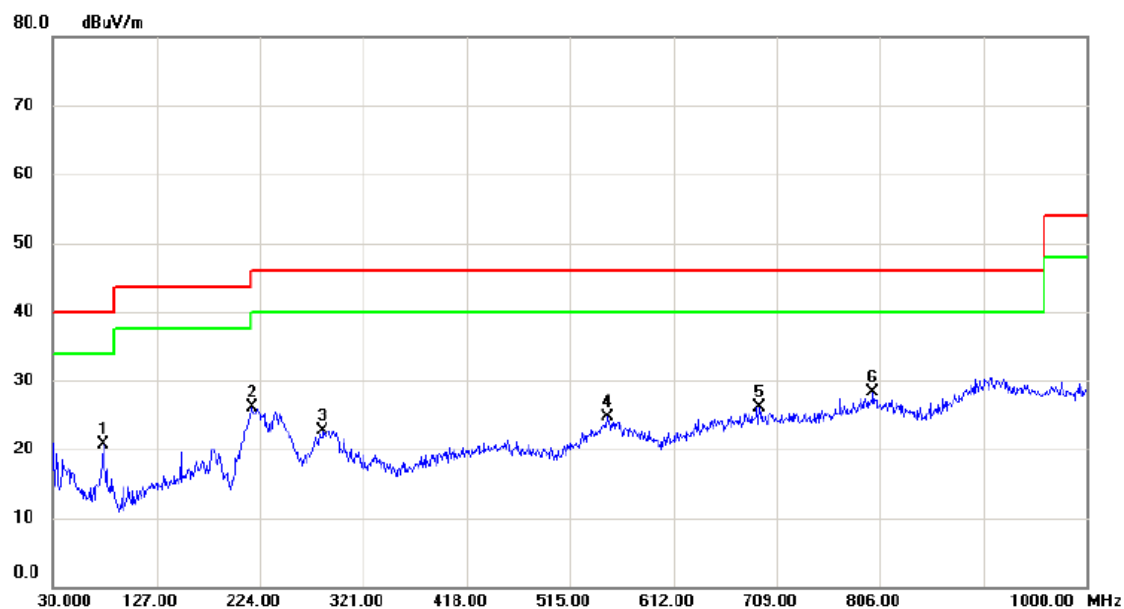

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		76.5600	37.20	-16.40	20.80	40.00	-19.20	peak	
2		216.2400	40.69	-14.51	26.18	46.00	-19.82	peak	
3		283.1700	34.57	-11.85	22.72	46.00	-23.28	peak	
4		550.8900	29.91	-5.19	24.72	46.00	-21.28	peak	
5		692.5100	30.48	-4.33	26.15	46.00	-19.85	peak	
6	*	799.2100	30.34	-2.11	28.23	46.00	-17.77	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz


Vertical

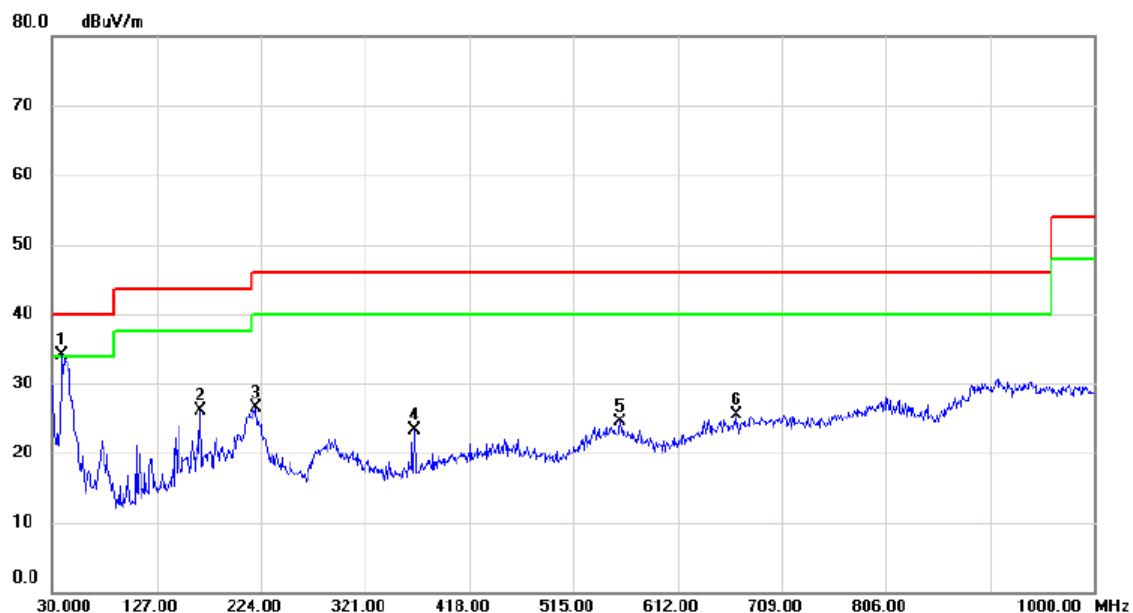

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	38.7300	48.21	-14.09	34.12	40.00	-5.88	peak	
2		167.7400	38.86	-12.78	26.08	43.50	-17.42	peak	
3		219.1500	40.81	-14.35	26.46	46.00	-19.54	peak	
4		366.5900	33.96	-10.67	23.29	46.00	-22.71	peak	
5		558.6500	30.21	-5.61	24.60	46.00	-21.40	peak	
6		666.3200	30.41	-4.81	25.60	46.00	-20.40	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz


Horizontal

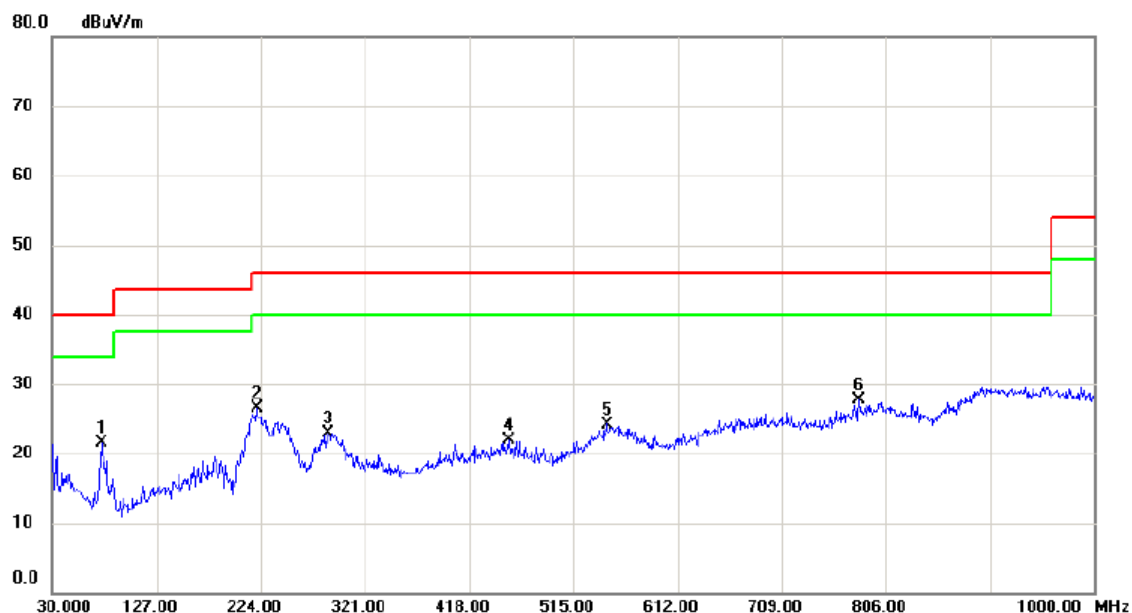

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		75.5900	37.79	-16.31	21.48	40.00	-18.52	peak	
2		220.1200	40.74	-14.31	26.43	46.00	-19.57	peak	
3		287.0500	34.28	-11.36	22.92	46.00	-23.08	peak	
4		454.8600	30.14	-8.23	21.91	46.00	-24.09	peak	
5		546.0400	29.72	-5.52	24.20	46.00	-21.80	peak	
6	*	780.7800	30.76	-3.05	27.71	46.00	-18.29	peak	


Test Mode: UNII-2A/TX A Mode 5320MHz

Vertical

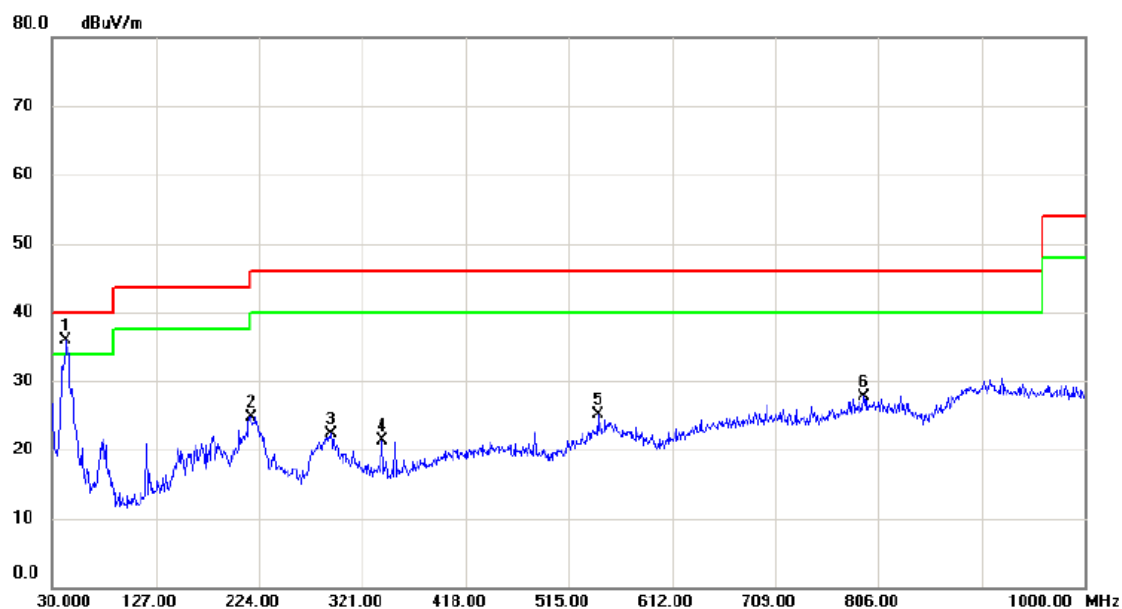

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	49.60	-13.62	35.98	40.00	-4.02	peak	
2		216.2400	39.28	-14.51	24.77	46.00	-21.23	peak	
3		291.9000	33.21	-10.91	22.30	46.00	-23.70	peak	
4		339.4300	32.39	-11.16	21.23	46.00	-24.77	peak	
5		542.1600	30.98	-5.90	25.08	46.00	-20.92	peak	
6		792.4200	30.11	-2.46	27.65	46.00	-18.35	peak	


Test Mode: UNII-2A/TX A Mode 5320MHz

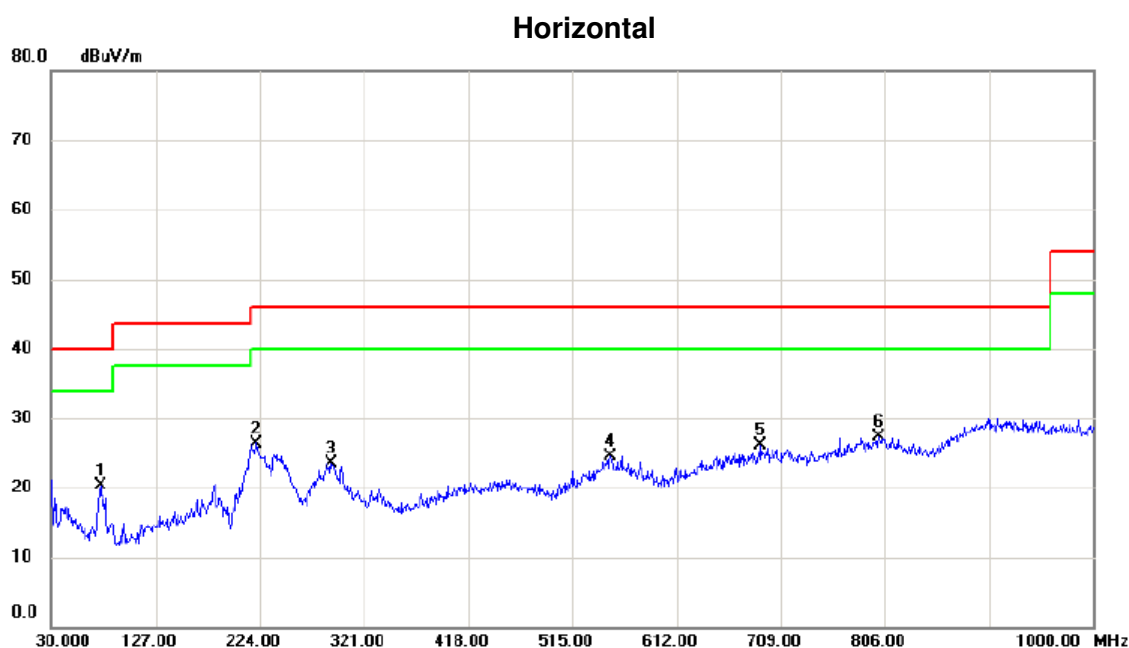

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		75.5900	36.65	-16.31	20.34	40.00	-19.66	peak	
2		221.0900	40.71	-14.31	26.40	46.00	-19.60	peak	
3		290.9300	34.50	-10.95	23.55	46.00	-22.45	peak	
4		550.8900	29.67	-5.19	24.48	46.00	-21.52	peak	
5		690.5700	30.45	-4.36	26.09	46.00	-19.91	peak	
6	*	800.1800	29.46	-2.08	27.38	46.00	-18.62	peak	

Test Mode:	UNII-2C/TX A Mode 5500MHz
------------	---------------------------


Vertical

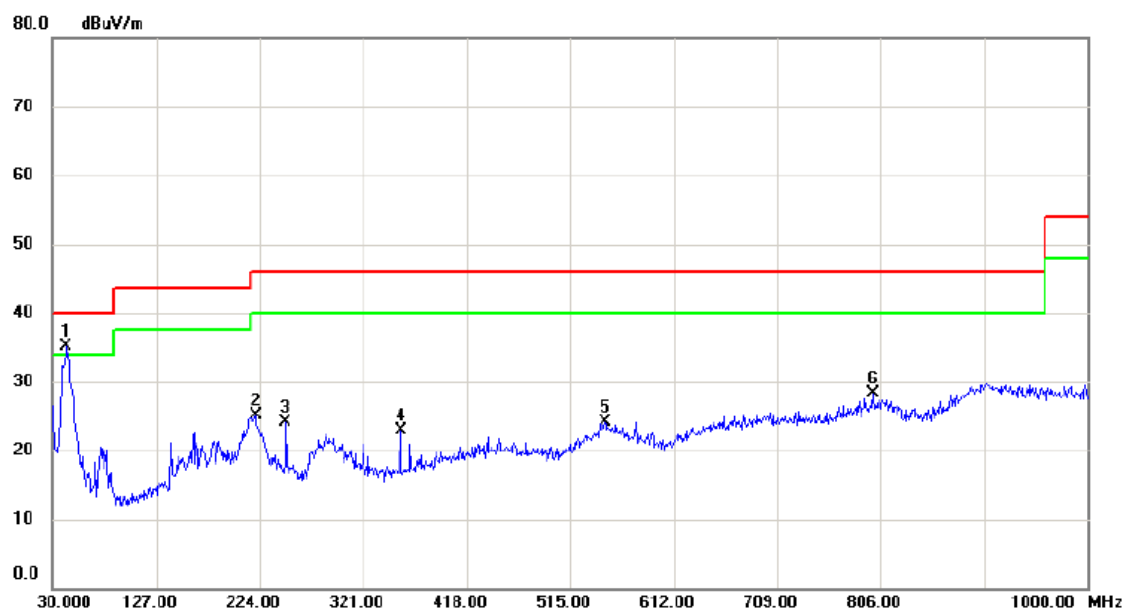

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	48.70	-13.62	35.08	40.00	-4.92	peak	
2		220.1200	39.48	-14.31	25.17	46.00	-20.83	peak	
3		248.2500	38.31	-14.27	24.04	46.00	-21.96	peak	
4		355.9200	33.97	-11.10	22.87	46.00	-23.13	peak	
5		547.9800	29.49	-5.33	24.16	46.00	-21.84	peak	
6		798.2400	30.46	-2.16	28.30	46.00	-17.70	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz


Horizontal

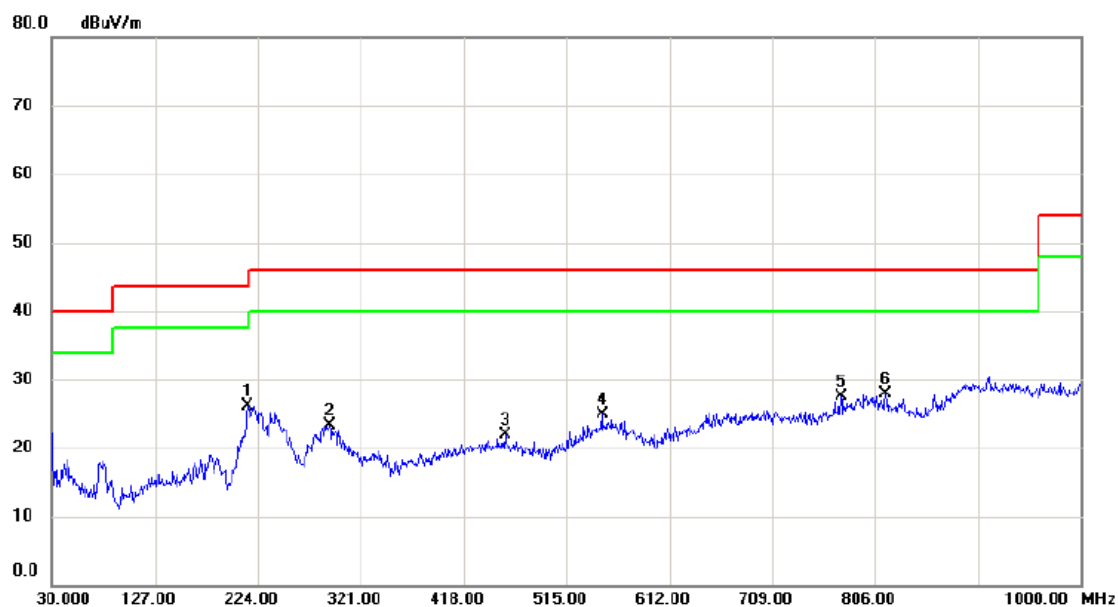

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	214.3000	40.75	-14.62	26.13	43.50	-17.37	peak	
2		291.9000	34.24	-10.91	23.33	46.00	-22.67	peak	
3		456.8000	30.12	-8.31	21.81	46.00	-24.19	peak	
4		548.9500	30.15	-5.24	24.91	46.00	-21.09	peak	
5		773.9900	30.96	-3.39	27.57	46.00	-18.43	peak	
6		815.7000	30.54	-2.69	27.85	46.00	-18.15	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz


Vertical

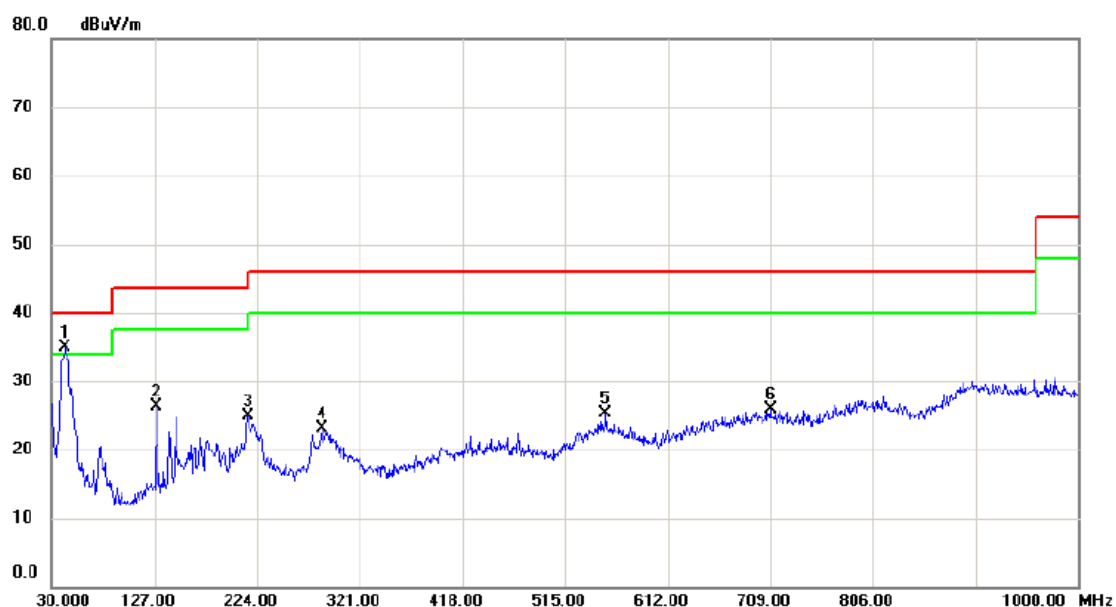

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	48.57	-13.62	34.95	40.00	-5.05	peak	
2		128.9400	39.51	-13.17	26.34	43.50	-17.16	peak	
3		215.2700	39.46	-14.56	24.90	43.50	-18.60	peak	
4		285.1100	34.70	-11.61	23.09	46.00	-22.91	peak	
5		553.8000	30.73	-5.35	25.38	46.00	-20.62	peak	
6		709.0000	30.11	-4.27	25.84	46.00	-20.16	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz


Horizontal

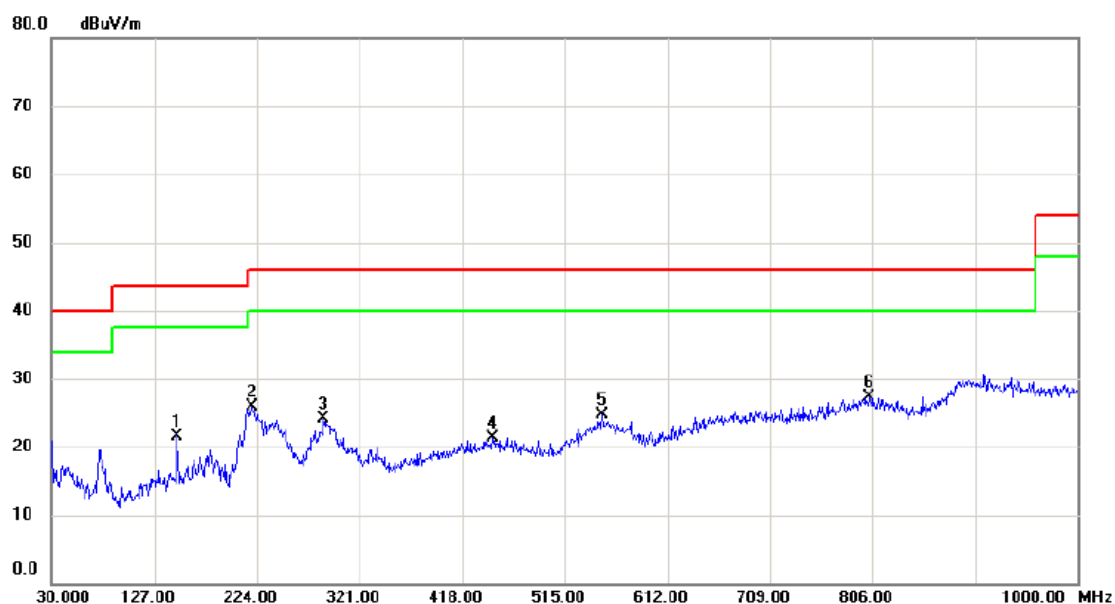

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		148.3400	34.79	-13.19	21.60	43.50	-21.90	peak	
2		219.1500	40.20	-14.35	25.85	46.00	-20.15	peak	
3		287.0500	35.41	-11.36	24.05	46.00	-21.95	peak	
4		447.1000	29.50	-8.13	21.37	46.00	-24.63	peak	
5		550.8900	29.90	-5.19	24.71	46.00	-21.29	peak	
6	*	803.0900	29.49	-2.20	27.29	46.00	-18.71	peak	

Test Mode: UNII-3/TX A Mode 5745MHz

Vertical

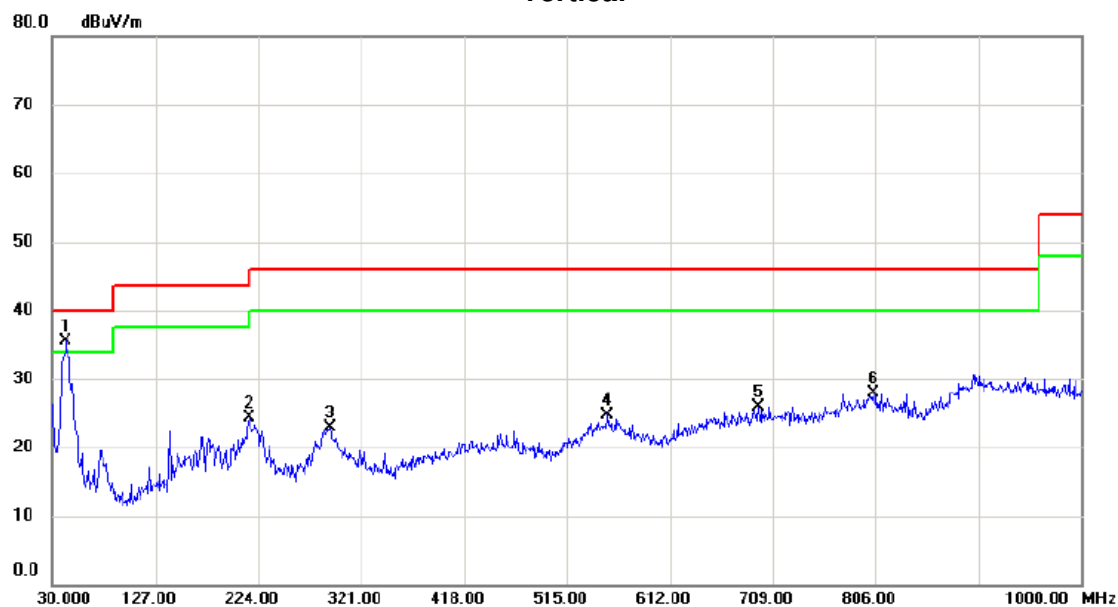

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	49.07	-13.62	35.45	40.00	-4.55	peak	
2		215.2700	38.95	-14.56	24.39	43.50	-19.11	peak	
3		291.9000	33.87	-10.91	22.96	46.00	-23.04	peak	
4		553.8000	30.15	-5.35	24.80	46.00	-21.20	peak	
5		695.4200	30.22	-4.27	25.95	46.00	-20.05	peak	
6		804.0600	30.15	-2.22	27.93	46.00	-18.07	peak	

Test Mode: UNII-3/TX A Mode 5745MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		222.0600	39.13	-14.31	24.82	46.00	-21.18	peak	
2		288.0200	35.78	-11.25	24.53	46.00	-21.47	peak	
3		465.5300	29.86	-8.65	21.21	46.00	-24.79	peak	
4		543.1300	30.69	-5.81	24.88	46.00	-21.12	peak	
5		692.5100	30.12	-4.33	25.79	46.00	-20.21	peak	
6	*	796.3000	29.99	-2.26	27.73	46.00	-18.27	peak	

Test Mode: UNII-3/TX A Mode 5825MHz


Vertical

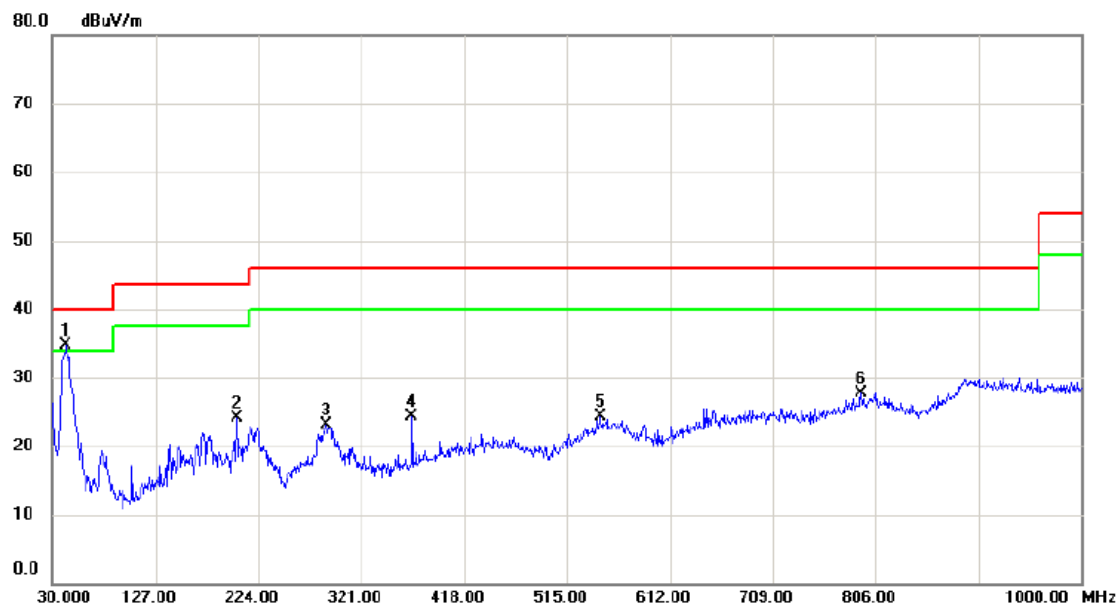

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	48.29	-13.62	34.67	40.00	-5.33	peak	
2		203.6300	39.07	-15.03	24.04	43.50	-19.46	peak	
3		288.0200	34.44	-11.25	23.19	46.00	-22.81	peak	
4		368.5300	34.95	-10.59	24.36	46.00	-21.64	peak	
5		546.0400	29.84	-5.52	24.32	46.00	-21.68	peak	
6		792.4200	30.14	-2.46	27.68	46.00	-18.32	peak	

Test Mode: UNII-3/TX A Mode 5825MHz

Horizontal

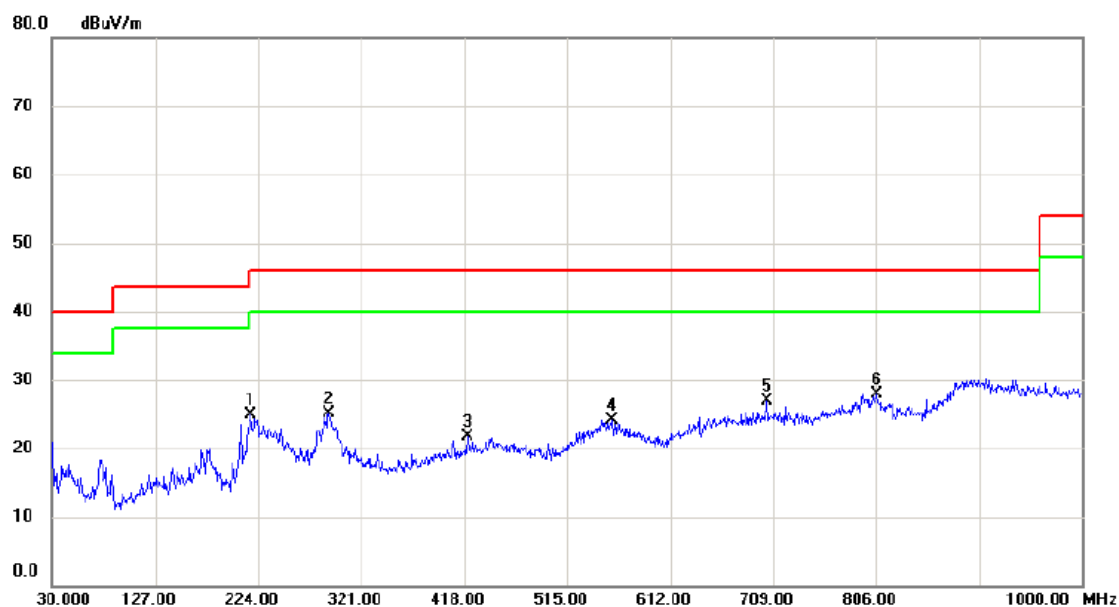


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		217.2100	39.36	-14.46	24.90	46.00	-21.10	peak	
2		290.9300	36.05	-10.95	25.10	46.00	-20.90	peak	
3		420.9100	30.49	-8.79	21.70	46.00	-24.30	peak	
4		557.6800	29.75	-5.56	24.19	46.00	-21.81	peak	
5		703.1800	31.13	-4.22	26.91	46.00	-19.09	peak	
6	*	806.0000	30.27	-2.31	27.96	46.00	-18.04	peak	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

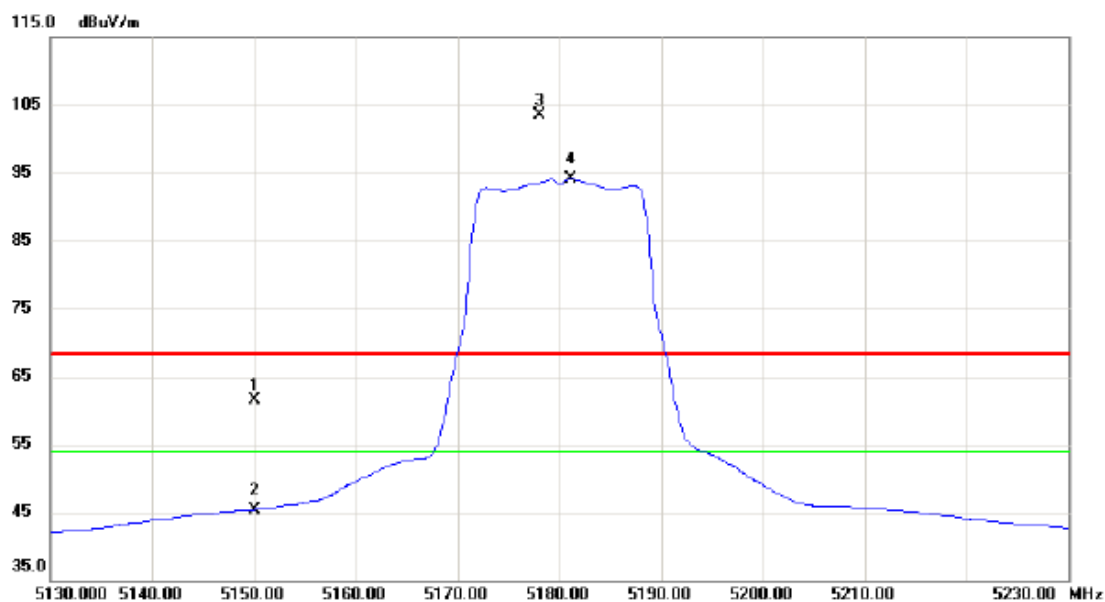


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	21.38	40.22	61.60	68.30	-6.70	peak	
2		5150.000	5.17	40.22	45.39	54.00	-8.61	AVG	
3	X	5178.100	63.15	40.28	103.43	68.30	35.13	peak	NO LIMIT
4	*	5181.100	53.82	40.28	94.10	54.00	40.10	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

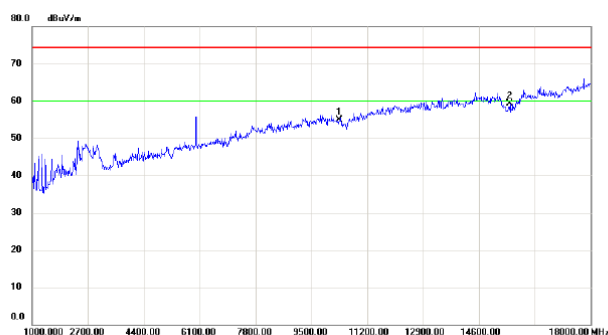

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	41.02	13.85	54.87	74.30	-19.43	peak	
2	*	15540.00	42.51	16.85	59.36	74.30	-14.94	peak	

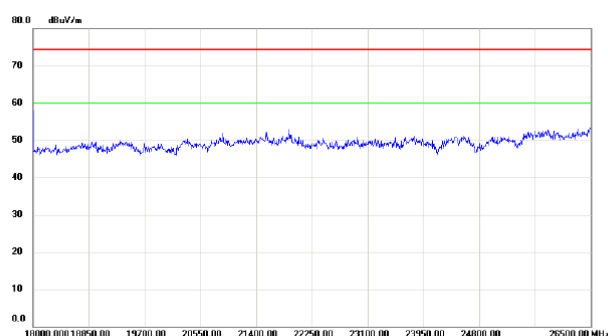


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

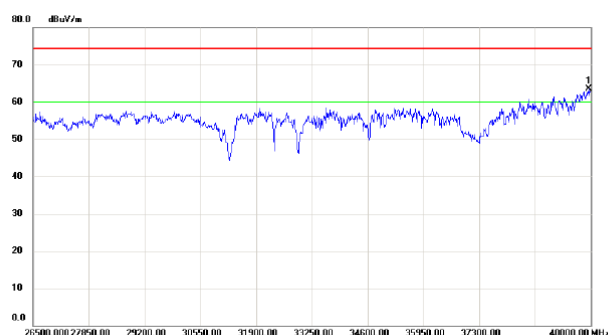

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	46.00	17.47	63.47	74.30	-10.83	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

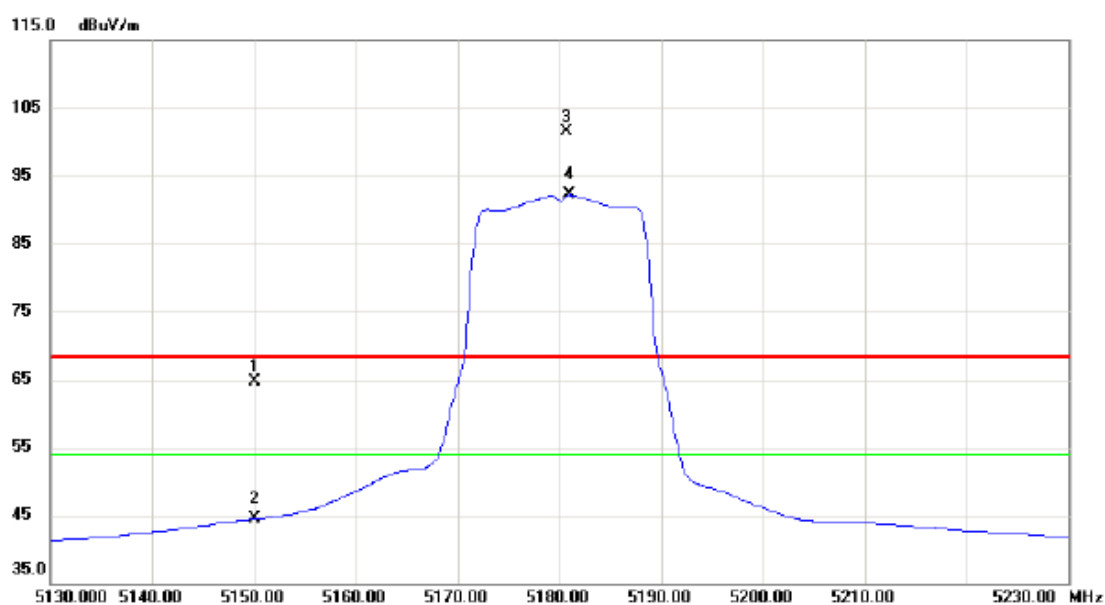


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	24.51	40.22	64.73	68.30	-3.57	peak	
2		5150.000	4.25	40.22	44.47	54.00	-9.53	AVG	
3	X	5180.700	61.30	40.28	101.58	68.30	33.28	peak	NO LIMIT
4	*	5181.000	51.93	40.28	92.21	54.00	38.21	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

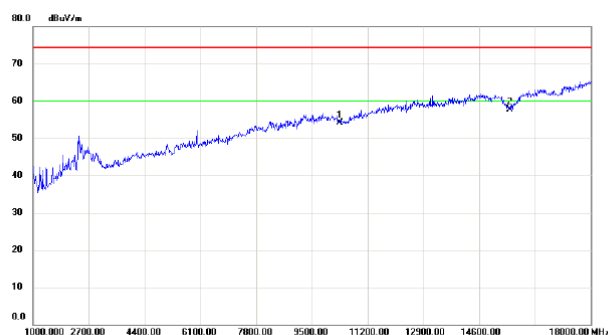

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	40.16	13.85	54.01	74.30	-20.29	peak	
2	*	15540.00	40.78	16.85	57.63	74.30	-16.67	peak	

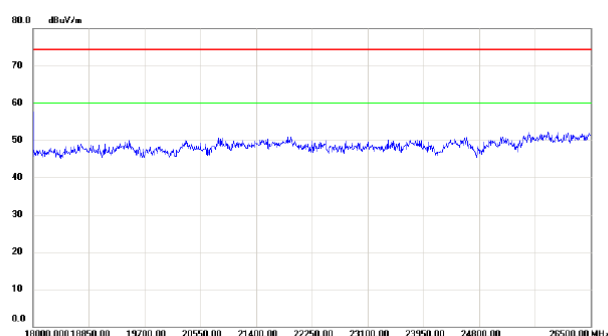


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

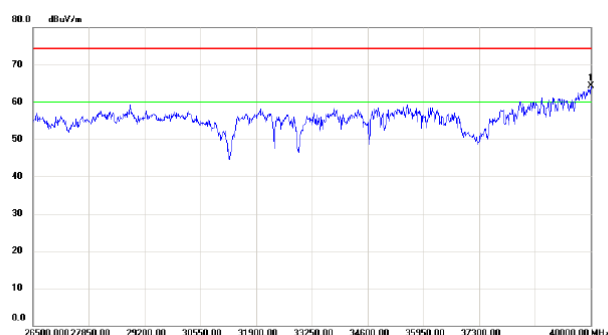

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	46.68	17.60	64.28	74.30	-10.02	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

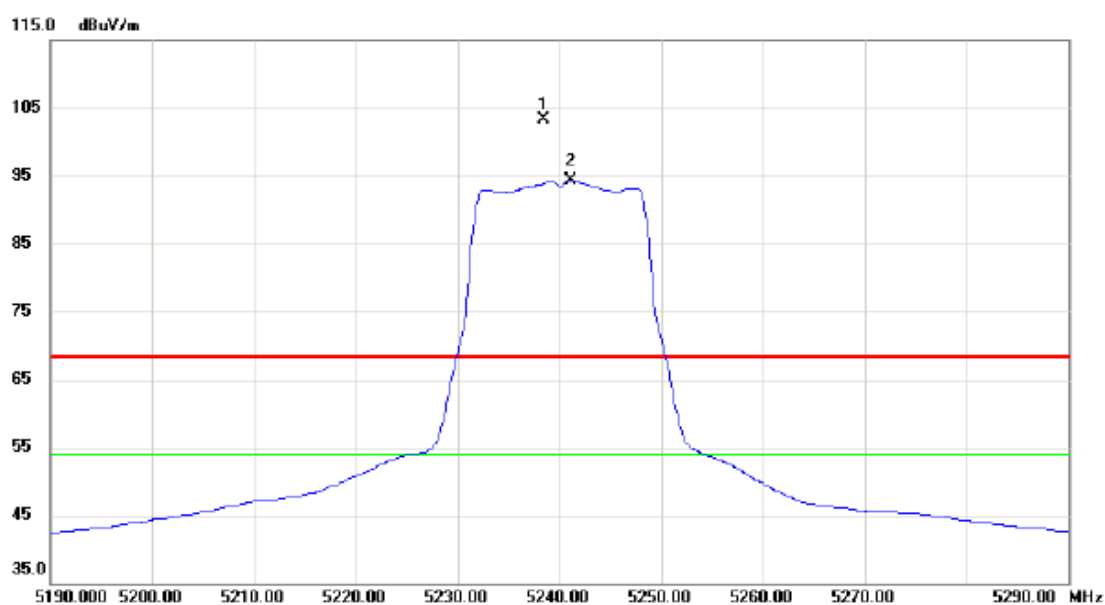


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5238.500	62.97	40.40	103.37	68.30	35.07	peak	NO LIMIT
2	*	5241.100	53.88	40.41	94.29	54.00	40.29	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

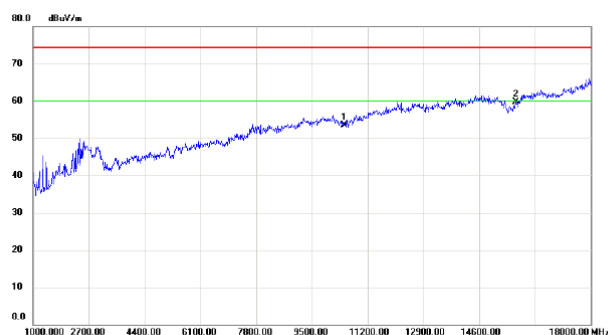

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10480.00	39.77	13.69	53.46	74.30	-20.84	peak	
2	*	15720.00	41.94	17.78	59.72	74.30	-14.58	peak	

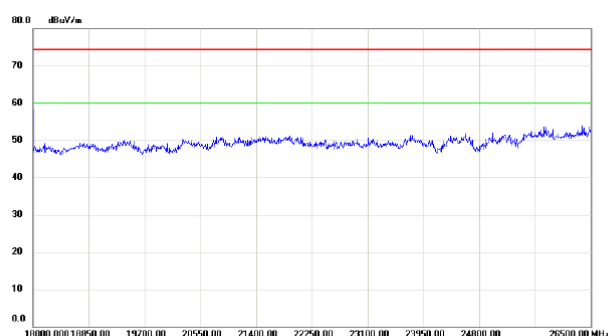


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.61	17.54	63.15	74.30	-11.15	peak	

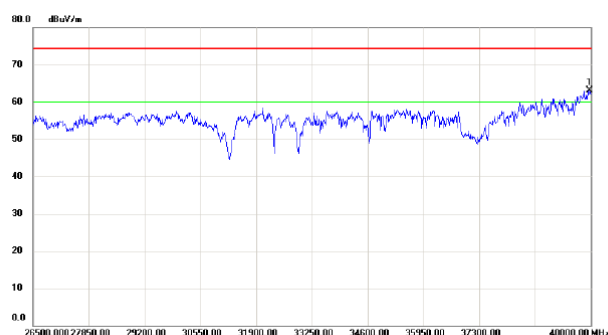

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.61	17.54	63.15	74.30	-11.15	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

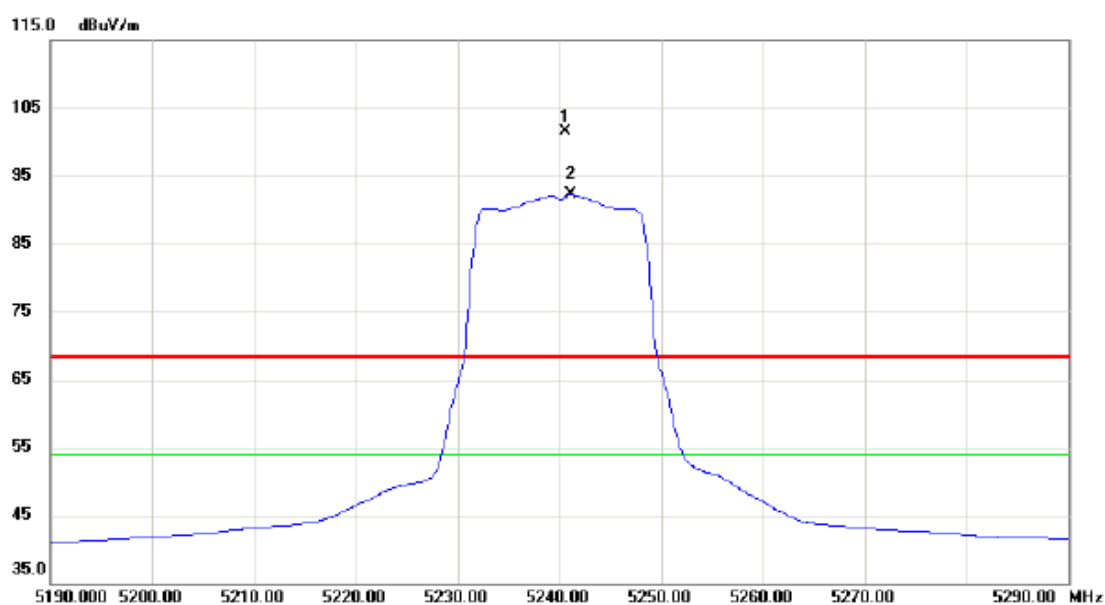


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.600	61.17	40.41	101.58	68.30	33.28	peak	NO LIMIT
2	*	5241.100	51.90	40.41	92.31	54.00	38.31	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

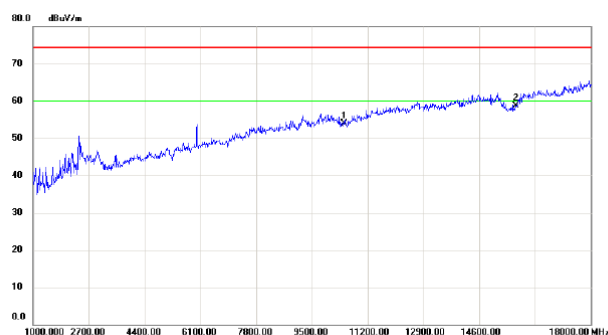

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	40.13	13.69	53.82	74.30	-20.48	peak	
2	*	15720.00	40.94	17.78	58.72	74.30	-15.58	peak	

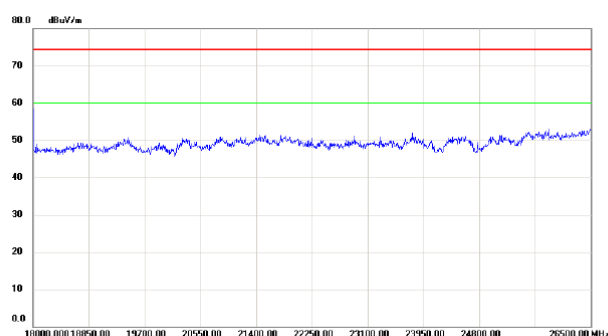


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

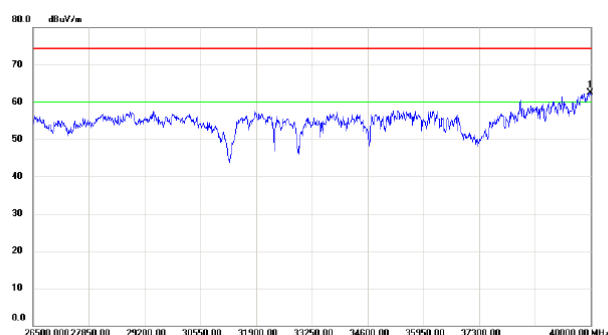

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	44.93	17.56	62.49	74.30	-11.81	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

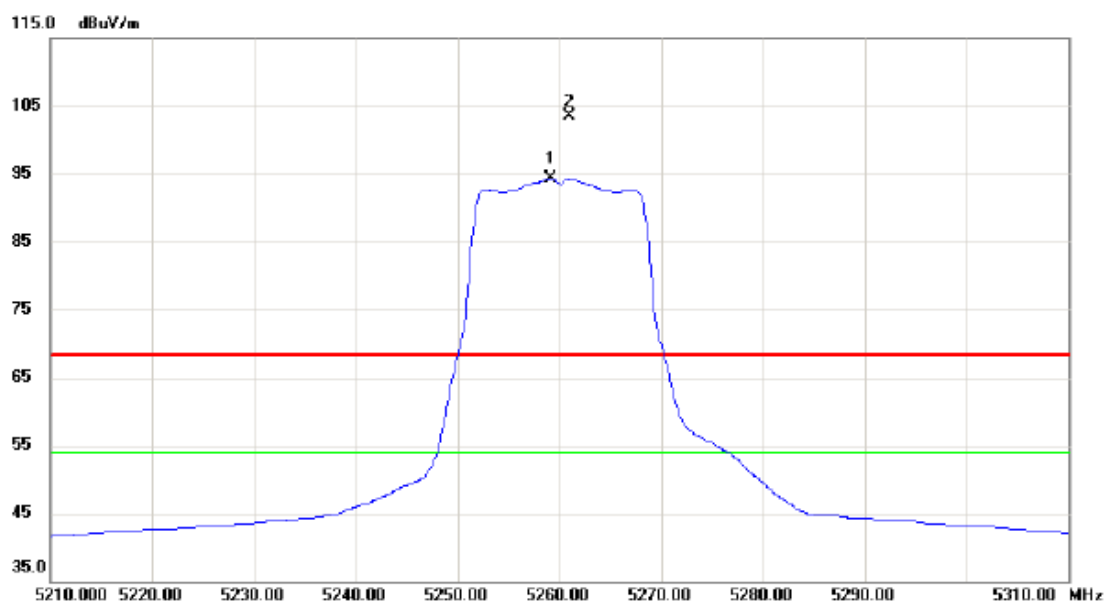


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5259.200	53.87	40.45	94.32	54.00	40.32	AVG	NO LIMIT
2	X	5261.000	62.97	40.46	103.43	68.30	35.13	peak	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

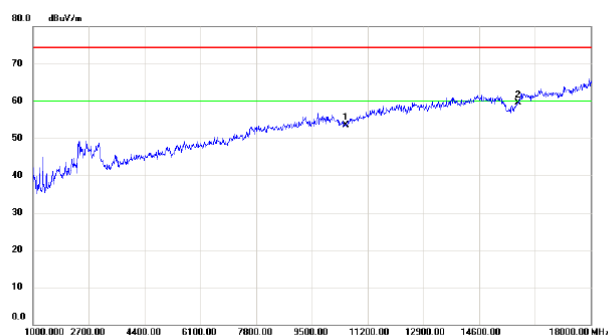

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10520.00	39.66	13.75	53.41	74.30	-20.89	peak	
2	*	15780.00	41.33	18.10	59.43	74.30	-14.87	peak	

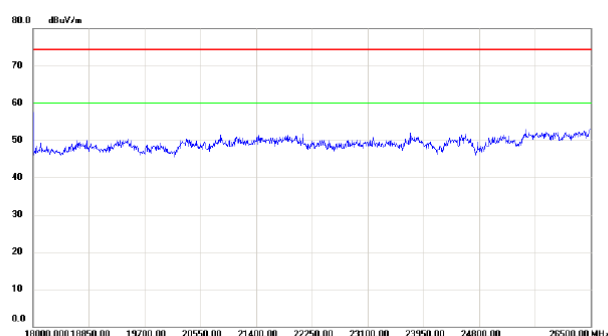


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.72	17.21	62.93	74.30	-11.37	peak	

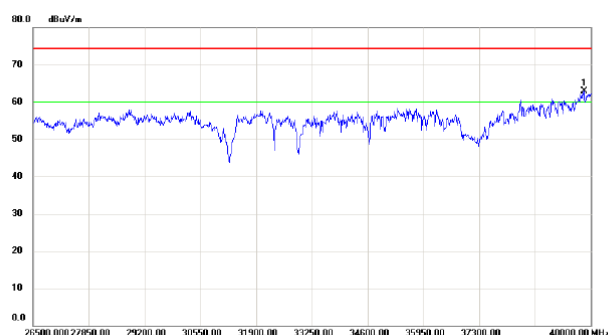

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.72	17.21	62.93	74.30	-11.37	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

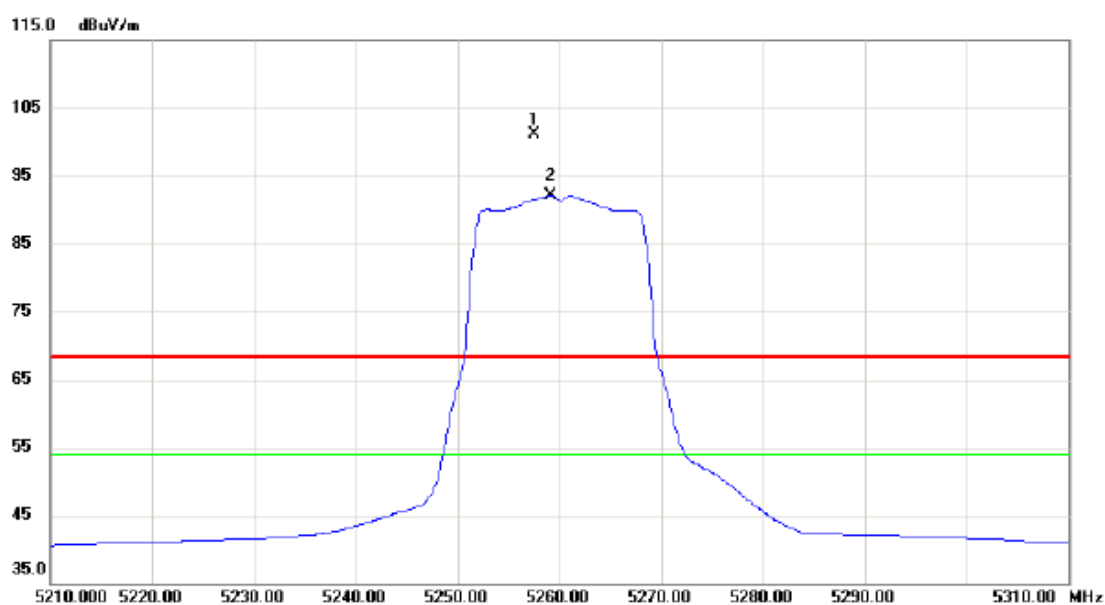


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5257.500	60.56	40.45	101.01	68.30	32.71	peak	NO LIMIT
2	*	5259.200	51.74	40.45	92.19	54.00	38.19	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

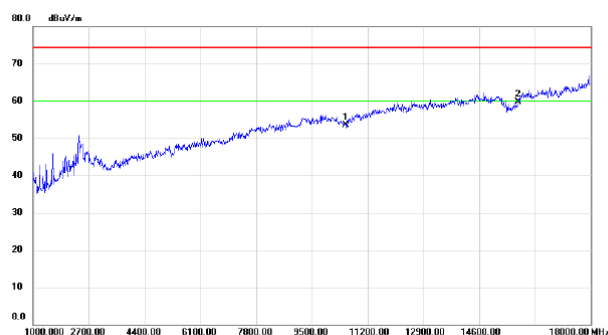

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10520.00	39.72	13.75	53.47	74.30	-20.83	peak	
2	*	15780.00	41.62	18.10	59.72	74.30	-14.58	peak	

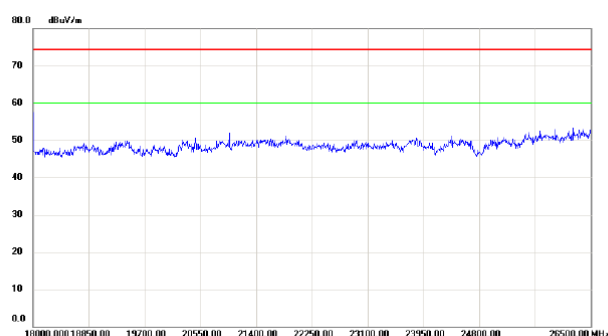


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

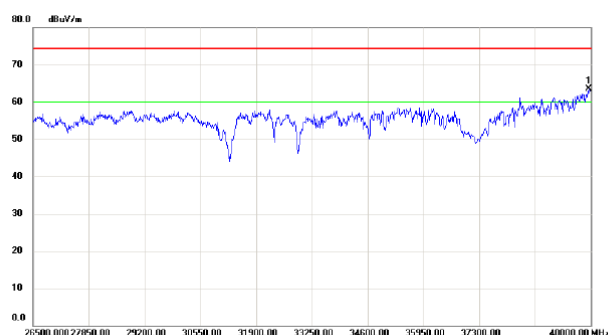

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39946.00	46.01	17.47	63.48	74.30	-10.82	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

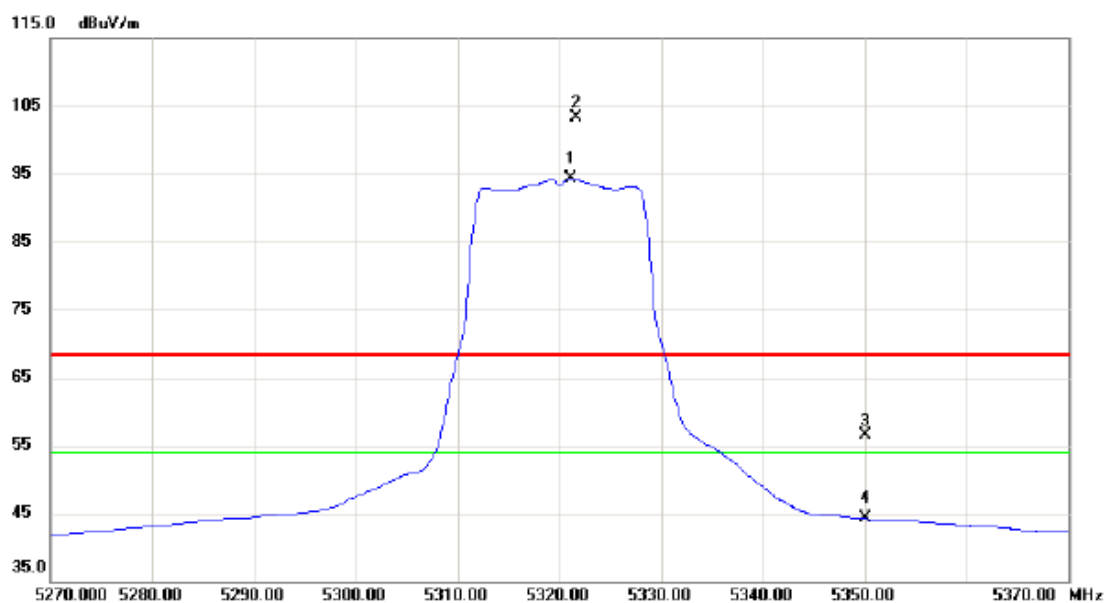


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.100	53.71	40.58	94.29	54.00	40.29	AVG	NO LIMIT
2	X	5321.700	62.80	40.58	103.38	68.30	35.08	peak	NO LIMIT
3		5350.000	15.96	40.64	56.60	68.30	-11.70	peak	
4		5350.000	3.59	40.64	44.23	54.00	-9.77	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

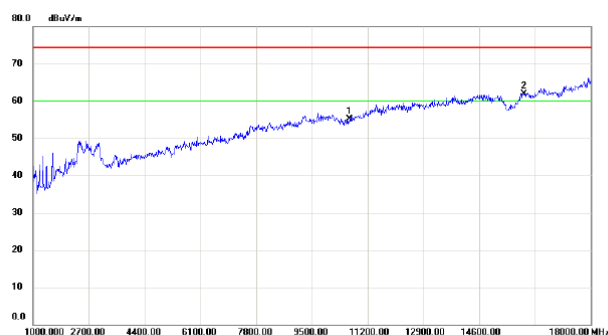

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	40.82	14.25	55.07	74.30	-19.23	peak	
2	*	15960.00	42.84	19.04	61.88	74.30	-12.42	peak	

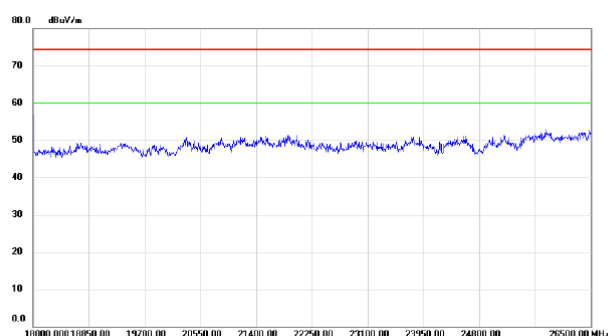


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

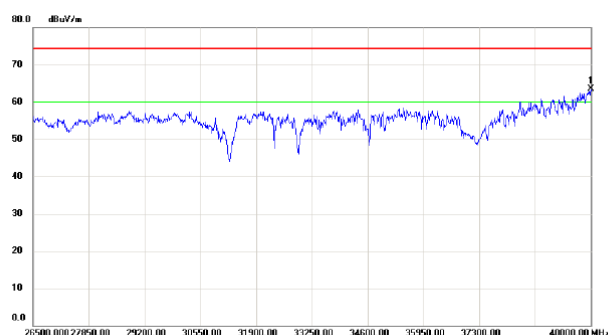

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	45.82	17.60	63.42	74.30	-10.88	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

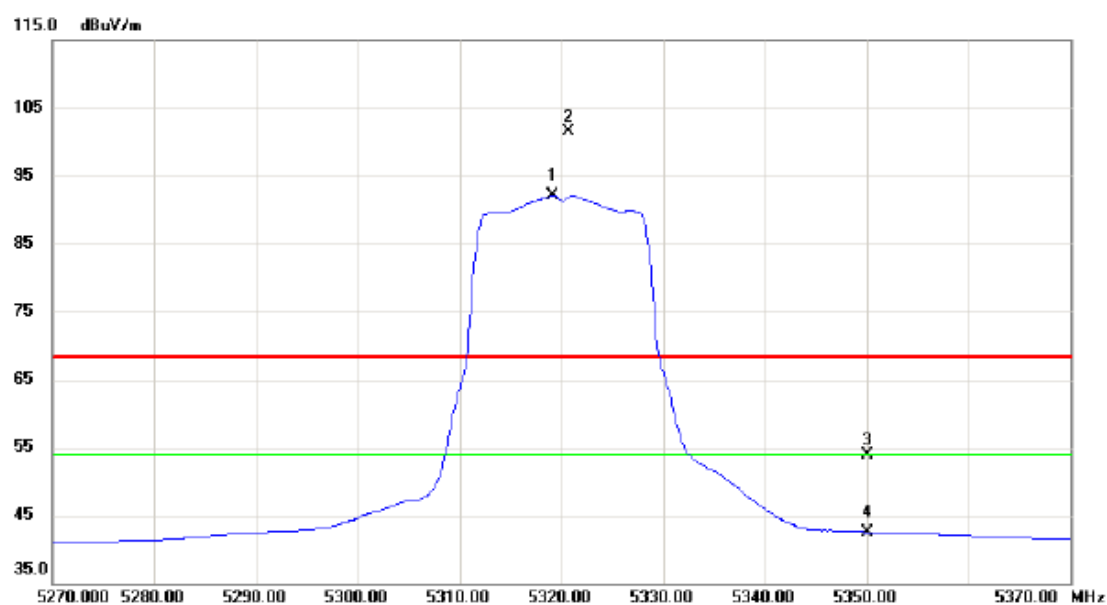


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.200	51.61	40.58	92.19	54.00	38.19	AVG	NO LIMIT
2	X	5320.700	60.86	40.58	101.44	68.30	33.14	peak	NO LIMIT
3		5350.000	13.34	40.64	53.98	68.30	-14.32	peak	
4		5350.000	1.95	40.64	42.59	54.00	-11.41	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

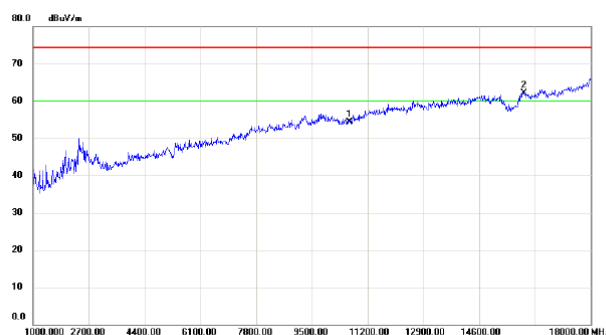

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	40.13	14.25	54.38	74.30	-19.92	peak	
2	*	15960.00	42.97	19.04	62.01	74.30	-12.29	peak	

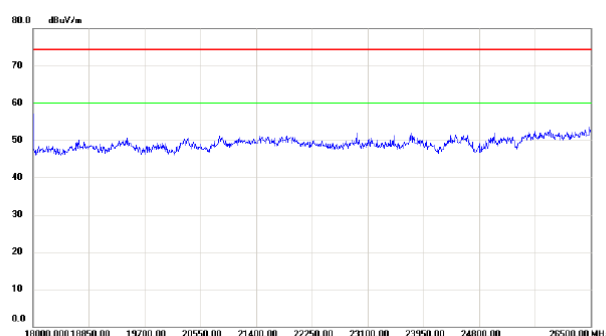


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

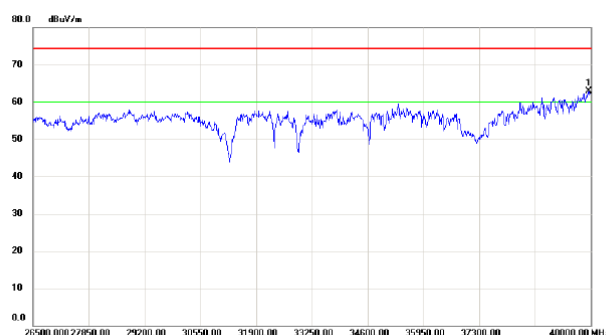

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39946.00	45.37	17.47	62.84	74.30	-11.46	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

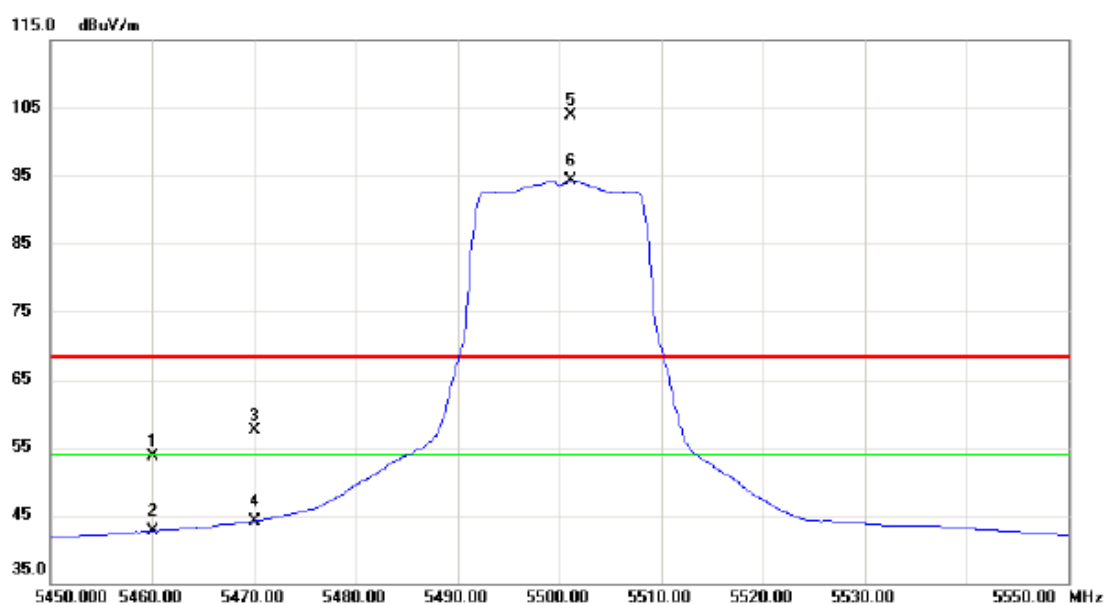


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	12.87	40.87	53.74	68.30	-14.56	peak	
2		5460.000	1.87	40.87	42.74	54.00	-11.26	AVG	
3		5470.000	16.59	40.90	57.49	68.30	-10.81	peak	
4		5470.000	3.28	40.90	44.18	54.00	-9.82	AVG	
5	X	5501.100	62.87	40.96	103.83	68.30	35.53	peak	NO LIMIT
6	*	5501.100	53.41	40.96	94.37	54.00	40.37	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

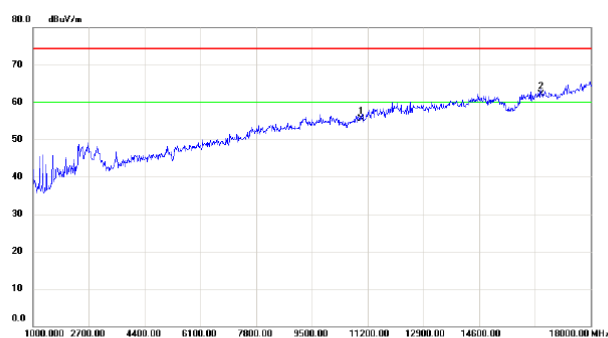

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	39.67	15.75	55.42	74.30	-18.88	peak	
2	*	16500.00	41.74	20.37	62.11	74.30	-12.19	peak	

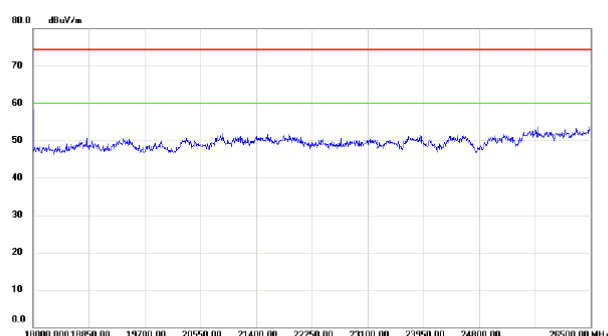


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

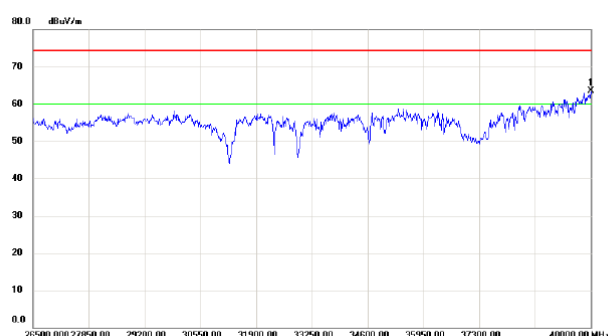

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40000.00	45.90	17.60	63.50	74.30	-10.80	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

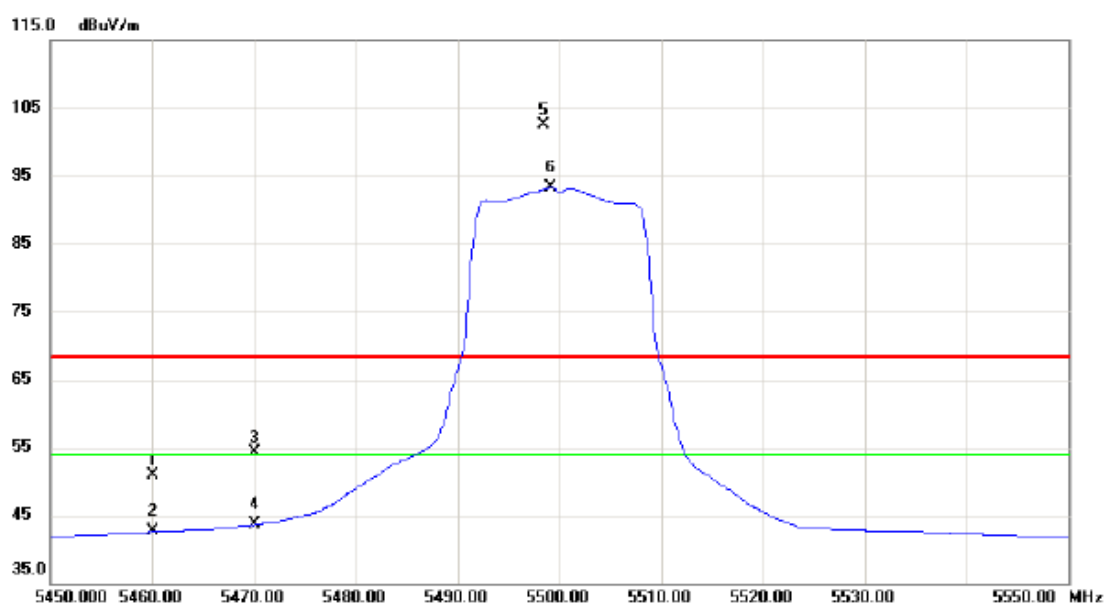


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	10.02	40.87	50.89	68.30	-17.41	peak	
2		5460.000	1.73	40.87	42.60	54.00	-11.40	AVG	
3		5470.000	13.35	40.90	54.25	68.30	-14.05	peak	
4		5470.000	2.71	40.90	43.61	54.00	-10.39	AVG	
5	X	5498.500	61.50	40.96	102.46	68.30	34.16	peak	NO LIMIT
6	*	5499.200	52.37	40.96	93.33	54.00	39.33	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

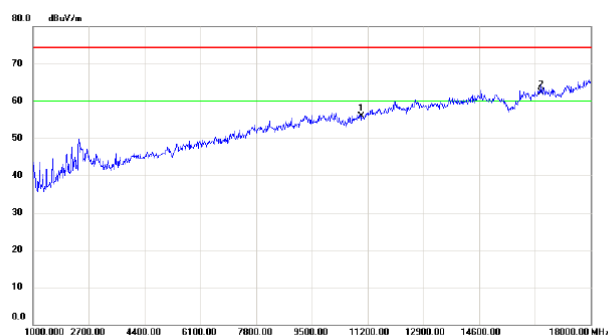

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	40.10	15.75	55.85	74.30	-18.45	peak	
2	*	16500.00	41.96	20.37	62.33	74.30	-11.97	peak	

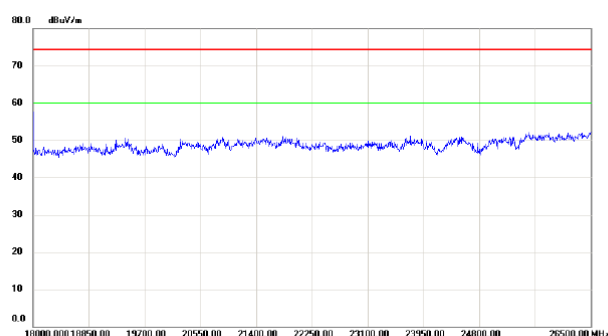


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

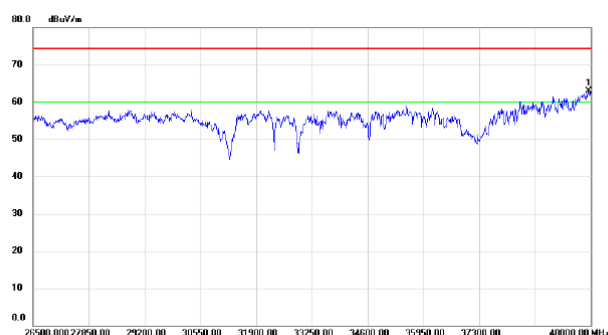

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	45.47	17.47	62.94	74.30	-11.36	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

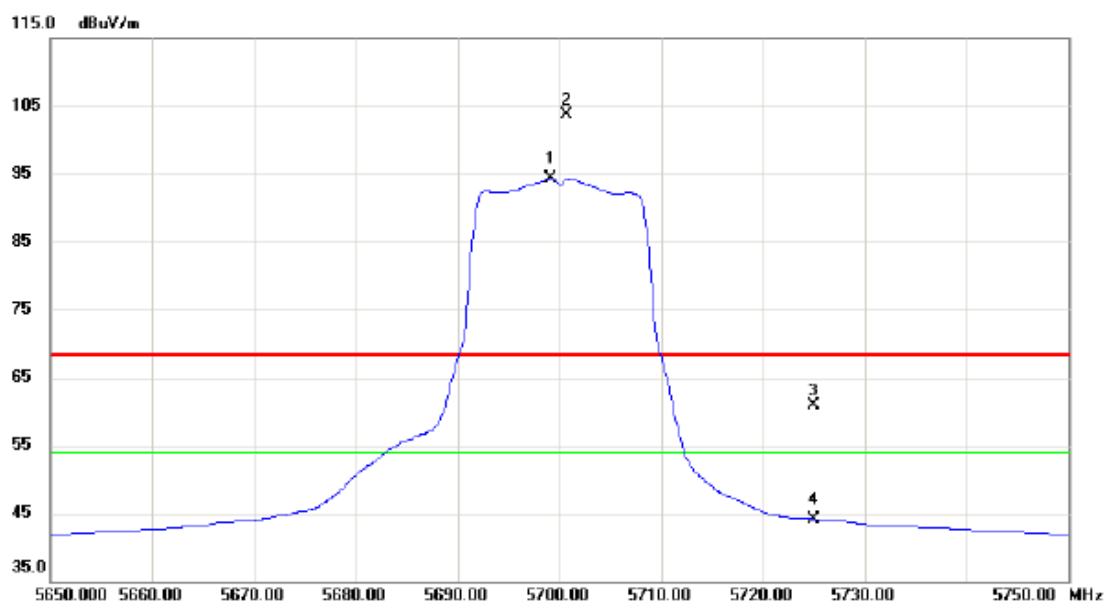


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5699.200	53.07	41.23	94.30	54.00	40.30	AVG	NO LIMIT
2	X	5700.700	62.51	41.23	103.74	68.30	35.44	peak	NO LIMIT
3		5725.000	19.67	41.27	60.94	68.30	-7.36	peak	
4		5725.000	2.89	41.27	44.16	54.00	-9.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

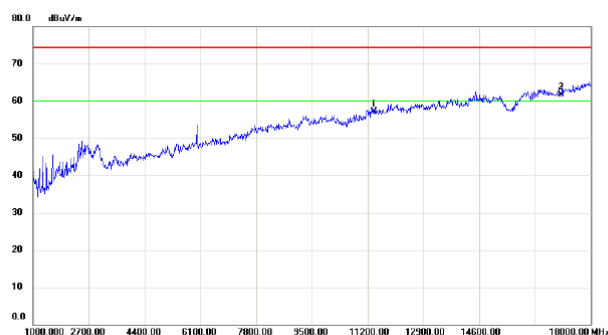

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	40.41	16.70	57.11	74.30	-17.19	peak	
2	*	17100.00	40.61	21.10	61.71	74.30	-12.59	peak	

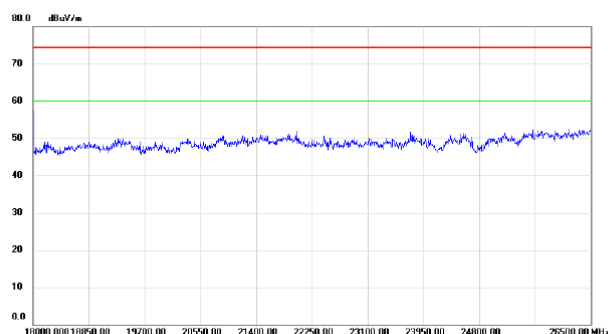


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

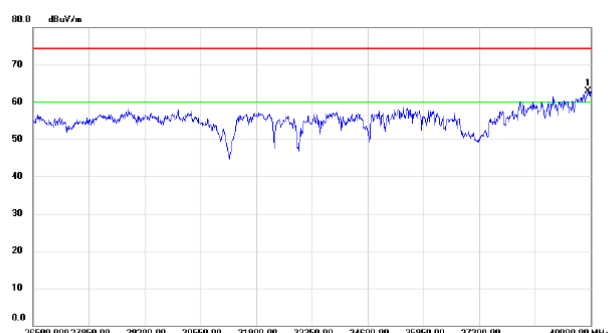

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	45.44	17.43	62.87	74.30	-11.43	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

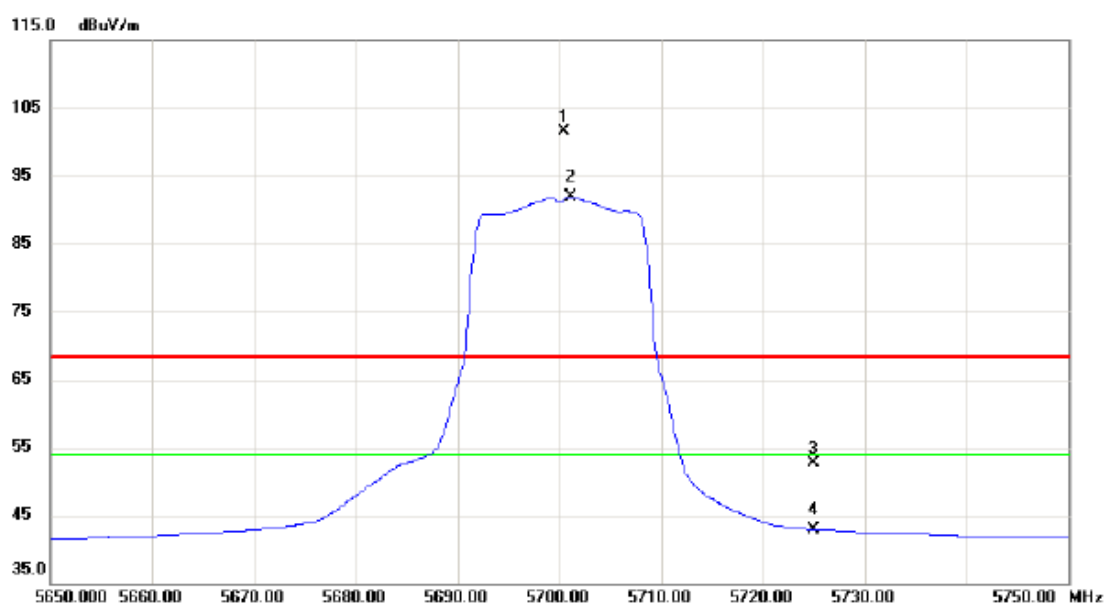


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.500	60.18	41.23	101.41	68.30	33.11	peak	NO LIMIT
2	*	5701.100	50.72	41.23	91.95	54.00	37.95	AVG	NO LIMIT
3		5725.000	11.41	41.27	52.68	68.30	-15.62	peak	
4		5725.000	1.64	41.27	42.91	54.00	-11.09	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

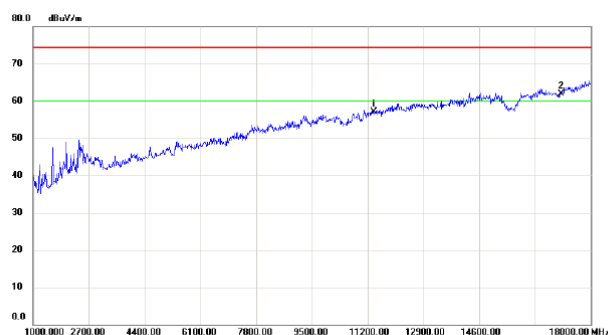

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	40.35	16.70	57.05	74.30	-17.25	peak	
2	*	17100.00	40.84	21.10	61.94	74.30	-12.36	peak	

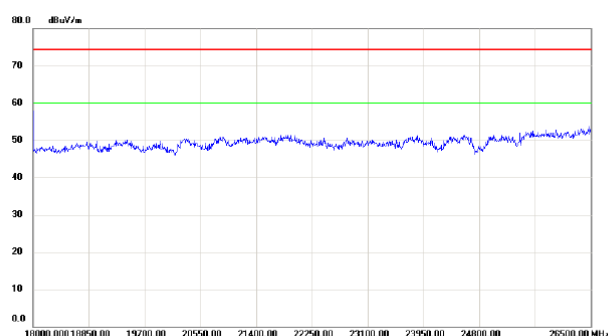


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

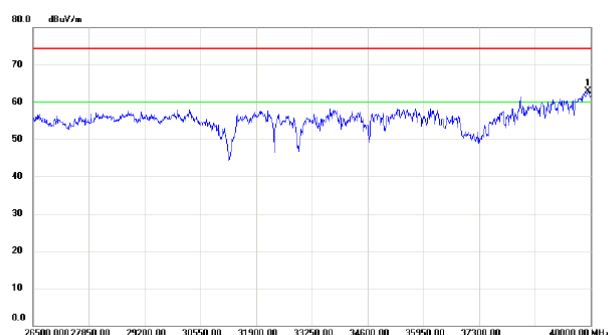

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	45.40	17.43	62.83	74.30	-11.47	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

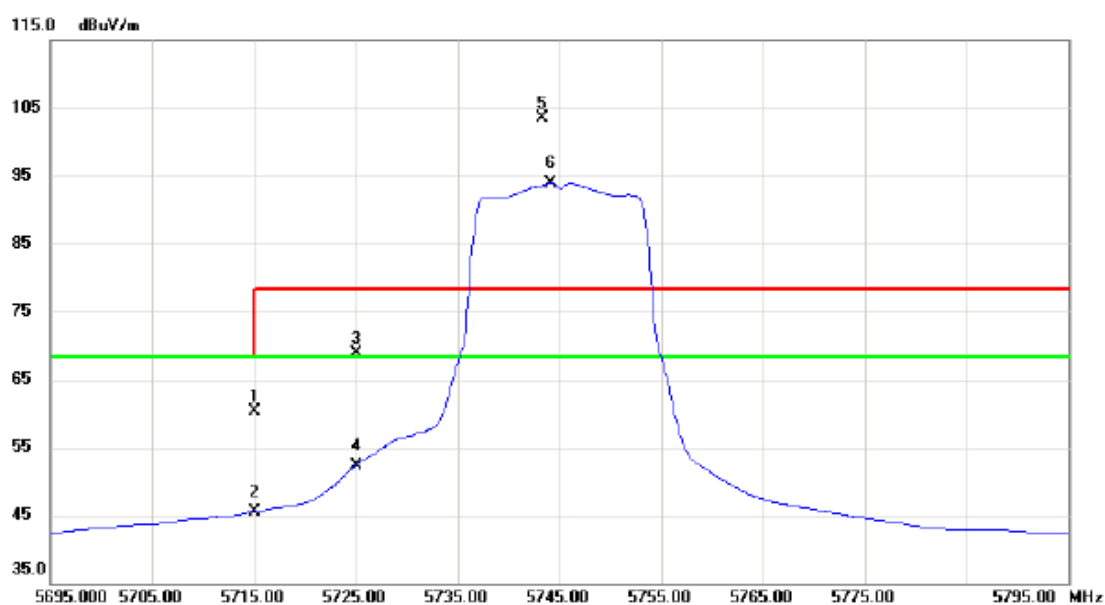


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	18.97	41.25	60.22	68.30	-8.08	peak	
2		5715.000	4.21	41.25	45.46	68.30	-22.84	AVG	
3		5725.000	27.55	41.27	68.82	78.30	-9.48	peak	
4		5725.000	11.10	41.27	52.37	68.30	-15.93	AVG	
5	X	5743.300	62.17	41.29	103.46	78.30	25.16	peak	NO LIMIT
6	*	5744.200	52.67	41.29	93.96	68.30	25.66	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

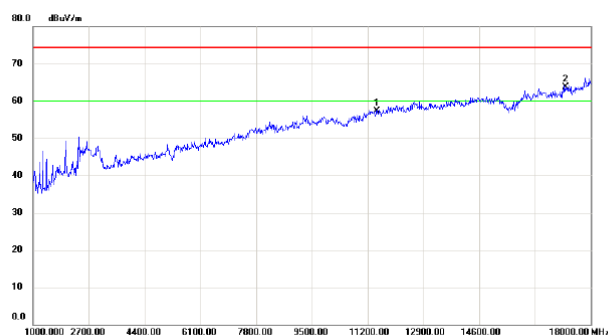

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	40.31	16.91	57.22	74.30	-17.08	peak	
2	*	17235.00	42.11	21.53	63.64	74.30	-10.66	peak	

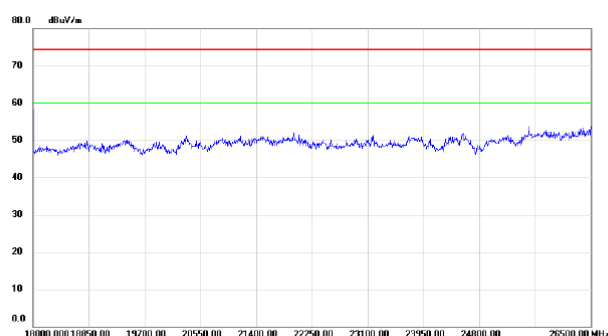


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

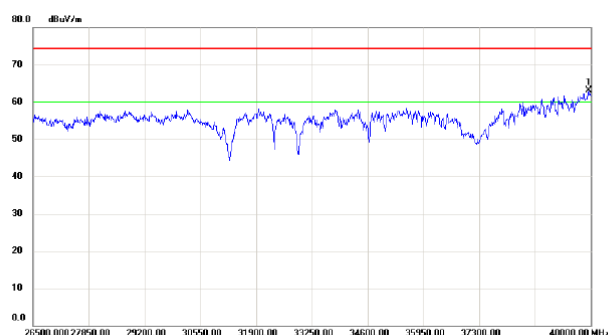

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39946.00	45.59	17.47	63.06	74.30	-11.24	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

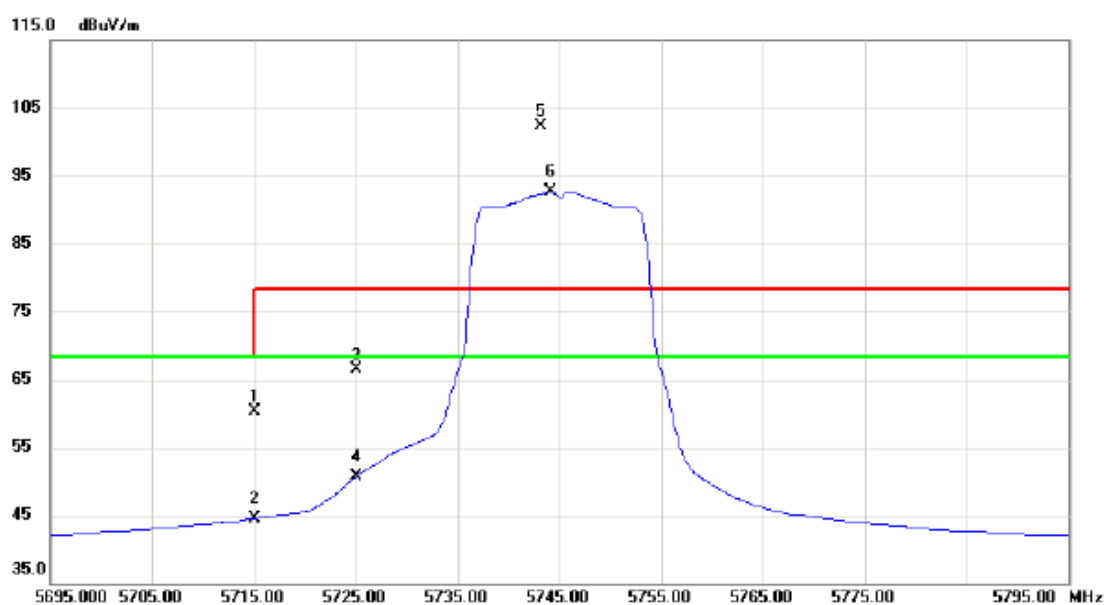


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	18.95	41.25	60.20	68.30	-8.10	peak	
2		5715.000	3.29	41.25	44.54	68.30	-23.76	AVG	
3		5725.000	25.19	41.27	66.46	78.30	-11.84	peak	
4		5725.000	9.42	41.27	50.69	68.30	-17.61	AVG	
5	X	5743.200	60.95	41.29	102.24	78.30	23.94	peak	NO LIMIT
6	*	5744.200	51.47	41.29	92.76	68.30	24.46	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

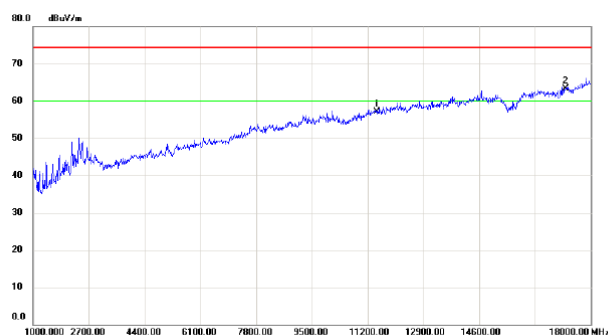

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	40.22	16.91	57.13	74.30	-17.17	peak	
2	*	17235.00	41.85	21.53	63.38	74.30	-10.92	peak	

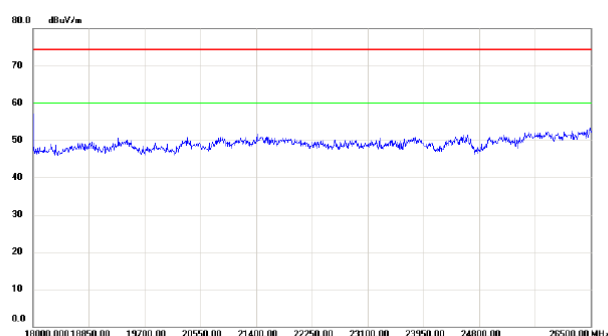


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

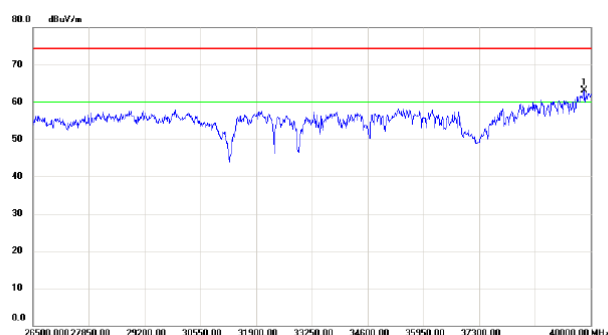

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39838.00	45.86	17.21	63.07	74.30	-11.23	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

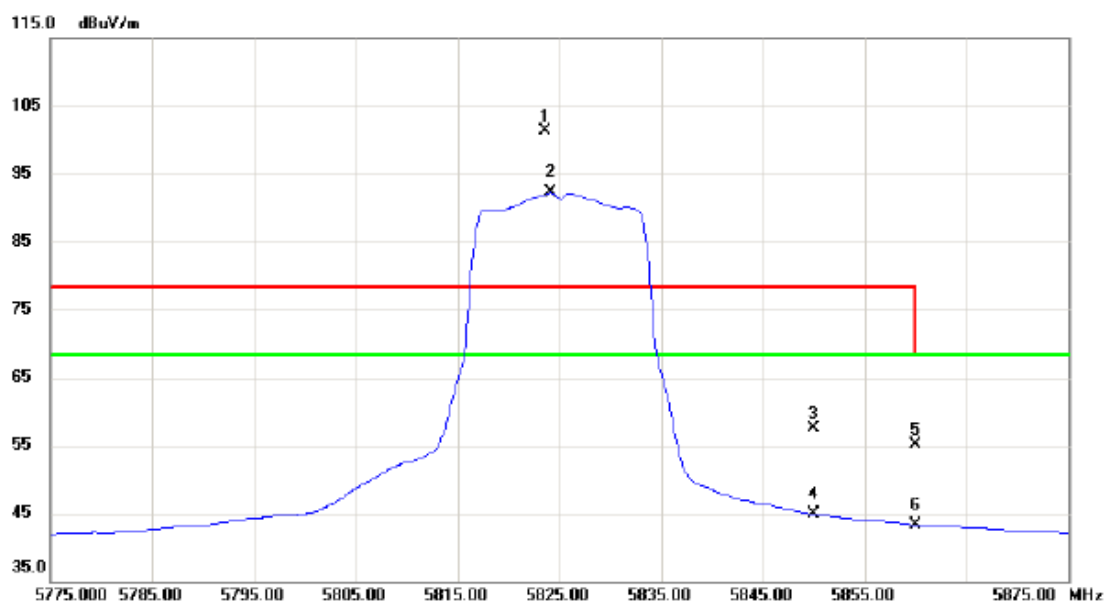


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5823.600	59.87	41.40	101.27	78.30	22.97	peak	NO LIMIT
2	*	5824.200	50.81	41.40	92.21	68.30	23.91	AVG	NO LIMIT
3		5850.000	15.97	41.44	57.41	78.30	-20.89	peak	
4		5850.000	3.44	41.44	44.88	68.30	-23.42	AVG	
5		5860.000	13.63	41.45	55.08	68.30	-13.22	peak	
6		5860.000	1.88	41.45	43.33	68.30	-24.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

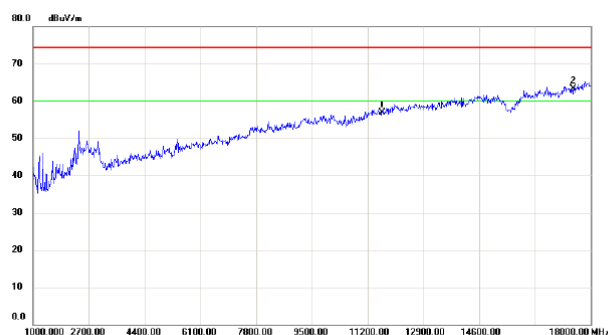

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	39.67	17.17	56.84	74.30	-17.46	peak	
2	*	17475.00	41.08	22.29	63.37	74.30	-10.93	peak	

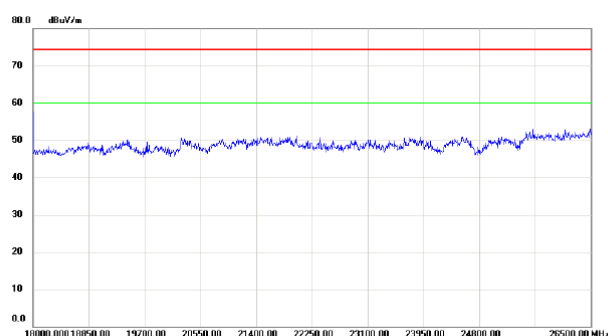


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

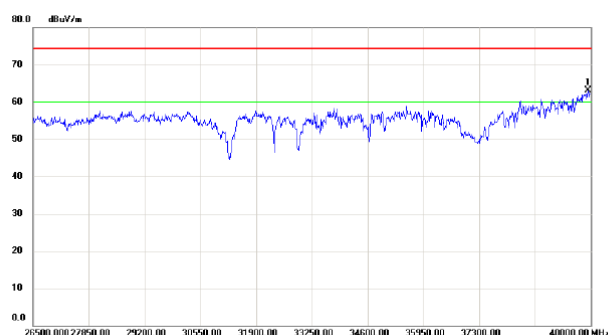

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	45.62	17.43	63.05	74.30	-11.25	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

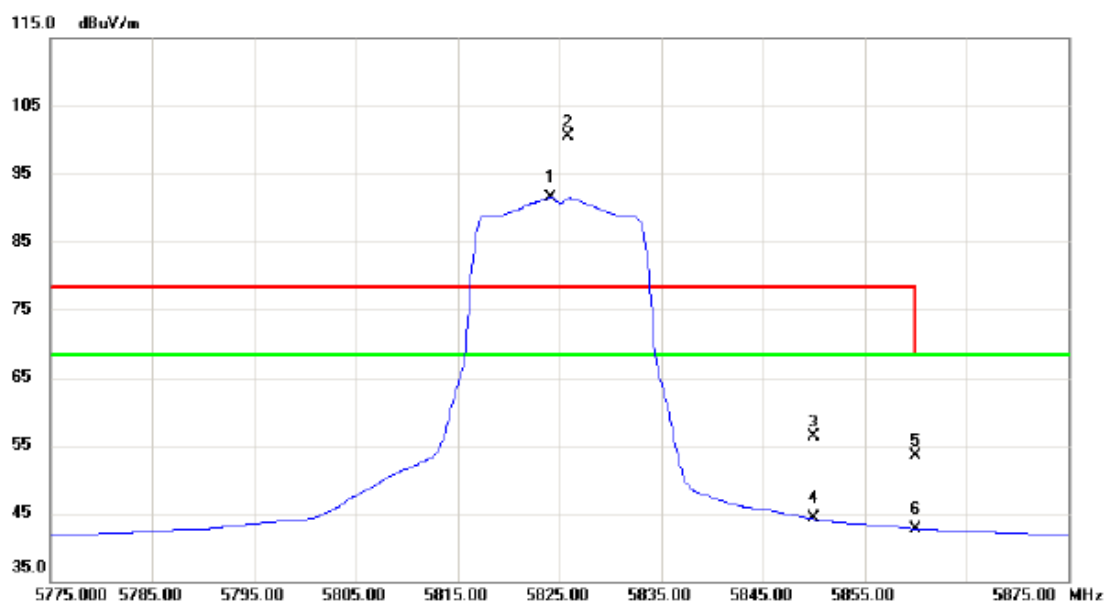


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5824.200	50.08	41.40	91.48	68.30	23.18	AVG	NO LIMIT
2	X	5825.800	59.02	41.40	100.42	78.30	22.12	peak	NO LIMIT
3		5850.000	14.82	41.44	56.26	78.30	-22.04	peak	
4		5850.000	2.76	41.44	44.20	68.30	-24.10	AVG	
5		5860.000	12.04	41.45	53.49	68.30	-14.81	peak	
6		5860.000	1.31	41.45	42.76	68.30	-25.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

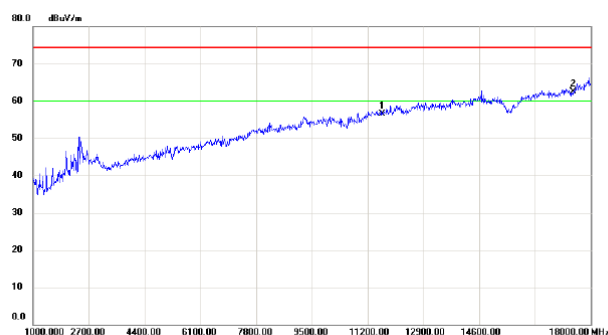

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	39.43	17.17	56.60	74.30	-17.70	peak	
2	*	17475.00	40.21	22.29	62.50	74.30	-11.80	peak	

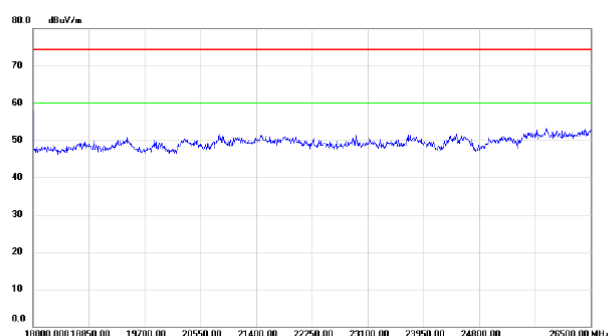


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

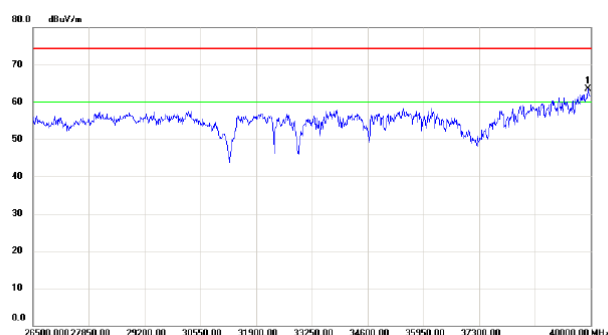

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	45.98	17.43	63.41	74.30	-10.89	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

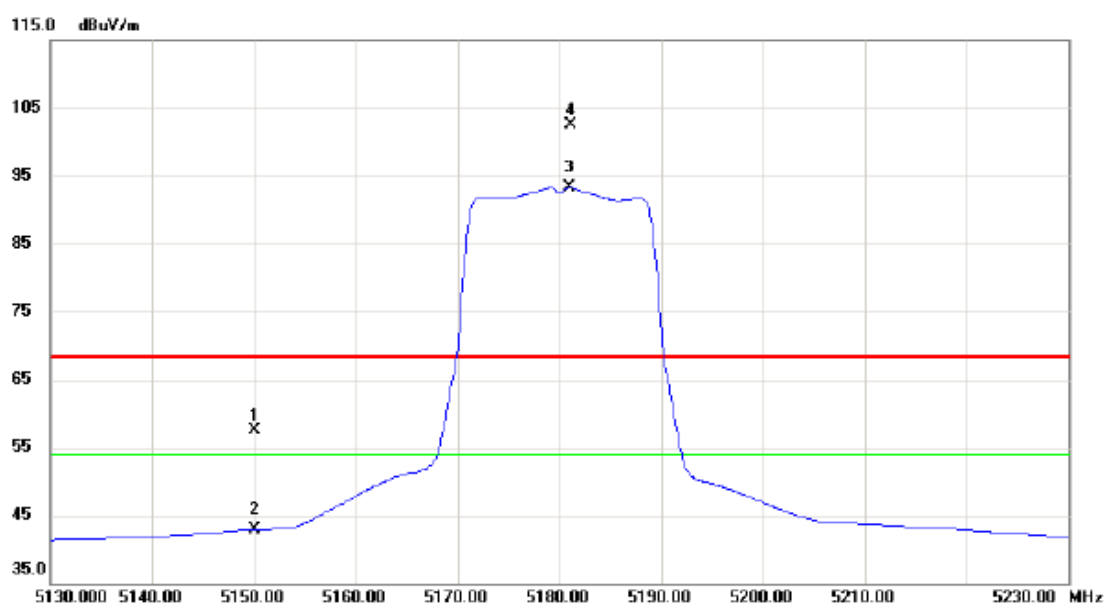


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	17.28	40.22	57.50	68.30	-10.80	peak	
2		5150.000	2.68	40.22	42.90	54.00	-11.10	AVG	
3	*	5181.000	53.00	40.28	93.28	54.00	39.28	AVG	NO LIMIT
4	X	5181.200	62.27	40.28	102.55	68.30	34.25	peak	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

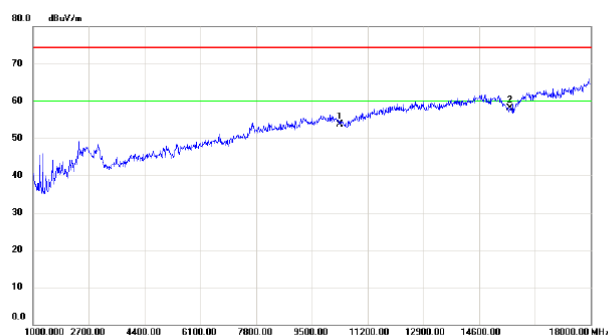

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	39.85	13.85	53.70	74.30	-20.60	peak	
2	*	15540.00	41.26	16.85	58.11	74.30	-16.19	peak	

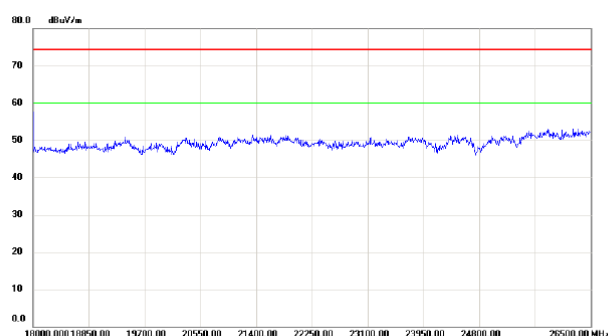


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

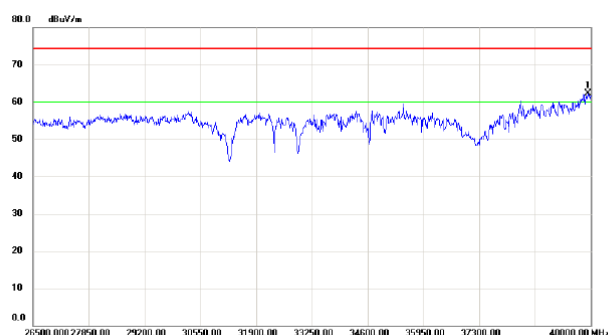

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	44.91	17.43	62.34	74.30	-11.96	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

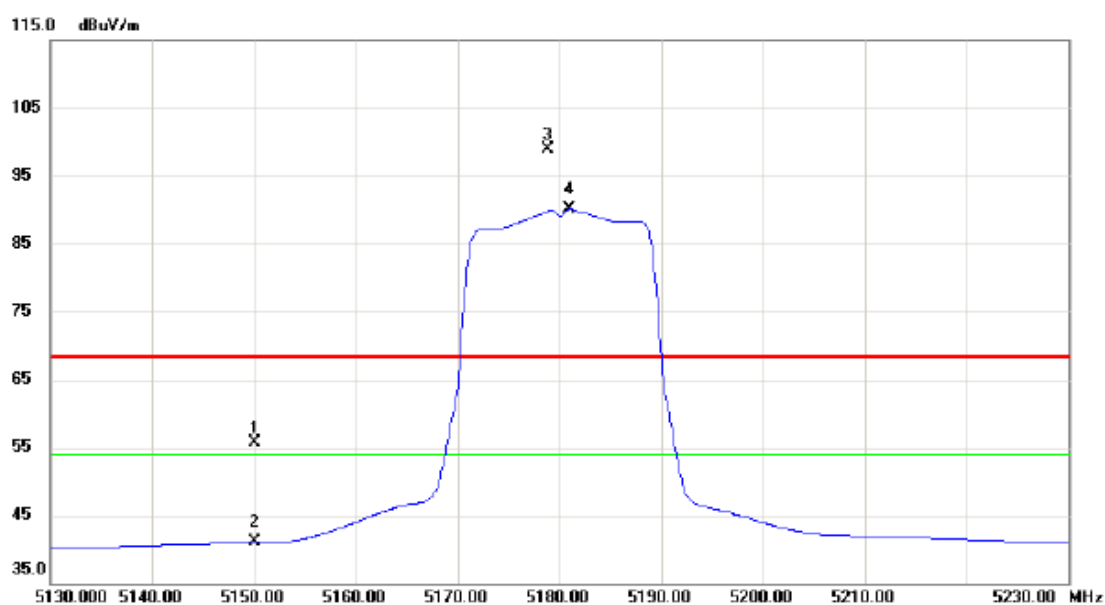


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	15.39	40.22	55.61	68.30	-12.69	peak	
2		5150.000	0.79	40.22	41.01	54.00	-12.99	AVG	
3	X	5178.900	58.55	40.28	98.83	68.30	30.53	peak	NO LIMIT
4	*	5181.000	49.77	40.28	90.05	54.00	36.05	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

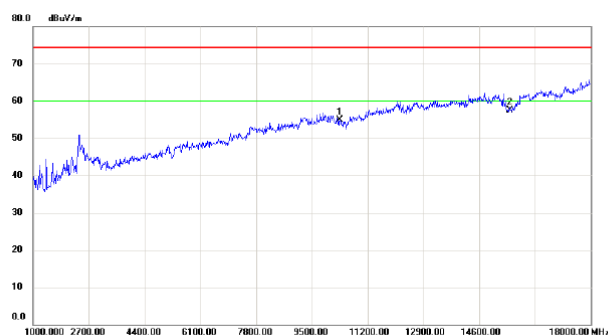

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10360.00	40.99	13.85	54.84	74.30	-19.46	peak	
2	*	15540.00	40.69	16.85	57.54	74.30	-16.76	peak	

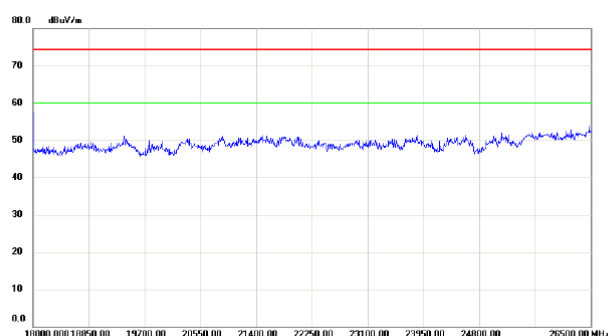


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

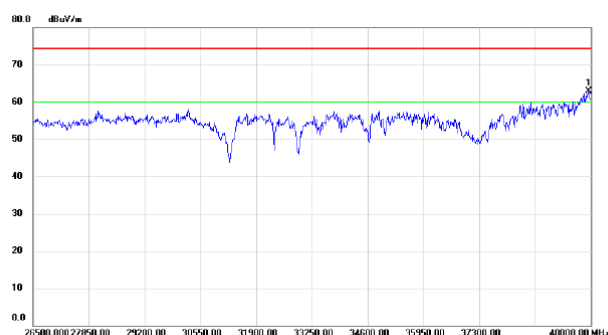

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	45.41	17.47	62.88	74.30	-11.42	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

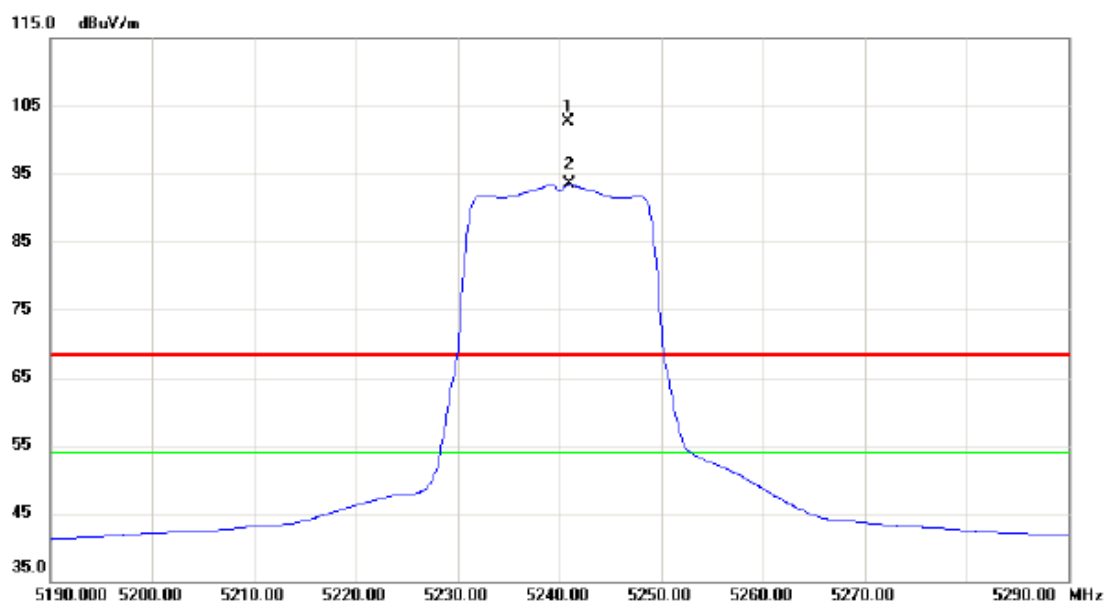


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5240.900	62.34	40.41	102.75	68.30	34.45	peak	NO LIMIT
2	*	5241.000	53.04	40.41	93.45	54.00	39.45	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

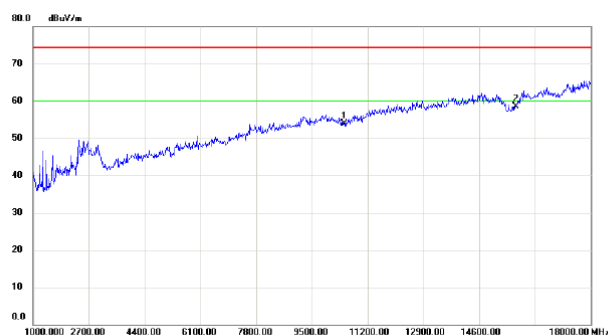

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	40.24	13.69	53.93	74.30	-20.37	peak	
2	*	15720.00	40.80	17.78	58.58	74.30	-15.72	peak	

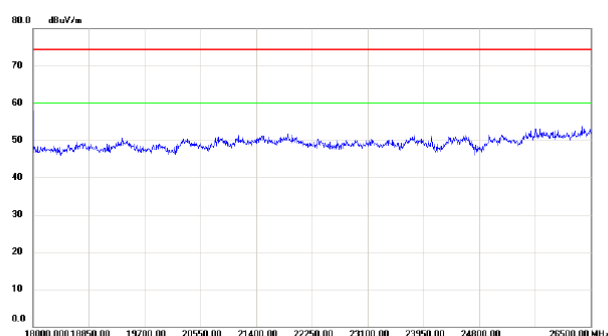


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

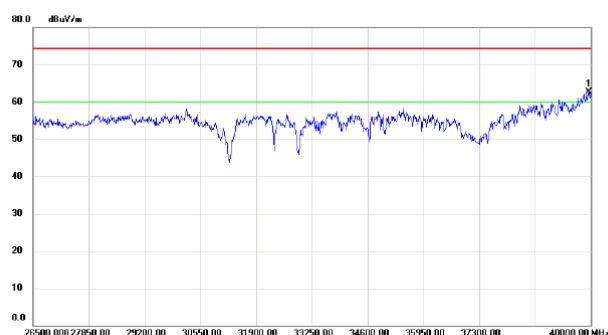

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	45.19	17.50	62.69	74.30	-11.61	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

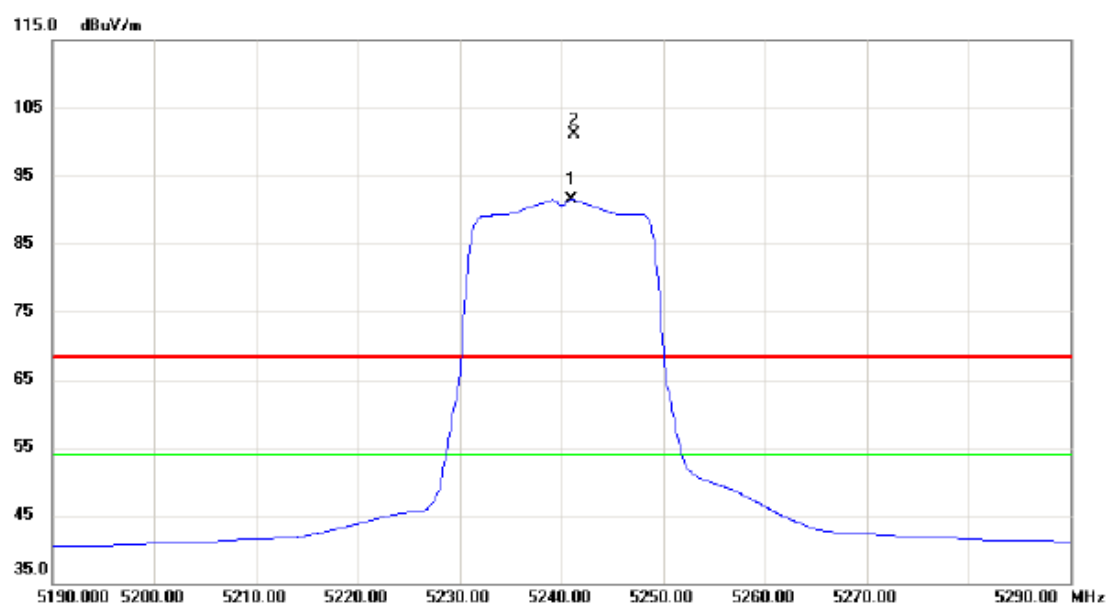


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5241.000	51.06	40.41	91.47	54.00	37.47	AVG	NO LIMIT
2	X	5241.300	60.76	40.41	101.17	68.30	32.87	peak	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

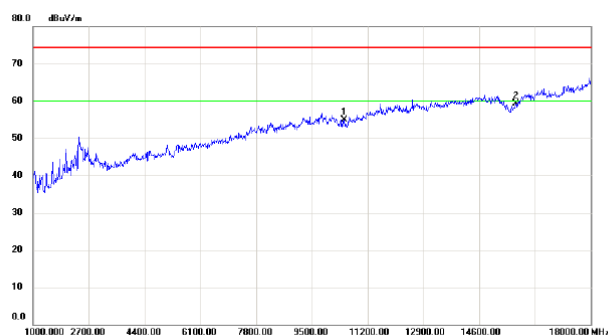

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10480.00	41.27	13.69	54.96	74.30	-19.34	peak	
2	*	15720.00	41.60	17.78	59.38	74.30	-14.92	peak	

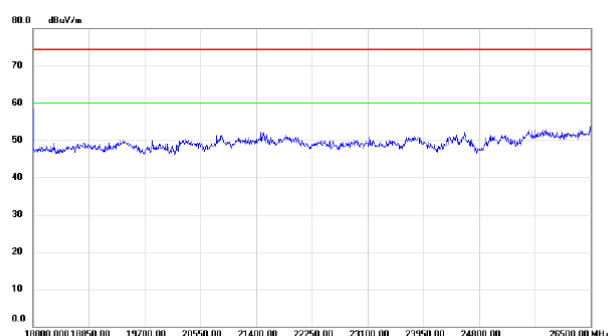


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

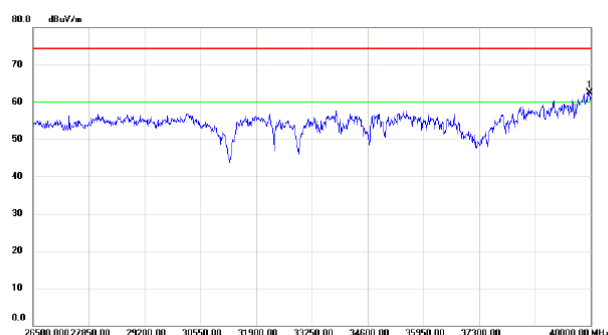

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39973.00	45.05	17.54	62.59	74.30	-11.71	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

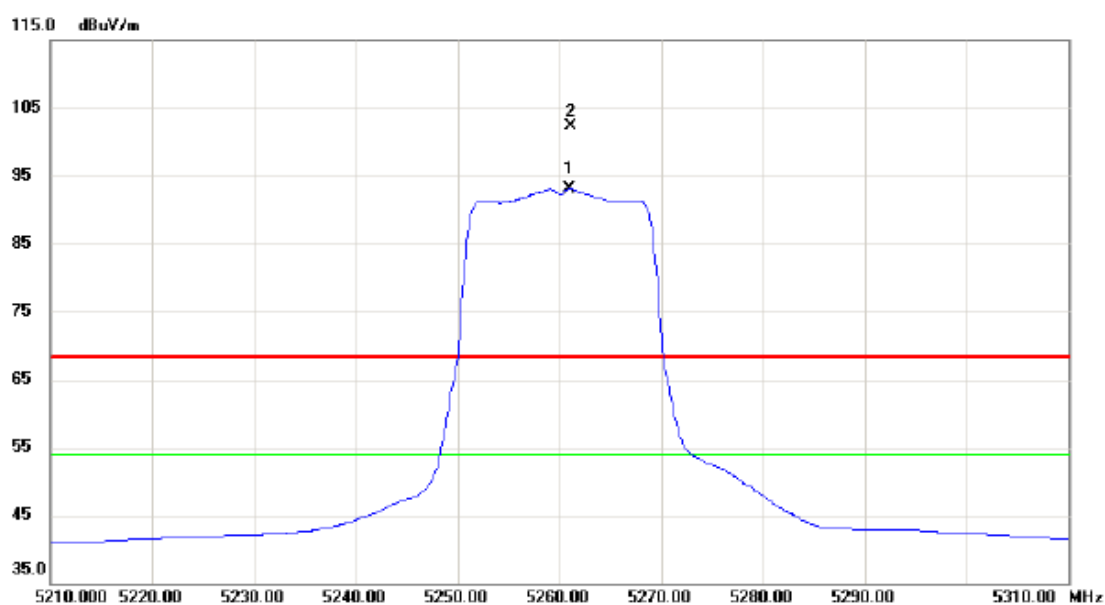


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5261.000	52.63	40.46	93.09	54.00	39.09	AVG	NO LIMIT
2	X	5261.100	61.84	40.46	102.30	68.30	34.00	peak	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

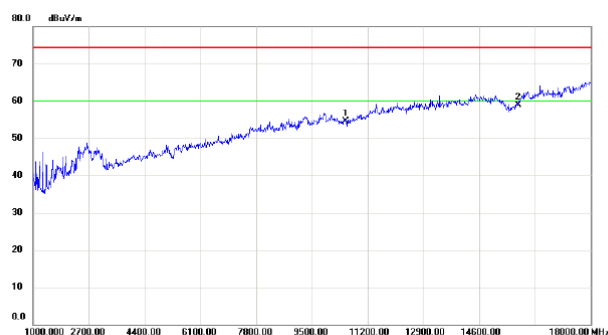

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10520.00	40.77	13.75	54.52	74.30	-19.78	peak	
2	*	15780.00	40.84	18.10	58.94	74.30	-15.36	peak	

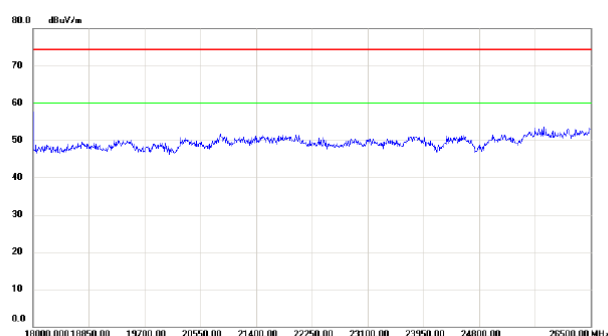


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

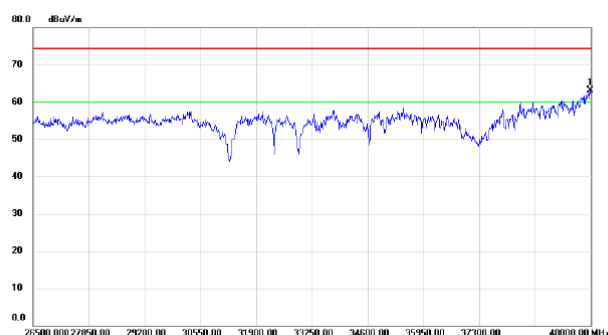

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39986.50	45.55	17.56	63.11	74.30	-11.19	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

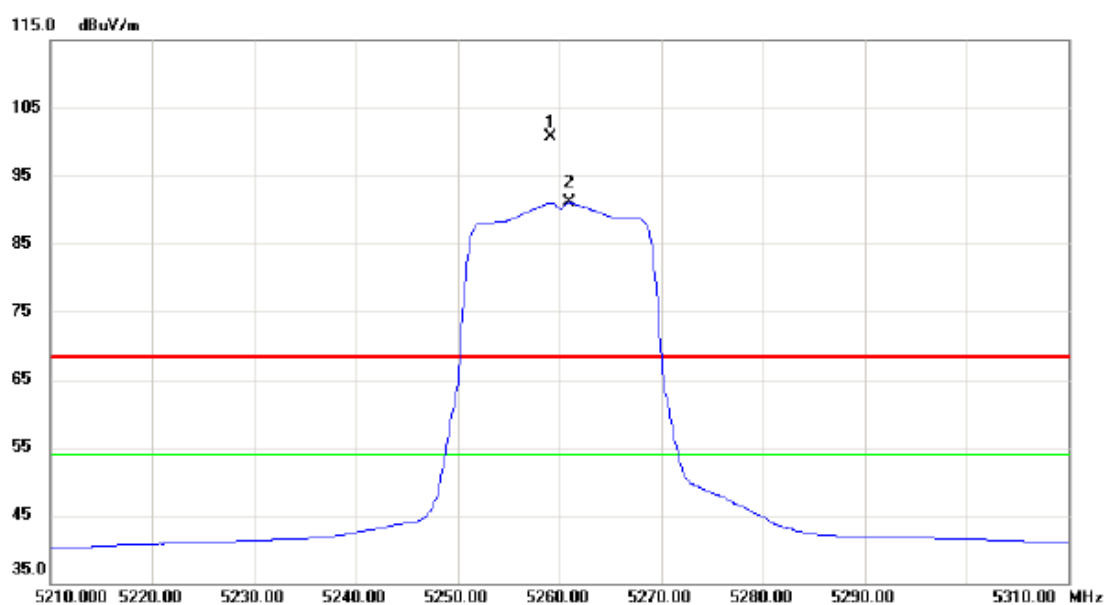


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5259.200	60.35	40.45	100.80	68.30	32.50	peak	NO LIMIT
2	*	5261.000	50.55	40.46	91.01	54.00	37.01	AVG	NO LIMIT

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

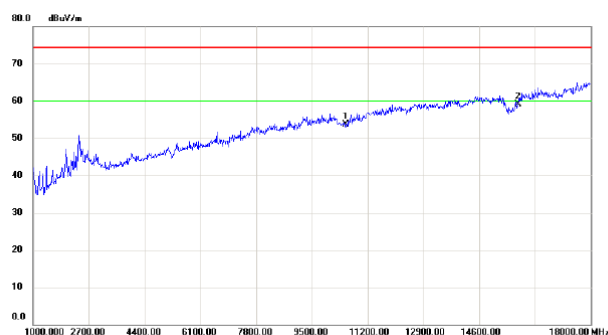

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10520.00	39.95	13.75	53.70	74.30	-20.60	peak	
2	*	15780.00	41.08	18.10	59.18	74.30	-15.12	peak	

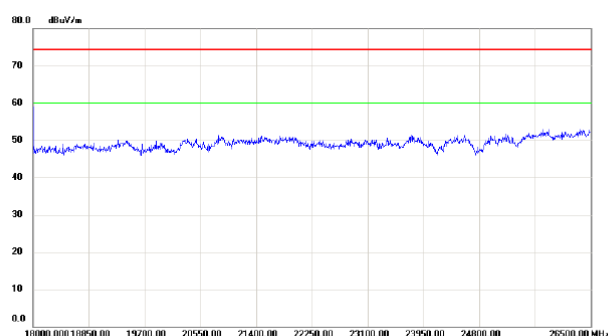


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

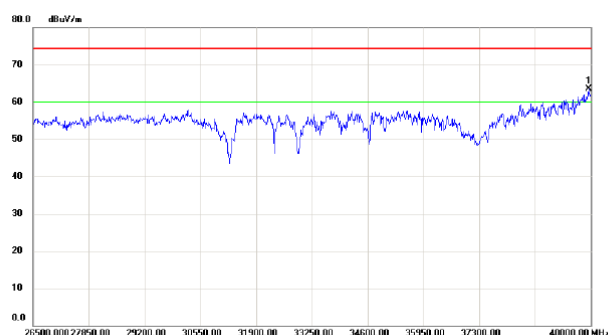

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	46.07	17.47	63.54	74.30	-10.76	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

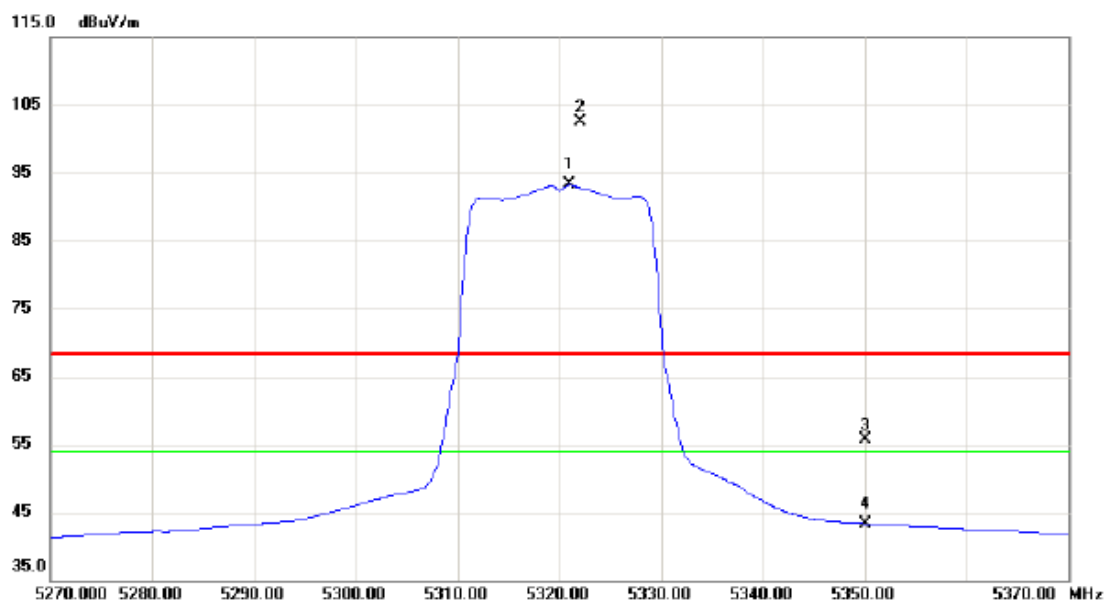


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.000	52.66	40.58	93.24	54.00	39.24	AVG	NO LIMIT
2	X	5322.000	62.00	40.58	102.58	68.30	34.28	peak	NO LIMIT
3		5350.000	15.06	40.64	55.70	68.30	-12.60	peak	
4		5350.000	2.73	40.64	43.37	54.00	-10.63	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

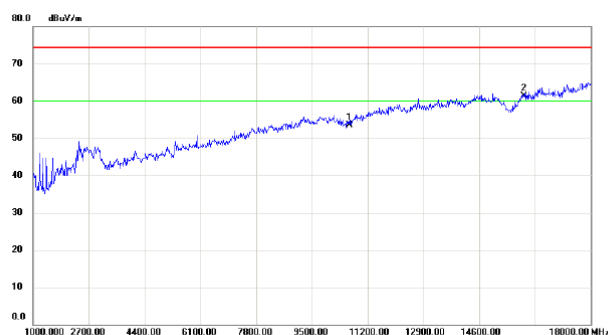

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	39.35	14.25	53.60	74.30	-20.70	peak	
2	*	15960.00	42.30	19.04	61.34	74.30	-12.96	peak	

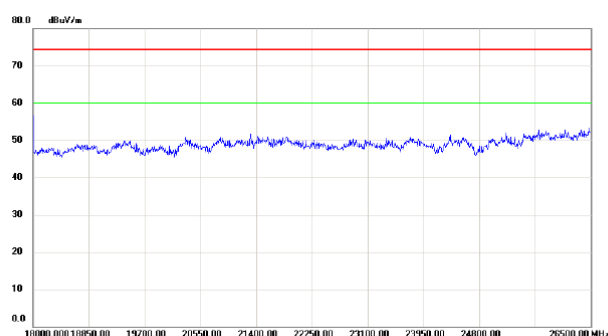


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

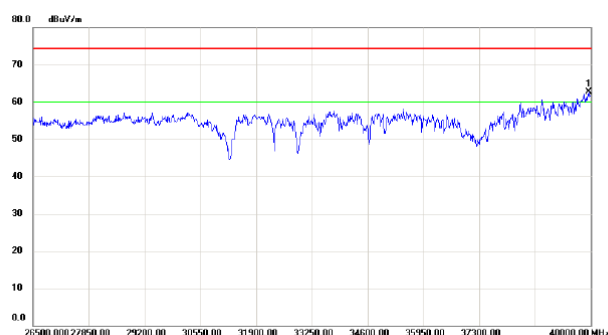

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	45.29	17.47	62.76	74.30	-11.54	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

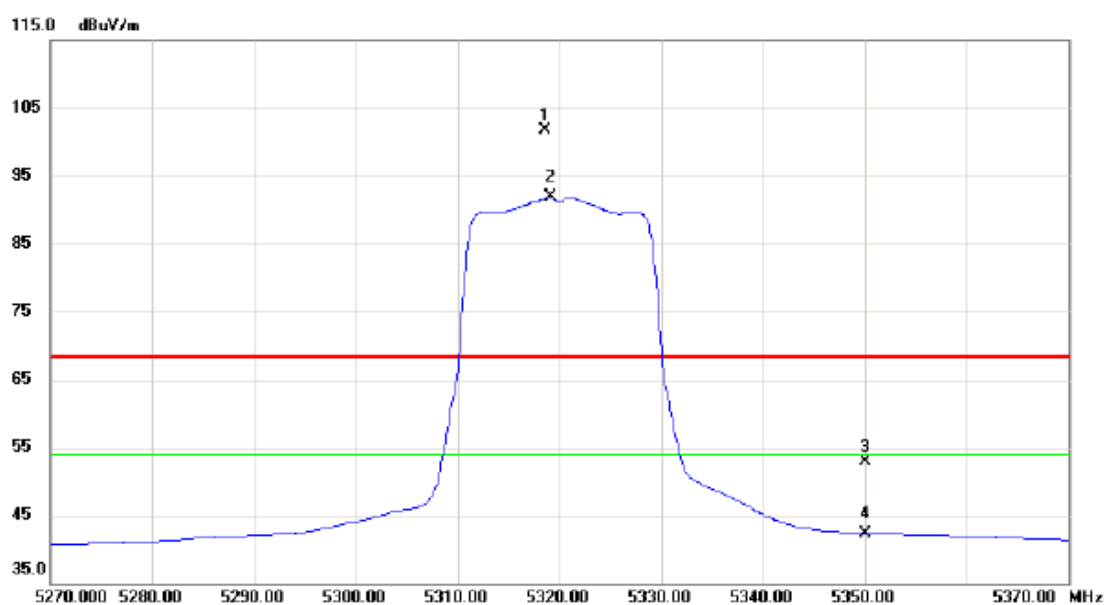


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5318.600	61.19	40.57	101.76	68.30	33.46	peak	NO LIMIT
2	*	5319.200	51.32	40.58	91.90	54.00	37.90	AVG	NO LIMIT
3		5350.000	12.29	40.64	52.93	68.30	-15.37	peak	
4		5350.000	1.74	40.64	42.38	54.00	-11.62	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

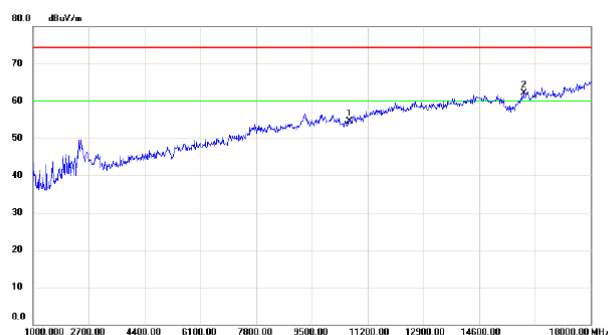

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	40.31	14.25	54.56	74.30	-19.74	peak	
2	*	15960.00	42.99	19.04	62.03	74.30	-12.27	peak	

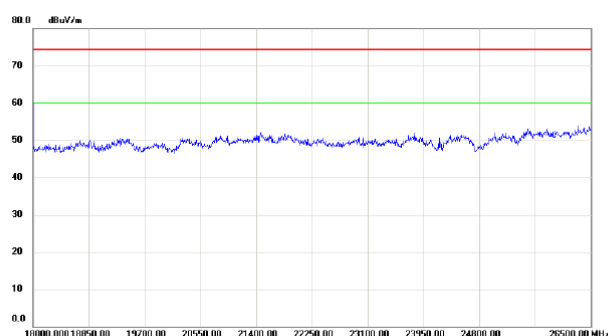


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

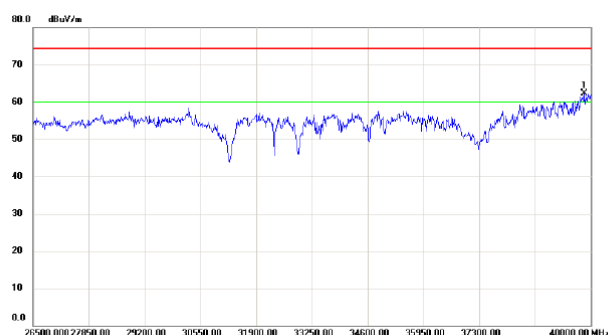

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39838.00	45.06	17.21	62.27	74.30	-12.03	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

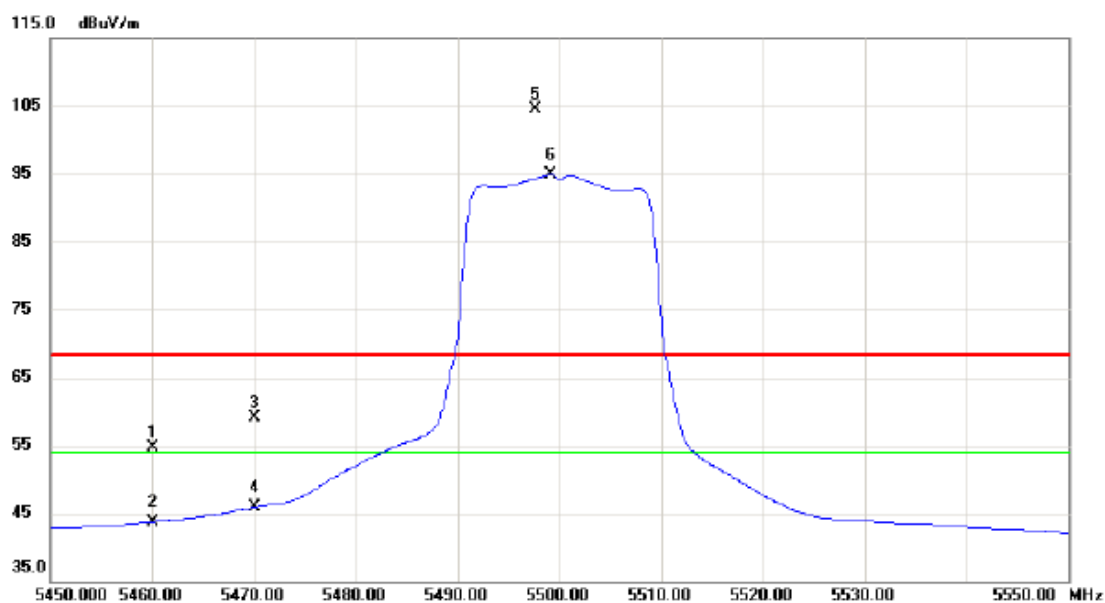


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	13.90	40.87	54.77	68.30	-13.53	peak	
2		5460.000	2.91	40.87	43.78	54.00	-10.22	AVG	
3		5470.000	18.12	40.90	59.02	68.30	-9.28	peak	
4		5470.000	5.01	40.90	45.91	54.00	-8.09	AVG	
5	X	5497.700	63.63	40.95	104.58	68.30	36.28	peak	NO LIMIT
6	*	5499.100	53.95	40.96	94.91	54.00	40.91	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

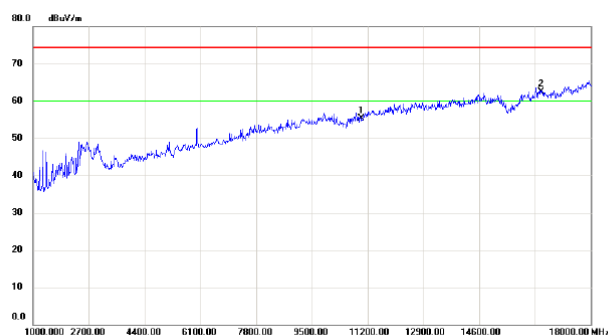

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	39.55	15.75	55.30	74.30	-19.00	peak	
2	*	16500.00	42.10	20.37	62.47	74.30	-11.83	peak	

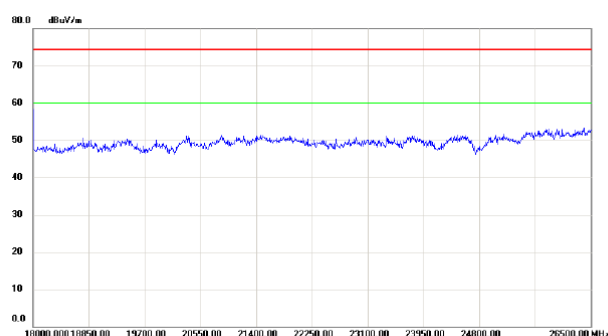


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

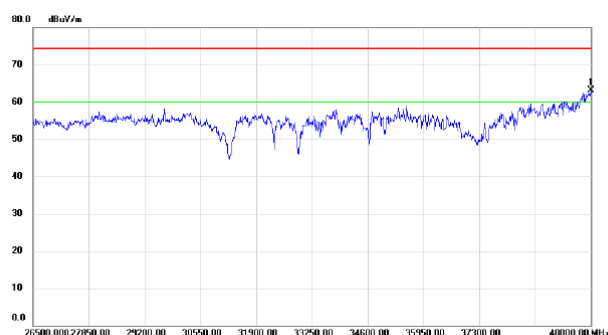

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40000.00	45.59	17.60	63.19	74.30	-11.11	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

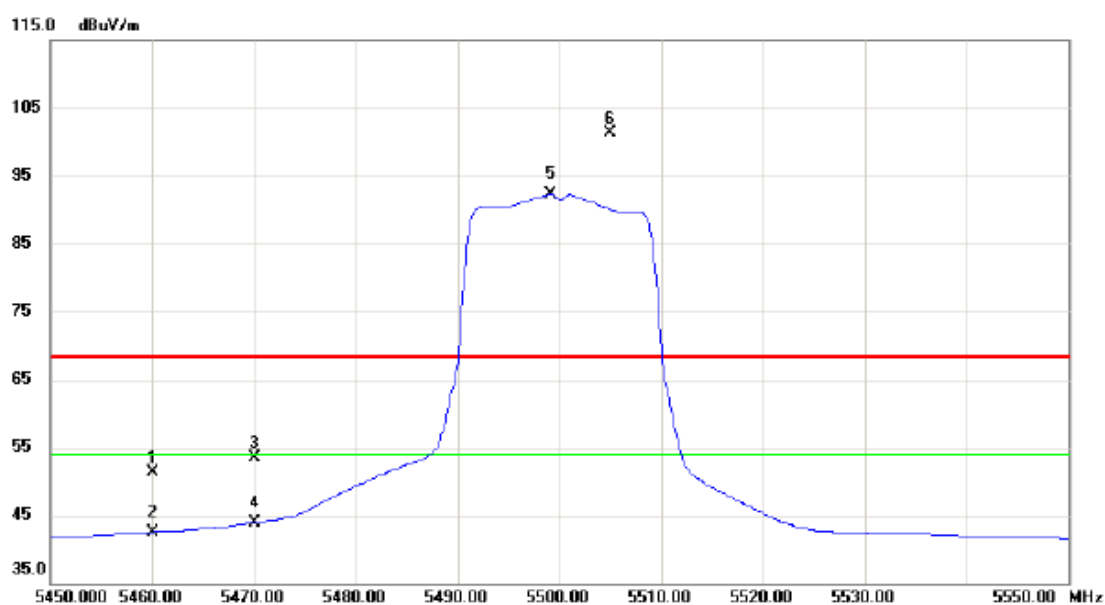


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	10.43	40.87	51.30	68.30	-17.00	peak	
2		5460.000	1.71	40.87	42.58	54.00	-11.42	AVG	
3		5470.000	12.64	40.90	53.54	68.30	-14.76	peak	
4		5470.000	3.01	40.90	43.91	54.00	-10.09	AVG	
5	*	5499.200	51.32	40.96	92.28	54.00	38.28	AVG	NO LIMIT
6	X	5505.000	60.36	40.97	101.33	68.30	33.03	peak	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

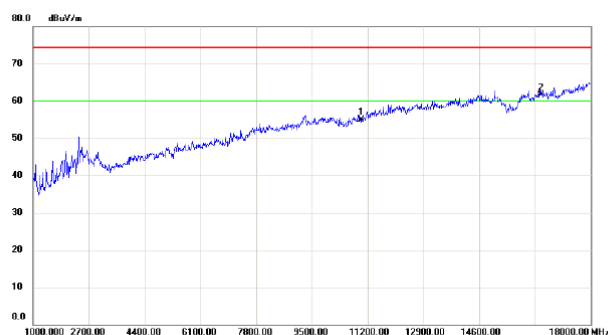

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	39.14	15.75	54.89	74.30	-19.41	peak	
2	*	16500.00	41.22	20.37	61.59	74.30	-12.71	peak	

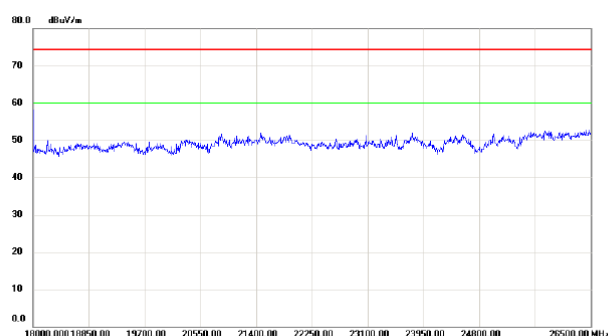


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

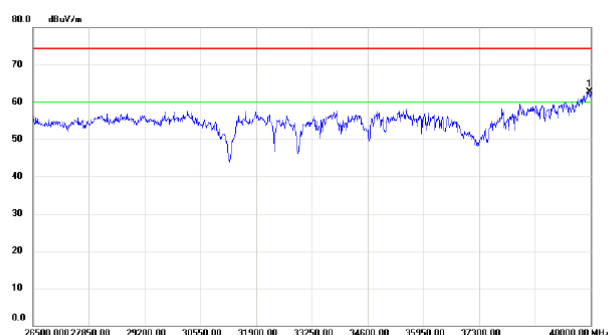

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39973.00	45.15	17.54	62.69	74.30	-11.61	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

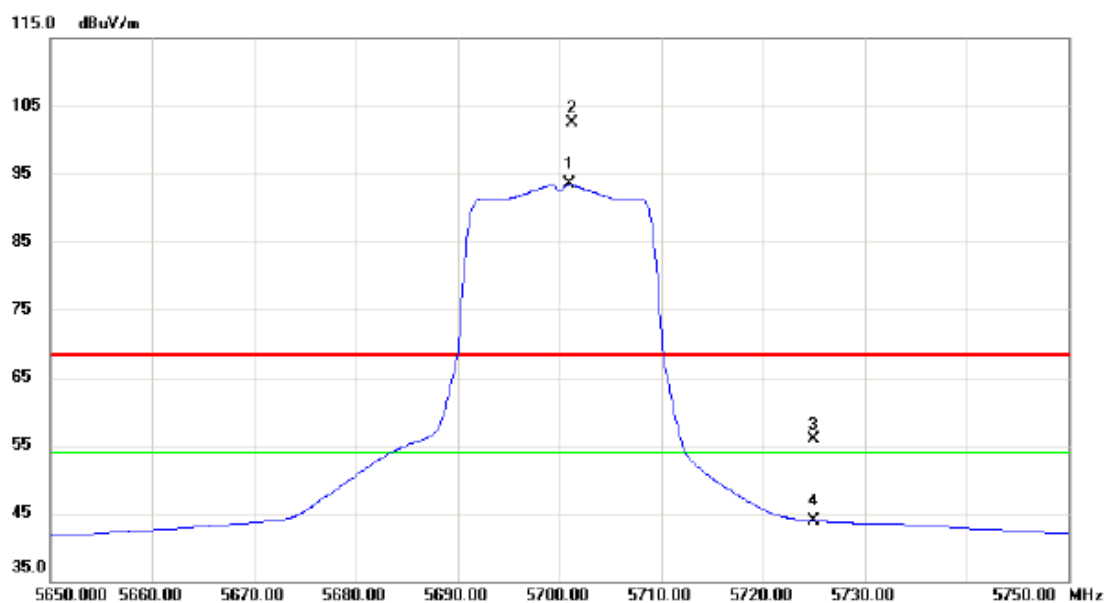


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5701.000	52.22	41.23	93.45	54.00	39.45	AVG	NO LIMIT
2	X	5701.300	61.35	41.23	102.58	68.30	34.28	peak	NO LIMIT
3		5725.000	14.56	41.27	55.83	68.30	-12.47	peak	
4		5725.000	2.66	41.27	43.93	54.00	-10.07	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

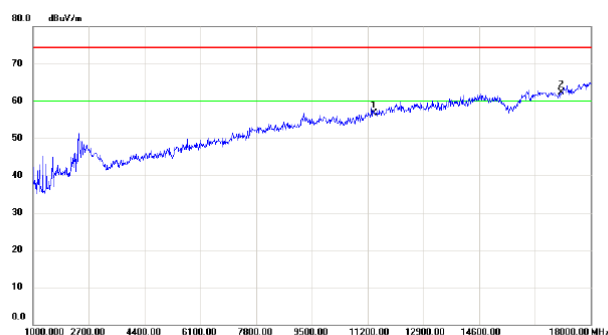

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	39.94	16.70	56.64	74.30	-17.66	peak	
2	*	17100.00	41.21	21.10	62.31	74.30	-11.99	peak	

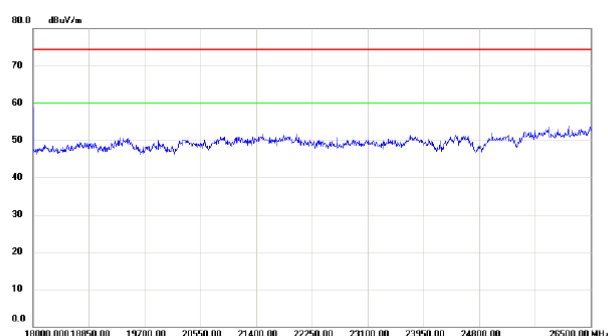


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

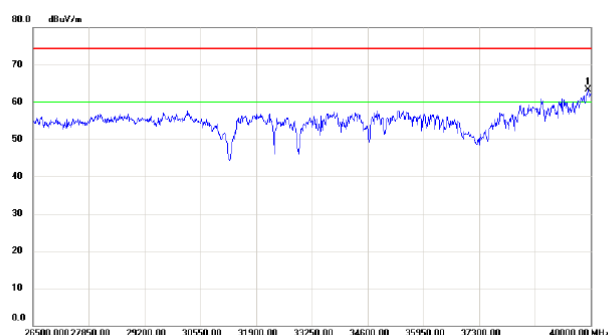

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	45.82	17.43	63.25	74.30	-11.05	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

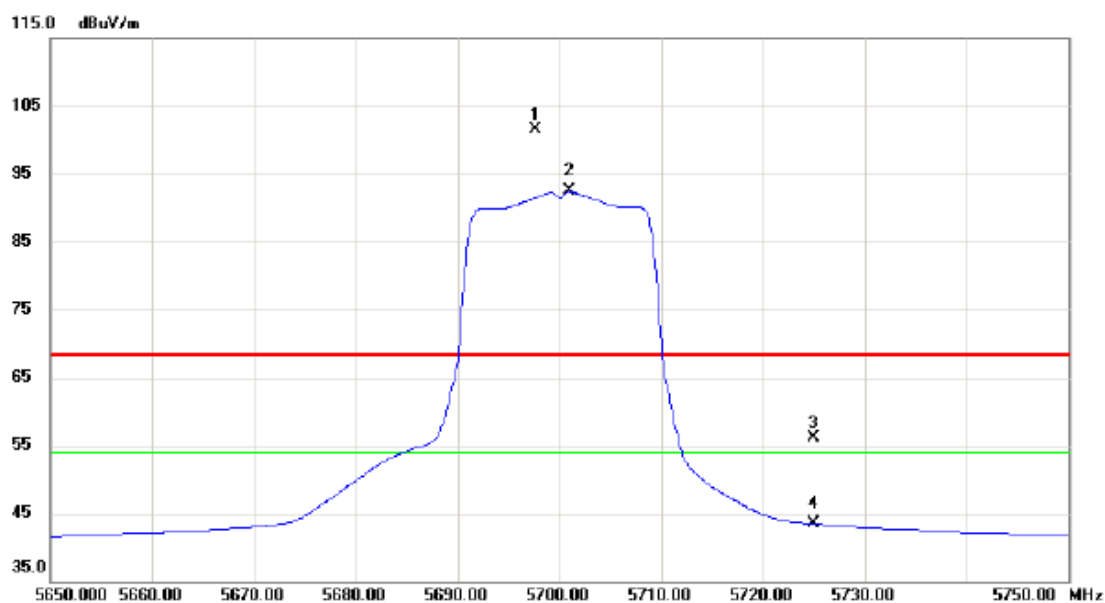


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5697.600	60.28	41.23	101.51	68.30	33.21	peak	NO LIMIT
2	*	5701.000	51.18	41.23	92.41	54.00	38.41	AVG	NO LIMIT
3		5725.000	14.88	41.27	56.15	68.30	-12.15	peak	
4		5725.000	2.20	41.27	43.47	54.00	-10.53	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

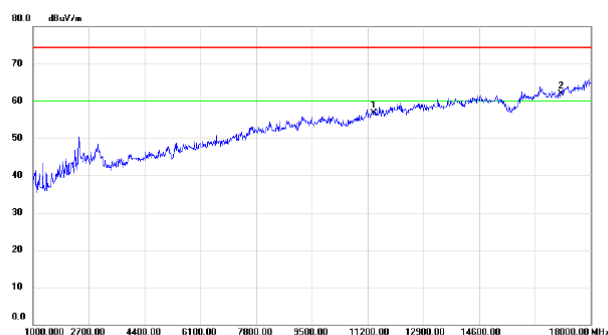

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	39.91	16.70	56.61	74.30	-17.69	peak	
2	*	17100.00	40.86	21.10	61.96	74.30	-12.34	peak	

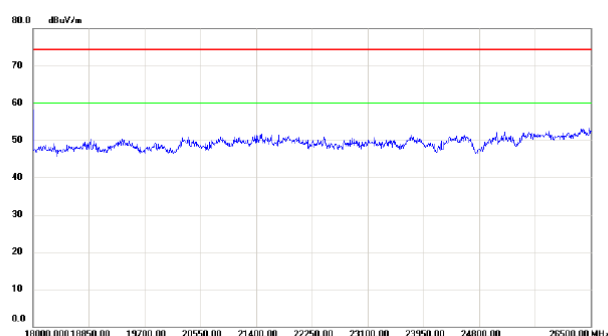


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

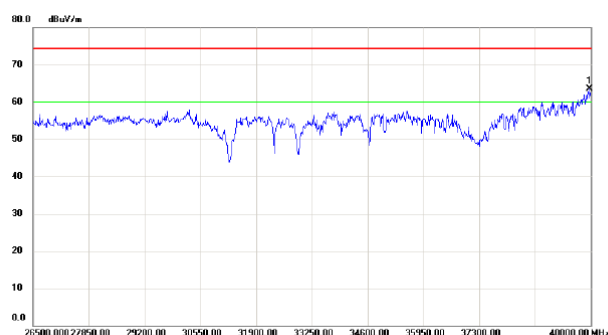

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.96	17.54	63.50	74.30	-10.80	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

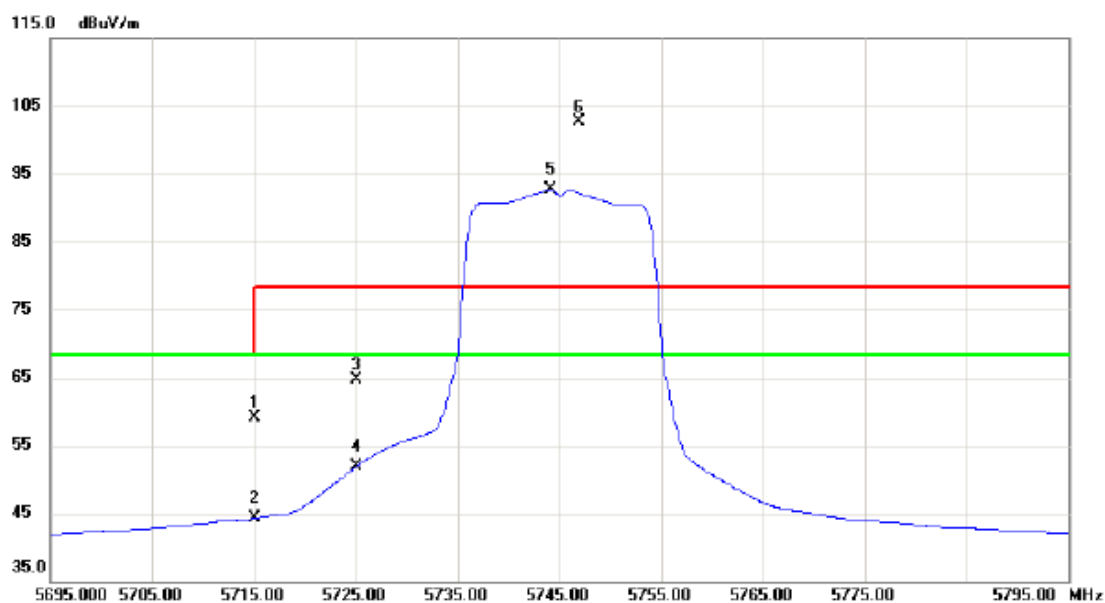


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	17.83	41.25	59.08	68.30	-9.22	peak	
2		5715.000	3.05	41.25	44.30	68.30	-24.00	AVG	
3		5725.000	23.40	41.27	64.67	78.30	-13.63	peak	
4		5725.000	10.58	41.27	51.85	68.30	-16.45	AVG	
5	X	5744.100	51.38	41.29	92.67	68.30	24.37	AVG	NO LIMIT
6	*	5746.900	61.47	41.30	102.77	78.30	24.47	peak	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

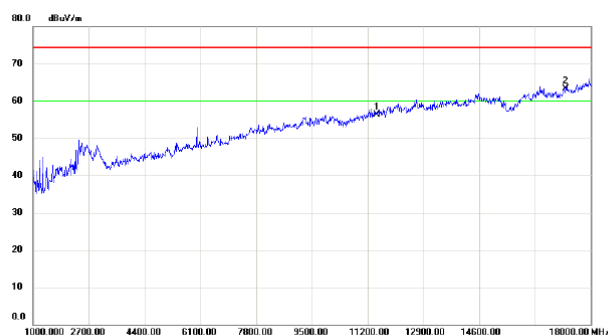

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	39.49	16.91	56.40	74.30	-17.90	peak	
2	*	17235.00	41.70	21.53	63.23	74.30	-11.07	peak	

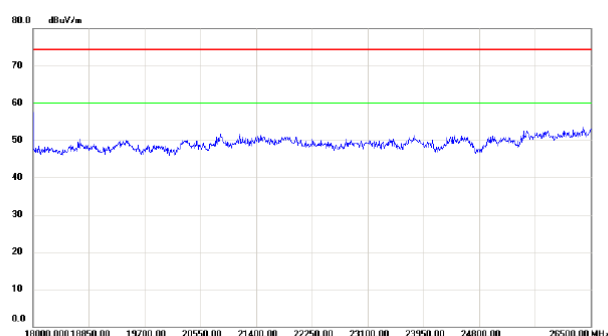


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

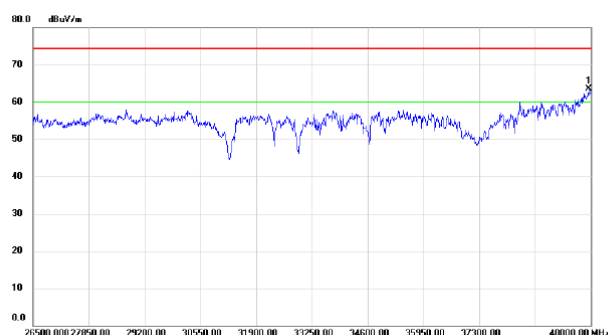

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	46.02	17.50	63.52	74.30	-10.78	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

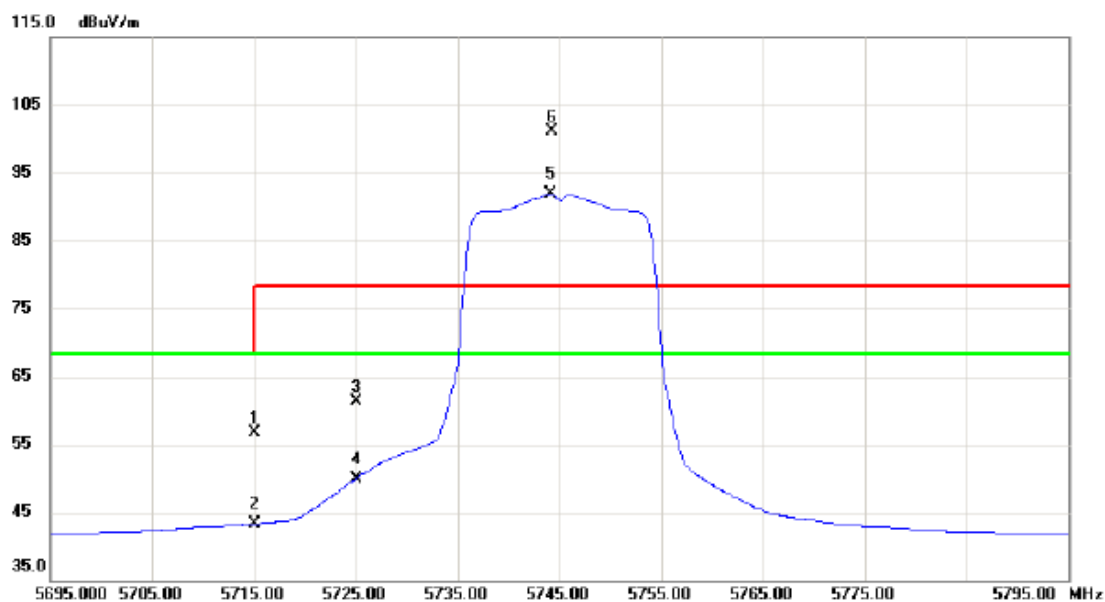


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	15.45	41.25	56.70	68.30	-11.60	peak	
2		5715.000	2.09	41.25	43.34	68.30	-24.96	AVG	
3		5725.000	20.07	41.27	61.34	78.30	-16.96	peak	
4		5725.000	8.73	41.27	50.00	68.30	-18.30	AVG	
5	*	5744.100	50.58	41.29	91.87	68.30	23.57	AVG	NO LIMIT
6	X	5744.300	59.80	41.29	101.09	78.30	22.79	peak	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

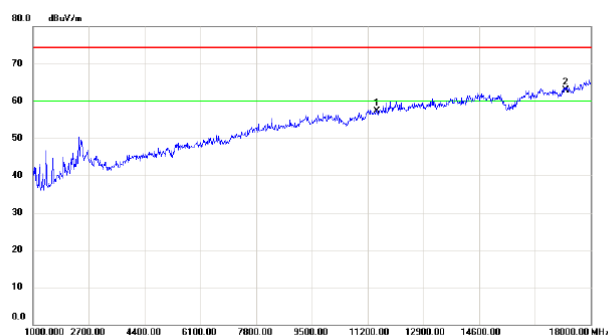

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	40.47	16.91	57.38	74.30	-16.92	peak	
2	*	17235.00	41.38	21.53	62.91	74.30	-11.39	peak	

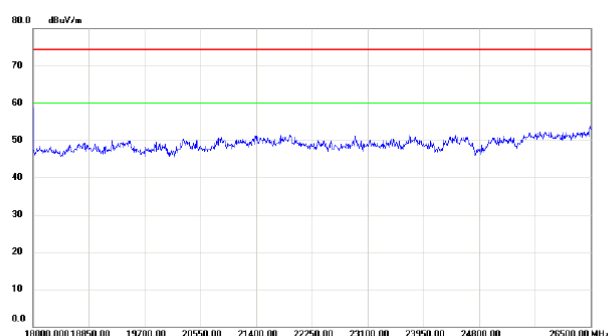


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

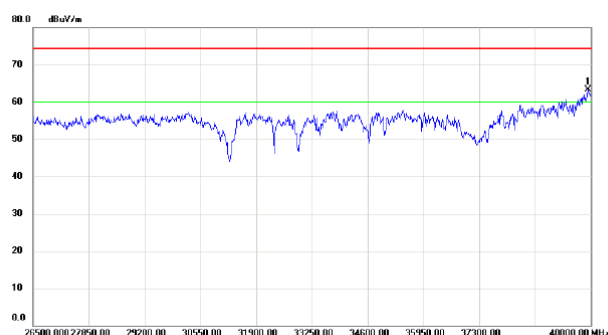

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	45.87	17.43	63.30	74.30	-11.00	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

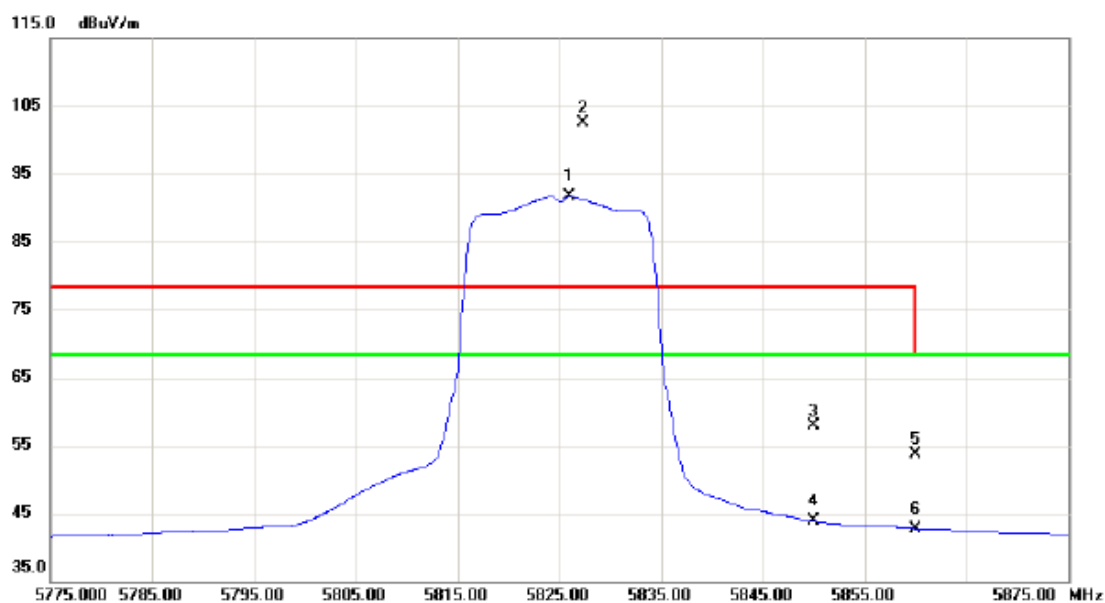


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5826.000	50.33	41.40	91.73	68.30	23.43	AVG	NO LIMIT
2	*	5827.300	61.07	41.40	102.47	78.30	24.17	peak	NO LIMIT
3		5850.000	16.55	41.44	57.99	78.30	-20.31	peak	
4		5850.000	2.43	41.44	43.87	68.30	-24.43	AVG	
5		5860.000	12.20	41.45	53.65	68.30	-14.65	peak	
6		5860.000	1.34	41.45	42.79	68.30	-25.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

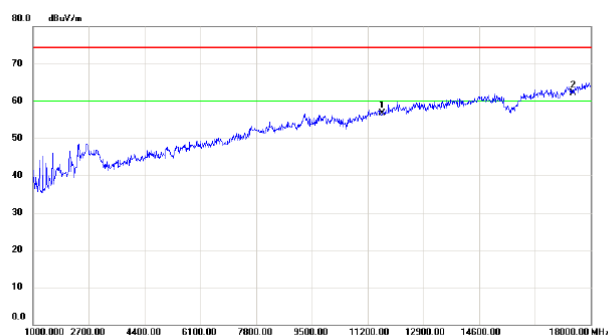

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	39.61	17.17	56.78	74.30	-17.52	peak	
2	*	17475.00	39.82	22.29	62.11	74.30	-12.19	peak	

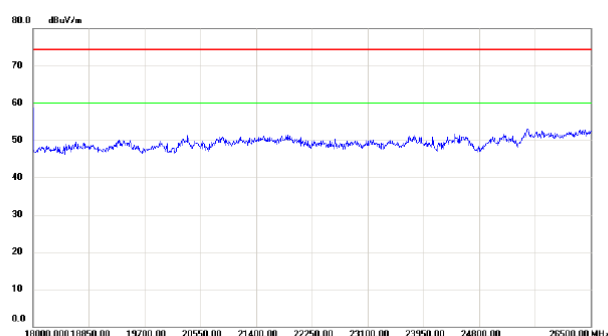


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

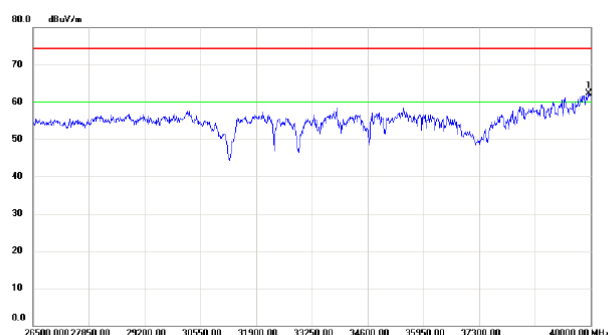

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	44.77	17.47	62.24	74.30	-12.06	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

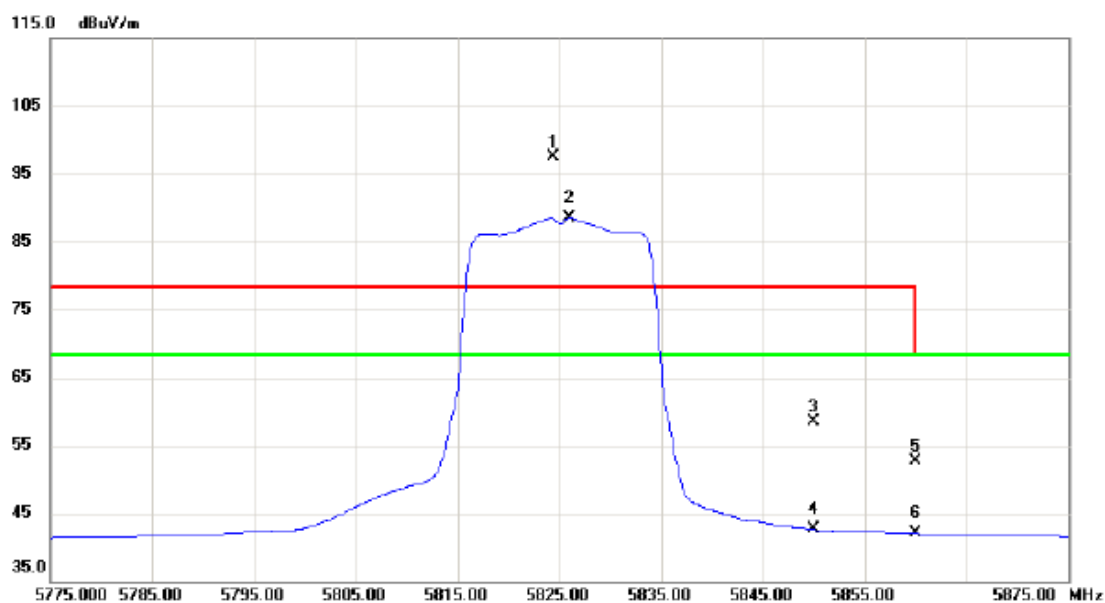


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5824.400	56.13	41.40	97.53	78.30	19.23	peak	NO LIMIT
2	*	5826.000	47.08	41.40	88.48	68.30	20.18	AVG	NO LIMIT
3		5850.000	16.97	41.44	58.41	78.30	-19.89	peak	
4		5850.000	1.23	41.44	42.67	68.30	-25.63	AVG	
5		5860.000	11.26	41.45	52.71	68.30	-15.59	peak	
6		5860.000	0.57	41.45	42.02	68.30	-26.28	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

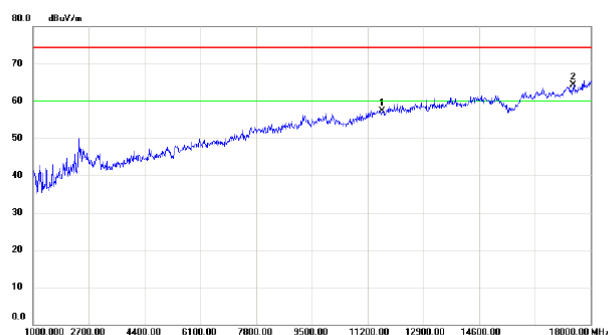

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	40.12	17.17	57.29	74.30	-17.01	peak	
2	*	17475.00	42.08	22.29	64.37	74.30	-9.93	peak	

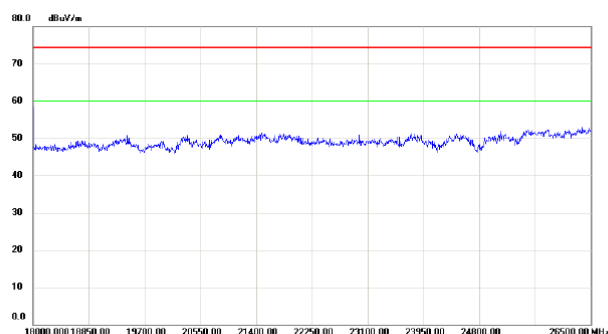


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

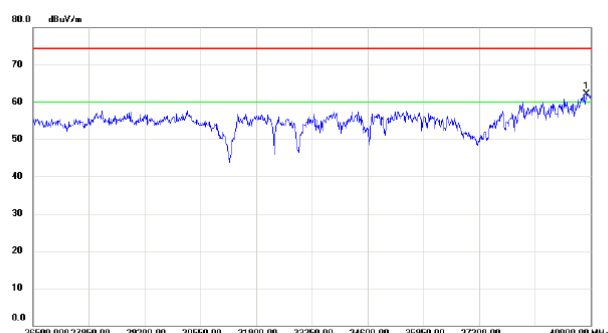

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39905.50	44.80	17.37	62.17	74.30	-12.13	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

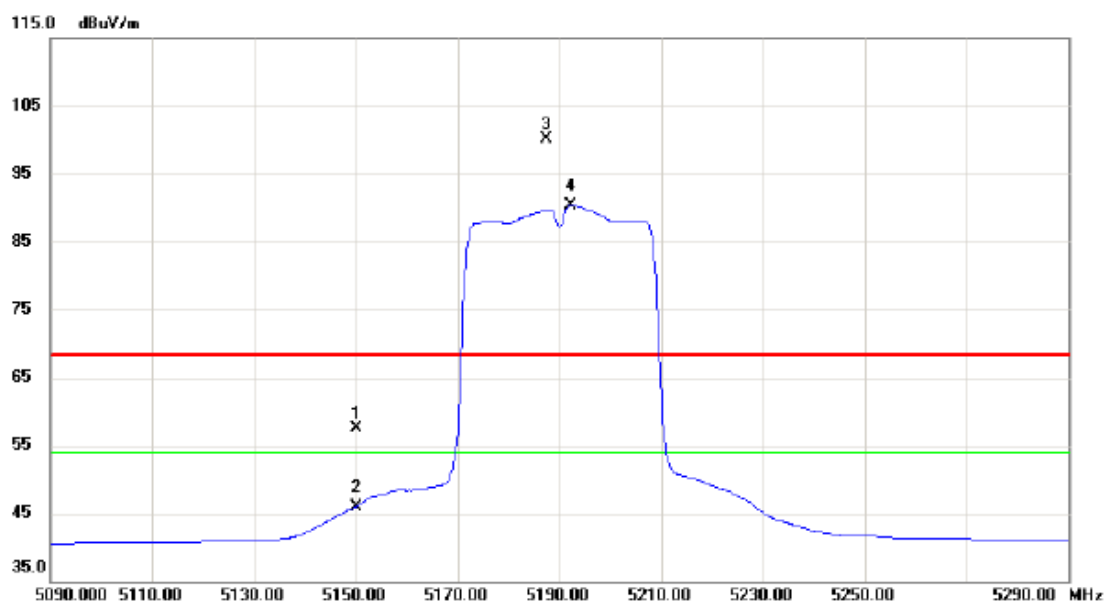


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	17.35	40.22	57.57	68.30	-10.73	peak	
2		5150.000	5.77	40.22	45.99	54.00	-8.01	AVG	
3	X	5187.400	59.73	40.30	100.03	68.30	31.73	peak	NO LIMIT
4	*	5192.200	50.00	40.31	90.31	54.00	36.31	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

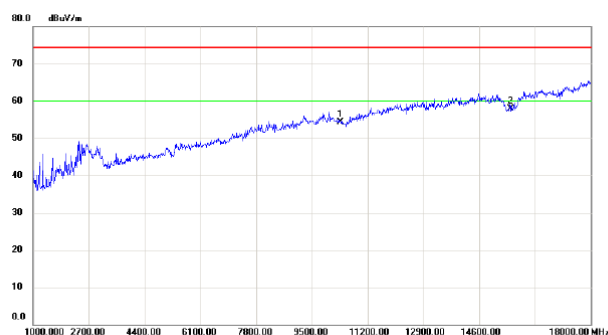

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10380.00	40.56	13.83	54.39	74.30	-19.91	peak	
2	*	15570.00	40.87	17.00	57.87	74.30	-16.43	peak	

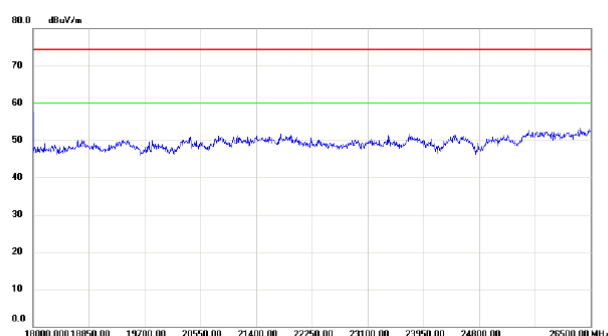


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

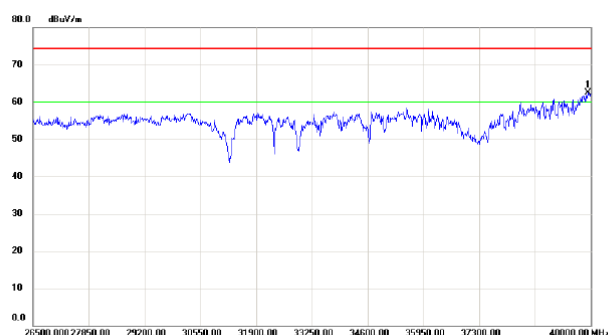

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39932.50	45.15	17.43	62.58	74.30	-11.72	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

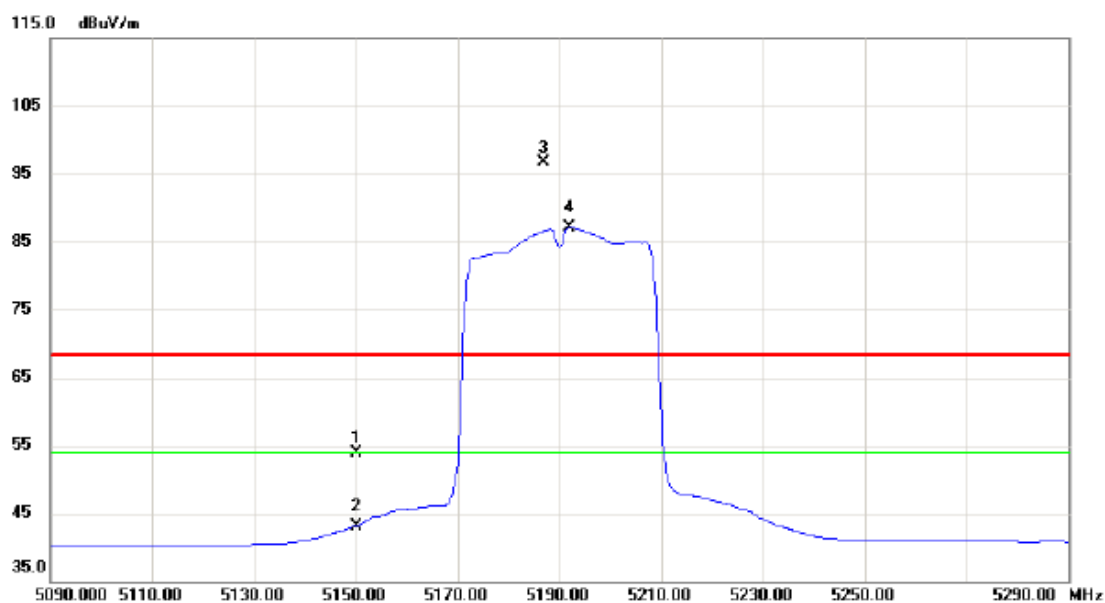


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	13.69	40.22	53.91	68.30	-14.39	peak	
2		5150.000	2.94	40.22	43.16	54.00	-10.84	AVG	
3	X	5186.800	56.41	40.30	96.71	68.30	28.41	peak	NO LIMIT
4	*	5192.000	46.83	40.31	87.14	54.00	33.14	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

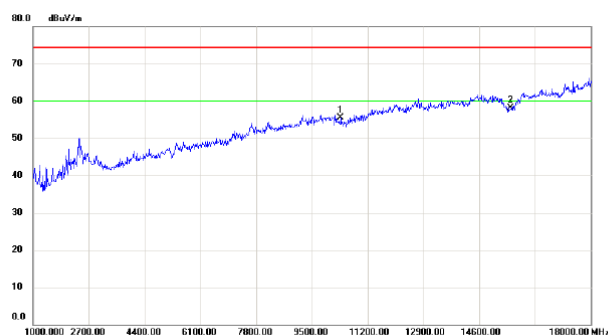

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10380.00	41.66	13.83	55.49	74.30	-18.81	peak	
2	*	15570.00	41.12	17.00	58.12	74.30	-16.18	peak	

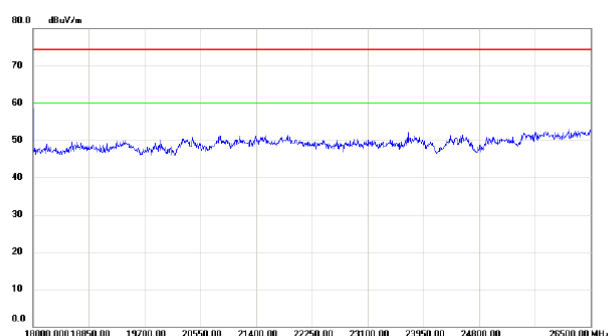


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

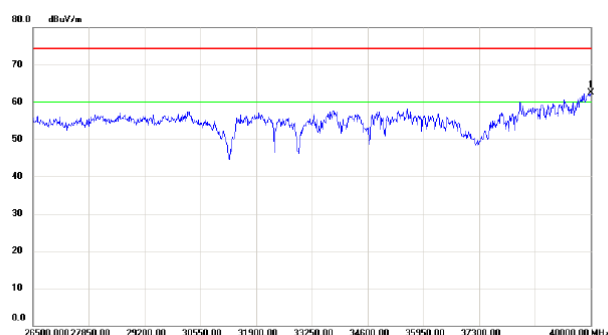

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	44.85	17.60	62.45	74.30	-11.85	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

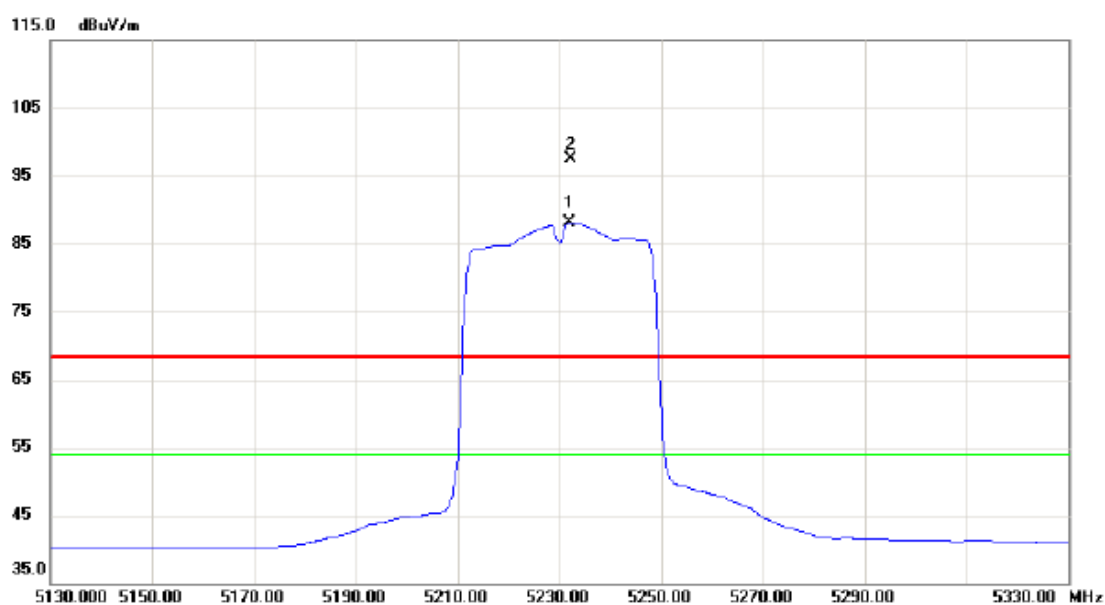


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5232.000	47.79	40.40	88.19	54.00	34.19	AVG	NO LIMIT
2	X	5232.200	57.09	40.39	97.48	68.30	29.18	peak	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

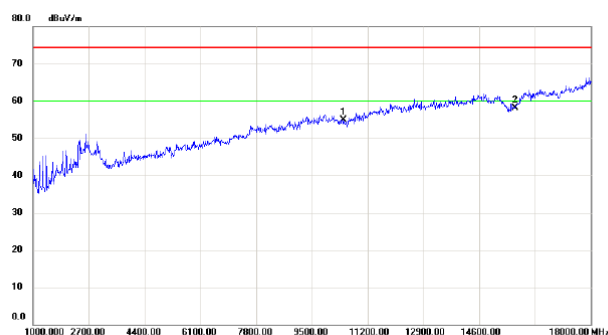

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10460.00	41.15	13.71	54.86	74.30	-19.44	peak	
2	*	15690.00	40.39	17.63	58.02	74.30	-16.28	peak	

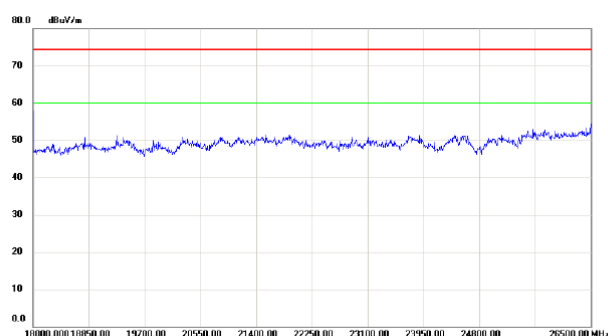


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

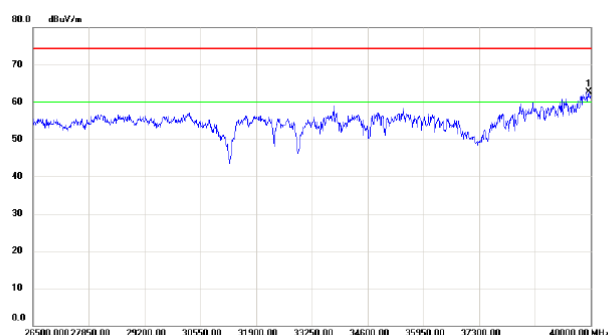

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39946.00	45.32	17.47	62.79	74.30	-11.51	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

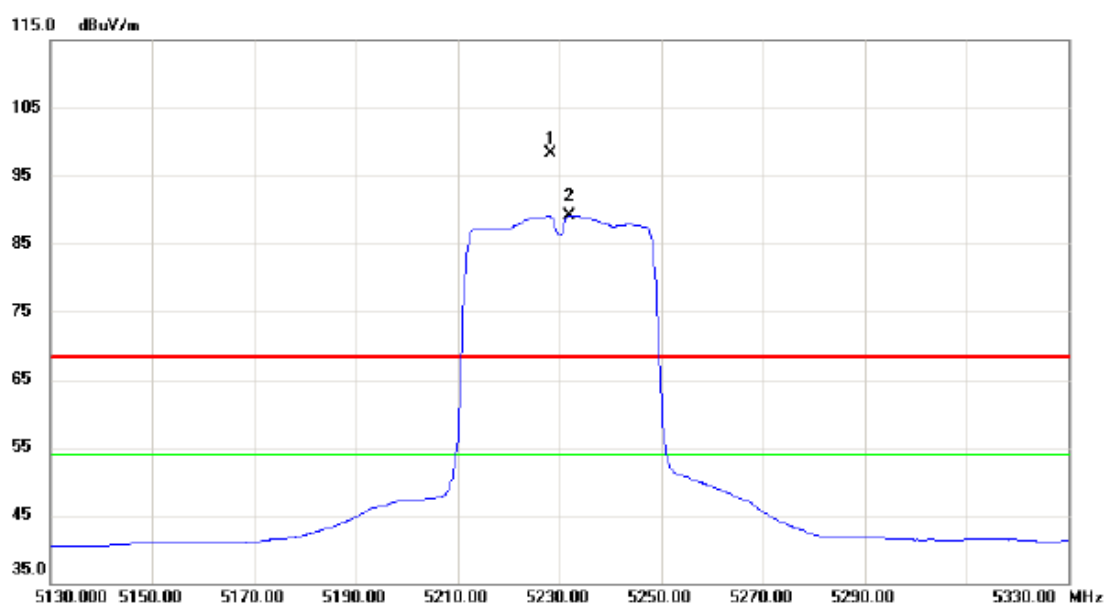


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5228.400	57.97	40.39	98.36	68.30	30.06	peak	NO LIMIT
2	*	5232.000	48.79	40.40	89.19	54.00	35.19	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

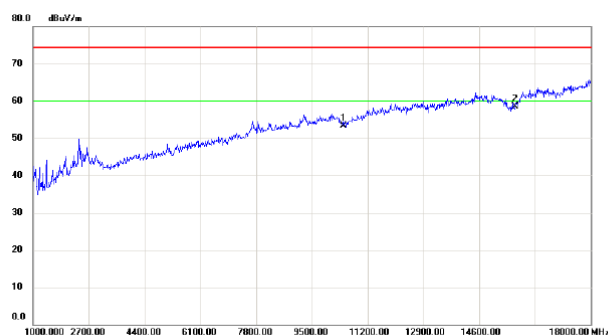

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10460.00	39.50	13.71	53.21	74.30	-21.09	peak	
2	*	15690.00	40.78	17.63	58.41	74.30	-15.89	peak	

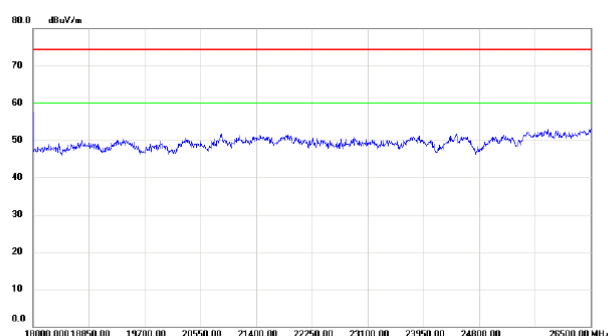


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

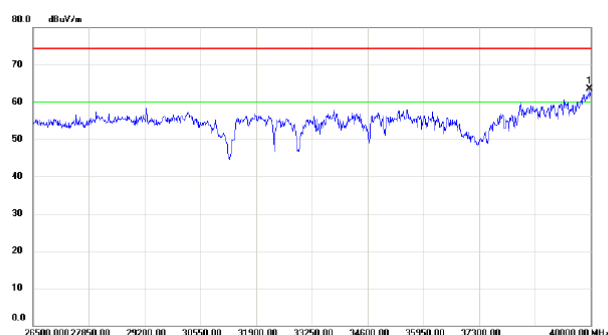

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39973.00	45.96	17.54	63.50	74.30	-10.80	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

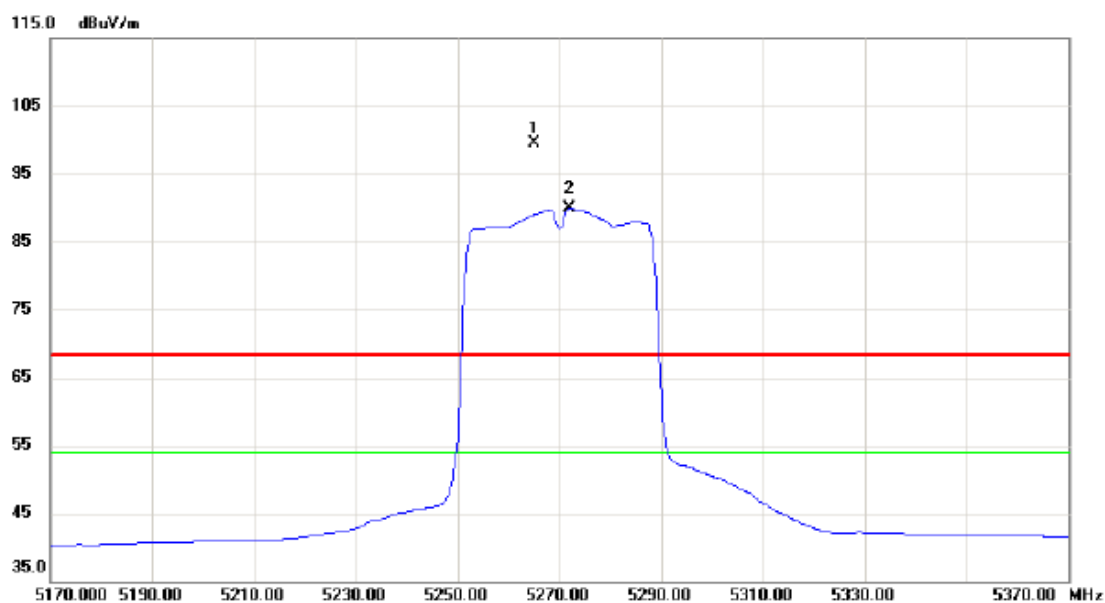


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5265.200	59.11	40.47	99.58	68.30	31.28	peak	NO LIMIT
2	*	5272.000	49.37	40.47	89.84	54.00	35.84	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

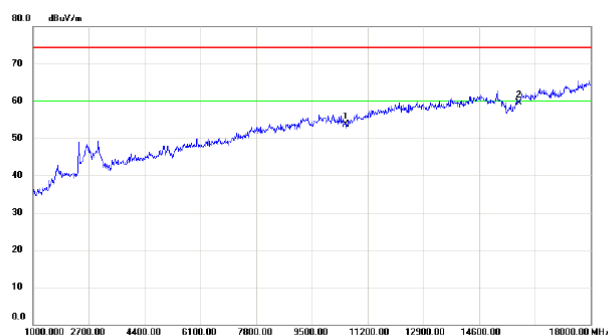

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10540.00	39.89	13.84	53.73	74.30	-20.57	peak	
2	*	15810.00	41.17	18.25	59.42	74.30	-14.88	peak	

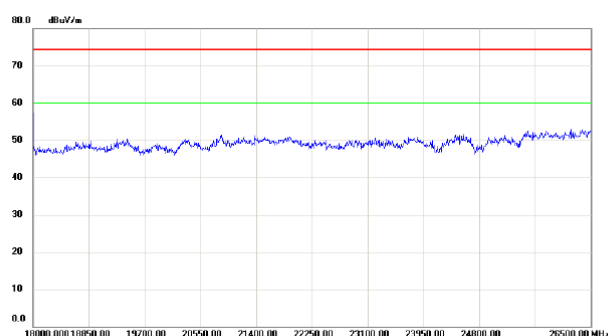


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

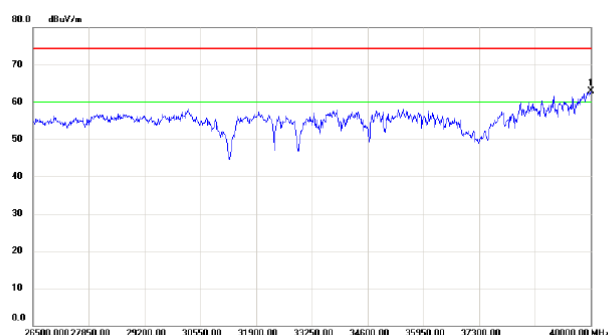

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	45.37	17.60	62.97	74.30	-11.33	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

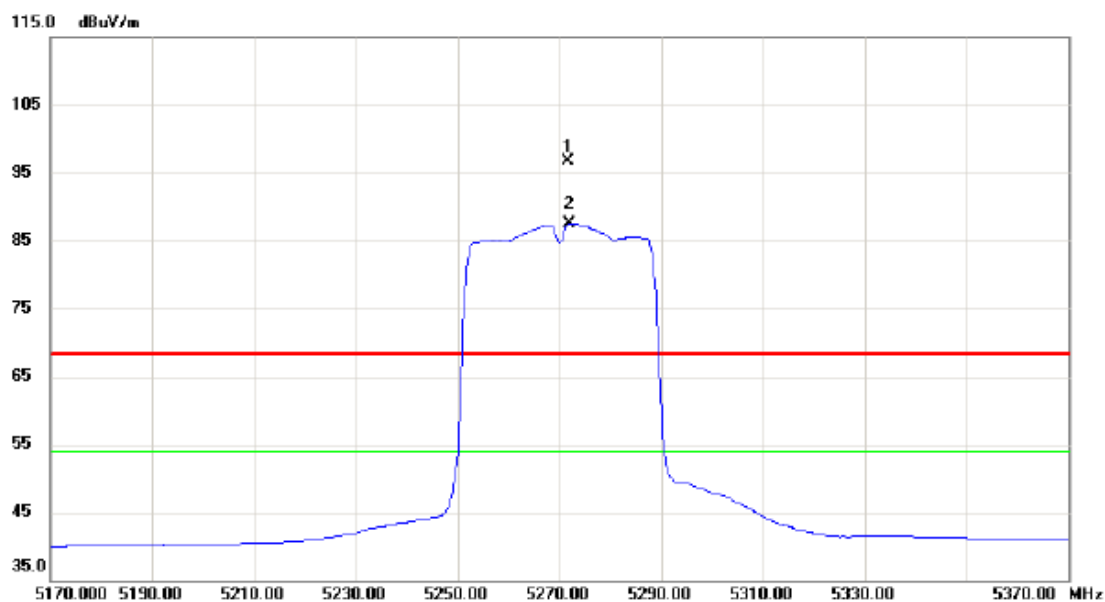


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5271.600	56.26	40.47	96.73	68.30	28.43	peak	NO LIMIT
2	*	5272.000	47.11	40.47	87.58	54.00	33.58	AVG	NO LIMIT

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

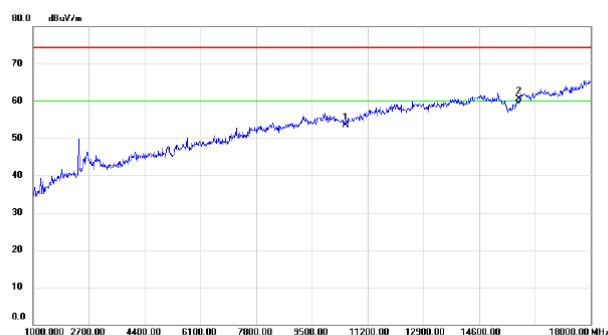

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10540.00	39.64	13.84	53.48	74.30	-20.82	peak	
2	*	15810.00	42.17	18.25	60.42	74.30	-13.88	peak	

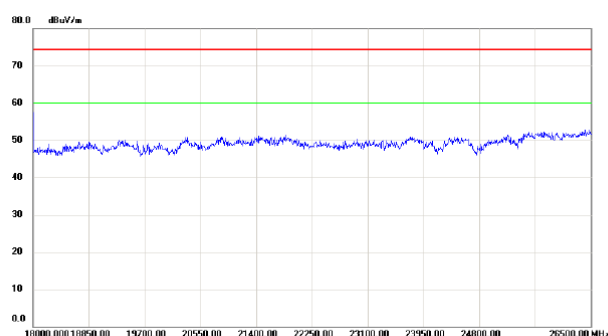


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------

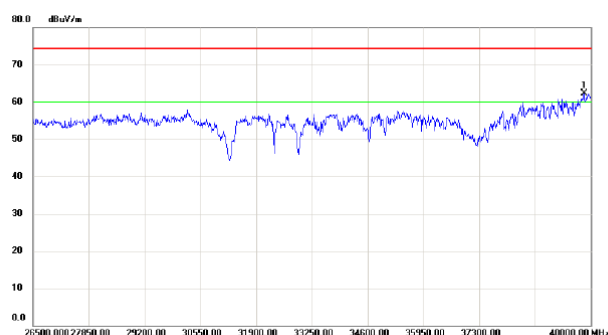

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39838.00	45.00	17.21	62.21	74.30	-12.09	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

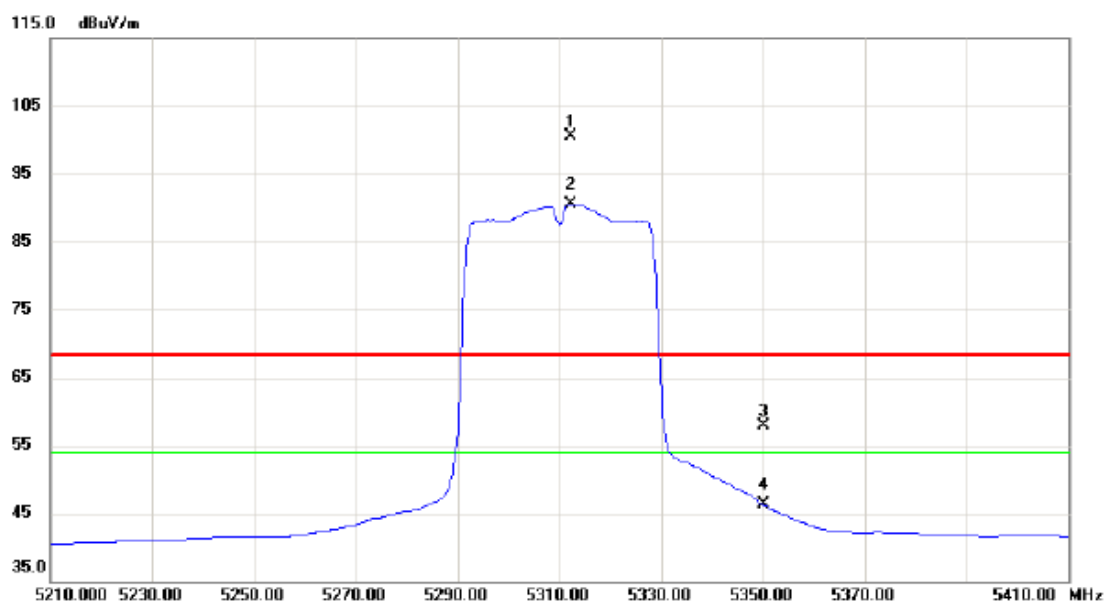


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5312.200	60.00	40.56	100.56	68.30	32.26	peak	NO LIMIT
2	*	5312.200	50.04	40.56	90.60	54.00	36.60	AVG	NO LIMIT
3		5350.000	17.19	40.64	57.83	68.30	-10.47	peak	
4		5350.000	5.62	40.64	46.26	54.00	-7.74	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

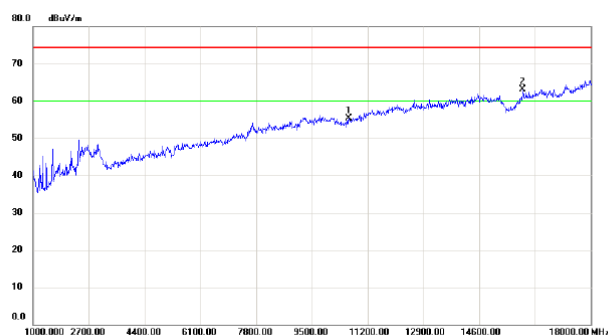

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	41.19	14.17	55.36	74.30	-18.94	peak	
2	*	15930.00	44.13	18.89	63.02	74.30	-11.28	peak	

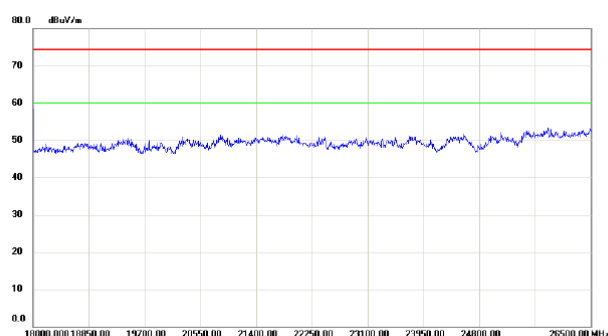


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment

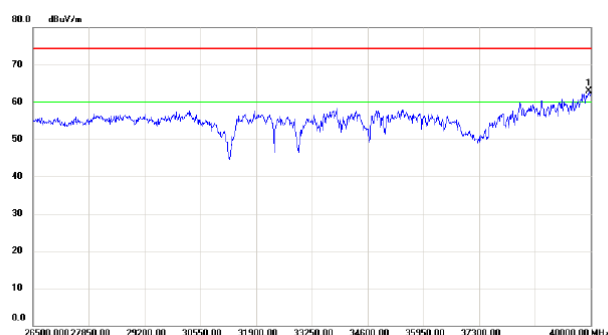

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39959.50	45.44	17.50	62.94	74.30	-11.36	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

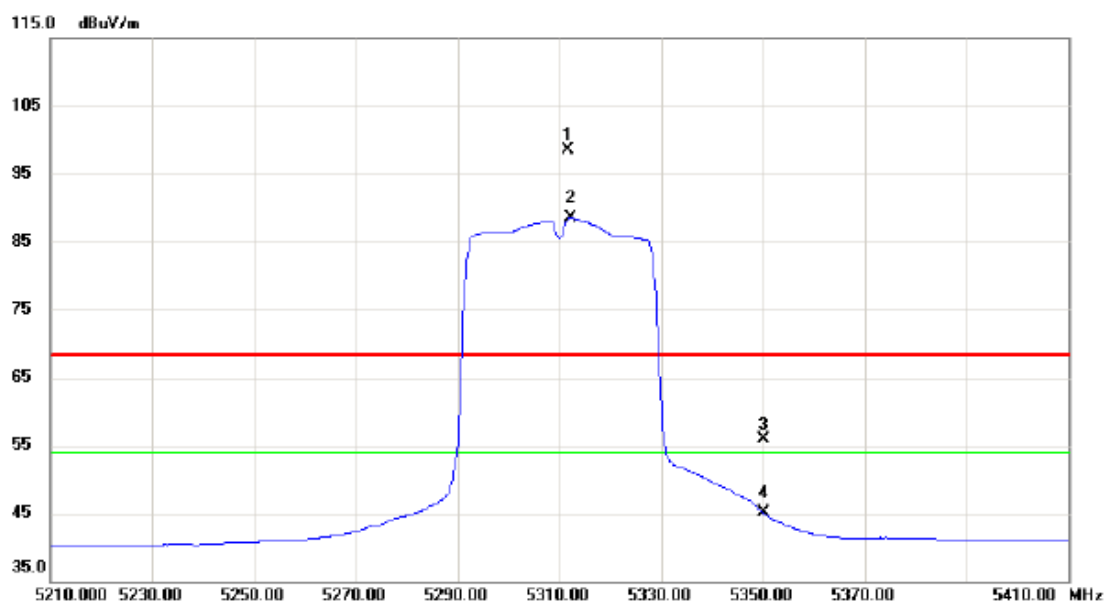

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5311.800	57.92	40.56	98.48	68.30	30.18	peak	NO LIMIT
2	*	5312.200	47.89	40.56	88.45	54.00	34.45	AVG	NO LIMIT
3		5350.000	15.27	40.64	55.91	68.30	-12.39	peak	
4		5350.000	4.41	40.64	45.05	54.00	-8.95	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

