

1.1 Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

1.2 Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).



MEASUREMENT RESULT: QP Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
32.71865	26.09	40.00	13.91	107.0	V	147.0	14.2
49.02705	28.8	40.00	11.20	100.0	V	314.0	15.5
54.0054	29.3	40.00	10.70	100.0	V	277.0	14.8
80.75035	32.89	40.00	7.11	137.0	V	38.0	10.8
102.06395	27.07	43.50	16.43	123.0	V	347.0	13.7
200.3661	30.76	43.50	12.74	100.0	V	176.0	13.0

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3 Part 3: Testing Range of “1 GHz to 3 GHz”


Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.

Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).


Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode:

1.3.1 Test Mode: 11B

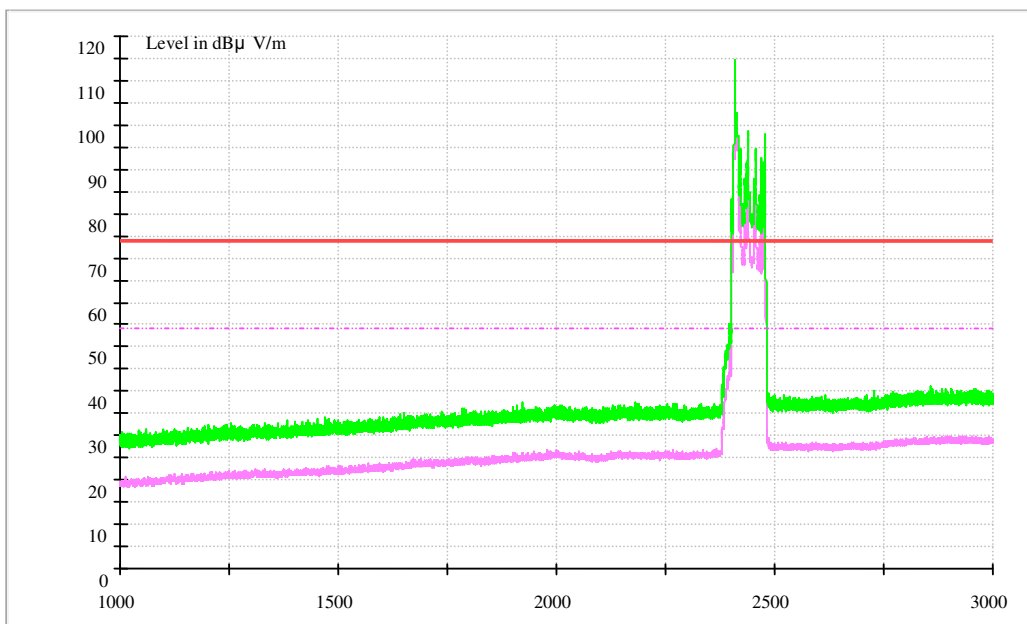

1.3.1.1 Channel 1 @Ant 1

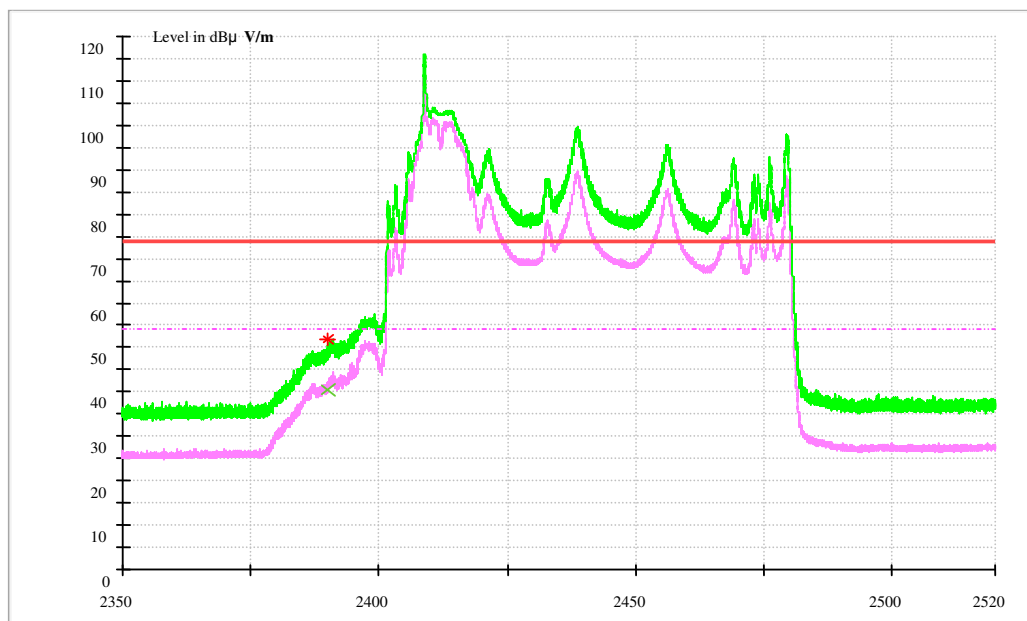

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	40.34	54.00	13.66	150.0	V	225.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	51.66	74.00	22.34	150.0	V	225.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.1.2 Channel 11@Ant 1

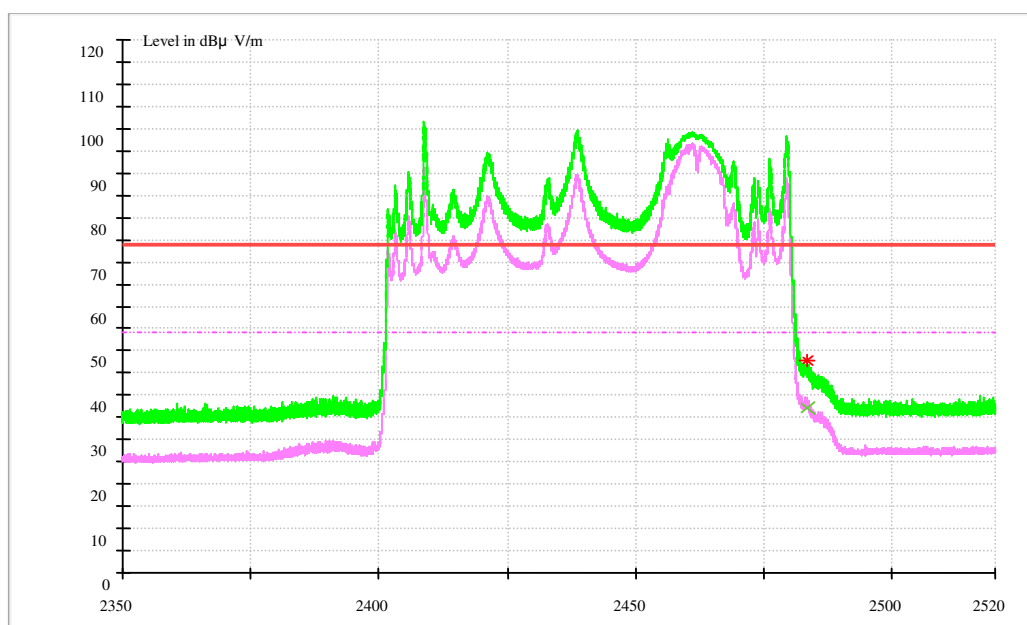

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	37.09	54.00	16.91	150.0	V	221.0	-6.8

MEASUREMENT RESULT: PK Detector


Frequency (MHz)	Level (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	47.72	74.00	26.28	150.0	V	154.0	-6.8

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2 Test Mode: 11G

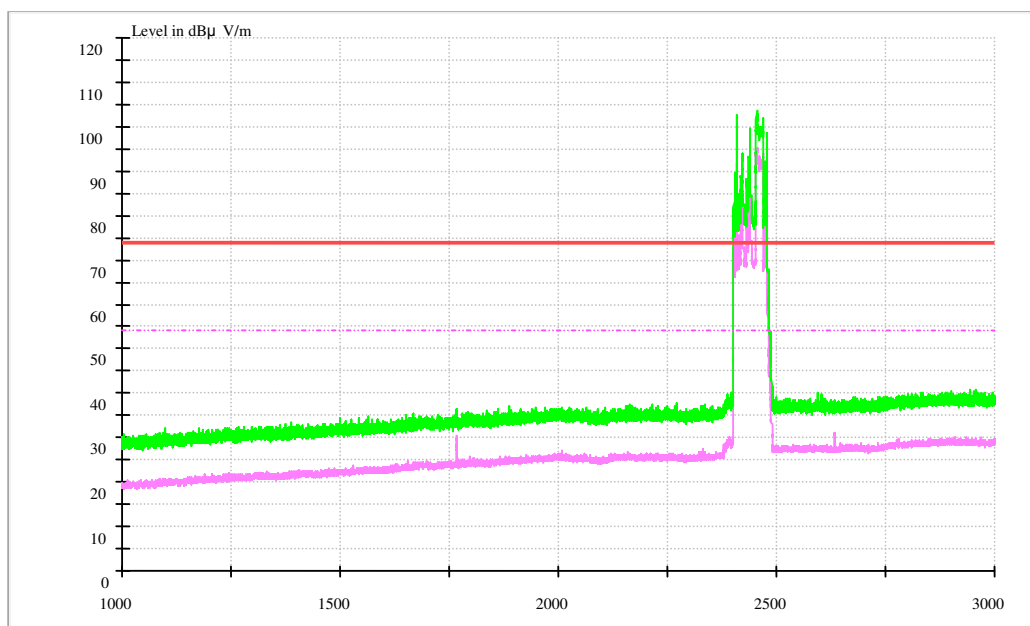

1.3.2.1 Channel 1 @Ant 1

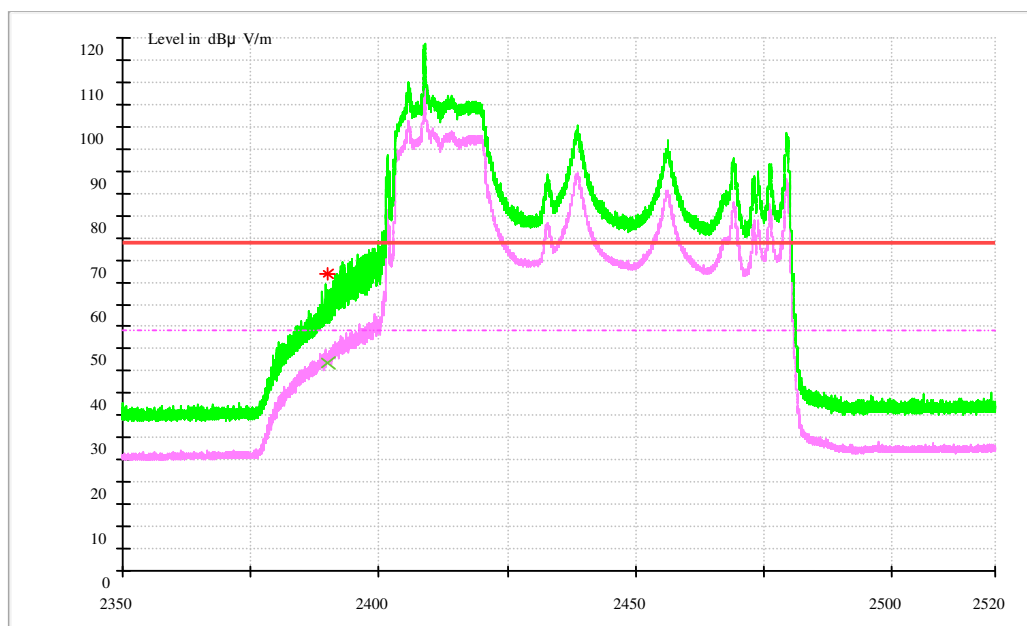

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	46.74	54.00	7.26	150.0	V	221.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	66.93	74.00	7.07	150.0	V	220.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.2.2 Channel 11@Ant 1

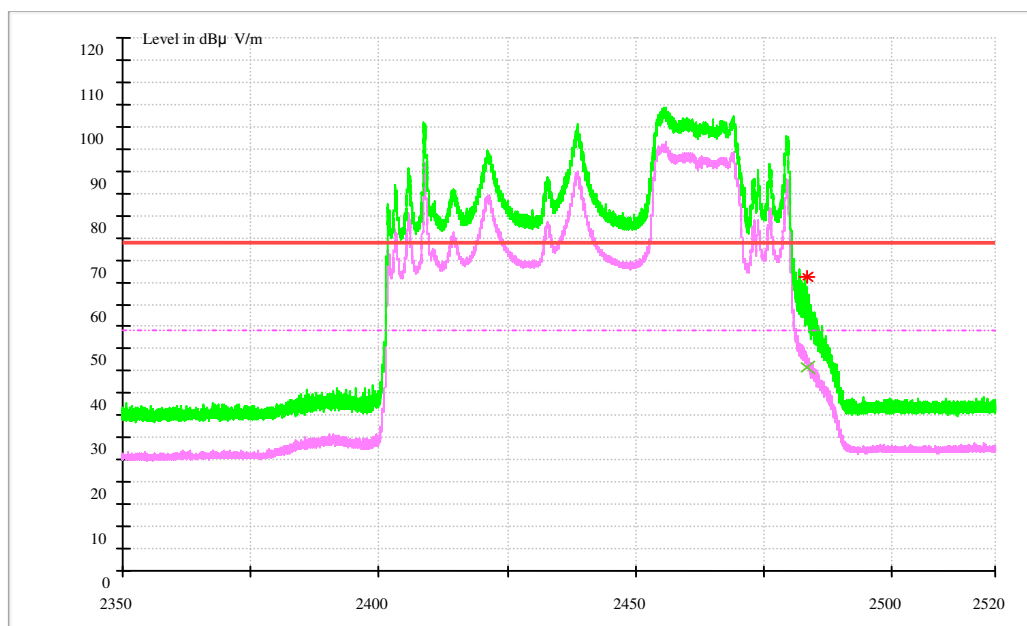

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	45.78	54.00	8.22	150.0	V	225.0	-6.8


MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	66.04	74.00	7.96	150.0	V	164.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

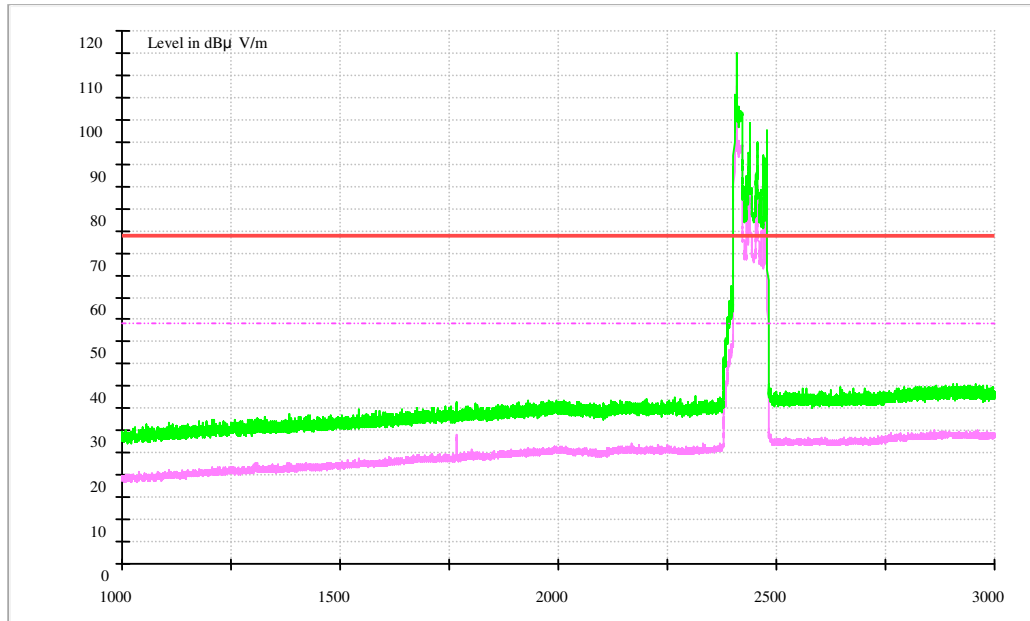1.3.3 Test Mode: 11N20

1.3.3.1 Channel 1 @Ant 1

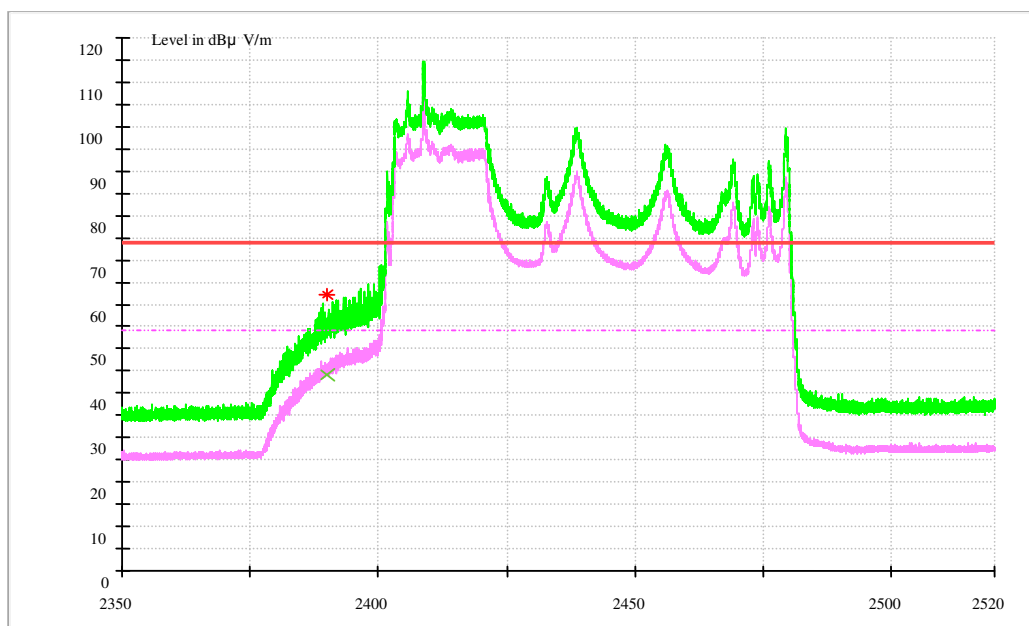

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.15	54.00	9.85	150.0	V	57.0	-10.2

MEASUREMENT RESULT: PK Detector


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	62.20	74.00	11.80	150.0	V	51.0	-10.2

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.2 Channel 11@Ant 1

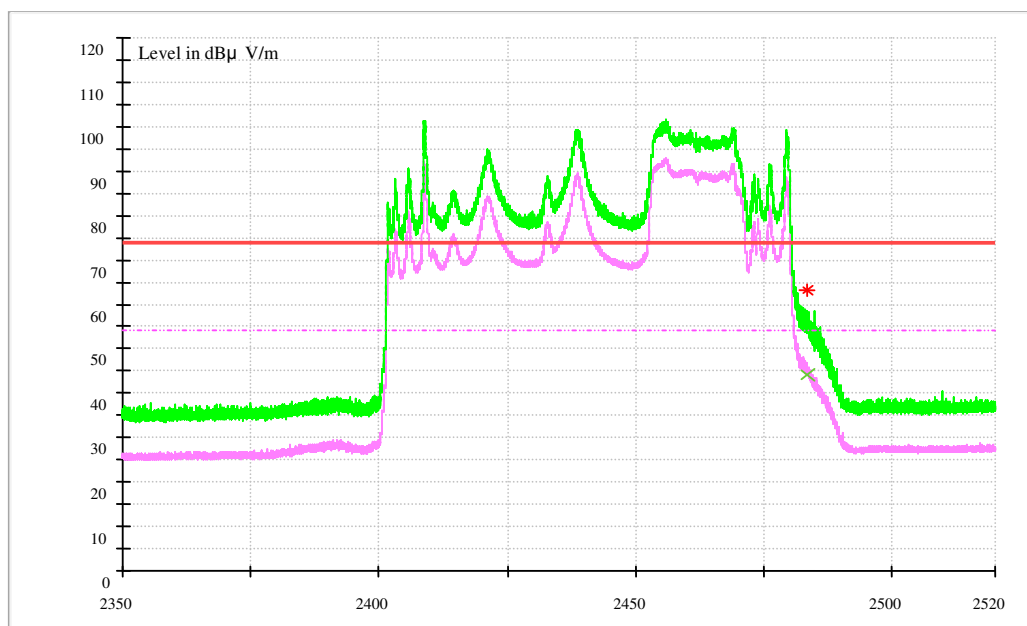

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.03	54.00	9.97	150.0	V	225.0	-6.8

MEASUREMENT RESULT: PK Detector


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	63.32	74.00	10.68	150.0	V	165.0	-6.8

Note:


1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.4 Test Mode: 11N40

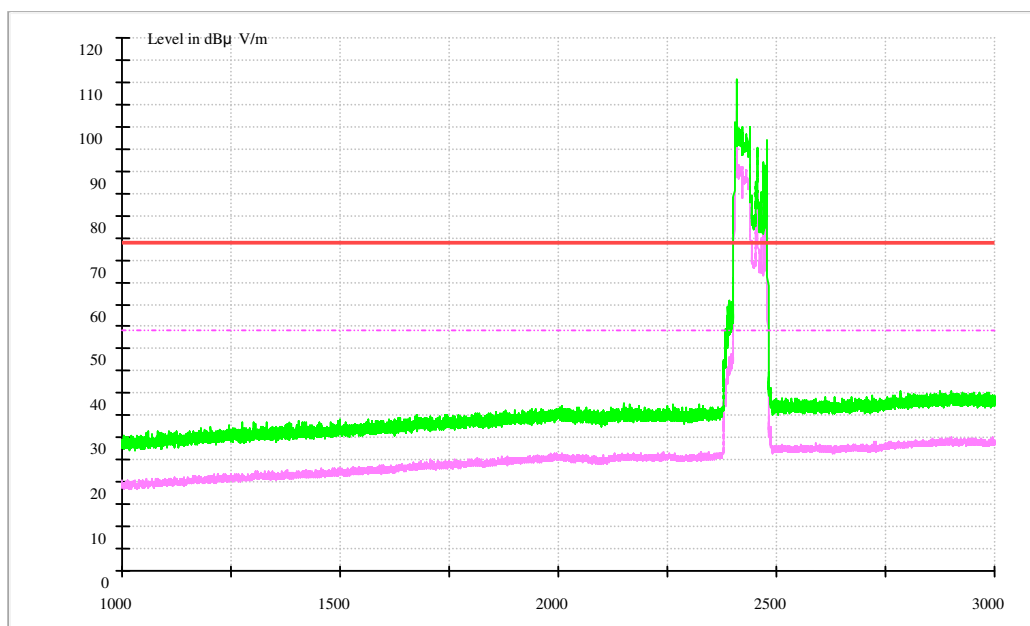

1.3.4.1 Channel 3 @Ant 1

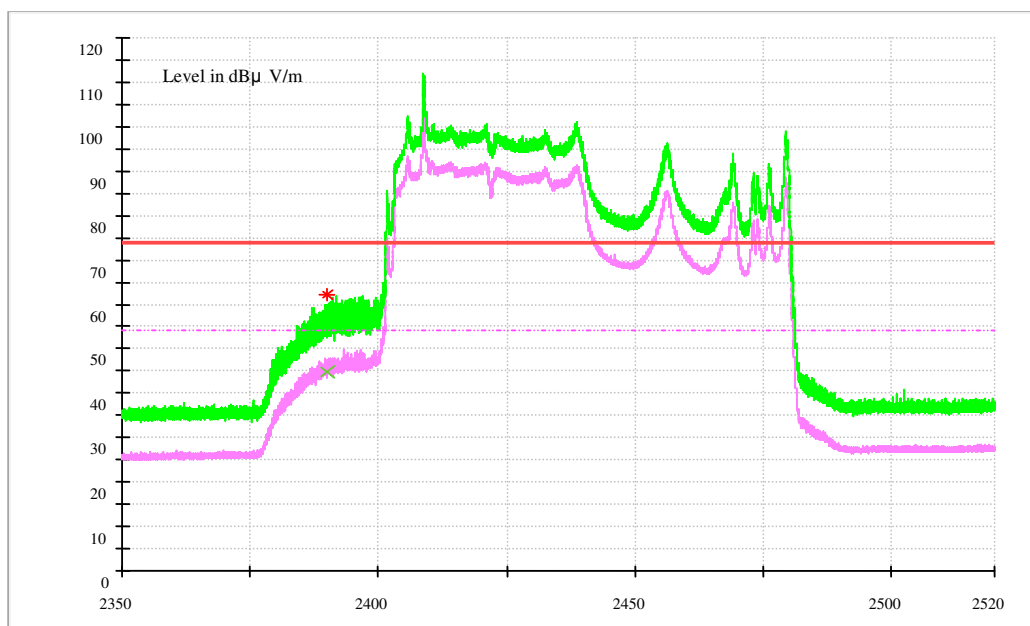

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	44.88	54.00	9.12	150.0	V	225.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	62.18	74.00	11.82	150.0	V	225.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.4.2 Channel 9@Ant 1

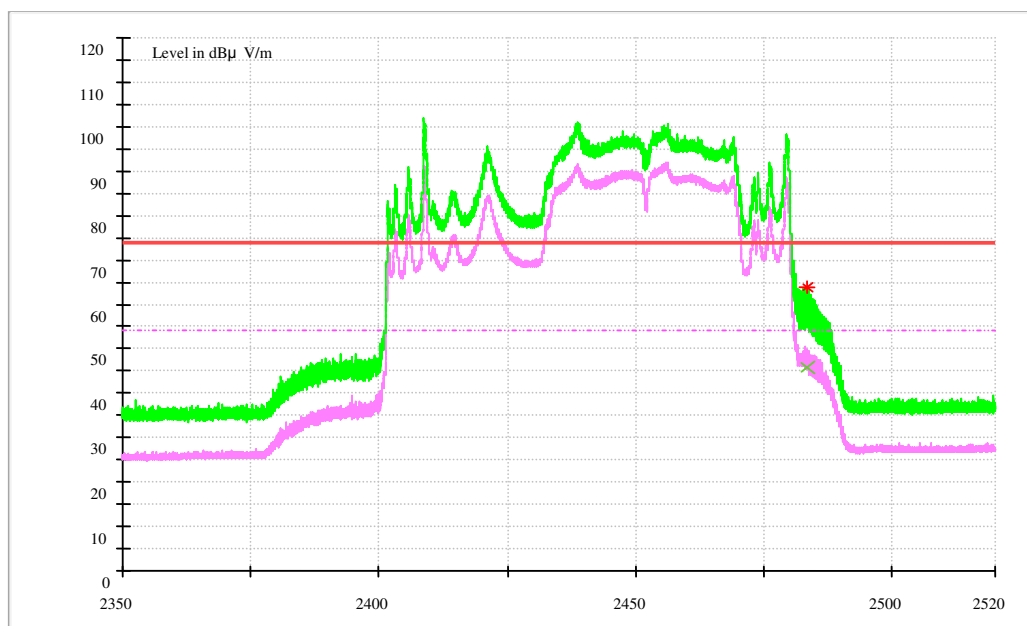

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	45.82	54.00	8.18	150.0	V	165.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	64.00	74.00	10.00	150.0	V	164.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)
The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 3 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

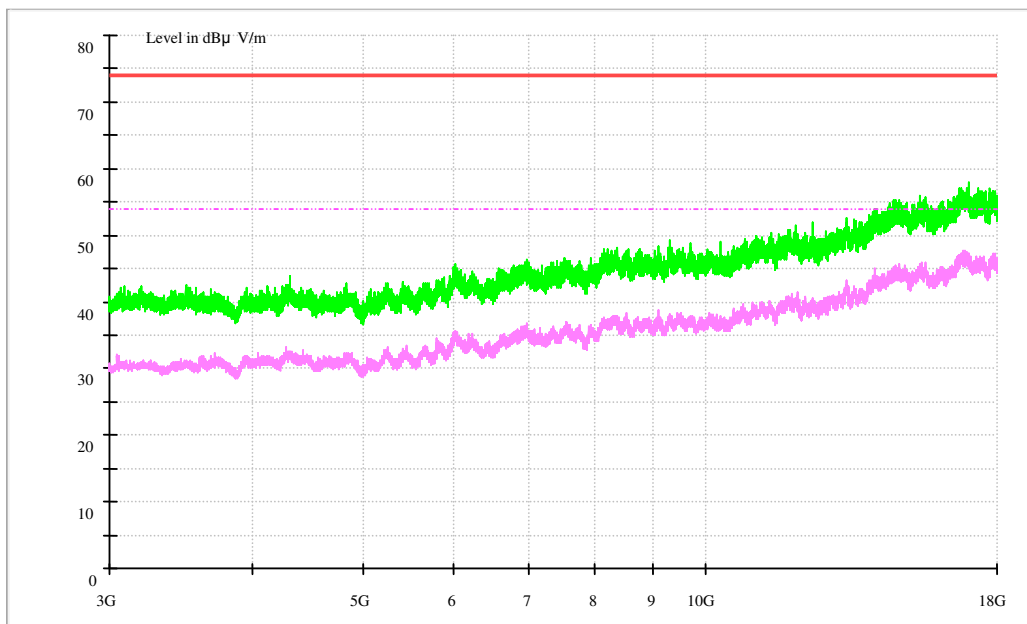


1.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE: No peak found in the Test Range of “18 GHz to 26.5GHz”

Appendix I: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

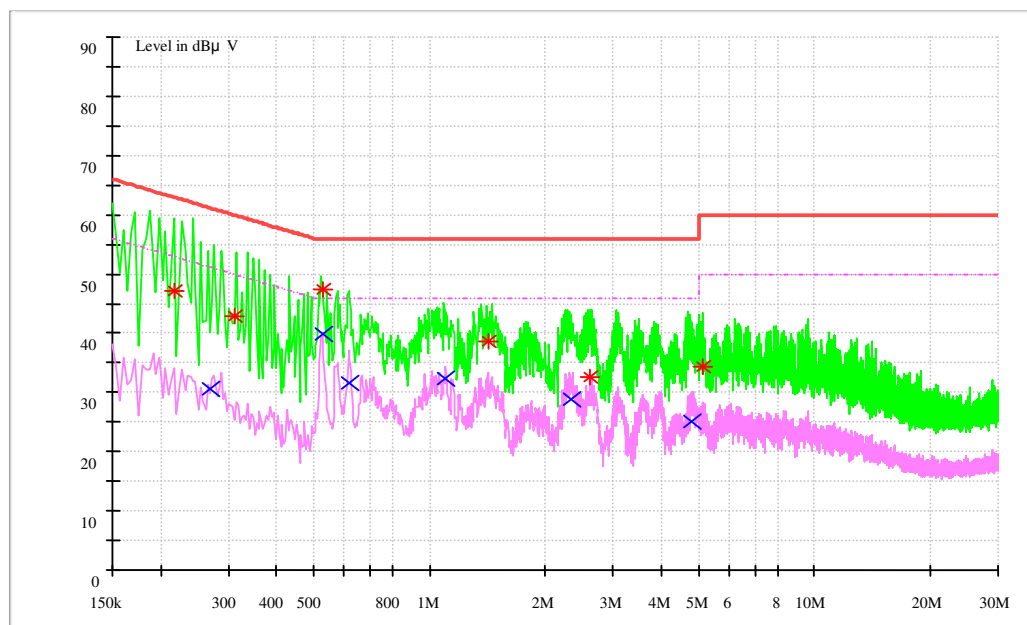

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.216686	47.04	62.95	9.7	15.91	L1	FLO
0.311938	42.76	59.92	9.7	17.16	L1	FLO
0.530273	47.36	56	9.7	8.64	N	FLO
1.41549	38.61	56	9.7	17.39	N	FLO
2.609357	32.56	56	9.7	23.44	N	FLO
5.105631	34.39	60	9.8	25.61	N	FLO

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμ V)	Limit (dBμ V)	Transd. (dB)	Margin (dB)	Line	PE
0.269892	30.47	51.12	9.7	20.65	L1	FLO
0.529698	39.87	46	9.7	6.13	L1	FLO
0.616757	31.51	46	9.7	14.49	L1	FLO
1.096616	32.42	46	9.7	13.58	L1	FLO
2.322596	28.74	46	9.8	17.26	L1	FLO
4.786654	25.09	46	9.8	20.91	L1	FLO

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

END