


Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:25
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5745MHz Ant 0 + 1	

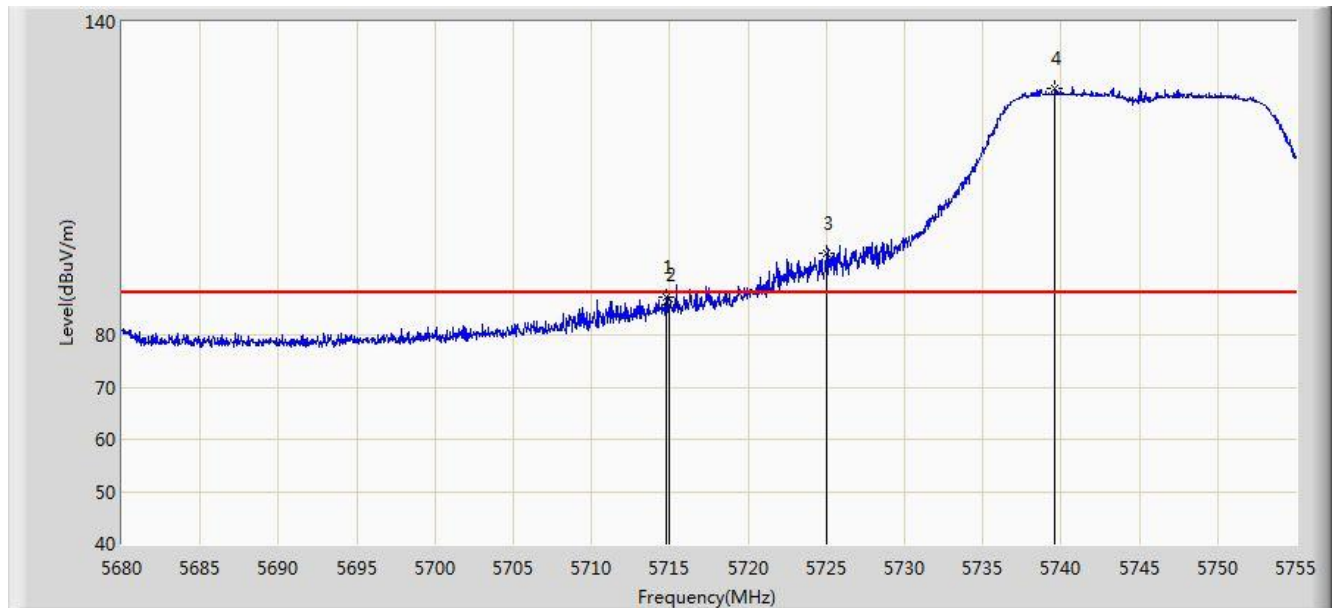


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.763	87.249	79.478	-0.951	88.200	7.771	PK
2			5715.000	85.847	78.075	-2.353	88.200	7.772	PK
3			5725.000	95.555	87.764	-2.645	98.200	7.791	PK
4		*	5739.587	127.212	119.390	N/A	N/A	7.822	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:27
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5745MHz Ant 0 + 1	

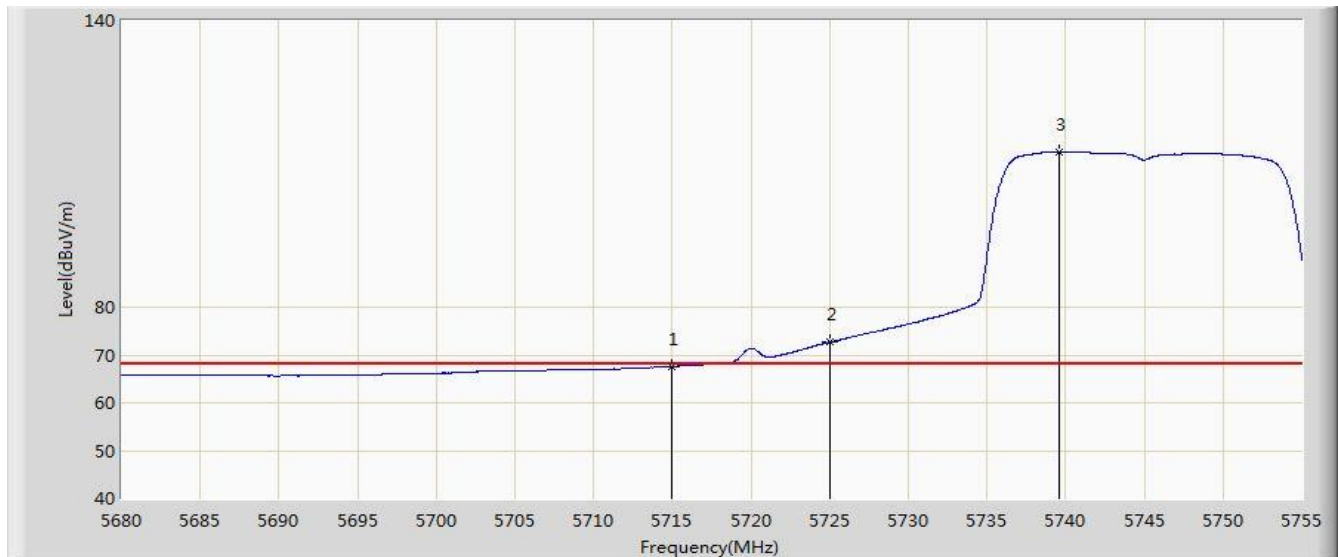


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	67.620	59.848	-0.580	68.200	7.772	AV
2			5725.000	72.697	64.906	-5.503	78.200	7.791	AV
3		*	5739.550	112.405	104.583	N/A	N/A	7.822	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:28
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5825MHz Ant 0 + 1	

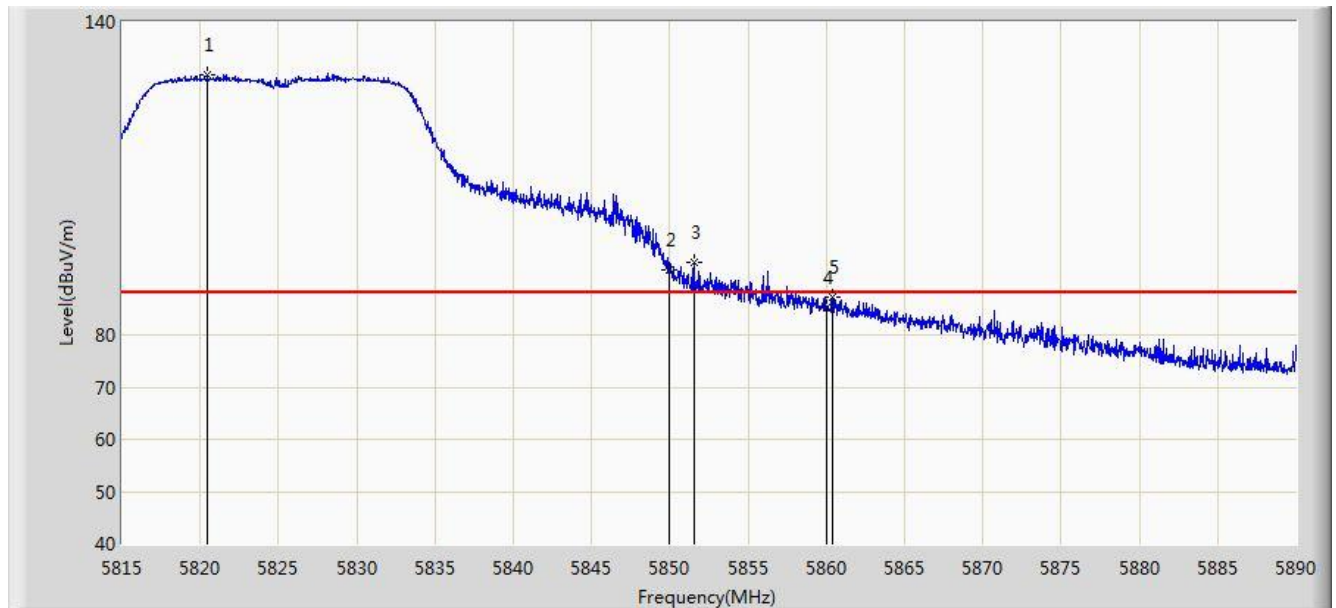


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.475	129.949	121.906	N/A	N/A	8.043	PK
2			5850.000	92.471	84.337	-5.729	98.200	8.134	PK
3			5851.525	93.905	85.763	-4.295	98.200	8.142	PK
4			5860.000	85.284	77.095	-2.916	88.200	8.189	PK
5			5860.375	87.293	79.102	-0.907	88.200	8.191	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:30
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5825MHz Ant 0 + 1	

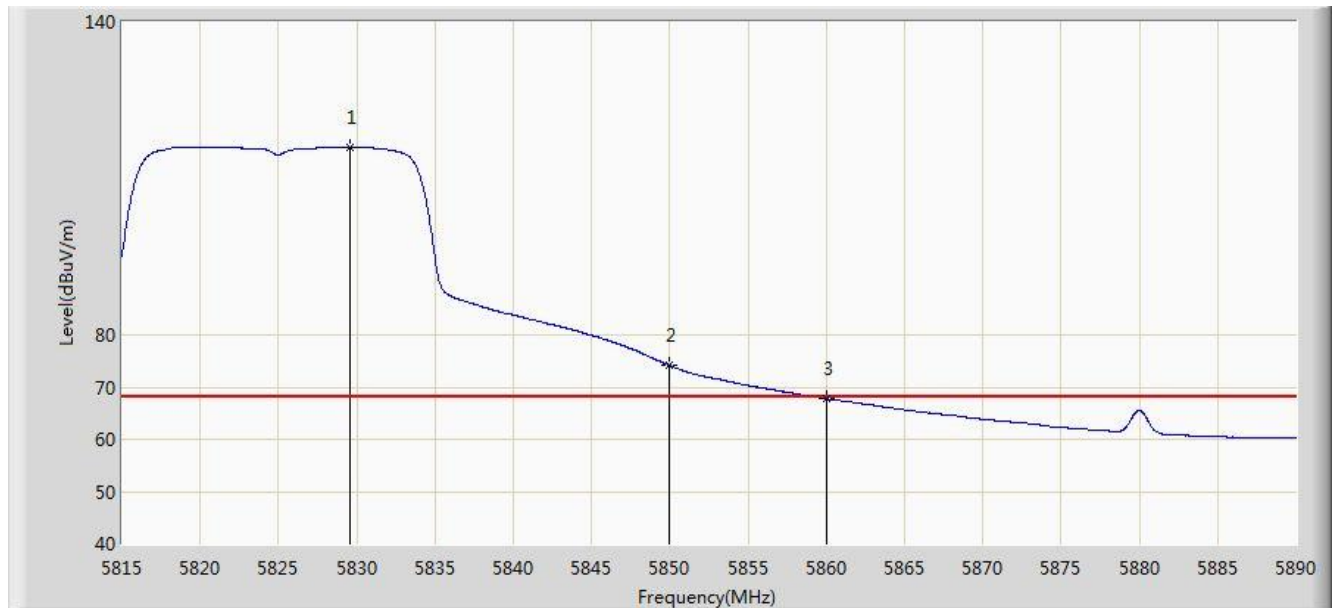


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.550	115.971	107.911	N/A	N/A	8.060	AV
2			5850.000	74.184	66.050	-4.016	78.200	8.134	AV
3			5860.000	67.754	59.565	-0.446	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:31
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5825MHz Ant 0 + 1	

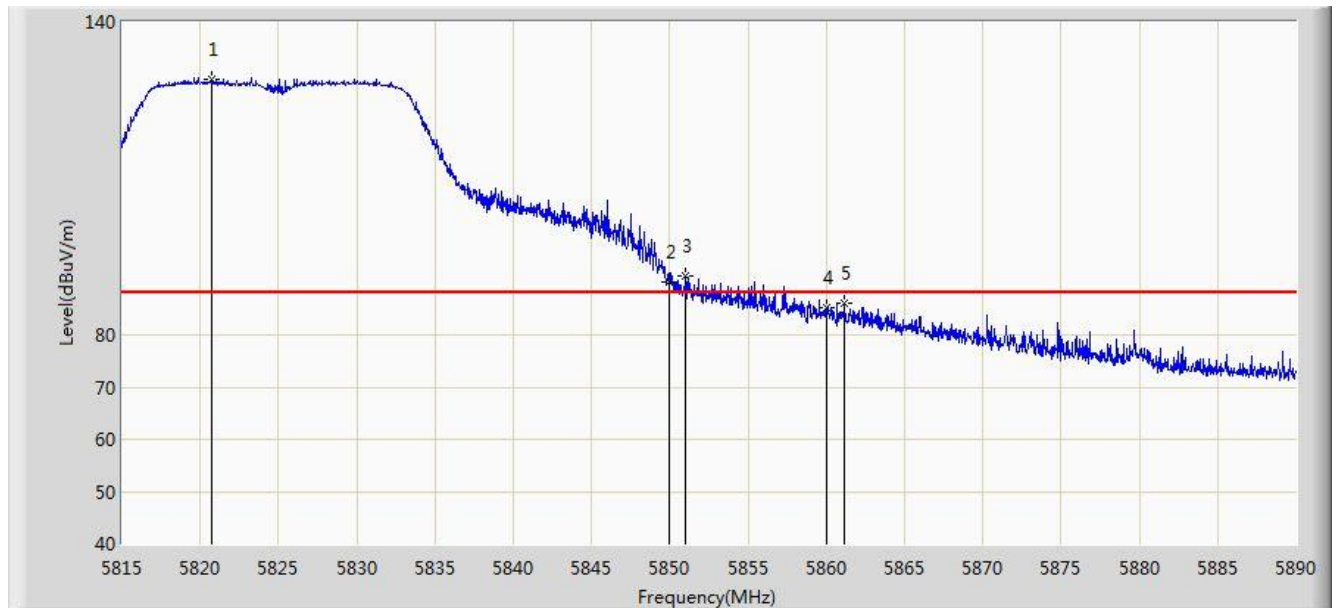


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.700	128.978	120.934	N/A	N/A	8.044	PK
2			5850.000	90.233	82.099	-7.967	98.200	8.134	PK
3			5851.038	91.373	83.233	-6.827	98.200	8.139	PK
4			5860.000	85.176	76.987	-3.024	88.200	8.189	PK
5			5861.163	86.134	77.939	-2.066	88.200	8.195	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:32
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5825MHz Ant 0 + 1	

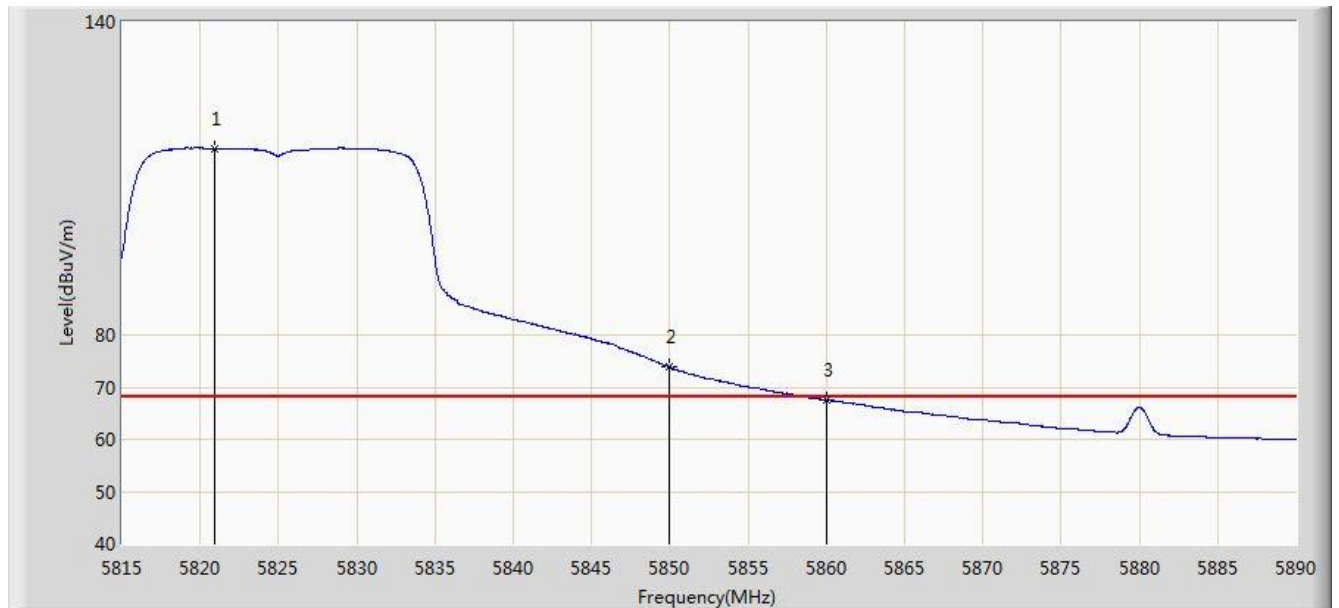


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.925	115.737	107.693	N/A	N/A	8.044	AV
2			5850.000	73.955	65.821	-4.245	78.200	8.134	AV
3			5860.000	67.482	59.293	-0.718	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:35
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0	

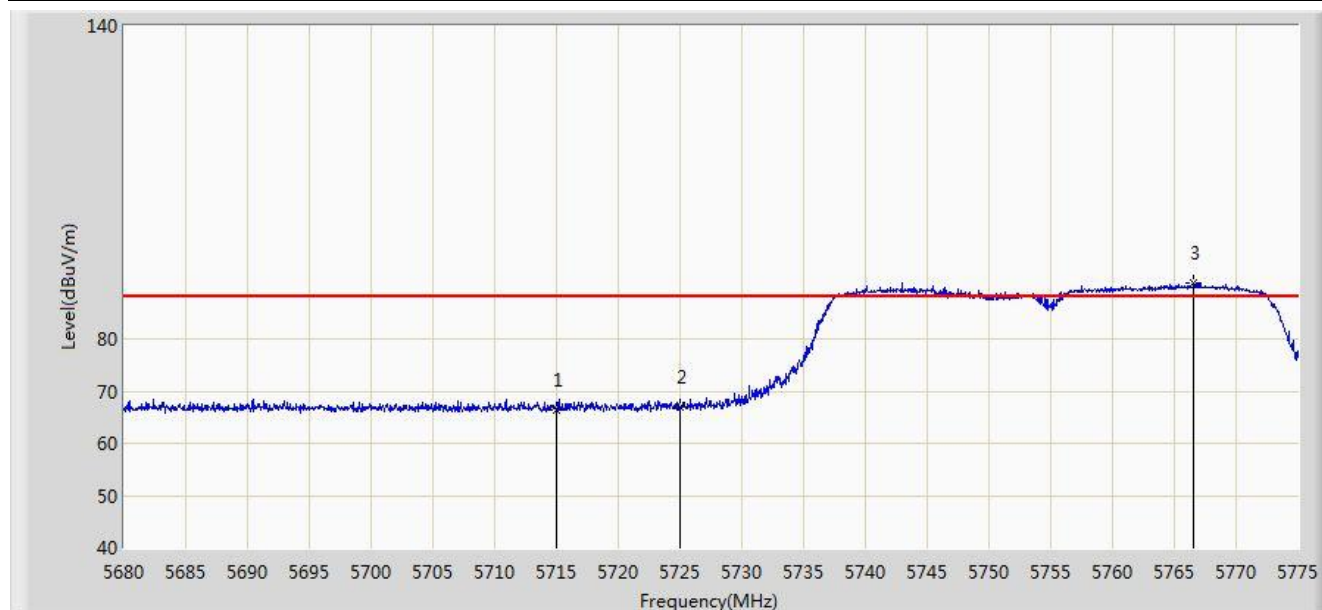


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	66.435	58.663	-21.765	88.200	7.772	PK
2			5725.000	66.853	59.062	-31.347	98.200	7.791	PK
3		*	5766.592	90.678	82.794	N/A	N/A	7.884	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:37
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0	

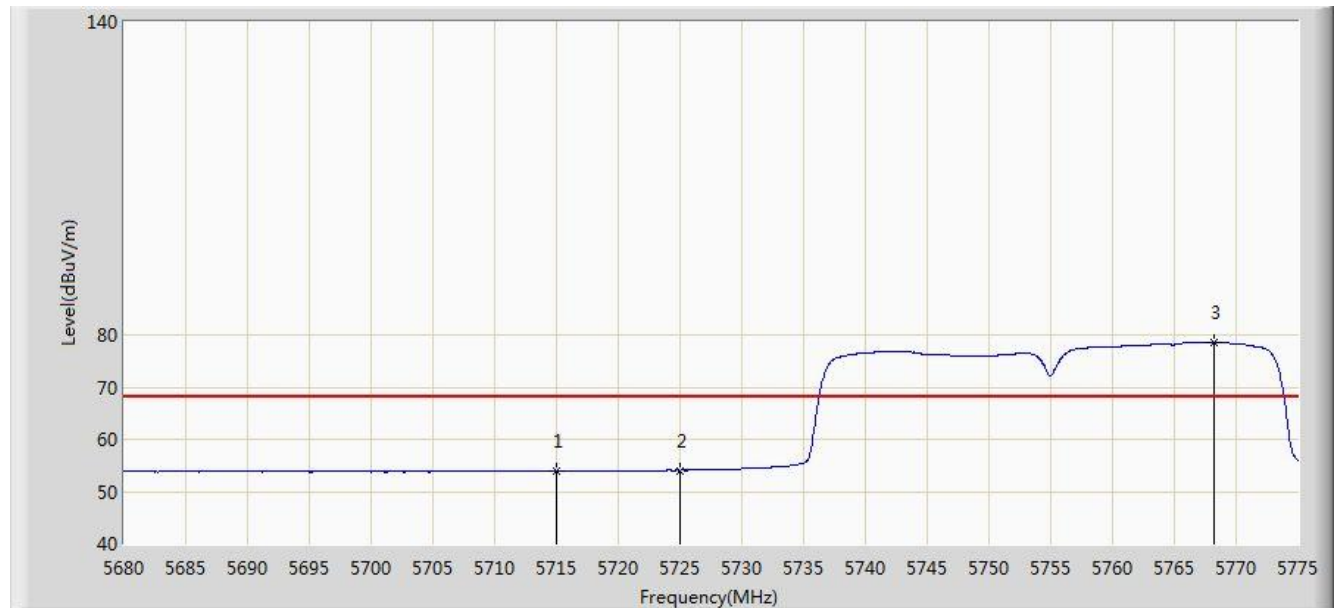


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.913	46.141	-14.287	68.200	7.772	AV
2			5725.000	54.042	46.251	-24.158	78.200	7.791	AV
3		*	5768.160	78.565	70.676	N/A	N/A	7.889	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:37
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0	

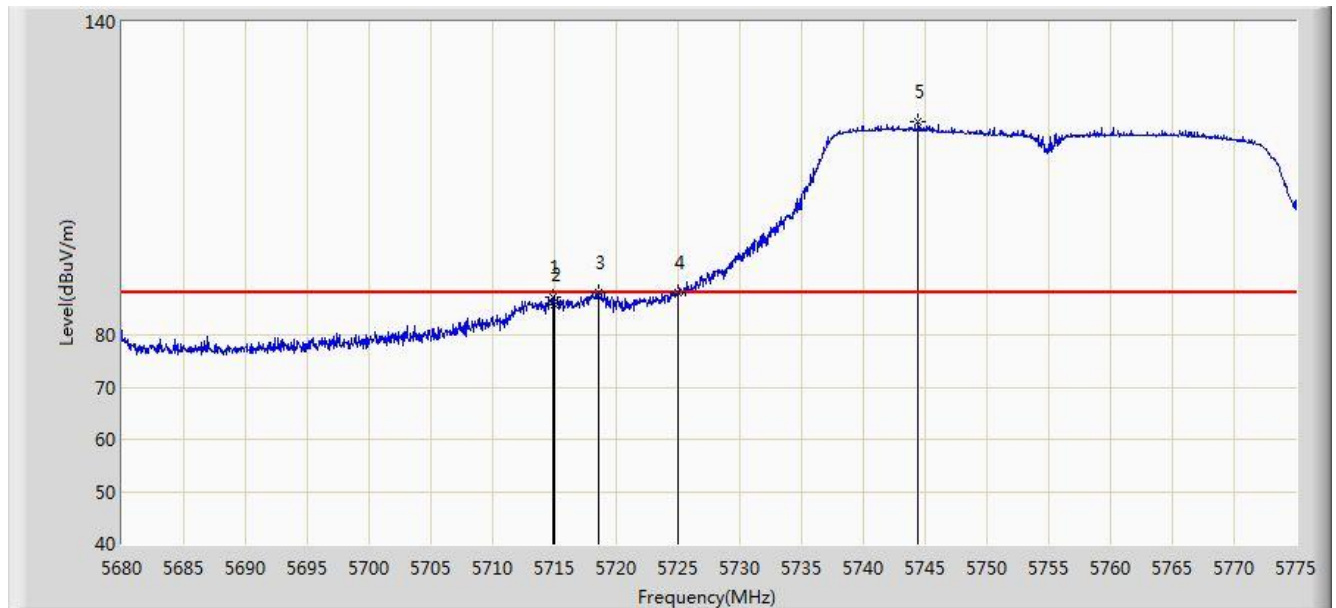


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.913	87.140	79.369	-1.060	88.200	7.771	PK
2			5715.000	85.752	77.980	-2.448	88.200	7.772	PK
3			5718.618	88.042	80.264	-10.158	98.200	7.778	PK
4			5725.000	87.980	80.189	-10.220	98.200	7.791	PK
5		*	5744.410	120.848	113.017	N/A	N/A	7.831	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:41
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0	

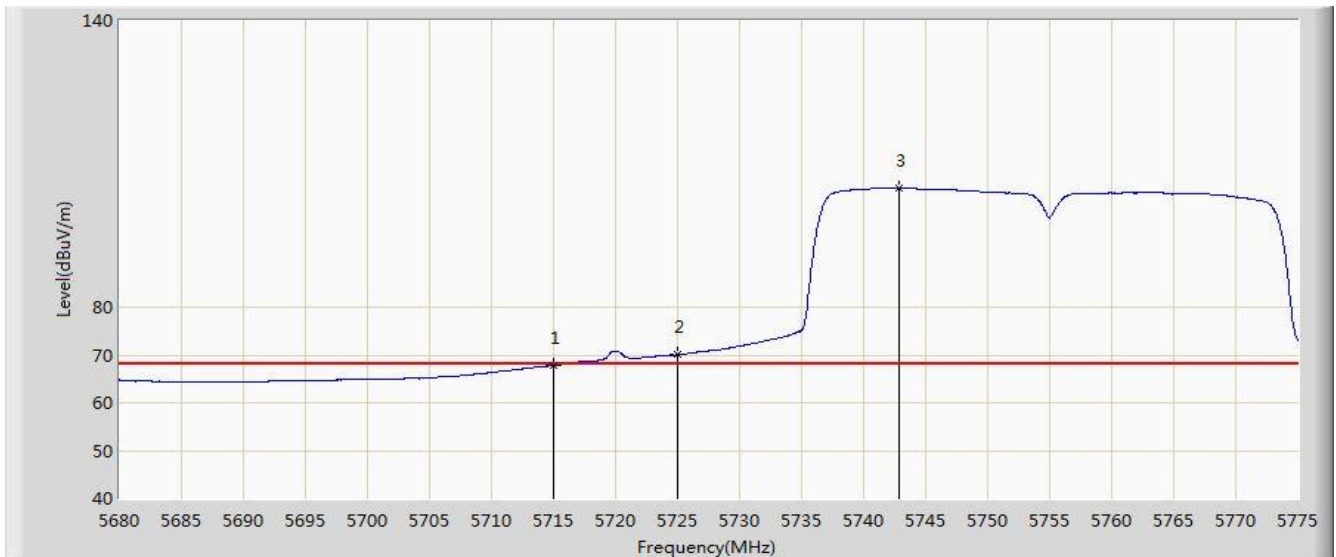


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	67.787	60.015	-0.413	68.200	7.772	AV
2			5725.000	70.036	62.245	-8.164	78.200	7.791	AV
3		*	5742.890	104.931	97.103	N/A	N/A	7.828	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:52
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0	

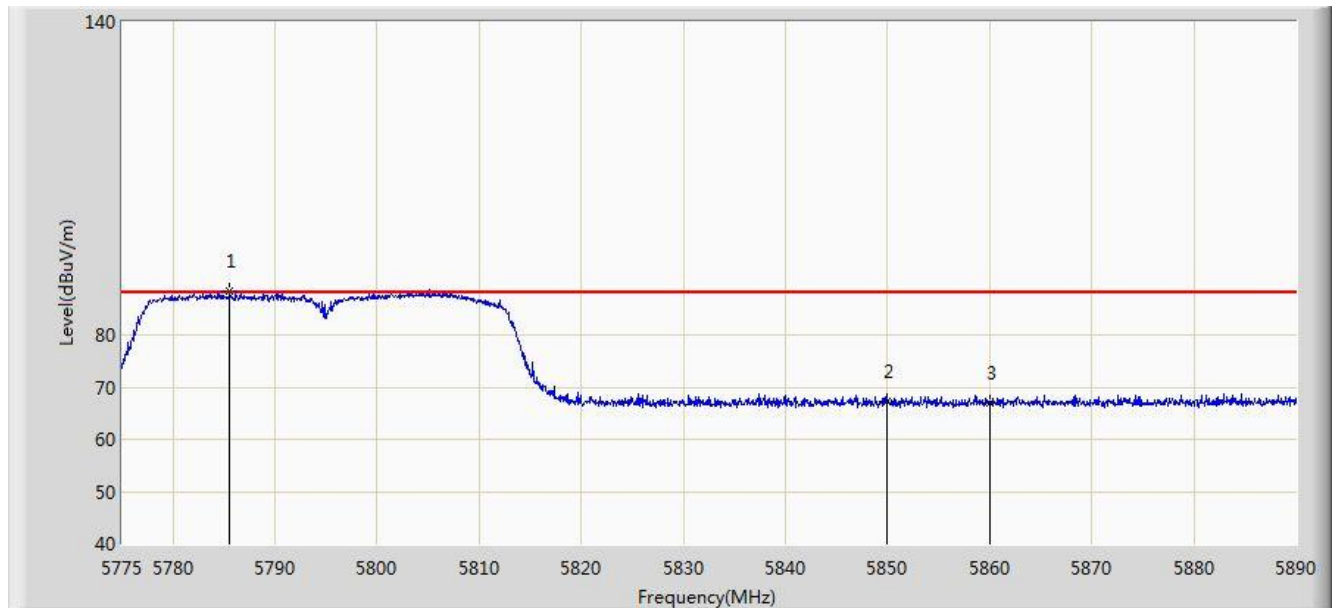


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.522	88.528	80.579	N/A	N/A	7.949	PK
2			5850.000	67.191	59.057	-31.009	98.200	8.134	PK
3			5860.000	66.976	58.787	-21.224	88.200	8.189	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:54
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0	

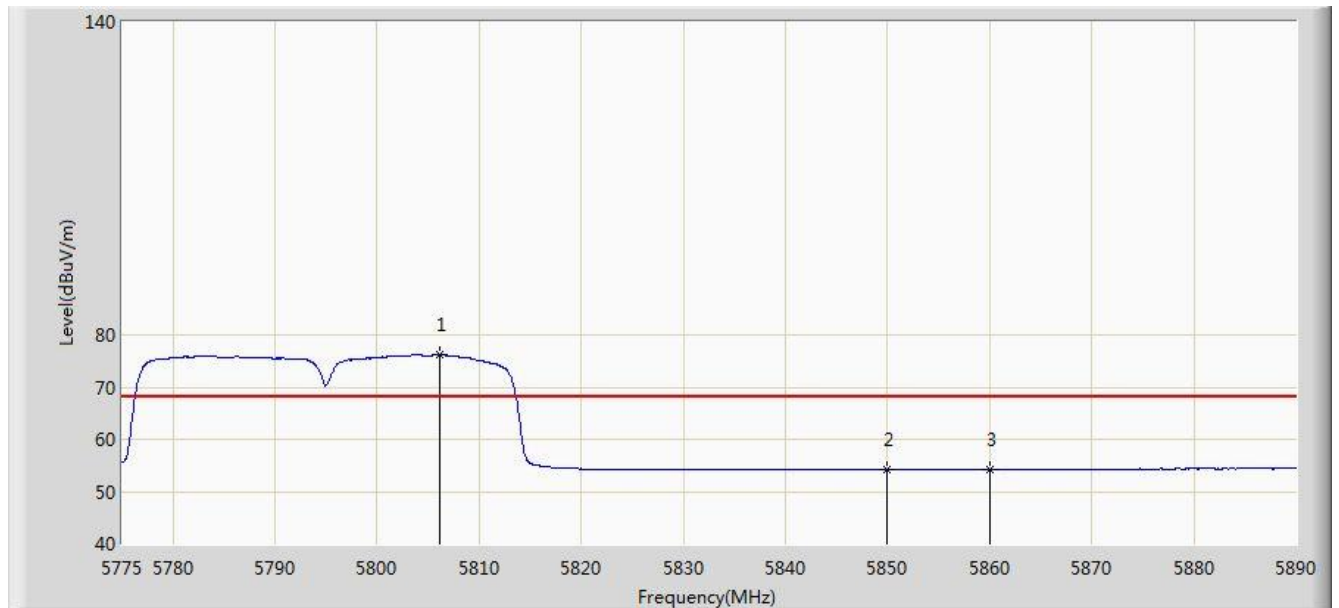


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5806.107	76.183	68.169	N/A	N/A	8.015	AV
2			5850.000	54.211	46.077	-23.989	78.200	8.134	AV
3			5860.000	54.283	46.094	-13.917	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:55
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0	

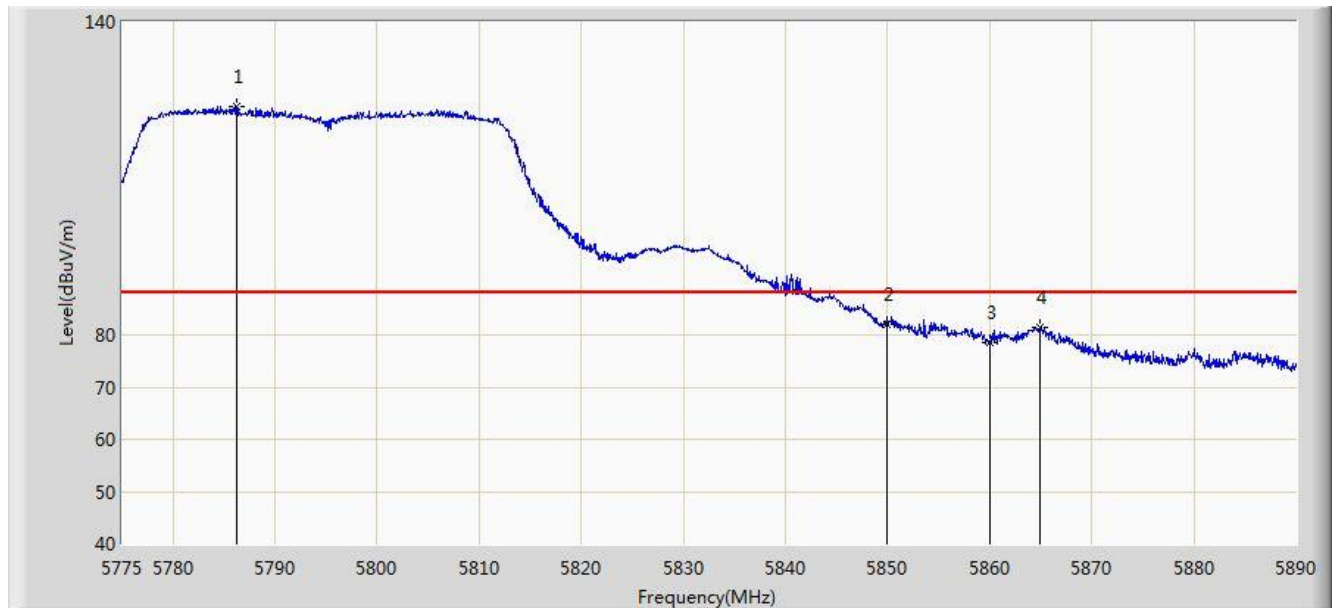


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.270	123.769	115.817	N/A	N/A	7.953	PK
2			5850.000	82.062	73.928	-16.138	98.200	8.134	PK
3			5860.000	78.587	70.398	-9.613	88.200	8.189	PK
4			5864.873	81.496	73.292	-6.704	88.200	8.210	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:55
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0	

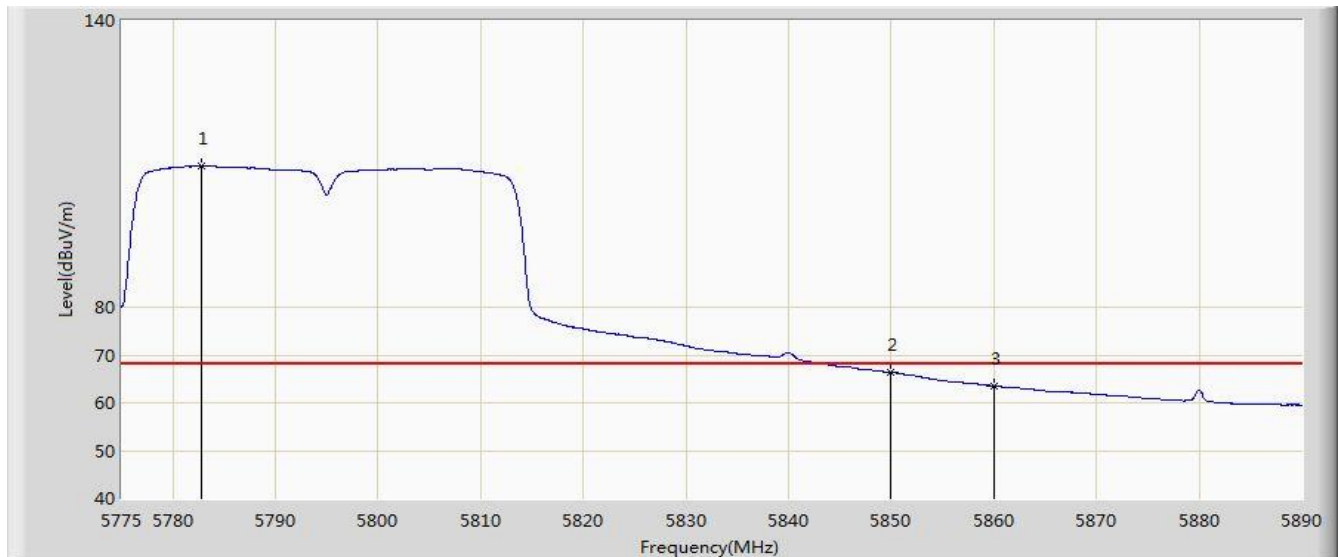


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.820	109.519	101.579	N/A	N/A	7.940	AV
2			5850.000	66.403	58.269	-11.797	78.200	8.134	AV
3			5860.000	63.530	55.341	-4.670	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 19:56
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 1	

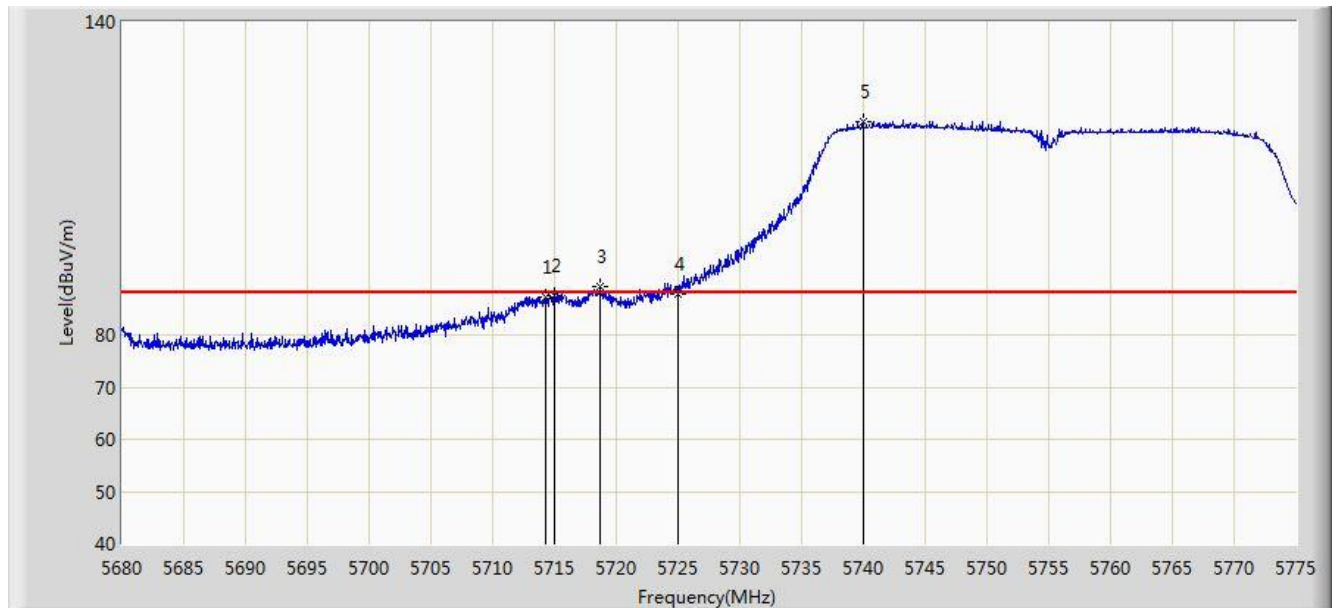


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.342	87.327	79.557	-0.873	88.200	7.770	PK
2			5715.000	87.518	79.746	-0.682	88.200	7.772	PK
3			5718.712	89.205	81.426	-8.995	98.200	7.779	PK
4			5725.000	87.958	80.167	-10.242	98.200	7.791	PK
5		*	5739.945	120.969	113.146	N/A	N/A	7.823	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:00
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 1	

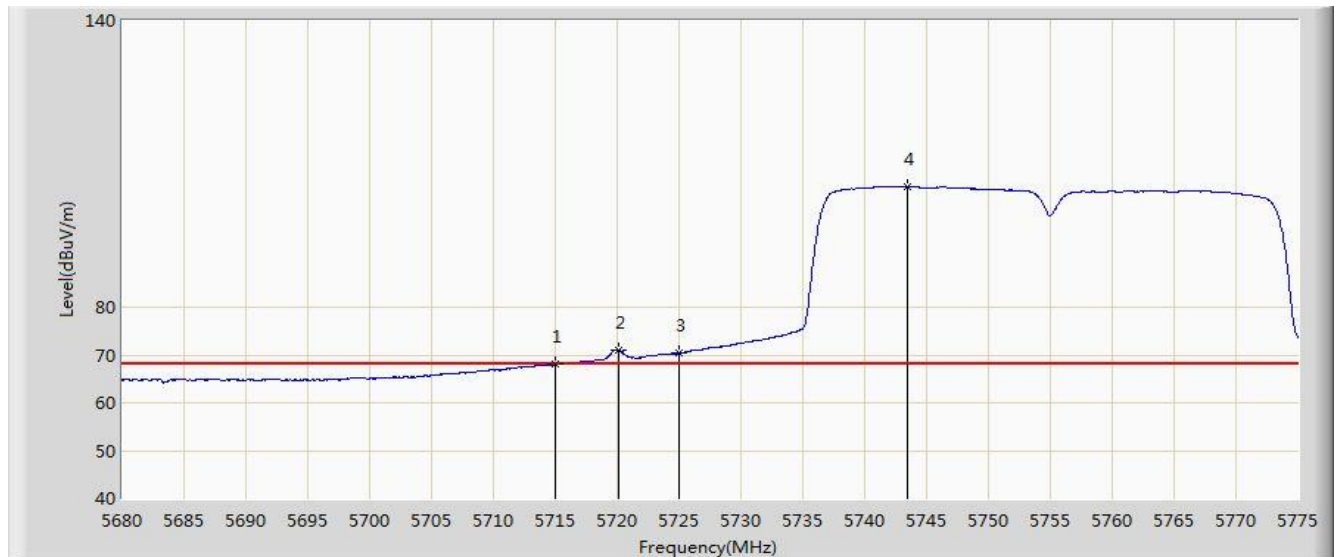


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	68.048	60.276	-0.152	68.200	7.772	AV
2			5720.138	71.079	63.298	-7.121	78.200	7.781	AV
3			5725.000	70.429	62.638	-7.771	78.200	7.791	AV
4		*	5743.460	105.204	97.375	N/A	N/A	7.829	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:02
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 1	

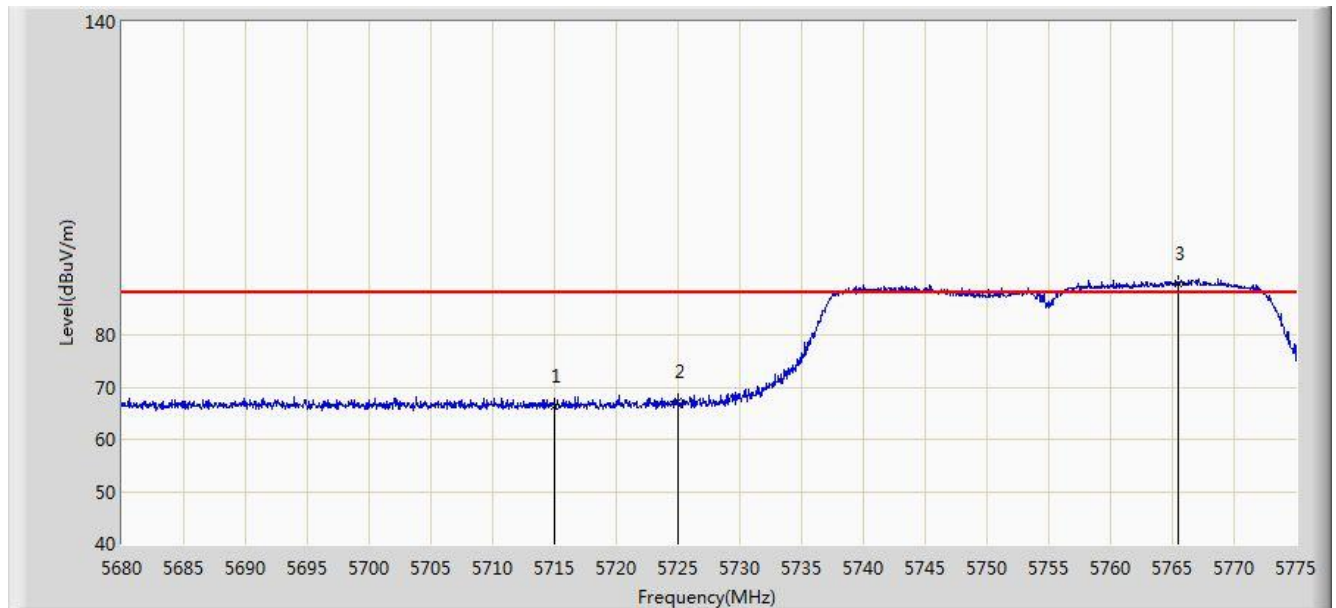


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	66.291	58.519	-21.909	88.200	7.772	PK
2			5725.000	67.272	59.481	-30.928	98.200	7.791	PK
3		*	5765.500	89.877	81.997	N/A	N/A	7.880	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:03
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 1	

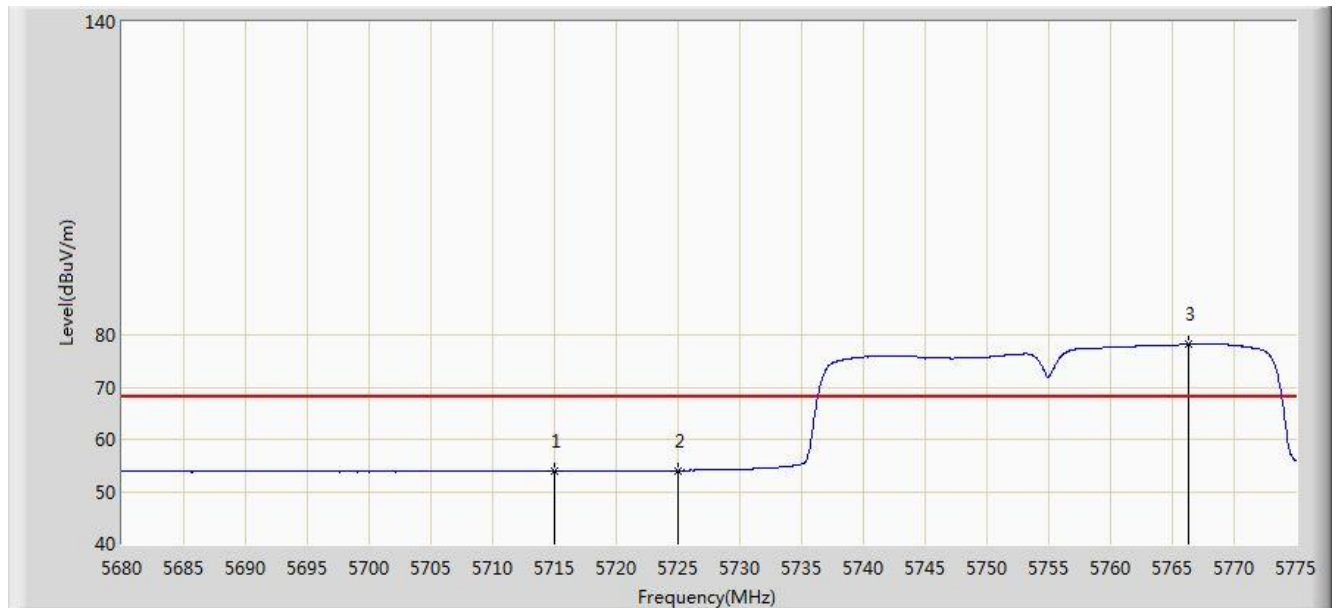


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.938	46.166	-14.262	68.200	7.772	AV
2			5725.000	54.031	46.240	-24.169	78.200	7.791	AV
3		*	5766.355	78.366	70.483	N/A	N/A	7.884	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:05
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 1	

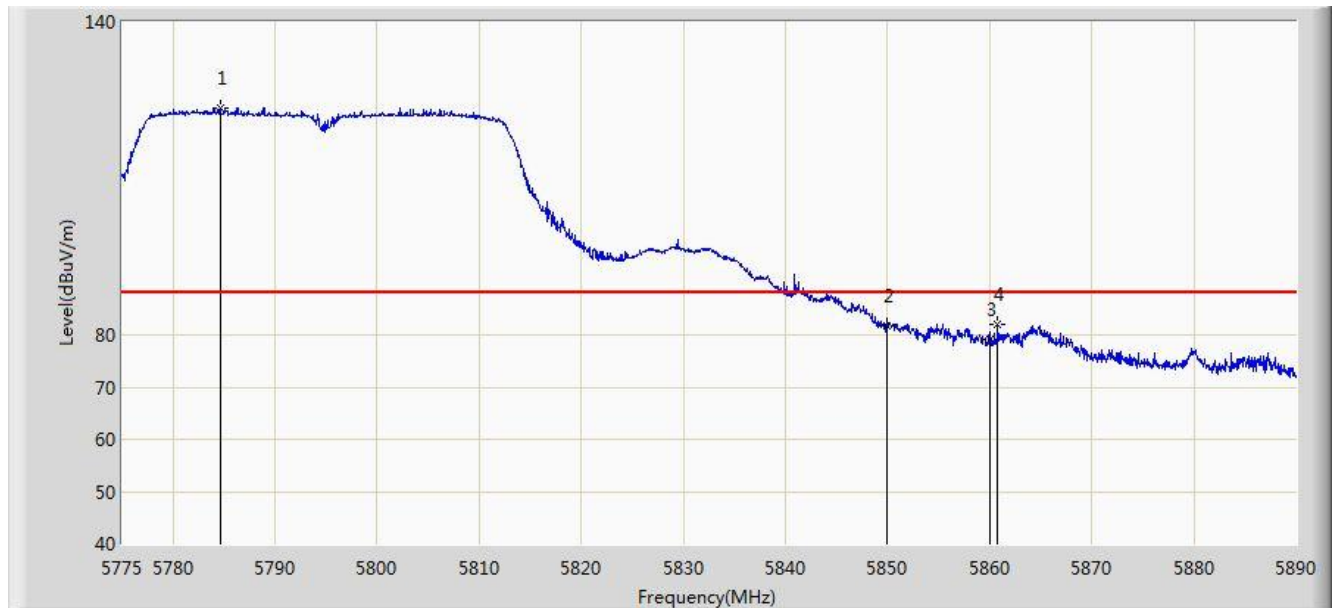


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.603	123.530	115.584	N/A	N/A	7.946	PK
2			5850.000	81.657	73.523	-16.543	98.200	8.134	PK
3			5860.000	79.159	70.970	-9.041	88.200	8.189	PK
4			5860.790	82.004	73.811	-6.196	88.200	8.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:08
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 1	

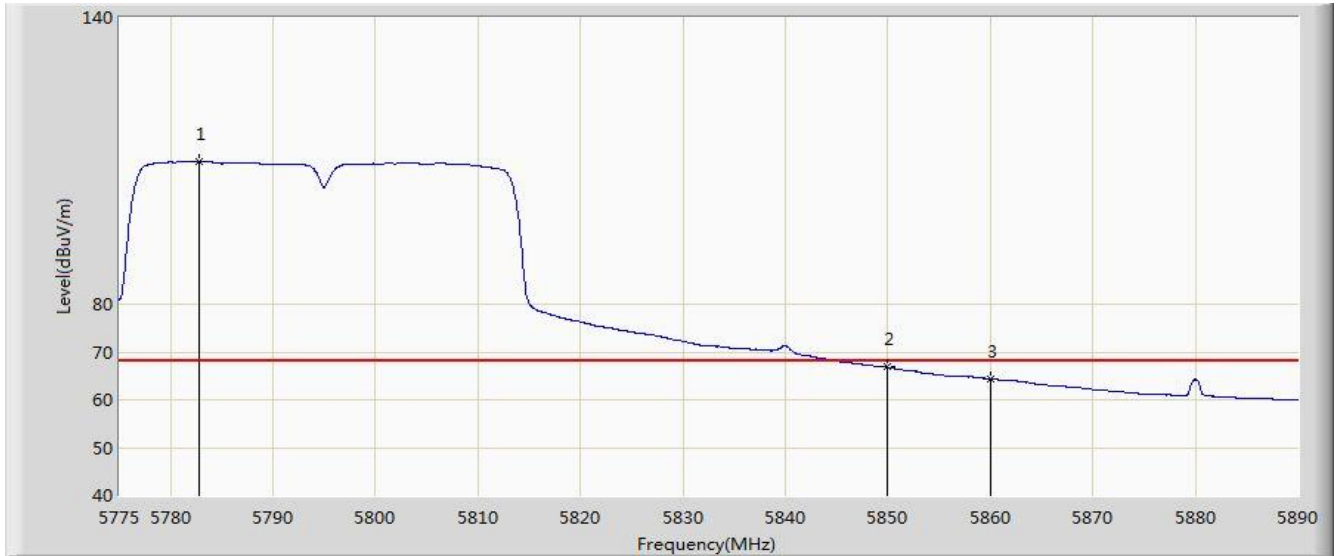


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.820	109.844	101.904	N/A	N/A	7.940	AV
2			5850.000	66.817	58.683	-11.383	78.200	8.134	AV
3			5860.000	64.322	56.133	-3.878	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:09
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 1	

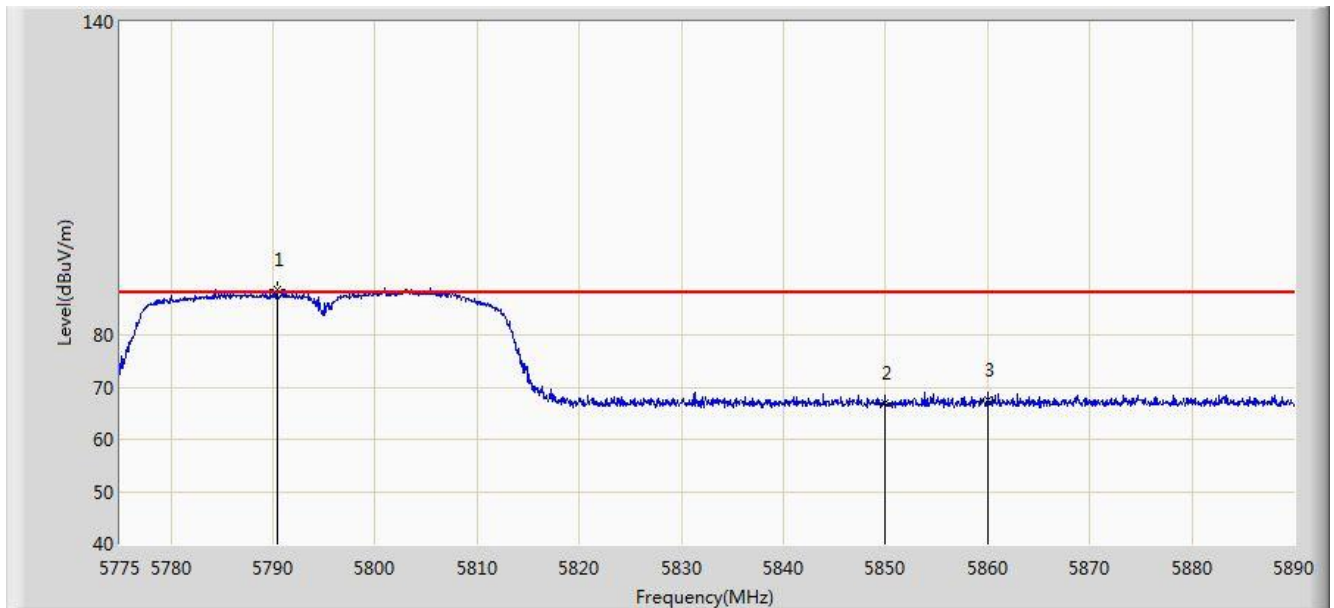


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5790.410	88.618	80.651	N/A	N/A	7.967	PK
2			5850.000	66.914	58.780	-31.286	98.200	8.134	PK
3			5860.000	67.671	59.482	-20.529	88.200	8.189	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:10
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 1	

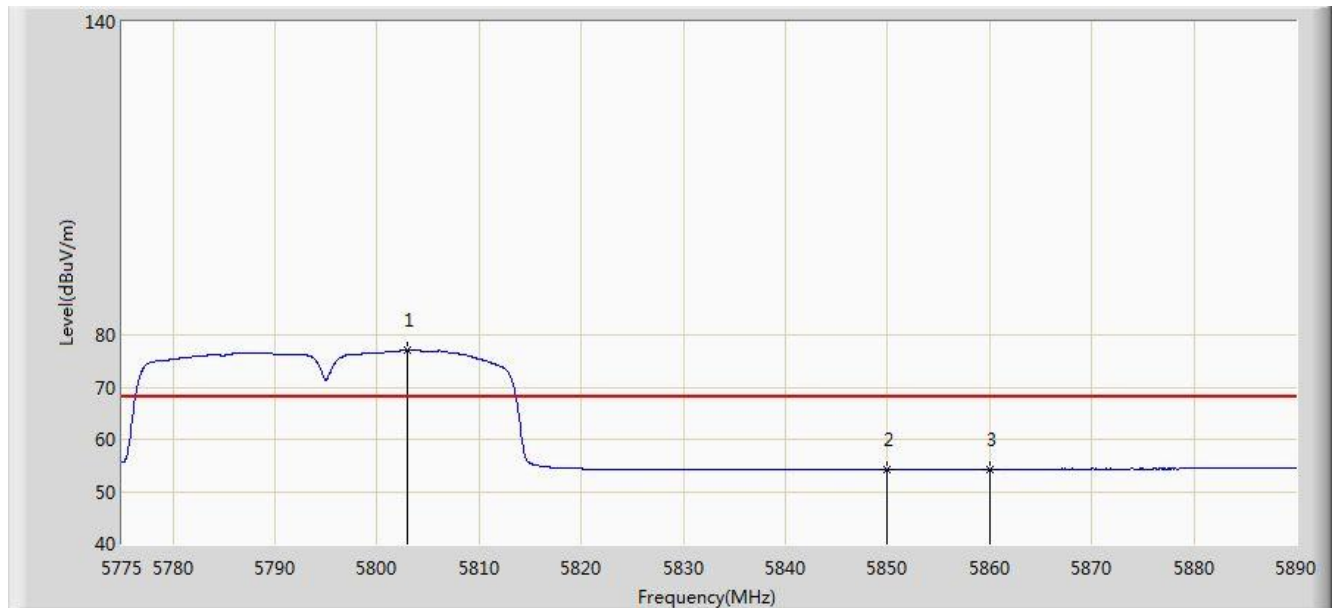


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5803.002	76.965	68.959	N/A	N/A	8.006	AV
2			5850.000	54.288	46.154	-23.912	78.200	8.134	AV
3			5860.000	54.291	46.102	-13.909	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:12
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0 + 1	

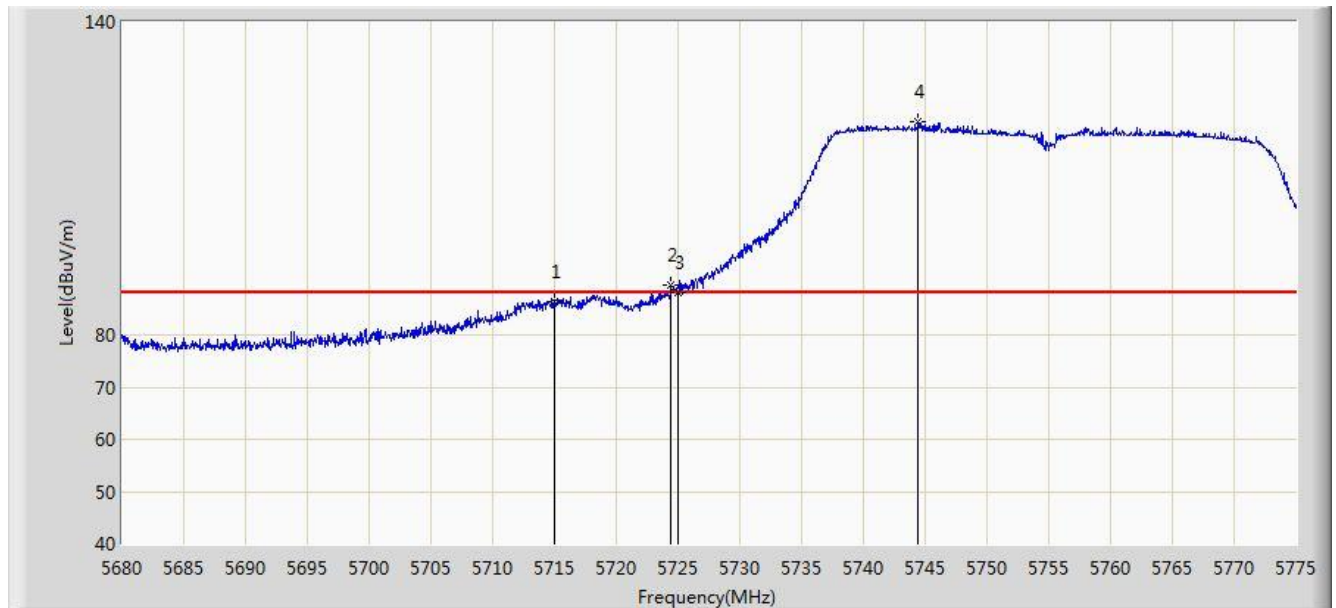


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	86.253	78.481	-1.947	88.200	7.772	PK
2			5724.413	89.583	81.793	-8.617	98.200	7.790	PK
3			5725.000	88.098	80.307	-10.102	98.200	7.791	PK
4		*	5744.458	120.793	112.962	N/A	N/A	7.831	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:14
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0 + 1	

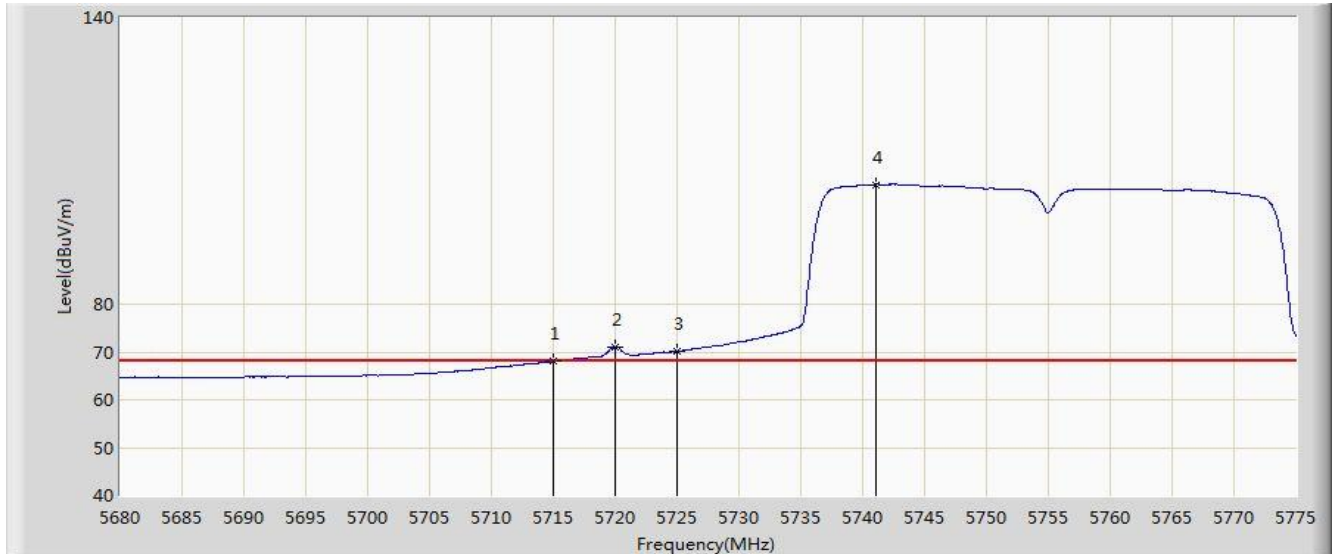


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	67.975	60.203	-0.225	68.200	7.772	AV
2			5719.995	71.079	63.298	-7.121	78.200	7.781	AV
3			5725.000	70.100	62.309	-8.100	78.200	7.791	AV
4		*	5741.038	105.069	97.244	N/A	N/A	7.825	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:16
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0 + 1	

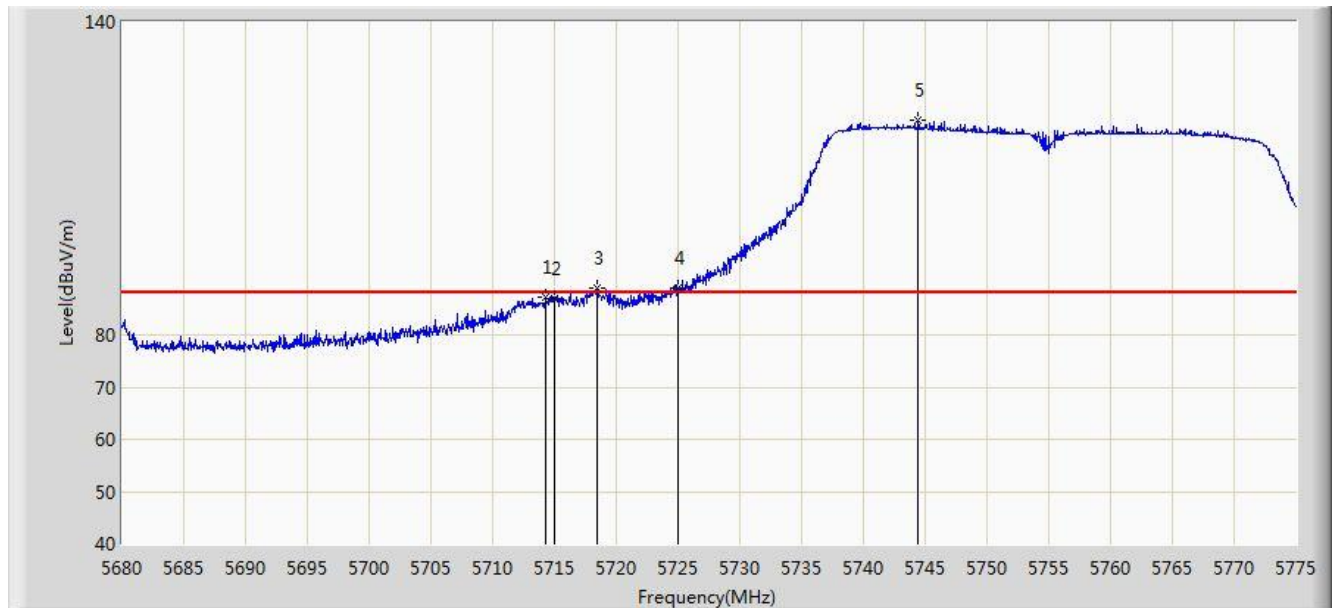


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.295	87.264	79.494	-0.936	88.200	7.770	PK
2			5715.000	86.872	79.100	-1.328	88.200	7.772	PK
3			5718.475	89.118	81.340	-9.082	98.200	7.778	PK
4			5725.000	89.046	81.255	-9.154	98.200	7.791	PK
5		*	5744.458	121.068	113.237	N/A	N/A	7.831	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:17
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5755MHz Ant 0 + 1	

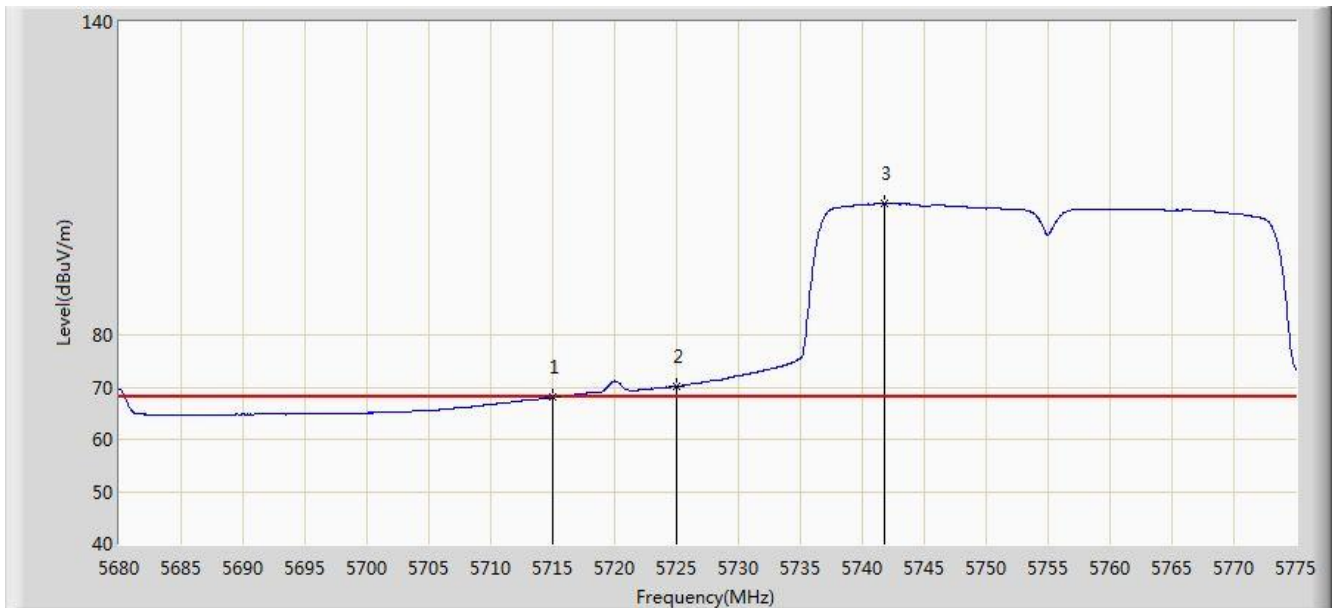


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	67.981	60.209	-0.219	68.200	7.772	AV
2			5725.000	70.109	62.318	-8.091	78.200	7.791	AV
3		*	5741.845	105.080	97.254	N/A	N/A	7.826	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:18
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0 + 1	

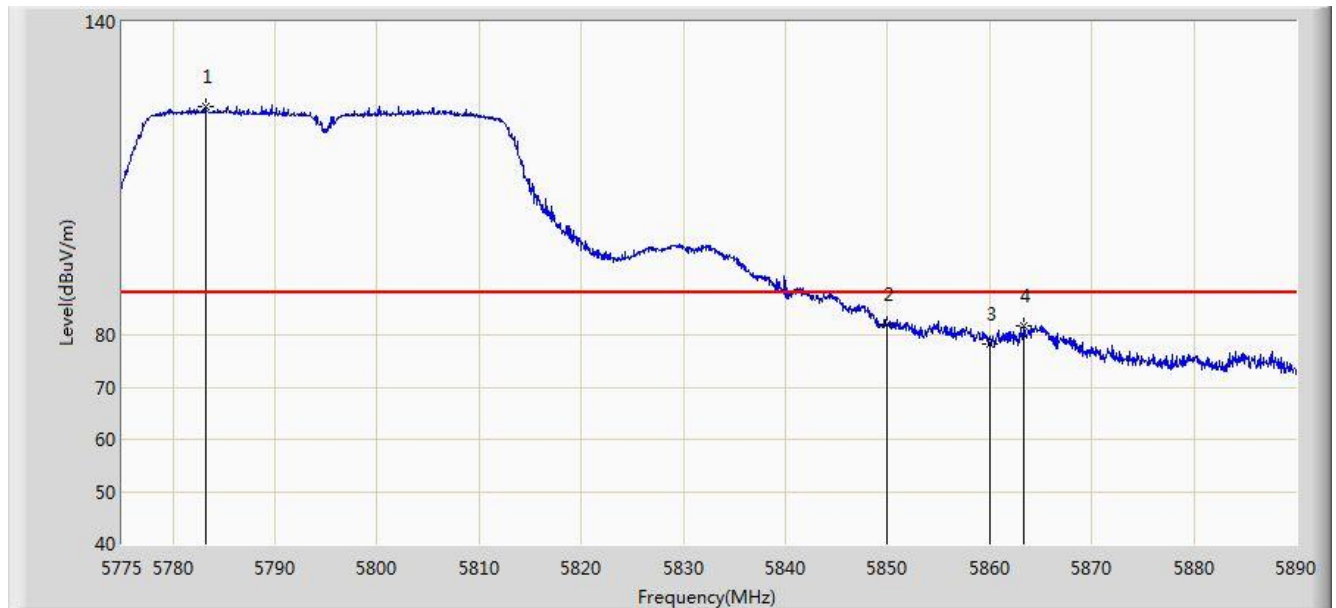


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.165	123.818	115.877	N/A	N/A	7.941	PK
2			5850.000	82.002	73.868	-16.198	98.200	8.134	PK
3			5860.000	78.307	70.118	-9.893	88.200	8.189	PK
4			5863.377	81.852	73.647	-6.348	88.200	8.204	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:20
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0 + 1	

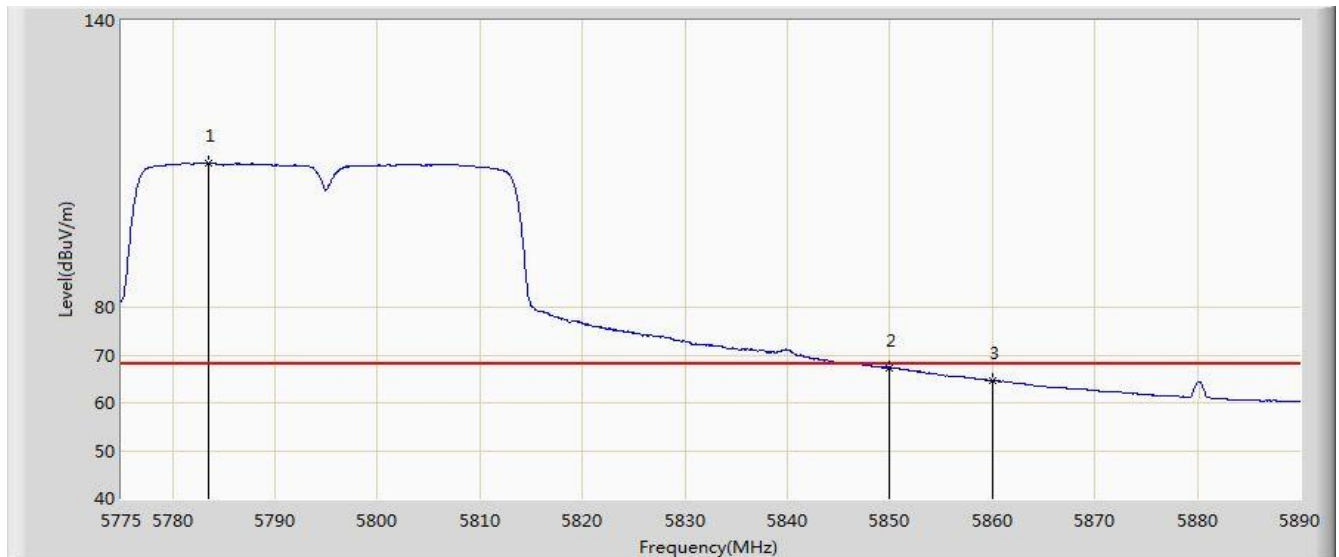


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.510	110.041	102.099	N/A	N/A	7.943	AV
2			5850.000	67.368	59.234	-10.832	78.200	8.134	AV
3			5860.000	64.596	56.407	-3.604	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:20
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0 + 1	

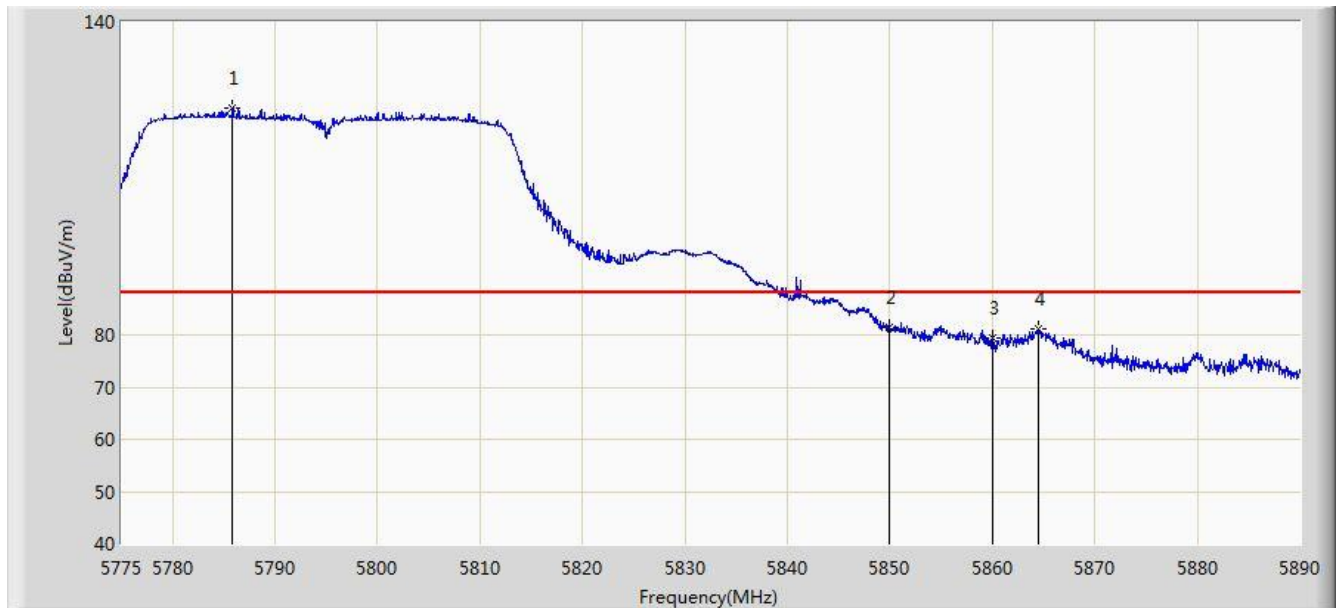


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5785.868	123.415	115.464	N/A	N/A	7.950	PK
2			5850.000	81.556	73.422	-16.644	98.200	8.134	PK
3			5860.000	79.401	71.212	-18.799	98.200	8.189	PK
4			5864.470	81.180	72.972	-7.020	88.200	8.208	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:21
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5795MHz Ant 0 + 1	

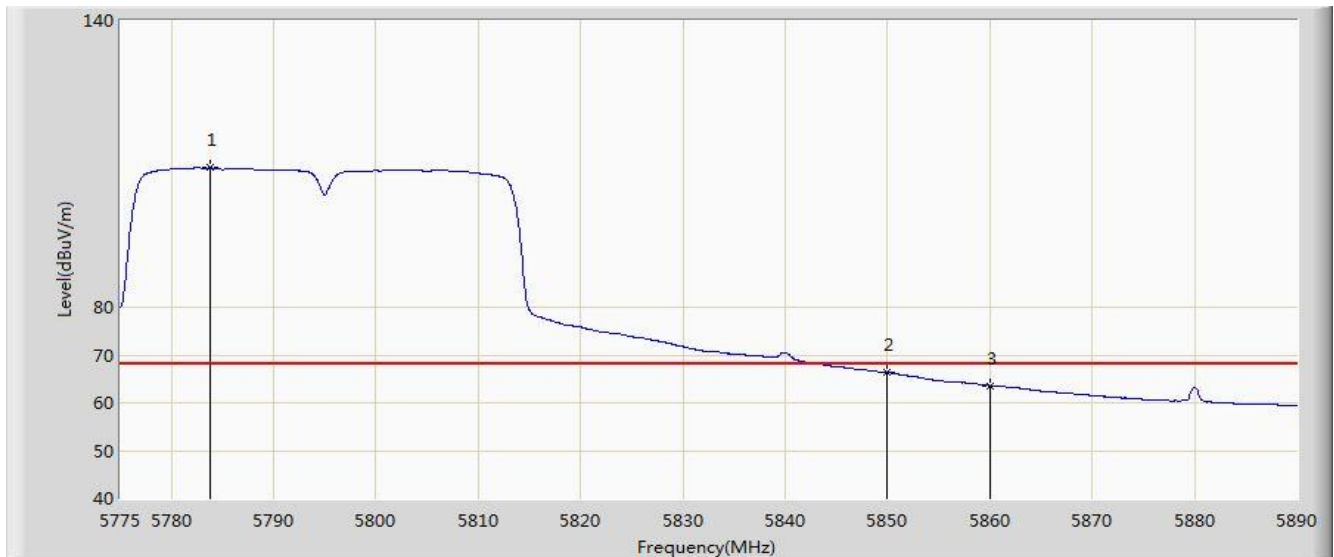


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.855	109.146	101.203	N/A	N/A	7.944	AV
2			5850.000	66.353	58.219	-11.847	78.200	8.134	AV
3			5860.000	63.518	55.329	-4.682	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Test by Dipole Antenna – 2dBi for 5150-5250MHz and 5725-5850MHz Band

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 0	

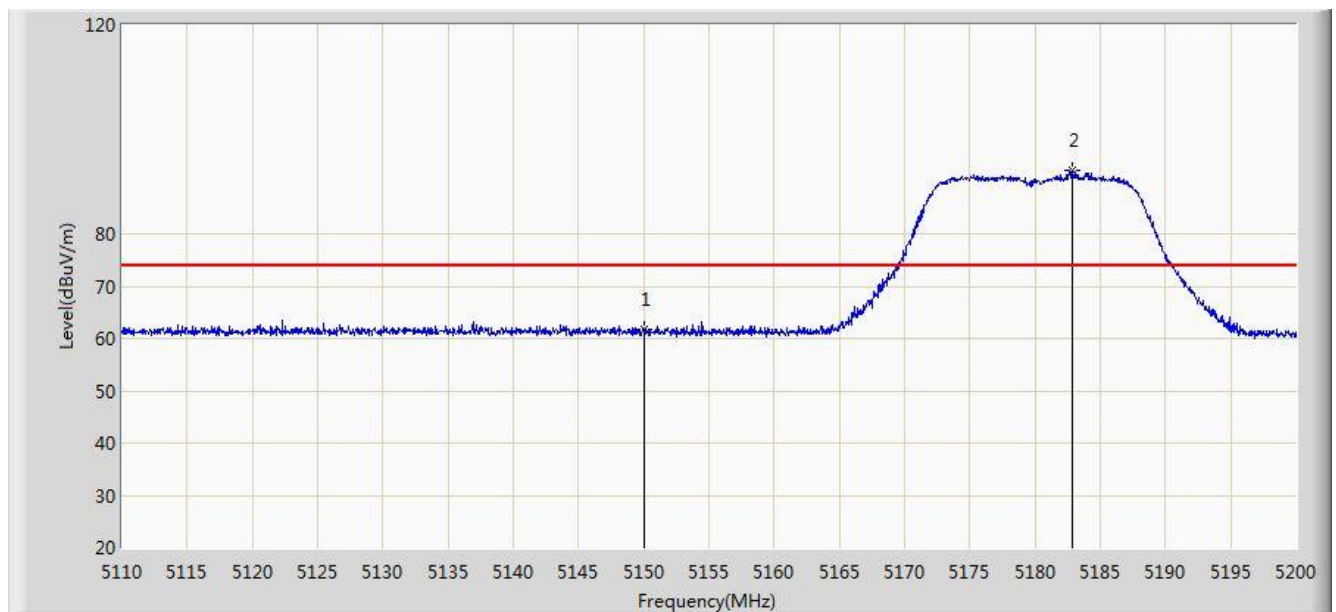


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.645	54.469	-12.355	74.000	7.176	PK
2		*	5182.855	92.072	85.036	N/A	N/A	7.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 0	

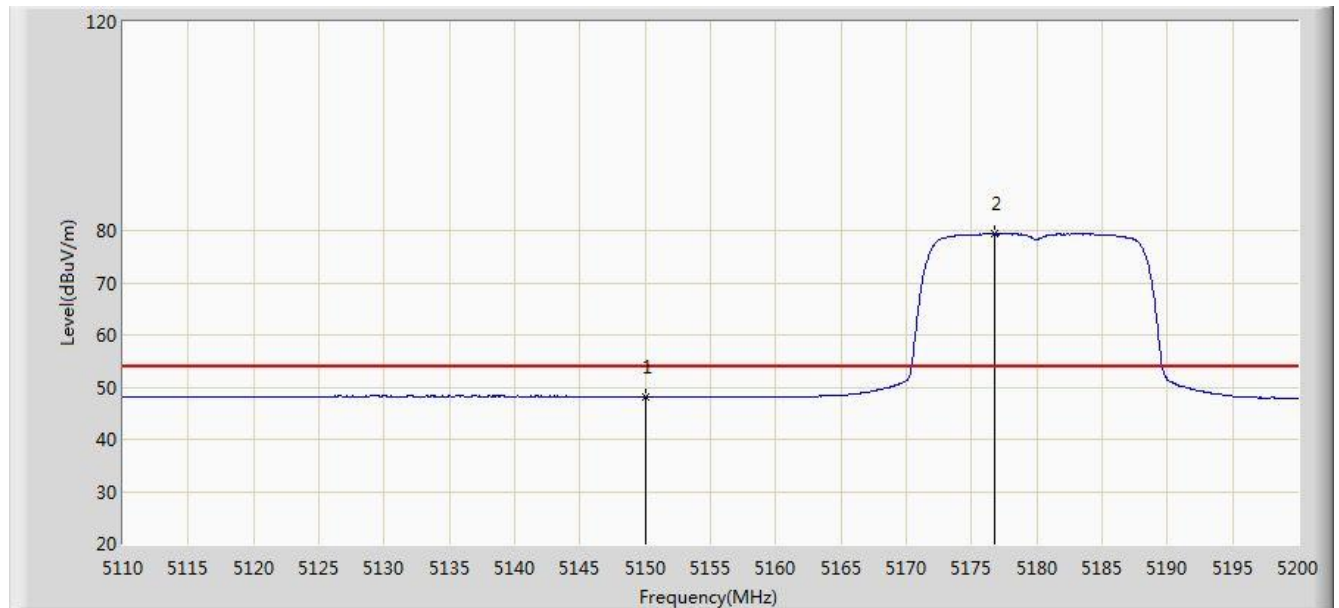


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.197	41.021	-5.803	54.000	7.176	AV
2		*	5176.735	79.293	72.217	N/A	N/A	7.075	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 0	

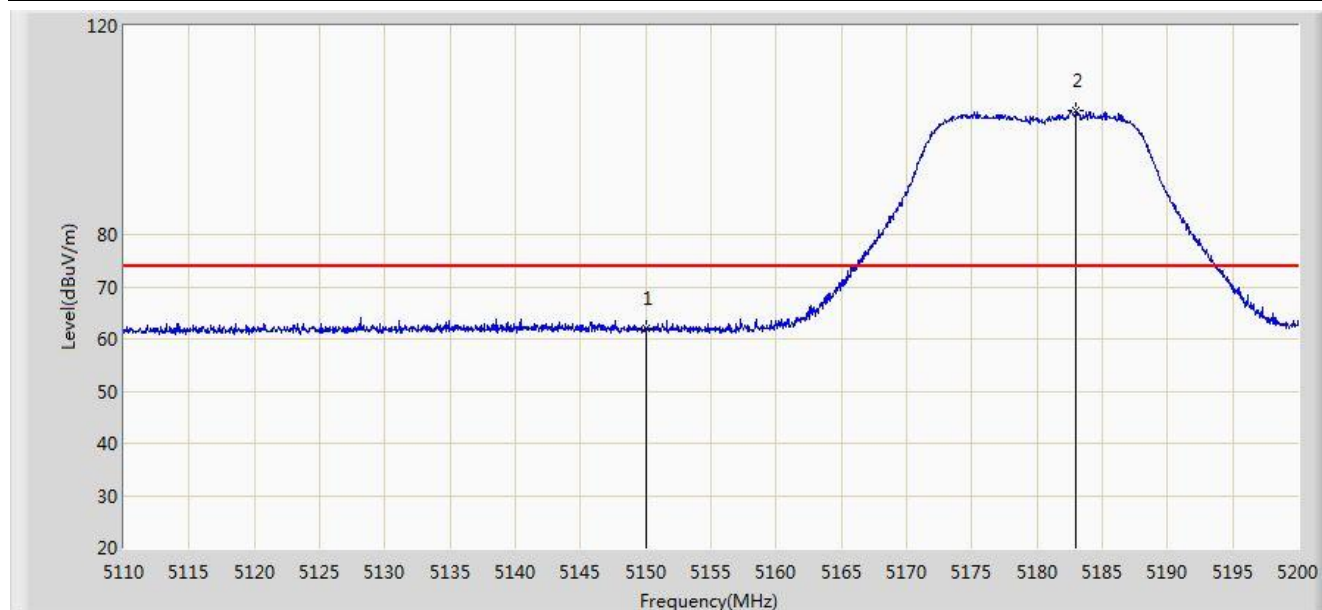


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.958	54.782	-12.042	74.000	7.176	PK
2		*	5182.990	103.807	96.772	N/A	N/A	7.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 0	

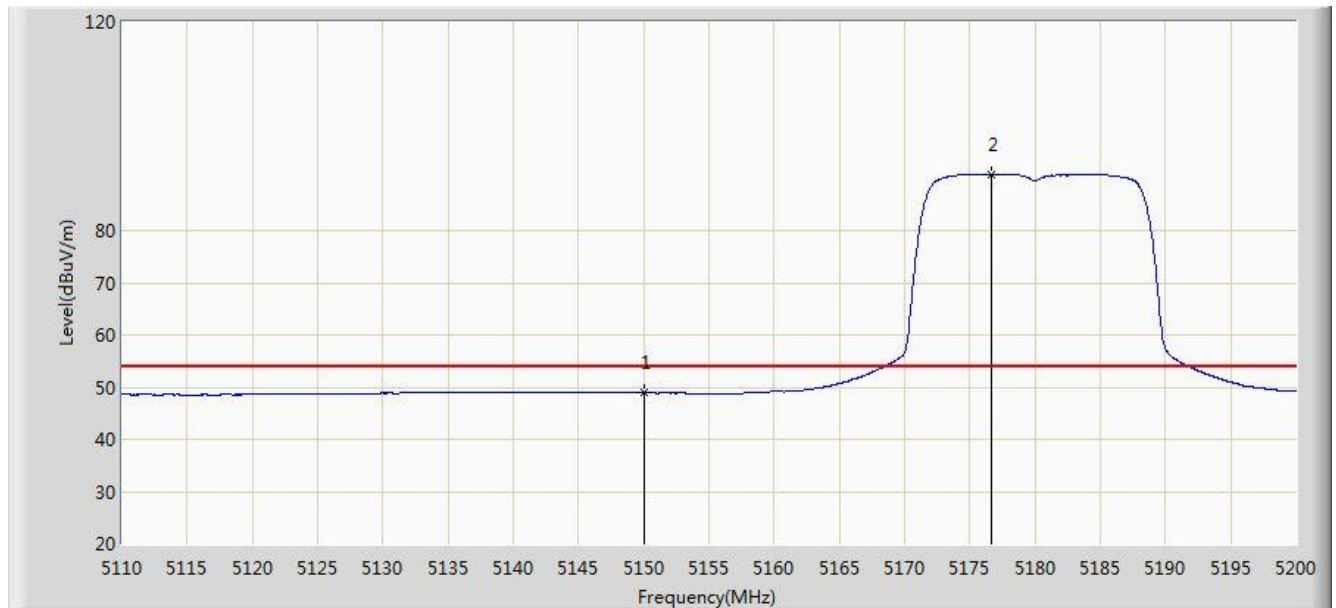


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.918	41.742	-5.082	54.000	7.176	AV
2		*	5176.600	90.756	83.679	N/A	N/A	7.076	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 1	

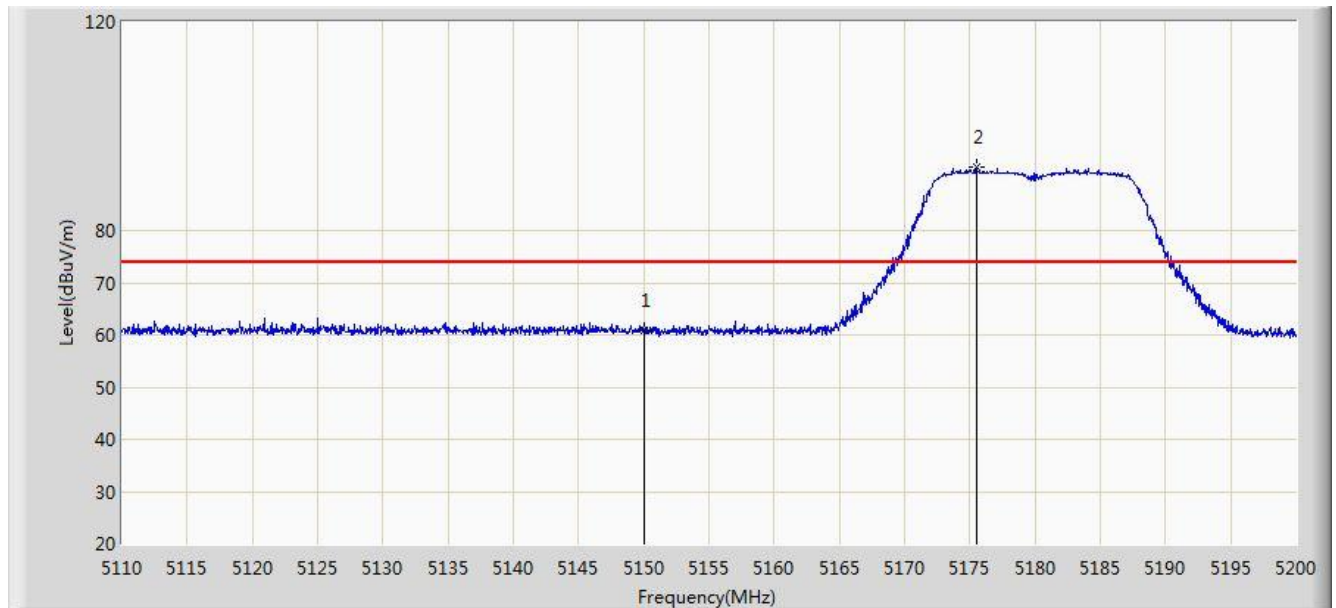


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	60.911	53.735	-13.089	74.000	7.176	PK
2		*	5175.475	92.251	85.167	N/A	N/A	7.084	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 1	

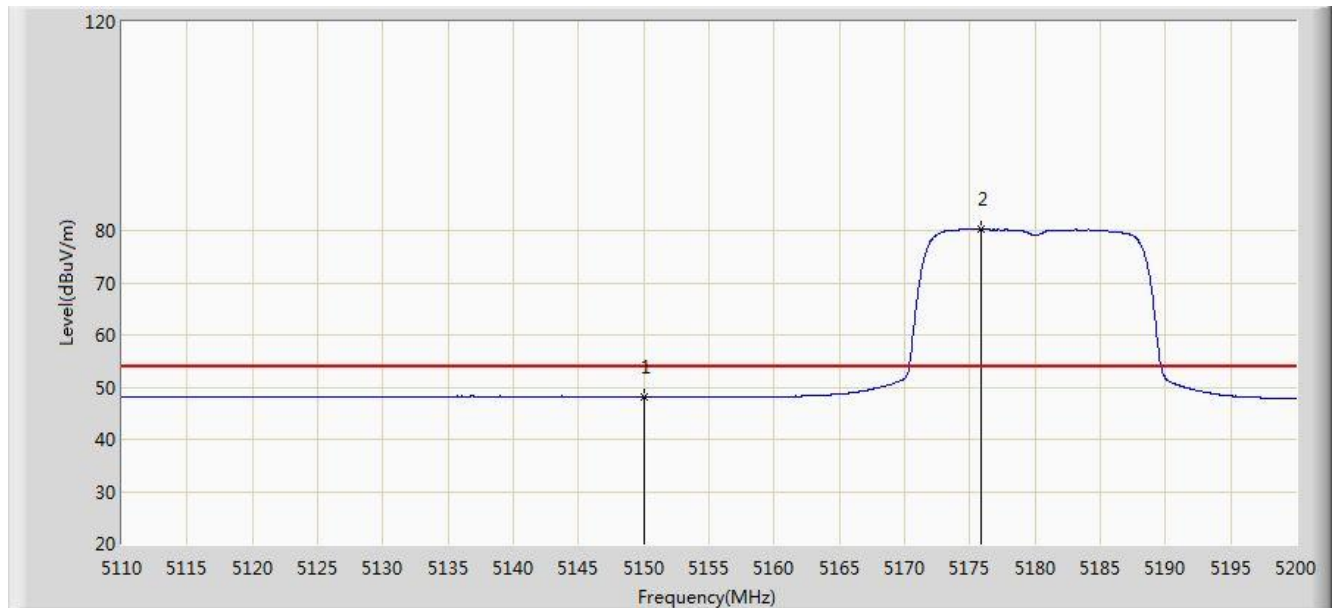


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.170	40.994	-5.830	54.000	7.176	AV
2		*	5175.880	80.242	73.161	N/A	N/A	7.081	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 1	

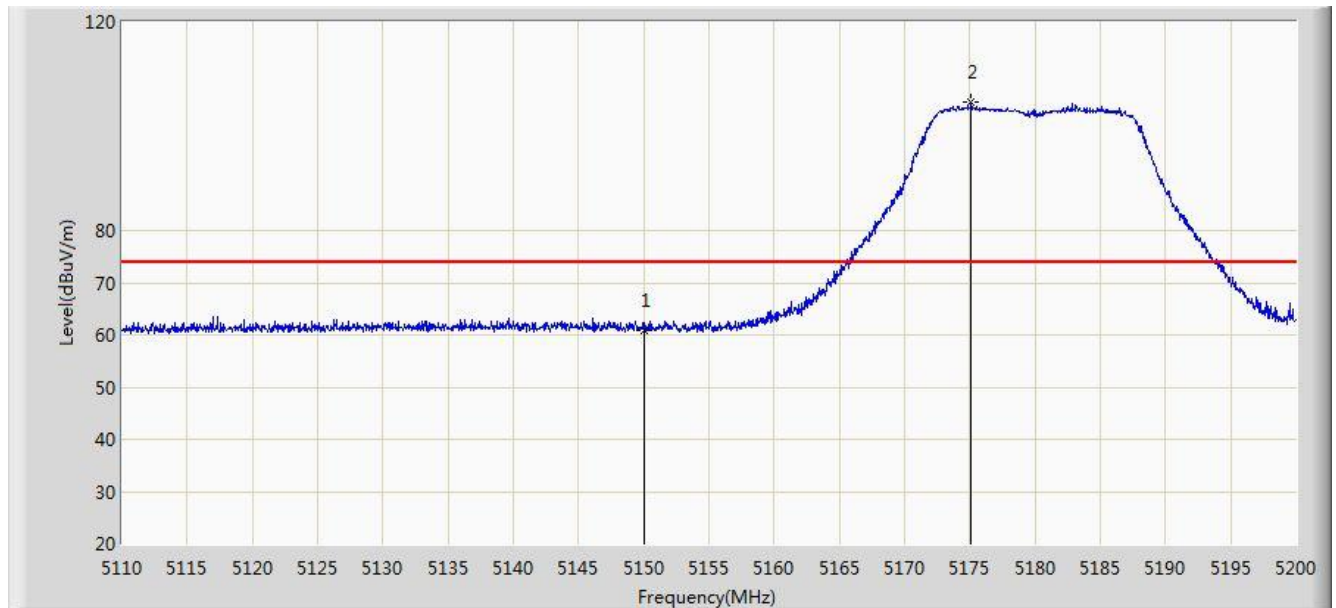


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	60.995	53.819	-13.005	74.000	7.176	PK
2		*	5175.115	104.671	97.585	N/A	N/A	7.086	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5180MHz Ant 1	

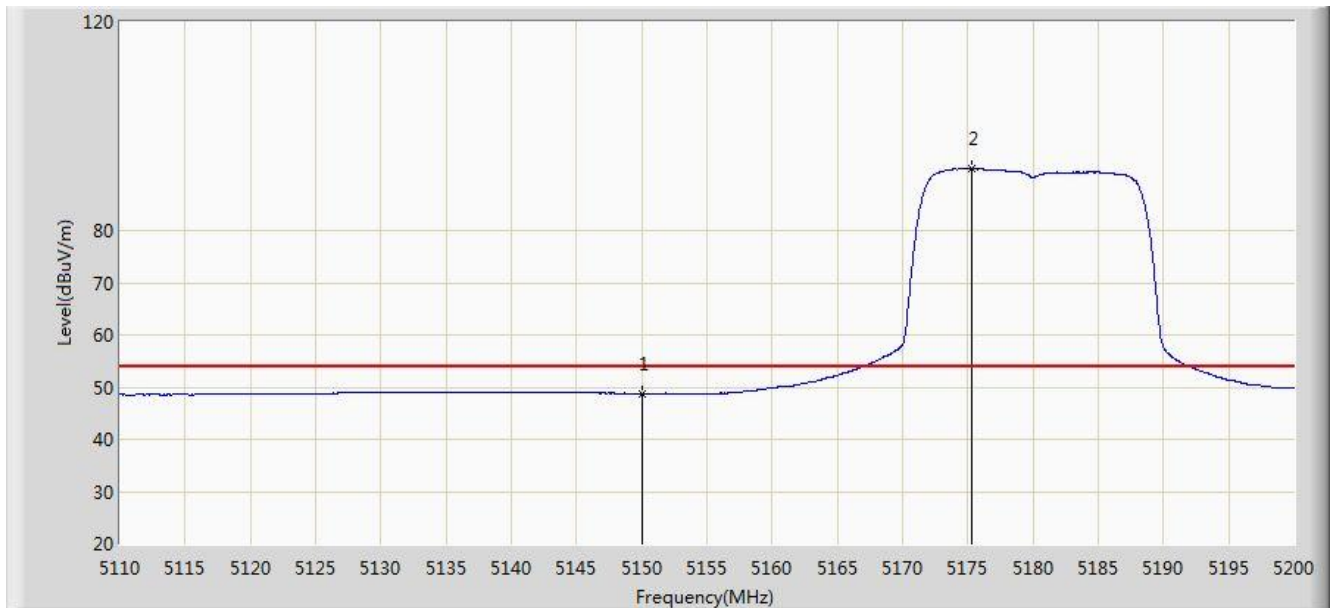


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.813	41.637	-5.187	54.000	7.176	AV
2		*	5175.340	91.799	84.714	N/A	N/A	7.085	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0	

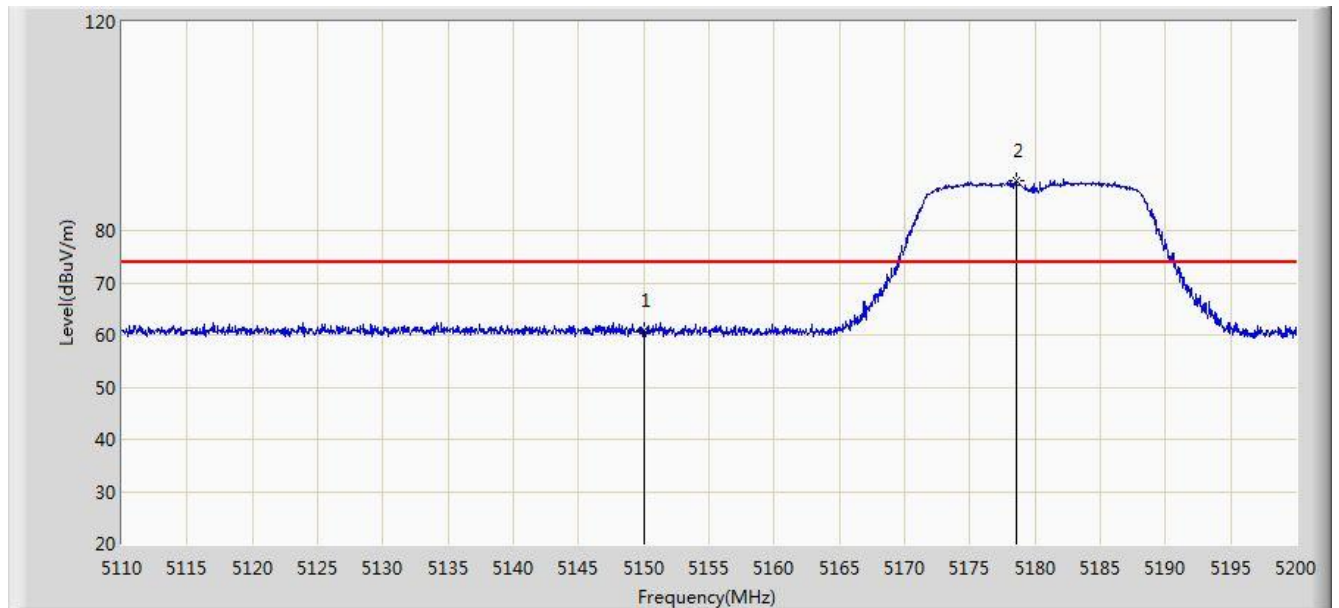


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	60.907	53.731	-13.093	74.000	7.176	PK
2		*	5178.580	89.608	82.544	N/A	N/A	7.064	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0	

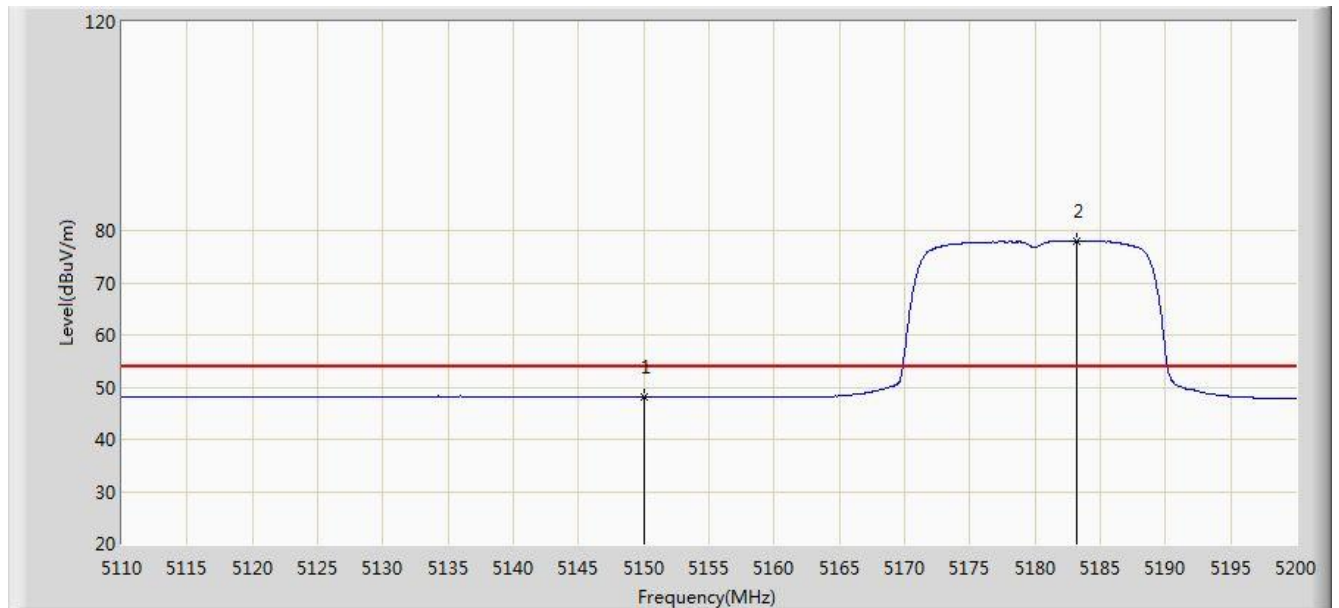


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.148	40.972	-5.852	54.000	7.176	AV
2		*	5183.170	78.049	71.015	N/A	N/A	7.034	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0	

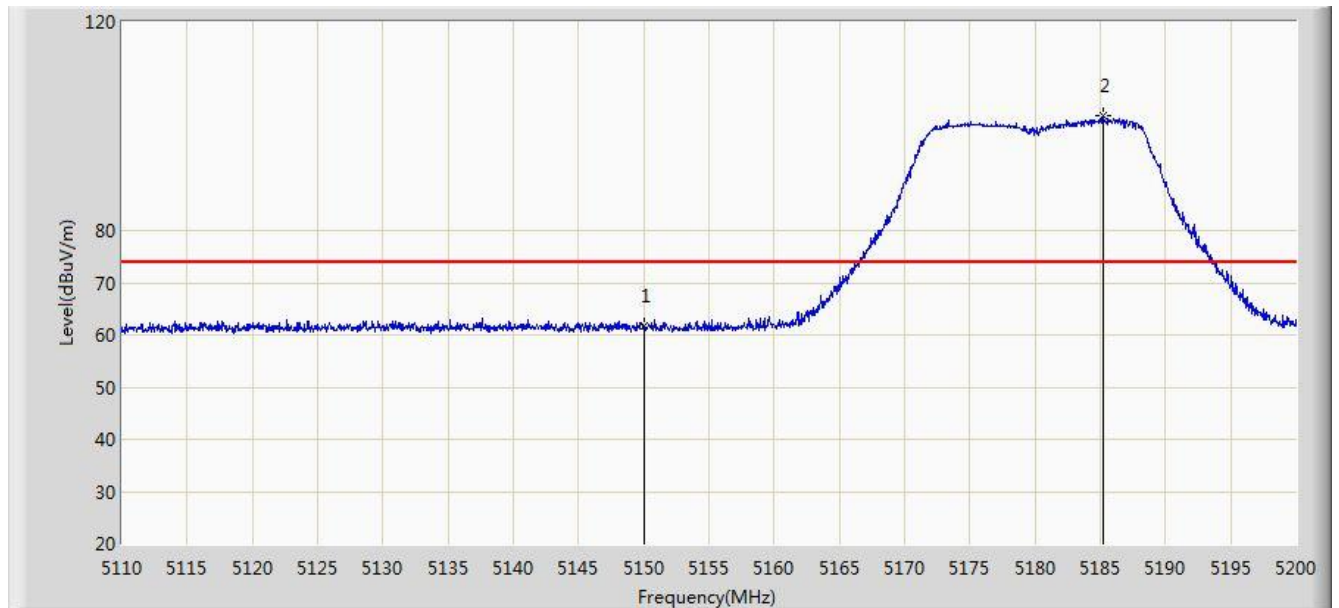


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.792	54.616	-12.208	74.000	7.176	PK
2		*	5185.240	101.907	94.886	N/A	N/A	7.021	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0	

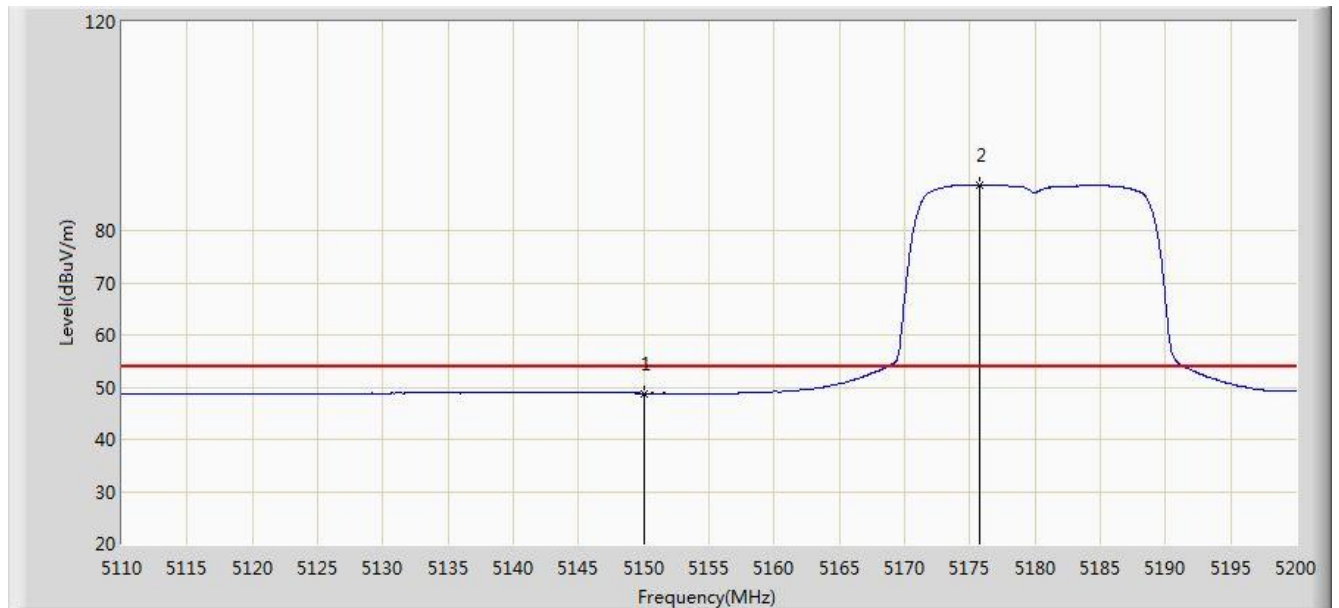


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.819	41.643	-5.181	54.000	7.176	AV
2		*	5175.745	88.667	81.585	N/A	N/A	7.082	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

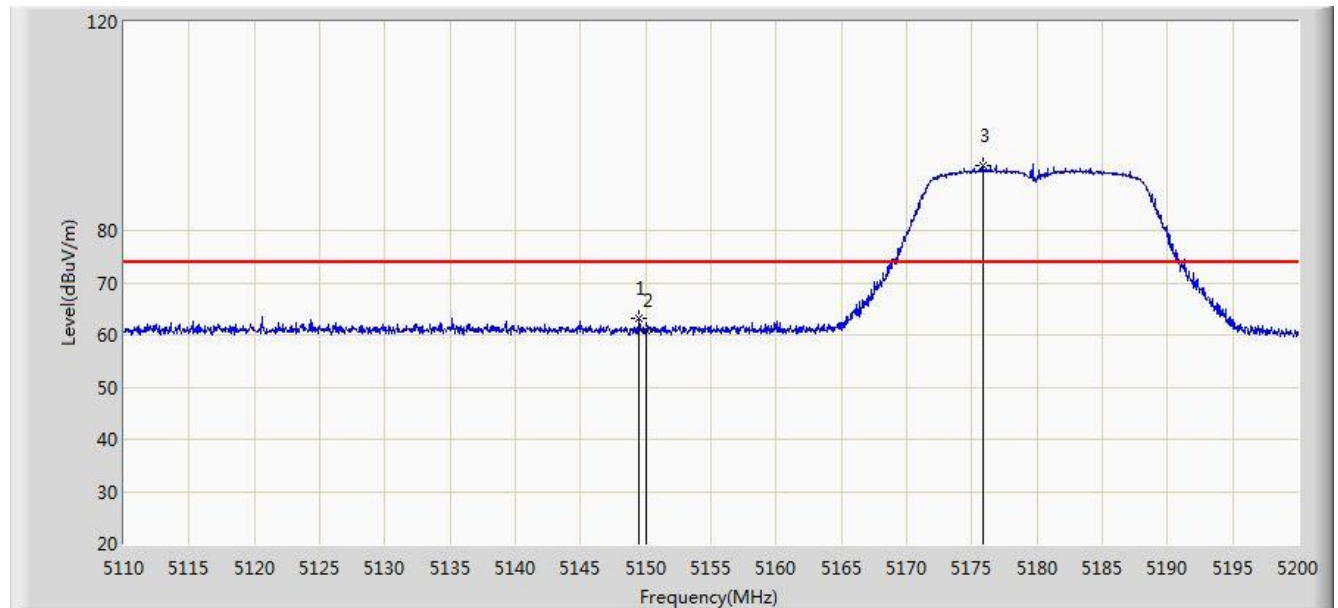


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.510	63.230	56.054	-10.770	74.000	7.177	PK
2			5150.000	60.847	53.671	-13.153	74.000	7.176	PK
3		*	5175.880	92.457	85.376	N/A	N/A	7.081	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

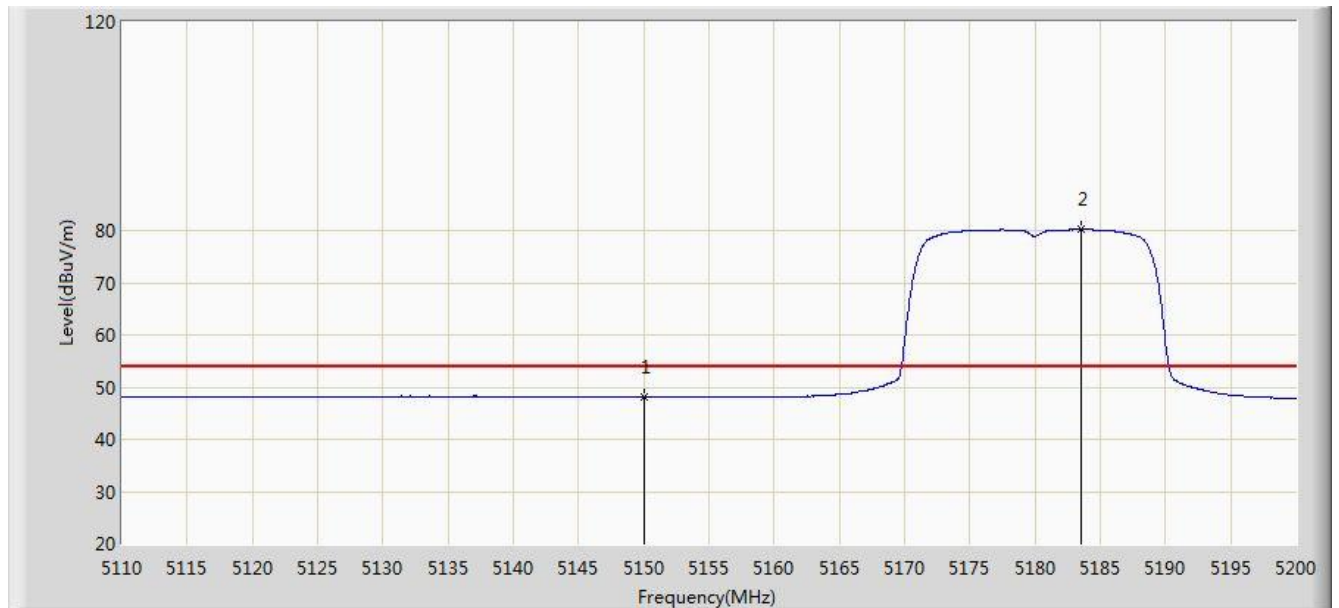


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.165	40.989	-5.835	54.000	7.176	AV
2		*	5183.575	80.206	73.174	N/A	N/A	7.032	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

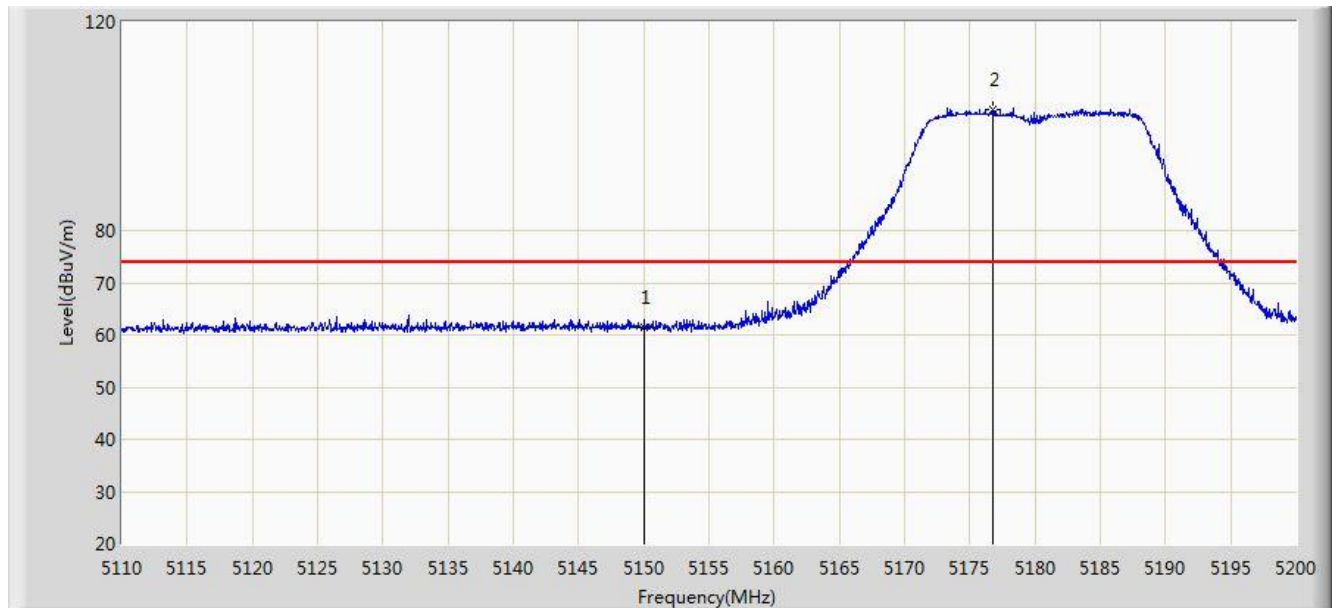


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.544	54.368	-12.456	74.000	7.176	PK
2		*	5176.735	103.166	96.090	N/A	N/A	7.075	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1	

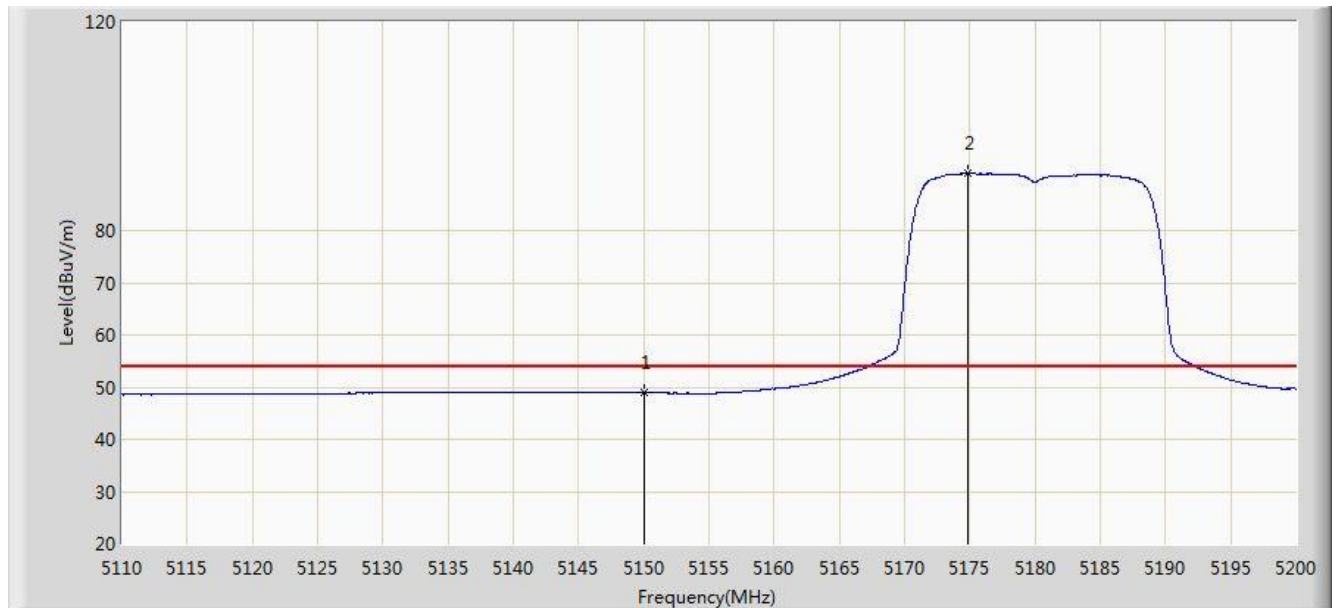


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.869	41.693	-5.131	54.000	7.176	AV
2		*	5174.890	90.965	83.877	N/A	N/A	7.088	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 20:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0 + 1	

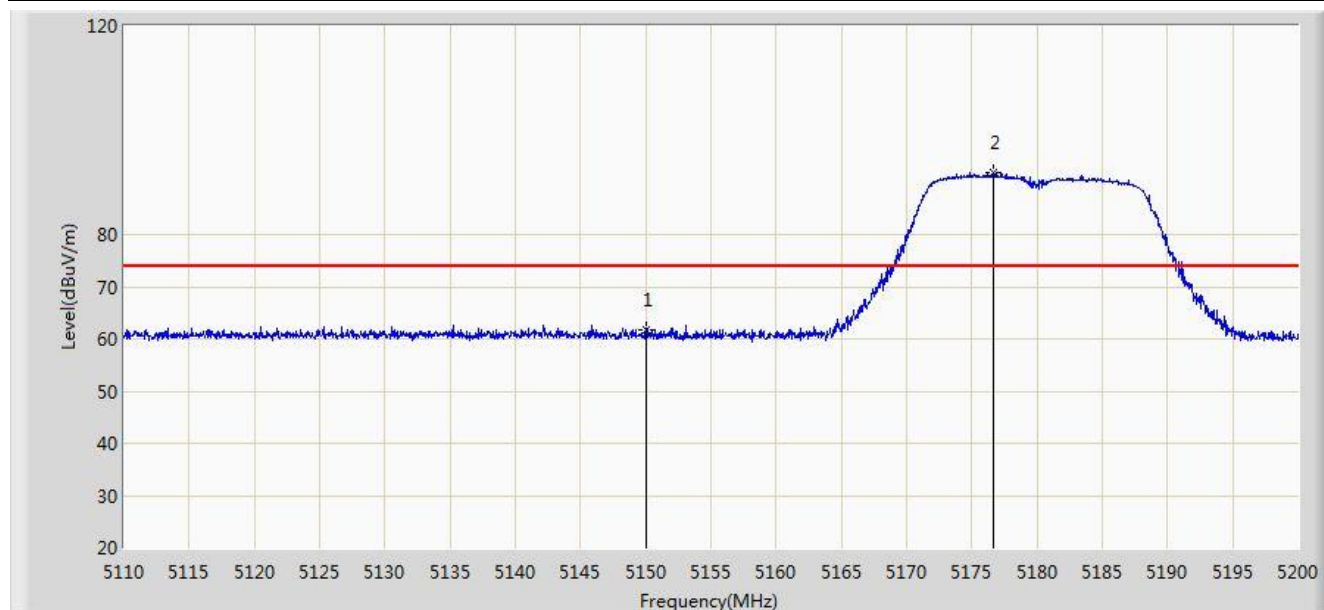


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.799	54.623	-12.201	74.000	7.176	PK
2		*	5176.690	91.853	84.777	N/A	N/A	7.075	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0 + 1	

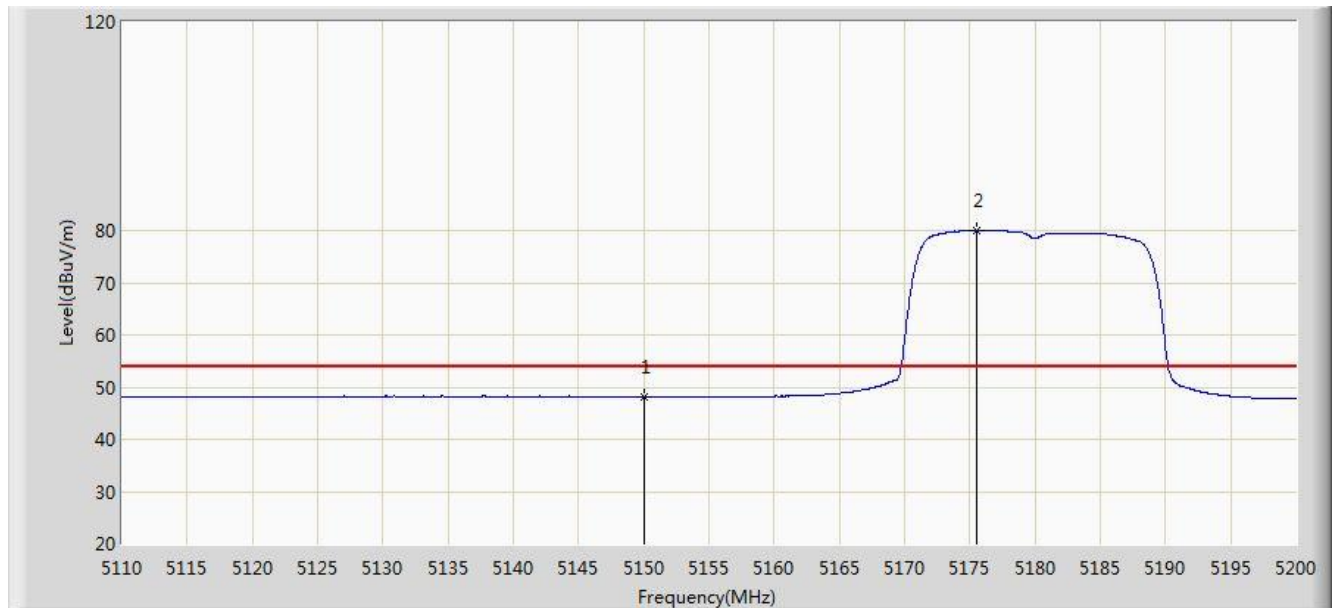


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.174	40.998	-5.826	54.000	7.176	AV
2		*	5175.475	79.883	72.799	N/A	N/A	7.084	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0 + 1	

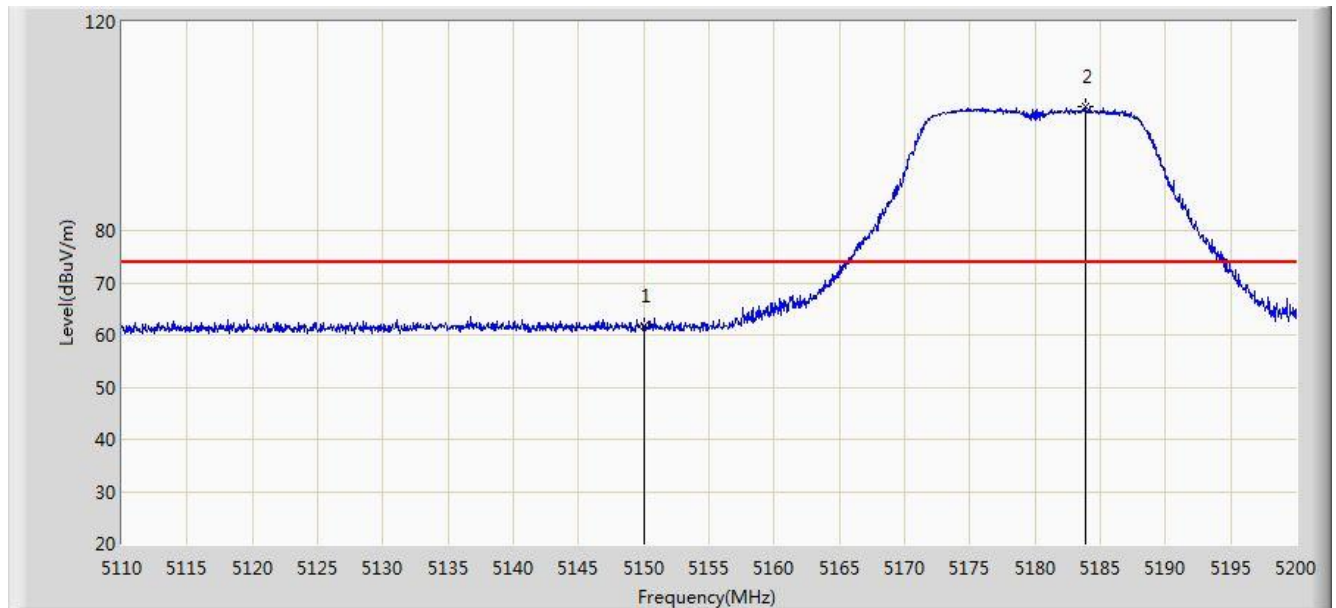


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.640	54.464	-12.360	74.000	7.176	PK
2		*	5183.845	103.723	96.693	N/A	N/A	7.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11n-HT20 at channel 5180MHz Ant 0 + 1	

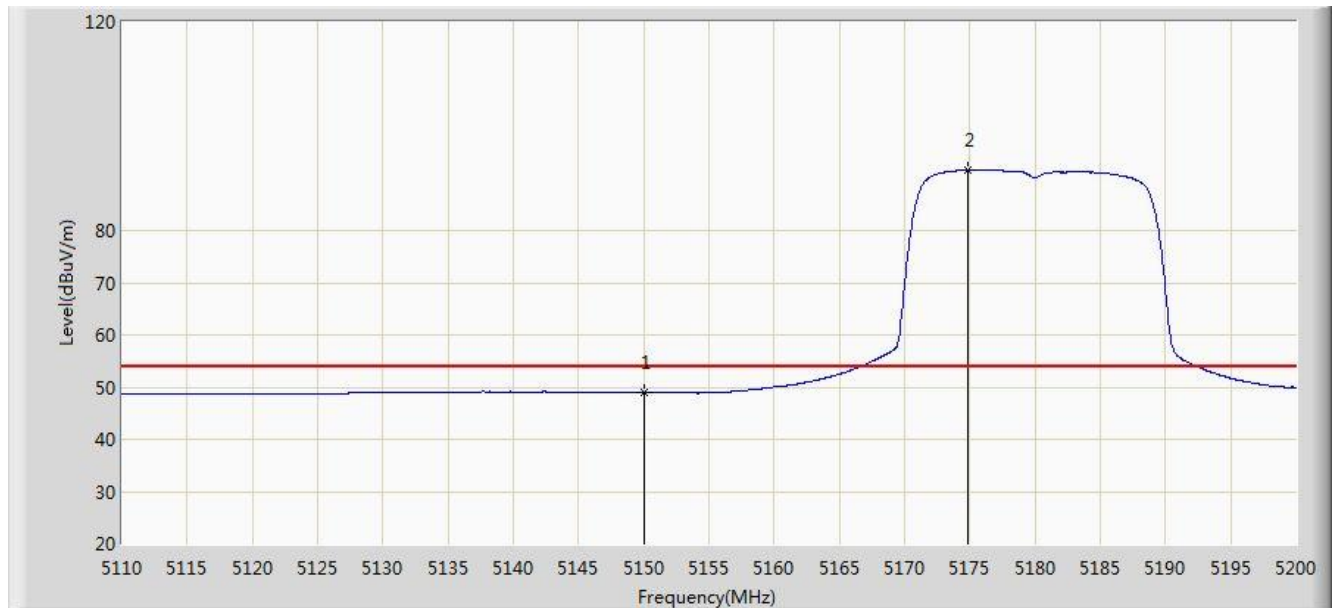


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.901	41.725	-5.099	54.000	7.176	AV
2		*	5174.890	91.638	84.550	N/A	N/A	7.088	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0	

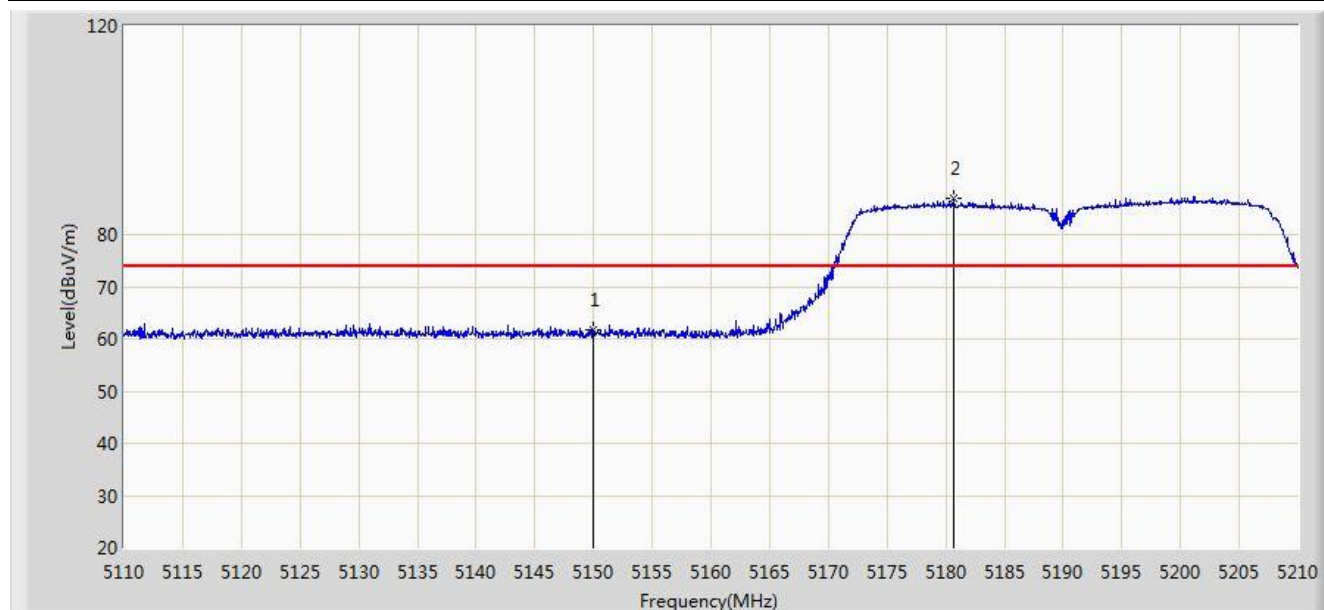


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.800	54.624	-12.200	74.000	7.176	PK
2		*	5180.650	87.001	79.951	N/A	N/A	7.051	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0	

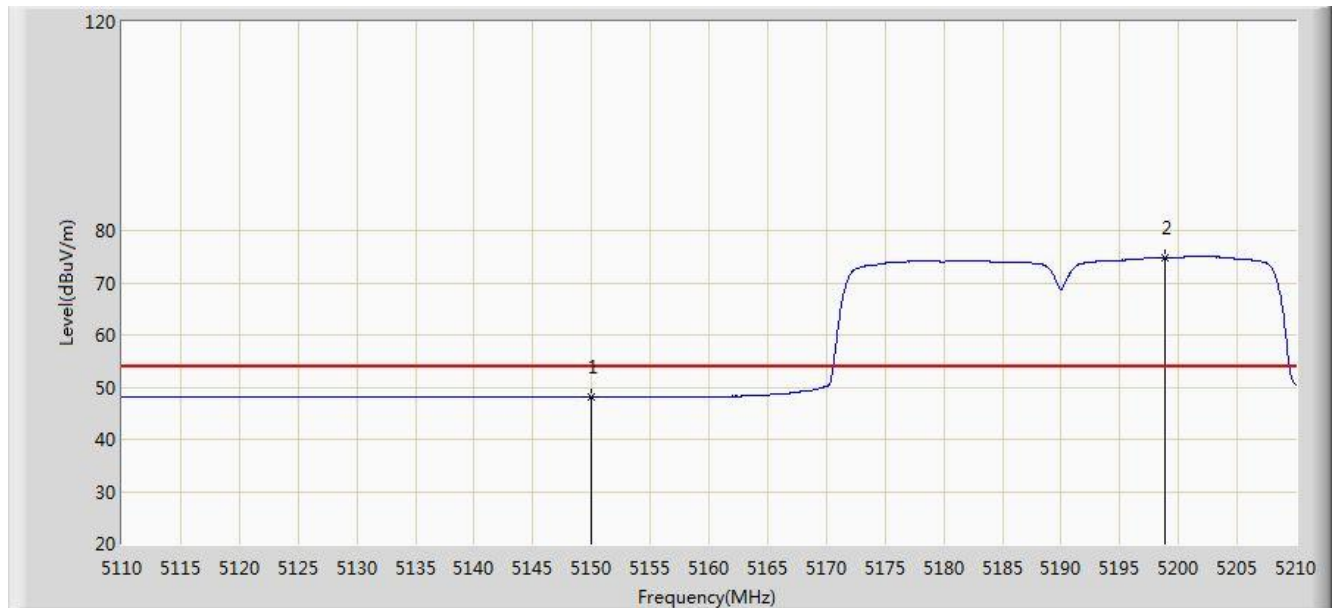


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.151	40.975	-5.849	54.000	7.176	AV
2		*	5198.900	74.877	67.938	N/A	N/A	6.939	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0	

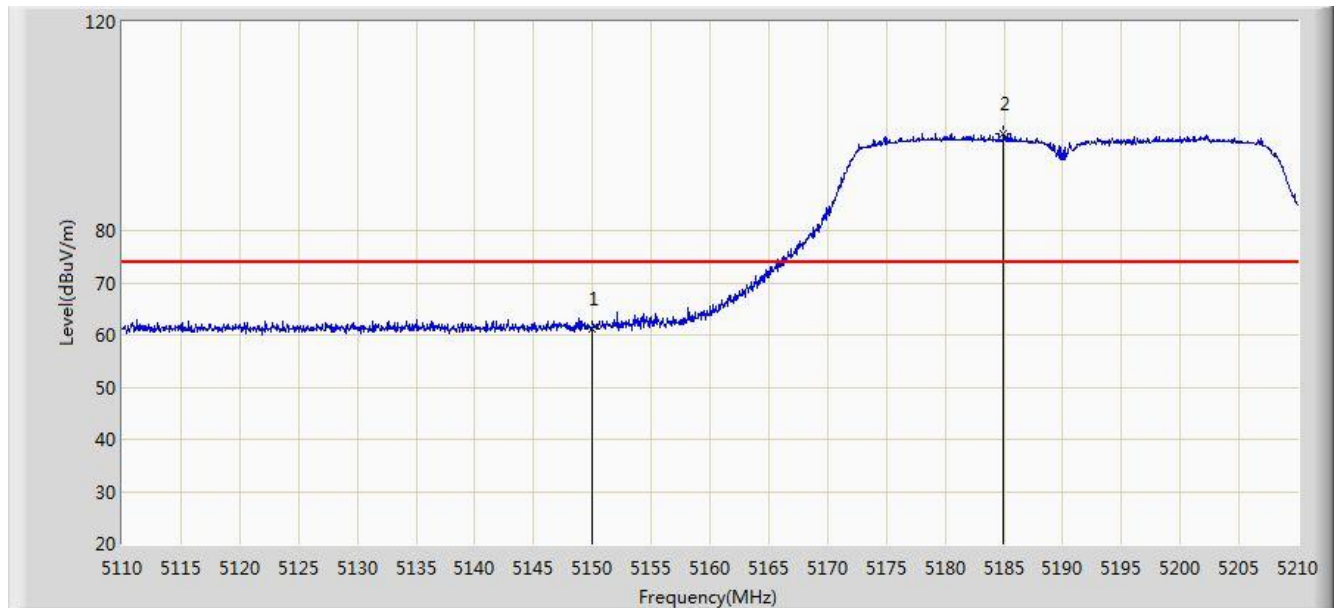


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	61.149	53.973	-12.851	74.000	7.176	PK
2		*	5184.950	98.591	91.568	N/A	N/A	7.023	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0	

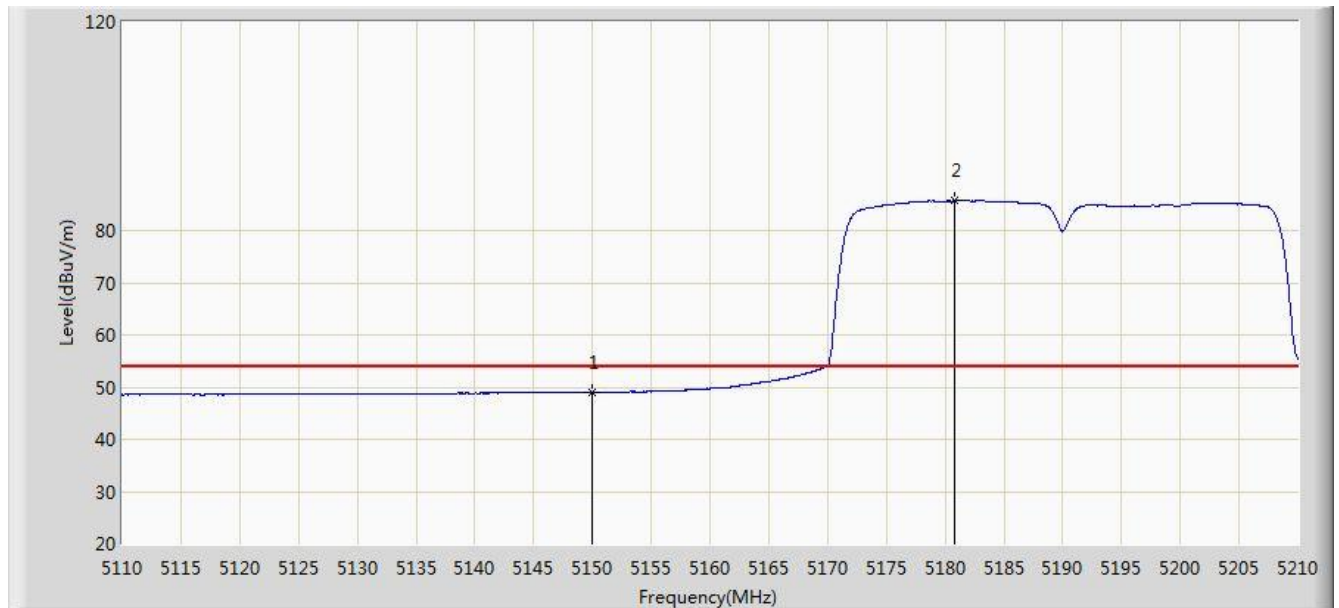


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.965	41.789	-5.035	54.000	7.176	AV
2		*	5180.850	85.698	78.649	N/A	N/A	7.049	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

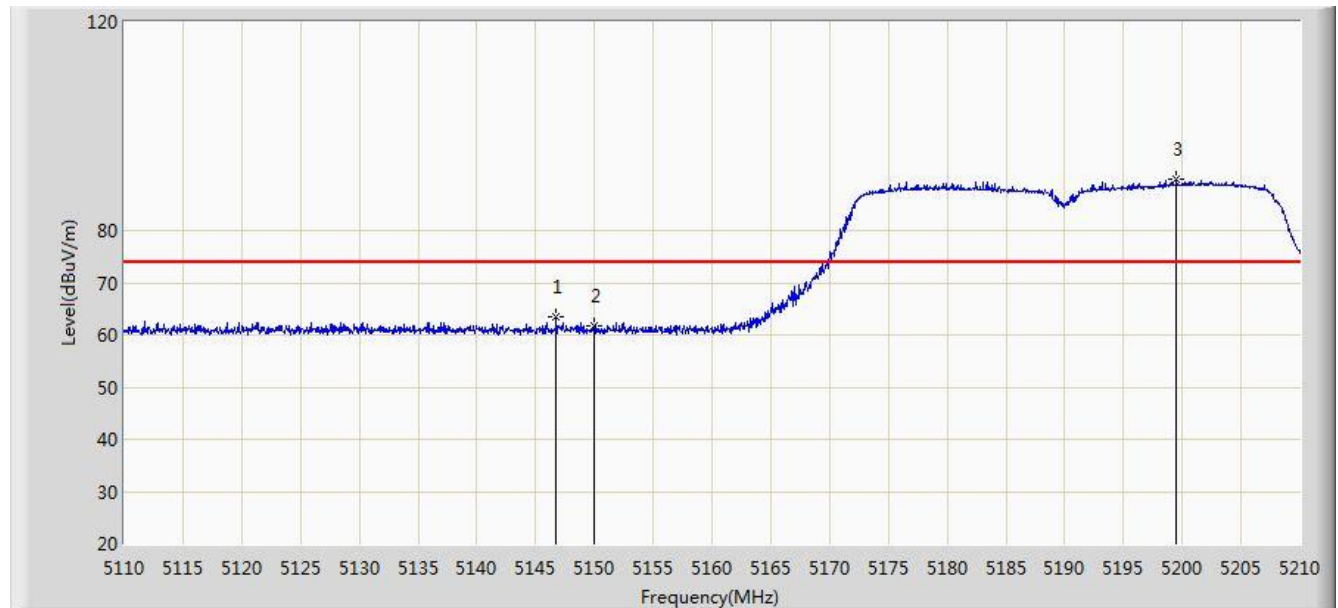


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.750	63.587	56.410	-10.413	74.000	7.178	PK
2			5150.000	61.694	54.518	-12.306	74.000	7.176	PK
3		*	5199.500	89.723	82.787	N/A	N/A	6.936	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

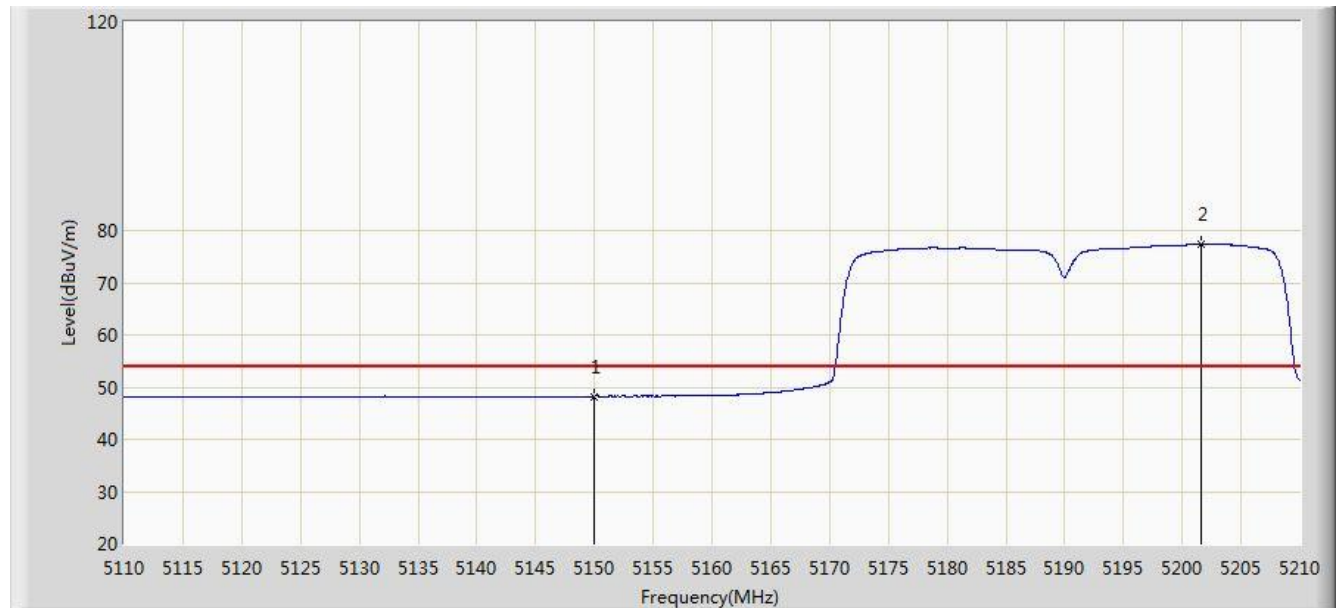


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.231	41.055	-5.769	54.000	7.176	AV
2		*	5201.550	77.480	70.555	N/A	N/A	6.925	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

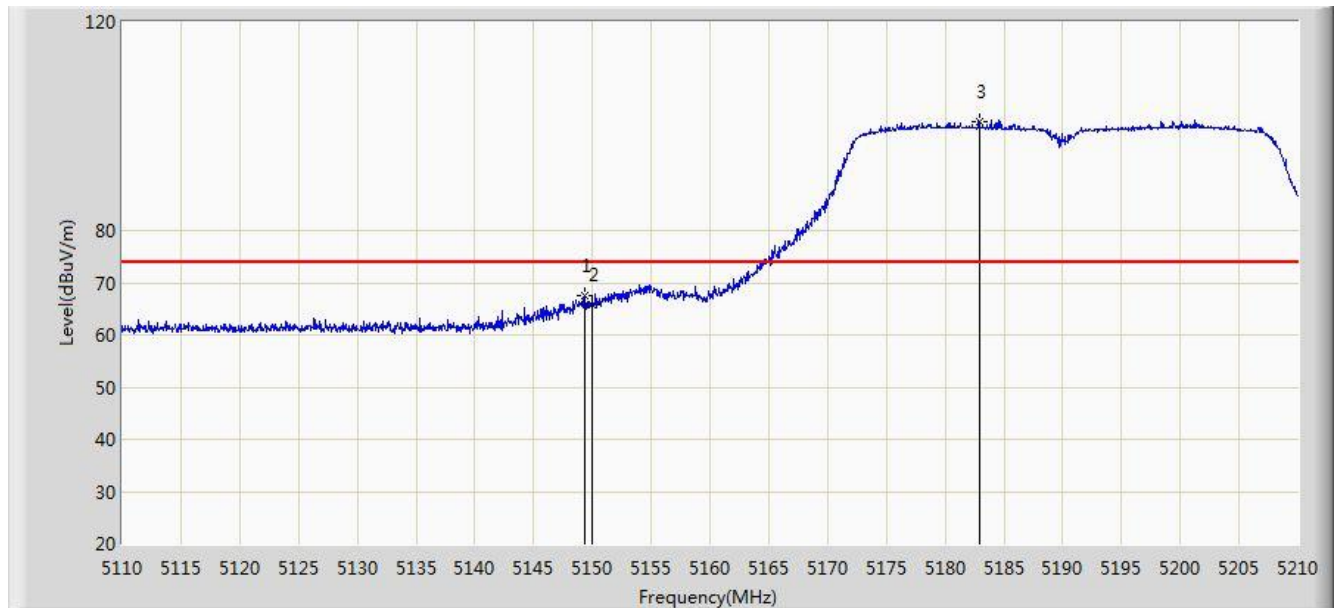


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.350	67.402	60.225	-6.598	74.000	7.176	PK
2			5150.000	65.897	58.721	-8.103	74.000	7.176	PK
3		*	5182.900	100.908	93.872	N/A	N/A	7.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1	

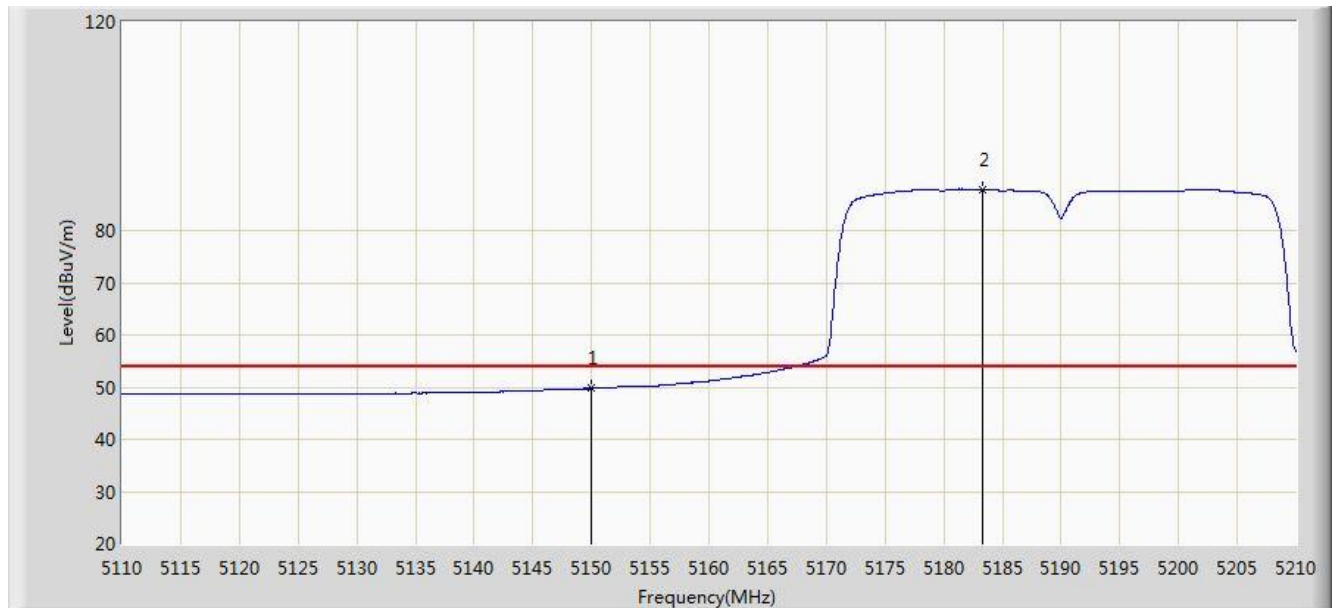


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.753	42.577	-4.247	54.000	7.176	AV
2		*	5183.350	87.872	80.839	N/A	N/A	7.033	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0 + 1	

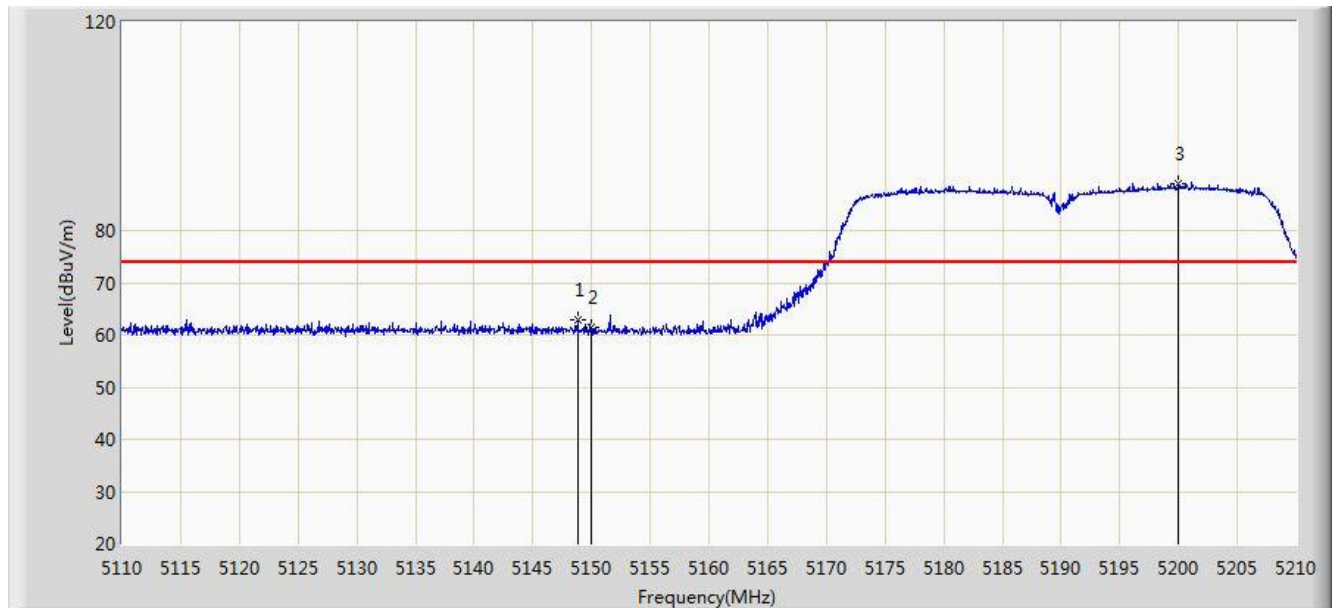


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.800	63.034	55.857	-10.966	74.000	7.177	PK
2			5150.000	61.450	54.274	-12.550	74.000	7.176	PK
3		*	5200.000	89.044	82.111	N/A	N/A	6.934	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0 + 1	

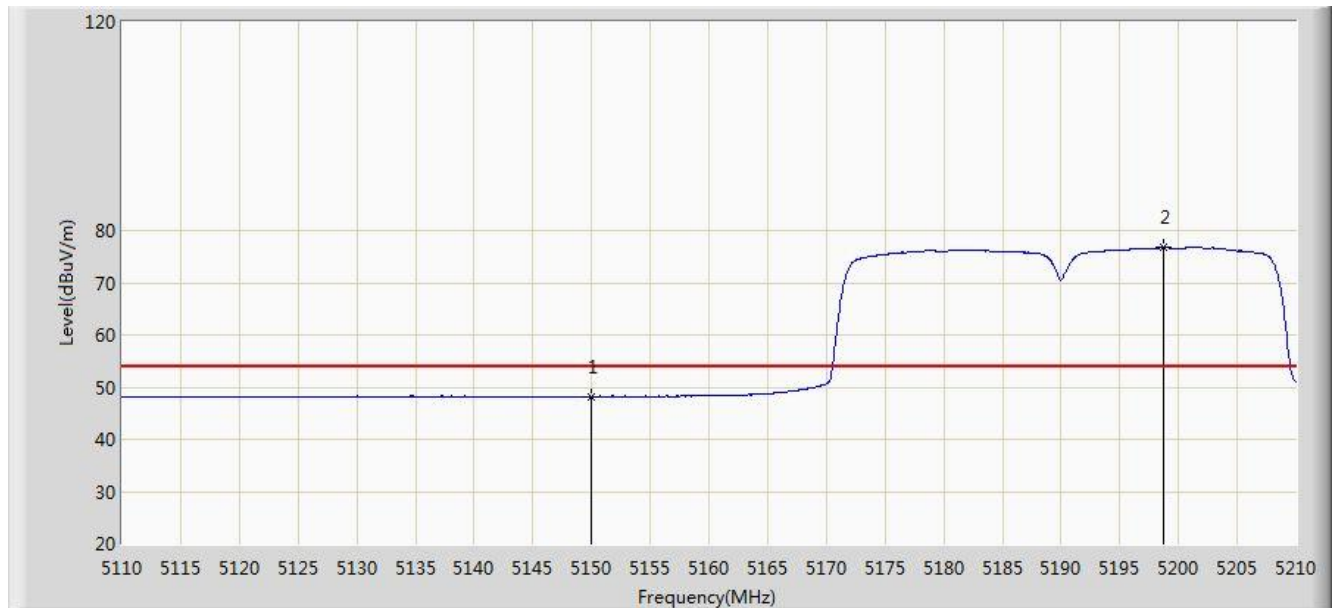


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.240	41.064	-5.760	54.000	7.176	AV
2		*	5198.750	76.734	69.794	N/A	N/A	6.941	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0 + 1	

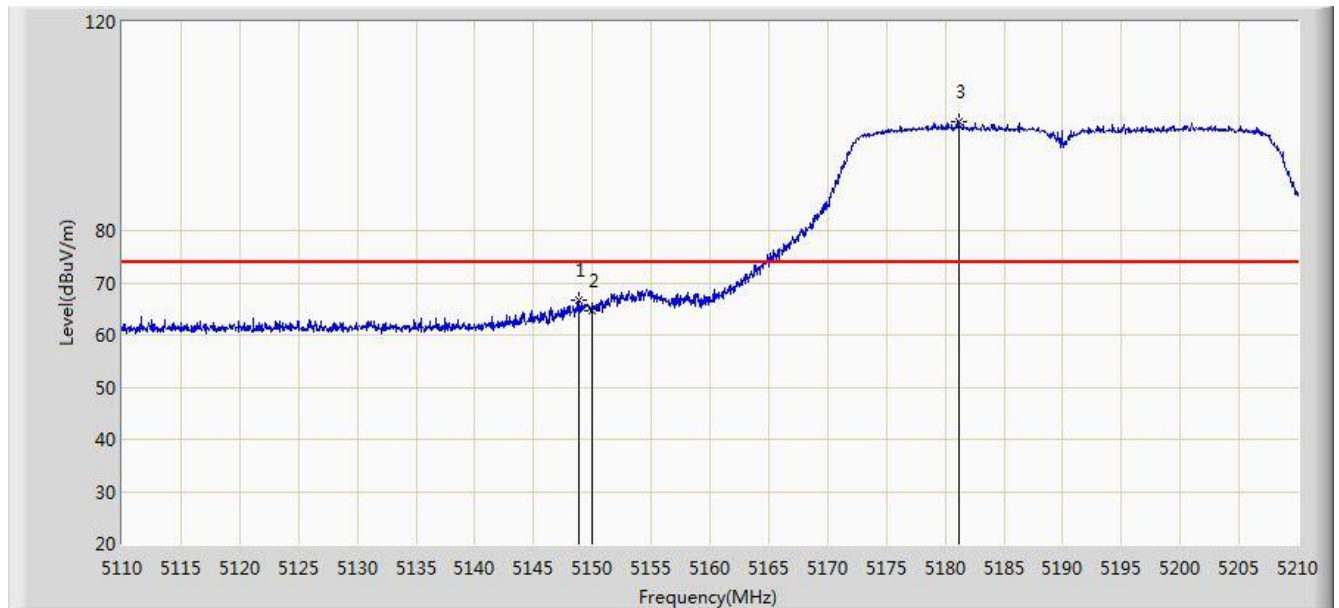


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.800	66.682	59.505	-7.318	74.000	7.177	PK
2			5150.000	64.769	57.593	-9.231	74.000	7.176	PK
3		*	5181.200	100.732	93.686	N/A	N/A	7.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT40 at channel 5190MHz Ant 0 + 1	

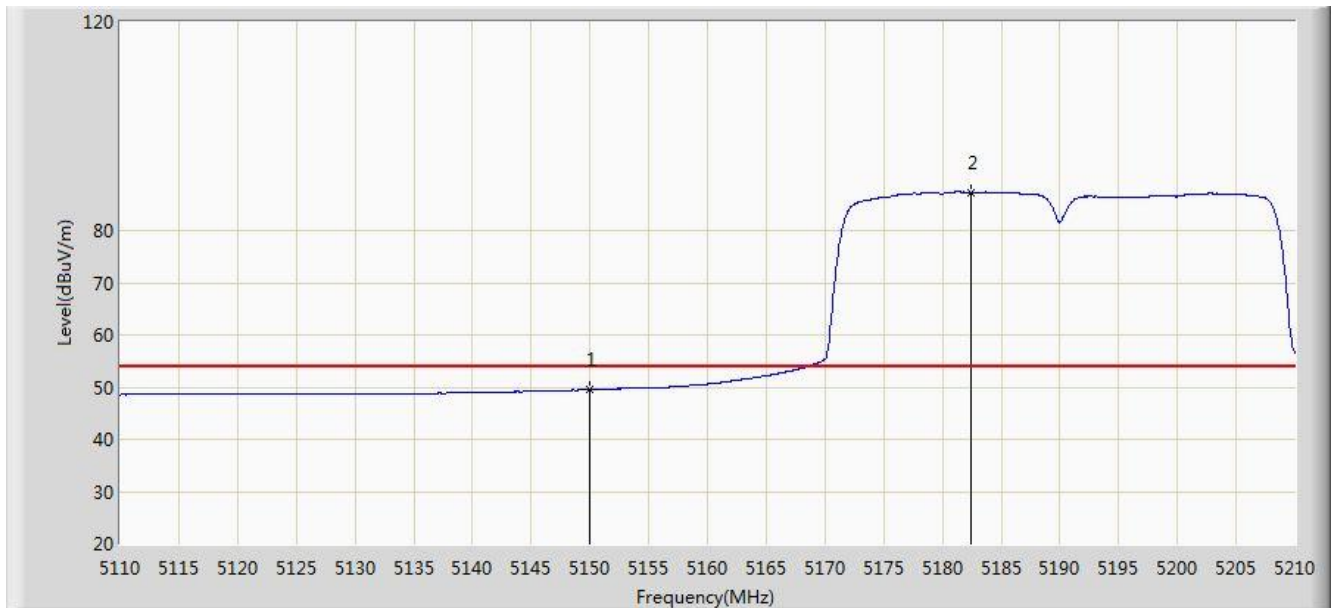


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.517	42.341	-4.483	54.000	7.176	AV
2		*	5182.400	87.324	80.285	N/A	N/A	7.039	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:20
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5745MHz Ant 0	

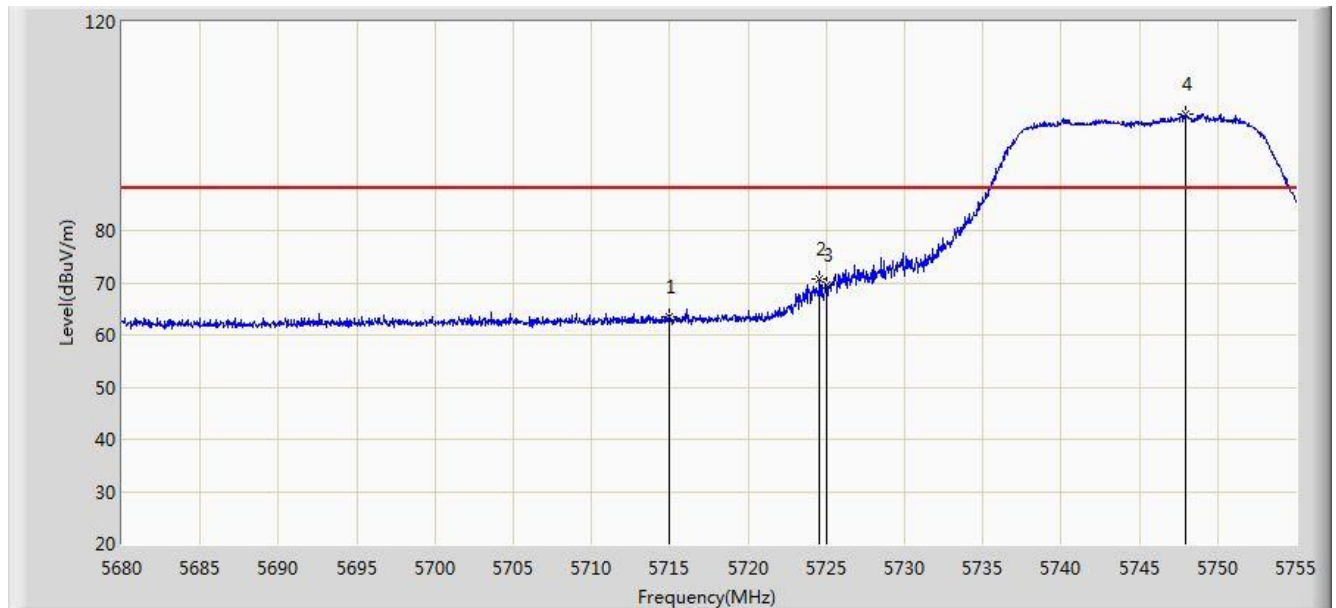


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.403	55.631	-24.797	88.200	7.772	PK
2			5724.587	70.655	62.865	-27.545	98.200	7.790	PK
3			5725.000	69.580	61.789	-28.620	98.200	7.791	PK
4		*	5747.950	102.326	94.487	N/A	N/A	7.839	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:24
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5745MHz Ant 0	

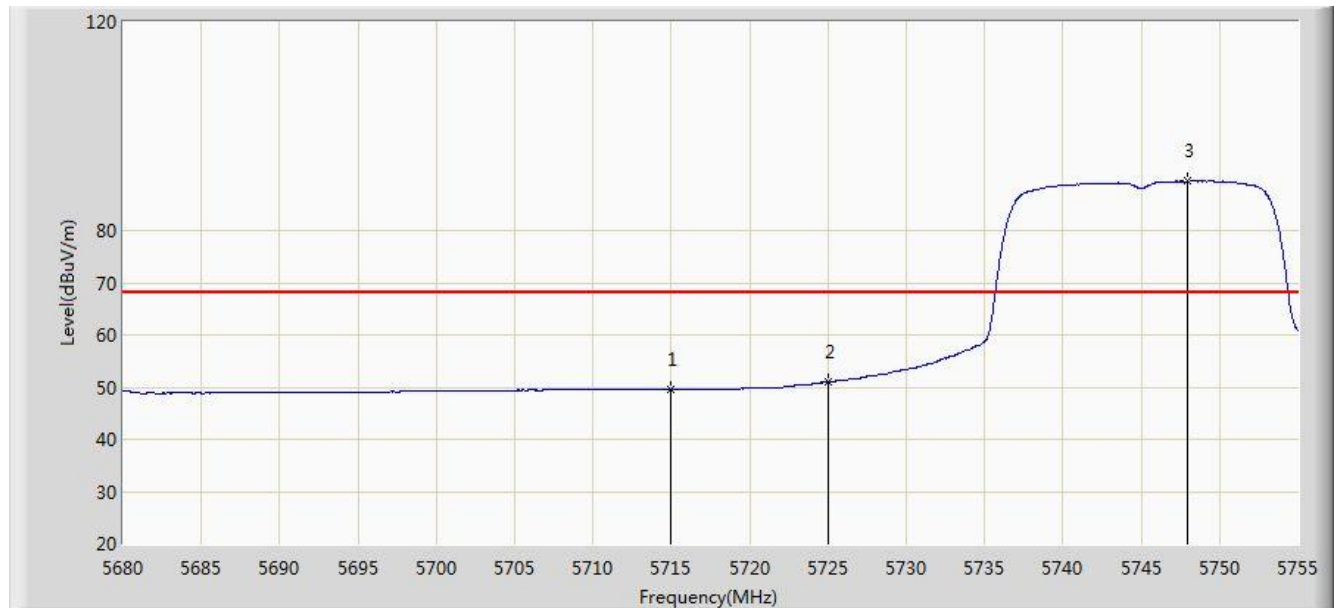


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	49.559	41.787	-18.641	68.200	7.772	AV
2			5725.000	50.949	43.158	-27.251	78.200	7.791	AV
3		*	5747.950	89.428	81.589	N/A	N/A	7.839	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:25
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5745MHz Ant 0	

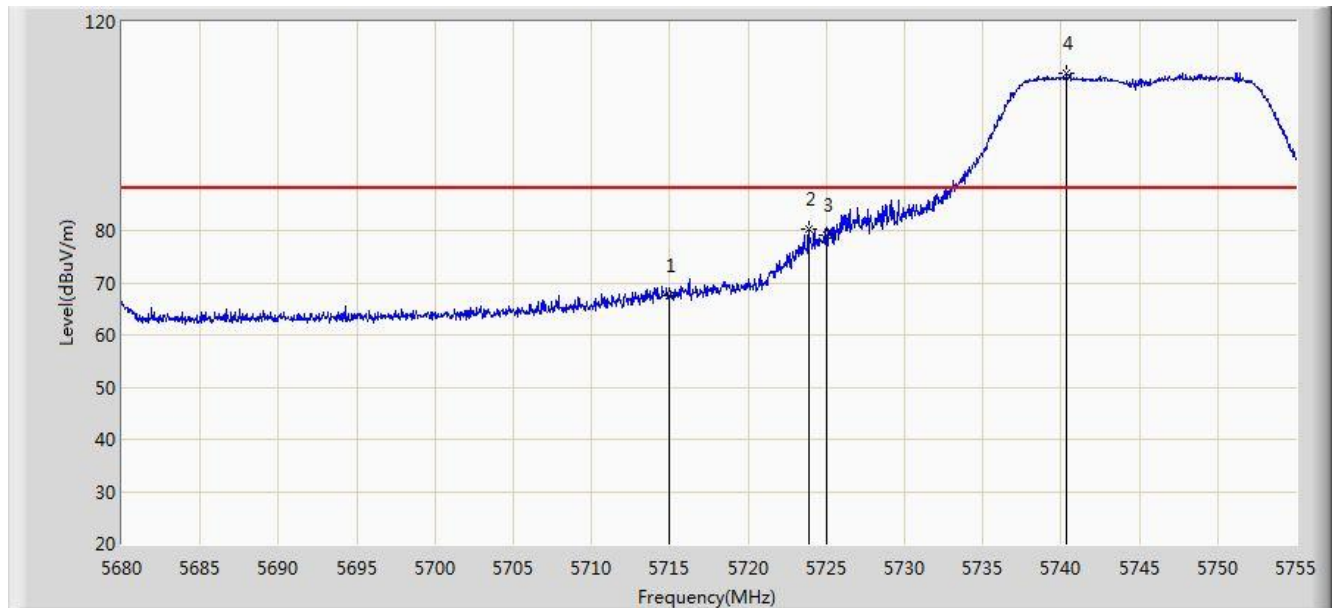


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	67.583	59.811	-20.617	88.200	7.772	PK
2			5723.875	80.203	72.414	-17.997	98.200	7.789	PK
3			5725.000	79.027	71.236	-19.173	98.200	7.791	PK
4		*	5740.375	110.135	102.312	N/A	N/A	7.823	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:26
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5745MHz Ant 0	

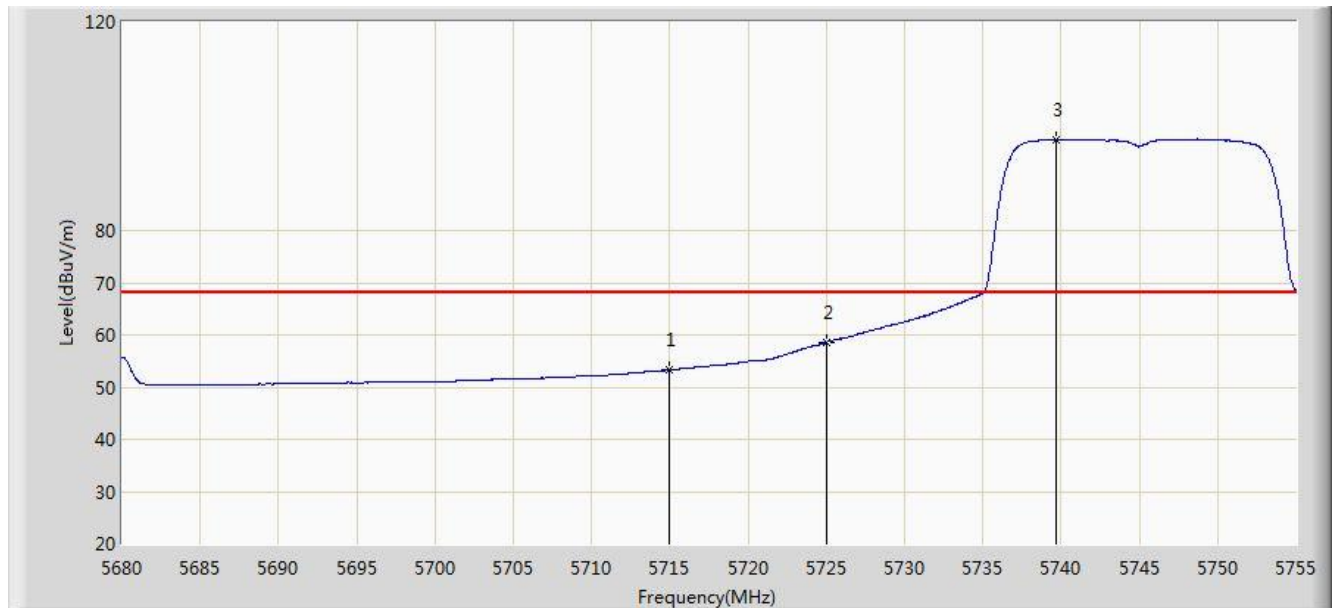


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.246	45.474	-14.954	68.200	7.772	AV
2			5725.000	58.595	50.804	-19.605	78.200	7.791	AV
3		*	5739.663	97.501	89.679	N/A	N/A	7.822	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:36
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5825MHz Ant 0	

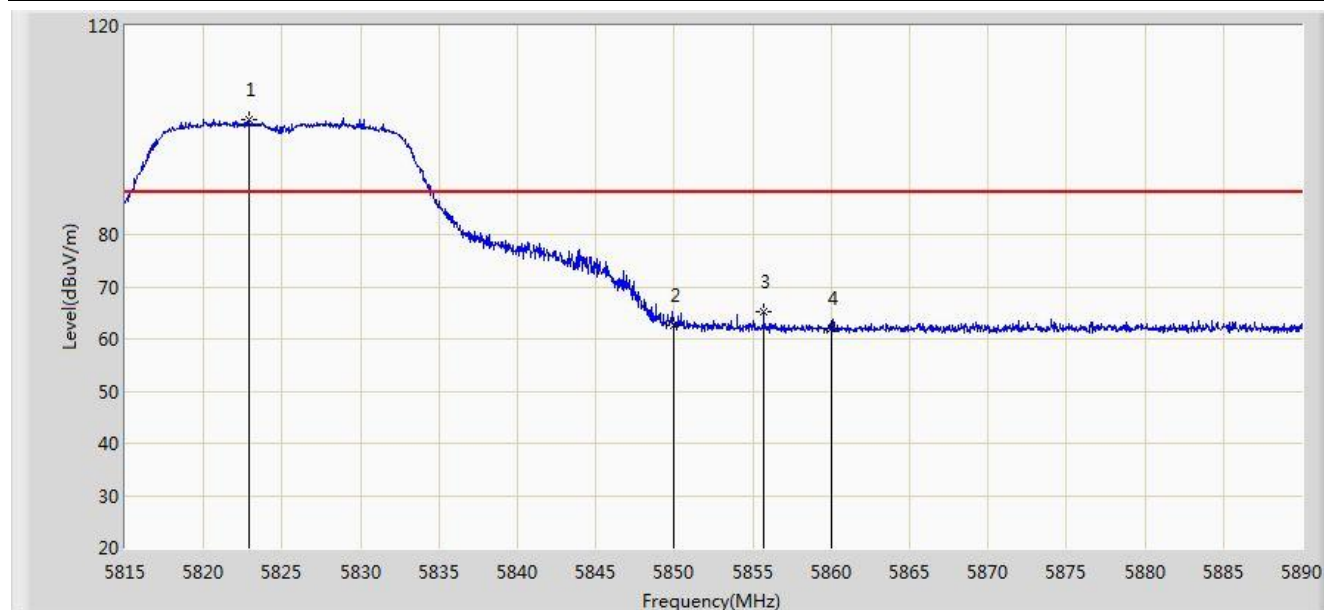


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.875	102.016	93.969	N/A	N/A	8.048	PK
2			5850.000	62.665	54.531	-35.535	98.200	8.134	PK
3			5855.687	65.138	56.973	-33.062	98.200	8.166	PK
4			5860.000	61.931	53.742	-26.269	88.200	8.189	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:39
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5825MHz Ant 0	

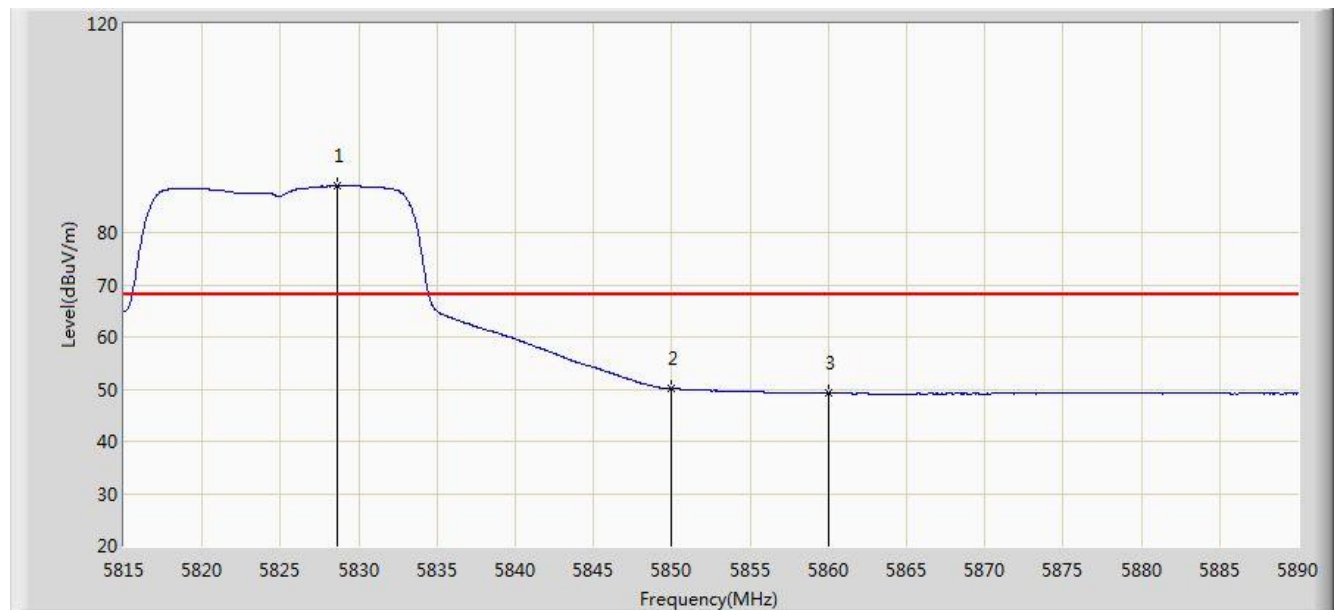


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.612	88.945	80.888	N/A	N/A	8.057	AV
2			5850.000	50.064	41.930	-28.136	78.200	8.134	AV
3			5860.000	49.229	41.040	-18.971	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:40
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5825MHz Ant 0	

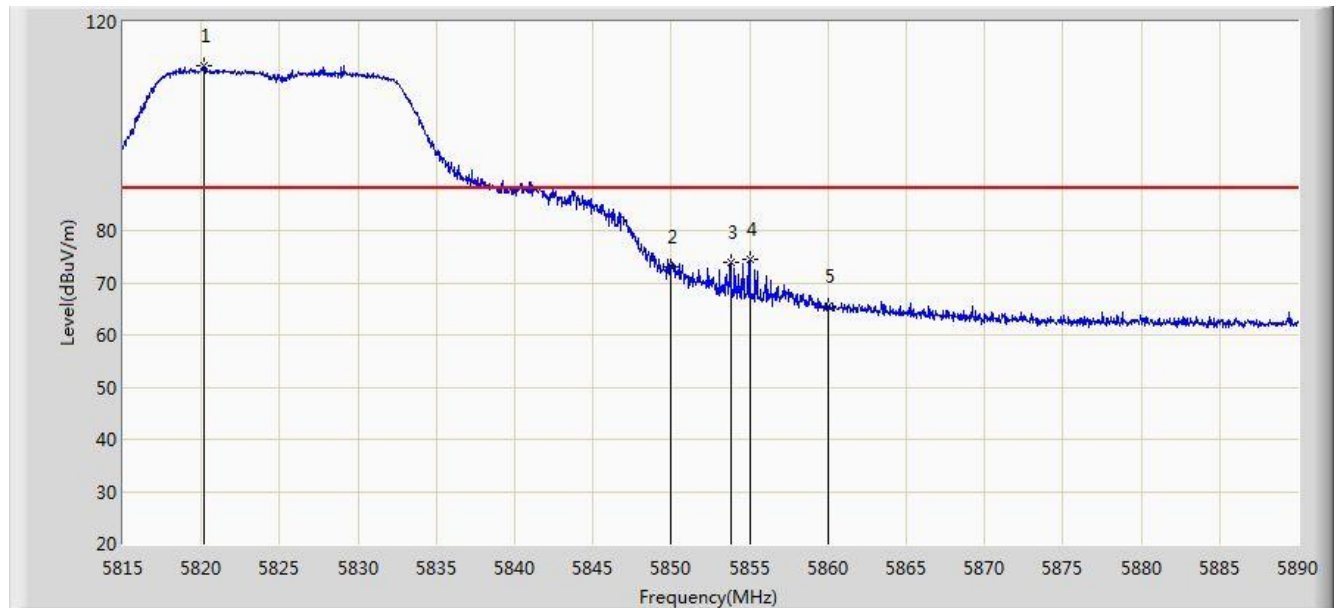


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.175	111.595	103.552	N/A	N/A	8.044	PK
2			5850.000	73.176	65.042	-25.024	98.200	8.134	PK
3			5853.775	73.897	65.742	-24.303	98.200	8.154	PK
4			5855.013	74.402	66.240	-23.798	98.200	8.161	PK
5			5860.000	65.594	57.405	-22.606	88.200	8.189	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/27 - 21:41
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11a at channel 5825MHz Ant 0	

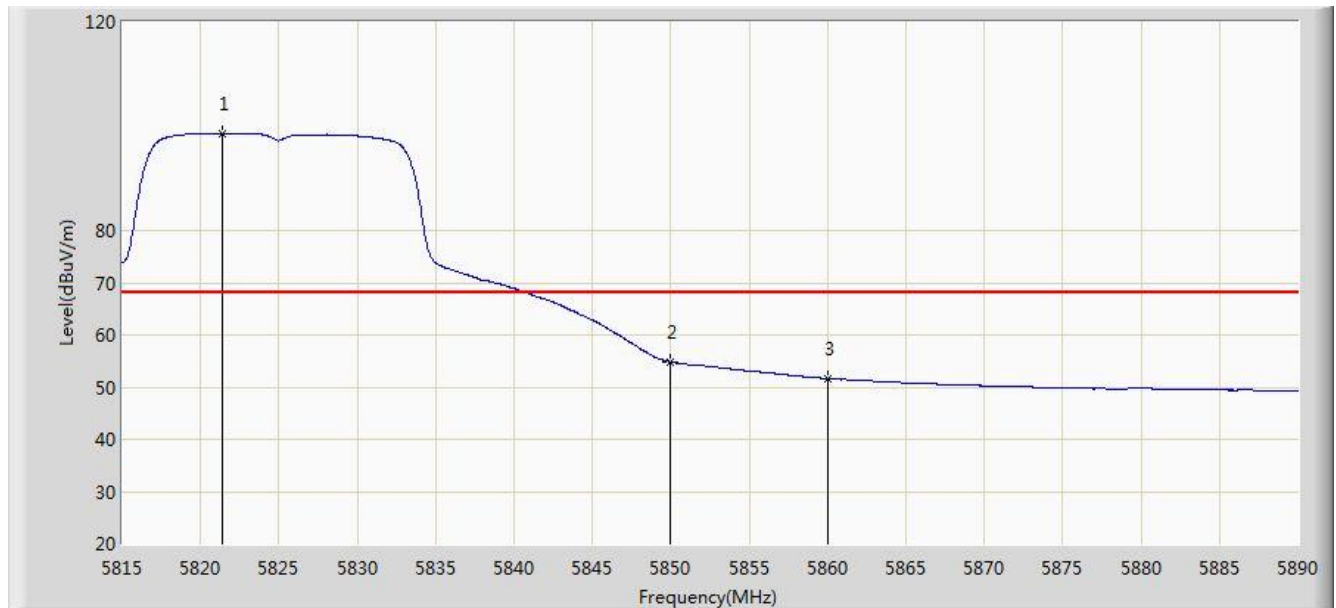

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.375	98.649	90.604	N/A	N/A	8.045	AV
2			5850.000	54.861	46.727	-23.339	78.200	8.134	AV
3			5860.000	51.661	43.472	-16.539	68.200	8.189	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre_Amplifier Gain (dB).