

# FCC REPORT

## (UNII)

**Applicant:** Autel Intelligent Technology Corp., Ltd.  
**Address of Applicant:** 7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China

### Equipment Under Test (EUT)

Product Name: ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM

Model No.: MaxiSys MS909, MaxiSys MS919

Trade mark: AUTEL

**FCC ID:** WQ8MAXISYSMS909

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407

**Date of sample receipt:** 28 May, 2019

**Date of Test:** 29 May, to 21 Nov., 2019

**Date of report issued:** 21 Nov., 2019

**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	21 Nov., 2019	Original

**Tested by:**

*YT Yang*

**Date:**

21 Nov., 2019

\_\_\_\_\_  
**Test Engineer**

**Reviewed by:**

*Winner Zhang*

**Date:**

21 Nov., 2019

\_\_\_\_\_  
**Project Engineer**

### 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION.....</b>	<b>2</b>
<b>3 CONTENTS.....</b>	<b>3</b>
<b>4 TEST SUMMARY.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND TEST MODE.....	8
5.4 DESCRIPTION OF SUPPORT UNITS.....	9
5.5 MEASUREMENT UNCERTAINTY.....	9
5.6 RELATED SUBMITTAL(S) / GRANT (S).....	9
5.7 LABORATORY FACILITY.....	9
5.8 LABORATORY LOCATION.....	9
5.9 TEST INSTRUMENTS LIST.....	10
<b>6 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>11</b>
6.1 ANTENNA REQUIREMENT.....	11
6.2 CONDUCTED EMISSION.....	12
6.3 CONDUCTED OUTPUT POWER.....	15
6.4 OCCUPY BANDWIDTH.....	40
6.5 POWER SPECTRAL DENSITY.....	70
6.6 BAND EDGE.....	95
6.7 SPURIOUS EMISSION.....	125
6.7.1 Restricted Band.....	125
6.7.2 Unwanted Emissions out of the Restricted Bands.....	154
6.8 FREQUENCY STABILITY.....	182
<b>7 TEST SETUP PHOTO.....</b>	<b>185</b>
<b>8 EUT CONSTRUCTIONAL DETAILS.....</b>	<b>186</b>

## 4 Test Summary

Test Item	Section in CFR 47	Test Result
Antenna requirement	15.203 & 15.407 (a)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407 (a) (1) (iv) & (a) (3)	Pass
26dB Occupied Bandwidth	15.407 (a) (5)	Pass
6dB Emission Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407 (a) (1) (iv) & (a) (3)	Pass
Band Edge	15.407(b)	Pass
Spurious Emission	15.407 (b) & 15.205 & 15.209	Pass
Frequency Stability	15.407(g)	Pass
<p><i>Pass: The EUT complies with the essential requirements in the standard.</i>  <i>N/A: Not Applicable.</i></p>		

## 5 General Information

### 5.1 Client Information

Applicant/ Manufacturer:	Autel Intelligent Technology Corp., Ltd.
Address:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China
Factory1:	Autel Intelligent Technology Corp., Ltd.
Address:	6th Floor, Building 1, Yanxiang Zhigu, NO.11 Gaoxin West Rd, Guangming New District, Shenzhen City, Guangdong Province, China.
Factory2:	AUTEL VIETNAM COMPANY LIMITED
Address:	4th Floor, Factory#6, Land#CN1, An Duong Industrial Zone, Hong Phong Township, An Duong County, Hai Phong, VietNam

### 5.2 General Description of E.U.T.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM
Model No.:	MaxiSys MS909, MaxiSys MS919
Operation Frequency:	Band 1: 5150MHz-5250MHz, Band 4: 5725MHz-5825MHz
Channel numbers:	Band 1: 802.11a/802.11n20/802.11ac20: 4, 802.11n40/802.11ac40: 2, 802.11ac80: 1 Band 4: 802.11a/802.11n20/802.11ac20: 4, 802.11n40/802.11ac40: 2, 802.11ac80: 1
Channel separation:	802.11a/802.11n20/802.11ac20: 20MHz, 802.11n40/802.11ac40: 40MHz, 802.11ac80: 80MHz
Modulation technology (IEEE 802.11a):	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology (IEEE 802.11n):	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology (IEEE 802.11ac):	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Data speed (IEEE 802.11a):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n20):	MCS0: 6.5Mbps, MCS1:13Mbps, MCS2:19.5Mbps, MCS3:26Mbps, MCS4:39Mbps, MCS5:52Mbps, MCS6:58.5Mbps, MCS7:65Mbps
Data speed (IEEE 802.11n40):	MCS0:15Mbps, MCS1:30Mbps, MCS2:45Mbps, MCS3:60Mbps, MCS4:90Mbps, MCS5:120Mbps, MCS6:135Mbps, MCS7:150Mbps
Data speed (IEEE 802.11ac):	Up to 866.6Mbps
Antenna Type:	Internal Antenna
Antenna gain:	Left module: ANT 1: 5.2G Wi-Fi: 3.3 dBi, 5.8G Wi-F: 3.4 dBi ANT 2: 5.2G Wi-Fi: 2.6 dBi, 5.8G Wi-F: 5.2 dBi Right module: ANT 3: 5.2G Wi-Fi: 2.4 dBi, 5.8G Wi-F: 4.8 dBi ANT 4: 5.2G Wi-Fi: 2.5 dBi, 5.8G Wi-F: 3.3 dBi
Power supply:	Rechargeable Li-ion Battery DC3.8V, 1500mAh

<p>AC adapter:</p>	<p>Adapter 1:            Model.: GME36A-120300FDS            Input: 100-240V, 50/60Hz, 1.2A            Output: 12V, 3A            Adapter 2:            Model.: A361-1203000DI            Input: 100-240V, 50/60Hz, 1.5A            Output:12V,3000mA            Adapter 3:            Model.: j361-1203000DI            Input: 100-240V, 50/60Hz, 1.5A            Output:12V,3000mA</p>
<p>Remark:</p>	<p>Model No.: MaxiSys MS909, MaxiSys MS919 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.</p>
<p>Test Sample Condition:</p>	<p>The test samples were provided in good working order with no visible defects.</p>

Operation Frequency each of channel					
Band 1					
802.11a/802.11n/ac20		802.11n/ac40		802.11ac80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190MHz	42	5210MHz
40	5200MHz	46	5230MHz		
44	5220MHz				
48	5240MHz				
Band 4					
802.11a/802.11n/ac20		802.11n/ac40		802.11ac80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	155	5775MHz
153	5765MHz	159	5795MHz		
157	5785MHz				
161	5805MHz				
165	5825MHz				

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Band 1					
802.11a/802.11n/ac20		802.11n/ac40		802.11ac80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
Lowest	5180MHz	Lowest	5190MHz	Middle	5210MHz
Middle	5200MHz	Highest	5230MHz		
Highest	5240MHz				
Band 4					
802.11a/802.11n/ac20		802.11n/ac40		802.11ac80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
Lowest	5745MHz	Lowest	5755MHz	Middle	5775MHz
Middle	5785MHz	Highest	5795MHz		
Highest	5825MHz				

## 5.3 Test environment and test mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
<b>Test mode:</b>	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation.
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
<b>Per-scan all kind of data rate, and found the follow list were the worst case.</b>	
Mode	Data rate
802.11a	6 Mbps
802.11n20	6.5 Mbps
802.11n40	13 Mbps
802.11ac80	29.3 Mbps
<i>Remark: 802.11a support SISO, 802.11n20/n40/ac20/ac40/ac80 support MIMO</i>	



## 5.4 Description of Support Units

The EUT has been tested as an independent unit.

## 5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

## 5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

## 5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
 Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
 Bao'an District, Shenzhen, Guangdong, China  
 Tel: +86-755-23118282, Fax: +86-755-23116366  
 Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

## 5.9 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2018	11-20-2019
				11-21-2019	11-20-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2018	11-20-2019
				11-21-2019	11-20-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-10-2018	11-09-2019
				11-10-2019	11-09-2020
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-18-2019	03-17-2020
Signal Generator	R&S	SMR20	1008100050	03-18-2019	03-17-2020
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	10-31-2018	10-30-2019
				10-31-2019	10-30-2020
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	09-24-2018	09-23-2019
				09-24-2019	09-23-2020
Simulated Station	Rohde & Schwarz	CMW500	140493	07-16-2018	07-15-2019
				07-16-2019	07-15-2020

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-18-2019	03-17-2020
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-18-2019	03-17-2020
LISN	CHASE	MN2050D	1447	03-18-2019	03-17-2020
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2019
				07-21-2019	07-20-2020
Cable	HP	10503A	N/A	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		

## 6 Test results and Measurement Data

### 6.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 E Section 15.203 /407(a)
<p>15.203 requirement:            An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>	
<b>E.U.T Antenna:</b>	
<p>The Wi-Fi antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is 5.2 dBi.</p>	




## 6.2 Conducted Emission

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dBUV)	
		Quasi-peak	
	0.15-0.5	66 to 56*	0.15-0.5
	0.5-5	56	0.5-5
	5-30	60	5-30
* Decreases with the logarithm of the frequency.			
Test procedure	<ol style="list-style-type: none"> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>		
Test setup:	<p><i>Remark</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>		
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Passed		

**Measurement Data:**

<b>Product name:</b>	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	<b>Product model:</b>	MaxiSys MS909
<b>Test by:</b>	YT	<b>Test mode:</b>	5G Wi-Fi Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Line
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Humi: 55%

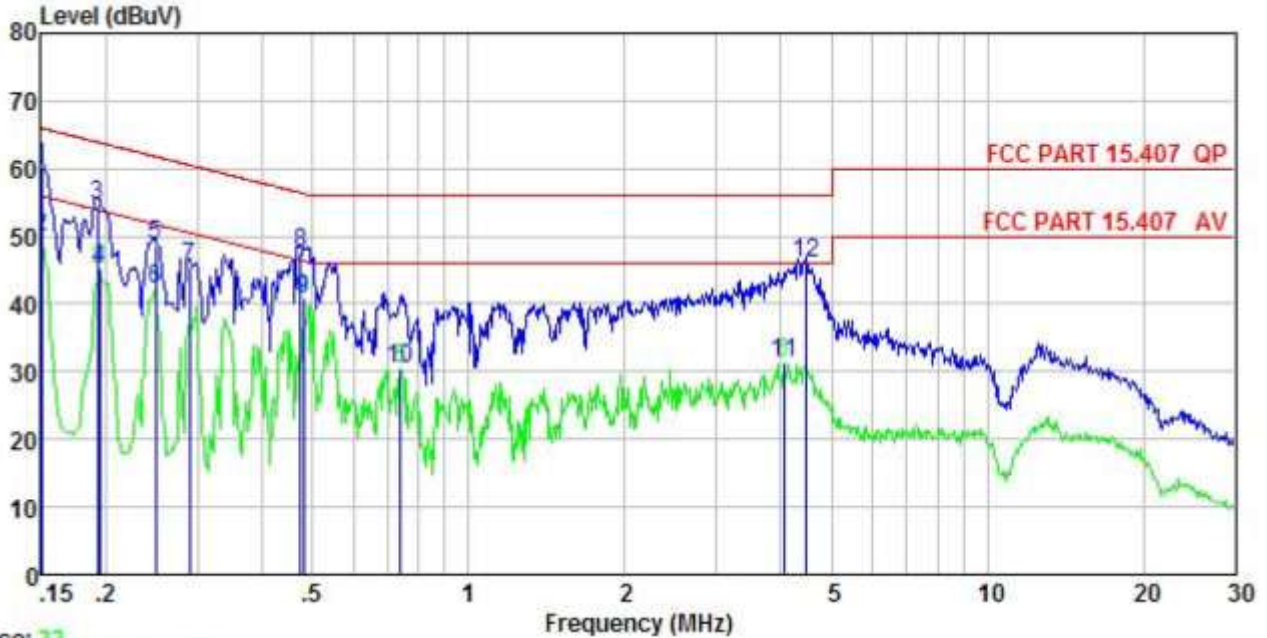


Trace: 33

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	49.93	-0.45	10.78	60.26	66.00	-5.74	QP
2	0.150	39.56	-0.45	10.78	49.89	56.00	-6.11	Average
3	0.192	44.28	-0.42	10.76	54.62	63.93	-9.31	QP
4	0.194	34.74	-0.41	10.76	45.09	53.84	-8.75	Average
5	0.249	38.34	-0.40	10.75	48.69	61.78	-13.09	QP
6	0.249	31.77	-0.40	10.75	42.12	51.78	-9.66	Average
7	0.289	35.22	-0.39	10.74	45.57	60.54	-14.97	QP
8	0.474	37.29	-0.39	10.75	47.65	56.45	-8.80	QP
9	0.481	30.37	-0.39	10.75	40.73	46.32	-5.59	Average
10	0.739	20.09	-0.38	10.79	30.50	46.00	-15.50	Average
11	4.049	20.96	-0.46	10.89	31.39	46.00	-14.61	Average
12	4.454	35.51	-0.47	10.87	45.91	56.00	-10.09	QP

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.
4. Test all adapters and modes to reflect only the worst mode

<b>Product name:</b>	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	<b>Product model:</b>	MaxiSys MS909
<b>Test by:</b>	YT	<b>Test mode:</b>	5G Wi-Fi Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Humi: 55%

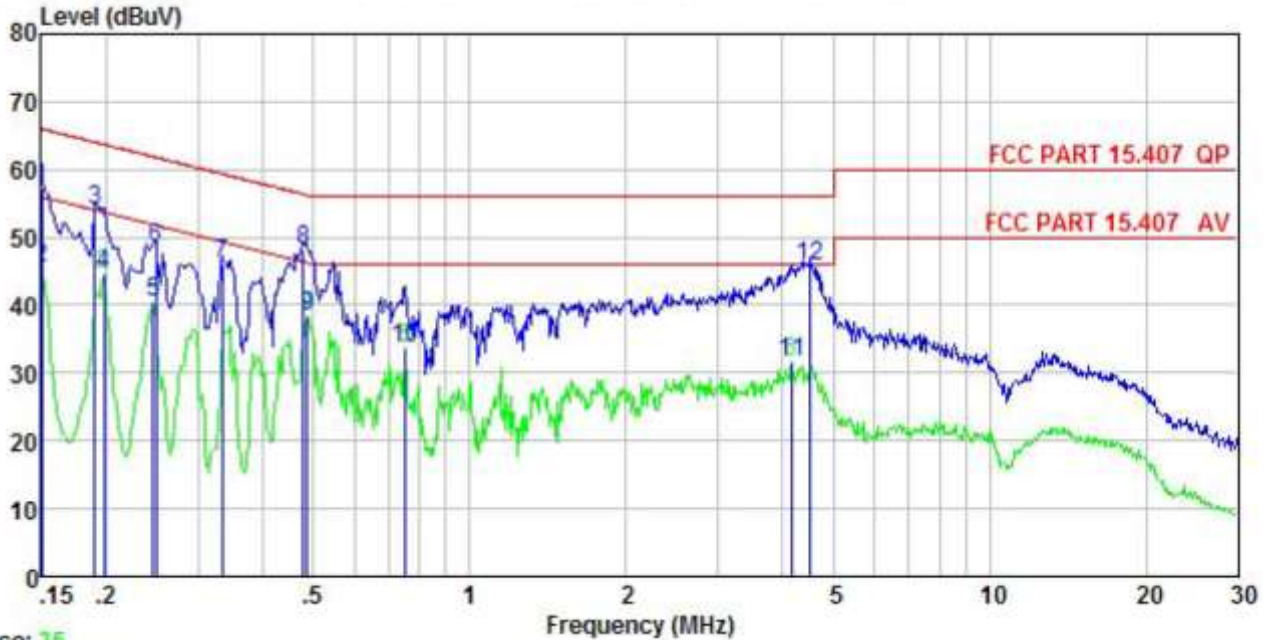


Trace: 35

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	47.08	-0.68	10.78	57.18	66.00	-8.82	QP
2	0.150	35.44	-0.68	10.78	45.54	56.00	-10.46	Average
3	0.190	44.06	-0.69	10.76	54.13	64.02	-9.89	QP
4	0.198	34.58	-0.69	10.76	44.65	53.71	-9.06	Average
5	0.246	30.45	-0.66	10.75	40.54	51.91	-11.37	Average
6	0.249	38.23	-0.66	10.75	48.32	61.78	-13.46	QP
7	0.334	36.01	-0.63	10.73	46.11	59.35	-13.24	QP
8	0.479	38.12	-0.65	10.75	48.22	56.36	-8.14	QP
9	0.486	28.33	-0.65	10.76	38.44	46.23	-7.79	Average
10	0.751	23.63	-0.64	10.79	33.78	46.00	-12.22	Average
11	4.158	21.55	-0.70	10.88	31.73	46.00	-14.27	Average
12	4.525	35.64	-0.71	10.87	45.80	56.00	-10.20	QP

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.
4. Test all adapters and modes to reflect only the worst mode

## 6.3 Conducted Output Power

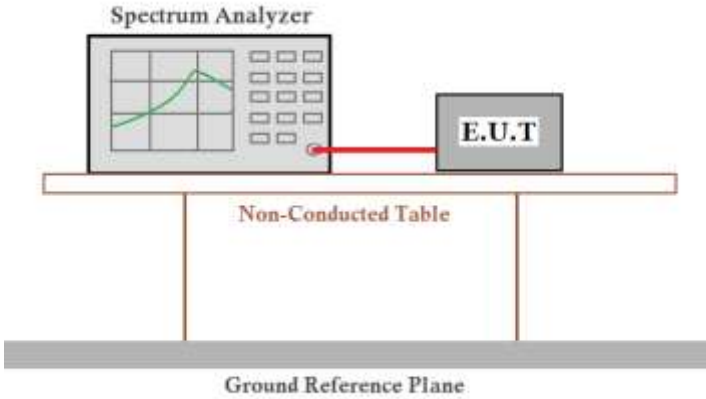Test Requirement:	FCC Part15 E Section 15.407 (a) (1) (iv) & (a) (3)
Test Method:	ANSI C63.10: 2013, KDB789033
Limit:	Band 1: 24dBm Band 4: 30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

**Measurement Data:**

**Left module:**

Band 1						
Mode	Test CH	Ant. Port	Conducted Output power(dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX1	11.58	/	24.0	Pass
		TX2	11.55	/		
	Middle	TX1	11.65	/	24.0	Pass
		TX2	11.65	/		
	Highest	TX1	12.19	/	24.0	Pass
		TX2	12.06	/		
802.11n20	Lowest	TX1	11.57	14.56	24.0	Pass
		TX2	11.53			
	Middle	TX1	11.52	14.51	24.0	Pass
		TX2	11.47			
	Highest	TX1	11.91	14.96	24.0	Pass
		TX2	11.98			
802.11n40	Lowest	TX1	6.46	9.61	24.0	Pass
		TX2	6.74			
	Highest	TX1	6.97	9.92	24.0	Pass
		TX2	6.84			
802.11ac20	Lowest	TX1	11.55	14.50	24.0	Pass
		TX2	11.42			
	Middle	TX1	11.53	14.58	24.0	Pass
		TX2	11.61			
	Highest	TX1	12.00	15.05	24.0	Pass
		TX2	12.07			
802.11ac40	Lowest	TX1	6.41	9.67	24.0	Pass
		TX2	6.90			
	Highest	TX1	6.77	9.85	24.0	Pass
		TX2	6.91			
802.11ac80	Middle	TX1	6.55	9.56	24.0	Pass
		TX2	6.54			
<p><b>Remark:</b></p> <p>1. Because transmit signals are correlated, Directional gain = <math>10 \log[(10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(GN/20)})^2 / N_{ANT}]</math>, So the Directional gain = <math>10 \log[(10^{(3.3/20)} + 10^{(2.6/20)})^2 / 2] = 5.97 \text{dBi}</math></p> <p>2. The directional Gain of antenna is not greater than 6 dBi, so the limit of power is 24 dBm.</p>						



Band 4						
Mode	Test CH	Ant. Port	Conducted Output power(dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX1	10.23	/	28.65	Pass
		TX2	9.70	/		
	Middle	TX1	10.23	/	28.65	Pass
		TX2	10.29	/		
	Highest	TX1	10.14	/	28.65	Pass
		TX2	10.29	/		
802.11n20	Lowest	TX1	10.18	12.98	28.65	Pass
		TX2	9.74			
	Middle	TX1	10.14	13.20	28.65	Pass
		TX2	10.23			
	Highest	TX1	10.15	13.16	28.65	Pass
		TX2	10.15			
802.11n40	Lowest	TX1	10.84	13.78	28.65	Pass
		TX2	10.70			
	Highest	TX1	10.71	13.81	28.65	Pass
		TX2	10.88			
802.11ac20	Lowest	TX1	10.23	13.26	28.65	Pass
		TX2	10.26			
	Middle	TX1	10.18	13.23	28.65	Pass
		TX2	10.25			
	Highest	TX1	10.14	13.22	28.65	Pass
		TX2	10.27			
802.11ac40	Lowest	TX1	10.76	13.66	28.65	Pass
		TX2	10.54			
	Highest	TX1	10.76	13.78	28.65	Pass
		TX2	10.78			
802.11ac80	Middle	TX1	10.37	12.94	28.65	Pass
		TX2	9.44			

**Remark:**

1. Because transmit signals are correlated, Directional gain =  $10 \log[(10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(GN/20)})^2 / N_{ANT}]$ , So the Directional gain =  $10 \log[(10^{(3.4/20)} + 10^{(5.2/20)})^2 / 2] = 7.35 \text{dBi}$
2. The directional Gain of antenna is greater than 6 dBi, so the limit of power is 28.65 dBm.

Right module:

Band 1						
Mode	Test CH	Ant. Port	Conducted Output power(dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX3	10.62	/	24.0	Pass
		TX4	10.83	/		
	Middle	TX3	10.83	/	24.0	Pass
		TX4	10.79	/		
	Highest	TX3	10.89	/	24.0	Pass
		TX4	10.86	/		
802.11n20	Lowest	TX3	11.62	14.14	24.0	Pass
		TX4	10.57			
	Middle	TX3	11.28	13.99	24.0	Pass
		TX4	10.65			
	Highest	TX3	12.04	14.38	24.0	Pass
		TX4	10.57			
802.11n40	Lowest	TX3	6.58	9.56	24.0	Pass
		TX4	6.51			
	Highest	TX3	6.71	9.72	24.0	Pass
		TX4	6.70			
802.11ac20	Lowest	TX3	10.53	13.62	24.0	Pass
		TX4	10.69			
	Middle	TX3	11.99	14.39	24.0	Pass
		TX4	10.66			
	Highest	TX3	10.31	13.54	24.0	Pass
		TX4	10.74			
802.11ac40	Lowest	TX3	6.50	9.52	24.0	Pass
		TX4	6.52			
	Highest	TX3	6.69	9.71	24.0	Pass
		TX4	6.71			
802.11ac80	Middle	TX3	6.24	9.25	24.0	Pass
		TX4	6.23			

**Remark:**


1. Because transmit signals are correlated, Directional gain =  $10 \log\left[\frac{(10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(GN/20)})^2}{N_{ANT}}\right]$ , So the Directional gain =  $10 \log\left[\frac{(10^{(2.4/20)} + 10^{(2.5/20)})^2}{2}\right] = 5.46 \text{dBi}$
2. The directional Gain of antenna is not greater than 6 dBi, so the limit of power is 24 dBm.

Band 4						
Mode	Test CH	Ant. Port	Conducted Output power(dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX3	9.98	/	28.91	Pass
		TX4	10.09	/		
	Middle	TX3	9.73	/	28.91	Pass
		TX4	10.00	/		
	Highest	TX3	9.82	/	28.91	Pass
		TX4	9.83	/		
802.11n20	Lowest	TX3	10.04	12.95	28.91	Pass
		TX4	9.83			
	Middle	TX3	10.03	13.06	28.91	Pass
		TX4	10.07			
	Highest	TX3	9.89	12.87	28.91	Pass
		TX4	9.83			
802.11n40	Lowest	TX3	10.28	13.26	28.91	Pass
		TX4	10.21			
	Highest	TX3	10.11	13.12	28.91	Pass
		TX4	10.10			
802.11ac20	Lowest	TX3	9.83	12.82	28.91	Pass
		TX4	9.78			
	Middle	TX3	9.79	12.78	28.91	Pass
		TX4	9.74			
	Highest	TX3	10.12	13.09	28.91	Pass
		TX4	10.03			
802.11ac40	Lowest	TX3	10.18	13.18	28.91	Pass
		TX4	10.16			
	Highest	TX3	10.18	13.18	28.91	Pass
		TX4	10.15			
802.11ac80	Middle	TX3	9.75	12.70	28.91	Pass
		TX4	9.63			

**Remark:**


1. Because transmit signals are correlated, Directional gain =  $10 \log[(10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(GN/20)})^2 / N_{ANT}]$ , So the Directional gain =  $10 \log[(10^{(4.3/20)} + 10^{(3.3/20)})^2 / 2] = 7.09 \text{dBi}$
2. The directional Gain of antenna is greater than 6 dBi, so the limit of power is 28.91 dBm.

Test plot as follows:  
Left module: Band 1

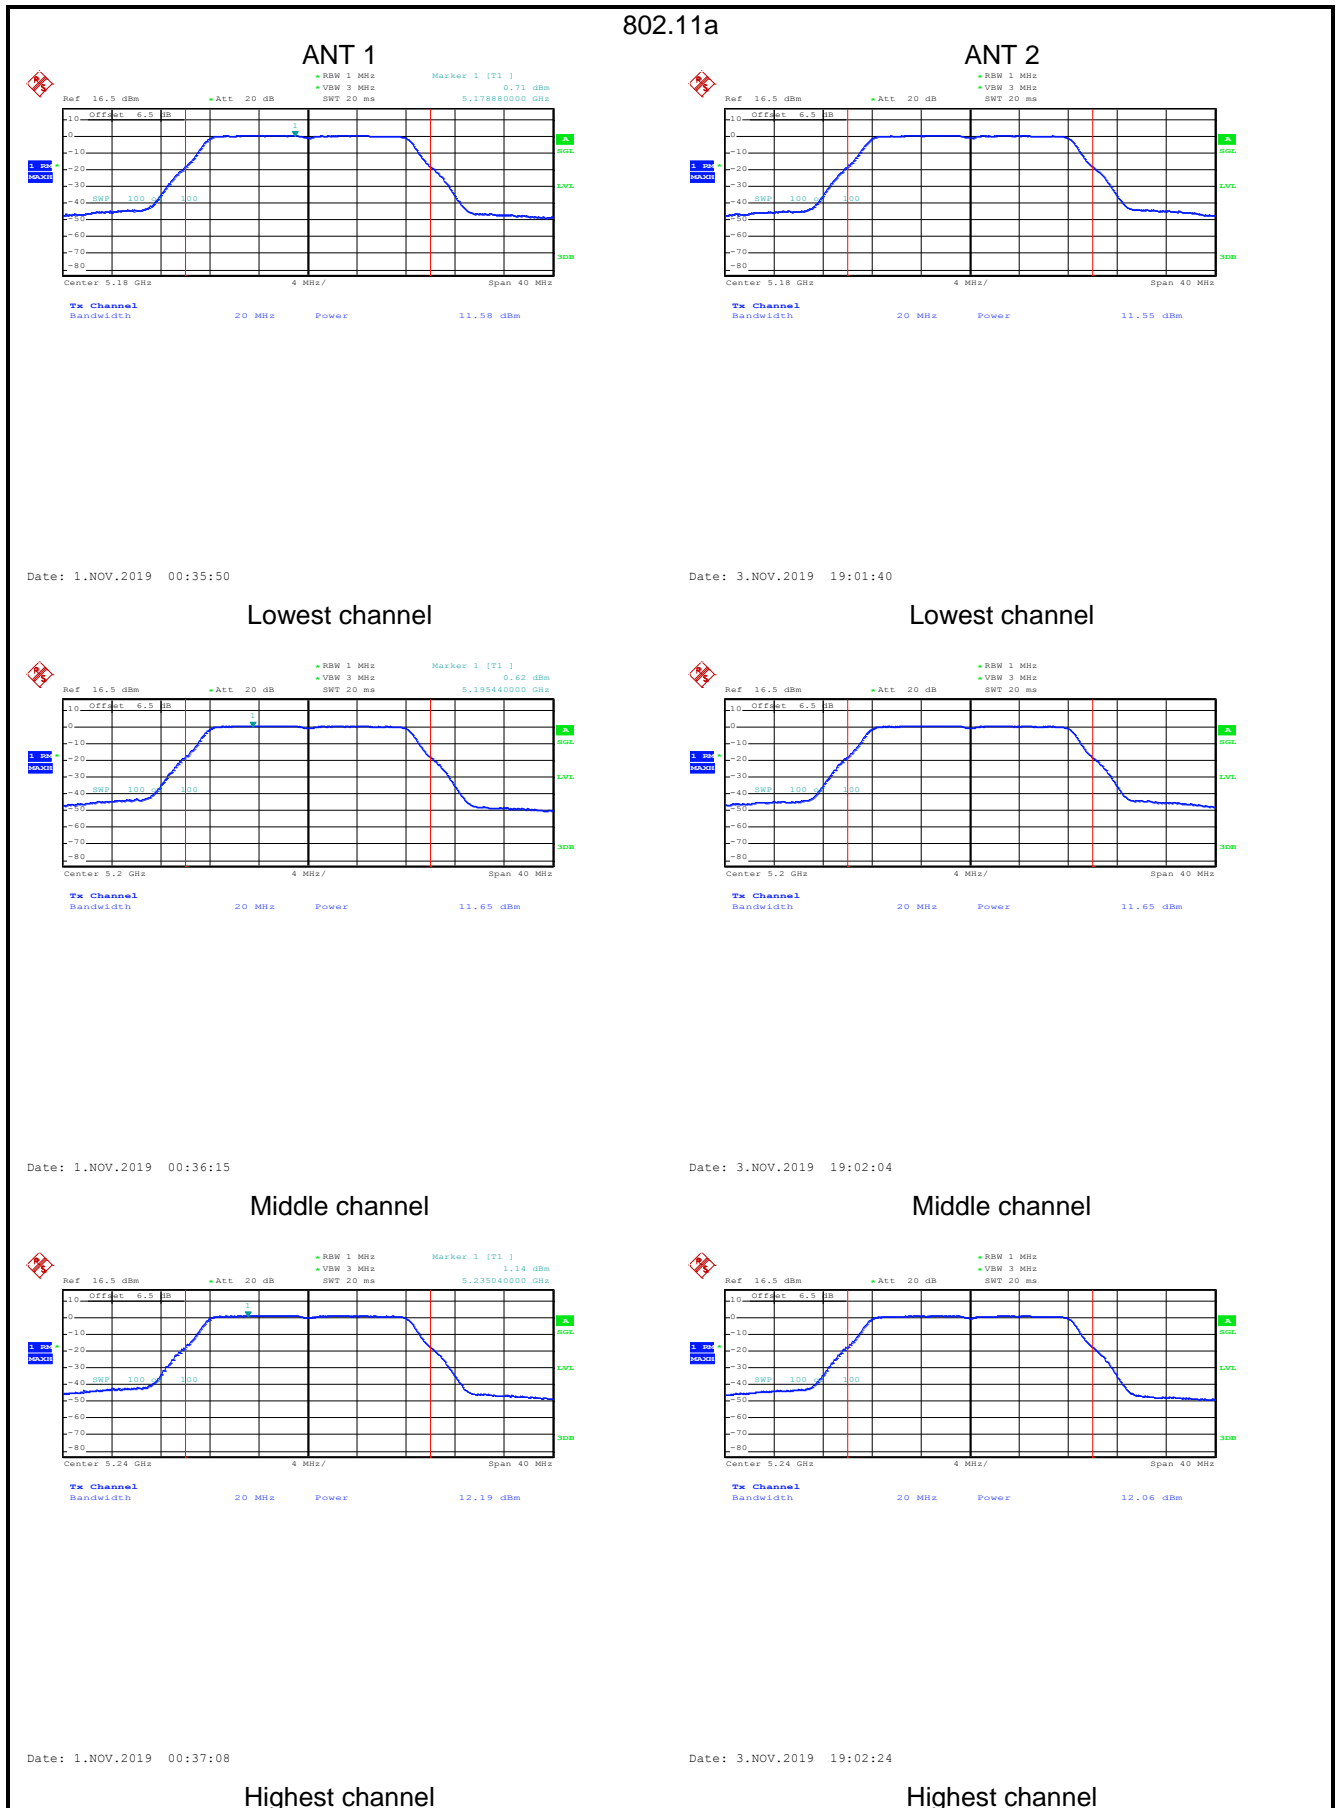


## 802.11n-HT20

### ANT 1

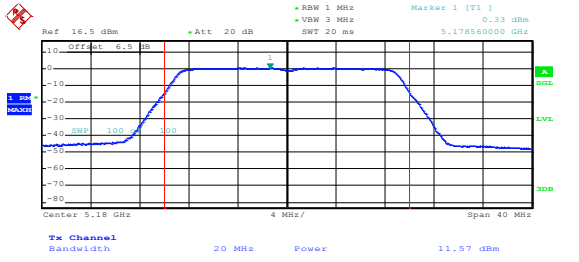


Date: 1.NOV.2019 00:38:19

### ANT 2

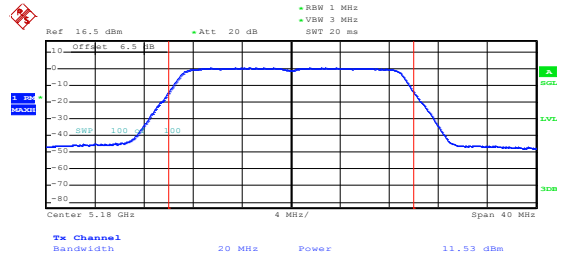


Date: 3.NOV.2019 19:24:08

### Lowest channel

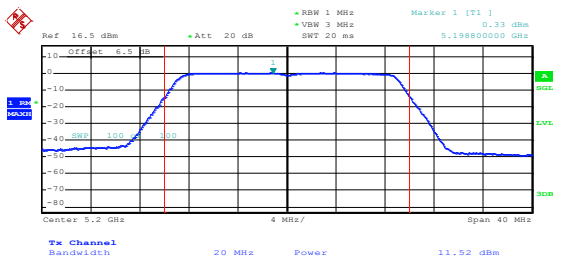


Date: 1.NOV.2019 00:38:45

### Lowest channel

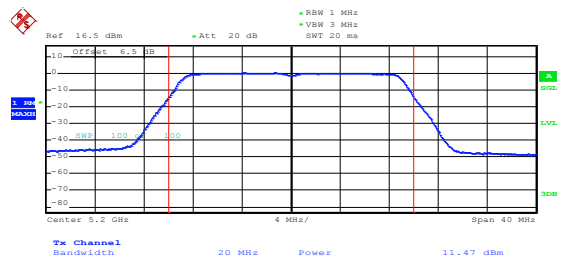


Date: 3.NOV.2019 19:24:34

### Middle channel

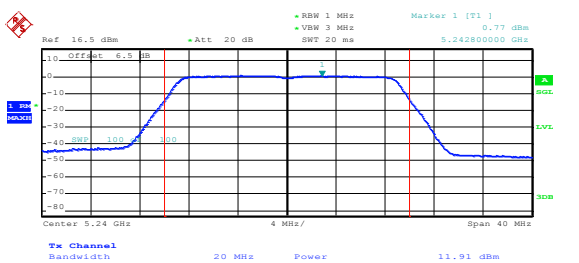

Date: 1.NOV.2019 00:39:45

### Middle channel

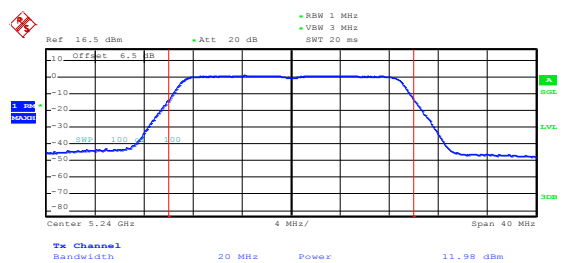


Date: 3.NOV.2019 19:25:06

### Highest channel


### Highest channel

## 802.11n-HT40

ANT 1

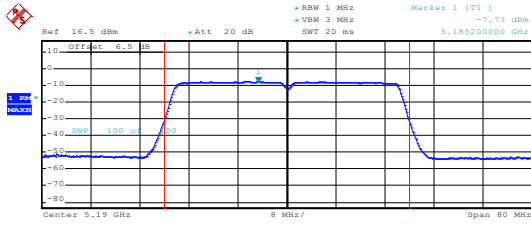


ANT 2

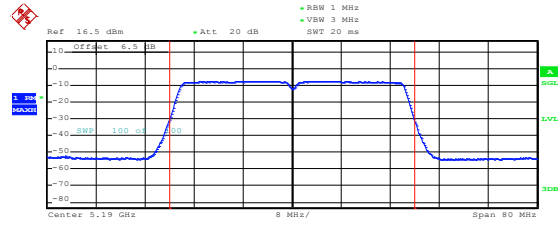


Date: 1.NOV.2019 00:43:40

Date: 3.NOV.2019 19:26:32

Lowest channel

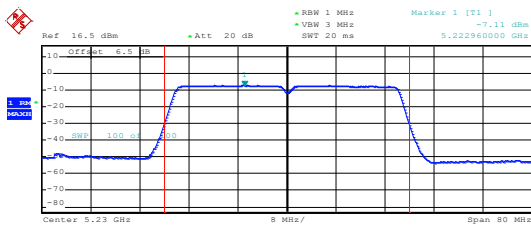

Lowest channel

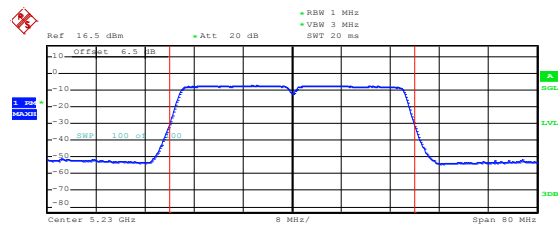

Date: 1.NOV.2019 00:44:11


Date: 3.NOV.2019 19:27:10

Highest channel

Highest channel


## 802.11ac-HT20

ANT 1

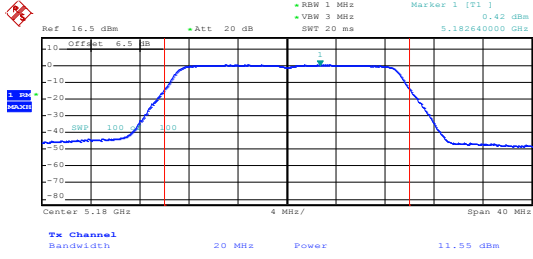


Date: 1.NOV.2019 00:45:24

ANT 2

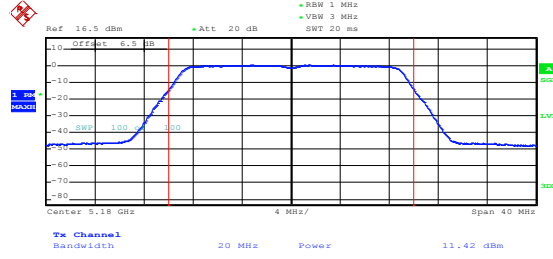


Date: 3.NOV.2019 19:29:12

Lowest channel

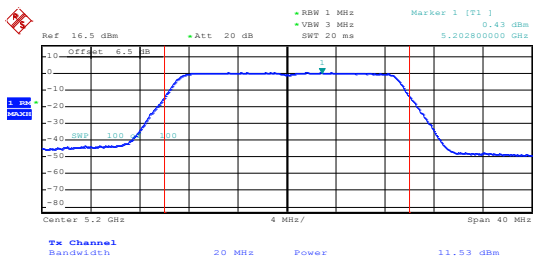


Date: 1.NOV.2019 00:45:49

Lowest channel

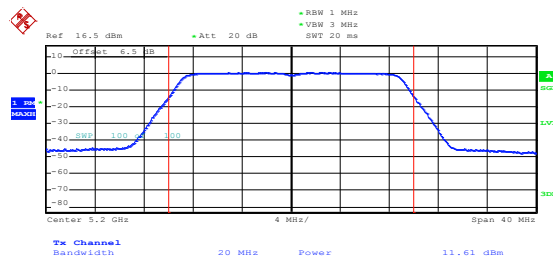


Date: 3.NOV.2019 19:29:34

Middle channel

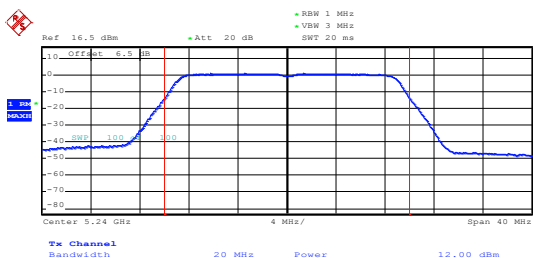

Date: 1.NOV.2019 00:46:30

Middle channel

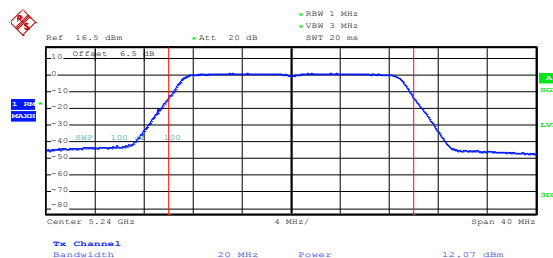


Date: 3.NOV.2019 19:29:54

Highest channel

Highest channel


## 802.11ac-HT40

ANT 1

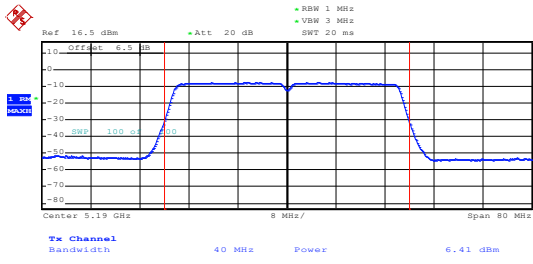


Date: 1.NOV.2019 00:47:31

ANT 2

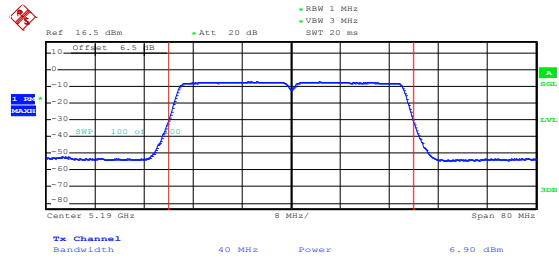


Date: 3.NOV.2019 19:30:35

Lowest channel

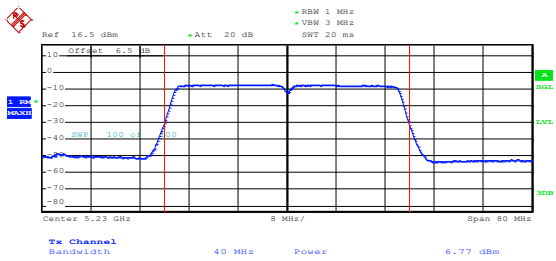

Date: 1.NOV.2019 00:48:37


Lowest channel

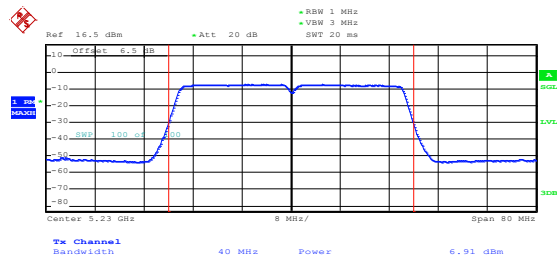

Date: 3.NOV.2019 19:30:51

Highest channel


## 802.11ac-HT80

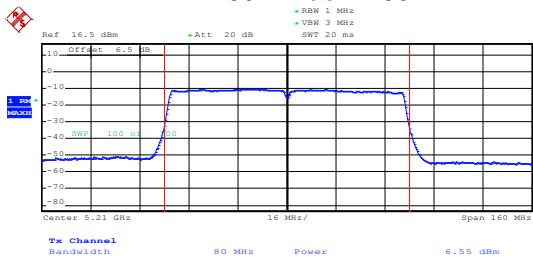

Date: 1.NOV.2019 00:51:12

Highest channel

## 802.11ac-HT80

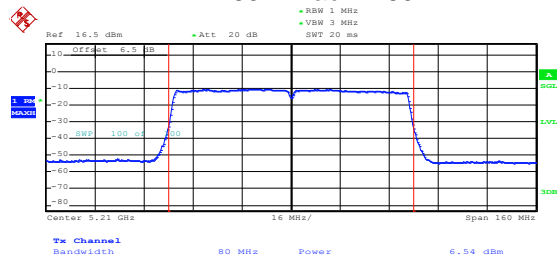

Date: 3.NOV.2019 19:31:33



Middle channel

Middle channel



**Band 4:**

802.11a

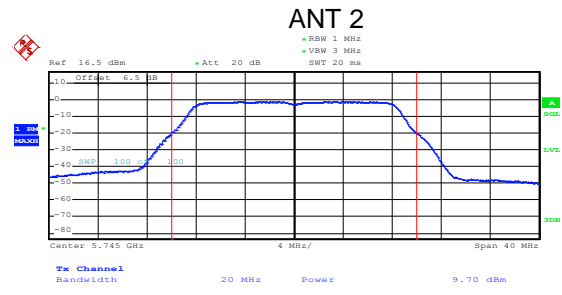
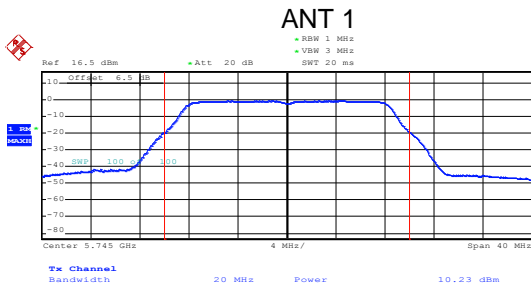


Date: 1.NOV.2019 01:04:43

Date: 3.NOV.2019 19:44:14

**Lowest channel**

**Lowest channel**

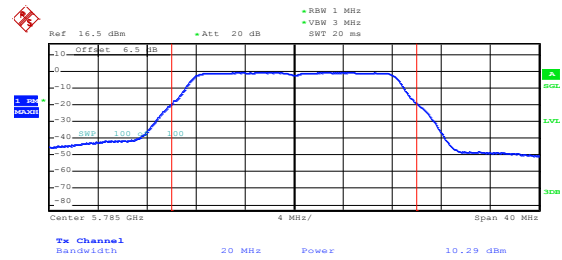
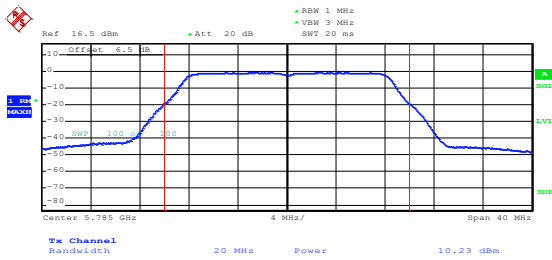


Date: 1.NOV.2019 01:05:50

Date: 3.NOV.2019 19:46:19

**Middle channel**

**Middle channel**

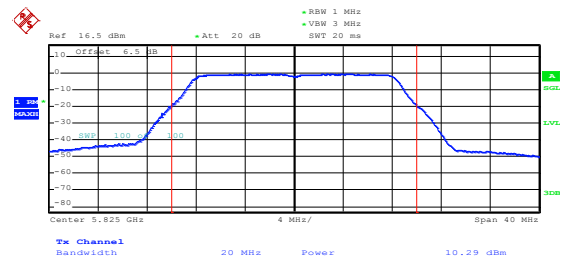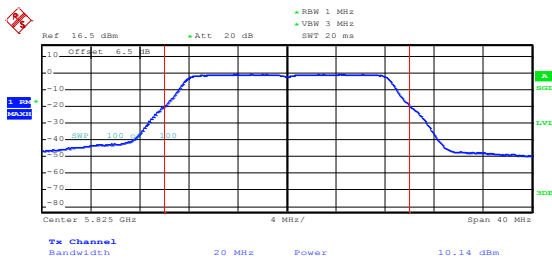

Date: 1.NOV.2019 01:06:39


Date: 3.NOV.2019 19:46:47

**Highest channel**

**Highest channel**


## 802.11n-HT20

ANT 1

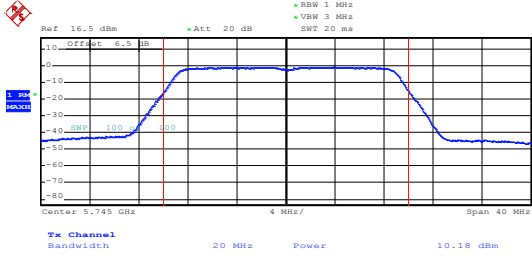


Date: 1.NOV.2019 01:08:16

ANT 2

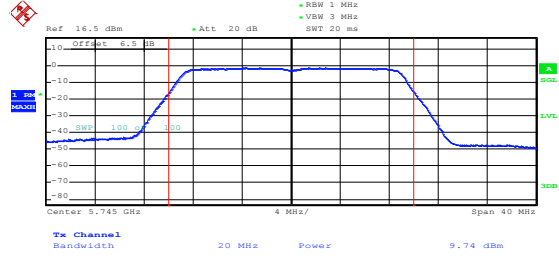


Date: 3.NOV.2019 19:49:09

Lowest channel

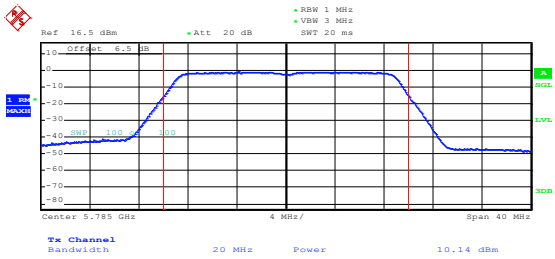


Date: 1.NOV.2019 01:07:53

Lowest channel

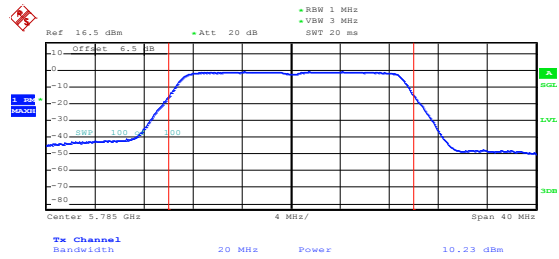


Date: 3.NOV.2019 19:48:40

Middle channel

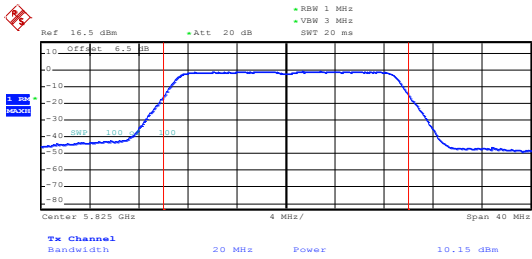

Date: 1.NOV.2019 01:07:22

Middle channel

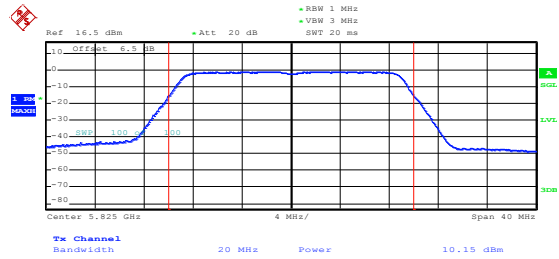


Date: 3.NOV.2019 19:47:57

Highest channel

Highest channel


## 802.11n-HT40

ANT 1

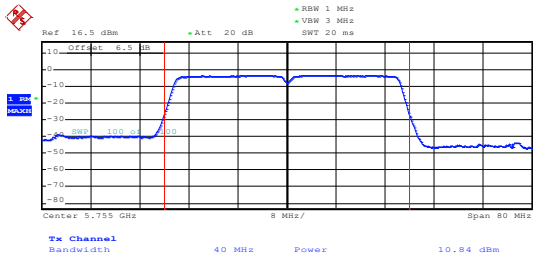


Date: 1.NOV.2019 01:09:09

ANT 2

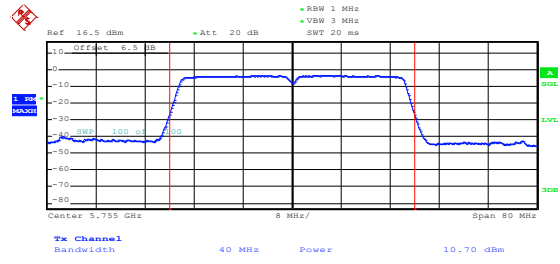


Date: 3.NOV.2019 19:50:32

Lowest channel

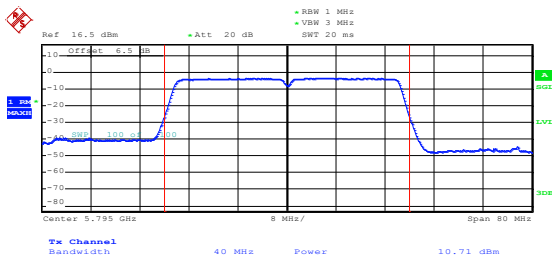

Date: 1.NOV.2019 01:09:59

Lowest channel

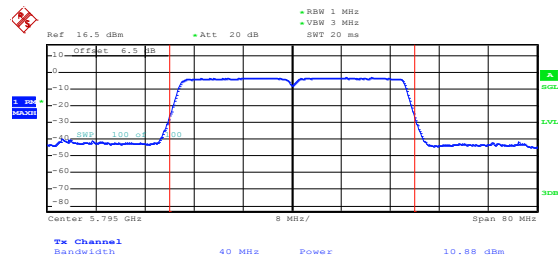


Date: 3.NOV.2019 19:51:06

Highest channel

Highest channel

## 802.11ac-HT20


ANT 1

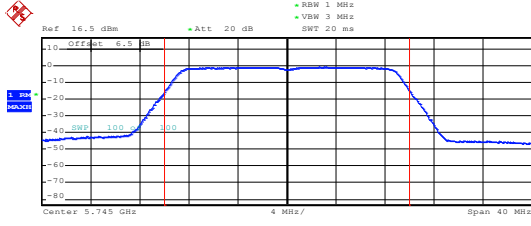

Tx Channel Bandwidth 20 MHz Power 10.23 dBm

Date: 1.NOV.2019 01:16:01


ANT 2

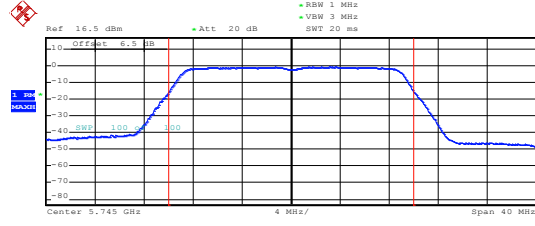

Tx Channel Bandwidth 20 MHz Power 10.26 dBm

Date: 3.NOV.2019 19:53:49


Lowest channel

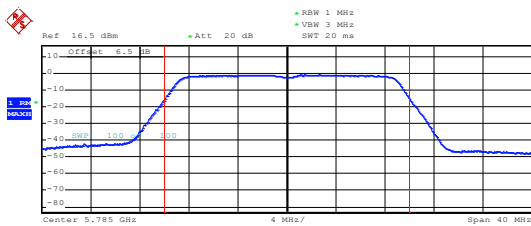

Tx Channel Bandwidth 20 MHz Power 10.18 dBm

Date: 1.NOV.2019 01:16:35


Lowest channel

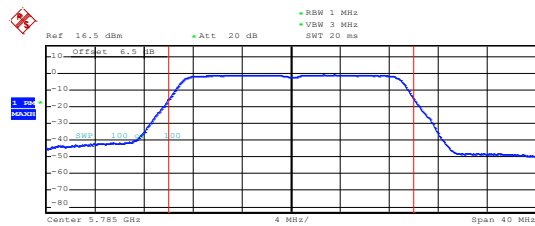

Tx Channel Bandwidth 20 MHz Power 10.25 dBm

Date: 3.NOV.2019 19:54:25


Middle channel

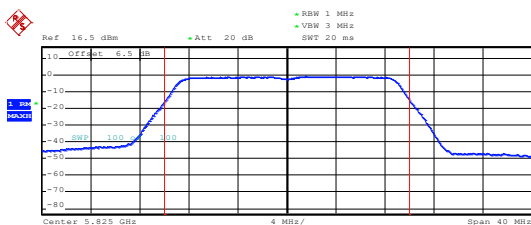

Tx Channel Bandwidth 20 MHz Power 10.14 dBm

Date: 1.NOV.2019 01:16:55

Middle channel

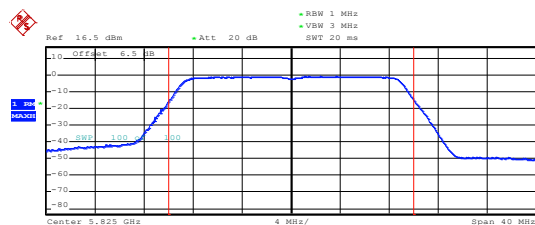

Tx Channel Bandwidth 20 MHz Power 10.27 dBm


Date: 3.NOV.2019 19:55:01

Highest channel

Highest channel


## 802.11ac-HT40

ANT 1

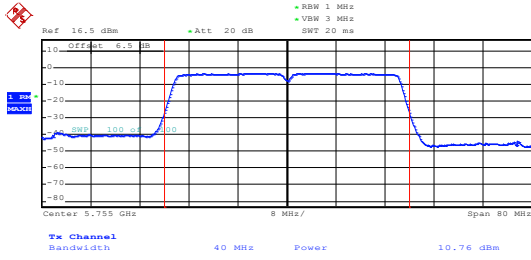


Date: 1.NOV.2019 01:20:07

ANT 2

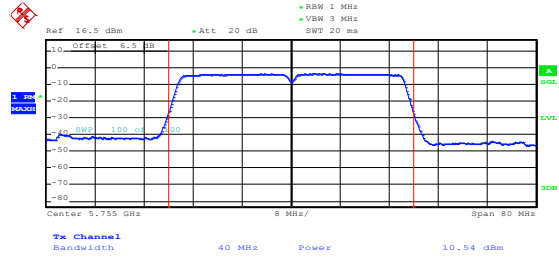


Date: 3.NOV.2019 19:55:41

Lowest channel

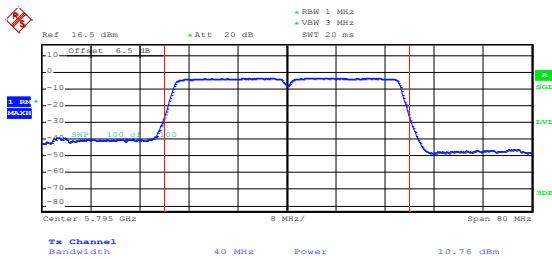

Date: 1.NOV.2019 01:20:51


Lowest channel

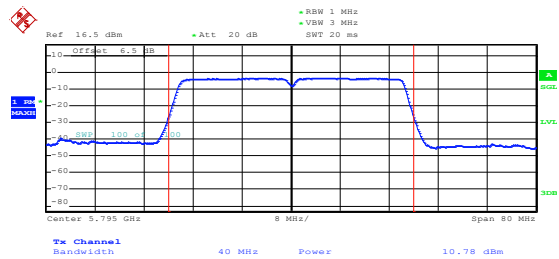

Date: 3.NOV.2019 19:56:07

Highest channel


## 802.11ac-HT80

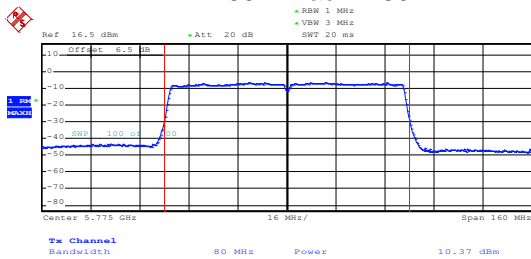

Date: 1.NOV.2019 01:21:45

Highest channel

## 802.11ac-HT80

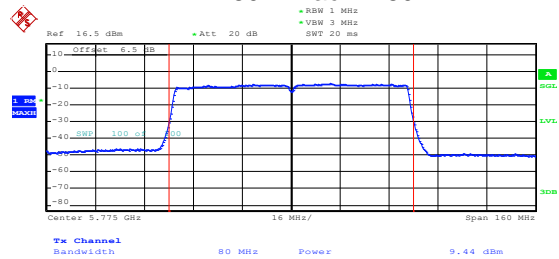


Date: 19.NOV.2019 02:31:09

Middle channel


Middle channel

Right module: Band1

802.11a

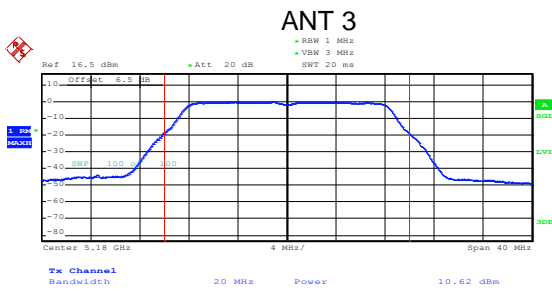


Date: 20.NOV.2019 09:53:27

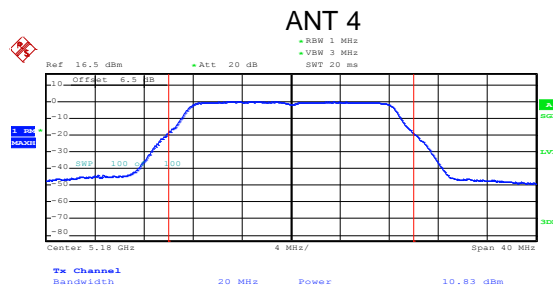


Date: 20.NOV.2019 09:53:34

Lowest channel

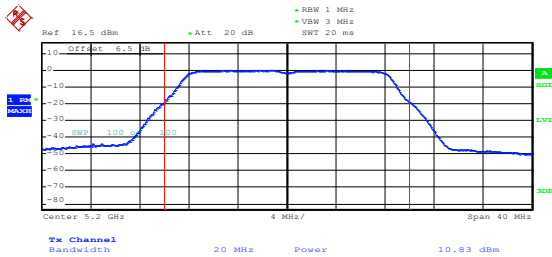


Date: 20.NOV.2019 09:53:50

Lowest channel

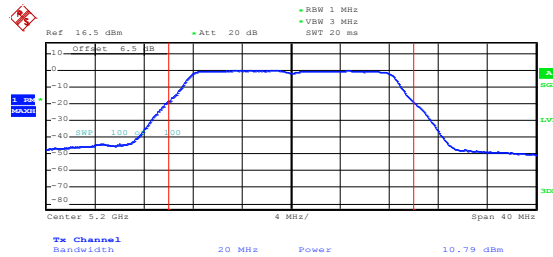


Date: 20.NOV.2019 09:53:57

Middle channel

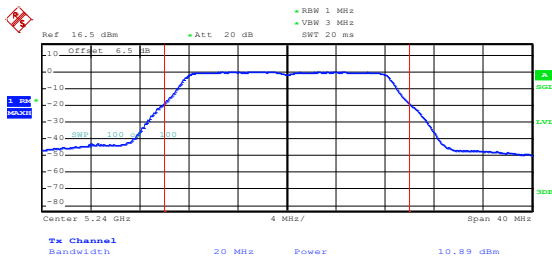

Date: 20.NOV.2019 09:54:14

Middle channel

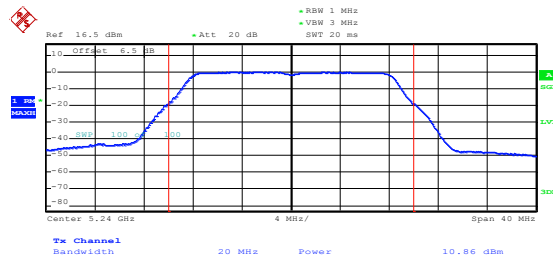


Date: 20.NOV.2019 09:54:21

Highest channel

Highest channel


## 802.11n-HT20

### ANT 3

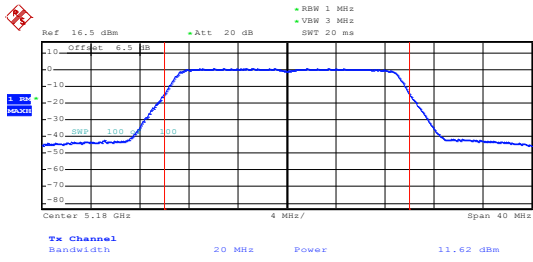


Date: 20.NOV.2019 09:55:31

### ANT 4

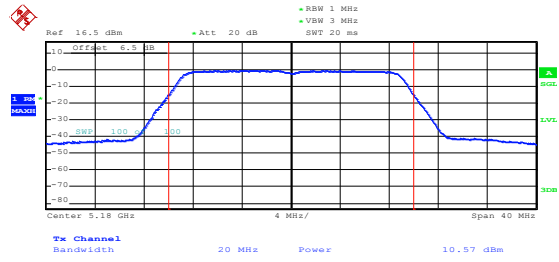


Date: 20.NOV.2019 09:55:39

### Lowest channel

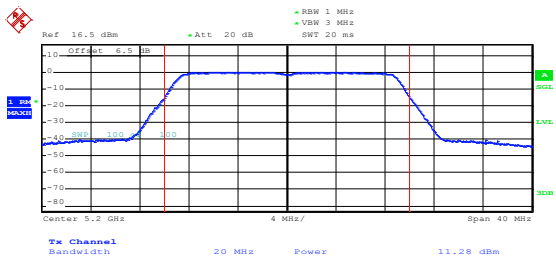


Date: 20.NOV.2019 09:55:57

### Lowest channel

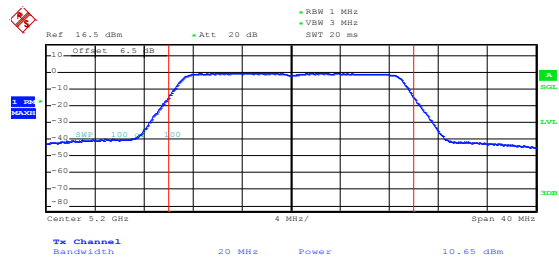


Date: 20.NOV.2019 09:56:04

### Middle channel

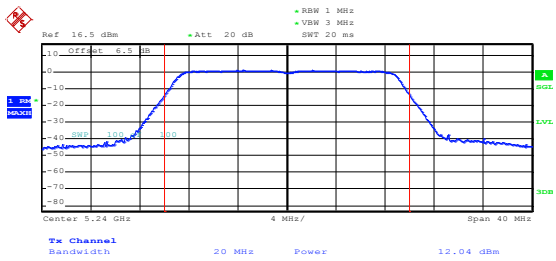

Date: 20.NOV.2019 09:56:46

### Middle channel

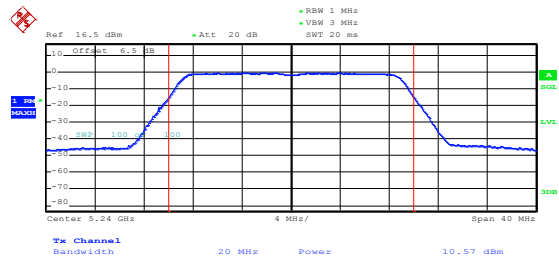


Date: 20.NOV.2019 09:57:00

### Highest channel

### Highest channel


## 802.11n-HT40

ANT 3

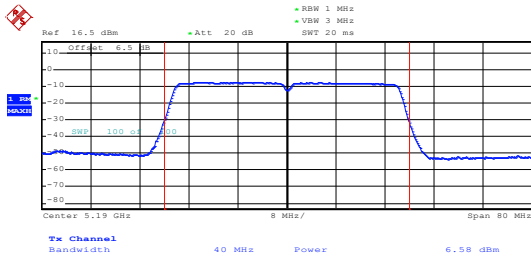


Date: 20.NOV.2019 10:50:58

ANT 4

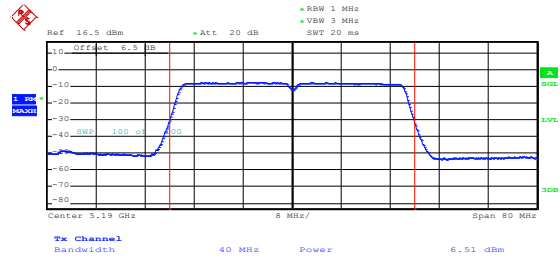


Date: 20.NOV.2019 10:51:14

Lowest channel

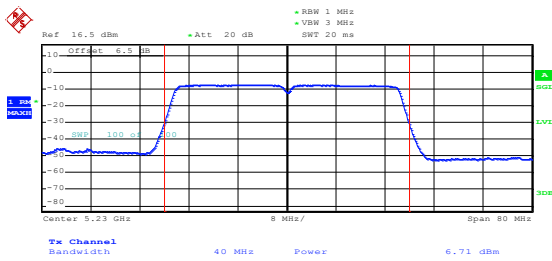

Date: 20.NOV.2019 10:53:33

Lowest channel

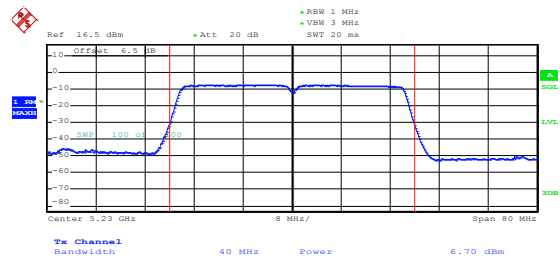

Date: 20.NOV.2019 10:53:46


Highest channel

Highest channel



## 802.11ac-HT20


### ANT 3

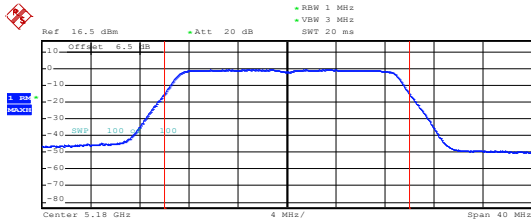

Tx Channel Bandwidth 20 MHz Power 10.53 dBm

Date: 20.NOV.2019 09:58:02


### ANT 4

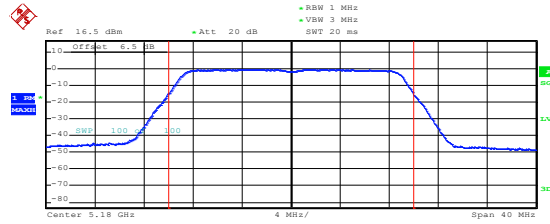

Tx Channel Bandwidth 20 MHz Power 10.69 dBm

Date: 20.NOV.2019 09:58:09


### Lowest channel

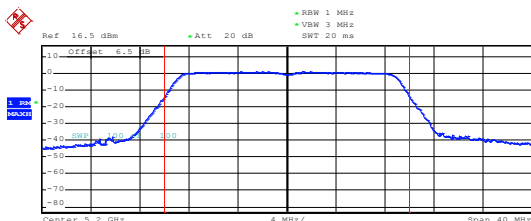

Tx Channel Bandwidth 20 MHz Power 11.99 dBm

Date: 20.NOV.2019 09:59:31


### Lowest channel

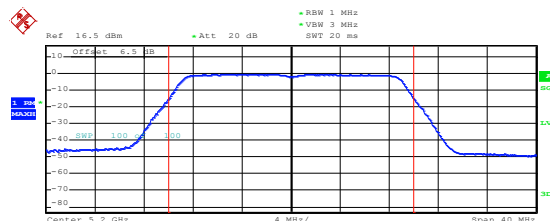

Tx Channel Bandwidth 20 MHz Power 10.66 dBm

Date: 20.NOV.2019 09:59:39


### Middle channel

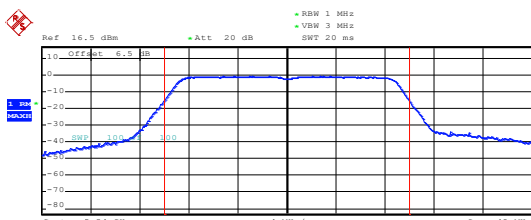

Tx Channel Bandwidth 20 MHz Power 10.31 dBm

Date: 20.NOV.2019 09:59:55

### Middle channel

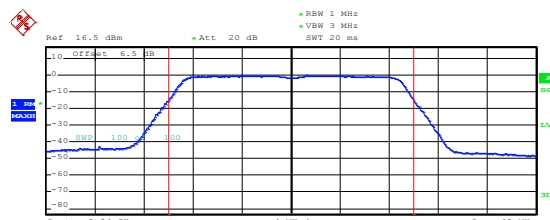

Tx Channel Bandwidth 20 MHz Power 10.74 dBm


Date: 20.NOV.2019 10:00:08

### Highest channel


### Highest channel

## 802.11ac-HT40

ANT 3

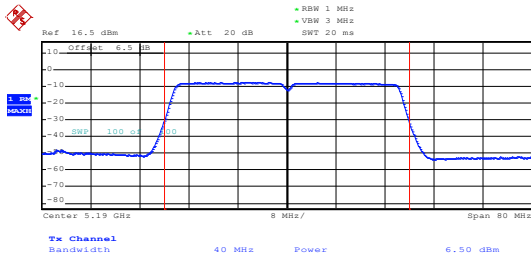


ANT 4

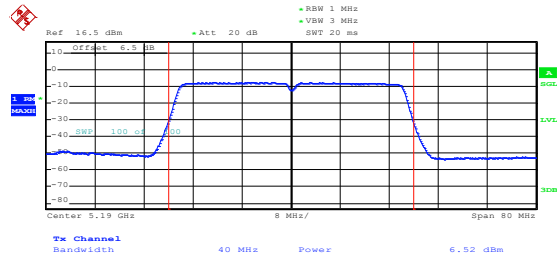


Date: 20.NOV.2019 10:51:27

Date: 20.NOV.2019 10:51:41

Lowest channel

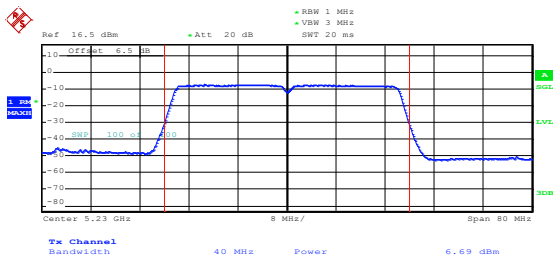

Lowest channel

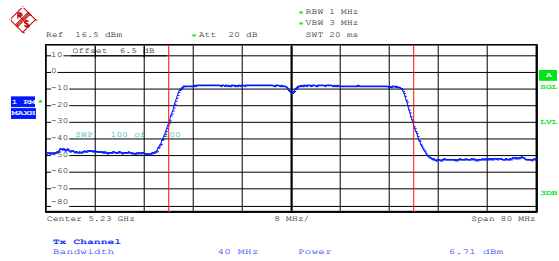


Date: 20.NOV.2019 10:53:13

Date: 20.NOV.2019 10:53:20


Highest channel

802.11ac-HT80

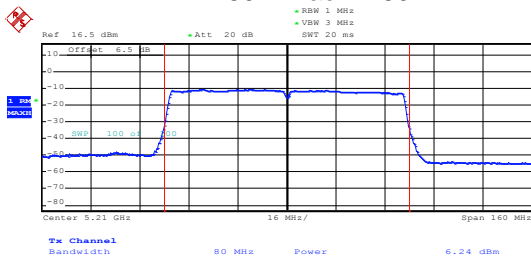

Highest channel

802.11ac-HT80

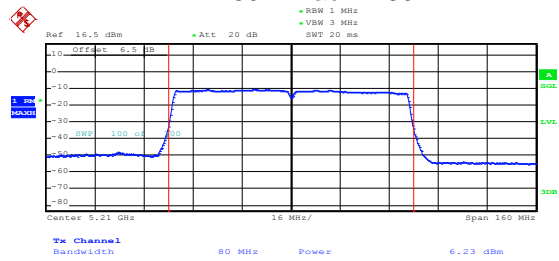

Date: 20.NOV.2019 10:54:52



Date: 20.NOV.2019 10:55:02

Middle channel

Middle channel

**Band 4:**

802.11a

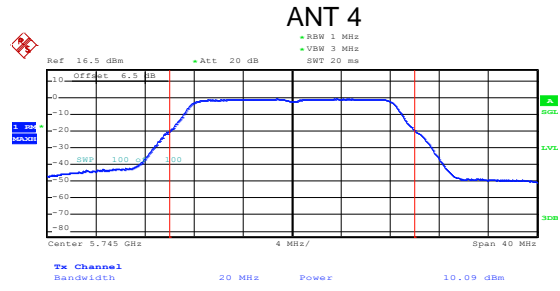
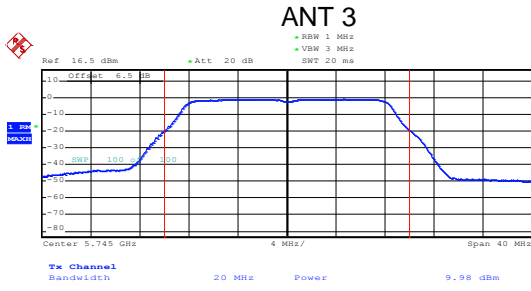


Date: 20.NOV.2019 16:08:44

Date: 20.NOV.2019 16:08:52

**Lowest channel**

**Lowest channel**

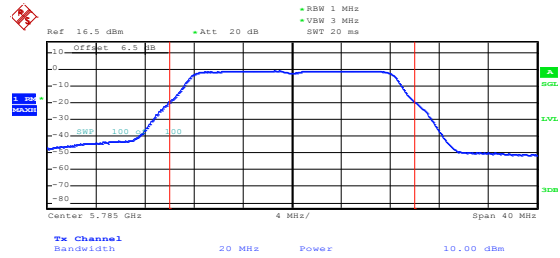
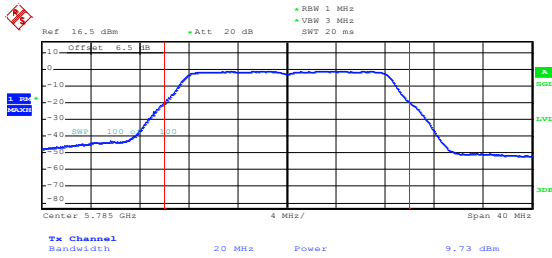


Date: 20.NOV.2019 16:10:53

Date: 20.NOV.2019 16:11:17

**Middle channel**

**Middle channel**

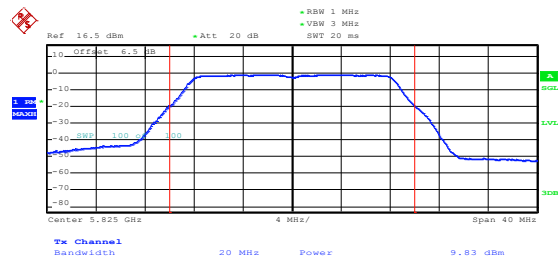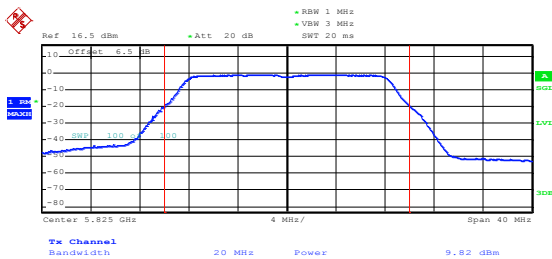

Date: 20.NOV.2019 16:12:41


Date: 20.NOV.2019 16:12:48

**Highest channel**

**Highest channel**


## 802.11n-HT20

### ANT 3

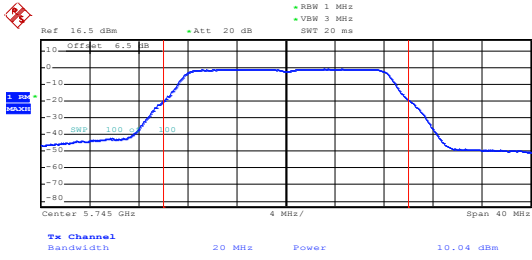


Date: 20.NOV.2019 16:09:21

### ANT 4

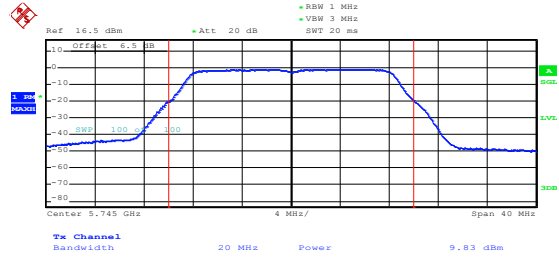


Date: 20.NOV.2019 16:09:49

### Lowest channel

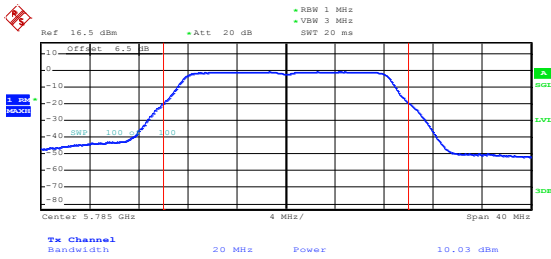


Date: 20.NOV.2019 16:11:37

### Lowest channel

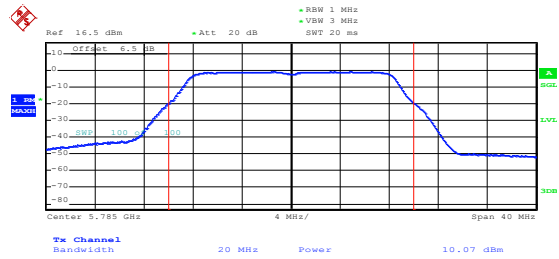


Date: 20.NOV.2019 16:11:52

### Middle channel

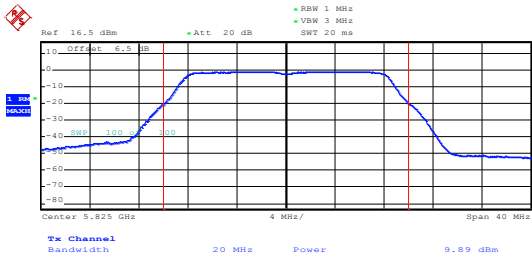

Date: 20.NOV.2019 16:12:22

### Middle channel

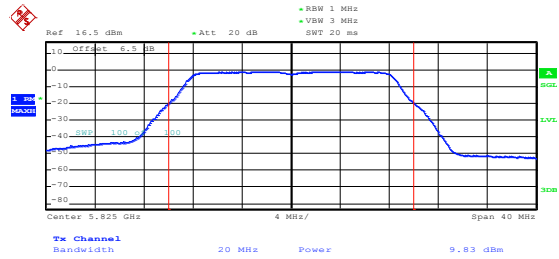


Date: 20.NOV.2019 16:12:29

### Highest channel

### Highest channel


## 802.11n-HT40

ANT 3

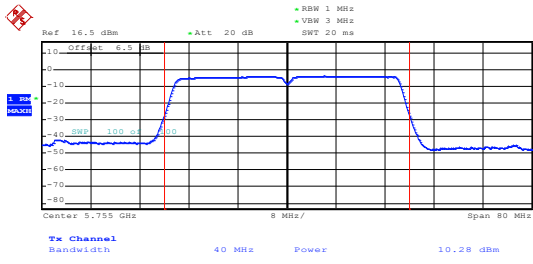


Date: 20.NOV.2019 16:14:13

ANT 4

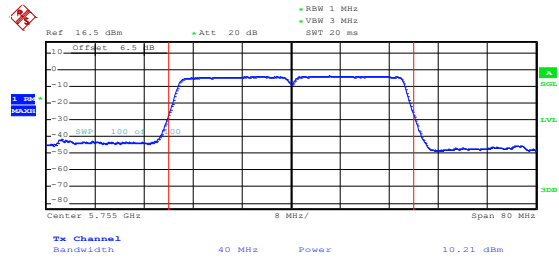


Date: 20.NOV.2019 16:14:21

Lowest channel

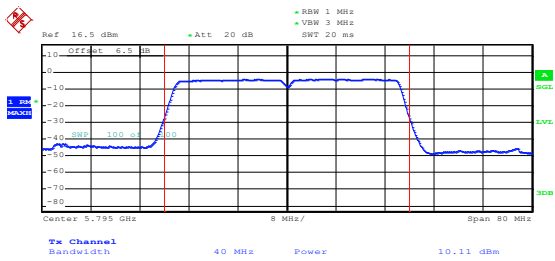

Date: 20.NOV.2019 16:15:26

Lowest channel

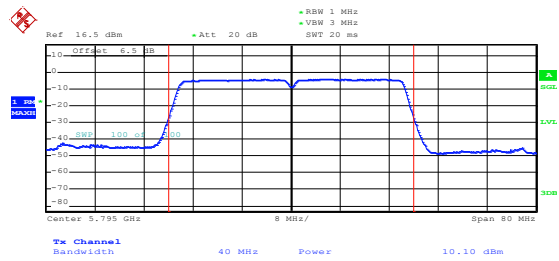


Date: 20.NOV.2019 16:15:36

Highest channel


Highest channel

## 802.11ac-HT20

### ANT 3

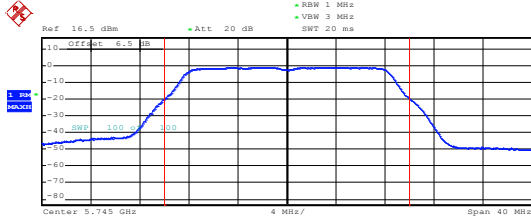


### ANT 4

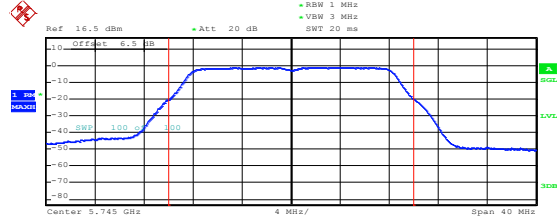


Date: 20.NOV.2019 16:10:04

Date: 20.NOV.2019 16:10:13

### Lowest channel

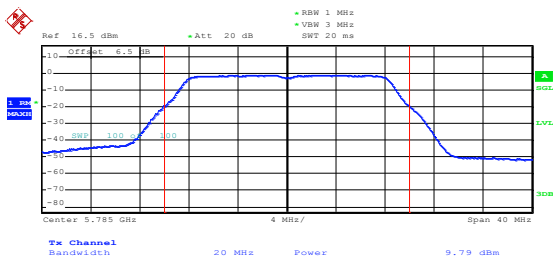


### Lowest channel

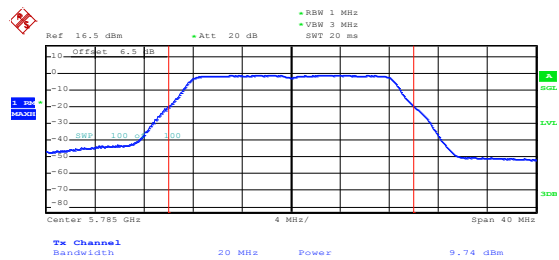


Date: 20.NOV.2019 16:10:34

Date: 20.NOV.2019 16:10:42

### Middle channel

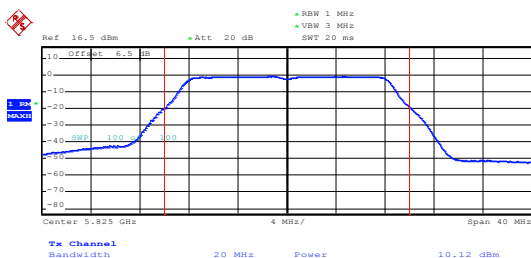

### Middle channel

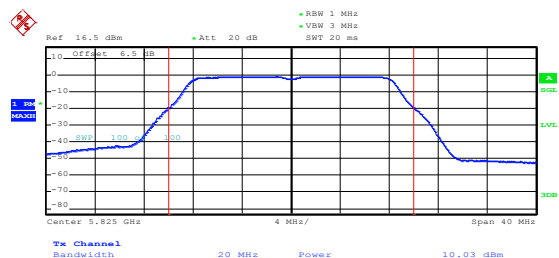

Date: 20.NOV.2019 16:13:13


Date: 20.NOV.2019 16:13:21

### Highest channel

### Highest channel


## 802.11ac-HT40

ANT 3

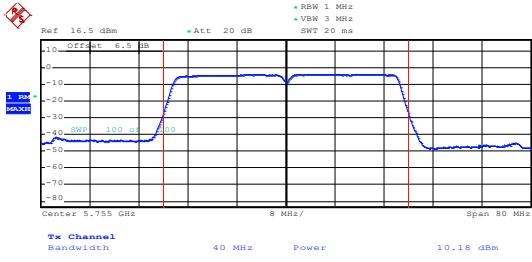


Date: 20.NOV.2019 16:14:32

ANT 4

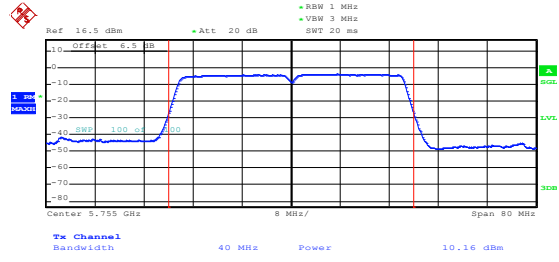


Date: 20.NOV.2019 16:14:40

Lowest channel

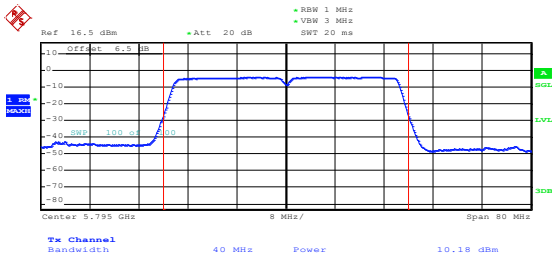

Date: 20.NOV.2019 16:15:04


Lowest channel

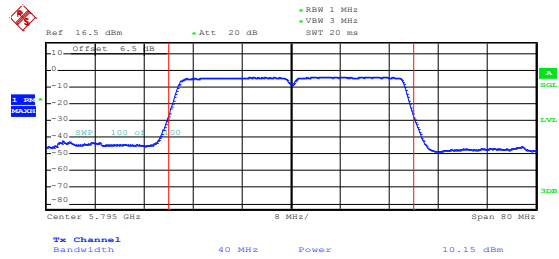

Date: 20.NOV.2019 16:15:15

Highest channel


## 802.11ac-HT80

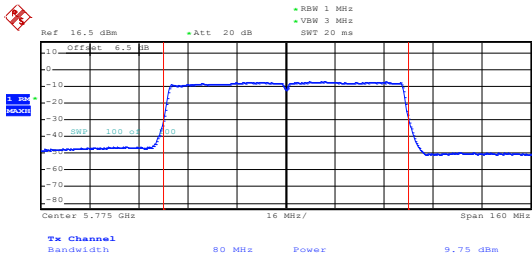

Date: 20.NOV.2019 16:17:03

Highest channel

## 802.11ac-HT80

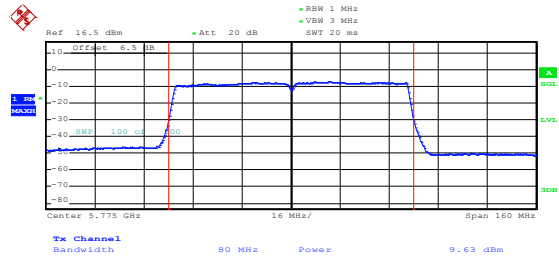


Date: 20.NOV.2019 16:17:20

Middle channel

Middle channel

## 6.4 Occupy Bandwidth

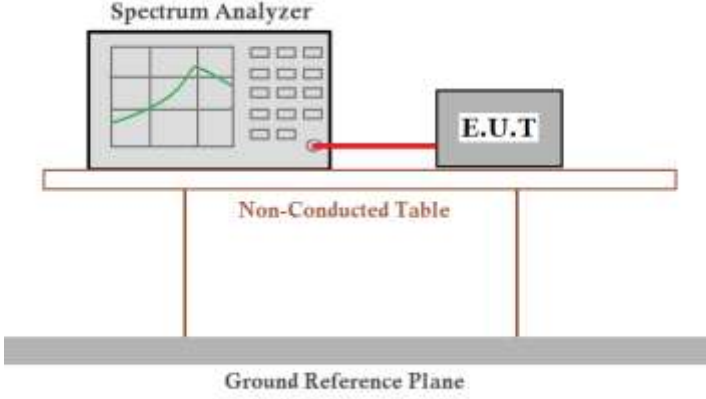Test Requirement:	FCC Part15 E Section 15.407 (a) (5) and Section 15.407 (e)
Test Method:	ANSI C63.10:2013 and KDB 789033
Limit:	Band 1/4: N/A (26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: >500kHz (6dB Bandwidth)
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

### Measurement Data:

#### Left module:

#### Band 1: ANT 1

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.92	22.16	40.40	22.24	40.08	---	N/A	PASS
Middle	21.92	22.16	---	22.08	---	79.76		
Highest	18.63	20.16	39.52	19.90	39.84	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.36	18.40	37.12	18.40	37.12	---	N/A	PASS
Middle	17.36	18.40	---	18.40	---	76.16		
Highest	17.36	18.40	37.12	18.32	37.12	---		

Remark: The ANT 1 and ANT 2 are the same chip control, pre-scan ANT 1 and ANT 2, found ANT 1 was worse case mode. The report only reflects the worst mode.



**Band 4:ANT 1**

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.92	21.84	40.32	21.92	40.32	---	N/A	PASS
Middle	21.92	21.92	---	21.92	---	81.28		
Highest	22.00	22.00	40.16	22.00	40.32	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.28	17.28	37.12	17.28	37.12	---	N/A	PASS
Middle	17.36	17.36	---	17.28	---	76.32		
Highest	17.36	17.36	36.96	17.36	37.12	---		
Test Channel	6dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.56	17.76	36.64	17.84	36.64	---	>500kHz	PASS
Middle	16.56	17.68	---	17.84	---	76.48		
Highest	16.56	17.84	36.64	17.84	36.64	---		

Remark: The ANT 1 and ANT 2 are the same chip control, pre-scan ANT 1 and ANT 2, found ANT 1 was worse case mode. The report only reflects the worst mode.

**Right module:**

**Band 1: ANT 3**

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.92	22.08	40.20	22.08	39.84	---	N/A	PASS
Middle	21.76	22.08	---	22.16	---	80.28		
Highest	18.63	20.08	39.60	20.40	39.76	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.28	18.40	37.12	18.40	37.12	---	N/A	PASS
Middle	17.36	18.40	---	18.32	---	76.16		
Highest	17.36	18.32	37.12	18.40	36.96	---		


*Remark: The ANT 3 and ANT 4 are the same chip control, pre-scan ANT 3 and ANT 4, found ANT 3 was worse case mode. The report only reflects the worst mode.*


**Band 4: ANT 3**


Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.84	21.84	40.00	21.84	39.84	---	N/A	PASS
Middle	21.92	21.92	---	21.92	---	80.96		
Highest	21.84	21.84	40.16	21.92	40.16	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.28	17.28	37.12	17.28	36.96	---	N/A	PASS
Middle	17.28	17.36	---	17.28	---	75.96		
Highest	17.28	17.28	36.96	17.28	36.96	---		
Test Channel	6dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.56	17.76	36.64	17.68	36.64	---	>500kHz	PASS
Middle	16.56	17.76	---	17.76	---	76.48		
Highest	16.56	17.84	36.64	17.84	36.64	---		


Remark: The ANT 3 and ANT 4 are the same chip control, pre-scan ANT 3 and ANT 4, found ANT 3 was worse case mode. The report only reflects the worst mode.


Measurement Data:  
 Left module:  
 Band 1: TX1

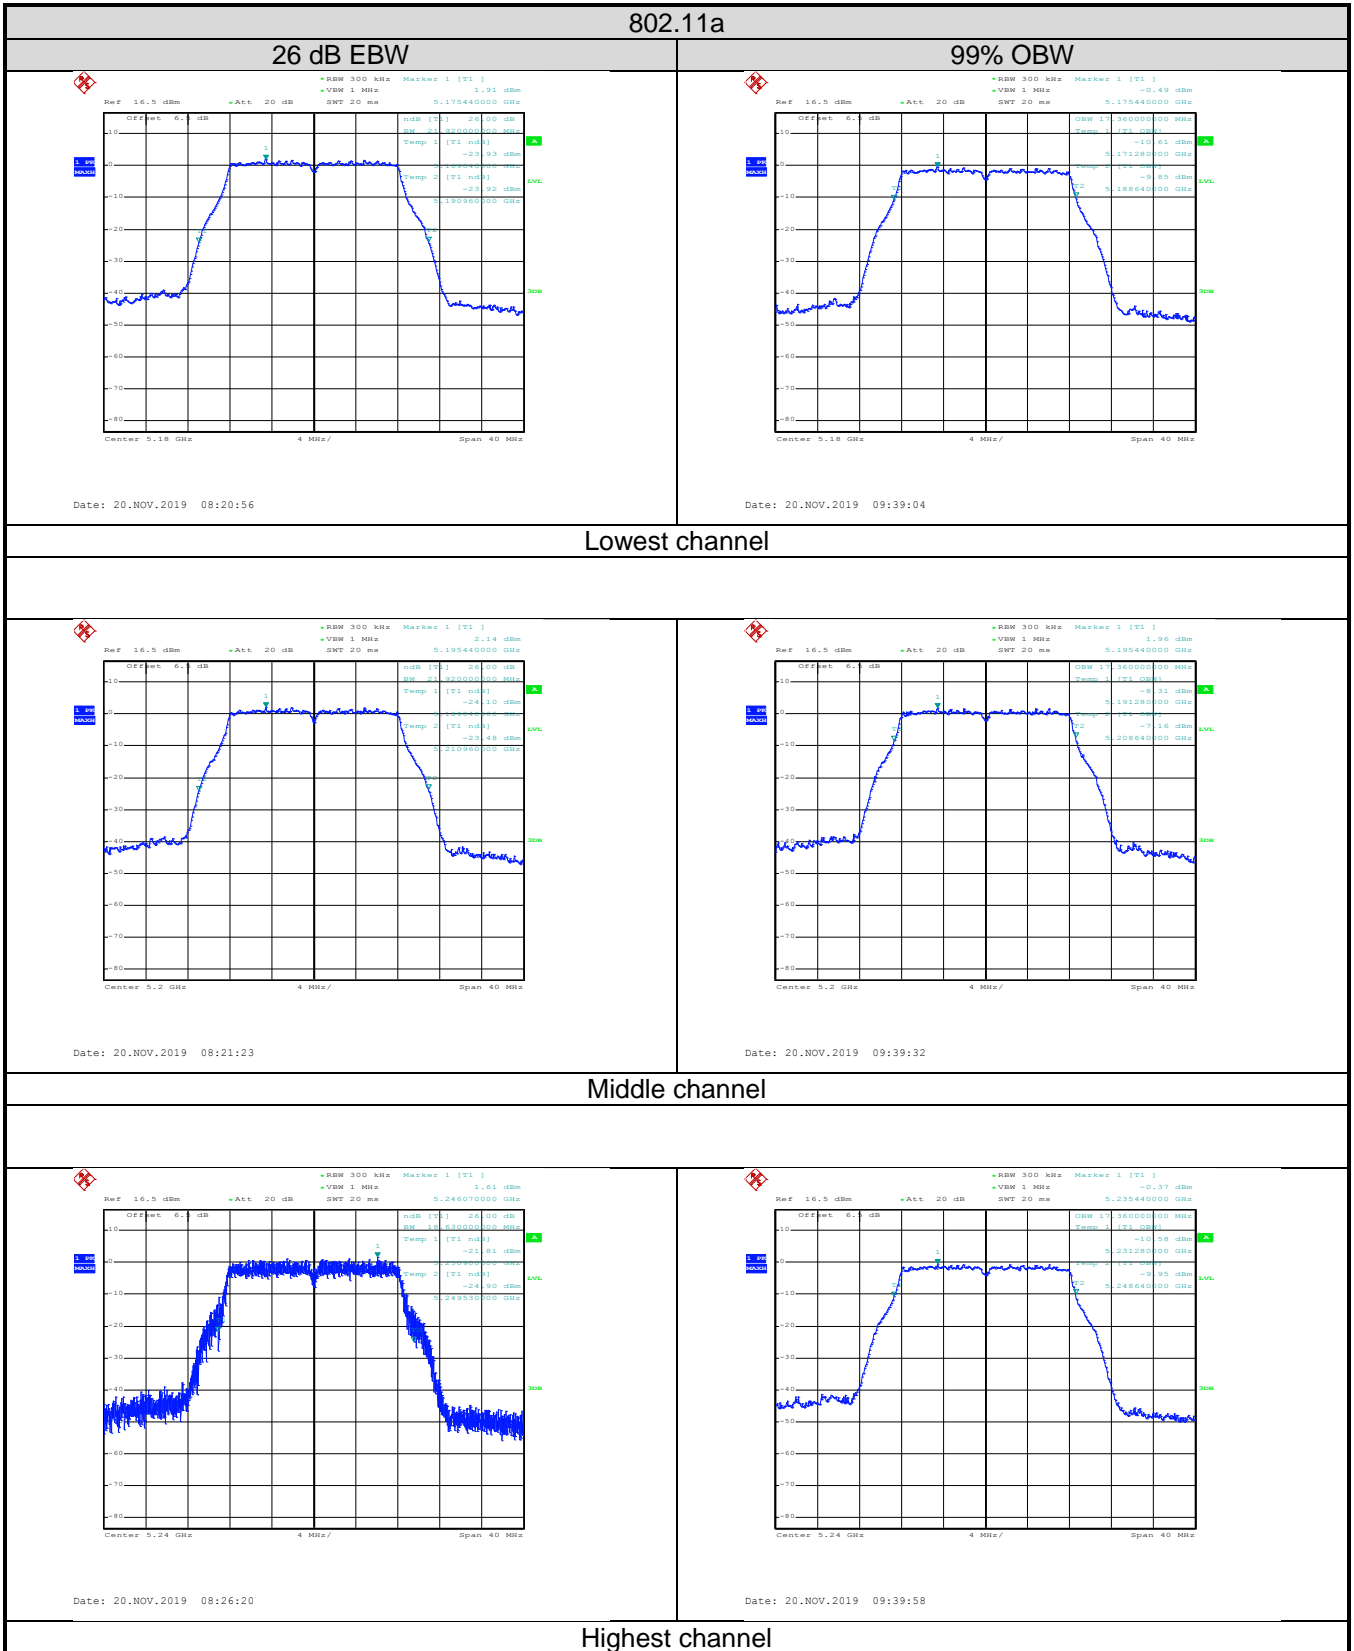

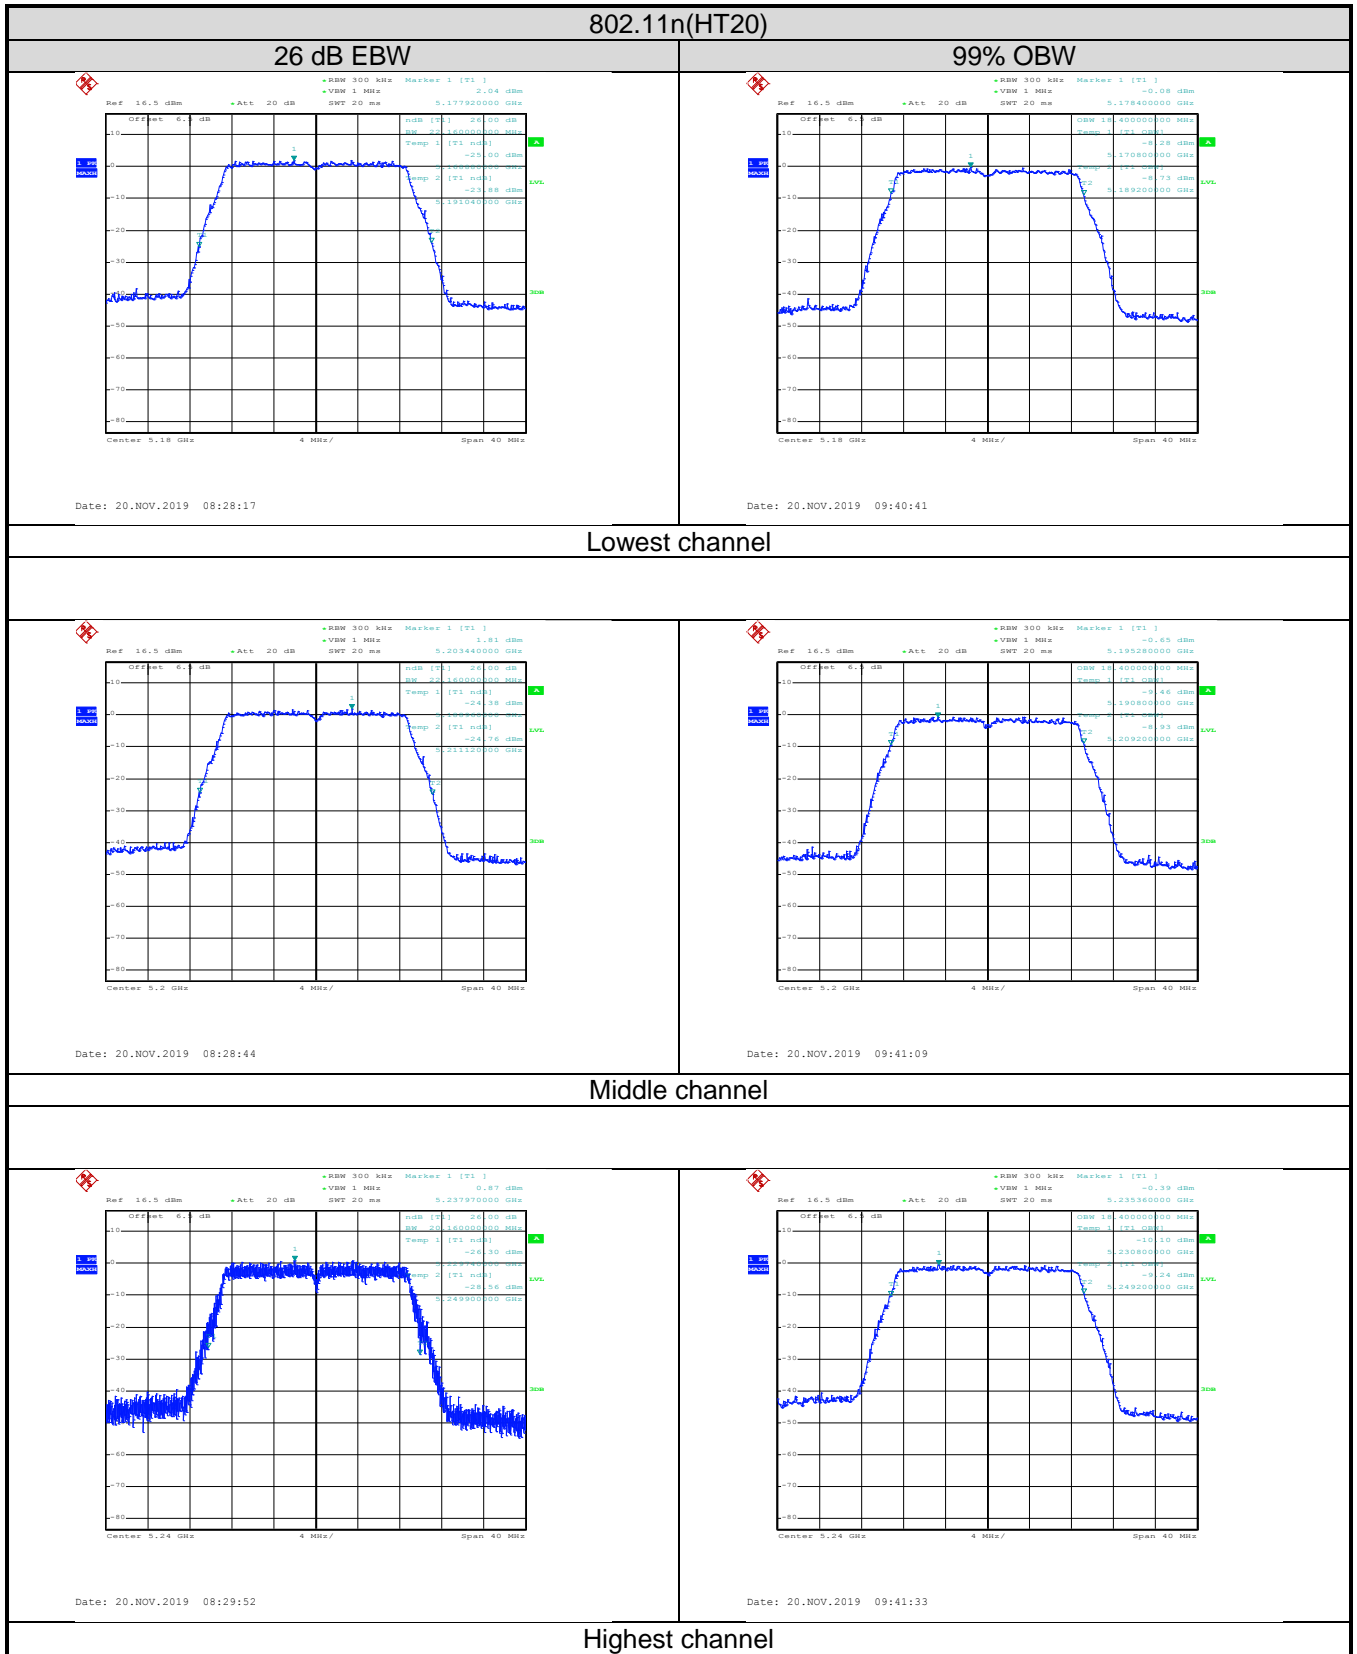

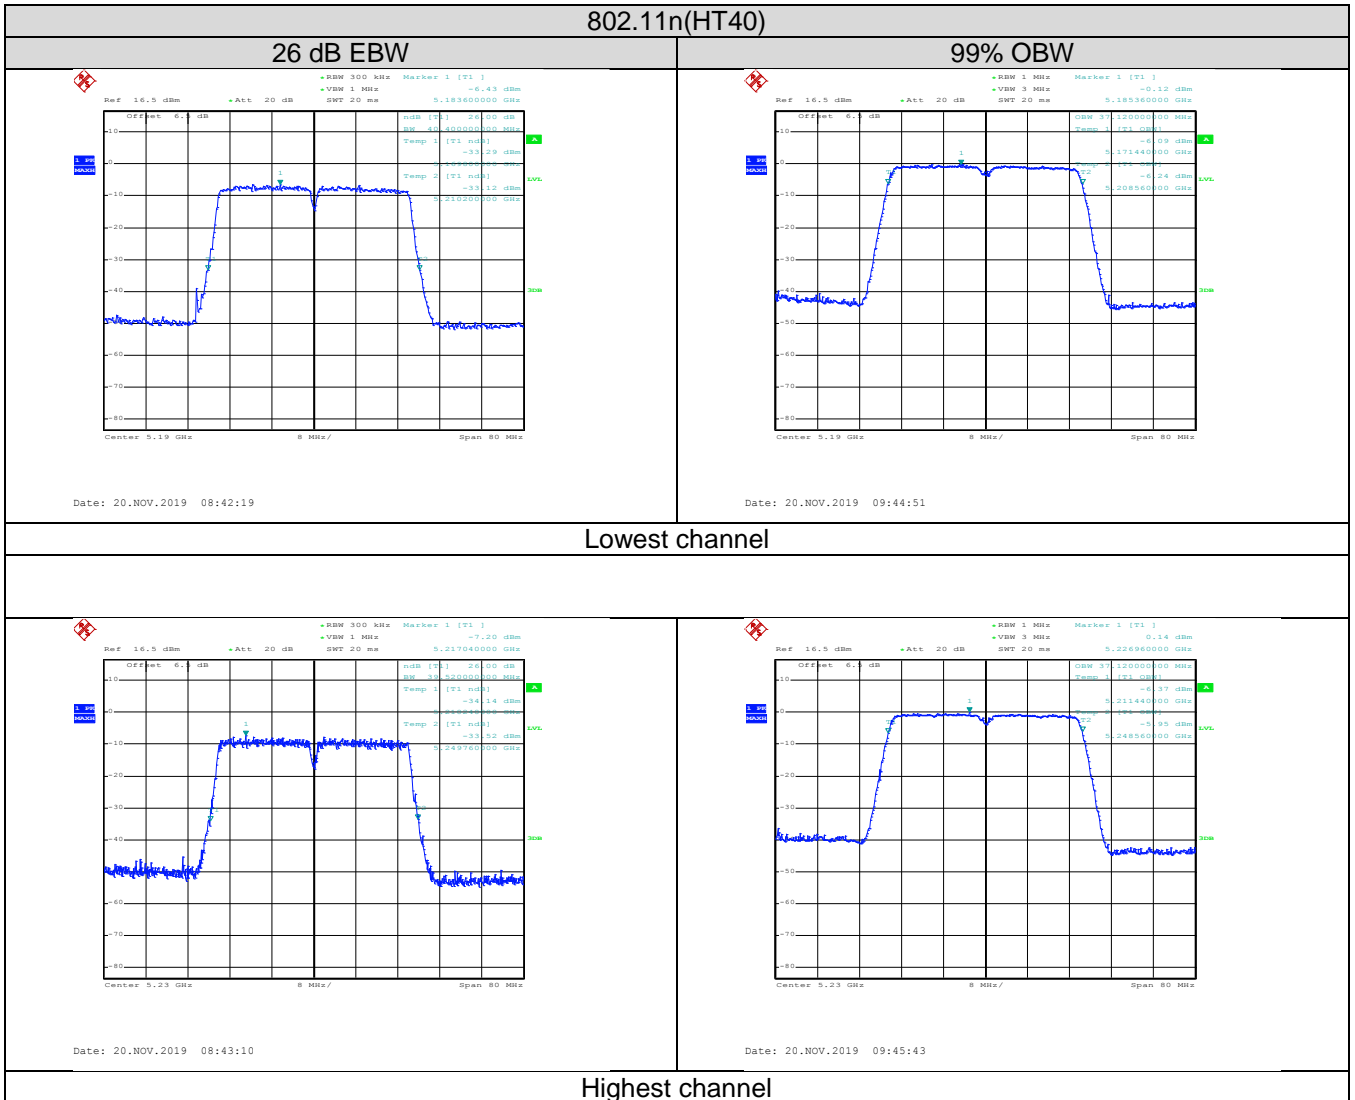

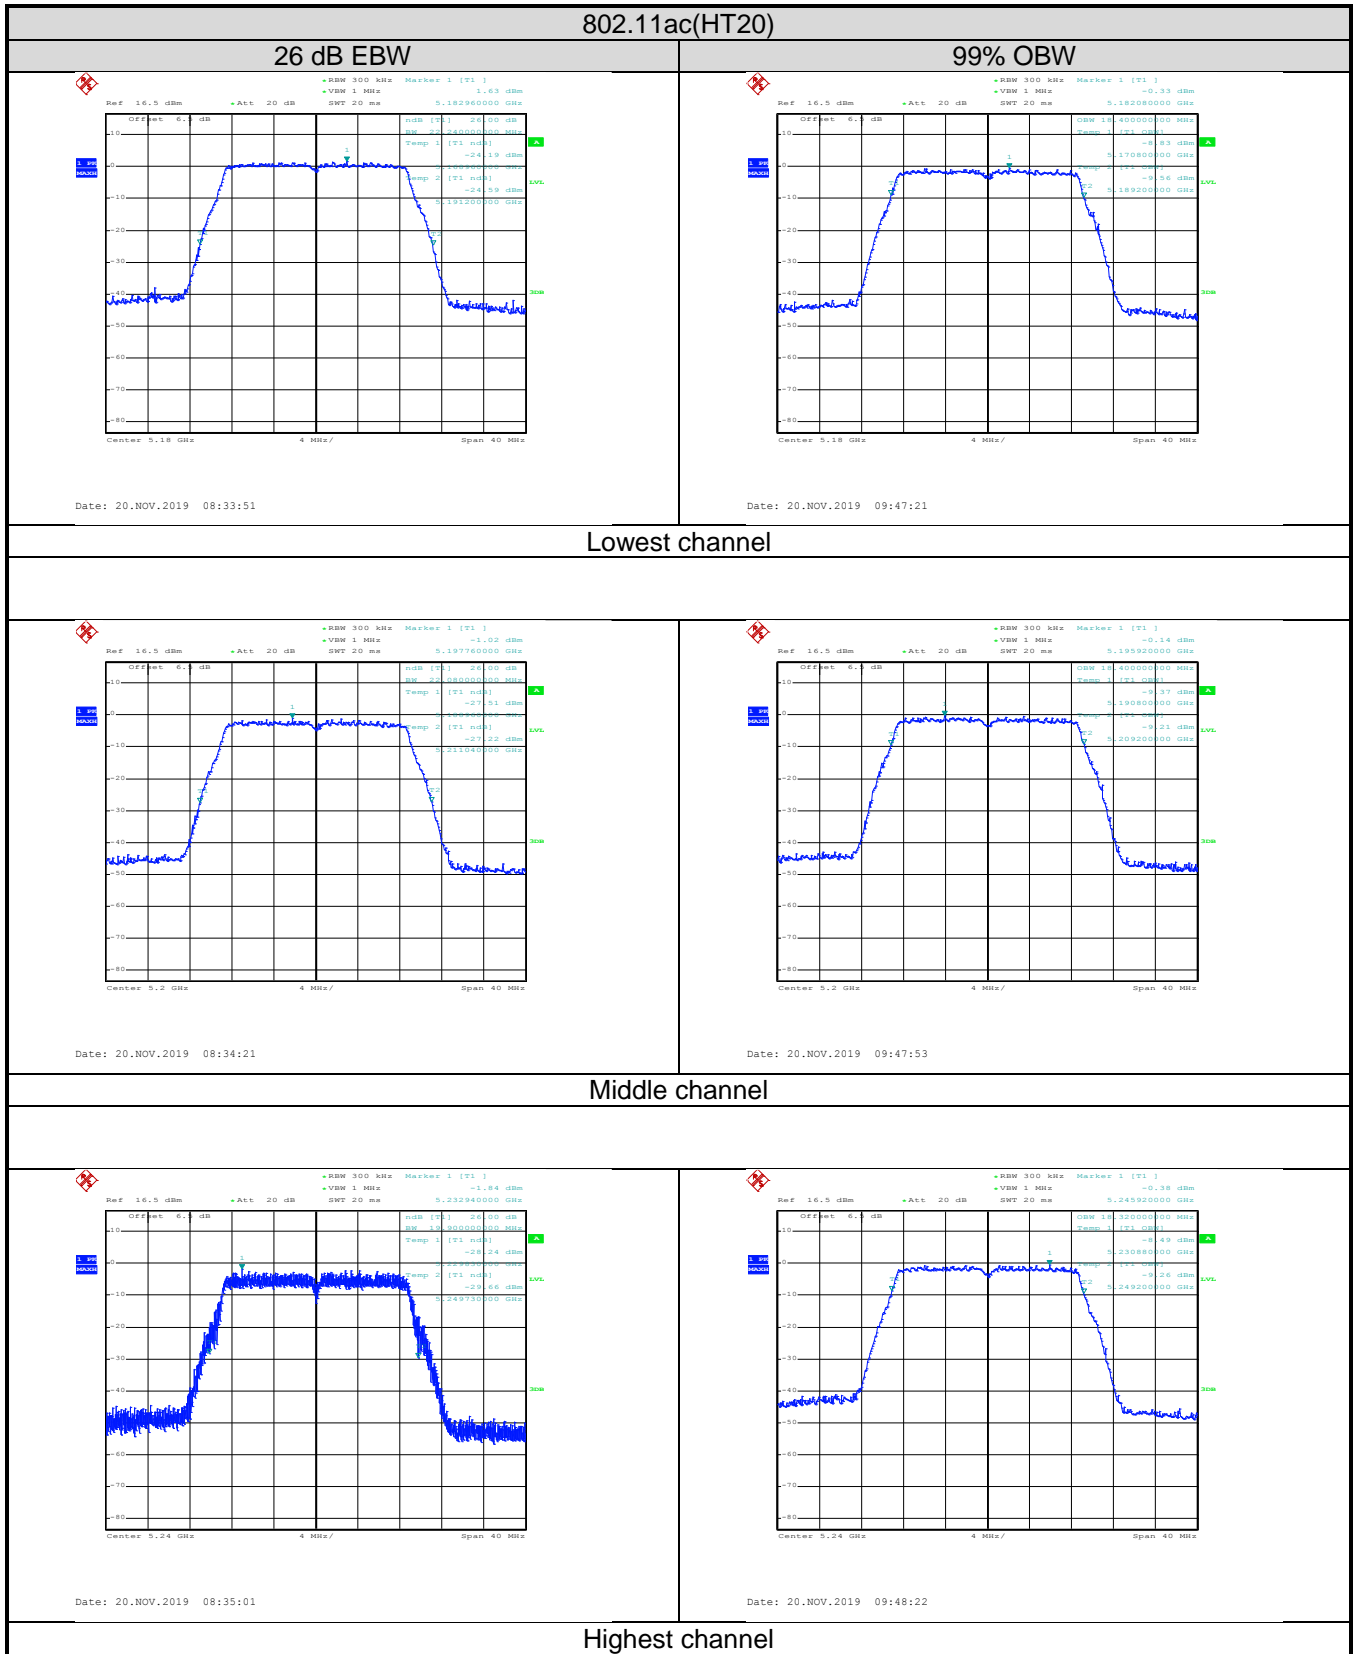

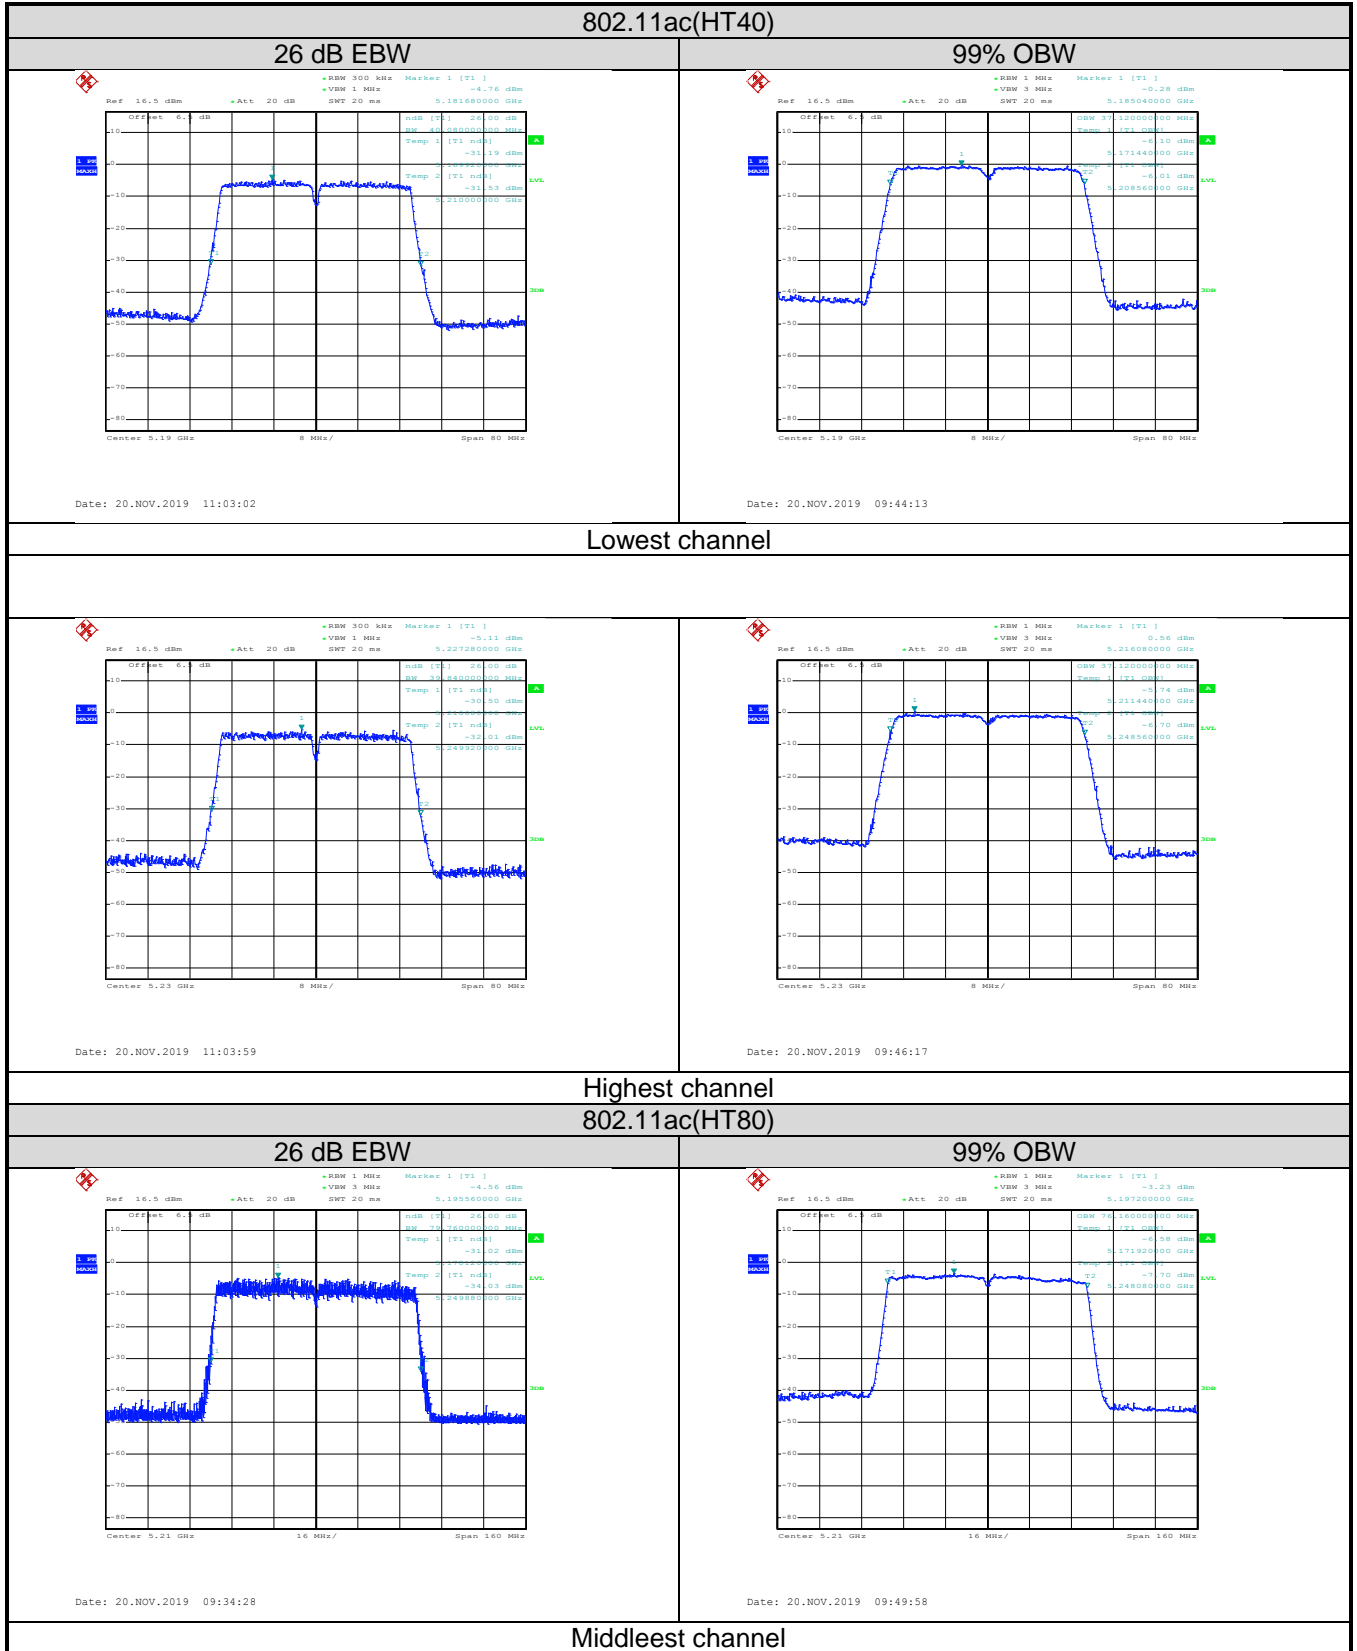



Band 4: TX1

