

TECHNICAL APPENDIX FOR SES-4

1. Name, Address, and Telephone Number of Applicant

New Skies Satellites B.V.
Rooseveltplantsoen 4
2517 KR Den Hague
The Netherlands
+31 70 306 4100

2. Contacts for Correspondence or Inquiries

Joslyn Read
Vice President
Daniel Mah
Regulatory Counsel

SES WORLD SKIES
1129 20th Street, N.W.
Suite 1000
Washington, DC 20036
(202) 478-7100
joslyn.read@ses.com
daniel.mah@ses.com

with a copy to counsel:

John K. Hane
Tony Lin
Pillsbury Winthrop Shaw Pittman LLP
2300 N Street NW
Washington, DC 20037
202-663-8000
john.hane@pillsburylaw.com

3. Type of Authorization Requested

New Skies Satellites B.V. (doing business as “SES WORLD SKIES”) hereby submits this Petition for Declaratory Ruling (“Petition”) seeking U.S. market access for SES-4, as a replacement for the currently operating NSS-7 satellite at the 22.0° W.L. (338° E.L.) orbital location. Specifically, SES WORLD SKIES requests: (1) the inclusion of SES-4, with respect to its conventional C-band and Ku-band payloads, on the Permitted Space Station List (“Permitted List”) for the provision of Fixed-Satellite

Service (“FSS”) to, from and within the United States; (2) a ruling permitting the use of the extended C-band and Ku-band capacity on SES-4 for the provision of international FSS and limited tracking, telemetry and command (“TT&C”) operations; and (3) authority to provide direct-to-home (“DTH”) FSS within the United States and between the United States and certain other countries.

4. General Description of Overall System Facilities, Operations and Services

SES-4 is a geostationary satellite operating in the C-band and Ku-band that will provide a range of FSS to users located in various countries in ITU Regions 1 and 2 from the 22° W.L. orbital location. The C-band portion of the communications payload consists of 36 transponders with one group of 42-for-36 Traveling Wave Tube Amplifiers (“TWTAs”), using both left hand and right hand circular polarization to achieve dual frequency re-use. The satellite features three C-band beams that can be interconnected on a transponder-by-transponder basis: (a) West Hemisphere beam (covering Eastern North America, Central America, and South America), (b) East Hemisphere beam (covering Europe, the Middle East, and Africa), and (c) a Global beam. Eight (8) C-band transponders have a bandwidth of 72 MHz, sixteen (16) transponders have a bandwidth of 54 MHz, and twelve (12) transponders have a bandwidth of 36 MHz.

The Ku-band portion of the communications payload consists of 50 transponders with one group of 58-for-50 Traveling Wave Tube Amplifiers TWTAs, using both horizontal and vertical polarization to achieve dual frequency re-use. The satellite features four Ku-band beams that can be interconnected on a transponder-by-transponder basis: (a) Europe/Middle East beam (covering Europe, Middle East, Northern Africa and part of Russia), (b) North American beam (covering North America), (c) Southern Cone beam (covering Latin America) and (c) a West Africa beam (covering Western and

Central Africa). Six (6) Ku-band transponders have a bandwidth of 62 MHz, thirty eight (38) transponders have a bandwidth of 54 MHz, and six (6) transponders have a bandwidth of 36 MHz.

SES-4 has a wide range of possible connectivities between the different beams, including the possibility to cross-connect between C-band beams and Ku-band beams.

As specified in Table 5-5 and Appendix C, the Telemetry, Tracking and Control ("TT&C") functions will be provided at the edges of the allocated conventional C-band, Ku-band, and extended Ku-band frequencies, consistent with the Commission's rules.¹ The accompanying Schedule S includes information on which antenna beams are connected or switchable to each transponder and TT&C functions.

5. Operational Characteristics

5.1 Frequency/Channelization and Polarization Plan

Details of the SES-4 frequency/channelization and polarization plan, including the TT&C frequencies, are included in the accompanying Schedule S. Typical emission designators with associated bandwidth can also be found in the Schedule S.

5.2 Communications Payload

5.2.1 Uplink Transmissions

The maximum receive antenna gain, receive system noise temperature, and beam peak G/T, SFD and cross-polarization isolation of the SES-4 satellite are all specified in the accompanying Schedule S. Note that the G/T will decrease and the SFD level will increase, dB-for-dB, from the beam peak value as the uplink location moves away from beam peak.

¹ See 47 C.F.R. § 25.202(g); *see also In the Matter of EchoStar KuX Corporation Application for Authority to Construct, Launch and Operate a Geostationary Satellite Using the Extended Ku-band* (footnote continued)

5.2.2 Downlink Transmissions

In the C-band, the SES-4 downlink will be capable of a maximum EIRP of 42.8 dBW in the East Hemi Beam, 42.1 dBW in the West Hemi Beam, and 36.4 dBW in the Global Beam. In the Ku-band, the SES-4 downlink will be capable of a maximum EIRP of 50.9 dBW in the Europe/Middle East Beam, 54.3 dBW in the North America Beam, 51.9 dBW in the Southern Cone Beam, and 51.9 dBW in the West Africa Beam. The peak transmit antenna gain, EIRP, cross-polarization, and associated contours are specified in the accompanying Schedule S.

5.2.3 Channel Filter Response

The predicted worst case channel filter response performance for each of the transponder bandwidths (72 MHz, 62 MHz, 54 MHz and 36 MHz), measured between the receive antenna reference interface point and the transmit antenna reference interface point, is shown in Table 5-1a and Table 5-1b.

| Parameter | Frequency Offset from Channel Center (F_c) | Gain Relative to Channel Center Frequency |
|--|--|---|
| Insertion Loss Variation 36 MHz Channel | ±12.6 MHz | 0.3 dB _{p-p} |
| | ±14.4 MHz | 0.4 dB _{p-p} |
| | ±16.2 MHz | 0.6 dB _{p-p} |
| | ±18.0 MHz | 1.2 dB _{p-p} |
| Insertion Loss Variation 54 MHz Channel | ±18.9 MHz | 0.3 dB _{p-p} |
| | ±21.6 MHz | 0.4 dB _{p-p} |
| | ±24.3 MHz | 0.5 dB _{p-p} |
| | ±27 MHz | 1.0 dB _{p-p} |
| Insertion Loss Variation 72 MHz Channel | ±25.2 MHz | 0.3 dB _{p-p} |
| | ±28.8 MHz | 0.4 dB _{p-p} |
| | ±32.4 MHz | 0.5 dB _{p-p} |
| | ±36 MHz | 1.0 dB _{p-p} |

Table 5-1a. Response Characteristics of Representative SES-4 C-band Channel Filter

Frequencies in the Fixed-Satellite Service at the 83° W.L. Orbital Location, 20 FCC Rcd 919, at ¶ 18 (Int'l Bur. 2004).

| Parameter | Frequency Offset from Channel Center (F_c) | Gain Relative to Channel Center Frequency |
|--|--|---|
| Insertion Loss Variation 36 MHz Channel | ± 12.6 MHz | 0.4 dB _{p-p} |
| | ± 14.4 MHz | 0.6 dB _{p-p} |
| | ± 16.2 MHz | 1.1 dB _{p-p} |
| | ± 18.0 MHz | 2.3 dB _{p-p} |
| Insertion Loss Variation 54 MHz Channel | ± 18.9 MHz | 0.4 dB _{p-p} |
| | ± 21.6 MHz | 0.6 dB _{p-p} |
| | ± 24.3 MHz | 0.9 dB _{p-p} |
| | ± 27 MHz | 1.6 dB _{p-p} |
| Insertion Loss Variation 62 MHz Channel | ± 21.7 MHz | 0.5 dB _{p-p} |
| | ± 24.8 MHz | 0.6 dB _{p-p} |
| | ± 27.9 MHz | 0.9 dB _{p-p} |
| | ± 31.0 MHz | 1.6 dB _{p-p} |

Table 5-1b. Response Characteristics of Representative SES-4 Ku-band Channel Filter

The narrow-band receive and transmit out-of-band response, and the wide-band receive out-of-band response for each of the transponder bandwidths (72 MHz, 62 MHz, 54 MHz and 36 MHz) are shown in Tables 5-2a, 5-2b, 5-3a, 5-3b and 5-4.

| Parameter | Frequency Offset from Channel Center (F_c) | Gain Relative to Channel Center Frequency |
|--|--|---|
| Insertion Loss Variation 36 MHz Channel | $> \pm 23$ MHz | -10 dB |
| | $> \pm 27$ MHz | -40 dB |
| Insertion Loss Variation 54 MHz Channel | $> \pm 34$ MHz | -10 dB |
| | $> \pm 38$ MHz | -40 dB |
| Insertion Loss Variation 72 MHz Channel | $> \pm 44$ MHz | -10 dB |
| | $> \pm 50$ MHz | -40 dB |
| | $> \pm 94$ MHz | -40 dB |

Table 5-2a. Narrow-band Receive Out-of-Band Response Characteristics of Representative SES-4 C-band Channels

| Parameter | Frequency Offset from Channel Center (F_c) | Gain Relative to Channel Center Frequency |
|--|--|---|
| Insertion Loss Variation 36 MHz Channel | $> \pm 23$ MHz | -10 dB |
| | $> \pm 27$ MHz | -25 dB |
| | $> \pm 30$ MHz | -40 dB |
| Insertion Loss Variation 54 MHz Channel | $> \pm 34$ MHz | -10 dB |
| | $> \pm 38$ MHz | -40 dB |
| Insertion Loss Variation 62 MHz Channel | $> \pm 38$ MHz | -10 dB |
| | $> \pm 43$ MHz | -40 dB |
| | $> \pm 81$ MHz | -40 dB |

Table 5-2b. Narrow-band Receive Out-of-Band Response Characteristics of Representative SES-4 Ku-band Channels

| Parameter | Frequency Offset from Channel Center (F_c) | Gain Relative to Channel Center Frequency |
|--|--|---|
| Insertion Loss Variation 36 MHz Channel | > ± 23 MHz | -8 (-6) dB |
| | > ± 27 MHz | -20 (-15) dB |
| Insertion Loss Variation 54 MHz Channel | > ± 34 MHz | -8 (-6) dB |
| | > ± 38 MHz | -20 (-15) dB |
| Insertion Loss Variation 72 MHz Channel | > ± 44 MHz | -8 (-6) dB |
| | > ± 50 MHz | -20 (-15) dB |
| | > ± 94 MHz | -20 (-15) dB |

Table 5-3a. Narrow-band Transmit Out-of-Band Response Characteristics of Representative SES-4 C-band Channels (values in parentheses apply to the channel edge corresponding to the upper or lower edge of the transmit band)

| Parameter | Frequency Offset from Channel Center (F_c) | Gain Relative to Channel Center Frequency |
|--|--|---|
| Insertion Loss Variation 36 MHz Channel | > ± 23 MHz | -8 (-6) dB |
| | > ± 27 MHz | -20 (-15) dB |
| Insertion Loss Variation 54 MHz Channel | > ± 34 MHz | -8 (-6) dB |
| | > ± 38 MHz | -20 (-15) dB |
| Insertion Loss Variation 62 MHz Channel | > ± 38 MHz | -8 (-6) dB |
| | > ± 43 MHz | -20 (-15) dB |
| | > ± 81 MHz | -20 (-15) dB |

Table 5-3b. Narrow-band Transmit Out-of-Band Response Characteristics of Representative SES-4 Ku-band Ku-band Channels (values in parentheses apply to the channel edge corresponding to the upper or lower edge of the transmit band)

| Parameter | Frequency Offset from Bands Edges (F_e) | Gain Relative to Channel Center Frequency |
|---|---|---|
| Out of Band Rejection All Channels | ± 160 MHz | -20 dB |
| | ± 200 MHz | -30 dB |

Table 5-4. Wide-band Receive Out-of-Band Response Characteristics of Representative SES-4 Channels

The filtered signals will have 15 dB of gain adjustment with a step size of 1 dB dB for both the C- and Ku-band payload. The Ku-band payload also has an ALC

adjustment range of -10 to +3 dB w.r.t. saturation, with 0.5dB steps. Each active satellite transmission chain (channel amplifiers and associated TWTAs) can be individually turned on and off by ground telecommand, resulting in cessation of emissions from the satellite, as required.

5.3 TT&C Subsystem

The satellite TT&C subsystem provides redundant telemetry, tracking and command channels for the SES-4 spacecraft. The principal functions of the subsystem are:

1. Reception and amplification of the radio frequency command uplinks and demodulation for subsequent signal processing and command distribution.
2. Modulation, up-conversion, amplification, and transmission of all telemetry data.
3. Reception and retransmission of ground-station-generated ranging signals.

Normal on-station commands will be received through the earth-facing horn antenna, and on-station telemetry will be transmitted through the earth facing horn antenna, allowing the satellite to be commanded from anywhere on the Earth that is visible from its orbital location.

A beacon signal will be continuously transmitted by the satellite and used by earth station operators as a calibrated reference to compensate for rain attenuation and to adjust antenna pointing. This frequency will be transmitted through the earth facing horn antenna and will be available anywhere within the satellite's coverage area.

The TT&C frequency and polarization plans for all phases of the mission are shown in Table 5-5.

| Carrier | Frequency, MHz | Polarization |
|---------------|----------------|--------------|
| Telecommand 1 | 14496.0 | RHCP |
| Telecommand 2 | 14499.0 | RHCP |
| Telemetry 1 | 11451.0 | RHCP |

| | | |
|-----------------|---------|------|
| Telemetry 2 | 11454.0 | RHCP |
| Telemetry 3 | 12500.5 | LHCP |
| Telemetry 4 | 12502.0 | LHCP |
| Tracking Beacon | 4199.75 | V |

Table 5-5. SES-4 TT&C Frequency and Polarization Plan

It should be noted that Telemetry frequencies 1 through 4 can also be used as tracking beacon signals. The two telemetry frequencies in the 12.5 GHz band are usable only in ITU Region 1.

The telemetry and command link performance is summarized in the link budget analysis in Appendix C. The antenna patterns for the TT&C subsystem are discussed in Section 7.3. The emission designators associated with the TT&C subsystem are 800KF9D for command, 300KF9D for telemetry and 25K0N0N for the tracking beacons. The associated allocated bandwidth is 800 kHz, 300 kHz and 25 kHz for each of these emissions, respectively.

5.6 Cross-polarization Isolation

The cross-polarization isolation performance of the SES-4 antennas are given in Schedule S. The cross-polarization isolation performance is less than the 30 dB required by Section 25.210(i) for the primary coverage areas of the satellite. The cross-polarization isolation performance for the SES-4 satellite is 28 dB for the East Hemi beam and 26.3 dB for the West Hemi beam. For the Ku-band beams, the worst-case cross-polarization isolation is in the 27 dB range. Such cross-polarization isolation performance levels will have a negligible impact on adjacent satellites. SES WORLD SKIES respectfully requests a waiver of Section 25.210(i) for SES-4. *See* Narrative, at Section III.C.2.

6. Orbital Location

SES WORLD SKIES will operate the SES-4 satellite at the 22.0° W.L. orbital location, under a license issued by and ITU network filings registered to The Netherlands. The requested orbital location is necessary to provide continuity of service to customers.

7. Predicted Spacecraft Antenna Gain Contours

7.1 Uplink Beams

The receive antenna gain contours for the SES-4 receive beams are given in GXT format in the accompanying Schedule S. The contours can also be found in Appendix B.

7.2 Downlink Beams

The peak transmit gain, and the antenna gain contours in GXT format, are given in the accompanying Schedule S. The contours can also be found in Appendix B.

7.3 TT&C Beams

The TT&C coverage for all stages of mission operation will be provided by the receive communications antenna for command and by the earth facing horn transmit communications antenna for telemetry. The receive and transmit antenna beam patterns are given in GXT format in the accompanying Schedule S (see also Sections 7.1 and 7.2 above).

8. Service Description, Link Performance Analysis, and Earth Station Parameters

8.1 Service Description

SES WORLD SKIES will use the SES-4 satellite to provide a wide range of FSS services, including voice, video and narrowband to wideband digital services, to customers throughout the Americas, Europe, the Middle East, and Africa.

8.2 Link Performance

Representative communications link budgets for the SES-4 satellite are shown in Appendix A as Tables A-1 to A-39. The TT&C link budgets are shown in Appendix C as Tables C-1 to C-4.

In the link budgets depicted in Tables A-1 to A-39 it is also indicated to which transponders they relate (under the header “Associated Txr IDs”) as they are defined in the accompanying Schedule S. This information would relate to Columns “a” and “b” of Table S13 of Schedule S.

The link budgets assume two adjacent operating satellites at 2 degrees orbital separation each. For the C-band digital carrier link budgets, the uplink power density of the emissions from each of the neighboring satellites was assumed to be -42 dBW/Hz. The downlink EIRP density of the emissions of each of the adjacent satellites was assumed to be -34 dBW/Hz. At Ku-band, the uplink power density of the emissions from each of the adjacent satellites was assumed to be -50 dBW/Hz, and the maximum downlink EIRP density of the emissions from each of the hypothetical satellites was assumed to be -26 dBW/Hz.

8.3 Earth Station Parameters

Earth station characteristics are reflected in the representative link budgets shown in Appendix A as Tables A-1 to A-39 as well as the accompanying Schedule S.

9. Satellite Orbit Characteristics

The SES-4 satellite will be maintained in geosynchronous orbit at the 22° W.L. orbital location with a maximum N-S drift of $\pm 0.05^\circ$ and a maximum E-W drift of $\pm 0.05^\circ$. The antenna axis attitude will be maintained within a value of $\pm 0.16^\circ$ for pitch, $\pm 0.14^\circ$ for roll, and 0.41° for yaw, for all modes of operation.

10. Power Flux Density

The allowable PFD levels in the C-band are defined in Section 25.208(a) of the Commission's rules for all conditions, including clear sky, and for all methods of modulation as:

- (1) For angles of arrival between 0 and 5 degrees above the horizontal plane: -152 dBW/m² in any 4 kHz band;
- (2) For angles of arrival δ (in degrees) between 5 and 25 degrees above the horizontal plane: $-152 + (\delta-5)/2$ dBW/m² in any 4 kHz band; and
- (3) For angles of arrival between 25 and 90 degrees above the horizontal plane: -142 dBW/m² in any 4 kHz band.

SES WORLD SKIES will operate SES-4 such that all C-band downlink transmissions will comply with these PFD limits.

The allowable PFD levels in the 10.95-11.20 GHz and 11.45-11.70 GHz bands (per 4kHz) are defined in Section 25.208(b)(1) of the Commission's rules for all conditions, including clear sky, and for all methods of modulation as:

- (1) For angles of arrival between 0 and 5 degrees above the horizontal plane: -150 dBW/m² in any 4 kHz band;
- (2) For angles of arrival δ (in degrees) between 5 and 25 degrees above the horizontal plane: $-150 + (\delta-5)/2$ dBW/m² in any 4 kHz band; and
- (3) For angles of arrival between 25 and 90 degrees above the horizontal plane: -140 dBW/m² in any 4 kHz band.

With respect to the 12.50-12.75 GHz band, the allowable PFD levels are defined in No. 21.16 of the ITU Radio Regulations for all conditions, including clear sky, and for all methods of modulation as:

- (1) For angles of arrival between 0 and 5 degrees above the horizontal plane: -148 dBW/m² in any 4 kHz band;
- (2) For angles of arrival δ (in degrees) between 5 and 25 degrees above the horizontal plane: $-148 + (\delta-5)/2$ dBW/m² in any 4 kHz band; and

- (3) For angles of arrival between 25 and 90 degrees above the horizontal plane: -138 dBW/m^2 in any 4 kHz band.

With respect to the frequency band 11.70-11.95 GHz, no PFD limits are specified in either the FCC rules or the ITU Radio Regulations.

The SES-4 payload will be operated such that all Ku-band downlink transmissions will comply with the applicable PFD limits referenced above.

In order to demonstrate such compliance, the carrier with the highest EIRP density in each of the possible beam connectivities, based on the link budgets set forth in Appendix A, is depicted in Table 10.1 (the worst case for digital and analog transmissions is provided separately) and analyzed below. It should be noted that in the Ku-band downlink there are also some transponders with a bandwidth of 62 MHz on-board the spacecraft. However, from the carrier design point of view, and for the maximum PFD value calculations, these transponders are the same as the 54 MHz transponders. Therefore, the below tables will not separately reflect the connectivities for 62 MHz separately.

| Connectivity | Analog/Digital Carrier | EIRP density (dBW/4kHz) | Carrier Type |
|------------------------------------|------------------------|-------------------------|--------------|
| West Hemi/West Hemi (WH/WH 36 MHz) | Digital | 1.0 | 36M0G7W |
| | Analog | 13.4 | 36M0F3F |
| West Hemi/West Hemi (WH/WH 54 MHz) | Digital | 0.6 | 54M0G7W |
| | Analog | 13.4 | 36M0F3F |
| West Hemi/West Hemi (WH/WH 72 MHz) | Digital | -0.8 | 72M0G7W |
| | Analog | 10.2 | 36M0F3F |
| East Hemi/West Hemi (EH/WH 36 MHz) | Digital | 1.0 | 36M0G7W |
| | Analog | 13.0 | 36M0F3F |
| East Hemi/West Hemi (EH/WH 54 MHz) | Digital | 0.6 | 54M0G7W |
| | Analog | 13.0 | 36M0F3F |
| East Hemi/West Hemi | Digital | -0.8 | 72M0G7W |

| Connectivity | Analog/Digital Carrier | EIRP density (dBW/4kHz) | Carrier Type |
|---|-------------------------------|--------------------------------|---------------------|
| (EH/WH 72 MHz) | Analog | 10.2 | 36M0F3F |
| Europe/West Hemi (EU/WH 54 MHz) | Digital | 0.6 | 54M0G7W |
| | Analog | 13.2 | 36M0F3F |
| West Africa/West Hemi (WA/WH 54 MHz) | Digital | 0.7 | 54M0G7W |
| | Analog | 13.1 | 36M0F3F |
| Global/Global (GLB/GLB 36 MHz) | Digital | -2.2 | 36M0G7W |
| | Analog | 9.6 | 36M0F3F |
| West Hemi/East Hemi (WH/EH 36 MHz) | Digital | 1.0 | 36M0G7W |
| | Analog | 12.7 | 36M0F3F |
| West Hemi/East Hemi (WH/EH 54 MHz) | Digital | 1.0 | 54M0G7W |
| | Analog | 12.7 | 36M0F3F |
| West Hemi/East Hemi (WH/EH 72 MHz) | Digital | -0.3 | 72M0G7W |
| | Analog | 10.7 | 36M0F3F |
| East Hemi/East Hemi (EH/EH 36 MHz) | Digital | 1.0 | 36M0G7W |
| | Analog | 12.6 | 36M0F3F |
| East Hemi/East Hemi (EH/EH 54 MHz) | Digital | 0.9 | 54M0G7W |
| | Analog | 12.6 | 36M0F3F |
| East Hemi/East Hemi (EH/EH 72 MHz) | Digital | -0.3 | 72M0G7W |
| | Analog | 10.7 | 36M0F3F |
| Europe/East Hemi (EU/EH 54 MHz) | Digital | 0.8 | 54M0G7W |
| | Analog | 12.9 | 36M0F3F |
| West Africa/East Hemi (WA/EH 54 MHz) | Digital | 1.0 | 54M0G7W |
| | Analog | 12.9 | 36M0F3F |
| Europe/Europe (EU/EU 36 MHz) | Digital | 9.9 | 36M0G7W |
| | Analog | 14.2 | 36M0F3F |
| Europe/Europe (EU/EU 54 MHz) | Digital | 9.3 | 54M0G7W |
| | Analog | 14.2 | 36M0F3F |
| West Africa/Europe (WA/EU 36 MHz) | Digital | 9.8 | 36M0G7W |
| | Analog | 13.6 | 36M0F3F |
| West Africa/Europe (WA/EU 54 MHz) | Digital | 9.4 | 54M0G7W |
| | Analog | 13.6 | 36M0F3F |

| Connectivity | Analog/Digital Carrier | EIRP density (dBW/4kHz) | Carrier Type |
|---|-------------------------------|--------------------------------|---------------------|
| West Hemi/Europe (WH/EU 54 MHz) | Digital | 9.4 | 54M0G7W |
| | Analog | 13.8 | 36M0F3F |
| East Hemi/Europe (EH/EU 54 MHz) | Digital | 9.4 | 54M0G7W |
| | Analog | 14.0 | 36M0F3F |
| North America/Europe (NA/EU 36 MHz) | Digital | 9.7 | 36M0G7W |
| | Analog | 14.2 | 36M0F3F |
| North America/Europe (NA/EU 54 MHz) | Digital | 9.4 | 54M0G7W |
| | Analog | 14.2 | 36M0F3F |
| Europe/West Africa (EU/WA 36 MHz) | Digital | 9.8 | 36M0G7W |
| | Analog | 19.9 | 36M0F3F |
| Europe/West Africa (EU/WA 54 MHz) | Digital | 9.8 | 54M0G7W |
| | Analog | 19.9 | 36M0F3F |
| West Africa/West Africa (WA/WA 36 MHz) | Digital | 10.0 | 36M0G7W |
| | Analog | 19.8 | 36M0F3F |
| West Africa/West Africa (WA/WA 54 MHz) | Digital | 10.0 | 54M0G7W |
| | Analog | 19.8 | 36M0F3F |
| West Hemi/West Africa (WH/WA 54 MHz) | Digital | 10.0 | 54M0G7W |
| | Analog | 19.7 | 36M0F3F |
| East Hemi/West Africa (EH/WA 54 MHz) | Digital | 10.0 | 54M0G7W |
| | Analog | 19.7 | 36M0F3F |
| N. America/West Africa (NA/WA 36 MHz) | Digital | 9.9 | 36M0G7W |
| | Analog | 19.3 | 36M0F3F |
| N. America/West Africa (NA/WA 54 MHz) | Digital | 10.0 | 54M0G7W |
| | Analog | 19.3 | 36M0F3F |
| S. Cone/S. Cone (SC/SC 54 MHz) | Digital | 10.0 | 54M0G7W |
| | Analog | 16.0 | 36M0F3F |
| North America/S. Cone (NA/SC 54 MHz) | Digital | 10.0 | 54M0G7W |
| | Analog | 16.0 | 36M0F3F |
| S. Cone /North America (SC/NA 54 MHz) | Digital | 10.0 | 54M0G7W |
| | Analog | 14.4 | 36M0F3F |
| N. America /N. America | Digital | 9.9 | 54M0G7W |

| Connectivity | Analog/Digital Carrier | EIRP density (dBW/4kHz) | Carrier Type |
|---|------------------------|-------------------------|--------------|
| (NA/NA 54 MHz) | Analog | 14.1 | 36M0F3F |
| W. Africa /N. America (WA/NA 54 MHz) | Digital | 9.9 | 54M0G7W |
| | Analog | 13.9 | 36M0F3F |
| Europe /N. America (EU/NA 54 MHz) | Digital | 10.0 | 54M0G7W |
| | Analog | 14.5 | 36M0F3F |

Table 10-1. Maximum power density levels for different connectivities

Tables 10-2 to 10-82 below show the worst case PFD levels that will occur at various angles of arrival, for the different connectivities, to demonstrate that they will comply with the requirements of Section 25.208(a) and 25.208(b).

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -164.7 | 12.7 |
| 5° | -152.0 | -163.3 | -2.2 | -164.5 | 12.5 |
| 10° | -149.5 | -163.2 | -1.2 | -163.4 | 13.9 |
| 15° | -147.0 | -163.0 | -1.0 | -163.0 | 16.0 |
| 20° | -144.5 | -162.9 | -0.7 | -162.6 | 18.1 |
| 25° | -142.0 | -162.8 | -0.2 | -162.0 | 20.0 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -161.7 | 19.7 |

Table 10-2. Max PFD Levels, WH/WH 36 MHz, Digital Carrier (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -152.3 | 0.3 |

| | | | | | |
|---------------|--------|--------|------|--------|-----|
| 5° | -152.0 | -163.3 | -2.2 | -152.1 | 0.1 |
| 10° | -149.5 | -163.2 | -1.2 | -151.0 | 1.5 |
| 15° | -147.0 | -163.0 | -1.0 | -150.6 | 3.6 |
| 20° | -144.5 | -162.9 | -0.7 | -150.2 | 5.7 |
| 25° | -142.0 | -162.8 | -0.2 | -149.6 | 7.6 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -149.3 | 7.3 |

Table 10-3. Max PFD Levels, WH/WH 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -165.1 | 13.1 |
| 5° | -152.0 | -163.3 | -2.2 | -164.9 | 12.9 |
| 10° | -149.5 | -163.2 | -1.2 | -163.8 | 14.3 |
| 15° | -147.0 | -163.0 | -1.0 | -163.4 | 16.4 |
| 20° | -144.5 | -162.9 | -0.7 | -163.0 | 18.5 |
| 25° | -142.0 | -162.8 | -0.2 | -162.4 | 20.4 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -162.1 | 20.1 |

Table 10-4. Max PFD Levels, WH/WH 54 MHz, Digital Carrier (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -152.3 | 0.3 |
| 5° | -152.0 | -163.3 | -2.2 | -152.1 | 0.1 |
| 10° | -149.5 | -163.2 | -1.2 | -151.0 | 1.5 |
| 15° | -147.0 | -163.0 | -1.0 | -150.6 | 3.6 |
| 20° | -144.5 | -162.9 | -0.7 | -150.2 | 5.7 |
| 25° | -142.0 | -162.8 | -0.2 | -149.6 | 7.6 |

| | | | | | |
|---------------|--------|--------|-----|--------|-----|
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -149.3 | 7.3 |
|---------------|--------|--------|-----|--------|-----|

Table 10-5. Max PFD Levels, WH/WH 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -166.5 | 14.5 |
| 5° | -152.0 | -163.3 | -2.2 | -166.3 | 14.3 |
| 10° | -149.5 | -163.2 | -1.2 | -165.2 | 15.7 |
| 15° | -147.0 | -163.0 | -1.0 | -164.8 | 17.8 |
| 20° | -144.5 | -162.9 | -0.7 | -164.4 | 19.9 |
| 25° | -142.0 | -162.8 | -0.2 | -163.8 | 21.8 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -163.5 | 21.5 |

Table 10-6. Max PFD Levels, WH/WH 72 MHz, Digital Carrier (72M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -155.5 | 3.5 |
| 5° | -152.0 | -163.3 | -2.2 | -155.3 | 3.3 |
| 10° | -149.5 | -163.2 | -1.2 | -154.2 | 4.7 |
| 15° | -147.0 | -163.0 | -1.0 | -153.8 | 6.8 |
| 20° | -144.5 | -162.9 | -0.7 | -153.4 | 8.9 |
| 25° | -142.0 | -162.8 | -0.2 | -152.8 | 10.8 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -152.5 | 10.5 |

Table 10-7. Max PFD Levels, WH/WH 72 MHz, Analog Carrier (36M0F3F)

| Angle of | Applicable PFD Limit | Spreading Loss | Gain Contour | Worst Case PFD Level at | PFD Margin |
|----------|----------------------|----------------|--------------|-------------------------|------------|
|----------|----------------------|----------------|--------------|-------------------------|------------|

| Arrival | for Angle of Arrival (dBW/m ² /4 kHz) | (dBW/m ²) | (dB) | Angle of Arrival (dBW/m ² /4kHz) | (dB) |
|---------------|---|-----------------------|------|--|------|
| 0° | -152.0 | -163.4 | -2.3 | -164.7 | 12.7 |
| 5° | -152.0 | -163.3 | -2.2 | -164.5 | 12.5 |
| 10° | -149.5 | -163.2 | -1.2 | -163.4 | 13.9 |
| 15° | -147.0 | -163.0 | -1.0 | -163.0 | 16.0 |
| 20° | -144.5 | -162.9 | -0.7 | -162.6 | 18.1 |
| 25° | -142.0 | -162.8 | -0.2 | -162.0 | 20.0 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -161.7 | 19.7 |

Table 10-8. Max PFD Levels, EH/WH 36 MHz, Digital Carrier (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|--|---|----------------------|--|--------------------|
| 0° | -152.0 | -163.4 | -2.3 | -152.7 | 0.7 |
| 5° | -152.0 | -163.3 | -2.2 | -152.5 | 0.5 |
| 10° | -149.5 | -163.2 | -1.2 | -151.4 | 1.9 |
| 15° | -147.0 | -163.0 | -1.0 | -151.0 | 4.0 |
| 20° | -144.5 | -162.9 | -0.7 | -150.6 | 6.1 |
| 25° | -142.0 | -162.8 | -0.2 | -150.0 | 8.0 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -149.7 | 7.7 |

Table 10-9. Max PFD Levels, EH/WH 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|--|---|----------------------|--|--------------------|
| 0° | -152.0 | -163.4 | -2.3 | -165.1 | 13.1 |
| 5° | -152.0 | -163.3 | -2.2 | -164.9 | 12.9 |

| | | | | | |
|---------------|--------|--------|------|--------|------|
| 10° | -149.5 | -163.2 | -1.2 | -163.8 | 14.3 |
| 15° | -147.0 | -163.0 | -1.0 | -163.4 | 16.4 |
| 20° | -144.5 | -162.9 | -0.7 | -163.0 | 18.5 |
| 25° | -142.0 | -162.8 | -0.2 | -162.4 | 20.4 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -162.1 | 20.1 |

Table 10-10. Max PFD Levels, EH/WH 54 MHz, Digital Carrier (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -152.7 | 0.7 |
| 5° | -152.0 | -163.3 | -2.2 | -152.5 | 0.5 |
| 10° | -149.5 | -163.2 | -1.2 | -151.4 | 1.9 |
| 15° | -147.0 | -163.0 | -1.0 | -151.0 | 4.0 |
| 20° | -144.5 | -162.9 | -0.7 | -150.6 | 6.1 |
| 25° | -142.0 | -162.8 | -0.2 | -150.0 | 8.0 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -149.7 | 7.7 |

Table 10-11. Max PFD Levels, EH/WH 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -166.5 | 14.5 |
| 5° | -152.0 | -163.3 | -2.2 | -166.3 | 14.3 |
| 10° | -149.5 | -163.2 | -1.2 | -165.2 | 15.7 |
| 15° | -147.0 | -163.0 | -1.0 | -164.8 | 17.8 |
| 20° | -144.5 | -162.9 | -0.7 | -164.4 | 19.9 |
| 25° | -142.0 | -162.8 | -0.2 | -163.8 | 21.8 |
| 30° | -142.0 | -162.7 | 0.0 | -163.5 | 21.5 |

| | | | | | |
|--------|--|--|--|--|--|
| (Peak) | | | | | |
|--------|--|--|--|--|--|

Table 10-12. Max PFD Levels, EH/WH 72 MHz, Digital Carrier (72M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -155.5 | 3.5 |
| 5° | -152.0 | -163.3 | -2.2 | -155.3 | 3.3 |
| 10° | -149.5 | -163.2 | -1.2 | -154.2 | 4.7 |
| 15° | -147.0 | -163.0 | -1.0 | -153.8 | 6.8 |
| 20° | -144.5 | -162.9 | -0.7 | -153.4 | 8.9 |
| 25° | -142.0 | -162.8 | -0.2 | -152.8 | 10.8 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -152.5 | 10.5 |

Table 10-13. Max PFD Levels, EH/WH 72 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -2.3 | -165.1 | 13.1 |
| 5° | -152.0 | -163.3 | -2.2 | -164.9 | 12.9 |
| 10° | -149.5 | -163.2 | -1.2 | -163.8 | 14.3 |
| 15° | -147.0 | -163.0 | -1.0 | -163.4 | 16.4 |
| 20° | -144.5 | -162.9 | -0.7 | -163.0 | 18.5 |
| 25° | -142.0 | -162.8 | -0.2 | -162.4 | 20.4 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -162.1 | 20.1 |

Table 10-14. Max PFD Levels, EU/WH 54 MHz, Digital Carrier (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of | PFD Margin |
|------------------|-----------------------------------|--------------------------------------|-------------------|----------------------------------|------------|
|------------------|-----------------------------------|--------------------------------------|-------------------|----------------------------------|------------|

| | Arrival (dBW/m ² /4 kHz) | | | Arrival (dBW/m ² /4kHz) | (dB) |
|---------------|---|--------|------|---------------------------------------|------|
| 0° | -152.0 | -163.4 | -2.3 | -152.5 | 0.5 |
| 5° | -152.0 | -163.3 | -2.2 | -152.3 | 0.3 |
| 10° | -149.5 | -163.2 | -1.2 | -151.2 | 1.7 |
| 15° | -147.0 | -163.0 | -1.0 | -150.8 | 3.8 |
| 20° | -144.5 | -162.9 | -0.7 | -150.4 | 5.9 |
| 25° | -142.0 | -162.8 | -0.2 | -149.8 | 7.8 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -149.5 | 7.5 |

Table 10-15. Max PFD Levels, EU/WH 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------------|--|--|-------------------------|---|-----------------------|
| 0° | -152.0 | -163.4 | -2.3 | -165.0 | 13.0 |
| 5° | -152.0 | -163.3 | -2.2 | -164.8 | 12.8 |
| 10° | -149.5 | -163.2 | -1.2 | -163.7 | 14.2 |
| 15° | -147.0 | -163.0 | -1.0 | -163.3 | 16.3 |
| 20° | -144.5 | -162.9 | -0.7 | -162.9 | 18.4 |
| 25° | -142.0 | -162.8 | -0.2 | -162.3 | 20.3 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -162.0 | 20.0 |

Table 10-16. Max PFD Levels, WA/WH 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------------|--|--|-------------------------|---|-----------------------|
| 0° | -152.0 | -163.4 | -2.3 | -152.6 | 0.6 |
| 5° | -152.0 | -163.3 | -2.2 | -152.4 | 0.4 |

| | | | | | |
|---------------|--------|--------|------|--------|-----|
| 10° | -149.5 | -163.2 | -1.2 | -151.3 | 1.8 |
| 15° | -147.0 | -163.0 | -1.0 | -150.9 | 3.9 |
| 20° | -144.5 | -162.9 | -0.7 | -150.5 | 6.0 |
| 25° | -142.0 | -162.8 | -0.2 | -149.9 | 7.9 |
| 30° (Peak) | -142.0 | -162.7 | 0.0 | -149.6 | 7.6 |

Table 10-17. Max PFD Levels, WA/WH 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -3.4 | -169.0 | 17.0 |
| 5° | -152.0 | -163.3 | -3.0 | -168.5 | 16.5 |
| 10° | -149.5 | -163.2 | -2.8 | -168.2 | 18.7 |
| 15° | -147.0 | -163.0 | -2.7 | -167.9 | 20.9 |
| 20° | -144.5 | -162.9 | -2.6 | -167.7 | 23.2 |
| 25° | -142.0 | -162.8 | -2.4 | -167.4 | 25.4 |
| 90° (Peak) | -142.0 | -162.1 | 0.0 | -164.3 | 22.3 |

Table 10-18. Max PFD Levels, GLB/GLB 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -3.4 | -157.2 | 5.2 |
| 5° | -152.0 | -163.3 | -3.0 | -156.7 | 4.7 |
| 10° | -149.5 | -163.2 | -2.8 | -156.4 | 6.9 |
| 15° | -147.0 | -163.0 | -2.7 | -156.1 | 9.1 |
| 20° | -144.5 | -162.9 | -2.6 | -155.9 | 11.4 |
| 25° | -142.0 | -162.8 | -2.4 | -155.6 | 13.6 |
| 90° | -142.0 | -162.1 | 0.0 | -152.5 | 10.5 |

| | | | | | |
|--------|--|--|--|--|--|
| (Peak) | | | | | |
|--------|--|--|--|--|--|

Table 10-19. Max PFD Levels, GLB/GLB 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -164.1 | 12.1 |
| 5° | -152.0 | -163.3 | -1.7 | -164.0 | 12.0 |
| 10° | -149.5 | -163.2 | -1.7 | -163.9 | 14.4 |
| 15° | -147.0 | -163.0 | -1.4 | -163.4 | 16.4 |
| 20° | -144.5 | -162.9 | -1.0 | -162.9 | 18.4 |
| 25° | -142.0 | -162.8 | -0.7 | -162.5 | 20.5 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -161.2 | 19.2 |

Table 10-20. Max PFD Levels, WH/EH 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -152.4 | 0.4 |
| 5° | -152.0 | -163.3 | -1.7 | -152.3 | 0.3 |
| 10° | -149.5 | -163.2 | -1.7 | -152.2 | 2.7 |
| 15° | -147.0 | -163.0 | -1.4 | -151.7 | 4.7 |
| 20° | -144.5 | -162.9 | -1.0 | -151.2 | 6.7 |
| 25° | -142.0 | -162.8 | -0.7 | -150.8 | 8.8 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -149.5 | 7.5 |

Table 10-21. Max PFD Levels, WH/EH 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|--|-----------------|
|------------------|---|--------------------------------------|-------------------|--|-----------------|

| | (dBW/m ² /4 kHz) | | | (dBW/m ² /4kHz) | |
|---------------|-----------------------------|--------|------|----------------------------|------|
| 0° | -152.0 | -163.4 | -1.7 | -164.1 | 12.1 |
| 5° | -152.0 | -163.3 | -1.7 | -164.0 | 12.0 |
| 10° | -149.5 | -163.2 | -1.7 | -163.9 | 14.4 |
| 15° | -147.0 | -163.0 | -1.4 | -163.4 | 16.4 |
| 20° | -144.5 | -162.9 | -1.0 | -162.9 | 18.4 |
| 25° | -142.0 | -162.8 | -0.7 | -162.5 | 20.5 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -161.2 | 19.2 |

Table 10-22. Max PFD Levels, WH/EH 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -152.4 | 0.4 |
| 5° | -152.0 | -163.3 | -1.7 | -152.3 | 0.3 |
| 10° | -149.5 | -163.2 | -1.7 | -152.2 | 2.7 |
| 15° | -147.0 | -163.0 | -1.4 | -151.7 | 4.7 |
| 20° | -144.5 | -162.9 | -1.0 | -151.2 | 6.7 |
| 25° | -142.0 | -162.8 | -0.7 | -150.8 | 8.8 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -149.5 | 7.5 |

Table 10-23. Max PFD Levels, WH/EH 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -165.4 | 13.4 |
| 5° | -152.0 | -163.3 | -1.7 | -165.3 | 13.3 |
| 10° | -149.5 | -163.2 | -1.7 | -165.2 | 15.7 |
| 15° | -147.0 | -163.0 | -1.4 | -164.7 | 17.7 |

| | | | | | |
|---------------|--------|--------|------|--------|------|
| 20° | -144.5 | -162.9 | -1.0 | -164.2 | 19.7 |
| 25° | -142.0 | -162.8 | -0.7 | -163.8 | 21.8 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -162.5 | 20.5 |

Table 10-24. Max PFD Levels, WH/EH 72 MHz, Digital Crx (72M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -154.4 | 2.4 |
| 5° | -152.0 | -163.3 | -1.7 | -154.3 | 2.3 |
| 10° | -149.5 | -163.2 | -1.7 | -154.2 | 4.7 |
| 15° | -147.0 | -163.0 | -1.4 | -153.7 | 6.7 |
| 20° | -144.5 | -162.9 | -1.0 | -153.2 | 8.7 |
| 25° | -142.0 | -162.8 | -0.7 | -152.8 | 10.8 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -151.5 | 9.5 |

Table 10-25. Max PFD Levels, WH/EH 72 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -164.1 | 12.1 |
| 5° | -152.0 | -163.3 | -1.7 | -164.0 | 12.0 |
| 10° | -149.5 | -163.2 | -1.7 | -163.9 | 14.4 |
| 15° | -147.0 | -163.0 | -1.4 | -163.4 | 16.4 |
| 20° | -144.5 | -162.9 | -1.0 | -162.9 | 18.4 |
| 25° | -142.0 | -162.8 | -0.7 | -162.5 | 20.5 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -161.2 | 19.2 |

Table 10-26. Max PFD Levels, EH/EH 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -152.5 | 0.5 |
| 5° | -152.0 | -163.3 | -1.7 | -152.4 | 0.4 |
| 10° | -149.5 | -163.2 | -1.7 | -152.3 | 2.8 |
| 15° | -147.0 | -163.0 | -1.4 | -151.8 | 4.8 |
| 20° | -144.5 | -162.9 | -1.0 | -151.3 | 6.8 |
| 25° | -142.0 | -162.8 | -0.7 | -150.9 | 8.9 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -149.6 | 7.6 |

Table 10-27. Max PFD Levels, EH/EH 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -164.2 | 12.2 |
| 5° | -152.0 | -163.3 | -1.7 | -164.1 | 12.1 |
| 10° | -149.5 | -163.2 | -1.7 | -164.0 | 14.5 |
| 15° | -147.0 | -163.0 | -1.4 | -163.5 | 16.5 |
| 20° | -144.5 | -162.9 | -1.0 | -163.0 | 18.5 |
| 25° | -142.0 | -162.8 | -0.7 | -162.6 | 20.6 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -161.3 | 19.3 |

Table 10-28. Max PFD Levels, EH/EH 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -152.5 | 0.5 |

| | | | | | |
|---------------|--------|--------|------|--------|-----|
| 5° | -152.0 | -163.3 | -1.7 | -152.4 | 0.4 |
| 10° | -149.5 | -163.2 | -1.7 | -152.3 | 2.8 |
| 15° | -147.0 | -163.0 | -1.4 | -151.8 | 4.8 |
| 20° | -144.5 | -162.9 | -1.0 | -151.3 | 6.8 |
| 25° | -142.0 | -162.8 | -0.7 | -150.9 | 8.9 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -149.6 | 7.6 |

Table 10-29. Max PFD Levels, EH/EH 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -165.4 | 13.4 |
| 5° | -152.0 | -163.3 | -1.7 | -165.3 | 13.3 |
| 10° | -149.5 | -163.2 | -1.7 | -165.2 | 15.7 |
| 15° | -147.0 | -163.0 | -1.4 | -164.7 | 17.7 |
| 20° | -144.5 | -162.9 | -1.0 | -164.2 | 19.7 |
| 25° | -142.0 | -162.8 | -0.7 | -163.8 | 21.8 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -162.5 | 20.5 |

Table 10-30. Max PFD Levels, EH/EH 72 MHz, Digital Crx (72M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -154.4 | 2.4 |
| 5° | -152.0 | -163.3 | -1.7 | -154.3 | 2.3 |
| 10° | -149.5 | -163.2 | -1.7 | -154.2 | 4.7 |
| 15° | -147.0 | -163.0 | -1.4 | -153.7 | 6.7 |
| 20° | -144.5 | -162.9 | -1.0 | -153.2 | 8.7 |
| 25° | -142.0 | -162.8 | -0.7 | -152.8 | 10.8 |
| 60° | -142.0 | -162.2 | 0.0 | -151.5 | 9.5 |

| | | | | | |
|--------|--|--|--|--|--|
| (Peak) | | | | | |
|--------|--|--|--|--|--|

Table 10-31. Max PFD Levels, EH/EH 72 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -164.3 | 12.3 |
| 5° | -152.0 | -163.3 | -1.7 | -164.2 | 12.2 |
| 10° | -149.5 | -163.2 | -1.7 | -164.1 | 14.6 |
| 15° | -147.0 | -163.0 | -1.4 | -163.6 | 16.6 |
| 20° | -144.5 | -162.9 | -1.0 | -163.1 | 18.6 |
| 25° | -142.0 | -162.8 | -0.7 | -162.7 | 20.7 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -161.4 | 19.4 |

Table 10-32. Max PFD Levels, EU/EH 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -152.2 | 0.2 |
| 5° | -152.0 | -163.3 | -1.7 | -152.1 | 0.1 |
| 10° | -149.5 | -163.2 | -1.7 | -152.0 | 2.5 |
| 15° | -147.0 | -163.0 | -1.4 | -151.5 | 4.5 |
| 20° | -144.5 | -162.9 | -1.0 | -151.0 | 6.5 |
| 25° | -142.0 | -162.8 | -0.7 | -150.6 | 8.6 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -149.3 | 7.3 |

Table 10-33. Max PFD Levels, EU/EH 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|--|-----------------|
|------------------|---|--------------------------------------|-------------------|--|-----------------|

| | (dBW/m ² /4 kHz) | | | (dBW/m ² /4kHz) | |
|---------------|-----------------------------|--------|------|----------------------------|------|
| 0° | -152.0 | -163.4 | -1.7 | -164.1 | 12.1 |
| 5° | -152.0 | -163.3 | -1.7 | -164.0 | 12.0 |
| 10° | -149.5 | -163.2 | -1.7 | -163.9 | 14.4 |
| 15° | -147.0 | -163.0 | -1.4 | -163.4 | 16.4 |
| 20° | -144.5 | -162.9 | -1.0 | -162.9 | 18.4 |
| 25° | -142.0 | -162.8 | -0.7 | -162.5 | 20.5 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -161.2 | 19.2 |

Table 10-34. Max PFD Levels, WA/EH 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.7 | -152.2 | 0.2 |
| 5° | -152.0 | -163.3 | -1.7 | -152.1 | 0.1 |
| 10° | -149.5 | -163.2 | -1.7 | -152.0 | 2.5 |
| 15° | -147.0 | -163.0 | -1.4 | -151.5 | 4.5 |
| 20° | -144.5 | -162.9 | -1.0 | -151.0 | 6.5 |
| 25° | -142.0 | -162.8 | -0.7 | -150.6 | 8.6 |
| 60° (Peak) | -142.0 | -162.2 | 0.0 | -149.3 | 7.3 |

Table 10-35. Max PFD Levels, WA/EH 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -155.0 | 5.0 |
| 5° | -150.0 | -163.3 | -1.0 | -154.4 | 4.4 |
| 10° | -147.5 | -163.2 | -1.0 | -154.3 | 6.8 |
| 15° | -145.0 | -163.0 | -1.0 | -154.1 | 9.1 |

| | | | | | |
|---------------|--------|--------|------|--------|------|
| 20° | -142.5 | -162.9 | -0.5 | -153.5 | 11.0 |
| 25° | -140.0 | -162.8 | -0.1 | -153.0 | 13.0 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -152.9 | 12.9 |

Table 10-36. Max PFD Levels, EU/EU 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -150.7 | 0.7 |
| 5° | -150.0 | -163.3 | -1.0 | -150.1 | 0.1 |
| 10° | -147.5 | -163.2 | -1.0 | -150.0 | 2.5 |
| 15° | -145.0 | -163.0 | -1.0 | -149.8 | 4.8 |
| 20° | -142.5 | -162.9 | -0.5 | -149.2 | 6.7 |
| 25° | -140.0 | -162.8 | -0.1 | -148.7 | 8.7 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -148.6 | 8.6 |

Table 10-37. Max PFD Levels, EU/EU 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -155.6 | 5.6 |
| 5° | -150.0 | -163.3 | -1.0 | -155.0 | 5.0 |
| 10° | -147.5 | -163.2 | -1.0 | -154.9 | 7.4 |
| 15° | -145.0 | -163.0 | -1.0 | -154.7 | 9.7 |
| 20° | -142.5 | -162.9 | -0.5 | -154.1 | 11.6 |
| 25° | -140.0 | -162.8 | -0.1 | -153.6 | 13.6 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -153.5 | 13.5 |

Table 10-38. Max PFD Levels, EU/EU 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -150.7 | 0.7 |
| 5° | -150.0 | -163.3 | -1.0 | -150.1 | 0.1 |
| 10° | -147.5 | -163.2 | -1.0 | -150.0 | 2.5 |
| 15° | -145.0 | -163.0 | -1.0 | -149.8 | 4.8 |
| 20° | -142.5 | -162.9 | -0.5 | -149.2 | 6.7 |
| 25° | -140.0 | -162.8 | -0.1 | -148.7 | 8.7 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -148.6 | 8.6 |

Table 10-39. Max PFD Levels, EU/EU 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -155.1 | 5.1 |
| 5° | -150.0 | -163.3 | -1.0 | -154.5 | 4.5 |
| 10° | -147.5 | -163.2 | -1.0 | -154.4 | 6.9 |
| 15° | -145.0 | -163.0 | -1.0 | -154.2 | 9.2 |
| 20° | -142.5 | -162.9 | -0.5 | -153.6 | 11.1 |
| 25° | -140.0 | -162.8 | -0.1 | -153.1 | 13.1 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -153.0 | 13.0 |

Table 10-40. Max PFD Levels, WA/EU 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -151.3 | 1.3 |

| | | | | | |
|---------------|--------|--------|------|--------|-----|
| 5° | -150.0 | -163.3 | -1.0 | -150.7 | 0.7 |
| 10° | -147.5 | -163.2 | -1.0 | -150.6 | 3.1 |
| 15° | -145.0 | -163.0 | -1.0 | -150.4 | 5.4 |
| 20° | -142.5 | -162.9 | -0.5 | -149.8 | 7.3 |
| 25° | -140.0 | -162.8 | -0.1 | -149.3 | 9.3 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -149.2 | 9.2 |

Table 10-41. Max PFD Levels, WA/EU 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -155.5 | 5.5 |
| 5° | -150.0 | -163.3 | -1.0 | -154.9 | 4.9 |
| 10° | -147.5 | -163.2 | -1.0 | -154.8 | 7.3 |
| 15° | -145.0 | -163.0 | -1.0 | -154.6 | 9.6 |
| 20° | -142.5 | -162.9 | -0.5 | -154.0 | 11.5 |
| 25° | -140.0 | -162.8 | -0.1 | -153.5 | 13.5 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -153.4 | 13.4 |

Table 10-42. Max PFD Levels, WA/EU 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -151.3 | 1.3 |
| 5° | -150.0 | -163.3 | -1.0 | -150.7 | 0.7 |
| 10° | -147.5 | -163.2 | -1.0 | -150.6 | 3.1 |
| 15° | -145.0 | -163.0 | -1.0 | -150.4 | 5.4 |
| 20° | -142.5 | -162.9 | -0.5 | -149.8 | 7.3 |
| 25° | -140.0 | -162.8 | -0.1 | -149.3 | 9.3 |
| 27° | -140.0 | -162.8 | 0.0 | -149.2 | 9.2 |

| | | | | | |
|--------|--|--|--|--|--|
| (Peak) | | | | | |
|--------|--|--|--|--|--|

Table 10-43. Max PFD Levels, WA/EU 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -155.5 | 5.5 |
| 5° | -150.0 | -163.3 | -1.0 | -154.9 | 4.9 |
| 10° | -147.5 | -163.2 | -1.0 | -154.8 | 7.3 |
| 15° | -145.0 | -163.0 | -1.0 | -154.6 | 9.6 |
| 20° | -142.5 | -162.9 | -0.5 | -154.0 | 11.5 |
| 25° | -140.0 | -162.8 | -0.1 | -153.5 | 13.5 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -153.4 | 13.4 |

Table 10-44. Max PFD Levels, WH/EU 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -151.1 | 1.1 |
| 5° | -150.0 | -163.3 | -1.0 | -150.5 | 0.5 |
| 10° | -147.5 | -163.2 | -1.0 | -150.4 | 2.9 |
| 15° | -145.0 | -163.0 | -1.0 | -150.2 | 5.2 |
| 20° | -142.5 | -162.9 | -0.5 | -149.6 | 7.1 |
| 25° | -140.0 | -162.8 | -0.1 | -149.1 | 9.1 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -149.0 | 9.0 |

Table 10-45. Max PFD Levels, WH/EU 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|--|-----------------|
|------------------|---|--------------------------------------|-------------------|--|-----------------|

| | (dBW/m ² /4 kHz) | | | (dBW/m ² /4kHz) | |
|---------------|-----------------------------|--------|------|----------------------------|------|
| 0° | -150.0 | -163.4 | -1.5 | -155.5 | 5.5 |
| 5° | -150.0 | -163.3 | -1.0 | -154.9 | 4.9 |
| 10° | -147.5 | -163.2 | -1.0 | -154.8 | 7.3 |
| 15° | -145.0 | -163.0 | -1.0 | -154.6 | 9.6 |
| 20° | -142.5 | -162.9 | -0.5 | -154.0 | 11.5 |
| 25° | -140.0 | -162.8 | -0.1 | -153.5 | 13.5 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -153.4 | 13.4 |

Table 10-46. Max PFD Levels, EH/EU 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -150.9 | 0.9 |
| 5° | -150.0 | -163.3 | -1.0 | -150.3 | 0.3 |
| 10° | -147.5 | -163.2 | -1.0 | -150.2 | 2.7 |
| 15° | -145.0 | -163.0 | -1.0 | -150.0 | 5.0 |
| 20° | -142.5 | -162.9 | -0.5 | -149.4 | 6.9 |
| 25° | -140.0 | -162.8 | -0.1 | -148.9 | 8.9 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -148.8 | 8.8 |

Table 10-47. Max PFD Levels, EH/EU 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -155.2 | 5.2 |
| 5° | -150.0 | -163.3 | -1.0 | -154.6 | 4.6 |
| 10° | -147.5 | -163.2 | -1.0 | -154.5 | 7.0 |
| 15° | -145.0 | -163.0 | -1.0 | -154.3 | 9.3 |

| | | | | | |
|---------------|--------|--------|------|--------|------|
| 20° | -142.5 | -162.9 | -0.5 | -153.7 | 11.2 |
| 25° | -140.0 | -162.8 | -0.1 | -153.2 | 13.2 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -153.1 | 13.1 |

Table 10-48. Max PFD Levels, NA/EU 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -150.7 | 0.7 |
| 5° | -150.0 | -163.3 | -1.0 | -150.1 | 0.1 |
| 10° | -147.5 | -163.2 | -1.0 | -150.0 | 2.5 |
| 15° | -145.0 | -163.0 | -1.0 | -149.8 | 4.8 |
| 20° | -142.5 | -162.9 | -0.5 | -149.2 | 6.7 |
| 25° | -140.0 | -162.8 | -0.1 | -148.7 | 8.7 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -148.6 | 8.6 |

Table 10-49. Max PFD Levels, NA/EU 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -155.5 | 5.5 |
| 5° | -150.0 | -163.3 | -1.0 | -154.9 | 4.9 |
| 10° | -147.5 | -163.2 | -1.0 | -154.8 | 7.3 |
| 15° | -145.0 | -163.0 | -1.0 | -154.6 | 9.6 |
| 20° | -142.5 | -162.9 | -0.5 | -154.0 | 11.5 |
| 25° | -140.0 | -162.8 | -0.1 | -153.5 | 13.5 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -153.4 | 13.4 |

Table 10-50. Max PFD Levels, NA/EU 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.5 | -150.7 | 0.7 |
| 5° | -150.0 | -163.3 | -1.0 | -150.1 | 0.1 |
| 10° | -147.5 | -163.2 | -1.0 | -150.0 | 2.5 |
| 15° | -145.0 | -163.0 | -1.0 | -149.8 | 4.8 |
| 20° | -142.5 | -162.9 | -0.5 | -149.2 | 6.7 |
| 25° | -140.0 | -162.8 | -0.1 | -148.7 | 8.7 |
| 27° (Peak) | -140.0 | -162.8 | 0.0 | -148.6 | 8.6 |

Table 10-51. Max PFD Levels, NA/EU 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -160.7 | 10.7 |
| 5° | -150.0 | -163.3 | -7.0 | -160.5 | 10.5 |
| 10° | -147.5 | -163.2 | -6.3 | -159.7 | 12.2 |
| 15° | -145.0 | -163.0 | -6.0 | -159.2 | 14.2 |
| 20° | -142.5 | -162.9 | -5.1 | -158.2 | 15.7 |
| 25° | -140.0 | -162.8 | -4.1 | -157.1 | 17.1 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -152.4 | 12.4 |

Table 10-52. Max PFD Levels, EU/WA 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -150.6 | 0.6 |

| | | | | | |
|---------------|--------|--------|------|--------|-----|
| 5° | -150.0 | -163.3 | -7.0 | -150.4 | 0.4 |
| 10° | -147.5 | -163.2 | -6.3 | -149.6 | 2.1 |
| 15° | -145.0 | -163.0 | -6.0 | -149.1 | 4.1 |
| 20° | -142.5 | -162.9 | -5.1 | -148.1 | 5.6 |
| 25° | -140.0 | -162.8 | -4.1 | -147.0 | 7.0 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -142.3 | 2.3 |

Table 10-53. Max PFD Levels, EU/WA 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -160.7 | 10.7 |
| 5° | -150.0 | -163.3 | -7.0 | -160.5 | 10.5 |
| 10° | -147.5 | -163.2 | -6.3 | -159.7 | 12.2 |
| 15° | -145.0 | -163.0 | -6.0 | -159.2 | 14.2 |
| 20° | -142.5 | -162.9 | -5.1 | -158.2 | 15.7 |
| 25° | -140.0 | -162.8 | -4.1 | -157.1 | 17.1 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -152.4 | 12.4 |

Table 10-54. Max PFD Levels, EU/WA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -150.6 | 0.6 |
| 5° | -150.0 | -163.3 | -7.0 | -150.4 | 0.4 |
| 10° | -147.5 | -163.2 | -6.3 | -149.6 | 2.1 |
| 15° | -145.0 | -163.0 | -6.0 | -149.1 | 4.1 |
| 20° | -142.5 | -162.9 | -5.1 | -148.1 | 5.6 |
| 25° | -140.0 | -162.8 | -4.1 | -147.0 | 7.0 |
| 70° | -140.0 | -162.2 | 0.0 | -142.3 | 2.3 |

| | | | | | |
|--------|--|--|--|--|--|
| (Peak) | | | | | |
|--------|--|--|--|--|--|

Table 10-55. Max PFD Levels, EU/WA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -160.5 | 10.5 |
| 5° | -150.0 | -163.3 | -7.0 | -160.3 | 10.3 |
| 10° | -147.5 | -163.2 | -6.3 | -159.5 | 12.0 |
| 15° | -145.0 | -163.0 | -6.0 | -159.0 | 14.0 |
| 20° | -142.5 | -162.9 | -5.1 | -158.0 | 15.5 |
| 25° | -140.0 | -162.8 | -4.1 | -156.9 | 16.9 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -152.2 | 12.2 |

Table 10-56. Max PFD Levels, WA/WA 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -150.7 | 0.7 |
| 5° | -150.0 | -163.3 | -7.0 | -150.5 | 0.5 |
| 10° | -147.5 | -163.2 | -6.3 | -149.7 | 2.2 |
| 15° | -145.0 | -163.0 | -6.0 | -149.2 | 4.2 |
| 20° | -142.5 | -162.9 | -5.1 | -148.2 | 5.7 |
| 25° | -140.0 | -162.8 | -4.1 | -147.1 | 7.1 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -142.4 | 2.4 |

Table 10-57. Max PFD Levels, WA/WA 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|--|-----------------|
|------------------|---|--------------------------------------|-------------------|--|-----------------|

| | (dBW/m ² /4 kHz) | | | (dBW/m ² /4kHz) | |
|---------------|-----------------------------|--------|------|----------------------------|------|
| 0° | -150.0 | -163.4 | -7.1 | -160.5 | 10.5 |
| 5° | -150.0 | -163.3 | -7.0 | -160.3 | 10.3 |
| 10° | -147.5 | -163.2 | -6.3 | -159.5 | 12.0 |
| 15° | -145.0 | -163.0 | -6.0 | -159.0 | 14.0 |
| 20° | -142.5 | -162.9 | -5.1 | -158.0 | 15.5 |
| 25° | -140.0 | -162.8 | -4.1 | -156.9 | 16.9 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -152.2 | 12.2 |

Table 10-58. Max PFD Levels, WA/WA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -150.7 | 0.7 |
| 5° | -150.0 | -163.3 | -7.0 | -150.5 | 0.5 |
| 10° | -147.5 | -163.2 | -6.3 | -149.7 | 2.2 |
| 15° | -145.0 | -163.0 | -6.0 | -149.2 | 4.2 |
| 20° | -142.5 | -162.9 | -5.1 | -148.2 | 5.7 |
| 25° | -140.0 | -162.8 | -4.1 | -147.1 | 7.1 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -142.4 | 2.4 |

Table 10-59. Max PFD Levels, WA/WA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -160.5 | 10.5 |
| 5° | -150.0 | -163.3 | -7.0 | -160.3 | 10.3 |
| 10° | -147.5 | -163.2 | -6.3 | -159.5 | 12.0 |
| 15° | -145.0 | -163.0 | -6.0 | -159.0 | 14.0 |

| | | | | | |
|---------------|--------|--------|------|--------|------|
| 20° | -142.5 | -162.9 | -5.1 | -158.0 | 15.5 |
| 25° | -140.0 | -162.8 | -4.1 | -156.9 | 16.9 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -152.2 | 12.2 |

Table 10-60. Max PFD Levels, WH/WA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -150.8 | 0.8 |
| 5° | -150.0 | -163.3 | -7.0 | -150.6 | 0.6 |
| 10° | -147.5 | -163.2 | -6.3 | -149.8 | 2.3 |
| 15° | -145.0 | -163.0 | -6.0 | -149.3 | 4.3 |
| 20° | -142.5 | -162.9 | -5.1 | -148.3 | 5.8 |
| 25° | -140.0 | -162.8 | -4.1 | -147.2 | 7.2 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -142.5 | 2.5 |

Table 10-61. Max PFD Levels, WH/WA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -160.5 | 10.5 |
| 5° | -150.0 | -163.3 | -7.0 | -160.3 | 10.3 |
| 10° | -147.5 | -163.2 | -6.3 | -159.5 | 12.0 |
| 15° | -145.0 | -163.0 | -6.0 | -159.0 | 14.0 |
| 20° | -142.5 | -162.9 | -5.1 | -158.0 | 15.5 |
| 25° | -140.0 | -162.8 | -4.1 | -156.9 | 16.9 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -152.2 | 12.2 |

Table 10-62. Max PFD Levels, EH/WA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -150.8 | 0.8 |
| 5° | -150.0 | -163.3 | -7.0 | -150.6 | 0.6 |
| 10° | -147.5 | -163.2 | -6.3 | -149.8 | 2.3 |
| 15° | -145.0 | -163.0 | -6.0 | -149.3 | 4.3 |
| 20° | -142.5 | -162.9 | -5.1 | -148.3 | 5.8 |
| 25° | -140.0 | -162.8 | -4.1 | -147.2 | 7.2 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -142.5 | 2.5 |

Table 10-63. Max PFD Levels, EH/WA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -160.6 | 10.6 |
| 5° | -150.0 | -163.3 | -7.0 | -160.4 | 10.4 |
| 10° | -147.5 | -163.2 | -6.3 | -159.6 | 12.1 |
| 15° | -145.0 | -163.0 | -6.0 | -159.1 | 14.1 |
| 20° | -142.5 | -162.9 | -5.1 | -158.1 | 15.6 |
| 25° | -140.0 | -162.8 | -4.1 | -157.0 | 17.0 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -152.3 | 12.3 |

Table 10-64. Max PFD Levels, NA/WA 36 MHz, Digital Crx (36M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -151.2 | 1.2 |

| | | | | | |
|---------------|--------|--------|------|--------|-----|
| 5° | -150.0 | -163.3 | -7.0 | -151.0 | 1.0 |
| 10° | -147.5 | -163.2 | -6.3 | -150.2 | 2.7 |
| 15° | -145.0 | -163.0 | -6.0 | -149.7 | 4.7 |
| 20° | -142.5 | -162.9 | -5.1 | -148.7 | 6.2 |
| 25° | -140.0 | -162.8 | -4.1 | -147.6 | 7.6 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -142.9 | 2.9 |

Table 10-65. Max PFD Levels, NA/WA 36 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -160.5 | 10.5 |
| 5° | -150.0 | -163.3 | -7.0 | -160.3 | 10.3 |
| 10° | -147.5 | -163.2 | -6.3 | -159.5 | 12.0 |
| 15° | -145.0 | -163.0 | -6.0 | -159.0 | 14.0 |
| 20° | -142.5 | -162.9 | -5.1 | -158.0 | 15.5 |
| 25° | -140.0 | -162.8 | -4.1 | -156.9 | 16.9 |
| 70° (Peak) | -140.0 | -162.2 | 0.0 | -152.2 | 12.2 |

Table 10-66. Max PFD Levels, NA/WA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -7.1 | -151.2 | 1.2 |
| 5° | -150.0 | -163.3 | -7.0 | -151.0 | 1.0 |
| 10° | -147.5 | -163.2 | -6.3 | -150.2 | 2.7 |
| 15° | -145.0 | -163.0 | -6.0 | -149.7 | 4.7 |
| 20° | -142.5 | -162.9 | -5.1 | -148.7 | 6.2 |
| 25° | -140.0 | -162.8 | -4.1 | -147.6 | 7.6 |
| 70° | -140.0 | -162.2 | 0.0 | -142.9 | 2.9 |

| | | | | | |
|--------|--|--|--|--|--|
| (Peak) | | | | | |
|--------|--|--|--|--|--|

Table 10-67. Max PFD Levels, NA/WA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -3.7 | -157.1 | 7.1 |
| 5° | -150.0 | -163.3 | -3.2 | -156.5 | 6.5 |
| 10° | -147.5 | -163.2 | -2.5 | -155.7 | 8.2 |
| 15° | -145.0 | -163.0 | -1.7 | -154.7 | 9.7 |
| 20° | -142.5 | -162.9 | -1.0 | -153.9 | 11.4 |
| 25° | -140.0 | -162.8 | -0.7 | -153.5 | 13.5 |
| 40° (Peak) | -140.0 | -162.5 | 0.0 | -152.5 | 12.5 |

Table 10-68. Max PFD Levels, SC/SC 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -3.7 | -151.1 | 1.1 |
| 5° | -150.0 | -163.3 | -3.2 | -150.5 | 0.5 |
| 10° | -147.5 | -163.2 | -2.5 | -149.7 | 2.2 |
| 15° | -145.0 | -163.0 | -1.7 | -148.7 | 3.7 |
| 20° | -142.5 | -162.9 | -1.0 | -147.9 | 5.4 |
| 25° | -140.0 | -162.8 | -0.7 | -147.5 | 7.5 |
| 40° (Peak) | -140.0 | -162.5 | 0.0 | -146.5 | 6.5 |

Table 10-69. Max PFD Levels, SC/SC 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|--|-----------------|
|------------------|---|--------------------------------------|-------------------|--|-----------------|

| | (dBW/m ² /4 kHz) | | | (dBW/m ² /4kHz) | |
|---------------|-----------------------------|--------|------|----------------------------|------|
| 0° | -150.0 | -163.4 | -3.7 | -157.1 | 7.1 |
| 5° | -150.0 | -163.3 | -3.2 | -156.5 | 6.5 |
| 10° | -147.5 | -163.2 | -2.5 | -155.7 | 8.2 |
| 15° | -145.0 | -163.0 | -1.7 | -154.7 | 9.7 |
| 20° | -142.5 | -162.9 | -1.0 | -153.9 | 11.4 |
| 25° | -140.0 | -162.8 | -0.7 | -153.5 | 13.5 |
| 40° (Peak) | -140.0 | -162.5 | 0.0 | -152.5 | 12.5 |

Table 10-70. Max PFD Levels, NA/SC 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -3.7 | -151.1 | 1.1 |
| 5° | -150.0 | -163.3 | -3.2 | -150.5 | 0.5 |
| 10° | -147.5 | -163.2 | -2.5 | -149.7 | 2.2 |
| 15° | -145.0 | -163.0 | -1.7 | -148.7 | 3.7 |
| 20° | -142.5 | -162.9 | -1.0 | -147.9 | 5.4 |
| 25° | -140.0 | -162.8 | -0.7 | -147.5 | 7.5 |
| 40° (Peak) | -140.0 | -162.5 | 0.0 | -146.5 | 6.5 |

Table 10-71. Max PFD Levels, NA/SC 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.4 | -154.8 | 4.8 |
| 5° | -150.0 | -163.3 | -1.2 | -154.5 | 4.5 |
| 10° | -147.5 | -163.2 | -0.9 | -154.1 | 6.6 |
| 15° | -145.0 | -163.0 | -0.9 | -153.9 | 8.9 |

| | | | | | |
|---------------|--------|--------|------|--------|------|
| 20° | -142.5 | -162.9 | -0.4 | -153.3 | 10.8 |
| 25° | -140.0 | -162.8 | 0.0 | -152.8 | 12.8 |
| 25° (Peak) | -140.0 | -162.8 | 0.0 | -152.8 | 12.8 |

Table 10-72. Max PFD Levels, SC/NA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.4 | -150.4 | 0.4 |
| 5° | -150.0 | -163.3 | -1.2 | -150.1 | 0.1 |
| 10° | -147.5 | -163.2 | -0.9 | -149.7 | 2.2 |
| 15° | -145.0 | -163.0 | -0.9 | -149.5 | 4.5 |
| 20° | -142.5 | -162.9 | -0.4 | -148.9 | 6.4 |
| 25° | -140.0 | -162.8 | 0.0 | -148.4 | 8.4 |
| 25° (Peak) | -140.0 | -162.8 | 0.0 | -148.4 | 8.4 |

Table 10-73. Max PFD Levels, SC/NA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.4 | -154.9 | 4.9 |
| 5° | -150.0 | -163.3 | -1.2 | -154.6 | 4.6 |
| 10° | -147.5 | -163.2 | -0.9 | -154.2 | 6.7 |
| 15° | -145.0 | -163.0 | -0.9 | -154.0 | 9.0 |
| 20° | -142.5 | -162.9 | -0.4 | -153.4 | 10.9 |
| 25° | -140.0 | -162.8 | 0.0 | -152.9 | 12.9 |
| 25° (Peak) | -140.0 | -162.8 | 0.0 | -152.9 | 12.9 |

Table 10-74. Max PFD Levels, NA/NA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.4 | -150.7 | 0.7 |
| 5° | -150.0 | -163.3 | -1.2 | -150.4 | 0.4 |
| 10° | -147.5 | -163.2 | -0.9 | -150.0 | 2.5 |
| 15° | -145.0 | -163.0 | -0.9 | -149.8 | 4.8 |
| 20° | -142.5 | -162.9 | -0.4 | -149.2 | 6.7 |
| 25° | -140.0 | -162.8 | 0.0 | -148.7 | 8.7 |
| 25° (Peak) | -140.0 | -162.8 | 0.0 | -148.7 | 8.7 |

Table 10-75. Max PFD Levels, NA/NA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.4 | -154.9 | 4.9 |
| 5° | -150.0 | -163.3 | -1.2 | -154.6 | 4.6 |
| 10° | -147.5 | -163.2 | -0.9 | -154.2 | 6.7 |
| 15° | -145.0 | -163.0 | -0.9 | -154.0 | 9.0 |
| 20° | -142.5 | -162.9 | -0.4 | -153.4 | 10.9 |
| 25° | -140.0 | -162.8 | 0.0 | -152.9 | 12.9 |
| 25° (Peak) | -140.0 | -162.8 | 0.0 | -152.9 | 12.9 |

Table 10-76. Max PFD Levels, WA/NA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.4 | -150.9 | 0.9 |

| | | | | | |
|---------------|--------|--------|------|--------|-----|
| 5° | -150.0 | -163.3 | -1.2 | -150.6 | 0.6 |
| 10° | -147.5 | -163.2 | -0.9 | -150.2 | 2.7 |
| 15° | -145.0 | -163.0 | -0.9 | -150.0 | 5.0 |
| 20° | -142.5 | -162.9 | -0.4 | -149.4 | 6.9 |
| 25° | -140.0 | -162.8 | 0.0 | -148.9 | 8.9 |
| 25° (Peak) | -140.0 | -162.8 | 0.0 | -148.9 | 8.9 |

Table 10-77. Max PFD Levels, WA/NA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.4 | -154.8 | 4.8 |
| 5° | -150.0 | -163.3 | -1.2 | -154.5 | 4.5 |
| 10° | -147.5 | -163.2 | -0.9 | -154.1 | 6.6 |
| 15° | -145.0 | -163.0 | -0.9 | -153.9 | 8.9 |
| 20° | -142.5 | -162.9 | -0.4 | -153.3 | 10.8 |
| 25° | -140.0 | -162.8 | 0.0 | -152.8 | 12.8 |
| 25° (Peak) | -140.0 | -162.8 | 0.0 | -152.8 | 12.8 |

Table 10-78. Max PFD Levels, EU/NA 54 MHz, Digital Crx (54M0G7W)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.4 | -150.3 | 0.3 |
| 5° | -150.0 | -163.3 | -1.2 | -150.0 | 0.0 |
| 10° | -147.5 | -163.2 | -0.9 | -149.6 | 2.1 |
| 15° | -145.0 | -163.0 | -0.9 | -149.4 | 4.4 |
| 20° | -142.5 | -162.9 | -0.4 | -148.8 | 6.3 |
| 25° | -140.0 | -162.8 | 0.0 | -148.3 | 8.3 |
| 25° | -140.0 | -162.8 | 0.0 | -148.3 | 8.3 |

| | | | | | |
|--------|--|--|--|--|--|
| (Peak) | | | | | |
|--------|--|--|--|--|--|

Table 10-79. Max PFD Levels, EU/NA 54 MHz, Analog Carrier (36M0F3F)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -150.0 | -163.4 | -1.0 | -174.2 | 22.2 |
| 5° | -150.0 | -163.3 | -1.0 | -174.1 | 22.1 |
| 10° | -147.5 | -163.2 | -1.0 | -174.0 | 24.5 |
| 15° | -145.0 | -163.0 | -0.9 | -173.7 | 26.7 |
| 20° | -142.5 | -162.9 | -0.8 | -173.5 | 29.0 |
| 25° | -140.0 | -162.8 | -0.8 | -173.4 | 31.4 |
| 90° (Peak) | -140.0 | -162.1 | 0.0 | -171.9 | 29.9 |

Table 10-80. Max. PFD Levels, TLM beam, Telemetry (300KF9D)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival (dBW/m ² /4 kHz) | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival (dBW/m ² /4kHz) | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|---|-----------------|
| 0° | -152.0 | -163.4 | -1.0 | -166.4 | 14.4 |
| 5° | -152.0 | -163.3 | -1.0 | -166.3 | 14.3 |
| 10° | -149.5 | -163.2 | -1.0 | -166.2 | 16.7 |
| 15° | -147.0 | -163.0 | -0.9 | -165.9 | 18.9 |
| 20° | -144.5 | -162.9 | -0.8 | -165.7 | 21.2 |
| 25° | -142.0 | -162.8 | -0.8 | -165.6 | 23.6 |
| 90° (Peak) | -142.0 | -162.1 | 0.0 | -164.1 | 22.1 |

Table 10-81. Max. PFD Levels, BNC beam, Tracking Beacon (25K0N0N)

| Angle of Arrival | Applicable PFD Limit for Angle of Arrival | Spreading Loss (dBW/m ²) | Gain Contour (dB) | Worst Case PFD Level at Angle of Arrival | PFD Margin (dB) |
|------------------|---|--------------------------------------|-------------------|--|-----------------|
|------------------|---|--------------------------------------|-------------------|--|-----------------|

| | (dBW/m ² /4 kHz) | | | (dBW/m ² /4kHz) | |
|---------------|-----------------------------|--------|------|----------------------------|------|
| 0° | -150.0 | -163.4 | -1.0 | -163.4 | 13.4 |
| 5° | -150.0 | -163.3 | -1.0 | -163.3 | 13.3 |
| 10° | -147.5 | -163.2 | -1.0 | -163.2 | 15.7 |
| 15° | -145.0 | -163.0 | -0.9 | -162.9 | 17.9 |
| 20° | -142.5 | -162.9 | -0.8 | -162.7 | 20.2 |
| 25° | -140.0 | -162.8 | -0.8 | -162.6 | 22.6 |
| 90° (Peak) | -140.0 | -162.1 | 0.0 | -161.1 | 21.1 |

Table 10-82. Max. PFD Levels, BNK beam, Tracking Beacon (25K0N0N)

11. Arrangement for Tracking, Telemetry, and Control

SES WORLD SKIES will conduct primary TT&C operations for SES-4 using antennas that are located in Betzdorf, Luxembourg. Back-up TT&C capability will also be available from Manassas, Virginia, in the United States. In addition, SES WORLD SKIES will have remote control capability from its headquarters in The Hague that will, if required by the Dutch Administration, enable satellite operations to be controlled from the territory of The Netherlands.

12. Physical Characteristics of the Space Station

SES-4 is being constructed by Space System Loral based on the Series FS1300 satellite design, a three-axis stabilized system. The spacecraft will have a launch mass of 6,170 kg, total power of 15,500 watts (end-of-life), and a design lifetime of 15 years. Additional key spacecraft characteristics for SES-4 can be found in the appropriate sections of the accompanying Schedule S.

13. Common Carrier Status

SES WORLD SKIES intends to market all of the C-band and Ku-band transponders on the SES-4 satellite on a non-common carrier basis.

14. Schedule

See Narrative, at Section IV.

15. Polarization Information

The SES-4 C-band payload operates using circular polarization and is not capable of switching polarization sense upon ground command. SES WORLD SKIES has requested waivers of Section 25.210 to account for these operational parameters. *See* Narrative, at Section II.C.2. The SES-4 Ku-band payload operates using linear polarization.

16. Public Interest Considerations

See Narrative, at Section II.C.2.

17. Interference Analysis

At present, the nearest operational C-band and/or Ku-band satellites to the proposed location for SES-4, 22.0° W.L., are NSS-5 at 20.0° W.L. and Intelsat-905 at 24.5° W.L. As demonstrated below, SES-4 largely is in compliance with the FCC's two-degree spacing policy, as explained herein, and to the extent it is not, SES-4 has been coordinated with both of these satellites and therefore a waiver of the rule is warranted.

In order to assess compliance with the Commission's two-degree spacing policy, two interference analyses are provided below, distinguishing a number of different cases, as required by the FCC's rules.² The first case is the assessment of interference from communication carriers of SES-4 into the communication carriers of a hypothetical

² *See* Public Notice, Report No. SPB-207, DA 04-1708 (June 16, 2004).

satellite at 24.0° W.L.(the “general interference analysis case”). The second case is the assessment of interference from communication carriers of SES-4 into the communication carriers of NSS-5, which operates at 20.0° W.L.(the “specific interference analysis case”). Apart from these assessments, an assessment is provided of the interference of the TT&C carriers of SES-4 into the TT&C and communication carriers of NSS-5, as well as an assessment of the SES-4 TT&C carriers into a hypothetical satellite at 24.0° W.L. having the same TT&C parameters.

17.1 General interference analysis case

For this case, SES WORLD SKIES has assumed that the transmission parameters of the SES-4 satellite are both the wanted and victim transmissions in a two-degree spacing environment (i.e. the victim satellite is assumed to be at 24.0° W.L.). This analysis is performed for digital signals in both networks, and analog TV/FM signal link calculations are provided in Appendix A to this Technical Appendix. Analog TV/FM signals are coordinated on a case-by-case basis with nearby spacecraft.

The odd numbered Tables in the range from 17-1 to 17-78 below (e.g. Tables 17-1, 17-3, 17-5, ...,17-77) provide summaries of the C- and Ku-band transmission parameters derived from the SES-4 link budgets for the different connectivity options that are presented in Tables A-1 through A-39 in Appendix A and embedded in the accompanying Schedule S form. The interference calculations assume a 1 dB advantage for topocentric-to-geocentric conversion, co-polarization of all wanted and interfering carriers, and all earth station antennas conforming to a sidelobe pattern of $29-25 \log(\theta)$, as specified in section 25.209(a)(1) of the Commission’s Rules.

The even numbered Tables in the range from 17-1 to 17-78 below (e.g. Tables 17-2, 17-4, 17-6, ...,17-78) show the results of the C- and Ku-band interference calculations in terms of the overall C/I margins for the different possible connectivities on the SES-4

satellite. For ease of reference and analysis, these tables are provided in a format similar to the output of the commonly-used Sharp Adjacent Satellite Interference Analysis program.

Global/Global beam connectivity

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.7 | 53.6 | 13.0 | 42.5 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.6 | 57.1 | 16.6 | 43.8 | 21.5 |
| 3 | 1M84G7W | 1.365 | 55.4 | 63.2 | 22.6 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.7 | 68.3 | 27.8 | 42.5 | 19.1 |
| 5 | 36M0G7W | 30.000 | 56.8 | 79.1 | 36.6 | 42.5 | 19.1 |

Table 17-1. Summary of Typical Transmission Parameters for the SES-4 Global/Global beam connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 3.3 | 0.4 | 1.3 | 2.4 | 0.7 |
| | 2 | 2 | 3.4 | 0.3 | 1.5 | 2.5 | 0.9 |
| | 3 | 3 | 3.4 | 0.3 | 1.5 | 2.5 | 0.9 |
| | 4 | 4 | 3.4 | 0.4 | 1.4 | 2.4 | 0.7 |
| | 5 | 5 | 5.5 | 2.7 | 3.4 | 4.5 | 2.8 |

Table 17-2. Summary of Overall C/I Margins for the SES-4 Global/Global beam connectivity (dB)

As shown in Table 17-2, all C/I margins are positive.

West Hemi/West Hemi beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 52.1 | 16.3 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 55.0 | 19.2 | 42.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 61.0 | 25.2 | 42.3 | 21.5 |

| | | | | | | | |
|---|---------|--------|------|------|------|------|------|
| 4 | 8M25G7W | 6.111 | 51.2 | 65.9 | 30.1 | 42.3 | 19.1 |
| 5 | 36M0G7W | 30.000 | 56.3 | 76.5 | 39.7 | 42.3 | 19.1 |

Table 17-3. Summary of Typical Transmission Parameters for the SES-4 West Hemi/West Hemi beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|------|-----|-----|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 3.1 | 0.7 | 1.8 | 3.0 | 0.7 | |
| | 2 | 1.4 | -0.9 | 0.1 | 1.4 | -1.0 | |
| | 3 | 1.4 | -0.9 | 0.1 | 1.4 | -1.0 | |
| | 4 | 2.3 | -0.1 | 0.9 | 2.2 | -0.2 | |
| | 5 | 5.0 | 2.8 | 3.6 | 5.0 | 2.6 | |

Table 17-4. Summary of Overall C/I Margins for the SES-4 West Hemi/West Hemi beam (36 MHz) connectivity (dB)

It can be seen in Table 17-4 that most C/I margins are positive, except for some cases, like for Interfering Carrier 2 and Interfering Carrier 5. The worst case is represented for Wanted Carrier 3 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.0dB, which is equivalent to an increase of 7.6% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

West Hemi/West Hemi beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 51.2 | 15.4 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 54.5 | 18.7 | 42.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 59.3 | 23.6 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 65.7 | 29.9 | 42.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 56.3 | 77.9 | 41.1 | 42.3 | 19.1 |

Table 17-5. Summary of Typical Transmission Parameters for the SES-4 West Hemi/West Hemi beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|--|--|----------------------|---|---|---|---|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |

| | | | | | | |
|------------------------|---|-----|------|-----|-----|------|
| Wanted Carriers | 1 | 3.1 | 0.3 | 2.5 | 2.3 | 0.1 |
| | 2 | 1.9 | -0.9 | 1.3 | 1.1 | -1.1 |
| | 3 | 2.0 | -1.1 | 1.5 | 1.2 | -0.8 |
| | 4 | 3.0 | 0.1 | 2.4 | 2.2 | 0.0 |
| | 5 | 5.6 | 2.9 | 4.9 | 4.8 | 2.6 |

Table 17-6. Summary of Overall C/I Margins for the SES-4 West Hemi/West Hemi beam (54 MHz) connectivity (dB)

It can be seen in Table 17-6 that almost all C/I margins are positive, except for some cases, like for Interfering Carrier 2 and Interfering Carrier 5. The worst case is represented for Wanted Carrier 2 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.1dB, which is equivalent to an increase of 7.7% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

West Hemi/West Hemi beam connectivity (72 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|-------------------|----------------------------|------------------------|--------------------------|--------------------------|----------------------------|--------------------------|---------------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 50.5 | 14.7 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 52.8 | 17.0 | 43.8 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 58.8 | 23.0 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 64.6 | 28.8 | 42.3 | 19.1 |
| 5 | 72M0G7W | 63.330 | 56.3 | 78.0 | 41.1 | 48.0 | 24.9 |

Table 17-7. Summary of Typical Transmission Parameters for the SES-4 West Hemi/West Hemi beam (72 MHz) connectivity

| Wanted Carriers | Carrier ID | Interfering Carriers | | | | |
|------------------------|-------------------|-----------------------------|-----|-----|-----|-----|
| | | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 3.1 | 1.3 | 2.3 | 2.7 | 0.9 |
| | 2 | 2.2 | 0.1 | 1.5 | 1.8 | 0.1 |
| | 3 | 2.2 | 0.1 | 1.5 | 1.8 | 0.1 |
| | 4 | 2.6 | 0.7 | 1.8 | 2.2 | 0.4 |
| | 5 | 3.8 | 1.1 | 3.4 | 3.4 | 2.0 |

Table 17-8. Summary of Overall C/I Margins for the SES-4 West Hemi/West Hemi beam (72 MHz) connectivity (dB)

As shown in Table 17-8, all C/I margins are positive.

East Hemi/East Hemi beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 52.2 | 17.0 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 54.7 | 19.5 | 42.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 60.7 | 25.5 | 42.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 66.9 | 31.8 | 42.3 | 19.1 |
| 5 | 36M0G7W | 30.000 | 56.3 | 76.9 | 39.8 | 42.3 | 19.1 |

Table 17-9. Summary of Typical Transmission Parameters for the SES-4 East Hemi/East Hemi beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|------|-----|-----|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 3.1 | 1.1 | 2.2 | 2.1 | 1.3 |
| | 2 | 2 | 1.0 | -0.9 | 0.1 | 0.1 | -0.8 |
| | 3 | 3 | 1.0 | -0.9 | 0.1 | 0.1 | -0.8 |
| | 4 | 4 | 3.2 | 1.2 | 2.2 | 2.2 | 1.4 |
| | 5 | 5 | 4.5 | 2.7 | 3.4 | 3.5 | 2.6 |

Table 17-10. Summary of Overall C/I Margins for the SES-4 East Hemi/East Hemi beam (36 MHz) connectivity (dB)

It can be seen in Table 17-10 that most C/I margins are positive, except for some cases, like for Interfering Carrier 2 and Interfering Carrier 5. The worst case is represented for Wanted Carrier 3 with respect to Interfering Carrier 2. The deficit with respect to the 6% C/I criterion is 0.9dB, which is equivalent to an increase of 7.5% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

East Hemi/East Hemi beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S | Uplink EIRP | Downlink EIRP | Rx E/S | C/I Criterion |
|------------|---------------------|-----------------|--------|-------------|---------------|--------|---------------|
|------------|---------------------|-----------------|--------|-------------|---------------|--------|---------------|

| | | | Gain (dBi) | (dBW) | (dBW) | Gain (dBi) | (dB) |
|---|---------|--------|---------------|-------|-------|---------------|------|
| 1 | 346KG7W | 0.256 | 51.2 | 51.2 | 16.0 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 53.5 | 18.3 | 42.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 59.0 | 23.8 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 65.2 | 30.1 | 42.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 56.3 | 78.6 | 41.4 | 42.3 | 19.1 |

Table 17-11. Summary of Typical Transmission Parameters for the SES-4 East Hemi/East Hemi beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|------|-----|-----|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 3.1 | 1.3 | 2.9 | 2.8 | 0.4 |
| | 2 | 2 | 0.9 | -0.9 | 0.6 | 0.6 | -1.8 |
| | 3 | 3 | 1.6 | -0.4 | 1.5 | 1.4 | -0.9 |
| | 4 | 4 | 2.5 | 0.7 | 2.2 | 2.2 | -0.2 |
| | 5 | 5 | 5.3 | 3.8 | 5.0 | 5.1 | 2.6 |

Table 17-12. Summary of Overall C/I Margins for the SES-4 East Hemi/East Hemi beam (54 MHz) connectivity (dB)

It can be seen in Table 17-10 that most C/I margins are positive, except for some cases, like for Interfering Carrier 2 and Interfering Carrier 5. The worst case is represented for Wanted Carrier 2 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.8dB, which is equivalent to an increase of 9.2% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

East Hemi/East Hemi beam connectivity (72 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 49.9 | 14.8 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 52.4 | 17.2 | 43.8 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 58.6 | 23.4 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 64.3 | 29.1 | 42.3 | 19.1 |
| 5 | 72M0G7W | 63.330 | 56.3 | 78.9 | 41.7 | 48.0 | 24.9 |

Table 17-13. Summary of Typical Transmission Parameters for the SES-4 East Hemi/East Hemi beam (72 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 3.1 | 1.2 | 2.0 | 2.5 | 0.4 | |
| | 2 | 2.3 | 0.1 | 1.3 | 1.7 | -0.4 | |
| | 3 | 2.5 | 0.3 | 1.5 | 1.9 | -0.2 | |
| | 4 | 2.8 | 0.8 | 1.7 | 2.2 | 0.0 | |
| | 5 | 4.5 | 1.9 | 3.7 | 3.9 | 2.0 | |

Table 17-14. Summary of Overall C/I Margins for the SES-4 East Hemi/East Hemi beam (72 MHz) connectivity (dB)

It can be seen in Table 17-14 that most C/I margins are positive, except for Interfering Carrier 5. The worst case is represented for Wanted Carrier 2 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 0.4dB, which is equivalent to an increase of 6.5% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

East Hemi/West Hemi beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 52.3 | 16.6 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 54.9 | 19.2 | 42.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 60.9 | 25.2 | 42.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 67.0 | 31.4 | 42.3 | 19.1 |
| 5 | 36M0G7W | 30.000 | 56.3 | 76.4 | 39.8 | 42.3 | 19.1 |

Table 17-15. Summary of Typical Transmission Parameters for the SES-4 East Hemi/West Hemi beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|------|-----|-----|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 3.1 | 1.0 | 2.1 | 2.1 | 1.0 | |
| | 2 | 1.1 | -0.9 | 0.1 | 0.2 | -1.0 | |
| | 3 | 1.1 | -0.9 | 0.1 | 0.2 | -1.0 | |

| | | | | | | |
|--|---|-----|-----|-----|-----|-----|
| | 4 | 3.2 | 1.1 | 2.1 | 2.2 | 1.0 |
| | 5 | 4.8 | 2.8 | 3.7 | 3.8 | 2.6 |

Table 17-16. Summary of Overall C/I Margins for the SES-4 East Hemi/West Hemi beam (36 MHz) connectivity (dB)

It can be seen in Table 17-16 that most C/I margins are positive, except for some cases, like for Interfering Carrier 2 and Interfering Carrier 5. The worst case is represented for Wanted Carrier 3 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.0dB, which is equivalent to an increase of 7.6% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

East Hemi/West Hemi beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 51.4 | 15.8 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 54.4 | 18.8 | 42.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 59.3 | 23.7 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 65.4 | 29.8 | 42.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 56.3 | 77.7 | 41.1 | 42.3 | 19.1 |

Table 17-17. Summary of Typical Transmission Parameters for the SES-4 East Hemi/West Hemi beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|------|-----|-----|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 3.1 | 0.6 | 2.8 | 2.9 | 0.6 | |
| | 2 | 1.6 | -0.9 | 1.3 | 1.3 | -1.0 | |
| | 3 | 1.7 | -1.0 | 1.5 | 1.5 | -0.7 | |
| | 4 | 2.4 | -0.1 | 2.1 | 2.2 | -0.1 | |
| | 5 | 5.2 | 2.8 | 4.8 | 4.9 | 2.6 | |

Table 17-18. Summary of Overall C/I Margins for the SES-4 East Hemi/West Hemi beam (54 MHz) connectivity (dB)

It can be seen in Table 17-18 that most C/I margins are positive, except for some cases, like for Interfering Carrier 2 and Interfering Carrier 5. The worst case is represented

for Wanted Carrier 2 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.0dB, which is equivalent to an increase of 7.6% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

East Hemi/West Hemi beam connectivity (72 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 50.1 | 14.4 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 52.8 | 17.2 | 43.8 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 58.8 | 23.2 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 64.4 | 28.8 | 42.3 | 19.1 |
| 5 | 72M0G7W | 63.330 | 56.3 | 77.9 | 41.2 | 48.0 | 24.9 |

Table 17-19. Summary of Typical Transmission Parameters for the SES-4 East Hemi/West Hemi beam (72 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 3.1 | 0.9 | 1.9 | 2.5 | 0.6 | |
| | 2 | 2.6 | 0.1 | 1.5 | 2.1 | 0.2 | |
| | 3 | 2.6 | 0.1 | 1.5 | 2.1 | 0.2 | |
| | 4 | 2.7 | 0.5 | 1.5 | 2.2 | 0.2 | |
| | 5 | 4.1 | 1.0 | 3.3 | 3.5 | 2.0 | |

Table 17-20. Summary of Overall C/I Margins for the SES-4 East Hemi/West Hemi beam (72 MHz) connectivity (dB)

As shown in Table 17-20, all C/I margins are positive.

West Hemi/East Hemi beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 52.6 | 17.3 | 42.3 | 18.2 |

| | | | | | | | |
|---|---------|--------|------|------|------|------|------|
| 2 | 461KG7W | 0.341 | 47.0 | 55.5 | 20.2 | 42.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 61.5 | 26.3 | 42.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 66.9 | 31.6 | 42.3 | 19.1 |
| 5 | 36M0G7W | 30.000 | 56.3 | 77.0 | 39.7 | 42.3 | 19.1 |

Table 17-21. Summary of Typical Transmission Parameters for the SES-4 West Hemi/East Hemi beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|------|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 3.1 | 0.7 | 1.7 | 2.6 | 1.7 |
| | 2 | 2 | 1.5 | -0.9 | 0.1 | 1.0 | 0.0 |
| | 3 | 3 | 1.5 | -0.9 | 0.1 | 1.0 | 0.0 |
| | 4 | 4 | 2.7 | 0.3 | 1.3 | 2.2 | 1.2 |
| | 5 | 5 | 4.1 | 1.9 | 2.6 | 3.6 | 2.6 |

Table 17-22. Summary of Overall C/I Margins for the SES-4 West Hemi/East Hemi beam (36 MHz) connectivity (dB)

It can be seen in Table 17-22 that most C/I margins are positive, except for some cases, like for Interfering Carrier 2. The worst case is represented for Wanted Carrier 3 with respect to Interfering Carrier 2. The deficit with respect to the 6% C/I criterion is 0.9dB, which is equivalent to an increase of 7.5% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

West Hemi/East Hemi beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 51.6 | 16.3 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 54.2 | 18.9 | 42.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 59.4 | 24.1 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 65.8 | 30.5 | 42.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 56.3 | 78.8 | 41.5 | 42.3 | 19.1 |

Table 17-23. Summary of Typical Transmission Parameters for the SES-4 West Hemi/East Hemi beam (54 MHz) connectivity

| Interfering Carriers |
|----------------------|
|----------------------|

| Wanted Carriers | Carrier ID | 1 | 2 | 3 | 4 | 5 |
|-----------------|------------|-----|------|-----|-----|------|
| | 1 | 3.1 | 1.0 | 2.9 | 2.6 | 0.6 |
| | 2 | 1.1 | -0.9 | 0.9 | 0.7 | -1.4 |
| | 3 | 1.6 | -0.7 | 1.5 | 1.2 | -0.8 |
| | 4 | 2.7 | 0.6 | 2.4 | 2.2 | 0.2 |
| | 5 | 5.1 | 3.3 | 4.8 | 4.7 | 2.6 |

Table 17-24. Summary of Overall C/I Margins for the SES-4 West Hemi/East Hemi beam (54 MHz) connectivity (dB)

It can be seen in Table 17-24 that most C/I margins are positive, except for some cases, like for Interfering Carrier 2 and Interfering Carrier 5. The worst case is represented for Wanted Carrier 2 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.4dB, which is equivalent to an increase of 8.2% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

West Hemi/East Hemi beam connectivity (72 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 50.2 | 14.9 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.0 | 52.4 | 17.1 | 43.8 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.9 | 58.5 | 23.2 | 43.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.2 | 64.6 | 29.3 | 42.3 | 19.1 |
| 5 | 72M0G7W | 63.330 | 56.3 | 78.9 | 41.7 | 48.0 | 24.9 |

Table 17-25. Summary of Typical Transmission Parameters for the SES-4 West Hemi/East Hemi beam (72 MHz) connectivity

| Wanted Carriers | Carrier ID | Interfering Carriers | | | | |
|-----------------|------------|----------------------|-----|-----|-----|------|
| | | 1 | 2 | 3 | 4 | 5 |
| | 1 | 3.1 | 1.4 | 2.4 | 2.5 | 0.5 |
| | 2 | 2.1 | 0.1 | 1.5 | 1.5 | -0.4 |
| | 3 | 2.1 | 0.1 | 1.5 | 1.5 | -0.4 |
| | 4 | 2.8 | 1.1 | 2.1 | 2.2 | 0.2 |
| 5 | 4.3 | 1.9 | 4.0 | 3.7 | 2.0 | |

Table 17-26. Summary of Overall C/I Margins for the SES-4 West Hemi/East Hemi beam (72 MHz) connectivity (dB)

It can be seen in Table 17-26 that most C/I margins are positive, except for Interfering Carrier 5. The worst case is represented for Wanted Carrier 2 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 0.4 dB, which is equivalent to an increase of 6.6% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

Europe/West Hemi beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 52.1 | 15.0 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 53.1 | 54.8 | 17.7 | 45.9 | 21.5 |
| 3 | 1M84G7W | 1.365 | 53.1 | 60.8 | 23.7 | 45.9 | 21.5 |
| 4 | 8M25G7W | 6.111 | 53.1 | 66.9 | 29.8 | 42.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 54.6 | 80.3 | 41.2 | 42.3 | 19.1 |

Table 17-27. Summary of Typical Transmission Parameters for the SES-4 Europe/West Hemi beam (54 MHz) connectivity

| | | Interfering Carriers | | | | |
|-----------------|---|----------------------|-----|-----|-----|------|
| | | Carrier ID | 1 | 2 | 3 | 4 |
| Wanted Carriers | 1 | 3.3 | 1.8 | 1.8 | 2.3 | -0.5 |
| | 2 | 4.6 | 3.2 | 3.2 | 3.7 | 0.8 |
| | 3 | 4.6 | 3.2 | 3.2 | 3.7 | 0.8 |
| | 4 | 3.3 | 1.9 | 1.9 | 2.4 | -0.4 |
| | 5 | 6.2 | 4.8 | 4.8 | 5.3 | 2.5 |

Table 17-28. Summary of Overall C/I Margins for the SES-4 Europe/West Hemi beam (54 MHz) connectivity (dB)

It can be seen in Table 17-28 that most C/I margins are positive, except for Interfering Carrier 5. The worst case is represented for Wanted Carrier 1 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 0.5 dB, which is equivalent to an increase of 6.8% of victim noise temperature. However, these C/I levels

reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

Europe/East Hemi beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.0 | 51.5 | 14.9 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 53.1 | 54.4 | 17.8 | 45.9 | 21.5 |
| 3 | 1M84G7W | 1.365 | 53.1 | 60.4 | 23.8 | 45.9 | 21.5 |
| 4 | 8M25G7W | 6.111 | 53.1 | 66.2 | 29.6 | 42.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 54.6 | 79.9 | 41.3 | 42.3 | 19.1 |

Table 17-29. Summary of Typical Transmission Parameters for the SES-4 Europe/East Hemi beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 2.8 | 1.7 | 1.7 | 2.3 | -0.7 | |
| | 2 | 3.8 | 3.2 | 3.2 | 3.8 | 0.7 | |
| | 3 | 3.8 | 3.2 | 3.2 | 3.8 | 0.7 | |
| | 4 | 2.9 | 1.7 | 1.7 | 2.4 | -0.6 | |
| | 5 | 6.1 | 4.8 | 4.8 | 5.5 | 2.5 | |

Table 17-30. Summary of Overall C/I Margins for the SES-4 Europe/East Hemi beam (54 MHz) connectivity (dB)

It can be seen in Table 17-30 that most C/I margins are positive, except for Interfering Carrier 5. The worst case is represented for Wanted Carrier 1 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 0.7 dB, which is equivalent to an increase of 7.3% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

West Africa/West Hemi beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 55.4 | 15.5 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 57.8 | 17.9 | 45.9 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.6 | 63.9 | 24.0 | 45.9 | 21.5 |
| 4 | 8M25G7W | 6.111 | 53.1 | 70.2 | 30.3 | 42.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 58.7 | 82.1 | 41.2 | 42.3 | 19.1 |

Table 17-31. Summary of Typical Transmission Parameters for the SES-4 West Africa/West Hemi beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 3.3 | 2.2 | 2.2 | 2.3 | 0.3 |
| | 2 | 2 | 4.3 | 3.4 | 3.4 | 3.3 | 1.6 |
| | 3 | 3 | 4.3 | 3.4 | 3.4 | 3.3 | 1.6 |
| | 4 | 4 | 3.3 | 2.3 | 2.3 | 2.4 | 0.4 |
| | 5 | 5 | 5.6 | 4.6 | 4.6 | 4.7 | 2.6 |

Table 17-32. Summary of Overall C/I Margins for the SES-4 West Africa/West Hemi beam (54 MHz) connectivity (dB)

As shown in Table 17-32, all C/I margins are positive.

West Africa/East Hemi beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 54.8 | 15.4 | 42.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 57.3 | 17.9 | 45.9 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.6 | 63.3 | 23.9 | 45.9 | 21.5 |
| 4 | 8M25G7W | 6.111 | 54.6 | 69.5 | 30.1 | 42.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 58.7 | 82.9 | 41.5 | 42.3 | 19.1 |

Table 17-33. Summary of Typical Transmission Parameters for the SES-4 West Africa/East Hemi beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 3.3 | 2.1 | 2.1 | 2.4 | -0.2 |

| | | | | | | |
|--|---|-----|-----|-----|-----|------|
| | 2 | 4.4 | 3.4 | 3.4 | 3.7 | 1.2 |
| | 3 | 4.4 | 3.4 | 3.4 | 3.7 | 1.2 |
| | 4 | 3.3 | 2.2 | 2.2 | 2.5 | -0.1 |
| | 5 | 6.2 | 5.0 | 5.0 | 5.3 | 2.6 |

Table 17-34. Summary of Overall C/I Margins for the SES-4 West Africa/East Hemi beam (54 MHz) connectivity (dB)

It can be seen in Table 17-34 that most C/I margins are positive, except for Interfering Carrier 5. The worst case is represented for Wanted Carrier 1 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 0.2 dB, which is equivalent to an increase of 6.3% of victim noise temperature. However, these C/I levels reasonably can be expected to be coordinated with an adjacent satellite at 2 degrees spacing.

West Hemi/Europe beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.3 | 51.8 | 24.8 | 47.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.2 | 53.2 | 26.2 | 51.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 55.1 | 59.2 | 32.2 | 51.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.3 | 66.5 | 39.5 | 47.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 55.1 | 78.9 | 50.0 | 47.3 | 19.1 |

Table 17-35. Summary of Typical Transmission Parameters for the SES-4 West Hemi/Europe beam (54 MHz) connectivity

| Wanted Carriers | Interfering Carriers | | | | | |
|-----------------|----------------------|-----|-----|-----|-----|-----|
| | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| 1 | 1 | 7.2 | 5.4 | 7.8 | 6.2 | 4.8 |
| 2 | 2 | 6.5 | 3.8 | 7.8 | 5.5 | 4.5 |
| 3 | 3 | 6.5 | 3.8 | 7.8 | 5.5 | 4.5 |
| 4 | 4 | 7.3 | 5.5 | 7.9 | 6.3 | 4.9 |
| 5 | 5 | 9.5 | 8.2 | 9.9 | 8.5 | 7.1 |

Table 17-36. Summary of Overall C/I Margins for the SES-4 West Hemi/Europe beam (54 MHz) connectivity (dB)

As shown in Table 17-36, all C/I margins are positive.

East Hemi/Europe beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.3 | 51.6 | 24.8 | 47.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.2 | 53.1 | 26.3 | 51.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 55.1 | 59.1 | 32.3 | 51.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.3 | 66.4 | 39.6 | 47.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 55.1 | 78.8 | 50.0 | 47.3 | 19.1 |

Table 17-37. Summary of Typical Transmission Parameters for the SES-4 East Hemi/Europe beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 7.2 | 5.4 | 7.7 | 6.2 | 4.9 | |
| | 2 | 6.5 | 3.8 | 7.8 | 5.5 | 4.6 | |
| | 3 | 6.5 | 3.8 | 7.8 | 5.5 | 4.6 | |
| | 4 | 7.3 | 5.4 | 7.8 | 6.3 | 5.0 | |
| | 5 | 9.5 | 8.1 | 9.8 | 8.5 | 7.1 | |

Table 17-38. Summary of Overall C/I Margins for the SES-4 East Hemi/Europe beam (54 MHz) connectivity (dB)

As shown in Table 17-38, all C/I margins are positive.

West Hemi/West Africa beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.3 | 51.1 | 25.3 | 47.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.2 | 52.7 | 26.8 | 51.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 55.1 | 58.7 | 32.8 | 51.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.3 | 65.9 | 40.0 | 47.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 55.1 | 78.4 | 50.5 | 47.3 | 19.1 |

Table 17-39. Summary of Typical Transmission Parameters for the SES-4 West Hemi/West Africa beam (54 MHz) connectivity

| Interfering Carriers | |
|----------------------|--|
|----------------------|--|

| Wanted Carriers | Carrier ID | 1 | 2 | 3 | 4 | 5 |
|-----------------|------------|-----|-----|-----|-----|-----|
| | 1 | 7.2 | 5.3 | 7.6 | 6.2 | 4.8 |
| | 2 | 6.6 | 3.8 | 7.8 | 5.6 | 4.6 |
| | 3 | 6.6 | 3.8 | 7.8 | 5.6 | 4.6 |
| | 4 | 7.3 | 5.3 | 7.7 | 6.3 | 4.9 |
| | 5 | 9.5 | 8.0 | 9.8 | 8.6 | 7.1 |

Table 17-40. Summary of Overall C/I Margins for the SES-4 West Hemi/West Africa beam (54 MHz) connectivity (dB)

As shown in Table 17-40, all C/I margins are positive.

East Hemi/West Africa beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.3 | 51.1 | 25.3 | 47.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 47.2 | 52.7 | 26.9 | 51.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 55.1 | 58.7 | 33.0 | 51.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 51.3 | 65.8 | 40.1 | 47.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 55.1 | 78.3 | 50.5 | 47.3 | 19.1 |

Table 17-41. Summary of Typical Transmission Parameters for the SES-4 East Hemi/West Africa beam (54 MHz) connectivity

| Wanted Carriers | Interfering Carriers | | | | | |
|-----------------|----------------------|-----|-----|-----|-----|-----|
| | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| | 1 | 7.2 | 5.2 | 7.6 | 6.2 | 4.9 |
| | 2 | 6.7 | 3.8 | 7.8 | 5.7 | 4.7 |
| | 3 | 6.7 | 3.8 | 7.8 | 5.7 | 4.7 |
| | 4 | 7.3 | 5.3 | 7.7 | 6.3 | 5.0 |
| 5 | 9.5 | 7.9 | 9.7 | 8.5 | 7.1 | |

Table 17-42. Summary of Overall C/I Margins for the SES-4 East Hemi/West Africa beam (54 MHz) connectivity (dB)

As shown in Table 17-42, all C/I margins are positive.

Europe/Europe beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S | Uplink EIRP | Downlink EIRP | Rx E/S | C/I Criterion |
|------------|---------------------|-----------------|--------|-------------|---------------|--------|---------------|
|------------|---------------------|-----------------|--------|-------------|---------------|--------|---------------|

| | | | Gain (dBi) | (dBW) | (dBW) | Gain (dBi) | (dB) |
|---|---------|--------|---------------|-------|-------|---------------|------|
| 1 | 346KG7W | 0.256 | 54.4 | 53.7 | 26.4 | 48.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.4 | 55.1 | 27.8 | 52.2 | 21.5 |
| 3 | 1M84G7W | 1.365 | 56.3 | 61.2 | 33.9 | 52.2 | 21.5 |
| 4 | 8M25G7W | 6.111 | 56.3 | 68.4 | 41.1 | 48.2 | 19.1 |
| 5 | 36M0G7W | 30.000 | 54.4 | 79.0 | 48.7 | 48.2 | 19.1 |

Table 17-43. Summary of Typical Transmission Parameters for the SES-4 Europe/Europe beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 8.6 | 8.4 | 8.7 | 8.0 | 6.2 |
| | 2 | 2 | 8.4 | 8.2 | 8.8 | 8.0 | 5.4 |
| | 3 | 3 | 8.4 | 8.2 | 8.8 | 8.0 | 5.4 |
| | 4 | 4 | 8.6 | 8.4 | 8.8 | 8.0 | 6.3 |
| | 5 | 5 | 9.7 | 9.6 | 9.7 | 9.0 | 7.7 |

Table 17-44. Summary of Overall C/I Margins for the SES-4 Europe/Europe beam (36 MHz) connectivity (dB)

As shown in Table 17-44, all C/I margins are positive.

Europe/Europe beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.6 | 52.1 | 24.8 | 49.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 54.2 | 26.9 | 52.8 | 21.5 |
| 3 | 1M84G7W | 1.365 | 56.5 | 60.2 | 32.9 | 52.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 56.5 | 66.8 | 39.5 | 49.2 | 19.1 |
| 5 | 54M0G7W | 45.000 | 54.6 | 79.2 | 50.0 | 47.3 | 19.1 |

Table 17-45. Summary of Typical Transmission Parameters for the SES-4 Europe/Europe beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|------|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 9.4 | 8.6 | 9.0 | 8.8 | 6.2 |
| | 2 | 2 | 9.5 | 8.6 | 9.3 | 9.2 | 5.9 |
| | 3 | 3 | 9.5 | 8.6 | 9.3 | 9.2 | 5.9 |
| | 4 | 4 | 9.5 | 8.6 | 9.0 | 8.9 | 6.2 |
| | 5 | 5 | 10.0 | 9.1 | 9.3 | 9.2 | 7.0 |

Table 17-46. Summary of Overall C/I Margins for the SES-4 Europe/Europe beam (54 MHz) connectivity (dB)

As shown in Table 17-46, all C/I margins are positive.

West Africa/Europe beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 55.4 | 26.3 | 48.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.4 | 56.9 | 27.8 | 52.2 | 21.5 |
| 3 | 1M84G7W | 1.365 | 56.3 | 63.0 | 33.9 | 52.2 | 21.5 |
| 4 | 8M25G7W | 6.111 | 56.3 | 70.1 | 41.0 | 48.2 | 19.1 |
| 5 | 36M0G7W | 30.000 | 56.3 | 80.6 | 48.5 | 48.2 | 19.1 |

Table 17-47. Summary of Typical Transmission Parameters for the SES-4 West Africa/Europe beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 8.6 | 8.3 | 8.6 | 8.0 | 6.8 |
| | 2 | 2 | 8.5 | 8.2 | 8.8 | 8.2 | 6.5 |
| | 3 | 3 | 8.5 | 8.2 | 8.8 | 8.2 | 6.5 |
| | 4 | 4 | 8.6 | 8.3 | 8.6 | 8.0 | 6.8 |
| | 5 | 5 | 9.7 | 9.3 | 9.5 | 8.9 | 8.0 |

Table 17-48. Summary of Overall C/I Margins for the SES-4 West Africa/Europe beam (36 MHz) connectivity (dB)

As shown in Table 17-48, all C/I margins are positive.

West Africa/Europe beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.6 | 53.6 | 24.5 | 49.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 56.2 | 27.1 | 52.8 | 21.5 |
| 3 | 1M84G7W | 1.365 | 56.5 | 62.3 | 33.2 | 52.8 | 21.5 |
| 4 | 8M25G7W | 6.111 | 56.5 | 68.4 | 39.3 | 49.2 | 19.1 |

| | | | | | | | |
|---|---------|--------|------|------|------|------|------|
| 5 | 54M0G7W | 45.000 | 56.5 | 81.0 | 50.0 | 47.3 | 19.1 |
|---|---------|--------|------|------|------|------|------|

Table 17-49. Summary of Typical Transmission Parameters for the SES-4 West Africa/Europe beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|------|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 9.4 | 8.1 | 8.4 | 8.8 | 6.4 |
| | 2 | 2 | 10.0 | 8.6 | 9.3 | 9.7 | 7.0 |
| | 3 | 3 | 10.0 | 8.6 | 9.3 | 9.7 | 7.0 |
| | 4 | 4 | 9.5 | 8.1 | 8.5 | 8.9 | 6.5 |
| | 5 | 5 | 10.2 | 8.9 | 9.1 | 9.5 | 7.2 |

Table 17-50. Summary of Overall C/I Margins for the SES-4 West Africa/Europe beam (54 MHz) connectivity (dB)

As shown in Table 17-50, all C/I margins are positive.

North America/Europe beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 53.9 | 26.2 | 50.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.4 | 56.1 | 28.5 | 53.7 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.4 | 62.1 | 34.5 | 53.7 | 21.5 |
| 4 | 8M25G7W | 6.111 | 54.4 | 68.6 | 40.9 | 50.2 | 19.1 |
| 5 | 36M0G7W | 30.000 | 54.4 | 79.1 | 48.4 | 48.2 | 19.1 |

Table 17-51. Summary of Typical Transmission Parameters for the SES-4 North America/Europe beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|------|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 10.1 | 9.1 | 9.1 | 9.2 | 7.6 |
| | 2 | 2 | 10.0 | 9.1 | 9.1 | 9.1 | 6.9 |
| | 3 | 3 | 10.0 | 9.1 | 9.1 | 9.1 | 6.9 |
| | 4 | 4 | 10.2 | 9.2 | 9.2 | 9.2 | 7.6 |
| | 5 | 5 | 9.6 | 8.6 | 8.6 | 8.7 | 7.7 |

Table 17-52. Summary of Overall C/I Margins for the SES-4 North America/Europe beam (36 MHz) connectivity (dB)

As shown in Table 17-52, all C/I margins are positive.

North America/Europe beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.6 | 52.4 | 24.8 | 51.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 55.1 | 27.5 | 54.6 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.6 | 61.2 | 33.5 | 54.6 | 21.5 |
| 4 | 8M25G7W | 6.111 | 54.6 | 67.1 | 39.5 | 51.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 54.6 | 79.6 | 49.9 | 49.2 | 19.1 |

Table 17-53. Summary of Typical Transmission Parameters for the SES-4 North America/Europe beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|------|------|------|-----|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 11.0 | 9.5 | 9.5 | 10.0 | 7.5 | |
| | 2 | 11.1 | 9.6 | 9.6 | 10.1 | 7.3 | |
| | 3 | 11.1 | 9.6 | 9.6 | 10.1 | 7.3 | |
| | 4 | 11.0 | 9.5 | 9.5 | 10.1 | 7.6 | |
| | 5 | 11.6 | 10.1 | 10.1 | 10.7 | 8.5 | |

Table 17-54. Summary of Overall C/I Margins for the SES-4 North America/Europe beam (54 MHz) connectivity (dB)

As shown in Table 17-54, all C/I margins are positive.

Europe/West Africa beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 52.5 | 26.3 | 48.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.4 | 55.6 | 29.4 | 50.2 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.4 | 61.6 | 35.4 | 50.2 | 21.5 |
| 4 | 8M25G7W | 6.111 | 54.4 | 67.2 | 41.0 | 48.2 | 19.1 |
| 5 | 36M0G7W | 30.000 | 54.4 | 78.7 | 48.5 | 48.2 | 19.1 |

Table 17-55. Summary of Typical Transmission Parameters for the SES-4 Europe/West Africa beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 8.6 | 6.7 | 6.7 | 7.6 | 5.9 | |

| | | | | | | |
|--|---|-----|-----|-----|-----|-----|
| | 2 | 8.7 | 6.8 | 6.8 | 7.8 | 5.7 |
| | 3 | 8.7 | 6.8 | 6.8 | 7.8 | 5.7 |
| | 4 | 8.6 | 6.7 | 6.7 | 7.7 | 6.0 |
| | 5 | 9.8 | 7.9 | 7.9 | 8.8 | 7.7 |

Table 17-56. Summary of Overall C/I Margins for the SES-4 Europe/West Africa beam (36 MHz) connectivity (dB)

As shown in Table 17-56, all C/I margins are positive.

Europe/West Africa beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 52.5 | 26.3 | 47.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 53.1 | 54.3 | 28.1 | 51.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 53.1 | 60.3 | 34.1 | 51.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 53.1 | 65.7 | 39.5 | 49.2 | 19.1 |
| 5 | 54M0G7W | 45.000 | 53.1 | 79.5 | 50.3 | 47.3 | 19.1 |

Table 17-57. Summary of Typical Transmission Parameters for the SES-4 Europe/West Africa beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | | 7.6 | 7.0 | 7.0 | 8.2 | 5.2 |
| | 2 | | 7.7 | 7.1 | 7.1 | 8.3 | 4.7 |
| | 3 | | 7.7 | 7.1 | 7.1 | 8.3 | 4.7 |
| | 4 | | 7.6 | 7.0 | 7.0 | 8.1 | 4.9 |
| | 5 | | 8.8 | 8.2 | 8.2 | 9.3 | 6.7 |

Table 17-58. Summary of Overall C/I Margins for the SES-4 Europe/West Africa beam (54 MHz) connectivity (dB)

As shown in Table 17-58, all C/I margins are positive.

West Africa/West Africa beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|

| | | | | | | | |
|---|---------|--------|------|------|------|------|------|
| 1 | 346KG7W | 0.256 | 54.4 | 56.2 | 28.0 | 45.7 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.4 | 57.5 | 29.4 | 50.2 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.4 | 63.5 | 35.4 | 50.2 | 21.5 |
| 4 | 8M25G7W | 6.111 | 54.4 | 69.1 | 40.9 | 48.2 | 19.1 |
| 5 | 36M0G7W | 30.000 | 56.3 | 80.9 | 48.8 | 48.2 | 19.1 |

Table 17-59. Summary of Typical Transmission Parameters for the SES-4 West Africa/West Africa beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 6.5 | 6.4 | 6.4 | 7.3 | 6.1 |
| | 2 | 2 | 6.9 | 6.8 | 6.8 | 7.8 | 6.1 |
| | 3 | 3 | 6.9 | 6.8 | 6.8 | 7.8 | 6.1 |
| | 4 | 4 | 6.8 | 6.8 | 6.8 | 7.7 | 6.3 |
| | 5 | 5 | 8.3 | 8.2 | 8.2 | 9.2 | 8.0 |

Table 17-60. Summary of Overall C/I Margins for the SES-4 West Africa/West Africa beam (36 MHz) connectivity (dB)

As shown in Table 17-60, all C/I margins are positive.

West Africa/West Africa beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.6 | 54.6 | 26.5 | 47.3 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 56.2 | 28.1 | 51.3 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.6 | 62.2 | 34.1 | 51.3 | 21.5 |
| 4 | 8M25G7W | 6.111 | 54.6 | 67.8 | 39.6 | 49.2 | 19.1 |
| 5 | 54M0G7W | 45.000 | 56.5 | 82.7 | 50.5 | 47.3 | 19.1 |

Table 17-61. Summary of Typical Transmission Parameters for the SES-4 West Africa/West Africa beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 7.9 | 7.5 | 7.5 | 8.5 | 5.9 |
| | 2 | 2 | 8.0 | 7.7 | 7.7 | 8.6 | 5.6 |
| | 3 | 3 | 8.0 | 7.7 | 7.7 | 8.6 | 5.6 |
| | 4 | 4 | 7.9 | 7.5 | 7.5 | 8.5 | 5.7 |
| | 5 | 5 | 9.0 | 8.6 | 8.6 | 9.6 | 7.2 |

Table 17-62. Summary of Overall C/I Margins for the SES-4 West Africa/West Africa beam (54 MHz) connectivity (dB)

As shown in Table 17-62, all C/I margins are positive.

North America/West Africa beam connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 54.5 | 27.9 | 48.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.4 | 55.4 | 28.8 | 53.7 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.4 | 61.9 | 35.3 | 52.2 | 21.5 |
| 4 | 8M25G7W | 6.111 | 54.4 | 68.4 | 41.8 | 48.2 | 19.1 |
| 5 | 36M0G7W | 30.000 | 54.4 | 78.2 | 48.6 | 48.2 | 19.1 |

Table 17-63. Summary of Typical Transmission Parameters for the SES-4 North America/West Africa beam (36 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 8.6 | 8.9 | 8.4 | 8.4 | 7.8 |
| | 2 | 2 | 8.7 | 9.1 | 8.6 | 8.6 | 7.0 |
| | 3 | 3 | 8.3 | 8.7 | 8.2 | 8.2 | 6.9 |
| | 4 | 4 | 7.8 | 8.2 | 7.7 | 7.7 | 7.0 |
| | 5 | 5 | 8.2 | 8.5 | 8.0 | 8.0 | 7.7 |

Table 17-64. Summary of Overall C/I Margins for the SES-4 North America/West Africa beam (36 MHz) connectivity (dB)

As shown in Table 17-64, all C/I margins are positive.

North America/West Africa beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 53.0 | 26.5 | 49.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 54.5 | 28.0 | 54.6 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.6 | 60.5 | 34.0 | 54.6 | 21.5 |
| 4 | 8M25G7W | 6.111 | 53.1 | 66.4 | 39.8 | 51.3 | 19.1 |
| 5 | 54M0G7W | 45.000 | 53.1 | 79.1 | 50.5 | 47.3 | 19.1 |

Table 17-65. Summary of Typical Transmission Parameters for the SES-4 North America/West Africa beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 9.0 | 9.2 | 9.2 | 9.5 | 6.8 | |
| | 2 | 9.0 | 9.6 | 9.6 | 9.5 | 6.2 | |
| | 3 | 9.0 | 9.6 | 9.6 | 9.5 | 6.2 | |
| | 4 | 9.1 | 9.4 | 9.4 | 9.5 | 6.6 | |
| | 5 | 8.6 | 8.6 | 8.6 | 9.1 | 6.7 | |

Table 17-66. Summary of Overall C/I Margins for the SES-4 North America/West Africa beam (54 MHz) connectivity (dB)

As shown in Table 17-66, all C/I margins are positive.

North America/Southern Cone beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 52.4 | 25.5 | 49.6 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 54.2 | 27.2 | 55.0 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.6 | 60.2 | 33.3 | 55.0 | 21.5 |
| 4 | 8M25G7W | 6.111 | 53.1 | 65.9 | 38.9 | 51.7 | 19.1 |
| 5 | 54M0G7W | 45.000 | 53.1 | 79.5 | 50.5 | 47.7 | 19.1 |

Table 17-67. Summary of Typical Transmission Parameters for the SES-4 North America/Southern Cone beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|------|-----|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 9.3 | 9.2 | 9.2 | 9.7 | 6.0 | |
| | 2 | 9.5 | 9.8 | 9.8 | 9.8 | 5.6 | |
| | 3 | 9.5 | 9.8 | 9.8 | 9.8 | 5.6 | |
| | 4 | 9.4 | 9.4 | 9.4 | 9.8 | 5.8 | |
| | 5 | 10.0 | 9.7 | 9.7 | 10.3 | 7.0 | |

Table 17-68. Summary of Overall C/I Margins for the SES-4 North America/Southern Cone beam (54 MHz) connectivity (dB)

As shown in Table 17-68, all C/I margins are positive.

Southern Cone/North America beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 54.1 | 27.1 | 45.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 56.4 | 29.3 | 49.6 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.6 | 62.4 | 35.3 | 49.6 | 21.5 |
| 4 | 8M25G7W | 6.111 | 53.1 | 68.9 | 41.8 | 45.2 | 19.1 |
| 5 | 54M0G7W | 45.000 | 53.1 | 79.5 | 50.5 | 45.2 | 19.1 |

Table 17-69. Summary of Typical Transmission Parameters for the SES-4 Southern Cone/North America beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 5.9 | 5.1 | 5.1 | 4.9 | 4.6 |
| | 2 | 2 | 7.0 | 6.4 | 6.4 | 6.0 | 5.3 |
| | 3 | 3 | 7.0 | 6.4 | 6.4 | 6.0 | 5.3 |
| | 4 | 4 | 5.9 | 5.1 | 5.1 | 5.0 | 4.6 |
| | 5 | 5 | 6.1 | 5.3 | 5.3 | 5.2 | 5.0 |

Table 17-70. Summary of Overall C/I Margins for the SES-4 Southern Cone/North America beam (54 MHz) connectivity (dB)

As shown in Table 17-70, all C/I margins are positive.

Southern Cone/Southern Cone beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 55.1 | 25.3 | 47.7 | 18.2 |
| 2 | 461KG7W | 0.341 | 54.6 | 57.4 | 27.7 | 51.7 | 21.5 |
| 3 | 1M84G7W | 1.365 | 54.6 | 62.8 | 33.1 | 53.1 | 21.5 |
| 4 | 8M25G7W | 6.111 | 53.1 | 69.8 | 40.1 | 47.7 | 19.1 |
| 5 | 54M0G7W | 45.000 | 56.5 | 82.2 | 50.5 | 45.2 | 19.1 |

Table 17-71. Summary of Typical Transmission Parameters for the SES-4 Southern Cone/Southern Cone beam (54 MHz) connectivity

| | | Interfering Carriers | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 |
| Wanted Carriers | 1 | 7.9 | 7.1 | 7.7 | 7.0 | 5.5 |
| | 2 | 8.5 | 7.9 | 8.6 | 7.5 | 6.3 |
| | 3 | 8.6 | 8.2 | 8.8 | 7.7 | 6.5 |
| | 4 | 8.0 | 7.1 | 7.8 | 7.0 | 5.5 |
| | 5 | 7.9 | 6.9 | 7.5 | 7.0 | 5.3 |

Table 17-72. Summary of Overall C/I Margins for the SES-4 Southern Cone/Southern Cone beam (54 MHz) connectivity (dB)

As shown in Table 17-72, all C/I margins are positive.

North America/North America beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.1 | 52.1 | 27.0 | 45.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 53.1 | 54.2 | 29.1 | 47.6 | 21.5 |
| 3 | 1M84G7W | 1.365 | 53.1 | 60.2 | 35.1 | 47.6 | 21.5 |
| 4 | 8M25G7W | 6.111 | 49.1 | 66.8 | 41.7 | 45.2 | 19.1 |
| 5 | 54M0G7W | 45.000 | 53.1 | 77.5 | 50.4 | 45.2 | 19.1 |

Table 17-73. Summary of Typical Transmission Parameters for the SES-4 North America/North America beam (54 MHz) connectivity

| | | Interfering Carriers | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 |
| Wanted Carriers | 1 | 5.0 | 5.0 | 5.0 | 4.1 | 4.6 |
| | 2 | 4.1 | 4.5 | 4.5 | 3.2 | 3.9 |
| | 3 | 4.1 | 4.5 | 4.5 | 3.2 | 3.9 |
| | 4 | 5.1 | 5.1 | 5.1 | 4.1 | 4.6 |
| | 5 | 5.6 | 5.3 | 5.3 | 4.7 | 5.0 |

Table 17-74. Summary of Overall C/I Margins for the SES-4 North America/North America beam (54 MHz) connectivity (dB)

As shown in Table 17-74, all C/I margins are positive.

West Africa/North America beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.1 | 53.2 | 27.4 | 45.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 53.1 | 55.2 | 29.3 | 49.6 | 21.5 |
| 3 | 1M84G7W | 1.365 | 53.1 | 61.2 | 35.3 | 49.6 | 21.5 |
| 4 | 8M25G7W | 6.111 | 49.1 | 67.6 | 41.8 | 45.2 | 19.1 |
| 5 | 54M0G7W | 45.000 | 53.1 | 79.2 | 50.4 | 45.2 | 19.1 |

Table 17-75. Summary of Typical Transmission Parameters for the SES-4 West Africa/North America beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|-----|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 1 | 5.0 | 5.2 | 5.2 | 4.4 | 4.8 |
| | 2 | 2 | 5.0 | 6.0 | 6.0 | 4.4 | 5.0 |
| | 3 | 3 | 5.0 | 6.0 | 6.0 | 4.4 | 5.0 |
| | 4 | 4 | 4.8 | 4.9 | 4.9 | 4.1 | 4.5 |
| | 5 | 5 | 5.4 | 5.2 | 5.2 | 4.7 | 5.0 |

Table 17-76. Summary of Overall C/I Margins for the SES-4 West Africa/North America beam (54 MHz) connectivity (dB)

As shown in Table 17-76, all C/I margins are positive.

Europe/North America beam connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion (dB) |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.1 | 51.5 | 27.5 | 45.2 | 18.2 |
| 2 | 461KG7W | 0.341 | 53.1 | 53.3 | 29.3 | 49.6 | 21.5 |
| 3 | 1M84G7W | 1.365 | 53.1 | 59.4 | 35.3 | 49.6 | 21.5 |
| 4 | 8M25G7W | 6.111 | 49.1 | 65.9 | 41.9 | 45.2 | 19.1 |
| 5 | 54M0G7W | 45.000 | 53.1 | 78.5 | 50.5 | 45.2 | 19.1 |

Table 17-77. Summary of Typical Transmission Parameters for the SES-4 Europe/North America beam (54 MHz) connectivity

| | | Interfering Carriers | | | | | |
|-----------------|---|----------------------|-----|-----|-----|-----|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted Carriers | 1 | 5.0 | 5.3 | 5.3 | 4.4 | 4.5 | |
| | 2 | 4.9 | 6.0 | 6.0 | 4.3 | 4.4 | |
| | 3 | 4.9 | 6.0 | 6.0 | 4.3 | 4.4 | |
| | 4 | 4.8 | 5.0 | 5.0 | 4.1 | 4.2 | |
| | 5 | 5.5 | 5.4 | 5.4 | 4.9 | 5.0 | |

Table 17-78. Summary of Overall C/I Margins for the SES-4 Europe/North America beam (54 MHz) connectivity (dB)

As shown in Table 17-78, all C/I margins are positive.

17.2 Summary of results for the generic interference analysis case

The table below summarizes all the results for the studied connectivities under the generic interference analysis case. It shows the uplink beam, the downlink beam, the associated frequency bands, and the worst case observed C/I margin from the calculations.

| Uplink Beam | Downlink Beam | Uplink Band | Downlink Band | Txp BW | Worst Case C/I Margin |
|-------------|---------------|-------------|---------------|--------|-----------------------|
| GLB | GLB | C | C | 36 | 0.3 |
| WH | WH | C | C | 36 | -1.0 |
| WH | WH | C | C | 54 | -1.1 |
| WH | WH | C | C | 72 | 0.1 |
| EH | EH | C | C | 36 | -0.9 |
| EH | EH | C | C | 54 | -1.8 |
| EH | EH | C | C | 72 | -0.4 |
| EH | WH | C | C | 36 | -1.0 |
| EH | WH | C | C | 54 | -1.0 |
| EH | WH | C | C | 72 | 0.1 |
| WH | EH | C | C | 36 | -0.9 |
| WH | EH | C | C | 54 | -1.4 |
| WH | EH | C | C | 72 | -0.4 |
| EU | WH | Ku | C | 54 | -0.5 |
| EU | EH | Ku | C | 54 | -0.7 |
| WA | WH | Ku | C | 54 | 0.3 |
| WA | EH | Ku | C | 54 | -0.2 |
| WH | EU | C | Ku | 54 | 3.8 |
| EH | EU | C | Ku | 54 | 3.8 |
| WH | WA | C | Ku | 54 | 3.8 |
| EH | WA | C | Ku | 54 | 3.8 |
| EU | EU | Ku | Ku | 36 | 5.4 |
| EU | EU | Ku | Ku | 54 | 5.9 |
| WA | EU | Ku | Ku | 36 | 6.5 |
| WA | EU | Ku | Ku | 54 | 6.4 |
| NA | EU | Ku | Ku | 36 | 6.9 |
| NA | EU | Ku | Ku | 54 | 7.3 |
| EU | WA | Ku | Ku | 36 | 5.7 |
| EU | WA | Ku | Ku | 54 | 4.7 |
| WA | WA | Ku | Ku | 36 | 6.1 |
| WA | WA | Ku | Ku | 54 | 5.6 |
| NA | WA | Ku | Ku | 36 | 6.9 |
| NA | WA | Ku | Ku | 54 | 6.2 |
| NA | SC | Ku | Ku | 54 | 5.6 |
| SC | NA | Ku | Ku | 54 | 4.6 |
| SC | SC | Ku | Ku | 54 | 5.3 |
| NA | NA | Ku | Ku | 54 | 3.2 |
| WA | NA | Ku | Ku | 54 | 4.1 |
| EU | NA | Ku | Ku | 54 | 4.1 |

17.3 Specific interference analysis case (SES-4 with respect to NSS-

5)

For this case, SES WORLD SKIES has assumed that the transmission parameters of the NSS-5 satellite are the wanted transmissions and the transmission parameters of the SES-4 satellite are the interfering transmissions.³ This analysis is performed for digital signals only in both the SES-4 and NSS-5 networks as analog TV/FM signals are coordinated on a case-by-case basis with nearby spacecraft.

The SES-4 and NSS-5 spacecraft do not have exactly the same coverages, and therefore a number of geographic overlap scenarios are chosen. For each of the possible SES-4 connectivities and transponder bandwidths, the minimum transponder bandwidth available was chosen as this presents the maximum victim transmission parameters within a certain connectivity. Further, only the scenarios where an actual frequency overlap could occur have been studied. Table 17-79 below depicts the scenarios that are analyzed in this section.

³ Technical information for NSS-5 is available in the technical appendices associated with File Nos. SAT-PPL-20091208-00142 and SAT-LOA-20091208-00141.

| | Interfering | Wanted |
|----------|--------------------|--|
| Scenario | SES-4 connectivity | NSS-5 connectivity |
| 1 | GLB/GLB 36 MHz | GLB/GLB 36 MHz |
| 2 | WH/WH 36 MHz | HEMI/HEMI 72 MHz GLB/GLB 36 MHz HEMI/GLB 36 MHz GLB/HEMI 36 MHz ZONE/ZONE 72 MHz HEMI/ZONE 72 MHz ZONE/HEMI 72 MHz |
| 3 | EH/EH 36 MHz | HEMI/HEMI 72 MHz GLB/GLB 36 MHz HEMI/GLB 36 MHz GLB/HEMI 36 MHz ZONE/ZONE 72 MHz HEMI/ZONE 72 MHz ZONE/HEMI 72 MHz |
| 4 | EH/WH 36 MHz | HEMI/HEMI 72 MHz GLB/GLB 36 MHz HEMI/GLB 36 MHz GLB/HEMI 36 MHz ZONE/ZONE 72 MHz HEMI/ZONE 72 MHz ZONE/HEMI 72 MHz |
| 5 | WH/EH 36 MHz | HEMI/HEMI 72 MHz GLB/GLB 36 MHz HEMI/GLB 36 MHz GLB/HEMI 36 MHz ZONE/ZONE 72 MHz HEMI/ZONE 72 MHz ZONE/HEMI 72 MHz |
| 6 | EU/WH 54 MHz | KSPOT/GLB 36 MHz KSPOT/HEMI 72 MHz KSPOT/ZONE 72 MHz |

| | Interfering | Wanted |
|----------|--------------------|--|
| Scenario | SES-4 connectivity | NSS-5 connectivity |
| 7 | EU/EH 54 MHz | KSPOT/GLB 36 MHz KSPOT/HEMI 72 MHz KSPOT/ZONE 72 MHz |
| 8 | WA/WH 54 MHz | KSPOT/GLB 36 MHz KSPOT/HEMI 72 MHz KSPOT/ZONE 72 MHz |
| 9 | WA/EH 54 MHz | KSPOT/GLB 36 MHz KSPOT/HEMI 72 MHz KSPOT/ZONE 72 MHz |
| 10 | WH/EU 54 MHz | GLB/KSPOT 36 MHz HEMI/KSPOT 72 MHz ZONE/KSPOT 72 MHz |
| 11 | EH/EU 54 MHz | GLB/KSPOT 36 MHz HEMI/KSPOT 72 MHz ZONE/KSPOT 72 MHz |
| 12 | WH/WA 54 MHz | GLB/KSPOT 36 MHz HEMI/KSPOT 72 MHz ZONE/KSPOT 72 MHz |
| 13 | EH/WA 54 MHz | GLB/KSPOT 36 MHz HEMI/KSPOT 72 MHz ZONE/KSPOT 72 MHz |
| 14 | EU/EU 36 MHz | KSPOT/KSPOT 72 MHz |
| 15 | WA/EU 36 MHz | KSPOT/KSPOT 72 MHz |
| 16 | NA/EU 36 MHz | KSPOT/KSPOT 72 MHz |
| 17 | EU/WA 36 MHz | KSPOT/KSPOT 72 MHz |
| 18 | WA/WA 36 MHz | KSPOT/KSPOT 72 MHz |
| 19 | NA/WA 36 MHz | KSPOT/KSPOT 72 MHz |
| 20 | NA/SC 54 MHz | KSPOT/KSPOT 72 MHz |
| 21 | SC/NA 54 MHz | KSPOT/KSPOT 72 MHz |
| 22 | SC/SC 54 MHz | KSPOT/KSPOT 72 MHz |
| 23 | NA/NA 54 MHz | KSPOT/KSPOT 72 MHz |
| 24 | WA/NA 54 MHz | KSPOT/KSPOT 72 MHz |
| 25 | EU/NA 54 MHz | KSPOT/KSPOT 72 MHz |

Table 17-79. Overview of interference analysis scenarios between SES-4 (interfering) and NSS-5 (wanted)

For each scenario as described in the table above, the summary of the transmission parameters for SES-4 (derived from the link budgets in Annex A) and NSS-5⁴ will be given together with the results of the interference calculations in terms of the overall C/I margins. For ease of reference and analysis, these tables are provided in a format similar to the output of the commonly-used Sharp Adjacent Satellite Interference Analysis program.

⁴ See supra note 3

The interference calculations assume a 1 dB advantage for topocentric-to-geocentric conversion, co-polarization of all wanted and interfering carriers, and all earth station antennas conforming to a sidelobe pattern of $29-25 \log(\theta)$, as specified in section 25.209(a)(1) of the Commission’s Rules.

Scenario 1: SES-4 Global/Global connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.6 | 52.6 | 11.4 | 43.8 | 18.2 | -53.1 | -42.7 | GLB/GLB 36 MHz |
| 2 | 461KG7W | 0.341 | 47.5 | 55.1 | 13.8 | 46.9 | 21.5 | -47.7 | -41.5 | GLB/GLB 36 MHz |
| 3 | 1M84G7W | 1.365 | 55.3 | 64.4 | 23.2 | 42.5 | 21.5 | -52.3 | -38.2 | GLB/GLB 36 MHz |
| 4 | 8M25G7W | 6.111 | 51.6 | 67.3 | 26.1 | 43.8 | 19.1 | -52.2 | -41.8 | GLB/GLB 36 MHz |
| 5 | 36M0G7W | 30.000 | 56.8 | 80.7 | 33.4 | 42.5 | 19.1 | -50.9 | -41.4 | GLB/GLB 36 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.7 | 53.6 | 13.0 | 42.5 | 18.2 | -52.2 | -41.0 | GLB/GLB 36 MHz |
| 2 | 461KG7W | 0.341 | 47.6 | 57.1 | 16.6 | 43.8 | 21.5 | -45.8 | -38.8 | GLB/GLB 36 MHz |
| 3 | 1M84G7W | 1.365 | 55.4 | 63.2 | 22.6 | 43.8 | 21.5 | -53.6 | -38.8 | GLB/GLB 36 MHz |
| 4 | 8M25G7W | 6.111 | 51.7 | 68.3 | 27.8 | 42.5 | 19.1 | -51.2 | -40.1 | GLB/GLB 36 MHz |
| 5 | 36M0G7W | 30.000 | 56.8 | 79.1 | 36.6 | 42.5 | 19.1 | -52.5 | -38.2 | GLB/GLB 36 MHz |

Table 17-80. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 1

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------|---|---------------------------|-----|------|-----|-----|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | | 2.9 | -0.1 | 1.0 | 2.0 | 0.3 |
| | 2 | | 3.4 | -0.2 | 1.7 | 2.4 | 1.0 |
| | 3 | | 3.0 | 0.1 | 1.0 | 2.1 | 0.3 |
| | 4 | | 2.9 | -0.1 | 1.0 | 2.0 | 0.4 |
| | 5 | | 2.5 | 0.1 | 0.3 | 1.6 | -0.3 |

Table 17-81. Summary of Overall C/I Margins for scenario 1 (dB)

It can be seen in Table 17-81 that most C/I margins are positive, except for Interfering Carriers 2 and 5. The worst case is represented for Wanted Carrier 5 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 0.3 dB, which is equivalent to an increase of 6.5% of victim noise temperature. These C/I levels

have been successfully coordinated between these two spacecraft and therefore no harmful interference will be caused.

Scenario 2: SES-4 West Hemi/West Hemi connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 47.2 | 49.6 | 14.0 | 42.3 | 18.2 | -51.7 | -40.1 | HEMI/HEMI 72 MHz |
| 2 | 461KG7W | 0.341 | 51.3 | 52.2 | 16.6 | 43.8 | 21.5 | -54.4 | -38.7 | HEMI/HEMI 72 MHz |
| 3 | 1M84G7W | 1.365 | 55.0 | 58.2 | 22.6 | 43.8 | 21.5 | -58.2 | -38.8 | HEMI/HEMI 72 MHz |
| 4 | 8M25G7W | 6.111 | 47.2 | 63.4 | 27.8 | 42.3 | 19.1 | -51.7 | -40.1 | HEMI/HEMI 72 MHz |
| 5 | 72M0G7W | 63.330 | 56.4 | 80.9 | 40.2 | 46.9 | 19.1 | -53.5 | -37.8 | HEMI/HEMI 72 MHz |
| 6 | 346KG7W | 0.256 | 51.6 | 52.6 | 11.4 | 43.8 | 18.2 | -53.1 | -42.7 | GLB/GLB 36 MHz |
| 7 | 461KG7W | 0.3413 | 47.5 | 55.1 | 13.8 | 46.9 | 21.5 | -47.7 | -41.5 | GLB/GLB 36 MHz |
| 8 | 1M84G7W | 1.3653 | 55.3 | 64.4 | 23.2 | 42.5 | 21.5 | -52.3 | -38.2 | GLB/GLB 36 MHz |
| 9 | 8M25G7W | 6.1113 | 51.6 | 67.3 | 26.1 | 43.8 | 19.1 | -52.2 | -41.8 | GLB/GLB 36 MHz |
| 10 | 36M0G7W | 30 | 56.8 | 80.7 | 33.4 | 42.5 | 19.1 | -50.9 | -41.4 | GLB/GLB 36 MHz |
| 11 | 346KG7W | 0.256 | 47.5 | 52.5 | 11 | 43.8 | 18.2 | -49.1 | -43.1 | HEMI/GLB 36 MHz |
| 12 | 461KG7W | 0.3413 | 51.6 | 55 | 13.6 | 46.8 | 21.5 | -51.9 | -41.7 | HEMI/GLB 36 MHz |
| 13 | 1M84G7W | 1.3653 | 55.3 | 63.6 | 22.1 | 43.8 | 21.5 | -53.1 | -39.3 | HEMI/GLB 36 MHz |
| 14 | 8M25G7W | 6.1113 | 47.5 | 67.3 | 25.8 | 43.8 | 19.1 | -48.1 | -42.1 | HEMI/GLB 36 MHz |
| 15 | 36M0G7W | 30.000 | 56.8 | 81.9 | 33.4 | 42.3 | 19.1 | -49.7 | -41.4 | HEMI/GLB 36 MHz |
| 16 | 346KG7W | 0.256 | 47.5 | 49.7 | 15.2 | 42.3 | 18.2 | -51.9 | -38.9 | GLB/HEMI 36 MHz |
| 17 | 461KG7W | 0.3413 | 51.6 | 52.7 | 18.3 | 43.8 | 21.5 | -54.2 | -37.0 | GLB/HEMI 36 MHz |
| 18 | 1M84G7W | 1.3653 | 55.3 | 58.7 | 24.3 | 42.3 | 21.5 | -58.0 | -37.1 | GLB/HEMI 36 MHz |
| 19 | 8M25G7W | 6.1113 | 47.5 | 64.4 | 30 | 42.3 | 19.1 | -51.0 | -37.9 | GLB/HEMI 36 MHz |
| 20 | 36M0G7W | 30.000 | 56.8 | 77 | 37.6 | 42.3 | 19.1 | -54.6 | -37.2 | GLB/HEMI 36 MHz |
| 21 | 346KG7W | 0.256 | 47.3 | 48.1 | 15.2 | 42.3 | 18.2 | -53.3 | -38.9 | ZONE/ZONE 72 MHz |
| 22 | 461KG7W | 0.3413 | 51.4 | 51 | 18.1 | 43.8 | 21.5 | -55.7 | -37.2 | ZONE/ZONE 72 MHz |
| 23 | 1M84G7W | 1.3653 | 55.1 | 57.3 | 24.4 | 43.8 | 21.5 | -59.2 | -37.0 | ZONE/ZONE 72 MHz |
| 24 | 8M25G7W | 6.1113 | 47.3 | 62.9 | 29.9 | 42.3 | 19.1 | -52.3 | -38.0 | ZONE/ZONE 72 MHz |
| 25 | 72M0G7W | 63.330 | 56.6 | 79 | 41 | 47.1 | 19.1 | -55.6 | -37.0 | ZONE/ZONE 72 MHz |
| 26 | 346KG7W | 0.256 | 47.3 | 48.8 | 15.8 | 42.3 | 18.2 | -52.6 | -38.3 | HEMI/ZONE 72 MHz |
| 27 | 461KG7W | 0.3413 | 51.4 | 52.2 | 19.1 | 43.8 | 21.5 | -54.5 | -36.2 | HEMI/ZONE 72 MHz |
| 28 | 1M84G7W | 1.3653 | 55.1 | 58.4 | 25.4 | 43.8 | 21.5 | -58.1 | -36.0 | HEMI/ZONE 72 MHz |
| 29 | 8M25G7W | 6.1113 | 47.3 | 63.6 | 30.6 | 42.3 | 19.1 | -51.6 | -37.3 | HEMI/ZONE 72 MHz |
| 30 | 72M0G7W | 63.330 | 56.6 | 82.9 | 41.9 | 47.1 | 19.1 | -51.7 | -36.1 | HEMI/ZONE 72 MHz |
| 31 | 346KG7W | 0.256 | 47.2 | 48.2 | 13.6 | 42.3 | 18.2 | -53.1 | -40.5 | ZONE/HEMI 72 MHz |
| 32 | 461KG7W | 0.3413 | 51.3 | 50.3 | 15.8 | 43.8 | 21.5 | -56.3 | -39.5 | ZONE/HEMI 72 MHz |
| 33 | 1M84G7W | 1.3653 | 55 | 56.4 | 21.8 | 43.8 | 21.5 | -60.0 | -39.6 | ZONE/HEMI 72 MHz |
| 34 | 8M25G7W | 6.1113 | 47.2 | 62.3 | 27.7 | 42.3 | 19.1 | -52.8 | -40.2 | ZONE/HEMI 72 MHz |
| 35 | 72M0G7W | 63.330 | 56.4 | 81.3 | 39.8 | 45.9 | 19.1 | -53.1 | -38.2 | ZONE/HEMI 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 52.1 | 16.3 | 42.3 | 18.2 | -53.2 | -37.8 | WH/WH 36 MHz |
| 2 | 461KG7W | 0.341 | 47.0 | 55.0 | 19.2 | 42.3 | 21.5 | -47.4 | -36.2 | WH/WH 36 MHz |
| 3 | 1M84G7W | 1.365 | 54.9 | 61.0 | 25.2 | 42.3 | 21.5 | -55.3 | -36.2 | WH/WH 36 MHz |
| 4 | 8M25G7W | 6.111 | 51.2 | 65.9 | 30.1 | 42.3 | 19.1 | -53.2 | -37.7 | WH/WH 36 MHz |
| 5 | 36M0G7W | 30.000 | 56.3 | 76.5 | 39.7 | 42.3 | 19.1 | -54.6 | -35.1 | WH/WH 36 MHz |

Table 17-82. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 2

| | Interfering (SES-4 @338E) | | | | | |
|----------------------|---------------------------|------|------|------|------|------|
| | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 0.8 | -1.6 | -0.5 | 0.7 | -1.6 |
| | 2 | 0.1 | -2.5 | -1.1 | 0.1 | -2.1 |
| | 3 | 0.1 | -2.5 | -1.1 | 0.1 | -2.2 |
| | 4 | -0.1 | -2.5 | -1.4 | -0.1 | -2.5 |
| | 5 | 6.8 | 4.5 | 5.5 | 6.8 | 4.4 |
| | 6 | 0.0 | -1.9 | -1.5 | 0.0 | -2.6 |
| | 7 | 0.8 | -1.5 | -0.6 | 0.7 | -1.7 |
| | 8 | 0.0 | -1.9 | -1.5 | 0.0 | -2.6 |
| | 9 | 0.1 | -1.9 | -1.5 | 0.0 | -2.6 |
| | 10 | -0.7 | -2.4 | -2.3 | -0.7 | -3.4 |
| | 11 | -0.4 | -2.3 | -1.9 | -0.4 | -3.0 |
| | 12 | 0.5 | -1.7 | -0.9 | 0.4 | -2.0 |
| | 13 | 0.2 | -1.8 | -1.3 | 0.1 | -2.4 |
| | 14 | -0.2 | -2.2 | -1.8 | -0.3 | -2.8 |
| | 15 | -0.9 | -2.6 | -2.5 | -0.9 | -3.6 |
| | 16 | 1.9 | -0.7 | 0.6 | 1.8 | -0.5 |
| | 17 | 1.6 | -1.2 | 0.5 | 1.6 | -0.5 |
| | 18 | 0.4 | -2.2 | -0.9 | 0.3 | -1.9 |
| | 19 | 2.0 | -0.6 | 0.7 | 1.9 | -0.4 |
| | 20 | 3.1 | 1.1 | 1.6 | 3.1 | 0.5 |
| | 21 | 1.6 | -1.3 | 0.5 | 1.5 | -0.6 |
| | 22 | 1.1 | -2.1 | 0.2 | 1.0 | -0.9 |
| | 23 | 1.4 | -1.8 | 0.4 | 1.3 | -0.6 |
| | 24 | 1.6 | -1.2 | 0.5 | 1.6 | -0.6 |
| | 25 | 7.4 | 4.6 | 6.3 | 7.3 | 5.2 |
| | 26 | 2.2 | -0.6 | 1.1 | 2.1 | 0.0 |
| | 27 | 2.1 | -1.0 | 1.2 | 2.1 | 0.1 |
| | 28 | 2.4 | -0.8 | 1.4 | 2.3 | 0.4 |
| | 29 | 2.3 | -0.5 | 1.2 | 2.3 | 0.1 |
| | 30 | 8.7 | 6.4 | 7.4 | 8.7 | 6.3 |
| | 31 | 0.3 | -2.3 | -1.0 | 0.2 | -2.1 |
| | 32 | -0.8 | -3.7 | -2.0 | -0.9 | -3.0 |
| | 33 | -0.8 | -3.7 | -2.0 | -0.9 | -3.0 |
| | 34 | -0.3 | -2.9 | -1.6 | -0.4 | -2.6 |
| | 35 | 5.6 | 3.5 | 4.1 | 5.5 | 3.0 |

Table 17-83. Summary of Overall C/I Margins for scenario 2 (dB)

It can be seen in Table 17-83 that there is a variety of positive and negative C/I margins (with respect to the criteria of 6%). The worst case is represented for Wanted Carrier 33 with respect to Interfering Carrier 2. The deficit with respect to the 6% C/I criterion is 3.7 dB, which is equivalent to an increase of 14.1% of victim noise temperature. The C/I deficit indicated will lead to an impact on the overall C/N+I of only

0.6 dB. These C/I levels have been successfully coordinated between these two spacecraft and therefore no harmful interference will be caused.

Scenario 3: SES-4 East Hemi/East Hemi connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 47.2 | 49.6 | 14.0 | 42.3 | 18.2 | -51.7 | -40.1 | HEMI/HEMI 72 MHz |
| 2 | 461KG7W | 0.341 | 51.3 | 52.2 | 16.6 | 43.8 | 21.5 | -54.4 | -38.7 | HEMI/HEMI 72 MHz |
| 3 | 1M84G7W | 1.365 | 55.0 | 58.2 | 22.6 | 43.8 | 21.5 | -58.2 | -38.8 | HEMI/HEMI 72 MHz |
| 4 | 8M25G7W | 6.111 | 47.2 | 63.4 | 27.8 | 42.3 | 19.1 | -51.7 | -40.1 | HEMI/HEMI 72 MHz |
| 5 | 72M0G7W | 63.330 | 56.4 | 80.9 | 40.2 | 46.9 | 19.1 | -53.5 | -37.8 | HEMI/HEMI 72 MHz |
| 6 | 346KG7W | 0.256 | 51.6 | 52.6 | 11.4 | 43.8 | 18.2 | -53.1 | -42.7 | GLB/GLB 36 MHz |
| 7 | 461KG7W | 0.3413 | 47.5 | 55.1 | 13.8 | 46.9 | 21.5 | -47.7 | -41.5 | GLB/GLB 36 MHz |
| 8 | 1M84G7W | 1.3653 | 55.3 | 64.4 | 23.2 | 42.5 | 21.5 | -52.3 | -38.2 | GLB/GLB 36 MHz |
| 9 | 8M25G7W | 6.1113 | 51.6 | 67.3 | 26.1 | 43.8 | 19.1 | -52.2 | -41.8 | GLB/GLB 36 MHz |
| 10 | 36M0G7W | 30 | 56.8 | 80.7 | 33.4 | 42.5 | 19.1 | -50.9 | -41.4 | GLB/GLB 36 MHz |
| 11 | 346KG7W | 0.256 | 47.5 | 52.5 | 11 | 43.8 | 18.2 | -49.1 | -43.1 | HEMI/GLB 36 MHz |
| 12 | 461KG7W | 0.3413 | 51.6 | 55 | 13.6 | 46.8 | 21.5 | -51.9 | -41.7 | HEMI/GLB 36 MHz |
| 13 | 1M84G7W | 1.3653 | 55.3 | 63.6 | 22.1 | 43.8 | 21.5 | -53.1 | -39.3 | HEMI/GLB 36 MHz |
| 14 | 8M25G7W | 6.1113 | 47.5 | 67.3 | 25.8 | 43.8 | 19.1 | -48.1 | -42.1 | HEMI/GLB 36 MHz |
| 15 | 36M0G7W | 30.000 | 56.8 | 81.9 | 33.4 | 42.3 | 19.1 | -49.7 | -41.4 | HEMI/GLB 36 MHz |
| 16 | 346KG7W | 0.256 | 47.5 | 49.7 | 15.2 | 42.3 | 18.2 | -51.9 | -38.9 | GLB/HEMI 36 MHz |
| 17 | 461KG7W | 0.3413 | 51.6 | 52.7 | 18.3 | 43.8 | 21.5 | -54.2 | -37.0 | GLB/HEMI 36 MHz |
| 18 | 1M84G7W | 1.3653 | 55.3 | 58.7 | 24.3 | 42.3 | 21.5 | -58.0 | -37.1 | GLB/HEMI 36 MHz |
| 19 | 8M25G7W | 6.1113 | 47.5 | 64.4 | 30 | 42.3 | 19.1 | -51.0 | -37.9 | GLB/HEMI 36 MHz |
| 20 | 36M0G7W | 30.000 | 56.8 | 77 | 37.6 | 42.3 | 19.1 | -54.6 | -37.2 | GLB/HEMI 36 MHz |
| 21 | 346KG7W | 0.256 | 47.3 | 48.1 | 15.2 | 42.3 | 18.2 | -53.3 | -38.9 | ZONE/ZONE 72 MHz |
| 22 | 461KG7W | 0.3413 | 51.4 | 51 | 18.1 | 43.8 | 21.5 | -55.7 | -37.2 | ZONE/ZONE 72 MHz |
| 23 | 1M84G7W | 1.3653 | 55.1 | 57.3 | 24.4 | 43.8 | 21.5 | -59.2 | -37.0 | ZONE/ZONE 72 MHz |
| 24 | 8M25G7W | 6.1113 | 47.3 | 62.9 | 29.9 | 42.3 | 19.1 | -52.3 | -38.0 | ZONE/ZONE 72 MHz |
| 25 | 72M0G7W | 63.330 | 56.6 | 79 | 41 | 47.1 | 19.1 | -55.6 | -37.0 | ZONE/ZONE 72 MHz |
| 26 | 346KG7W | 0.256 | 47.3 | 48.8 | 15.8 | 42.3 | 18.2 | -52.6 | -38.3 | HEMI/ZONE 72 MHz |
| 27 | 461KG7W | 0.3413 | 51.4 | 52.2 | 19.1 | 43.8 | 21.5 | -54.5 | -36.2 | HEMI/ZONE 72 MHz |
| 28 | 1M84G7W | 1.3653 | 55.1 | 58.4 | 25.4 | 43.8 | 21.5 | -58.1 | -36.0 | HEMI/ZONE 72 MHz |
| 29 | 8M25G7W | 6.1113 | 47.3 | 63.6 | 30.6 | 42.3 | 19.1 | -51.6 | -37.3 | HEMI/ZONE 72 MHz |
| 30 | 72M0G7W | 63.330 | 56.6 | 82.9 | 41.9 | 47.1 | 19.1 | -51.7 | -36.1 | HEMI/ZONE 72 MHz |
| 31 | 346KG7W | 0.256 | 47.2 | 48.2 | 13.6 | 42.3 | 18.2 | -53.1 | -40.5 | ZONE/HEMI 72 MHz |
| 32 | 461KG7W | 0.3413 | 51.3 | 50.3 | 15.8 | 43.8 | 21.5 | -56.3 | -39.5 | ZONE/HEMI 72 MHz |
| 33 | 1M84G7W | 1.3653 | 55 | 56.4 | 21.8 | 43.8 | 21.5 | -60.0 | -39.6 | ZONE/HEMI 72 MHz |
| 34 | 8M25G7W | 6.1113 | 47.2 | 62.3 | 27.7 | 42.3 | 19.1 | -52.8 | -40.2 | ZONE/HEMI 72 MHz |
| 35 | 72M0G7W | 63.330 | 56.4 | 81.3 | 39.8 | 45.9 | 19.1 | -53.1 | -38.2 | ZONE/HEMI 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 52.2 | 17.0 | 42.3 | 18.2 | -53.1 | -37.1 | EH/EH 36 MHz |
| 2 | 461KG7W | 0.341 | 47.0 | 54.7 | 19.5 | 42.3 | 21.5 | -47.7 | -35.8 | EH/EH 36 MHz |
| 3 | 1M84G7W | 1.365 | 54.9 | 60.7 | 25.5 | 42.3 | 21.5 | -55.6 | -35.8 | EH/EH 36 MHz |
| 4 | 8M25G7W | 6.111 | 51.2 | 66.9 | 31.8 | 42.3 | 19.1 | -52.1 | -36.1 | EH/EH 36 MHz |
| 5 | 36M0G7W | 30.000 | 56.3 | 76.9 | 39.8 | 42.3 | 19.1 | -54.2 | -35.0 | EH/EH 36 MHz |

Table 17-84. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 3

| | Interfering (SES-4 @338E) | | | | | |
|----------------------|---------------------------|------|------|------|------|------|
| | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 0.1 | -1.8 | -0.9 | -0.8 | -1.7 |
| | 2 | -0.5 | -2.7 | -1.4 | -1.5 | -2.3 |
| | 3 | -0.5 | -2.7 | -1.4 | -1.5 | -2.3 |
| | 4 | -0.8 | -2.7 | -1.7 | -1.7 | -2.6 |
| | 5 | 6.1 | 4.3 | 5.1 | 5.2 | 4.3 |
| | 6 | -0.7 | -2.2 | -1.8 | -1.7 | -2.7 |
| | 7 | 0.1 | -1.7 | -1.0 | -0.9 | -1.8 |
| | 8 | -0.7 | -2.2 | -1.9 | -1.7 | -2.7 |
| | 9 | -0.7 | -2.2 | -1.8 | -1.6 | -2.7 |
| | 10 | -1.4 | -2.7 | -2.7 | -2.4 | -3.5 |
| | 11 | -1.1 | -2.6 | -2.2 | -2.1 | -3.1 |
| | 12 | -0.2 | -2.0 | -1.3 | -1.2 | -2.1 |
| | 13 | -0.6 | -2.1 | -1.7 | -1.5 | -2.5 |
| | 14 | -1.0 | -2.5 | -2.1 | -1.9 | -3.0 |
| | 15 | -1.6 | -2.9 | -2.8 | -2.6 | -3.7 |
| | 16 | 1.2 | -0.9 | 0.3 | 0.2 | -0.6 |
| | 17 | 1.0 | -1.3 | 0.2 | 0.0 | -0.7 |
| | 18 | -0.3 | -2.4 | -1.2 | -1.3 | -2.1 |
| | 19 | 1.3 | -0.8 | 0.4 | 0.3 | -0.5 |
| | 20 | 2.4 | 0.8 | 1.3 | 1.4 | 0.4 |
| | 21 | 0.9 | -1.4 | 0.2 | 0.0 | -0.7 |
| | 22 | 0.5 | -2.2 | -0.1 | -0.5 | -1.0 |
| | 23 | 0.8 | -1.9 | 0.2 | -0.2 | -0.8 |
| | 24 | 1.0 | -1.3 | 0.2 | 0.0 | -0.7 |
| | 25 | 6.8 | 4.5 | 6.0 | 5.8 | 5.1 |
| | 26 | 1.6 | -0.8 | 0.8 | 0.6 | -0.1 |
| | 27 | 1.5 | -1.1 | 0.9 | 0.6 | 0.0 |
| | 28 | 1.8 | -0.8 | 1.2 | 0.8 | 0.3 |
| | 29 | 1.7 | -0.6 | 0.9 | 0.7 | 0.0 |
| | 30 | 8.0 | 6.2 | 7.0 | 7.1 | 6.2 |
| | 31 | -0.4 | -2.5 | -1.3 | -1.4 | -2.2 |
| | 32 | -1.5 | -3.8 | -2.3 | -2.5 | -3.2 |
| | 33 | -1.5 | -3.8 | -2.3 | -2.5 | -3.2 |
| | 34 | -1.0 | -3.0 | -1.9 | -1.9 | -2.8 |
| | 35 | 4.9 | 3.2 | 3.8 | 3.9 | 2.9 |

Table 17-85. Summary of Overall C/I Margins for scenario 3 (dB)

It can be seen in Table 17-85 that there is a variety of positive and negative C/I margins (with respect to the criteria of 6%). The worst case is represented for Wanted Carrier 32 with respect to Interfering Carrier 2. The deficit with respect to the 6% C/I criterion is 3.8 dB, which is equivalent to an increase of 14.4% of victim noise temperature. The C/I deficit indicated will lead to an impact on the overall C/N+I of only

0.6 dB. These C/I levels have been successfully coordinated between these two spacecraft and therefore no harmful interference will be caused.

Scenario 4: SES-4 East Hemi/West Hemi connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 47.2 | 49.6 | 14.0 | 42.3 | 18.2 | -51.7 | -40.1 | HEMI/HEMI 72 MHz |
| 2 | 461KG7W | 0.341 | 51.3 | 52.2 | 16.6 | 43.8 | 21.5 | -54.4 | -38.7 | HEMI/HEMI 72 MHz |
| 3 | 1M84G7W | 1.365 | 55.0 | 58.2 | 22.6 | 43.8 | 21.5 | -58.2 | -38.8 | HEMI/HEMI 72 MHz |
| 4 | 8M25G7W | 6.111 | 47.2 | 63.4 | 27.8 | 42.3 | 19.1 | -51.7 | -40.1 | HEMI/HEMI 72 MHz |
| 5 | 72M0G7W | 63.330 | 56.4 | 80.9 | 40.2 | 46.9 | 19.1 | -53.5 | -37.8 | HEMI/HEMI 72 MHz |
| 6 | 346KG7W | 0.256 | 51.6 | 52.6 | 11.4 | 43.8 | 18.2 | -53.1 | -42.7 | GLB/GLB 36 MHz |
| 7 | 461KG7W | 0.3413 | 47.5 | 55.1 | 13.8 | 46.9 | 21.5 | -47.7 | -41.5 | GLB/GLB 36 MHz |
| 8 | 1M84G7W | 1.3653 | 55.3 | 64.4 | 23.2 | 42.5 | 21.5 | -52.3 | -38.2 | GLB/GLB 36 MHz |
| 9 | 8M25G7W | 6.1113 | 51.6 | 67.3 | 26.1 | 43.8 | 19.1 | -52.2 | -41.8 | GLB/GLB 36 MHz |
| 10 | 36M0G7W | 30 | 56.8 | 80.7 | 33.4 | 42.5 | 19.1 | -50.9 | -41.4 | GLB/GLB 36 MHz |
| 11 | 346KG7W | 0.256 | 47.5 | 52.5 | 11 | 43.8 | 18.2 | -49.1 | -43.1 | HEMI/GLB 36 MHz |
| 12 | 461KG7W | 0.3413 | 51.6 | 55 | 13.6 | 46.8 | 21.5 | -51.9 | -41.7 | HEMI/GLB 36 MHz |
| 13 | 1M84G7W | 1.3653 | 55.3 | 63.6 | 22.1 | 43.8 | 21.5 | -53.1 | -39.3 | HEMI/GLB 36 MHz |
| 14 | 8M25G7W | 6.1113 | 47.5 | 67.3 | 25.8 | 43.8 | 19.1 | -48.1 | -42.1 | HEMI/GLB 36 MHz |
| 15 | 36M0G7W | 30.000 | 56.8 | 81.9 | 33.4 | 42.3 | 19.1 | -49.7 | -41.4 | HEMI/GLB 36 MHz |
| 16 | 346KG7W | 0.256 | 47.5 | 49.7 | 15.2 | 42.3 | 18.2 | -51.9 | -38.9 | GLB/HEMI 36 MHz |
| 17 | 461KG7W | 0.3413 | 51.6 | 52.7 | 18.3 | 43.8 | 21.5 | -54.2 | -37.0 | GLB/HEMI 36 MHz |
| 18 | 1M84G7W | 1.3653 | 55.3 | 58.7 | 24.3 | 42.3 | 21.5 | -58.0 | -37.1 | GLB/HEMI 36 MHz |
| 19 | 8M25G7W | 6.1113 | 47.5 | 64.4 | 30 | 42.3 | 19.1 | -51.0 | -37.9 | GLB/HEMI 36 MHz |
| 20 | 36M0G7W | 30.000 | 56.8 | 77 | 37.6 | 42.3 | 19.1 | -54.6 | -37.2 | GLB/HEMI 36 MHz |
| 21 | 346KG7W | 0.256 | 47.3 | 48.1 | 15.2 | 42.3 | 18.2 | -53.3 | -38.9 | ZONE/ZONE 72 MHz |
| 22 | 461KG7W | 0.3413 | 51.4 | 51 | 18.1 | 43.8 | 21.5 | -55.7 | -37.2 | ZONE/ZONE 72 MHz |
| 23 | 1M84G7W | 1.3653 | 55.1 | 57.3 | 24.4 | 43.8 | 21.5 | -59.2 | -37.0 | ZONE/ZONE 72 MHz |
| 24 | 8M25G7W | 6.1113 | 47.3 | 62.9 | 29.9 | 42.3 | 19.1 | -52.3 | -38.0 | ZONE/ZONE 72 MHz |
| 25 | 72M0G7W | 63.330 | 56.6 | 79 | 41 | 47.1 | 19.1 | -55.6 | -37.0 | ZONE/ZONE 72 MHz |
| 26 | 346KG7W | 0.256 | 47.3 | 48.8 | 15.8 | 42.3 | 18.2 | -52.6 | -38.3 | HEMI/ZONE 72 MHz |
| 27 | 461KG7W | 0.3413 | 51.4 | 52.2 | 19.1 | 43.8 | 21.5 | -54.5 | -36.2 | HEMI/ZONE 72 MHz |
| 28 | 1M84G7W | 1.3653 | 55.1 | 58.4 | 25.4 | 43.8 | 21.5 | -58.1 | -36.0 | HEMI/ZONE 72 MHz |
| 29 | 8M25G7W | 6.1113 | 47.3 | 63.6 | 30.6 | 42.3 | 19.1 | -51.6 | -37.3 | HEMI/ZONE 72 MHz |
| 30 | 72M0G7W | 63.330 | 56.6 | 82.9 | 41.9 | 47.1 | 19.1 | -51.7 | -36.1 | HEMI/ZONE 72 MHz |
| 31 | 346KG7W | 0.256 | 47.2 | 48.2 | 13.6 | 42.3 | 18.2 | -53.1 | -40.5 | ZONE/HEMI 72 MHz |
| 32 | 461KG7W | 0.3413 | 51.3 | 50.3 | 15.8 | 43.8 | 21.5 | -56.3 | -39.5 | ZONE/HEMI 72 MHz |
| 33 | 1M84G7W | 1.3653 | 55 | 56.4 | 21.8 | 43.8 | 21.5 | -60.0 | -39.6 | ZONE/HEMI 72 MHz |
| 34 | 8M25G7W | 6.1113 | 47.2 | 62.3 | 27.7 | 42.3 | 19.1 | -52.8 | -40.2 | ZONE/HEMI 72 MHz |
| 35 | 72M0G7W | 63.330 | 56.4 | 81.3 | 39.8 | 45.9 | 19.1 | -53.1 | -38.2 | ZONE/HEMI 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 52.3 | 16.6 | 42.3 | 18.2 | -53.0 | -37.4 | EH/WH 36 MHz |
| 2 | 461KG7W | 0.341 | 47.0 | 54.9 | 19.2 | 42.3 | 21.5 | -47.5 | -36.1 | EH/WH 36 MHz |
| 3 | 1M84G7W | 1.365 | 54.9 | 60.9 | 25.2 | 42.3 | 21.5 | -55.4 | -36.1 | EH/WH 36 MHz |
| 4 | 8M25G7W | 6.111 | 51.2 | 67.0 | 31.4 | 42.3 | 19.1 | -52.0 | -36.5 | EH/WH 36 MHz |
| 5 | 36M0G7W | 30.000 | 56.3 | 76.4 | 39.8 | 42.3 | 19.1 | -54.7 | -35.0 | EH/WH 36 MHz |

Table 17-86. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 4

| | Interfering (SES-4 @338E) | | | | | |
|----------------------|---------------------------|------|------|------|------|------|
| | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 0.4 | -1.6 | -0.6 | -0.5 | -1.7 |
| | 2 | -0.2 | -2.5 | -1.1 | -1.2 | -2.2 |
| | 3 | -0.2 | -2.5 | -1.1 | -1.2 | -2.3 |
| | 4 | -0.4 | -2.5 | -1.5 | -1.4 | -2.6 |
| | 5 | 6.5 | 4.5 | 5.4 | 5.5 | 4.3 |
| | 6 | -0.3 | -2.0 | -1.5 | -1.3 | -2.7 |
| | 7 | 0.4 | -1.5 | -0.7 | -0.6 | -1.8 |
| | 8 | -0.4 | -1.9 | -1.6 | -1.3 | -2.7 |
| | 9 | -0.3 | -2.0 | -1.5 | -1.3 | -2.6 |
| | 10 | -1.1 | -2.4 | -2.4 | -2.0 | -3.5 |
| | 11 | -0.7 | -2.4 | -1.9 | -1.7 | -3.1 |
| | 12 | 0.1 | -1.8 | -1.0 | -0.8 | -2.1 |
| | 13 | -0.2 | -1.8 | -1.4 | -1.2 | -2.5 |
| | 14 | -0.6 | -2.2 | -1.8 | -1.6 | -2.9 |
| | 15 | -1.2 | -2.6 | -2.5 | -2.2 | -3.7 |
| | 16 | 1.5 | -0.7 | 0.6 | 0.5 | -0.6 |
| | 17 | 1.3 | -1.2 | 0.5 | 0.3 | -0.6 |
| | 18 | 0.0 | -2.2 | -0.9 | -0.9 | -2.0 |
| | 19 | 1.6 | -0.6 | 0.7 | 0.6 | -0.4 |
| | 20 | 2.8 | 1.1 | 1.6 | 1.8 | 0.4 |
| | 21 | 1.2 | -1.3 | 0.4 | 0.3 | -0.7 |
| | 22 | 0.7 | -2.1 | 0.1 | -0.2 | -1.0 |
| | 23 | 1.0 | -1.8 | 0.4 | 0.1 | -0.7 |
| | 24 | 1.3 | -1.2 | 0.5 | 0.3 | -0.6 |
| | 25 | 7.1 | 4.6 | 6.2 | 6.1 | 5.1 |
| | 26 | 1.9 | -0.7 | 1.0 | 0.9 | -0.1 |
| | 27 | 1.8 | -1.0 | 1.1 | 0.8 | 0.1 |
| | 28 | 2.1 | -0.8 | 1.4 | 1.1 | 0.3 |
| | 29 | 2.0 | -0.5 | 1.2 | 1.0 | 0.1 |
| | 30 | 8.4 | 6.4 | 7.3 | 7.4 | 6.2 |
| | 31 | -0.1 | -2.3 | -1.0 | -1.0 | -2.2 |
| | 32 | -1.2 | -3.7 | -2.0 | -2.2 | -3.1 |
| | 33 | -1.2 | -3.7 | -2.0 | -2.2 | -3.1 |
| | 34 | -0.7 | -2.9 | -1.6 | -1.6 | -2.7 |
| | 35 | 5.2 | 3.4 | 4.1 | 4.3 | 3.0 |

Table 17-87. Summary of Overall C/I Margins for scenario 4 (dB)

It can be seen in Table 17-87 that there is a variety of positive and negative C/I margins (with respect to the criteria of 6%). The worst case is represented for Wanted Carrier 32 with respect to Interfering Carrier 2. The deficit with respect to the 6% C/I criterion is 3.7 dB, which is equivalent to an increase of 14.1% of victim noise temperature. The C/I deficit indicated will lead to an impact on the overall C/N+I of only

0.6 dB. These C/I levels have been successfully coordinated between these two spacecraft and therefore no harmful interference will be caused.

Scenario 5: SES-4 West Hemi/East Hemi connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 47.2 | 49.6 | 14.0 | 42.3 | 18.2 | -51.7 | -40.1 | HEMI/HEMI 72 MHz |
| 2 | 461KG7W | 0.341 | 51.3 | 52.2 | 16.6 | 43.8 | 21.5 | -54.4 | -38.7 | HEMI/HEMI 72 MHz |
| 3 | 1M84G7W | 1.365 | 55.0 | 58.2 | 22.6 | 43.8 | 21.5 | -58.2 | -38.8 | HEMI/HEMI 72 MHz |
| 4 | 8M25G7W | 6.111 | 47.2 | 63.4 | 27.8 | 42.3 | 19.1 | -51.7 | -40.1 | HEMI/HEMI 72 MHz |
| 5 | 72M0G7W | 63.330 | 56.4 | 80.9 | 40.2 | 46.9 | 19.1 | -53.5 | -37.8 | HEMI/HEMI 72 MHz |
| 6 | 346KG7W | 0.256 | 51.6 | 52.6 | 11.4 | 43.8 | 18.2 | -53.1 | -42.7 | GLB/GLB 36 MHz |
| 7 | 461KG7W | 0.3413 | 47.5 | 55.1 | 13.8 | 46.9 | 21.5 | -47.7 | -41.5 | GLB/GLB 36 MHz |
| 8 | 1M84G7W | 1.3653 | 55.3 | 64.4 | 23.2 | 42.5 | 21.5 | -52.3 | -38.2 | GLB/GLB 36 MHz |
| 9 | 8M25G7W | 6.1113 | 51.6 | 67.3 | 26.1 | 43.8 | 19.1 | -52.2 | -41.8 | GLB/GLB 36 MHz |
| 10 | 36M0G7W | 30 | 56.8 | 80.7 | 33.4 | 42.5 | 19.1 | -50.9 | -41.4 | GLB/GLB 36 MHz |
| 11 | 346KG7W | 0.256 | 47.5 | 52.5 | 11 | 43.8 | 18.2 | -49.1 | -43.1 | HEMI/GLB 36 MHz |
| 12 | 461KG7W | 0.3413 | 51.6 | 55 | 13.6 | 46.8 | 21.5 | -51.9 | -41.7 | HEMI/GLB 36 MHz |
| 13 | 1M84G7W | 1.3653 | 55.3 | 63.6 | 22.1 | 43.8 | 21.5 | -53.1 | -39.3 | HEMI/GLB 36 MHz |
| 14 | 8M25G7W | 6.1113 | 47.5 | 67.3 | 25.8 | 43.8 | 19.1 | -48.1 | -42.1 | HEMI/GLB 36 MHz |
| 15 | 36M0G7W | 30.000 | 56.8 | 81.9 | 33.4 | 42.3 | 19.1 | -49.7 | -41.4 | HEMI/GLB 36 MHz |
| 16 | 346KG7W | 0.256 | 47.5 | 49.7 | 15.2 | 42.3 | 18.2 | -51.9 | -38.9 | GLB/HEMI 36 MHz |
| 17 | 461KG7W | 0.3413 | 51.6 | 52.7 | 18.3 | 43.8 | 21.5 | -54.2 | -37.0 | GLB/HEMI 36 MHz |
| 18 | 1M84G7W | 1.3653 | 55.3 | 58.7 | 24.3 | 42.3 | 21.5 | -58.0 | -37.1 | GLB/HEMI 36 MHz |
| 19 | 8M25G7W | 6.1113 | 47.5 | 64.4 | 30 | 42.3 | 19.1 | -51.0 | -37.9 | GLB/HEMI 36 MHz |
| 20 | 36M0G7W | 30.000 | 56.8 | 77 | 37.6 | 42.3 | 19.1 | -54.6 | -37.2 | GLB/HEMI 36 MHz |
| 21 | 346KG7W | 0.256 | 47.3 | 48.1 | 15.2 | 42.3 | 18.2 | -53.3 | -38.9 | ZONE/ZONE 72 MHz |
| 22 | 461KG7W | 0.3413 | 51.4 | 51 | 18.1 | 43.8 | 21.5 | -55.7 | -37.2 | ZONE/ZONE 72 MHz |
| 23 | 1M84G7W | 1.3653 | 55.1 | 57.3 | 24.4 | 43.8 | 21.5 | -59.2 | -37.0 | ZONE/ZONE 72 MHz |
| 24 | 8M25G7W | 6.1113 | 47.3 | 62.9 | 29.9 | 42.3 | 19.1 | -52.3 | -38.0 | ZONE/ZONE 72 MHz |
| 25 | 72M0G7W | 63.330 | 56.6 | 79 | 41 | 47.1 | 19.1 | -55.6 | -37.0 | ZONE/ZONE 72 MHz |
| 26 | 346KG7W | 0.256 | 47.3 | 48.8 | 15.8 | 42.3 | 18.2 | -52.6 | -38.3 | HEMI/ZONE 72 MHz |
| 27 | 461KG7W | 0.3413 | 51.4 | 52.2 | 19.1 | 43.8 | 21.5 | -54.5 | -36.2 | HEMI/ZONE 72 MHz |
| 28 | 1M84G7W | 1.3653 | 55.1 | 58.4 | 25.4 | 43.8 | 21.5 | -58.1 | -36.0 | HEMI/ZONE 72 MHz |
| 29 | 8M25G7W | 6.1113 | 47.3 | 63.6 | 30.6 | 42.3 | 19.1 | -51.6 | -37.3 | HEMI/ZONE 72 MHz |
| 30 | 72M0G7W | 63.330 | 56.6 | 82.9 | 41.9 | 47.1 | 19.1 | -51.7 | -36.1 | HEMI/ZONE 72 MHz |
| 31 | 346KG7W | 0.256 | 47.2 | 48.2 | 13.6 | 42.3 | 18.2 | -53.1 | -40.5 | ZONE/HEMI 72 MHz |
| 32 | 461KG7W | 0.3413 | 51.3 | 50.3 | 15.8 | 43.8 | 21.5 | -56.3 | -39.5 | ZONE/HEMI 72 MHz |
| 33 | 1M84G7W | 1.3653 | 55 | 56.4 | 21.8 | 43.8 | 21.5 | -60.0 | -39.6 | ZONE/HEMI 72 MHz |
| 34 | 8M25G7W | 6.1113 | 47.2 | 62.3 | 27.7 | 42.3 | 19.1 | -52.8 | -40.2 | ZONE/HEMI 72 MHz |
| 35 | 72M0G7W | 63.330 | 56.4 | 81.3 | 39.8 | 45.9 | 19.1 | -53.1 | -38.2 | ZONE/HEMI 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.2 | 52.6 | 17.3 | 42.3 | 18.2 | -52.7 | -36.8 | WH/EH 36 MHz |
| 2 | 461KG7W | 0.341 | 47.0 | 55.5 | 20.2 | 42.3 | 21.5 | -46.8 | -35.1 | WH/EH 36 MHz |
| 3 | 1M84G7W | 1.365 | 54.9 | 61.5 | 26.3 | 42.3 | 21.5 | -54.7 | -35.1 | WH/EH 36 MHz |
| 4 | 8M25G7W | 6.111 | 51.2 | 66.9 | 31.6 | 42.3 | 19.1 | -52.2 | -36.3 | WH/EH 36 MHz |
| 5 | 36M0G7W | 30.000 | 56.3 | 77.0 | 39.7 | 42.3 | 19.1 | -54.1 | -35.1 | WH/EH 36 MHz |

Table 17-88. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 5

| | Carrier ID | Interfering (SES-4 @338E) | | | | |
|----------------------|------------|---------------------------|------|------|------|------|
| | | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | -0.2 | -2.5 | -1.6 | -0.7 | -1.6 |
| | 2 | -0.8 | -3.4 | -2.1 | -1.3 | -2.2 |
| | 3 | -0.8 | -3.4 | -2.1 | -1.3 | -2.2 |
| | 4 | -1.1 | -3.4 | -2.5 | -1.5 | -2.5 |
| | 5 | 5.8 | 3.5 | 4.4 | 5.4 | 4.4 |
| | 6 | -1.0 | -3.0 | -2.5 | -1.5 | -2.6 |
| | 7 | -0.2 | -2.5 | -1.7 | -0.7 | -1.7 |
| | 8 | -1.0 | -2.9 | -2.6 | -1.5 | -2.6 |
| | 9 | -1.0 | -2.9 | -2.5 | -1.4 | -2.6 |
| | 10 | -1.7 | -3.4 | -3.4 | -2.2 | -3.4 |
| | 11 | -1.4 | -3.3 | -2.9 | -1.9 | -3.0 |
| | 12 | -0.5 | -2.7 | -2.0 | -1.0 | -2.0 |
| | 13 | -0.8 | -2.8 | -2.4 | -1.3 | -2.4 |
| | 14 | -1.2 | -3.2 | -2.8 | -1.7 | -2.9 |
| | 15 | -1.9 | -3.6 | -3.6 | -2.4 | -3.6 |
| | 16 | 0.9 | -1.6 | -0.4 | 0.4 | -0.5 |
| | 17 | 0.7 | -2.1 | -0.5 | 0.2 | -0.6 |
| | 18 | -0.6 | -3.1 | -1.9 | -1.1 | -2.0 |
| | 19 | 1.0 | -1.5 | -0.3 | 0.5 | -0.4 |
| | 20 | 2.1 | 0.1 | 0.6 | 1.6 | 0.5 |
| | 21 | 0.6 | -2.2 | -0.6 | 0.2 | -0.6 |
| | 22 | 0.2 | -2.9 | -0.9 | -0.3 | -1.0 |
| | 23 | 0.5 | -2.7 | -0.6 | 0.0 | -0.7 |
| | 24 | 0.7 | -2.1 | -0.5 | 0.2 | -0.6 |
| | 25 | 6.5 | 3.7 | 5.2 | 6.0 | 5.2 |
| | 26 | 1.3 | -1.5 | 0.1 | 0.8 | 0.0 |
| | 27 | 1.2 | -1.8 | 0.2 | 0.7 | 0.1 |
| | 28 | 1.5 | -1.6 | 0.4 | 1.0 | 0.3 |
| | 29 | 1.4 | -1.4 | 0.2 | 0.9 | 0.1 |
| | 30 | 7.8 | 5.5 | 6.3 | 7.3 | 6.3 |
| | 31 | -0.7 | -3.2 | -2.0 | -1.2 | -2.1 |
| | 32 | -1.8 | -4.6 | -3.0 | -2.3 | -3.1 |
| | 33 | -1.8 | -4.6 | -3.0 | -2.3 | -3.1 |
| | 34 | -1.3 | -3.8 | -2.6 | -1.8 | -2.7 |
| | 35 | 4.6 | 2.5 | 3.1 | 4.1 | 3.0 |

Table 17-89. Summary of Overall C/I Margins for scenario 5 (dB)

It can be seen in Table 17-89 that there is a variety of positive and negative C/I margins (with respect to the criteria of 6%). The worst case is represented for Wanted Carrier 32 with respect to Interfering Carrier 2. The deficit with respect to the 6% C/I criterion is 4.6 dB, which is equivalent to an increase of 17.3% of victim noise temperature. The C/I deficit indicated will lead to an impact on the overall C/N+I of only

0.7 dB. These C/I levels have been successfully coordinated between these two spacecraft and therefore no harmful interference will be caused.

Scenario 6: SES-4 Europe/West Hemi connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.2 | 52.4 | 8.2 | 48.1 | 18.2 | -50.9 | -45.9 | KSPOT/GLB 36 MHz |
| 2 | 461KG7W | 0.3413 | 53.3 | 55.3 | 11.2 | 50 | 21.5 | -53.3 | -44.1 | KSPOT/GLB 36 MHz |
| 3 | 1M84G7W | 1.3653 | 53.3 | 61.4 | 17.2 | 50 | 21.5 | -53.3 | -44.2 | KSPOT/GLB 36 MHz |
| 4 | 8M25G7W | 6.1113 | 46.7 | 64 | 19.8 | 51.7 | 19.1 | -50.6 | -48.1 | KSPOT/GLB 36 MHz |
| 5 | 36M0G7W | 30.000 | 49.2 | 73.9 | 26.1 | 51.7 | 19.1 | -50.1 | -48.7 | KSPOT/GLB 36 MHz |
| 6 | 346KG7W | 0.256 | 46.5 | 49.6 | 14.6 | 42.3 | 18.2 | -51.0 | -39.5 | KSPOT/HEMI 72 MHz |
| 7 | 461KG7W | 0.3413 | 49.1 | 51.1 | 16.2 | 45.8 | 21.5 | -53.3 | -39.1 | KSPOT/HEMI 72 MHz |
| 8 | 1M84G7W | 1.3653 | 52.9 | 57.7 | 22.7 | 45.8 | 21.5 | -56.6 | -38.7 | KSPOT/HEMI 72 MHz |
| 9 | 8M25G7W | 6.1113 | 49.1 | 63.4 | 28.4 | 43.8 | 19.1 | -53.6 | -39.5 | KSPOT/HEMI 72 MHz |
| 10 | 72M0G7W | 63.330 | 56.5 | 80.6 | 38.6 | 50 | 19.1 | -53.9 | -39.4 | KSPOT/HEMI 72 MHz |
| 11 | 346KG7W | 0.256 | 46.5 | 49.2 | 16.8 | 42.3 | 18.2 | -51.4 | -37.3 | KSPOT/ZONE 72 MHz |
| 12 | 461KG7W | 0.3413 | 49 | 51 | 18.6 | 45.8 | 21.5 | -53.3 | -36.7 | KSPOT/ZONE 72 MHz |
| 13 | 1M84G7W | 1.3653 | 52.8 | 57 | 24.7 | 45.8 | 21.5 | -57.2 | -36.7 | KSPOT/ZONE 72 MHz |
| 14 | 8M25G7W | 6.1113 | 46.5 | 62.7 | 30.3 | 43.8 | 19.1 | -51.7 | -37.6 | KSPOT/ZONE 72 MHz |
| 15 | 72M0G7W | 63.330 | 54.5 | 79.1 | 40.8 | 50 | 19.1 | -53.4 | -37.2 | KSPOT/ZONE 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 52.1 | 15.0 | 42.3 | 18.2 | -55.1 | -39.1 | EU/WH 54 MHz |
| 2 | 461KG7W | 0.341 | 53.1 | 54.8 | 17.7 | 45.9 | 21.5 | -53.6 | -37.6 | EU/WH 54 MHz |
| 3 | 1M84G7W | 1.365 | 53.1 | 60.8 | 23.7 | 45.9 | 21.5 | -53.6 | -37.6 | EU/WH 54 MHz |
| 4 | 8M25G7W | 6.111 | 53.1 | 66.9 | 29.8 | 42.3 | 19.1 | -54.1 | -38.1 | EU/WH 54 MHz |
| 5 | 54M0G7W | 45.000 | 54.6 | 80.3 | 41.2 | 42.3 | 19.1 | -50.8 | -35.3 | EU/WH 54 MHz |

Table 17-90. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 6

| | | Interfering (SES-4 @338E) | | | | |
|-----------------------------|----|---------------------------|-----|-----|-----|------|
| Carrier ID | | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 2.4 | 0.9 | 0.9 | 1.4 | -1.4 |
| | 2 | 2.6 | 1.1 | 1.1 | 1.6 | -1.2 |
| | 3 | 2.5 | 1.1 | 1.1 | 1.6 | -1.2 |
| | 4 | 2.6 | 1.1 | 1.1 | 1.6 | -1.2 |
| | 5 | 2.3 | 0.8 | 0.8 | 1.3 | -1.5 |
| | 6 | 2.7 | 1.2 | 1.2 | 1.7 | -1.1 |
| | 7 | 2.6 | 1.1 | 1.1 | 1.6 | -1.3 |
| | 8 | 3.1 | 1.6 | 1.6 | 2.1 | -0.8 |
| | 9 | 3.1 | 1.6 | 1.6 | 2.1 | -0.7 |
| | 10 | 9.4 | 8.0 | 8.0 | 8.5 | 5.6 |
| | 11 | 4.5 | 3.0 | 3.0 | 3.5 | 0.6 |
| | 12 | 4.3 | 2.8 | 2.8 | 3.3 | 0.3 |
| | 13 | 4.3 | 2.9 | 2.9 | 3.3 | 0.4 |
| | 14 | 4.4 | 3.0 | 3.0 | 3.5 | 0.6 |
| | 15 | 10.9 | 9.5 | 9.5 | 9.9 | 7.0 |

Table 17-91. Summary of Overall C/I Margins for scenario 6 (dB)

It can be seen in Table 17-91 that most C/I margins are positive, except for Interfering Carrier 5 (with respect to the criteria of 6%). The worst case is represented for Wanted Carrier 5 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.5 dB, which is equivalent to an increase of 8.5% of victim noise temperature. The two spacecraft have been successfully coordinated, including for the 13.75-14.0 GHz band in which the NSS-5 satellite does not operate.⁵

Scenario 7: SES-4 Europe/East Hemi connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.2 | 52.4 | 8.2 | 48.1 | 18.2 | -50.9 | -45.9 | KSPOT/GLB 36 MHz |
| 2 | 461KG7W | 0.3413 | 53.3 | 55.3 | 11.2 | 50 | 21.5 | -53.3 | -44.1 | KSPOT/GLB 36 MHz |
| 3 | 1M84G7W | 1.3653 | 53.3 | 61.4 | 17.2 | 50 | 21.5 | -53.3 | -44.2 | KSPOT/GLB 36 MHz |
| 4 | 8M25G7W | 6.1113 | 46.7 | 64 | 19.8 | 51.7 | 19.1 | -50.6 | -48.1 | KSPOT/GLB 36 MHz |
| 5 | 36M0G7W | 30.000 | 49.2 | 73.9 | 26.1 | 51.7 | 19.1 | -50.1 | -48.7 | KSPOT/GLB 36 MHz |
| 6 | 346KG7W | 0.256 | 46.5 | 49.6 | 14.6 | 42.3 | 18.2 | -51.0 | -39.5 | KSPOT/HEMI 72 MHz |
| 7 | 461KG7W | 0.3413 | 49.1 | 51.1 | 16.2 | 45.8 | 21.5 | -53.3 | -39.1 | KSPOT/HEMI 72 MHz |
| 8 | 1M84G7W | 1.3653 | 52.9 | 57.7 | 22.7 | 45.8 | 21.5 | -56.6 | -38.7 | KSPOT/HEMI 72 MHz |
| 9 | 8M25G7W | 6.1113 | 49.1 | 63.4 | 28.4 | 43.8 | 19.1 | -53.6 | -39.5 | KSPOT/HEMI 72 MHz |
| 10 | 72M0G7W | 63.330 | 56.5 | 80.6 | 38.6 | 50 | 19.1 | -53.9 | -39.4 | KSPOT/HEMI 72 MHz |
| 11 | 346KG7W | 0.256 | 46.5 | 49.2 | 16.8 | 42.3 | 18.2 | -51.4 | -37.3 | KSPOT/ZONE 72 MHz |
| 12 | 461KG7W | 0.3413 | 49 | 51 | 18.6 | 45.8 | 21.5 | -53.3 | -36.7 | KSPOT/ZONE 72 MHz |
| 13 | 1M84G7W | 1.3653 | 52.8 | 57 | 24.7 | 45.8 | 21.5 | -57.2 | -36.7 | KSPOT/ZONE 72 MHz |
| 14 | 8M25G7W | 6.1113 | 46.5 | 62.7 | 30.3 | 43.8 | 19.1 | -51.7 | -37.6 | KSPOT/ZONE 72 MHz |
| 15 | 72M0G7W | 63.330 | 54.5 | 79.1 | 40.8 | 50 | 19.1 | -53.4 | -37.2 | KSPOT/ZONE 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.0 | 51.5 | 14.9 | 42.3 | 18.2 | -51.6 | -39.2 | EU/EH 54 MHz |
| 2 | 461KG7W | 0.341 | 53.1 | 54.4 | 17.8 | 45.9 | 21.5 | -54.1 | -37.6 | EU/EH 54 MHz |
| 3 | 1M84G7W | 1.365 | 53.1 | 60.4 | 23.8 | 45.9 | 21.5 | -54.1 | -37.6 | EU/EH 54 MHz |
| 4 | 8M25G7W | 6.111 | 53.1 | 66.2 | 29.6 | 42.3 | 19.1 | -54.7 | -38.2 | EU/EH 54 MHz |
| 5 | 54M0G7W | 45.000 | 54.6 | 79.9 | 41.3 | 42.3 | 19.1 | -51.2 | -35.2 | EU/EH 54 MHz |

Table 17-92. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 7

⁵ See *supra* Section 17.1 (providing a two-degree interference analysis for a hypothetical satellite operating under the same technical parameters). The closest satellite operating in the 13.75-14 GHz band is Telstar-12 at 15° W.L. and the calculated C/I deficit with respect to that satellite, operating at a seven-degree separation, is negligible.

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------|----|---------------------------|-----|-----|------|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 2.1 | 0.9 | 0.9 | 1.5 | -1.5 | |
| | 2 | 2.2 | 1.1 | 1.1 | 1.7 | -1.3 | |
| | 3 | 2.2 | 1.1 | 1.1 | 1.7 | -1.3 | |
| | 4 | 2.0 | 1.1 | 1.1 | 1.8 | -1.3 | |
| | 5 | 2.1 | 0.8 | 0.8 | 1.4 | -1.6 | |
| | 6 | 2.2 | 1.2 | 1.2 | 1.9 | -1.2 | |
| | 7 | 1.5 | 1.2 | 1.2 | 1.9 | -1.2 | |
| | 8 | 2.1 | 1.7 | 1.7 | 2.4 | -0.7 | |
| | 9 | 2.4 | 1.7 | 1.7 | 2.3 | -0.8 | |
| | 10 | 8.8 | 8.0 | 8.0 | 8.6 | 5.6 | |
| | 11 | 3.6 | 3.1 | 3.1 | 3.7 | 0.6 | |
| | 12 | 2.7 | 2.9 | 2.9 | 3.6 | 0.4 | |
| | 13 | 2.8 | 3.0 | 3.0 | 3.6 | 0.5 | |
| | 14 | 3.3 | 3.1 | 3.1 | 3.7 | 0.6 | |
| | 15 | 9.7 | 9.5 | 9.5 | 10.2 | 7.1 | |

Table 17-93. Summary of Overall C/I Margins for scenario 7 (dB)

It can be seen in Table 17-93 that most C/I margins are positive, except for Interfering Carrier 5 (with respect to the criteria of 6%). The worst case is represented for Wanted Carrier 5 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.6 dB, which is equivalent to an increase of 8.7% of victim noise temperature. The two spacecraft have been successfully coordinated, including for the 13.75-14.0 GHz band in which the NSS-5 satellite does not operate.⁶

⁶ See *supra* note 5 and accompanying text.

Scenario 8: SES-4 West Africa/West Hemi connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.2 | 52.4 | 8.2 | 48.1 | 18.2 | -50.9 | -45.9 | KSPOT/GLB 36 MHz |
| 2 | 461KG7W | 0.3413 | 53.3 | 55.3 | 11.2 | 50 | 21.5 | -53.3 | -44.1 | KSPOT/GLB 36 MHz |
| 3 | 1M84G7W | 1.3653 | 53.3 | 61.4 | 17.2 | 50 | 21.5 | -53.3 | -44.2 | KSPOT/GLB 36 MHz |
| 4 | 8M25G7W | 6.1113 | 46.7 | 64 | 19.8 | 51.7 | 19.1 | -50.6 | -48.1 | KSPOT/GLB 36 MHz |
| 5 | 36M0G7W | 30.000 | 49.2 | 73.9 | 26.1 | 51.7 | 19.1 | -50.1 | -48.7 | KSPOT/GLB 36 MHz |
| 6 | 346KG7W | 0.256 | 46.5 | 49.6 | 14.6 | 42.3 | 18.2 | -51.0 | -39.5 | KSPOT/HEMI 72 MHz |
| 7 | 461KG7W | 0.3413 | 49.1 | 51.1 | 16.2 | 45.8 | 21.5 | -53.3 | -39.1 | KSPOT/HEMI 72 MHz |
| 8 | 1M84G7W | 1.3653 | 52.9 | 57.7 | 22.7 | 45.8 | 21.5 | -56.6 | -38.7 | KSPOT/HEMI 72 MHz |
| 9 | 8M25G7W | 6.1113 | 49.1 | 63.4 | 28.4 | 43.8 | 19.1 | -53.6 | -39.5 | KSPOT/HEMI 72 MHz |
| 10 | 72M0G7W | 63.330 | 56.5 | 80.6 | 38.6 | 50 | 19.1 | -53.9 | -39.4 | KSPOT/HEMI 72 MHz |
| 11 | 346KG7W | 0.256 | 46.5 | 49.2 | 16.8 | 42.3 | 18.2 | -51.4 | -37.3 | KSPOT/ZONE 72 MHz |
| 12 | 461KG7W | 0.3413 | 49 | 51 | 18.6 | 45.8 | 21.5 | -53.3 | -36.7 | KSPOT/ZONE 72 MHz |
| 13 | 1M84G7W | 1.3653 | 52.8 | 57 | 24.7 | 45.8 | 21.5 | -57.2 | -36.7 | KSPOT/ZONE 72 MHz |
| 14 | 8M25G7W | 6.1113 | 46.5 | 62.7 | 30.3 | 43.8 | 19.1 | -51.7 | -37.6 | KSPOT/ZONE 72 MHz |
| 15 | 72M0G7W | 63.330 | 54.5 | 79.1 | 40.8 | 50 | 19.1 | -53.4 | -37.2 | KSPOT/ZONE 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 55.4 | 15.5 | 42.3 | 18.2 | -51.7 | -38.5 | WA/WH 54 MHz |
| 2 | 461KG7W | 0.341 | 54.6 | 57.8 | 17.9 | 45.9 | 21.5 | -52.1 | -37.4 | WA/WH 54 MHz |
| 3 | 1M84G7W | 1.365 | 54.6 | 63.9 | 24.0 | 45.9 | 21.5 | -52.1 | -37.4 | WA/WH 54 MHz |
| 4 | 8M25G7W | 6.111 | 53.1 | 70.2 | 30.3 | 42.3 | 19.1 | -50.8 | -37.6 | WA/WH 54 MHz |
| 5 | 54M0G7W | 45.000 | 58.7 | 82.1 | 41.2 | 42.3 | 19.1 | -53.1 | -35.3 | WA/WH 54 MHz |

Table 17-94. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 8

| | | Interfering (SES-4 @338E) | | | | |
|-----------------------------|-----------|---------------------------|-----|-----|-----|------|
| Carrier ID | | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 1.6 | 0.6 | 0.6 | 0.6 | -1.3 |
| | 2 | 1.7 | 0.8 | 0.8 | 0.7 | -1.0 |
| | 3 | 1.7 | 0.7 | 0.7 | 0.7 | -1.1 |
| | 4 | 1.6 | 0.7 | 0.7 | 0.6 | -1.0 |
| | 5 | 1.5 | 0.5 | 0.5 | 0.5 | -1.4 |
| | 6 | 1.7 | 0.8 | 0.8 | 0.7 | -0.9 |
| | 7 | 1.2 | 0.6 | 0.6 | 0.3 | -0.8 |
| | 8 | 1.7 | 1.1 | 1.1 | 0.8 | -0.3 |
| | 9 | 2.0 | 1.2 | 1.2 | 1.0 | -0.4 |
| | 10 | 8.4 | 7.6 | 7.6 | 7.4 | 5.9 |
| | 11 | 3.2 | 2.5 | 2.5 | 2.2 | 1.0 |
| | 12 | 2.5 | 2.1 | 2.1 | 1.6 | 1.1 |
| | 13 | 2.5 | 2.1 | 2.1 | 1.6 | 1.1 |
| | 14 | 3.0 | 2.4 | 2.4 | 2.0 | 1.1 |
| | 15 | 9.4 | 8.8 | 8.8 | 8.5 | 7.6 |

Table 17-95. Summary of Overall C/I Margins for scenario 8 (dB)

It can be seen in Table 17-95 that most C/I margins are positive, except for Interfering Carrier 5 (with respect to the criteria of 6%). The worst case is represented for Wanted Carrier 5 with respect to Interfering Carrier 5. The deficit with respect to the 6%

C/I criterion is 1.4 dB, which is equivalent to an increase of 8.3% of victim noise temperature. The two spacecraft have been successfully coordinated, including for the 13.75-14.0 GHz band in which the NSS-5 satellite does not operate.⁷

Scenario 9: SES-4 West Africa/East Hemi connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.2 | 52.4 | 8.2 | 48.1 | 18.2 | -50.9 | -45.9 | KSPOT/GLB 36 MHz |
| 2 | 461KG7W | 0.3413 | 53.3 | 55.3 | 11.2 | 50 | 21.5 | -53.3 | -44.1 | KSPOT/GLB 36 MHz |
| 3 | 1M84G7W | 1.3653 | 53.3 | 61.4 | 17.2 | 50 | 21.5 | -53.3 | -44.2 | KSPOT/GLB 36 MHz |
| 4 | 8M25G7W | 6.1113 | 46.7 | 64 | 19.8 | 51.7 | 19.1 | -50.6 | -48.1 | KSPOT/GLB 36 MHz |
| 5 | 36M0G7W | 30.000 | 49.2 | 73.9 | 26.1 | 51.7 | 19.1 | -50.1 | -48.7 | KSPOT/GLB 36 MHz |
| 6 | 346KG7W | 0.256 | 46.5 | 49.6 | 14.6 | 42.3 | 18.2 | -51.0 | -39.5 | KSPOT/HEMI 72 MHz |
| 7 | 461KG7W | 0.3413 | 49.1 | 51.1 | 16.2 | 45.8 | 21.5 | -53.3 | -39.1 | KSPOT/HEMI 72 MHz |
| 8 | 1M84G7W | 1.3653 | 52.9 | 57.7 | 22.7 | 45.8 | 21.5 | -56.6 | -38.7 | KSPOT/HEMI 72 MHz |
| 9 | 8M25G7W | 6.1113 | 49.1 | 63.4 | 28.4 | 43.8 | 19.1 | -53.6 | -39.5 | KSPOT/HEMI 72 MHz |
| 10 | 72M0G7W | 63.330 | 56.5 | 80.6 | 38.6 | 50 | 19.1 | -53.9 | -39.4 | KSPOT/HEMI 72 MHz |
| 11 | 346KG7W | 0.256 | 46.5 | 49.2 | 16.8 | 42.3 | 18.2 | -51.4 | -37.3 | KSPOT/ZONE 72 MHz |
| 12 | 461KG7W | 0.3413 | 49 | 51 | 18.6 | 45.8 | 21.5 | -53.3 | -36.7 | KSPOT/ZONE 72 MHz |
| 13 | 1M84G7W | 1.3653 | 52.8 | 57 | 24.7 | 45.8 | 21.5 | -57.2 | -36.7 | KSPOT/ZONE 72 MHz |
| 14 | 8M25G7W | 6.1113 | 46.5 | 62.7 | 30.3 | 43.8 | 19.1 | -51.7 | -37.6 | KSPOT/ZONE 72 MHz |
| 15 | 72M0G7W | 63.330 | 54.5 | 79.1 | 40.8 | 50 | 19.1 | -53.4 | -37.2 | KSPOT/ZONE 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 54.8 | 15.4 | 42.3 | 18.2 | -52.4 | -38.7 | WA/EH 54 MHz |
| 2 | 461KG7W | 0.341 | 54.6 | 57.3 | 17.9 | 45.9 | 21.5 | -52.6 | -37.4 | WA/EH 54 MHz |
| 3 | 1M84G7W | 1.365 | 54.6 | 63.3 | 23.9 | 45.9 | 21.5 | -52.6 | -37.4 | WA/EH 54 MHz |
| 4 | 8M25G7W | 6.111 | 54.6 | 69.5 | 30.1 | 42.3 | 19.1 | -52.9 | -37.7 | WA/EH 54 MHz |
| 5 | 54M0G7W | 45.000 | 58.7 | 82.9 | 41.5 | 42.3 | 19.1 | -52.3 | -35.0 | WA/EH 54 MHz |

Table 17-96. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 9

⁷ See *supra* note 5 and accompanying text.

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------|----|---------------------------|-----|-----|-----|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 1.8 | 0.7 | 0.7 | 1.0 | -1.6 | |
| | 2 | 1.9 | 0.9 | 0.9 | 1.2 | -1.4 | |
| | 3 | 1.9 | 0.8 | 0.8 | 1.1 | -1.4 | |
| | 4 | 1.8 | 0.8 | 0.8 | 1.1 | -1.3 | |
| | 5 | 1.7 | 0.6 | 0.6 | 0.9 | -1.7 | |
| | 6 | 2.0 | 0.9 | 0.9 | 1.2 | -1.2 | |
| | 7 | 1.6 | 0.8 | 0.8 | 1.1 | -1.2 | |
| | 8 | 2.1 | 1.3 | 1.3 | 1.6 | -0.7 | |
| | 9 | 2.3 | 1.3 | 1.3 | 1.6 | -0.8 | |
| | 10 | 8.7 | 7.7 | 7.7 | 8.0 | 5.6 | |
| | 11 | 3.5 | 2.7 | 2.7 | 3.0 | 0.6 | |
| | 12 | 2.9 | 2.3 | 2.3 | 2.6 | 0.6 | |
| | 13 | 3.0 | 2.4 | 2.4 | 2.7 | 0.7 | |
| | 14 | 3.4 | 2.6 | 2.6 | 2.9 | 0.7 | |
| | 15 | 9.8 | 9.0 | 9.0 | 9.3 | 7.2 | |

Table 17-97. Summary of Overall C/I Margins for scenario 9 (dB)

It can be seen in Table 17-97 that most C/I margins are positive, except for Interfering Carrier 5 (with respect to the criteria of 6%). The worst case is represented for Wanted Carrier 5 with respect to Interfering Carrier 5. The deficit with respect to the 6% C/I criterion is 1.7 dB, which is equivalent to an increase of 8.9% of victim noise temperature. The two spacecraft have been successfully coordinated, including for the 13.75-14.0 GHz band in which the NSS-5 satellite does not operate.⁸

⁸ See *supra* note 5 and accompanying text.

Scenario 10: SES-4 West Hemi/Europe connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.8 | 52.9 | 27.4 | 48.2 | 18.2 | -53.0 | -26.7 | GLB/KSPOT 36 MHz |
| 2 | 461KG7W | 0.341 | 53.7 | 54.8 | 29.3 | 52.2 | 21.5 | -54.2 | -26.0 | GLB/KSPOT 36 MHz |
| 3 | 1M84G7W | 1.365 | 53.7 | 60.8 | 35.3 | 52.2 | 21.5 | -54.3 | -26.1 | GLB/KSPOT 36 MHz |
| 4 | 8M25G7W | 6.111 | 55.5 | 67.3 | 41.8 | 48.2 | 19.1 | -56.1 | -26.1 | GLB/KSPOT 36 MHz |
| 5 | 36M0G7W | 30.000 | 55.5 | 74.3 | 48.8 | 48.3 | 19.1 | -56.0 | -26.0 | GLB/KSPOT 36 MHz |
| 6 | 346KG7W | 0.256 | 45.8 | 50.8 | 25.9 | 48.1 | 18.2 | -49.1 | -28.2 | HEMI/KSPOT 72 MHz |
| 7 | 461KG7W | 0.341 | 47.3 | 52.5 | 27.7 | 51.7 | 21.5 | -50.1 | -27.6 | HEMI/KSPOT 72 MHz |
| 8 | 1M84G7W | 1.365 | 47.3 | 58.5 | 33.7 | 51.7 | 21.5 | -50.2 | -27.7 | HEMI/KSPOT 72 MHz |
| 9 | 8M25G7W | 6.111 | 53.4 | 65.2 | 40.3 | 48.1 | 19.1 | -56.1 | -27.6 | HEMI/KSPOT 72 MHz |
| 10 | 72M0G7W | 63.330 | 53.4 | 81.9 | 52.0 | 53.4 | 19.1 | -49.5 | -26.0 | HEMI/KSPOT 72 MHz |
| 11 | 346KG7W | 0.256 | 45.7 | 48.9 | 25.2 | 48.1 | 18.2 | -50.9 | -28.9 | ZONE/KSPOT 72 MHz |
| 12 | 461KG7W | 0.341 | 47.2 | 50.6 | 26.9 | 51.7 | 21.5 | -51.9 | -28.4 | ZONE/KSPOT 72 MHz |
| 13 | 1M84G7W | 1.365 | 47.2 | 56.7 | 32.9 | 51.7 | 21.5 | -51.9 | -28.5 | ZONE/KSPOT 72 MHz |
| 14 | 8M25G7W | 6.111 | 53.2 | 63.7 | 39.9 | 48.1 | 19.1 | -57.4 | -28.0 | ZONE/KSPOT 72 MHz |
| 15 | 72M0G7W | 63.330 | 53.2 | 80.7 | 50.9 | 53.4 | 19.1 | -50.5 | -27.1 | ZONE/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.3 | 51.8 | 24.8 | 47.3 | 18.2 | -53.6 | -29.3 | WH/EU 54 MHz |
| 2 | 461KG7W | 0.341 | 47.2 | 53.2 | 26.2 | 51.3 | 21.5 | -49.4 | -29.2 | WH/EU 54 MHz |
| 3 | 1M84G7W | 1.365 | 55.1 | 59.2 | 32.2 | 51.3 | 21.5 | -57.3 | -29.2 | WH/EU 54 MHz |
| 4 | 8M25G7W | 6.111 | 51.3 | 66.5 | 39.5 | 47.3 | 19.1 | -52.7 | -28.3 | WH/EU 54 MHz |
| 5 | 54M0G7W | 45.000 | 55.1 | 78.9 | 50.0 | 47.3 | 19.1 | -52.7 | -26.5 | WH/EU 54 MHz |

Table 17-98. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 10

| | | Interfering (SES-4 @338E) | | | | |
|----------------------|----|---------------------------|------|------|------|------|
| Carrier ID | | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 9.9 | 7.6 | 10.9 | 8.9 | 7.8 |
| | 2 | 9.1 | 6.0 | 11.0 | 8.2 | 7.5 |
| | 3 | 9.1 | 6.0 | 11.0 | 8.1 | 7.4 |
| | 4 | 9.6 | 7.3 | 10.6 | 8.6 | 7.5 |
| | 5 | 9.8 | 7.4 | 10.8 | 8.8 | 7.7 |
| | 6 | 8.1 | 5.7 | 9.2 | 7.1 | 6.0 |
| | 7 | 6.9 | 3.7 | 8.8 | 5.9 | 5.3 |
| | 8 | 6.9 | 3.7 | 8.8 | 5.9 | 5.2 |
| | 9 | 7.8 | 5.4 | 8.9 | 6.8 | 5.7 |
| | 10 | 14.5 | 12.0 | 15.7 | 13.5 | 12.5 |
| | 11 | 6.8 | 4.1 | 8.2 | 5.8 | 4.9 |
| | 12 | 5.4 | 2.0 | 7.5 | 4.4 | 3.8 |
| | 13 | 5.4 | 2.1 | 7.5 | 4.4 | 3.9 |
| | 14 | 6.9 | 4.2 | 8.2 | 5.9 | 4.9 |
| | 15 | 13.4 | 10.8 | 14.6 | 12.4 | 11.3 |

Table 17-99. Summary of Overall C/I Margins for scenario 10 (dB)

As shown in Table 17-99, all C/I margins are positive.

Scenario 11: SES-4 East Hemi/Europe connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.8 | 52.9 | 27.4 | 48.2 | 18.2 | -53.0 | -26.7 | GLB/KSPOT 36 MHz |
| 2 | 461KG7W | 0.341 | 53.7 | 54.8 | 29.3 | 52.2 | 21.5 | -54.2 | -26.0 | GLB/KSPOT 36 MHz |
| 3 | 1M84G7W | 1.365 | 53.7 | 60.8 | 35.3 | 52.2 | 21.5 | -54.3 | -26.1 | GLB/KSPOT 36 MHz |
| 4 | 8M25G7W | 6.111 | 55.5 | 67.3 | 41.8 | 48.2 | 19.1 | -56.1 | -26.1 | GLB/KSPOT 36 MHz |
| 5 | 36M0G7W | 30.000 | 55.5 | 74.3 | 48.8 | 48.3 | 19.1 | -56.0 | -26.0 | GLB/KSPOT 36 MHz |
| 6 | 346KG7W | 0.256 | 45.8 | 50.8 | 25.9 | 48.1 | 18.2 | -49.1 | -28.2 | HEMI/KSPOT 72 MHz |
| 7 | 461KG7W | 0.341 | 47.3 | 52.5 | 27.7 | 51.7 | 21.5 | -50.1 | -27.6 | HEMI/KSPOT 72 MHz |
| 8 | 1M84G7W | 1.365 | 47.3 | 58.5 | 33.7 | 51.7 | 21.5 | -50.2 | -27.7 | HEMI/KSPOT 72 MHz |
| 9 | 8M25G7W | 6.111 | 53.4 | 65.2 | 40.3 | 48.1 | 19.1 | -56.1 | -27.6 | HEMI/KSPOT 72 MHz |
| 10 | 72M0G7W | 63.330 | 53.4 | 81.9 | 52.0 | 53.4 | 19.1 | -49.5 | -26.0 | HEMI/KSPOT 72 MHz |
| 11 | 346KG7W | 0.256 | 45.7 | 48.9 | 25.2 | 48.1 | 18.2 | -50.9 | -28.9 | ZONE/KSPOT 72 MHz |
| 12 | 461KG7W | 0.341 | 47.2 | 50.6 | 26.9 | 51.7 | 21.5 | -51.9 | -28.4 | ZONE/KSPOT 72 MHz |
| 13 | 1M84G7W | 1.365 | 47.2 | 56.7 | 32.9 | 51.7 | 21.5 | -51.9 | -28.5 | ZONE/KSPOT 72 MHz |
| 14 | 8M25G7W | 6.111 | 53.2 | 63.7 | 39.9 | 48.1 | 19.1 | -57.4 | -28.0 | ZONE/KSPOT 72 MHz |
| 15 | 72M0G7W | 63.330 | 53.2 | 80.7 | 50.9 | 53.4 | 19.1 | -50.5 | -27.1 | ZONE/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.3 | 51.6 | 24.8 | 47.3 | 18.2 | -53.7 | -29.3 | EH/EU 54 MHz |
| 2 | 461KG7W | 0.341 | 47.2 | 53.1 | 26.3 | 51.3 | 21.5 | -49.4 | -29.1 | EH/EU 54 MHz |
| 3 | 1M84G7W | 1.365 | 55.1 | 59.1 | 32.3 | 51.3 | 21.5 | -57.3 | -29.1 | EH/EU 54 MHz |
| 4 | 8M25G7W | 6.111 | 51.3 | 66.4 | 39.6 | 47.3 | 19.1 | -52.8 | -28.3 | EH/EU 54 MHz |
| 5 | 54M0G7W | 45.000 | 55.1 | 78.8 | 50.0 | 47.3 | 19.1 | -52.8 | -26.5 | EH/EU 54 MHz |

Table 17-100. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 11

| | | Interfering (SES-4 @338E) | | | | |
|----------------------|----|---------------------------|------|------|------|------|
| Carrier ID | | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 9.9 | 7.6 | 10.8 | 8.9 | 7.8 |
| | 2 | 9.2 | 6.0 | 11.0 | 8.2 | 7.5 |
| | 3 | 9.2 | 6.0 | 10.9 | 8.2 | 7.5 |
| | 4 | 9.6 | 7.3 | 10.6 | 8.6 | 7.5 |
| | 5 | 9.8 | 7.4 | 10.7 | 8.8 | 7.7 |
| | 6 | 8.1 | 5.7 | 9.1 | 7.1 | 6.0 |
| | 7 | 7.0 | 3.8 | 8.8 | 6.0 | 5.3 |
| | 8 | 7.0 | 3.7 | 8.8 | 6.0 | 5.3 |
| | 9 | 7.8 | 5.4 | 8.9 | 6.8 | 5.8 |
| | 10 | 14.5 | 12.0 | 15.6 | 13.6 | 12.5 |
| | 11 | 6.8 | 4.1 | 8.1 | 5.9 | 4.9 |
| | 12 | 5.4 | 2.0 | 7.5 | 4.5 | 3.9 |
| | 13 | 5.5 | 2.1 | 7.5 | 4.5 | 3.9 |
| | 14 | 6.9 | 4.2 | 8.2 | 5.9 | 5.0 |
| | 15 | 13.4 | 10.9 | 14.5 | 12.4 | 11.4 |

Table 17-101. Summary of Overall C/I Margins for scenario 11 (dB)

As shown in Table 17-101, all C/I margins are positive.

Scenario 12: SES-4 West Hemi/West Africa connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.8 | 52.9 | 27.4 | 48.2 | 18.2 | -53.0 | -26.7 | GLB/KSPOT 36 MHz |
| 2 | 461KG7W | 0.341 | 53.7 | 54.8 | 29.3 | 52.2 | 21.5 | -54.2 | -26.0 | GLB/KSPOT 36 MHz |
| 3 | 1M84G7W | 1.365 | 53.7 | 60.8 | 35.3 | 52.2 | 21.5 | -54.3 | -26.1 | GLB/KSPOT 36 MHz |
| 4 | 8M25G7W | 6.111 | 55.5 | 67.3 | 41.8 | 48.2 | 19.1 | -56.1 | -26.1 | GLB/KSPOT 36 MHz |
| 5 | 36M0G7W | 30.000 | 55.5 | 74.3 | 48.8 | 48.3 | 19.1 | -56.0 | -26.0 | GLB/KSPOT 36 MHz |
| 6 | 346KG7W | 0.256 | 45.8 | 50.8 | 25.9 | 48.1 | 18.2 | -49.1 | -28.2 | HEMI/KSPOT 72 MHz |
| 7 | 461KG7W | 0.341 | 47.3 | 52.5 | 27.7 | 51.7 | 21.5 | -50.1 | -27.6 | HEMI/KSPOT 72 MHz |
| 8 | 1M84G7W | 1.365 | 47.3 | 58.5 | 33.7 | 51.7 | 21.5 | -50.2 | -27.7 | HEMI/KSPOT 72 MHz |
| 9 | 8M25G7W | 6.111 | 53.4 | 65.2 | 40.3 | 48.1 | 19.1 | -56.1 | -27.6 | HEMI/KSPOT 72 MHz |
| 10 | 72M0G7W | 63.330 | 53.4 | 81.9 | 52.0 | 53.4 | 19.1 | -49.5 | -26.0 | HEMI/KSPOT 72 MHz |
| 11 | 346KG7W | 0.256 | 45.7 | 48.9 | 25.2 | 48.1 | 18.2 | -50.9 | -28.9 | ZONE/KSPOT 72 MHz |
| 12 | 461KG7W | 0.341 | 47.2 | 50.6 | 26.9 | 51.7 | 21.5 | -51.9 | -28.4 | ZONE/KSPOT 72 MHz |
| 13 | 1M84G7W | 1.365 | 47.2 | 56.7 | 32.9 | 51.7 | 21.5 | -51.9 | -28.5 | ZONE/KSPOT 72 MHz |
| 14 | 8M25G7W | 6.111 | 53.2 | 63.7 | 39.9 | 48.1 | 19.1 | -57.4 | -28.0 | ZONE/KSPOT 72 MHz |
| 15 | 72M0G7W | 63.330 | 53.2 | 80.7 | 50.9 | 53.4 | 19.1 | -50.5 | -27.1 | ZONE/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.3 | 51.1 | 25.3 | 47.3 | 18.2 | -54.2 | -28.8 | WH/WA 54 MHz |
| 2 | 461KG7W | 0.341 | 47.2 | 52.7 | 26.8 | 51.3 | 21.5 | -49.8 | -28.5 | WH/WA 54 MHz |
| 3 | 1M84G7W | 1.365 | 55.1 | 58.7 | 32.8 | 51.3 | 21.5 | -57.7 | -28.5 | WH/WA 54 MHz |
| 4 | 8M25G7W | 6.111 | 51.3 | 65.9 | 40.0 | 47.3 | 19.1 | -53.2 | -27.8 | WH/WA 54 MHz |
| 5 | 54M0G7W | 45.000 | 55.1 | 78.4 | 50.5 | 47.3 | 19.1 | -53.2 | -26.0 | WH/WA 54 MHz |

Table 17-102. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 12

| | | Interfering (SES-4 @338E) | | | | |
|----------------------|----|---------------------------|------|------|------|------|
| Carrier ID | | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 9.8 | 7.6 | 10.5 | 8.8 | 7.6 |
| | 2 | 9.3 | 6.2 | 10.8 | 8.3 | 7.5 |
| | 3 | 9.3 | 6.2 | 10.8 | 8.3 | 7.4 |
| | 4 | 9.5 | 7.3 | 10.2 | 8.5 | 7.3 |
| | 5 | 9.7 | 7.4 | 10.4 | 8.7 | 7.4 |
| | 6 | 8.0 | 5.7 | 8.8 | 7.0 | 5.8 |
| | 7 | 7.1 | 4.0 | 8.6 | 6.1 | 5.3 |
| | 8 | 7.1 | 3.9 | 8.6 | 6.1 | 5.2 |
| | 9 | 7.7 | 5.4 | 8.5 | 6.8 | 5.5 |
| | 10 | 14.5 | 12.1 | 15.3 | 13.5 | 12.3 |
| | 11 | 6.8 | 4.2 | 7.8 | 5.8 | 4.7 |
| | 12 | 5.6 | 2.3 | 7.4 | 4.6 | 3.9 |
| | 13 | 5.7 | 2.3 | 7.4 | 4.7 | 3.9 |
| | 14 | 6.9 | 4.3 | 7.9 | 5.9 | 4.8 |
| | 15 | 13.3 | 10.9 | 14.2 | 12.3 | 11.2 |

Table 17-103. Summary of Overall C/I Margins for scenario 12 (dB)

As shown in Table 17-103, all C/I margins are positive.

Scenario 13: SES-4 East Hemi/West Africa connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.8 | 52.9 | 27.4 | 48.2 | 18.2 | -53.0 | -26.7 | GLB/KSPOT 36 MHz |
| 2 | 461KG7W | 0.341 | 53.7 | 54.8 | 29.3 | 52.2 | 21.5 | -54.2 | -26.0 | GLB/KSPOT 36 MHz |
| 3 | 1M84G7W | 1.365 | 53.7 | 60.8 | 35.3 | 52.2 | 21.5 | -54.3 | -26.1 | GLB/KSPOT 36 MHz |
| 4 | 8M25G7W | 6.111 | 55.5 | 67.3 | 41.8 | 48.2 | 19.1 | -56.1 | -26.1 | GLB/KSPOT 36 MHz |
| 5 | 36M0G7W | 30.000 | 55.5 | 74.3 | 48.8 | 48.3 | 19.1 | -56.0 | -26.0 | GLB/KSPOT 36 MHz |
| 6 | 346KG7W | 0.256 | 45.8 | 50.8 | 25.9 | 48.1 | 18.2 | -49.1 | -28.2 | HEMI/KSPOT 72 MHz |
| 7 | 461KG7W | 0.341 | 47.3 | 52.5 | 27.7 | 51.7 | 21.5 | -50.1 | -27.6 | HEMI/KSPOT 72 MHz |
| 8 | 1M84G7W | 1.365 | 47.3 | 58.5 | 33.7 | 51.7 | 21.5 | -50.2 | -27.7 | HEMI/KSPOT 72 MHz |
| 9 | 8M25G7W | 6.111 | 53.4 | 65.2 | 40.3 | 48.1 | 19.1 | -56.1 | -27.6 | HEMI/KSPOT 72 MHz |
| 10 | 72M0G7W | 63.330 | 53.4 | 81.9 | 52.0 | 53.4 | 19.1 | -49.5 | -26.0 | HEMI/KSPOT 72 MHz |
| 11 | 346KG7W | 0.256 | 45.7 | 48.9 | 25.2 | 48.1 | 18.2 | -50.9 | -28.9 | ZONE/KSPOT 72 MHz |
| 12 | 461KG7W | 0.341 | 47.2 | 50.6 | 26.9 | 51.7 | 21.5 | -51.9 | -28.4 | ZONE/KSPOT 72 MHz |
| 13 | 1M84G7W | 1.365 | 47.2 | 56.7 | 32.9 | 51.7 | 21.5 | -51.9 | -28.5 | ZONE/KSPOT 72 MHz |
| 14 | 8M25G7W | 6.111 | 53.2 | 63.7 | 39.9 | 48.1 | 19.1 | -57.4 | -28.0 | ZONE/KSPOT 72 MHz |
| 15 | 72M0G7W | 63.330 | 53.2 | 80.7 | 50.9 | 53.4 | 19.1 | -50.5 | -27.1 | ZONE/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 51.3 | 51.1 | 25.3 | 47.3 | 18.2 | -54.3 | -28.8 | EH/WA 54 MHz |
| 2 | 461KG7W | 0.341 | 47.2 | 52.7 | 26.9 | 51.3 | 21.5 | -49.8 | -28.4 | EH/WA 54 MHz |
| 3 | 1M84G7W | 1.365 | 55.1 | 58.7 | 33.0 | 51.3 | 21.5 | -57.7 | -28.4 | EH/WA 54 MHz |
| 4 | 8M25G7W | 6.111 | 51.3 | 65.8 | 40.1 | 47.3 | 19.1 | -53.3 | -27.8 | EH/WA 54 MHz |
| 5 | 54M0G7W | 45.000 | 55.1 | 78.3 | 50.5 | 47.3 | 19.1 | -53.3 | -26.0 | EH/WA 54 MHz |

Table 17-104. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 13

| | | Interfering (SES-4 @338E) | | | | |
|----------------------|----|---------------------------|------|------|------|------|
| Carrier ID | | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 9.8 | 7.6 | 10.4 | 8.8 | 7.6 |
| | 2 | 9.3 | 6.2 | 10.7 | 8.4 | 7.5 |
| | 3 | 9.3 | 6.2 | 10.7 | 8.3 | 7.5 |
| | 4 | 9.5 | 7.3 | 10.1 | 8.5 | 7.3 |
| | 5 | 9.7 | 7.4 | 10.3 | 8.7 | 7.5 |
| | 6 | 8.0 | 5.7 | 8.7 | 7.0 | 5.8 |
| | 7 | 7.1 | 4.0 | 8.5 | 6.1 | 5.3 |
| | 8 | 7.1 | 3.9 | 8.5 | 6.1 | 5.3 |
| | 9 | 7.7 | 5.4 | 8.4 | 6.8 | 5.6 |
| | 10 | 14.5 | 12.1 | 15.2 | 13.5 | 12.3 |
| | 11 | 6.8 | 4.2 | 7.7 | 5.9 | 4.8 |
| | 12 | 5.7 | 2.3 | 7.3 | 4.7 | 4.0 |
| | 13 | 5.7 | 2.3 | 7.3 | 4.7 | 4.0 |
| | 14 | 6.9 | 4.3 | 7.8 | 5.9 | 4.8 |
| | 15 | 13.3 | 10.9 | 14.1 | 12.3 | 11.2 |

Table 17-105. Summary of Overall C/I Margins for scenario 13 (dB)

As shown in Table 17-105, all C/I margins are positive.

Scenario 14: SES-4 Europe/Europe connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 53.7 | 26.4 | 48.2 | 18.2 | -54.8 | -27.7 | EU/EU 36 MHz |
| 2 | 461KG7W | 0.341 | 54.4 | 55.1 | 27.8 | 52.2 | 21.5 | -54.6 | -27.5 | EU/EU 36 MHz |
| 3 | 1M84G7W | 1.365 | 56.3 | 61.2 | 33.9 | 52.2 | 21.5 | -56.5 | -27.5 | EU/EU 36 MHz |
| 4 | 8M25G7W | 6.111 | 56.3 | 68.4 | 41.1 | 48.2 | 19.1 | -55.7 | -26.7 | EU/EU 36 MHz |
| 5 | 36M0G7W | 30.000 | 54.4 | 79.0 | 48.7 | 48.2 | 19.1 | -50.2 | -26.1 | EU/EU 36 MHz |

Table 17-106. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 14

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------|---|---------------------------|------|------|------|------|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 1 | 6.4 | 6.2 | 6.3 | 5.6 | 4.4 |
| | 2 | 2 | 6.6 | 6.4 | 6.6 | 5.8 | 4.4 |
| | 3 | 3 | 6.7 | 6.5 | 6.7 | 5.9 | 4.5 |
| | 4 | 4 | 6.6 | 6.5 | 6.7 | 5.9 | 4.5 |
| | 5 | 5 | 12.7 | 12.5 | 12.8 | 12.1 | 10.4 |

Table 17-107. Summary of Overall C/I Margins for scenario 14 (dB)

As shown in Table 17-107, all C/I margins are positive.

Scenario 15: SES-4 West Africa/Europe connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 55.4 | 26.3 | 48.2 | 18.2 | -53.1 | -27.8 | WA/EU 36 MHz |
| 2 | 461KG7W | 0.341 | 54.4 | 56.9 | 27.8 | 52.2 | 21.5 | -52.8 | -27.5 | WA/EU 36 MHz |
| 3 | 1M84G7W | 1.365 | 56.3 | 63.0 | 33.9 | 52.2 | 21.5 | -54.7 | -27.5 | WA/EU 36 MHz |
| 4 | 8M25G7W | 6.111 | 56.3 | 70.1 | 41.0 | 48.2 | 19.1 | -54.1 | -26.9 | WA/EU 36 MHz |
| 5 | 36M0G7W | 30.000 | 56.3 | 80.6 | 48.5 | 48.2 | 19.1 | -50.5 | -26.3 | WA/EU 36 MHz |

Table 17-108. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 15

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------------|---|---------------------------|------|------|------|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 6.4 | 6.0 | 6.2 | 5.6 | 4.7 | |
| | 2 | 6.4 | 6.1 | 6.4 | 5.8 | 4.7 | |
| | 3 | 6.5 | 6.2 | 6.5 | 5.9 | 4.7 | |
| | 4 | 6.5 | 6.2 | 6.5 | 5.9 | 4.7 | |
| | 5 | 12.5 | 12.1 | 12.5 | 11.9 | 10.6 | |

Table 17-109. Summary of Overall C/I Margins for scenario 15 (dB)

As shown in Table 17-109, all C/I margins are positive.

Scenario 16: SES-4 North America/Europe connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 53.9 | 26.2 | 50.2 | 18.2 | -54.6 | -27.9 | NA/EU 36 MHz |
| 2 | 461KG7W | 0.341 | 54.4 | 56.1 | 28.5 | 53.7 | 21.5 | -53.6 | -26.9 | NA/EU 36 MHz |
| 3 | 1M84G7W | 1.365 | 54.4 | 62.1 | 34.5 | 53.7 | 21.5 | -53.6 | -26.9 | NA/EU 36 MHz |
| 4 | 8M25G7W | 6.111 | 54.4 | 68.6 | 40.9 | 50.2 | 19.1 | -53.7 | -26.9 | NA/EU 36 MHz |
| 5 | 36M0G7W | 30.000 | 54.4 | 79.1 | 48.4 | 48.2 | 19.1 | -50.1 | -26.4 | NA/EU 36 MHz |

Table 17-110. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 16

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------------|---|---------------------------|------|------|------|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 6.5 | 5.5 | 5.5 | 5.6 | 4.7 | |
| | 2 | 6.7 | 5.7 | 5.7 | 5.8 | 4.6 | |
| | 3 | 6.8 | 5.8 | 5.8 | 5.9 | 4.7 | |
| | 4 | 6.8 | 5.8 | 5.8 | 5.8 | 4.7 | |
| | 5 | 12.8 | 11.8 | 11.8 | 11.9 | 10.5 | |

Table 17-111. Summary of Overall C/I Margins for scenario 16 (dB)

As shown in Table 17-111, all C/I margins are positive.

Scenario 17: SES-4 Europe/West Africa connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 52.5 | 26.3 | 48.2 | 18.2 | -56.0 | -27.8 | EU/WA 36 MHz |
| 2 | 461KG7W | 0.341 | 54.4 | 55.6 | 29.4 | 50.2 | 21.5 | -54.1 | -25.9 | EU/WA 36 MHz |
| 3 | 1M84G7W | 1.365 | 54.4 | 61.6 | 35.4 | 50.2 | 21.5 | -54.1 | -25.9 | EU/WA 36 MHz |
| 4 | 8M25G7W | 6.111 | 54.4 | 67.2 | 41.0 | 48.2 | 19.1 | -55.1 | -26.9 | EU/WA 36 MHz |
| 5 | 36M0G7W | 30.000 | 54.4 | 78.7 | 48.5 | 48.2 | 19.1 | -50.5 | -26.3 | EU/WA 36 MHz |

Table 17-112. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 17

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------|---|---------------------------|------|------|------|------|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | | 6.6 | 4.7 | 4.7 | 5.7 | 4.7 |
| | 2 | | 6.9 | 4.9 | 4.9 | 5.9 | 4.7 |
| | 3 | | 6.9 | 5.0 | 5.0 | 6.0 | 4.7 |
| | 4 | | 6.9 | 5.0 | 5.0 | 6.0 | 4.7 |
| | 5 | | 13.0 | 11.1 | 11.1 | 12.1 | 10.6 |

Table 17-113. Summary of Overall C/I Margins for scenario 17 (dB)

As shown in Table 17-113, all C/I margins are positive.

Scenario 18: SES-4 West Africa/West Africa connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 56.2 | 28.0 | 45.7 | 18.2 | -52.3 | -26.1 | WA/WA 36 MHz |
| 2 | 461KG7W | 0.341 | 54.4 | 57.5 | 29.4 | 50.2 | 21.5 | -52.2 | -26.0 | WA/WA 36 MHz |
| 3 | 1M84G7W | 1.365 | 54.4 | 63.5 | 35.4 | 50.2 | 21.5 | -52.2 | -26.0 | WA/WA 36 MHz |
| 4 | 8M25G7W | 6.111 | 54.4 | 69.1 | 40.9 | 48.2 | 19.1 | -53.2 | -26.9 | WA/WA 36 MHz |
| 5 | 36M0G7W | 30.000 | 56.3 | 80.9 | 48.8 | 48.2 | 19.1 | -50.2 | -26.0 | WA/WA 36 MHz |

Table 17-114. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 18

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------------|---|---------------------------|------|------|------|------|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | | 4.7 | 4.6 | 4.6 | 5.5 | 4.4 |
| | 2 | | 4.8 | 4.8 | 4.8 | 5.7 | 4.4 |
| | 3 | | 4.9 | 4.8 | 4.8 | 5.8 | 4.4 |
| | 4 | | 4.9 | 4.8 | 4.8 | 5.8 | 4.4 |
| | 5 | | 10.9 | 10.8 | 10.8 | 11.8 | 10.3 |

Table 17-115. Summary of Overall C/I Margins for scenario 18 (dB)

As shown in Table 17-115, all C/I margins are positive.

Scenario 19: SES-4 North America/West Africa connectivity (36 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.4 | 54.5 | 27.9 | 48.2 | 18.2 | -54.0 | -26.2 | NA/WA 36 MHz |
| 2 | 461KG7W | 0.341 | 54.4 | 55.4 | 28.8 | 53.7 | 21.5 | -54.4 | -26.5 | NA/WA 36 MHz |
| 3 | 1M84G7W | 1.365 | 54.4 | 61.9 | 35.3 | 52.2 | 21.5 | -53.9 | -26.0 | NA/WA 36 MHz |
| 4 | 8M25G7W | 6.111 | 54.4 | 68.4 | 41.8 | 48.2 | 19.1 | -53.9 | -26.0 | NA/WA 36 MHz |
| 5 | 36M0G7W | 30.000 | 54.4 | 78.2 | 48.6 | 48.2 | 19.1 | -51.0 | -26.2 | NA/WA 36 MHz |

Table 17-116. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 19

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------------|---|---------------------------|------|------|------|------|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | | 5.0 | 5.3 | 4.8 | 4.8 | 4.6 |
| | 2 | | 5.2 | 5.5 | 5.0 | 5.0 | 4.7 |
| | 3 | | 5.3 | 5.6 | 5.1 | 5.1 | 4.8 |
| | 4 | | 5.3 | 5.6 | 5.1 | 5.1 | 4.8 |
| | 5 | | 11.4 | 11.7 | 11.2 | 11.2 | 10.7 |

Table 17-117. Summary of Overall C/I Margins for scenario 19 (dB)

As shown in Table 17-117, all C/I margins are positive.

Scenario 20: SES-4 North America/Southern Cone connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 52.4 | 25.5 | 49.6 | 18.2 | -54.7 | -28.6 | NA/SC 54 MHz |
| 2 | 461KG7W | 0.341 | 54.6 | 54.2 | 27.2 | 55.0 | 21.5 | -55.7 | -28.1 | NA/SC 54 MHz |
| 3 | 1M84G7W | 1.365 | 54.6 | 60.2 | 33.3 | 55.0 | 21.5 | -55.7 | -28.1 | NA/SC 54 MHz |
| 4 | 8M25G7W | 6.111 | 53.1 | 65.9 | 38.9 | 51.7 | 19.1 | -55.1 | -29.0 | NA/SC 54 MHz |
| 5 | 54M0G7W | 45.000 | 53.1 | 79.5 | 50.5 | 47.7 | 19.1 | -50.1 | -26.0 | NA/SC 54 MHz |

Table 17-118. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 20

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------|---|---------------------------|------|------|------|------|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 1 | 7.2 | 6.8 | 6.8 | 7.6 | 4.4 |
| | 2 | 2 | 7.4 | 7.1 | 7.1 | 7.7 | 4.4 |
| | 3 | 3 | 7.5 | 7.1 | 7.1 | 7.8 | 4.5 |
| | 4 | 4 | 7.4 | 7.1 | 7.1 | 7.8 | 4.5 |
| | 5 | 5 | 13.5 | 13.2 | 13.2 | 13.8 | 10.3 |

Table 17-119. Summary of Overall C/I Margins for scenario 20 (dB)

As shown in Table 17-119, all C/I margins are positive.

Scenario 21: SES-4 Southern Cone/North America connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 54.1 | 27.1 | 45.2 | 18.2 | -53.0 | -27.0 | SC/NA 54 MHz |
| 2 | 461KG7W | 0.341 | 54.6 | 56.4 | 29.3 | 49.6 | 21.5 | -53.6 | -26.0 | SC/NA 54 MHz |
| 3 | 1M84G7W | 1.365 | 54.6 | 62.4 | 35.3 | 49.6 | 21.5 | -53.6 | -26.0 | SC/NA 54 MHz |
| 4 | 8M25G7W | 6.111 | 53.1 | 68.9 | 41.8 | 45.2 | 19.1 | -52.1 | -26.0 | SC/NA 54 MHz |
| 5 | 54M0G7W | 45.000 | 53.1 | 79.5 | 50.5 | 45.2 | 19.1 | -50.1 | -26.0 | SC/NA 54 MHz |

Table 17-120. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 21

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------------|---|---------------------------|------|------|------|------|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | | 5.6 | 4.7 | 4.7 | 4.6 | 4.4 |
| | 2 | | 5.7 | 5.0 | 5.0 | 4.8 | 4.4 |
| | 3 | | 5.8 | 5.0 | 5.0 | 4.9 | 4.5 |
| | 4 | | 5.8 | 5.0 | 5.0 | 4.8 | 4.5 |
| | 5 | | 11.8 | 11.1 | 11.1 | 10.9 | 10.3 |

Table 17-121. Summary of Overall C/I Margins for scenario 21 (dB)

As shown in Table 17-121, all C/I margins are positive.

Scenario 22: SES-4 Southern Cone/Southern Cone connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 53.1 | 55.1 | 25.3 | 47.7 | 18.2 | -52.1 | -28.7 | SC/SC 54 MHz |
| 2 | 461KG7W | 0.341 | 54.6 | 57.4 | 27.7 | 51.7 | 21.5 | -52.5 | -27.6 | SC/SC 54 MHz |
| 3 | 1M84G7W | 1.365 | 54.6 | 62.8 | 33.1 | 53.1 | 21.5 | -53.1 | -28.3 | SC/SC 54 MHz |
| 4 | 8M25G7W | 6.111 | 53.1 | 69.8 | 40.1 | 47.7 | 19.1 | -51.2 | -27.8 | SC/SC 54 MHz |
| 5 | 54M0G7W | 45.000 | 56.5 | 82.2 | 50.5 | 45.2 | 19.1 | -50.8 | -26.0 | SC/SC 54 MHz |

Table 17-122. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 22

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------------|---|---------------------------|------|------|------|------|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | | 7.0 | 6.1 | 6.7 | 6.1 | 4.5 |
| | 2 | | 6.9 | 6.2 | 6.8 | 6.0 | 4.6 |
| | 3 | | 7.0 | 6.2 | 6.9 | 6.1 | 4.6 |
| | 4 | | 7.0 | 6.2 | 6.9 | 6.1 | 4.6 |
| | 5 | | 12.8 | 12.2 | 12.8 | 11.9 | 10.5 |

Table 17-123. Summary of Overall C/I Margins for scenario 22 (dB)

As shown in Table 17-123, all C/I margins are positive.

Scenario 23: SES-4 North America/North America connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.1 | 52.1 | 27.0 | 45.2 | 18.2 | -51.1 | -27.1 | NA/NA 54 MHz |
| 2 | 461KG7W | 0.341 | 53.1 | 54.2 | 29.1 | 47.6 | 21.5 | -54.3 | -26.3 | NA/NA 54 MHz |
| 3 | 1M84G7W | 1.365 | 53.1 | 60.2 | 35.1 | 47.6 | 21.5 | -54.3 | -26.3 | NA/NA 54 MHz |
| 4 | 8M25G7W | 6.111 | 49.1 | 66.8 | 41.7 | 45.2 | 19.1 | -50.2 | -26.2 | NA/NA 54 MHz |
| 5 | 54M0G7W | 45.000 | 53.1 | 77.5 | 50.4 | 45.2 | 19.1 | -52.1 | -26.1 | NA/NA 54 MHz |

Table 17-124. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 23

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------|---|---------------------------|------|------|------|------|------|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | | 5.5 | 5.0 | 5.0 | 4.5 | 4.7 |
| | 2 | | 5.4 | 5.3 | 5.3 | 4.5 | 4.9 |
| | 3 | | 5.5 | 5.4 | 5.4 | 4.6 | 4.9 |
| | 4 | | 5.5 | 5.3 | 5.3 | 4.6 | 4.9 |
| | 5 | | 11.4 | 11.5 | 11.5 | 10.4 | 10.9 |

Table 17-125. Summary of Overall C/I Margins for scenario 23 (dB)

As shown in Table 17-125, all C/I margins are positive.

Scenario 24: SES-4 West Africa/North America connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.1 | 53.2 | 27.4 | 45.2 | 18.2 | -50.0 | -26.7 | WA/NA 54 MHz |
| 2 | 461KG7W | 0.341 | 53.1 | 55.2 | 29.3 | 49.6 | 21.5 | -53.3 | -26.0 | WA/NA 54 MHz |
| 3 | 1M84G7W | 1.365 | 53.1 | 61.2 | 35.3 | 49.6 | 21.5 | -53.3 | -26.0 | WA/NA 54 MHz |
| 4 | 8M25G7W | 6.111 | 49.1 | 67.6 | 41.8 | 45.2 | 19.1 | -49.3 | -26.1 | WA/NA 54 MHz |
| 5 | 54M0G7W | 45.000 | 53.1 | 79.2 | 50.4 | 45.2 | 19.1 | -50.4 | -26.1 | WA/NA 54 MHz |

Table 17-126. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 24

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------------|---|---------------------------|------|------|------|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 4.9 | 4.7 | 4.7 | 4.3 | 4.5 | |
| | 2 | 4.8 | 4.9 | 4.9 | 4.2 | 4.5 | |
| | 3 | 4.9 | 5.0 | 5.0 | 4.3 | 4.6 | |
| | 4 | 4.9 | 5.0 | 5.0 | 4.3 | 4.6 | |
| | 5 | 10.7 | 11.1 | 11.1 | 10.1 | 10.5 | |

Table 17-127. Summary of Overall C/I Margins for scenario 24 (dB)

As shown in Table 17-127, all C/I margins are positive.

Scenario 25: SES-4 Europe/North America connectivity (54 MHz)

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | NSS-5 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 54.5 | 55.5 | 26.5 | 45.3 | 18.2 | -53.1 | -27.6 | KSPOT/KSPOT 72 MHz |
| 2 | 461KG7W | 0.341 | 52.8 | 58.0 | 29.0 | 47.8 | 21.5 | -50.1 | -26.3 | KSPOT/KSPOT 72 MHz |
| 3 | 1M84G7W | 1.365 | 62.4 | 64.1 | 35.1 | 47.8 | 21.5 | -59.7 | -26.3 | KSPOT/KSPOT 72 MHz |
| 4 | 8M25G7W | 6.111 | 54.5 | 68.2 | 39.2 | 47.8 | 19.1 | -54.2 | -28.7 | KSPOT/KSPOT 72 MHz |
| 5 | 72M0G7W | 63.330 | 62.4 | 82.9 | 51.9 | 51.6 | 19.1 | -57.5 | -26.1 | KSPOT/KSPOT 72 MHz |

| Carrier ID | Emission Designator | Bandwidth (MHz) | Tx E/S Gain (dBi) | Uplink EIRP (dBW) | Downlink EIRP (dBW) | Rx E/S Gain (dBi) | C/I Criterion | (up density) | (dn density) | SES-4 Connectivity |
|------------|---------------------|-----------------|-------------------|-------------------|---------------------|-------------------|---------------|--------------|--------------|--------------------|
| 1 | 346KG7W | 0.256 | 49.1 | 51.5 | 27.5 | 45.2 | 18.2 | -51.6 | -26.6 | EU/NA 54 MHz |
| 2 | 461KG7W | 0.341 | 53.1 | 53.3 | 29.3 | 49.6 | 21.5 | -55.1 | -26.0 | EU/NA 54 MHz |
| 3 | 1M84G7W | 1.365 | 53.1 | 59.4 | 35.3 | 49.6 | 21.5 | -55.1 | -26.0 | EU/NA 54 MHz |
| 4 | 8M25G7W | 6.111 | 49.1 | 65.9 | 41.9 | 45.2 | 19.1 | -51.0 | -26.0 | EU/NA 54 MHz |
| 5 | 54M0G7W | 45.000 | 53.1 | 78.5 | 50.5 | 45.2 | 19.1 | -51.1 | -26.0 | EU/NA 54 MHz |

Table 17-128. Summary of Typical Transmission Parameters for SES-4 and NSS-5 under scenario 25

| | | Interfering (SES-4 @338E) | | | | | |
|----------------------------|---|---------------------------|------|------|------|------|---|
| | | Carrier ID | 1 | 2 | 3 | 4 | 5 |
| Wanted (NSS-5 @340E) | 1 | 5.1 | 4.9 | 4.9 | 4.5 | 4.5 | |
| | 2 | 5.2 | 5.1 | 5.1 | 4.5 | 4.6 | |
| | 3 | 5.2 | 5.2 | 5.2 | 4.6 | 4.7 | |
| | 4 | 5.2 | 5.2 | 5.2 | 4.6 | 4.7 | |
| | 5 | 11.2 | 11.4 | 11.4 | 10.6 | 10.6 | |

Table 17-129. Summary of Overall C/I Margins for scenario 25 (dB)

As shown in Table 17-129, all C/I margins are positive.

17.4 Summary of results for the specific interference analysis case

The table below summarizes all the results for the studied connectivities under the specific interference analysis case. It shows for each scenario the uplink beam and downlink beam for the wanted and interfering satellite, the associated frequency bands, and the worst case observed C/I margin from the calculations.

| | Interfering | Wanted | | | |
|----------|--------------------|--|-------------|---------------|-----------------------|
| Scenario | SES-4 connectivity | NSS-5 connectivity | Uplink band | Downlink band | Worst Case C/I margin |
| 1 | GLB/GLB 36 MHz | GLB/GLB 36 MHz | C | C | -0.3 |
| 2 | WH/WH 36 MHz | HEMI/HEMI 72 MHz GLB/GLB 36 MHz HEMI/GLB 36 MHz GLB/HEMI 36 MHz ZONE/ZONE 72 MHz HEMI/ZONE 72 MHz ZONE/HEMI 72 MHz | C | C | -3.7 |
| 3 | EH/EH 36 MHz | HEMI/HEMI 72 MHz GLB/GLB 36 MHz HEMI/GLB 36 MHz GLB/HEMI 36 MHz ZONE/ZONE 72 MHz HEMI/ZONE 72 MHz ZONE/HEMI 72 MHz | C | C | -3.8 |
| 4 | EH/WH 36 MHz | HEMI/HEMI 72 MHz GLB/GLB 36 MHz HEMI/GLB 36 MHz GLB/HEMI 36 MHz ZONE/ZONE 72 MHz HEMI/ZONE 72 MHz ZONE/HEMI 72 MHz | C | C | -3.7 |
| 5 | WH/EH 36 MHz | HEMI/HEMI 72 MHz GLB/GLB 36 MHz HEMI/GLB 36 MHz GLB/HEMI 36 MHz ZONE/ZONE 72 MHz HEMI/ZONE 72 MHz ZONE/HEMI 72 MHz | C | C | -4.6 |
| 6 | EU/WH 54 MHz | KSPOT/GLB 36 MHz KSPOT/HEMI 72 MHz KSPOT/ZONE 72 MHz | Ku | C | -1.5 |
| 7 | EU/EH 54 MHz | KSPOT/GLB 36 MHz KSPOT/HEMI 72 MHz KSPOT/ZONE 72 MHz | Ku | C | -1.6 |
| 8 | WA/WH 54 MHz | KSPOT/GLB 36 MHz KSPOT/HEMI 72 MHz KSPOT/ZONE 72 MHz | Ku | C | -1.7 |
| 9 | WA/EH 54 MHz | KSPOT/GLB 36 MHz KSPOT/HEMI 72 MHz KSPOT/ZONE 72 MHz | Ku | C | -1.4 |
| 10 | WH/EU 54 MHz | GLB/KSPOT 36 MHz HEMI/KSPOT 72 MHz ZONE/KSPOT 72 MHz | C | Ku | 2.0 |
| 11 | EH/EU 54 MHz | GLB/KSPOT 36 MHz HEMI/KSPOT 72 MHz ZONE/KSPOT 72 MHz | C | Ku | 2.0 |
| 12 | WH/WA 54 MHz | GLB/KSPOT 36 MHz HEMI/KSPOT 72 MHz ZONE/KSPOT 72 MHz | C | Ku | 2.3 |
| 13 | EH/WA 54 MHz | GLB/KSPOT 36 MHz HEMI/KSPOT 72 MHz ZONE/KSPOT 72 MHz | C | Ku | 2.3 |
| 14 | EU/EU 36 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.4 |
| 15 | WA/EU 36 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.7 |
| 16 | NA/EU 36 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.6 |
| 17 | EU/WA 36 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.7 |
| 18 | WA/WA 36 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.4 |
| 19 | NA/WA 36 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.6 |
| 20 | NA/SC 54 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.4 |
| 21 | SC/NA 54 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.4 |
| 22 | SC/SC 54 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.5 |
| 23 | NA/NA 54 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.5 |
| 24 | WA/NA 54 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.2 |
| 25 | EU/NA 54 MHz | KSPOT/KSPOT 72 MHz | Ku | Ku | 4.5 |

17.5 Analysis of the interference of the SES-4 TT&C carriers into the NSS-5 TT&C carriers

Table 17-130 shows the TT&C carrier frequencies of SES-4 and NSS-5 (derived from the Schedule S information). Also shown are the closest frequency separation of each NSS-5 TT&C carrier from the SES-4 TT&C carriers.

| Satellite | Carrier name | Channel ID (from Sched. S) | Frequency (MHz) | Polarisation | BW (kHz) | Frequency separation from closest SES-4 TTC (MHz) |
|-----------|-----------------|-------------------------------|--------------------|--------------|-------------|---|
| SES-4 | Telecommand 1 | CM1 | 14496.0 | RHCP | 800 | |
| | Telecommand 2 | CM2 | 14499.0 | RHCP | 800 | |
| | Telemetry 1 | TM1 | 11451.0 | RHCP | 300 | |
| | Telemetry 2 | TM2 | 11454.0 | RHCP | 300 | |
| | Telemetry 3 | TM3 | 12500.5 | LHCP | 300 | |
| | Telemetry 4 | TM4 | 12502.0 | LHCP | 300 | |
| | Beacon 1 | BNK1 | 11451.0 | RHCP | 25 | |
| | Beacon 2 | BNK2 | 11454.0 | RHCP | 25 | |
| | Beacon 3 | BNK3 | 12500.5 | LHCP | 25 | |
| | Beacon 4 | BNK4 | 12502.0 | LHCP | 25 | |
| | Tracking Beacon | BNC1 | 4199.75 | V | 25 | |
| NSS-5 | Telecommand 1 | CM1 | 6173.7 | LHCP | 800 | 8322.30 |
| | Telecommand 2 | CM2 | 6176.3 | LHCP | 800 | 8319.70 |
| | Telemetry 1 | TM1 | 3947.5 | RHCP | 300 | 252.25 |
| | Telemetry 2 | TM2 | 3948.0 | RHCP | 300 | 251.75 |
| | Telemetry 3 | TM3 | 3952.0 | RHCP | 300 | 247.75 |
| | Telemetry 4 | TM4 | 3952.5 | RHCP | 300 | 247.25 |
| | Beacon 1 | BCN1 | 3950.0 | V | 25 | 249.75 |
| | Beacon 2 | BCN2 | 11198.0 | RHCP | 25 | 253.00 |
| | Beacon 3 | BCN3 | 11452.0 | RHCP | 25 | 1.00 |
| | Beacon 4 | BCN4 | 11701.0 | V | 25 | 247.00 |
| | Beacon 5 | BCN5 | 12501.0 | V | 25 | 0.50 |

Table 17-130. TT&C carrier frequencies of SES-4 and NSS-5 and the closest frequency separation of each NSS-5 TT&C carrier from the SES-4 TT&C carriers

It can be seen from the Table that there are no direct frequency overlaps between any of the TT&C carriers. Nevertheless there are two cases where the frequency separation between some beacon frequencies of SES-4 (BNK1 and BNK3) are separated by 1MHz of less from some NSS-5 beacon frequencies (BCN3 and BCN5). Therefore an

C/I analysis is provided in Table 17-131 for a worse case scenario, where it is assumed that the beacon frequencies are co-frequency and operating in the same polarization. For this analysis a C/N threshold for the beacon operations was assumed to be 0 dB and the C/I protection criteria was assumed to be 14 dB (based on NSS-5 Schedule S information). Receive antenna sizes of 1.8m and 2.4 were assumed. From the Schedule S information for NSS-5 it can be derived that the downlink EIRP of the beacon signals is 6 dBW for EOC, whereas for the SES-4 beacon the downlink is 8 dBW at EOC. A difference in downlink EIRP of 2 dB is therefore assumed between these two beacons.

| | | Frequency (MHz) | | | |
|-----------------|-------------|-----------------|-------------|------------|-------------|
| | | 11452 | | 12501 | |
| Rx Antenna Size | (m) | 1.8 | 2.4 | 1.8 | 2.4 |
| Rx Antenna Gain | (dBi) | 44.8 | 47.3 | 45.6 | 48.1 |
| Off-Axis gain | (dBi) | 21.0 | 21.0 | 21.0 | 21.0 |
| Discrimination | (dB) | 23.8 | 26.3 | 24.6 | 27.1 |
| Delta EIRP | (dB) | -2.0 | -2.0 | -2.0 | -2.0 |
| C/I | (dB) | 21.8 | 24.3 | 22.6 | 25.1 |
| Threshold | (dB) | 14.0 | 14.0 | 14.0 | 14.0 |
| Margin | (dB) | 7.8 | 10.3 | 8.6 | 11.1 |

Table 17-131. Overview of C/I margins (dB) for SES-4 beacon interference into NSS-5 beacons in Ku-band

It can be seen from the analysis in the above table that all C/I margins are positive, and that there is therefore no interference from the SES-4 TT&C carriers at 22° W.L. into the NSS-5 TT&C carriers at 20° W.L.

17.6 Analysis of the interference of the SES-4 Communication carriers into the NSS-5 TT&C carriers

Table 17-132 shows the TT&C carrier frequencies of NSS-5 at 20° W.L. together with an assessment of whether there would be a frequency overlap, and possible interference from SES-4 communication carriers.

| Satellite | Carrier name | Channel ID (from Sched. S) | Frequency (MHz) | Polarisation | BW (kHz) | Overlap with SES-4 communication carriers |
|-----------|---------------|-------------------------------|--------------------|--------------|-------------|--|
| NSS-5 | Telecommand 1 | CM1 | 6173.7 | LHCP | 800 | Yes (Hemi beam up) |
| | Telecommand 2 | CM2 | 6176.3 | LHCP | 800 | Yes (Hemi beam up) |
| | Telemetry 1 | TM1 | 3947.5 | RHCP | 300 | Yes (Hemi beam down) |
| | Telemetry 2 | TM2 | 3948.0 | RHCP | 300 | Yes (Hemi beam down) |
| | Telemetry 3 | TM3 | 3952.0 | RHCP | 300 | Yes (Hemi beam down) |
| | Telemetry 4 | TM4 | 3952.5 | RHCP | 300 | Yes (Hemi beam down) |
| | Beacon 1 | BCN1 | 3950.0 | V | 25 | Yes (Hemi beam down) |
| | Beacon 2 | BCN2 | 11198.0 | RHCP | 25 | No |
| | Beacon 3 | BCN3 | 11452.0 | RHCP | 25 | No |
| | Beacon 4 | BCN4 | 11701.0 | V | 25 | No |
| Beacon 5 | BCN5 | 12501.0 | V | 25 | No | |

Table 17-132. Overview of the TT&C carrier frequencies of NSS-5 at 20° W.L. together with an assessment of whether there would be a frequency overlap, and possible interference from SES-4 communication carriers at 22° W.L.

From the table it can be seen that there are a number of interference cases to study, i.e.: a) interference from SES-4 communication carriers in C-band hemi uplink into NSS-5 Telecommand carriers, b) interference from SES-4 communication carriers in C-band hemi downlink into NSS-5 Telemetry carriers, and c) interference from SES-4 communication carriers in C-band hemi downlink into NSS-5 C-band beacon carrier. For the SES-4 C-band uplink and downlink carriers in the hemi beams the worst case carriers (in terms of potential for interference in the uplink and downlink direction) will be chosen. For the uplink case, the uplink carrier parameters of the 461KG7W carrier in the WH/EH 36 MHz beam connectivity is chosen. For the downlink case, the downlink carrier parameters of the 54M0G7W carrier in the WH/EH 54 MHz beam connectivity is chosen. The carrier parameters for the NSS-5 telecommand, telemetry and beacon carriers are derived from the NSS-5 Schedule S information. Table 17-133, 17-134 and 17-135 show the (result) of the interference analyses for the NSS-5 Telecommand, Telemetry and Beacon carriers respectively.

| SES-4 - 461KG7W crx | | |
|--------------------------------|----------|-------------|
| input power density | (dBW/Hz) | -46.8 |
| Off-axis EIRP density | (dBW/Hz) | -25.8 |
| Off-axis EIRP over 800 kHz | (dBW) | 33.2 |
| NSS-5 - Telecommand crx | | |
| uplink EIRP | (dBW) | 75.5 |
| Required C/N | (dB) | 10.0 |
| Required C/I | (dB) | 24.0 |
| Interference analysis | | |
| Calculated C/I | (dB) | 42.3 |
| Margin | (dB) | 18.3 |

Table 17-133. Interference assessment of SES-4 communication carrier (461KG7W) into NSS-5 Telecommand carrier

| SES-4 - 54M0G7W | | |
|----------------------------------|----------|------------|
| downlink EIRP density (peak) | (dBW/Hz) | -35.0 |
| downlink EIRP over 300 kHz | (dBW) | 19.8 |
| NSS-5 - Telemetry carrier | | |
| Downlink EIRP (EOC) | (dBW) | 3.0 |
| Receive earth station size | (m) | 12.0 |
| Receive earth station gain | (dBi) | 52.2 |
| Receive earth station off-axis | (dBi) | 21.0 |
| Required C/N | (dB) | 0.0 |
| Required C/I | (dB) | 14.0 |
| Interference analysis | | |
| Calculated C/I | (dB) | 14.4 |
| Margin | (dB) | 0.4 |

Table 17-134. Interference assessment of SES-4 communication carrier (54M0G7W) into NSS-5 Telemetry carrier

| SES-4 - 54M0G7W | | |
|--------------------------------|----------|------------|
| downlink EIRP density (peak) | (dBW/Hz) | -35.0 |
| downlink EIRP over 25 kHz | (dBW) | 9.0 |
| NSS-5 - Beacon carrier | | |
| Downlink EIRP (EOC) | (dBW) | 4.0 |
| Receive earth station size | (m) | 3.7 |
| Receive earth station gain | (dBi) | 41.9 |
| Receive earth station off-axis | (dBi) | 21.0 |
| Required C/N | (dB) | 0.0 |
| Required C/I | (dB) | 14.0 |
| Interference analysis | | |
| Calculated C/I | (dB) | 15.9 |
| Margin | (dB) | 1.9 |

Table 17-135. Interference assessment of SES-4 communication carrier (54M0G7W) into NSS-5 Beacon carrier

It can be seen that all the C/I margins in Tables 17-133, 17-134 and 17-135 are positive.

17.7 Analysis of the interference of the SES-4 TT&C carriers into the NSS-5 Communication carriers

Table 17-136 shows the TT&C carrier frequencies of SES-4 at 22° W.L. together with an assessment of whether there would be a frequency overlap, and possible interference into NSS-5 communication carriers.

| Satellite | Carrier name | Channel ID (from Sched. S) | Frequency (MHz) | Polarisation | BW (kHz) | Overlap with NSS-5 communication carriers |
|-----------|-----------------|-------------------------------|--------------------|--------------|-------------|--|
| SES-4 | Telecommand 1 | CM1 | 14496.0 | RHCP | 800 | Yes |
| | Telecommand 2 | CM2 | 14499.0 | RHCP | 800 | No |
| | Telemetry 1 | TM1 | 11451.0 | RHCP | 300 | No |
| | Telemetry 2 | TM2 | 11454.0 | RHCP | 300 | No |
| | Telemetry 3 | TM3 | 12500.5 | LHCP | 300 | No |
| | Telemetry 4 | TM4 | 12502.0 | LHCP | 300 | No |
| | Beacon 1 | BNK1 | 11451.0 | RHCP | 25 | No |
| | Beacon 2 | BNK2 | 11454.0 | RHCP | 25 | No |
| | Beacon 3 | BNK3 | 12500.5 | LHCP | 25 | No |
| | Beacon 4 | BNK4 | 12502.0 | LHCP | 25 | No |
| | Tracking Beacon | BNC1 | 4199.75 | V | 25 | No |

Table 17-136. Overview of the TT&C carrier frequencies of SES-4 at 22° W.L. together with an assessment of whether there would be a frequency overlap, and possible interference into NSS-5 communication carriers at 20° W.L.

The only occurrence of frequency overlap between a SES-4 TT&C carrier and an NSS-5 communication carrier is for an overlap between the SES-4 Telecommand1 carrier at 14496 MHz (RHCP) with the NSS-5 SPOT/GLB 41MHz transponder connectivity. This is a 41 MHz transponder with center uplink in Ku-band SPOT at 14477.5 MHz (and cross-strapped into C-band GLB at 4177.5 MHz). It should be noted that the SPOT on NSS-5 is operating in linear polarization, whereas the Telecommand carrier on SES-4 is operating in circular polarization. Table 17-137 below provides the interference calculations for the SES-4 Telecommand carrier into the NSS-5 communication carrier. An advantage of 1.7dB was taken into account for the fact that both carriers operate in different polarizations. Further, the power levels for the SES-4 Telecommand carrier have been adjusted for the cases where the bandwidth of the NSS-5 communication carrier was smaller than 800 kHz.

| SES-4 - Telecommand crx | | | | | | | |
|--------------------------|-------------|------------|-------------|------------|------------|-------------|--|
| input power | (dBW) | 19.0 | | | | | |
| Off-axis EIRP | (dBW) | 40.0 | | | | | |
| NSS-5 - Communcation crx | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | |
| uplink EIRP | (dBW) | 52.4 | 55.3 | 61.4 | 64.0 | 73.9 | |
| Required C/I | (dB) | 18.2 | 21.5 | 21.5 | 19.1 | 19.1 | |
| Interference analysis | | | | | | | |
| C/I without adjustments | (dB) | 12.4 | 15.3 | 21.4 | 24.0 | 33.9 | |
| Bandwidth adjustment | (dB) | 4.9 | 3.7 | 0.0 | 0.0 | 0.0 | |
| Polarisation adjustment | (dB) | 1.7 | 1.7 | 1.7 | 1.7 | 1.7 | |
| C/I total | (dB) | 19.1 | 20.7 | 23.1 | 25.7 | 35.6 | |
| Margin | (dB) | 0.9 | -0.8 | 1.6 | 6.6 | 16.5 | |

Table 17-137. Interference calculations for the SES-4 Telecommand carrier (CM1) into the NSS-5 communication carrier (SPOT/GLB)

The C/I margins in Table 17-137 are all positive except for the case of NSS-5 carrier 416KG7W. In this case the C/I margin is 0.8 dB negative. This negative margin is

however negligible. Further, the coordination between the TT&C carriers of SES-4 and the communication carriers of NSS-5 has been completed.

17.8 Analysis of the interference of the SES-4 TT&C carriers into the communication and TT&C carriers of a hypothetical satellite at 24°W.L. having the same transmission parameters as the NSS-703 satellite

It is assumed that SES-4 has a hypothetical neighbor at an orbital separation of 2°, with the same TT&C transmission parameters as the SES-4 satellite. The interference between the two systems then is only in the TT&C carriers. Table 17-138 shows the interference analysis for the telecommand carriers whereas Table 17-139 shows the interference analyses for the telemetry and beacon carriers. All C/I margins in the analyses are positive.

| SES-4 CM1 | | |
|-------------------------------------|-------------|-------------|
| input power | (dBW) | 19.0 |
| Off-axis EIRP | (dBW) | 40.0 |
| Hypothetical satellite - CM1 | | |
| uplink EIRP | (dBW) | 83.0 |
| required C/N | (dB) | 10.0 |
| Required C/I | (dB) | 24.0 |
| Interference analysis | | |
| C/I total | (dB) | 43.0 |
| Margin | (dB) | 19.0 |

Table 17-138. Interference calculations for the SES-4 telecommand carrier into the hypothetical satellite telecommand carrier

| SES-4 | | TM1 | BNK1 | BNC1 |
|--------------------------------|-------|-------------|------------|------------|
| downlink EIRP | (dBW) | 8.0 | 8.0 | 5.0 |
| Hypothetical satellite | | TM1 | BNK1 | BNC1 |
| Downlink EIRP (EOC) | (dBW) | 8.0 | 8.0 | 5.0 |
| Receive earth station size | (m) | 9.0 | 2.4 | 3.7 |
| Receive earth station gain | (dBi) | 58.8 | 44.8 | 41.9 |
| Receive earth station off-axis | (dBi) | 21.0 | 21.0 | 21.0 |
| Required C/N | (dB) | 0.0 | 0.0 | 0.0 |
| Required C/I | (dB) | 14.0 | 14.0 | 14.0 |
| Interference analysis | | | | |
| Calculated C/I | (dB) | 37.8 | 23.8 | 20.9 |
| Margin | (dB) | 23.8 | 9.8 | 6.9 |

Table 17-139. Interference calculations for the SES-4 telemetry and beacon carrier into the hypothetical satellite telemetry and beacon carrier

18. Orbital Debris Mitigation

SES WORLD SKIES has reviewed orbit debris mitigation for all satellites in its fleet, including the SES-4 spacecraft. SES WORLD SKIES' policy is to incorporate these objectives, as appropriate, into its test plan, including a formal analysis of orbital debris risks associated with the TT&C, propulsion, and power generation and storage systems.

Spacecraft Hardware Design

SES WORLD SKIES has assessed and limited the amount of debris released in a planned manner during normal operations. SES-4 will not be a source of debris during drift or operating mode, as SES WORLD SKIES does not intend to release debris during the planned course of operations of the satellite.

SES WORLD SKIES has also assessed and limited the possibility of SES-4 becoming a source of debris by collisions with small debris or meteoroids that could cause loss of control of the spacecraft and prevent post-mission disposal. Specifically, the SES-4 satellite has been designed and constructed in a manner that incorporates redundancy, shielding, separation of components, and other physical characteristics into the satellite's design. For example, omni-directional antennas are mounted on opposite sides of the

spacecraft, and either will be sufficient to support orbit raising. The command receivers and decoders, telemetry encoders and transmitters, and the bus control electronics are fully redundant, physically separated, and located within a shielded area to minimize the probability of the spacecraft becoming a source of debris due to a collision.

Minimizing Accidental Explosions

SES WORLD SKIES has assessed and limited the probability of accidental explosion during and after completion of mission operations. The key areas reviewed for this purpose included leakage of propellant and mixing of fuel and oxidizer as well as battery pressure vessels. The basic propulsion design (including component and functional redundancy, and the placement of fuel tanks inside a central cylinder which provides a high level of shielding), propulsion subsystem component construction, preflight verification through both proof testing and analysis, and quality standards have been designed to ensure a very low risk of propellant leakage and fuel and oxidizer mixing that can result in subsequent explosions. During the mission, batteries and various critical areas of the propulsion subsystem will be continually monitored (for both pressure and temperature) to preclude conditions that could result in the remote possibility of explosion and subsequent generation of debris.

After SES-4 reaches its final disposal orbit, all on-board sources of stored energy will be depleted, all residual fuel will be depleted, all fuel line valves will be left "open," all batteries will be left in a permanent discharge state, and all pressurized systems will be vented. The solar cells will also be slewed away from the sun to minimize power generation.

Through this process, SES WORLD SKIES has assessed and limited the possibility of accidental explosions during and after completion of mission operations and will assure that all stored energy at the end of the satellite's operation will be removed.

Safe Flight Profiles

SES WORLD SKIES has assessed and limited the probability of SES-4 becoming a source of debris by collisions with large debris or other operational space stations through detailed and conscientious mission planning. SES WORLD SKIES has reviewed the list of licensed systems and systems that are under consideration by the Commission for the nominal 22° W.L. orbital location where SES-4 will operate. In addition, in order to address non-U.S. licensed systems, SES WORLD SKIES has reviewed the list of satellite networks in the vicinity of 22° W.L. for which a request for coordination has been submitted to the ITU. Only those networks that are operating, or are planned to be operating, within $\pm 0.2^\circ$ have been taken into account in this review.

SES WORLD SKIES has determined that no system is under consideration or has been licensed by the Commission, or is currently operating, at the nominal 22° W.L. location, except for the NSS-7 satellite. Also, with the exception of the filings made by SES WORLD SKIES, the company is not aware of any system with an overlapping station-keeping volume with SES-4, that is the subject of an ITU filing and that is either in orbit or progressing towards launch. SES WORLD SKIES therefore concludes that physical coordination of SES-4 with another operator will not be required at the present time.

With respect to the NSS-7 satellite, which is currently located at 22.0° W.L., that satellite will be moved to another location once SES-4 has arrived on station and traffic transfer is complete. At that time, SES-4 will assume the station-keeping box currently occupied by NSS-7. During the brief period in which communication traffic is being transferred from NSS-7 to SES-4, SES WORLD SKIES will take all the necessary steps, e.g., execute a “pass-in-the-night-maneuver” or temporarily offset the orbital location of

NSS-7 and/or SES-4 (with Commission authorization, where necessary), to minimize the risk of collision between the two spacecraft.

Post-Mission Disposal

Consistent with the requirements of Section 25.283(a) of the Commission's rules, at the end of the operational life of the satellite, SES WORLD SKIES will maneuver SES-4 into a disposal orbit with an altitude no less than that calculated using the IADC formula:

$$36,021 \text{ km} + (1000 \cdot \text{CR} \cdot \text{A}/\text{m}).$$

The calculated value of CRA/m in this instance is based on the following parameters:

$$\text{CR} = \text{Solar Pressure Radiation Coefficient} = 1.20$$

$$\text{A} = \text{Total Solar Pressure Area} = 115 \text{ m}^2$$

$$\text{M} = \text{Dry Mass of Satellite} = 3073.3 \text{ kg}$$

Using these values in the IADC formula results in a minimum de-orbit altitude of 36066 km, or approximately 280 km above geosynchronous altitude. To provide adequate margin, the nominal disposal orbit will be increased above this calculated value to a value of 300 km. Approximately 31.6 kg of propellant will be allocated and reserved for final orbit raising maneuvers to this altitude. This value was determined through a detailed Proton/M-Breeze M propellant budget analysis. In addition, SES WORLD SKIES has assessed fuel gauging uncertainty and this budgeted propellant provides an adequate margin of fuel reserve to ensure that the disposal orbit will be achieved despite such uncertainty.

APPENDIX A

Link Budget Analysis

| Link Parameters | Units | WH/WH 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.1 | 55.0 | 61.0 | 65.9 | 76.5 | 78.1 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dBi | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | 0.9 | 7.9 | 6.1 | 14.8 | 20.2 | 21.8 |
| Free Space Loss | dB | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 |
| G/T Satellite | dB/K | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 |
| C/N Thermal Uplink | dB | 23.4 | 25.1 | 25.1 | 23.5 | 27.2 | 28.0 |
| C/I XPOL, ACI, IM, ASI | dB | 16.0 | 17.7 | 17.7 | 16.1 | 19.8 | 20.6 |
| C/(N+I) uplink | dB | 15.3 | 16.9 | 16.9 | 15.4 | 19.1 | 19.9 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 13.3 | 16.2 | 22.2 | 27.1 | 36.7 | 37.4 |
| Maximum e.i.r.p. density | dBW/4kHz | -1.8 | -0.2 | -0.2 | -1.7 | 1.0 | 13.4 |
| Free Space Loss | dB | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 |
| Earth Station Diameter | m | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dBi | 41.6 | 41.6 | 41.6 | 41.6 | 41.6 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 21.8 | 21.8 | 21.8 | 21.8 | 21.8 |
| C/N Thermal Downlink | dB | 13.9 | 15.5 | 15.5 | 13.9 | 16.6 | 16.5 |
| C/I XPOL, ACI, IM, ASI | dB | 13.8 | 15.5 | 15.5 | 13.9 | 16.6 | 16.4 |
| C/(N+I) downlink | dB | 10.8 | 12.5 | 12.5 | 10.9 | 13.6 | 13.4 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 19.0 | 20.7 | 20.7 | 19.1 | 22.8 | 23.6 |
| C/I dn (single satellite) | dB | 16.8 | 18.5 | 18.5 | 16.9 | 19.6 | 19.4 |
| Aggregate C/I up | dB | 16.0 | 17.7 | 17.7 | 16.1 | 19.8 | 20.6 |
| Aggregate C/I down | dB | 13.8 | 15.5 | 15.5 | 13.9 | 16.6 | 16.4 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 9.5 | 11.2 | 11.2 | 9.6 | 12.5 | 12.6 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 3.5 | 1.9 | 1.9 | 2.7 | 5.6 | 2.6 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 43 | 45 |

TABLE A-1. LINK BUDGET, WEST HEMI/WEST HEMI, 36 MHz TRANSPONDER

| | | WH/WH 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.2 | 54.5 | 59.3 | 65.7 | 77.9 | 78.1 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | 0.0 | 7.5 | 4.5 | 14.6 | 21.6 | 21.8 |
| Free Space Loss | dB | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 |
| G/T Satellite | dB/K | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 |
| C/N Thermal Uplink | dB | 22.5 | 24.6 | 23.4 | 23.3 | 26.8 | 28.0 |
| C/I XPOL, ACI, IM, ASI | dB | 15.1 | 17.2 | 16.1 | 15.9 | 19.4 | 20.6 |
| C/(N+I) uplink | dB | 14.4 | 16.5 | 15.3 | 15.2 | 18.7 | 19.9 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 12.4 | 15.7 | 20.6 | 26.9 | 38.1 | 37.4 |
| Maximum e.i.r.p. density | dBW/4kHz | -2.7 | -0.6 | -1.8 | -1.9 | 0.6 | 13.4 |
| Free Space Loss | dB | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 |
| Earth Station Diameter | m | 3.8 | 3.8 | 4.5 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.6 | 41.6 | 43.1 | 41.6 | 41.6 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 21.8 | 23.3 | 21.8 | 21.8 | 21.8 |
| C/N Thermal Downlink | dB | 13.0 | 15.1 | 15.4 | 13.8 | 16.3 | 16.5 |
| C/I XPOL, ACI, IM, ASI | dB | 12.9 | 15.0 | 15.3 | 13.7 | 16.2 | 16.4 |
| C/(N+I) downlink | dB | 10.0 | 12.1 | 12.3 | 10.7 | 13.2 | 13.4 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 18.1 | 20.2 | 19.1 | 18.9 | 22.4 | 23.6 |
| C/I dn (single satellite) | dB | 15.9 | 18.0 | 18.3 | 16.7 | 19.2 | 19.4 |
| Aggregate C/I up | dB | 15.1 | 17.2 | 16.1 | 15.9 | 19.4 | 20.6 |
| Aggregate C/I down | dB | 12.9 | 15.0 | 15.3 | 13.7 | 16.2 | 16.4 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 8.6 | 10.7 | 10.6 | 9.4 | 12.2 | 12.6 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 2.6 | 1.5 | 1.3 | 2.5 | 5.2 | 2.6 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 3 | 7 |
| 40 | 42 |

TABLE A-2. LINK BUDGET, WEST HEMI/WEST HEMI, 54 MHz TRANSPONDER

| Link Parameters | Units | WH/WH 72MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 72M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 72000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 50.5 | 52.8 | 58.8 | 64.6 | 78.0 | 72.0 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | -0.7 | 5.7 | 3.9 | 13.4 | 21.6 | 15.7 |
| Free Space Loss | dB | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 |
| G/T Satellite | dB/K | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 |
| C/N Thermal Uplink | dB | 21.8 | 22.9 | 22.9 | 22.2 | 25.4 | 21.9 |
| C/I XPOL, ACI, IM, ASI | dB | 14.4 | 15.5 | 15.5 | 14.8 | 18.0 | 16.5 |
| C/(N+I) uplink | dB | 13.7 | 14.8 | 14.8 | 14.1 | 17.3 | 15.4 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 11.7 | 14.0 | 20.0 | 25.8 | 38.2 | 34.2 |
| Maximum e.i.r.p. density | dBW/4kHz | -3.4 | -2.3 | -2.3 | -3.0 | -0.8 | 10.2 |
| Free Space Loss | dB | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 7.2 | 4.5 |
| Earth Station Gain | dB | 41.6 | 43.1 | 43.1 | 41.6 | 47.1 | 43.1 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 23.3 | 23.3 | 21.8 | 27.4 | 23.3 |
| C/N Thermal Downlink | dB | 12.3 | 14.8 | 14.8 | 12.6 | 20.4 | 14.8 |
| C/I XPOL, ACI, IM, ASI | dB | 12.2 | 14.8 | 14.8 | 12.6 | 20.4 | 17.7 |
| C/(N+I) downlink | dB | 9.2 | 11.8 | 11.8 | 9.6 | 17.4 | 13.0 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -44 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -37 |
| C/I up (single satellite) | dB | 17.4 | 18.5 | 18.5 | 17.8 | 21.0 | 19.5 |
| C/I dn (single satellite) | dB | 15.2 | 17.8 | 17.8 | 15.6 | 23.4 | 20.7 |
| Aggregate C/I up | dB | 14.4 | 15.5 | 15.5 | 14.8 | 18.0 | 16.5 |
| Aggregate C/I down | dB | 12.2 | 14.8 | 14.8 | 12.6 | 20.4 | 17.7 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 7.9 | 10.0 | 10.0 | 8.3 | 14.3 | 11.0 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 12.7 | 10.0 |
| System Margin | dB | 1.9 | 0.7 | 0.7 | 1.4 | 1.6 | 1.0 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 1 | 2 |
| 38 | 39 |

TABLE A-3. LINK BUDGET, WEST HEMI/WEST HEMI, 72 MHz TRANSPONDER

| Link Parameters | Units | EH/WH 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.3 | 54.9 | 60.9 | 67.0 | 76.4 | 75.7 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dBi | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | 1.1 | 7.8 | 6.0 | 15.9 | 20.1 | 19.3 |
| Free Space Loss | dB | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 |
| G/T Satellite | dB/K | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 |
| C/N Thermal Uplink | dB | 22.7 | 24.0 | 24.0 | 23.7 | 26.1 | 24.6 |
| C/I XPOL, ACI, IM, ASI | dB | 16.3 | 17.6 | 17.6 | 17.2 | 19.7 | 18.2 |
| C/(N+I) uplink | dB | 15.4 | 16.7 | 16.7 | 16.3 | 18.8 | 17.3 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 13.6 | 16.2 | 22.2 | 28.4 | 36.8 | 37.0 |
| Maximum e.i.r.p. density | dBW/4kHz | -1.4 | -0.1 | -0.1 | -0.5 | 1.0 | 13.0 |
| Free Space Loss | dB | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 |
| Earth Station Diameter | m | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dBi | 41.6 | 41.6 | 41.6 | 41.6 | 41.6 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 21.8 | 21.8 | 21.8 | 21.8 | 21.8 |
| C/N Thermal Downlink | dB | 14.3 | 15.6 | 15.6 | 15.2 | 16.7 | 16.2 |
| C/I XPOL, ACI, IM, ASI | dB | 14.2 | 15.5 | 15.5 | 15.2 | 16.6 | 16.1 |
| C/(N+I) downlink | dB | 11.2 | 12.5 | 12.5 | 12.2 | 13.6 | 13.1 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 19.3 | 20.6 | 20.6 | 20.2 | 22.7 | 21.2 |
| C/I dn (single satellite) | dB | 17.2 | 18.5 | 18.5 | 18.2 | 19.6 | 19.1 |
| Aggregate C/I up | dB | 16.3 | 17.6 | 17.6 | 17.2 | 19.7 | 18.2 |
| Aggregate C/I down | dB | 14.2 | 15.5 | 15.5 | 15.2 | 16.6 | 16.1 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 9.8 | 11.1 | 11.1 | 10.8 | 12.5 | 11.7 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 3.8 | 1.9 | 1.9 | 3.9 | 5.6 | 1.7 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 51 | 53 |

TABLE A-4. LINK BUDGET, EAST HEMI/WEST HEMI, 36 MHz TRANSPONDER

| Link Parameters | Units | EH/WH 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.4 | 54.4 | 59.3 | 65.4 | 77.7 | 75.7 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | 0.3 | 7.4 | 4.4 | 14.3 | 21.4 | 19.3 |
| Free Space Loss | dB | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 |
| G/T Satellite | dB/K | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 |
| C/N Thermal Uplink | dB | 21.8 | 23.6 | 22.4 | 22.1 | 25.7 | 24.6 |
| C/I XPOL, ACI, IM, ASI | dB | 15.4 | 17.2 | 16.0 | 15.6 | 19.3 | 18.2 |
| C/(N+I) uplink | dB | 14.5 | 16.3 | 15.1 | 14.7 | 18.4 | 17.3 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 12.8 | 15.8 | 20.7 | 26.8 | 38.1 | 37.0 |
| Maximum e.i.r.p. density | dBW/4kHz | -2.3 | -0.5 | -1.7 | -2.1 | 0.6 | 13.0 |
| Free Space Loss | dB | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 |
| Earth Station Diameter | m | 3.8 | 3.8 | 4.5 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.6 | 41.6 | 43.1 | 41.6 | 41.6 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 21.8 | 23.3 | 21.8 | 21.8 | 21.8 |
| C/N Thermal Downlink | dB | 13.4 | 15.2 | 15.5 | 13.6 | 16.3 | 16.2 |
| C/I XPOL, ACI, IM, ASI | dB | 13.3 | 15.1 | 15.4 | 13.6 | 16.2 | 16.1 |
| C/(N+I) downlink | dB | 10.4 | 12.1 | 12.4 | 10.6 | 13.2 | 13.1 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 18.4 | 20.2 | 19.0 | 18.6 | 22.3 | 21.2 |
| C/I dn (single satellite) | dB | 16.3 | 18.1 | 18.4 | 16.6 | 19.2 | 19.1 |
| Aggregate C/I up | dB | 15.4 | 17.2 | 16.0 | 15.6 | 19.3 | 18.2 |
| Aggregate C/I down | dB | 13.3 | 15.1 | 15.4 | 13.6 | 16.2 | 16.1 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 9.0 | 10.7 | 10.6 | 9.2 | 12.1 | 11.7 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 3.0 | 1.5 | 1.3 | 2.3 | 5.2 | 1.7 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 10 | 14 |
| 48 | 50 |

TABLE A-5. LINK BUDGET, EAST HEMI/WEST HEMI, 54 MHz TRANSPONDER

| Link Parameters | Units | EH/WH 72MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 72M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 72000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 50.1 | 52.8 | 58.8 | 64.4 | 77.9 | 71.9 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | -1.1 | 5.8 | 4.0 | 13.3 | 21.5 | 15.5 |
| Free Space Loss | dB | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 |
| G/T Satellite | dB/K | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 |
| C/N Thermal Uplink | dB | 20.5 | 22.0 | 22.0 | 21.0 | 24.3 | 20.8 |
| C/I XPOL, ACI, IM, ASI | dB | 14.0 | 15.6 | 15.6 | 14.6 | 17.9 | 16.3 |
| C/(N+I) uplink | dB | 13.2 | 14.7 | 14.7 | 13.7 | 17.0 | 15.0 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 11.4 | 14.2 | 20.2 | 25.8 | 38.2 | 34.2 |
| Maximum e.i.r.p. density | dBW/4kHz | -3.6 | -2.1 | -2.1 | -3.1 | -0.8 | 10.2 |
| Free Space Loss | dB | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 | 195.7 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 7.2 | 4.5 |
| Earth Station Gain | dB | 41.6 | 43.1 | 43.1 | 41.6 | 47.1 | 43.1 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 23.3 | 23.3 | 21.8 | 27.4 | 23.3 |
| C/N Thermal Downlink | dB | 12.0 | 15.0 | 15.0 | 12.6 | 20.5 | 14.8 |
| C/I XPOL, ACI, IM, ASI | dB | 12.0 | 15.0 | 15.0 | 12.5 | 20.4 | 17.8 |
| C/(N+I) downlink | dB | 9.0 | 12.0 | 12.0 | 9.6 | 17.4 | 13.0 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -44 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -37 |
| C/I up (single satellite) | dB | 17.0 | 18.6 | 18.6 | 17.6 | 20.9 | 19.3 |
| C/I dn (single satellite) | dB | 15.0 | 18.0 | 18.0 | 15.5 | 23.4 | 20.8 |
| Aggregate C/I up | dB | 14.0 | 15.6 | 15.6 | 14.6 | 17.9 | 16.3 |
| Aggregate C/I down | dB | 12.0 | 15.0 | 15.0 | 12.5 | 20.4 | 17.8 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 7.6 | 10.1 | 10.1 | 8.1 | 14.2 | 10.9 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 12.7 | 10.0 |
| System Margin | dB | 1.6 | 0.8 | 0.8 | 1.2 | 1.5 | 0.9 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 8 | 9 |
| 46 | 47 |

TABLE A-6. LINK BUDGET, EAST HEMI/WEST HEMI, 72 MHz TRANSPONDER

| | | EU/WH 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.161 | 14.161 | 14.161 | 14.161 | 14.161 | 14.161 |
| Downlink Frequency | GHz | 3.871 | 3.871 | 3.871 | 3.871 | 3.871 | 3.871 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.1 | 54.8 | 60.8 | 66.9 | 80.3 | 79.3 |
| Earth Station Diameter | m | 3.8 | 3.8 | 3.8 | 3.8 | 4.5 | 4.5 |
| Earth Station Gain | dB | 53.1 | 53.1 | 53.1 | 53.1 | 54.6 | 54.6 |
| Uplink Input Power per Carrier | dBW | -1.0 | 1.7 | 7.8 | 13.8 | 25.7 | 24.7 |
| Free Space Loss | dB | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 |
| G/T Satellite | dB/K | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 |
| C/N Thermal Uplink | dB | 17.3 | 18.7 | 18.7 | 18.2 | 23.0 | 22.9 |
| C/I XPOL, ACI, IM, ASI | dB | 24.1 | 25.5 | 25.5 | 25.0 | 29.8 | 29.8 |
| C/(N+I) uplink | dB | 16.4 | 17.9 | 17.9 | 17.4 | 22.1 | 22.1 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 12.0 | 14.7 | 20.7 | 26.8 | 38.2 | 37.2 |
| Maximum e.i.r.p. density | dBW/4kHz | -3.1 | -1.6 | -1.6 | -2.1 | 0.6 | 13.2 |
| Free Space Loss | dB | 196.0 | 196.0 | 196.0 | 196.0 | 196.0 | 196.0 |
| Earth Station Diameter | m | 3.8 | 5.6 | 5.6 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.9 | 45.2 | 45.2 | 41.9 | 41.9 | 41.9 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 22.1 | 25.5 | 25.5 | 22.1 | 22.1 | 22.1 |
| C/N Thermal Downlink | dB | 12.6 | 17.4 | 17.4 | 13.6 | 16.3 | 16.3 |
| C/I XPOL, ACI, IM, ASI | dB | 12.9 | 17.7 | 17.7 | 13.8 | 16.6 | 16.5 |
| C/(N+I) downlink | dB | 9.7 | 14.6 | 14.6 | 10.7 | 13.4 | 13.4 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 27.1 | 28.5 | 28.5 | 28.0 | 32.8 | 32.8 |
| C/I dn (single satellite) | dB | 15.9 | 20.7 | 20.7 | 16.8 | 19.6 | 19.5 |
| Aggregate C/I up | dB | 24.1 | 25.5 | 25.5 | 25.0 | 29.8 | 29.8 |
| Aggregate C/I down | dB | 12.9 | 17.7 | 17.7 | 13.8 | 16.6 | 16.5 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 8.9 | 12.9 | 12.9 | 9.9 | 12.9 | 12.9 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 2.9 | 3.6 | 3.6 | 3.0 | 6.0 | 2.9 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 15 | 17 |

TABLE A-7. LINK BUDGET, EUROPE/WEST HEMI, 54 MHz TRANSPONDER

| | | WA/WH 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.161 | 14.161 | 14.161 | 14.161 | 14.161 | 14.161 |
| Downlink Frequency | GHz | 3.871 | 3.871 | 3.871 | 3.871 | 3.871 | 3.871 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 55.4 | 57.8 | 63.9 | 70.2 | 82.1 | 81.0 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 7.2 | 7.2 |
| Earth Station Gain | dB | 53.1 | 54.6 | 54.6 | 53.1 | 58.7 | 58.7 |
| Uplink Input Power per Carrier | dBW | 2.4 | 3.3 | 9.3 | 17.1 | 23.4 | 22.3 |
| Free Space Loss | dB | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 |
| G/T Satellite | dB/K | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 |
| C/N Thermal Uplink | dB | 20.2 | 21.3 | 21.3 | 21.2 | 24.4 | 24.2 |
| C/I XPOL, ACI, IM, ASI | dB | 27.4 | 28.6 | 28.6 | 28.4 | 31.6 | 31.5 |
| C/(N+I) uplink | dB | 19.4 | 20.6 | 20.6 | 20.4 | 23.6 | 23.5 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 12.5 | 14.9 | 21.0 | 27.3 | 38.2 | 37.1 |
| Maximum e.i.r.p. density | dBW/4kHz | -2.5 | -1.4 | -1.4 | -1.5 | 0.7 | 13.1 |
| Free Space Loss | dB | 196.0 | 196.0 | 196.0 | 196.0 | 196.0 | 196.3 |
| Earth Station Diameter | m | 3.8 | 5.6 | 5.6 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.9 | 45.2 | 45.2 | 41.9 | 41.9 | 41.9 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 22.1 | 25.5 | 25.5 | 22.1 | 22.1 | 22.1 |
| C/N Thermal Downlink | dB | 13.2 | 17.7 | 17.7 | 14.1 | 16.3 | 16.0 |
| C/I XPOL, ACI, IM, ASI | dB | 13.4 | 17.9 | 17.9 | 14.4 | 16.6 | 16.5 |
| C/(N+I) downlink | dB | 10.3 | 14.8 | 14.8 | 11.2 | 13.4 | 13.2 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 30.4 | 31.6 | 31.6 | 31.4 | 34.6 | 34.5 |
| C/I dn (single satellite) | dB | 16.4 | 20.9 | 20.9 | 17.4 | 19.6 | 19.5 |
| Aggregate C/I up | dB | 27.4 | 28.6 | 28.6 | 28.4 | 31.6 | 31.5 |
| Aggregate C/I down | dB | 13.4 | 17.9 | 17.9 | 14.4 | 16.6 | 16.5 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 9.8 | 13.8 | 13.8 | 10.7 | 13.0 | 12.8 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 3.8 | 4.5 | 4.5 | 3.8 | 6.1 | 2.8 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 54 | 56 |

TABLE A-8. LINK BUDGET, WEST AFRICA/WEST HEMI, 54 MHz TRANSPONDER

| | | GL/GL 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 6.325 | 6.325 | 6.325 | 6.325 | 6.325 | 6.325 |
| Downlink Frequency | GHz | 4.100 | 4.100 | 4.100 | 4.100 | 4.100 | 4.100 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 53.6 | 57.1 | 63.2 | 68.3 | 79.1 | 80.2 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.7 | 47.6 | 55.4 | 51.7 | 56.8 | 56.9 |
| Uplink Input Power per Carrier | dBW | 2.0 | 9.6 | 7.8 | 16.7 | 22.3 | 23.3 |
| Free Space Loss | dB | 200.6 | 200.6 | 200.6 | 200.6 | 200.6 | 200.7 |
| G/T Satellite | dB/K | -10.6 | -10.6 | -10.6 | -10.6 | -10.6 | -10.6 |
| C/N Thermal Uplink | dB | 16.9 | 19.2 | 19.2 | 17.8 | 21.7 | 21.9 |
| C/I XPOL, ACI, IM, ASI | dB | 17.6 | 19.9 | 19.9 | 18.5 | 22.4 | 22.7 |
| C/(N+I) uplink | dB | 14.2 | 16.5 | 16.5 | 15.1 | 19.0 | 19.2 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 10.0 | 13.6 | 19.6 | 24.8 | 33.6 | 33.6 |
| Maximum e.i.r.p. density | dBW/4kHz | -5.0 | -2.8 | -2.8 | -4.1 | -2.2 | 9.6 |
| Free Space Loss | dB | 196.9 | 196.9 | 196.9 | 196.9 | 196.9 | 197.0 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 3.8 | 4.5 |
| Earth Station Gain | dB | 42.4 | 43.8 | 43.8 | 42.4 | 42.4 | 43.8 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 22.6 | 24.1 | 24.1 | 22.6 | 22.6 | 24.1 |
| C/N Thermal Downlink | dB | 10.3 | 14.0 | 14.0 | 11.2 | 13.1 | 13.7 |
| C/I XPOL, ACI, IM, ASI | dB | 11.4 | 15.1 | 15.1 | 12.3 | 14.2 | 14.9 |
| C/(N+I) downlink | dB | 7.8 | 11.5 | 11.5 | 8.7 | 10.6 | 11.3 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 20.6 | 22.9 | 22.9 | 21.5 | 25.4 | 25.7 |
| C/I dn (single satellite) | dB | 14.4 | 18.1 | 18.1 | 15.3 | 17.2 | 17.9 |
| Aggregate C/I up | dB | 17.6 | 19.9 | 19.9 | 18.5 | 22.4 | 22.7 |
| Aggregate C/I down | dB | 11.4 | 15.1 | 15.1 | 12.3 | 14.2 | 14.9 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 6.9 | 10.3 | 10.3 | 7.8 | 10.1 | 10.6 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 0.9 | 1.1 | 1.1 | 0.9 | 3.1 | 0.6 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 18 | 20 |
| 76 | 78 |

TABLE A-9. LINK BUDGET, GLOBAL/GLOBAL, 36 MHz TRANSPONDER

| | | WH/EH 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.6 | 55.5 | 61.5 | 66.9 | 77.0 | 75.0 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | 1.4 | 8.5 | 6.7 | 15.7 | 20.7 | 18.6 |
| Free Space Loss | dB | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 |
| G/T Satellite | dB/K | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 |
| C/N Thermal Uplink | dB | 24.0 | 25.6 | 25.6 | 24.4 | 27.7 | 24.8 |
| C/I XPOL, ACI, IM, ASI | dB | 16.6 | 18.2 | 18.2 | 17.1 | 20.3 | 17.4 |
| C/(N+I) uplink | dB | 15.8 | 17.5 | 17.5 | 16.3 | 19.6 | 16.7 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 14.3 | 17.2 | 23.3 | 28.6 | 36.7 | 36.7 |
| Maximum e.i.r.p. density | dBW/4kHz | -0.8 | 0.9 | 0.9 | -0.3 | 1.0 | 12.7 |
| Free Space Loss | dB | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 |
| Earth Station Diameter | m | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.6 | 41.6 | 41.6 | 41.6 | 41.6 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 21.8 | 21.8 | 21.8 | 21.8 | 21.8 |
| C/N Thermal Downlink | dB | 15.3 | 17.0 | 17.0 | 15.8 | 17.0 | 16.2 |
| C/I XPOL, ACI, IM, ASI | dB | 14.9 | 16.5 | 16.5 | 15.3 | 16.6 | 15.7 |
| C/(N+I) downlink | dB | 12.1 | 13.7 | 13.7 | 12.5 | 13.8 | 12.9 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 19.6 | 21.2 | 21.2 | 20.1 | 23.3 | 20.4 |
| C/I dn (single satellite) | dB | 17.9 | 19.5 | 19.5 | 18.3 | 19.6 | 18.7 |
| Aggregate C/I up | dB | 16.6 | 18.2 | 18.2 | 17.1 | 20.3 | 17.4 |
| Aggregate C/I down | dB | 14.9 | 16.5 | 16.5 | 15.3 | 16.6 | 15.7 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 10.5 | 12.2 | 12.2 | 11.0 | 12.8 | 11.4 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 4.5 | 3.0 | 3.0 | 4.1 | 5.9 | 1.4 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 62 | 64 |

TABLE A-10. LINK BUDGET, WEST HEMI/EAST HEMI, 36 MHz TRANSPONDER

| Link Parameters | Units | WH/EH 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.6 | 54.2 | 59.4 | 65.8 | 78.8 | 75.0 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | 0.4 | 7.1 | 4.5 | 14.7 | 22.5 | 18.6 |
| Free Space Loss | dB | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 |
| G/T Satellite | dB/K | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 |
| C/N Thermal Uplink | dB | 22.9 | 24.3 | 23.5 | 23.4 | 27.7 | 24.8 |
| C/I XPOL, ACI, IM, ASI | dB | 15.6 | 16.9 | 16.1 | 16.0 | 20.4 | 17.4 |
| C/(N+I) uplink | dB | 14.8 | 16.2 | 15.4 | 15.3 | 19.6 | 16.7 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 13.3 | 15.9 | 21.1 | 27.5 | 38.5 | 36.7 |
| Maximum e.i.r.p. density | dBW/4kHz | -1.8 | -0.4 | -1.2 | -1.3 | 1.0 | 12.7 |
| Free Space Loss | dB | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 |
| Earth Station Diameter | m | 3.8 | 3.8 | 4.5 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.6 | 41.6 | 43.1 | 41.6 | 41.6 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 21.8 | 23.3 | 21.8 | 21.8 | 21.8 |
| C/N Thermal Downlink | dB | 14.3 | 15.6 | 16.3 | 14.7 | 17.1 | 16.2 |
| C/I XPOL, ACI, IM, ASI | dB | 13.9 | 15.2 | 15.9 | 14.3 | 16.6 | 15.7 |
| C/(N+I) downlink | dB | 11.1 | 12.4 | 13.1 | 11.5 | 13.8 | 12.9 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 18.6 | 19.9 | 19.1 | 19.0 | 23.4 | 20.4 |
| C/I dn (single satellite) | dB | 16.9 | 18.2 | 18.9 | 17.3 | 19.6 | 18.7 |
| Aggregate C/I up | dB | 15.6 | 16.9 | 16.1 | 16.0 | 20.4 | 17.4 |
| Aggregate C/I down | dB | 13.9 | 15.2 | 15.9 | 14.3 | 16.6 | 15.7 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 9.5 | 10.9 | 11.1 | 10.0 | 12.8 | 11.4 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 3.5 | 1.6 | 1.8 | 3.1 | 5.9 | 1.4 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 23 | 27 |
| 59 | 61 |

TABLE A-11. LINK BUDGET, WEST HEMI/EAST HEMI, 54 MHz TRANSPONDER

| Link Parameters | Units | WH/EH 72MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 72M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 72000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 50.2 | 52.4 | 58.5 | 64.6 | 78.9 | 72.0 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | -0.9 | 5.4 | 3.6 | 13.4 | 22.6 | 15.7 |
| Free Space Loss | dB | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 |
| G/T Satellite | dB/K | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 |
| C/N Thermal Uplink | dB | 21.6 | 22.5 | 22.5 | 22.2 | 26.4 | 21.9 |
| C/I XPOL, ACI, IM, ASI | dB | 14.2 | 15.2 | 15.2 | 14.8 | 19.0 | 16.5 |
| C/(N+I) uplink | dB | 13.5 | 14.4 | 14.4 | 14.0 | 18.3 | 15.4 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 11.9 | 14.1 | 20.2 | 26.3 | 38.7 | 34.7 |
| Maximum e.i.r.p. density | dBW/4kHz | -3.1 | -2.2 | -2.2 | -2.6 | -0.3 | 10.7 |
| Free Space Loss | dB | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 7.2 | 3.8 |
| Earth Station Gain | dB | 41.6 | 43.1 | 43.1 | 41.6 | 47.1 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 23.3 | 23.3 | 21.8 | 27.4 | 21.8 |
| C/N Thermal Downlink | dB | 12.9 | 15.3 | 15.3 | 13.5 | 21.3 | 14.2 |
| C/I XPOL, ACI, IM, ASI | dB | 12.5 | 14.9 | 14.9 | 13.1 | 20.8 | 16.8 |
| C/(N+I) downlink | dB | 9.7 | 12.1 | 12.1 | 10.3 | 18.0 | 12.3 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -44 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -37 |
| C/I up (single satellite) | dB | 17.2 | 18.2 | 18.2 | 17.8 | 22.0 | 19.5 |
| C/I dn (single satellite) | dB | 15.5 | 17.9 | 17.9 | 16.1 | 23.8 | 19.8 |
| Aggregate C/I up | dB | 14.2 | 15.2 | 15.2 | 14.8 | 19.0 | 16.5 |
| Aggregate C/I down | dB | 12.5 | 14.9 | 14.9 | 13.1 | 20.8 | 16.8 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 8.2 | 10.1 | 10.1 | 8.7 | 15.1 | 10.6 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 12.7 | 10.0 |
| System Margin | dB | 2.2 | 0.9 | 0.9 | 1.8 | 2.4 | 0.6 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 21 | 22 |
| 57 | 58 |

TABLE A-12. LINK BUDGET, WEST HEMI/EAST HEMI, 72 MHz TRANSPONDER

| Link Parameters | Units | EH/EH 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.2 | 54.7 | 60.7 | 66.9 | 76.9 | 76.8 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dBi | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | 1.0 | 7.6 | 5.8 | 15.8 | 20.6 | 20.4 |
| Free Space Loss | dB | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 |
| G/T Satellite | dB/K | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 |
| C/N Thermal Uplink | dB | 22.6 | 23.8 | 23.8 | 23.6 | 26.6 | 25.7 |
| C/I XPOL, ACI, IM, ASI | dB | 16.1 | 17.4 | 17.4 | 17.1 | 20.2 | 19.2 |
| C/(N+I) uplink | dB | 15.3 | 16.5 | 16.5 | 16.2 | 19.3 | 18.4 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 14.0 | 16.5 | 22.5 | 28.8 | 36.8 | 36.6 |
| Maximum e.i.r.p. density | dBW/4kHz | -1.0 | 0.2 | 0.2 | -0.1 | 1.0 | 12.6 |
| Free Space Loss | dB | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 |
| Earth Station Diameter | m | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dBi | 41.6 | 41.6 | 41.6 | 41.6 | 41.6 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 21.8 | 21.8 | 21.8 | 21.8 | 21.8 |
| C/N Thermal Downlink | dB | 15.0 | 16.3 | 16.3 | 16.0 | 17.1 | 16.1 |
| C/I XPOL, ACI, IM, ASI | dB | 14.6 | 15.8 | 15.8 | 15.6 | 16.6 | 15.7 |
| C/(N+I) downlink | dB | 11.8 | 13.0 | 13.0 | 12.8 | 13.8 | 12.9 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 19.1 | 20.4 | 20.4 | 20.1 | 23.2 | 22.2 |
| C/I dn (single satellite) | dB | 17.6 | 18.8 | 18.8 | 18.6 | 19.6 | 18.7 |
| Aggregate C/I up | dB | 16.1 | 17.4 | 17.4 | 17.1 | 20.2 | 19.2 |
| Aggregate C/I down | dB | 14.6 | 15.8 | 15.8 | 15.6 | 16.6 | 15.7 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 10.2 | 11.4 | 11.4 | 11.1 | 12.8 | 11.8 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 4.2 | 2.2 | 2.2 | 4.2 | 5.8 | 1.8 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 70 | 72 |

TABLE A-13. LINK BUDGET, EAST HEMI/EAST HEMI, 36 MHz TRANSPONDER

| Link Parameters | Units | EH/EH 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.2 | 53.5 | 59.0 | 65.2 | 78.6 | 76.8 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | 0.0 | 6.4 | 4.1 | 14.1 | 22.3 | 20.4 |
| Free Space Loss | dB | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 |
| G/T Satellite | dB/K | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 |
| C/N Thermal Uplink | dB | 21.6 | 22.6 | 22.1 | 21.8 | 26.6 | 25.7 |
| C/I XPOL, ACI, IM, ASI | dB | 15.1 | 16.2 | 15.7 | 15.4 | 20.1 | 19.2 |
| C/(N+I) uplink | dB | 14.2 | 15.3 | 14.8 | 14.5 | 19.2 | 18.4 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 13.0 | 15.3 | 20.8 | 27.1 | 38.4 | 36.6 |
| Maximum e.i.r.p. density | dBW/4kHz | -2.0 | -1.0 | -1.5 | -1.8 | 0.9 | 12.6 |
| Free Space Loss | dB | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 |
| Earth Station Diameter | m | 3.8 | 3.8 | 4.5 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.6 | 41.6 | 43.1 | 41.6 | 41.6 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 21.8 | 23.3 | 21.8 | 21.8 | 21.8 |
| C/N Thermal Downlink | dB | 14.0 | 15.1 | 16.0 | 14.3 | 17.0 | 16.1 |
| C/I XPOL, ACI, IM, ASI | dB | 13.6 | 14.6 | 15.6 | 13.8 | 16.6 | 15.7 |
| C/(N+I) downlink | dB | 10.8 | 11.8 | 12.8 | 11.0 | 13.8 | 12.9 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 18.1 | 19.2 | 18.7 | 18.4 | 23.1 | 22.2 |
| C/I dn (single satellite) | dB | 16.6 | 17.6 | 18.6 | 16.8 | 19.6 | 18.7 |
| Aggregate C/I up | dB | 15.1 | 16.2 | 15.7 | 15.4 | 20.1 | 19.2 |
| Aggregate C/I down | dB | 13.6 | 14.6 | 15.6 | 13.8 | 16.6 | 15.7 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 9.2 | 10.2 | 10.7 | 9.4 | 12.7 | 11.8 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 3.2 | 1.0 | 1.4 | 2.5 | 5.8 | 1.8 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 30 | 34 |
| 67 | 69 |

TABLE A-14. LINK BUDGET, EAST HEMI/EAST HEMI, 54 MHz TRANSPONDER

| Link Parameters | Units | EH/EH 72MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 72M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 | 5.966 |
| Downlink Frequency | GHz | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 | 3.741 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 72000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 49.9 | 52.4 | 58.6 | 64.3 | 78.9 | 73.9 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 13.0 | 13.0 |
| Earth Station Gain | dB | 51.2 | 47.0 | 54.9 | 51.2 | 56.3 | 56.3 |
| Uplink Input Power per Carrier | dBW | -1.2 | 5.3 | 3.7 | 13.1 | 22.5 | 17.5 |
| Free Space Loss | dB | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 | 199.8 |
| G/T Satellite | dB/K | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 |
| C/N Thermal Uplink | dB | 20.3 | 21.5 | 21.7 | 20.9 | 25.3 | 22.8 |
| C/I XPOL, ACI, IM, ASI | dB | 13.9 | 15.1 | 15.3 | 14.5 | 18.9 | 18.4 |
| C/(N+I) uplink | dB | 13.0 | 14.2 | 14.4 | 13.6 | 18.0 | 17.0 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 11.8 | 14.2 | 20.4 | 26.1 | 38.7 | 34.7 |
| Maximum e.i.r.p. density | dBW/4kHz | -3.3 | -2.1 | -1.9 | -2.7 | -0.3 | 10.7 |
| Free Space Loss | dB | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 | 195.3 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 7.2 | 3.8 |
| Earth Station Gain | dB | 41.6 | 43.1 | 43.1 | 41.6 | 47.1 | 41.6 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 21.8 | 23.3 | 23.3 | 21.8 | 27.4 | 21.8 |
| C/N Thermal Downlink | dB | 12.8 | 15.4 | 15.6 | 13.3 | 21.3 | 14.2 |
| C/I XPOL, ACI, IM, ASI | dB | 12.3 | 15.0 | 15.2 | 12.9 | 20.9 | 16.8 |
| C/(N+I) downlink | dB | 9.5 | 12.2 | 12.4 | 10.1 | 18.1 | 12.3 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -44 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -37 |
| C/I up (single satellite) | dB | 16.9 | 18.1 | 18.3 | 17.5 | 21.9 | 21.4 |
| C/I dn (single satellite) | dB | 15.3 | 18.0 | 18.2 | 15.9 | 23.9 | 19.8 |
| Aggregate C/I up | dB | 13.9 | 15.1 | 15.3 | 14.5 | 18.9 | 18.4 |
| Aggregate C/I down | dB | 12.3 | 15.0 | 15.2 | 12.9 | 20.9 | 16.8 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 7.9 | 10.1 | 10.3 | 8.5 | 15.0 | 11.0 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 12.7 | 10.0 |
| System Margin | dB | 1.9 | 0.8 | 1.0 | 1.6 | 2.4 | 1.0 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 28 | 29 |
| 65 | 66 |

TABLE A-15. LINK BUDGET, EAST HEMI/EAST HEMI, 72 MHz TRANSPONDER

| | | EU/EH 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.161 | 14.161 | 14.161 | 14.161 | 14.161 | 14.161 |
| Downlink Frequency | GHz | 3.871 | 3.871 | 3.871 | 3.871 | 3.871 | 3.871 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.5 | 54.4 | 60.4 | 66.2 | 79.9 | 78.9 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 3.8 | 4.5 | 4.5 |
| Earth Station Gain | dB | 49.0 | 53.1 | 53.1 | 53.1 | 54.6 | 54.6 |
| Uplink Input Power per Carrier | dBW | 2.5 | 1.3 | 7.3 | 13.2 | 25.4 | 24.3 |
| Free Space Loss | dB | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 |
| G/T Satellite | dB/K | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 |
| C/N Thermal Uplink | dB | 16.7 | 18.3 | 18.3 | 17.6 | 22.6 | 22.5 |
| C/I XPOL, ACI, IM, ASI | dB | 23.5 | 25.1 | 25.1 | 24.4 | 29.5 | 29.4 |
| C/(N+I) uplink | dB | 15.8 | 17.4 | 17.4 | 16.8 | 21.8 | 21.7 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 11.9 | 14.8 | 20.8 | 26.6 | 38.3 | 36.9 |
| Maximum e.i.r.p. density | dBW/4kHz | -3.2 | -1.5 | -1.5 | -2.2 | 0.8 | 12.9 |
| Free Space Loss | dB | 195.6 | 195.6 | 195.6 | 195.6 | 195.6 | 195.9 |
| Earth Station Diameter | m | 3.8 | 5.6 | 5.6 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.9 | 45.2 | 45.2 | 41.9 | 41.9 | 41.9 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 22.1 | 25.5 | 25.5 | 22.1 | 22.1 | 22.1 |
| C/N Thermal Downlink | dB | 12.9 | 17.9 | 17.9 | 13.9 | 16.9 | 16.1 |
| C/I XPOL, ACI, IM, ASI | dB | 12.8 | 17.7 | 17.7 | 13.7 | 16.7 | 16.3 |
| C/(N+I) downlink | dB | 9.8 | 14.8 | 14.8 | 10.8 | 13.8 | 13.2 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 26.5 | 28.1 | 28.1 | 27.4 | 32.5 | 32.4 |
| C/I dn (single satellite) | dB | 15.8 | 20.7 | 20.7 | 16.7 | 19.7 | 19.3 |
| Aggregate C/I up | dB | 23.5 | 25.1 | 25.1 | 24.4 | 29.5 | 29.4 |
| Aggregate C/I down | dB | 12.8 | 17.7 | 17.7 | 13.7 | 16.7 | 16.3 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 8.8 | 12.9 | 12.9 | 9.8 | 13.2 | 12.6 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 2.8 | 3.6 | 3.6 | 2.9 | 6.3 | 2.6 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 35 | 37 |

TABLE A-16. LINK BUDGET, EUROPE/EAST HEMI, 54 MHz TRANSPONDER

| | | WA/EH 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.161 | 14.161 | 14.161 | 14.161 | 14.161 | 14.161 |
| Downlink Frequency | GHz | 3.871 | 3.871 | 3.871 | 3.871 | 3.871 | 3.871 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 54.8 | 57.3 | 63.3 | 69.5 | 82.9 | 80.7 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 4.5 | 7.2 | 4.5 |
| Earth Station Gain | dB | 53.1 | 54.6 | 54.6 | 54.6 | 58.7 | 54.6 |
| Uplink Input Power per Carrier | dBW | 1.7 | 2.7 | 8.8 | 15.0 | 24.3 | 26.0 |
| Free Space Loss | dB | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 |
| G/T Satellite | dB/K | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 |
| C/N Thermal Uplink | dB | 19.5 | 20.8 | 20.8 | 20.5 | 25.2 | 23.9 |
| C/I XPOL, ACI, IM, ASI | dB | 26.7 | 28.0 | 28.0 | 27.7 | 32.5 | 31.2 |
| C/(N+I) uplink | dB | 18.8 | 20.0 | 20.0 | 19.7 | 24.5 | 23.1 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3dB contour) | dBW | 12.4 | 14.9 | 20.9 | 27.1 | 38.5 | 36.9 |
| Maximum e.i.r.p. density | dBW/4kHz | -2.7 | -1.4 | -1.4 | -1.7 | 1.0 | 12.9 |
| Free Space Loss | dB | 195.6 | 195.6 | 195.6 | 195.6 | 195.6 | 195.9 |
| Earth Station Diameter | m | 3.8 | 5.6 | 5.6 | 3.8 | 3.8 | 3.8 |
| Earth Station Gain | dB | 41.9 | 45.2 | 45.2 | 41.9 | 41.9 | 41.9 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 22.1 | 25.5 | 25.5 | 22.1 | 22.1 | 22.1 |
| C/N Thermal Downlink | dB | 13.4 | 18.0 | 18.0 | 14.3 | 17.1 | 16.1 |
| C/I XPOL, ACI, IM, ASI | dB | 13.2 | 17.9 | 17.9 | 14.2 | 17.0 | 16.3 |
| C/(N+I) downlink | dB | 10.3 | 14.9 | 14.9 | 11.2 | 14.0 | 13.2 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -34 | -34 | -34 | -34 | -34 | -34 |
| C/I up (single satellite) | dB | 29.7 | 31.0 | 31.0 | 30.7 | 35.5 | 34.2 |
| C/I dn (single satellite) | dB | 16.2 | 20.9 | 20.9 | 17.2 | 20.0 | 19.3 |
| Aggregate C/I up | dB | 26.7 | 28.0 | 28.0 | 27.7 | 32.5 | 31.2 |
| Aggregate C/I down | dB | 13.2 | 17.9 | 17.9 | 14.2 | 17.0 | 16.3 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 9.7 | 13.8 | 13.8 | 10.7 | 13.6 | 12.8 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 3.7 | 4.5 | 4.5 | 3.8 | 6.7 | 2.8 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 73 | 75 |

TABLE A-17. LINK BUDGET, WEST AFRICA/EAST HEMI, 54 MHZ TRANSPONDER

| Link Parameters | Units | EU/EU 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 |
| Downlink Frequency | GHz | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 53.7 | 55.1 | 61.2 | 68.4 | 79.0 | 70.5 |
| Earth Station Diameter | m | 4.5 | 4.5 | 5.6 | 5.6 | 4.5 | 4.5 |
| Earth Station Gain | dB | 54.4 | 54.4 | 56.3 | 56.3 | 54.4 | 54.5 |
| Uplink Input Power per Carrier | dBW | -0.7 | 0.7 | 4.9 | 12.1 | 24.6 | 16.0 |
| Free Space Loss | dB | 206.6 | 206.6 | 206.6 | 206.6 | 206.6 | 206.7 |
| G/T Satellite | dB/K | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 |
| C/N Thermal Uplink | dB | 19.0 | 19.2 | 19.2 | 20.0 | 23.6 | 14.2 |
| C/I XPOL, ACI, IM, ASI | dB | 25.7 | 25.9 | 25.9 | 26.6 | 30.2 | 21.0 |
| C/(N+I) uplink | dB | 18.2 | 18.4 | 18.4 | 19.1 | 22.7 | 13.4 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 20.4 | 21.8 | 27.9 | 35.1 | 42.7 | 35.2 |
| Maximum e.i.r.p. density | dBW/4kHz | 8.3 | 8.5 | 8.5 | 9.3 | 9.9 | 14.2 |
| Free Space Loss | dB | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 2.4 | 6.5 |
| Earth Station Gain | dB | 48.2 | 52.2 | 52.2 | 48.2 | 48.2 | 56.8 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 28.4 | 32.4 | 32.4 | 28.4 | 28.4 | 37.1 |
| C/N Thermal Downlink | dB | 16.9 | 21.1 | 21.1 | 17.8 | 18.5 | 18.9 |
| C/I XPOL, ACI, IM, ASI | dB | 19.5 | 23.7 | 23.7 | 20.5 | 21.1 | 21.5 |
| C/(N+I) downlink | dB | 15.0 | 19.2 | 19.2 | 16.0 | 16.6 | 17.0 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 28.7 | 28.9 | 28.9 | 29.6 | 33.2 | 24.0 |
| C/I dn (single satellite) | dB | 22.5 | 26.7 | 26.7 | 23.5 | 24.1 | 24.5 |
| Aggregate C/I up | dB | 25.7 | 25.9 | 25.9 | 26.6 | 30.2 | 21.0 |
| Aggregate C/I down | dB | 19.5 | 23.7 | 23.7 | 20.5 | 21.1 | 21.5 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 13.3 | 15.7 | 15.7 | 14.2 | 15.6 | 11.8 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 7.3 | 6.5 | 6.5 | 7.3 | 8.7 | 1.8 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 165 | 170 |

TABLE A-18. LINK BUDGET, EUROPE/EUROPE, 36 MHz TRANSPONDER

| Link Parameters | Units | EU/EU 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.1 | 54.2 | 60.2 | 66.8 | 79.2 | 70.5 |
| Earth Station Diameter | m | 4.5 | 4.5 | 5.6 | 5.6 | 4.5 | 4.5 |
| Earth Station Gain | dB | 54.6 | 54.6 | 56.5 | 56.5 | 54.6 | 54.5 |
| Uplink Input Power per Carrier | dBW | -2.5 | -0.4 | 3.7 | 10.3 | 24.5 | 16.0 |
| Free Space Loss | dB | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 | 206.7 |
| G/T Satellite | dB/K | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 |
| C/N Thermal Uplink | dB | 17.2 | 18.0 | 18.0 | 18.1 | 21.8 | 14.2 |
| C/I XPOL, ACI, IM, ASI | dB | 24.1 | 24.9 | 24.9 | 25.0 | 28.7 | 21.0 |
| C/(N+I) uplink | dB | 16.4 | 17.2 | 17.2 | 17.3 | 21.0 | 13.4 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 18.8 | 20.9 | 26.9 | 33.5 | 43.9 | 35.2 |
| Maximum e.i.r.p. density | dBW/4kHz | 6.8 | 7.6 | 7.6 | 7.7 | 9.3 | 14.2 |
| Free Space Loss | dB | 205.6 | 205.6 | 205.6 | 205.6 | 205.6 | 206.4 |
| Earth Station Diameter | m | 3.0 | 4.5 | 4.5 | 3.0 | 2.4 | 6.5 |
| Earth Station Gain | dB | 49.3 | 52.8 | 52.8 | 49.3 | 47.3 | 56.0 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 29.5 | 33.0 | 33.0 | 29.5 | 27.6 | 36.2 |
| C/N Thermal Downlink | dB | 17.3 | 21.6 | 21.6 | 18.2 | 17.9 | 18.1 |
| C/I XPOL, ACI, IM, ASI | dB | 19.1 | 23.4 | 23.4 | 20.0 | 19.7 | 20.7 |
| C/(N+I) downlink | dB | 15.1 | 19.4 | 19.4 | 16.0 | 15.7 | 16.2 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 27.1 | 27.9 | 27.9 | 28.0 | 31.7 | 24.0 |
| C/I dn (single satellite) | dB | 22.1 | 26.4 | 26.4 | 23.0 | 22.7 | 23.7 |
| Aggregate C/I up | dB | 24.1 | 24.9 | 24.9 | 25.0 | 28.7 | 21.0 |
| Aggregate C/I down | dB | 19.1 | 23.4 | 23.4 | 20.0 | 19.7 | 20.7 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 12.7 | 15.2 | 15.2 | 13.6 | 14.6 | 11.5 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 6.7 | 5.9 | 5.9 | 6.7 | 7.7 | 1.5 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 79 | 90 |
| 107 | 110 |

TABLE A-19. LINK BUDGET, EUROPE/EUROPE, 54 MHz TRANSPONDER

| Link Parameters | Units | WA/EU 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 |
| Downlink Frequency | GHz | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 55.4 | 56.9 | 63.0 | 70.1 | 80.6 | 73.7 |
| Earth Station Diameter | m | 4.5 | 4.5 | 5.6 | 5.6 | 5.6 | 5.6 |
| Earth Station Gain | dB | 54.4 | 54.4 | 56.3 | 56.3 | 56.3 | 56.4 |
| Uplink Input Power per Carrier | dBW | 1.0 | 2.6 | 6.7 | 13.8 | 24.3 | 17.2 |
| Free Space Loss | dB | 206.6 | 206.6 | 206.6 | 206.6 | 206.6 | 206.7 |
| G/T Satellite | dB/K | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 |
| C/N Thermal Uplink | dB | 20.3 | 20.6 | 20.6 | 21.2 | 24.8 | 17.0 |
| C/I XPOL, ACI, IM, ASI | dB | 27.3 | 27.7 | 27.7 | 28.3 | 31.9 | 24.1 |
| C/(N+I) uplink | dB | 19.5 | 19.8 | 19.8 | 20.4 | 24.1 | 16.2 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 20.3 | 21.8 | 27.9 | 35.0 | 42.5 | 34.6 |
| Maximum e.i.r.p. density | dBW/4kHz | 8.2 | 8.5 | 8.5 | 9.1 | 9.8 | 13.6 |
| Free Space Loss | dB | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 2.4 | 6.5 |
| Earth Station Gain | dB | 48.2 | 52.2 | 52.2 | 48.2 | 48.2 | 56.8 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 28.4 | 32.4 | 32.4 | 28.4 | 28.4 | 37.1 |
| C/N Thermal Downlink | dB | 16.8 | 21.1 | 21.1 | 17.7 | 18.3 | 18.3 |
| C/I XPOL, ACI, IM, ASI | dB | 19.4 | 23.7 | 23.7 | 20.3 | 21.0 | 20.9 |
| C/(N+I) downlink | dB | 14.9 | 19.2 | 19.2 | 15.8 | 16.4 | 16.4 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 30.3 | 30.7 | 30.7 | 31.3 | 34.9 | 27.1 |
| C/I dn (single satellite) | dB | 22.4 | 26.7 | 26.7 | 23.3 | 24.0 | 23.9 |
| Aggregate C/I up | dB | 27.3 | 27.7 | 27.7 | 28.3 | 31.9 | 24.1 |
| Aggregate C/I down | dB | 19.4 | 23.7 | 23.7 | 20.3 | 21.0 | 20.9 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 13.6 | 16.5 | 16.5 | 14.5 | 15.7 | 13.3 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 7.6 | 7.2 | 7.2 | 7.6 | 8.8 | 3.3 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 171 | 176 |

TABLE A-20. LINK BUDGET, WEST AFRICA/EUROPE, 36 MHz TRANSPONDER

| Link Parameters | Units | WA/EU 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 53.6 | 56.2 | 62.3 | 68.4 | 81.0 | 73.7 |
| Earth Station Diameter | m | 4.5 | 4.5 | 5.6 | 5.6 | 5.6 | 5.6 |
| Earth Station Gain | dB | 54.6 | 54.6 | 56.5 | 56.5 | 56.5 | 56.4 |
| Uplink Input Power per Carrier | dBW | -1.0 | 1.6 | 5.7 | 11.8 | 24.5 | 17.2 |
| Free Space Loss | dB | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 | 206.7 |
| G/T Satellite | dB/K | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 |
| C/N Thermal Uplink | dB | 18.3 | 19.7 | 19.7 | 19.3 | 23.3 | 17.0 |
| C/I XPOL, ACI, IM, ASI | dB | 25.6 | 27.0 | 27.0 | 26.6 | 30.6 | 24.1 |
| C/(N+I) uplink | dB | 17.6 | 18.9 | 18.9 | 18.5 | 22.5 | 16.2 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 18.5 | 21.1 | 27.2 | 33.3 | 43.9 | 34.6 |
| Maximum e.i.r.p. density | dBW/4kHz | 6.5 | 7.8 | 7.8 | 7.4 | 9.4 | 13.6 |
| Free Space Loss | dB | 205.6 | 205.6 | 205.6 | 205.6 | 205.6 | 206.4 |
| Earth Station Diameter | m | 3.0 | 4.5 | 4.5 | 3.0 | 2.4 | 6.5 |
| Earth Station Gain | dB | 49.3 | 52.8 | 52.8 | 49.3 | 47.3 | 56.0 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 29.5 | 33.0 | 33.0 | 29.5 | 27.6 | 36.2 |
| C/N Thermal Downlink | dB | 17.0 | 21.9 | 21.9 | 17.9 | 18.0 | 17.4 |
| C/I XPOL, ACI, IM, ASI | dB | 18.8 | 23.7 | 23.7 | 19.7 | 19.8 | 20.0 |
| C/(N+I) downlink | dB | 14.8 | 19.7 | 19.7 | 15.7 | 15.8 | 15.5 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 28.6 | 30.0 | 30.0 | 29.6 | 33.6 | 27.1 |
| C/I dn (single satellite) | dB | 21.8 | 26.7 | 26.7 | 22.7 | 22.8 | 23.0 |
| Aggregate C/I up | dB | 25.6 | 27.0 | 27.0 | 26.6 | 30.6 | 24.1 |
| Aggregate C/I down | dB | 18.8 | 23.7 | 23.7 | 19.7 | 19.8 | 20.0 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 12.9 | 16.3 | 16.3 | 13.9 | 14.9 | 12.8 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 6.9 | 7.0 | 7.0 | 7.0 | 8.0 | 2.8 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 91 | 98 |

TABLE A-21. LINK BUDGET, WEST AFRICA/EUROPE, 54 MHz TRANSPONDER

| | | WH/EU 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 6.096 | 6.096 | 6.096 | 6.096 | 6.096 | 6.096 |
| Downlink Frequency | GHz | 11.111 | 11.111 | 11.111 | 11.111 | 11.111 | 11.111 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.8 | 53.2 | 59.2 | 66.5 | 78.9 | 69.8 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 11.0 | 11.0 |
| Earth Station Gain | dB | 51.3 | 47.2 | 55.1 | 51.3 | 55.1 | 55.1 |
| Uplink Input Power per Carrier | dBW | 0.4 | 5.9 | 4.1 | 15.2 | 23.8 | 14.7 |
| Free Space Loss | dB | 200.1 | 200.1 | 200.1 | 200.1 | 200.1 | 200.2 |
| G/T Satellite | dB/K | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 |
| C/N Thermal Uplink | dB | 22.9 | 23.1 | 23.1 | 23.9 | 27.6 | 19.4 |
| C/I XPOL, ACI, IM, ASI | dB | 15.7 | 15.9 | 15.9 | 16.7 | 20.4 | 17.3 |
| C/(N+I) uplink | dB | 15.0 | 15.1 | 15.1 | 15.9 | 19.6 | 15.2 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 18.8 | 20.2 | 26.2 | 33.5 | 43.9 | 34.8 |
| Maximum e.i.r.p. density | dBW/4kHz | 6.7 | 6.9 | 6.9 | 7.7 | 9.4 | 13.8 |
| Free Space Loss | dB | 204.9 | 204.9 | 204.9 | 204.9 | 204.9 | 205.0 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 2.4 | 4.5 |
| Earth Station Gain | dB | 47.0 | 51.0 | 51.0 | 47.0 | 47.0 | 52.5 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 27.3 | 31.3 | 31.3 | 27.3 | 27.3 | 32.7 |
| C/N Thermal Downlink | dB | 15.6 | 19.8 | 19.8 | 16.6 | 18.3 | 15.6 |
| C/I XPOL, ACI, IM, ASI | dB | 16.8 | 20.9 | 20.9 | 17.8 | 19.5 | 16.8 |
| C/(N+I) downlink | dB | 13.1 | 17.3 | 17.3 | 14.1 | 15.8 | 13.2 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -47 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 18.7 | 18.9 | 18.9 | 19.7 | 23.4 | 20.3 |
| C/I dn (single satellite) | dB | 19.8 | 23.9 | 23.9 | 20.8 | 22.5 | 19.8 |
| Aggregate C/I up | dB | 15.7 | 15.9 | 15.9 | 16.7 | 20.4 | 17.3 |
| Aggregate C/I down | dB | 16.8 | 20.9 | 20.9 | 17.8 | 19.5 | 16.8 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 11.0 | 13.1 | 13.1 | 11.9 | 14.3 | 11.1 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 5.0 | 3.8 | 3.8 | 5.0 | 7.4 | 1.1 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 111 | 113 |

TABLE A-22. LINK BUDGET, WEST HEMI/EUROPE, 54 MHz TRANSPONDER

| | | EH/EU 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 6.096 | 6.096 | 6.096 | 6.096 | 6.096 | 6.096 |
| Downlink Frequency | GHz | 11.111 | 11.111 | 11.111 | 11.111 | 11.111 | 11.111 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.6 | 53.1 | 59.1 | 66.4 | 78.8 | 69.8 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 11.0 | 11.0 |
| Earth Station Gain | dB | 51.3 | 47.2 | 55.1 | 51.3 | 55.1 | 55.1 |
| Uplink Input Power per Carrier | dBW | 0.3 | 5.9 | 4.1 | 15.1 | 23.7 | 14.6 |
| Free Space Loss | dB | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.1 |
| G/T Satellite | dB/K | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 |
| C/N Thermal Uplink | dB | 21.9 | 22.1 | 22.1 | 22.8 | 26.5 | 18.4 |
| C/I XPOL, ACI, IM, ASI | dB | 15.6 | 15.8 | 15.8 | 16.6 | 20.3 | 17.3 |
| C/(N+I) uplink | dB | 14.7 | 14.9 | 14.9 | 15.7 | 19.4 | 14.8 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 18.8 | 20.3 | 26.3 | 33.6 | 43.9 | 34.9 |
| Maximum e.i.r.p. density | dBW/4kHz | 6.7 | 6.9 | 6.9 | 7.7 | 9.4 | 14.0 |
| Free Space Loss | dB | 204.9 | 204.9 | 204.9 | 204.9 | 204.9 | 205.0 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 2.4 | 4.5 |
| Earth Station Gain | dB | 47.0 | 51.0 | 51.0 | 47.0 | 47.0 | 52.5 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 27.3 | 31.3 | 31.3 | 27.3 | 27.3 | 32.7 |
| C/N Thermal Downlink | dB | 15.7 | 19.9 | 19.9 | 16.6 | 18.3 | 15.7 |
| C/I XPOL, ACI, IM, ASI | dB | 16.8 | 21.0 | 21.0 | 17.8 | 19.5 | 16.9 |
| C/(N+I) downlink | dB | 13.2 | 17.4 | 17.4 | 14.2 | 15.9 | 13.3 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -47 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 18.6 | 18.8 | 18.8 | 19.6 | 23.3 | 20.3 |
| C/I dn (single satellite) | dB | 19.8 | 24.0 | 24.0 | 20.8 | 22.5 | 19.9 |
| Aggregate C/I up | dB | 15.6 | 15.8 | 15.8 | 16.6 | 20.3 | 17.3 |
| Aggregate C/I down | dB | 16.8 | 21.0 | 21.0 | 17.8 | 19.5 | 16.9 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 10.9 | 13.0 | 13.0 | 11.8 | 14.2 | 11.0 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 4.9 | 3.7 | 3.7 | 4.9 | 7.3 | 1.0 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 114 | 116 |

TABLE A-23. LINK BUDGET, EAST HEMI/EUROPE, 54 MHz TRANSPONDER

| Link Parameters | Units | NA/EU 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 |
| Downlink Frequency | GHz | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 53.9 | 56.1 | 62.1 | 68.6 | 79.1 | 72.2 |
| Earth Station Diameter | m | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 5.6 |
| Earth Station Gain | dB | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 56.4 |
| Uplink Input Power per Carrier | dBW | -0.5 | 1.7 | 7.8 | 14.2 | 24.7 | 15.8 |
| Free Space Loss | dB | 207.3 | 207.3 | 207.3 | 207.3 | 207.3 | 206.7 |
| G/T Satellite | dB/K | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| C/N Thermal Uplink | dB | 24.1 | 25.1 | 25.1 | 25.1 | 28.7 | 21.5 |
| C/I XPOL, ACI, IM, ASI | dB | 25.9 | 26.8 | 26.8 | 26.8 | 30.4 | 22.7 |
| C/(N+I) uplink | dB | 21.9 | 22.9 | 22.9 | 22.8 | 26.4 | 19.0 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 20.2 | 22.5 | 28.5 | 34.9 | 42.4 | 35.2 |
| Maximum e.i.r.p. density | dBW/4kHz | 8.2 | 9.1 | 9.1 | 9.1 | 9.7 | 14.2 |
| Free Space Loss | dB | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 |
| Earth Station Diameter | m | 3.0 | 4.5 | 4.5 | 3.0 | 2.4 | 6.5 |
| Earth Station Gain | dB | 50.1 | 53.6 | 53.6 | 50.1 | 48.2 | 56.8 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 30.3 | 33.9 | 33.9 | 30.3 | 28.4 | 37.1 |
| C/N Thermal Downlink | dB | 18.7 | 23.2 | 23.2 | 19.6 | 18.2 | 18.9 |
| C/I XPOL, ACI, IM, ASI | dB | 21.3 | 25.8 | 25.8 | 22.2 | 20.9 | 21.5 |
| C/(N+I) downlink | dB | 16.8 | 21.3 | 21.3 | 17.7 | 16.4 | 17.0 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 28.9 | 29.8 | 29.8 | 29.8 | 33.4 | 25.7 |
| C/I dn (single satellite) | dB | 24.3 | 28.8 | 28.8 | 25.2 | 23.9 | 24.5 |
| Aggregate C/I up | dB | 25.9 | 26.8 | 26.8 | 26.8 | 30.4 | 22.7 |
| Aggregate C/I down | dB | 21.3 | 25.8 | 25.8 | 22.2 | 20.9 | 21.5 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 15.6 | 19.0 | 19.0 | 16.5 | 15.9 | 14.9 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 9.6 | 9.7 | 9.7 | 9.6 | 9.0 | 4.9 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 177 | 182 |

TABLE A-24. LINK BUDGET, NORTH AMERICA/EUROPE, 36 MHz TRANSPONDER

| Link Parameters | Units | NA/EU 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.4 | 55.1 | 61.2 | 67.1 | 79.6 | 72.2 |
| Earth Station Diameter | m | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 5.6 |
| Earth Station Gain | dB | 54.6 | 54.6 | 54.6 | 54.6 | 54.6 | 56.4 |
| Uplink Input Power per Carrier | dBW | -2.2 | 0.5 | 6.5 | 12.5 | 24.9 | 15.8 |
| Free Space Loss | dB | 207.5 | 207.5 | 207.5 | 207.5 | 207.5 | 206.7 |
| G/T Satellite | dB/K | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| C/N Thermal Uplink | dB | 22.4 | 23.9 | 23.9 | 23.4 | 27.1 | 21.5 |
| C/I XPOL, ACI, IM, ASI | dB | 24.4 | 25.9 | 25.9 | 25.3 | 29.1 | 22.7 |
| C/(N+I) uplink | dB | 20.3 | 21.8 | 21.8 | 21.2 | 25.0 | 19.0 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 18.8 | 21.5 | 27.5 | 33.5 | 43.9 | 35.2 |
| Maximum e.i.r.p. density | dBW/4kHz | 6.7 | 8.2 | 8.2 | 7.6 | 9.4 | 14.2 |
| Free Space Loss | dB | 205.6 | 205.6 | 205.6 | 205.6 | 205.6 | 206.4 |
| Earth Station Diameter | m | 3.8 | 5.6 | 5.6 | 3.8 | 3.0 | 6.5 |
| Earth Station Gain | dB | 51.3 | 54.7 | 54.7 | 51.3 | 49.3 | 56.0 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 31.6 | 34.9 | 34.9 | 31.6 | 29.5 | 36.2 |
| C/N Thermal Downlink | dB | 19.2 | 24.1 | 24.1 | 20.2 | 19.9 | 18.1 |
| C/I XPOL, ACI, IM, ASI | dB | 21.1 | 25.9 | 25.9 | 22.0 | 21.7 | 20.7 |
| C/(N+I) downlink | dB | 17.0 | 21.9 | 21.9 | 18.0 | 17.7 | 16.2 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 27.4 | 28.9 | 28.9 | 28.3 | 32.1 | 25.7 |
| C/I dn (single satellite) | dB | 24.1 | 28.9 | 28.9 | 25.0 | 24.7 | 23.7 |
| Aggregate C/I up | dB | 24.4 | 25.9 | 25.9 | 25.3 | 29.1 | 22.7 |
| Aggregate C/I down | dB | 21.1 | 25.9 | 25.9 | 22.0 | 21.7 | 20.7 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 15.4 | 18.8 | 18.8 | 16.3 | 17.0 | 14.4 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 9.4 | 9.5 | 9.5 | 9.4 | 10.0 | 4.4 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 99 | 106 |

TABLE A-25. LINK BUDGET, NORTH AMERICA/EUROPE, 54 MHz TRANSPONDER

| Link Parameters | Units | EU/WA 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 |
| Downlink Frequency | GHz | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.5 | 55.6 | 61.6 | 67.2 | 78.7 | 75.1 |
| Earth Station Diameter | m | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 |
| Earth Station Gain | dB | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 54.7 |
| Uplink Input Power per Carrier | dBW | -1.9 | 1.2 | 7.3 | 12.8 | 24.3 | 20.4 |
| Free Space Loss | dB | 206.6 | 206.6 | 206.6 | 206.6 | 206.6 | 206.6 |
| G/T Satellite | dB/K | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 |
| C/N Thermal Uplink | dB | 17.8 | 19.7 | 19.7 | 18.7 | 23.4 | 18.9 |
| C/I XPOL, ACI, IM, ASI | dB | 24.4 | 26.3 | 26.3 | 25.4 | 30.0 | 25.6 |
| C/(N+I) uplink | dB | 16.9 | 18.8 | 18.8 | 17.9 | 22.5 | 18.1 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 20.3 | 23.4 | 29.4 | 35.0 | 42.5 | 40.9 |
| Maximum e.i.r.p. density | dBW/4kHz | 8.2 | 10.1 | 10.1 | 9.1 | 9.8 | 19.9 |
| Free Space Loss | dB | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 |
| Earth Station Diameter | m | 2.4 | 3.0 | 3.0 | 2.4 | 2.4 | 2.4 |
| Earth Station Gain | dB | 48.2 | 50.1 | 50.1 | 48.2 | 48.2 | 48.2 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 28.4 | 30.3 | 30.3 | 28.4 | 28.4 | 28.4 |
| C/N Thermal Downlink | dB | 16.7 | 20.6 | 20.6 | 17.7 | 18.3 | 15.9 |
| C/I XPOL, ACI, IM, ASI | dB | 19.4 | 23.3 | 23.3 | 20.3 | 21.0 | 18.6 |
| C/(N+I) downlink | dB | 14.9 | 18.7 | 18.7 | 15.8 | 16.5 | 14.0 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 27.4 | 29.3 | 29.3 | 28.4 | 33.0 | 28.6 |
| C/I dn (single satellite) | dB | 22.4 | 26.3 | 26.3 | 23.3 | 24.0 | 21.6 |
| Aggregate C/I up | dB | 24.4 | 26.3 | 26.3 | 25.4 | 30.0 | 25.6 |
| Aggregate C/I down | dB | 19.4 | 23.3 | 23.3 | 20.3 | 21.0 | 18.6 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 12.8 | 15.8 | 15.8 | 13.7 | 15.5 | 12.6 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 6.8 | 6.5 | 6.5 | 6.8 | 8.6 | 2.6 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 125 | 130 |

TABLE A-26. LINK BUDGET, EUROPE/WEST AFRICA, 36 MHz TRANSPONDER

| Link Parameters | Units | EU/WA 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.5 | 54.3 | 60.3 | 65.7 | 79.5 | 75.1 |
| Earth Station Diameter | m | 3.8 | 3.8 | 3.8 | 3.8 | 3.8 | 4.5 |
| Earth Station Gain | dB | 53.1 | 53.1 | 53.1 | 53.1 | 53.1 | 54.7 |
| Uplink Input Power per Carrier | dBW | -0.7 | 1.2 | 7.2 | 12.5 | 26.4 | 20.4 |
| Free Space Loss | dB | 206.8 | 206.8 | 206.8 | 206.8 | 206.8 | 206.9 |
| G/T Satellite | dB/K | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 |
| C/N Thermal Uplink | dB | 17.6 | 18.1 | 18.1 | 17.0 | 22.2 | 18.6 |
| C/I XPOL, ACI, IM, ASI | dB | 24.5 | 25.0 | 25.0 | 23.9 | 29.1 | 25.6 |
| C/(N+I) uplink | dB | 16.7 | 17.3 | 17.3 | 16.2 | 21.4 | 17.8 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 20.3 | 22.1 | 28.1 | 33.5 | 44.3 | 40.9 |
| Maximum e.i.r.p. density | dBW/4kHz | 8.2 | 8.8 | 8.8 | 7.7 | 9.8 | 19.9 |
| Free Space Loss | dB | 205.6 | 205.6 | 205.6 | 205.6 | 205.6 | 205.7 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 3.0 | 2.4 | 2.4 |
| Earth Station Gain | dB | 47.3 | 51.3 | 51.3 | 49.3 | 47.3 | 47.3 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 27.6 | 31.6 | 31.6 | 29.5 | 27.6 | 27.6 |
| C/N Thermal Downlink | dB | 16.8 | 21.4 | 21.4 | 18.2 | 18.4 | 15.8 |
| C/I XPOL, ACI, IM, ASI | dB | 18.6 | 23.2 | 23.2 | 20.0 | 20.2 | 17.7 |
| C/(N+I) downlink | dB | 14.6 | 19.2 | 19.2 | 16.0 | 16.2 | 13.6 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 27.5 | 28.0 | 28.0 | 26.9 | 32.1 | 28.6 |
| C/I dn (single satellite) | dB | 21.6 | 26.2 | 26.2 | 23.0 | 23.2 | 20.7 |
| Aggregate C/I up | dB | 24.5 | 25.0 | 25.0 | 23.9 | 29.1 | 25.6 |
| Aggregate C/I down | dB | 18.6 | 23.2 | 23.2 | 20.0 | 20.2 | 17.7 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 12.5 | 15.1 | 15.1 | 13.1 | 15.0 | 12.2 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 6.5 | 5.9 | 5.9 | 6.2 | 8.1 | 2.2 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 117 | 124 |
| 145 | 148 |

TABLE A-27. LINK BUDGET, EUROPE/WEST AFRICA, 54 MHz TRANSPONDER

| Link Parameters | Units | WAWA 36MHz Transponder | | | | | |
|---|----------|------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 |
| Downlink Frequency | GHz | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 56.2 | 57.5 | 63.5 | 69.1 | 80.9 | 78.9 |
| Earth Station Diameter | m | 4.5 | 4.5 | 4.5 | 4.5 | 5.6 | 5.6 |
| Earth Station Gain | dB | 54.4 | 54.4 | 54.4 | 54.4 | 56.3 | 56.6 |
| Uplink Input Power per Carrier | dBW | 1.8 | 3.1 | 9.1 | 14.7 | 24.6 | 22.3 |
| Free Space Loss | dB | 206.7 | 206.7 | 206.7 | 206.7 | 206.7 | 206.7 |
| G/T Satellite | dB/K | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 |
| C/N Thermal Uplink | dB | 20.9 | 21.0 | 21.0 | 20.1 | 25.0 | 22.2 |
| C/I XPOL, ACI, IM, ASI | dB | 28.1 | 28.2 | 28.2 | 27.3 | 32.2 | 29.4 |
| C/(N+I) uplink | dB | 20.2 | 20.3 | 20.3 | 19.3 | 24.2 | 21.5 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 22.0 | 23.4 | 29.4 | 34.9 | 42.8 | 40.8 |
| Maximum e.i.r.p. density | dBW/4kHz | 10.0 | 10.0 | 10.0 | 9.1 | 10.0 | 19.8 |
| Free Space Loss | dB | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 |
| Earth Station Diameter | m | 1.8 | 3.0 | 3.0 | 2.4 | 2.4 | 2.4 |
| Earth Station Gain | dB | 45.7 | 50.1 | 50.1 | 48.2 | 48.2 | 48.2 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 25.9 | 30.3 | 30.3 | 28.4 | 28.4 | 28.4 |
| C/N Thermal Downlink | dB | 16.0 | 20.5 | 20.5 | 17.7 | 18.6 | 15.8 |
| C/I XPOL, ACI, IM, ASI | dB | 18.7 | 23.2 | 23.2 | 20.3 | 21.2 | 18.4 |
| C/(N+I) downlink | dB | 14.1 | 18.7 | 18.7 | 15.8 | 16.7 | 13.9 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 31.1 | 31.2 | 31.2 | 30.3 | 35.2 | 32.4 |
| C/I dn (single satellite) | dB | 21.7 | 26.2 | 26.2 | 23.3 | 24.2 | 21.4 |
| Aggregate C/I up | dB | 28.1 | 28.2 | 28.2 | 27.3 | 32.2 | 29.4 |
| Aggregate C/I down | dB | 18.7 | 23.2 | 23.2 | 20.3 | 21.2 | 18.4 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 13.2 | 16.4 | 16.4 | 14.2 | 16.0 | 13.2 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 7.2 | 7.1 | 7.1 | 7.3 | 9.1 | 3.2 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 139 | 144 |

TABLE A-28. LINK BUDGET, WEST AFRICA/WEST AFRICA, 36 MHz TRANSPONDER

| Link Parameters | Units | WAWA 54MHz Transponder | | | | | |
|---|----------|------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 54.6 | 56.2 | 62.2 | 67.8 | 82.7 | 78.9 |
| Earth Station Diameter | m | 4.5 | 4.5 | 4.5 | 4.5 | 5.6 | 5.6 |
| Earth Station Gain | dB | 54.6 | 54.6 | 54.6 | 54.6 | 56.5 | 56.6 |
| Uplink Input Power per Carrier | dBW | 0.0 | 1.6 | 7.6 | 13.1 | 26.1 | 22.3 |
| Free Space Loss | dB | 207.0 | 207.0 | 207.0 | 207.0 | 207.0 | 207.1 |
| G/T Satellite | dB/K | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 |
| C/N Thermal Uplink | dB | 19.1 | 19.5 | 19.5 | 18.5 | 24.8 | 21.9 |
| C/I XPOL, ACI, IM, ASI | dB | 26.6 | 26.9 | 26.9 | 26.0 | 32.2 | 29.4 |
| C/(N+I) uplink | dB | 18.4 | 18.8 | 18.8 | 17.8 | 24.0 | 21.2 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 20.5 | 22.1 | 28.1 | 33.6 | 44.5 | 40.8 |
| Maximum e.i.r.p. density | dBW/4kHz | 8.4 | 8.8 | 8.8 | 7.8 | 10.0 | 19.8 |
| Free Space Loss | dB | 205.6 | 205.6 | 205.6 | 205.6 | 205.6 | 205.7 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 3.0 | 2.4 | 2.4 |
| Earth Station Gain | dB | 47.3 | 51.3 | 51.3 | 49.3 | 47.3 | 47.3 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 27.6 | 31.6 | 31.6 | 29.5 | 27.6 | 27.6 |
| C/N Thermal Downlink | dB | 16.9 | 21.3 | 21.3 | 18.3 | 18.6 | 15.7 |
| C/I XPOL, ACI, IM, ASI | dB | 18.8 | 23.1 | 23.1 | 20.1 | 20.4 | 17.6 |
| C/(N+I) downlink | dB | 14.8 | 19.1 | 19.1 | 16.1 | 16.4 | 13.5 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 29.6 | 29.9 | 29.9 | 29.0 | 35.2 | 32.4 |
| C/I dn (single satellite) | dB | 21.8 | 26.1 | 26.1 | 23.1 | 23.4 | 20.6 |
| Aggregate C/I up | dB | 26.6 | 26.9 | 26.9 | 26.0 | 32.2 | 29.4 |
| Aggregate C/I down | dB | 18.8 | 23.1 | 23.1 | 20.1 | 20.4 | 17.6 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 13.2 | 15.9 | 15.9 | 13.9 | 15.7 | 12.8 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 7.2 | 6.7 | 6.7 | 6.9 | 8.8 | 2.8 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 131 | 138 |

TABLE A-29. LINK BUDGET, WEST AFRICA/WEST AFRICA, 54 MHz TRANSPONDER

| Link Parameters | Units | WH/WA 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 6.096 | 6.096 | 6.096 | 6.096 | 6.096 | 6.096 |
| Downlink Frequency | GHz | 11.111 | 11.111 | 11.111 | 11.111 | 11.111 | 11.111 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.1 | 52.7 | 58.7 | 65.9 | 78.4 | 76.6 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 11.0 | 9.3 |
| Earth Station Gain | dB | 51.3 | 47.2 | 55.1 | 51.3 | 55.1 | 53.6 |
| Uplink Input Power per Carrier | dBW | -0.2 | 5.5 | 3.7 | 14.6 | 23.3 | 23.0 |
| Free Space Loss | dB | 200.1 | 200.1 | 200.1 | 200.1 | 200.1 | 200.1 |
| G/T Satellite | dB/K | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 | -3.2 |
| C/N Thermal Uplink | dB | 22.3 | 22.6 | 22.6 | 23.3 | 27.1 | 26.3 |
| C/I XPOL, ACI, IM, ASI | dB | 15.1 | 15.4 | 15.4 | 16.1 | 19.9 | 19.1 |
| C/(N+I) uplink | dB | 14.4 | 14.7 | 14.7 | 15.4 | 19.2 | 18.3 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 19.3 | 20.8 | 26.8 | 34.0 | 44.5 | 40.7 |
| Maximum e.i.r.p. density | dBW/4kHz | 7.2 | 7.5 | 7.5 | 8.2 | 10.0 | 19.7 |
| Free Space Loss | dB | 204.8 | 204.8 | 204.8 | 204.8 | 204.8 | 204.8 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 2.4 | 2.4 |
| Earth Station Gain | dB | 47.0 | 51.0 | 51.0 | 47.0 | 47.0 | 47.0 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 27.3 | 31.3 | 31.3 | 27.3 | 27.3 | 27.3 |
| C/N Thermal Downlink | dB | 16.2 | 20.5 | 20.5 | 17.2 | 19.0 | 16.2 |
| C/I XPOL, ACI, IM, ASI | dB | 17.3 | 21.6 | 21.6 | 18.3 | 20.1 | 17.2 |
| C/(N+I) downlink | dB | 13.7 | 18.0 | 18.0 | 14.7 | 16.5 | 13.7 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 18.1 | 18.4 | 18.4 | 19.1 | 22.9 | 22.1 |
| C/I dn (single satellite) | dB | 20.3 | 24.6 | 24.6 | 21.3 | 23.1 | 20.2 |
| Aggregate C/I up | dB | 15.1 | 15.4 | 15.4 | 16.1 | 19.9 | 19.1 |
| Aggregate C/I down | dB | 17.3 | 21.6 | 21.6 | 18.3 | 20.1 | 17.2 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 11.0 | 13.0 | 13.0 | 12.0 | 14.6 | 12.4 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 5.0 | 3.8 | 3.8 | 5.1 | 7.7 | 2.4 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 159 | 161 |

TABLE A-30. LINK BUDGET, WEST HEMI/WEST AFRICA, 54 MHz TRANSPONDER

| Link Parameters | Units | EH/WA 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 6.096 | 6.096 | 6.096 | 6.096 | 6.096 | 6.096 |
| Downlink Frequency | GHz | 11.111 | 11.111 | 11.111 | 11.111 | 11.111 | 11.111 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.1 | 52.7 | 58.7 | 65.8 | 78.3 | 76.5 |
| Earth Station Diameter | m | 7.2 | 4.5 | 11.0 | 7.2 | 11.0 | 9.3 |
| Earth Station Gain | dB | 51.3 | 47.2 | 55.1 | 51.3 | 55.1 | 53.6 |
| Uplink Input Power per Carrier | dBW | -0.3 | 5.4 | 3.6 | 14.5 | 23.2 | 22.9 |
| Free Space Loss | dB | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 |
| G/T Satellite | dB/K | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 | -4.3 |
| C/N Thermal Uplink | dB | 21.3 | 21.7 | 21.7 | 22.3 | 26.0 | 25.2 |
| C/I XPOL, ACI, IM, ASI | dB | 15.0 | 15.4 | 15.4 | 16.0 | 19.8 | 19.0 |
| C/(N+I) uplink | dB | 14.1 | 14.5 | 14.5 | 15.1 | 18.9 | 18.0 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 19.3 | 20.9 | 27.0 | 34.1 | 44.5 | 40.7 |
| Maximum e.i.r.p. density | dBW/4kHz | 7.2 | 7.6 | 7.6 | 8.2 | 10.0 | 19.7 |
| Free Space Loss | dB | 204.8 | 204.8 | 204.8 | 204.8 | 204.8 | 204.8 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 2.4 | 2.4 |
| Earth Station Gain | dB | 47.0 | 51.0 | 51.0 | 47.0 | 47.0 | 47.0 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 27.3 | 31.3 | 31.3 | 27.3 | 27.3 | 27.3 |
| C/N Thermal Downlink | dB | 16.3 | 20.7 | 20.7 | 17.3 | 19.1 | 16.2 |
| C/I XPOL, ACI, IM, ASI | dB | 17.3 | 21.7 | 21.7 | 18.3 | 20.1 | 17.3 |
| C/(N+I) downlink | dB | 13.8 | 18.1 | 18.1 | 14.8 | 16.5 | 13.7 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -42 | -42 | -42 | -42 | -42 | -42 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 18.0 | 18.4 | 18.4 | 19.0 | 22.8 | 22.0 |
| C/I dn (single satellite) | dB | 20.3 | 24.7 | 24.7 | 21.3 | 23.1 | 20.3 |
| Aggregate C/I up | dB | 15.0 | 15.4 | 15.4 | 16.0 | 19.8 | 19.0 |
| Aggregate C/I down | dB | 17.3 | 21.7 | 21.7 | 18.3 | 20.1 | 17.3 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 10.9 | 12.9 | 12.9 | 11.9 | 14.5 | 12.4 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 4.9 | 3.7 | 3.7 | 5.0 | 7.6 | 2.4 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 162 | 164 |

TABLE A-31. LINK BUDGET, EAST HEMI/WEST AFRICA, 54 MHz TRANSPONDER

| Link Parameters | Units | NA/WA 36MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 36M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 | 13.898 |
| Downlink Frequency | GHz | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 | 12.650 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 36000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 54.5 | 55.4 | 61.9 | 68.4 | 78.2 | 76.8 |
| Earth Station Diameter | m | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 5.6 |
| Earth Station Gain | dB | 54.4 | 54.4 | 54.4 | 54.4 | 54.4 | 56.6 |
| Uplink Input Power per Carrier | dBW | 0.1 | 1.0 | 7.5 | 14.0 | 23.8 | 20.2 |
| Free Space Loss | dB | 207.3 | 207.3 | 207.3 | 207.3 | 207.3 | 207.3 |
| G/T Satellite | dB/K | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| C/N Thermal Uplink | dB | 24.7 | 24.4 | 24.9 | 24.8 | 27.7 | 25.6 |
| C/I XPOL, ACI, IM, ASI | dB | 26.4 | 26.1 | 26.6 | 26.6 | 29.5 | 27.3 |
| C/(N+I) uplink | dB | 22.5 | 22.1 | 22.6 | 22.6 | 25.5 | 23.4 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 21.9 | 22.8 | 29.3 | 35.8 | 42.6 | 40.3 |
| Maximum e.i.r.p. density | dBW/4kHz | 9.8 | 9.5 | 10.0 | 10.0 | 9.9 | 19.3 |
| Free Space Loss | dB | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 | 206.4 |
| Earth Station Diameter | m | 2.4 | 4.5 | 3.8 | 2.4 | 2.4 | 3.8 |
| Earth Station Gain | dB | 48.2 | 53.6 | 52.2 | 48.2 | 48.2 | 52.2 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 28.4 | 33.9 | 32.4 | 28.4 | 28.4 | 32.4 |
| C/N Thermal Downlink | dB | 18.4 | 23.5 | 22.5 | 18.5 | 18.4 | 19.3 |
| C/I XPOL, ACI, IM, ASI | dB | 21.0 | 26.2 | 25.2 | 21.2 | 21.1 | 21.9 |
| C/(N+I) downlink | dB | 16.5 | 21.6 | 20.6 | 16.6 | 16.5 | 17.4 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 29.4 | 29.1 | 29.6 | 29.6 | 32.5 | 30.3 |
| C/I dn (single satellite) | dB | 24.0 | 29.2 | 28.2 | 24.2 | 24.1 | 24.9 |
| Aggregate C/I up | dB | 26.4 | 26.1 | 26.6 | 26.6 | 29.5 | 27.3 |
| Aggregate C/I down | dB | 21.0 | 26.2 | 25.2 | 21.2 | 21.1 | 21.9 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 15.5 | 18.9 | 18.5 | 15.7 | 16.0 | 16.4 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 9.5 | 9.6 | 9.3 | 8.8 | 9.1 | 6.4 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 153 | 158 |

TABLE A-32. LINK BUDGET, NORTH AMERICA/WEST AFRICA, 36 MHz TRANSPONDER

| Link Parameters | Units | NA/WA 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 | 11.491 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 53.0 | 54.5 | 60.5 | 66.4 | 79.1 | 76.8 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 3.8 | 5.6 |
| Earth Station Gain | dB | 53.1 | 54.6 | 54.6 | 53.1 | 53.1 | 56.6 |
| Uplink Input Power per Carrier | dBW | -0.1 | -0.1 | 5.9 | 13.2 | 25.9 | 20.2 |
| Free Space Loss | dB | 207.5 | 207.5 | 207.5 | 207.5 | 207.5 | 207.5 |
| G/T Satellite | dB/K | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| C/N Thermal Uplink | dB | 23.0 | 23.3 | 23.3 | 22.6 | 26.6 | 25.4 |
| C/I XPOL, ACI, IM, ASI | dB | 25.0 | 25.3 | 25.3 | 24.6 | 28.6 | 27.3 |
| C/(N+I) uplink | dB | 20.9 | 21.1 | 21.1 | 20.5 | 24.5 | 23.2 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-6dB contour) | dBW | 20.5 | 22.0 | 28.0 | 33.8 | 44.5 | 40.3 |
| Maximum e.i.r.p. density | dBW/4kHz | 8.4 | 8.6 | 8.6 | 8.0 | 10.0 | 19.3 |
| Free Space Loss | dB | 205.6 | 205.6 | 205.6 | 205.6 | 205.6 | 205.6 |
| Earth Station Diameter | m | 3.0 | 5.6 | 5.6 | 3.8 | 2.4 | 3.8 |
| Earth Station Gain | dB | 49.3 | 54.7 | 54.7 | 51.3 | 47.3 | 51.3 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 29.5 | 34.9 | 34.9 | 31.6 | 27.6 | 31.6 |
| C/N Thermal Downlink | dB | 18.9 | 24.6 | 24.6 | 20.5 | 18.5 | 19.3 |
| C/I XPOL, ACI, IM, ASI | dB | 20.7 | 26.4 | 26.4 | 22.3 | 20.4 | 21.1 |
| C/(N+I) downlink | dB | 16.7 | 22.4 | 22.4 | 18.3 | 16.3 | 17.1 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 28.0 | 28.3 | 28.3 | 27.6 | 31.6 | 30.3 |
| C/I dn (single satellite) | dB | 23.7 | 29.4 | 29.4 | 25.3 | 23.4 | 24.1 |
| Aggregate C/I up | dB | 25.0 | 25.3 | 25.3 | 24.6 | 28.6 | 27.3 |
| Aggregate C/I down | dB | 20.7 | 26.4 | 26.4 | 22.3 | 20.4 | 21.1 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 15.3 | 18.7 | 18.7 | 16.2 | 15.7 | 16.1 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 9.3 | 9.4 | 9.4 | 9.3 | 8.8 | 6.1 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 149 | 152 |

TABLE A-33. LINK BUDGET, NORTH AMERICA/WEST AFRICA, 54 MHz TRANSPONDER

| Link Parameters | Units | SC/SC 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 55.1 | 57.4 | 62.8 | 69.8 | 82.2 | 75.7 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 5.6 | 4.5 |
| Earth Station Gain | dBi | 53.1 | 54.6 | 54.6 | 53.1 | 56.5 | 54.6 |
| Uplink Input Power per Carrier | dBW | 1.9 | 2.8 | 8.2 | 16.6 | 25.7 | 21.1 |
| Free Space Loss | dB | 207.4 | 207.4 | 207.4 | 207.4 | 207.4 | 207.4 |
| G/T Satellite | dB/K | -2.0 | -2.0 | -2.0 | -2.0 | -2.0 | -2.0 |
| C/N Thermal Uplink | dB | 20.2 | 21.3 | 20.7 | 21.1 | 24.9 | 19.4 |
| C/I XPOL, ACI, IM, ASI | dB | 27.0 | 28.2 | 27.5 | 28.0 | 31.8 | 26.2 |
| C/(N+I) uplink | dB | 19.4 | 20.5 | 19.9 | 20.3 | 24.1 | 18.5 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-4.7dB contour) | dBW | 20.6 | 23.0 | 28.4 | 35.4 | 45.8 | 38.3 |
| Maximum e.i.r.p. density | dBW/4kHz | 7.3 | 8.4 | 7.8 | 8.2 | 10.0 | 16.0 |
| Free Space Loss | dB | 205.5 | 205.5 | 205.5 | 205.5 | 205.5 | 205.5 |
| Earth Station Diameter | m | 2.4 | 3.8 | 4.5 | 2.4 | 1.8 | 4.5 |
| Earth Station Gain | dBi | 47.7 | 51.7 | 53.2 | 47.7 | 45.2 | 53.2 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 27.9 | 31.9 | 33.4 | 27.9 | 25.4 | 33.4 |
| C/N Thermal Downlink | dB | 17.6 | 22.7 | 23.5 | 18.5 | 17.8 | 19.2 |
| C/I XPOL, ACI, IM, ASI | dB | 19.3 | 24.4 | 25.3 | 20.3 | 19.5 | 20.9 |
| C/(N+I) downlink | dB | 15.3 | 20.5 | 21.3 | 16.3 | 15.6 | 17.0 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 30.0 | 31.2 | 30.5 | 31.0 | 34.8 | 29.2 |
| C/I dn (single satellite) | dB | 22.3 | 27.4 | 28.3 | 23.3 | 22.5 | 23.9 |
| Aggregate C/I up | dB | 27.0 | 28.2 | 27.5 | 28.0 | 31.8 | 26.2 |
| Aggregate C/I down | dB | 19.3 | 24.4 | 25.3 | 20.3 | 19.5 | 20.9 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 13.9 | 17.5 | 17.5 | 14.8 | 15.0 | 14.7 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 7.9 | 8.2 | 8.3 | 7.9 | 8.1 | 4.7 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 183 | 190 |
| 239 | 246 |

TABLE A-34. LINK BUDGET, SOUTHERN CONE/SOUTHERN CONE, 54 MHz TRANSPONDER

| Link Parameters | Units | NA/SC 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.4 | 54.2 | 60.2 | 65.9 | 79.5 | 72.0 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 3.8 | 5.6 |
| Earth Station Gain | dB | 53.1 | 54.6 | 54.6 | 53.1 | 53.1 | 56.5 |
| Uplink Input Power per Carrier | dBW | -0.7 | -0.4 | 5.6 | 12.7 | 26.4 | 15.5 |
| Free Space Loss | dB | 207.5 | 207.5 | 207.5 | 207.5 | 207.5 | 207.5 |
| G/T Satellite | dB/K | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| C/N Thermal Uplink | dB | 22.4 | 23.0 | 23.0 | 22.1 | 27.0 | 20.6 |
| C/I XPOL, ACI, IM, ASI | dB | 24.4 | 24.9 | 24.9 | 24.1 | 29.0 | 22.5 |
| C/(N+I) uplink | dB | 20.3 | 20.8 | 20.8 | 19.9 | 24.9 | 18.4 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-4.7dB contour) | dBW | 20.8 | 22.5 | 28.6 | 34.2 | 45.8 | 38.3 |
| Maximum e.i.r.p. density | dBW/4kHz | 7.4 | 7.9 | 7.9 | 7.0 | 10.0 | 16.0 |
| Free Space Loss | dB | 205.9 | 205.9 | 205.9 | 205.9 | 205.9 | 205.8 |
| Earth Station Diameter | m | 3.0 | 5.6 | 5.6 | 3.8 | 2.4 | 5.6 |
| Earth Station Gain | dB | 49.6 | 55.1 | 55.1 | 51.7 | 47.7 | 55.1 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 29.9 | 35.3 | 35.3 | 31.9 | 27.9 | 35.3 |
| C/N Thermal Downlink | dB | 19.3 | 25.2 | 25.2 | 21.0 | 20.0 | 20.8 |
| C/I XPOL, ACI, IM, ASI | dB | 21.4 | 27.3 | 27.3 | 23.1 | 22.1 | 22.9 |
| C/(N+I) downlink | dB | 17.2 | 23.1 | 23.1 | 18.9 | 17.9 | 18.7 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 27.4 | 27.9 | 27.9 | 27.1 | 32.0 | 25.5 |
| C/I dn (single satellite) | dB | 24.4 | 30.3 | 30.3 | 26.1 | 25.1 | 25.9 |
| Aggregate C/I up | dB | 24.4 | 24.9 | 24.9 | 24.1 | 29.0 | 22.5 |
| Aggregate C/I down | dB | 21.4 | 27.3 | 27.3 | 23.1 | 22.1 | 22.9 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 15.5 | 18.8 | 18.8 | 16.4 | 17.1 | 15.6 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 9.5 | 9.6 | 9.6 | 9.5 | 10.2 | 5.6 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 191 | 198 |
| 247 | 254 |

TABLE A-35. LINK BUDGET, NORTH AMERICA/SOUTHERN CONE, 54 MHz TRANSPONDER

| Link Parameters | Units | SC/NA 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 54.1 | 56.4 | 62.4 | 68.9 | 79.5 | 70.4 |
| Earth Station Diameter | m | 3.8 | 4.5 | 4.5 | 3.8 | 3.8 | 9.3 |
| Earth Station Gain | dBi | 53.1 | 54.6 | 54.6 | 53.1 | 53.1 | 61.0 |
| Uplink Input Power per Carrier | dBW | 1.0 | 1.7 | 7.7 | 15.7 | 26.4 | 9.4 |
| Free Space Loss | dB | 207.4 | 207.4 | 207.4 | 207.4 | 207.4 | 207.3 |
| G/T Satellite | dB/K | -2.0 | -2.0 | -2.0 | -2.0 | -2.0 | -2.0 |
| C/N Thermal Uplink | dB | 19.3 | 20.2 | 20.2 | 20.2 | 22.2 | 14.1 |
| C/I XPOL, ACI, IM, ASI | dB | 26.1 | 27.1 | 27.1 | 27.1 | 29.1 | 20.9 |
| C/(N+I) uplink | dB | 18.5 | 19.4 | 19.4 | 19.4 | 21.4 | 13.3 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3.4dB contour) | dBW | 23.7 | 25.9 | 31.9 | 38.4 | 47.1 | 37.9 |
| Maximum e.i.r.p. density | dBW/4kHz | 9.1 | 10.0 | 10.0 | 10.0 | 10.0 | 14.4 |
| Free Space Loss | dB | 206.0 | 206.0 | 206.0 | 206.0 | 206.0 | 205.9 |
| Earth Station Diameter | m | 1.8 | 3.0 | 3.0 | 1.8 | 1.8 | 11.0 |
| Earth Station Gain | dBi | 45.2 | 49.6 | 49.6 | 45.2 | 45.2 | 60.9 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 25.4 | 29.9 | 29.9 | 25.4 | 25.4 | 41.1 |
| C/N Thermal Downlink | dB | 17.7 | 23.1 | 23.1 | 18.6 | 18.6 | 26.2 |
| C/I XPOL, ACI, IM, ASI | dB | 19.9 | 25.3 | 25.3 | 20.8 | 20.8 | 28.4 |
| C/(N+I) downlink | dB | 15.6 | 21.0 | 21.0 | 16.6 | 16.6 | 24.1 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 29.1 | 30.1 | 30.1 | 30.1 | 32.1 | 23.9 |
| C/I dn (single satellite) | dB | 22.9 | 28.3 | 28.3 | 23.8 | 23.8 | 31.4 |
| Aggregate C/I up | dB | 26.1 | 27.1 | 27.1 | 27.1 | 29.1 | 20.9 |
| Aggregate C/I down | dB | 19.9 | 25.3 | 25.3 | 20.8 | 20.8 | 28.4 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 13.8 | 17.1 | 17.1 | 14.7 | 15.3 | 12.9 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 7.8 | 7.9 | 7.9 | 7.8 | 8.4 | 2.9 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 199 | 206 |

TABLE A-36. LINK BUDGET, SOUTHERN CONE/NORTH AMERICA, 54 MHz TRANSPONDER

| Link Parameters | Units | NA/NA 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 52.1 | 54.2 | 60.2 | 66.8 | 77.5 | 66.2 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 3.8 | 9.3 |
| Earth Station Gain | dB | 49.1 | 53.1 | 53.1 | 49.1 | 53.1 | 61.0 |
| Uplink Input Power per Carrier | dBW | 3.0 | 1.0 | 7.0 | 17.7 | 24.4 | 5.3 |
| Free Space Loss | dB | 207.4 | 207.4 | 207.4 | 207.4 | 207.4 | 207.3 |
| G/T Satellite | dB/K | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| C/N Thermal Uplink | dB | 22.3 | 23.1 | 23.1 | 23.2 | 25.2 | 15.0 |
| C/I XPOL, ACI, IM, ASI | dB | 24.1 | 24.9 | 24.9 | 25.0 | 27.0 | 16.7 |
| C/(N+I) uplink | dB | 20.1 | 20.9 | 20.9 | 21.0 | 23.0 | 12.8 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3.4dB contour) | dBW | 23.6 | 25.7 | 31.7 | 38.3 | 47.0 | 37.7 |
| Maximum e.i.r.p. density | dBW/4kHz | 8.9 | 9.7 | 9.7 | 9.9 | 9.9 | 14.1 |
| Free Space Loss | dB | 206.0 | 206.0 | 206.0 | 206.0 | 206.0 | 205.9 |
| Earth Station Diameter | m | 1.8 | 2.4 | 2.4 | 1.8 | 1.8 | 11.0 |
| Earth Station Gain | dB | 45.2 | 47.7 | 47.7 | 45.2 | 45.2 | 60.9 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 25.4 | 27.9 | 27.9 | 25.4 | 25.4 | 41.1 |
| C/N Thermal Downlink | dB | 17.5 | 20.9 | 20.9 | 18.5 | 18.5 | 26.0 |
| C/I XPOL, ACI, IM, ASI | dB | 19.8 | 23.1 | 23.1 | 20.7 | 20.7 | 28.2 |
| C/(N+I) downlink | dB | 15.5 | 18.8 | 18.8 | 16.4 | 16.5 | 23.9 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 27.1 | 27.9 | 27.9 | 28.0 | 30.0 | 19.7 |
| C/I dn (single satellite) | dB | 22.8 | 26.1 | 26.1 | 23.7 | 23.7 | 31.2 |
| Aggregate C/I up | dB | 24.1 | 24.9 | 24.9 | 25.0 | 27.0 | 16.7 |
| Aggregate C/I down | dB | 19.8 | 23.1 | 23.1 | 20.7 | 20.7 | 28.2 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 14.2 | 16.7 | 16.7 | 15.1 | 15.6 | 12.4 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 8.2 | 7.5 | 7.5 | 8.2 | 8.7 | 2.4 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 207 | 214 |

TABLE A-37. LINK BUDGET, NORTH AMERICA/NORTH AMERICA, 54 MHz TRANSPONDER

| | | WA/NA 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| Link Parameters | Units | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 53.2 | 55.2 | 61.2 | 67.6 | 79.2 | 70.7 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 3.8 | 9.3 |
| Earth Station Gain | dBi | 49.1 | 53.1 | 53.1 | 49.1 | 53.1 | 61.0 |
| Uplink Input Power per Carrier | dBW | 4.1 | 2.0 | 8.0 | 18.5 | 26.1 | 9.8 |
| Free Space Loss | dB | 207.0 | 207.0 | 207.0 | 207.0 | 207.0 | 206.9 |
| G/T Satellite | dB/K | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 | -3.0 |
| C/N Thermal Uplink | dB | 17.7 | 18.4 | 18.4 | 18.4 | 21.3 | 13.8 |
| C/I XPOL, ACI, IM, ASI | dB | 25.2 | 25.9 | 25.9 | 25.8 | 28.8 | 21.2 |
| C/(N+I) uplink | dB | 17.0 | 17.7 | 17.7 | 17.7 | 20.6 | 13.1 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3.4dB contour) | dBW | 24.0 | 25.9 | 31.9 | 38.4 | 47.0 | 37.5 |
| Maximum e.i.r.p. density | dBW/4kHz | 9.3 | 10.0 | 10.0 | 10.0 | 9.9 | 13.9 |
| Free Space Loss | dB | 206.0 | 206.0 | 206.0 | 206.0 | 206.0 | 205.9 |
| Earth Station Diameter | m | 1.8 | 3.0 | 3.0 | 1.8 | 1.8 | 11.0 |
| Earth Station Gain | dBi | 45.2 | 49.6 | 49.6 | 45.2 | 45.2 | 60.9 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 25.4 | 29.9 | 29.9 | 25.4 | 25.4 | 41.1 |
| C/N Thermal Downlink | dB | 17.9 | 23.1 | 23.1 | 18.6 | 18.5 | 25.7 |
| C/I XPOL, ACI, IM, ASI | dB | 20.1 | 25.3 | 25.3 | 20.8 | 20.7 | 27.9 |
| C/(N+I) downlink | dB | 15.9 | 21.0 | 21.0 | 16.5 | 16.5 | 23.7 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 28.2 | 28.9 | 28.9 | 28.8 | 31.8 | 24.2 |
| C/I dn (single satellite) | dB | 23.1 | 28.3 | 28.3 | 23.8 | 23.7 | 30.9 |
| Aggregate C/I up | dB | 25.2 | 25.9 | 25.9 | 25.8 | 28.8 | 21.2 |
| Aggregate C/I down | dB | 20.1 | 25.3 | 25.3 | 20.8 | 20.7 | 27.9 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 13.4 | 16.1 | 16.1 | 14.1 | 15.0 | 12.7 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 7.4 | 6.8 | 6.8 | 7.2 | 8.1 | 2.7 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 215 | 222 |

TABLE A-38. LINK BUDGET, WEST AFRICA/NORTH AMERICA, 54 MHz TRANSPONDER

| Link Parameters | Units | EU/NA 54MHz Transponder | | | | | |
|---|----------|-------------------------|---------|---------|---------|---------|---------|
| | | 346KG7W | 461KG7W | 1M84G7W | 8M25G7W | 54M0G7W | 36M0F3F |
| Uplink Frequency | GHz | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 | 14.281 |
| Downlink Frequency | GHz | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 | 11.981 |
| Carrier Allocated Bandwidth | kHz | 346.0 | 461.0 | 1840.0 | 8250.0 | 54000.0 | 36000.0 |
| Energy Dispersal | MHz | n/a | n/a | n/a | n/a | n/a | 2.0 |
| Uplink: | | | | | | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 51.5 | 53.3 | 59.4 | 65.9 | 78.5 | 69.5 |
| Earth Station Diameter | m | 2.4 | 3.8 | 3.8 | 2.4 | 3.8 | 9.3 |
| Earth Station Gain | dB | 49.1 | 53.1 | 53.1 | 49.1 | 53.1 | 61.0 |
| Uplink Input Power per Carrier | dBW | 2.4 | 0.2 | 6.2 | 16.8 | 25.4 | 8.5 |
| Free Space Loss | dB | 207.0 | 207.0 | 207.0 | 207.0 | 207.0 | 206.9 |
| G/T Satellite | dB/K | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 | -2.6 |
| C/N Thermal Uplink | dB | 16.5 | 17.0 | 17.0 | 17.1 | 21.0 | 13.0 |
| C/I XPOL, ACI, IM, ASI | dB | 23.5 | 24.1 | 24.1 | 24.1 | 28.0 | 20.0 |
| C/(N+I) uplink | dB | 15.7 | 16.2 | 16.2 | 16.3 | 20.2 | 12.2 |
| Downlink: | | | | | | | |
| Satellite e.i.r.p. per carrier (-3.4dB contour) | dBW | 24.1 | 25.9 | 31.9 | 38.5 | 47.1 | 38.0 |
| Maximum e.i.r.p. density | dBW/4kHz | 9.4 | 10.0 | 10.0 | 10.0 | 10.0 | 14.5 |
| Free Space Loss | dB | 206.0 | 206.0 | 206.0 | 206.0 | 206.0 | 205.9 |
| Earth Station Diameter | m | 1.8 | 3.0 | 3.0 | 1.8 | 1.8 | 11.0 |
| Earth Station Gain | dB | 45.2 | 49.6 | 49.6 | 45.2 | 45.2 | 60.9 |
| Noise Temperature | kHz | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 | 95.0 |
| Earth Station G/T | dB/K | 25.4 | 29.9 | 29.9 | 25.4 | 25.4 | 41.1 |
| C/N Thermal Downlink | dB | 18.1 | 23.0 | 23.0 | 18.7 | 18.6 | 26.3 |
| C/I XPOL, ACI, IM, ASI | dB | 20.3 | 25.3 | 25.3 | 20.9 | 20.8 | 28.5 |
| C/(N+I) downlink | dB | 16.0 | 21.0 | 21.0 | 16.6 | 16.5 | 24.2 |
| Adjacent Satellite Interference: | | | | | | | |
| Uplink Inp. Pwr. Dens. @ 2 degrees | dBW/Hz | -50 | -50 | -50 | -50 | -50 | -50 |
| Downlink e.i.r.p. Dens @ 2 degrees | dBW/Hz | -26 | -26 | -26 | -26 | -26 | -26 |
| C/I up (single satellite) | dB | 26.5 | 27.1 | 27.1 | 27.1 | 31.0 | 23.0 |
| C/I dn (single satellite) | dB | 23.3 | 28.3 | 28.3 | 23.9 | 23.8 | 31.5 |
| Aggregate C/I up | dB | 23.5 | 24.1 | 24.1 | 24.1 | 28.0 | 20.0 |
| Aggregate C/I down | dB | 20.3 | 25.3 | 25.3 | 20.9 | 20.8 | 28.5 |
| Overall: | | | | | | | |
| C/(N+I) overall | dB | 12.8 | 15.0 | 15.0 | 13.4 | 15.0 | 11.9 |
| C/(N+I) required | dB | 6.0 | 9.3 | 9.3 | 6.9 | 6.9 | 10.0 |
| System Margin | dB | 6.8 | 5.7 | 5.7 | 6.5 | 8.1 | 1.9 |

| Associated Txr IDs | |
|--------------------|-----|
| Start | End |
| 223 | 238 |

TABLE A-39. LINK BUDGET, EUROPE/NORTH AMERICA, 54 MHz TRANSPONDER

APPENDIX B

Antenna Beam Diagrams



Figure B-1.
Global Uplink Beam
Peak G/T = -7.6 dB/K
Peak Beam Gain = 20.9 dBi
Min. Saturation Flux Density = -93 dBW/m²
Polarization LHCP and RHCP

Schedule S beam designators: GBAU and GBBU⁹

9

⁹ Additional gain contours, as requested in Section 25.114(d)(3), are not provided because they do not intersect with the Earth's surface. SES WORLD SKIES requests a waiver of this rule to the extent necessary.



Figure B-2.
Global Downlink Beam
Peak EIRP = 36.6 dBW
Peak Beam Gain = 20.9 dBi
Polarization RHCP and LHCP
Schedule S beam designators: GBAD and GBBD¹⁰

¹⁰ Additional gain contours, as requested in Section 25.114(d)(3), are not provided because they do not intersect with the Earth's surface. SES WORLD SKIES requests a waiver of this rule to the extent necessary.

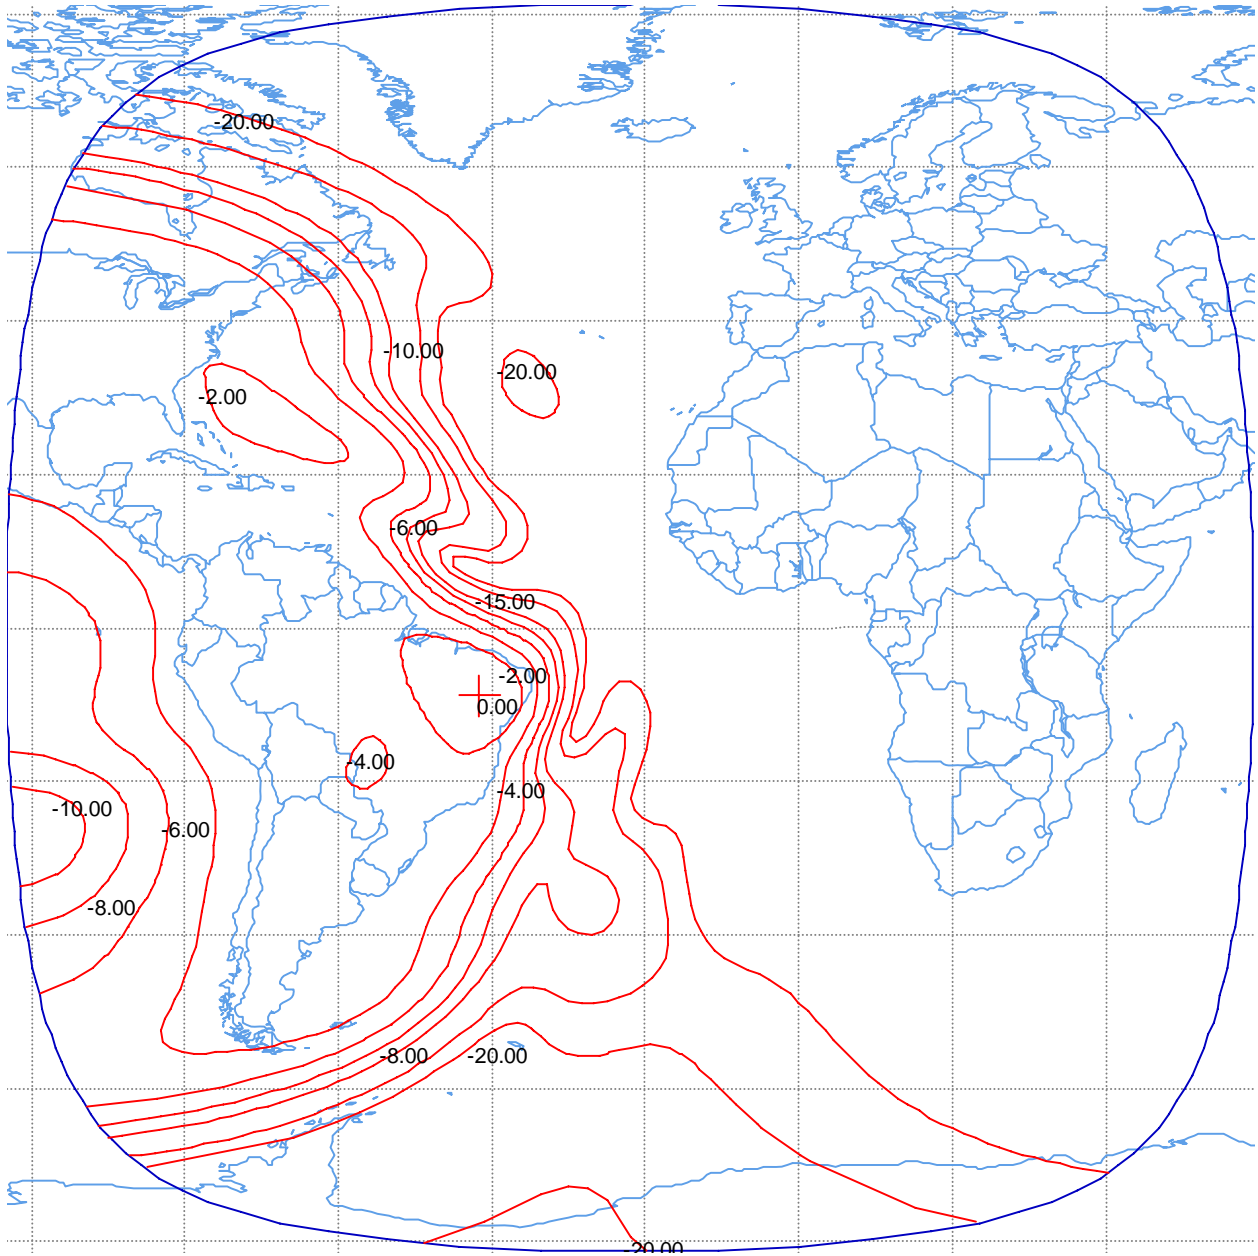


Figure B-3.
West Hemi Uplink Beam
Peak G/T = 1.4 dB/K
Peak Beam Gain = 29.4 dBi
Min. Saturation Flux Density = -96 dBW/m²
Polarization LHCP and RHCP
Schedule S beam designator: WHAU and WHBU

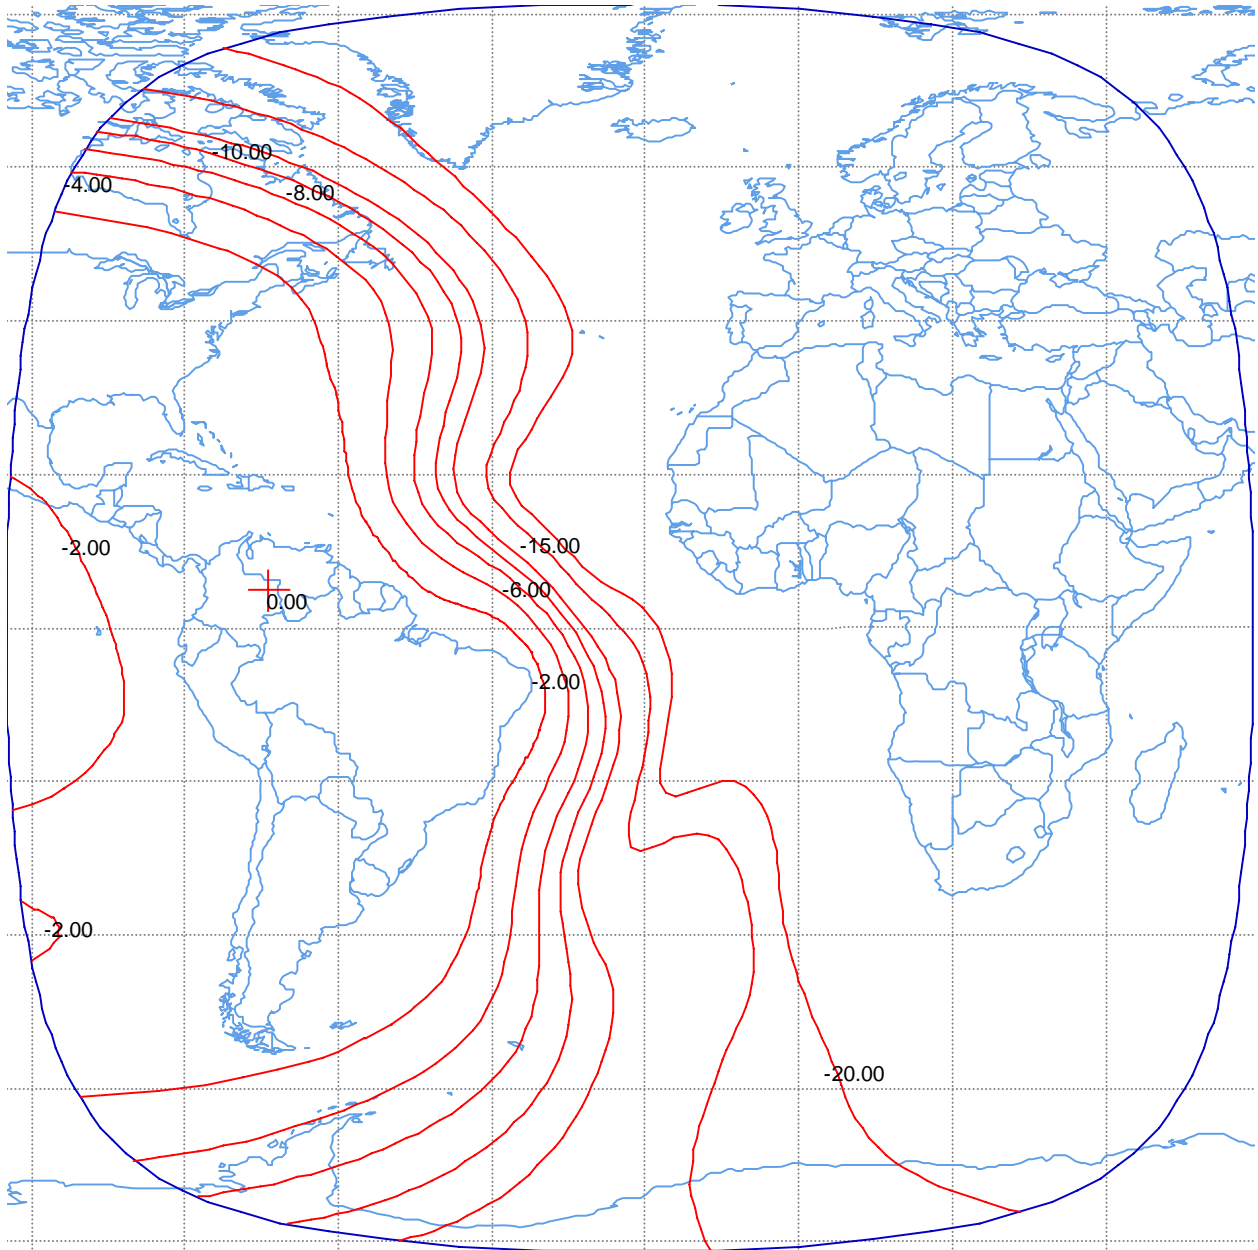


Figure B-4.
West Hemi Downlink Beam
Peak EIRP = 42.1 dBW
Peak Beam Gain = 26.8 dBi
Polarization LHCP and RHCP
Schedule S beam designator: WHAD and WHBD

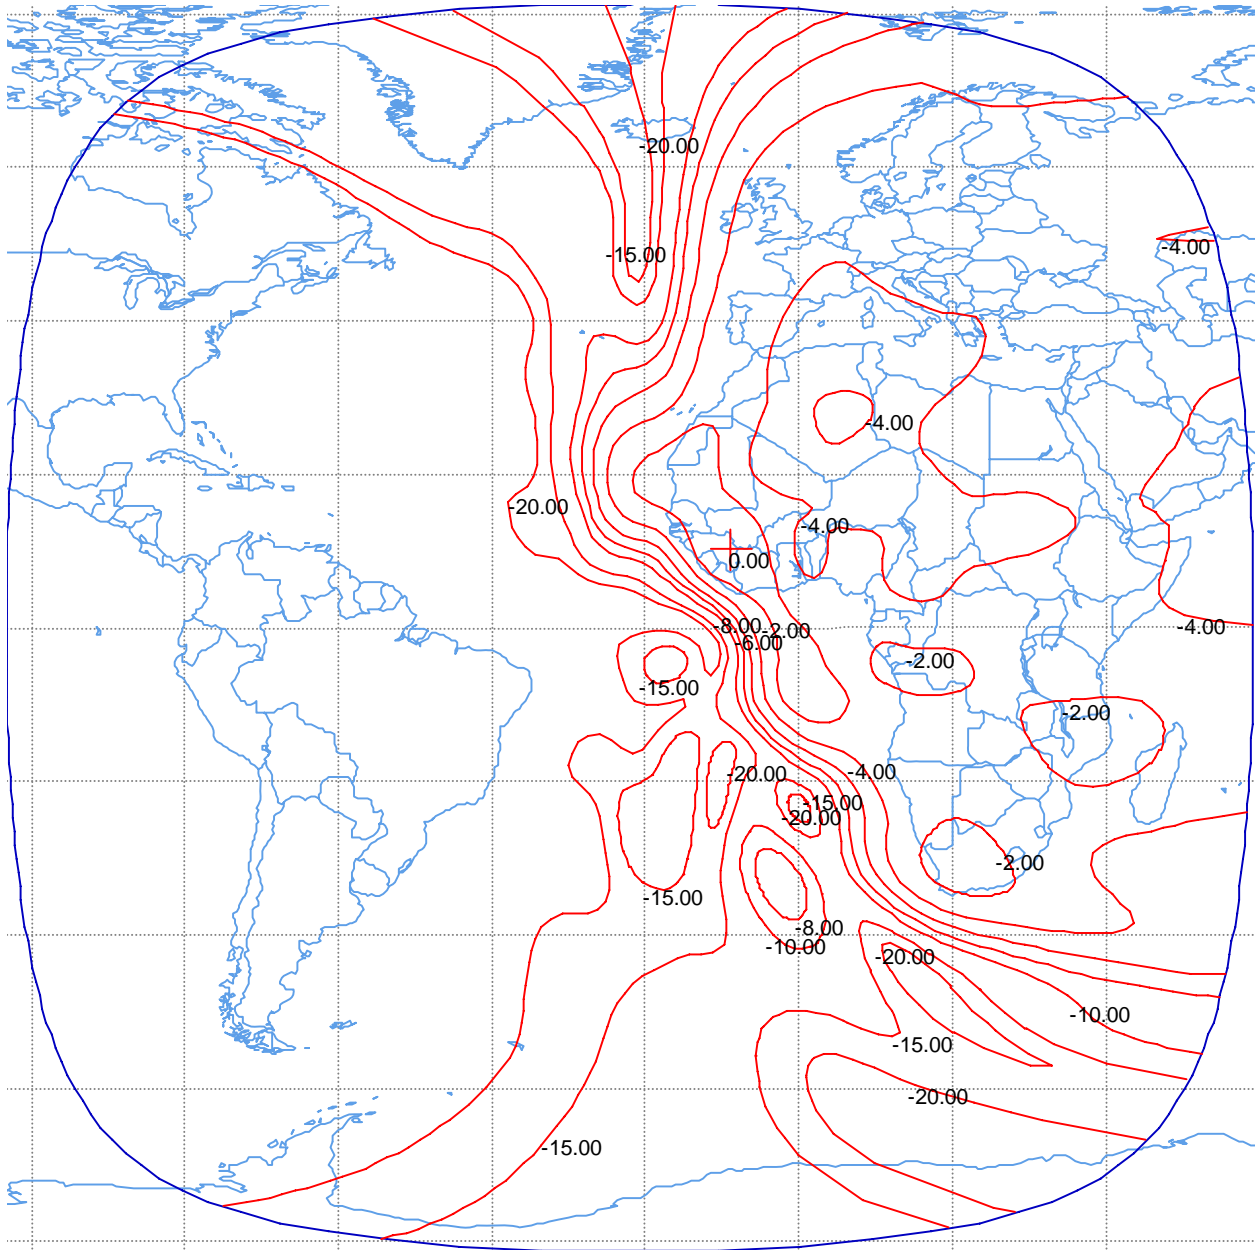


Figure B-5.
East Hemi Uplink Beam
Peak G/T = 0.4 dB/K
Peak Beam Gain = 28.2 dBi
Min. Saturation Flux Density = -96 dBW/m²
Polarization LHCP and RHCP
Schedule S beam designator: EHAU and EHBV

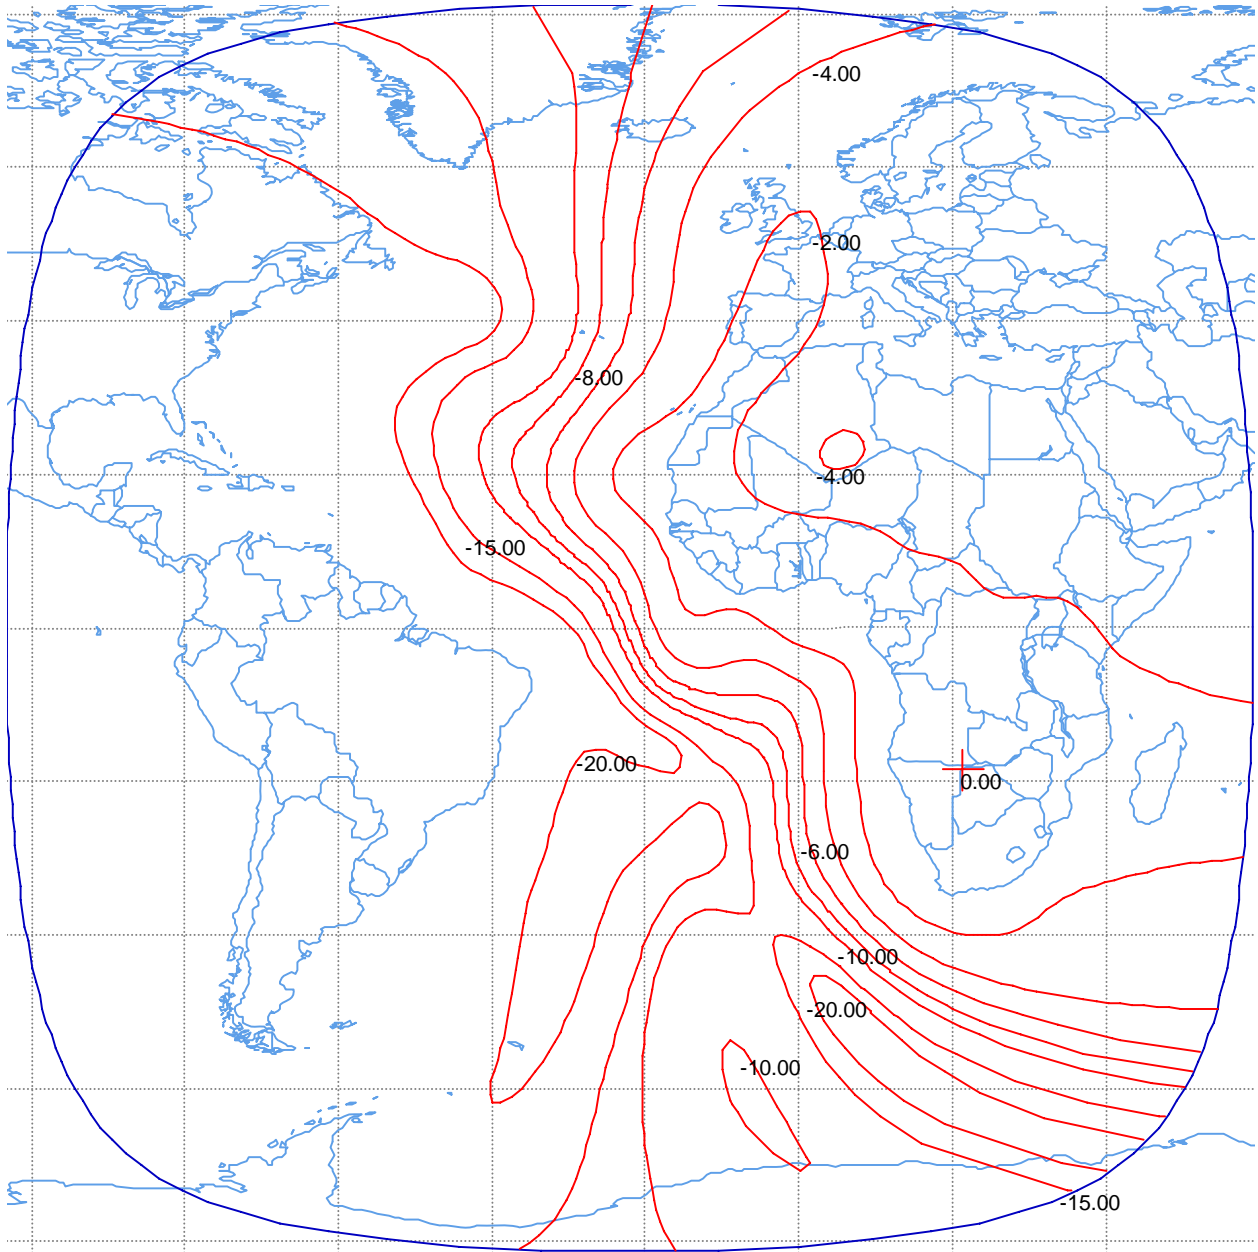


Figure B-6.
East Hemi Downlink Beam
Peak EIRP = 42.8 dBW
Peak Beam Gain = 26.5 dBi
Polarization LHCP and RHCP
Schedule S beam designator: EHAD and EHBD

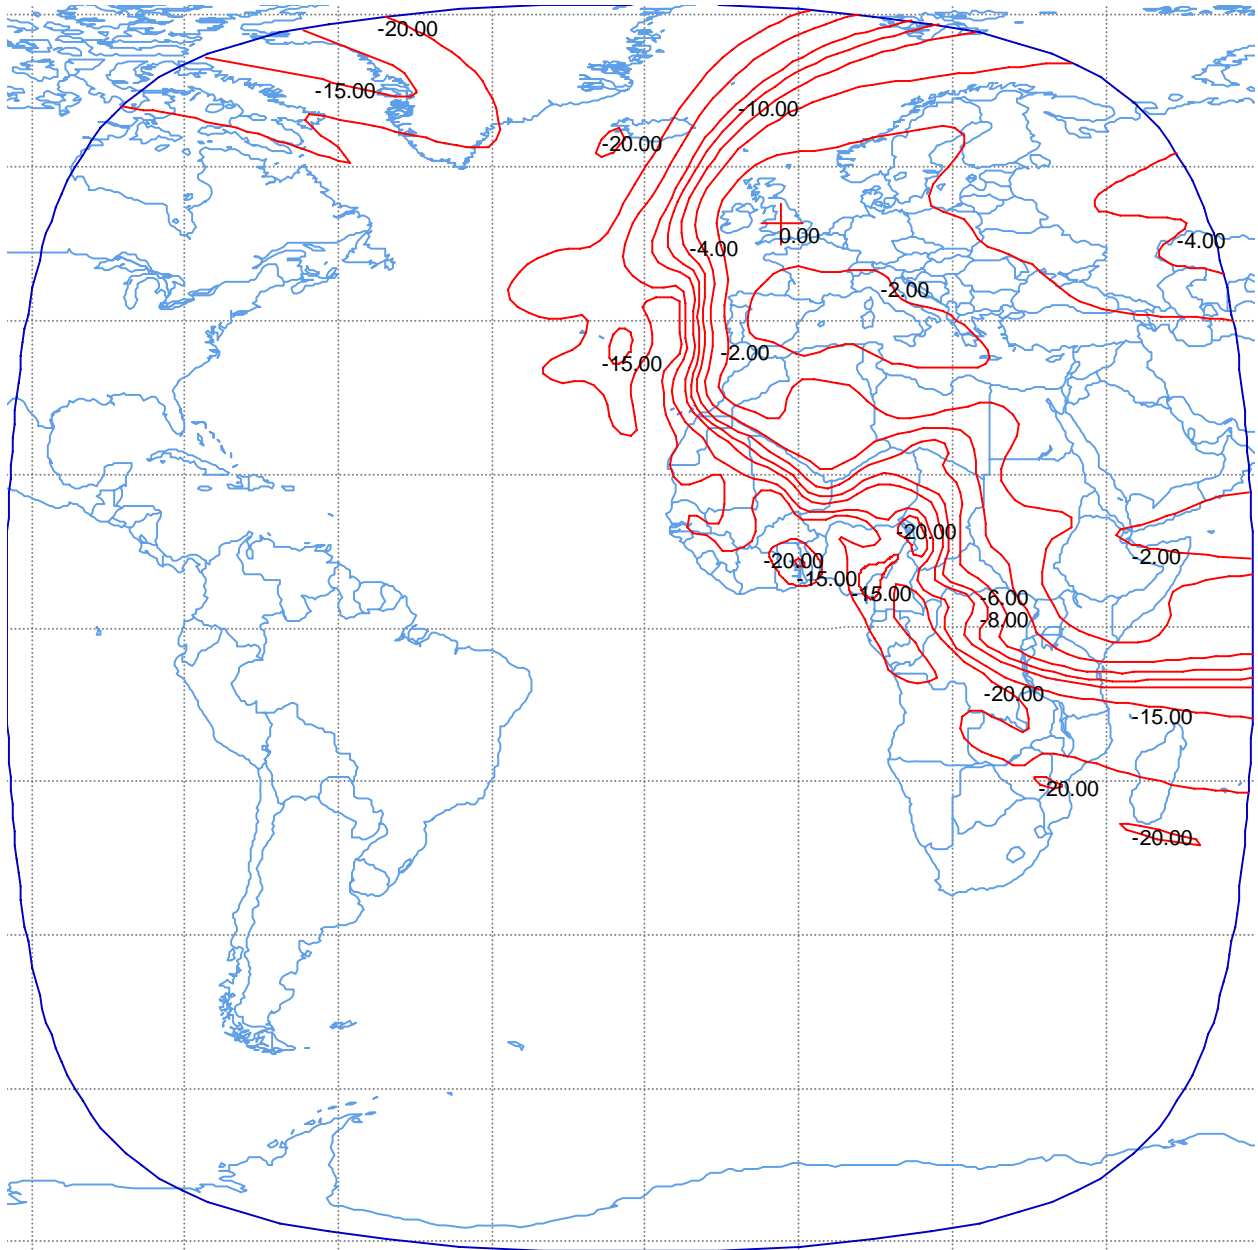


Figure B-7.
Europe Uplink Beam
Peak G/T = 4.1 dB/K
Peak Beam Gain = 32.3 dBi
Min. Saturation Flux Density = -97 dBW/m²
Polarization Vertical and Horizontal Linear
Schedule S beam designators: EUAU and EUBU

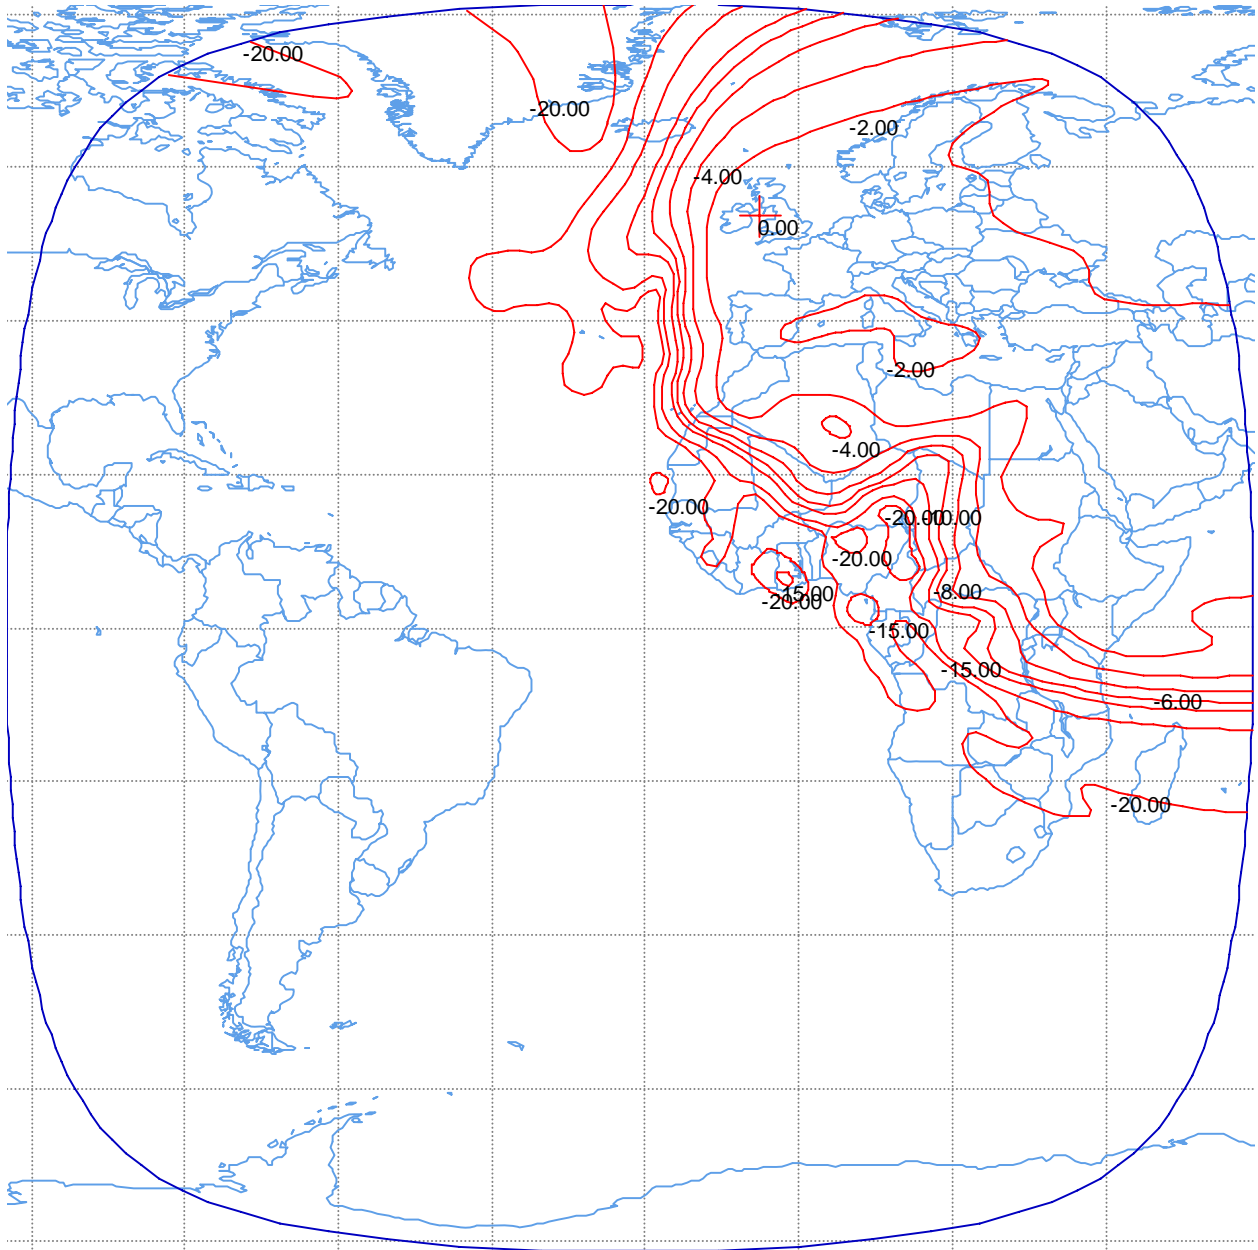


Figure B-8.
Europe Downlink Beam
Peak EIRP = 50.9 dBW
Peak Beam Gain = 31.6 dBi
Polarization Vertical and Horizontal Linear
Schedule S beam designators: EUAD and EUBD

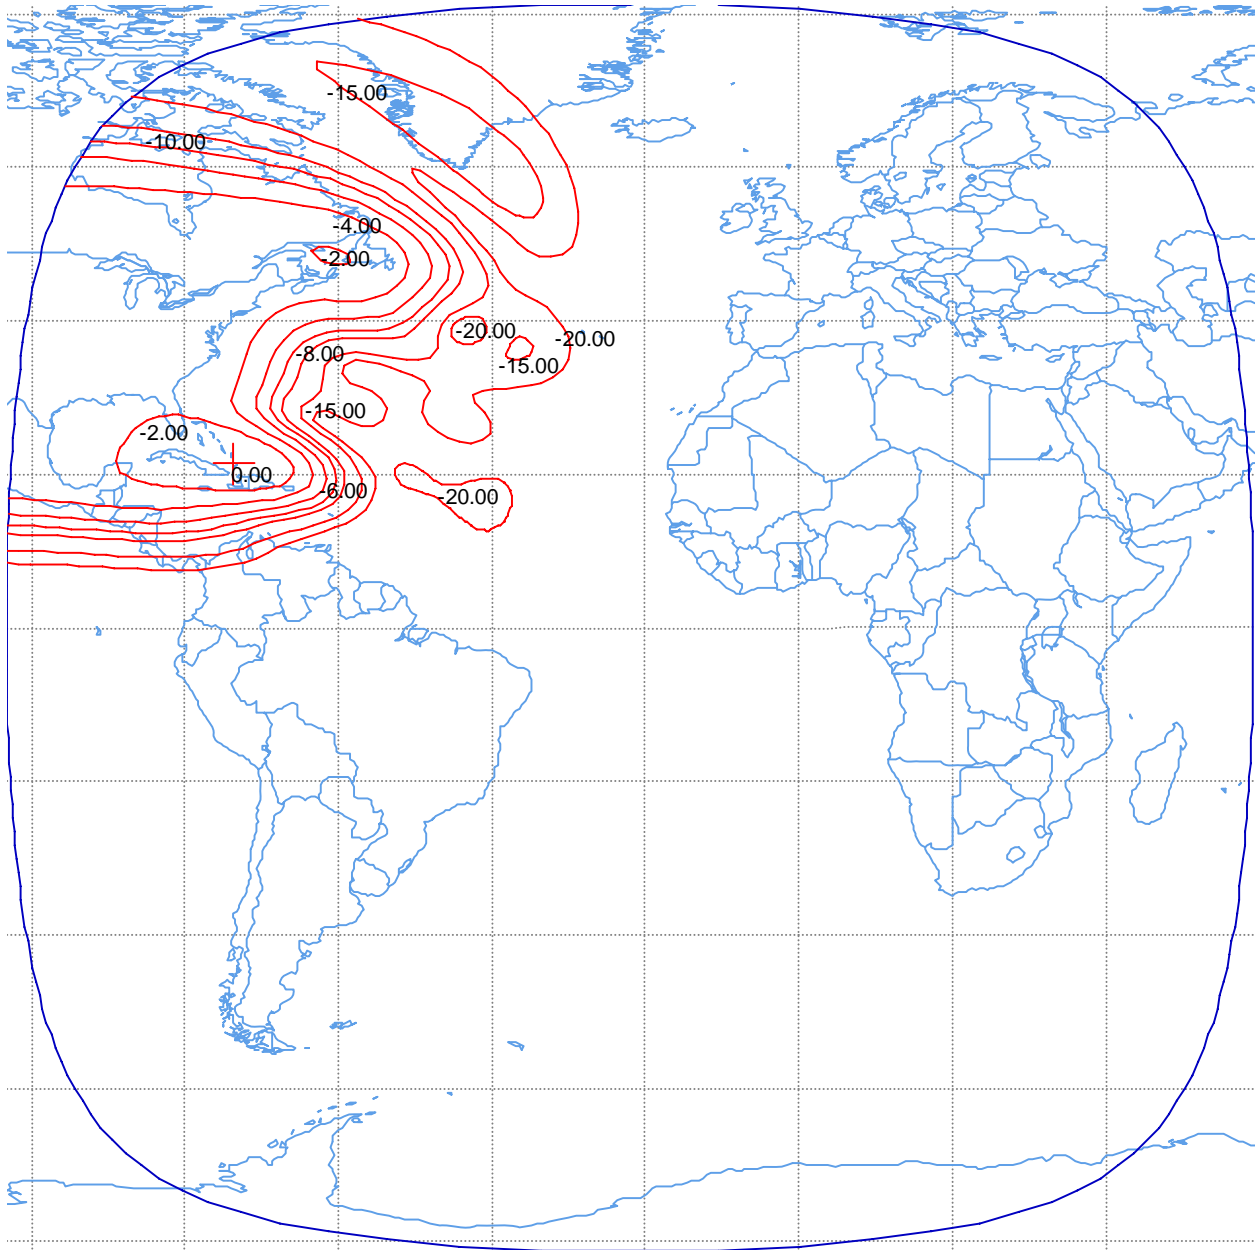


Figure B-9.
North America Uplink Beam
Peak G/T = 8.1 dB/K
Peak Beam Gain = 36.6 dBi
Min. Saturation Flux Density = -101 dBW/m²
Polarization Vertical and Horizontal Linear
Schedule S beam designators: NAAU and NABU

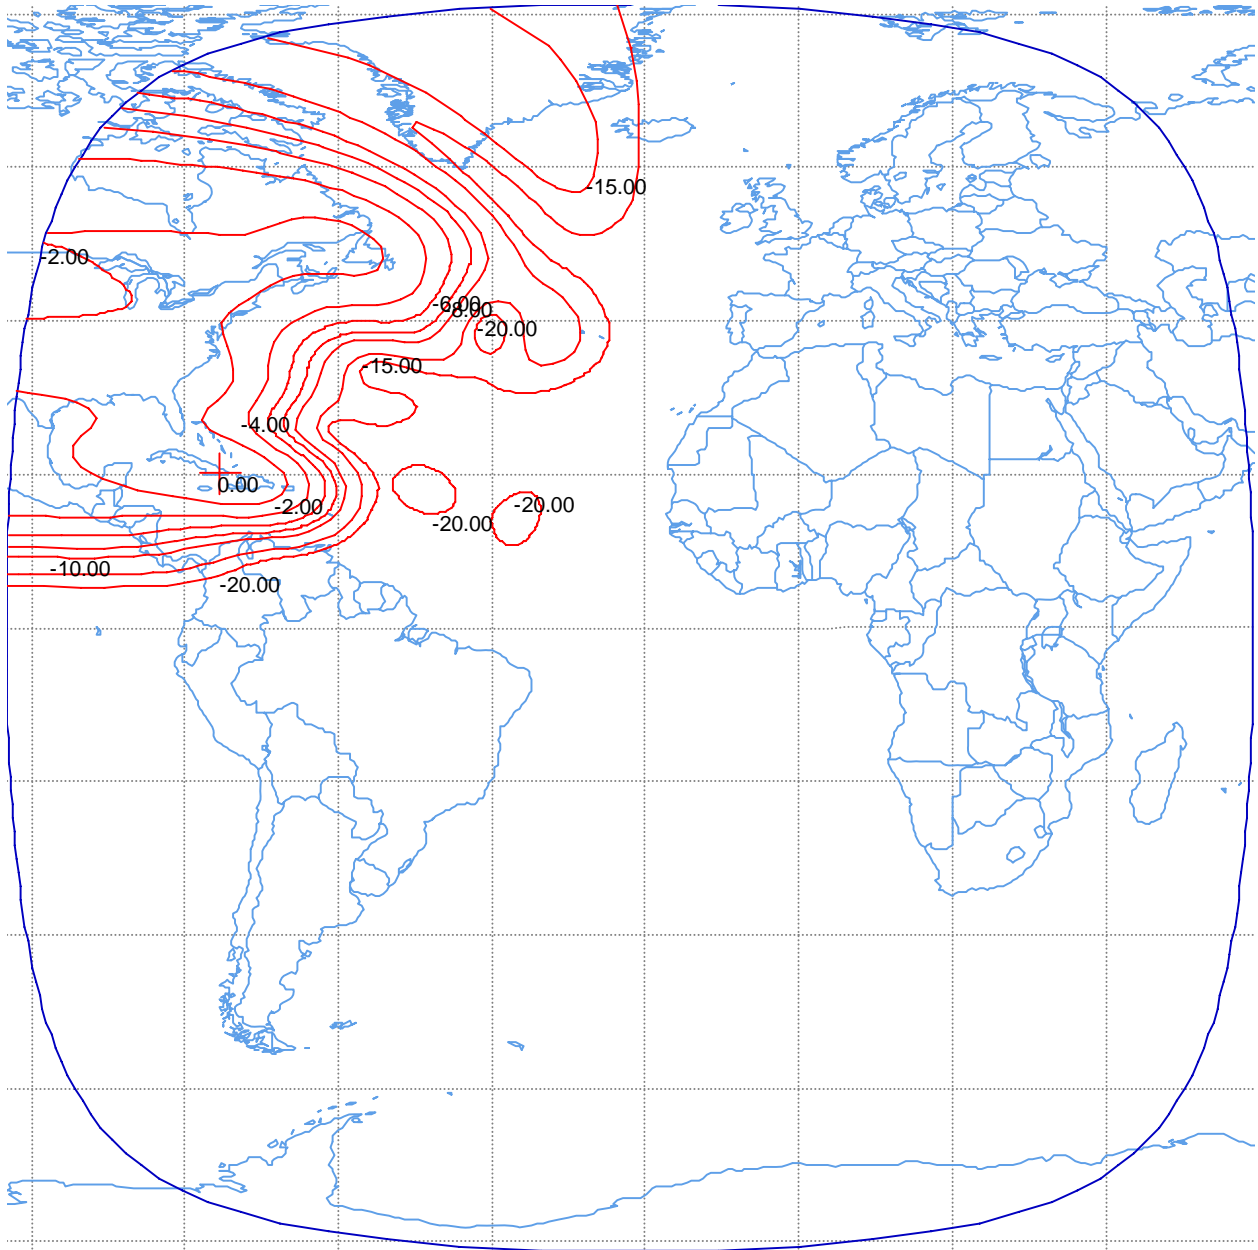


Figure B-10.
North America Downlink Beam
Peak EIRP = 54.3 dBW
Peak Beam Gain = 35.3 dBi
Polarization Horizontal Linear
Schedule S beam designators: NABD

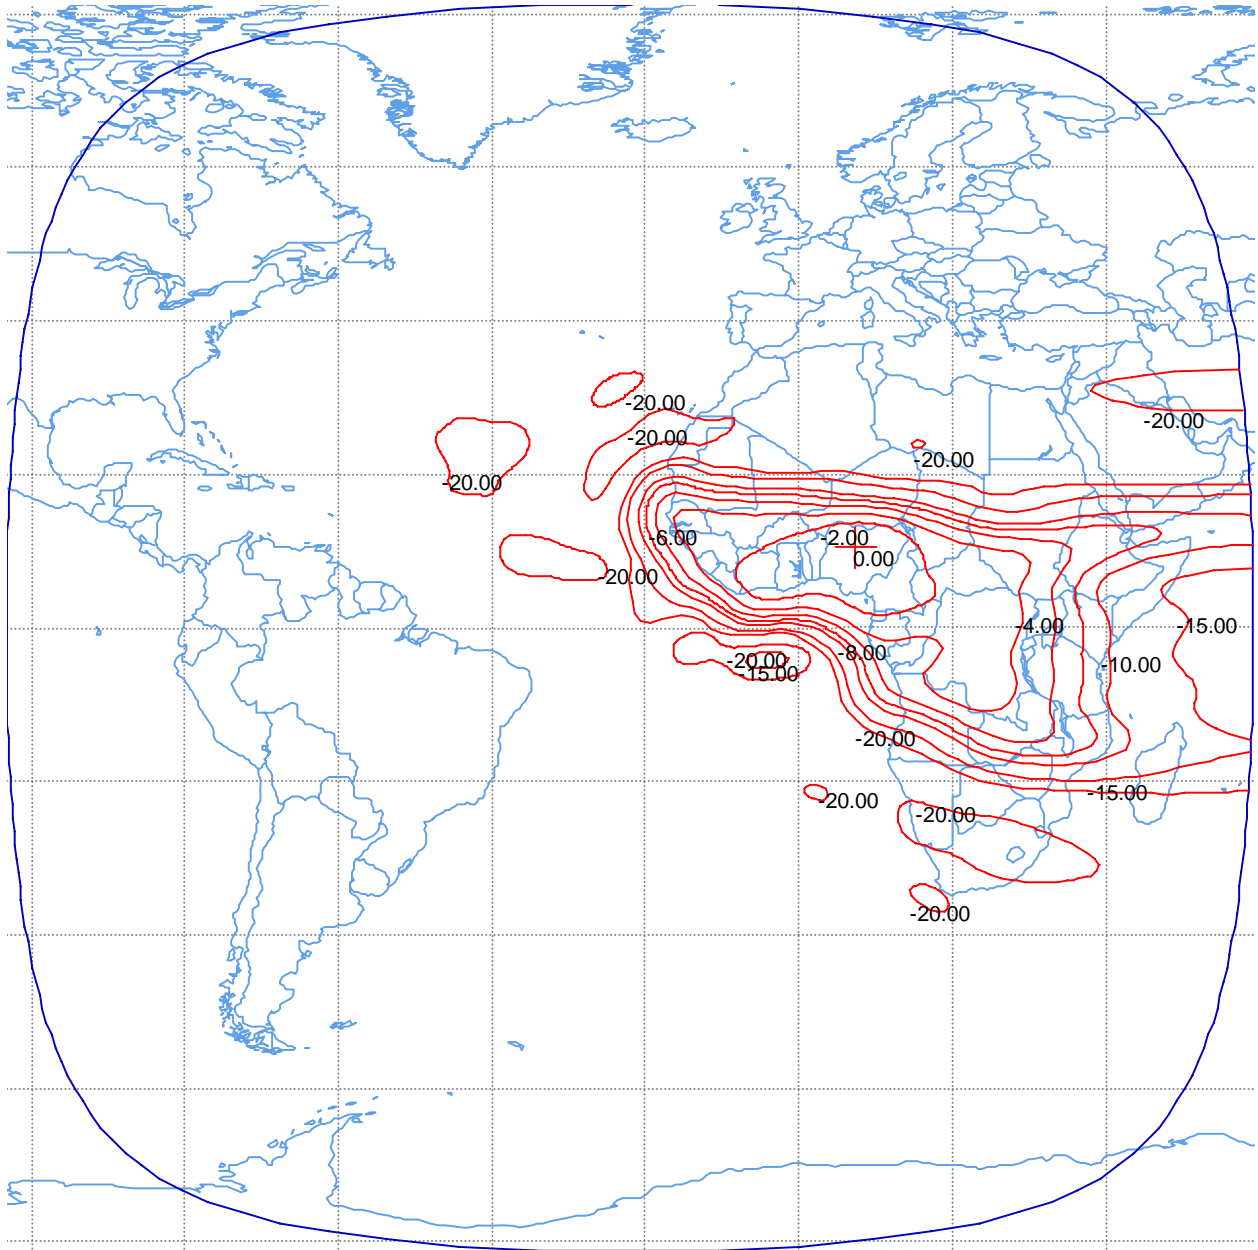


Figure B-11.
West Africa Uplink Beam
Peak G/T = 6.5 dB/K
Peak Beam Gain = 34.8 dBi
Min. Saturation Flux Density = -98 dBW/m²
Polarization Horizontal Linear
Schedule S beam designators: WAAU

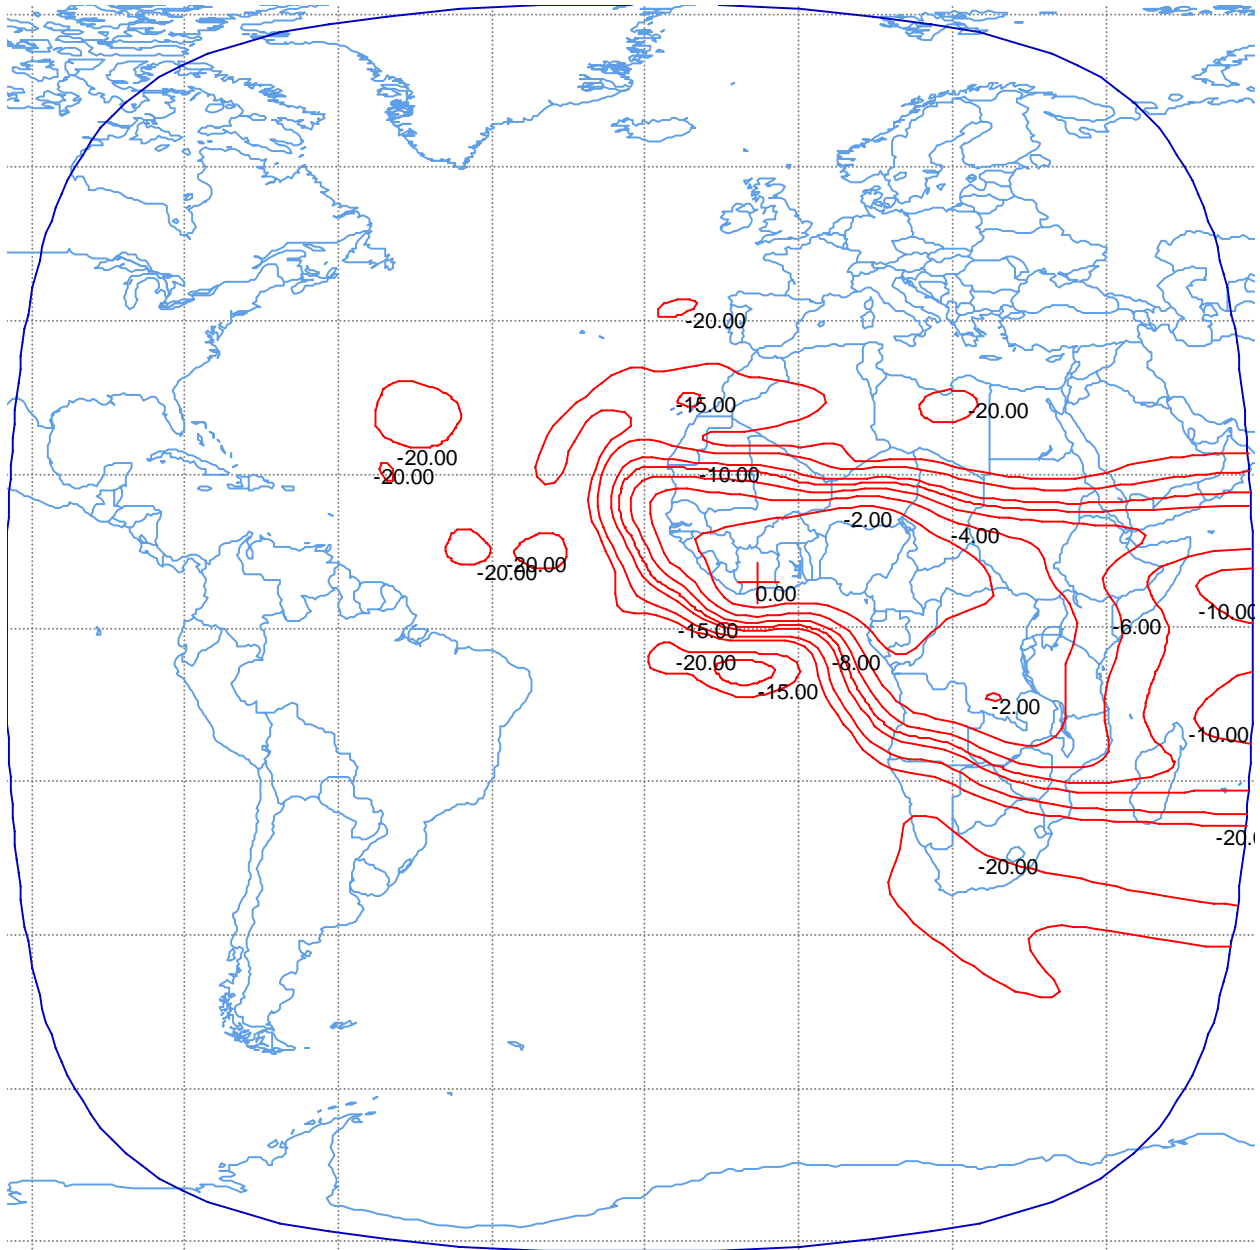


Figure B-12.
West Africa Downlink Beam
Peak EIRP = 51.9 dBW
Peak Beam Gain = 32.9 dBi
Polarization Vertical Linear
Schedule S beam designators: WAAD

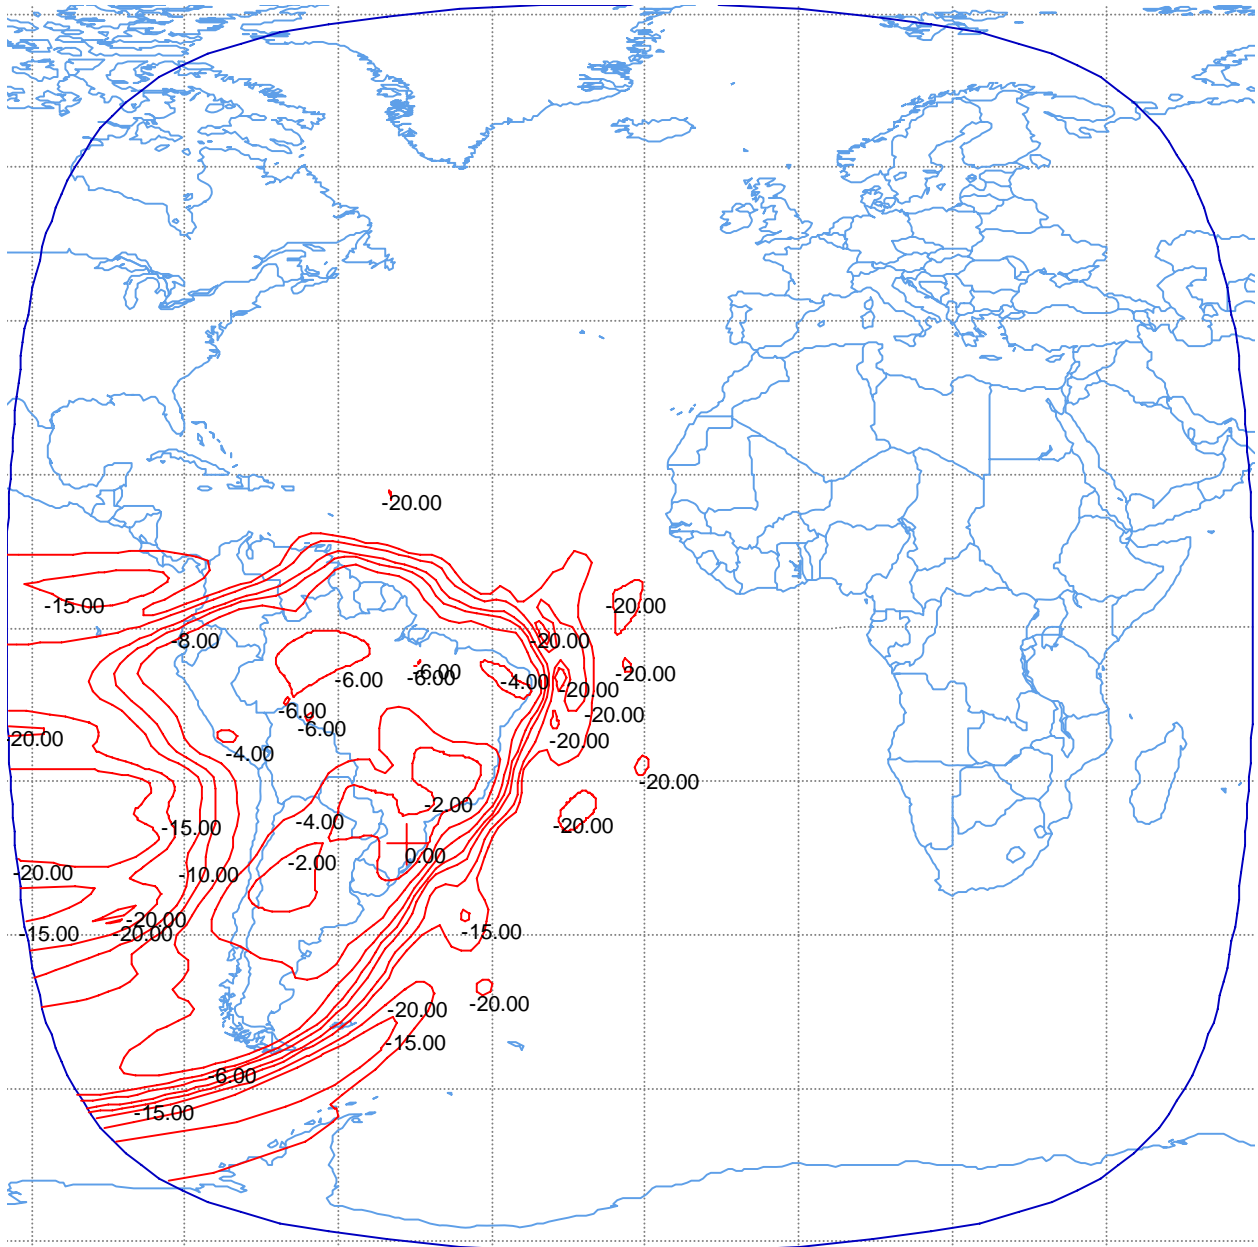


Figure B-13.
Southern Cone Uplink Beam
Peak G/T = 6.1 dB/K
Peak Beam Gain = 34.2 dBi
Min. Saturation Flux Density = -98 dBW/m²
Polarization Horizontal and Vertical Linear
Schedule S beam designators: SCAU and SCBU

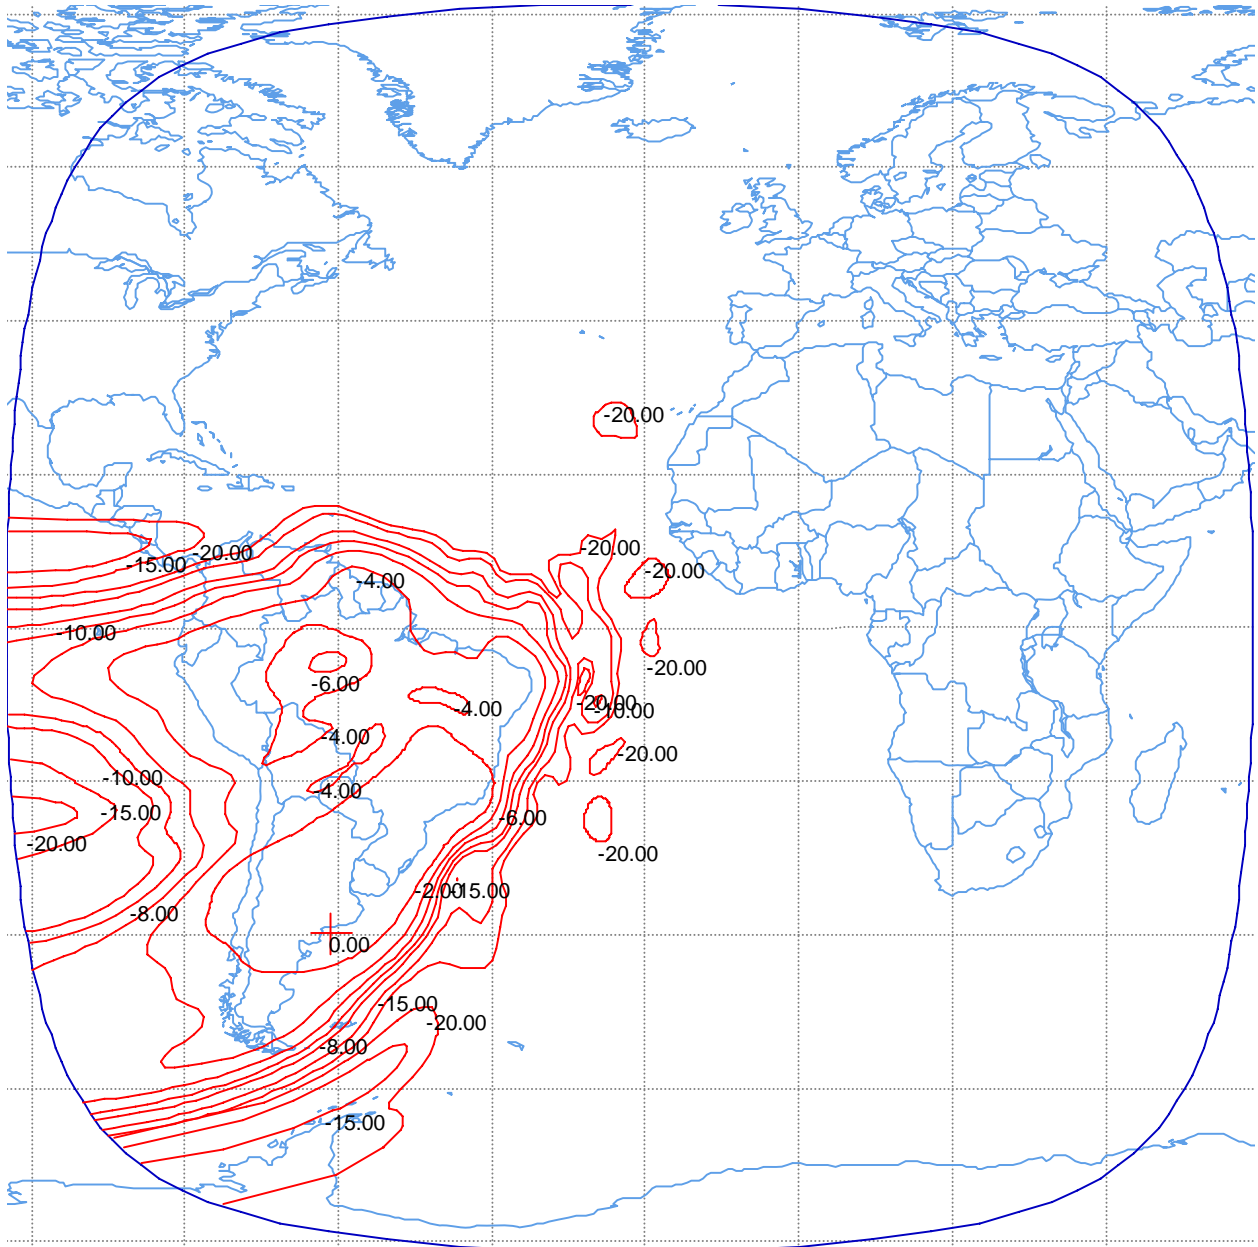


Figure B-14.
Southern Cone Downlink Beam
Peak EIRP = 51.9 dBW
Peak Beam Gain = 32.3 dBi
Polarization Horizontal and Vertical Linear
Schedule S beam designators: SCAD and SCBD



Figure B-15.
Command Carrier Earth Facing Receive Horn¹¹
Maximum receive gain = 11 dBi
Command Threshold Flux Density = -90 dBW/m²
Polarization RHCP
Schedule S beam designator: CMD

¹¹ Additional gain contours, as requested in Section 25.114(d)(3), are not provided because they do not intersect with the Earth's surface.



Figure B-16.
Telemetry Carrier Earth Facing Transmit Horn¹²
Maximum EIRP = 9 dBW
Maximum transmit gain = 11 dBi
Polarization LHCP and RHCP
Schedule S beam designator: TLM

¹² Additional gain contours, as requested in Section 25.114(d)(3), are not provided because they do not intersect with the Earth's surface. SES WORLD SKIES requests a waiver of this rule to the extent necessary.



Figure B-17.
C-band Tracking Beacon Earth Facing Transmit Horn¹³
Maximum EIRP = 6 dBW
Maximum transmit gain = 11 dBi
Polarization Vertical Linear
Schedule S beam designator: BNC

¹³ Additional gain contours, as requested in Section 25.114(d)(3), are not provided because they do not intersect with the Earth's surface. SES WORLD SKIES requests a waiver of this rule to the extent necessary.



Figure B-18.
Ku-band Tracking Beacon Earth Facing Transmit Horn¹⁴
Maximum EIRP = 9 dBW
Maximum transmit gain = 11 dBi
Polarization RHCP and LHCP
Schedule S beam designator: BNK

¹⁴ Additional gain contours, as requested in Section 25.114(d)(3), are not provided because they do not intersect with the Earth's surface. SES WORLD SKIES requests a waiver of this rule to the extent necessary.

APPENDIX C

TT&C Link Budgets

| Link Parameters | Units | 800KF9D |
|-------------------------------------|--------------|----------------|
| Uplink Frequency | GHz | 14.496 |
| Carrier Allocated Bandwidth | kHz | 800.0 |
| Uplink: | | |
| Nominal E/S e.i.r.p. per carrier | dBW | 83.0 |
| Earth Station Diameter | m | 13.0 |
| Earth Station Gain | dBi | 64.0 |
| Uplink Input Power per Carrier | dBW | 19.0 |
| Spreading Loss | dB | 162.8 |
| Rain Margin | dB | 5.0 |
| Other Losses | dB | 1.0 |
| SFD at satellite | dBW/m2 | -85.8 |
| Adjustment for +/- 30° to Earth EOC | dB | 4.2 |
| SFD at satellite | dBW/m2 | -81.6 |
| CMD subsystem SFD Threshold | dBW/m2 | -88.0 |
| Margin | dB | 6.4 |

TABLE C-1. LINK BUDGET, TELECOMMAND CARRIER, 800KF9D¹⁵

¹⁵ The link budget for the telecommand carrier at frequency 14499.0 MHz would be identical and is therefore not displayed separately.

| Link Parameters | Units | 300KF9D |
|-------------------------------------|-------|---------|
| Downlink Frequency | GHz | 11.451 |
| Carrier Allocated Bandwidth | kHz | 300.0 |
| Downlink: | | |
| Downlink e.i.r.p. (EOC)* | dBW | 8.0 |
| Free Space Loss | dB | 205.4 |
| Atmospheric and Polarization Losses | dB | 1.0 |
| Rain Fade | dB | 5.0 |
| Receive E/S Pointing Loss | dB | 0.3 |
| Receive E/S G/T | dB/K | 38.4 |
| Downlink C/No | dB | 63.3 |
| Required C/No | dB | 50.0 |
| Margin | dB | 13.3 |

* This is the specified minimum e.i.r.p. at the edge of Earth

TABLE C-2A. LINK BUDGET, TELEMETRY CARRIER, 300KF9D (11 GHz)¹⁶

| Link Parameters | Units | 300KF9D |
|-------------------------------------|-------|---------|
| Downlink Frequency | GHz | 12.502 |
| Carrier Allocated Bandwidth | kHz | 300.0 |
| Downlink: | | |
| Downlink e.i.r.p. (EOC)* | dBW | 8.0 |
| Free Space Loss | dB | 205.8 |
| Atmospheric and Polarization Losses | dB | 1.0 |
| Rain Fade | dB | 5.5 |
| Receive E/S Pointing Loss | dB | 0.3 |
| Receive E/S G/T | dB/K | 39.1 |
| Downlink C/No | dB | 63.1 |
| Required C/No | dB | 50.0 |
| Margin | dB | 13.1 |

TABLE C-2B. LINK BUDGET, TELEMETRY CARRIER, 300KF9D (12 GHz)¹⁷

¹⁶ The link budget for the telemetry carrier at frequency 11454.0 MHz would be identical and is therefore not displayed separately.

¹⁷ The link budget for the telemetry carrier at frequency 12500.5 MHz would be identical and is therefore not displayed separately.

| Link Parameters | Units | 25K0N0N |
|-------------------------------------|--------------|----------------|
| Downlink Frequency | MHz | 4199.750 |
| Carrier Allocated Bandwidth | kHz | 25.0 |
| Downlink: | | |
| Downlink e.i.r.p. (EOC)* | dBW | 5.0 |
| Free Space Loss | dB | 197.0 |
| Atmospheric and Polarization Losses | dB | 0.4 |
| Rain Fade | dB | 0.2 |
| Receive E/S Pointing Loss | dB | 0.1 |
| Receive E/S G/T | dB/K | 27.1 |
| Downlink C/No | dB | 63.0 |
| Required C/No | dB | 47.0 |
| Margin | dB | 16.0 |

* This is the specified minimum e.i.r.p. at the edge of Earth

TABLE C-3. TRACKING BEACON BUDGET, BNC BEAM, 25K0N0N

| Link Parameters | Units | 25K0N0N |
|-------------------------------------|--------------|----------------|
| Downlink Frequency | GHz | 12.501 |
| Carrier Allocated Bandwidth | kHz | 25.0 |
| Downlink: | | |
| Downlink e.i.r.p. (EOC)* | dBW | 8.0 |
| Free Space Loss | dB | 205.7 |
| Atmospheric and Polarization Losses | dB | 1.0 |
| Rain Fade | dB | 5.0 |
| Receive E/S Pointing Loss | dB | 0.3 |
| Receive E/S G/T | dB/K | 38.4 |
| Downlink C/No | dB | 63.0 |
| Required C/No | dB | 47.0 |
| Margin | dB | 16.0 |

* This is the specified minimum e.i.r.p. at the edge of Earth

TABLE C-4. TRACKING BEACON BUDGET, BNK BEAM, 25K0N0N