
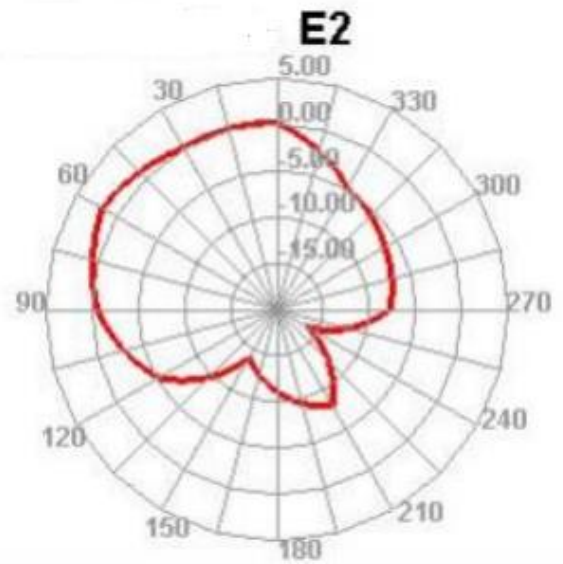
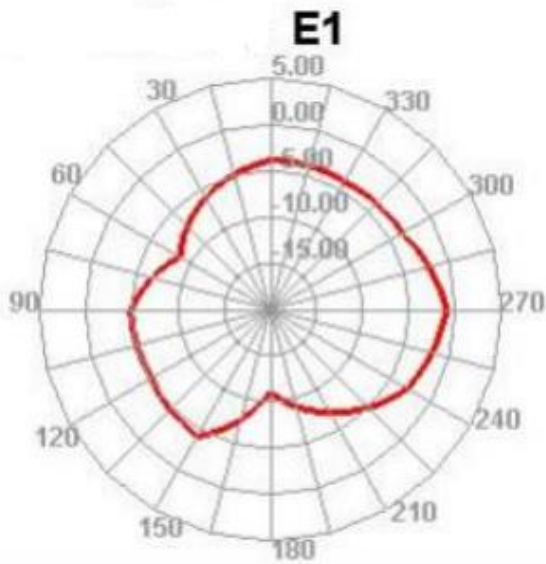
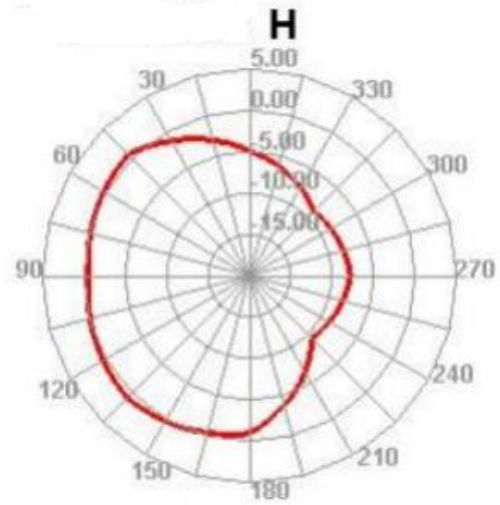



Antenna specification


Antenna Gain:

2500MHz



Passive Test For 2.4-2.5G										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	67.89	-1.68	2.2	0.77	42.174	25.715	2.92	-12.35	51.62	51.73
2410	67.07	-1.73	2.31	0.56	41.949	25.125	2.71	-12.14	51.62	51.65
2420	67.38	-1.71	2.62	0.47	42.407	24.977	2.62	-11.75	51.6	51.62
2430	67.92	-1.68	2.5	0.43	43.019	24.901	2.58	-11.52	51.57	51.68
2440	66.95	-1.55	2.3	0.58	44.661	25.285	2.73	-11.33	51.62	51.71
2450	63.2	-1.35	2.37	0.82	47.25	25.949	2.97	-11.77	51.8	51.91
2460	64.63	-1.27	2.18	1.03	48.59	26.037	3.18	-13.1	51.87	52.03
2470	62.84	-1.38	2.09	0.94	47.783	25.061	3.09	-14.64	51.94	52.07
2480	65	-1.21	2.15	1	49.977	25.722	3.15	-14.15	52.06	52.24
2490	69.83	-0.98	2.14	0.99	52.845	26.984	3.14	-14.53	52.28	52.44
2500	68.48	-1.05	2.09	0.84	51.804	26.68	2.99	-15.81	52.31	52.43

Antenna size:

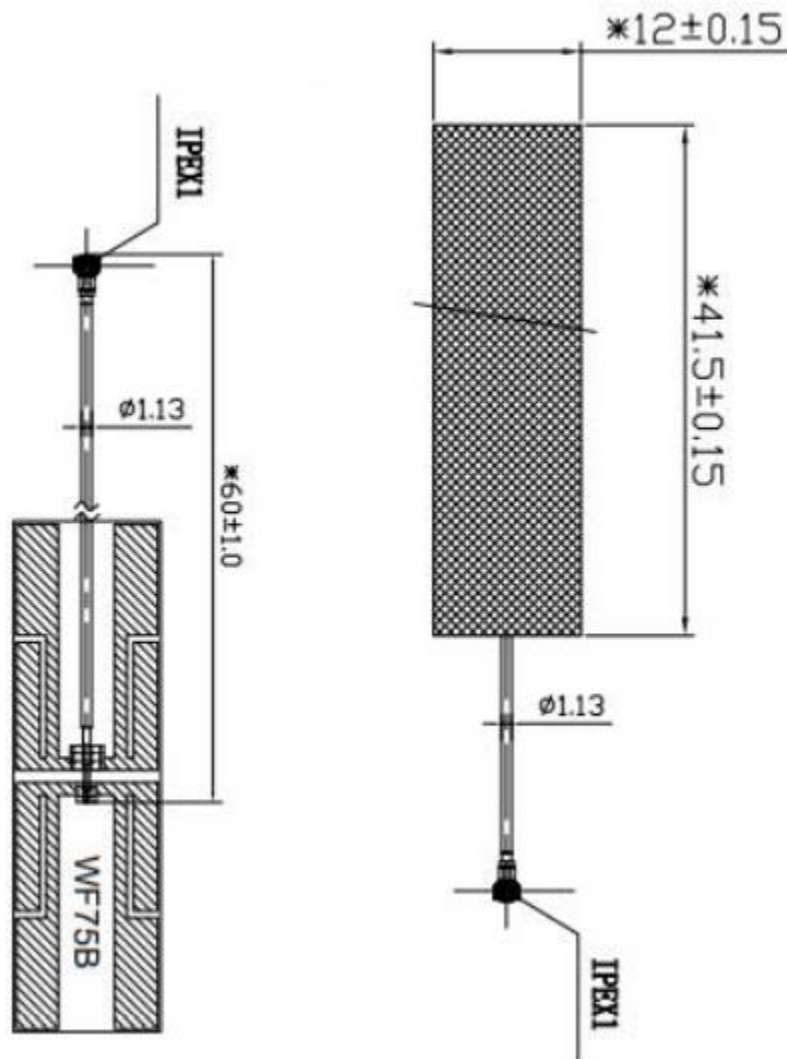

Two cables are shown. The top cable has a black label with the text 'WF75B' and a small, dark, irregular mark. The bottom cable has a brown label with green text that is partially visible, including 'OLSE' and 'STO'. Both cables have a gold-colored connector on the left end.