

FCC CFR47 PART 27 CERTIFICATION TEST REPORT FCC ID: 2A8X4-AIR2ULTRA

Product: Smart Phone

Trade Mark: IIF150

Model Number: Air2 Ultra

Family Model: N/A

Report No.: S24022803309007

Issue Date: Apr 11 , 2024

Prepared for

HONG KONG YO YOUNG INTELLIGENT CO., LIMITED
19H MAXGRAND PLAZA NO.3 TAIYAU STREET SAN PO
KONG,KOWLOONHONG KONG

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : HONG KONG YO YOUNG INTELLIGENT CO., LIMITED
Address : 19H MAXGRAND PLAZA NO.3 TAIYAU STREET SAN PO KONG, KOWLOON HONG KONG


Manufacturer's Name : HONG KONG YO YOUNG INTELLIGENT CO., LIMITED
Address : 19H MAXGRAND PLAZA NO.3 TAIYAU STREET SAN PO KONG, KOWLOON HONG KONG


Product name : Smart Phone
Trade Mark : IIF150
Model and/or type reference : Air2 Ultra
Family Model : N/A
Test Sample number : S240228033010
Date of Test : Feb. 28, 2024~ Apr 11, 2024

Standards : FCC CFR 47 Part 27
Test procedure ANSI C63.46:2015
ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Prepared : 
By : _____
Mary Hu
(Project Engineer)

Reviewed : 
By : _____
Aaron Cheng
(Supervisor)


Approved : 
By : _____
Alex Li
(Manager)

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
1.5 MEASUREMENT UNCERTAINTY	6
1.6 SPECIAL ACCESSORIES.....	6
1.7 WORST-CASE CONFIGURATION AND MODE.....	6
1.8 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE	8
2.3 CONFIGURATION OF EUT SYSTEM.....	8
2.4 TEST SETUP	9
3.TEST AND MEASUREMENT EQUIPMENT	10
4. OUTPUT POWER.....	12
4.1 OUTPUT POWER MEASUREMENT	12
5. OCCUPIED BANDWIDTH.....	13
6. BANEDGE AND EMISSION MASK	14
7. OUT OF BAND EMISSIONS.....	15
8. RADIATED MEASUREMENT	17
8.1. RADIATED POWER (ERP & EIRP).....	17
8.2 NR BAND 38.....	18
8.3 NR BAND 77	20
9. SPURIOUS RADIATION EMISSION	22

9.1 NR BAND 38	24
9.2 NR BAND 77	26
10. FREQUENCY STABILITY	28
10.1 NR BAND 38	29
10.2 NR BAND 77	31
11. PEAK-TO-AVERAGE RATIO	33
11.1 Description of the PAR Measurement	33
11.2 Measuring Instruments	33
11.3 Test Procedures	33
11.4 Test Setup	33
11.5 MODES TESTED	33

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Equipment	Smart Phone
Trade Mark	IIIF150
Model Name	Air2 Ultra
Family Model	N/A
Model Difference	N/A
FCC ID:	2A8X4-AIR2ULTRA
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> NR TDD Band 38, 77
Frequency Range:	NR TDD Band 38 Uplink/Downlink: 2570 MHz - 2620 MHz NR TDD Band 77 Uplink/Downlink: 3700 MHz - 3980 MHz
Type of Modulation:	DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM: QPSK/16-QAM/64QAM/256QAM
Subcarrier spacing	<input type="checkbox"/> 15KHz, <input checked="" type="checkbox"/> 30KHz, <input type="checkbox"/> 60KHz
NR architecture	<input checked="" type="checkbox"/> SA, <input type="checkbox"/> NSA
Antenna:	PIFA Antenna
Antenna gain:	N38: -2.31dBi, N77: -3.18dBi,
Adapter	Model:FC462U Input: 100-240V~50/60Hz 1.5A Max Output: 5.0V---3.0A 15.0W or 9.0V---3.0A 27.0W 12.0V---3.0A 36.0W or 15.0V---3.0A 45.0W Or 20.0V---3.25A 65.0W Max PPS:3.3-20V--- 3.25A Max
Battery	DC 3.89V,5000mAh, 19.45Wh
Power supply	DC 3.89V from battery or DC 5V from adapter
Extreme Vol. Limits:	DC 3.31V to DC 4.47V (Nominal DC 3.89V) (Note 1)
HW Version	Air2 Ultra_Mainboard_P1
SW Version	ASW3100_YO_2201_T0066
** Note1: The High Voltage 4.47V and Low Voltage 3.31V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2A8X4-AIR2ULTRA** filing to comply with the FCC Part 27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 27, ANSI C63.46:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1&5/F, Building C, 1&2/F, Building E, Fenda Science Park,

Sanwei Community, Hangcheng Street, Baoan District, Shenzhen ,Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI

C63.46:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

1.5 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has NR Bands of: Band 38/77.

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.8 SUMMARY OF TEST RESULTS

FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
<p>Remark:</p> <ol style="list-style-type: none"> 1. "N/A" denotes test is not applicable in this Test Report. 2. All test items were verified and recorded according to the standards and without any deviation during the test. 3. No modifications are made to the EUT during all test items. 			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Smart Phone	Air2 Ultra	FCC ID: 2A8X4-AIR2ULTRA	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases

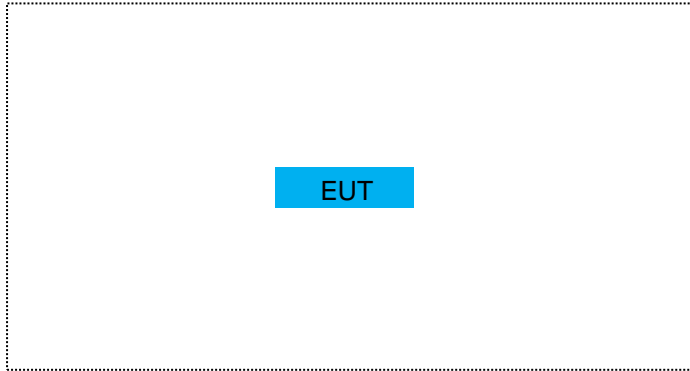


For Conducted Output Power

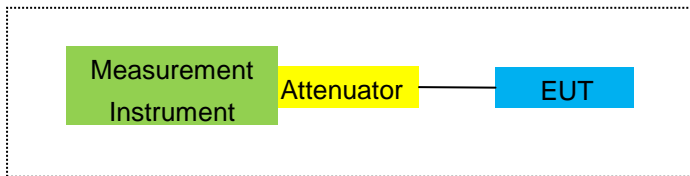

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

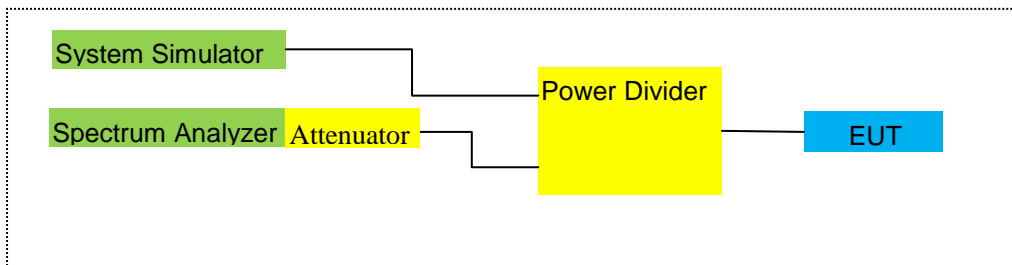

For Frequency Stability

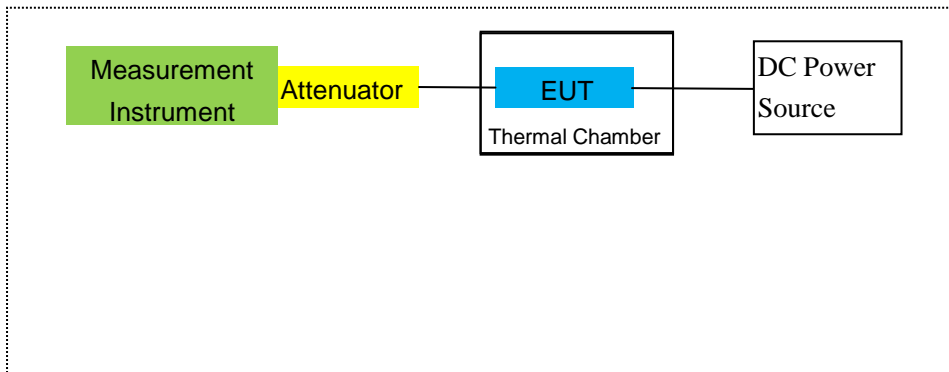

Note: EUT built-in battery-powered, the battery is fully-charged.

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2023.05.29	2024.05.28	1 year
2	Test Receiver	R&S	ESPI	101318	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2023.03.16 2024.03.11	2024.03.15 2025.03.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2023.05.06	2026.05.05	3 year
5	Horn Antenna	EM	EM-AH-1018 0	2011071402	2022.03.31	2025.03.30	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.11.07	2025.11.06	3 year
7	Amplifier	EM	EM-30180	060538	2023.05.29	2024.05.28	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2023.11.03	2026.11.02	3 year
9	Power Meter	R&S	NRVS	100696	2023.05.29	2024.05.28	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.0 5	2023.05.29	2024.05.28	1 year
11	Test Cable	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
12	Test Cable	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	Test Receiver	R&S	ESCI	101160	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
15	LISN	R&S	ENV216	101313	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
16	LISN	EMCO	3816/2	00042990	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
19	Test Cable	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
20	Test Cable	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
21	Test Cable	N/A	C03	N/A	2023.05.06	2026.05.05	3 year
22	Attenuator	MCE	24-10-34	BN9258	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year

23	Spectrum Analyzer	agilent	e4440a	us44300399	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
24	test receiver	R&S	ESCI	a0304218	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
25	Communication Tester	R&S	CMU200	A0304247	2023.05.29	2024.05.28	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2023.03.27 2024.03.12	2024.03.26 2025.03.11	1 year
27	DC Power Source	N/A	PS-6005D	2017040292 3	2023.05.06	2026.05.05	3 year
28	MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2023.05.29	2024.05.28	1 year
29	Communication Tester	R&S	CMW500	148500	2023.05.29	2024.05.28	1 year
30	Radio Communication Analyzer	Anritsu	MT8821C	SN 6262186364	2023.11.03	2024.11.02	1 year
31	Radio Communication Test Station	Anritsu	MT8000A	SN 6262192315	2023.11.03	2024.11.02	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

NR Measurement Procedure:

All NR bands conducted power peak and average are obtained from the MT8821C telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 38.521-1 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table Table 6.2.2.3-1: of the 3GPP TS 38.521-1 (V15.3.0) (07-2019).

Table 6.2.2.3-1: UE Power Class

EUTRA band	Class 1 (dBm)	Tolerance (dB)	Class 2 (dBm)	Tolerance (dB)	Class 3 (dBm)	Tolerance (dB)	Class 4 (dBm)	Tolerance (dB)
1					23	±2		
2					23	±2 ²		
3					23	±2 ²		
4					23	±2		
5					23	±2		
~					~	~		
40					23	±2		
41					23	±2 ²		
42					23	+2/-3		
43					23	+2/-3		
44					23	+2/[-3]		
45					23	±2		
47			26	±2	23	±2		

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS 38.521-1 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

NR Band 38/77

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

FCC: §2.1046,

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

□

NR Band 38/77

RESULTS

Test data reference attachment.

Note: Both DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM

CP-OFDM: QPSK/16-QAM/64QAM/256QAM has been tested, the worst case is CP_QPSK mode, the report just reported the worst case.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- NR Band 38/77

MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: Both DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM

CP-OFDM: QPSK/16-QAM/64QAM/256QAM has been tested, the worst case is CP_QPSK mode, the report just reported the worst case.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, “Measurement Guidance for Certification of Licensed Digital Transmitters”

MODES TESTED

NR Band 38/77

RESULTS

Pass

8.2 NR BAND 38

Radiated Power (EIRP) for N38 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QPSK	1@1	2575	-0.70	5.12	29.16	23.34	215.84	Horizontal	Pass
		2595	-0.67	5.18	28.92	23.07	202.82	Horizontal	Pass
		2615	-0.52	5.23	28.91	23.16	206.94	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	2577.5	-0.50	5.12	28.97	23.35	216.41	Horizontal	Pass
		2595	-1.16	5.18	28.92	22.58	181.13	Horizontal	Pass
		2612.5	-0.54	5.22	28.91	23.15	206.35	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	2580	-0.70	5.13	28.97	23.14	206.05	Horizontal	Pass
		2595	-0.46	5.18	28.92	23.28	212.96	Horizontal	Pass
		2610	-0.51	5.21	28.89	23.17	207.51	Horizontal	Pass
30.0MHz DFT_QPSK	1@1	2582.5	-1.08	5.13	28.98	22.77	189.10	Horizontal	Pass
		2595	-0.83	5.18	28.92	22.91	195.47	Horizontal	Pass
		2607.5	-2.21	5.21	28.9	21.48	140.63	Horizontal	Pass
40.0MHz DFT_QPSK 10.0MHz DFT_QPSK	1@1	2585	-0.98	5.14	28.98	22.86	193.18	Horizontal	Pass
		2595	-0.56	5.18	28.93	23.19	208.50	Horizontal	Pass
		2605	-0.22	5.2	28.9	23.48	222.59	Horizontal	Pass
		2575	-0.70	5.12	29.16	23.34	215.84	Horizontal	Pass

Radiated Power (EIRP) for N38 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_16QAM	1@1	2575	-6.87	5.12	29.16	22.06	160.80	Vertical	Pass
		2595	-6.67	5.18	28.92	22.15	163.96	Vertical	Pass
		2615	-6.38	5.23	28.91	21.57	143.59	Vertical	Pass
15.0MHz DFT_16QAM	1@1	2577.5	-6.75	5.12	28.97	21.90	154.89	Vertical	Pass
		2595	-6.72	5.18	28.92	22.31	170.16	Vertical	Pass
		2612.5	-6.90	5.22	28.91	21.72	148.54	Vertical	Pass
20.0MHz DFT_16QAM	1@1	2580	-7.05	5.13	28.97	22.10	162.12	Vertical	Pass
		2595	-6.49	5.18	28.92	21.60	144.54	Vertical	Pass
		2610	-6.44	5.21	28.89	22.15	164.06	Vertical	Pass
40.0MHz DFT_16QAM	1@1	2582.5	-6.95	5.13	28.98	22.08	161.51	Vertical	Pass
		2595	-6.48	5.18	28.92	22.36	172.05	Vertical	Pass
		2607.5	-6.42	5.21	28.9	21.57	143.55	Vertical	Pass
50.0MHz DFT_16QAM	1@1	2585	-6.65	5.14	28.98	22.11	162.63	Vertical	Pass
		2595	-6.59	5.18	28.93	22.50	177.96	Vertical	Pass
		2605	-6.97	5.2	28.9	21.77	150.16	Vertical	Pass

8.3 NR BAND 77

Radiated Power (EIRP) for N77 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_QPSK	1@1	3705	-1.37	5.12	29.16	22.67	184.93	Horizontal	Pass
		3840	-0.68	5.18	28.92	23.06	202.30	Horizontal	Pass
		3975	-0.81	5.23	28.91	22.87	193.64	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	3457.5	-1.00	5.12	28.97	22.85	192.75	Horizontal	Pass
		3500	-0.81	5.18	28.92	22.93	196.34	Horizontal	Pass
		3542.5	-1.08	5.22	28.91	22.61	182.39	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	3460	-1.07	5.13	28.97	22.77	189.23	Horizontal	Pass
		3500	-0.76	5.18	28.92	22.98	198.61	Horizontal	Pass
		3540	-1.06	5.21	28.89	22.62	182.81	Horizontal	Pass
40.0MHz DFT_QPSK	1@1	3470	-1.26	5.13	28.98	22.59	181.55	Horizontal	Pass
		3500	-1.01	5.18	28.92	22.73	187.50	Horizontal	Pass
		3530	-1.34	5.21	28.9	22.35	171.79	Horizontal	Pass
50.0MHz DFT_QPSK	1@1	3725.01	-0.85	5.14	28.98	22.99	199.07	Horizontal	Pass
		3840	-0.70	5.18	28.93	23.05	201.84	Horizontal	Pass
		3954.99	-0.68	5.2	28.9	23.02	200.45	Horizontal	Pass
60.0MHz DFT_QPSK	1@1	3480	-1.68	5.14	28.99	22.17	164.82	Horizontal	Pass
		3500	-0.97	5.18	28.92	22.77	189.23	Horizontal	Pass
		3520	-0.58	5.19	28.88	23.11	204.64	Horizontal	Pass
80.0MHz DFT_QPSK	1@1	3490	-0.94	5.14	28.95	22.87	193.64	Horizontal	Pass
		3500	-0.80	5.18	28.93	22.95	197.24	Horizontal	Pass
		3510	-0.70	5.19	28.92	23.03	200.91	Horizontal	Pass
90.0MHz DFT_QPSK	1@1	3495	-0.93	5.14	28.96	22.89	194.54	Horizontal	Pass
		3500	-1.22	5.18	28.93	22.53	179.06	Horizontal	Pass
		3505	-0.32	5.19	28.9	23.39	218.27	Horizontal	Pass
100.0MHz DFT_QPSK	1@1	3930	-0.40	5.14	28.97	23.43	220.29	Horizontal	Pass

Radiated Power (EIRP) for N77 /SCS (30kHz)									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
10.0MHz DFT_16QAM	1@1	3455	-6.87	5.12	29.16	21.64	145.88	Vertical	Pass
		3500	-6.67	5.18	28.92	21.33	135.83	Vertical	Pass
		3545	-6.38	5.23	28.91	21.17	130.92	Vertical	Pass
15.0MHz DFT_16QAM	1@1	3457.5	-6.75	5.12	28.97	21.54	142.56	Vertical	Pass
		3500	-6.72	5.18	28.92	21.52	141.91	Vertical	Pass
		3542.5	-6.90	5.22	28.91	21.28	134.28	Vertical	Pass
20.0MHz DFT_16QAM	1@1	3460	-7.05	5.13	28.97	21.25	133.35	Vertical	Pass
		3500	-6.49	5.18	28.92	21.77	150.31	Vertical	Pass
		3540	-6.44	5.21	28.89	21.78	150.66	Vertical	Pass
40.0MHz DFT_16QAM	1@1	3470	-6.95	5.13	28.98	21.40	138.04	Vertical	Pass
		3500	-6.48	5.18	28.92	21.74	149.28	Vertical	Pass
		3530	-6.42	5.21	28.9	21.72	148.59	Vertical	Pass
50.0MHz DFT_16QAM	1@1	3475	-6.65	5.14	28.98	21.68	147.23	Vertical	Pass
		3500	-6.59	5.18	28.93	21.65	146.22	Vertical	Pass
		3525	-6.97	5.2	28.9	21.22	132.43	Vertical	Pass
60.0MHz DFT_16QAM	1@1	3480	-6.74	5.14	28.99	21.60	144.54	Vertical	Pass
		3500	-6.58	5.18	28.92	21.65	146.22	Vertical	Pass
		3520	-6.49	5.19	28.88	21.69	147.57	Vertical	Pass
80.0MHz DFT_16QAM	1@1	3490	-6.93	5.14	28.95	21.37	137.09	Vertical	Pass
		3500	-6.91	5.18	28.93	21.38	137.40	Vertical	Pass
		3510	-6.73	5.19	28.92	21.47	140.28	Vertical	Pass
90.0MHz DFT_16QAM	1@1	3495	-6.68	5.14	28.96	21.66	146.55	Vertical	Pass
		3500	-6.76	5.18	28.93	21.45	139.64	Vertical	Pass
		3505	-6.53	5.19	28.9	21.67	146.89	Vertical	Pass
100.0MHz DFT_16QAM	1@1	3500	-1.53	5.19	28.9	22.18	165.20	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10}(p)$, dB at the channel edges and $55 + 10 \text{ Log}_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

NR Band 38/77

RESULTS

PASS

9.1 NR BAND 38

QPSK EIRP POWER FOR NR BAND 38 (10.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 2575MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5150	-52.93	2.63	28.37	-27.19	-13	-14.19	Horizontal
5150	-54.78	2.63	28.37	-29.04	-13	-16.04	Vertical
7725	-52.70	3.38	28.25	-27.83	-13	-14.83	Vertical
7725	-53.57	3.38	28.25	-28.70	-13	-15.70	Horizontal
183.2	-45.58	0.61	15.10	-31.09	-13	-18.09	Vertical
412.1	-47.51	1.38	15.45	-33.43	-13	-20.43	Horizontal
Test Results for Mid Channel 2595MHz							
5190	-52.88	2.65	28.33	-27.20	-13	-14.20	Horizontal
5190	-48.01	2.65	28.33	-22.33	-13	-9.33	Vertical
7785	-50.83	4.14	28.26	-26.71	-13	-13.71	Vertical
7785	-51.99	4.14	28.26	-27.87	-13	-14.87	Horizontal
184.3	-49.94	0.62	16.35	-34.21	-13	-21.21	Vertical
416.5	-49.83	1.39	15.55	-35.67	-13	-22.67	Horizontal
Test Results for High Channel 2615MHz							
5230	-46.66	2.65	28.41	-20.90	-13	-7.90	Horizontal
5230	-53.60	2.65	28.41	-27.84	-13	-14.84	Vertical
7845	-51.27	5.23	28.15	-28.35	-13	-15.35	Vertical
7845	-54.68	5.23	28.89	-31.02	-13	-18.02	Horizontal
194.7	-49.12	0.65	15.20	-34.57	-13	-21.57	Vertical
329.2	-51.04	1.10	15.16	-36.98	-13	-23.98	Horizontal

QPSK EIRP POWER FOR NR BAND 38 (40.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 2585MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7000	-47.87	2.63	28.33	-22.17	-13	-9.17	Horizontal
7000	-50.92	2.63	28.33	-25.22	-13	-12.22	Vertical
10500	-44.88	3.38	28.26	-20.00	-13	-7.00	Vertical
10500	-45.99	3.38	28.26	-21.11	-13	-8.11	Horizontal
184.6	-50.54	0.62	15.28	-35.87	-13	-22.87	Vertical
372.8	-49.63	1.24	16.64	-34.23	-13	-21.23	Horizontal
Test Results for Mid Channel 2595MHz							
7000	-47.87	2.63	28.33	-22.17	-13	-9.17	Horizontal
7000	-50.92	2.63	28.33	-25.22	-13	-12.22	Vertical
10500	-44.88	3.38	28.26	-20.00	-13	-7.00	Vertical
10500	-45.99	3.38	28.26	-21.11	-13	-8.11	Horizontal
184.6	-50.54	0.62	15.28	-35.87	-13	-22.87	Vertical
372.8	-49.63	1.24	16.64	-34.23	-13	-21.23	Horizontal
Test Results for High Channel 2605MHz							
7000	-47.87	2.63	28.33	-22.17	-13	-9.17	Horizontal
7000	-50.92	2.63	28.33	-25.22	-13	-12.22	Vertical
10500	-44.88	3.38	28.26	-20.00	-13	-7.00	Vertical
10500	-45.99	3.38	28.26	-21.11	-13	-8.11	Horizontal
184.6	-50.54	0.62	15.28	-35.87	-13	-22.87	Vertical
372.8	-49.63	1.24	16.64	-34.23	-13	-21.23	Horizontal

9.2 NR BAND 77

QPSK EIRP POWER FOR NR BAND 77 (10.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Low Channel 3705MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7410	-53.49	2.63	28.37	-27.75	-13	-14.75	Horizontal
7410	-53.82	2.63	28.37	-28.08	-13	-15.08	Vertical
11115	-52.05	3.38	28.25	-27.18	-13	-14.18	Vertical
11115	-53.56	3.38	28.25	-28.69	-13	-15.69	Horizontal
183.6	-46.08	0.61	15.10	-31.59	-13	-18.59	Vertical
412.7	-47.63	1.38	15.45	-33.55	-13	-20.55	Horizontal
Test Results for Mid Channel 3840MHz							
7680	-52.24	2.65	28.33	-26.56	-13	-13.56	Horizontal
7680	-49.01	2.65	28.33	-23.33	-13	-10.33	Vertical
11520	-50.82	4.14	28.26	-26.70	-13	-13.70	Vertical
11520	-52.56	4.14	28.26	-28.44	-13	-15.44	Horizontal
183.8	-49.93	0.62	16.35	-34.20	-13	-21.20	Vertical
417.6	-49.91	1.39	15.55	-35.75	-13	-22.75	Horizontal
Test Results for High Channel 3975MHz							
7950	-46.10	2.65	28.41	-20.34	-13	-7.34	Horizontal
7950	-53.18	2.65	28.41	-27.42	-13	-14.42	Vertical
11925	-51.06	5.23	28.15	-28.14	-13	-15.14	Vertical
11925	-55.49	5.23	28.89	-31.83	-13	-18.83	Horizontal
194.6	-48.59	0.65	15.20	-34.04	-13	-21.04	Vertical
329.7	-51.97	1.10	15.16	-37.91	-13	-24.91	Horizontal

QPSK EIRP POWER FOR NR BAND 77 (100.0MHZ BANDWIDTH/ SCS (30kHz))

Test Results for Mid Channel 3930MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7860	-48.78	2.63	28.33	-23.08	-13	-10.08	Horizontal
7860	-51.62	2.63	28.33	-25.92	-13	-12.92	Vertical
11790	-45.68	3.38	28.26	-20.80	-13	-7.80	Vertical
11790	-47.00	3.38	28.26	-22.12	-13	-9.12	Horizontal
184.6	-51.02	0.62	15.28	-36.35	-13	-23.35	Vertical
372.8	-50.80	1.24	16.64	-35.40	-13	-22.40	Horizontal

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = low voltage, DC 3.31V, Normal, DC 3.89V and High voltage, DC 4.47V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- NR Band 38/77

RESULTS

See the following pages.

10.1 NR BAND 38

N38 QPSK, (40MHz CH 519000 RB Allocation 50@25)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.31	2595	6.00	0.00231	2.5
3.89	2595	3.00	0.00116	2.5
4.47	2595	5.00	0.00193	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2595	5.00	0.00193	2.5
Extreme (50C)	2595	6.00	0.00231	2.5
Extreme (40C)	2595	4.00	0.00154	2.5
Extreme (30C)	2595	3.00	0.00116	2.5
Extreme (10C)	2595	5.00	0.00193	2.5
Extreme (0C)	2595	8.00	0.00308	2.5
Extreme (-10C)	2595	14.00	0.00539	2.5
Extreme (-20C)	2595	15.00	0.00578	2.5
Extreme (-30C)	2595	13.00	0.00501	2.5

N38 16QAM, (40MHz CH 519000 RB Allocation 50@25)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.31	2595	6.00	0.00231	2.5
3.89	2595	3.00	0.00116	2.5
4.47	2595	2.00	0.00077	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2595	6.00	0.00231	2.5
Extreme (50C)	2595	8.00	0.00308	2.5
Extreme (40C)	2595	6.00	0.00231	2.5
Extreme (30C)	2595	11.00	0.00424	2.5
Extreme (10C)	2595	9.00	0.00347	2.5
Extreme (0C)	2595	13.00	0.00501	2.5
Extreme (-10C)	2595	10.00	0.00385	2.5
Extreme (-20C)	2595	11.00	0.00424	2.5
Extreme (-30C)	2595	2.00	0.00077	2.5

10.2 NR BAND 77

N77 16QAM, (100MHz CH 656000 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.31	3840	6.00	0.00156	2.5
3.89	3840	5.00	0.00130	2.5
4.47	3840	3.00	0.00078	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	3840	7.00	0.00182	2.5
Extreme (50C)	3840	5.00	0.00130	2.5
Extreme (40C)	3840	9.00	0.00234	2.5
Extreme (30C)	3840	6.00	0.00156	2.5
Extreme (10C)	3840	4.00	0.00104	2.5
Extreme (0C)	3840	8.00	0.00208	2.5
Extreme (-10C)	3840	15.00	0.00391	2.5
Extreme (-20C)	3840	16.00	0.00417	2.5
Extreme (-30C)	3840	11.00	0.00286	2.5

N77 16QAM, (100MHz CH 656000 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.31	3840	10.00	0.00260	2.5
3.89	3840	15.00	0.00391	2.5
4.47	3840	13.00	0.00339	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	3840	5.00	0.00130	2.5
Extreme (50C)	3840	7.00	0.00182	2.5
Extreme (40C)	3840	3.00	0.00078	2.5
Extreme (30C)	3840	6.00	0.00156	2.5
Extreme (10C)	3840	8.00	0.00208	2.5
Extreme (0C)	3840	10.00	0.00260	2.5
Extreme (-10C)	3840	15.00	0.00391	2.5
Extreme (-20C)	3840	14.00	0.00365	2.5
Extreme (-30C)	3840	10.00	0.00260	2.5

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

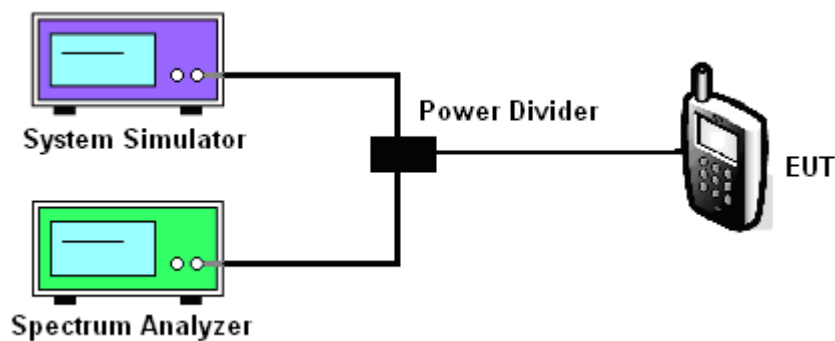

11.5 MODES TESTED

- NR Band38/77
-

Test data reference attachment.

----END OF REPORT----