

Radiation Hazard Analysis

9 Meter C2 Haleiwa, Hawaii 96712

Introduction

A radiation hazard analysis is presented for a 9 meter C band aperture antenna to be installed in Haleiwa Hawaii at the SES Sunset Beach ES. This Radiation Analysis calculates the non-ionizing radiation levels expected to be emitted from the earth station on a worst cases basis and is performed in accordance with the Federal Communications Commissions Office of Engineering and Technology (OET) Bulletin, No. 65.

Requirements

OET 65 outlines the maximum permissible exposure limits in two cases for operation in this frequency range.

1. The first case is the maximum level that a person may be exposed to in the general population. The exposure limit is defined as a non-ionizing power level equal to 1 milliwatt per centimeter squared averaged over a thirty minute period.
2. The second case is a controlled environment where the maximum permissible exposure limit must not exceed 5 milliwatts per centimeter squared averaged over any six minute period.

Summary

The results indicate that no significant hazard will be presented to the general population and will be fully mitigated in the controlled area by the use of procedures that require the removal of transmit power before accessing the area around the main reflector.

Analysis

This analysis was performed on seven zones with the results shown in Radiation Hazard Zones. The Table labeled Input Values provides the - input data required to perform the analysis. The table labeled OET 65 Calculated Values provides the intermediate calculation used to perform the assessment in accordance with OET 65. The Analysis is performed for each a the each of seven radiation zones as shown in figure 1 – Analysis Zones. These zones are:

1. Point between the feed and the sub-reflector
2. The power at the surface of the antenna
3. The power level between the main reflector and ground
4. The near-field or Fresnel region in which the maxima can be reached before the field starts to diminish with distance
5. The Transition region where power begins to decrease inversely with distance from the antenna
6. The Far Field or Fraunhofer region where power decreases inversely with the square of the distance. This is the point at which the antenna beam is fully collimated
7. The off axis level in the near field. This is defined as the area outside of the main beam removed and at least one antenna diameter removed from the main beam

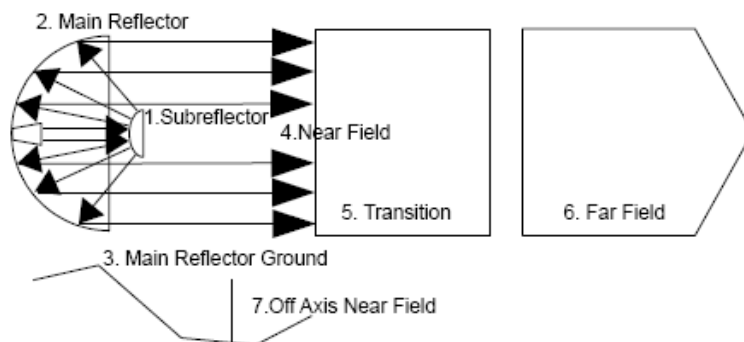


Figure 1 – Analysis Zones

Radiation Hazard Analysis

Operator: **SES**
 Location Designation: **Sunset Beach ES**
 County: **Honolulu**
 Town: **Haleiwa**
 State/Zip: **Hawaii 96712**

FCC Callsign: **E090060**
 SES ID: **C2**
 STA:

Input Values	Value	Unit
$D = \text{Aperture Diameter}$	9.00	Meters
$d = \text{Subreflector Diameter}$	0.94	Meters
$G = \text{Antenna Gain}$	53.4	dBi
FCC Designation	C	Band
$F = \text{Frequency}$	6.005	GHz
$P = \text{Transmitter Power Watts}$	1189	Watts
$R_{ua} = \text{closest point to uncontrolled area}$	50	meters
Elevation angle at closest point R_{ua}	10	Degrees
Height (AGL)	8.68	meters

Band	Frequency
L	1000-2000
S	2000-4000
C	4000-8000
X	8000-12500
Ku	12500-18000
K	18000-25500
Ka	26500-40000
O	40000-50000
V	50000-75000

OET 65 Calculated Values	Formula	Value	Unit
$\lambda = \text{Wavelength}$	$\frac{c}{F}$	0.0499	meters
$G = \text{Antenna Gain}$	$10^{(G/10)}$	218776.1624	(W) linear
$\eta = \text{Apperture Efficiency}$	$\frac{G\lambda^2/4\pi}{\pi D^2/4}$	68%	percentage
$A = \text{Area of reflector}$	πR^2	63.617	meters ²
$a = \text{area of subreflector}$	πr^2	6939.778	cm ²
$R_{nf} = \text{Near-Field Region}$	$\frac{D^2}{4\lambda}$	405.608	meters
		70	Meters AGL
$R_t = \text{Transition Region}$	$>R_{nf}$	405.608	>meters
	$<R_{ff}$	973.459	<meters
$R_{ff} = \text{Far Field Region}$	$\frac{0.6D^2}{\lambda}$	973.459	meters
		169	Meters AGL

Radiation Analysis Zone	Formula	Level	Value	Exposure Limits		
				General Public	Occupational	
				<1mW/cm2	<5mW/cm2	
1	Power Subreflector	$\frac{4P}{a}$	685.324	mW/cm2	>FCC MPE See Note 1	>FCC MPE See Note 2
2	Antenna Surface	$\frac{4P}{A}$	7.476	mW/cm2	>FCC MPE See Note 1	>FCC MPE See Note 2
3	Main Reflector Ground	$\frac{P}{A}$	1.869	mW/cm2	>FCC MPE See Note 1	<FCC MPE
4	$S_{nf} = \text{Near-Field Power Density}$	$\frac{4\eta P}{A}$	5.099	mW/cm2	>FCC MPE See Note 1	>FCC MPE See Note 2
5	$S_t = \text{Max Transition Power Density}$	$\leq S_{nf}$	5.099	mW/cm2	>FCC MPE See Note 1	>FCC MPE See Note 2
6	$S_{ff} = \text{Max Far field Power Density}$	$\frac{PG}{4\pi R_{ff}^2}$	2.184	mW/cm2	>FCC MPE See Note 3	<FCC MPE
7	Off Access Level Near Field	$S_{nf} - 20 \text{ dB}$	0.05099	mW/cm2	<FCC MPE	<FCC MPE

Notes

- The antenna is installed in a controlled location access is restricted to authorized personnel only. The antenna is marked with RF Radiation Hazard signage.
- Inside the controlled area, MPE levels exceed the MPE exposure for occupational levels. The levels will be reduced to safe MPE by removing power to the transmitters when work is performed on or around the antenna. This area can only be accessed by qualified personnel.
- The field develops 8.68 meters above ground level at the minimum elevation angle which is not accessible to the general public.