

UM108xx

QN9022 mini DK user guide

Rev. 1.0 — 14 June 2016

User manual

Document information

Info	Content
Keywords	mini DK, J-Link OB, UART, SWD, GPIO, LED, button, power supply, buzzer
Abstract	This user manual describes the features of the QN9022_MINIDK_Vx board.



Revision history

Rev	Date	Description
v.1	201506013	initial release

Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

1. Introduction

This user manual describes the hardware details of the QN9022 mini Development Kit (DK).

1.1 Kit contents

The QN9022 mini development kit includes the following:

- QN9022 mini development board
- QN902x USB dongle
- USB cable

1.2 Additional resource

For additional resources, visit

<http://www.nxp.com/products/microcontrollers-and-processors/more-processors/applications-specific-mcus-mpus/bluetooth-low-energy-ble:BLUETOOTH-LOW-ENERGY-BLE>


2. Hardware description

The QN9022 mini development board provides easy access to peripherals such as buttons, piezo buzzer and LED. The board also provides useful interfaces such as a USB port for UART communication and J-Link debug, and a GPIO/optional sensor board connector.


A USB dongle is a Bluetooth device powered by the QN9020. It acts as a master when communicating with the QN9022.

2.1 Hardware overview

The hardware blocks in the QN9022 mini DK, and the functional relationship of each main component, are shown in [Figure 1](#).

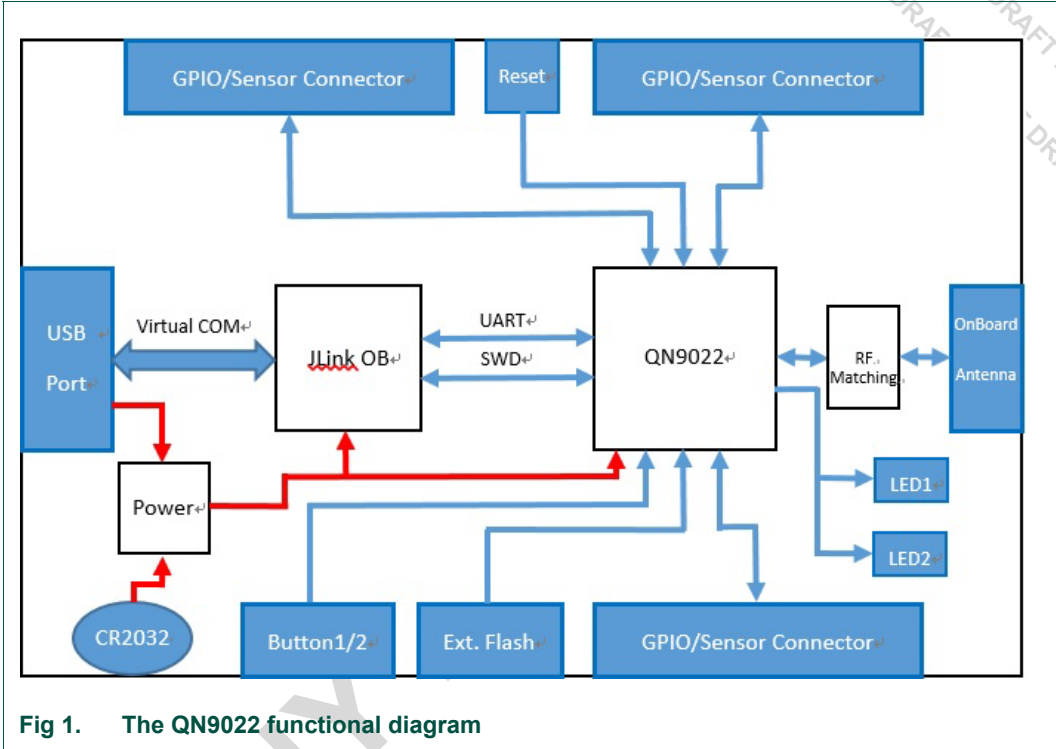

The component layout on both the sides of the board is shown in [Figure 2](#) and [Figure 3](#). The detailed information of each component is listed in [Table 1](#).

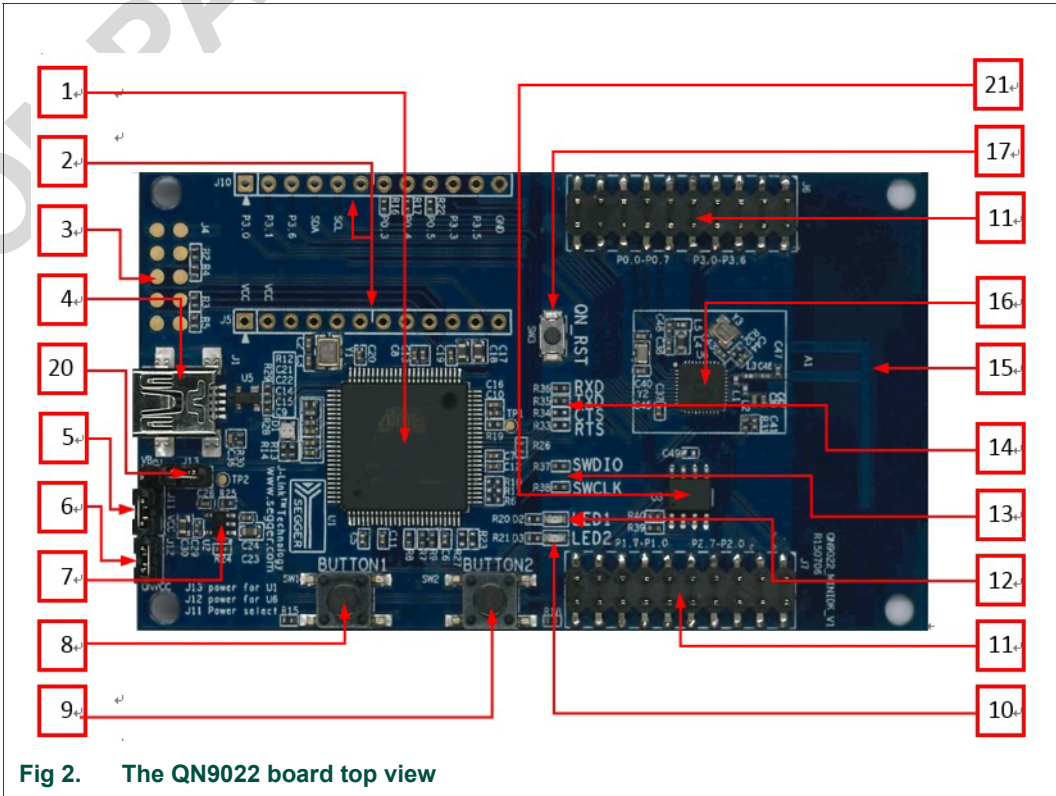

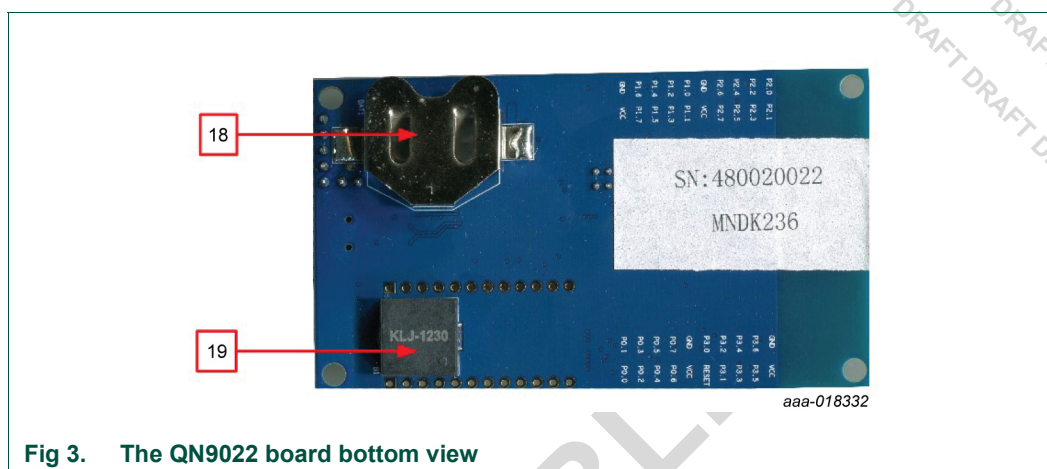


Fig 3. The QN9022 board bottom view

Table 1. QN9022 board components list

Number	Name	Description
1	J-Link OB	ATSAM3U2C; used to offer SWD and UART interfaces for QN9022 debug and communication
2	connector	optional; used for connecting sensor board
3	debug port	debug port for ATSAM3U2CA
4	mini USB port	power and communication port
5	power source select jumper	used for power source selection; see Section 2.3
6	current measurement jumper	used to measure the QN9022 device power consumption
7	LDO (TPS73630)	5 V to 3 V regulator
8	button1	used as input; see Section 2.9
9	button2	used as input; see Section 2.9
10	LED2	used as output; see Section 2.8
11	QN9022 GPIO port	used for interface extension
12	LED1	used as output; see Section 2.8
13	SWD resistors	zero ohm resistors; shorted for QN9022 device debug
14	UART interface	used as communication port for QN9022 device
15	PCB antenna	onboard Bluetooth antenna
16	QN9022 chip	QN9022 chip
17	QN9022 reset button	used for QN9022 hardware reset
18	CR2032 battery holder	CR2032 battery holder
19	piezo buzzer	buzzer: KLJ-1230
20	jumper	used for power cycle ATSAM3U2CA
21	External flash	Used for storing application firmware

2.2 Default jumper settings on mini DK board

The jumpers on QN9022 mini DK are factory set to power the board over the USB. The factory-set jumper and switch settings are shown in [Table 2](#).

Table 2. QN9022 mini DK board components list

Jumper	Pins to be shorted using jumpers	Function
J11	2 and 3	USB powered
J12	1 and 2	VCC_QN9022 3.3 V
J13	1 and 2	VCC_MB 3.3 V

2.3 Power supply

The QN9022 board has two power supply modes:

- 1. Bus-power mode: The board can be powered using the USB cable. The onboard LDO is used to regulate output voltage to 3 V and supplies power to all parts on the board.
- 2. Battery-power mode: The CR2032 supplies power to QN9022 and optional sensor connector when it is in battery-power mode. The J-Link OB still uses the LDO as power supply via USB cable. When using USB interface as a power supply, connect the jumper J11 pin 2 and pin 3; see [Figure 4](#).

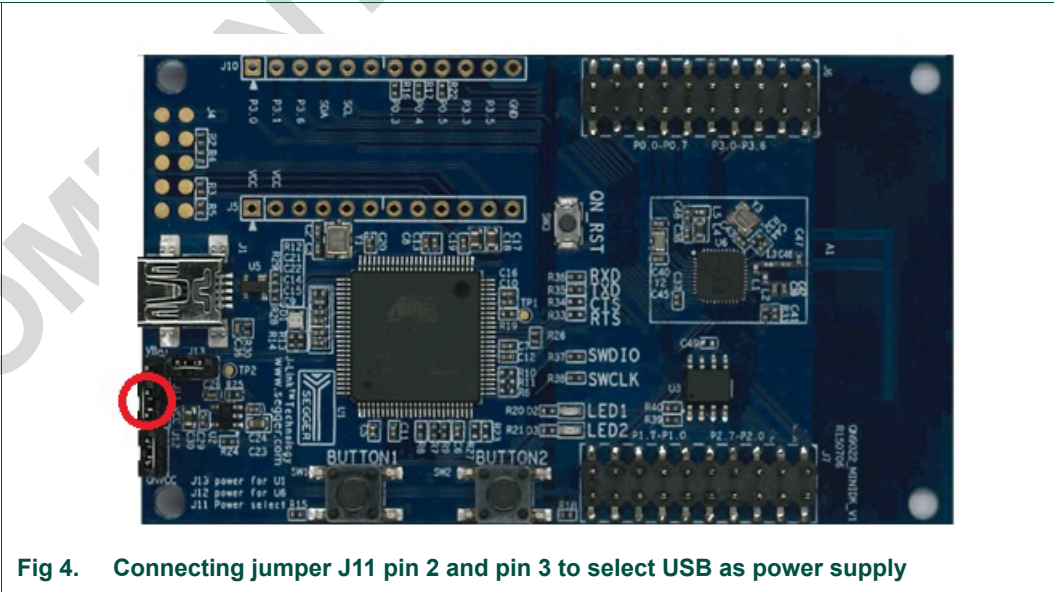


Fig 4. Connecting jumper J11 pin 2 and pin 3 to select USB as power supply

When using a CR2032 coin cell as a power supply, connect the jumper J11 pin 1 and pin 2; see [Figure 5](#).

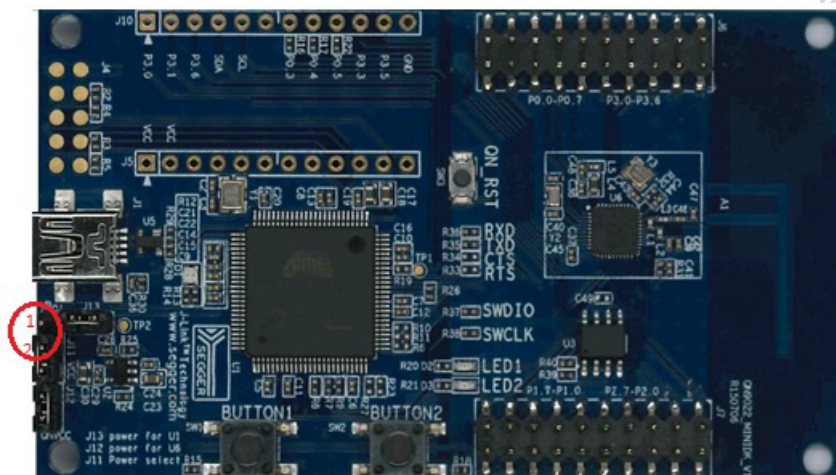


Fig 5. Connecting jumper J11 Pin1 and Pin 2 to select CR2032 coin cell as power supply

2.4 SEGGER J-Link OB part

The SEGGER J-Link OB offers the SWD and UART interface. Users can download or update firmware into a QN9022 device by using the UART or SWD interface. Furthermore, it is convenient to debug the program for a QN9022 device using SWD interface.

To program or debug the QN9022 device using the SEGGER J-Link OB, the 0 Ω resistors R37, R38 should be soldered; see [Figure 6](#).

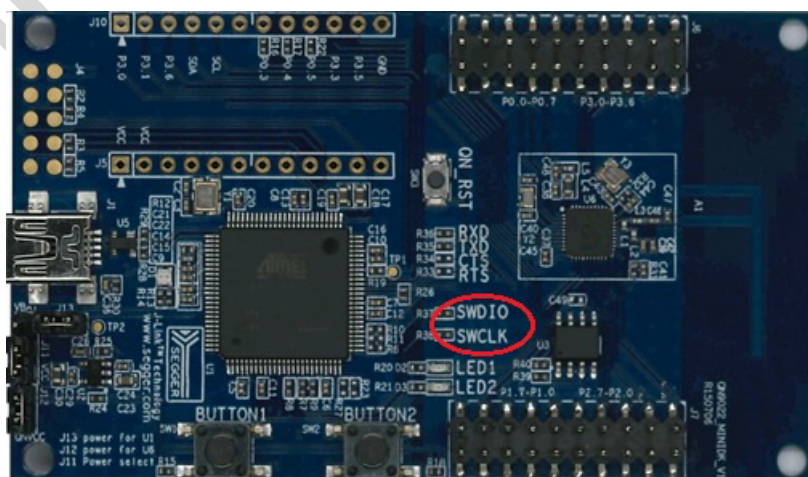


Fig 6. Connect R37, R38

In order to use a USB to UART bridge for the QN9022 download, the solder bridge SB3, SB4 should be shorted; see [Figure 7](#).

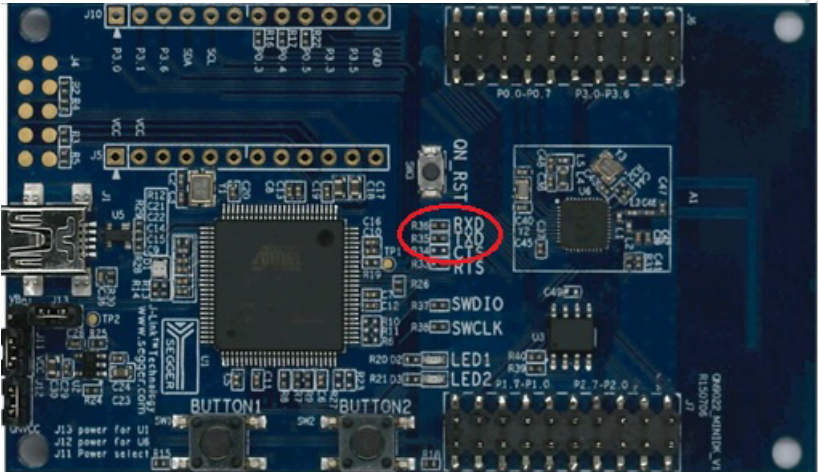


Fig 7. Short R35, R36

2.5 QN9022 device

The QN9022 device is integrated with a BLE radio, controller, protocol stack and profile software, and a high performance MCU on a single chip; see [Figure 8](#).


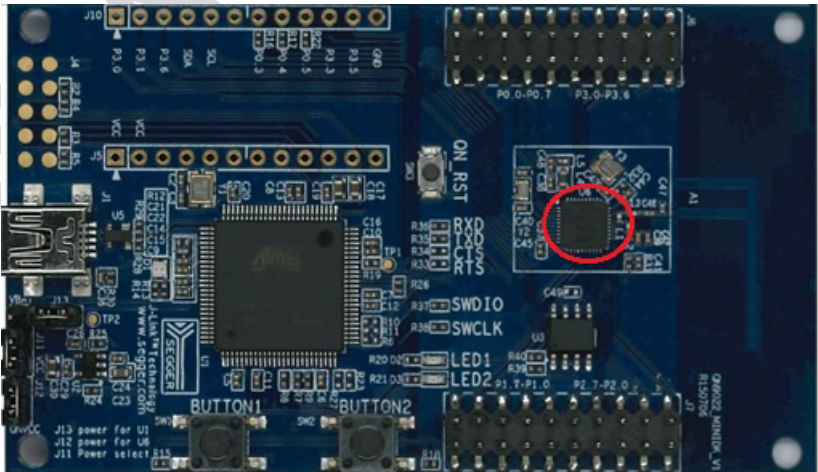


Fig 8. The QN9022 device


2.6 GPIO interface

In QN9022 mini development board version V1, the connectors J6 and J7 provide GPIO connection. The net name is shown in [Figure 9](#).

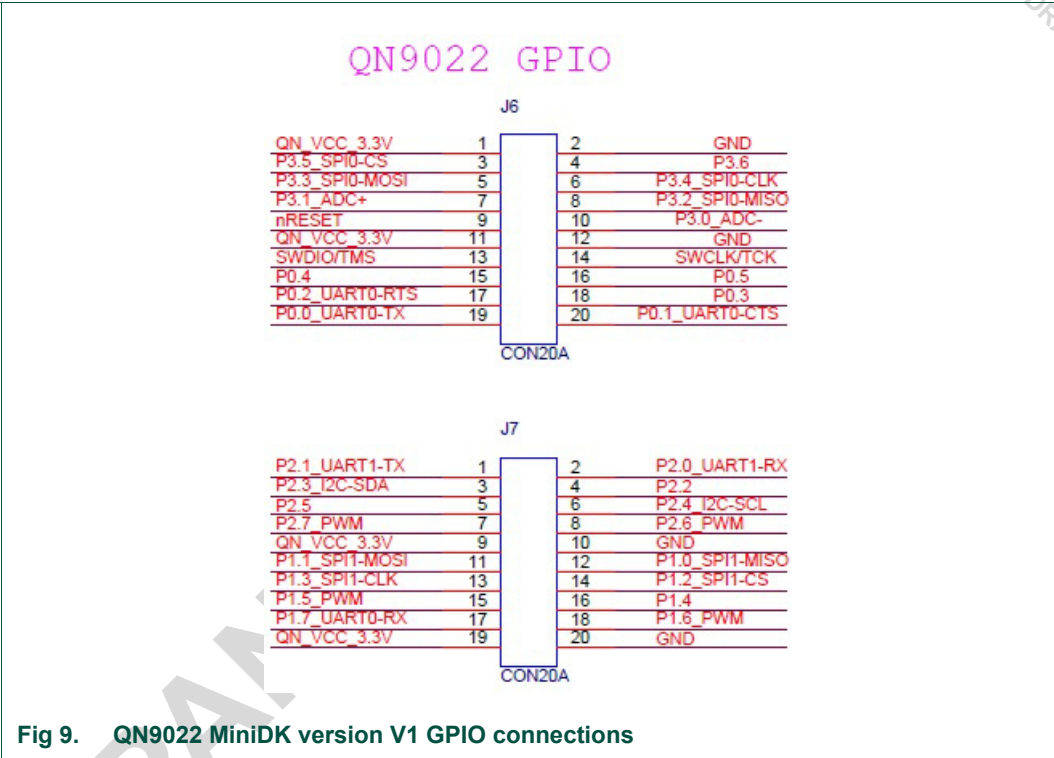

2.7 QN9022 reset button

The reset button is used to provide hardware reset to the QN9022 device. When programming the QN9022 using UART interface of SEGGER J-Link OB, the reset button should be pressed first to ensure that QN9022 is in boot mode. See [Figure 10](#) for the detailed circuit.

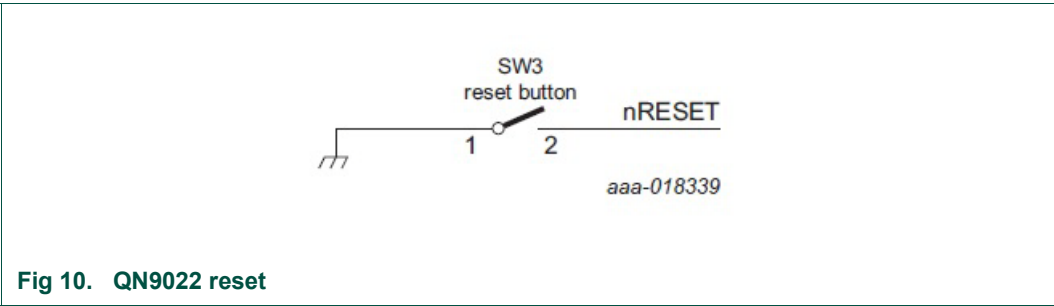

2.8 LED

The QN9022 board offers two programmable LEDs, which are connected to the QN9022 device GPIO.

LED1 and LED2 are connected to GPIO P0.3 and P1.6 respectively. The connections are shown in [Figure 11](#). The LEDs are powered-up when the corresponding GPIO outputs switch to logic LOW level.




Fig 11. LED circuit

2.9 Button

The QN9022 board offers two buttons which are connected to QN9022 device GPIO. Button 1 and button 2 are connected to GPIO P2.0 and P2.1 respectively. See [Figure 12](#) for detailed circuits.

When using the buttons, the GPIO P2.0 and P2.1 must be configured as inputs. Logic LOW input is applied to QN9022 when a button is pressed.

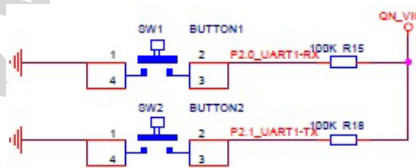


Fig 12. Button circuit

2.10 Piezo buzzer

The piezo buzzer receives input from GPIO P2.6; see [Figure 13](#). Refer to *KLJ-1230 data sheet* for detailed information.

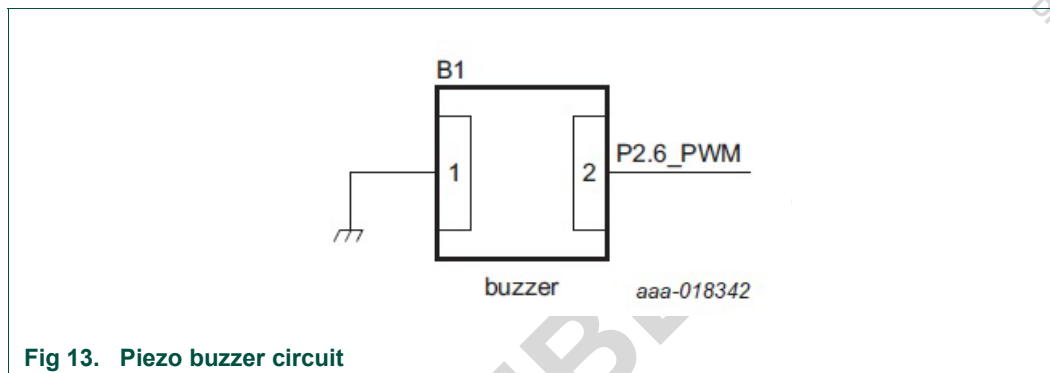


Fig 13. Piezo buzzer circuit

2.11 Optional sensor connector

These connectors are used as an interface to connect the sensor board. The pin name definitions are shown in [Figure 14](#).

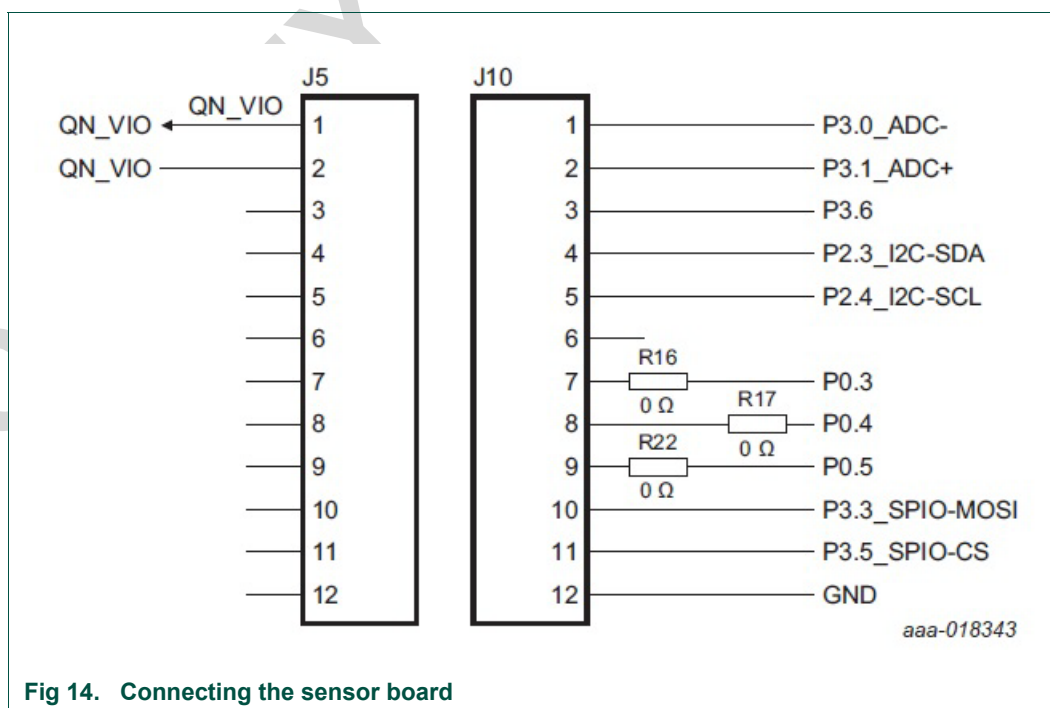


Fig 14. Connecting the sensor board

2.12 Current measurement

The jumper J12 is used to measure the QN9022 device current. In current test mode, the digital ammeter should be connected in series with J12. In the other modes, pin 1 and pin 2 of J12 are shorted. A jumper cap is used to short the pins.

3. QN902x USB Dongle

3.1 Dongle Block Diagram

USB Dongle works together with QTool and behaves as a master or slave when talking to MiniDK or other devices. Just as illustrated in diagram as below, USB Dongle receives commands from QTool via virtual COM port, by which QN902x would be initialized as a Master or Slave device. All tests can be performed by QTool after initialization.

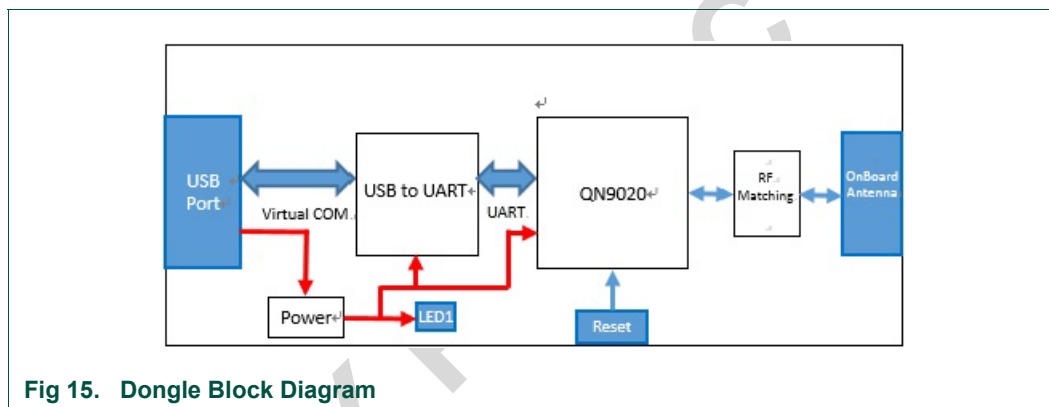


Fig 15. Dongle Block Diagram

3.2 Dongle Connection

QN902x USB dongle is a USB interfaced device with a QN9022 packed in. With driver and SDK installed in computer (refer to QN9022 quick start guide), user can use QTool in SDK to control the QN902x in dongle to work as a central device. The MiniDK board with USB power supply from computer works as a peripheral device. The connection of the dongle is illustrated as blow figure. For QTool usage, please refer to QTool User Manual v1.1 in SDK.

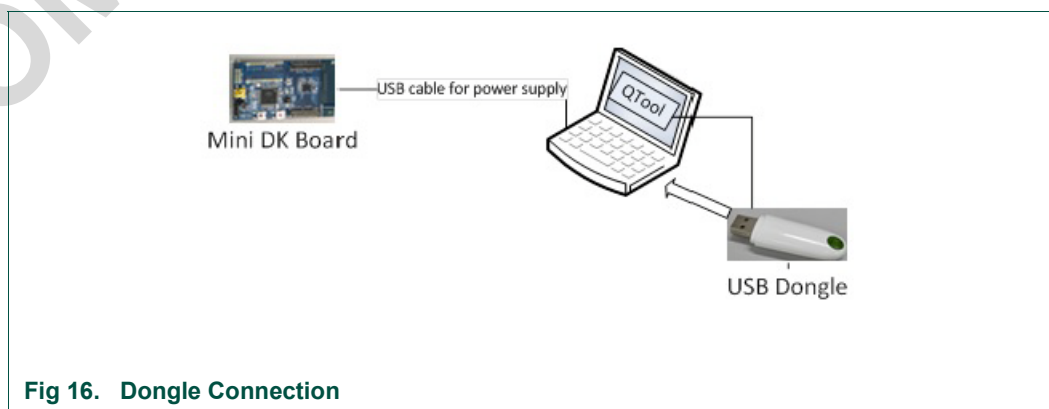


Fig 16. Dongle Connection

4. Notes

- Proper ESD precautions should be used when handling the board
- FCC related notes

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference,

and (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

5. Appendix - Schematics and PCB layout

5.1 Schematics for QN9022 mini DK board

QN9022 mini DK board schematics have three parts: J-Link, power and QN9022.

[Figure 17](#), [Figure 18](#) and [Figure 19](#).

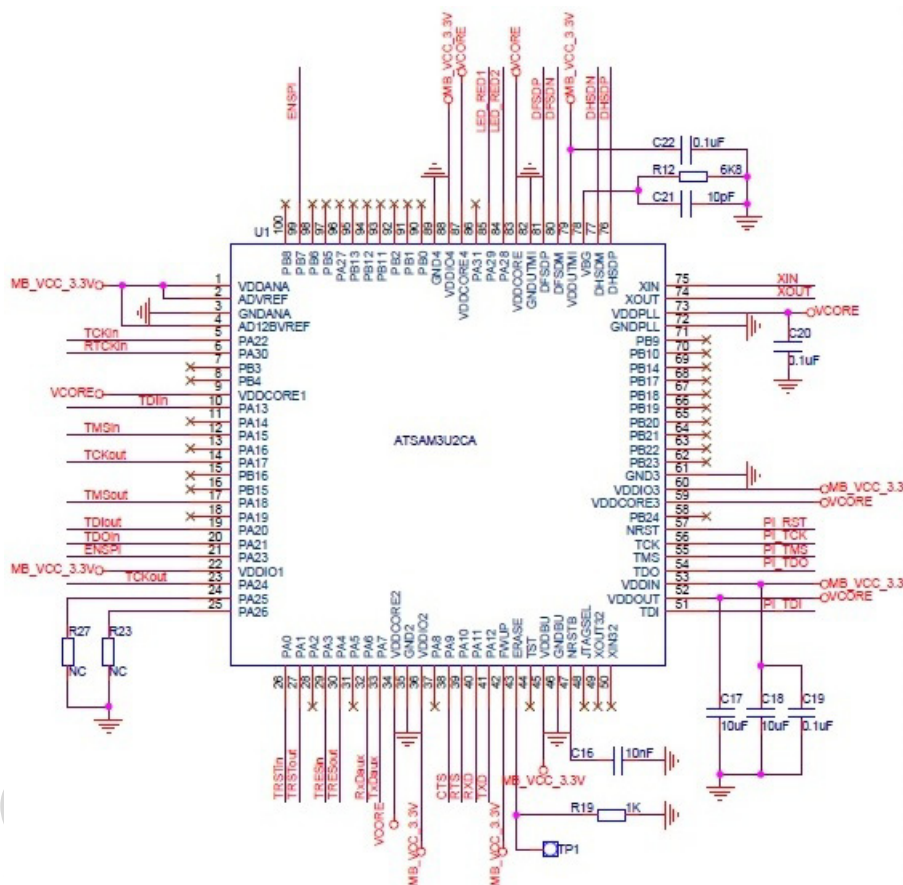
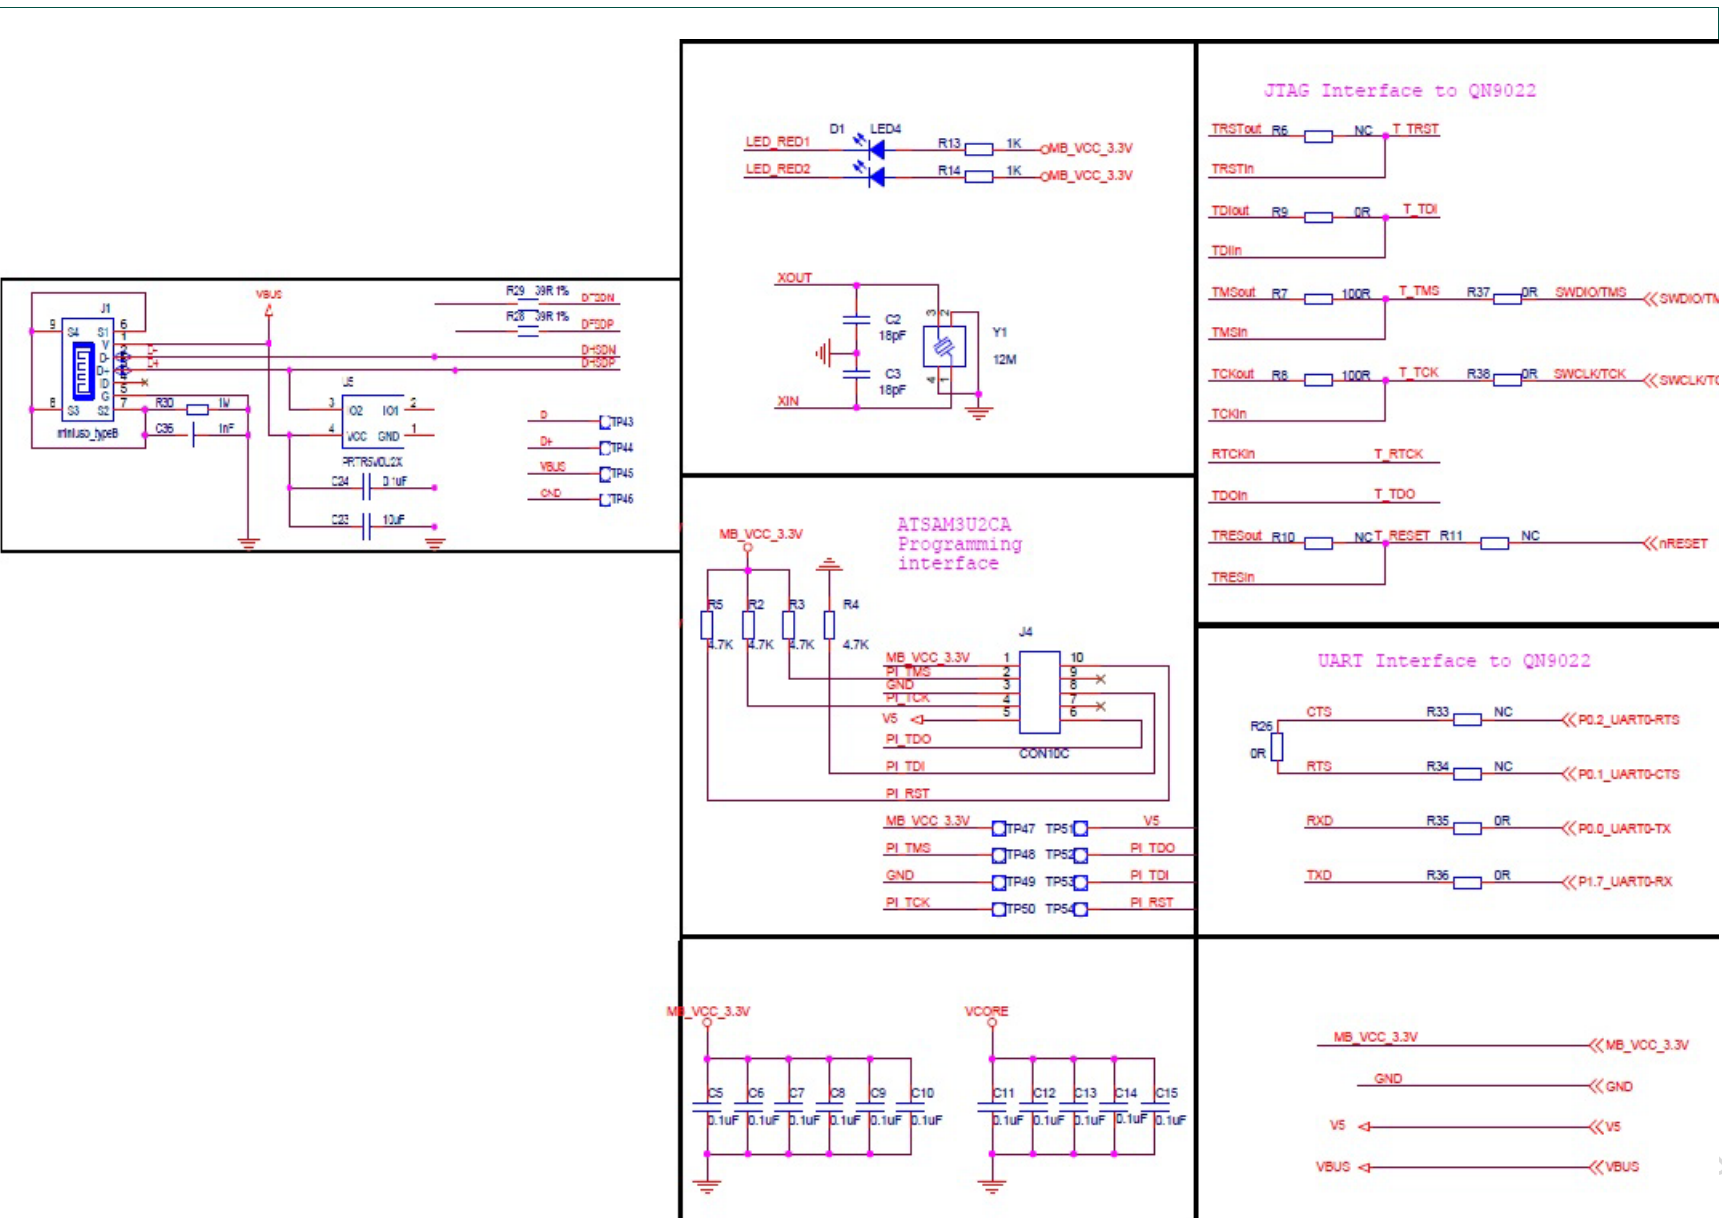


Fig 17. J-Link schematic for all QN9022 mini DK versions, part I



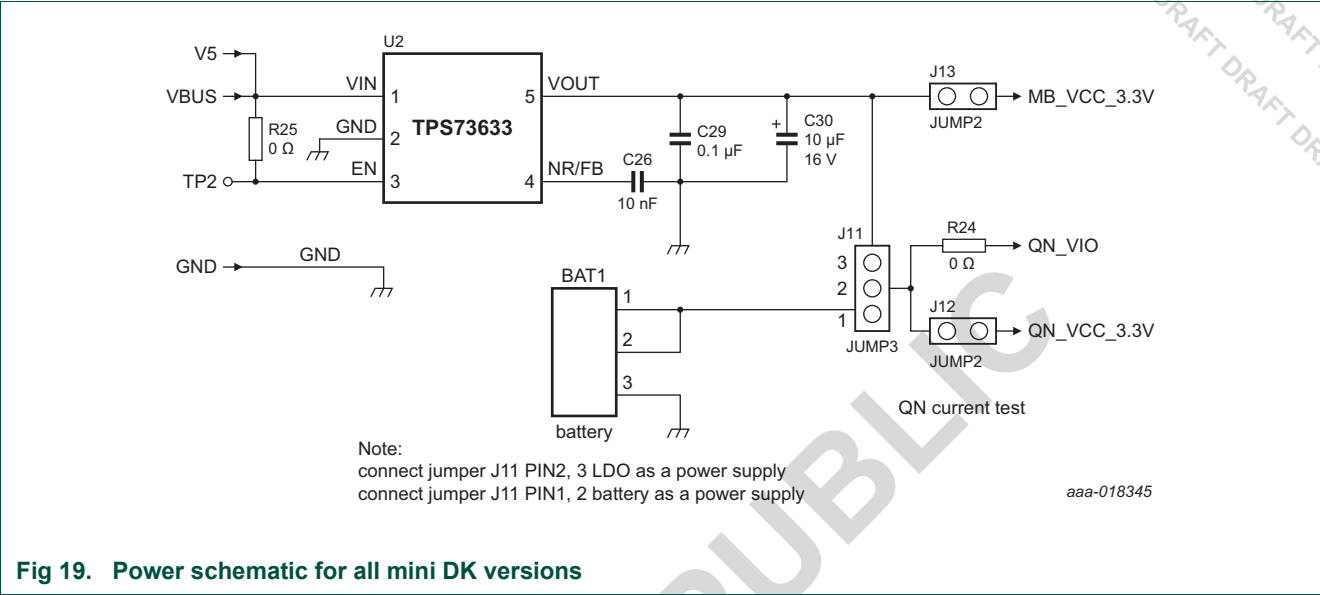


Fig 19. Power schematic for all mini DK versions

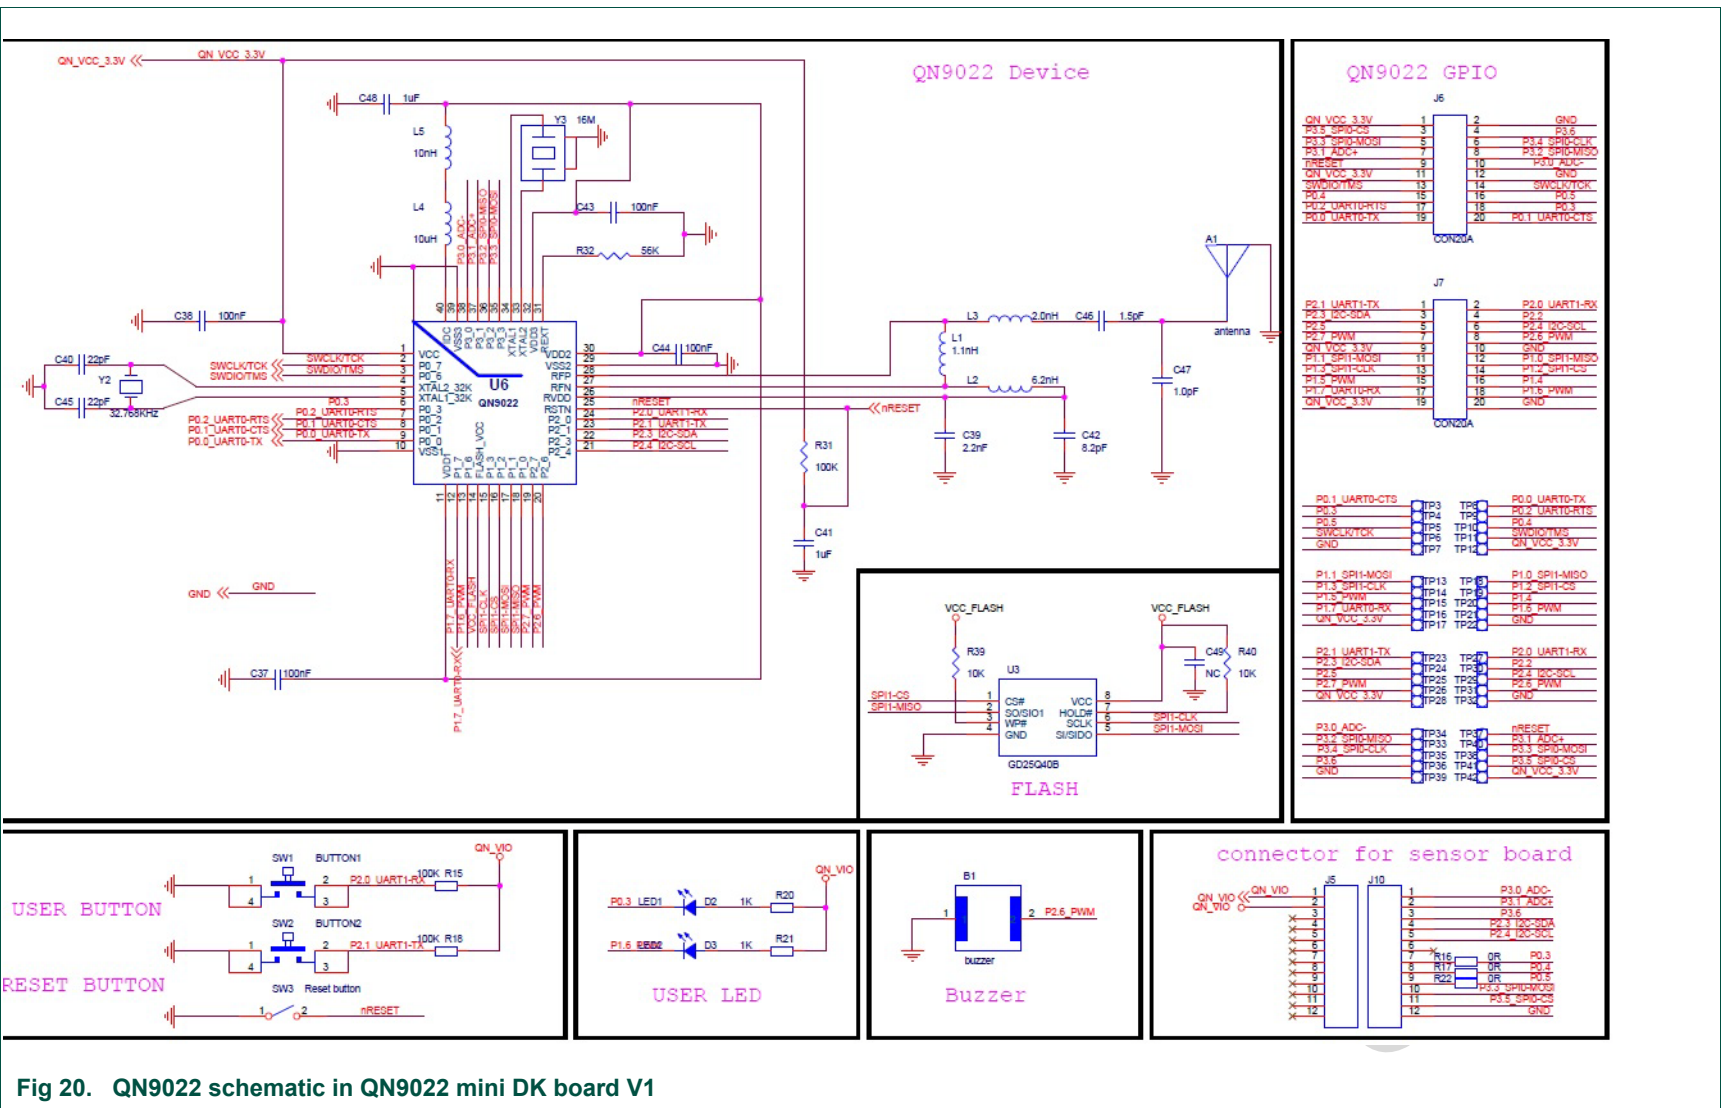


Fig 20. QN9022 schematic in QN9022 mini DK board V1

5.2 PCB layout

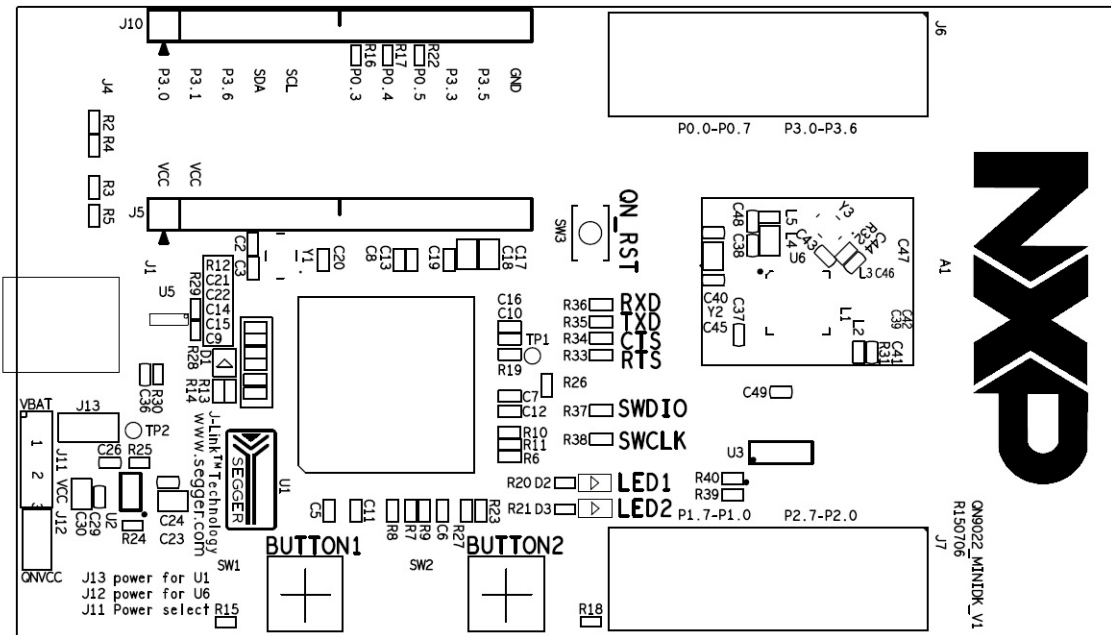


Fig 21. Silk screen top

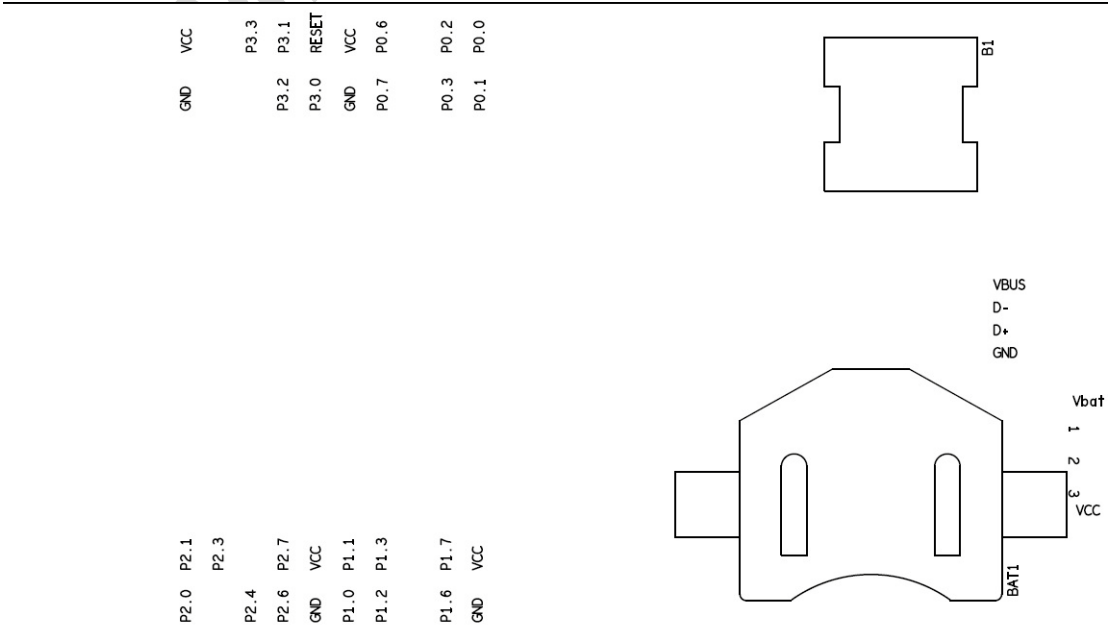


Fig 22. Silk screen bottom

6. Abbreviations

Table 3. Abbreviations

Acronym	Description
UART	Universal Asynchronous Receiver Transmitter
DK	Development Kit
LDO	Low DropOut
SWD	Serial Wire Debug
PCB	Printed-Circuit Board
BLE	Bluetooth Low Energy
MCU	MicroController Unit
GPIO	General Purpose Input Output
ISP	In System Programming
USB	Universal Serial Bus

7. Legal information

7.1 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

7.2 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Evaluation products — This product is provided on an "as is" and "with all faults" basis for evaluation purposes only. NXP Semiconductors, its affiliates and their suppliers expressly disclaim all warranties, whether express, implied or statutory, including but not limited to the implied warranties of non-infringement, merchantability and fitness for a particular purpose. The entire risk as to the quality, or arising out of the use or performance, of this product remains with customer.

In no event shall NXP Semiconductors, its affiliates or their suppliers be liable to customer for any special, indirect, consequential, punitive or incidental damages (including without limitation damages for loss of business, business interruption, loss of use, loss of data or information, and the like) arising out of the use of or inability to use the product, whether or not based on tort (including negligence), strict liability, breach of contract, breach of warranty or any other theory, even if advised of the possibility of such damages.

Notwithstanding any damages that customer might incur for any reason whatsoever (including without limitation, all damages referenced above and all direct or general damages), the entire liability of NXP Semiconductors, its affiliates and their suppliers and customer's exclusive remedy for all of the foregoing shall be limited to actual damages incurred by customer based on reasonable reliance up to the greater of the amount actually paid by customer for the product or five dollars (US\$5.00). The foregoing limitations, exclusions and disclaimers shall apply to the maximum extent permitted by applicable law, even if any remedy fails of its essential purpose.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

7.3 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

8. Tables

Table 1. QN9022 board components list	5	Table 3. Abbreviations	19
Table 2. QN9022 mini DK board components list.	6		

9. Figures

Fig 1. The QN9022 functional diagram.	4
Fig 2. The QN9022 board top view.	4
Fig 3. The QN9022 board bottom view	5
Fig 4. Connecting jumper J11 pin 2 and pin 3 to select USB as power supply.	6
Fig 5. Connecting jumper J11 Pin1 and Pin 2 to select CR2032 coin cell as power supply.	7
Fig 6. Connect R37, R38	7
Fig 7. Short R35, R36	8
Fig 8. The QN9022 device.	8
Fig 9. QN9022 MiniDK version V1 GPIO connections.	9
Fig 10. QN9022 reset	9
Fig 11. LED circuit	10
Fig 12. Button circuit	10
Fig 13. Piezo buzzer circuit	11
Fig 14. Connecting the sensor board.	11
Fig 15. Dongle Block Diagram	12
Fig 16. Dongle Connection	12
Fig 17. J-Link schematic for all QN9022 mini DK versions, part I.	14
Fig 18. J-Link schematic for all QN9022 mini DK versions, part II	15
Fig 19. Power schematic for all mini DK versions	16
Fig 20. QN9022 schematic in QN9022 mini DK board V1.	17
Fig 21. Silk screen top	18
Fig 22. Silk screen bottom	18

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP Semiconductors N.V. 2016.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 14 June 2016

Document identifier: UM108xx

10. Contents

1	Introduction	3
1.1	Kit contents	3
1.2	Additional resource	3
2	Hardware description	3
2.1	Hardware overview	3
2.2	Default jumper settings on mini DK board	6
2.3	Power supply	6
2.4	SEGGER J-Link OB part	7
2.5	QN9022 device	8
2.6	GPIO interface	9
2.7	QN9022 reset button	9
2.8	LED	9
2.9	Button	10
2.10	Piezo buzzer	11
2.11	Optional sensor connector	11
2.12	Current measurement	11
3	QN902x USB Dongle	12
3.1	Dongle Block Diagram	12
3.2	Dongle Connection	12
4	Notes	12
5	Appendix - Schematics and PCB layout	14
5.1	Schematics for QN9022 mini DK board	14
5.2	PCB layout	18
6	Abbreviations	19
7	Legal information	20
7.1	Definitions	20
7.2	Disclaimers	20
7.3	Trademarks	20
8	Tables	21
9	Figures	21
10	Contents	22

COMPANY PUBLIC