

# External Photo






Model Number:  
ATG-R01-40A  
Input:  
208-240VAC, single phase 50/60Hz 40A  
Output:  
208-240VAC, 40W-40A max  
Temperature Rating:  
-22°F to 122°F (-30°C to 50°C)  
Enclosure Rating:  
NEMA Type 4  
Date Code: 2123-1  
Serial Number: N22120013  
CCID: 32480001  
Made in China

   
3021209  
Conforms to UL and  
CSA  
Certified to CSA and  
CUL 290-200

    
Intertek  
3021209  
Conforms to UL and  
CSA  
Certified to CSA and  
CUL 290-200

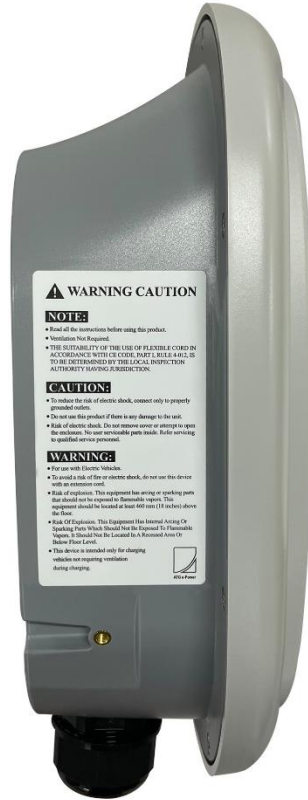

**WARNING CAUTION**

**NOTE**

- Read all the instructions before using this product.
- Ventilation Not Required.
- THE STABILITY OF THE USE OF FLEXIBLE CORDS IN ACCORDANCE WITH THE CODE, PART I, RULE 6-012, IS TO BE DETERMINED BY THE LOCAL INSPECTION AUTHORITY HAVING JURISDICTION.

**CAUTION:**

- To reduce the risk of electric shock, connect only to properly grounded outlets.
- Do not use this product if there is any damage to the unit.
- Risk of electric shock. Do not remove cover or attempt to open the enclosure. No user serviceable parts inside. Refer servicing to qualified service personnel.

**WARNING:**

- For use with heavy vehicles.
- To avoid a risk of fire or electric shock, do not use this device with an extension cord.
- Risk of explosion. This equipment has wiring or sparking parts that should not be exposed to flammable vapors. This equipment should be located at least 400 mm (16 inches) above the floor.
- Risk of explosion. This equipment has internal and/or external parts which should not be exposed to flammable vapors. It should not be located in a flammable atmosphere below floor level.
- The device is intended only for changing vehicles not requiring ventilation during charging.

