Antenna SPEC

FCC ID： 2AUYFRMX3941

Equipment： Mobile Phone

Brand Name： realme

Model Name： RMX3941

Manufacturer： Realme Chongqing Mobile

Telecommunications Corp., Ltd.

No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing,

China

Issue Date： December 13, 2023

Project Engineer: pengtao Nan   Date:2023/12/13

Checked by: yunpan Wei   Date:2023/12/13

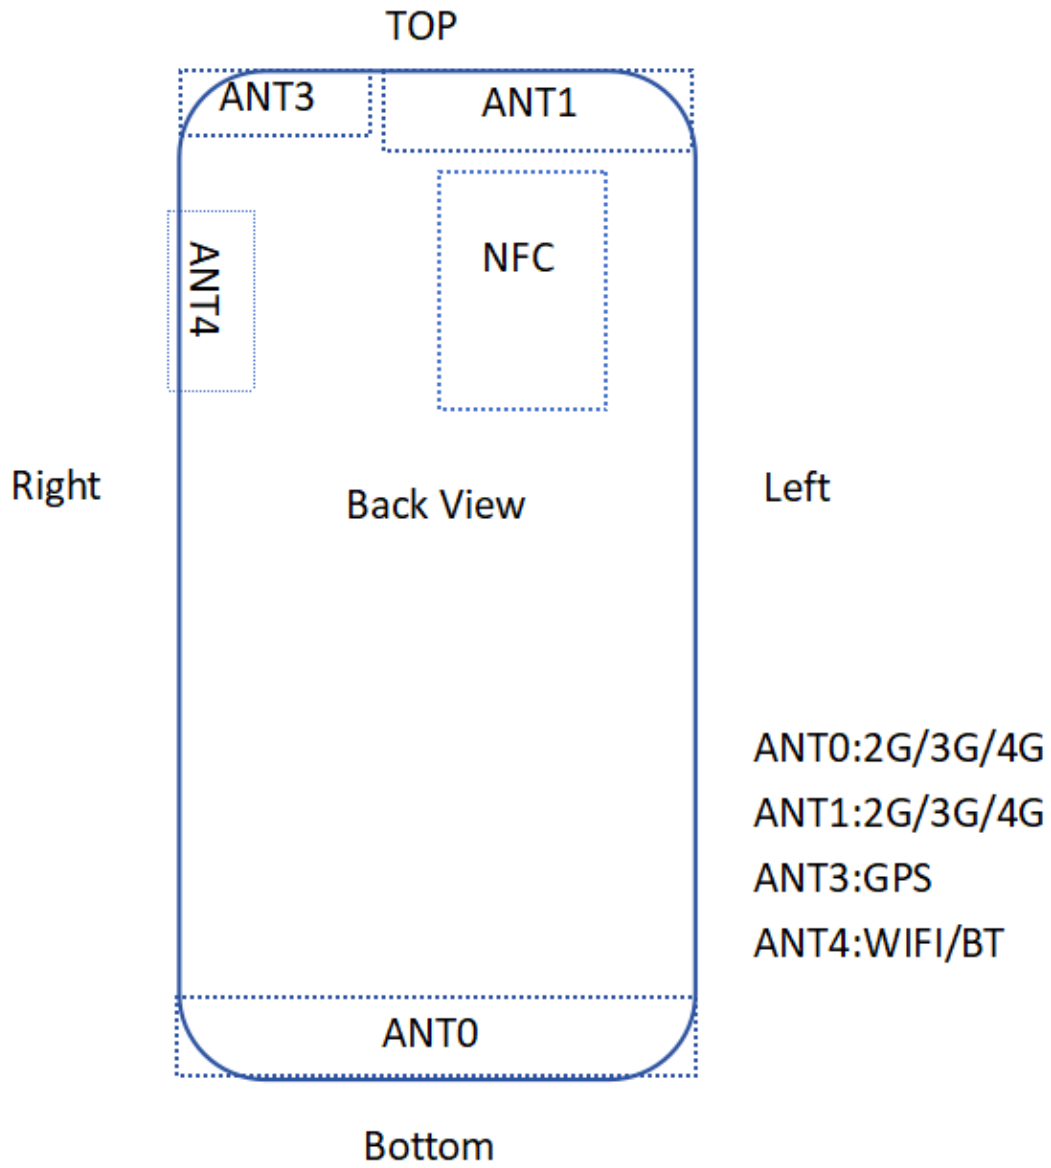Approved by:wei Li   Date:2023/12/13

Antenna Location&dimension:

Fig 1   Antenna location & dimension

Antenna Gain and Antenna Type specification:

Antenna Gain (dBi)		Ant 0	Ant 1	Ant 3	Antenna Type
2.4G WiFi	2400~2483.5MHz	−0.5	/	/	IFA(Inverted F Antenna)
5G Wifi	5150~5250 MHz	−0.7	/	/	IFA(Inverted F Antenna)
	5250~5350 MHz	−0.1	/	/	IFA(Inverted F Antenna)
	5470~5725 MHz	0.4	/	/	IFA(Inverted F Antenna)
	5725~5850 MHz	0.4	/	/	IFA(Inverted F Antenna)
BT	2400~2483.5MHz	−0.5	/	/	IFA(Inverted F Antenna)
NFC	13.56MHz	/	/	/	LOOP(loop Antenna)

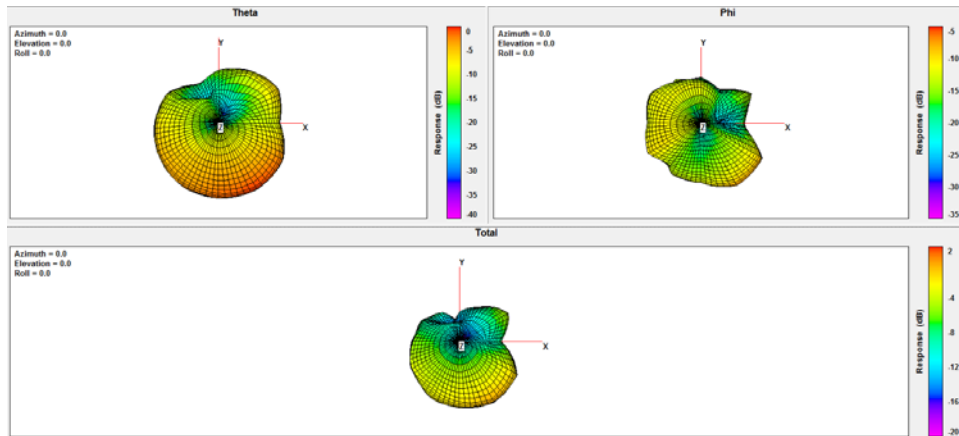Table1　Antenna Gain and Antenna Type specification
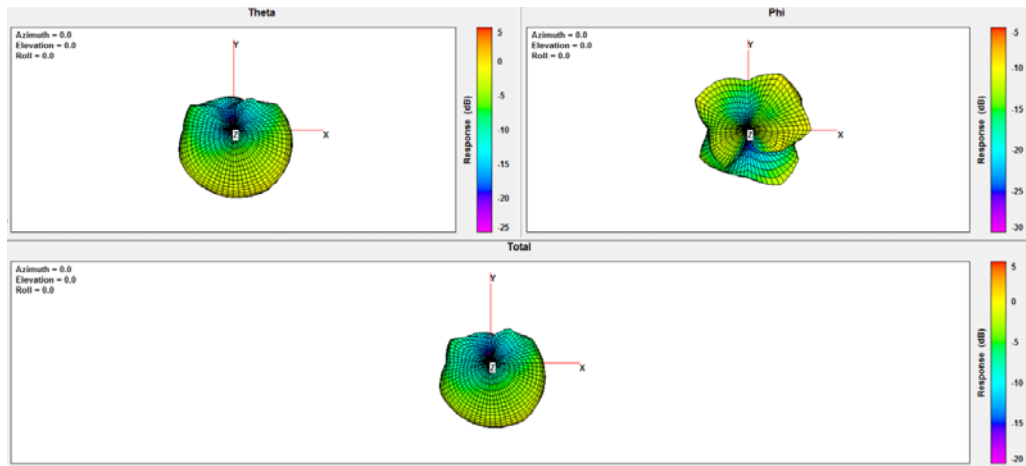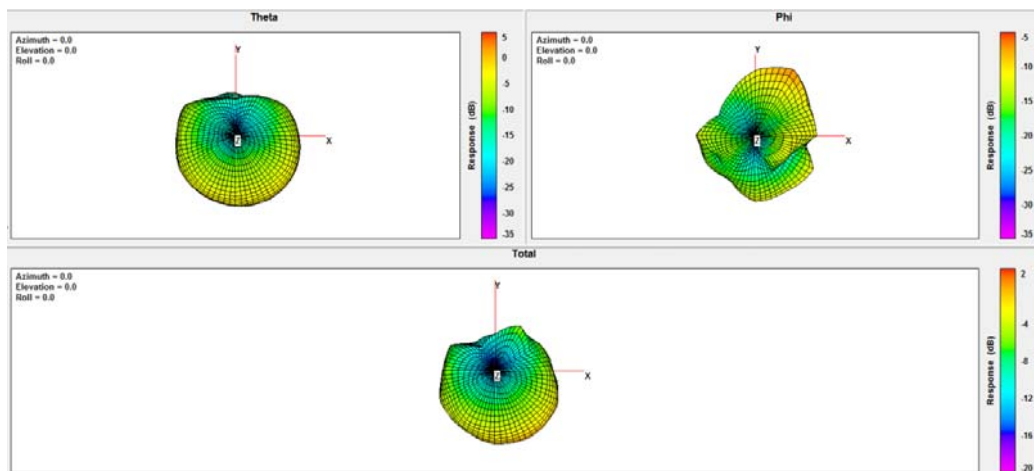
2450MHz：
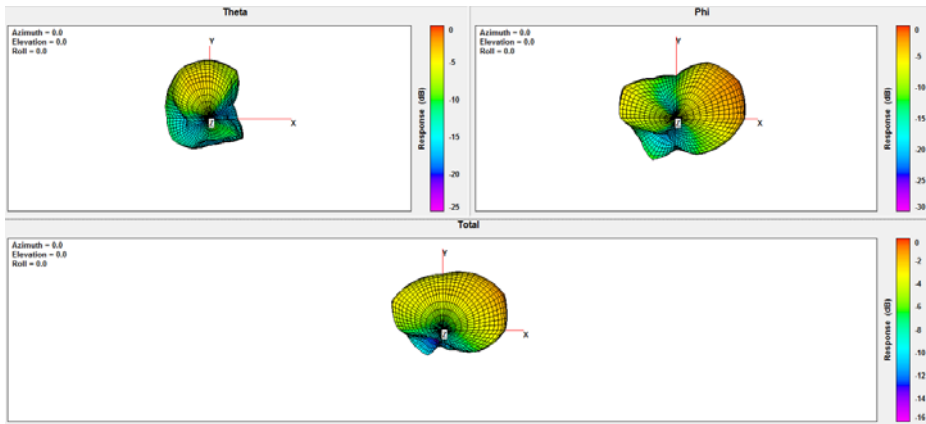
5200MHz：
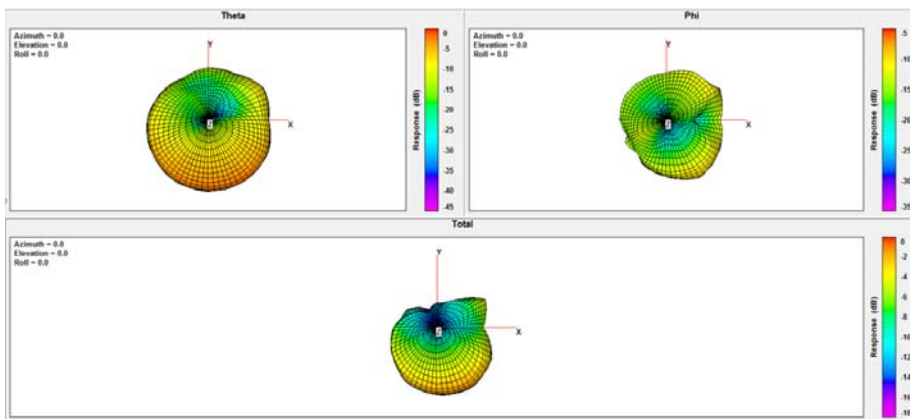
5300MHz：

5700MHz：

5800MHz：

Note: Antenna gain was measured in the anechoic chamber, 3D scan was

exercised, and the highest numbers are reported in this document.

Accoring toTest standard: IEEE Std 149-2021,we measure antenna gain .

List of Test and Measurement Instruments

TEST EQUIPMENT

NO.	Equipment	Manufacturer	Model No.
1	AMS-8923	ETS-Lingen	SN1702
2	Network Analyzer E5071C	Kesight	MY4690575

Fig 2   dipole model 3126-2500 frequency 2500 MHz

Fig 3   model 3126-5500 frequency 5500 MHz

I. Measurement Setup:

A. Reflection Coefficient Measurement:

Instrument: Network Analyzer (Kesight E5071C).
Setup:
1. Calibrate the Network Analyzer by one port calibration using Kesight 85093C Electronic calibration module .
2. Connect the antenna under test to the Network Analyzer.
3. Measure the S11(reflection coefficient),Return Loss….

B. Pattern Measurement:

A Fully Anechoic Chamber is used to simulate free-space conditions.

A Fully Anechoic Chamber is a shielded room lined with RF/microwave absorber on

all walls, ceiling, and floor.

RF/microwave absorber reduces reflections from the inner walls of the shield.

Absorber performance depends on the depth and design of the absorber and the angle

of incidence of the field.

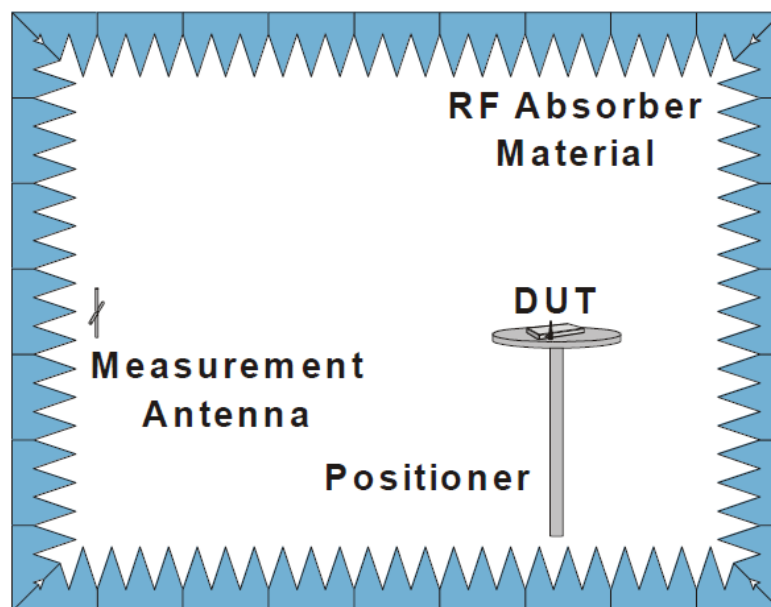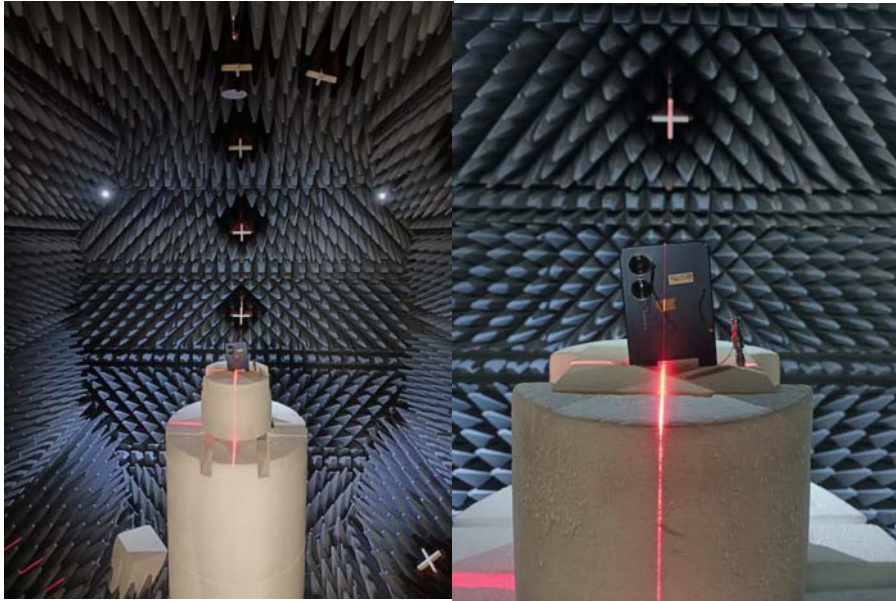Normal incidence is best, shallower angles are worse**.**

Fig. 4. The fully anechoic chamber

Fig.5. The DUT in the fully anechoic chamber