


M/N: PCBANT

Manufacturer: Shenzhen BKL Technology Co., LTD

ANT6:

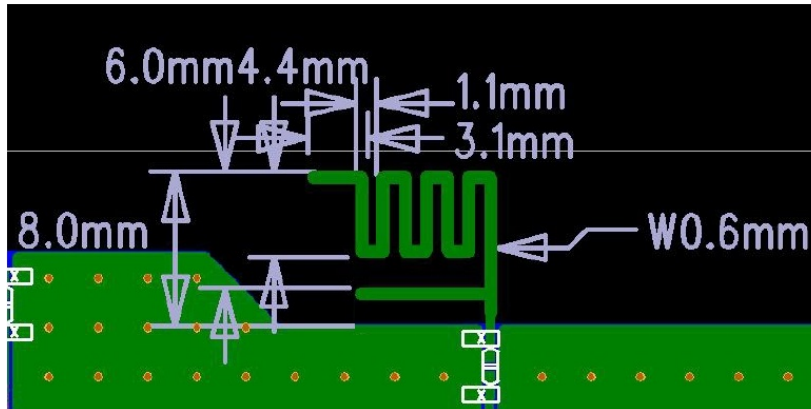

Gain and Efficiency

Frequency (MHz)	Efficiency(%)	Gain(dBi)
2300	42.68	0.78
2320	46.24	1.56
2340	44.62	2.23
2360	44.44	2.69
2380	42.81	3.27
2400	46.29	3.85
2420	56.89	4.41
2440	60.27	4.33
2460	57.59	3.73
2480	55.54	3.66
2500	56.50	4.05
2520	50.26	3.52
2540	47.76	3.49