**PART 22 & 90 MEASUREMENT REPORT****Applicant Name:**

Centum Research & Technology S.L
Fonte das Abelleiras S/N
Edificio Citexvi
36310 Vigo (Spain)

Date of Testing:

01/06/2023- 02/03/2023

Test Report Issue Date:

02/23/2023

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2212270143-04. 2A93U

FCC ID:

2A93U-55041-402

APPLICANT:

Centum Research & Technology S.L

Application Type:

Certification

Model:

Lifeseeker Mini S10

EUT Type:

Geolocation System

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part:

§22(H), §90(S)

Test Procedure(s):

ANSI C63.26-2015


This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President




FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 1 of 30

V2.0 4/7/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	Software and Firmware	6
2.5	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Transmitter Conducted Output Power/ Effective Radiated Power	12
7.3	Occupied Bandwidth	14
7.4	Spurious and Harmonic Emissions at Antenna Terminal	16
7.5	Band Edge Emissions at Antenna Terminal	20
7.6	Radiated Spurious Emissions Measurements.....	25
7.7	Frequency Stability / Temperature Variation	28
8.0	CONCLUSION.....	30

FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 2 of 30

MEASUREMENT REPORT

FCC Part 22 & 90

Mode	Bandwidth	Tx Frequency Range [MHz]	Measurement	Max. Power [W]	Max. Power [dBm]	Emission Designator
LTE Band 26	5 MHz	861.5 - 866.5	Conducted	0.119	20.77	4M90G7D

FCC ID: 2A93U-55041-402		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System		Page 3 of 30

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.


1.2 Element Test Location

These measurement tests were conducted at the Element Laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: 2A93U-55041-402		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System	Page 4 of 30

2.0 PRODUCT INFORMATION


2.1 Equipment Description

The Equipment Under Test (EUT) is the **Centum Geolocation System FCC ID: 2A93U-55041-402**. The test data contained in this report pertains only to the emissions due to the EUT's LTE Band operation under the provisions of Part 90 Subpart S. The EUT generates LTE signal. The EUT can transmit two different LTE band signals at the same time with its multiple antenna port. EUT was set up to operate as shown below with a 12 VDC power source with current limitation of 10A. Server equipment was used to control the RF functions of the EUT.

The EUT supports two output antennas and is capable of transmitting simultaneously on both antennas though not on the same band.

This device may be used in a land or air based vehicle. While operating in the air, per FCC §22.925, this device will not transmit on Band 26 for frequencies under Part 22 (i.e. 869 - 894MHz).

Test Device Serial No.: 213025

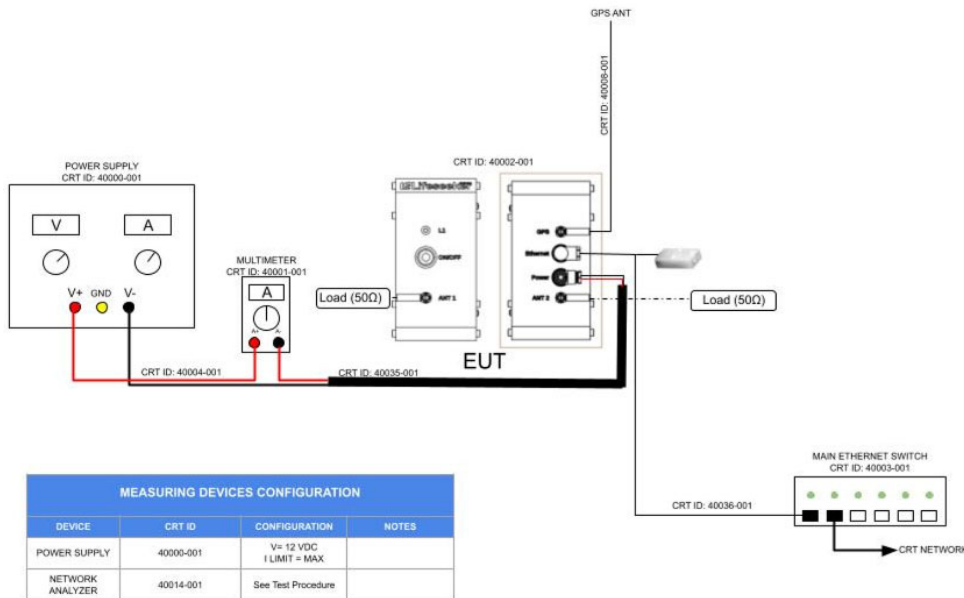

2.2 Device Capabilities

This device contains the following capabilities:

LTE Bands 2, 12, 13, 26, and 66 (with 5MHz operation only)

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

Per ANSI C63.26 Section 5.2.5.3, full testing was performed on a single port due to the fact that both antenna ports are driven by identical hardware and output power settings.

FCC ID: 2A93U-55041-402	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 5 of 30




2.4 Software and Firmware

The test was conducted with software/firmware version 3.7.11 v2.8.4 installed on the EUT

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2A93U-55041-402		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System	Page 6 of 30

V2.0 4/7/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:


$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.


Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 7 of 30

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 8 of 30

V2.0 4/7/2021

5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	ETS	EMC Cable and Switch System	8/11/2022	Annual	8/11/2023	ETS
-	WL25-3	Licensed Transmitter Cable Set	8/15/2022	Annual	8/15/2023	WL25-3
Emco	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Espec	ESX-2CA	Environmental Chamber	5/25/2022	Biennial	5/25/2024	17620
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2022	Annual	3/15/2023	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/18/2022	Annual	8/18/2023	MY54490576
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/25/2022	Annual	8/25/2023	100348

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: 2A93U-55041-402		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System	Page 9 of 30

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated


7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 10 of 30

V2.0 4/7/2021

7.0 TEST RESULTS

7.1 Summary


Company Name: Centum
 FCC ID: 2A93U-55041-402
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 26)	2.1051, 90.691(a)	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions beyond 37.5 kHz from the Block Edge > 50 + 10 log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Sections 7.4, 7.5
	Frequency Stability	2.1055, 90.213	< 2.5 ppm	PASS	Section 7.7
	Transmitter Conducted Output Power	2.1046, 90.635(b)	<100 Watts (50dBm)	PASS	Section 7.2
	Effective Radiated Power (LTE Band 26)	22.913(a)(5)	< 7 Watts max. ERP for operation crossing over into the 869- 894MHz band	PASS	Section 7.2
RADIATED	Radiated Spurious Emissions (LTE Band 26)	2.1053, 90.691(a)	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions beyond 37.5 kHz from the Block Edge > 50 + 10 log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Section 7.6

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is "Chamber Automation," Version 1.3.1.

FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 11 of 30

7.2 Transmitter Conducted Output Power/ Effective Radiated Power

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2.4.4.1

Test Settings

1. Power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. Span = 2 - 3 times the OBW
3. RBW = 1 – 5% of the expected OBW
4. VBW \geq 3 x RBW
5. No. of sweep points > 2 x span / RBW
6. Sweep time = auto-couple
7. Detector = RMS
8. Trigger is set to “free run” for signals with continuous operation.
9. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
10. Trace mode = trace averaging (RMS) over 100 sweeps
11. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





Figure 7-1. Test Instrument & Measurement Setup

Test Notes


The applicant has declared the usage of a 0.82dBi antenna for frequency around 830MHz with this system and hence the ERP is calculated accordingly.

FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 12 of 30


V2.0 4/7/2021

Bandwidth	Channel	Frequency [MHz]	Conducted Power [dBm]	Ant Gain [dBi]	EIRP [dBm]	EIRP [Watts]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
5 MHz	8715	861.5	19.73	0.82	20.55	0.11	18.40	0.07	60.00	-41.60
	8765	866.5	20.77	0.82	21.59	0.14	19.44	0.09	60.00	-40.56

Table 7-2. Transmitter Conducted Output Power / Effective Radiated Power (LTE Band 26)

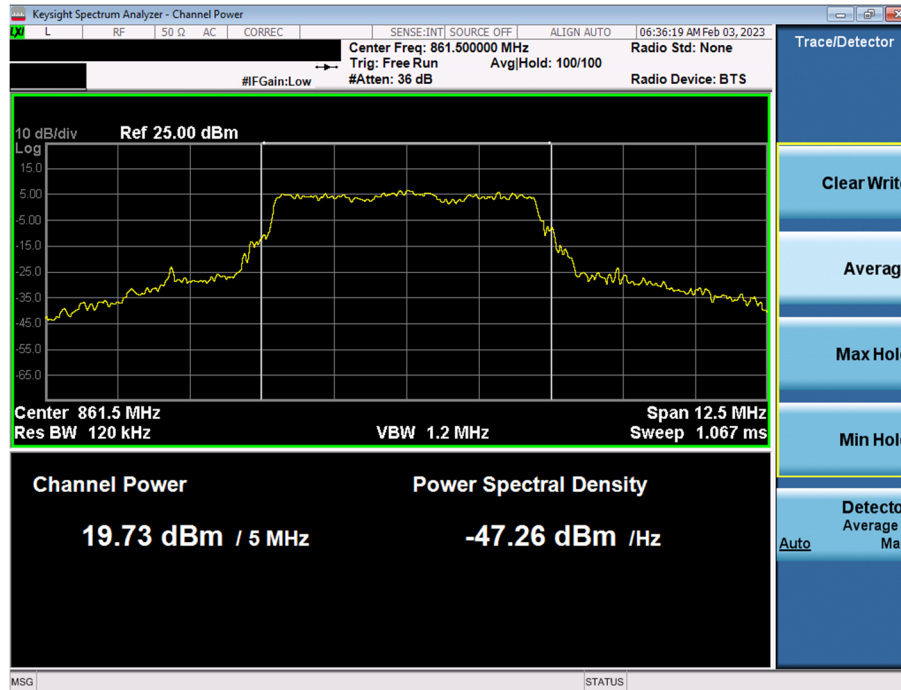

Plot 7-1. Transmitter Conducted Output Power Plot (LTE Band 26 - 5MHz QPSK - Full RB- Low)

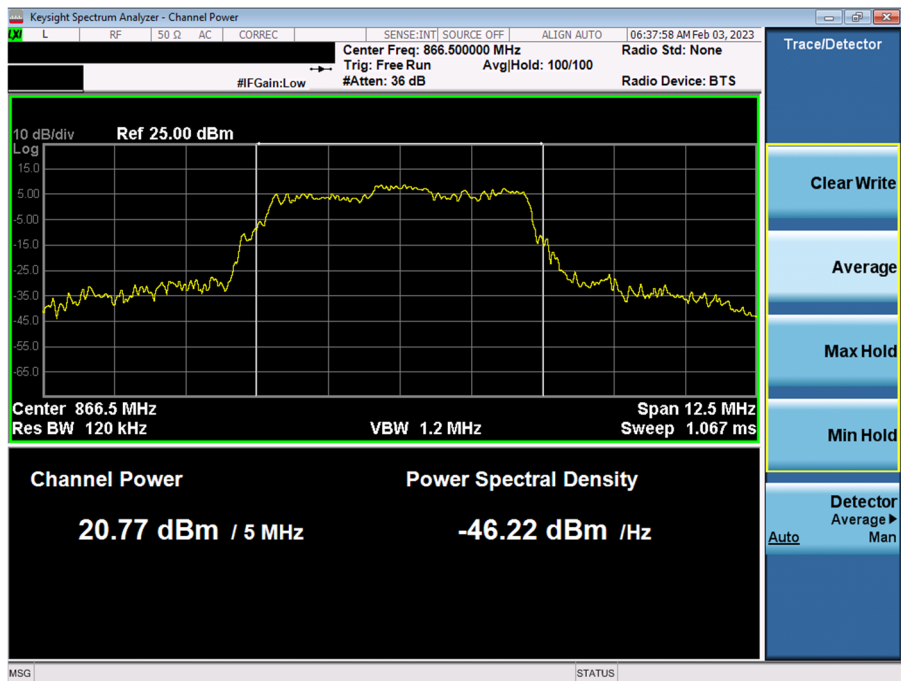

Plot 7-2. Transmitter Conducted Output Power Plot (LTE Band 26 - 5MHz QPSK - Full RB- High)

FCC ID: 2A93U-55041-402	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 13 of 30

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 14 of 30

LTE Band 26



Plot 7-3. Occupied Bandwidth Plot (LTE Band 26 - 5MHz - Full RB)

FCC ID: 2A93U-55041-402	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 15 of 30

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 100kHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup


Test Notes

Per Part 22H and 90, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.


FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 16 of 30

V2.0 4/7/2021


LTE Band 26

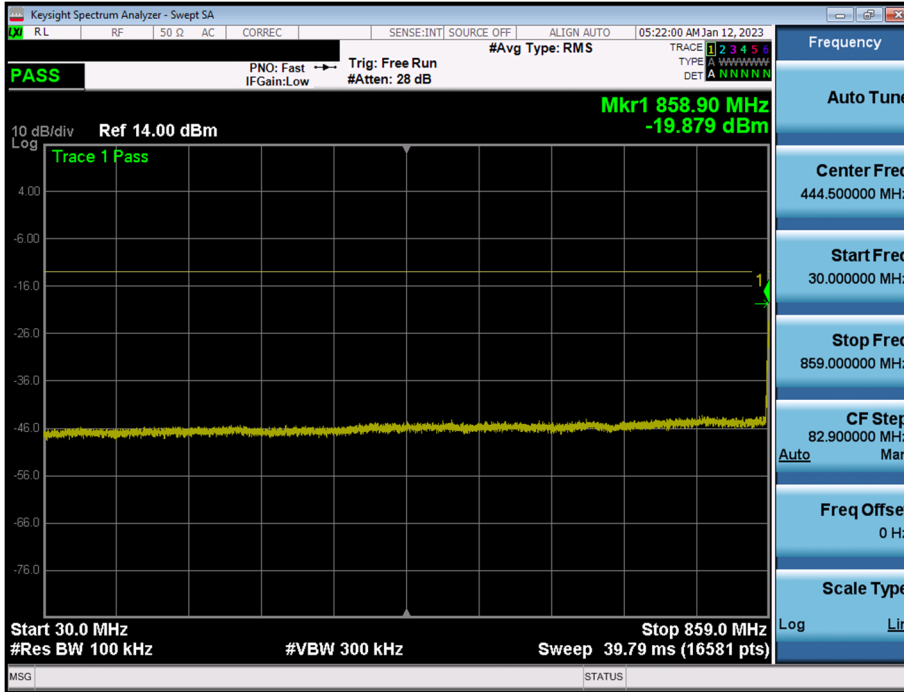


Plot 7-4. Conducted Spurious Plot (LTE Band 26 - 5MHz - Full RB- Low Channel)

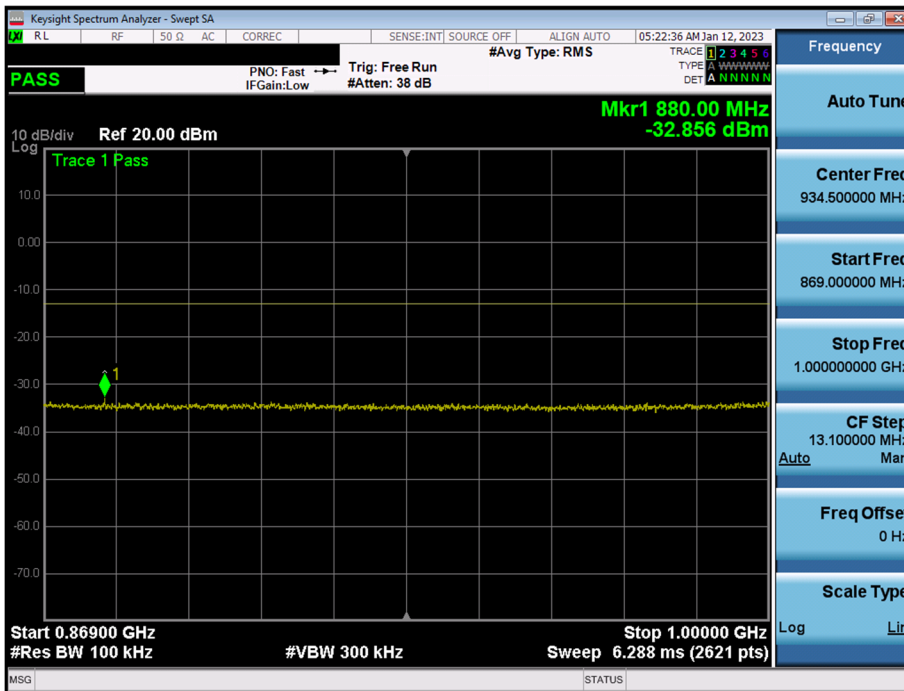


Plot 7-5. Conducted Spurious Plot (LTE Band 26 - 5MHz - Full RB- Low Channel)

FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 17 of 30

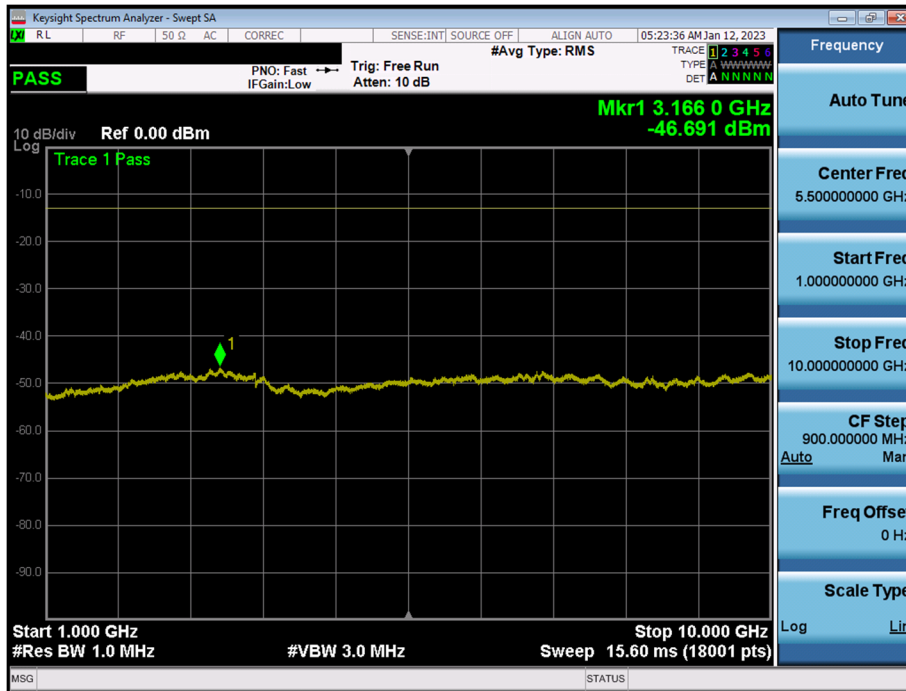


Plot 7-6. Conducted Spurious Plot (LTE Band 26 - 5MHz - Full RB- Low Channel)

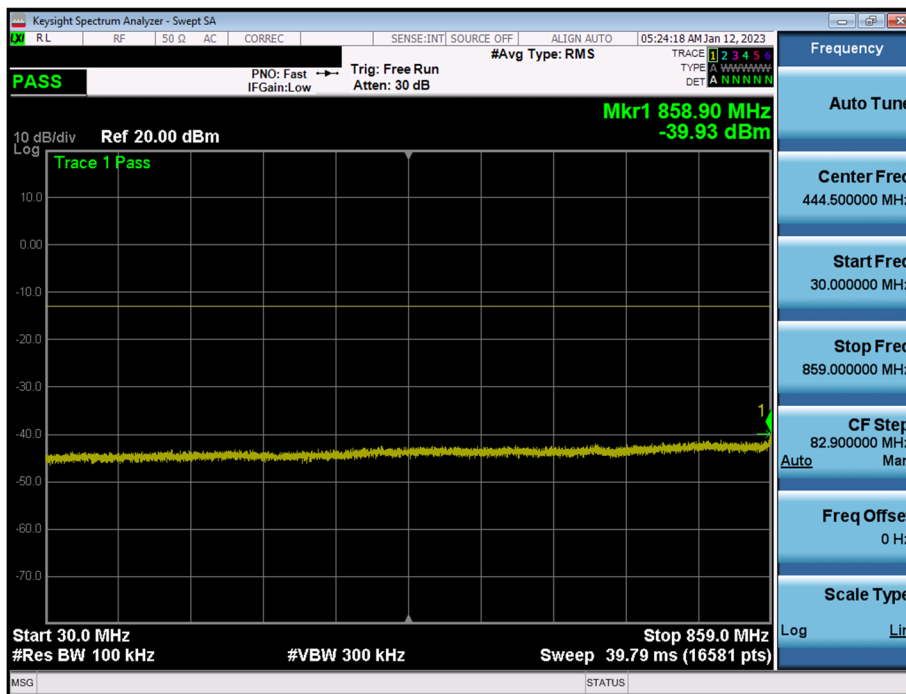


Plot 7-7. Conducted Spurious Plot (LTE Band 26 - 5MHz - Full RB- High Channel)

FCC ID: 2A93U-55041-402	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 18 of 30

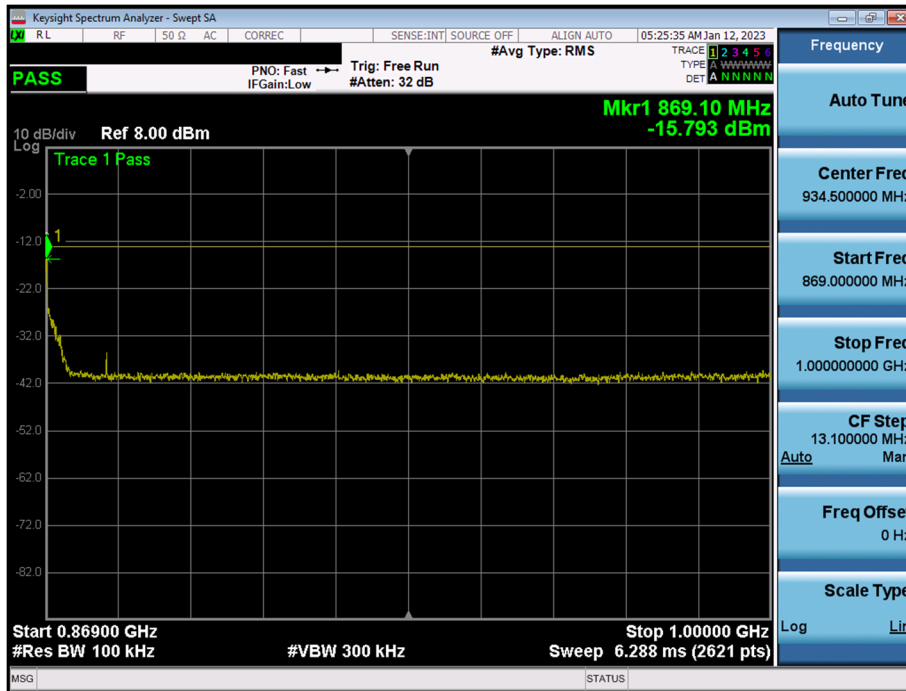

Plot 7-8. Conducted Spurious Plot (LTE Band 26 - 5MHz - Full RB- High Channel)

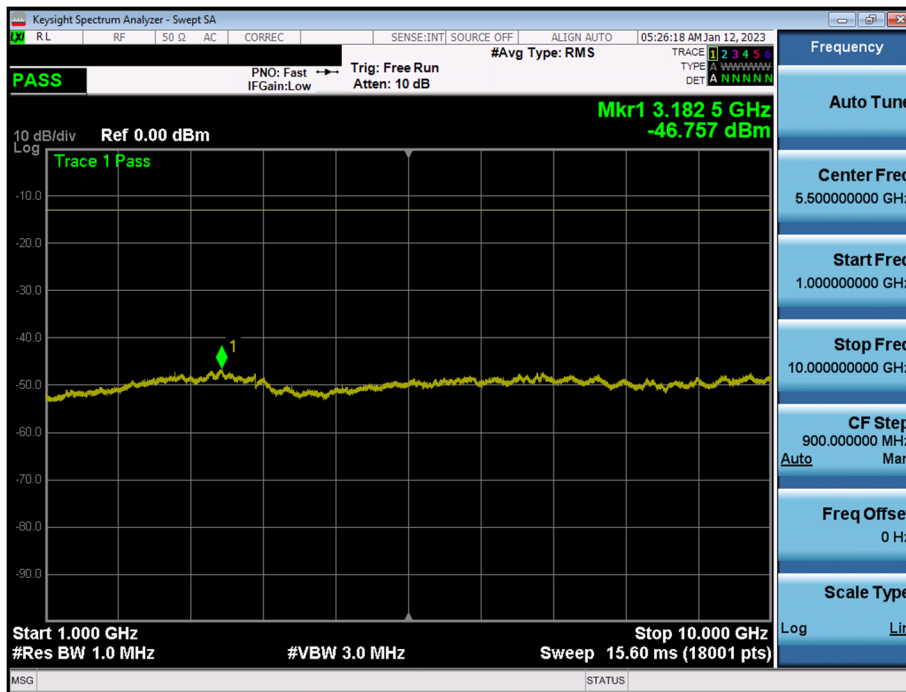

Plot 7-9. Conducted Spurious Plot (LTE Band 26 - 5MHz - Full RB- High Channel)

FCC ID: 2A93U-55041-402	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 19 of 30

7.5 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

For LTE B26 operation under Part 90.691, the minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts. The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup


Test Notes

Per KDB 971168 D02 VIII)c), an RBW = 300Hz was used for measurements within 37.5kHz from the band edge. For offsets greater than 37.5kHz from the band edge, an RBW = 100kHz was used.


FCC ID: 2A93U-55041-402	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 20 of 30

V2.0 4/7/2021

LTE Band 26

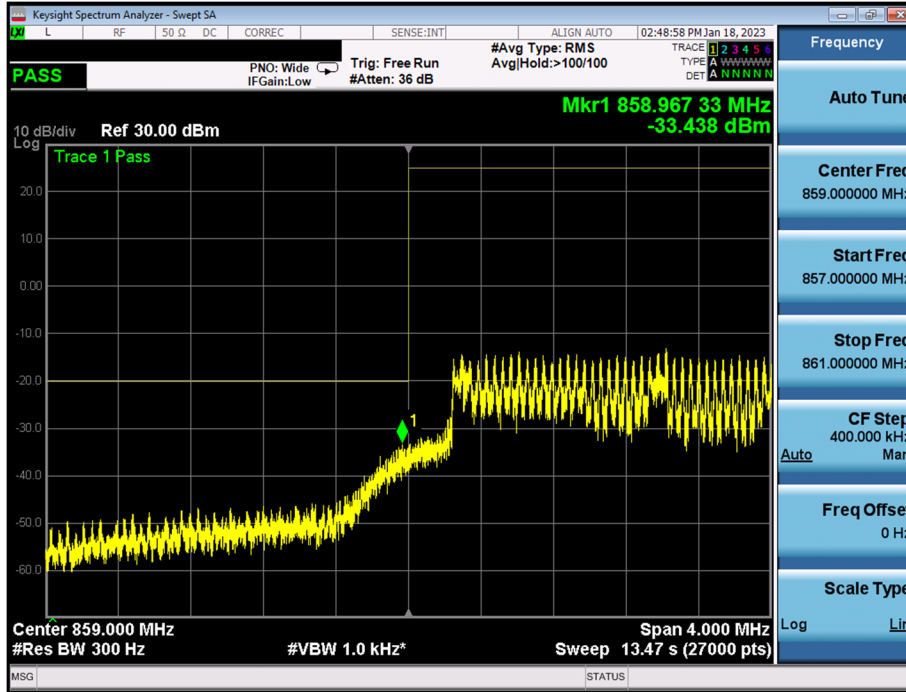

Plot 7-10. Lower Band Edge Plot (LTE Band 26 - 5MHz QPSK - Low Channel)

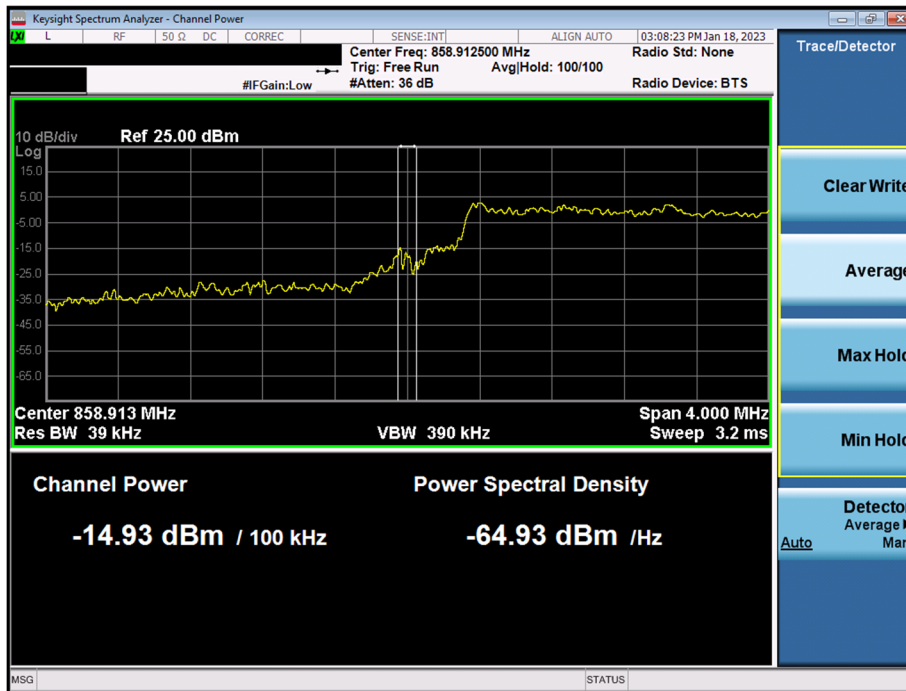

Plot 7-11. Lower Band Edge Plot (LTE Band 26 - 5MHz QPSK - Low Channel)

FCC ID: 2A93U-55041-402	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1M2212270143-04.2A93U	Test Dates: 01/06/2023- 02/03/2023	EUT Type: Geolocation System
		Page 21 of 30