

Test Mode:	TX(5.1G) - 802.11ax-HT40
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.104	70.11	-20.73	49.38	68.20	-18.82	PK
Vertical	4434.104	59.88	-20.73	39.15	54.00	-14.85	AV
Vertical	10380.002	63.13	-9.33	53.80	68.20	-14.40	PK
Vertical	10380.002	49.64	-9.33	40.31	54.00	-13.69	AV
Vertical	15570.105	63.99	-7.83	56.16	74.00	-17.84	PK
Vertical	15570.105	49.98	-7.83	42.15	54.00	-11.85	AV
Horizontal	4434.163	73.19	-20.73	52.46	74.00	-21.54	PK
Horizontal	4434.163	59.52	-20.73	38.78	54.00	-15.22	AV
Horizontal	10380.071	64.35	-9.33	55.02	68.20	-13.18	PK
Horizontal	10380.071	49.82	-9.33	40.49	54.00	-13.51	AV
Horizontal	15570.177	63.33	-7.83	55.50	74.00	-18.50	PK
Horizontal	15570.177	49.34	-7.83	41.51	54.00	-12.49	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.019	71.21	-20.12	51.09	68.20	-17.11	PK
Vertical	4739.019	59.82	-20.12	39.70	54.00	-14.30	AV
Vertical	10460.155	62.92	-9.21	53.71	68.20	-14.49	PK
Vertical	10460.155	49.10	-9.21	39.89	54.00	-14.11	AV
Vertical	15690.012	61.22	-7.79	53.43	74.00	-20.57	PK
Vertical	15690.012	49.10	-7.79	41.31	54.00	-12.69	AV
Horizontal	4739.014	71.64	-20.12	51.52	68.20	-16.68	PK
Horizontal	4739.014	59.44	-20.12	39.32	54.00	-14.68	AV
Horizontal	10460.146	64.70	-9.21	55.49	68.20	-12.71	PK
Horizontal	10460.146	49.77	-9.21	40.56	54.00	-13.44	AV
Horizontal	15690.140	61.18	-7.79	53.39	74.00	-20.61	PK
Horizontal	15690.140	49.99	-7.79	42.20	54.00	-11.80	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ax 80
------------	------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5210 MHz)-Above 1G							
Vertical	4434.161	70.41	-20.73	49.68	68.20	-18.52	PK
Vertical	4434.161	59.67	-20.73	38.94	54.00	-15.06	AV
Vertical	10420.164	62.83	-9.27	53.56	68.20	-14.64	PK
Vertical	10420.164	49.13	-9.27	39.86	54.00	-14.14	AV
Vertical	15630.190	62.53	-7.81	54.72	74.00	-19.28	PK
Vertical	15630.190	49.89	-7.81	42.08	54.00	-11.92	AV
Horizontal	4434.039	73.45	-20.73	52.71	68.20	-15.49	PK
Horizontal	4434.039	60.00	-20.73	39.26	54.00	-14.74	AV
Horizontal	10420.030	40.05	9.27	49.32	68.20	-18.88	PK
Horizontal	10420.030	29.04	9.27	38.31	54.00	-15.69	AV
Horizontal	15630.050	64.65	-7.81	56.84	74.00	-17.16	PK
Horizontal	15630.050	49.97	-7.81	42.16	54.00	-11.84	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX (5.8G) -- 802.11a
------------	----------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.142	72.70	-20.24	52.46	74.00	-21.54	PK
Vertical	4679.142	59.98	-20.24	39.74	54.00	-14.26	AV
Vertical	11490.047	60.72	-8.79	51.93	68.20	-16.27	PK
Vertical	11490.047	49.17	-8.79	40.38	54.00	-13.62	AV
Vertical	17235.055	56.72	-3.18	53.54	68.20	-14.66	PK
Vertical	17235.055	44.35	-3.18	41.17	54.00	-12.83	AV
Horizontal	4679.190	70.20	-20.73	49.47	74.00	-24.53	PK
Horizontal	4679.190	59.11	-20.73	38.38	54.00	-15.62	AV
Horizontal	11490.042	61.62	-8.79	52.83	68.20	-15.37	PK
Horizontal	11490.042	49.05	-8.79	40.26	54.00	-13.74	AV
Horizontal	17235.014	55.57	-3.18	52.39	68.20	-15.81	PK
Horizontal	17235.014	44.17	-3.18	40.99	54.00	-13.01	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.084	73.74	-20.42	53.32	74.00	-20.68	PK
Vertical	4592.084	59.56	-20.42	39.14	54.00	-14.86	AV
Vertical	11570.095	61.52	-8.86	52.66	68.20	-15.54	PK
Vertical	11570.095	49.40	-8.86	40.54	54.00	-13.46	AV
Vertical	17355.114	58.08	-2.52	55.56	68.20	-12.64	PK
Vertical	17355.114	44.41	-2.52	41.89	54.00	-12.11	AV
Horizontal	4592.036	73.96	-20.42	53.55	74.00	-20.45	PK
Horizontal	4592.036	59.79	-20.42	39.37	54.00	-14.63	AV
Horizontal	11570.125	60.22	-8.86	51.36	68.20	-16.84	PK
Horizontal	11570.125	49.16	-8.86	40.30	54.00	-13.70	AV
Horizontal	17355.054	57.68	-2.52	55.16	68.20	-13.04	PK
Horizontal	17355.054	44.46	-2.52	41.94	54.00	-12.06	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.125	72.94	-18.93	54.00	68.20	-14.20	PK
Vertical	6039.125	59.77	-18.93	40.84	54.00	-13.16	AV
Vertical	11650.186	62.55	-8.92	53.63	74.00	-20.37	PK
Vertical	11650.186	49.14	-8.92	40.22	54.00	-13.78	AV
Vertical	17475.170	56.18	-1.86	54.32	68.20	-13.88	PK
Vertical	17475.170	44.29	-1.86	42.43	54.00	-11.57	AV
Horizontal	6039.069	70.84	-18.93	51.90	68.20	-16.30	PK
Horizontal	6039.069	59.85	-18.93	40.92	54.00	-13.08	AV
Horizontal	11650.090	63.77	-8.92	54.85	74.00	-19.15	PK
Horizontal	11650.090	49.88	-8.92	40.96	54.00	-13.04	AV
Horizontal	17475.192	56.65	-1.86	54.79	68.20	-13.41	PK
Horizontal	17475.192	44.83	-1.86	42.97	54.00	-11.03	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A

Test Mode: TX (5.8G) --802.11n-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.038	74.98	-20.24	54.74	74.00	-19.26	PK
Vertical	4679.038	59.99	-20.24	39.75	54.00	-14.25	AV
Vertical	11490.195	60.19	-8.79	51.40	68.20	-16.80	PK
Vertical	11490.195	49.63	-8.79	40.84	54.00	-13.16	AV
Vertical	17235.098	59.28	-3.18	56.10	68.20	-12.10	PK
Vertical	17235.098	44.38	-3.18	41.20	54.00	-12.80	AV
Horizontal	4679.156	72.42	-20.24	52.18	74.00	-21.82	PK
Horizontal	4679.156	59.10	-20.24	38.86	54.00	-15.14	AV
Horizontal	11490.099	61.61	-8.79	52.82	68.20	-15.38	PK
Horizontal	11490.099	49.07	-8.79	40.28	54.00	-13.72	AV
Horizontal	17235.125	59.01	-3.18	55.83	68.20	-12.37	PK
Horizontal	17235.125	44.75	-3.18	41.57	54.00	-12.43	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.019	71.44	-20.42	51.02	74.00	-22.98	PK
Vertical	4592.019	59.33	-20.42	38.92	54.00	-15.08	AV
Vertical	11570.153	62.57	-8.86	53.71	68.20	-14.49	PK
Vertical	11570.153	49.62	-8.86	40.76	54.00	-13.24	AV
Vertical	17355.103	58.46	-2.52	55.94	68.20	-12.26	PK
Vertical	17355.103	44.11	-2.52	41.59	54.00	-12.41	AV
Horizontal	4592.155	73.29	-20.42	52.87	74.00	-21.13	PK
Horizontal	4592.155	59.50	-20.42	39.08	54.00	-14.92	AV
Horizontal	11570.091	60.22	-8.86	51.36	68.20	-16.84	PK
Horizontal	11570.091	49.24	-8.86	40.38	54.00	-13.62	AV
Horizontal	17355.119	58.19	-2.52	55.67	68.20	-12.53	PK
Horizontal	17355.119	44.82	-2.52	42.30	54.00	-11.70	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.042	74.87	-18.93	55.93	68.20	-12.27	PK
Vertical	6039.042	59.75	-18.93	40.81	54.00	-13.19	AV
Vertical	11650.107	63.72	-8.92	54.80	74.00	-19.20	PK
Vertical	11650.107	49.38	-8.92	40.46	54.00	-13.54	AV
Vertical	17475.022	55.51	-1.86	53.65	68.20	-14.55	PK
Vertical	17475.022	44.56	-1.86	42.70	54.00	-11.30	AV
Horizontal	6039.148	73.54	-18.93	54.61	68.20	-13.59	PK
Horizontal	6039.148	59.95	-18.93	41.02	54.00	-12.98	AV
Horizontal	11650.019	62.98	-8.92	54.06	74.00	-19.94	PK
Horizontal	11650.019	49.55	-8.92	40.63	54.00	-13.37	AV
Horizontal	17475.108	55.13	-1.86	53.27	68.20	-14.93	PK
Horizontal	17475.108	44.99	-1.86	43.13	54.00	-10.87	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX (5.8G) -- 802.11n-HT40
------------	---------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.034	72.41	-20.24	52.17	74.00	-21.83	PK
Vertical	4679.034	59.04	-20.24	38.79	54.00	-15.21	AV
Vertical	11510.109	62.81	-8.81	54.00	74.00	-20.00	PK
Vertical	11510.109	49.21	-8.81	40.40	54.00	-13.60	AV
Vertical	17265.198	55.58	-3.01	52.57	68.20	-15.63	PK
Vertical	17265.198	44.64	-3.01	41.63	54.00	-12.37	AV
Horizontal	4679.068	73.39	-20.24	53.15	74.00	-20.85	PK
Horizontal	4679.068	59.21	-20.24	38.97	54.00	-15.03	AV
Horizontal	11510.015	64.23	-8.81	55.42	74.00	-18.58	PK
Horizontal	11510.015	49.87	-8.81	41.06	54.00	-12.94	AV
Horizontal	17265.170	56.09	-3.01	53.08	68.20	-15.12	PK
Horizontal	17265.170	44.13	-3.01	41.12	54.00	-12.88	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.142	71.86	-18.93	52.93	68.20	-15.27	PK
Vertical	6039.142	59.74	-18.93	40.81	54.00	-13.19	AV
Vertical	11590.154	62.08	-8.87	53.21	74.00	-20.79	PK
Vertical	11590.154	49.56	-8.87	40.69	54.00	-13.31	AV
Vertical	17385.138	57.88	-2.35	55.53	68.20	-12.67	PK
Vertical	17385.138	44.16	-2.35	41.81	54.00	-12.19	AV
Horizontal	6039.185	71.01	-18.93	52.08	68.20	-16.12	PK
Horizontal	6039.185	59.67	-18.93	40.74	54.00	-13.26	AV
Horizontal	11590.192	64.86	-8.87	55.99	74.00	-18.01	PK
Horizontal	11590.192	49.17	-8.87	40.30	54.00	-13.70	AV
Horizontal	17385.120	58.36	-2.35	56.01	68.20	-12.19	PK
Horizontal	17385.120	44.45	-2.35	42.10	54.00	-11.90	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode: TX (5.8G) --802.11ac-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.041	70.70	-20.24	50.45	74.00	-23.55	PK
Vertical	4679.041	59.12	-20.24	38.88	54.00	-15.12	AV
Vertical	11490.129	63.36	-8.79	54.57	68.20	-13.63	PK
Vertical	11490.129	49.87	-8.79	41.08	54.00	-12.92	AV
Vertical	17235.105	55.05	-3.18	51.87	68.20	-16.33	PK
Vertical	17235.105	44.96	-3.18	41.78	54.00	-12.22	AV
Horizontal	4679.175	72.83	-20.24	52.59	74.00	-21.41	PK
Horizontal	4679.175	59.34	-20.24	39.10	54.00	-14.90	AV
Horizontal	11490.151	60.04	-8.79	51.25	68.20	-16.95	PK
Horizontal	11490.151	49.55	-8.79	40.76	54.00	-13.24	AV
Horizontal	17235.097	57.05	-3.18	53.87	68.20	-14.33	PK
Horizontal	17235.097	44.31	-3.18	41.13	54.00	-12.87	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.064	72.46	-20.42	52.04	74.00	-21.96	PK
Vertical	4592.064	59.38	-20.42	38.97	54.00	-15.03	AV
Vertical	11570.065	61.82	-8.86	52.96	68.20	-15.24	PK
Vertical	11570.065	49.39	-8.86	40.53	54.00	-13.47	AV
Vertical	17355.180	56.02	-2.52	53.50	68.20	-14.70	PK
Vertical	17355.180	44.10	-2.52	41.58	54.00	-12.42	AV
Horizontal	4592.113	71.12	-20.42	50.70	74.00	-23.30	PK
Horizontal	4592.113	59.45	-20.42	39.03	54.00	-14.97	AV
Horizontal	11570.068	63.86	-8.86	55.00	68.20	-13.20	PK
Horizontal	11570.068	49.51	-8.86	40.65	54.00	-13.35	AV
Horizontal	17355.147	55.67	-2.52	53.15	68.20	-15.05	PK
Horizontal	17355.147	44.00	-2.52	41.48	54.00	-12.52	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.166	70.28	-18.93	51.34	68.20	-16.86	PK
Vertical	6039.166	59.37	-18.93	40.44	54.00	-13.56	AV
Vertical	11650.054	63.11	-8.92	54.19	74.00	-19.81	PK
Vertical	11650.054	49.44	-8.92	40.52	54.00	-13.48	AV
Vertical	17475.054	58.58	-1.86	56.72	68.20	-11.48	PK
Vertical	17475.054	44.99	-1.86	43.13	54.00	-10.87	AV
Horizontal	6039.099	72.42	-18.93	53.49	68.20	-14.71	PK
Horizontal	6039.099	59.49	-18.93	40.56	54.00	-13.44	AV
Horizontal	11650.121	60.69	-8.92	51.77	74.00	-22.23	PK
Horizontal	11650.121	49.77	-8.92	40.85	54.00	-13.15	AV
Horizontal	17475.187	58.54	-1.86	56.68	68.20	-11.52	PK
Horizontal	17475.187	44.46	-1.86	42.60	54.00	-11.40	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.006	73.87	-20.24	53.63	74.00	-20.37	PK
Vertical	4679.006	60.00	-20.24	39.76	54.00	-14.24	AV
Vertical	11510.096	63.42	-8.81	54.61	74.00	-19.39	PK
Vertical	11510.096	49.48	-8.81	40.67	54.00	-13.33	AV
Vertical	17265.121	55.59	-3.01	52.58	68.20	-15.62	PK
Vertical	17265.121	44.14	-3.01	41.13	54.00	-12.87	AV
Horizontal	4679.047	72.28	-20.24	52.03	74.00	-21.97	PK
Horizontal	4679.047	59.20	-20.24	38.96	54.00	-15.04	AV
Horizontal	11510.016	64.77	-8.81	55.96	74.00	-18.04	PK
Horizontal	11510.016	49.16	-8.81	40.35	54.00	-13.65	AV
Horizontal	17265.053	56.08	-3.01	53.07	68.20	-15.13	PK
Horizontal	17265.053	44.40	-3.01	41.39	54.00	-12.61	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.019	70.59	-18.93	51.66	68.20	-16.54	PK
Vertical	6039.019	59.79	-18.93	40.86	54.00	-13.14	AV
Vertical	11590.060	64.19	-8.87	55.32	74.00	-18.68	PK
Vertical	11590.060	49.68	-8.87	40.81	54.00	-13.19	AV
Vertical	17385.176	58.41	-2.35	56.06	68.20	-12.14	PK
Vertical	17385.176	44.99	-2.35	42.64	54.00	-11.36	AV
Horizontal	6039.189	73.11	-18.93	54.18	68.20	-14.02	PK
Horizontal	6039.189	59.88	-18.93	40.95	54.00	-13.05	AV
Horizontal	11590.083	64.66	-8.87	55.79	74.00	-18.21	PK
Horizontal	11590.083	49.02	-8.87	40.15	54.00	-13.85	AV
Horizontal	17385.149	58.70	-2.35	56.35	68.20	-11.85	PK
Horizontal	17385.149	44.65	-2.35	42.30	54.00	-11.70	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ac 80
-------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5775 MHz)-Above 1G							
Vertical	4679.178	71.59	-20.24	51.35	74.00	-22.65	PK
Vertical	4679.178	59.14	-20.24	38.90	54.00	-15.10	AV
Vertical	11550.036	64.74	-8.84	55.90	74.00	-18.10	PK
Vertical	11550.036	49.62	-8.84	40.78	54.00	-13.22	AV
Vertical	17325.008	59.66	-2.68	56.98	68.20	-11.22	PK
Vertical	17325.008	44.86	-2.68	42.18	54.00	-11.82	AV
Horizontal	4679.148	72.27	-20.24	52.03	74.00	-21.97	PK
Horizontal	4679.148	59.49	-20.24	39.25	54.00	-14.75	AV
Horizontal	11550.170	64.81	-8.84	55.97	74.00	-18.03	PK
Horizontal	11550.170	49.14	-8.84	40.30	54.00	-13.70	AV
Horizontal	17325.024	58.56	-2.68	55.88	68.20	-12.32	PK
Horizontal	17325.024	44.72	-2.68	42.04	54.00	-11.96	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode: TX (5.8G) --802.11ax-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.051	72.93	-20.24	52.69	74.00	-21.31	PK
Vertical	4679.051	59.14	-20.24	38.90	54.00	-15.10	AV
Vertical	11490.073	63.59	-8.79	54.80	68.20	-13.40	PK
Vertical	11490.073	49.76	-8.79	40.97	54.00	-13.03	AV
Vertical	17235.122	57.47	-3.18	54.29	68.20	-13.91	PK
Vertical	17235.122	44.56	-3.18	41.38	54.00	-12.62	AV
Horizontal	4679.089	74.17	-20.24	53.92	74.00	-20.08	PK
Horizontal	4679.089	59.79	-20.24	39.54	54.00	-14.46	AV
Horizontal	11490.092	60.19	-8.79	51.40	68.20	-16.80	PK
Horizontal	11490.092	49.13	-8.79	40.34	54.00	-13.66	AV
Horizontal	17235.074	59.11	-3.18	55.93	68.20	-12.27	PK
Horizontal	17235.074	44.86	-3.18	41.68	54.00	-12.32	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.169	71.56	-20.42	51.14	74.00	-22.86	PK
Vertical	4592.169	59.21	-20.42	38.79	54.00	-15.21	AV
Vertical	11570.085	62.19	-8.86	53.33	68.20	-14.87	PK
Vertical	11570.085	49.40	-8.86	40.54	54.00	-13.46	AV
Vertical	17355.153	57.58	-2.52	55.06	68.20	-13.14	PK
Vertical	17355.153	44.57	-2.52	42.05	54.00	-11.95	AV
Horizontal	4592.185	71.85	-20.42	51.43	74.00	-22.57	PK
Horizontal	4592.185	59.07	-20.42	38.66	54.00	-15.34	AV
Horizontal	11570.182	63.85	-8.86	54.99	68.20	-13.21	PK
Horizontal	11570.182	49.54	-8.86	40.68	54.00	-13.32	AV
Horizontal	17355.143	55.54	-2.52	53.02	68.20	-15.18	PK
Horizontal	17355.143	44.45	-2.52	41.93	54.00	-12.07	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.046	71.08	-18.93	52.15	68.20	-16.05	PK
Vertical	6039.046	59.58	-18.93	40.65	54.00	-13.35	AV
Vertical	11650.108	64.86	-8.92	55.94	74.00	-18.06	PK
Vertical	11650.108	49.24	-8.92	40.32	54.00	-13.68	AV
Vertical	17475.163	57.21	-1.86	55.35	68.20	-12.85	PK
Vertical	17475.163	44.21	-1.86	42.35	54.00	-11.65	AV
Horizontal	6039.112	73.73	-18.93	54.80	68.20	-13.40	PK
Horizontal	6039.112	59.38	-18.93	40.45	54.00	-13.55	AV
Horizontal	11650.012	60.38	-8.92	51.46	74.00	-22.54	PK
Horizontal	11650.012	49.47	-8.92	40.55	54.00	-13.45	AV
Horizontal	17475.027	56.90	-1.86	55.04	68.20	-13.16	PK
Horizontal	17475.027	44.49	-1.86	42.63	54.00	-11.37	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ax-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.022	74.02	-20.24	53.78	74.00	-20.22	PK
Vertical	4679.022	59.73	-20.24	39.48	54.00	-14.52	AV
Vertical	11510.134	62.67	-8.81	53.86	74.00	-20.14	PK
Vertical	11510.134	49.62	-8.81	40.81	54.00	-13.19	AV
Vertical	17265.159	55.61	-3.01	52.60	68.20	-15.60	PK
Vertical	17265.159	44.26	-3.01	41.25	54.00	-12.75	AV
Horizontal	4679.145	74.88	-20.24	54.64	74.00	-19.36	PK
Horizontal	4679.145	59.32	-20.24	39.07	54.00	-14.93	AV
Horizontal	11510.113	63.33	-8.81	54.52	74.00	-19.48	PK
Horizontal	11510.113	49.42	-8.81	40.61	54.00	-13.39	AV
Horizontal	17265.188	59.74	-3.01	56.73	68.20	-11.47	PK
Horizontal	17265.188	44.14	-3.01	41.13	54.00	-12.87	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.125	71.59	-18.93	52.66	68.20	-15.54	PK
Vertical	6039.125	59.94	-18.93	41.01	54.00	-12.99	AV
Vertical	11590.049	63.58	-8.87	54.71	74.00	-19.29	PK
Vertical	11590.049	49.64	-8.87	40.77	54.00	-13.23	AV
Vertical	17385.159	57.52	-2.35	55.17	68.20	-13.03	PK
Vertical	17385.159	44.84	-2.35	42.49	54.00	-11.51	AV
Horizontal	6039.102	73.18	-18.93	54.25	68.20	-13.95	PK
Horizontal	6039.102	59.93	-18.93	41.00	54.00	-13.00	AV
Horizontal	11590.090	63.89	-8.87	55.02	74.00	-18.98	PK
Horizontal	11590.090	49.10	-8.87	40.23	54.00	-13.77	AV
Horizontal	17385.148	57.92	-2.35	55.57	68.20	-12.63	PK
Horizontal	17385.148	44.20	-2.35	41.85	54.00	-12.15	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ax 80
-------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5775 MHz)-Above 1G							
Vertical	4679.096	70.09	-20.24	49.84	74.00	-24.16	PK
Vertical	4679.096	59.39	-20.24	39.15	54.00	-14.85	AV
Vertical	11550.123	63.72	-8.84	54.88	74.00	-19.12	PK
Vertical	11550.123	49.19	-8.84	40.35	54.00	-13.65	AV
Vertical	17325.189	58.15	-2.68	55.47	68.20	-12.73	PK
Vertical	17325.189	44.19	-2.68	41.51	54.00	-12.49	AV
Horizontal	4679.002	70.75	-20.24	50.51	74.00	-23.49	PK
Horizontal	4679.002	59.09	-20.24	38.85	54.00	-15.15	AV
Horizontal	11550.126	63.05	-8.84	54.21	74.00	-19.79	PK
Horizontal	11550.126	49.49	-8.84	40.65	54.00	-13.35	AV
Horizontal	17325.151	57.00	-2.68	54.32	68.20	-13.88	PK
Horizontal	17325.151	44.53	-2.68	41.85	54.00	-12.15	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.067	71.28	-20.73	50.55	68.20	-17.65	PK
Vertical	4434.067	59.89	-20.73	39.16	54.00	-14.84	AV
Vertical	10360.070	64.19	-9.36	54.83	68.20	-13.37	PK
Vertical	10360.070	49.64	-9.36	40.28	54.00	-13.72	AV
Vertical	15540.147	61.28	-7.84	53.44	74.00	-20.56	PK
Vertical	15540.147	49.24	-7.84	41.40	54.00	-12.60	AV
Horizontal	4434.170	70.83	-20.73	50.10	68.20	-18.10	PK
Horizontal	4434.170	59.10	-20.73	38.37	54.00	-15.63	AV
Horizontal	10360.172	64.84	-9.36	55.48	68.20	-12.72	PK
Horizontal	10360.172	49.40	-9.36	40.04	54.00	-13.96	AV
Horizontal	15540.029	62.47	-7.84	54.63	74.00	-19.37	PK
Horizontal	15540.029	49.07	-7.84	41.23	54.00	-12.77	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.053	74.86	-20.42	54.44	74.00	-19.56	PK
Vertical	4592.053	59.02	-20.42	38.60	54.00	-15.40	AV
Vertical	10400.038	62.85	-9.30	53.55	68.20	-14.65	PK
Vertical	10400.038	49.92	-9.30	40.62	54.00	-13.38	AV
Vertical	15600.100	62.88	-7.82	55.06	74.00	-18.94	PK
Vertical	15600.100	49.76	-7.82	41.94	54.00	-12.06	AV
Horizontal	4592.133	72.82	-20.42	52.41	74.00	-21.59	PK
Horizontal	4592.133	59.32	-20.42	38.91	54.00	-15.09	AV
Horizontal	10400.113	63.30	-9.30	54.00	68.20	-14.20	PK
Horizontal	10400.113	49.26	-9.30	39.96	54.00	-14.04	AV
Horizontal	15600.046	62.66	-7.82	54.84	74.00	-19.16	PK
Horizontal	15600.046	49.69	-7.82	41.87	54.00	-12.13	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.192	70.32	-20.12	50.19	74.00	-23.81	PK
Vertical	4739.192	59.18	-20.12	39.06	54.00	-14.94	AV
Vertical	10480.019	60.30	-9.18	51.12	68.20	-17.08	PK
Vertical	10480.019	49.83	-9.18	40.65	54.00	-13.35	AV
Vertical	15720.166	63.86	-7.78	56.08	74.00	-17.92	PK
Vertical	15720.166	49.39	-7.78	41.61	54.00	-12.39	AV
Horizontal	4739.187	71.83	-20.12	51.71	74.00	-22.29	PK
Horizontal	4739.187	59.08	-20.12	38.95	54.00	-15.05	AV
Horizontal	10480.118	62.89	-9.18	53.71	68.20	-14.49	PK
Horizontal	10480.118	49.26	-9.18	40.08	54.00	-13.92	AV
Horizontal	15720.186	63.26	-7.78	55.48	74.00	-18.52	PK
Horizontal	15720.186	49.92	-7.78	42.14	54.00	-11.86	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A

Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.049	71.03	-20.73	50.30	68.20	-17.90	PK
Vertical	4434.049	59.14	-20.73	38.40	54.00	-15.60	AV
Vertical	10360.040	60.46	-9.36	51.10	68.20	-17.10	PK
Vertical	10360.040	49.22	-9.36	39.86	54.00	-14.14	AV
Vertical	15540.198	60.56	-7.84	52.72	74.00	-21.28	PK
Vertical	15540.198	49.49	-7.84	41.65	54.00	-12.35	AV
Horizontal	4434.043	72.12	-20.73	51.39	68.20	-16.81	PK
Horizontal	4434.043	59.92	-20.73	39.19	54.00	-14.81	AV
Horizontal	10360.066	61.38	-9.36	52.02	68.20	-16.18	PK
Horizontal	10360.066	49.13	-9.36	39.77	54.00	-14.23	AV
Horizontal	15540.072	64.13	-7.84	56.29	74.00	-17.71	PK
Horizontal	15540.072	49.56	-7.84	41.72	54.00	-12.28	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.137	71.24	-20.42	50.82	74.00	-23.18	PK
Vertical	4592.137	59.86	-20.42	39.44	54.00	-14.56	AV
Vertical	10400.158	60.33	-9.30	51.03	68.20	-17.17	PK
Vertical	10400.158	49.46	-9.30	40.16	54.00	-13.84	AV
Vertical	15600.117	63.72	-7.82	55.90	74.00	-18.10	PK
Vertical	15600.117	49.98	-7.82	42.16	54.00	-11.84	AV
Horizontal	4592.079	73.48	-20.42	53.06	74.00	-20.94	PK
Horizontal	4592.079	59.22	-20.42	38.81	54.00	-15.19	AV
Horizontal	10400.053	61.24	-9.30	51.94	68.20	-16.26	PK
Horizontal	10400.053	49.63	-9.30	40.33	54.00	-13.67	AV
Horizontal	15600.194	62.35	-7.82	54.53	74.00	-19.47	PK
Horizontal	15600.194	49.43	-7.82	41.61	54.00	-12.39	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.021	74.44	-20.12	54.32	74.00	-19.68	PK
Vertical	4739.021	59.79	-20.12	39.67	54.00	-14.33	AV
Vertical	10480.112	62.49	-9.18	53.31	68.20	-14.89	PK
Vertical	10480.112	49.14	-9.18	39.96	54.00	-14.04	AV
Vertical	15720.170	63.70	-7.78	55.92	74.00	-18.08	PK
Vertical	15720.170	49.55	-7.78	41.77	54.00	-12.23	AV
Horizontal	4739.199	71.65	-20.12	51.53	74.00	-22.47	PK
Horizontal	4739.199	59.67	-20.12	39.55	54.00	-14.45	AV
Horizontal	10480.074	60.03	-9.18	50.85	68.20	-17.35	PK
Horizontal	10480.074	49.08	-9.18	39.90	54.00	-14.10	AV
Horizontal	15720.127	60.25	-7.78	52.47	74.00	-21.53	PK
Horizontal	15720.127	49.96	-7.78	42.18	54.00	-11.82	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.086	74.52	-20.73	53.78	68.20	-14.42	PK
Vertical	4434.086	59.52	-20.73	38.79	54.00	-15.21	AV
Vertical	10380.006	64.68	-9.33	55.35	68.20	-12.85	PK
Vertical	10380.006	49.92	-9.33	40.59	54.00	-13.41	AV
Vertical	15570.001	63.41	-7.83	55.58	74.00	-18.42	PK
Vertical	15570.001	49.26	-7.83	41.43	54.00	-12.57	AV
Horizontal	4434.079	70.14	-20.73	49.41	74.00	-24.59	PK
Horizontal	4434.079	59.82	-20.73	39.09	54.00	-14.91	AV
Horizontal	10380.148	60.82	-9.33	51.49	68.20	-16.71	PK
Horizontal	10380.148	49.21	-9.33	39.88	54.00	-14.12	AV
Horizontal	15570.018	64.40	-7.83	56.57	74.00	-17.43	PK
Horizontal	15570.018	49.17	-7.83	41.34	54.00	-12.66	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.096	71.35	-20.12	51.23	68.20	-16.97	PK
Vertical	4739.096	59.67	-20.12	39.55	54.00	-14.45	AV
Vertical	10460.080	60.39	-9.21	51.18	68.20	-17.02	PK
Vertical	10460.080	49.01	-9.21	39.80	54.00	-14.20	AV
Vertical	15690.146	61.72	-7.79	53.93	74.00	-20.07	PK
Vertical	15690.146	49.60	-7.79	41.81	54.00	-12.19	AV
Horizontal	4739.039	70.92	-20.12	50.80	68.20	-17.40	PK
Horizontal	4739.039	59.53	-20.12	39.41	54.00	-14.59	AV
Horizontal	10460.116	60.07	-9.21	50.86	68.20	-17.34	PK
Horizontal	10460.116	49.50	-9.21	40.29	54.00	-13.71	AV
Horizontal	15690.116	60.68	-7.79	52.89	74.00	-21.11	PK
Horizontal	15690.116	49.63	-7.79	41.84	54.00	-12.16	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.102	70.31	-20.73	49.58	68.20	-18.62	PK
Vertical	4434.102	59.13	-20.73	38.40	54.00	-15.60	AV
Vertical	10360.133	63.51	-9.36	54.15	68.20	-14.05	PK
Vertical	10360.133	49.47	-9.36	40.11	54.00	-13.89	AV
Vertical	15540.006	60.97	-7.84	53.13	74.00	-20.87	PK
Vertical	15540.006	49.69	-7.84	41.85	54.00	-12.15	AV
Horizontal	4434.077	72.16	-20.73	51.43	68.20	-16.77	PK
Horizontal	4434.077	59.05	-20.73	38.31	54.00	-15.69	AV
Horizontal	10360.126	62.90	-9.36	53.54	68.20	-14.66	PK
Horizontal	10360.126	49.47	-9.36	40.11	54.00	-13.89	AV
Horizontal	15540.013	61.11	-7.84	53.27	74.00	-20.73	PK
Horizontal	15540.013	49.70	-7.84	41.86	54.00	-12.14	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.171	71.91	-20.42	51.49	74.00	-22.51	PK
Vertical	4592.171	59.46	-20.42	39.04	54.00	-14.96	AV
Vertical	10400.032	64.61	-9.30	55.31	68.20	-12.89	PK
Vertical	10400.032	49.18	-9.30	39.88	54.00	-14.12	AV
Vertical	15600.154	61.82	-7.82	54.00	74.00	-20.00	PK
Vertical	15600.154	49.76	-7.82	41.94	54.00	-12.06	AV
Horizontal	4592.137	74.32	-20.42	53.91	74.00	-20.09	PK
Horizontal	4592.137	59.08	-20.42	38.66	54.00	-15.34	AV
Horizontal	10400.082	63.21	-9.30	53.91	68.20	-14.29	PK
Horizontal	10400.082	49.60	-9.30	40.30	54.00	-13.70	AV
Horizontal	15600.138	64.27	-7.82	56.45	74.00	-17.55	PK
Horizontal	15600.138	49.84	-7.82	42.02	54.00	-11.98	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.063	71.91	-20.12	51.79	74.00	-22.21	PK
Vertical	4739.063	59.89	-20.12	39.76	54.00	-14.24	AV
Vertical	10480.158	61.10	-9.18	51.92	68.20	-16.28	PK
Vertical	10480.158	49.73	-9.18	40.55	54.00	-13.45	AV
Vertical	15720.130	61.76	-7.78	53.98	74.00	-20.02	PK
Vertical	15720.130	49.04	-7.78	41.26	54.00	-12.74	AV
Horizontal	4739.086	71.29	-20.12	51.17	74.00	-22.83	PK
Horizontal	4739.086	59.69	-20.12	39.57	54.00	-14.43	AV
Horizontal	10480.152	60.86	-9.18	51.68	68.20	-16.52	PK
Horizontal	10480.152	49.06	-9.18	39.88	54.00	-14.12	AV
Horizontal	15720.030	62.96	-7.78	55.18	74.00	-18.82	PK
Horizontal	15720.030	49.70	-7.78	41.92	54.00	-12.08	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.118	72.61	-20.73	51.88	68.20	-16.32	PK
Vertical	4434.118	59.60	-20.73	38.87	54.00	-15.13	AV
Vertical	10380.017	64.46	-9.33	55.13	68.20	-13.07	PK
Vertical	10380.017	49.87	-9.33	40.54	54.00	-13.46	AV
Vertical	15570.013	62.27	-7.83	54.44	74.00	-19.56	PK
Vertical	15570.013	49.60	-7.83	41.77	54.00	-12.23	AV
Horizontal	4434.132	72.83	-20.73	52.10	74.00	-21.90	PK
Horizontal	4434.132	59.71	-20.73	38.98	54.00	-15.02	AV
Horizontal	10380.198	63.53	-9.33	54.20	68.20	-14.00	PK
Horizontal	10380.198	49.48	-9.33	40.15	54.00	-13.85	AV
Horizontal	15570.039	64.75	-7.83	56.92	74.00	-17.08	PK
Horizontal	15570.039	49.18	-7.83	41.35	54.00	-12.65	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.135	72.98	-20.12	52.85	68.20	-15.35	PK
Vertical	4739.135	59.32	-20.12	39.20	54.00	-14.80	AV
Vertical	10460.010	64.26	-9.21	55.05	68.20	-13.15	PK
Vertical	10460.010	49.55	-9.21	40.34	54.00	-13.66	AV
Vertical	15690.053	61.52	-7.79	53.73	74.00	-20.27	PK
Vertical	15690.053	49.47	-7.79	41.68	54.00	-12.32	AV
Horizontal	4739.036	70.85	-20.12	50.73	68.20	-17.47	PK
Horizontal	4739.036	59.13	-20.12	39.01	54.00	-14.99	AV
Horizontal	10460.168	62.35	-9.21	53.14	68.20	-15.06	PK
Horizontal	10460.168	49.15	-9.21	39.94	54.00	-14.06	AV
Horizontal	15690.030	61.16	-7.79	53.37	74.00	-20.63	PK
Horizontal	15690.030	49.40	-7.79	41.61	54.00	-12.39	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ac 80
------------	------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5210 MHz)-Above 1G							
Vertical	4434.062	74.71	-20.73	53.97	68.20	-14.23	PK
Vertical	4434.062	59.31	-20.73	38.58	54.00	-15.42	AV
Vertical	10420.197	60.98	-9.27	51.71	68.20	-16.49	PK
Vertical	10420.197	49.18	-9.27	39.91	54.00	-14.09	AV
Vertical	15630.124	60.80	-7.81	52.99	74.00	-21.01	PK
Vertical	15630.124	49.88	-7.81	42.07	54.00	-11.93	AV
Horizontal	4434.034	71.71	-20.73	50.98	68.20	-17.22	PK
Horizontal	4434.034	59.77	-20.73	39.04	54.00	-14.96	AV
Horizontal	10420.157	41.31	9.27	50.58	68.20	-17.62	PK
Horizontal	10420.157	29.34	9.27	38.61	54.00	-15.39	AV
Horizontal	15630.068	61.55	-7.81	53.74	74.00	-20.26	PK
Horizontal	15630.068	49.77	-7.81	41.96	54.00	-12.04	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ax-HT20
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.101	74.48	-20.73	53.75	68.20	-14.45	PK
Vertical	4434.101	59.54	-20.73	38.81	54.00	-15.19	AV
Vertical	10360.057	62.78	-9.36	53.42	68.20	-14.78	PK
Vertical	10360.057	49.72	-9.36	40.36	54.00	-13.64	AV
Vertical	15540.106	63.91	-7.84	56.07	74.00	-17.93	PK
Vertical	15540.106	50.00	-7.84	42.16	54.00	-11.84	AV
Horizontal	4434.012	71.33	-20.73	50.60	68.20	-17.60	PK
Horizontal	4434.012	59.31	-20.73	38.58	54.00	-15.42	AV
Horizontal	10360.010	64.47	-9.36	55.11	68.20	-13.09	PK
Horizontal	10360.010	49.13	-9.36	39.77	54.00	-14.23	AV
Horizontal	15540.013	63.43	-7.84	55.59	74.00	-18.41	PK
Horizontal	15540.013	49.23	-7.84	41.39	54.00	-12.61	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.137	72.32	-20.42	51.90	74.00	-22.10	PK
Vertical	4592.137	59.15	-20.42	38.74	54.00	-15.26	AV
Vertical	10400.029	61.05	-9.30	51.75	68.20	-16.45	PK
Vertical	10400.029	49.82	-9.30	40.52	54.00	-13.48	AV
Vertical	15600.124	61.35	-7.82	53.53	74.00	-20.47	PK
Vertical	15600.124	49.94	-7.82	42.12	54.00	-11.88	AV
Horizontal	4592.122	71.81	-20.42	51.40	74.00	-22.60	PK
Horizontal	4592.122	59.91	-20.42	39.49	54.00	-14.51	AV
Horizontal	10400.041	64.97	-9.30	55.67	68.20	-12.53	PK
Horizontal	10400.041	49.05	-9.30	39.75	54.00	-14.25	AV
Horizontal	15600.124	63.13	-7.82	55.31	74.00	-18.69	PK
Horizontal	15600.124	49.56	-7.82	41.74	54.00	-12.26	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.042	74.57	-20.12	54.45	74.00	-19.55	PK
Vertical	4739.042	59.27	-20.12	39.15	54.00	-14.85	AV
Vertical	10480.171	64.62	-9.18	55.44	68.20	-12.76	PK
Vertical	10480.171	49.25	-9.18	40.07	54.00	-13.93	AV
Vertical	15720.187	63.04	-7.78	55.26	74.00	-18.74	PK
Vertical	15720.187	49.08	-7.78	41.30	54.00	-12.70	AV
Horizontal	4739.172	74.13	-20.12	54.01	74.00	-19.99	PK
Horizontal	4739.172	59.73	-20.12	39.61	54.00	-14.39	AV
Horizontal	10480.026	62.19	-9.18	53.01	68.20	-15.19	PK
Horizontal	10480.026	49.41	-9.18	40.23	54.00	-13.77	AV
Horizontal	15720.003	63.54	-7.78	55.76	74.00	-18.24	PK
Horizontal	15720.003	49.13	-7.78	41.35	54.00	-12.65	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ax-HT40
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.020	70.84	-20.73	50.11	68.20	-18.09	PK
Vertical	4434.020	59.07	-20.73	38.34	54.00	-15.66	AV
Vertical	10380.058	62.31	-9.33	52.98	68.20	-15.22	PK
Vertical	10380.058	49.45	-9.33	40.12	54.00	-13.88	AV
Vertical	15570.188	61.54	-7.83	53.71	74.00	-20.29	PK
Vertical	15570.188	49.36	-7.83	41.53	54.00	-12.47	AV
Horizontal	4434.171	74.51	-20.73	53.77	74.00	-20.23	PK
Horizontal	4434.171	59.78	-20.73	39.05	54.00	-14.95	AV
Horizontal	10380.064	61.32	-9.33	51.99	68.20	-16.21	PK
Horizontal	10380.064	49.98	-9.33	40.65	54.00	-13.35	AV
Horizontal	15570.111	62.47	-7.83	54.64	74.00	-19.36	PK
Horizontal	15570.111	49.99	-7.83	42.16	54.00	-11.84	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.189	73.95	-20.12	53.83	68.20	-14.37	PK
Vertical	4739.189	59.28	-20.12	39.15	54.00	-14.85	AV
Vertical	10460.003	60.53	-9.21	51.32	68.20	-16.88	PK
Vertical	10460.003	49.18	-9.21	39.97	54.00	-14.03	AV
Vertical	15690.171	64.05	-7.79	56.26	74.00	-17.74	PK
Vertical	15690.171	49.44	-7.79	41.65	54.00	-12.35	AV
Horizontal	4739.181	72.38	-20.12	52.25	68.20	-15.95	PK
Horizontal	4739.181	59.21	-20.12	39.08	54.00	-14.92	AV
Horizontal	10460.135	60.50	-9.21	51.29	68.20	-16.91	PK
Horizontal	10460.135	49.85	-9.21	40.64	54.00	-13.36	AV
Horizontal	15690.010	64.21	-7.79	56.42	74.00	-17.58	PK
Horizontal	15690.010	49.91	-7.79	42.12	54.00	-11.88	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ax 80
------------	------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5210 MHz)-Above 1G							
Vertical	4434.026	74.62	-20.73	53.89	68.20	-14.31	PK
Vertical	4434.026	59.38	-20.73	38.65	54.00	-15.35	AV
Vertical	10420.088	61.99	-9.27	52.72	68.20	-15.48	PK
Vertical	10420.088	49.89	-9.27	40.62	54.00	-13.38	AV
Vertical	15630.088	63.39	-7.81	55.58	74.00	-18.42	PK
Vertical	15630.088	49.16	-7.81	41.35	54.00	-12.65	AV
Horizontal	4434.176	70.70	-20.73	49.96	68.20	-18.24	PK
Horizontal	4434.176	59.57	-20.73	38.84	54.00	-15.16	AV
Horizontal	10420.007	44.51	9.27	53.78	68.20	-14.42	PK
Horizontal	10420.007	29.32	9.27	38.59	54.00	-15.41	AV
Horizontal	15630.112	60.88	-7.81	53.07	74.00	-20.93	PK
Horizontal	15630.112	49.44	-7.81	41.63	54.00	-12.37	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX (5.8G) -- 802.11a
------------	----------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.120	71.93	-20.24	51.69	74.00	-22.31	PK
Vertical	4679.120	59.02	-20.24	38.78	54.00	-15.22	AV
Vertical	11490.031	62.65	-8.79	53.86	68.20	-14.34	PK
Vertical	11490.031	49.09	-8.79	40.30	54.00	-13.70	AV
Vertical	17235.006	56.01	-3.18	52.83	68.20	-15.37	PK
Vertical	17235.006	44.64	-3.18	41.46	54.00	-12.54	AV
Horizontal	4679.164	74.18	-20.73	53.45	74.00	-20.55	PK
Horizontal	4679.164	59.95	-20.73	39.22	54.00	-14.78	AV
Horizontal	11490.100	64.69	-8.79	55.90	68.20	-12.30	PK
Horizontal	11490.100	49.37	-8.79	40.58	54.00	-13.42	AV
Horizontal	17235.010	57.83	-3.18	54.65	68.20	-13.55	PK
Horizontal	17235.010	44.31	-3.18	41.13	54.00	-12.87	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.165	73.09	-20.42	52.67	74.00	-21.33	PK
Vertical	4592.165	59.26	-20.42	38.84	54.00	-15.16	AV
Vertical	11570.136	64.62	-8.86	55.76	68.20	-12.44	PK
Vertical	11570.136	49.34	-8.86	40.48	54.00	-13.52	AV
Vertical	17355.091	55.61	-2.52	53.09	68.20	-15.11	PK
Vertical	17355.091	44.62	-2.52	42.10	54.00	-11.90	AV
Horizontal	4592.065	74.72	-20.42	54.30	74.00	-19.70	PK
Horizontal	4592.065	59.33	-20.42	38.91	54.00	-15.09	AV
Horizontal	11570.036	61.75	-8.86	52.89	68.20	-15.31	PK
Horizontal	11570.036	49.55	-8.86	40.69	54.00	-13.31	AV
Horizontal	17355.195	55.43	-2.52	52.91	68.20	-15.29	PK
Horizontal	17355.195	44.13	-2.52	41.61	54.00	-12.39	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.096	74.83	-18.93	55.89	68.20	-12.31	PK
Vertical	6039.096	59.98	-18.93	41.05	54.00	-12.95	AV
Vertical	11650.195	63.65	-8.92	54.73	74.00	-19.27	PK
Vertical	11650.195	49.12	-8.92	40.20	54.00	-13.80	AV
Vertical	17475.013	57.43	-1.86	55.57	68.20	-12.63	PK
Vertical	17475.013	44.88	-1.86	43.02	54.00	-10.98	AV
Horizontal	6039.014	72.11	-18.93	53.18	68.20	-15.02	PK
Horizontal	6039.014	59.33	-18.93	40.40	54.00	-13.60	AV
Horizontal	11650.197	63.73	-8.92	54.81	74.00	-19.19	PK
Horizontal	11650.197	49.70	-8.92	40.78	54.00	-13.22	AV
Horizontal	17475.092	55.84	-1.86	53.98	68.20	-14.22	PK
Horizontal	17475.092	44.89	-1.86	43.03	54.00	-10.97	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A

Test Mode: TX (5.8G) --802.11n-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.198	72.80	-20.24	52.56	74.00	-21.44	PK
Vertical	4679.198	59.69	-20.24	39.45	54.00	-14.55	AV
Vertical	11490.008	62.11	-8.79	53.32	68.20	-14.88	PK
Vertical	11490.008	49.67	-8.79	40.88	54.00	-13.12	AV
Vertical	17235.106	55.62	-3.18	52.44	68.20	-15.76	PK
Vertical	17235.106	44.09	-3.18	40.91	54.00	-13.09	AV
Horizontal	4679.187	74.60	-20.24	54.36	74.00	-19.64	PK
Horizontal	4679.187	59.76	-20.24	39.52	54.00	-14.48	AV
Horizontal	11490.078	63.06	-8.79	54.27	68.20	-13.93	PK
Horizontal	11490.078	49.96	-8.79	41.17	54.00	-12.83	AV
Horizontal	17235.179	59.44	-3.18	56.26	68.20	-11.94	PK
Horizontal	17235.179	44.15	-3.18	40.97	54.00	-13.03	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.171	71.56	-20.42	51.15	74.00	-22.85	PK
Vertical	4592.171	59.17	-20.42	38.75	54.00	-15.25	AV
Vertical	11570.026	63.55	-8.86	54.69	68.20	-13.51	PK
Vertical	11570.026	49.61	-8.86	40.75	54.00	-13.25	AV
Vertical	17355.011	55.63	-2.52	53.11	68.20	-15.09	PK
Vertical	17355.011	44.06	-2.52	41.54	54.00	-12.46	AV
Horizontal	4592.167	70.99	-20.42	50.57	74.00	-23.43	PK
Horizontal	4592.167	59.65	-20.42	39.23	54.00	-14.77	AV
Horizontal	11570.005	64.33	-8.86	55.47	68.20	-12.73	PK
Horizontal	11570.005	49.43	-8.86	40.57	54.00	-13.43	AV
Horizontal	17355.019	58.50	-2.52	55.98	68.20	-12.22	PK
Horizontal	17355.019	44.26	-2.52	41.74	54.00	-12.26	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.069	73.68	-18.93	54.75	68.20	-13.45	PK
Vertical	6039.069	59.41	-18.93	40.48	54.00	-13.52	AV
Vertical	11650.077	61.67	-8.92	52.75	74.00	-21.25	PK
Vertical	11650.077	49.45	-8.92	40.53	54.00	-13.47	AV
Vertical	17475.175	59.96	-1.86	58.10	68.20	-10.10	PK
Vertical	17475.175	44.46	-1.86	42.60	54.00	-11.40	AV
Horizontal	6039.058	73.74	-18.93	54.81	68.20	-13.39	PK
Horizontal	6039.058	59.35	-18.93	40.42	54.00	-13.58	AV
Horizontal	11650.168	64.30	-8.92	55.38	74.00	-18.62	PK
Horizontal	11650.168	49.95	-8.92	41.03	54.00	-12.97	AV
Horizontal	17475.039	59.36	-1.86	57.50	68.20	-10.70	PK
Horizontal	17475.039	44.55	-1.86	42.69	54.00	-11.31	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX (5.8G) -- 802.11n-HT40
------------	---------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.161	74.60	-20.24	54.36	74.00	-19.64	PK
Vertical	4679.161	59.14	-20.24	38.90	54.00	-15.10	AV
Vertical	11510.100	62.76	-8.81	53.95	74.00	-20.05	PK
Vertical	11510.100	49.16	-8.81	40.35	54.00	-13.65	AV
Vertical	17265.169	57.10	-3.01	54.09	68.20	-14.11	PK
Vertical	17265.169	44.68	-3.01	41.67	54.00	-12.33	AV
Horizontal	4679.155	71.56	-20.24	51.32	74.00	-22.68	PK
Horizontal	4679.155	60.00	-20.24	39.76	54.00	-14.24	AV
Horizontal	11510.079	64.72	-8.81	55.91	74.00	-18.09	PK
Horizontal	11510.079	49.65	-8.81	40.84	54.00	-13.16	AV
Horizontal	17265.186	56.34	-3.01	53.33	68.20	-14.87	PK
Horizontal	17265.186	44.45	-3.01	41.44	54.00	-12.56	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.005	73.97	-18.93	55.04	68.20	-13.16	PK
Vertical	6039.005	59.37	-18.93	40.43	54.00	-13.57	AV
Vertical	11590.054	64.92	-8.87	56.05	74.00	-17.95	PK
Vertical	11590.054	49.82	-8.87	40.95	54.00	-13.05	AV
Vertical	17385.107	58.77	-2.35	56.42	68.20	-11.78	PK
Vertical	17385.107	44.55	-2.35	42.20	54.00	-11.80	AV
Horizontal	6039.123	73.94	-18.93	55.01	68.20	-13.19	PK
Horizontal	6039.123	59.60	-18.93	40.67	54.00	-13.33	AV
Horizontal	11590.196	62.26	-8.87	53.39	74.00	-20.61	PK
Horizontal	11590.196	49.66	-8.87	40.79	54.00	-13.21	AV
Horizontal	17385.008	57.12	-2.35	54.77	68.20	-13.43	PK
Horizontal	17385.008	44.69	-2.35	42.34	54.00	-11.66	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode: TX (5.8G) --802.11ac-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.032	74.14	-20.24	53.90	74.00	-20.10	PK
Vertical	4679.032	59.84	-20.24	39.60	54.00	-14.40	AV
Vertical	11490.111	60.73	-8.79	51.94	68.20	-16.26	PK
Vertical	11490.111	49.56	-8.79	40.77	54.00	-13.23	AV
Vertical	17235.126	56.49	-3.18	53.31	68.20	-14.89	PK
Vertical	17235.126	44.24	-3.18	41.06	54.00	-12.94	AV
Horizontal	4679.008	72.65	-20.24	52.40	74.00	-21.60	PK
Horizontal	4679.008	59.02	-20.24	38.77	54.00	-15.23	AV
Horizontal	11490.173	61.07	-8.79	52.28	68.20	-15.92	PK
Horizontal	11490.173	49.21	-8.79	40.42	54.00	-13.58	AV
Horizontal	17235.026	55.32	-3.18	52.14	68.20	-16.06	PK
Horizontal	17235.026	44.87	-3.18	41.69	54.00	-12.31	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.032	70.17	-20.42	49.75	74.00	-24.25	PK
Vertical	4592.032	59.73	-20.42	39.32	54.00	-14.68	AV
Vertical	11570.054	61.50	-8.86	52.64	68.20	-15.56	PK
Vertical	11570.054	49.32	-8.86	40.46	54.00	-13.54	AV
Vertical	17355.077	55.52	-2.52	53.00	68.20	-15.20	PK
Vertical	17355.077	44.89	-2.52	42.37	54.00	-11.63	AV
Horizontal	4592.067	71.83	-20.42	51.42	74.00	-22.58	PK
Horizontal	4592.067	59.45	-20.42	39.03	54.00	-14.97	AV
Horizontal	11570.100	62.75	-8.86	53.89	68.20	-14.31	PK
Horizontal	11570.100	49.18	-8.86	40.32	54.00	-13.68	AV
Horizontal	17355.105	59.84	-2.52	57.32	68.20	-10.88	PK
Horizontal	17355.105	44.16	-2.52	41.64	54.00	-12.36	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.120	73.67	-18.93	54.74	68.20	-13.46	PK
Vertical	6039.120	59.19	-18.93	40.26	54.00	-13.74	AV
Vertical	11650.063	64.89	-8.92	55.97	74.00	-18.03	PK
Vertical	11650.063	49.17	-8.92	40.25	54.00	-13.75	AV
Vertical	17475.144	58.63	-1.86	56.77	68.20	-11.43	PK
Vertical	17475.144	44.04	-1.86	42.18	54.00	-11.82	AV
Horizontal	6039.094	71.94	-18.93	53.01	68.20	-15.19	PK
Horizontal	6039.094	59.48	-18.93	40.55	54.00	-13.45	AV
Horizontal	11650.175	62.37	-8.92	53.45	74.00	-20.55	PK
Horizontal	11650.175	49.68	-8.92	40.76	54.00	-13.24	AV
Horizontal	17475.190	55.35	-1.86	53.49	68.20	-14.71	PK
Horizontal	17475.190	44.18	-1.86	42.32	54.00	-11.68	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.046	73.14	-20.24	52.90	74.00	-21.10	PK
Vertical	4679.046	59.97	-20.24	39.73	54.00	-14.27	AV
Vertical	11510.032	64.76	-8.81	55.95	74.00	-18.05	PK
Vertical	11510.032	49.11	-8.81	40.30	54.00	-13.70	AV
Vertical	17265.130	58.20	-3.01	55.19	68.20	-13.01	PK
Vertical	17265.130	44.83	-3.01	41.82	54.00	-12.18	AV
Horizontal	4679.198	74.05	-20.24	53.81	74.00	-20.19	PK
Horizontal	4679.198	59.23	-20.24	38.99	54.00	-15.01	AV
Horizontal	11510.004	64.83	-8.81	56.02	74.00	-17.98	PK
Horizontal	11510.004	49.49	-8.81	40.68	54.00	-13.32	AV
Horizontal	17265.191	57.48	-3.01	54.47	68.20	-13.73	PK
Horizontal	17265.191	44.87	-3.01	41.86	54.00	-12.14	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.052	72.55	-18.93	53.62	68.20	-14.58	PK
Vertical	6039.052	59.95	-18.93	41.02	54.00	-12.98	AV
Vertical	11590.091	62.70	-8.87	53.83	74.00	-20.17	PK
Vertical	11590.091	49.70	-8.87	40.83	54.00	-13.17	AV
Vertical	17385.177	55.76	-2.35	53.41	68.20	-14.79	PK
Vertical	17385.177	44.32	-2.35	41.97	54.00	-12.03	AV
Horizontal	6039.101	71.32	-18.93	52.39	68.20	-15.81	PK
Horizontal	6039.101	59.01	-18.93	40.08	54.00	-13.92	AV
Horizontal	11590.125	64.57	-8.87	55.70	74.00	-18.30	PK
Horizontal	11590.125	49.18	-8.87	40.31	54.00	-13.69	AV
Horizontal	17385.196	57.98	-2.35	55.63	68.20	-12.57	PK
Horizontal	17385.196	44.17	-2.35	41.82	54.00	-12.18	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ac 80
-------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5775 MHz)-Above 1G							
Vertical	4679.083	70.54	-20.24	50.30	74.00	-23.70	PK
Vertical	4679.083	59.73	-20.24	39.48	54.00	-14.52	AV
Vertical	11550.029	60.07	-8.84	51.23	74.00	-22.77	PK
Vertical	11550.029	49.51	-8.84	40.67	54.00	-13.33	AV
Vertical	17325.039	59.63	-2.68	56.95	68.20	-11.25	PK
Vertical	17325.039	44.54	-2.68	41.86	54.00	-12.14	AV
Horizontal	4679.194	71.60	-20.24	51.36	74.00	-22.64	PK
Horizontal	4679.194	59.76	-20.24	39.52	54.00	-14.48	AV
Horizontal	11550.176	60.15	-8.84	51.31	74.00	-22.69	PK
Horizontal	11550.176	49.70	-8.84	40.86	54.00	-13.14	AV
Horizontal	17325.142	59.22	-2.68	56.54	68.20	-11.66	PK
Horizontal	17325.142	44.41	-2.68	41.73	54.00	-12.27	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode: TX (5.8G) --802.11ax-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.016	72.07	-20.24	51.83	74.00	-22.17	PK
Vertical	4679.016	59.31	-20.24	39.06	54.00	-14.94	AV
Vertical	11490.085	61.07	-8.79	52.28	68.20	-15.92	PK
Vertical	11490.085	49.89	-8.79	41.10	54.00	-12.90	AV
Vertical	17235.070	55.46	-3.18	52.28	68.20	-15.92	PK
Vertical	17235.070	44.90	-3.18	41.72	54.00	-12.28	AV
Horizontal	4679.117	71.43	-20.24	51.19	74.00	-22.81	PK
Horizontal	4679.117	59.06	-20.24	38.82	54.00	-15.18	AV
Horizontal	11490.033	63.91	-8.79	55.12	68.20	-13.08	PK
Horizontal	11490.033	49.27	-8.79	40.48	54.00	-13.52	AV
Horizontal	17235.038	55.50	-3.18	52.32	68.20	-15.88	PK
Horizontal	17235.038	44.09	-3.18	40.91	54.00	-13.09	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.154	70.19	-20.42	49.77	74.00	-24.23	PK
Vertical	4592.154	59.35	-20.42	38.94	54.00	-15.06	AV
Vertical	11570.145	62.92	-8.86	54.06	68.20	-14.14	PK
Vertical	11570.145	49.03	-8.86	40.17	54.00	-13.83	AV
Vertical	17355.016	57.53	-2.52	55.01	68.20	-13.19	PK
Vertical	17355.016	44.80	-2.52	42.28	54.00	-11.72	AV
Horizontal	4592.175	74.18	-20.42	53.76	74.00	-20.24	PK
Horizontal	4592.175	59.62	-20.42	39.20	54.00	-14.80	AV
Horizontal	11570.084	61.99	-8.86	53.13	68.20	-15.07	PK
Horizontal	11570.084	49.59	-8.86	40.73	54.00	-13.27	AV
Horizontal	17355.022	59.13	-2.52	56.61	68.20	-11.59	PK
Horizontal	17355.022	44.89	-2.52	42.37	54.00	-11.63	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.161	71.83	-18.93	52.89	68.20	-15.31	PK
Vertical	6039.161	59.83	-18.93	40.90	54.00	-13.10	AV
Vertical	11650.191	61.10	-8.92	52.18	74.00	-21.82	PK
Vertical	11650.191	49.27	-8.92	40.35	54.00	-13.65	AV
Vertical	17475.126	59.11	-1.86	57.25	68.20	-10.95	PK
Vertical	17475.126	44.34	-1.86	42.48	54.00	-11.52	AV
Horizontal	6039.045	71.06	-18.93	52.13	68.20	-16.07	PK
Horizontal	6039.045	59.52	-18.93	40.59	54.00	-13.41	AV
Horizontal	11650.159	63.71	-8.92	54.79	74.00	-19.21	PK
Horizontal	11650.159	49.12	-8.92	40.20	54.00	-13.80	AV
Horizontal	17475.127	57.67	-1.86	55.81	68.20	-12.39	PK
Horizontal	17475.127	44.34	-1.86	42.48	54.00	-11.52	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ax-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.057	74.54	-20.24	54.30	74.00	-19.70	PK
Vertical	4679.057	59.24	-20.24	39.00	54.00	-15.00	AV
Vertical	11510.171	64.04	-8.81	55.23	74.00	-18.77	PK
Vertical	11510.171	49.61	-8.81	40.80	54.00	-13.20	AV
Vertical	17265.147	57.85	-3.01	54.84	68.20	-13.36	PK
Vertical	17265.147	44.51	-3.01	41.50	54.00	-12.50	AV
Horizontal	4679.027	71.02	-20.24	50.78	74.00	-23.22	PK
Horizontal	4679.027	59.24	-20.24	38.99	54.00	-15.01	AV
Horizontal	11510.142	63.79	-8.81	54.98	74.00	-19.02	PK
Horizontal	11510.142	49.08	-8.81	40.27	54.00	-13.73	AV
Horizontal	17265.156	57.10	-3.01	54.09	68.20	-14.11	PK
Horizontal	17265.156	44.00	-3.01	40.99	54.00	-13.01	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.119	74.83	-18.93	55.90	68.20	-12.30	PK
Vertical	6039.119	59.17	-18.93	40.24	54.00	-13.76	AV
Vertical	11590.174	64.12	-8.87	55.25	74.00	-18.75	PK
Vertical	11590.174	49.01	-8.87	40.14	54.00	-13.86	AV
Vertical	17385.053	56.32	-2.35	53.97	68.20	-14.23	PK
Vertical	17385.053	44.77	-2.35	42.42	54.00	-11.58	AV
Horizontal	6039.098	71.52	-18.93	52.59	68.20	-15.61	PK
Horizontal	6039.098	59.91	-18.93	40.98	54.00	-13.02	AV
Horizontal	11590.161	61.29	-8.87	52.42	74.00	-21.58	PK
Horizontal	11590.161	49.40	-8.87	40.53	54.00	-13.47	AV
Horizontal	17385.029	57.58	-2.35	55.23	68.20	-12.97	PK
Horizontal	17385.029	44.04	-2.35	41.69	54.00	-12.31	AV

Note: PK value is lower than the Average value limit, So average didn't record.
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
Emission level (dBuV/m) = 20 log Emission level (uV/m).
Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ax 80
-------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5775 MHz)-Above 1G							
Vertical	4679.062	74.16	-20.24	53.92	74.00	-20.08	PK
Vertical	4679.062	59.01	-20.24	38.77	54.00	-15.23	AV
Vertical	11550.104	61.68	-8.84	52.84	74.00	-21.16	PK
Vertical	11550.104	49.68	-8.84	40.84	54.00	-13.16	AV
Vertical	17325.160	59.01	-2.68	56.33	68.20	-11.87	PK
Vertical	17325.160	44.12	-2.68	41.44	54.00	-12.56	AV
Horizontal	4679.162	74.78	-20.24	54.54	74.00	-19.46	PK
Horizontal	4679.162	59.64	-20.24	39.40	54.00	-14.60	AV
Horizontal	11550.097	61.68	-8.84	52.84	74.00	-21.16	PK
Horizontal	11550.097	49.75	-8.84	40.91	54.00	-13.09	AV
Horizontal	17325.025	59.84	-2.68	57.16	68.20	-11.04	PK
Horizontal	17325.025	44.29	-2.68	41.61	54.00	-12.39	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.099	73.36	-20.73	52.63	68.20	-15.57	PK
Vertical	4434.099	59.26	-20.73	38.53	54.00	-15.47	AV
Vertical	10360.181	63.93	-9.36	54.57	68.20	-13.63	PK
Vertical	10360.181	49.78	-9.36	40.42	54.00	-13.58	AV
Vertical	15540.124	64.66	-7.84	56.82	74.00	-17.18	PK
Vertical	15540.124	49.93	-7.84	42.09	54.00	-11.91	AV
Horizontal	4434.182	71.14	-20.73	50.41	68.20	-17.79	PK
Horizontal	4434.182	59.85	-20.73	39.12	54.00	-14.88	AV
Horizontal	10360.059	62.89	-9.36	53.53	68.20	-14.67	PK
Horizontal	10360.059	49.52	-9.36	40.16	54.00	-13.84	AV
Horizontal	15540.107	62.88	-7.84	55.04	74.00	-18.96	PK
Horizontal	15540.107	49.75	-7.84	41.91	54.00	-12.09	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.064	71.85	-20.42	51.43	74.00	-22.57	PK
Vertical	4592.064	59.83	-20.42	39.42	54.00	-14.58	AV
Vertical	10400.097	60.84	-9.30	51.54	68.20	-16.66	PK
Vertical	10400.097	49.71	-9.30	40.41	54.00	-13.59	AV
Vertical	15600.039	62.16	-7.82	54.34	74.00	-19.66	PK
Vertical	15600.039	49.37	-7.82	41.55	54.00	-12.45	AV
Horizontal	4592.199	74.92	-20.42	54.50	74.00	-19.50	PK
Horizontal	4592.199	59.57	-20.42	39.16	54.00	-14.84	AV
Horizontal	10400.101	63.08	-9.30	53.78	68.20	-14.42	PK
Horizontal	10400.101	49.79	-9.30	40.49	54.00	-13.51	AV
Horizontal	15600.118	64.95	-7.82	57.13	74.00	-16.87	PK
Horizontal	15600.118	49.77	-7.82	41.95	54.00	-12.05	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.014	71.27	-20.12	51.15	74.00	-22.85	PK
Vertical	4739.014	59.15	-20.12	39.03	54.00	-14.97	AV
Vertical	10480.057	63.08	-9.18	53.90	68.20	-14.30	PK
Vertical	10480.057	49.28	-9.18	40.10	54.00	-13.90	AV
Vertical	15720.061	60.62	-7.78	52.84	74.00	-21.16	PK
Vertical	15720.061	49.84	-7.78	42.06	54.00	-11.94	AV
Horizontal	4739.114	73.90	-20.12	53.78	74.00	-20.22	PK
Horizontal	4739.114	59.10	-20.12	38.97	54.00	-15.03	AV
Horizontal	10480.173	60.20	-9.18	51.02	68.20	-17.18	PK
Horizontal	10480.173	49.84	-9.18	40.66	54.00	-13.34	AV
Horizontal	15720.069	63.66	-7.78	55.88	74.00	-18.12	PK
Horizontal	15720.069	49.97	-7.78	42.19	54.00	-11.81	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A

Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.075	73.46	-20.73	52.73	68.20	-15.47	PK
Vertical	4434.075	59.32	-20.73	38.59	54.00	-15.41	AV
Vertical	10360.048	63.46	-9.36	54.10	68.20	-14.10	PK
Vertical	10360.048	49.76	-9.36	40.40	54.00	-13.60	AV
Vertical	15540.008	60.97	-7.84	53.13	74.00	-20.87	PK
Vertical	15540.008	49.76	-7.84	41.92	54.00	-12.08	AV
Horizontal	4434.024	73.81	-20.73	53.08	68.20	-15.12	PK
Horizontal	4434.024	59.70	-20.73	38.97	54.00	-15.03	AV
Horizontal	10360.119	63.03	-9.36	53.67	68.20	-14.53	PK
Horizontal	10360.119	49.53	-9.36	40.17	54.00	-13.83	AV
Horizontal	15540.147	62.22	-7.84	54.38	74.00	-19.62	PK
Horizontal	15540.147	49.44	-7.84	41.60	54.00	-12.40	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.152	70.48	-20.42	50.07	74.00	-23.93	PK
Vertical	4592.152	59.09	-20.42	38.67	54.00	-15.33	AV
Vertical	10400.054	64.35	-9.30	55.05	68.20	-13.15	PK
Vertical	10400.054	49.55	-9.30	40.25	54.00	-13.75	AV
Vertical	15600.155	62.03	-7.82	54.21	74.00	-19.79	PK
Vertical	15600.155	49.25	-7.82	41.43	54.00	-12.57	AV
Horizontal	4592.191	70.96	-20.42	50.54	74.00	-23.46	PK
Horizontal	4592.191	59.55	-20.42	39.14	54.00	-14.86	AV
Horizontal	10400.178	64.21	-9.30	54.91	68.20	-13.29	PK
Horizontal	10400.178	49.31	-9.30	40.01	54.00	-13.99	AV
Horizontal	15600.107	64.92	-7.82	57.10	74.00	-16.90	PK
Horizontal	15600.107	50.00	-7.82	42.18	54.00	-11.82	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.064	74.60	-20.12	54.48	74.00	-19.52	PK
Vertical	4739.064	59.57	-20.12	39.45	54.00	-14.55	AV
Vertical	10480.013	61.27	-9.18	52.09	68.20	-16.11	PK
Vertical	10480.013	49.26	-9.18	40.08	54.00	-13.92	AV
Vertical	15720.110	61.44	-7.78	53.66	74.00	-20.34	PK
Vertical	15720.110	49.59	-7.78	41.81	54.00	-12.19	AV
Horizontal	4739.154	73.62	-20.12	53.50	74.00	-20.50	PK
Horizontal	4739.154	59.79	-20.12	39.66	54.00	-14.34	AV
Horizontal	10480.038	60.49	-9.18	51.31	68.20	-16.89	PK
Horizontal	10480.038	49.51	-9.18	40.33	54.00	-13.67	AV
Horizontal	15720.043	60.71	-7.78	52.93	74.00	-21.07	PK
Horizontal	15720.043	49.59	-7.78	41.81	54.00	-12.19	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.137	74.81	-20.73	54.08	68.20	-14.12	PK
Vertical	4434.137	59.01	-20.73	38.28	54.00	-15.72	AV
Vertical	10380.187	63.07	-9.33	53.74	68.20	-14.46	PK
Vertical	10380.187	49.73	-9.33	40.40	54.00	-13.60	AV
Vertical	15570.142	61.54	-7.83	53.71	74.00	-20.29	PK
Vertical	15570.142	49.06	-7.83	41.23	54.00	-12.77	AV
Horizontal	4434.082	71.70	-20.73	50.96	74.00	-23.04	PK
Horizontal	4434.082	59.03	-20.73	38.30	54.00	-15.70	AV
Horizontal	10380.092	64.57	-9.33	55.24	68.20	-12.96	PK
Horizontal	10380.092	49.01	-9.33	39.68	54.00	-14.32	AV
Horizontal	15570.010	60.77	-7.83	52.94	74.00	-21.06	PK
Horizontal	15570.010	49.13	-7.83	41.30	54.00	-12.70	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.196	71.32	-20.12	51.20	68.20	-17.00	PK
Vertical	4739.196	59.31	-20.12	39.19	54.00	-14.81	AV
Vertical	10460.026	63.22	-9.21	54.01	68.20	-14.19	PK
Vertical	10460.026	49.99	-9.21	40.78	54.00	-13.22	AV
Vertical	15690.083	61.67	-7.79	53.88	74.00	-20.12	PK
Vertical	15690.083	49.98	-7.79	42.19	54.00	-11.81	AV
Horizontal	4739.081	73.01	-20.12	52.89	68.20	-15.31	PK
Horizontal	4739.081	59.99	-20.12	39.87	54.00	-14.13	AV
Horizontal	10460.172	64.17	-9.21	54.96	68.20	-13.24	PK
Horizontal	10460.172	49.71	-9.21	40.50	54.00	-13.50	AV
Horizontal	15690.176	61.59	-7.79	53.80	74.00	-20.20	PK
Horizontal	15690.176	49.24	-7.79	41.45	54.00	-12.55	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.171	72.23	-20.73	51.50	68.20	-16.70	PK
Vertical	4434.171	59.29	-20.73	38.56	54.00	-15.44	AV
Vertical	10360.031	64.17	-9.36	54.81	68.20	-13.39	PK
Vertical	10360.031	49.72	-9.36	40.36	54.00	-13.64	AV
Vertical	15540.076	61.28	-7.84	53.44	74.00	-20.56	PK
Vertical	15540.076	49.73	-7.84	41.89	54.00	-12.11	AV
Horizontal	4434.126	70.75	-20.73	50.02	68.20	-18.18	PK
Horizontal	4434.126	59.96	-20.73	39.23	54.00	-14.77	AV
Horizontal	10360.140	62.38	-9.36	53.02	68.20	-15.18	PK
Horizontal	10360.140	49.24	-9.36	39.88	54.00	-14.12	AV
Horizontal	15540.132	64.84	-7.84	57.00	74.00	-17.00	PK
Horizontal	15540.132	49.82	-7.84	41.98	54.00	-12.02	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.015	74.28	-20.42	53.87	74.00	-20.13	PK
Vertical	4592.015	59.76	-20.42	39.34	54.00	-14.66	AV
Vertical	10400.055	60.41	-9.30	51.11	68.20	-17.09	PK
Vertical	10400.055	49.38	-9.30	40.08	54.00	-13.92	AV
Vertical	15600.198	63.42	-7.82	55.60	74.00	-18.40	PK
Vertical	15600.198	49.98	-7.82	42.16	54.00	-11.84	AV
Horizontal	4592.196	74.18	-20.42	53.76	74.00	-20.24	PK
Horizontal	4592.196	59.23	-20.42	38.82	54.00	-15.18	AV
Horizontal	10400.181	63.70	-9.30	54.40	68.20	-13.80	PK
Horizontal	10400.181	49.74	-9.30	40.44	54.00	-13.56	AV
Horizontal	15600.112	60.56	-7.82	52.74	74.00	-21.26	PK
Horizontal	15600.112	49.34	-7.82	41.52	54.00	-12.48	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.177	70.92	-20.12	50.80	74.00	-23.20	PK
Vertical	4739.177	59.77	-20.12	39.65	54.00	-14.35	AV
Vertical	10480.137	64.49	-9.18	55.31	68.20	-12.89	PK
Vertical	10480.137	49.19	-9.18	40.01	54.00	-13.99	AV
Vertical	15720.066	64.88	-7.78	57.10	74.00	-16.90	PK
Vertical	15720.066	49.54	-7.78	41.76	54.00	-12.24	AV
Horizontal	4739.101	71.27	-20.12	51.15	74.00	-22.85	PK
Horizontal	4739.101	59.40	-20.12	39.28	54.00	-14.72	AV
Horizontal	10480.062	61.78	-9.18	52.60	68.20	-15.60	PK
Horizontal	10480.062	49.31	-9.18	40.13	54.00	-13.87	AV
Horizontal	15720.032	61.67	-7.78	53.89	74.00	-20.11	PK
Horizontal	15720.032	49.51	-7.78	41.73	54.00	-12.27	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.039	73.97	-20.73	53.23	68.20	-14.97	PK
Vertical	4434.039	59.29	-20.73	38.56	54.00	-15.44	AV
Vertical	10380.179	63.13	-9.33	53.80	68.20	-14.40	PK
Vertical	10380.179	49.12	-9.33	39.79	54.00	-14.21	AV
Vertical	15570.126	60.55	-7.83	52.72	74.00	-21.28	PK
Vertical	15570.126	49.10	-7.83	41.27	54.00	-12.73	AV
Horizontal	4434.156	72.55	-20.73	51.82	74.00	-22.18	PK
Horizontal	4434.156	59.56	-20.73	38.83	54.00	-15.17	AV
Horizontal	10380.125	64.48	-9.33	55.15	68.20	-13.05	PK
Horizontal	10380.125	49.59	-9.33	40.26	54.00	-13.74	AV
Horizontal	15570.134	62.47	-7.83	54.64	74.00	-19.36	PK
Horizontal	15570.134	49.46	-7.83	41.63	54.00	-12.37	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.005	70.98	-20.12	50.85	68.20	-17.35	PK
Vertical	4739.005	59.64	-20.12	39.52	54.00	-14.48	AV
Vertical	10460.185	60.39	-9.21	51.18	68.20	-17.02	PK
Vertical	10460.185	49.44	-9.21	40.23	54.00	-13.77	AV
Vertical	15690.024	62.21	-7.79	54.42	74.00	-19.58	PK
Vertical	15690.024	49.02	-7.79	41.23	54.00	-12.77	AV
Horizontal	4739.075	74.99	-20.12	54.86	68.20	-13.34	PK
Horizontal	4739.075	59.20	-20.12	39.08	54.00	-14.92	AV
Horizontal	10460.009	61.96	-9.21	52.75	68.20	-15.45	PK
Horizontal	10460.009	49.89	-9.21	40.68	54.00	-13.32	AV
Horizontal	15690.133	61.23	-7.79	53.44	74.00	-20.56	PK
Horizontal	15690.133	49.39	-7.79	41.60	54.00	-12.40	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ac 80
------------	------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5210 MHz)-Above 1G							
Vertical	4434.008	71.04	-20.73	50.31	68.20	-17.89	PK
Vertical	4434.008	59.03	-20.73	38.30	54.00	-15.70	AV
Vertical	10420.164	60.56	-9.27	51.29	68.20	-16.91	PK
Vertical	10420.164	49.95	-9.27	40.68	54.00	-13.32	AV
Vertical	15630.112	62.67	-7.81	54.86	74.00	-19.14	PK
Vertical	15630.112	49.82	-7.81	42.01	54.00	-11.99	AV
Horizontal	4434.030	71.12	-20.73	50.39	68.20	-17.81	PK
Horizontal	4434.030	59.89	-20.73	39.16	54.00	-14.84	AV
Horizontal	10420.045	41.32	9.27	50.59	68.20	-17.61	PK
Horizontal	10420.045	29.73	9.27	39.00	54.00	-15.00	AV
Horizontal	15630.039	60.33	-7.81	52.52	74.00	-21.48	PK
Horizontal	15630.039	49.46	-7.81	41.65	54.00	-12.35	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ax-HT20
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.021	71.73	-20.73	50.99	68.20	-17.21	PK
Vertical	4434.021	59.34	-20.73	38.61	54.00	-15.39	AV
Vertical	10360.177	63.65	-9.36	54.29	68.20	-13.91	PK
Vertical	10360.177	49.98	-9.36	40.62	54.00	-13.38	AV
Vertical	15540.184	62.53	-7.84	54.69	74.00	-19.31	PK
Vertical	15540.184	49.83	-7.84	41.99	54.00	-12.01	AV
Horizontal	4434.115	72.56	-20.73	51.83	68.20	-16.37	PK
Horizontal	4434.115	59.79	-20.73	39.06	54.00	-14.94	AV
Horizontal	10360.169	64.89	-9.36	55.53	68.20	-12.67	PK
Horizontal	10360.169	49.95	-9.36	40.59	54.00	-13.41	AV
Horizontal	15540.179	64.07	-7.84	56.23	74.00	-17.77	PK
Horizontal	15540.179	49.71	-7.84	41.87	54.00	-12.13	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.009	72.68	-20.42	52.26	74.00	-21.74	PK
Vertical	4592.009	59.23	-20.42	38.82	54.00	-15.18	AV
Vertical	10400.115	61.80	-9.30	52.50	68.20	-15.70	PK
Vertical	10400.115	49.84	-9.30	40.54	54.00	-13.46	AV
Vertical	15600.049	60.70	-7.82	52.88	74.00	-21.12	PK
Vertical	15600.049	49.97	-7.82	42.15	54.00	-11.85	AV
Horizontal	4592.059	70.30	-20.42	49.88	74.00	-24.12	PK
Horizontal	4592.059	59.91	-20.42	39.49	54.00	-14.51	AV
Horizontal	10400.022	63.83	-9.30	54.53	68.20	-13.67	PK
Horizontal	10400.022	49.23	-9.30	39.93	54.00	-14.07	AV
Horizontal	15600.045	61.57	-7.82	53.75	74.00	-20.25	PK
Horizontal	15600.045	49.74	-7.82	41.92	54.00	-12.08	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.103	70.54	-20.12	50.42	74.00	-23.58	PK
Vertical	4739.103	59.20	-20.12	39.08	54.00	-14.92	AV
Vertical	10480.099	62.70	-9.18	53.52	68.20	-14.68	PK
Vertical	10480.099	49.91	-9.18	40.73	54.00	-13.27	AV
Vertical	15720.169	60.25	-7.78	52.47	74.00	-21.53	PK
Vertical	15720.169	49.44	-7.78	41.66	54.00	-12.34	AV
Horizontal	4739.053	71.73	-20.12	51.60	74.00	-22.40	PK
Horizontal	4739.053	59.86	-20.12	39.74	54.00	-14.26	AV
Horizontal	10480.072	62.98	-9.18	53.80	68.20	-14.40	PK
Horizontal	10480.072	49.13	-9.18	39.95	54.00	-14.05	AV
Horizontal	15720.078	62.80	-7.78	55.02	74.00	-18.98	PK
Horizontal	15720.078	49.08	-7.78	41.30	54.00	-12.70	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ax-HT40
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.020	73.36	-20.73	52.63	68.20	-15.57	PK
Vertical	4434.020	59.91	-20.73	39.18	54.00	-14.82	AV
Vertical	10380.031	62.96	-9.33	53.63	68.20	-14.57	PK
Vertical	10380.031	49.20	-9.33	39.87	54.00	-14.13	AV
Vertical	15570.069	63.29	-7.83	55.46	74.00	-18.54	PK
Vertical	15570.069	49.97	-7.83	42.14	54.00	-11.86	AV
Horizontal	4434.150	74.42	-20.73	53.69	74.00	-20.31	PK
Horizontal	4434.150	59.27	-20.73	38.54	54.00	-15.46	AV
Horizontal	10380.116	62.31	-9.33	52.98	68.20	-15.22	PK
Horizontal	10380.116	49.64	-9.33	40.31	54.00	-13.69	AV
Horizontal	15570.124	62.67	-7.83	54.84	74.00	-19.16	PK
Horizontal	15570.124	49.06	-7.83	41.23	54.00	-12.77	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.141	71.43	-20.12	51.30	68.20	-16.90	PK
Vertical	4739.141	59.58	-20.12	39.45	54.00	-14.55	AV
Vertical	10460.068	60.76	-9.21	51.55	68.20	-16.65	PK
Vertical	10460.068	49.51	-9.21	40.30	54.00	-13.70	AV
Vertical	15690.034	60.89	-7.79	53.10	74.00	-20.90	PK
Vertical	15690.034	49.33	-7.79	41.54	54.00	-12.46	AV
Horizontal	4739.117	71.11	-20.12	50.99	68.20	-17.21	PK
Horizontal	4739.117	59.31	-20.12	39.19	54.00	-14.81	AV
Horizontal	10460.090	62.32	-9.21	53.11	68.20	-15.09	PK
Horizontal	10460.090	49.88	-9.21	40.67	54.00	-13.33	AV
Horizontal	15690.114	62.00	-7.79	54.21	74.00	-19.79	PK
Horizontal	15690.114	49.19	-7.79	41.40	54.00	-12.60	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX(5.1G) - 802.11ax 80
------------	------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5210 MHz)-Above 1G							
Vertical	4434.128	72.92	-20.73	52.19	68.20	-16.01	PK
Vertical	4434.128	59.17	-20.73	38.43	54.00	-15.57	AV
Vertical	10420.042	63.93	-9.27	54.66	68.20	-13.54	PK
Vertical	10420.042	49.24	-9.27	39.97	54.00	-14.03	AV
Vertical	15630.021	62.71	-7.81	54.90	74.00	-19.10	PK
Vertical	15630.021	49.83	-7.81	42.02	54.00	-11.98	AV
Horizontal	4434.151	74.85	-20.73	54.12	68.20	-14.08	PK
Horizontal	4434.151	59.81	-20.73	39.08	54.00	-14.92	AV
Horizontal	10420.170	42.15	9.27	51.42	68.20	-16.78	PK
Horizontal	10420.170	29.23	9.27	38.50	54.00	-15.50	AV
Horizontal	15630.077	61.73	-7.81	53.92	74.00	-20.08	PK
Horizontal	15630.077	49.61	-7.81	41.80	54.00	-12.20	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX (5.8G) -- 802.11a
------------	----------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.143	71.45	-20.24	51.21	74.00	-22.79	PK
Vertical	4679.143	59.61	-20.24	39.36	54.00	-14.64	AV
Vertical	11490.136	63.40	-8.79	54.61	68.20	-13.59	PK
Vertical	11490.136	49.14	-8.79	40.35	54.00	-13.65	AV
Vertical	17235.179	55.52	-3.18	52.34	68.20	-15.86	PK
Vertical	17235.179	44.28	-3.18	41.10	54.00	-12.90	AV
Horizontal	4679.174	73.39	-20.73	52.66	74.00	-21.34	PK
Horizontal	4679.174	59.81	-20.73	39.08	54.00	-14.92	AV
Horizontal	11490.150	64.35	-8.79	55.56	68.20	-12.64	PK
Horizontal	11490.150	49.16	-8.79	40.37	54.00	-13.63	AV
Horizontal	17235.090	55.64	-3.18	52.46	68.20	-15.74	PK
Horizontal	17235.090	44.87	-3.18	41.69	54.00	-12.31	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.085	72.08	-20.42	51.66	74.00	-22.34	PK
Vertical	4592.085	59.41	-20.42	38.99	54.00	-15.01	AV
Vertical	11570.080	60.48	-8.86	51.62	68.20	-16.58	PK
Vertical	11570.080	49.37	-8.86	40.51	54.00	-13.49	AV
Vertical	17355.154	58.23	-2.52	55.71	68.20	-12.49	PK
Vertical	17355.154	44.69	-2.52	42.17	54.00	-11.83	AV
Horizontal	4592.085	71.34	-20.42	50.93	74.00	-23.07	PK
Horizontal	4592.085	59.02	-20.42	38.60	54.00	-15.40	AV
Horizontal	11570.059	60.14	-8.86	51.28	68.20	-16.92	PK
Horizontal	11570.059	49.95	-8.86	41.09	54.00	-12.91	AV
Horizontal	17355.173	55.06	-2.52	52.54	68.20	-15.66	PK
Horizontal	17355.173	44.79	-2.52	42.27	54.00	-11.73	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.059	70.28	-18.93	51.35	68.20	-16.85	PK
Vertical	6039.059	59.12	-18.93	40.19	54.00	-13.81	AV
Vertical	11650.079	60.09	-8.92	51.17	74.00	-22.83	PK
Vertical	11650.079	49.66	-8.92	40.74	54.00	-13.26	AV
Vertical	17475.111	55.84	-1.86	53.98	68.20	-14.22	PK
Vertical	17475.111	44.76	-1.86	42.90	54.00	-11.10	AV
Horizontal	6039.116	71.88	-18.93	52.94	68.20	-15.26	PK
Horizontal	6039.116	59.98	-18.93	41.05	54.00	-12.95	AV
Horizontal	11650.098	60.52	-8.92	51.60	74.00	-22.40	PK
Horizontal	11650.098	49.75	-8.92	40.83	54.00	-13.17	AV
Horizontal	17475.173	58.07	-1.86	56.21	68.20	-11.99	PK
Horizontal	17475.173	44.07	-1.86	42.21	54.00	-11.79	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The worst case is Antenna A

Test Mode: TX (5.8G) --802.11n-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.127	72.66	-20.24	52.42	74.00	-21.58	PK
Vertical	4679.127	59.65	-20.24	39.41	54.00	-14.59	AV
Vertical	11490.175	62.60	-8.79	53.81	68.20	-14.39	PK
Vertical	11490.175	49.75	-8.79	40.96	54.00	-13.04	AV
Vertical	17235.020	59.60	-3.18	56.42	68.20	-11.78	PK
Vertical	17235.020	44.82	-3.18	41.64	54.00	-12.36	AV
Horizontal	4679.147	72.64	-20.24	52.39	74.00	-21.61	PK
Horizontal	4679.147	59.18	-20.24	38.93	54.00	-15.07	AV
Horizontal	11490.087	62.30	-8.79	53.51	68.20	-14.69	PK
Horizontal	11490.087	49.78	-8.79	40.99	54.00	-13.01	AV
Horizontal	17235.098	55.92	-3.18	52.74	68.20	-15.46	PK
Horizontal	17235.098	44.32	-3.18	41.14	54.00	-12.86	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.087	74.74	-20.42	54.33	74.00	-19.67	PK
Vertical	4592.087	59.96	-20.42	39.54	54.00	-14.46	AV
Vertical	11570.036	61.36	-8.86	52.50	68.20	-15.70	PK
Vertical	11570.036	49.20	-8.86	40.34	54.00	-13.66	AV
Vertical	17355.025	59.07	-2.52	56.55	68.20	-11.65	PK
Vertical	17355.025	44.68	-2.52	42.16	54.00	-11.84	AV
Horizontal	4592.107	74.10	-20.42	53.69	74.00	-20.31	PK
Horizontal	4592.107	59.94	-20.42	39.53	54.00	-14.47	AV
Horizontal	11570.130	61.72	-8.86	52.86	68.20	-15.34	PK
Horizontal	11570.130	49.29	-8.86	40.43	54.00	-13.57	AV
Horizontal	17355.093	59.15	-2.52	56.63	68.20	-11.57	PK
Horizontal	17355.093	44.41	-2.52	41.89	54.00	-12.11	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.187	73.79	-18.93	54.86	68.20	-13.34	PK
Vertical	6039.187	59.02	-18.93	40.09	54.00	-13.91	AV
Vertical	11650.122	62.44	-8.92	53.52	74.00	-20.48	PK
Vertical	11650.122	49.11	-8.92	40.19	54.00	-13.81	AV
Vertical	17475.149	55.69	-1.86	53.83	68.20	-14.37	PK
Vertical	17475.149	44.51	-1.86	42.65	54.00	-11.35	AV
Horizontal	6039.063	74.19	-18.93	55.26	68.20	-12.94	PK
Horizontal	6039.063	59.02	-18.93	40.09	54.00	-13.91	AV
Horizontal	11650.103	64.31	-8.92	55.39	74.00	-18.61	PK
Horizontal	11650.103	49.44	-8.92	40.52	54.00	-13.48	AV
Horizontal	17475.034	59.50	-1.86	57.64	68.20	-10.56	PK
Horizontal	17475.034	44.78	-1.86	42.92	54.00	-11.08	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode:	TX (5.8G) -- 802.11n-HT40
------------	---------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.128	71.39	-20.24	51.15	74.00	-22.85	PK
Vertical	4679.128	59.37	-20.24	39.13	54.00	-14.87	AV
Vertical	11510.018	62.85	-8.81	54.04	74.00	-19.96	PK
Vertical	11510.018	49.34	-8.81	40.53	54.00	-13.47	AV
Vertical	17265.009	58.59	-3.01	55.58	68.20	-12.62	PK
Vertical	17265.009	44.60	-3.01	41.59	54.00	-12.41	AV
Horizontal	4679.009	72.18	-20.24	51.94	74.00	-22.06	PK
Horizontal	4679.009	59.44	-20.24	39.20	54.00	-14.80	AV
Horizontal	11510.050	64.60	-8.81	55.79	74.00	-18.21	PK
Horizontal	11510.050	49.14	-8.81	40.33	54.00	-13.67	AV
Horizontal	17265.119	56.07	-3.01	53.06	68.20	-15.14	PK
Horizontal	17265.119	44.74	-3.01	41.73	54.00	-12.27	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.086	72.33	-18.93	53.40	68.20	-14.80	PK
Vertical	6039.086	59.24	-18.93	40.31	54.00	-13.69	AV
Vertical	11590.087	63.68	-8.87	54.81	74.00	-19.19	PK
Vertical	11590.087	49.44	-8.87	40.57	54.00	-13.43	AV
Vertical	17385.104	59.66	-2.35	57.31	68.20	-10.89	PK
Vertical	17385.104	44.70	-2.35	42.35	54.00	-11.65	AV
Horizontal	6039.178	74.89	-18.93	55.96	68.20	-12.24	PK
Horizontal	6039.178	59.35	-18.93	40.42	54.00	-13.58	AV
Horizontal	11590.021	60.81	-8.87	51.94	74.00	-22.06	PK
Horizontal	11590.021	49.15	-8.87	40.28	54.00	-13.72	AV
Horizontal	17385.010	58.82	-2.35	56.47	68.20	-11.73	PK
Horizontal	17385.010	44.03	-2.35	41.68	54.00	-12.32	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode: TX (5.8G) --802.11ac-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.047	73.30	-20.24	53.06	74.00	-20.94	PK
Vertical	4679.047	59.98	-20.24	39.74	54.00	-14.26	AV
Vertical	11490.061	61.67	-8.79	52.88	68.20	-15.32	PK
Vertical	11490.061	49.17	-8.79	40.38	54.00	-13.62	AV
Vertical	17235.184	57.14	-3.18	53.96	68.20	-14.24	PK
Vertical	17235.184	44.38	-3.18	41.20	54.00	-12.80	AV
Horizontal	4679.003	72.65	-20.24	52.41	74.00	-21.59	PK
Horizontal	4679.003	59.09	-20.24	38.84	54.00	-15.16	AV
Horizontal	11490.094	62.29	-8.79	53.50	68.20	-14.70	PK
Horizontal	11490.094	49.45	-8.79	40.66	54.00	-13.34	AV
Horizontal	17235.155	56.74	-3.18	53.56	68.20	-14.64	PK
Horizontal	17235.155	44.45	-3.18	41.27	54.00	-12.73	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.163	71.64	-20.42	51.23	74.00	-22.77	PK
Vertical	4592.163	59.36	-20.42	38.94	54.00	-15.06	AV
Vertical	11570.003	64.54	-8.86	55.68	68.20	-12.52	PK
Vertical	11570.003	49.96	-8.86	41.10	54.00	-12.90	AV
Vertical	17355.088	57.60	-2.52	55.08	68.20	-13.12	PK
Vertical	17355.088	44.12	-2.52	41.60	54.00	-12.40	AV
Horizontal	4592.051	73.99	-20.42	53.57	74.00	-20.43	PK
Horizontal	4592.051	59.40	-20.42	38.98	54.00	-15.02	AV
Horizontal	11570.065	63.36	-8.86	54.50	68.20	-13.70	PK
Horizontal	11570.065	49.84	-8.86	40.98	54.00	-13.02	AV
Horizontal	17355.129	55.01	-2.52	52.49	68.20	-15.71	PK
Horizontal	17355.129	44.16	-2.52	41.64	54.00	-12.36	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.148	72.19	-18.93	53.25	68.20	-14.95	PK
Vertical	6039.148	59.65	-18.93	40.72	54.00	-13.28	AV
Vertical	11650.080	60.05	-8.92	51.13	74.00	-22.87	PK
Vertical	11650.080	49.05	-8.92	40.13	54.00	-13.87	AV
Vertical	17475.140	59.57	-1.86	57.71	68.20	-10.49	PK
Vertical	17475.140	44.74	-1.86	42.88	54.00	-11.12	AV
Horizontal	6039.045	72.77	-18.93	53.84	68.20	-14.36	PK
Horizontal	6039.045	59.21	-18.93	40.27	54.00	-13.73	AV
Horizontal	11650.111	63.47	-8.92	54.55	74.00	-19.45	PK
Horizontal	11650.111	49.13	-8.92	40.21	54.00	-13.79	AV
Horizontal	17475.121	56.08	-1.86	54.22	68.20	-13.98	PK
Horizontal	17475.121	44.49	-1.86	42.63	54.00	-11.37	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.137	72.07	-20.24	51.83	74.00	-22.17	PK
Vertical	4679.137	59.80	-20.24	39.56	54.00	-14.44	AV
Vertical	11510.176	62.43	-8.81	53.62	74.00	-20.38	PK
Vertical	11510.176	49.64	-8.81	40.83	54.00	-13.17	AV
Vertical	17265.053	55.67	-3.01	52.66	68.20	-15.54	PK
Vertical	17265.053	44.81	-3.01	41.80	54.00	-12.20	AV
Horizontal	4679.137	73.10	-20.24	52.85	74.00	-21.15	PK
Horizontal	4679.137	60.00	-20.24	39.76	54.00	-14.24	AV
Horizontal	11510.015	63.41	-8.81	54.60	74.00	-19.40	PK
Horizontal	11510.015	49.35	-8.81	40.54	54.00	-13.46	AV
Horizontal	17265.111	56.53	-3.01	53.52	68.20	-14.68	PK
Horizontal	17265.111	44.02	-3.01	41.01	54.00	-12.99	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.157	73.00	-18.93	54.07	68.20	-14.13	PK
Vertical	6039.157	59.53	-18.93	40.60	54.00	-13.40	AV
Vertical	11590.105	64.23	-8.87	55.36	74.00	-18.64	PK
Vertical	11590.105	49.37	-8.87	40.50	54.00	-13.50	AV
Vertical	17385.015	55.18	-2.35	52.83	68.20	-15.37	PK
Vertical	17385.015	44.68	-2.35	42.33	54.00	-11.67	AV
Horizontal	6039.150	71.74	-18.93	52.81	68.20	-15.39	PK
Horizontal	6039.150	59.76	-18.93	40.83	54.00	-13.17	AV
Horizontal	11590.017	61.20	-8.87	52.33	74.00	-21.67	PK
Horizontal	11590.017	49.07	-8.87	40.20	54.00	-13.80	AV
Horizontal	17385.068	56.13	-2.35	53.78	68.20	-14.42	PK
Horizontal	17385.068	44.83	-2.35	42.48	54.00	-11.52	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ac 80
-------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5775 MHz)-Above 1G							
Vertical	4679.063	72.36	-20.24	52.12	74.00	-21.88	PK
Vertical	4679.063	60.00	-20.24	39.76	54.00	-14.24	AV
Vertical	11550.101	60.29	-8.84	51.45	74.00	-22.55	PK
Vertical	11550.101	49.32	-8.84	40.48	54.00	-13.52	AV
Vertical	17325.184	57.39	-2.68	54.71	68.20	-13.49	PK
Vertical	17325.184	44.85	-2.68	42.17	54.00	-11.83	AV
Horizontal	4679.076	70.78	-20.24	50.54	74.00	-23.46	PK
Horizontal	4679.076	59.48	-20.24	39.24	54.00	-14.76	AV
Horizontal	11550.110	60.35	-8.84	51.51	74.00	-22.49	PK
Horizontal	11550.110	49.80	-8.84	40.96	54.00	-13.04	AV
Horizontal	17325.127	58.39	-2.68	55.71	68.20	-12.49	PK
Horizontal	17325.127	44.29	-2.68	41.61	54.00	-12.39	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode: TX (5.8G) --802.11ax-HT20

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.187	71.04	-20.24	50.80	74.00	-23.20	PK
Vertical	4679.187	59.39	-20.24	39.15	54.00	-14.85	AV
Vertical	11490.143	61.97	-8.79	53.18	68.20	-15.02	PK
Vertical	11490.143	49.34	-8.79	40.55	54.00	-13.45	AV
Vertical	17235.143	58.04	-3.18	54.86	68.20	-13.34	PK
Vertical	17235.143	44.36	-3.18	41.18	54.00	-12.82	AV
Horizontal	4679.171	72.10	-20.24	51.86	74.00	-22.14	PK
Horizontal	4679.171	59.67	-20.24	39.43	54.00	-14.57	AV
Horizontal	11490.175	62.32	-8.79	53.53	68.20	-14.67	PK
Horizontal	11490.175	49.33	-8.79	40.54	54.00	-13.46	AV
Horizontal	17235.079	56.00	-3.18	52.82	68.20	-15.38	PK
Horizontal	17235.079	44.02	-3.18	40.84	54.00	-13.16	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.182	72.29	-20.42	51.88	74.00	-22.12	PK
Vertical	4592.182	59.56	-20.42	39.15	54.00	-14.85	AV
Vertical	11570.120	61.28	-8.86	52.42	68.20	-15.78	PK
Vertical	11570.120	49.15	-8.86	40.29	54.00	-13.71	AV
Vertical	17355.145	56.29	-2.52	53.77	68.20	-14.43	PK
Vertical	17355.145	44.02	-2.52	41.50	54.00	-12.50	AV
Horizontal	4592.139	72.22	-20.42	51.80	74.00	-22.20	PK
Horizontal	4592.139	59.99	-20.42	39.57	54.00	-14.43	AV
Horizontal	11570.182	63.12	-8.86	54.26	68.20	-13.94	PK
Horizontal	11570.182	49.29	-8.86	40.43	54.00	-13.57	AV
Horizontal	17355.009	58.01	-2.52	55.49	68.20	-12.71	PK
Horizontal	17355.009	44.99	-2.52	42.47	54.00	-11.53	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.140	70.68	-18.93	51.75	68.20	-16.45	PK
Vertical	6039.140	59.72	-18.93	40.79	54.00	-13.21	AV
Vertical	11650.090	60.50	-8.92	51.58	74.00	-22.42	PK
Vertical	11650.090	49.55	-8.92	40.63	54.00	-13.37	AV
Vertical	17475.099	56.18	-1.86	54.32	68.20	-13.88	PK
Vertical	17475.099	44.37	-1.86	42.51	54.00	-11.49	AV
Horizontal	6039.078	74.60	-18.93	55.67	68.20	-12.53	PK
Horizontal	6039.078	59.86	-18.93	40.93	54.00	-13.07	AV
Horizontal	11650.192	60.83	-8.92	51.91	74.00	-22.09	PK
Horizontal	11650.192	49.76	-8.92	40.84	54.00	-13.16	AV
Horizontal	17475.001	55.52	-1.86	53.66	68.20	-14.54	PK
Horizontal	17475.001	44.82	-1.86	42.96	54.00	-11.04	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ax-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.051	74.96	-20.24	54.72	74.00	-19.28	PK
Vertical	4679.051	59.50	-20.24	39.26	54.00	-14.74	AV
Vertical	11510.046	62.99	-8.81	54.18	74.00	-19.82	PK
Vertical	11510.046	49.84	-8.81	41.03	54.00	-12.97	AV
Vertical	17265.069	56.24	-3.01	53.23	68.20	-14.97	PK
Vertical	17265.069	44.13	-3.01	41.12	54.00	-12.88	AV
Horizontal	4679.144	73.26	-20.24	53.01	74.00	-20.99	PK
Horizontal	4679.144	59.18	-20.24	38.94	54.00	-15.06	AV
Horizontal	11510.013	63.26	-8.81	54.45	74.00	-19.55	PK
Horizontal	11510.013	49.96	-8.81	41.15	54.00	-12.85	AV
Horizontal	17265.042	56.42	-3.01	53.41	68.20	-14.79	PK
Horizontal	17265.042	44.72	-3.01	41.71	54.00	-12.29	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.076	70.28	-18.93	51.34	68.20	-16.86	PK
Vertical	6039.076	59.64	-18.93	40.71	54.00	-13.29	AV
Vertical	11590.186	60.01	-8.87	51.14	74.00	-22.86	PK
Vertical	11590.186	49.82	-8.87	40.95	54.00	-13.05	AV
Vertical	17385.048	57.59	-2.35	55.24	68.20	-12.96	PK
Vertical	17385.048	44.24	-2.35	41.89	54.00	-12.11	AV
Horizontal	6039.046	74.52	-18.93	55.58	68.20	-12.62	PK
Horizontal	6039.046	59.96	-18.93	41.03	54.00	-12.97	AV
Horizontal	11590.137	62.36	-8.87	53.49	74.00	-20.51	PK
Horizontal	11590.137	49.47	-8.87	40.60	54.00	-13.40	AV
Horizontal	17385.018	57.54	-2.35	55.19	68.20	-13.01	PK
Horizontal	17385.018	44.36	-2.35	42.01	54.00	-11.99	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ax 80
-------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5775 MHz)-Above 1G							
Vertical	4679.071	70.45	-20.24	50.21	74.00	-23.79	PK
Vertical	4679.071	59.12	-20.24	38.88	54.00	-15.12	AV
Vertical	11550.040	62.85	-8.84	54.01	74.00	-19.99	PK
Vertical	11550.040	49.21	-8.84	40.37	54.00	-13.63	AV
Vertical	17325.174	55.39	-2.68	52.71	68.20	-15.49	PK
Vertical	17325.174	44.55	-2.68	41.87	54.00	-12.13	AV
Horizontal	4679.106	70.99	-20.24	50.75	74.00	-23.25	PK
Horizontal	4679.106	59.70	-20.24	39.46	54.00	-14.54	AV
Horizontal	11550.131	64.47	-8.84	55.63	74.00	-18.37	PK
Horizontal	11550.131	49.29	-8.84	40.45	54.00	-13.55	AV
Horizontal	17325.148	58.61	-2.68	55.93	68.20	-12.27	PK
Horizontal	17325.148	44.45	-2.68	41.77	54.00	-12.23	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

8. Antenna Requirement

8.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 Test Result

The EUT antenna is Internal antenna. It comply with the standard requirement.

9. EUT Photographs

EUT Photo 1



NOTE: Appendix-Photographs Of EUT Constructional Details.




10. EUT Test Setup Photographs

Conducted Measurement Photo



Radiated Measurement Photos



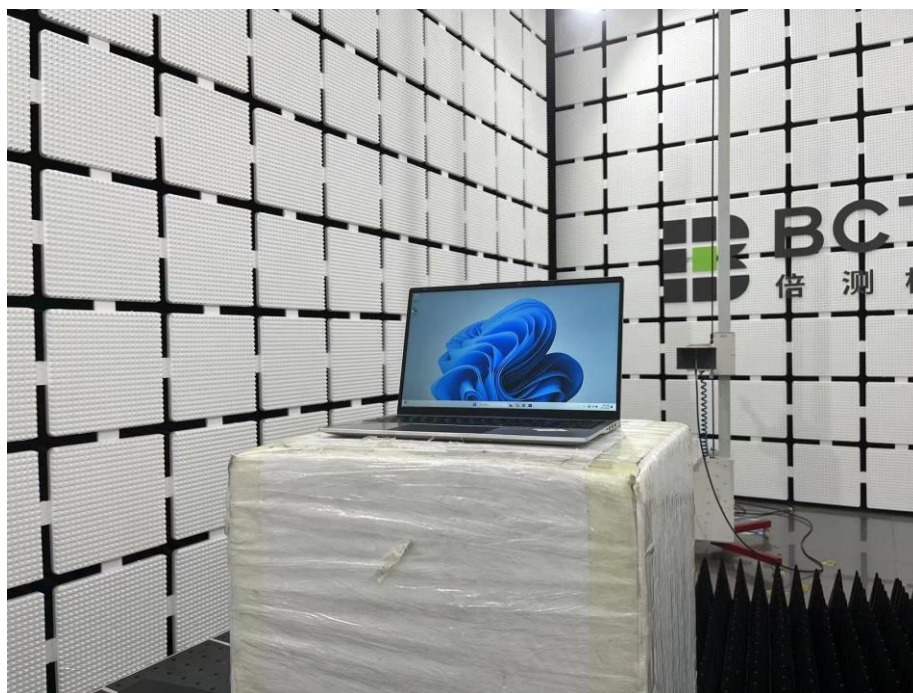

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****

