

TEST REPORT

Report No.: BCTC2408633035-4E

Applicant: Acer India PVT Limited

Product Name: Tablet

Test Model: Acer Iconia Tab iM10-22

Tested Date: 2024-08-07 to 2024-09-13


Issued Date: 2024-09-13

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A94K-IM10-22

Product Name: Tablet

Trademark: 

Model/Type reference: Acer Iconia Tab iM10-22
Acer One T10-22L

Prepared For: Acer India PVT Limited

Address: Acer India PVT Limited, 6th Floor, Embassy Heights, No.13, Magrath Road,
Bangalore, 560025, India

Manufacturer: Acer India PVT Limited

Address: RS No.38/2, Sedarapet Village Villianur Commune, Pondicherry 605111

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-08-07

Sample tested Date: 2024-08-07 to 2024-09-13


Issue Date: 2024-09-13

Report No.: BCTC2408633035-4E

Test Standards: FCC Part15 15.407
ANSI C63.10-2013
KDB 789033 D02 v02r01

Test Results: PASS

Tested by:

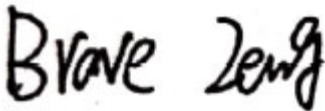

Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

	Page
Test Report Declaration	
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	11
5. Test Facility And Test Instrument Used	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test Procedure	14
6.4 EUT Operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test Procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	20
8. Power Spectral Density Test	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test Procedure	36
8.4 EUT Operating Conditions	36
8.5 Test Result	37
9. 26dB & 6dB & 99% Emission Bandwidth	52
9.1 Block Diagram Of Test Setup	52
9.2 Limit	52
9.3 Test Procedure	52
9.4 EUT Operating Conditions	53
9.5 Test Result	53
10. Maximum Conducted Output Power	83
10.1 Block Diagram Of Test Setup	83
10.2 Limit	83
10.3 Test Procedure	83
10.4 EUT Operating Conditions	84
10.5 Test Result	85
11. Out Of Band Emissions	100


11.1	Block Diagram Of Test Setup.....	100
11.2	Limit	100
11.3	Test Procedure	100
11.4	EUT Operating Conditions	100
11.5	Test Result.....	101
12.	Spurious RF Conducted Emissions.....	113
12.1	Block Diagram Of Test Setup.....	113
12.2	Limit	113
12.3	Test Procedure	113
12.4	Test Result.....	113
13.	Frequency Stability Measurement.....	128
13.1	Block Diagram Of Test Setup.....	128
13.2	Limit	128
13.3	Test Procedure	128
13.4	Test Result.....	129
14.	Duty Cycle Of Test Signal	135
14.1	Standard Requirement.....	135
14.2	Formula.....	135
14.3	Test Procedure	135
14.4	Test Result.....	135
15.	Antenna Requirement	143
15.1	Limit	143
15.2	Test Result.....	143
16.	EUT Photographs.....	144
17.	EUT Test Setup Photographs.....	145

(Note: N/A Means Not Applicable)

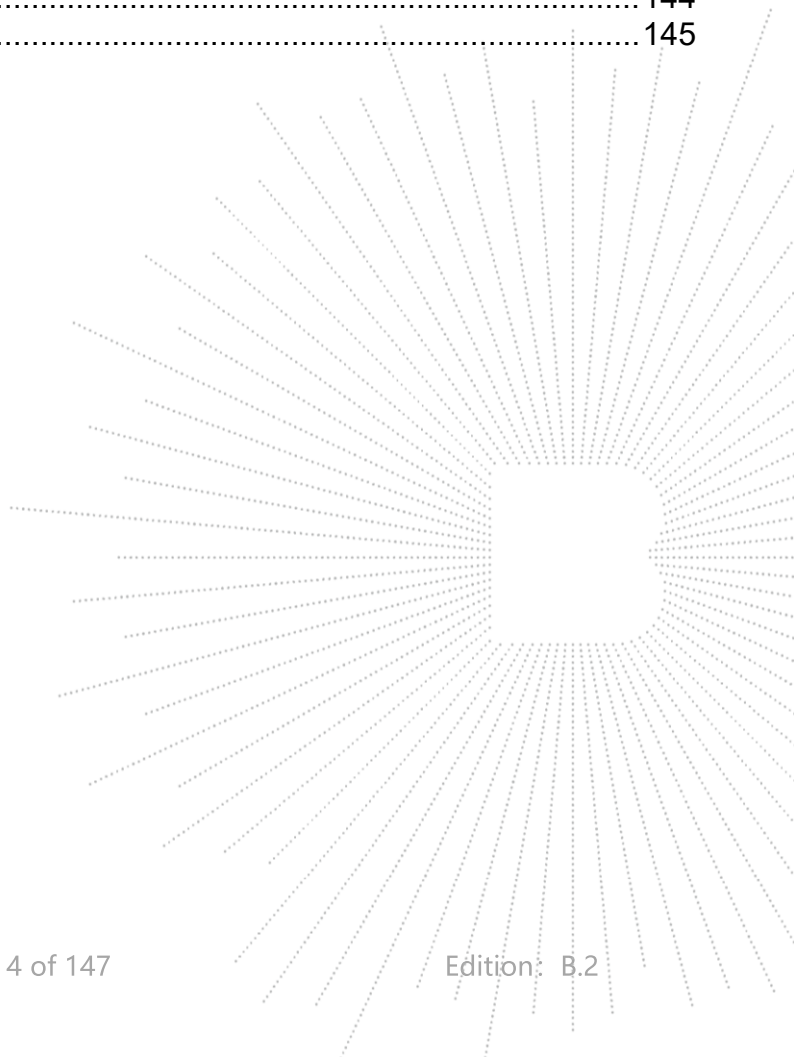

1. Version


Report No.	Issue Date	Description	Approved
BCTC2408633035-4E	2024-09-13	Original	Valid

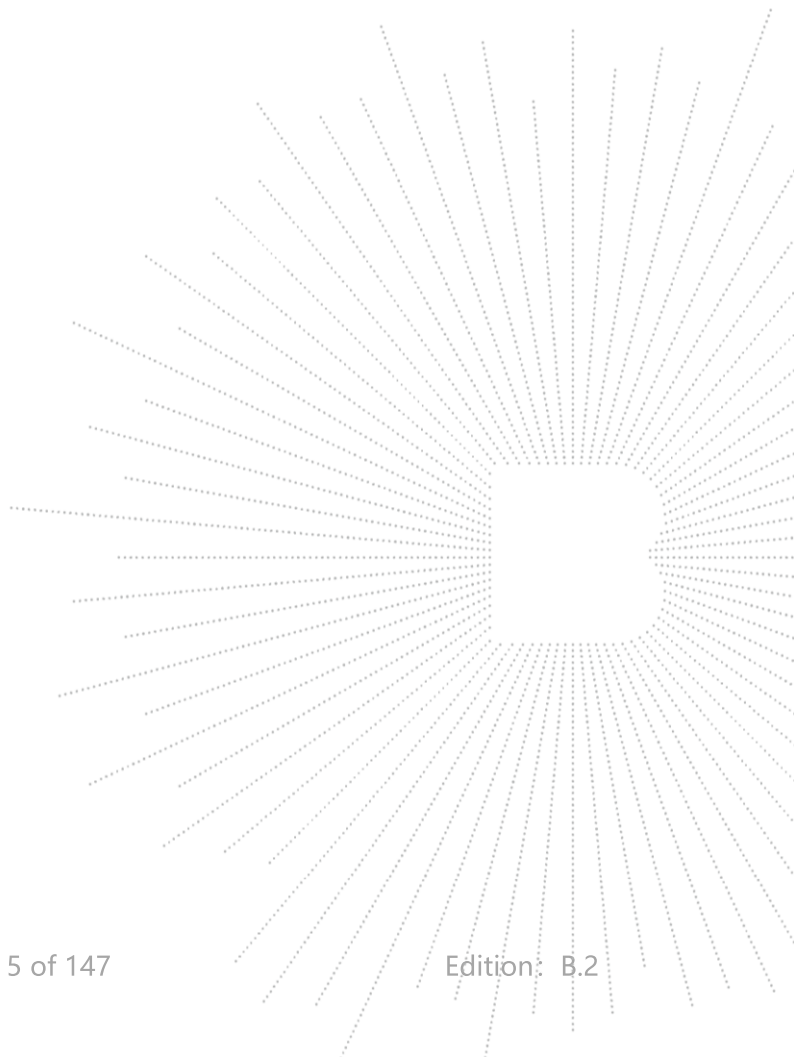

2. Test Summary

The Product has been tested according to the following specifications:


No.	Test Parameter	Clause No.	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)(1) 15.407 (a)(3)	PASS
6	Band Edge	2.1051, 15.407(b)(1) 15.407(b)(4)	PASS
7	Power Spectral Density	15.407 (a)(1) 15.407 (a)(3)	PASS
8	Spurious Emissions at Antenna Terminals	2.1051, 15.407(b)	PASS
9	Antenna Requirement	15.203	PASS

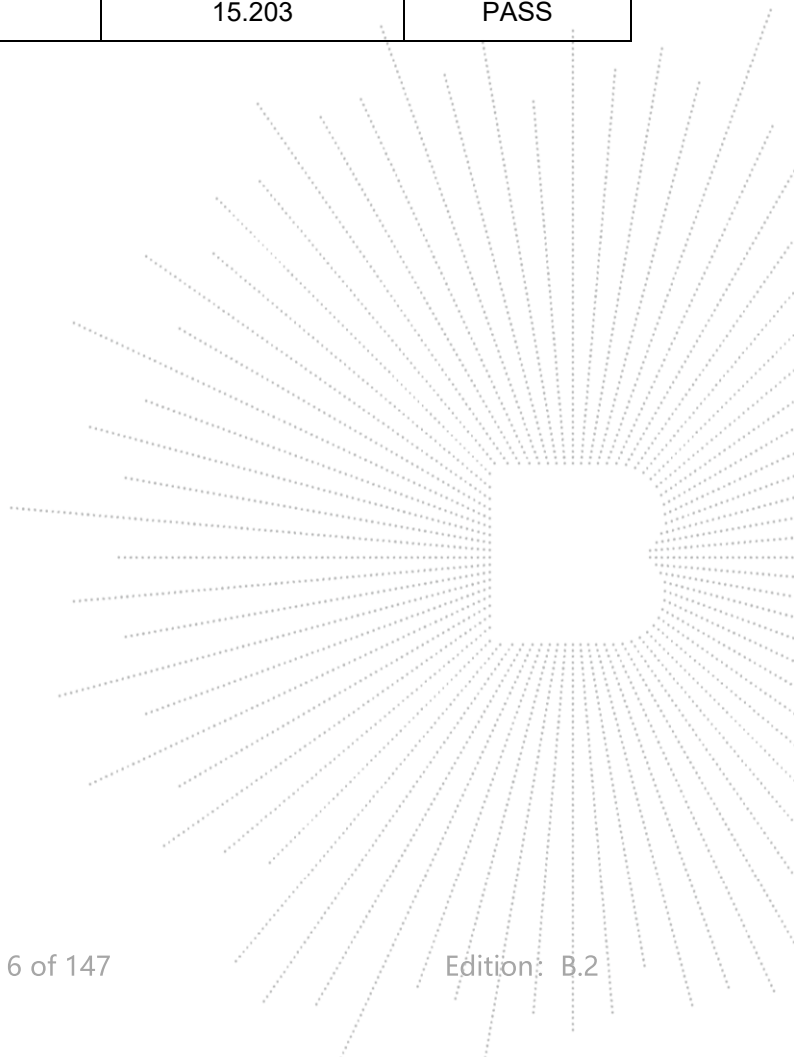

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

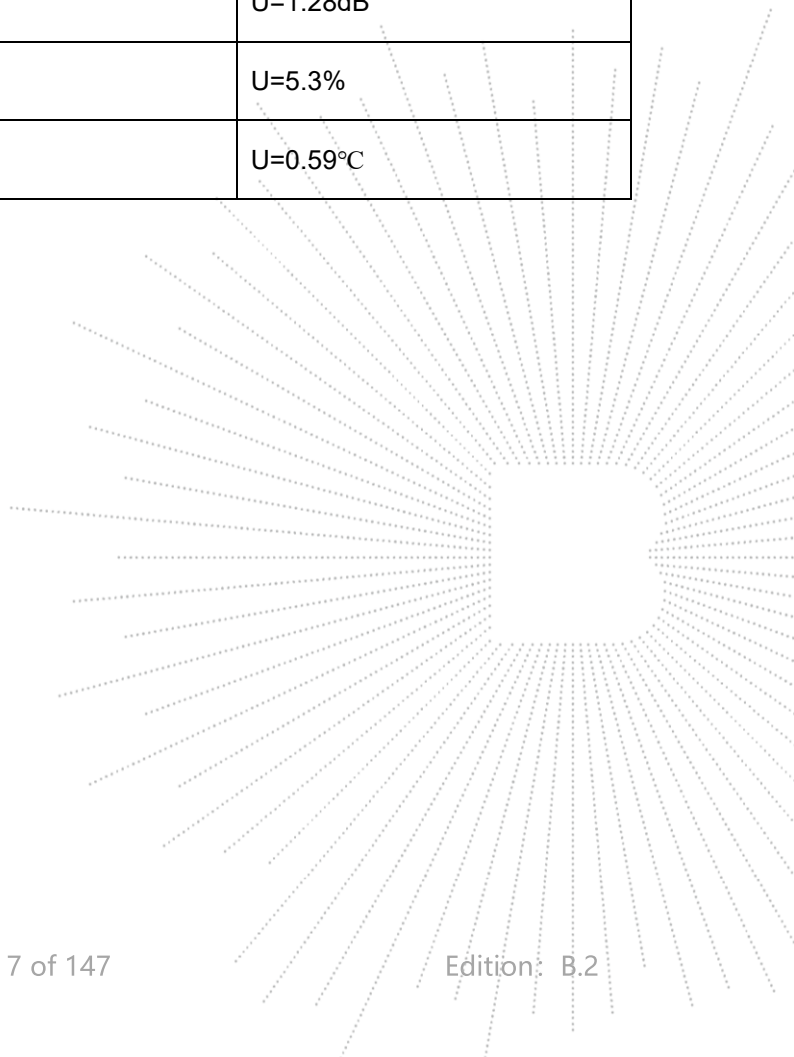

4. Product Information And Test Setup


4.1 Product Information

Model/Type Reference:	Acer Iconia Tab iM10-22 Acer One T10-22L
Model Differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20); 5190-5230MHz for 802.11n(HT40); 5210MHz for 802.11 ac80; 5745-5825 MHz for 802.11a/n(HT20); 5755-5795 MHz for 802.11n(HT40); 5775MHz for 802.11 ac80;
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
Number Of Channel	4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; 5 channels for 802.11a/n20 in the 5745-5825MHz band ; 2 channels for 802.11 n40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band
Antenna Type:	Internal antenna 5G: 2.06 dBi
Antenna Gain:	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 9V from adapter/DC 3.8V from battery
Adapter Information:	Model: TPD-203A120167VF01 Input: 100-240V~50/60Hz 0.6A USB-C Output: 5.0V ---3.0A or 9.0V ---2.22A or 12.0V ---1.67A

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.


4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Tablet		Acer Iconia Tab iM10-22	N/A	EUT
E-2	Adapter	N/A	TPD-203A120 167VF01	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

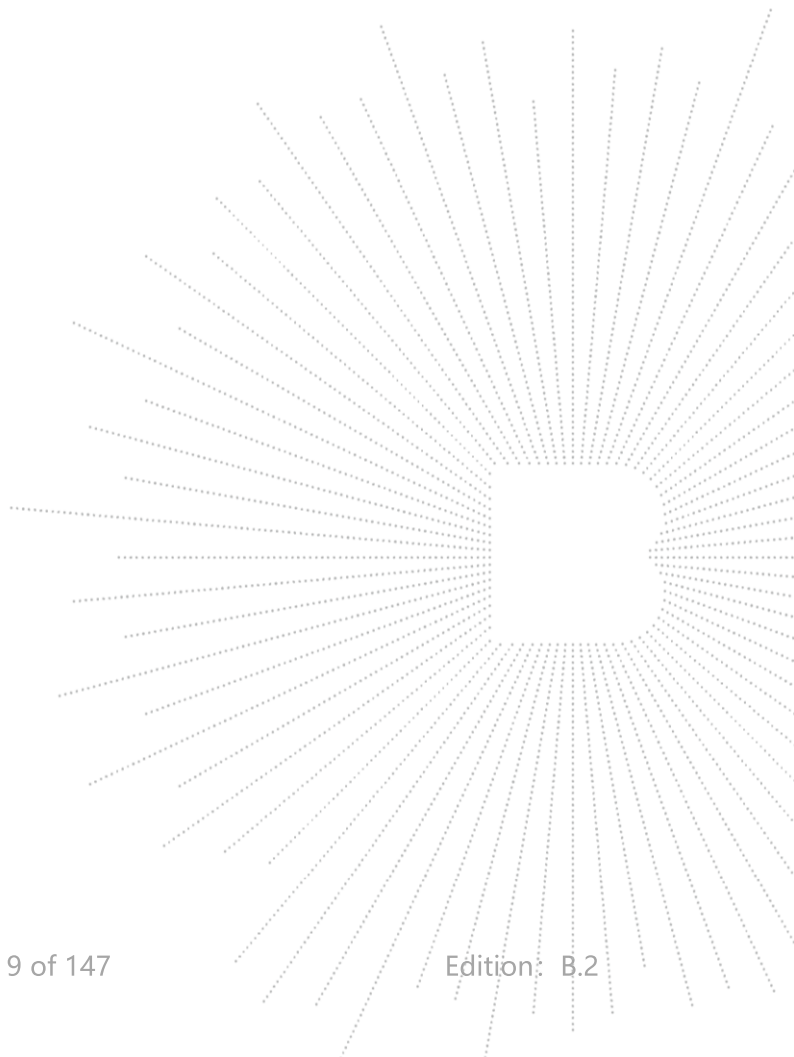

4.4 Channel List

5.1G

802.11a/n/ac (20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-


802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

5.8G

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

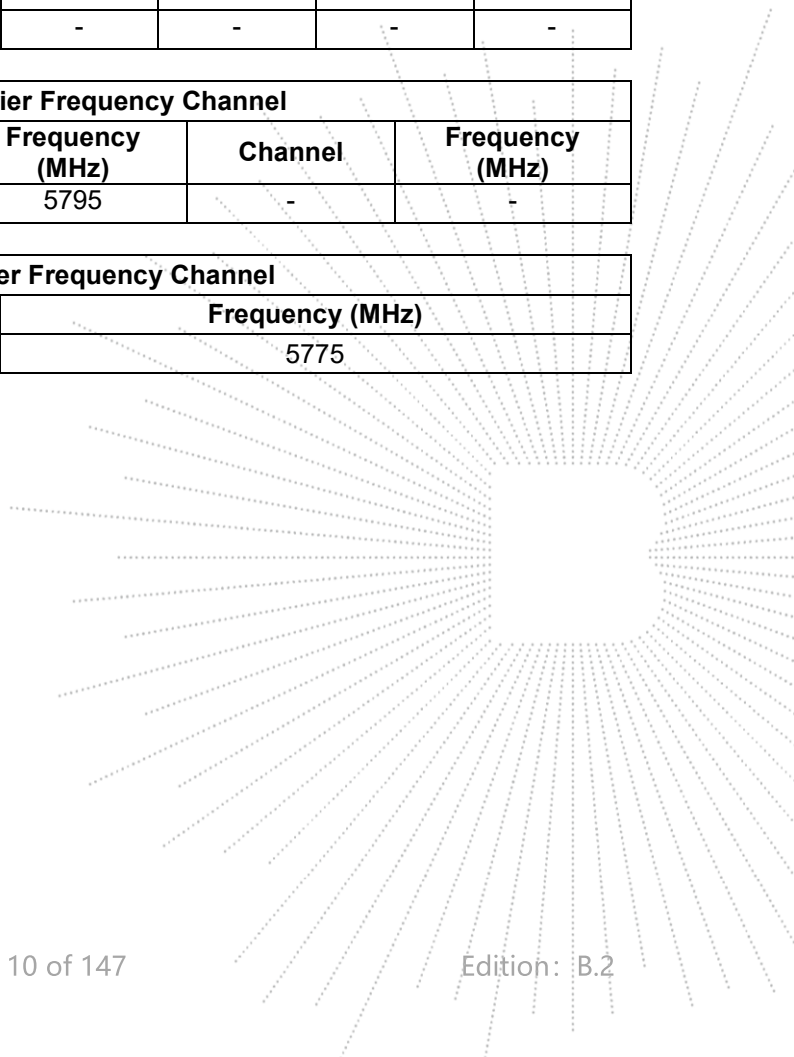

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	Link


Note:

1. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
2. We're testing antenna A data.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Parameters	DEF	DEF	DEF

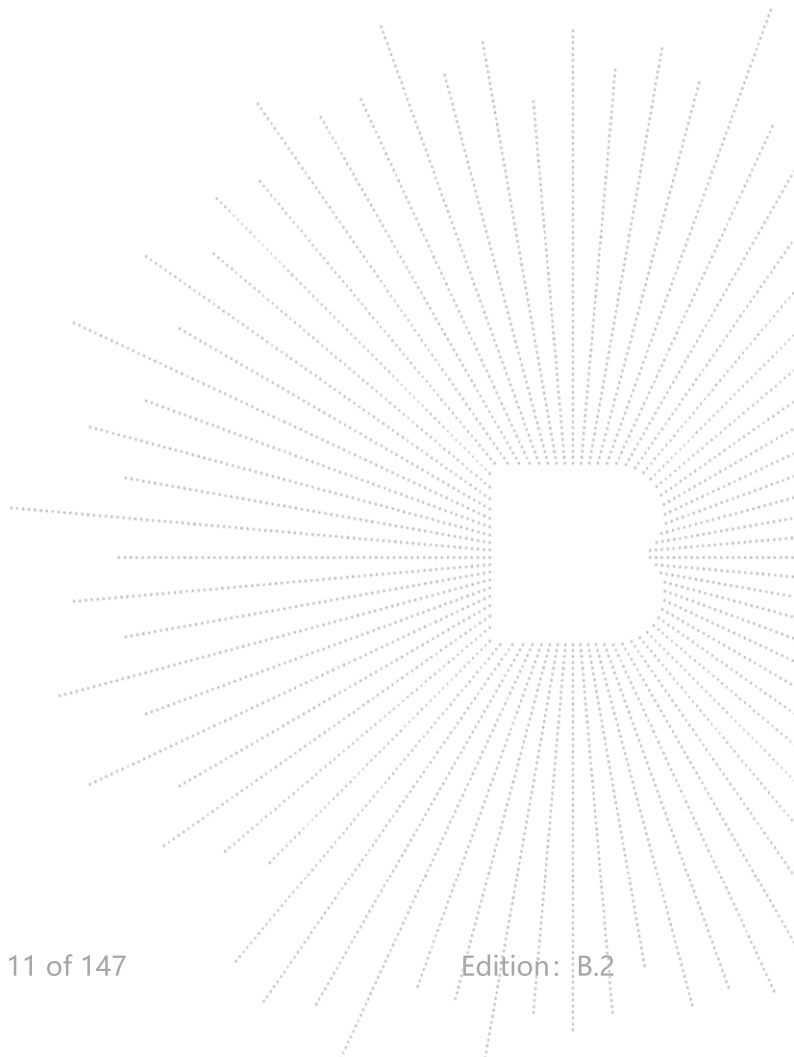

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK202104090 1	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

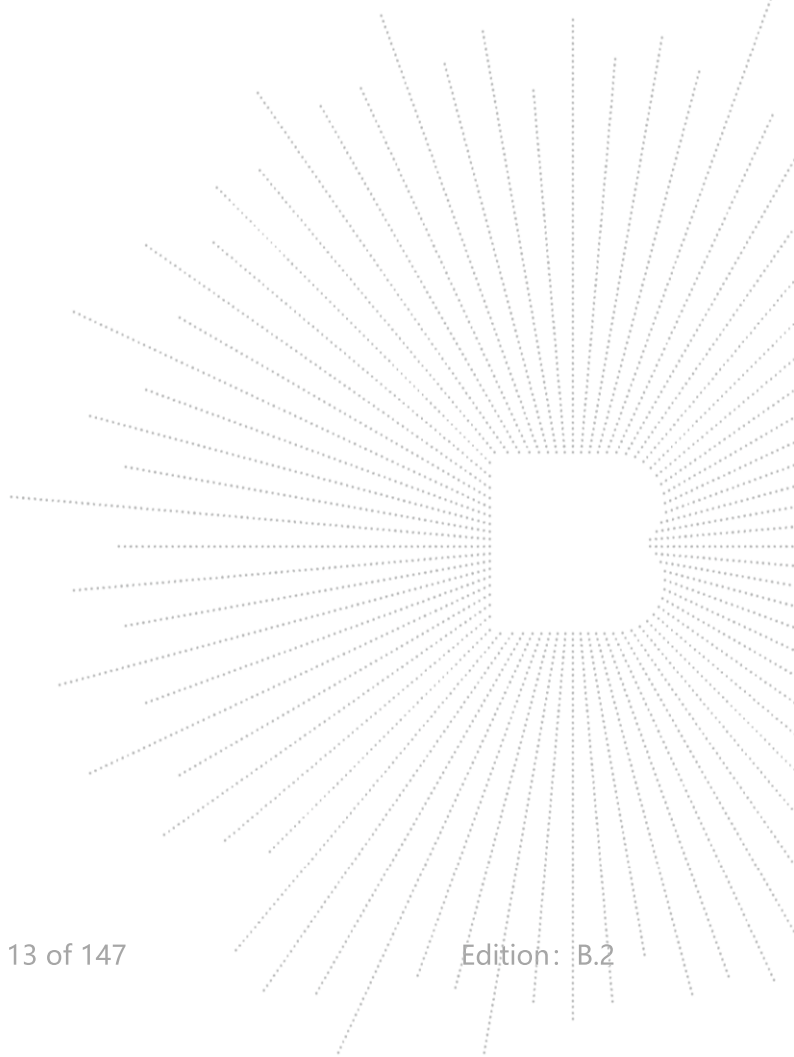

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

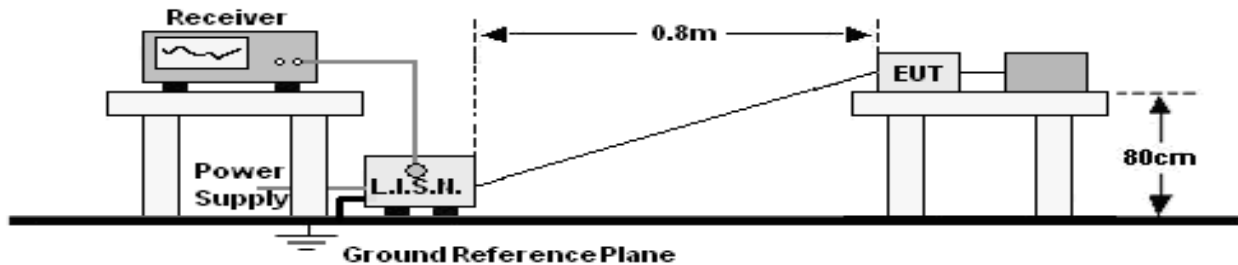

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4	Test Voltage :	AC120V/60Hz

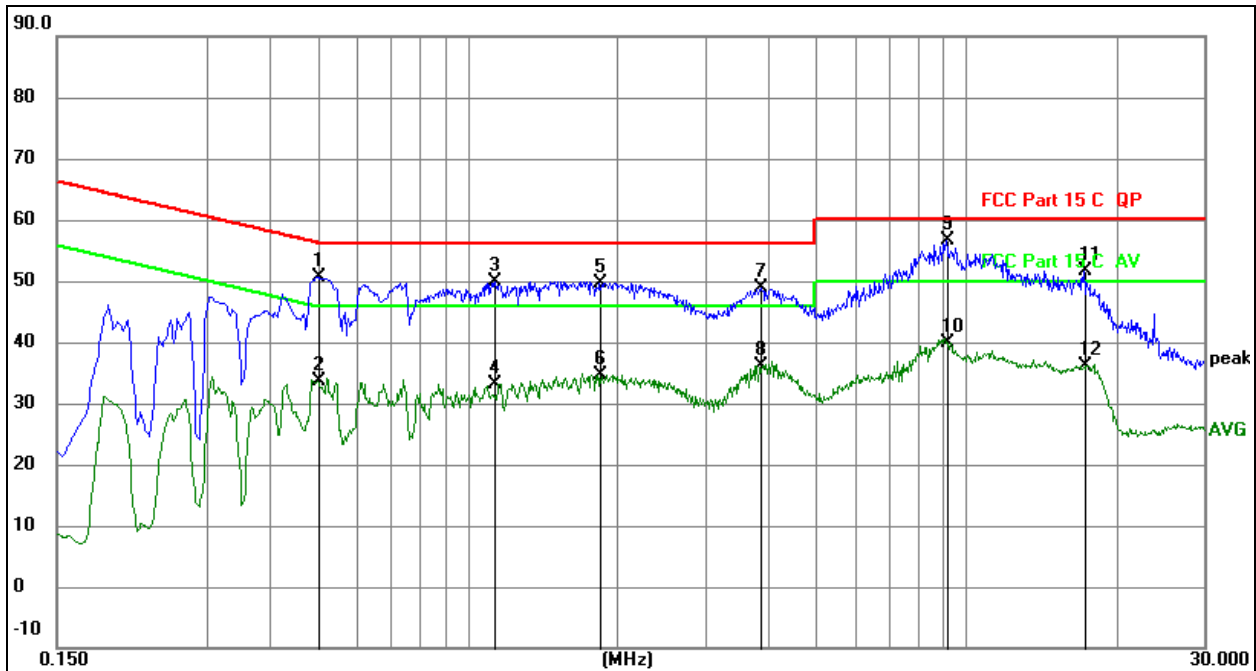


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4994	30.57	20.08	50.65	56.01	-5.36	QP
2		0.4994	13.45	20.08	33.53	46.01	-12.48	AVG
3		1.1352	29.75	20.09	49.84	56.00	-6.16	QP
4		1.1352	12.93	20.09	33.02	46.00	-12.98	AVG
5		1.8386	29.60	20.10	49.70	56.00	-6.30	QP
6		1.8386	14.51	20.10	34.61	46.00	-11.39	AVG
7		3.8808	28.71	20.14	48.85	56.00	-7.15	QP
8		3.8808	16.09	20.14	36.23	46.00	-9.77	AVG
9	*	9.1095	36.46	20.17	56.63	60.00	-3.37	QP
10		9.1095	19.73	20.17	39.90	50.00	-10.10	AVG
11		17.1994	31.23	20.32	51.55	60.00	-8.45	QP
12		17.1994	15.82	20.32	36.14	50.00	-13.86	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 4	Test Voltage :	AC120V/60Hz

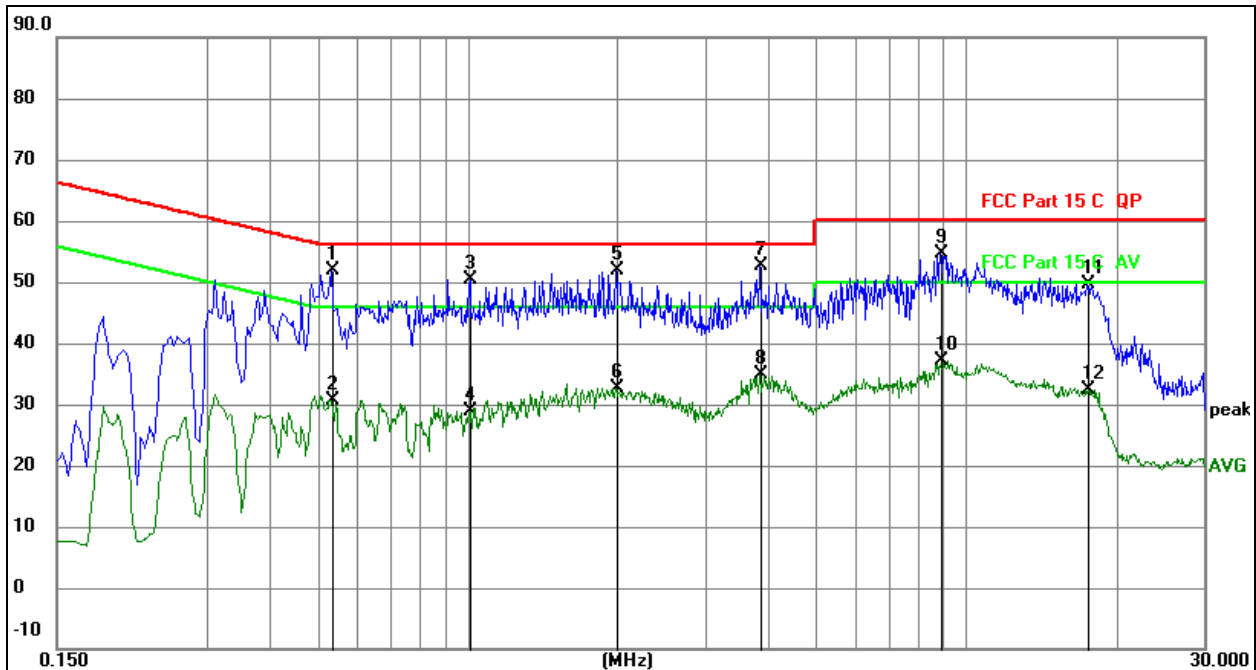
Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over1 Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.5325	31.85	20.08	51.93	56.00	-4.07	QP
2		0.5325	10.62	20.08	30.70	46.00	-15.30	AVG
3		1.0140	30.39	20.09	50.48	56.00	-5.52	QP
4		1.0140	8.79	20.09	28.88	46.00	-17.12	AVG
5		1.9905	31.70	20.10	51.80	56.00	-4.20	QP
6		1.9905	12.51	20.10	32.61	46.00	-13.39	AVG
7	*	3.8805	32.39	20.14	52.53	56.00	-3.47	QP
8		3.8805	14.71	20.14	34.85	46.00	-11.15	AVG
9		8.8890	34.48	20.17	54.65	60.00	-5.35	QP
10		8.8890	16.91	20.17	37.08	50.00	-12.92	AVG
11		17.5110	29.38	20.32	49.70	60.00	-10.30	QP
12		17.5110	12.16	20.32	32.48	50.00	-17.52	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

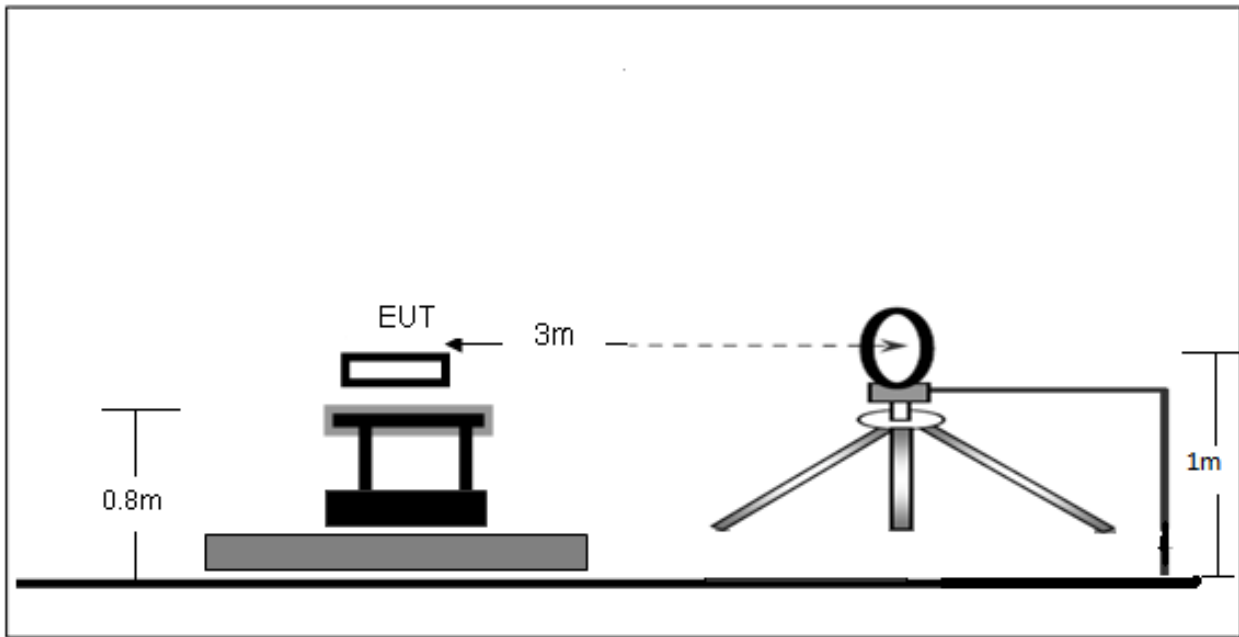

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

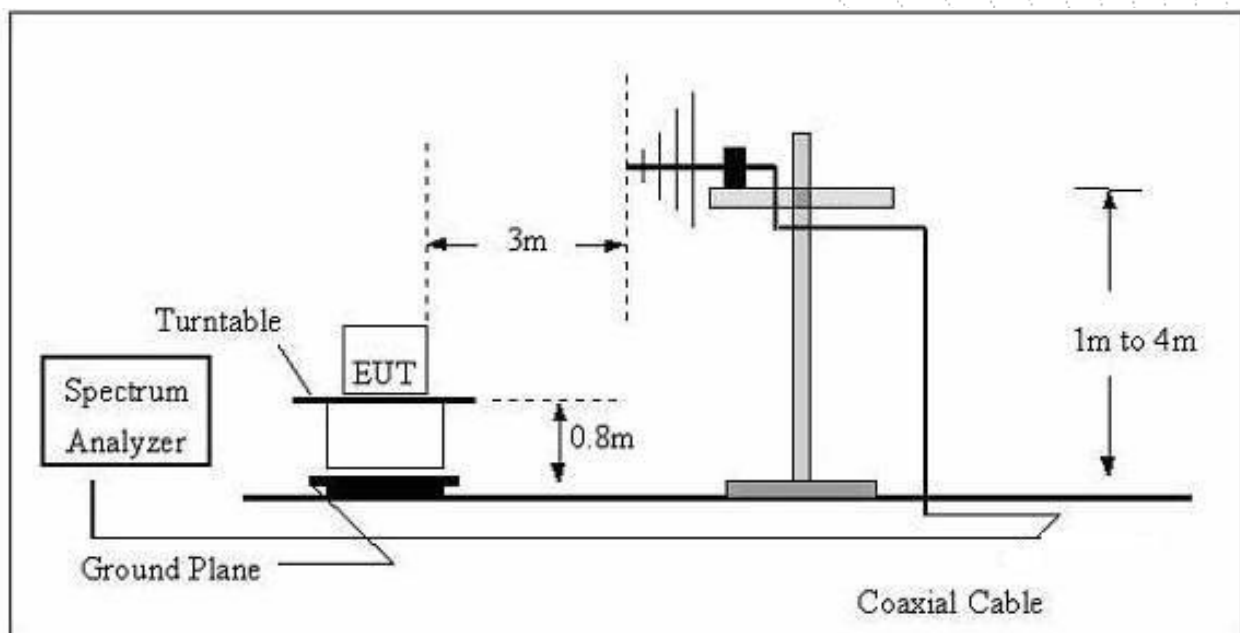

(C) Radiated Emission Test-Up Frequency Above 1GHz

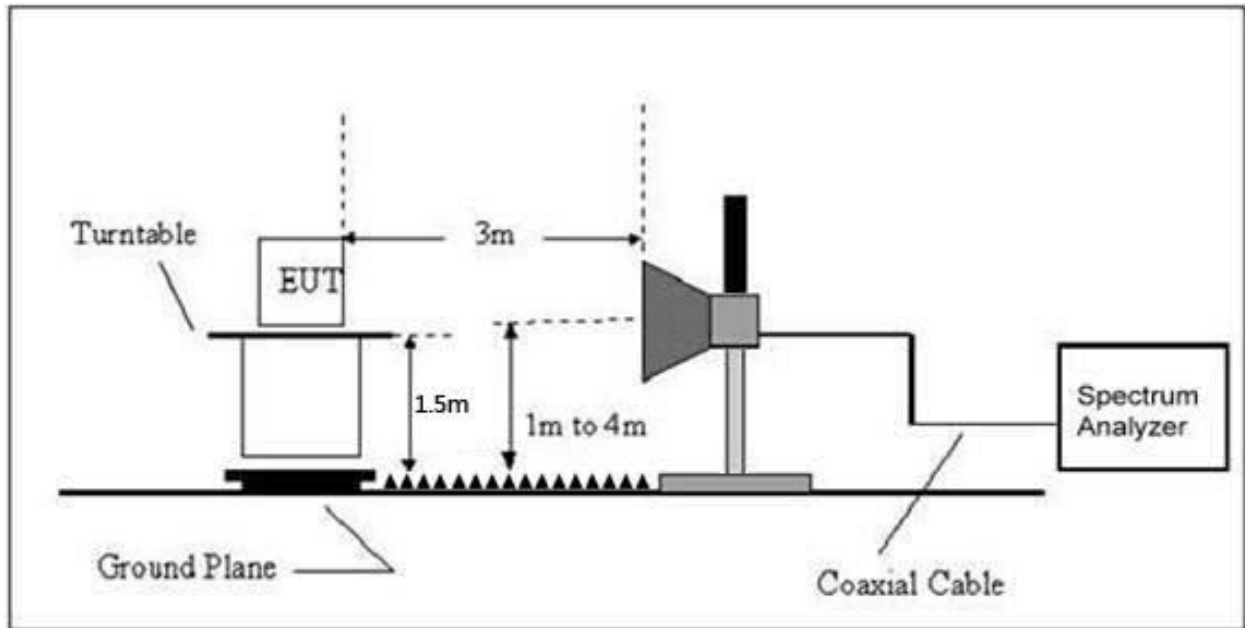

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	Mode 4	Polarization :	--


Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

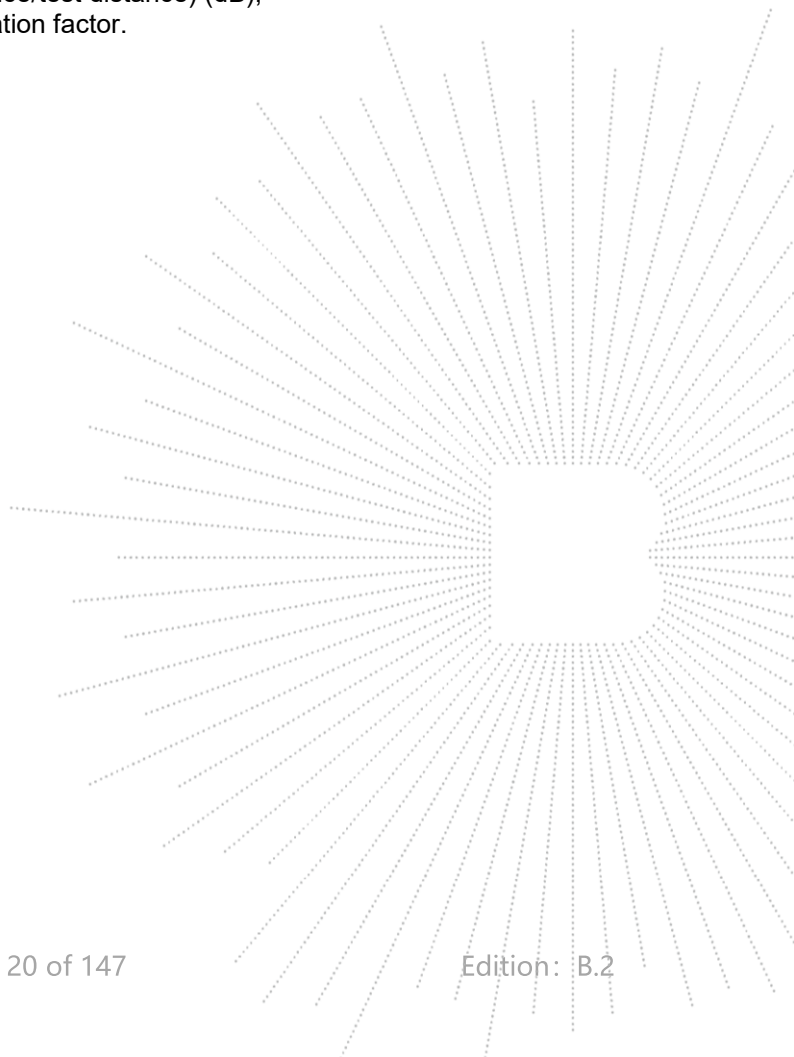

Between 30MHz – 1GHz


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4	Test Voltage :	AC120V/60Hz

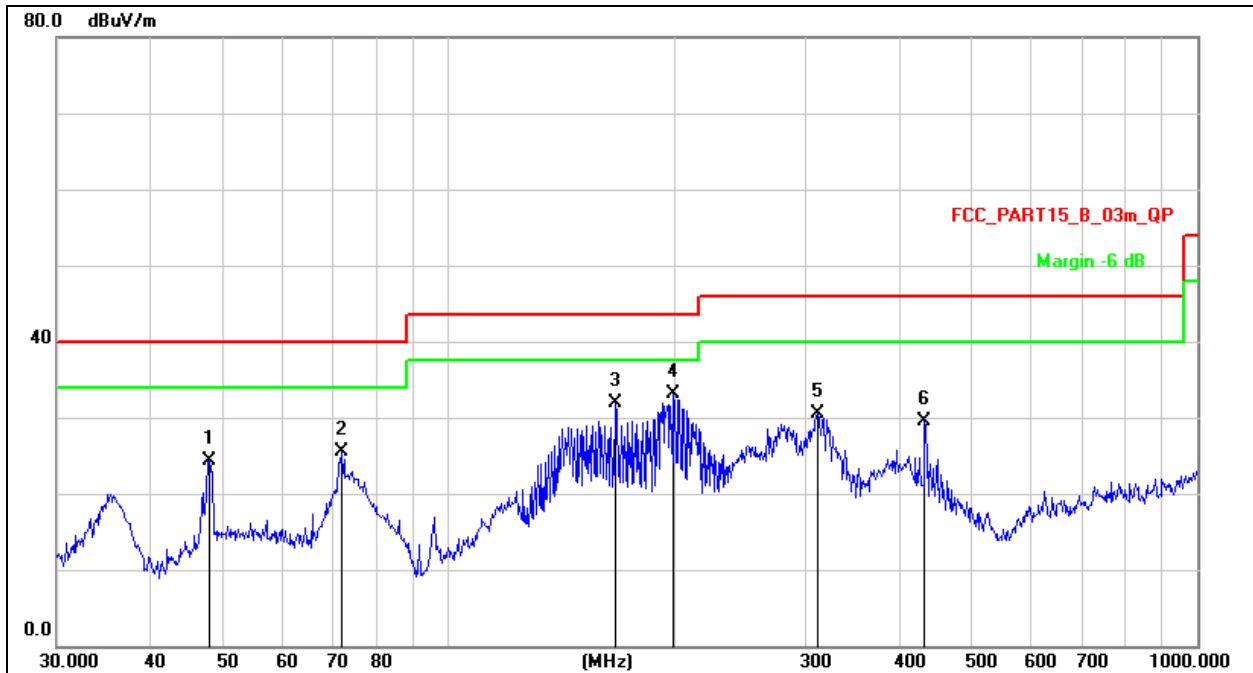

Remark:
 1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 2. Measurement=Reading Level+ Correct Factor
 3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		47.9940	38.41	-14.06	24.35	40.00	-15.65	QP
2		72.0843	43.85	-18.36	25.49	40.00	-14.51	QP
3		167.2368	50.10	-18.15	31.95	43.50	-11.55	QP
4	*	199.2855	48.79	-15.77	33.02	43.50	-10.48	QP
5		311.0867	43.39	-12.85	30.54	46.00	-15.46	QP
6		432.5457	39.65	-10.20	29.45	46.00	-16.55	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4	Test Voltage :	AC120V/60Hz

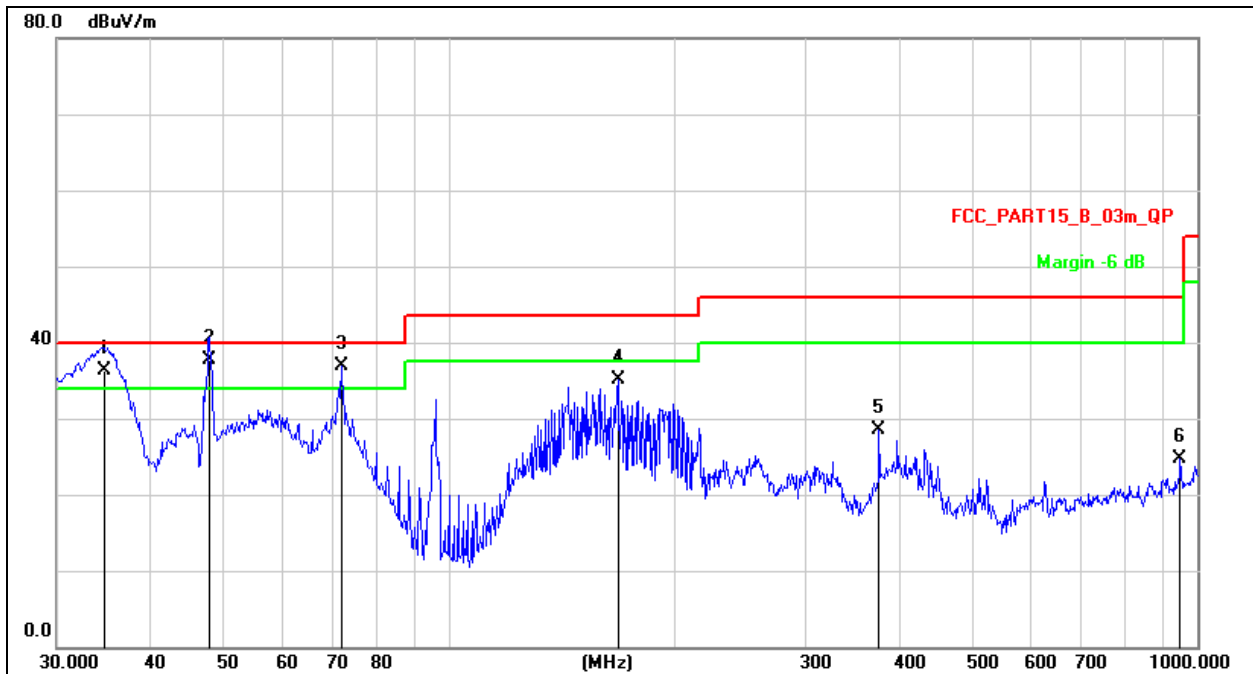

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over= Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	!	34.7602	52.09	-15.73	36.36	40.00	-3.64	QP
2	*	47.9940	51.73	-14.06	37.67	40.00	-2.33	QP
3	!	72.0843	55.21	-18.36	36.85	40.00	-3.15	QP
4		168.4138	53.20	-18.06	35.14	43.50	-8.36	QP
5		375.9385	39.63	-11.15	28.48	46.00	-17.52	QP
6		948.7610	27.55	-2.94	24.61	46.00	-21.39	QP

Between 1GHz – 40GHz

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.197	70.33	-20.73	49.60	68.2	-18.60	PK
Vertical	4434.197	59.56	-20.73	38.82	54	-15.18	AV
Vertical	10360.086	63.99	-9.36	54.63	68.2	-13.57	PK
Vertical	10360.086	49.54	-9.36	40.18	54	-13.82	AV
Vertical	15540.175	64.28	-7.84	56.44	74	-17.56	PK
Vertical	15540.175	49.25	-7.84	41.41	54	-12.59	AV
Horizontal	4434.149	73.25	-20.73	52.52	68.2	-15.68	PK
Horizontal	4434.149	59.16	-20.73	38.43	54	-15.57	AV
Horizontal	10360.074	64.89	-9.36	55.53	68.2	-12.67	PK
Horizontal	10360.074	49.34	-9.36	39.98	54	-14.02	AV
Horizontal	15540.068	62.38	-7.84	54.54	74	-19.46	PK
Horizontal	15540.068	49.27	-7.84	41.43	54	-12.57	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.150	71.86	-20.42	51.44	74	-22.56	PK
Vertical	4592.150	59.18	-20.42	38.76	54	-15.24	AV
Vertical	10400.092	61.13	-9.30	51.83	68.2	-16.37	PK
Vertical	10400.092	49.60	-9.30	40.30	54	-13.70	AV
Vertical	15600.114	63.61	-7.82	55.79	74	-18.21	PK
Vertical	15600.114	49.97	-7.82	42.15	54	-11.85	AV
Horizontal	4592.130	73.86	-20.42	53.44	74	-20.56	PK
Horizontal	4592.130	59.92	-20.42	39.50	54	-14.50	AV
Horizontal	10400.030	62.35	-9.30	53.05	68.2	-15.15	PK
Horizontal	10400.030	49.18	-9.30	39.88	54	-14.12	AV
Horizontal	15600.157	60.48	-7.82	52.66	74	-21.34	PK
Horizontal	15600.157	49.61	-7.82	41.79	54	-12.21	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.142	71.87	-20.12	51.75	74	-22.25	PK
Vertical	4739.142	59.15	-20.12	39.03	54	-14.97	AV
Vertical	10480.168	62.88	-9.18	53.70	68.2	-14.50	PK
Vertical	10480.168	49.13	-9.18	39.95	54	-14.05	AV
Vertical	15720.004	62.64	-7.78	54.86	74	-19.14	PK
Vertical	15720.004	49.86	-7.78	42.08	54	-11.92	AV
Horizontal	4739.076	73.38	-20.12	53.26	74	-20.74	PK
Horizontal	4739.076	59.73	-20.12	39.61	54	-14.39	AV
Horizontal	10480.023	60.13	-9.18	50.95	68.2	-17.25	PK
Horizontal	10480.023	49.82	-9.18	40.64	54	-13.36	AV
Horizontal	15720.073	63.99	-7.78	56.21	74	-17.79	PK
Horizontal	15720.073	49.05	-7.78	41.27	54	-12.73	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.148	73.22	-20.73	52.49	68.2	-15.71	PK
Vertical	4434.148	59.42	-20.73	38.69	54	-15.31	AV
Vertical	10360.136	62.55	-9.36	53.19	68.2	-15.01	PK
Vertical	10360.136	49.80	-9.36	40.44	54	-13.56	AV
Vertical	15540.182	62.84	-7.84	55.00	74	-19.00	PK
Vertical	15540.182	49.92	-7.84	42.08	54	-11.92	AV
Horizontal	4434.136	72.61	-20.73	51.88	68.2	-16.32	PK
Horizontal	4434.136	59.69	-20.73	38.95	54	-15.05	AV
Horizontal	10360.039	61.98	-9.36	52.62	68.2	-15.58	PK
Horizontal	10360.039	49.87	-9.36	40.51	54	-13.49	AV
Horizontal	15540.187	64.98	-7.84	57.14	74	-16.86	PK
Horizontal	15540.187	49.99	-7.84	42.15	54	-11.85	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.165	70.79	-20.42	50.38	74	-23.62	PK
Vertical	4592.165	59.13	-20.42	38.72	54	-15.28	AV
Vertical	10400.154	64.28	-9.30	54.98	68.2	-13.22	PK
Vertical	10400.154	49.85	-9.30	40.55	54	-13.45	AV
Vertical	15600.191	64.83	-7.82	57.01	74	-16.99	PK
Vertical	15600.191	49.70	-7.82	41.88	54	-12.12	AV
Horizontal	4592.156	71.20	-20.42	50.79	74	-23.21	PK
Horizontal	4592.156	59.63	-20.42	39.22	54	-14.78	AV
Horizontal	10400.121	62.45	-9.30	53.15	68.2	-15.05	PK
Horizontal	10400.121	49.01	-9.30	39.71	54	-14.29	AV
Horizontal	15600.073	63.47	-7.82	55.65	74	-18.35	PK
Horizontal	15600.073	49.07	-7.82	41.25	54	-12.75	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.035	73.62	-20.12	53.50	74	-20.50	PK
Vertical	4739.035	59.86	-20.12	39.74	54	-14.26	AV
Vertical	10480.050	64.28	-9.18	55.10	68.2	-13.10	PK
Vertical	10480.050	49.50	-9.18	40.32	54	-13.68	AV
Vertical	15720.102	62.00	-7.78	54.22	74	-19.78	PK
Vertical	15720.102	49.80	-7.78	42.02	54	-11.98	AV
Horizontal	4739.187	71.17	-20.12	51.05	74	-22.95	PK
Horizontal	4739.187	59.87	-20.12	39.74	54	-14.26	AV
Horizontal	10480.009	64.55	-9.18	55.37	68.2	-12.83	PK
Horizontal	10480.009	49.81	-9.18	40.63	54	-13.37	AV
Horizontal	15720.132	61.60	-7.78	53.82	74	-20.18	PK
Horizontal	15720.132	49.08	-7.78	41.30	54	-12.70	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.107	70.59	-20.73	49.86	68.2	-18.34	PK
Vertical	4434.107	59.90	-20.73	39.17	54	-14.83	AV
Vertical	10380.152	60.39	-9.33	51.06	68.2	-17.14	PK
Vertical	10380.152	49.88	-9.33	40.55	54	-13.45	AV
Vertical	15570.024	61.89	-7.83	54.06	74	-19.94	PK
Vertical	15570.024	49.62	-7.83	41.79	54	-12.21	AV
Horizontal	4434.122	73.35	-20.73	52.62	74	-21.38	PK
Horizontal	4434.122	59.63	-20.73	38.90	54	-15.10	AV
Horizontal	10380.045	64.11	-9.33	54.78	68.2	-13.42	PK
Horizontal	10380.045	49.65	-9.33	40.32	54	-13.68	AV
Horizontal	15570.060	61.57	-7.83	53.74	74	-20.26	PK
Horizontal	15570.060	49.34	-7.83	41.51	54	-12.49	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.007	70.27	-20.12	50.15	68.2	-18.05	PK
Vertical	4739.007	59.06	-20.12	38.93	54	-15.07	AV
Vertical	10460.107	62.19	-9.21	52.98	68.2	-15.22	PK
Vertical	10460.107	49.49	-9.21	40.28	54	-13.72	AV
Vertical	15690.067	63.92	-7.79	56.13	74	-17.87	PK
Vertical	15690.067	49.14	-7.79	41.35	54	-12.65	AV
Horizontal	4739.132	70.45	-20.12	50.33	68.2	-17.87	PK
Horizontal	4739.132	59.43	-20.12	39.31	54	-14.69	AV
Horizontal	10460.062	63.07	-9.21	53.86	68.2	-14.34	PK
Horizontal	10460.062	49.65	-9.21	40.44	54	-13.56	AV
Horizontal	15690.060	63.82	-7.79	56.03	74	-17.97	PK
Horizontal	15690.060	49.32	-7.79	41.53	54	-12.47	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4434.146	70.10	-20.73	49.37	68.2	-18.83	PK
Vertical	4434.146	59.71	-20.73	38.98	54	-15.02	AV
Vertical	10360.197	64.76	-9.36	55.40	68.2	-12.80	PK
Vertical	10360.197	49.42	-9.36	40.06	54	-13.94	AV
Vertical	15540.062	60.28	-7.84	52.44	74	-21.56	PK
Vertical	15540.062	49.84	-7.84	42.00	54	-12.00	AV
Horizontal	4434.121	74.55	-20.73	53.82	68.2	-14.38	PK
Horizontal	4434.121	59.13	-20.73	38.40	54	-15.60	AV
Horizontal	10360.119	62.86	-9.36	53.50	68.2	-14.70	PK
Horizontal	10360.119	49.34	-9.36	39.98	54	-14.02	AV
Horizontal	15540.055	63.34	-7.84	55.50	74	-18.50	PK
Horizontal	15540.055	49.76	-7.84	41.92	54	-12.08	AV
Middle Channel (5200 MHz)-Above 1G							
Vertical	4592.152	71.48	-20.42	51.06	74	-22.94	PK
Vertical	4592.152	59.07	-20.42	38.65	54	-15.35	AV
Vertical	10400.101	64.05	-9.30	54.75	68.2	-13.45	PK
Vertical	10400.101	49.16	-9.30	39.86	54	-14.14	AV
Vertical	15600.116	64.62	-7.82	56.80	74	-17.20	PK
Vertical	15600.116	49.54	-7.82	41.72	54	-12.28	AV
Horizontal	4592.145	70.94	-20.42	50.52	74	-23.48	PK
Horizontal	4592.145	59.53	-20.42	39.11	54	-14.89	AV
Horizontal	10400.053	63.67	-9.30	54.37	68.2	-13.83	PK
Horizontal	10400.053	49.45	-9.30	40.15	54	-13.85	AV
Horizontal	15600.113	62.10	-7.82	54.28	74	-19.72	PK
Horizontal	15600.113	49.22	-7.82	41.40	54	-12.60	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4739.029	70.99	-20.12	50.87	74	-23.13	PK
Vertical	4739.029	59.76	-20.12	39.63	54	-14.37	AV
Vertical	10480.123	61.58	-9.18	52.40	68.2	-15.80	PK
Vertical	10480.123	49.42	-9.18	40.24	54	-13.76	AV
Vertical	15720.134	60.41	-7.78	52.63	74	-21.37	PK
Vertical	15720.134	49.65	-7.78	41.87	54	-12.13	AV
Horizontal	4739.025	73.20	-20.12	53.08	74	-20.92	PK
Horizontal	4739.025	59.87	-20.12	39.75	54	-14.25	AV
Horizontal	10480.027	60.25	-9.18	51.07	68.2	-17.13	PK
Horizontal	10480.027	49.49	-9.18	40.31	54	-13.69	AV
Horizontal	15720.092	61.29	-7.78	53.51	74	-20.49	PK
Horizontal	15720.092	49.58	-7.78	41.80	54	-12.20	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G							
Vertical	4434.079	71.17	-20.73	50.44	68.2	-17.76	PK
Vertical	4434.079	59.64	-20.73	38.91	54	-15.09	AV
Vertical	10380.056	64.28	-9.33	54.95	68.2	-13.25	PK
Vertical	10380.056	49.73	-9.33	40.40	54	-13.60	AV
Vertical	15570.175	63.68	-7.83	55.85	74	-18.15	PK
Vertical	15570.175	49.09	-7.83	41.26	54	-12.74	AV
Horizontal	4434.038	73.14	-20.73	52.41	74	-21.59	PK
Horizontal	4434.038	59.08	-20.73	38.35	54	-15.65	AV
Horizontal	10380.172	61.41	-9.33	52.08	68.2	-16.12	PK
Horizontal	10380.172	49.87	-9.33	40.54	54	-13.46	AV
Horizontal	15570.105	61.35	-7.83	53.52	74	-20.48	PK
Horizontal	15570.105	49.11	-7.83	41.28	54	-12.72	AV
Middle Channel (5230 MHz)-Above 1G							
Vertical	4739.183	71.75	-20.12	51.63	68.2	-16.57	PK
Vertical	4739.183	59.84	-20.12	39.72	54	-14.28	AV
Vertical	10460.108	64.08	-9.21	54.87	68.2	-13.33	PK
Vertical	10460.108	49.13	-9.21	39.92	54	-14.08	AV
Vertical	15690.071	60.60	-7.79	52.81	74	-21.19	PK
Vertical	15690.071	49.82	-7.79	42.03	54	-11.97	AV
Horizontal	4739.030	72.69	-20.12	52.57	68.2	-15.63	PK
Horizontal	4739.030	59.53	-20.12	39.41	54	-14.59	AV
Horizontal	10460.118	64.13	-9.21	54.92	68.2	-13.28	PK
Horizontal	10460.118	49.00	-9.21	39.79	54	-14.21	AV
Horizontal	15690.054	61.22	-7.79	53.43	74	-20.57	PK
Horizontal	15690.054	49.24	-7.79	41.45	54	-12.55	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac 80
------------	------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5210 MHz)-Above 1G							
Vertical	4434.143	74.50	-20.73	53.77	68.2	-14.43	PK
Vertical	4434.143	59.28	-20.73	38.55	54	-15.45	AV
Vertical	10420.109	61.44	-9.27	52.17	68.2	-16.03	PK
Vertical	10420.109	49.63	-9.27	40.36	54	-13.64	AV
Vertical	15630.078	63.88	-7.81	56.07	74	-17.93	PK
Vertical	15630.078	49.86	-7.81	42.05	54	-11.95	AV
Horizontal	4434.062	73.04	-20.73	52.31	68.2	-15.89	PK
Horizontal	4434.062	59.16	-20.73	38.43	54	-15.57	AV
Horizontal	10420.067	42.80	9.27	52.07	68.2	-16.13	PK
Horizontal	10420.067	29.42	9.27	38.69	54	-15.31	AV
Horizontal	15630.088	60.26	-7.81	52.45	74	-21.55	PK
Horizontal	15630.088	49.09	-7.81	41.28	54	-12.72	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

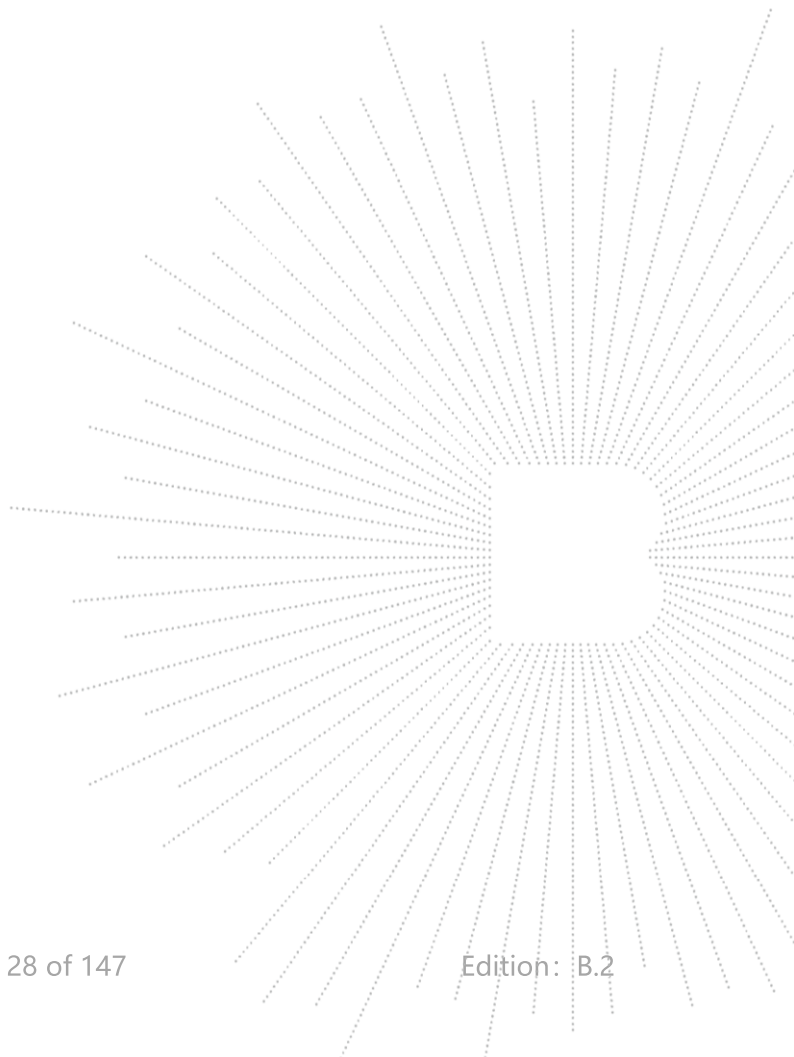

Test Mode:	TX (5.8G) -- 802.11a
------------	----------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.160	73.30	-20.24	53.06	74	-20.94	PK
Vertical	4679.160	59.27	-20.24	39.03	54	-14.97	AV
Vertical	11490.183	60.59	-8.79	51.80	68.2	-16.40	PK
Vertical	11490.183	49.28	-8.79	40.49	54	-13.51	AV
Vertical	17235.091	59.46	-3.18	56.28	68.2	-11.92	PK
Vertical	17235.091	44.07	-3.18	40.89	54	-13.11	AV
Horizontal	4679.075	72.98	-20.73	52.25	74	-21.75	PK
Horizontal	4679.075	59.67	-20.73	38.94	54	-15.06	AV
Horizontal	11490.066	61.03	-8.79	52.24	68.2	-15.96	PK
Horizontal	11490.066	49.62	-8.79	40.83	54	-13.17	AV
Horizontal	17235.100	57.94	-3.18	54.76	68.2	-13.44	PK
Horizontal	17235.100	44.78	-3.18	41.60	54	-12.40	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.175	73.97	-20.42	53.56	74	-20.44	PK
Vertical	4592.175	59.99	-20.42	39.58	54	-14.42	AV
Vertical	11570.061	64.65	-8.86	55.79	68.2	-12.41	PK
Vertical	11570.061	49.54	-8.86	40.68	54	-13.32	AV
Vertical	17355.065	57.93	-2.52	55.41	68.2	-12.79	PK
Vertical	17355.065	44.44	-2.52	41.92	54	-12.08	AV
Horizontal	4592.095	71.52	-20.42	51.11	74	-22.89	PK
Horizontal	4592.095	59.46	-20.42	39.05	54	-14.95	AV
Horizontal	11570.177	64.51	-8.86	55.65	68.2	-12.55	PK
Horizontal	11570.177	49.92	-8.86	41.06	54	-12.94	AV
Horizontal	17355.146	59.03	-2.52	56.51	68.2	-11.69	PK
Horizontal	17355.146	44.66	-2.52	42.14	54	-11.86	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.141	73.36	-18.93	54.43	68.2	-13.77	PK
Vertical	6039.141	59.72	-18.93	40.79	54	-13.21	AV
Vertical	11650.163	60.68	-8.92	51.76	74	-22.24	PK
Vertical	11650.163	49.17	-8.92	40.25	54	-13.75	AV
Vertical	17475.112	58.96	-1.86	57.10	68.2	-11.10	PK
Vertical	17475.112	44.20	-1.86	42.34	54	-11.66	AV
Horizontal	6039.063	70.98	-18.93	52.05	68.2	-16.15	PK
Horizontal	6039.063	59.93	-18.93	41.00	54	-13.00	AV
Horizontal	11650.084	60.43	-8.92	51.51	74	-22.49	PK
Horizontal	11650.084	49.93	-8.92	41.01	54	-12.99	AV
Horizontal	17475.040	56.92	-1.86	55.06	68.2	-13.14	PK
Horizontal	17475.040	44.31	-1.86	42.45	54	-11.55	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) --802.11n-HT20
------------	--------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.054	73.85	-20.24	53.61	74	-20.39	PK
Vertical	4679.054	59.02	-20.24	38.78	54	-15.22	AV
Vertical	11490.153	62.84	-8.79	54.05	68.2	-14.15	PK
Vertical	11490.153	49.25	-8.79	40.46	54	-13.54	AV
Vertical	17235.045	56.79	-3.18	53.61	68.2	-14.59	PK
Vertical	17235.045	44.18	-3.18	41.00	54	-13.00	AV
Horizontal	4679.000	70.36	-20.24	50.12	74	-23.88	PK
Horizontal	4679.000	59.36	-20.24	39.12	54	-14.88	AV
Horizontal	11490.175	60.03	-8.79	51.24	68.2	-16.96	PK
Horizontal	11490.175	49.44	-8.79	40.65	54	-13.35	AV
Horizontal	17235.032	59.97	-3.18	56.79	68.2	-11.41	PK
Horizontal	17235.032	44.02	-3.18	40.84	54	-13.16	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.045	73.83	-20.42	53.42	74	-20.58	PK
Vertical	4592.045	59.32	-20.42	38.90	54	-15.10	AV
Vertical	11570.015	63.12	-8.86	54.26	68.2	-13.94	PK
Vertical	11570.015	49.35	-8.86	40.49	54	-13.51	AV
Vertical	17355.161	59.66	-2.52	57.14	68.2	-11.06	PK
Vertical	17355.161	44.77	-2.52	42.25	54	-11.75	AV
Horizontal	4592.036	72.23	-20.42	51.81	74	-22.19	PK
Horizontal	4592.036	59.83	-20.42	39.41	54	-14.59	AV
Horizontal	11570.139	62.88	-8.86	54.02	68.2	-14.18	PK
Horizontal	11570.139	49.83	-8.86	40.97	54	-13.03	AV
Horizontal	17355.112	56.52	-2.52	54.00	68.2	-14.20	PK
Horizontal	17355.112	44.80	-2.52	42.28	54	-11.72	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.047	73.20	-18.93	54.27	68.2	-13.93	PK
Vertical	6039.047	59.51	-18.93	40.58	54	-13.42	AV
Vertical	11650.066	63.45	-8.92	54.53	74	-19.47	PK
Vertical	11650.066	49.91	-8.92	40.99	54	-13.01	AV
Vertical	17475.121	59.99	-1.86	58.13	68.2	-10.07	PK
Vertical	17475.121	44.08	-1.86	42.22	54	-11.78	AV
Horizontal	6039.002	71.89	-18.93	52.95	68.2	-15.25	PK
Horizontal	6039.002	59.24	-18.93	40.31	54	-13.69	AV
Horizontal	11650.150	62.63	-8.92	53.71	74	-20.29	PK
Horizontal	11650.150	49.71	-8.92	40.79	54	-13.21	AV
Horizontal	17475.175	57.63	-1.86	55.77	68.2	-12.43	PK
Horizontal	17475.175	44.08	-1.86	42.22	54	-11.78	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) -- 802.11n-HT40
------------	---------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.057	72.18	-20.24	51.93	74	-22.07	PK
Vertical	4679.057	59.34	-20.24	39.10	54	-14.90	AV
Vertical	11510.109	64.41	-8.81	55.60	74	-18.40	PK
Vertical	11510.109	49.09	-8.81	40.28	54	-13.72	AV
Vertical	17265.012	59.25	-3.01	56.24	68.2	-11.96	PK
Vertical	17265.012	44.64	-3.01	41.63	54	-12.37	AV
Horizontal	4679.063	71.70	-20.24	51.46	74	-22.54	PK
Horizontal	4679.063	59.77	-20.24	39.53	54	-14.47	AV
Horizontal	11510.154	64.28	-8.81	55.47	74	-18.53	PK
Horizontal	11510.154	49.75	-8.81	40.94	54	-13.06	AV
Horizontal	17265.052	56.73	-3.01	53.72	68.2	-14.48	PK
Horizontal	17265.052	44.60	-3.01	41.59	54	-12.41	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.093	72.89	-18.93	53.96	68.2	-14.24	PK
Vertical	6039.093	59.17	-18.93	40.24	54	-13.76	AV
Vertical	11590.029	62.80	-8.87	53.93	74	-20.07	PK
Vertical	11590.029	49.19	-8.87	40.32	54	-13.68	AV
Vertical	17385.199	56.19	-2.35	53.84	68.2	-14.36	PK
Vertical	17385.199	44.24	-2.35	41.89	54	-12.11	AV
Horizontal	6039.108	74.96	-18.93	56.03	68.2	-12.17	PK
Horizontal	6039.108	59.76	-18.93	40.83	54	-13.17	AV
Horizontal	11590.151	62.58	-8.87	53.71	74	-20.29	PK
Horizontal	11590.151	49.89	-8.87	41.02	54	-12.98	AV
Horizontal	17385.055	56.96	-2.35	54.61	68.2	-13.59	PK
Horizontal	17385.055	44.71	-2.35	42.36	54	-11.64	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX (5.8G) --802.11ac-HT20
------------	---------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4679.148	70.91	-20.24	50.67	74	-23.33	PK
Vertical	4679.148	59.89	-20.24	39.65	54	-14.35	AV
Vertical	11490.022	62.01	-8.79	53.22	68.2	-14.98	PK
Vertical	11490.022	49.36	-8.79	40.57	54	-13.43	AV
Vertical	17235.192	56.89	-3.18	53.71	68.2	-14.49	PK
Vertical	17235.192	44.69	-3.18	41.51	54	-12.49	AV
Horizontal	4679.069	71.69	-20.24	51.45	74	-22.55	PK
Horizontal	4679.069	59.47	-20.24	39.23	54	-14.77	AV
Horizontal	11490.150	63.42	-8.79	54.63	68.2	-13.57	PK
Horizontal	11490.150	49.35	-8.79	40.56	54	-13.44	AV
Horizontal	17235.197	59.04	-3.18	55.86	68.2	-12.34	PK
Horizontal	17235.197	44.06	-3.18	40.88	54	-13.12	AV
Middle Channel (5785 MHz)-Above 1G							
Vertical	4592.130	71.99	-20.42	51.58	74	-22.42	PK
Vertical	4592.130	59.90	-20.42	39.48	54	-14.52	AV
Vertical	11570.030	60.41	-8.86	51.55	68.2	-16.65	PK
Vertical	11570.030	49.33	-8.86	40.47	54	-13.53	AV
Vertical	17355.019	55.73	-2.52	53.21	68.2	-14.99	PK
Vertical	17355.019	44.90	-2.52	42.38	54	-11.62	AV
Horizontal	4592.143	74.33	-20.42	53.91	74	-20.09	PK
Horizontal	4592.143	59.93	-20.42	39.51	54	-14.49	AV
Horizontal	11570.099	61.43	-8.86	52.57	68.2	-15.63	PK
Horizontal	11570.099	49.72	-8.86	40.86	54	-13.14	AV
Horizontal	17355.134	58.97	-2.52	56.45	68.2	-11.75	PK
Horizontal	17355.134	44.90	-2.52	42.38	54	-11.62	AV
High Channel (5825 MHz)-Above 1G							
Vertical	6039.068	73.09	-18.93	54.16	68.2	-14.04	PK
Vertical	6039.068	59.47	-18.93	40.54	54	-13.46	AV
Vertical	11650.085	60.00	-8.92	51.08	74	-22.92	PK
Vertical	11650.085	49.09	-8.92	40.17	54	-13.83	AV
Vertical	17475.106	56.70	-1.86	54.84	68.2	-13.36	PK
Vertical	17475.106	44.29	-1.86	42.43	54	-11.57	AV
Horizontal	6039.110	74.99	-18.93	56.06	68.2	-12.14	PK
Horizontal	6039.110	59.15	-18.93	40.21	54	-13.79	AV
Horizontal	11650.073	61.35	-8.92	52.43	74	-21.57	PK
Horizontal	11650.073	49.83	-8.92	40.91	54	-13.09	AV
Horizontal	17475.064	58.33	-1.86	56.47	68.2	-11.73	PK
Horizontal	17475.064	44.54	-1.86	42.68	54	-11.32	AV

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G							
Vertical	4679.096	70.14	-20.24	49.90	74	-24.10	PK
Vertical	4679.096	59.92	-20.24	39.68	54	-14.32	AV
Vertical	11510.141	61.68	-8.81	52.87	74	-21.13	PK
Vertical	11510.141	49.73	-8.81	40.92	54	-13.08	AV
Vertical	17265.157	57.46	-3.01	54.45	68.2	-13.75	PK
Vertical	17265.157	44.02	-3.01	41.01	54	-12.99	AV
Horizontal	4679.143	70.07	-20.24	49.83	74	-24.17	PK
Horizontal	4679.143	59.88	-20.24	39.64	54	-14.36	AV
Horizontal	11510.195	63.40	-8.81	54.59	74	-19.41	PK
Horizontal	11510.195	49.99	-8.81	41.18	54	-12.82	AV
Horizontal	17265.020	58.45	-3.01	55.44	68.2	-12.76	PK
Horizontal	17265.020	44.54	-3.01	41.53	54	-12.47	AV
Middle Channel (5795 MHz)-Above 1G							
Vertical	6039.025	70.30	-18.93	51.37	68.2	-16.83	PK
Vertical	6039.025	59.54	-18.93	40.61	54	-13.39	AV
Vertical	11590.179	63.36	-8.87	54.49	74	-19.51	PK
Vertical	11590.179	49.03	-8.87	40.16	54	-13.84	AV
Vertical	17385.044	55.52	-2.35	53.17	68.2	-15.03	PK
Vertical	17385.044	44.52	-2.35	42.17	54	-11.83	AV
Horizontal	6039.054	72.19	-18.93	53.26	68.2	-14.94	PK
Horizontal	6039.054	59.11	-18.93	40.18	54	-13.82	AV
Horizontal	11590.153	64.58	-8.87	55.71	74	-18.29	PK
Horizontal	11590.153	49.58	-8.87	40.71	54	-13.29	AV
Horizontal	17385.100	58.20	-2.35	55.85	68.2	-12.35	PK
Horizontal	17385.100	44.83	-2.35	42.48	54	-11.52	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX (5.8G) -- 802.11ac 80
-------------	--------------------------


Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (5775 MHz)-Above 1G							
Vertical	4679.122	72.51	-20.24	52.27	74	-21.73	PK
Vertical	4679.122	59.30	-20.24	39.06	54	-14.94	AV
Vertical	11550.051	63.54	-8.84	54.70	74	-19.30	PK
Vertical	11550.051	49.53	-8.84	40.69	54	-13.31	AV
Vertical	17325.170	55.20	-2.68	52.52	68.2	-15.68	PK
Vertical	17325.170	44.01	-2.68	41.33	54	-12.67	AV
Horizontal	4679.057	70.29	-20.24	50.05	74	-23.95	PK
Horizontal	4679.057	59.22	-20.24	38.97	54	-15.03	AV
Horizontal	11550.155	63.22	-8.84	54.38	74	-19.62	PK
Horizontal	11550.155	49.15	-8.84	40.31	54	-13.69	AV
Horizontal	17325.179	57.34	-2.68	54.66	68.2	-13.54	PK
Horizontal	17325.179	44.48	-2.68	41.80	54	-12.20	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

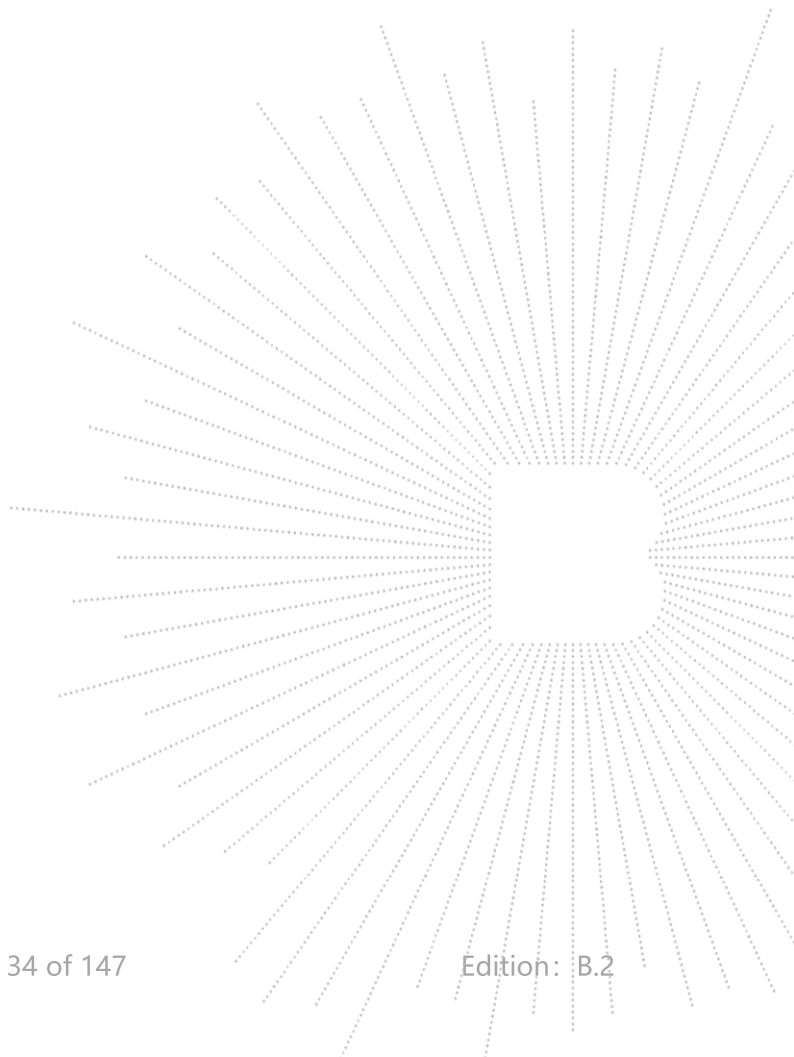

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test Procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

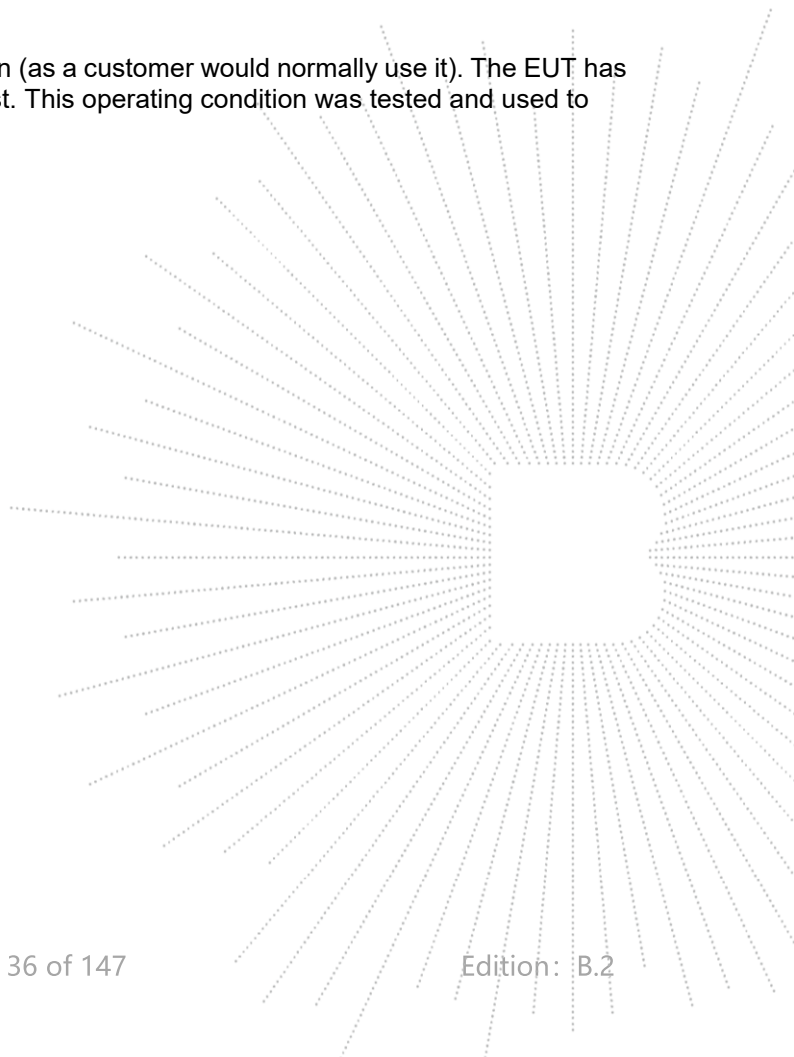


8.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 3.8V
Test Mode:	(5180-5240MHz); (5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/1MHz)	Limit (dBm/1MHz)	Verdict
NVNT	a	5180	-0.95	11	Pass
NVNT	a	5200	-0.95	11	Pass
NVNT	a	5240	-0.56	11	Pass
NVNT	n20	5180	-2.44	11	Pass
NVNT	n20	5200	-2.21	11	Pass
NVNT	n20	5240	-3.62	11	Pass
NVNT	n40	5190	-5.39	11	Pass
NVNT	n40	5230	-6.31	11	Pass
NVNT	ac20	5180	-2.27	11	Pass
NVNT	ac20	5200	-2.47	11	Pass
NVNT	ac20	5240	-2.06	11	Pass
NVNT	ac40	5190	-5.23	11	Pass
NVNT	ac40	5230	-6.41	11	Pass
NVNT	ac80	5210	-10.96	11	Pass



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510KHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	3.94	3.85	30	Pass
NVNT	a	5785	3.08	2.99	30	Pass
NVNT	a	5825	2.48	2.39	30	Pass
NVNT	n20	5745	2.75	2.66	30	Pass
NVNT	n20	5785	2.90	2.81	30	Pass
NVNT	n20	5825	1.43	1.34	30	Pass
NVNT	n40	5755	-1.61	-1.70	30	Pass
NVNT	n40	5795	-1.52	-1.61	30	Pass
NVNT	ac20	5745	1.04	0.95	30	Pass
NVNT	ac20	5785	0.95	0.86	30	Pass
NVNT	ac20	5825	0.03	-0.06	30	Pass
NVNT	ac40	5755	-1.52	-1.61	30	Pass
NVNT	ac40	5795	-2.20	-2.29	30	Pass
NVNT	ac80	5775	-7.11	-7.20	30	Pass



Note: Correction Factor = $10\log(500\text{KHz}/\text{RBW in measurement}) = -0.086$


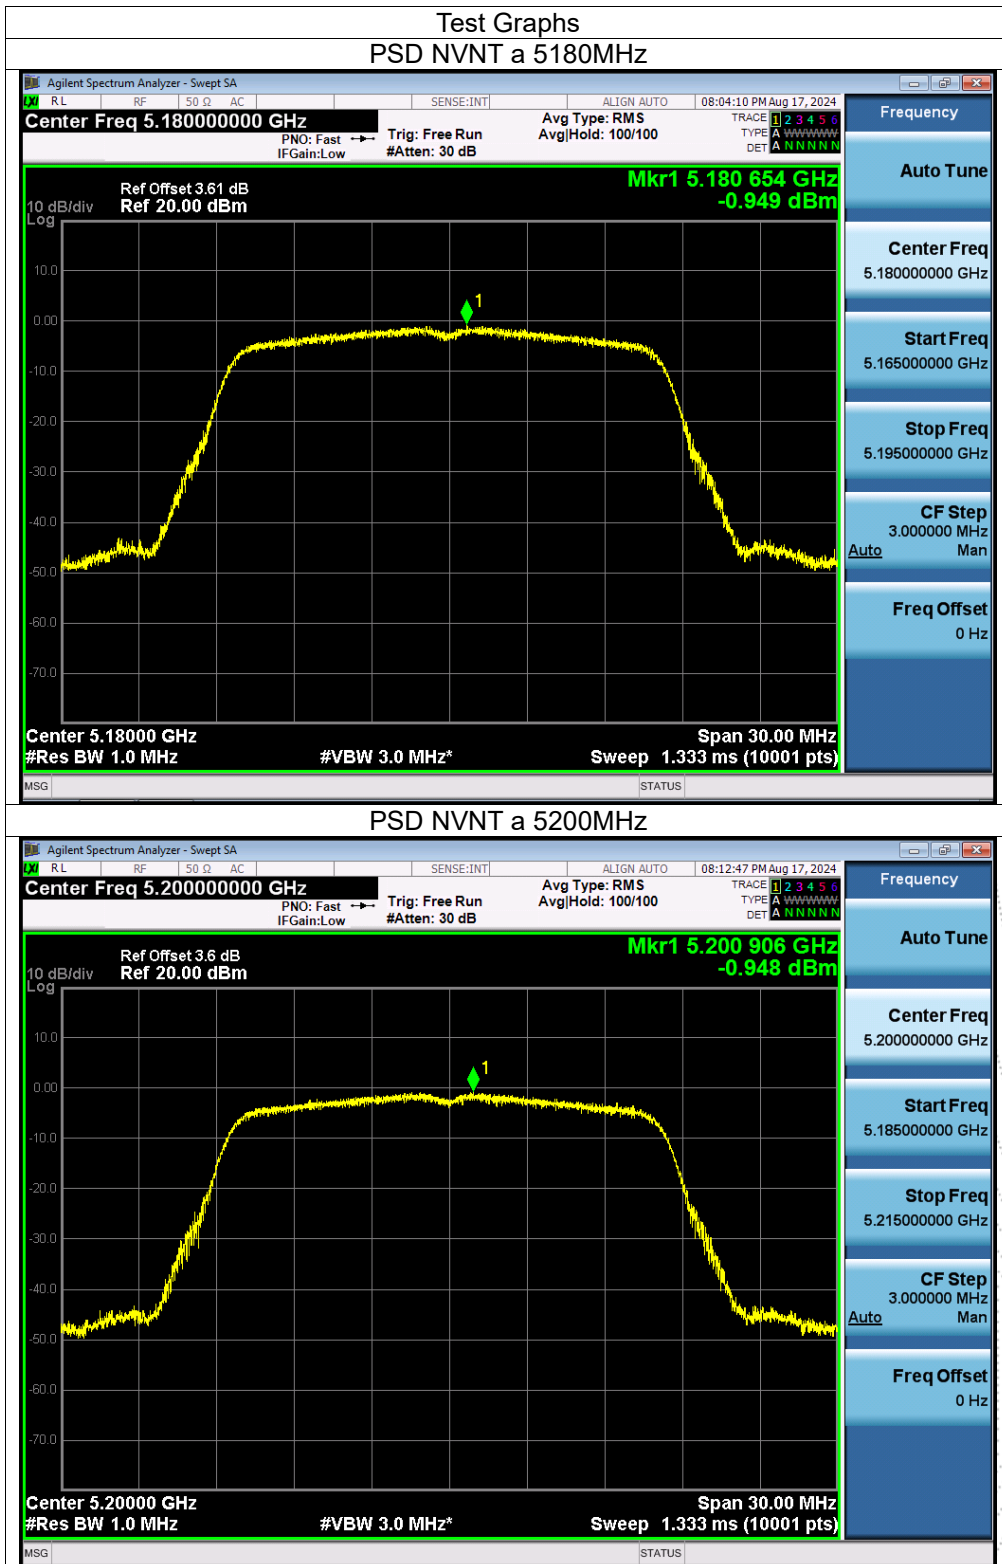


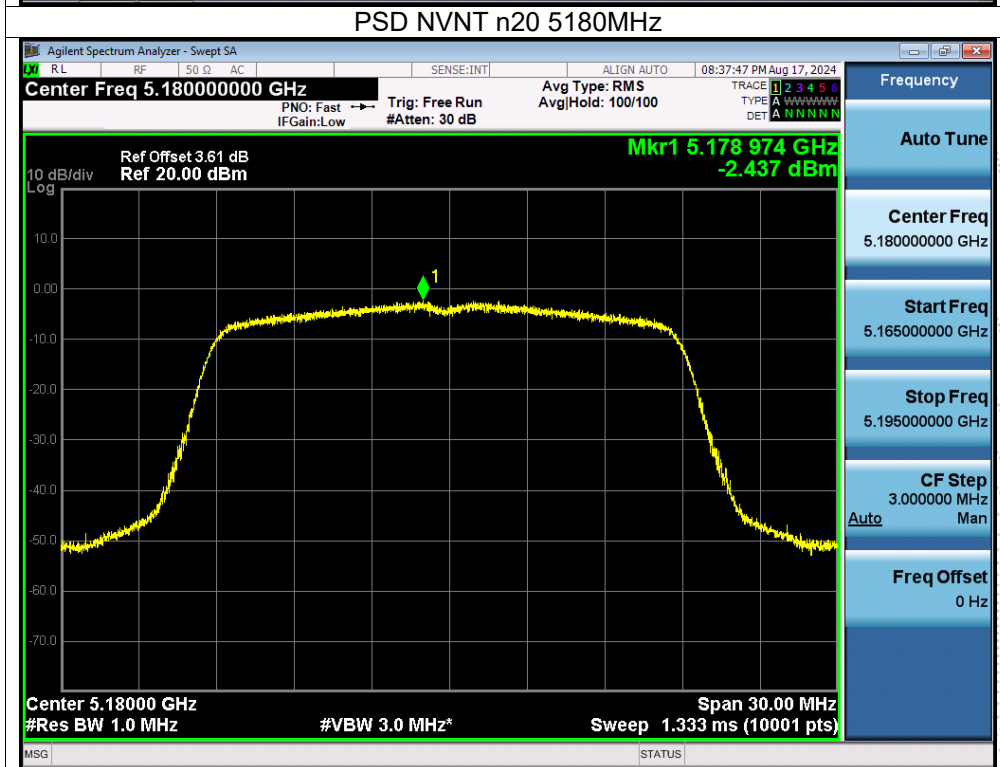
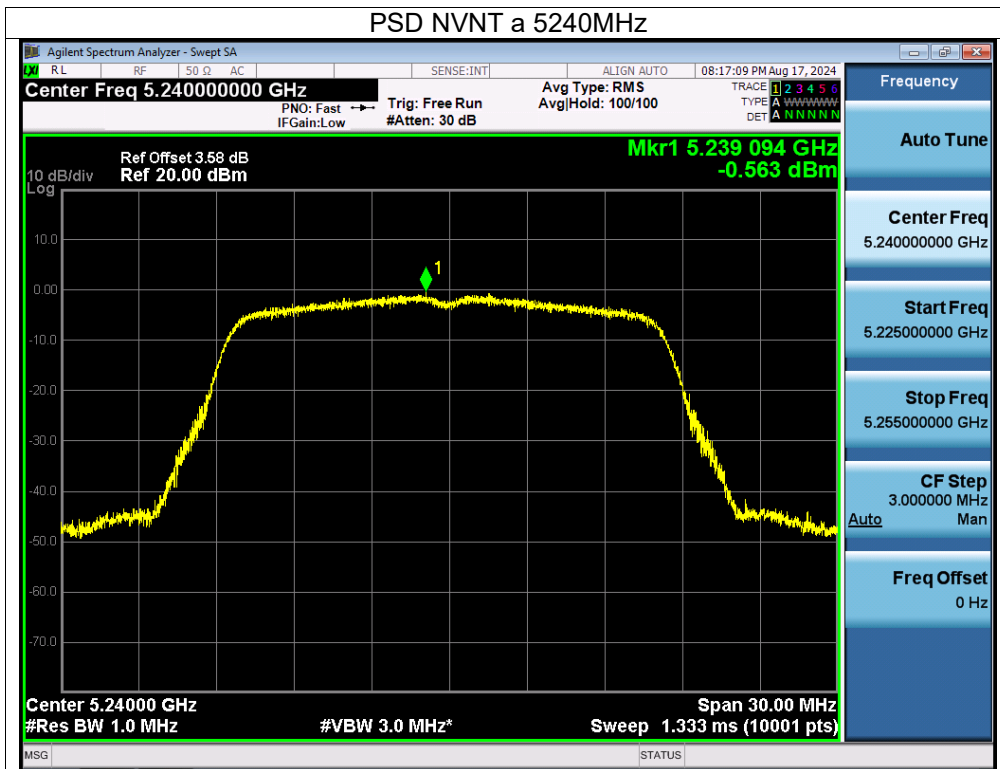


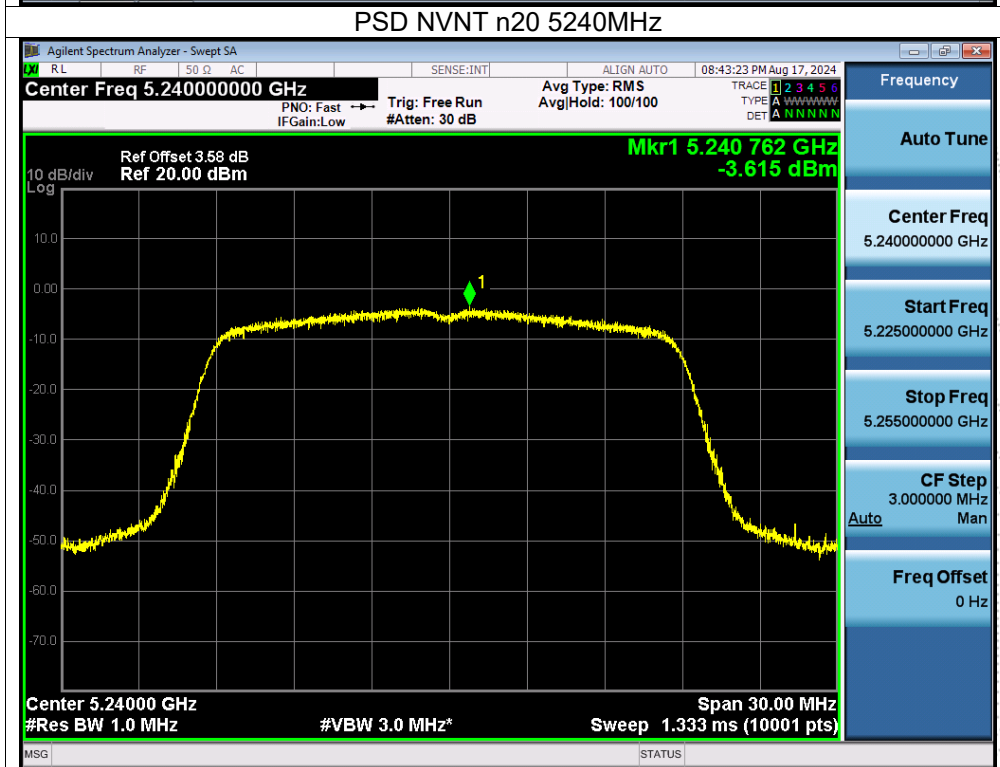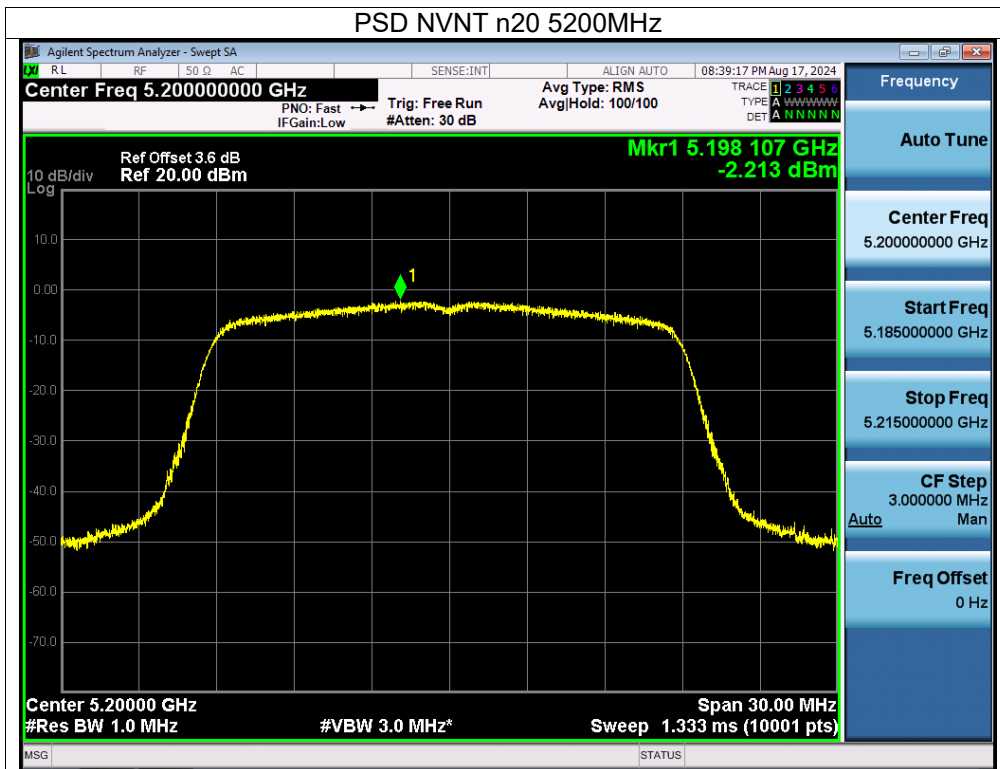

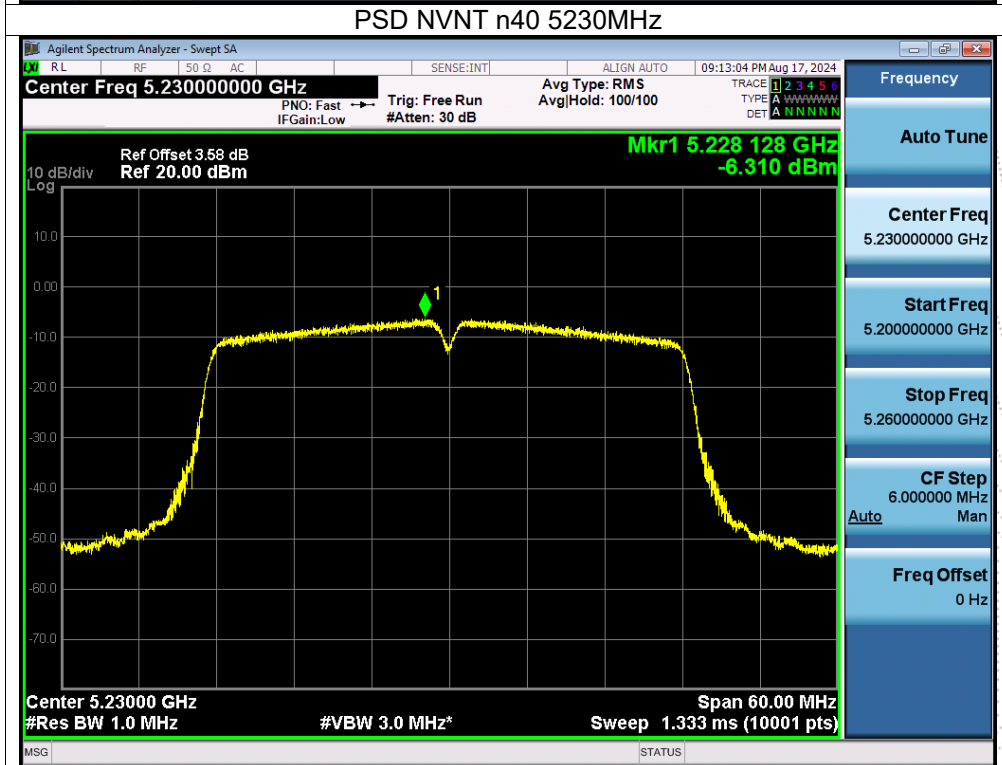
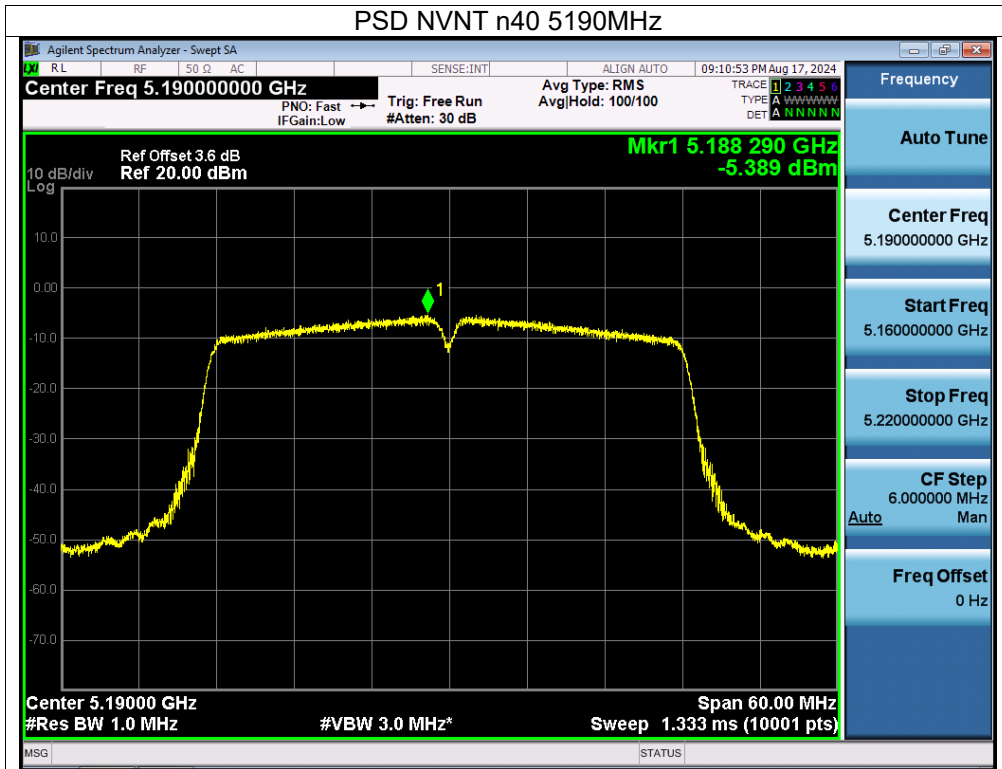


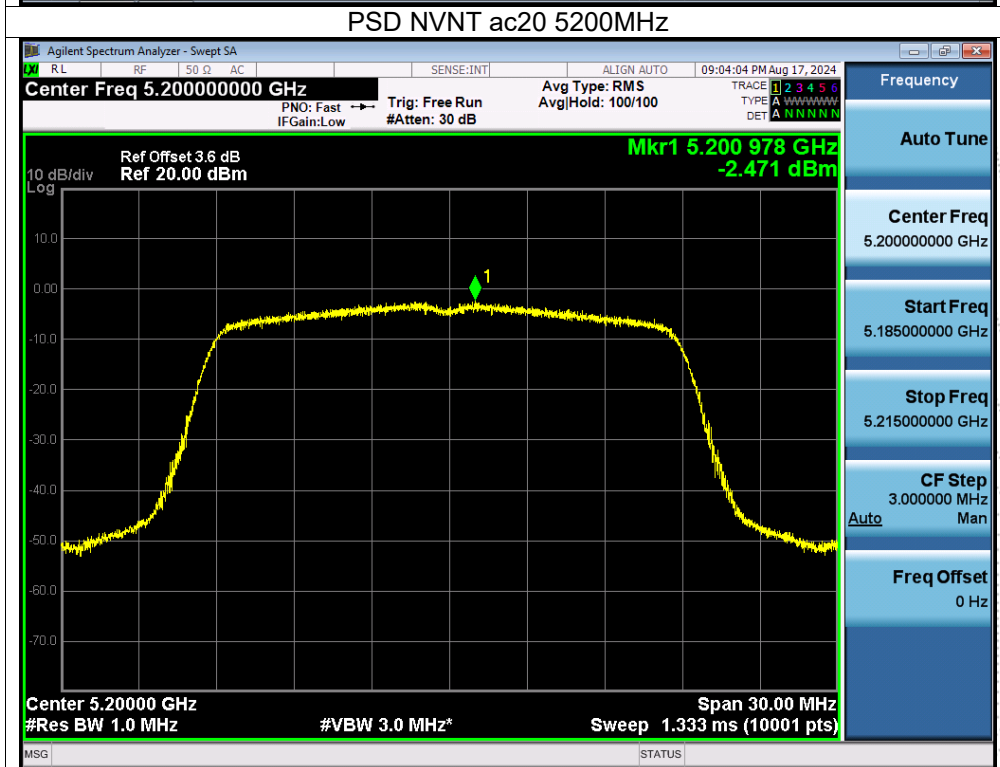
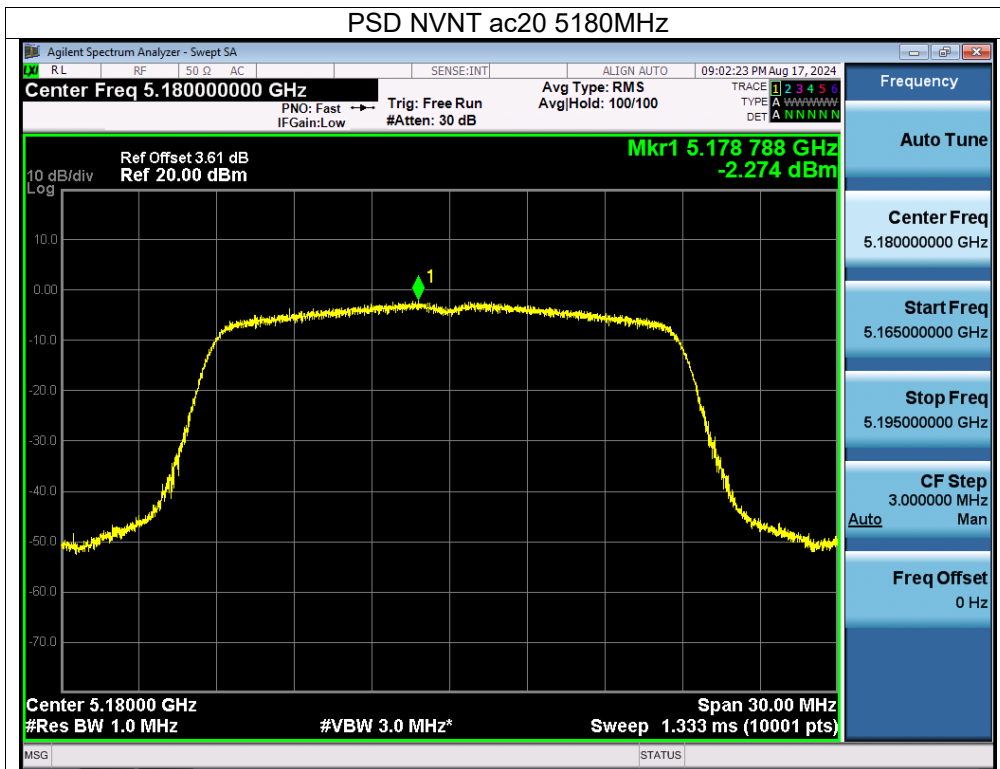


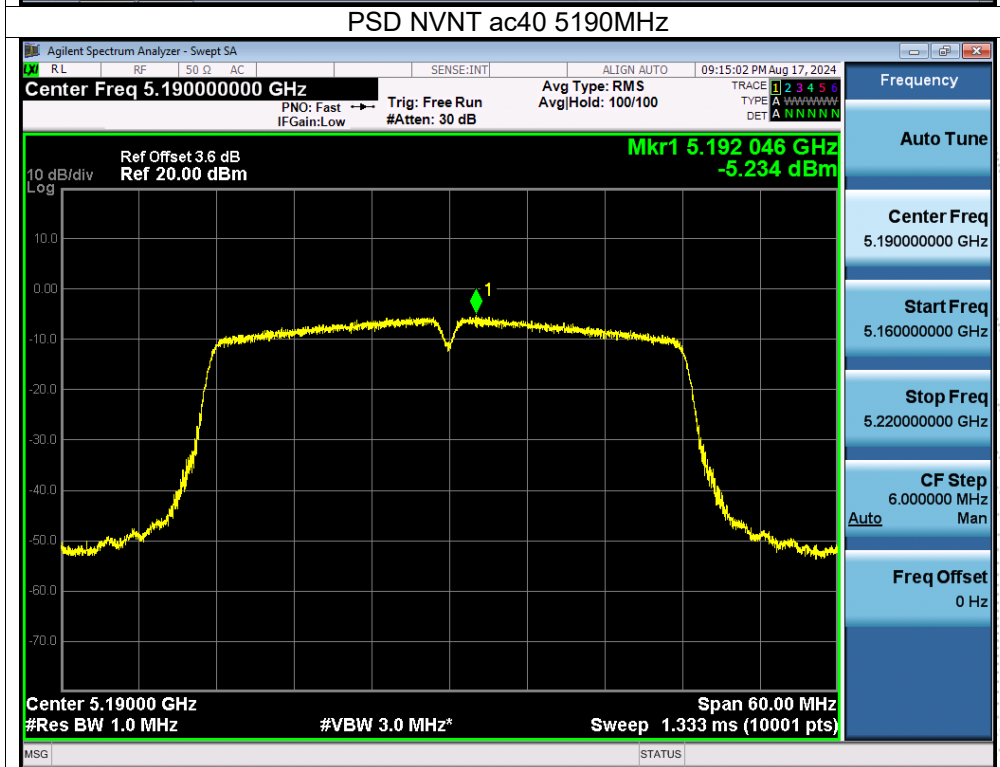
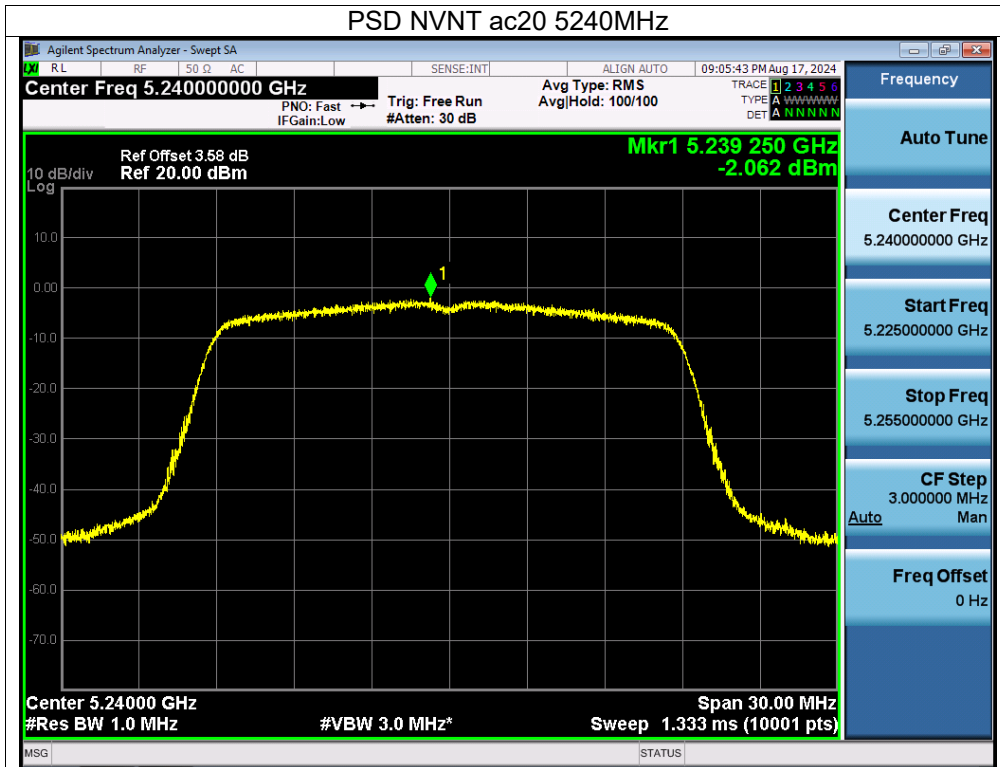


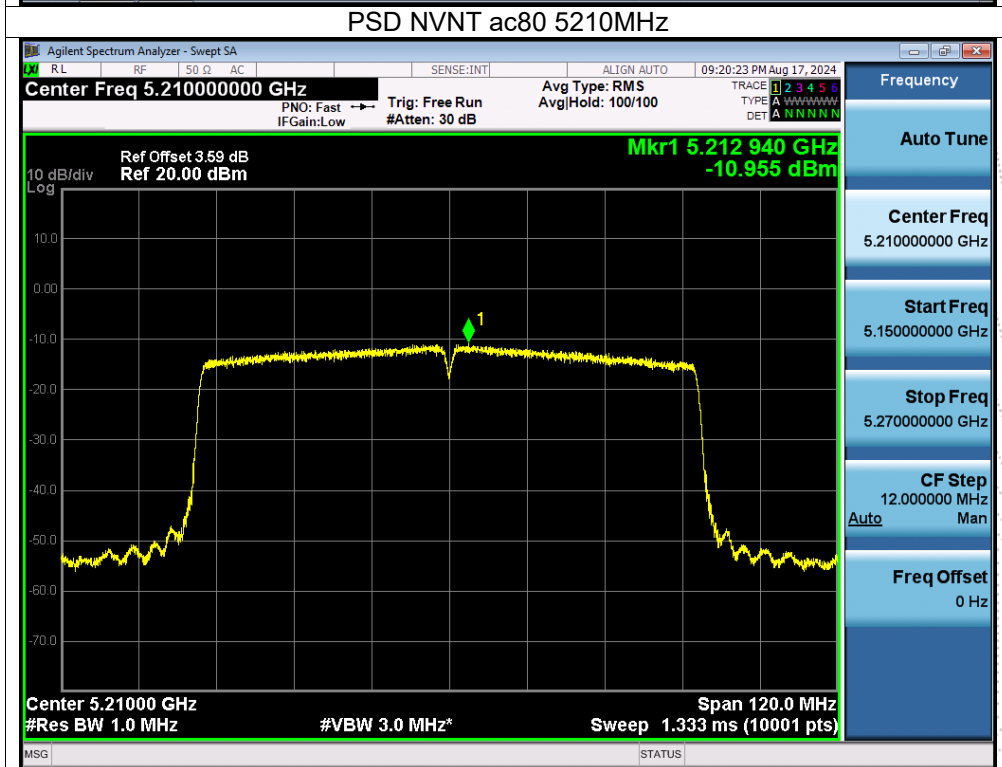
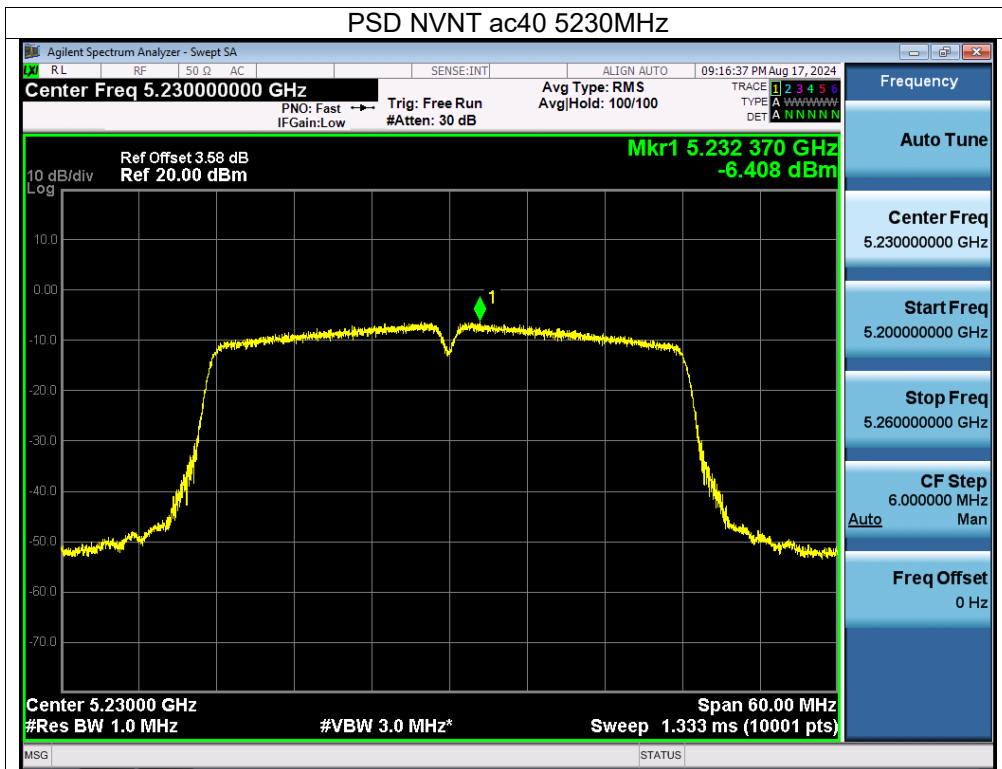






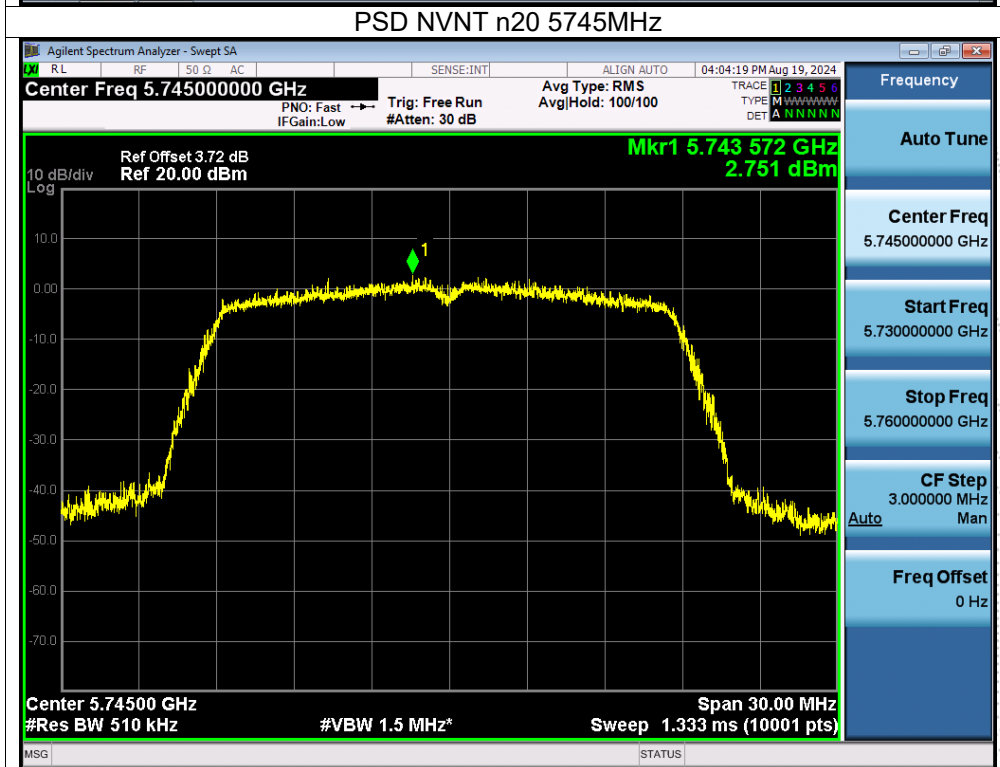
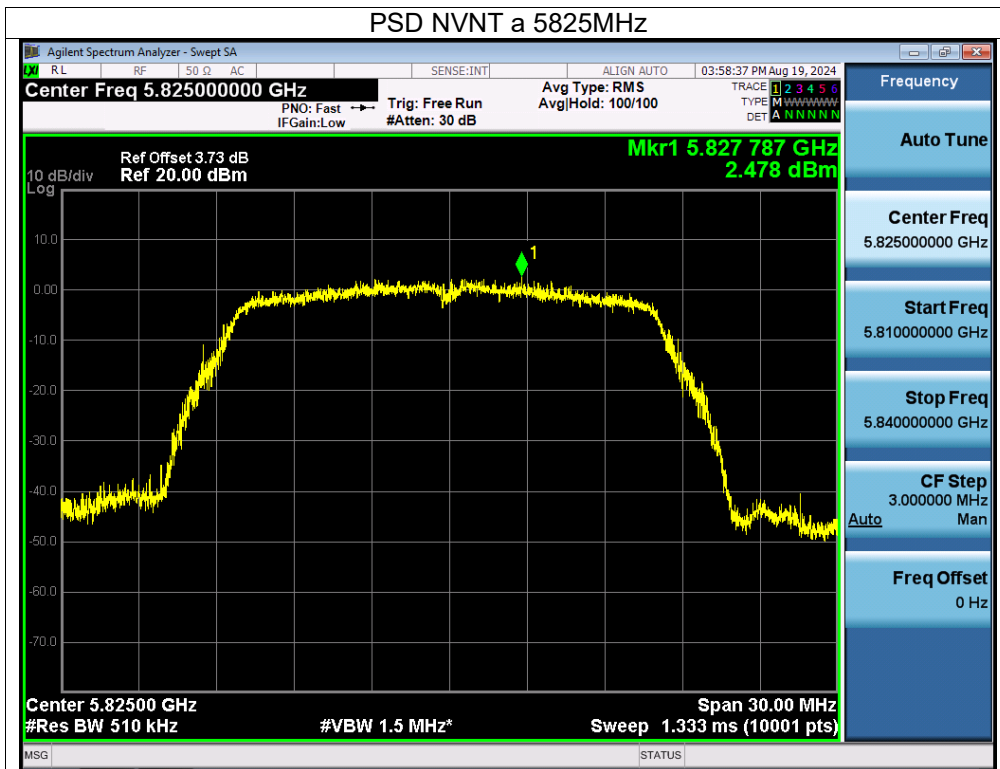


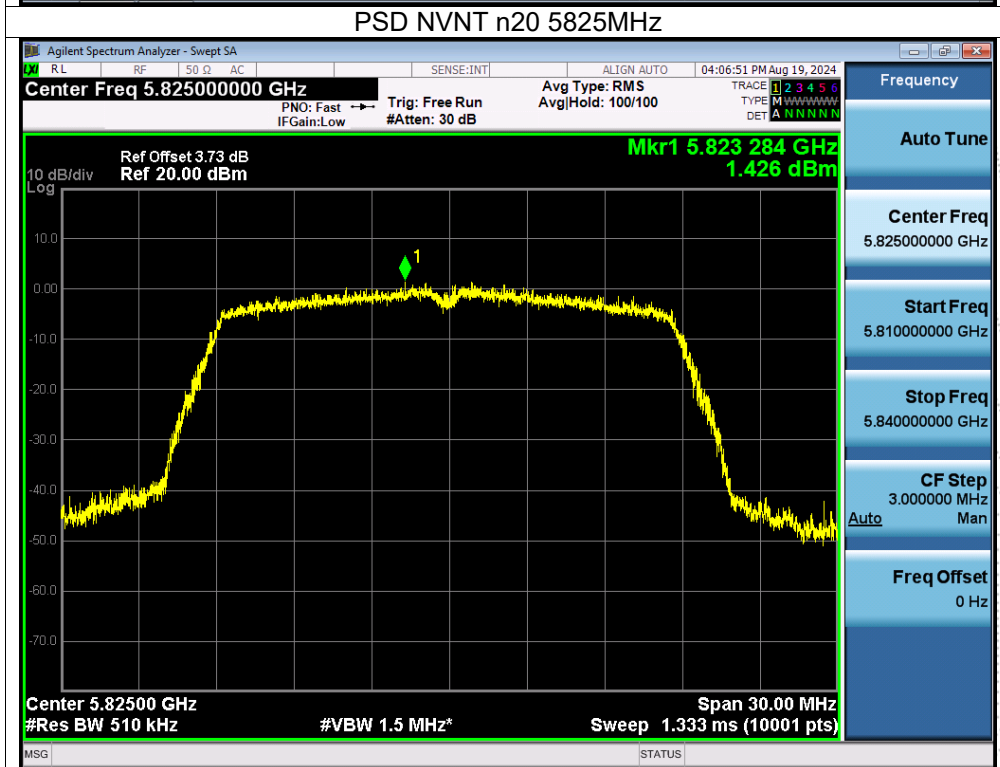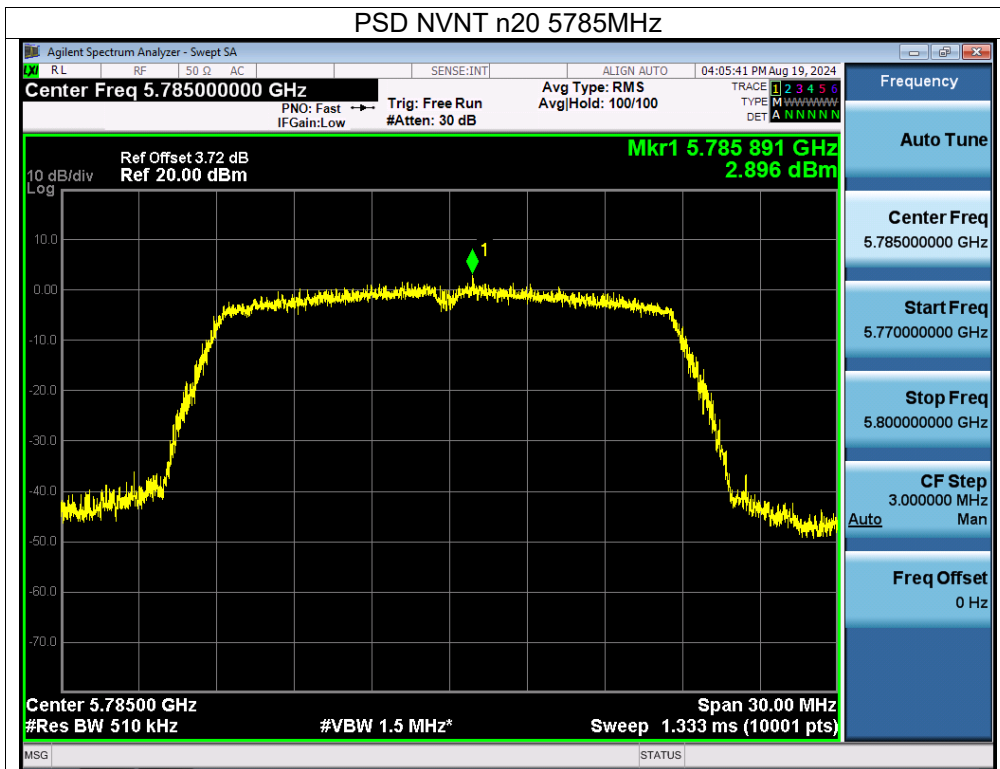

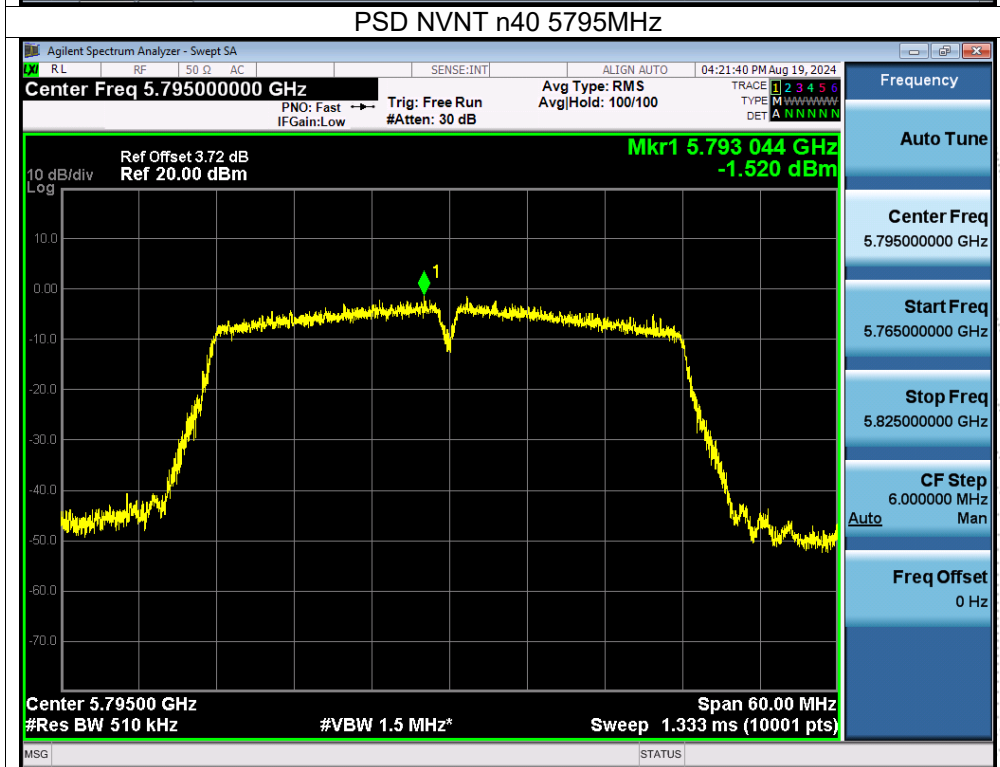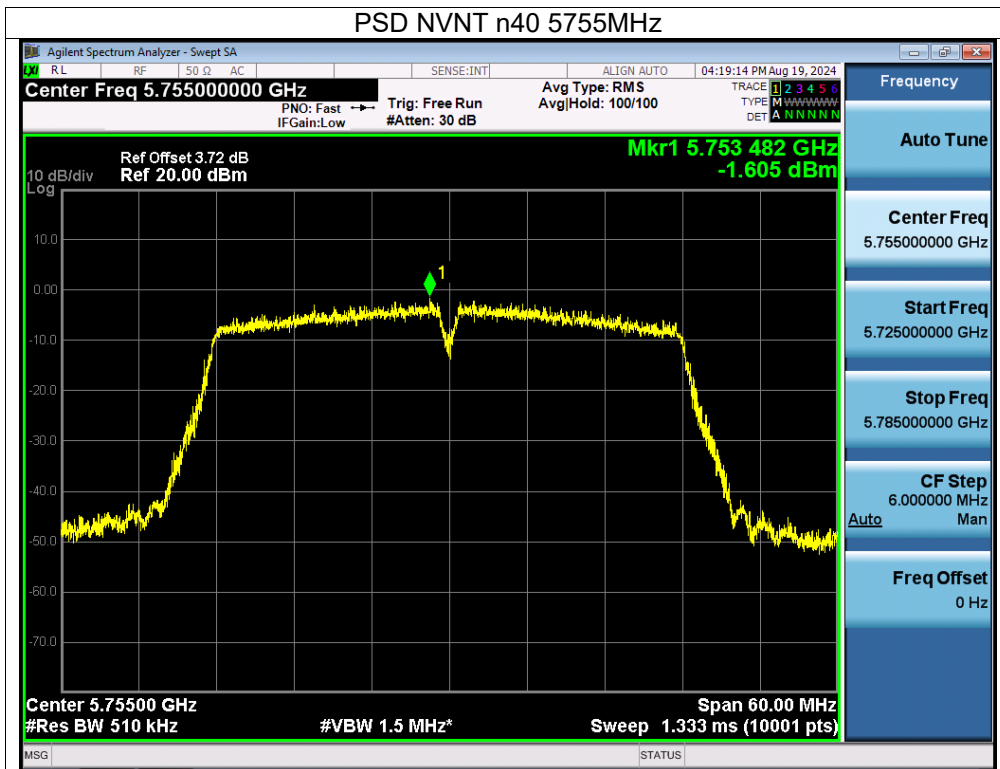

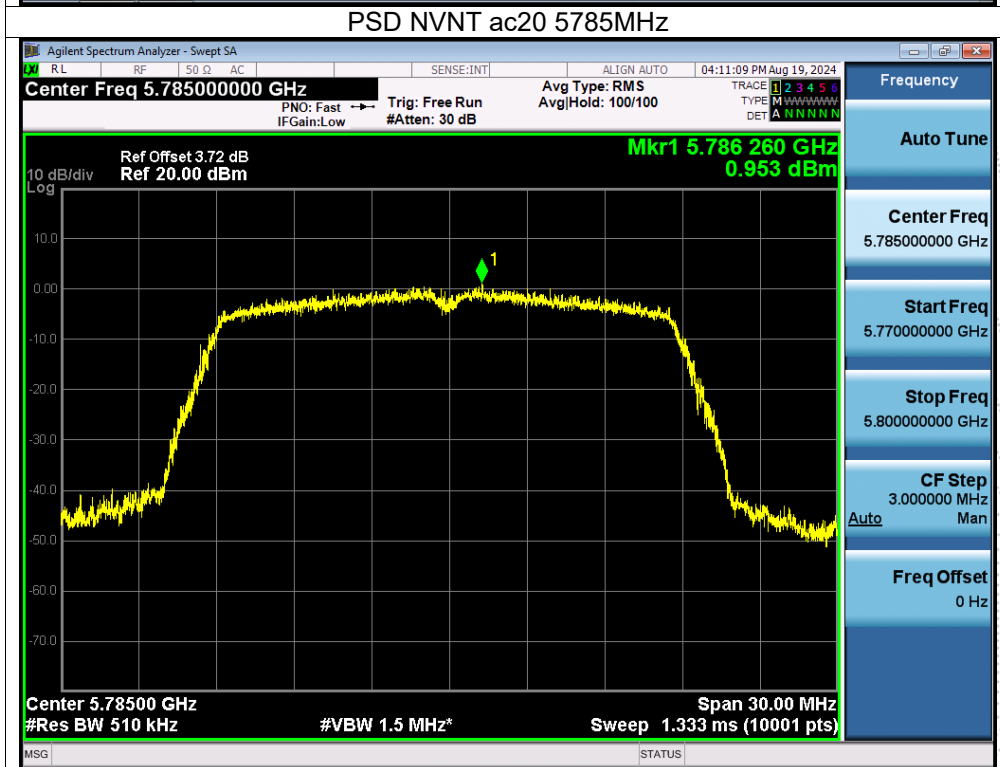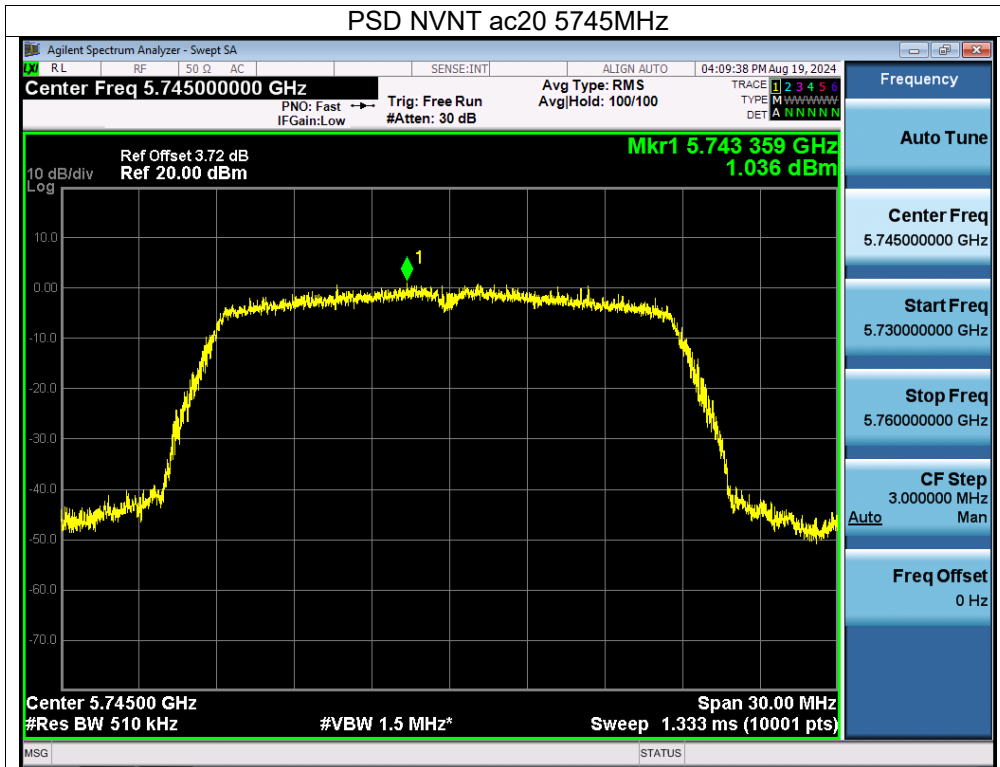


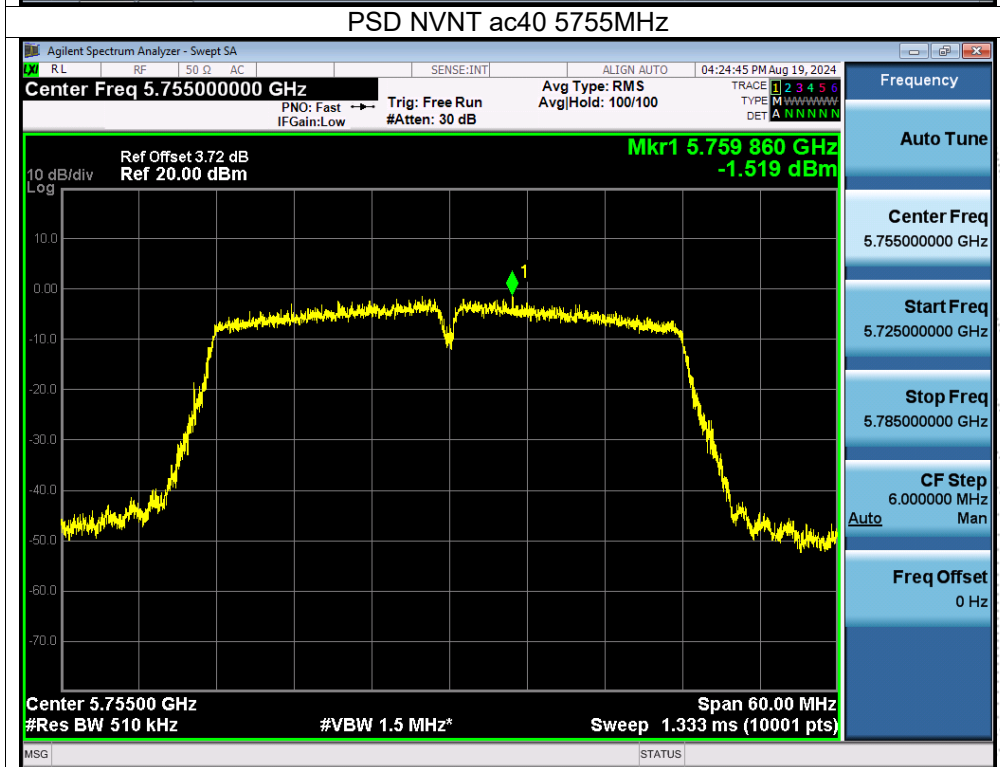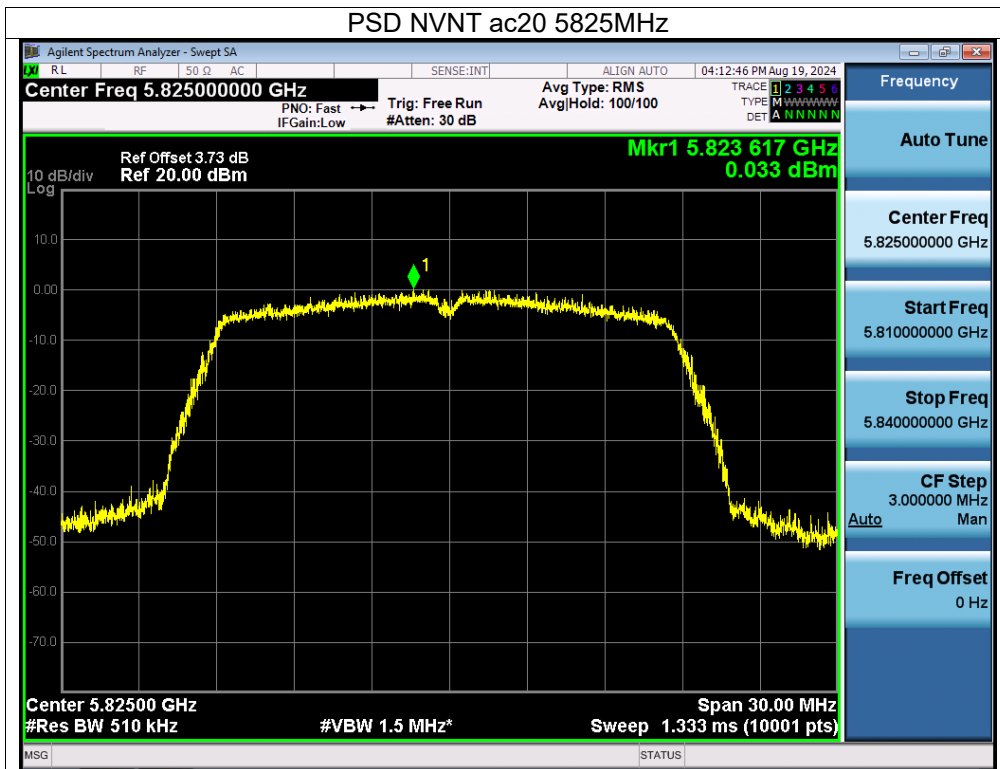

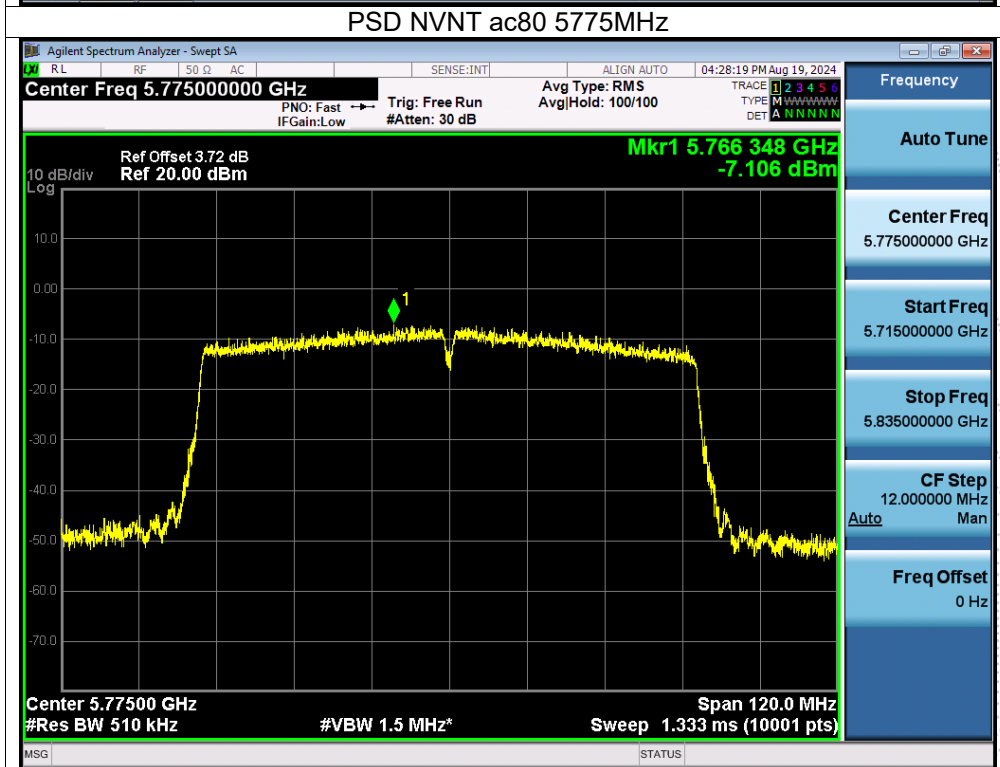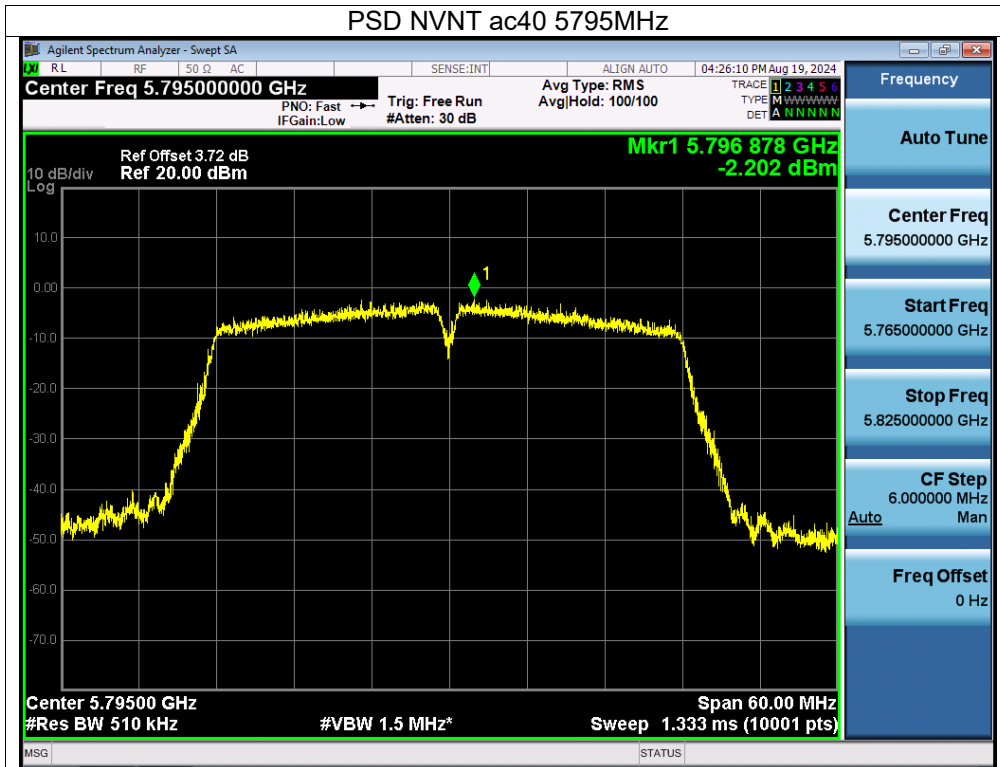

9. 26dB & 6dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

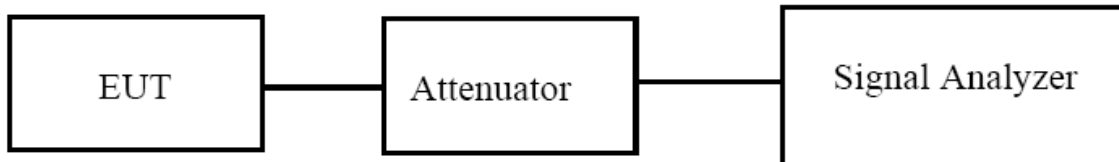

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.
(6dB bandwidth)>500kHz

9.3 Test Procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6dB

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.

6. Allow the trace to stabilize.

7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



9.4 EUT Operating Conditions



The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



9.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 3.8V
Test Mode:	TX Frequency U-NII-1 (5180-5240MHz)		



Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-26dB bandwidth (MHz)	Result
NVNT	a	5180	19.685	16.416	Pass
NVNT	a	5200	19.814	16.389	Pass
NVNT	a	5240	19.735	16.377	Pass
NVNT	n20	5180	19.997	17.529	Pass
NVNT	n20	5200	20.131	17.567	Pass
NVNT	n20	5240	20.012	17.559	Pass
NVNT	n40	5190	40.587	35.980	Pass
NVNT	n40	5230	40.186	36.001	Pass
NVNT	ac20	5180	20.083	17.565	Pass
NVNT	ac20	5200	20.171	17.539	Pass
NVNT	ac20	5240	20.207	17.553	Pass
NVNT	ac40	5190	40.688	35.928	Pass
NVNT	ac40	5230	40.307	35.994	Pass
NVNT	ac80	5210	80.184	75.303	Pass

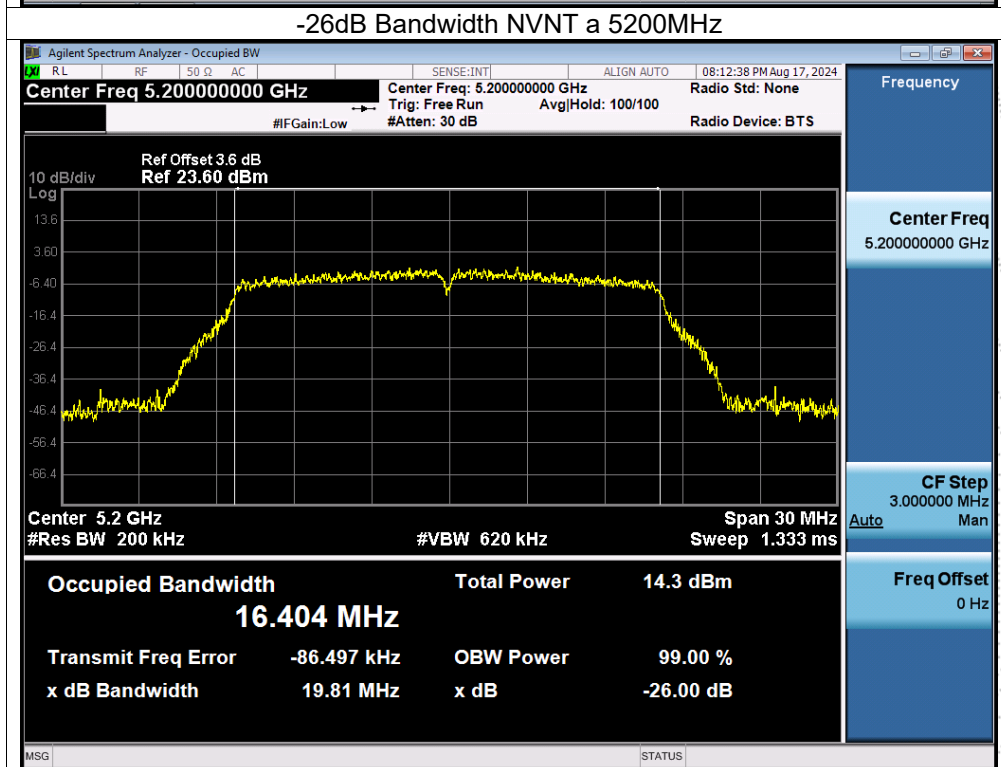
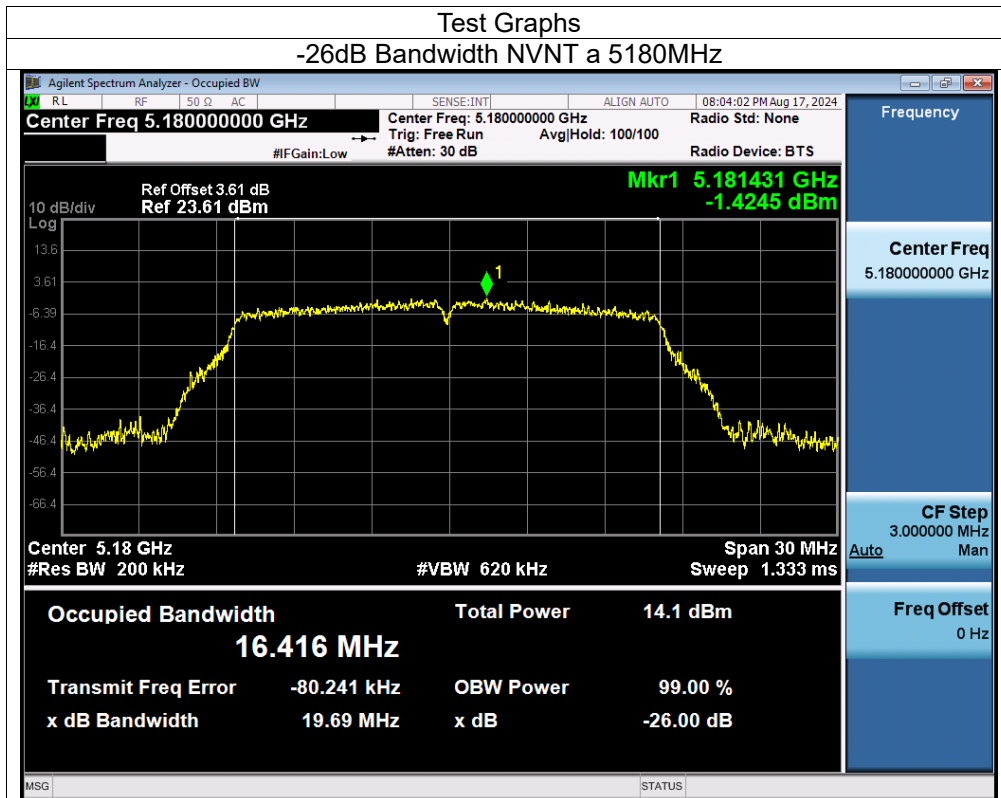


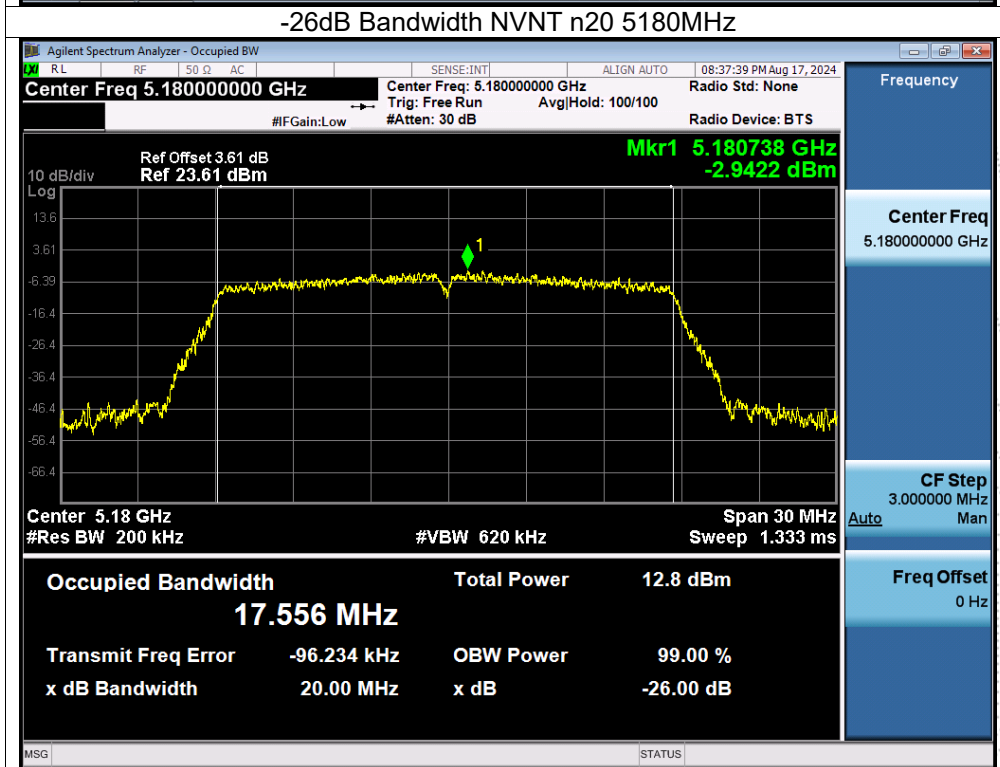
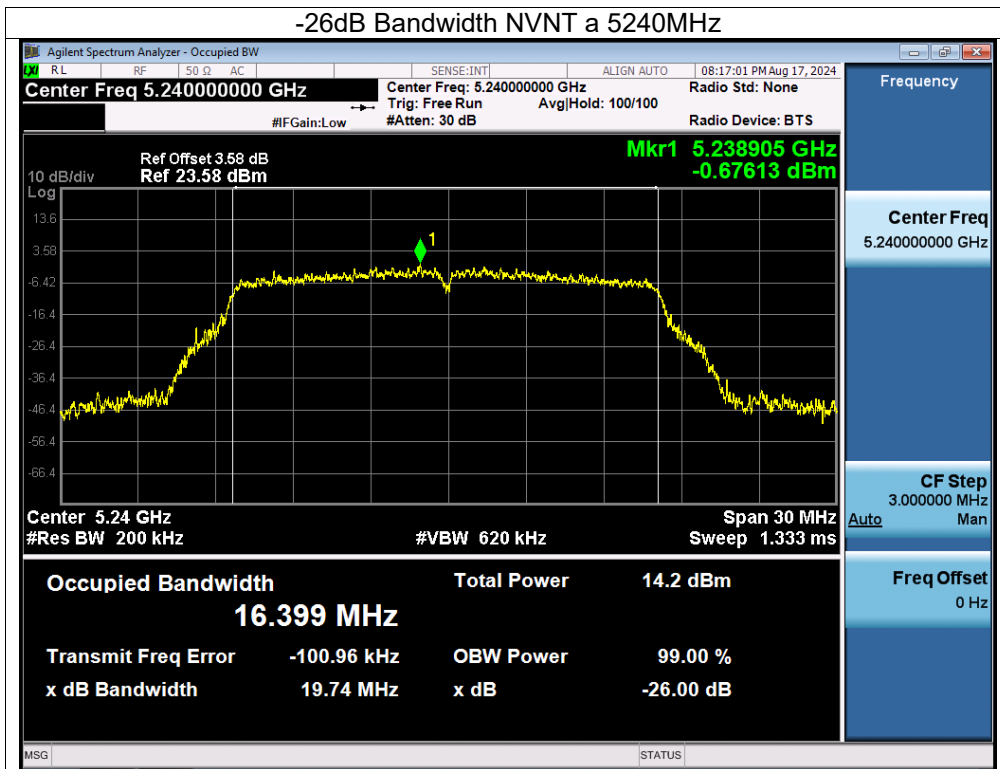


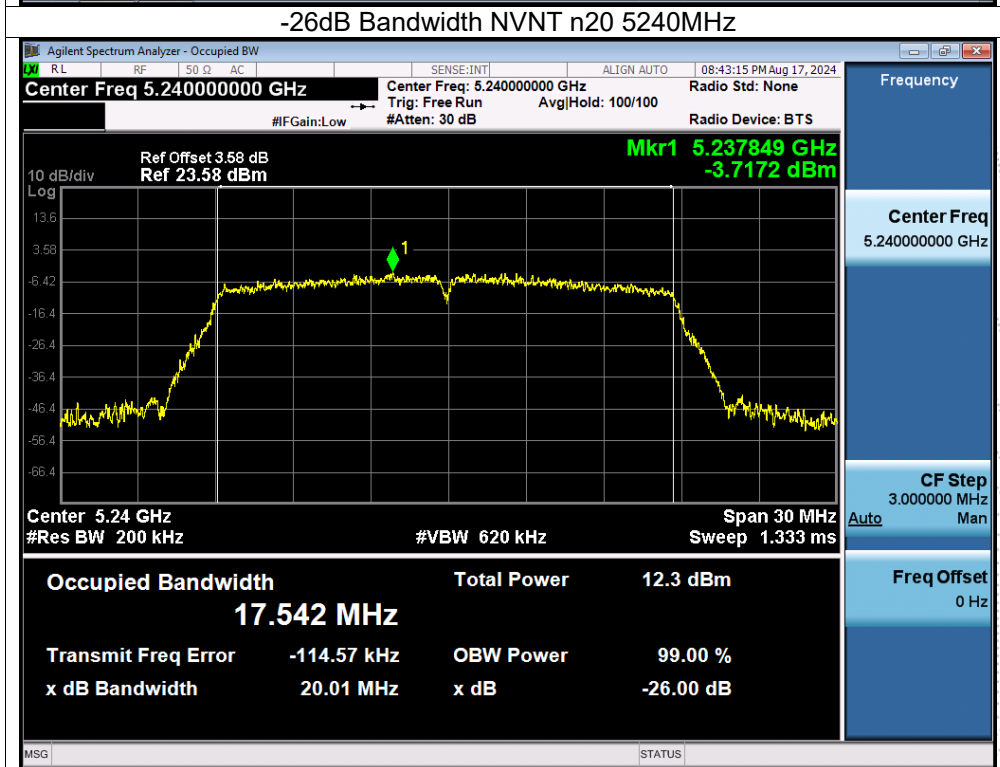
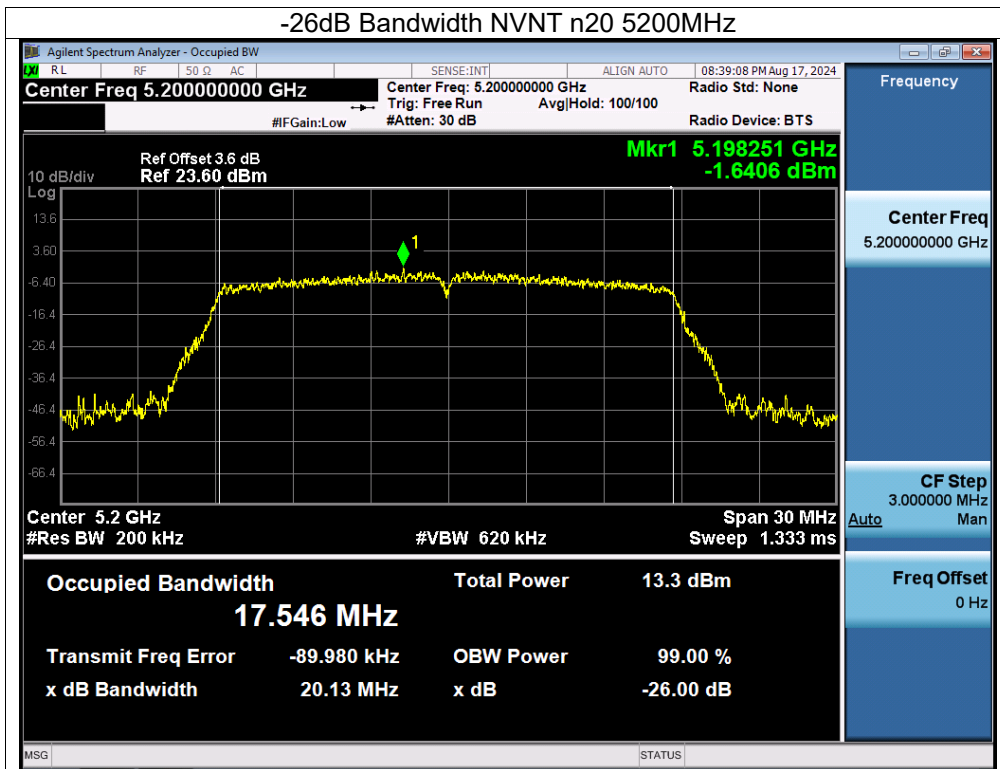


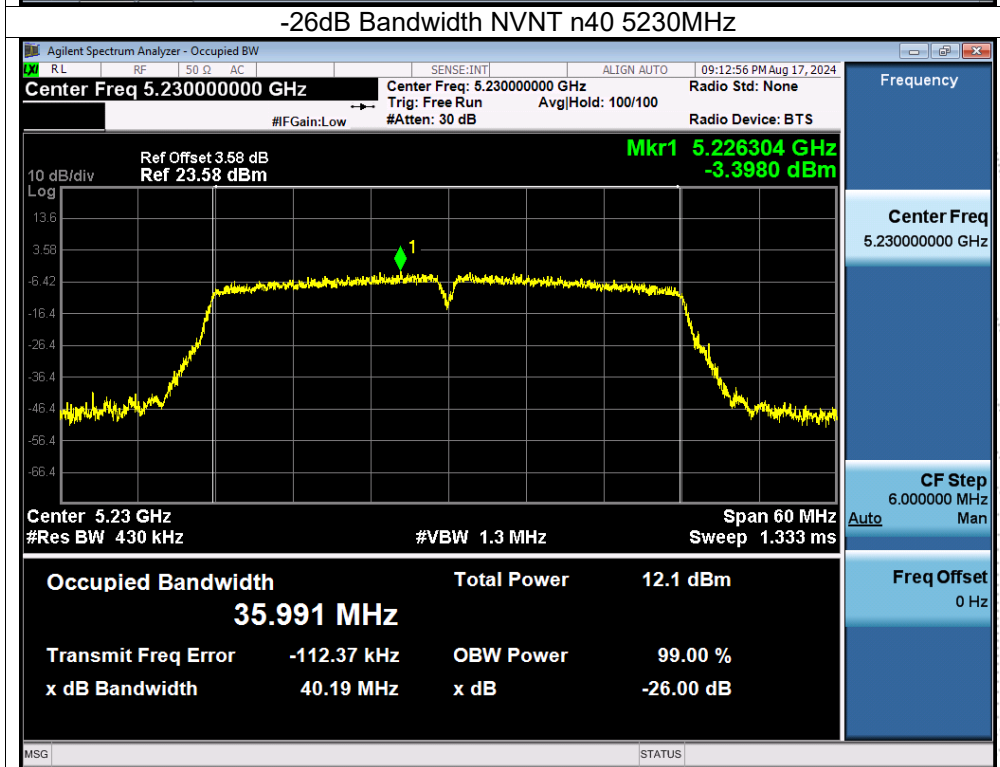
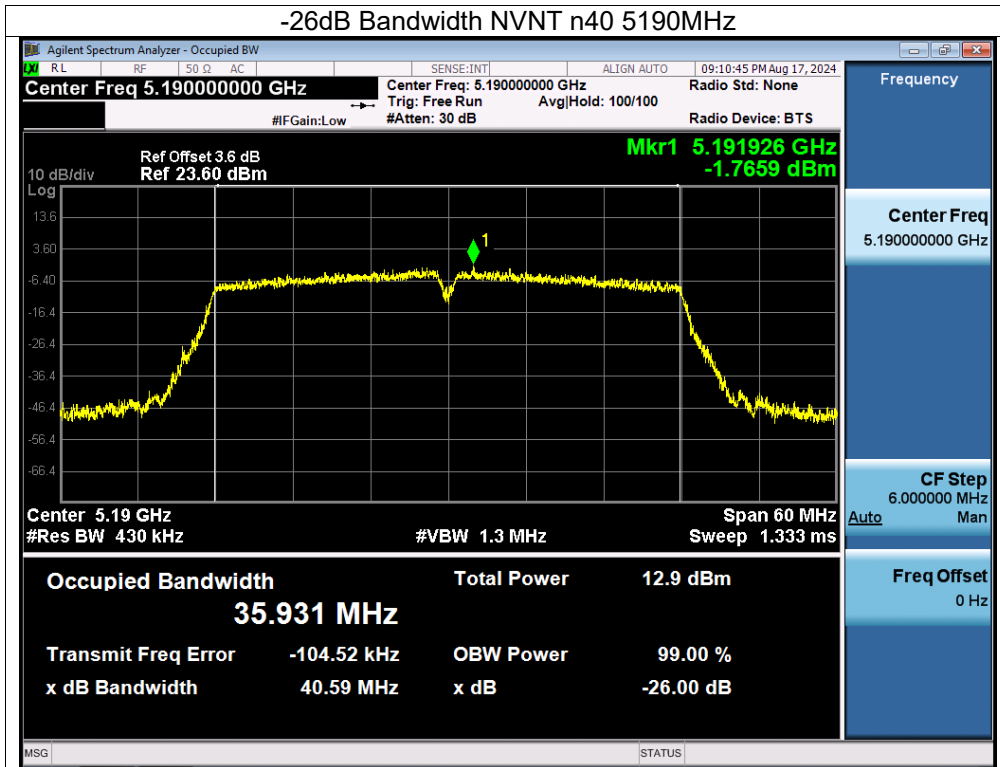


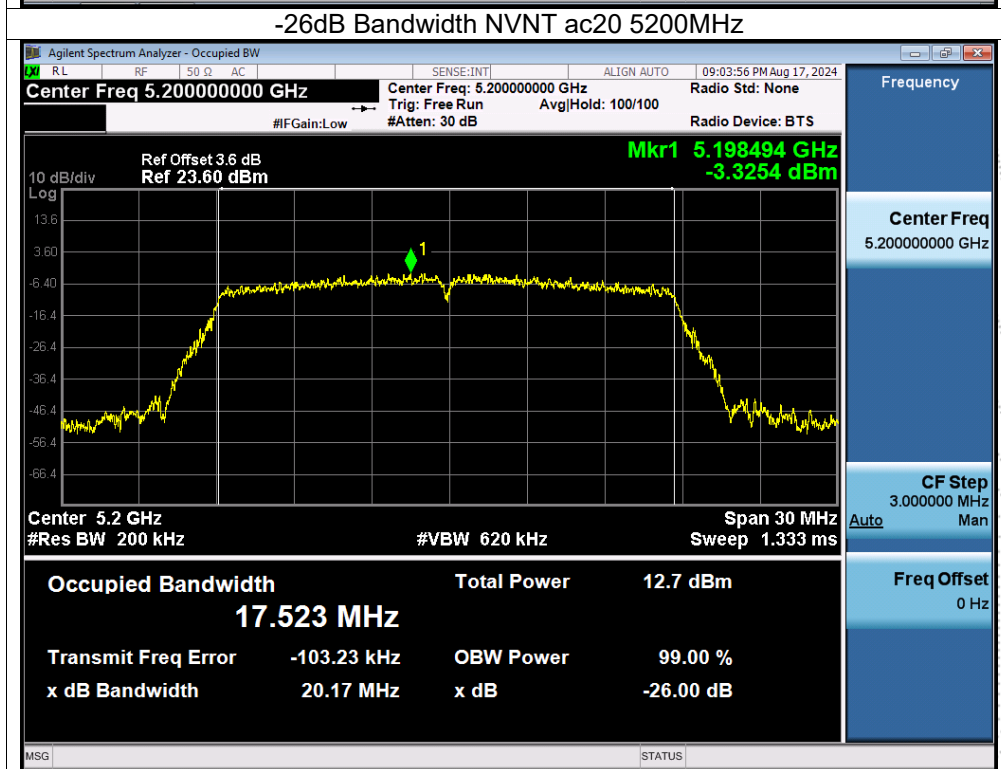
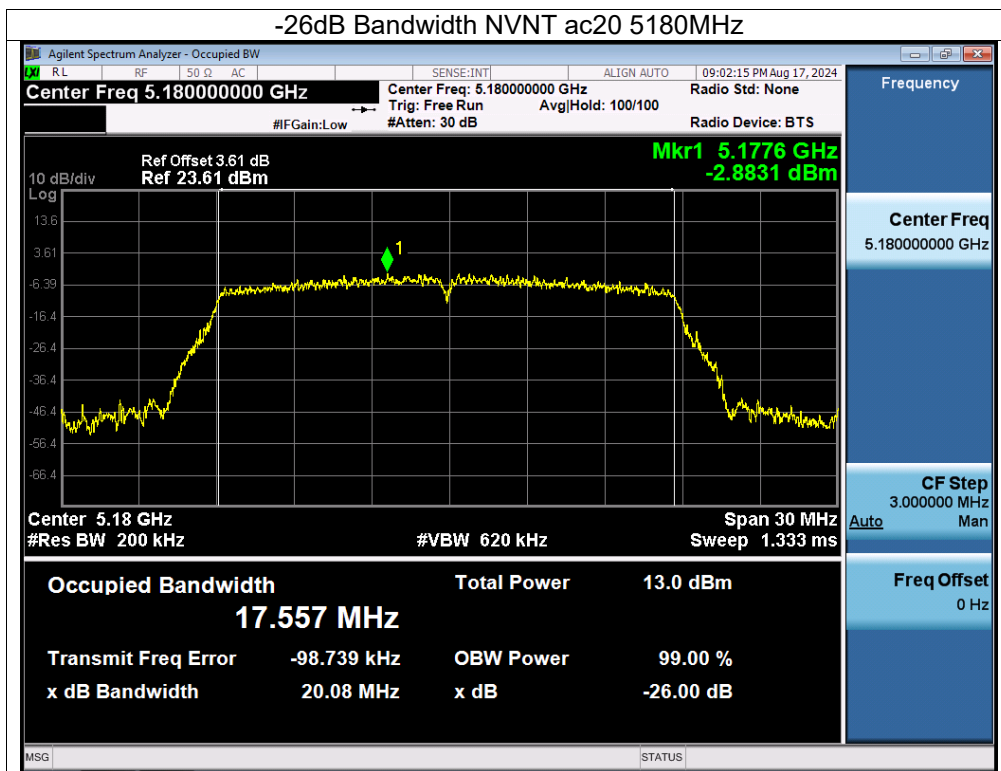


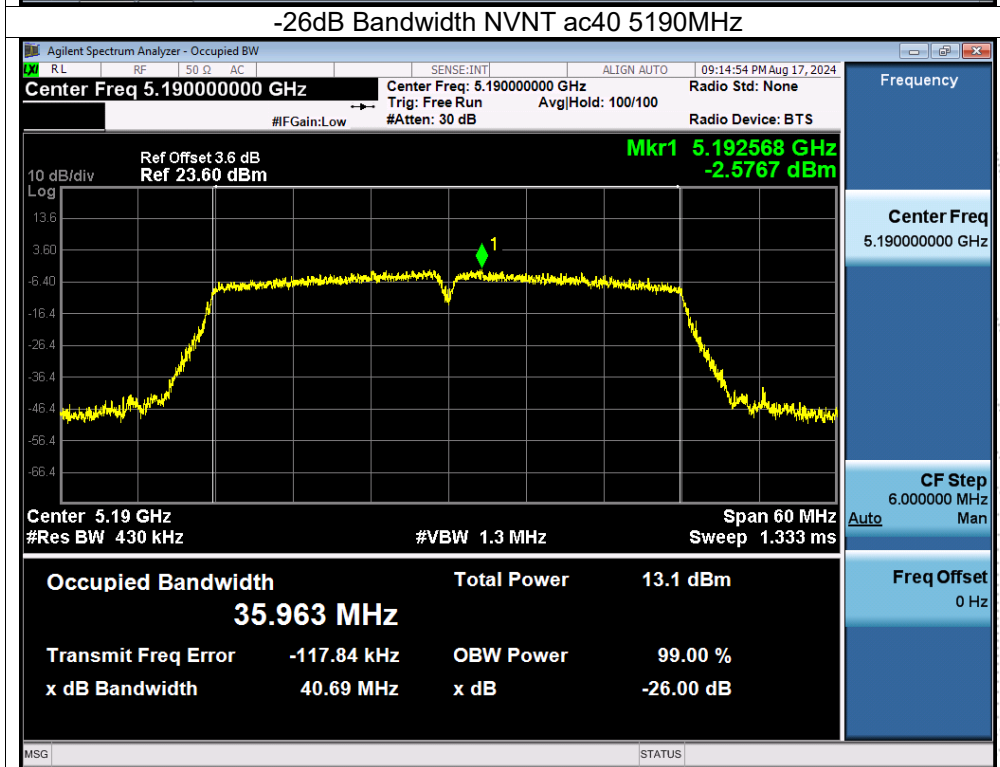
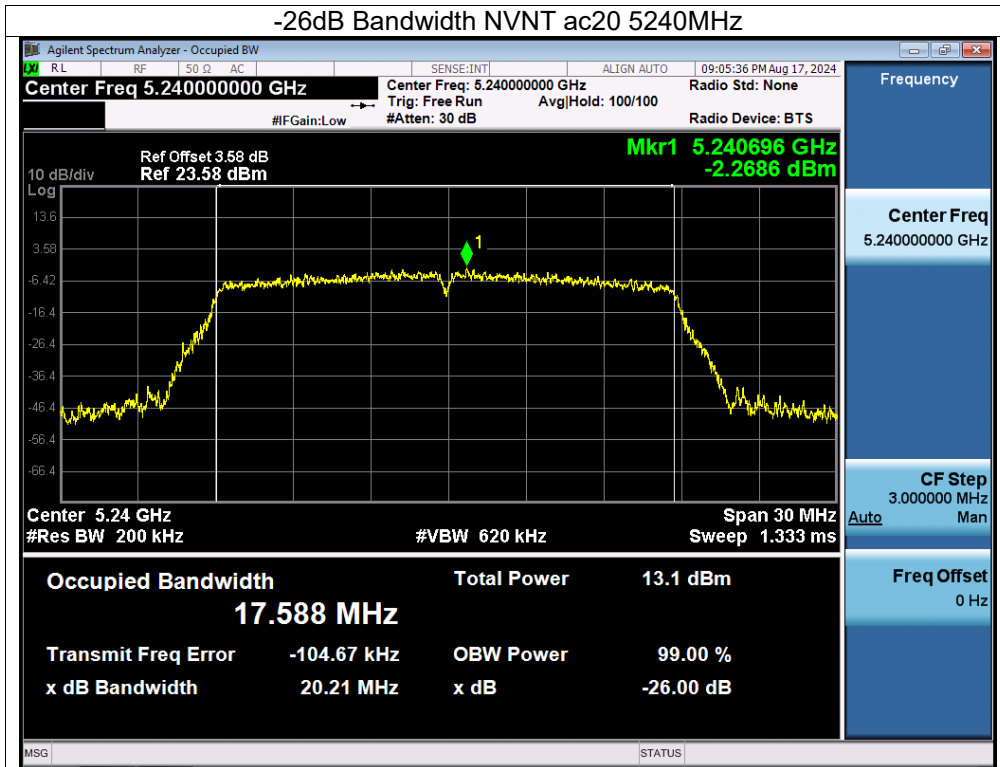


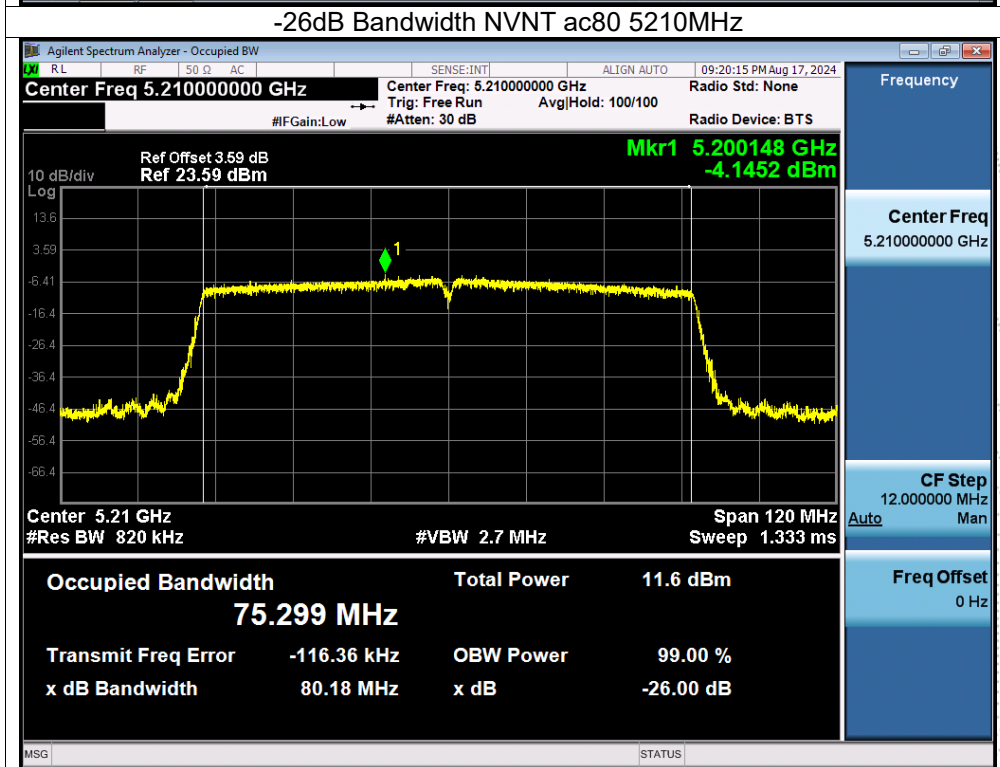
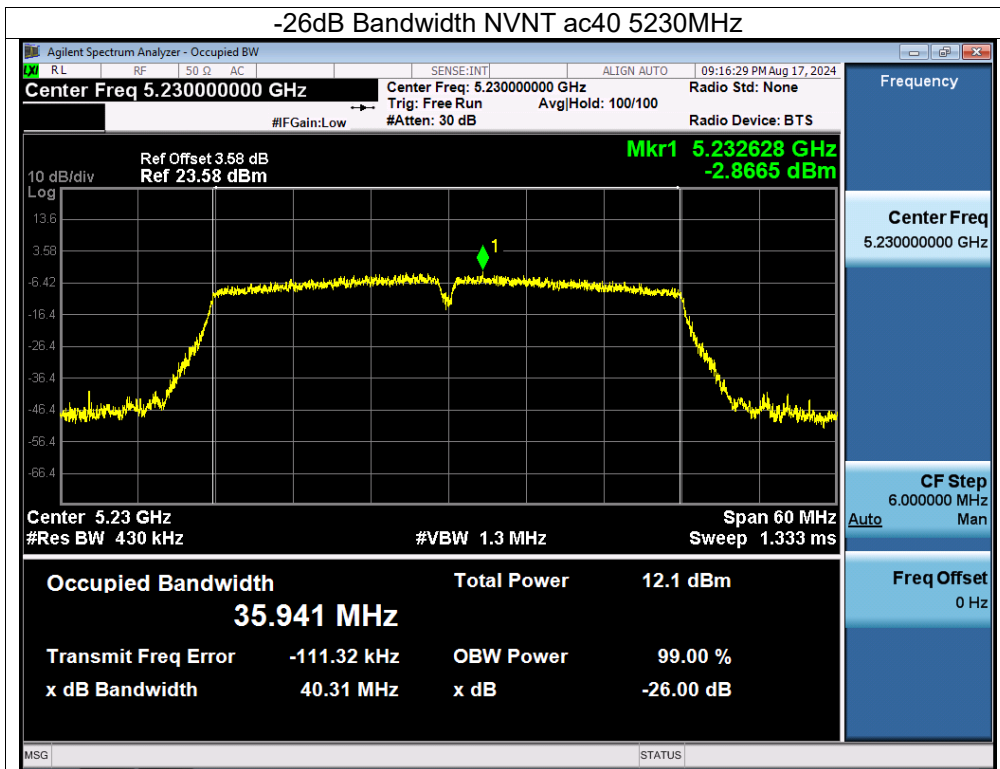


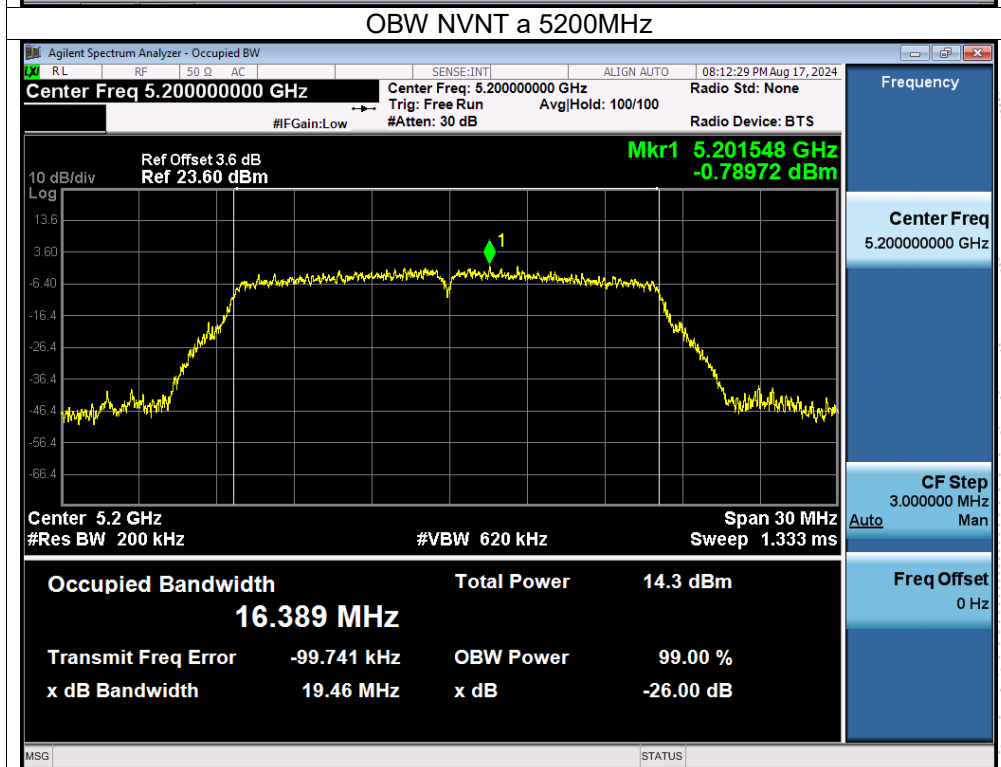
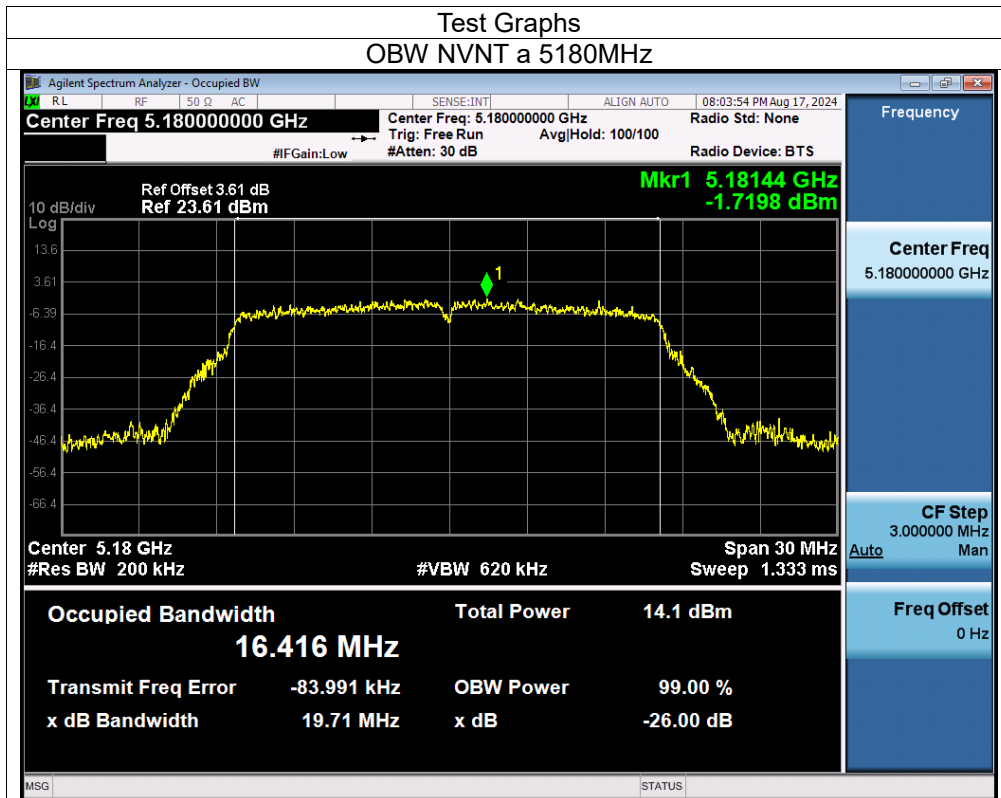


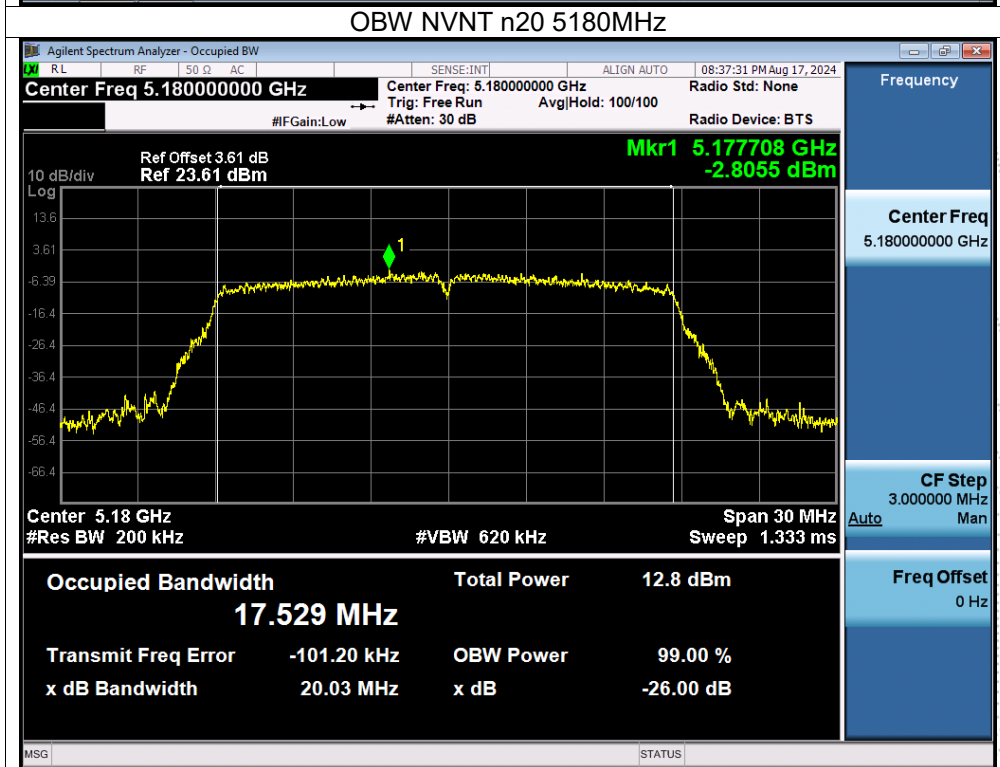
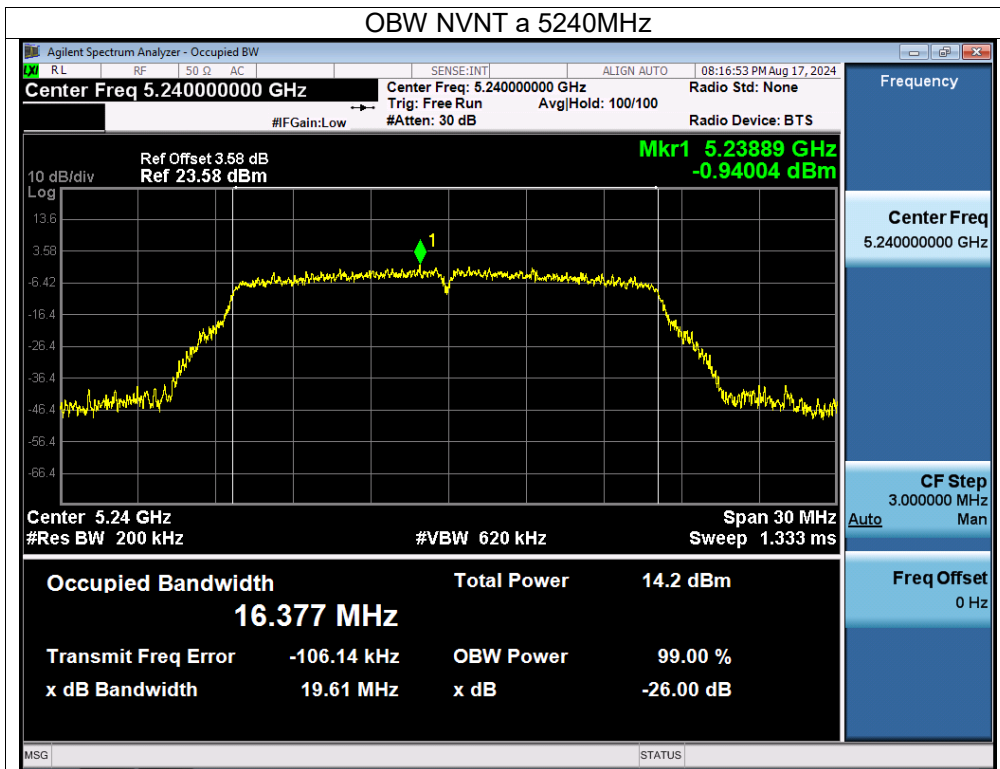


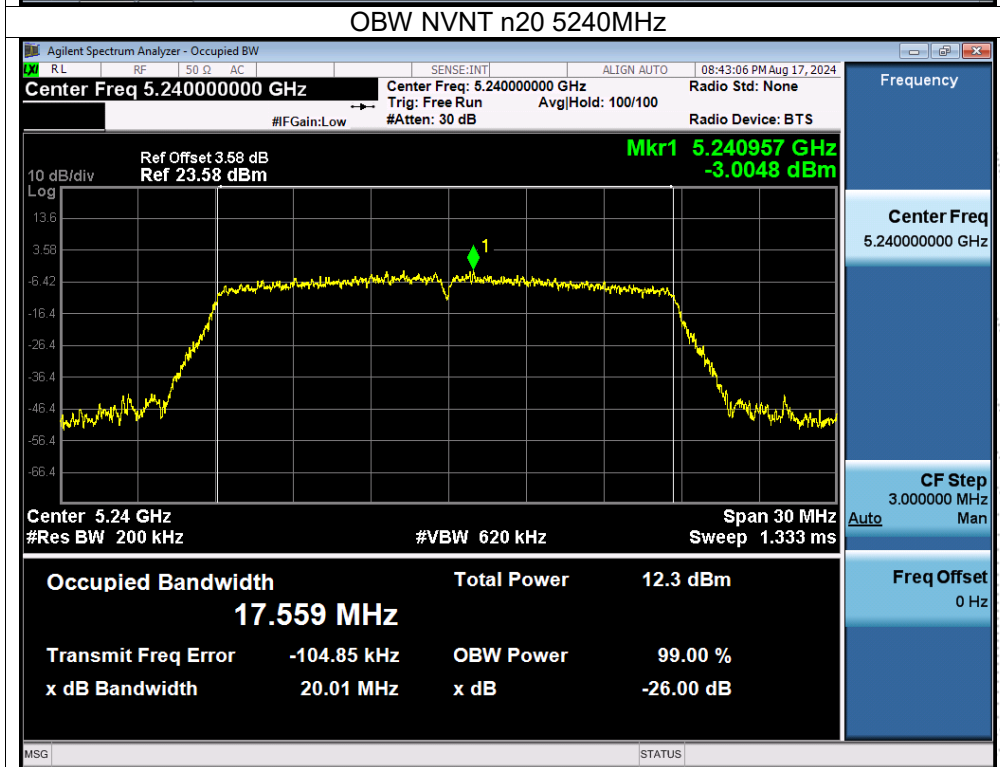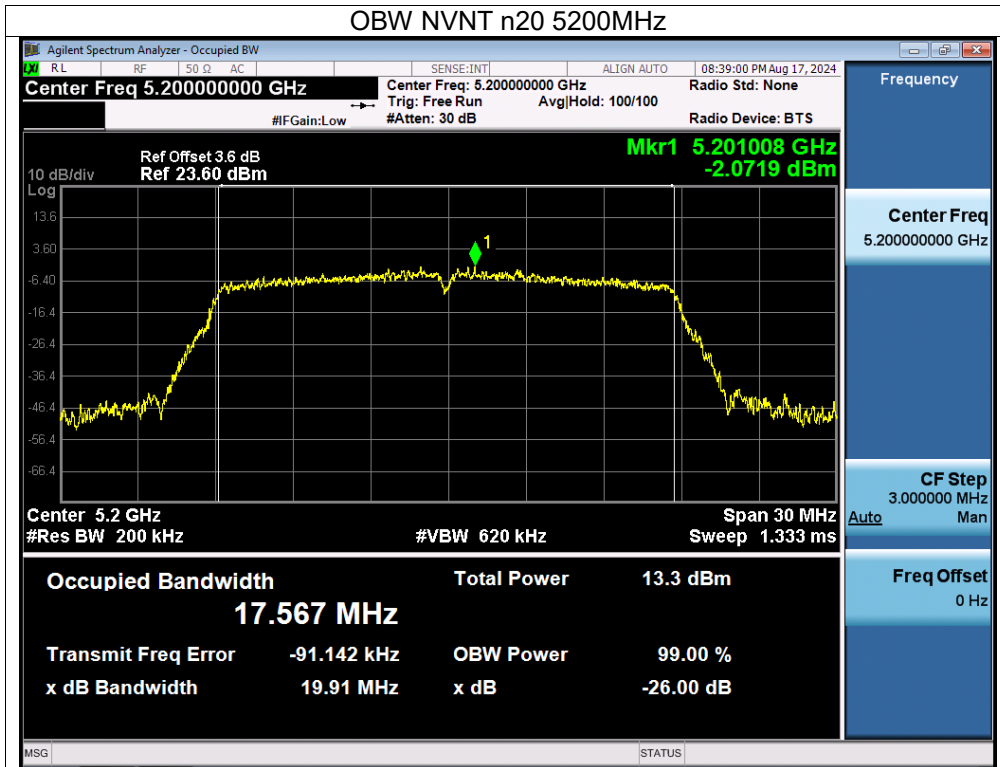

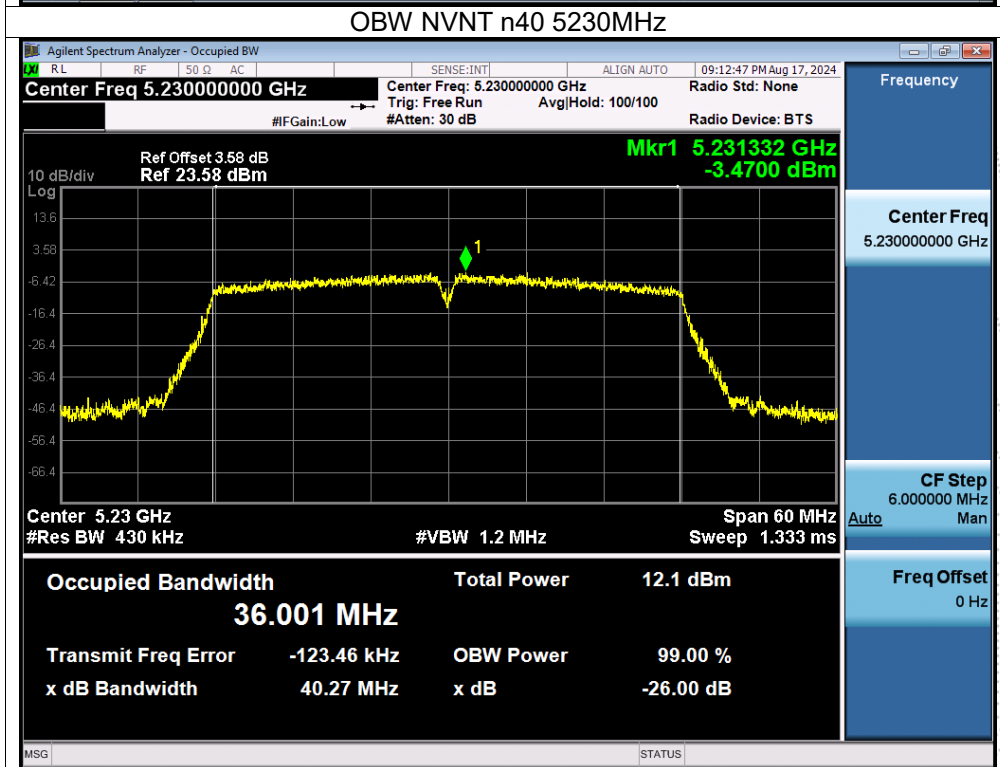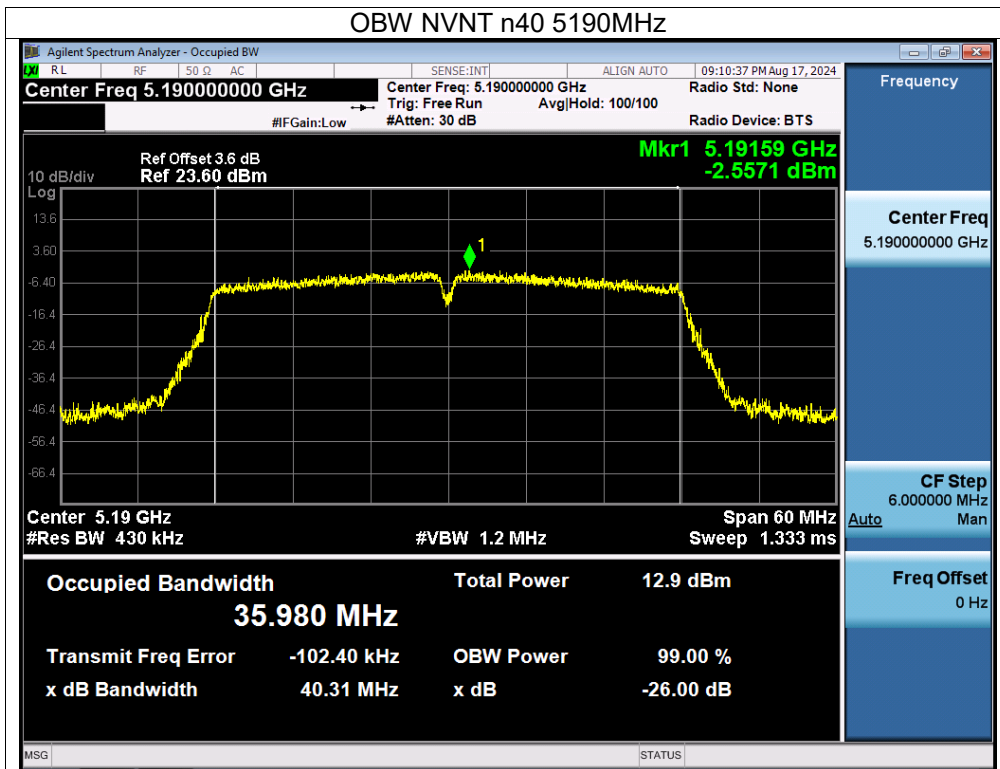

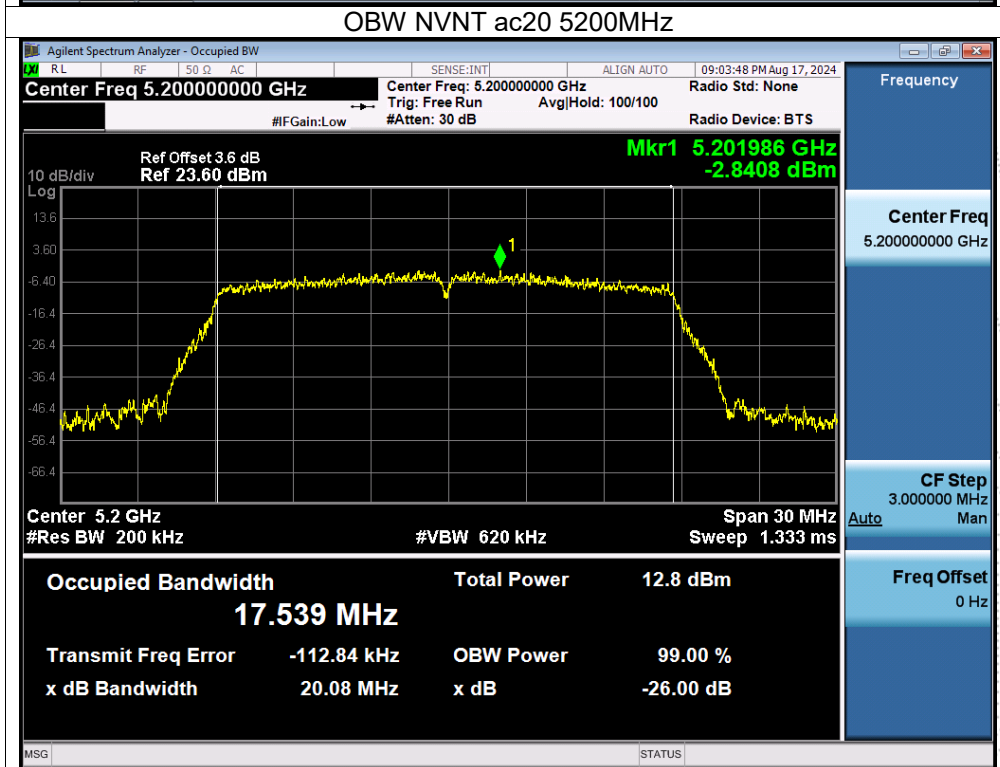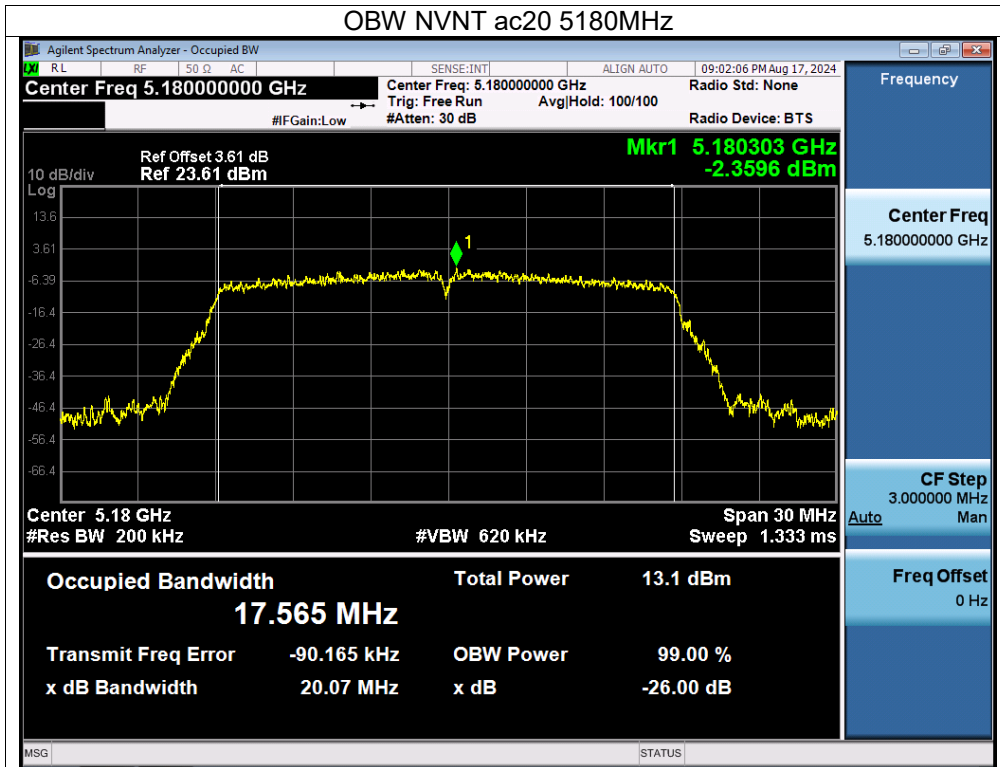

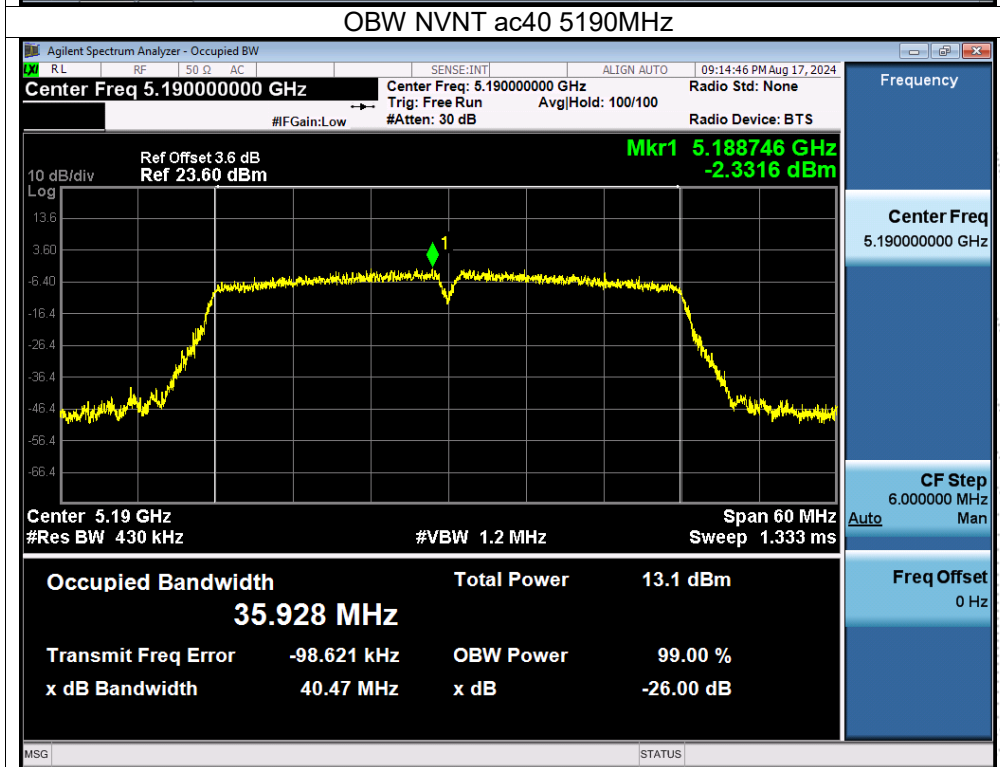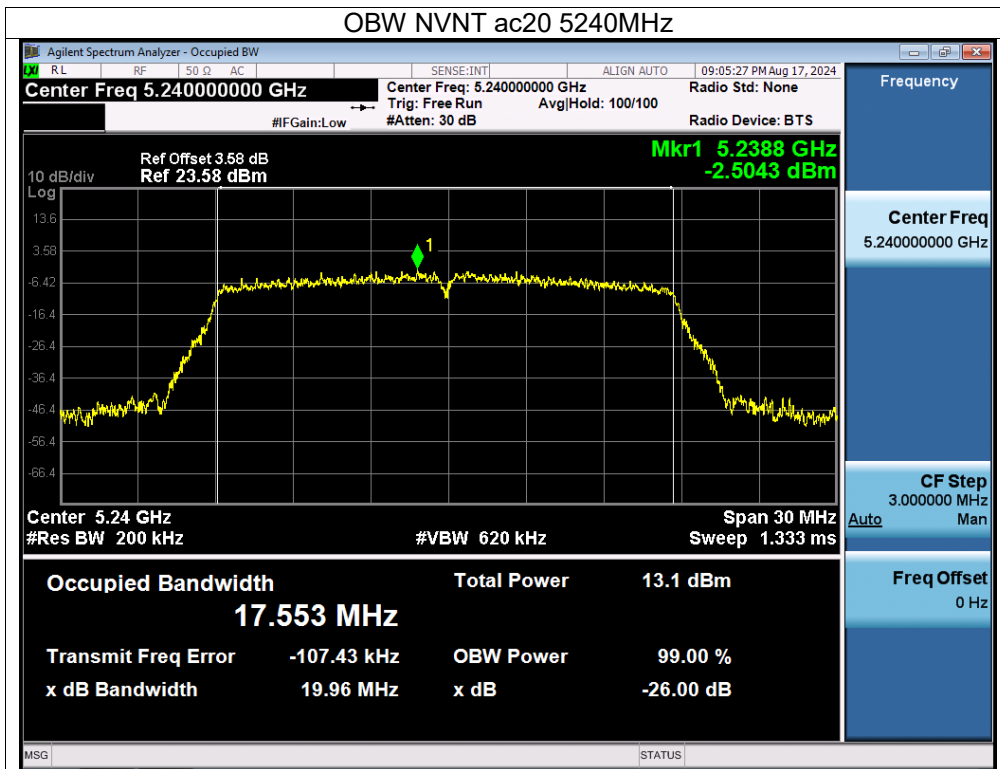

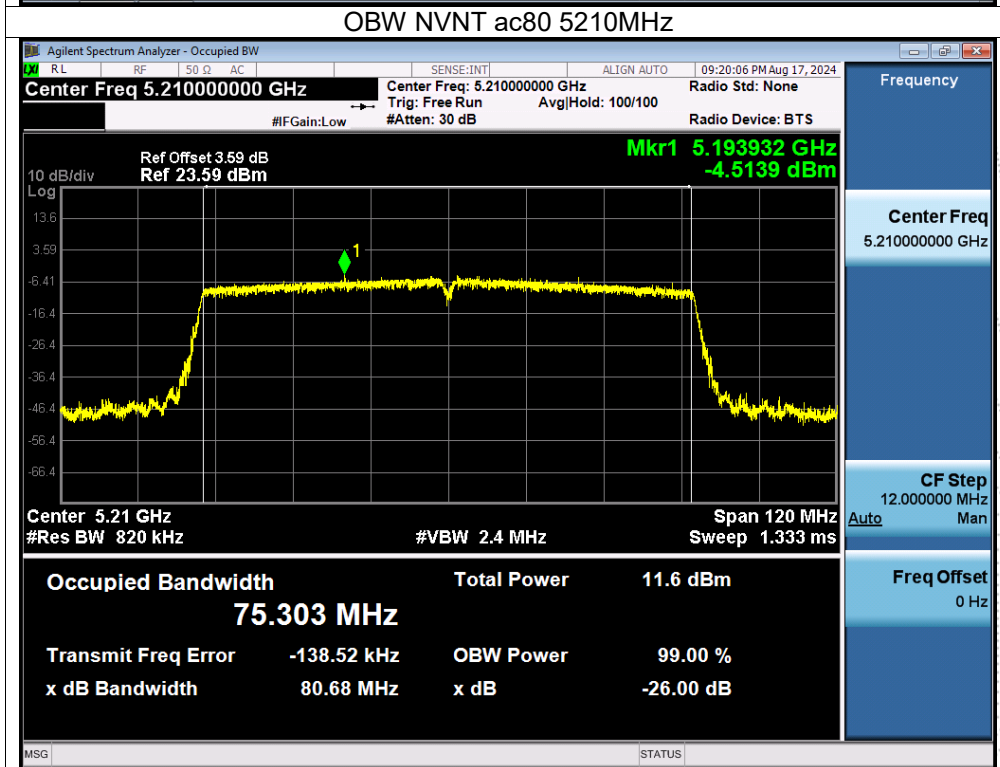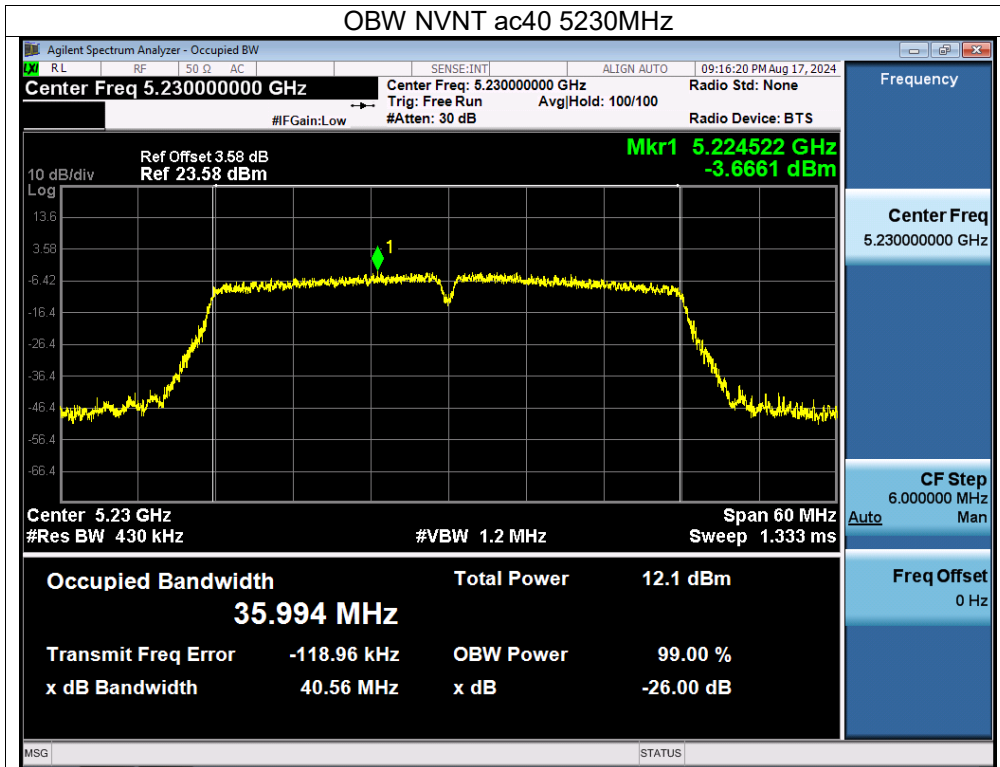

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 3.8V
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		

Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-6dB bandwidth (MHz)	Limit -6dB bandwidth MHz	Result
NVNT	a	5745	16.389	16.347	≥500	Pass
NVNT	a	5785	16.410	16.346	≥500	Pass
NVNT	a	5825	16.379	16.327	≥500	Pass
NVNT	n20	5745	17.555	17.580	≥500	Pass
NVNT	n20	5785	17.557	17.584	≥500	Pass
NVNT	n20	5825	17.550	17.552	≥500	Pass
NVNT	n40	5755	35.964	36.056	≥500	Pass
NVNT	n40	5795	35.940	36.025	≥500	Pass
NVNT	ac20	5745	17.544	17.586	≥500	Pass
NVNT	ac20	5785	17.561	17.589	≥500	Pass
NVNT	ac20	5825	17.537	17.540	≥500	Pass
NVNT	ac40	5755	35.947	36.077	≥500	Pass
NVNT	ac40	5795	35.944	36.040	≥500	Pass
NVNT	ac80	5775	75.138	76.311	≥500	Pass

