






Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 5, 802.11ac VHT80 CH122 UNII-2C		

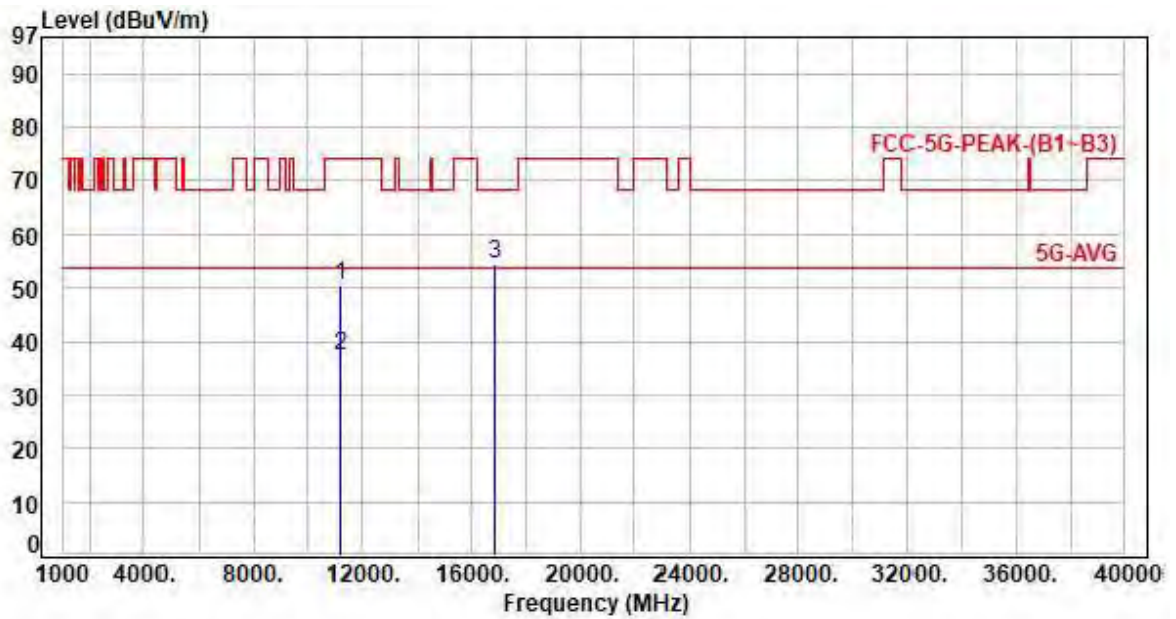

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11220.00	12.38	37.97	50.35	74.00	-23.65	Peak	P
2	11220.00	12.38	25.02	37.40	54.00	-16.60	Average	P
3	16830.00	13.39	41.31	54.70	68.20	-13.50	Peak	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

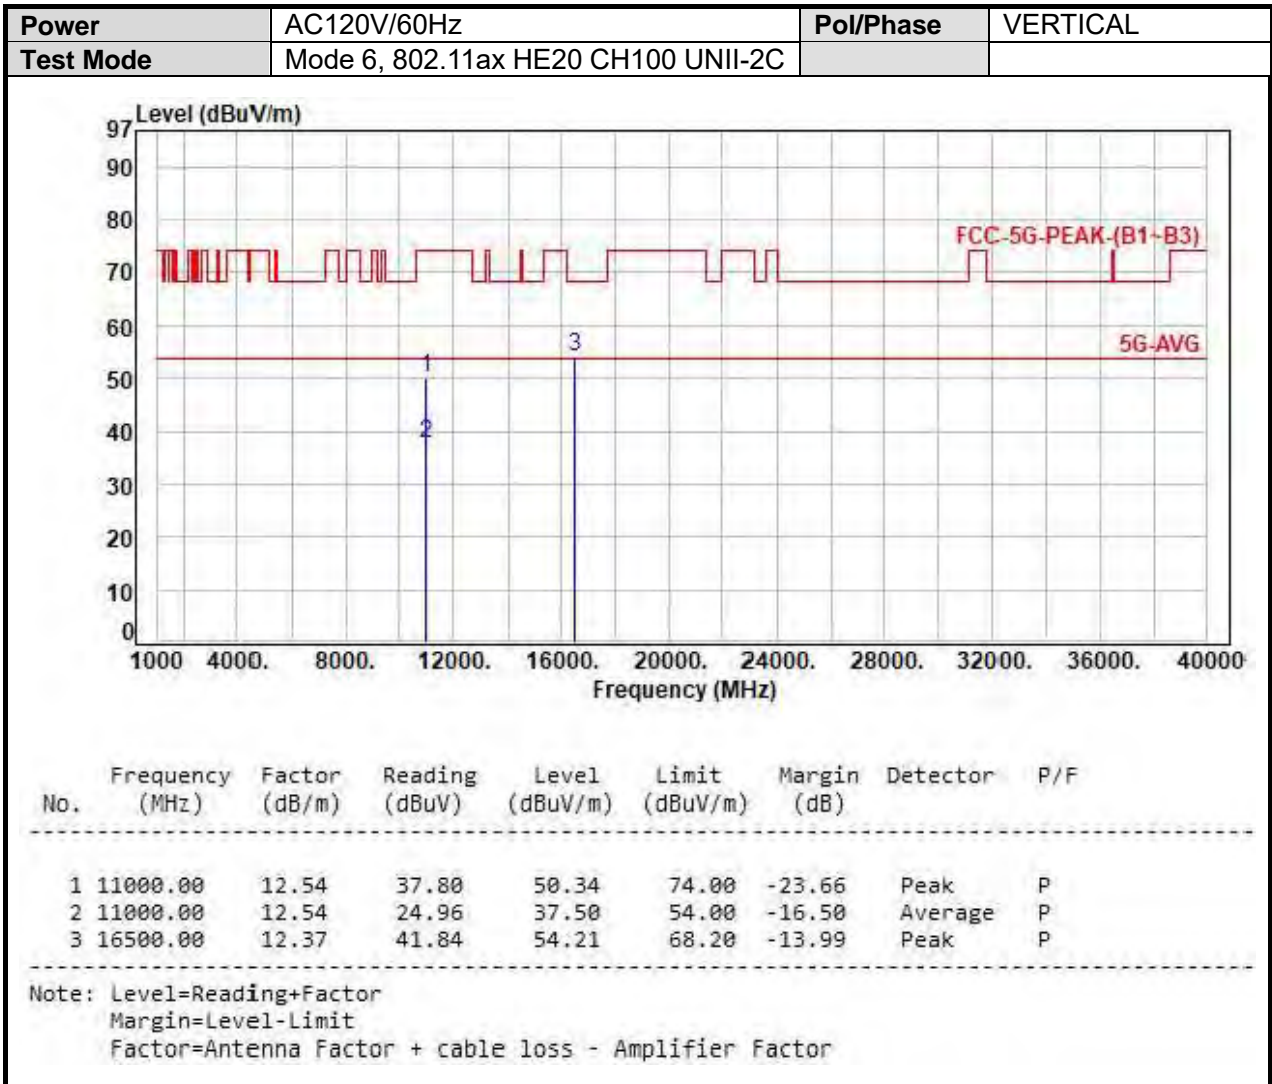

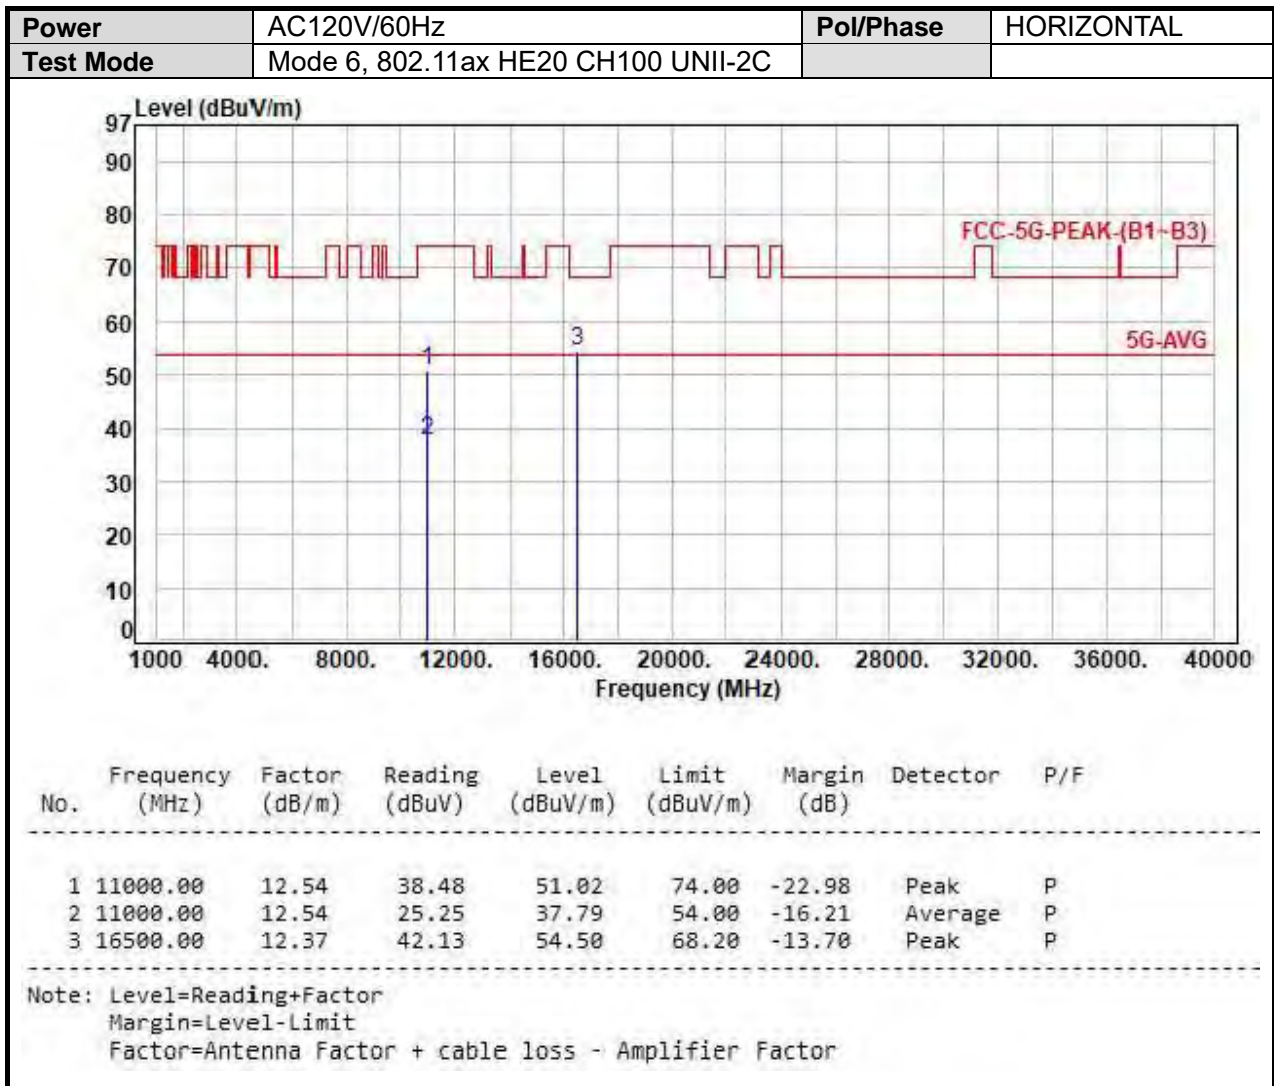



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 6, 802.11ax HE20 CH116 UNII-2C		

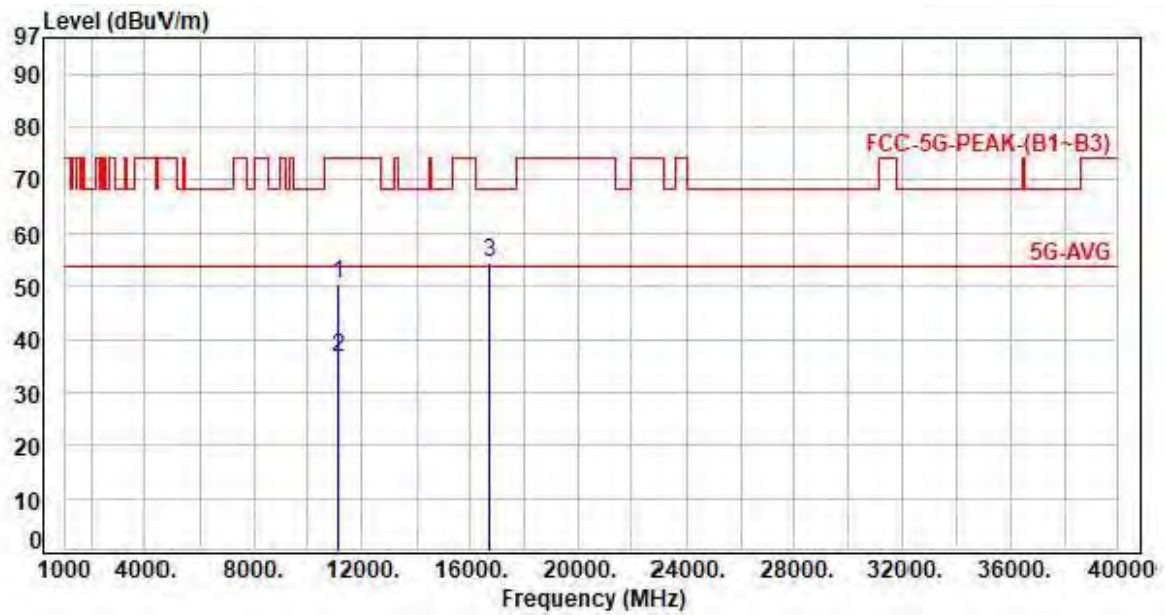


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11160.00	12.40	37.97	50.37	74.00	-23.63	Peak	P
2	11160.00	12.40	24.05	36.45	54.00	-17.55	Average	P
3	16740.00	13.07	41.66	54.73	68.20	-13.47	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 6, 802.11ax HE20 CH116 UNII-2C		

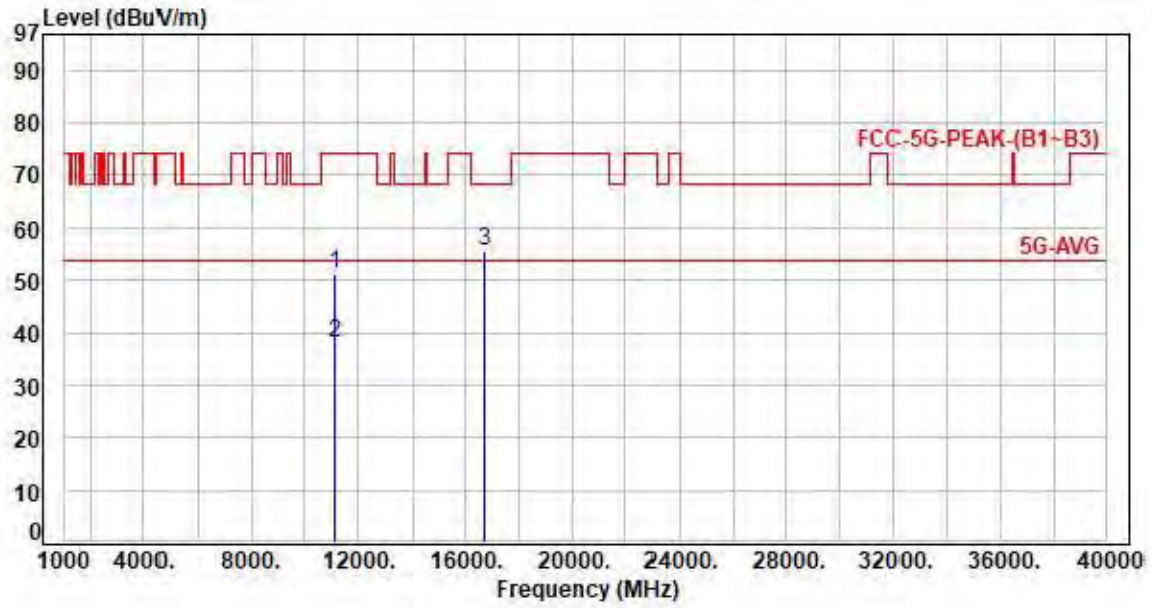


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11160.00	12.40	38.95	51.35	74.00	-22.65	Peak	P
2	11160.00	12.40	25.74	38.14	54.00	-15.86	Average	P
3	16740.00	13.07	42.51	55.58	68.20	-12.62	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 6, 802.11ax HE20 CH140 UNII-2C		

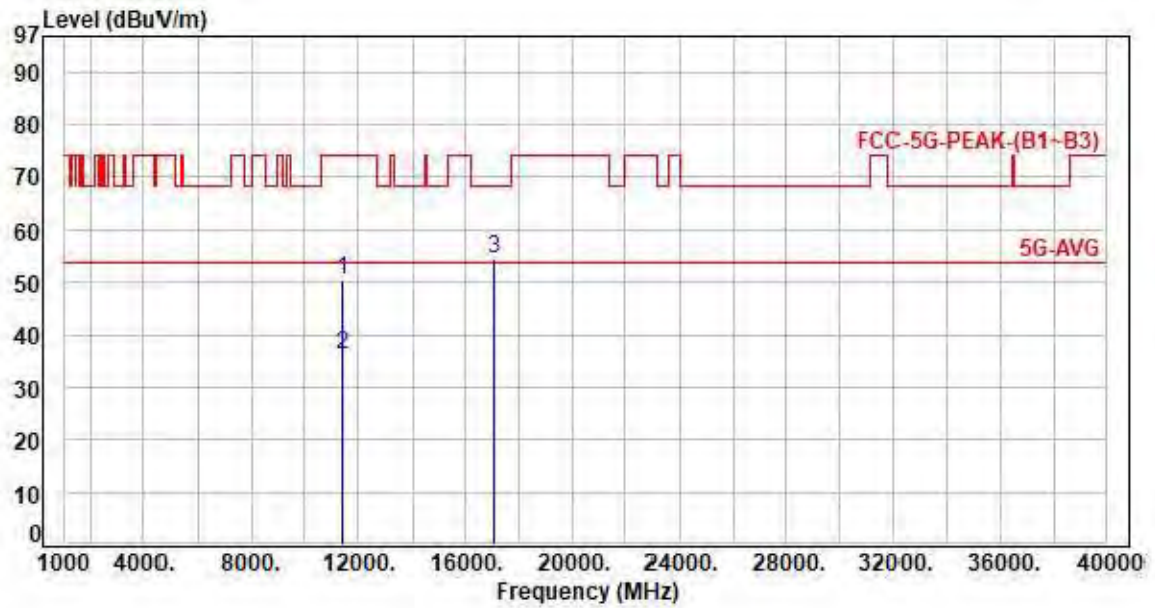


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	11400.00	12.40	38.12	50.52	74.00	-23.48	Peak	P
2	11400.00	12.40	23.87	36.27	54.00	-17.73	Average	P
3	17100.00	13.81	40.67	54.48	68.20	-13.72	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

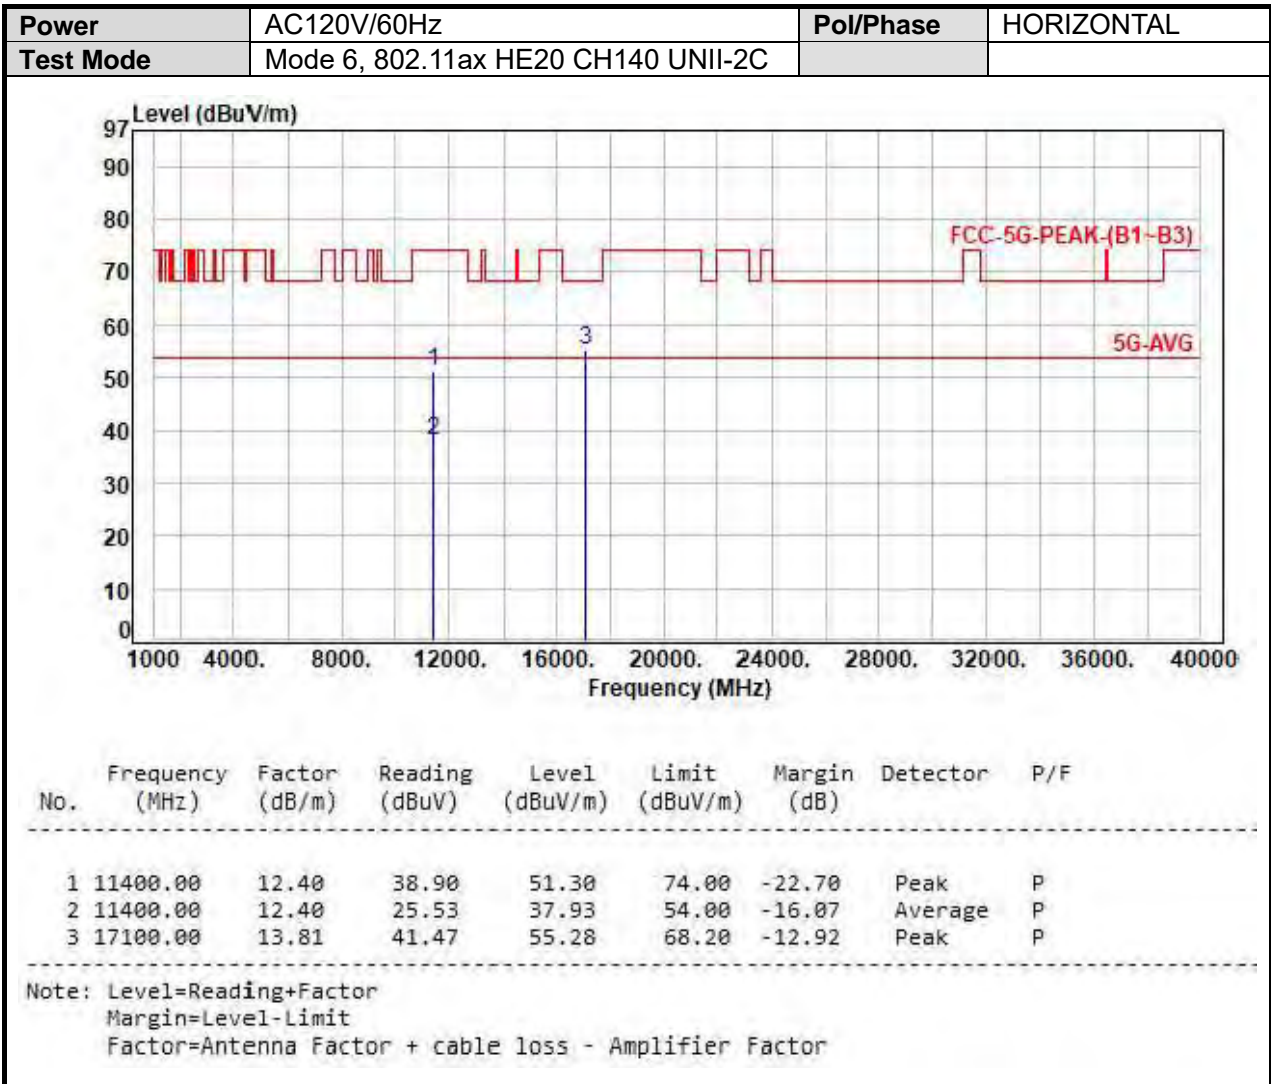



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 7, 802.11ax HE40 CH102 UNII-2C		

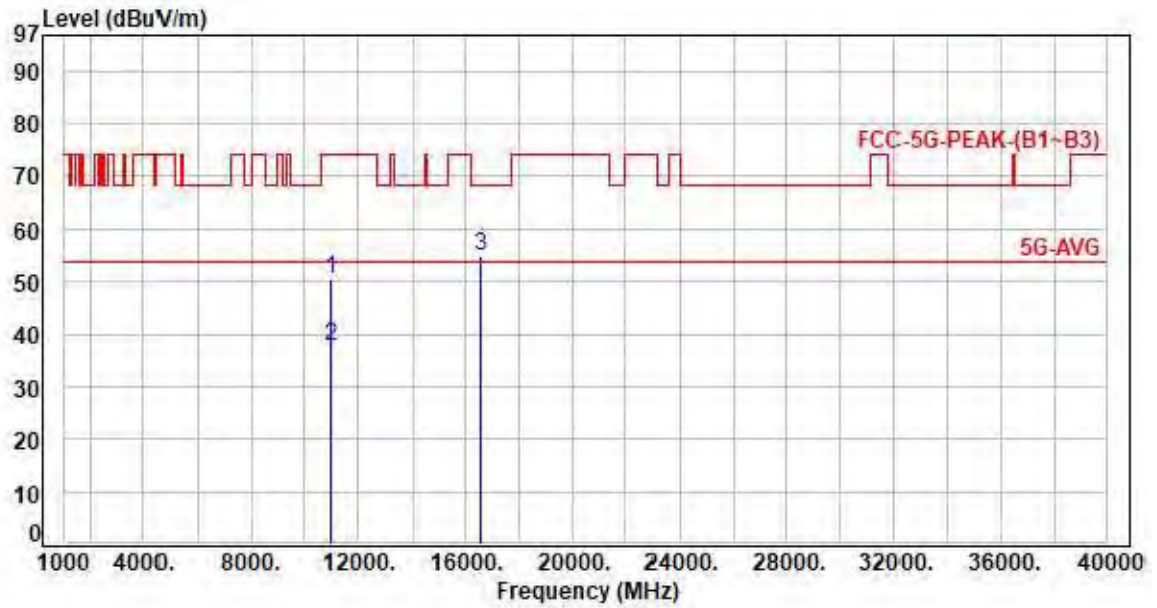


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11020.00	12.53	37.82	50.35	74.00	-23.65	Peak	P
2	11020.00	12.53	25.01	37.54	54.00	-16.46	Average	P
3	16530.00	12.43	42.62	55.05	68.20	-13.15	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor





Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 7, 802.11ax HE40 CH102 UNII-2C		

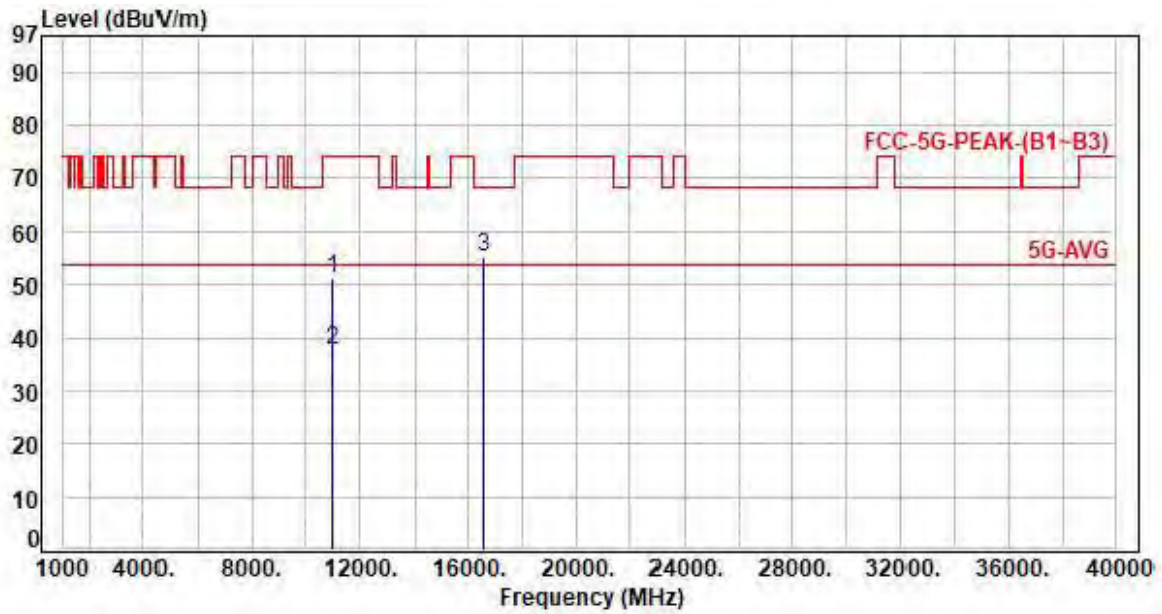

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11020.00	12.53	38.89	51.42	74.00	-22.58	Peak	P
2	11020.00	12.53	25.07	37.60	54.00	-16.40	Average	P
3	16530.00	12.43	42.91	55.34	68.20	-12.86	Peak	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

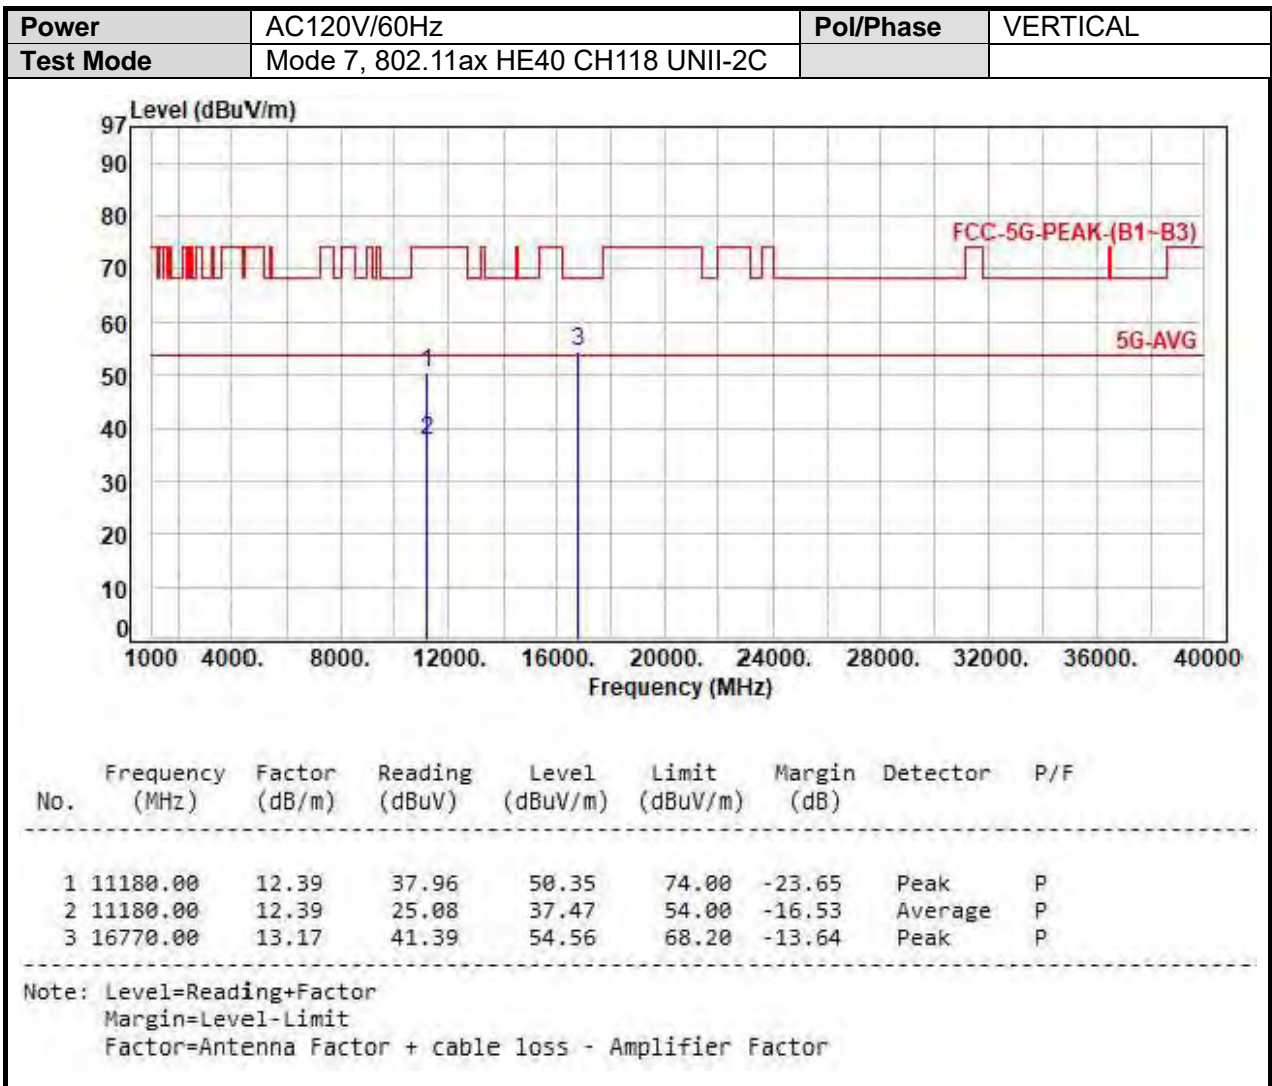

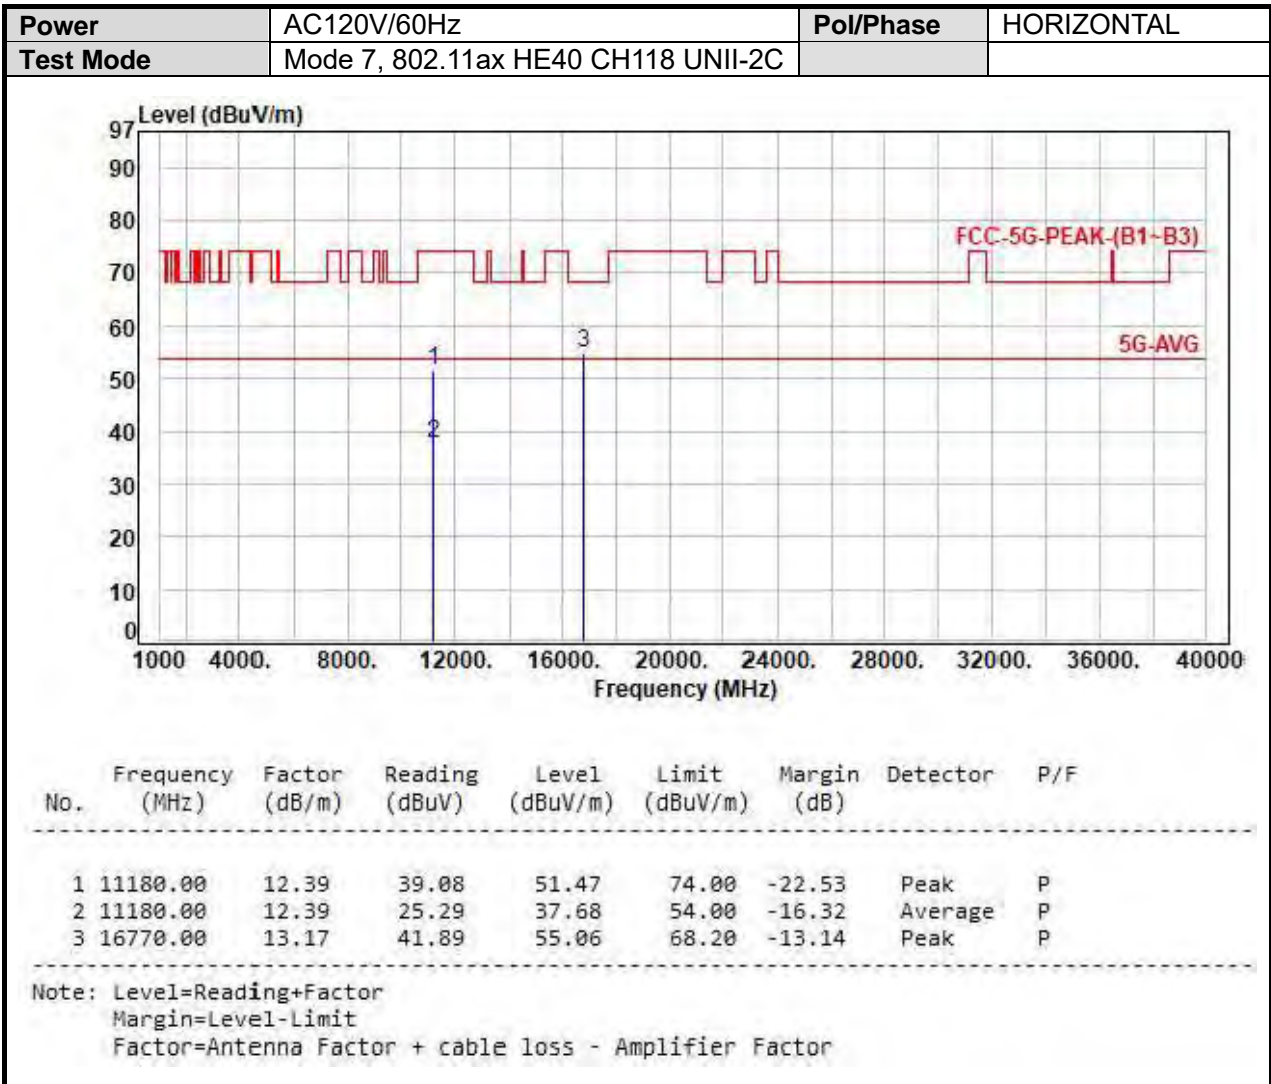



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 7, 802.11ax HE40 CH134 UNII-2C		

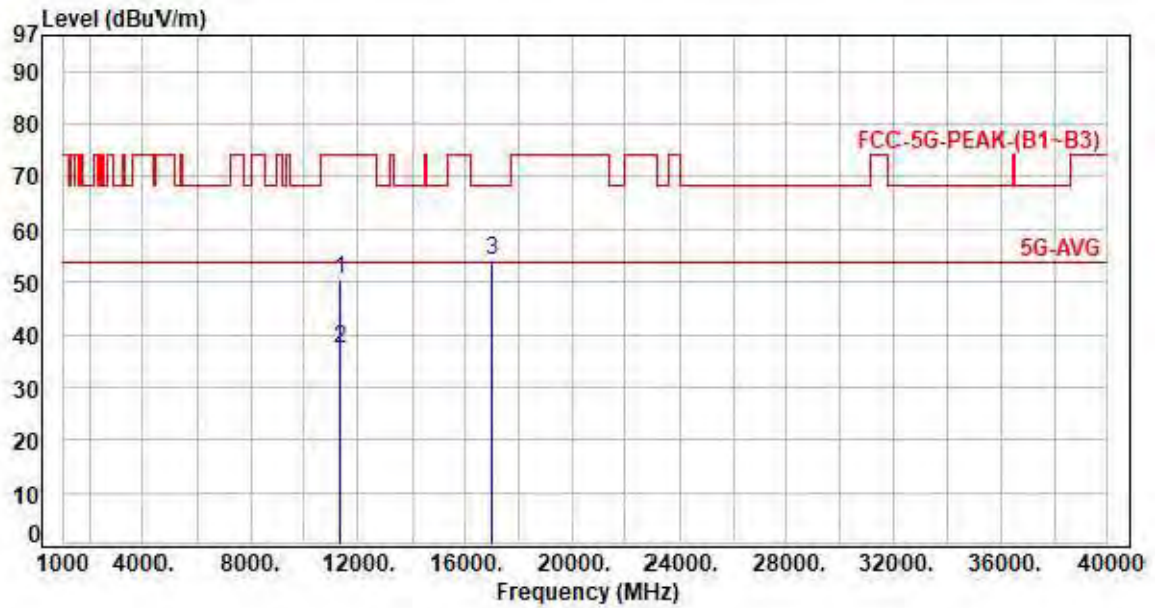


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11340.00	12.40	38.05	50.45	74.00	-23.55	Peak	P
2	11340.00	12.40	24.84	37.24	54.00	-16.76	Average	P
3	17010.00	13.96	40.29	54.25	68.20	-13.95	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 7, 802.11ax HE40 CH134 UNII-2C		

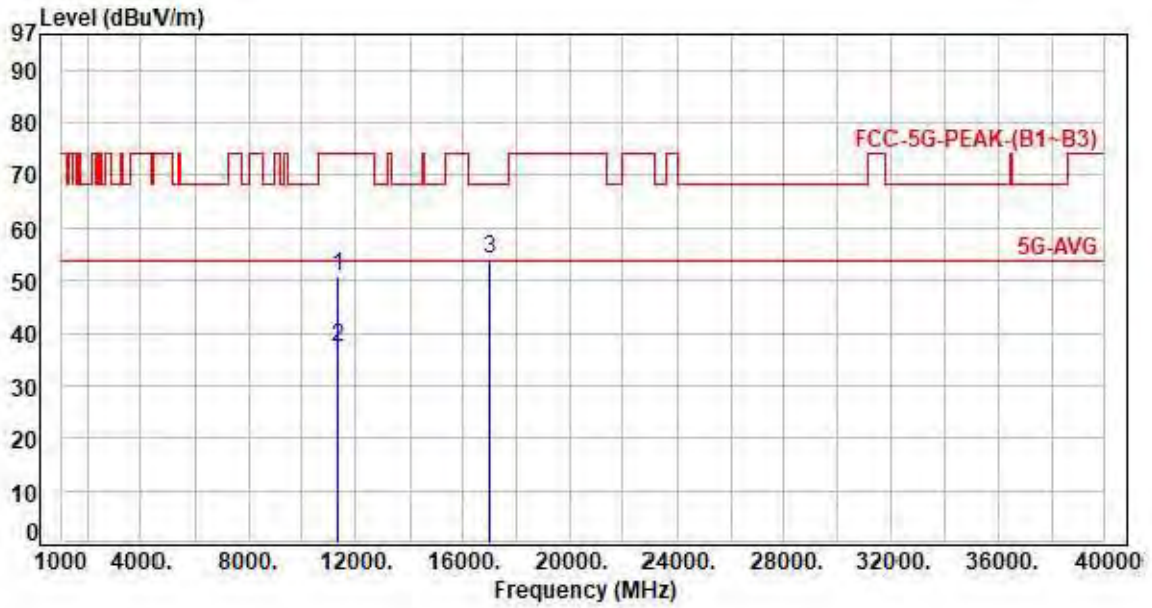


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	11340.00	12.40	38.46	50.86	74.00	-23.14	Peak	P
2	11340.00	12.40	24.85	37.25	54.00	-16.75	Average	P
3	17010.00	13.96	40.41	54.37	68.20	-13.83	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 8, 802.11ax HE80 CH106 UNII-2C		

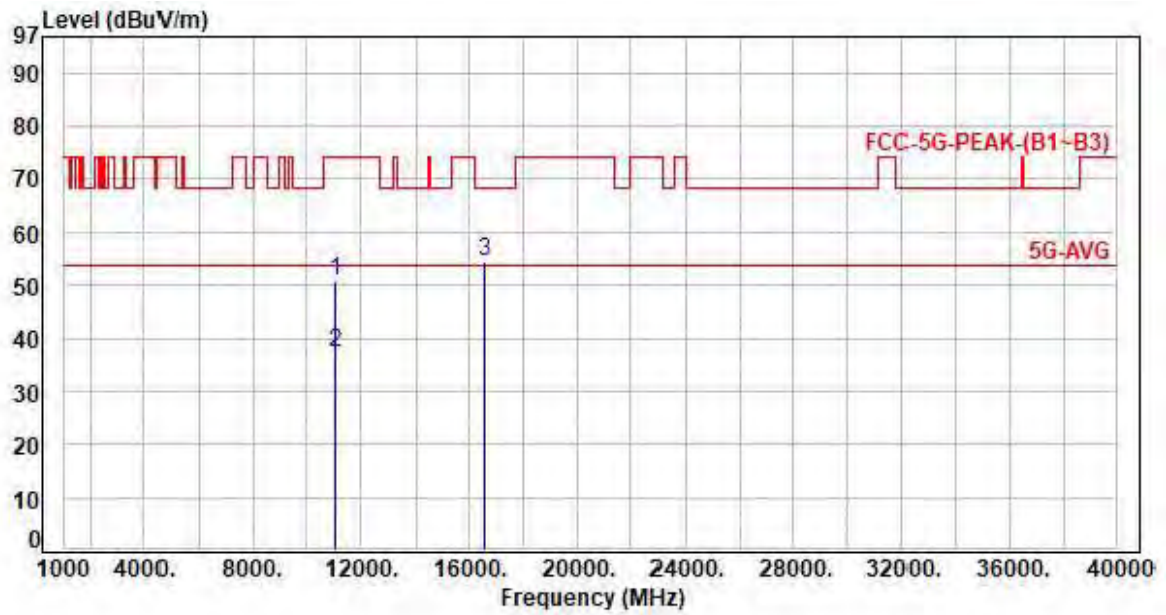


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11060.00	12.49	38.37	50.86	74.00	-23.14	Peak	P
2	11060.00	12.49	24.87	37.36	54.00	-16.64	Average	P
3	16590.00	12.55	42.06	54.61	68.20	-13.59	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 8, 802.11ax HE80 CH106 UNII-2C		

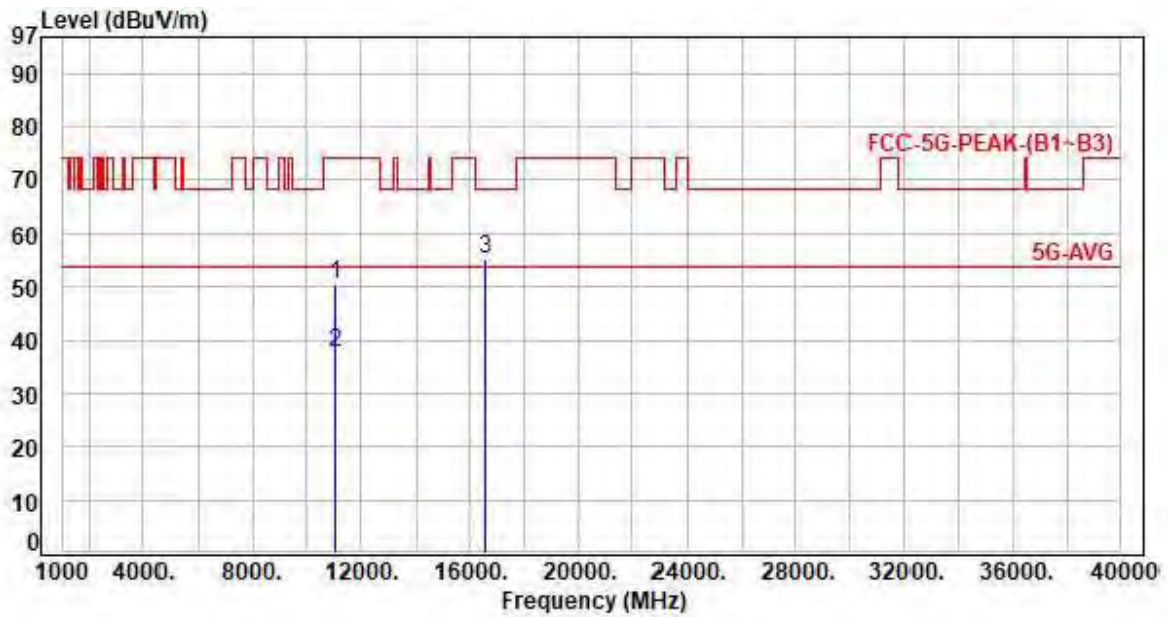


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11060.00	12.49	37.86	50.35	74.00	-23.65	Peak	P
2	11060.00	12.49	25.26	37.75	54.00	-16.25	Average	P
3	16590.00	12.55	42.66	55.21	68.20	-12.99	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 8, 802.11ax HE80 CH122 UNII-2C		

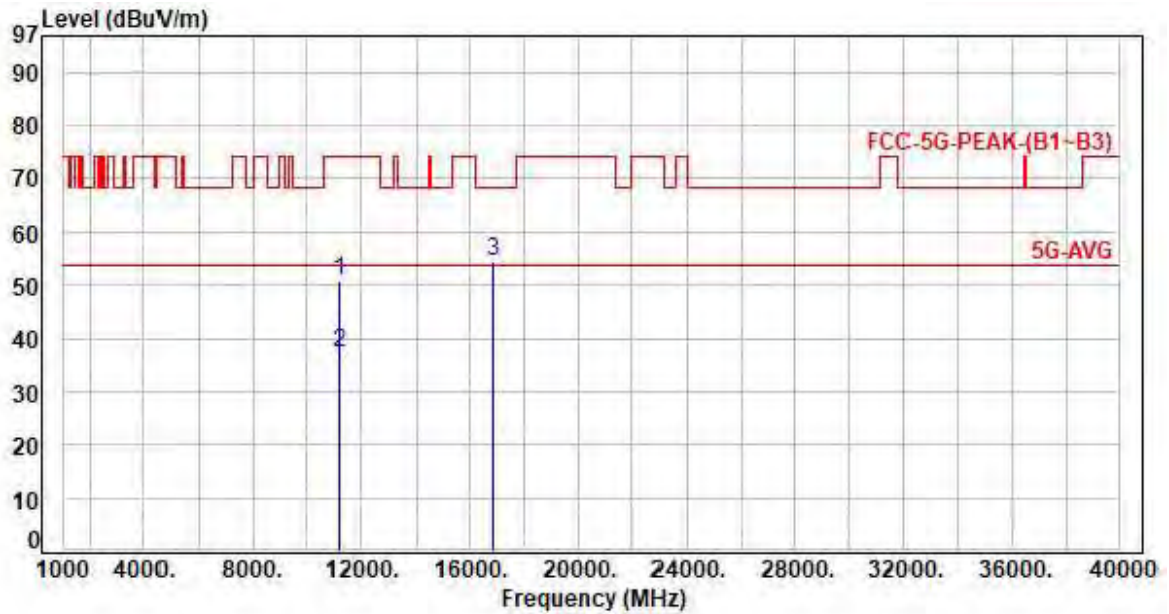


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11220.00	12.38	38.47	50.85	74.00	-23.15	Peak	P
2	11220.00	12.38	24.89	37.27	54.00	-16.73	Average	P
3	16830.00	13.39	41.03	54.42	68.20	-13.78	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 6, 802.11ax HE80 CH122 UNII-2C		

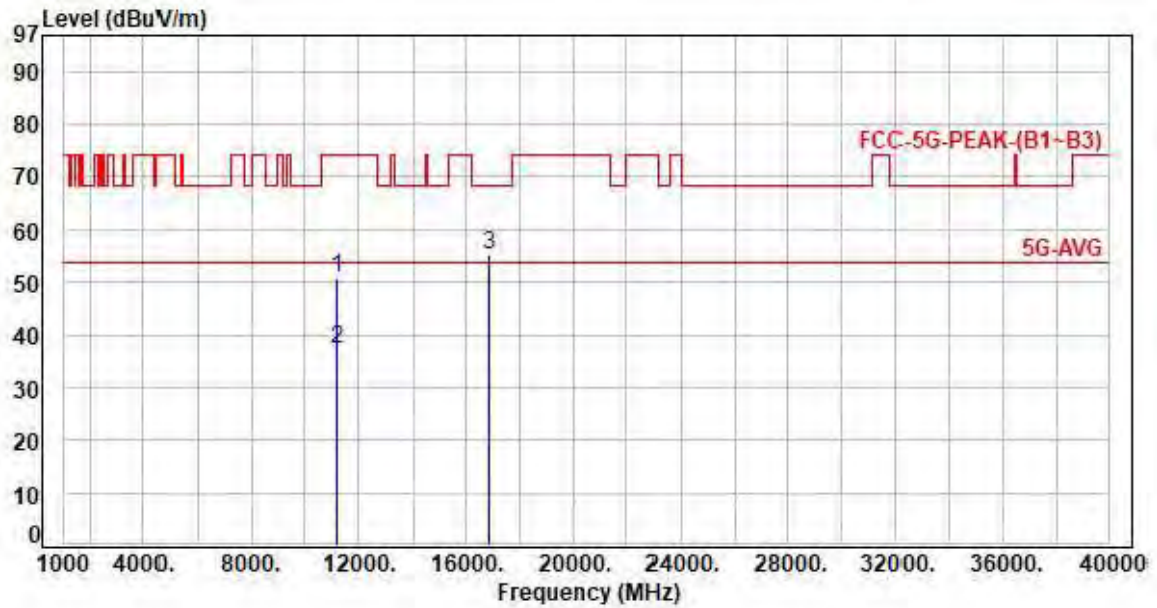

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	11220.00	12.38	38.38	50.76	74.00	-23.24	Peak	P
2	11220.00	12.38	24.86	37.24	54.00	-16.76	Average	P
3	16830.00	13.39	41.96	55.35	68.20	-12.85	Peak	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-Ant B


UNII-3


Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH149 UNII-3		

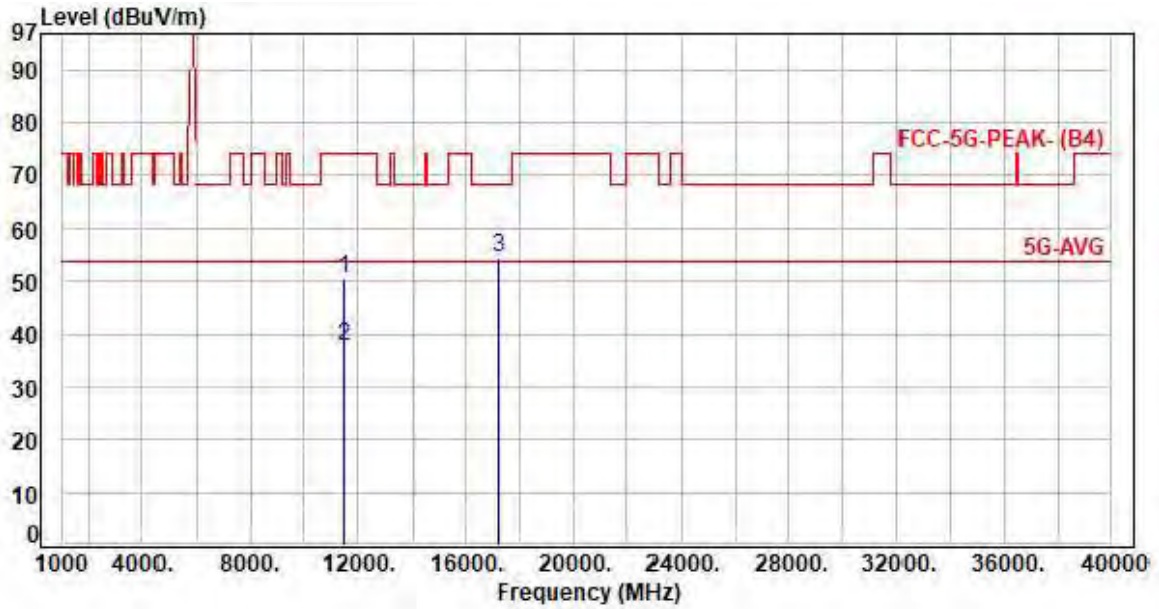



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11490.00	12.23	38.19	50.42	74.00	-23.58	Peak	P
2	11490.00	12.23	25.50	37.73	54.00	-16.27	Average	P
3	17235.00	13.65	41.03	54.68	68.20	-13.52	Peak	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

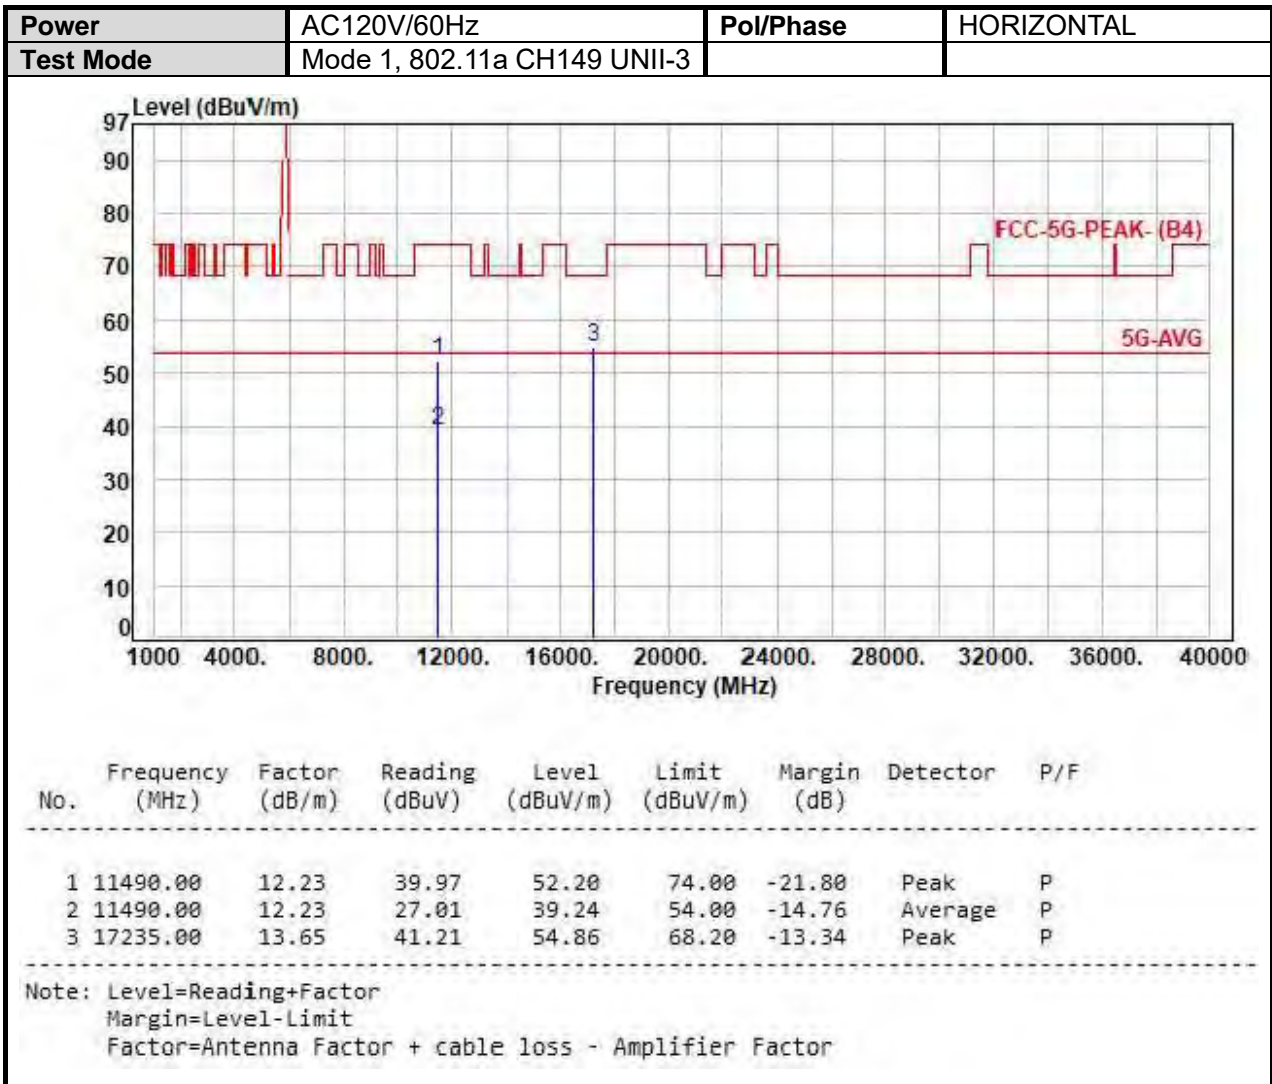

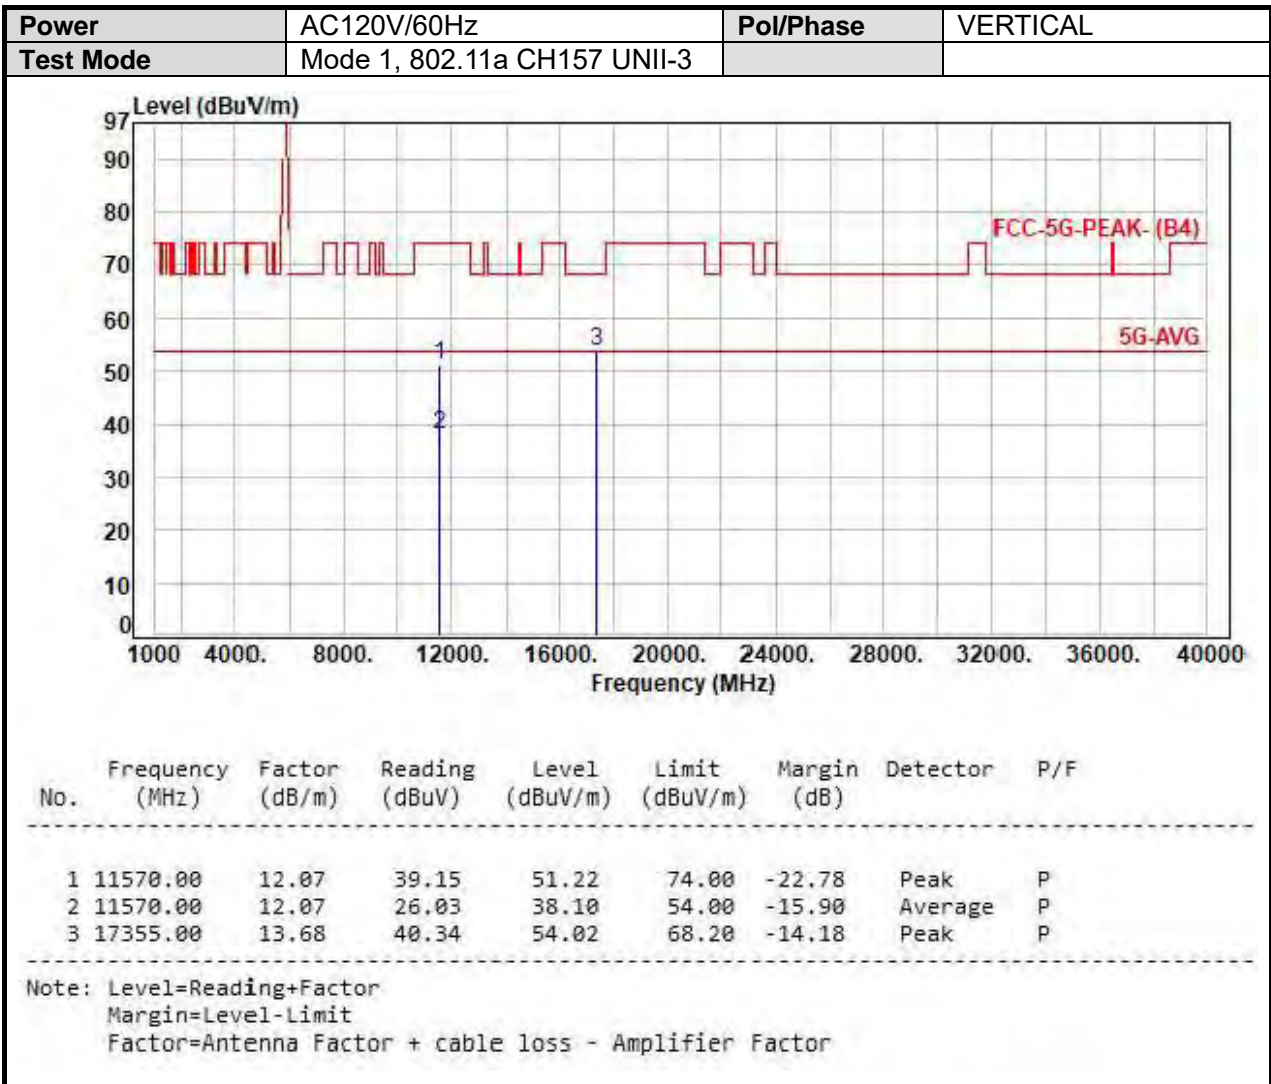

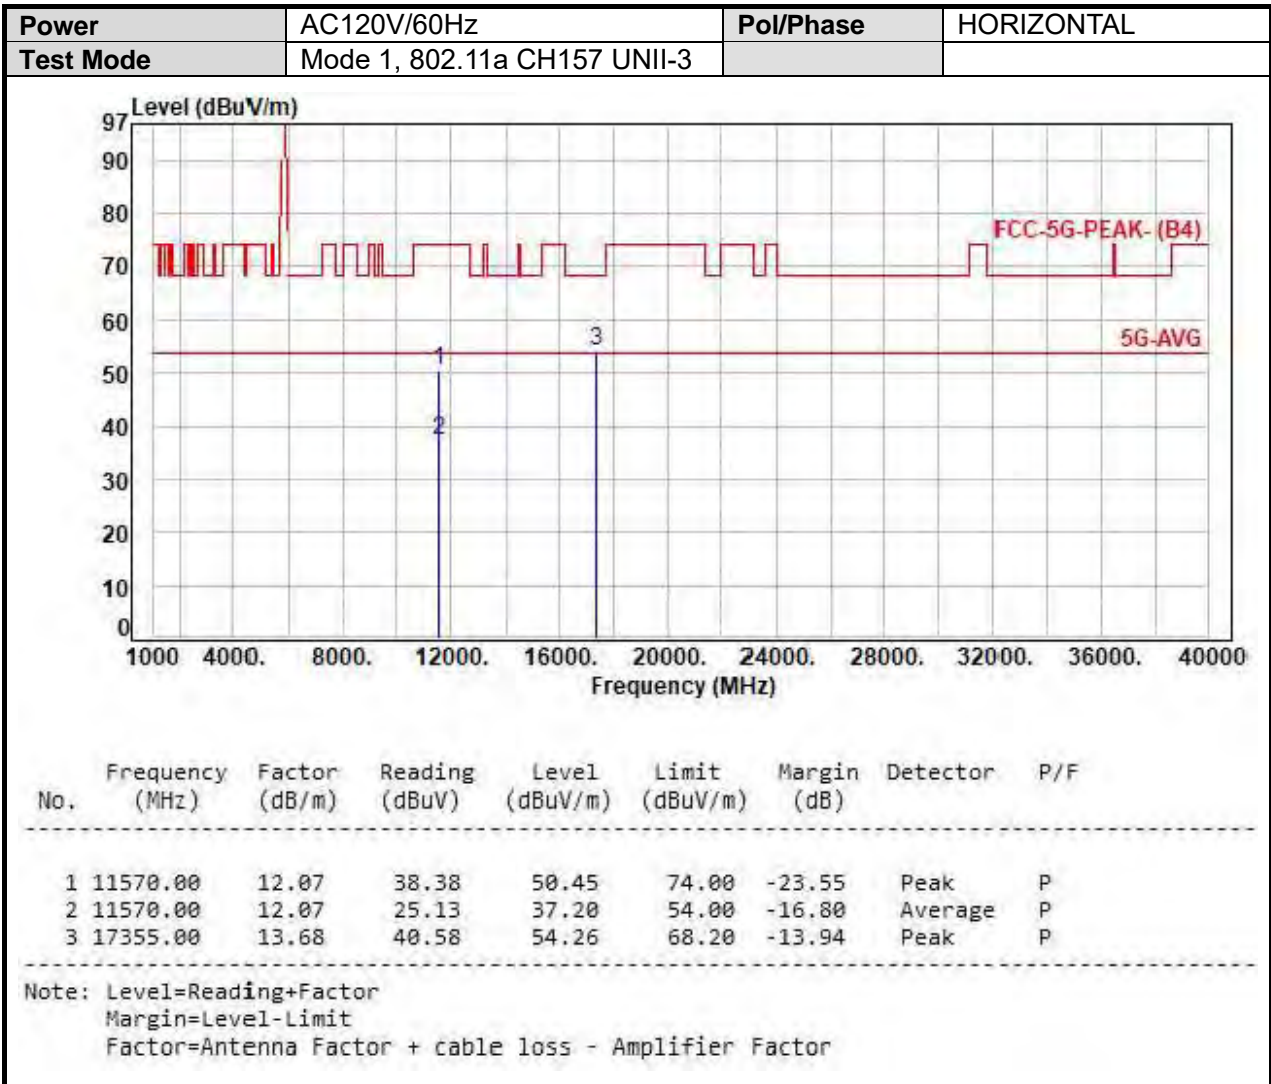

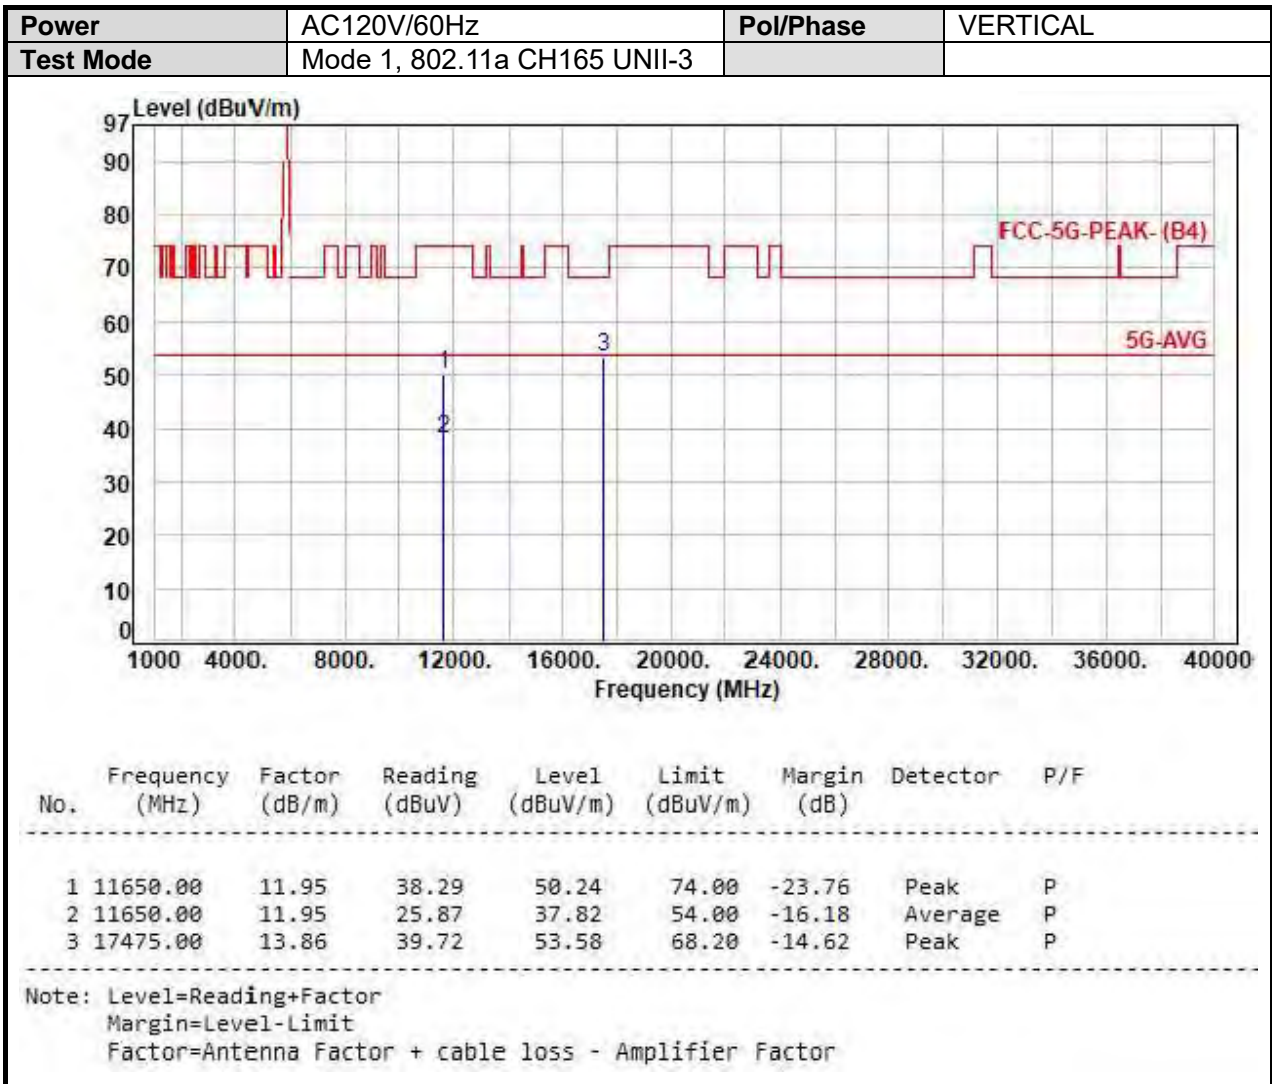


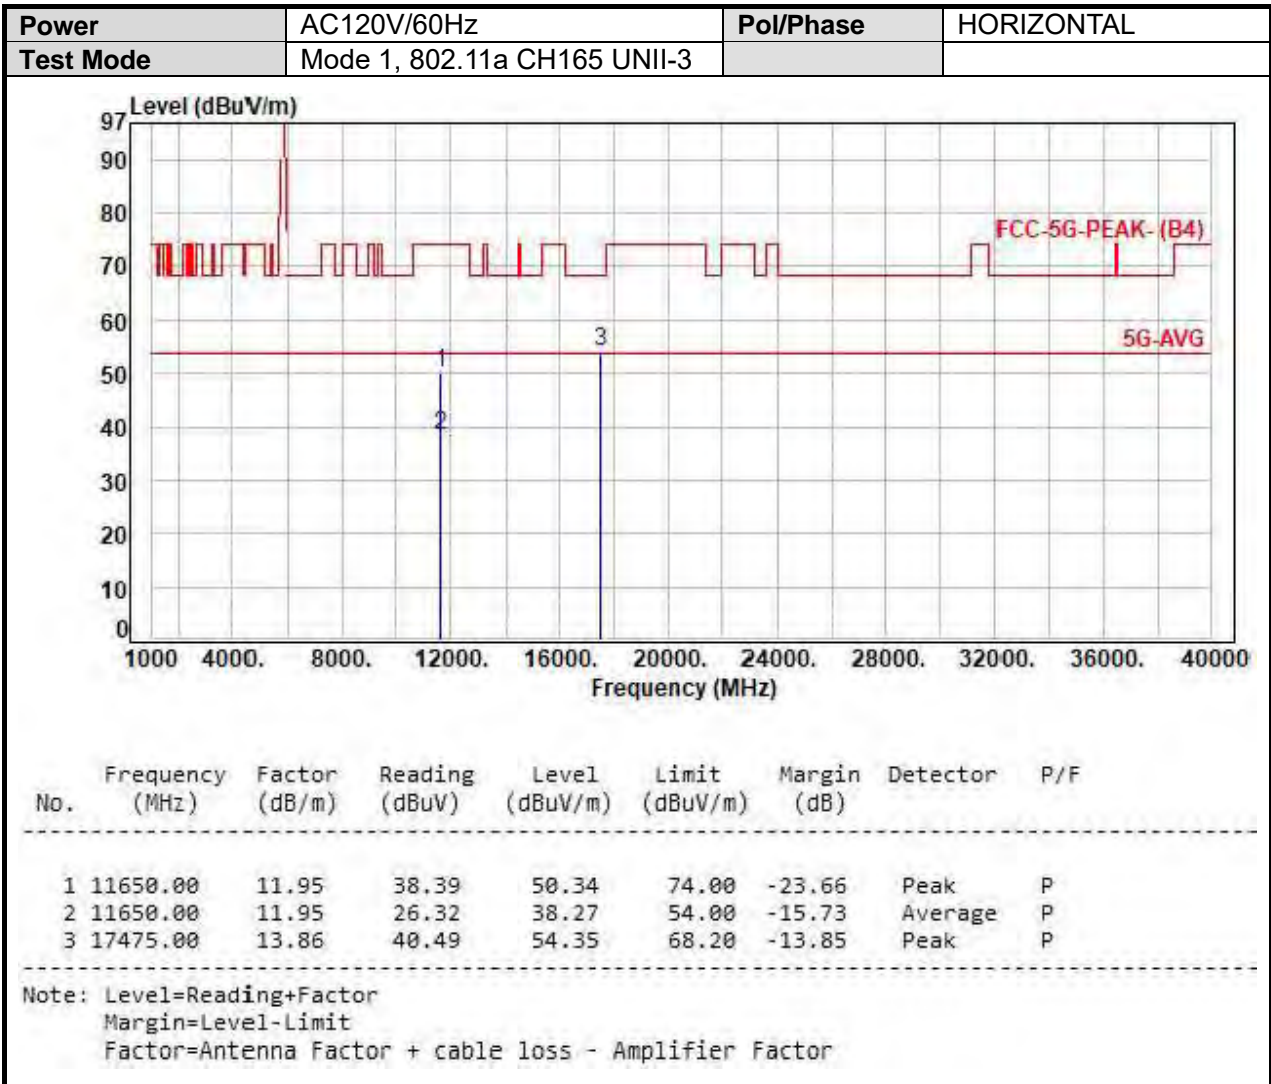



MIMO-UNII-3

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, 802.11ac VHT20 CH149 UNII-3		

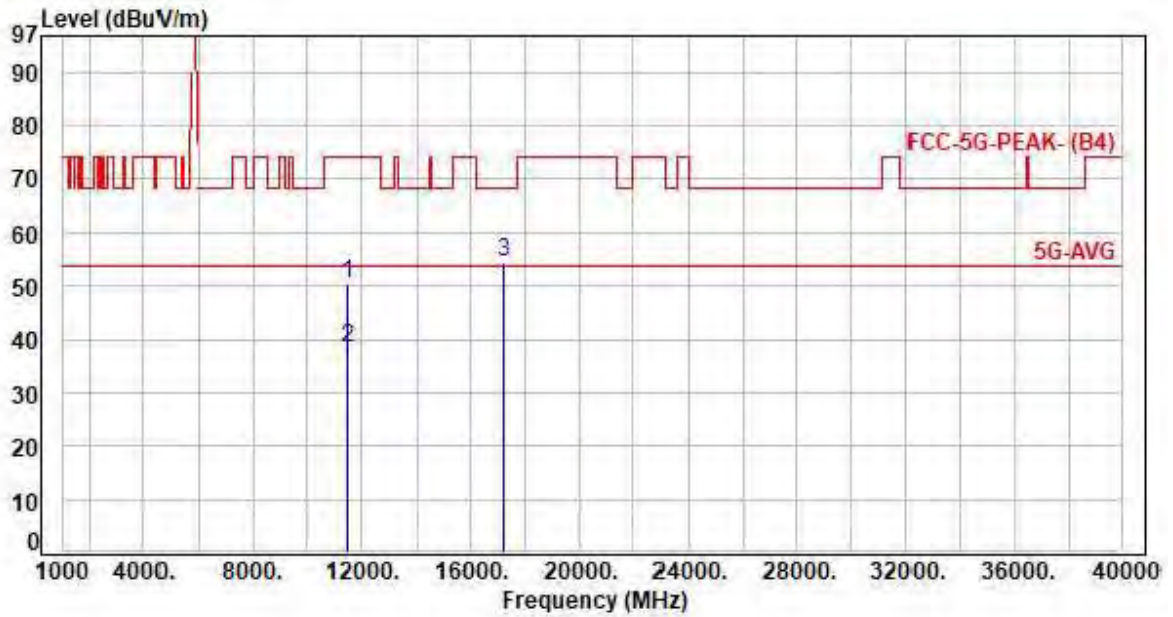


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11490.00	12.23	38.18	50.41	74.00	-23.59	Peak	P
2	11490.00	12.23	26.05	38.28	54.00	-15.72	Average	P
3	17235.00	13.65	40.98	54.63	68.20	-13.57	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 3, 802.11ac VHT20 CH149 UNII-3		

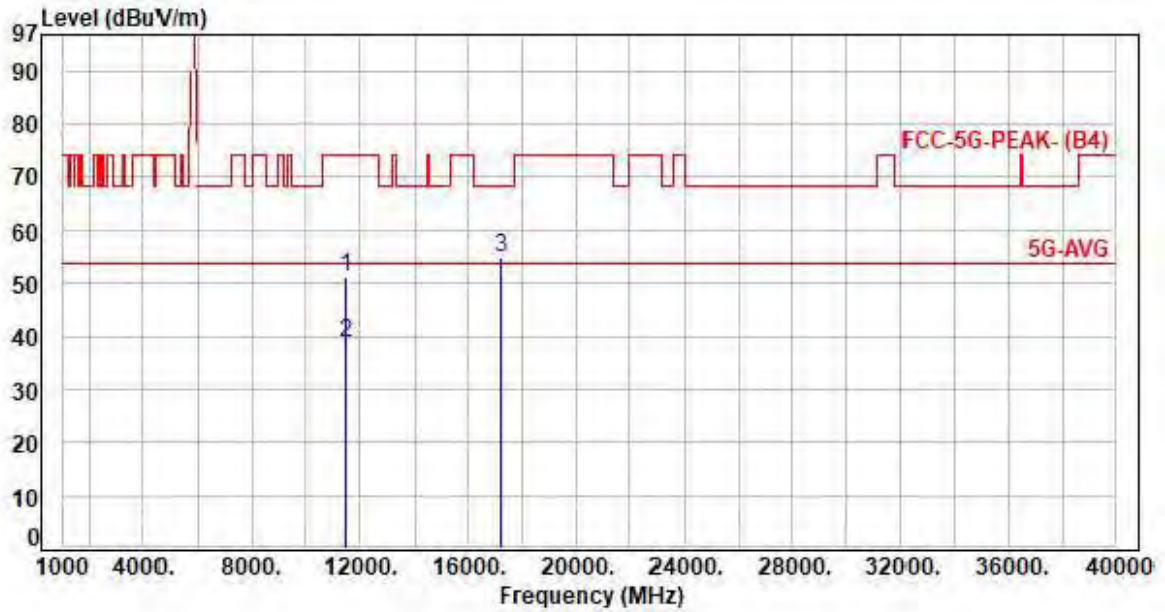


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	11490.00	12.23	39.09	51.32	74.00	-22.68	Peak	P
2	11490.00	12.23	26.42	38.65	54.00	-15.35	Average	P
3	17235.00	13.65	41.41	55.06	68.20	-13.14	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, 802.11ac VHT20 CH157 UNII-3		

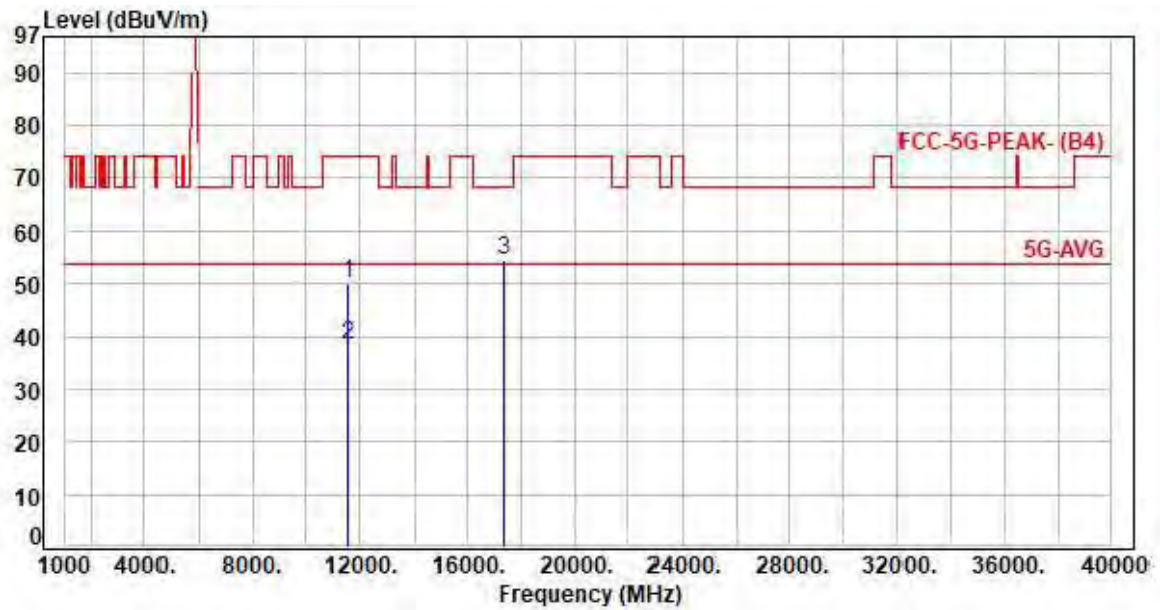


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11570.00	12.07	38.25	50.32	74.00	-23.68	Peak	P
2	11570.00	12.07	26.33	38.40	54.00	-15.60	Average	P
3	17355.00	13.68	40.92	54.60	68.20	-13.60	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

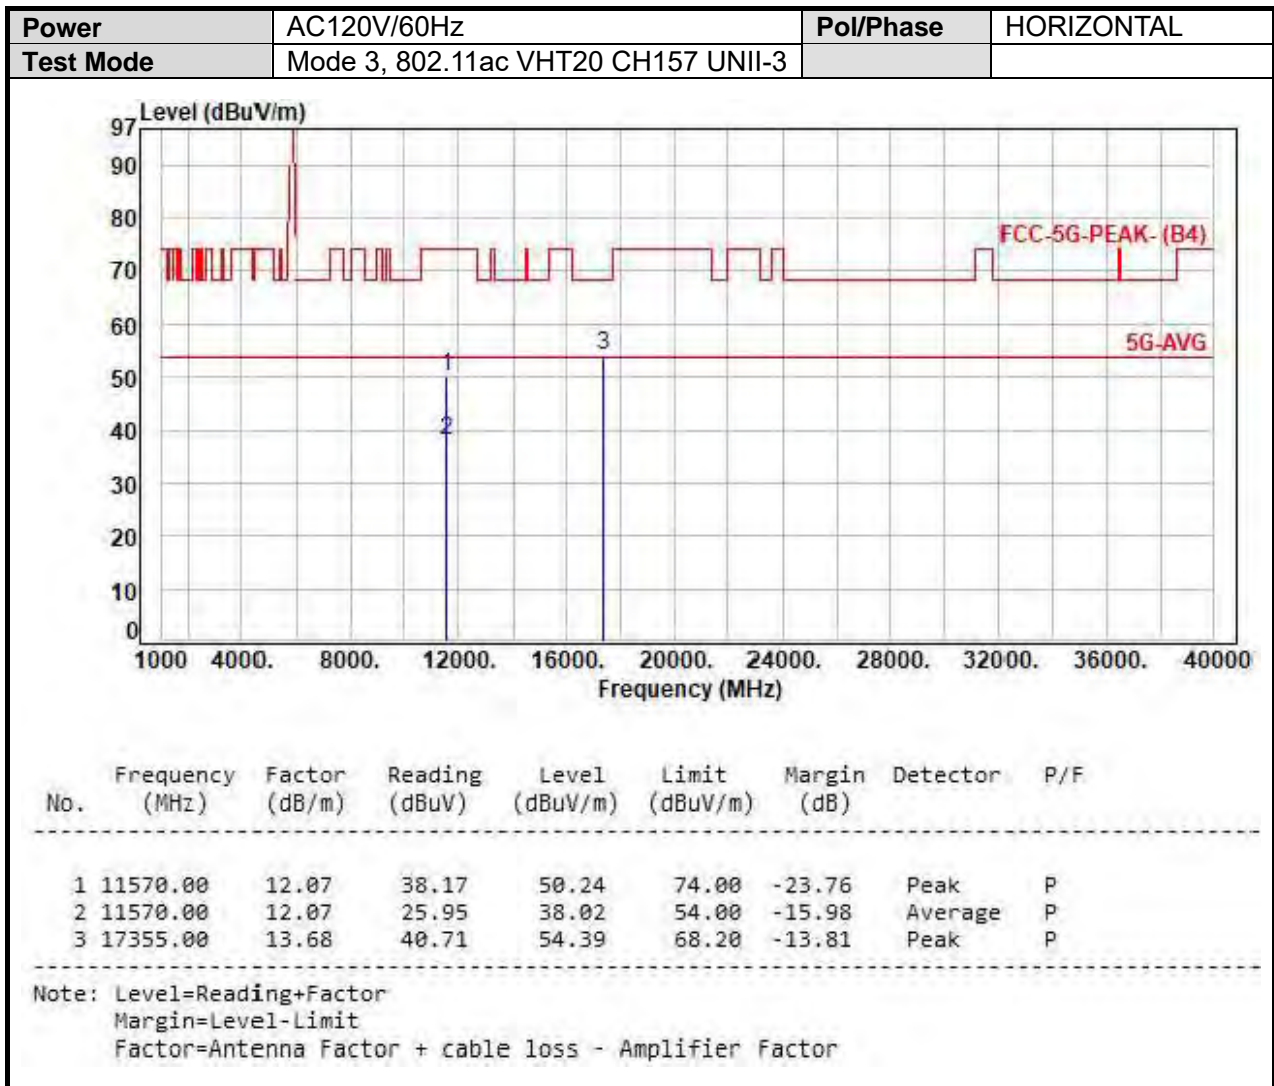



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, 802.11ac VHT20 CH165 UNII-3		

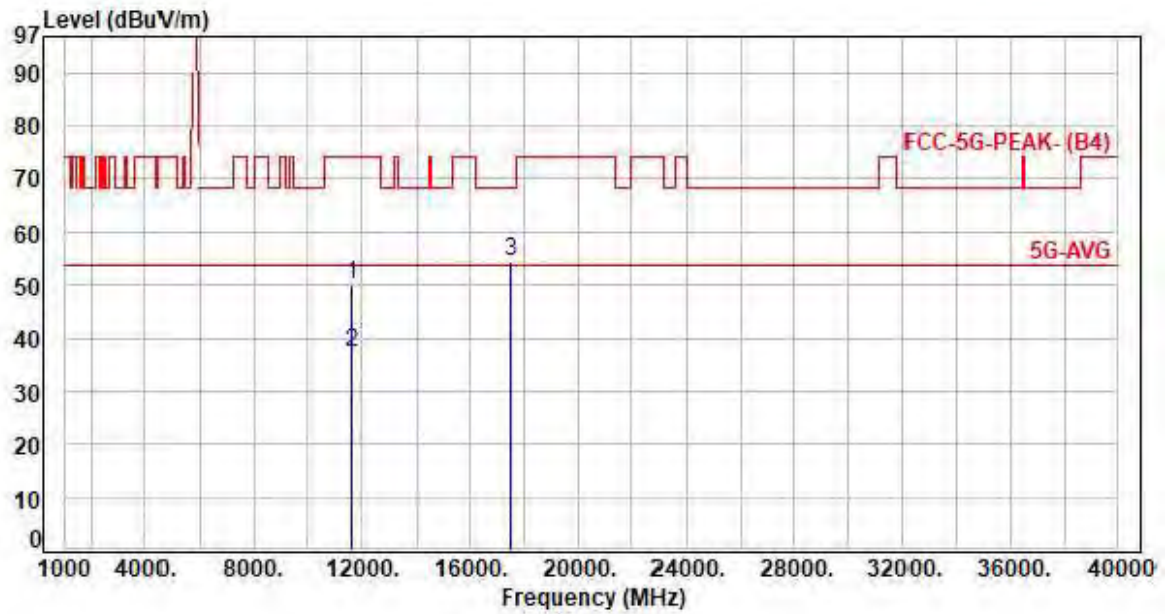


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11650.00	11.95	38.29	50.24	74.00	-23.76	Peak	P
2	11650.00	11.95	25.47	37.42	54.00	-16.58	Average	P
3	17475.00	13.86	40.78	54.64	68.20	-13.56	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 3, 802.11ac VHT20 CH165 UNII-3		

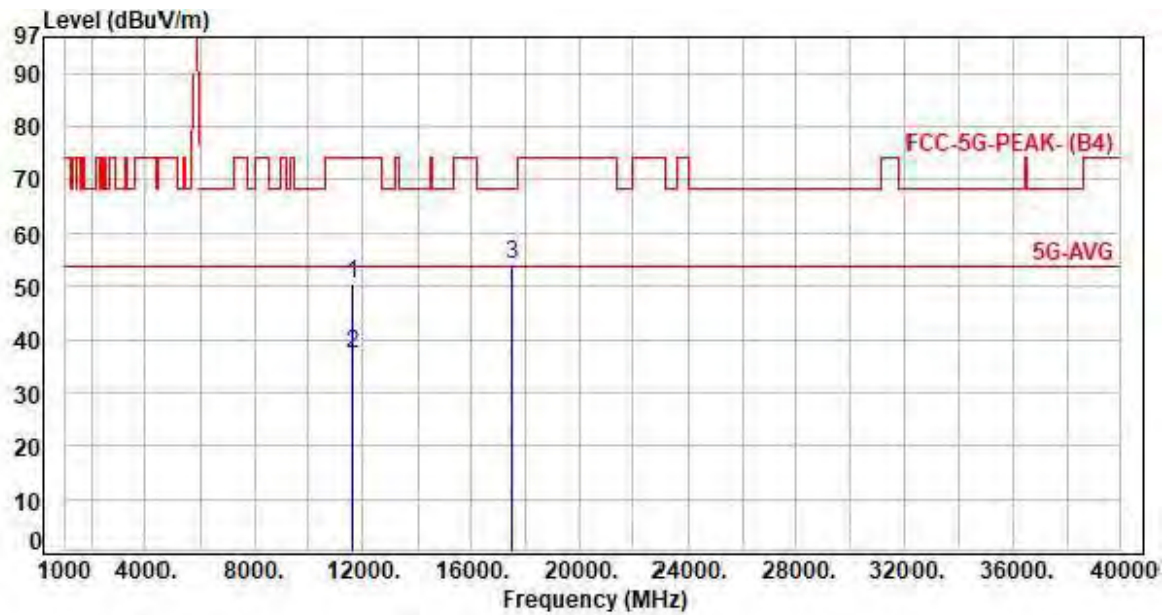


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	11650.00	11.95	38.63	50.58	74.00	-23.42	Peak	P
2	11650.00	11.95	25.44	37.39	54.00	-16.61	Average	P
3	17475.00	13.86	40.50	54.36	68.20	-13.84	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 4, 802.11ac VHT40 CH151 UNII-3		

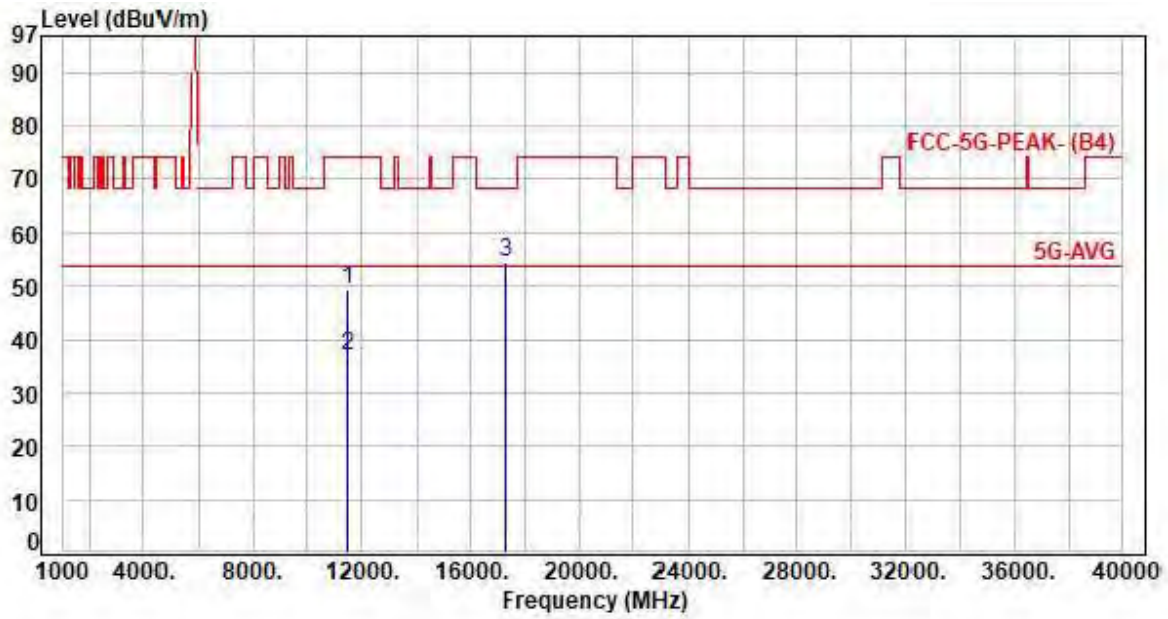


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11510.00	12.20	37.25	49.45	74.00	-24.55	Peak	P
2	11510.00	12.20	24.86	37.06	54.00	-16.94	Average	P
3	17265.00	13.65	40.97	54.62	68.20	-13.58	Peak	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 4, 802.11ac VHT40 CH151 UNII-3		

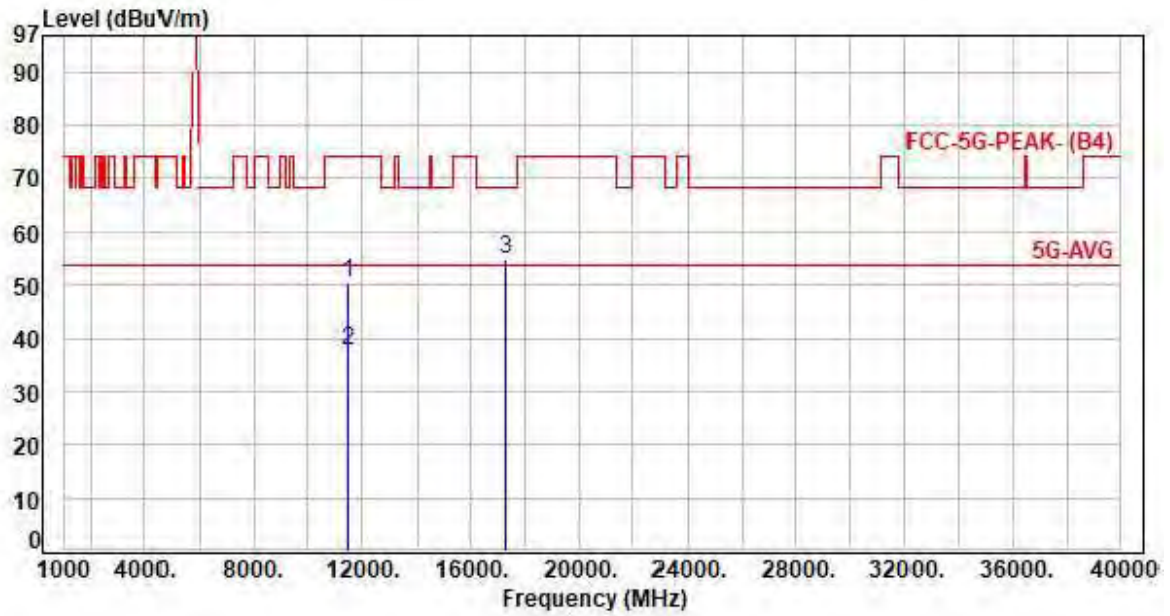


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11510.00	12.20	38.19	50.39	74.00	-23.61	Peak	P
2	11510.00	12.20	25.25	37.45	54.00	-16.55	Average	P
3	17265.00	13.65	41.21	54.86	68.20	-13.34	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 4, 802.11ac VHT40 CH159 UNII-3		

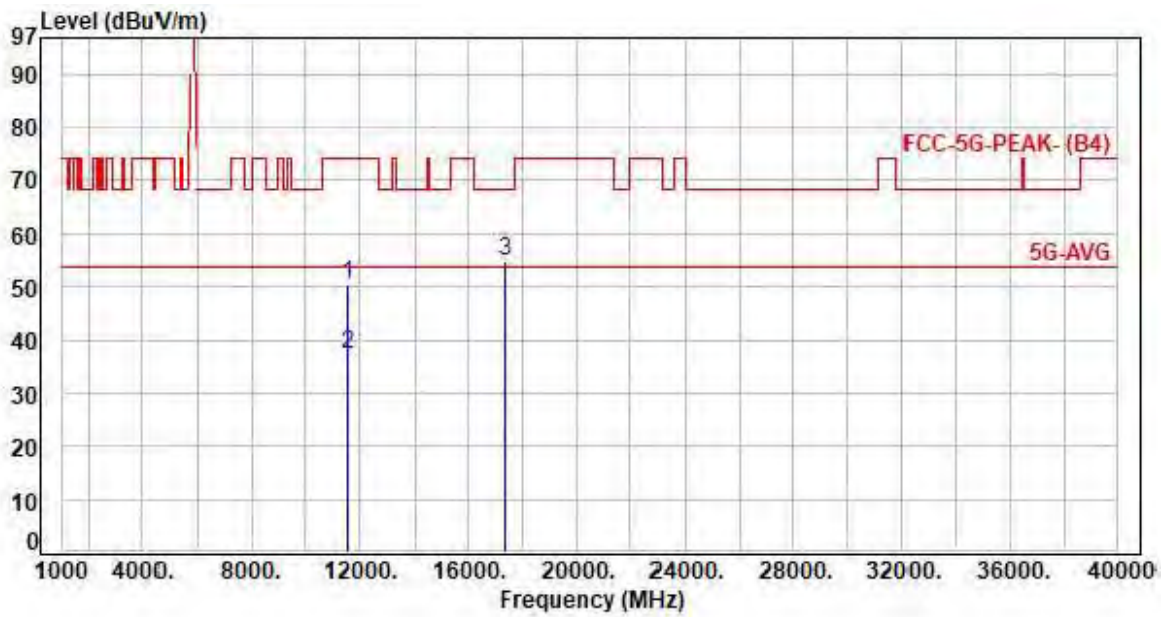


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11590.00	12.03	38.46	50.49	74.00	-23.51	Peak	P
2	11590.00	12.03	25.35	37.38	54.00	-16.62	Average	P
3	17385.00	13.69	41.34	55.03	68.20	-13.17	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

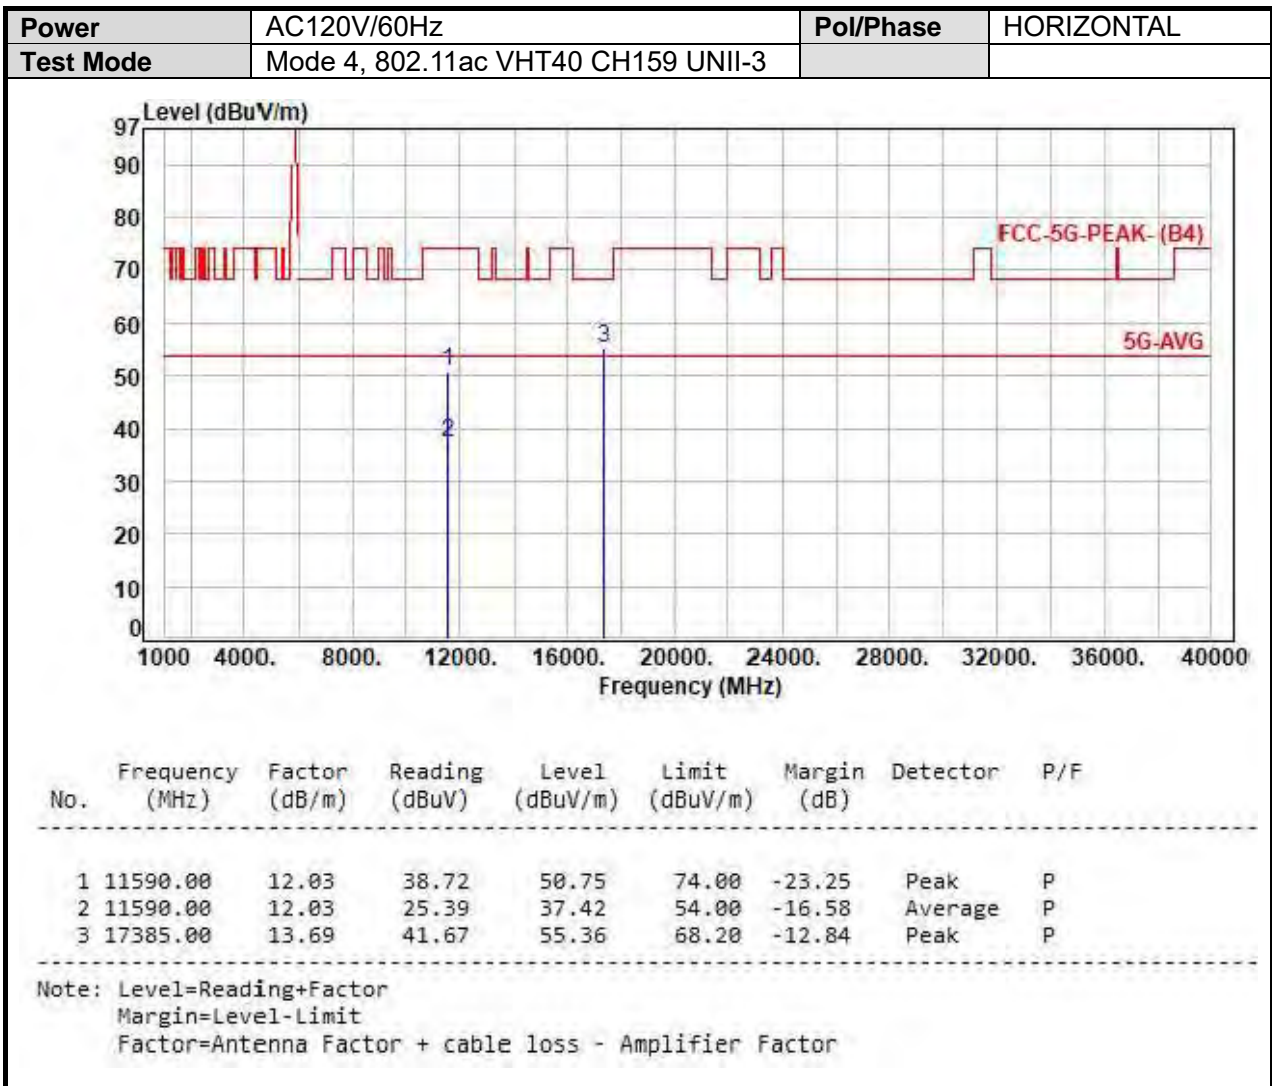



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 5, 802.11ac VHT80 CH155 UNII-3		

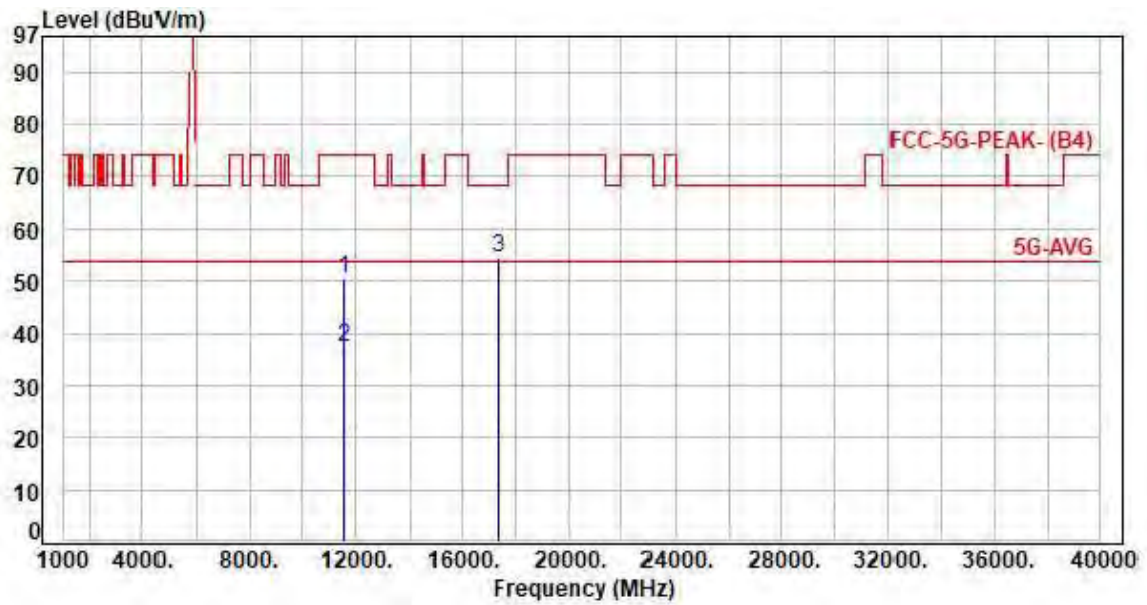


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11550.00	12.11	38.35	50.46	74.00	-23.54	Peak	P
2	11550.00	12.11	25.13	37.24	54.00	-16.76	Average	P
3	17325.00	13.67	40.94	54.61	68.20	-13.59	Peak	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 5, 802.11ac VHT80 CH155 UNII-3		

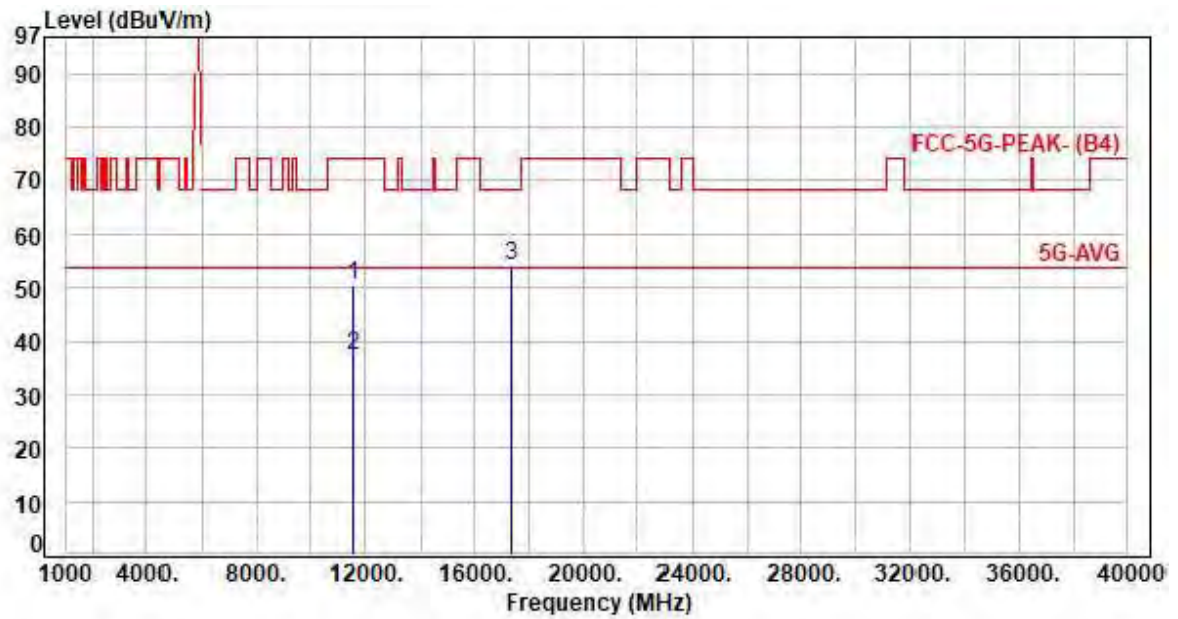


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	11550.00	12.11	38.51	50.62	74.00	-23.38	Peak	P
2	11550.00	12.11	25.30	37.41	54.00	-16.59	Average	P
3	17325.00	13.67	40.58	54.25	68.20	-13.95	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 6, 802.11ax HE20 CH149 UNII-3		

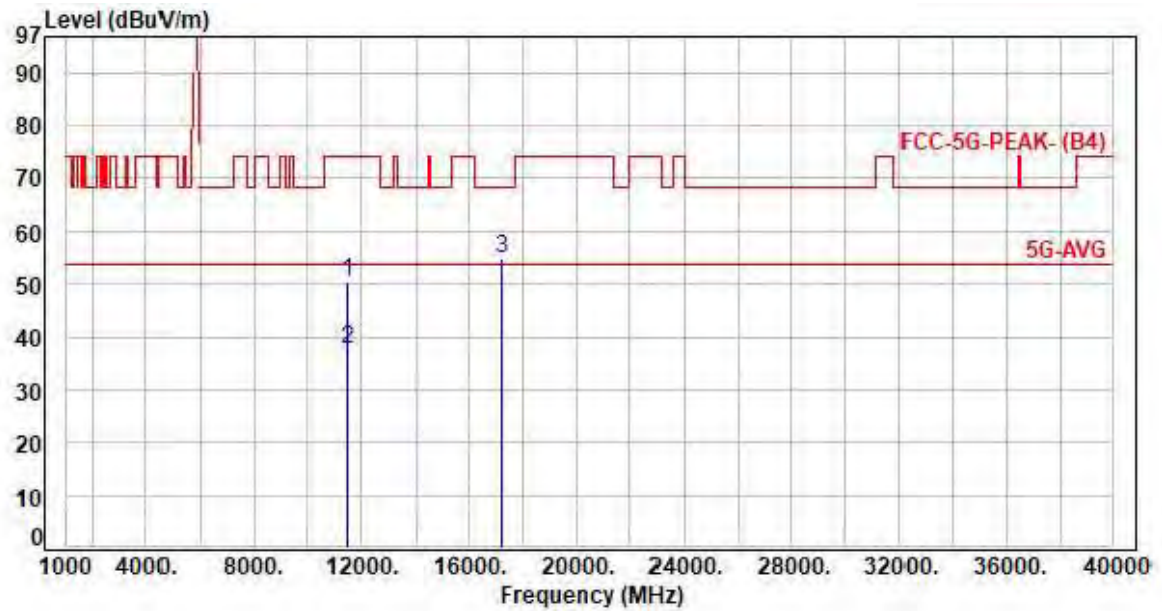


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11490.00	12.23	38.30	50.53	74.00	-23.47	Peak	P
2	11490.00	12.23	25.46	37.69	54.00	-16.31	Average	P
3	17235.00	13.65	41.45	55.10	68.20	-13.10	Peak	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor

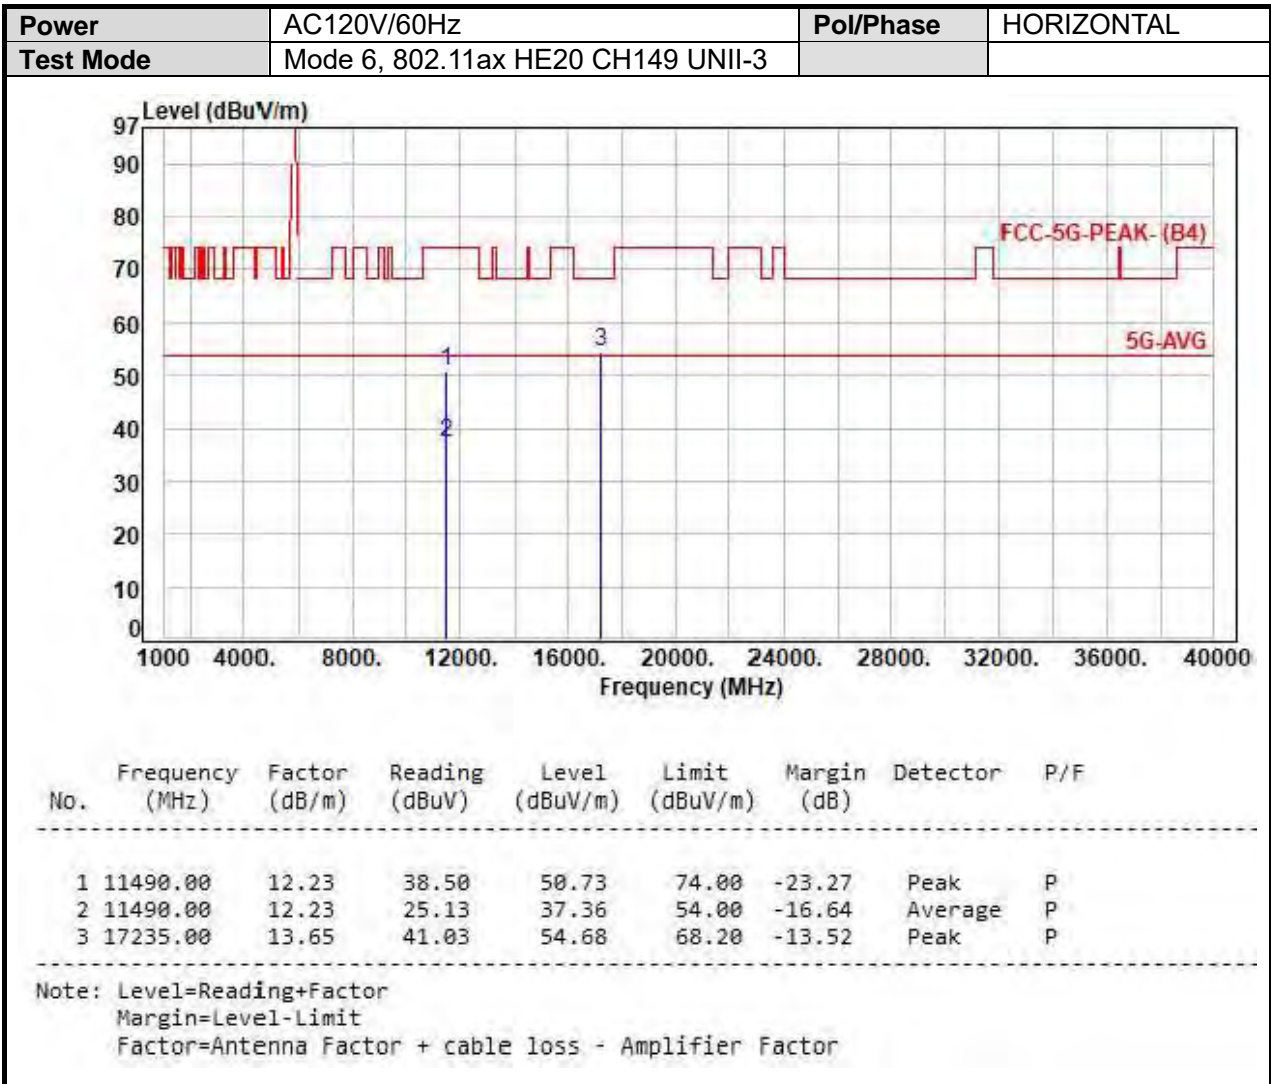





Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 6, 802.11ax HE20 CH157 UNII-3		

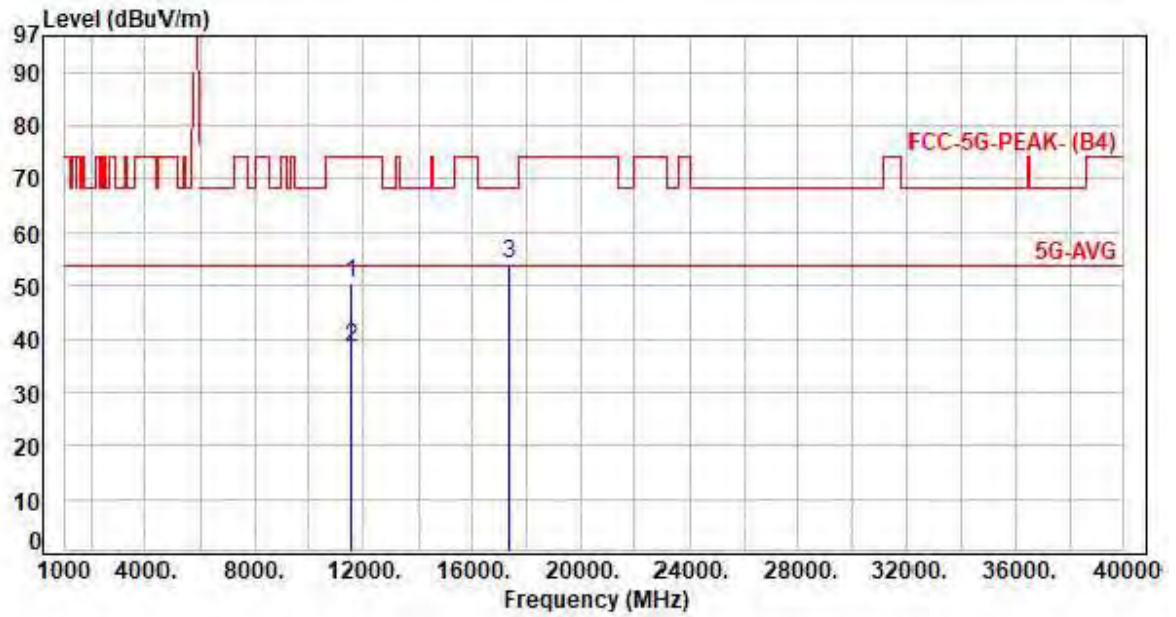

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11570.00	12.07	38.30	50.37	74.00	-23.63	Peak	P
2	11570.00	12.07	26.39	38.46	54.00	-15.54	Average	P
3	17355.00	13.68	40.56	54.24	68.20	-13.96	Peak	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

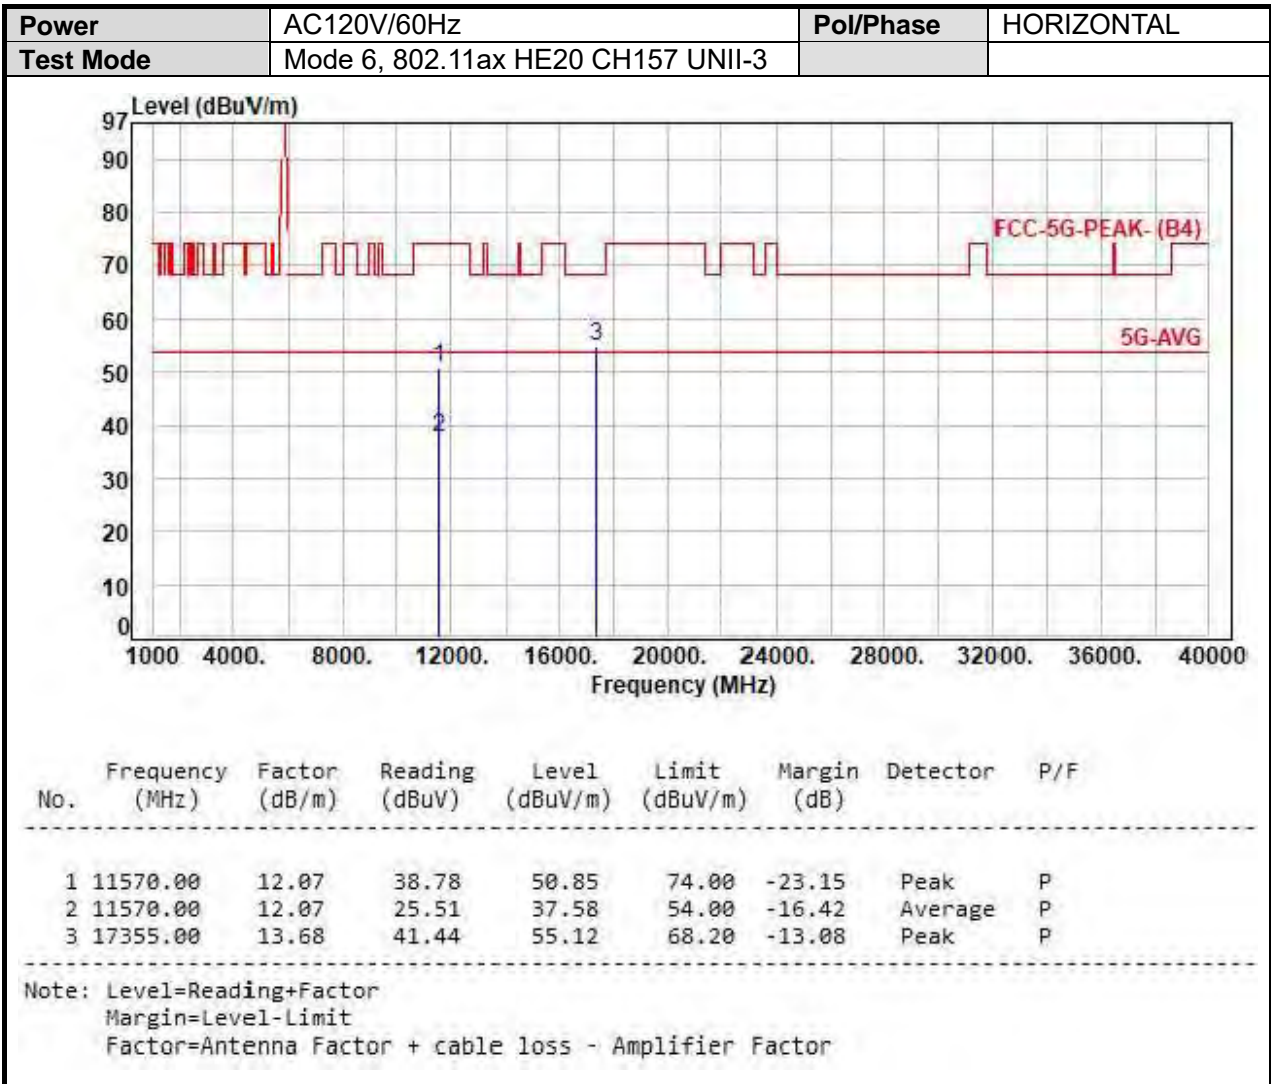

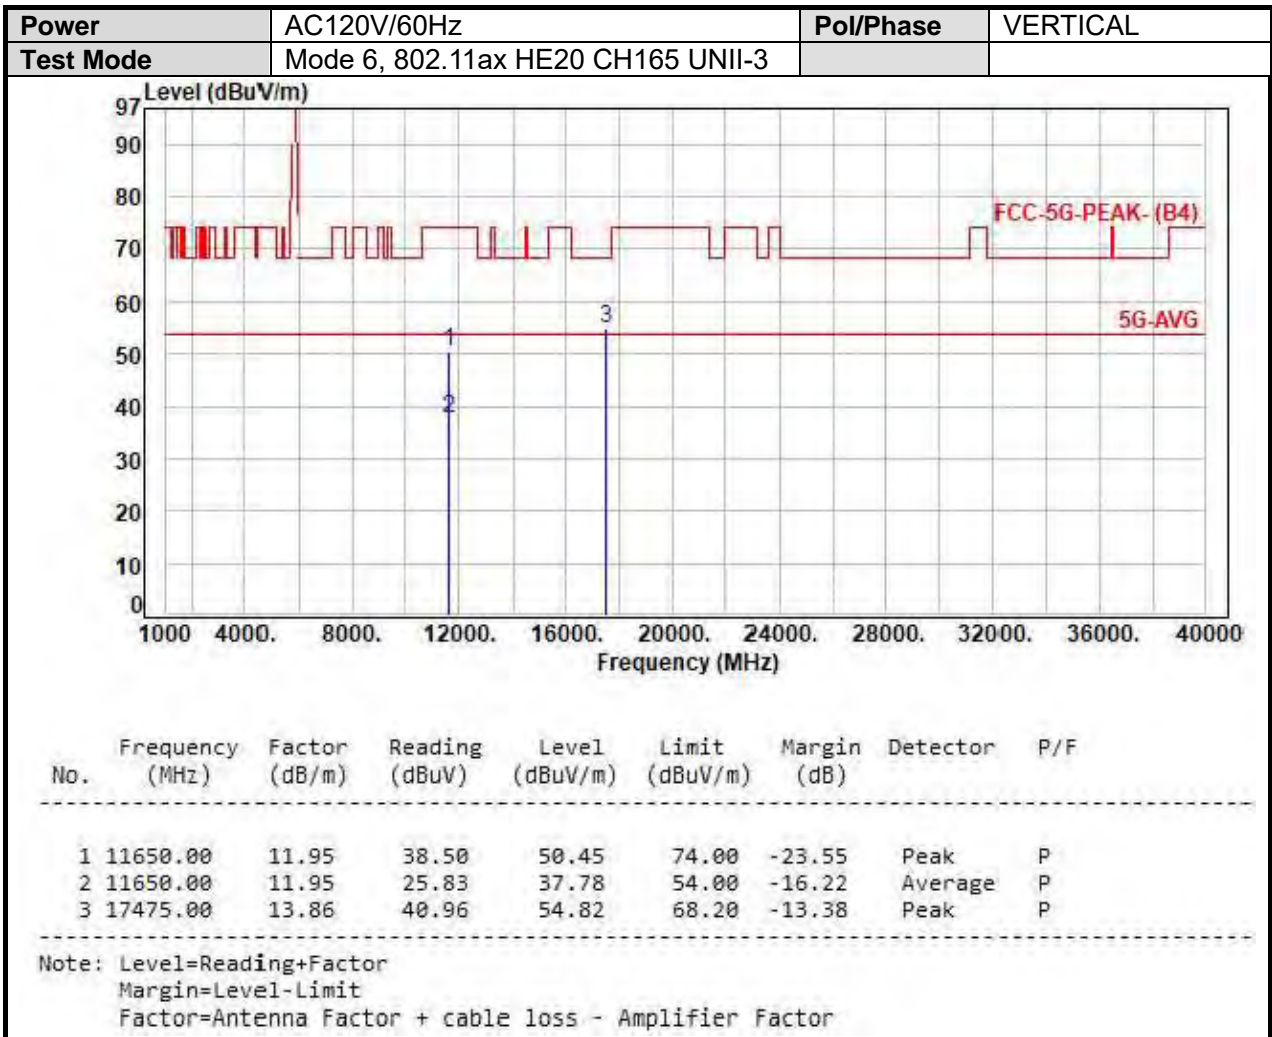





Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 6, 802.11ax HE20 CH165 UNII-3		

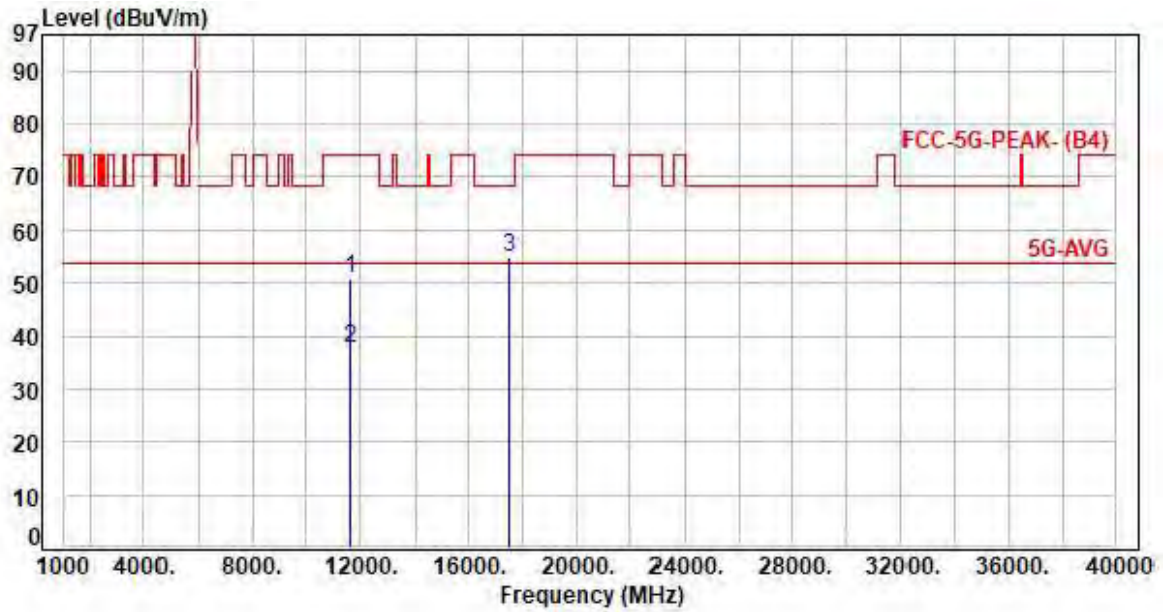

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11650.00	11.95	38.85	50.80	74.00	-23.20	Peak	P
2	11650.00	11.95	25.81	37.76	54.00	-16.24	Average	P
3	17475.00	13.86	41.15	55.01	68.20	-13.19	Peak	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

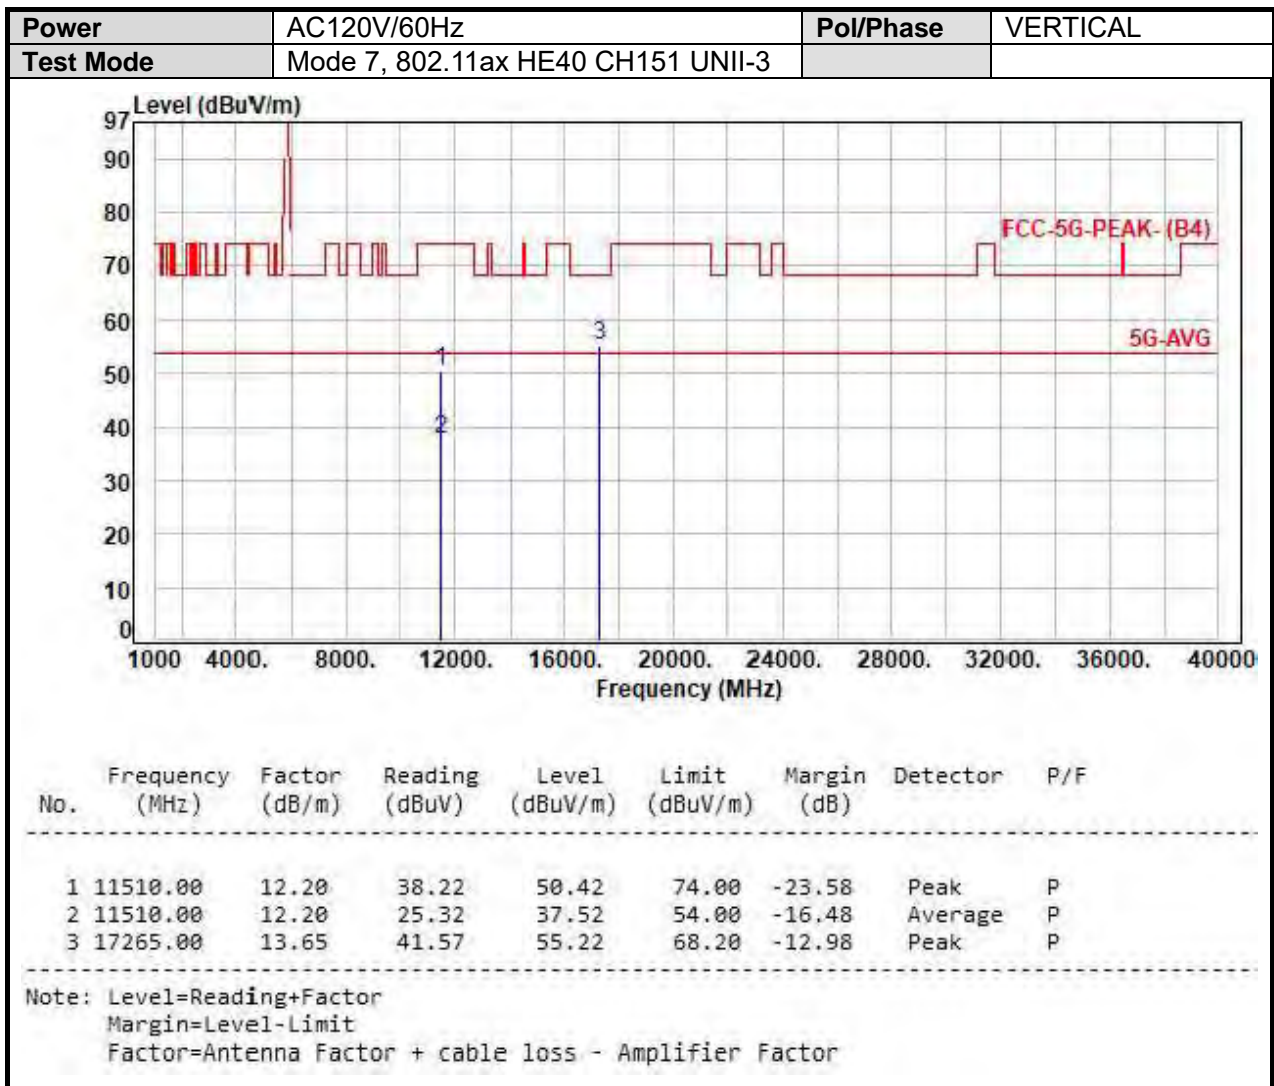

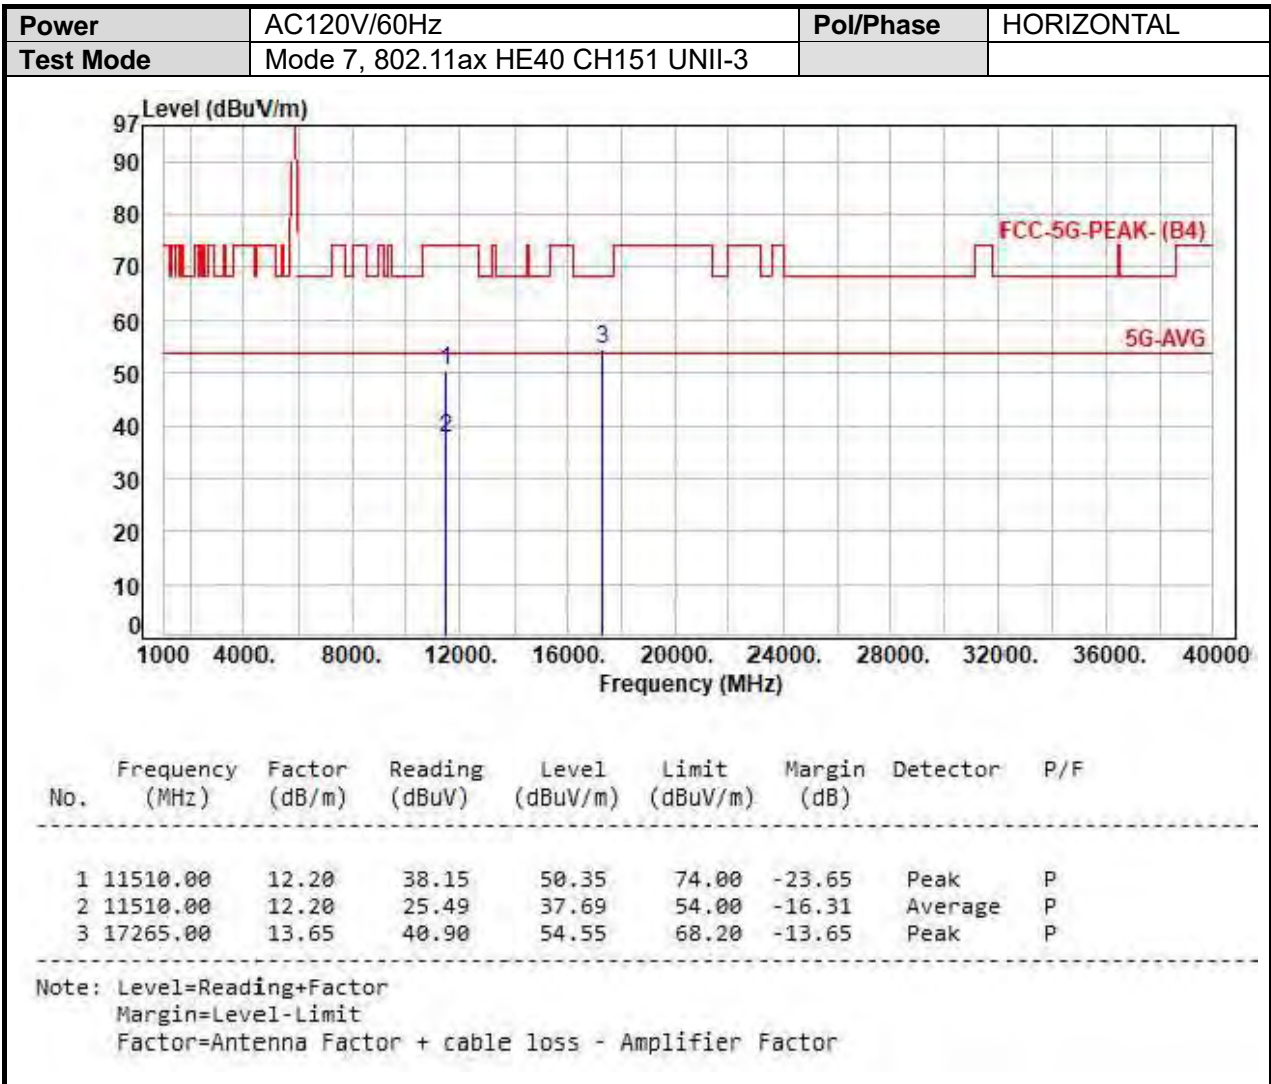




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 7, 802.11ax HE40 CH159 UNII-3		

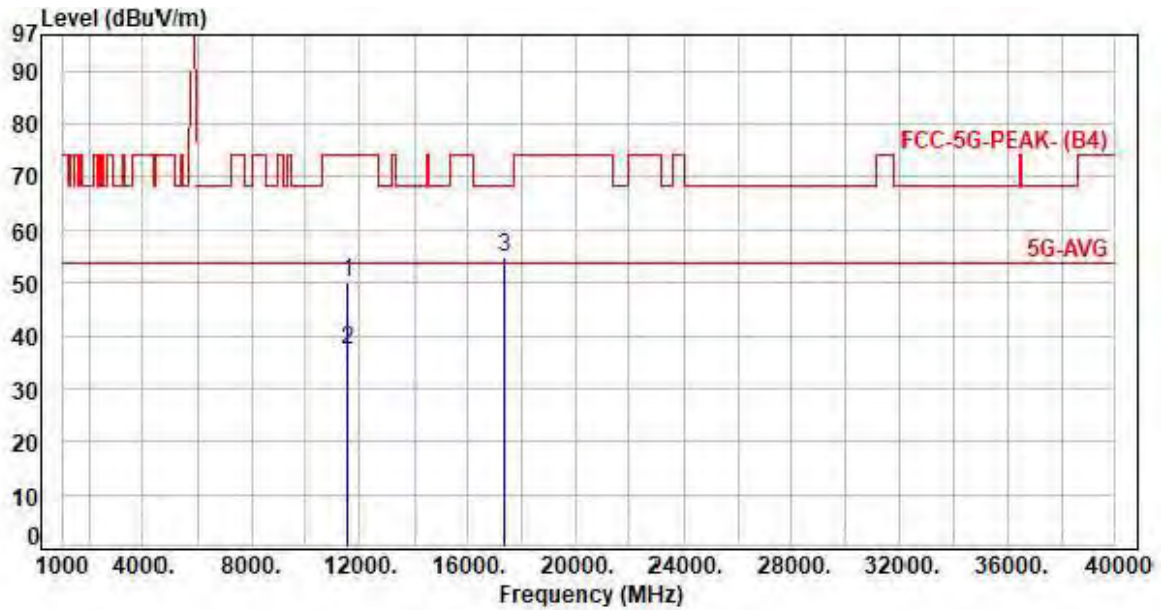


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11590.00	12.03	38.31	50.34	74.00	-23.66	Peak	P
2	11590.00	12.03	25.39	37.42	54.00	-16.58	Average	P
3	17385.00	13.69	41.11	54.80	68.20	-13.40	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

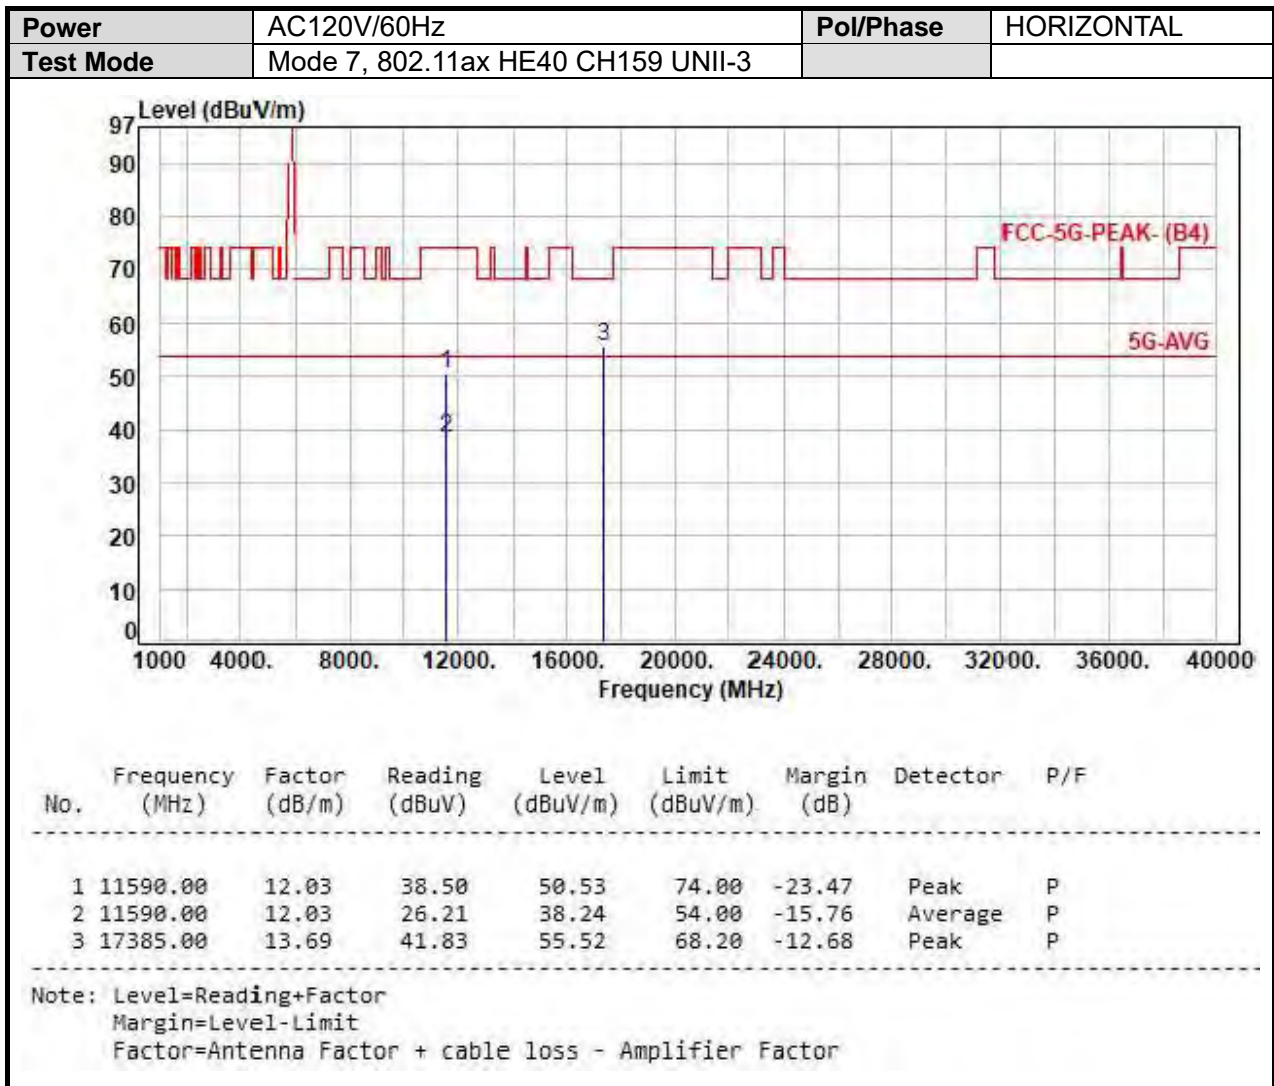




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 8, 802.11ax HE80 CH155 UNII-3		

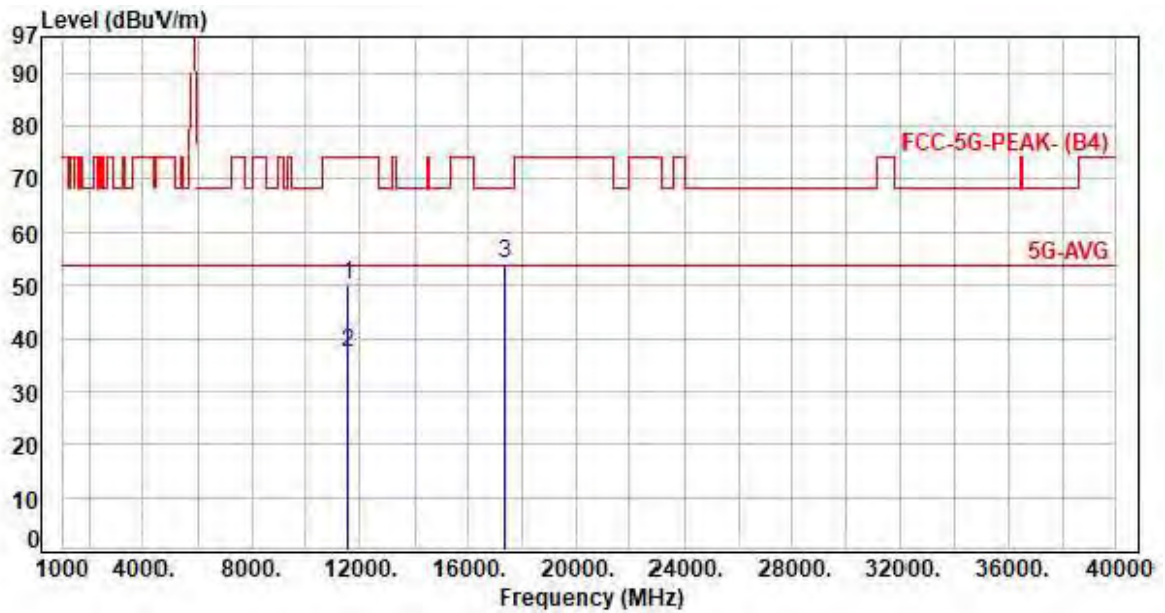

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11550.00	12.11	38.04	50.15	74.00	-23.85	Peak	P
2	11550.00	12.11	25.13	37.24	54.00	-16.76	Average	P
3	17325.00	13.67	40.60	54.27	68.20	-13.93	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

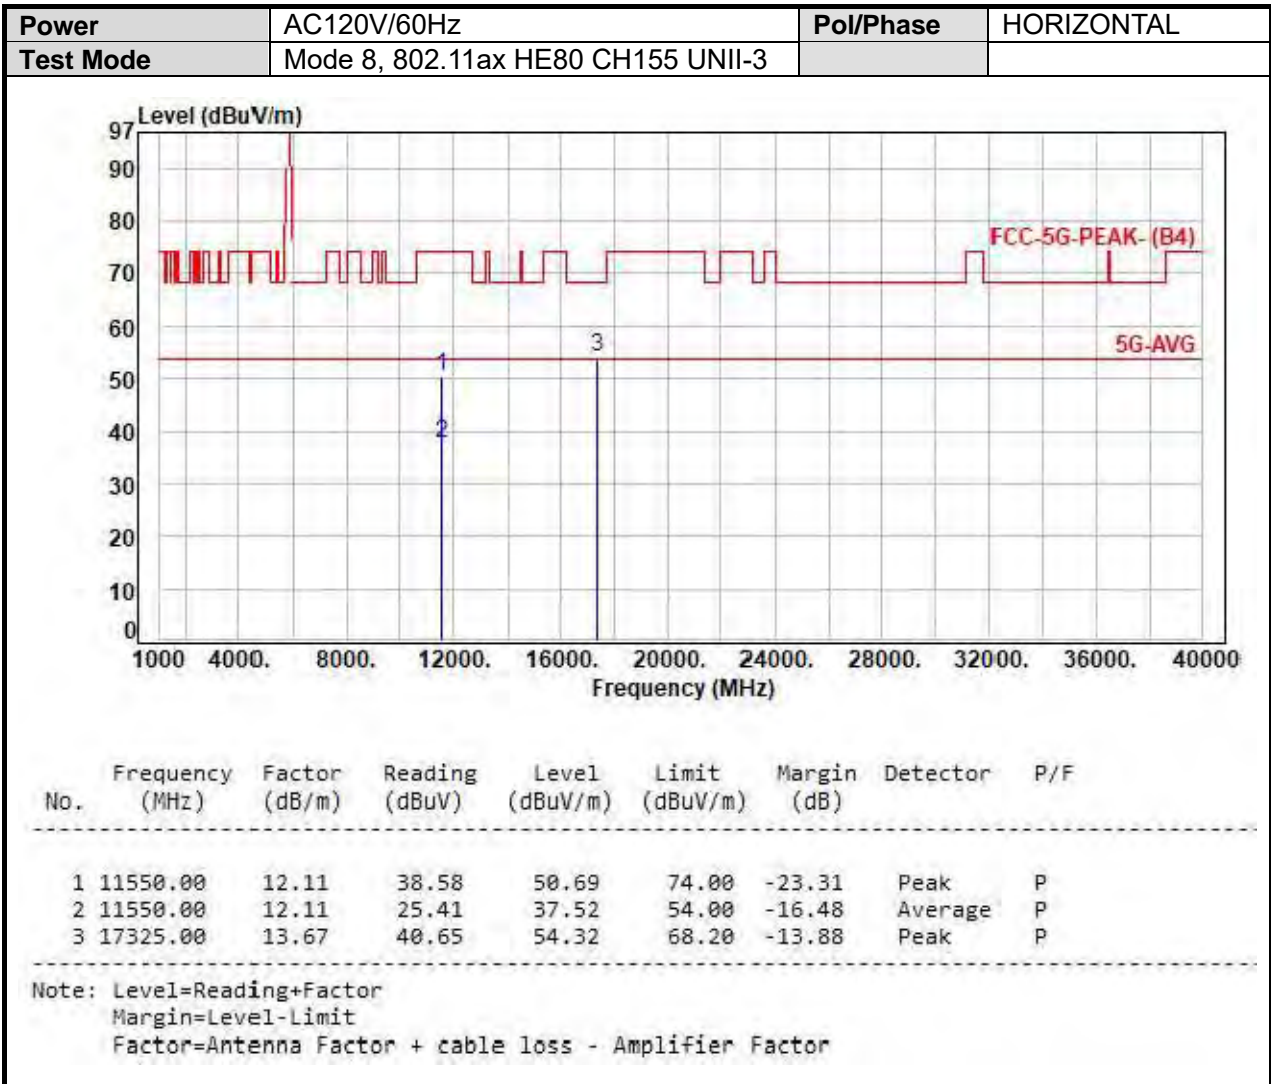



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



SISO-Ant B
UNII-1

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH36 UNII-1		

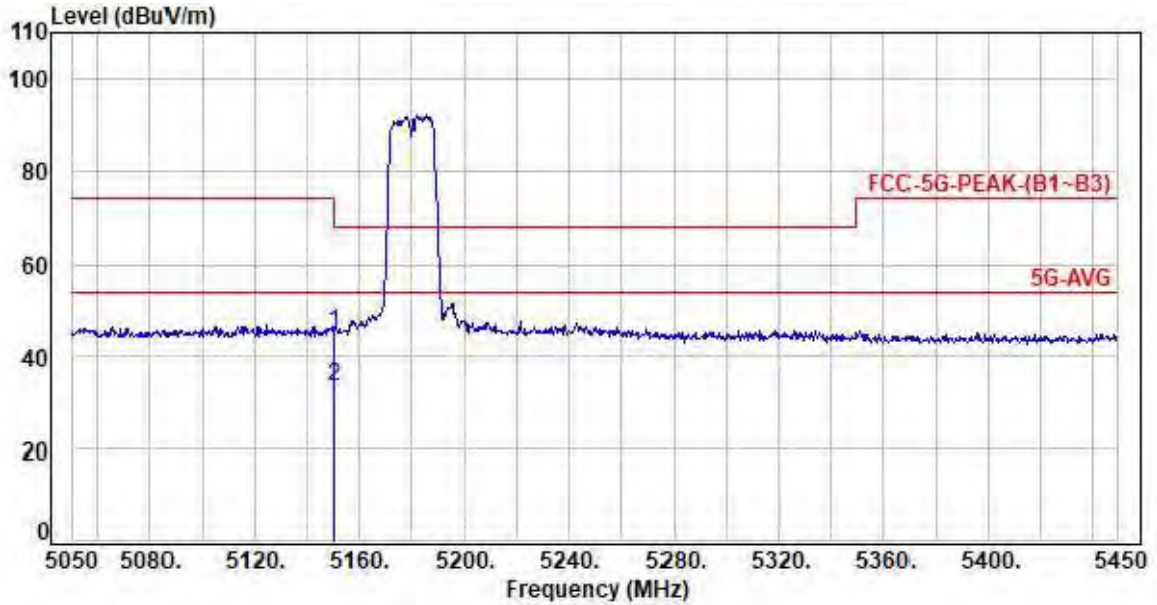


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	42.76	45.01	74.00	-28.99	Peak	P
2	5150.00	2.25	31.22	33.47	54.00	-20.53	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, 802.11a CH36 UNII-1		

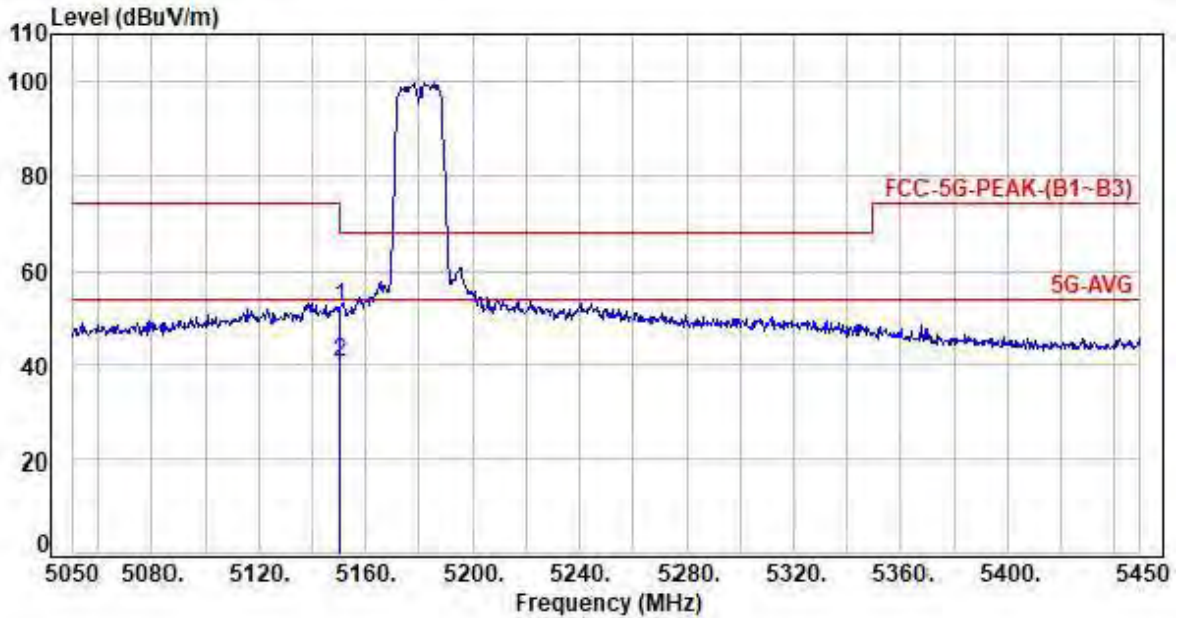


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	49.88	52.13	74.00	-21.87	Peak	P
2	5150.00	2.25	38.44	40.69	54.00	-13.31	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH48 UNII-1		

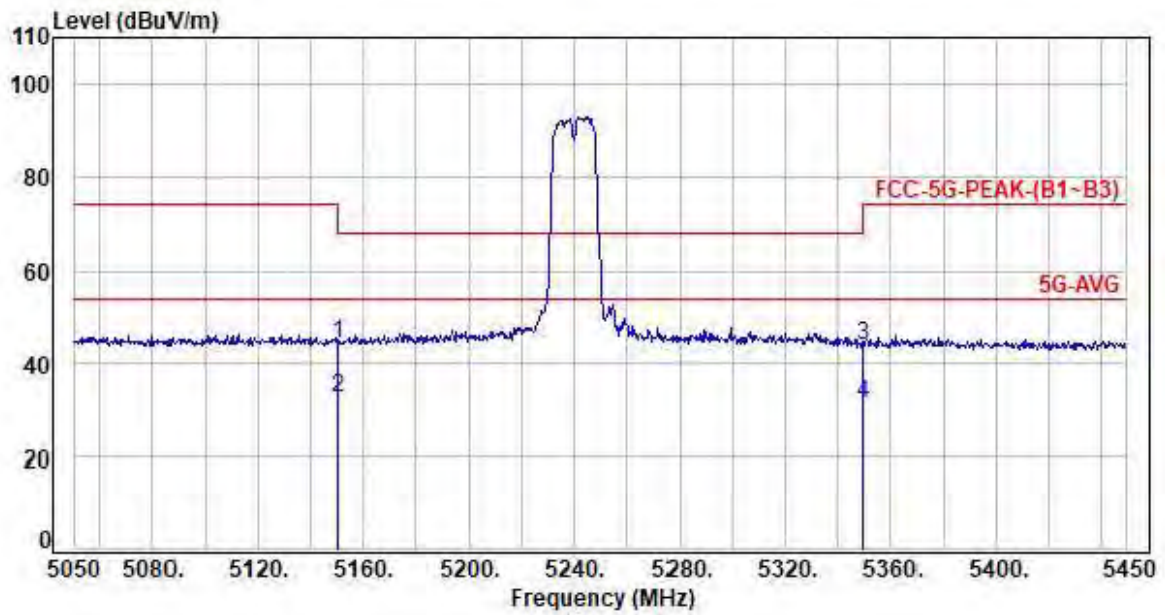

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	42.08	44.33	74.00	-29.67	Peak	P
2	5150.00	2.25	30.27	32.52	54.00	-21.48	Average	P
3	5350.00	2.26	41.50	43.76	74.00	-30.24	Peak	P
4	5350.00	2.26	29.12	31.38	54.00	-22.62	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

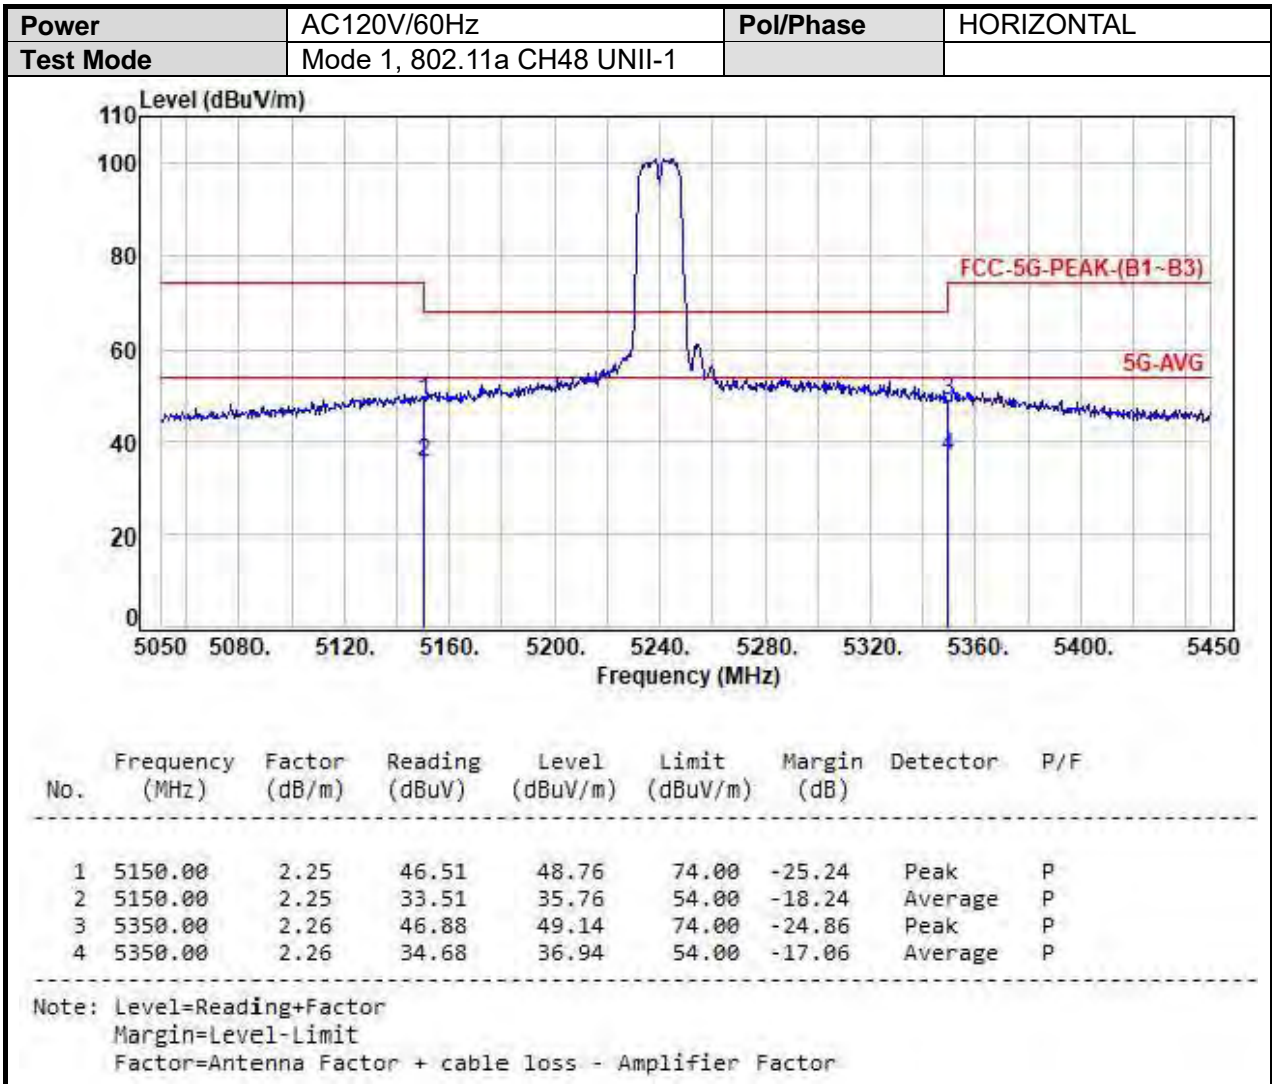




MIMO-UNII-1


Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode3, 802.11ac VHT20 CH36 UNII-1		

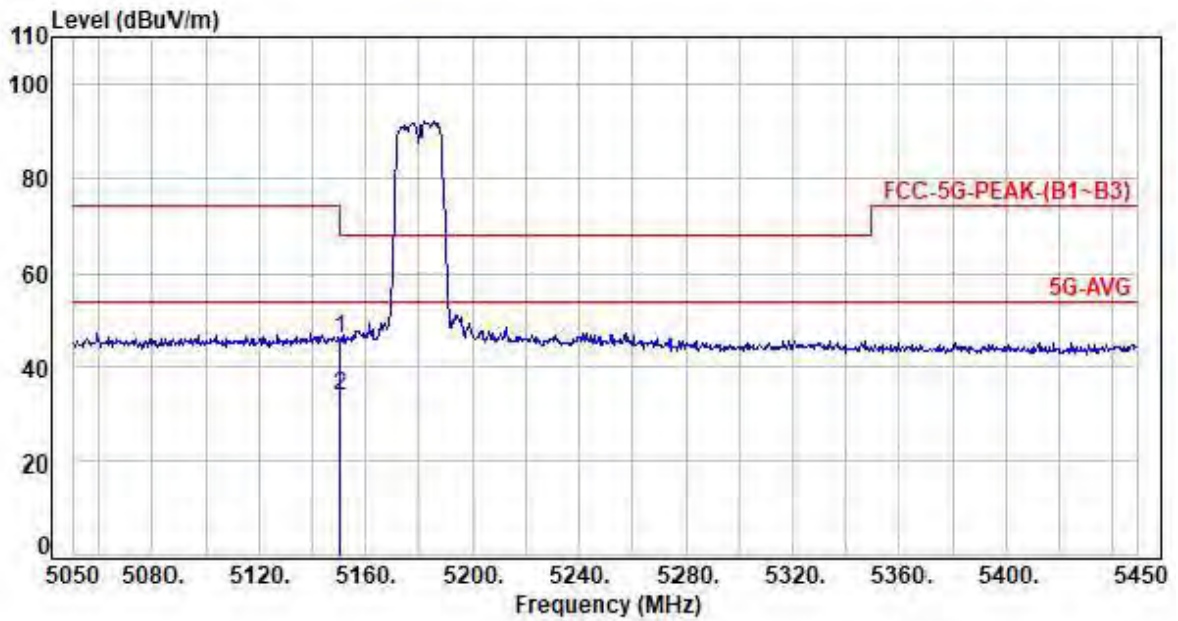



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	43.92	46.17	74.00	-27.83	Peak	P
2	5150.00	2.25	31.50	33.75	54.00	-20.25	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

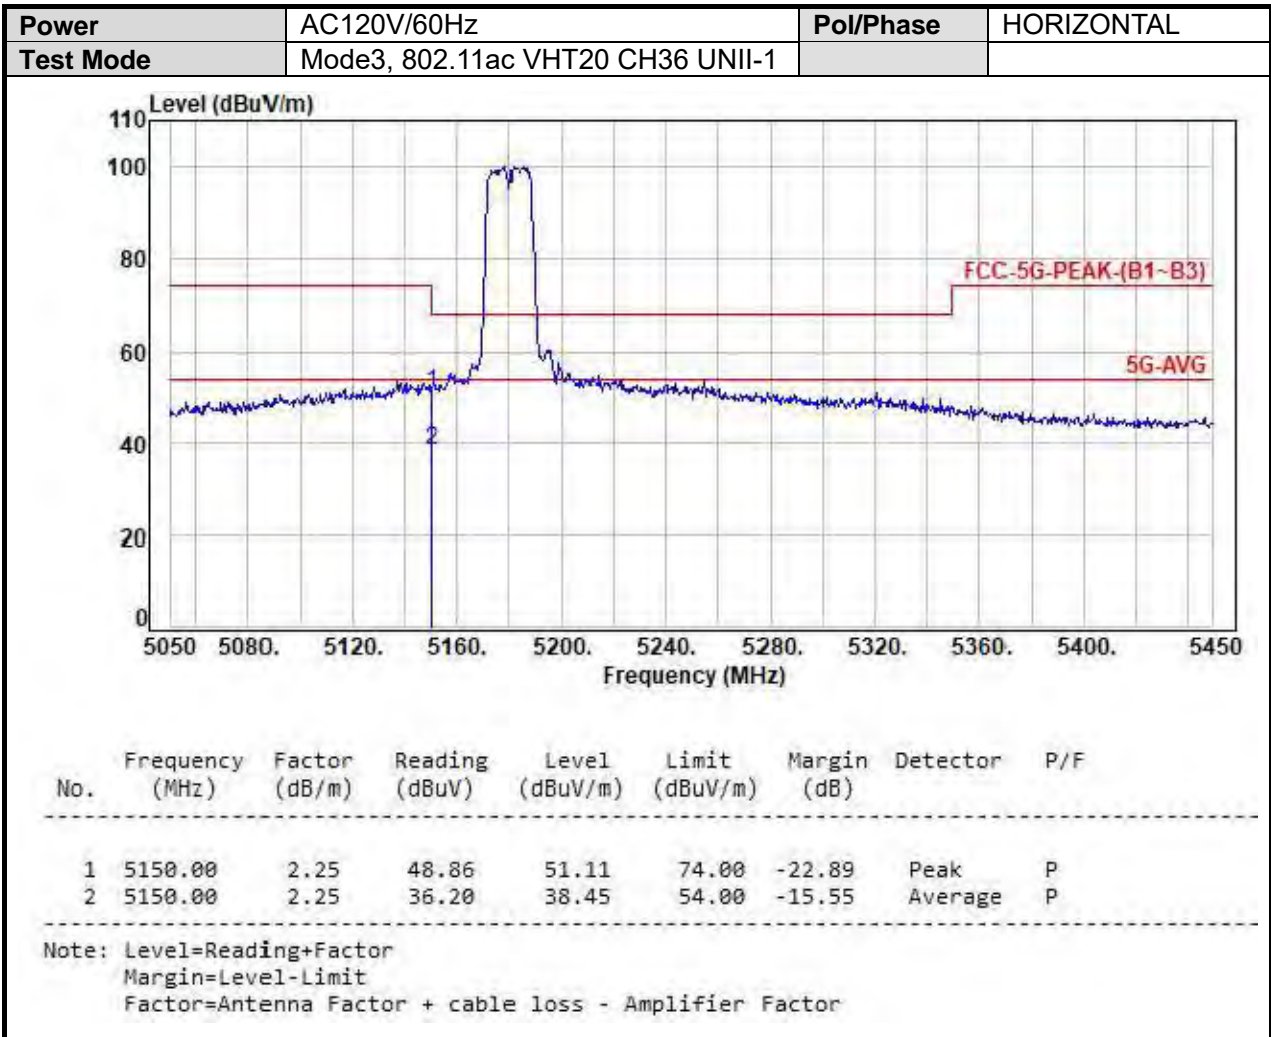

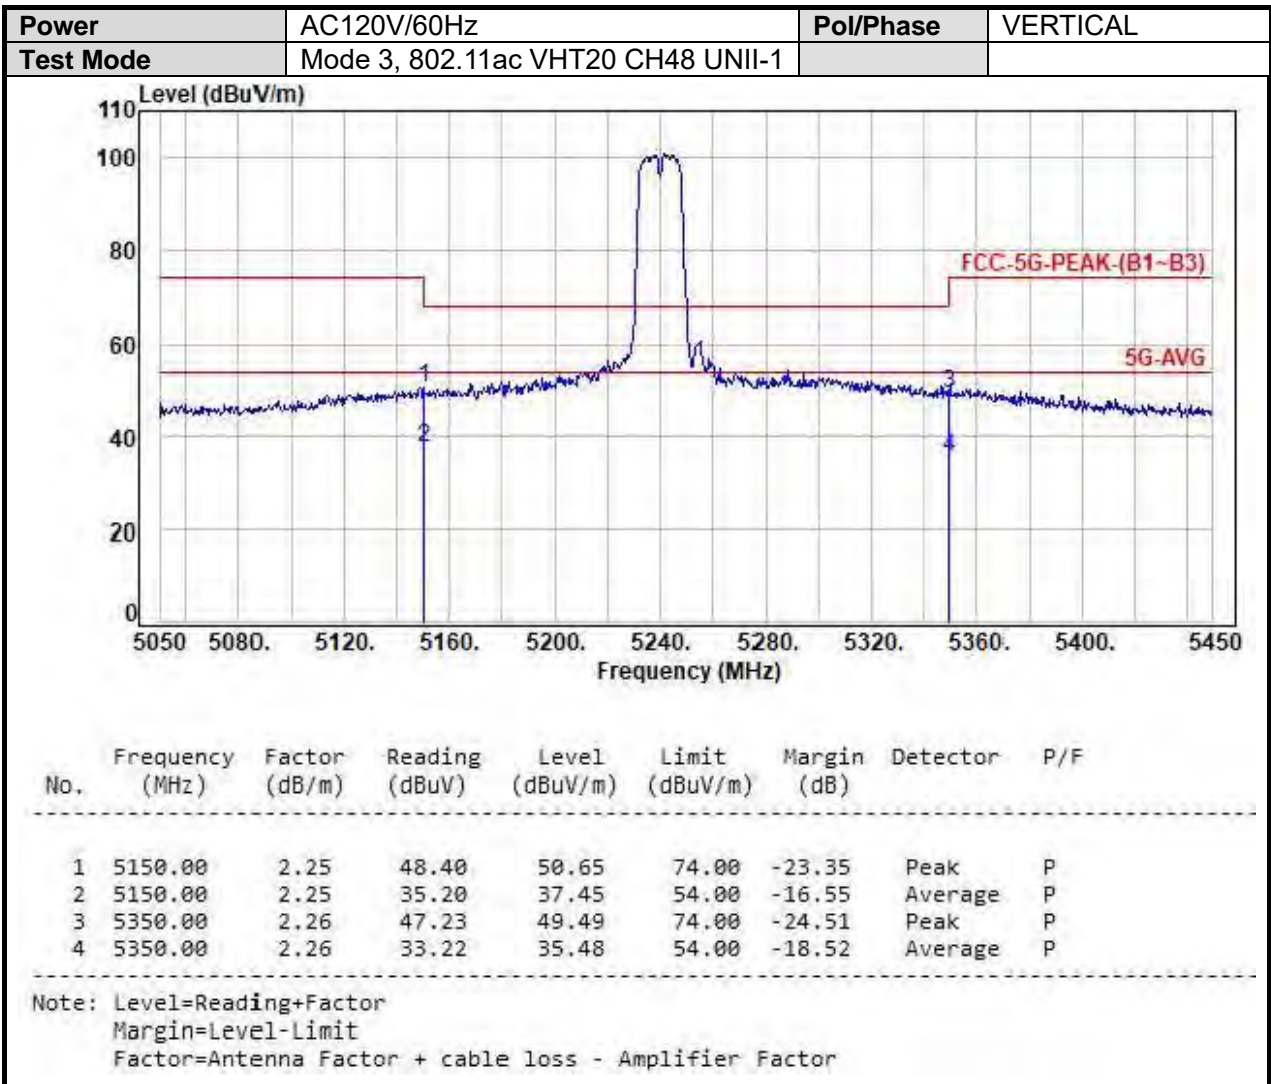

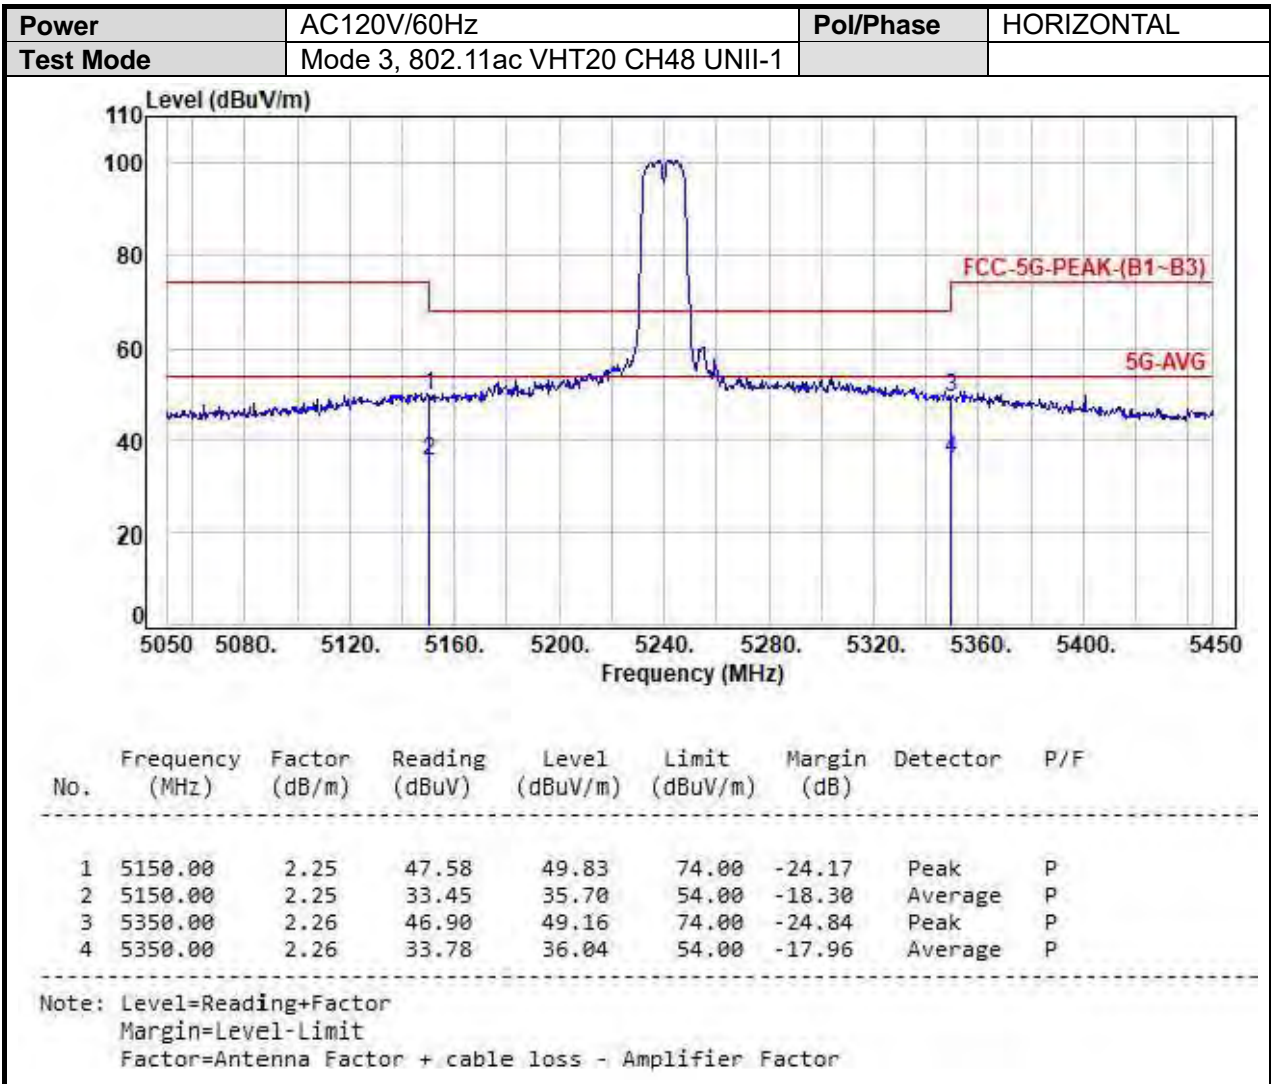


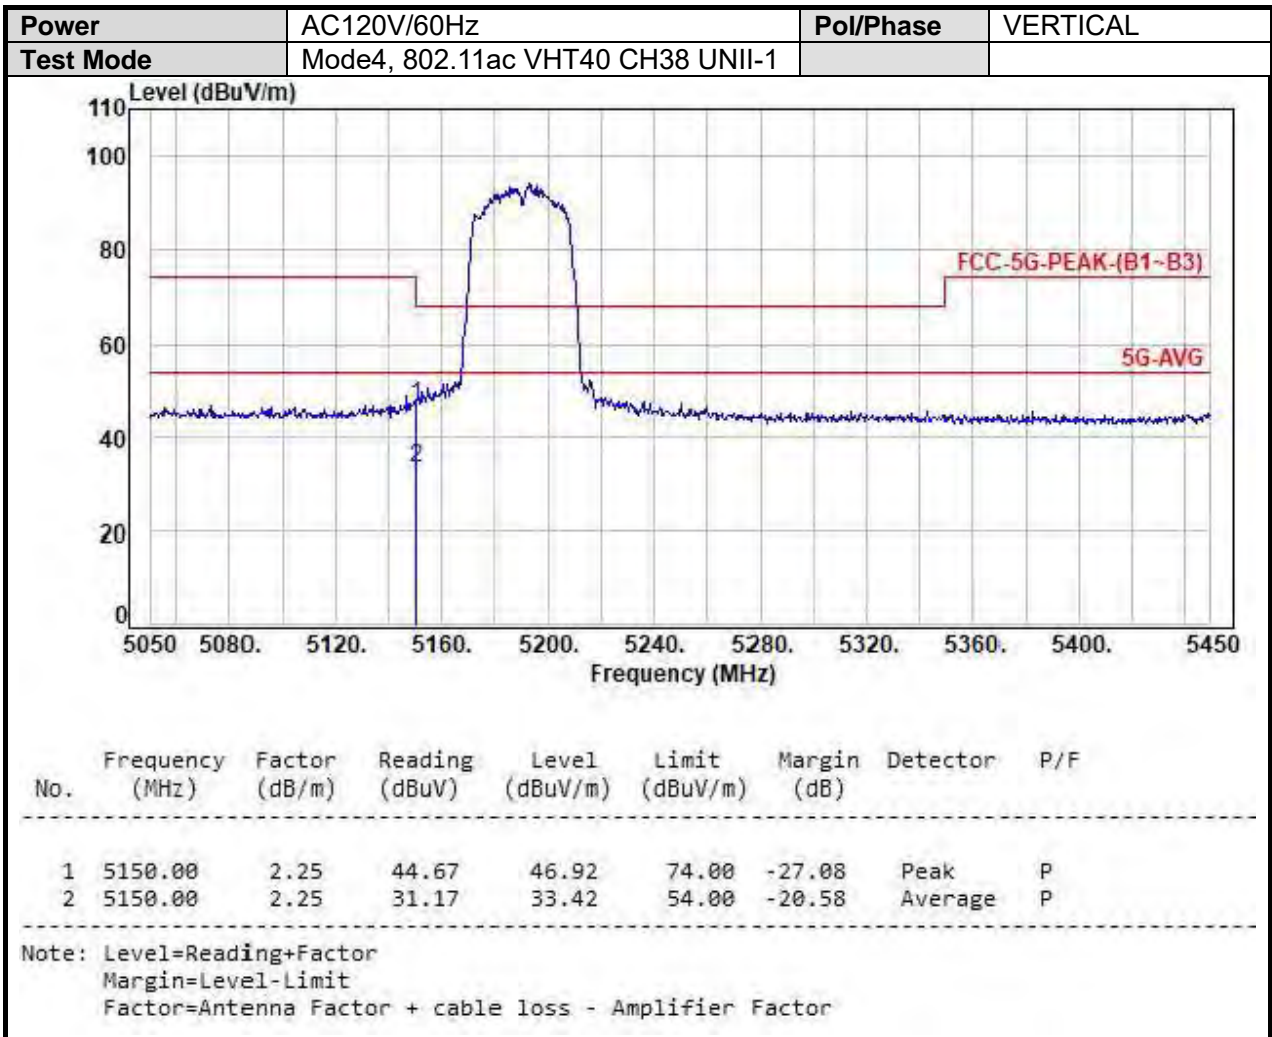

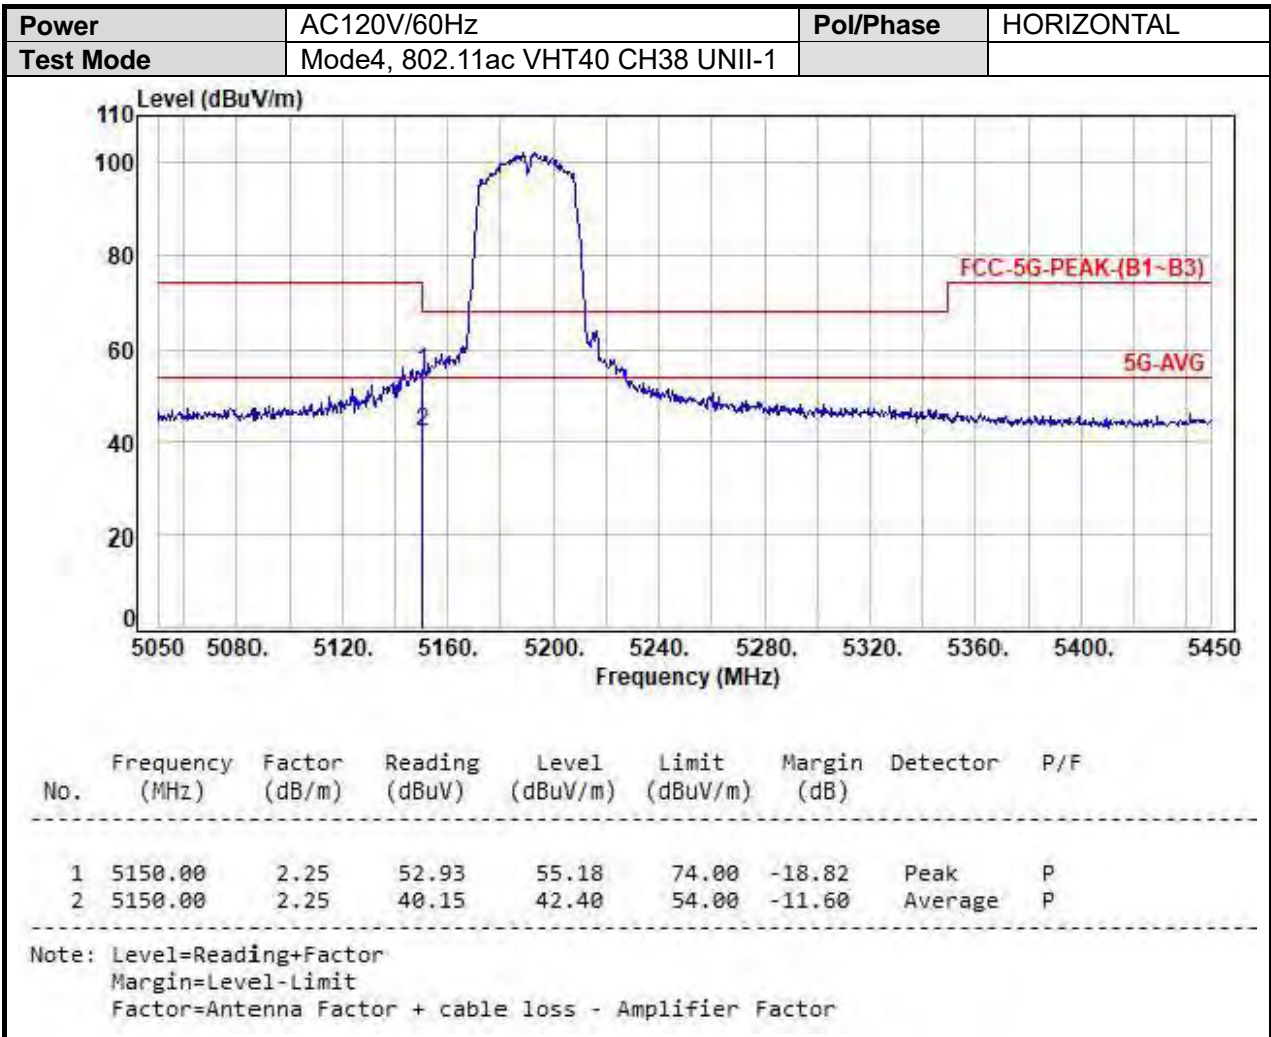



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 4, 802.11ac VHT40 CH46 UNII-1		

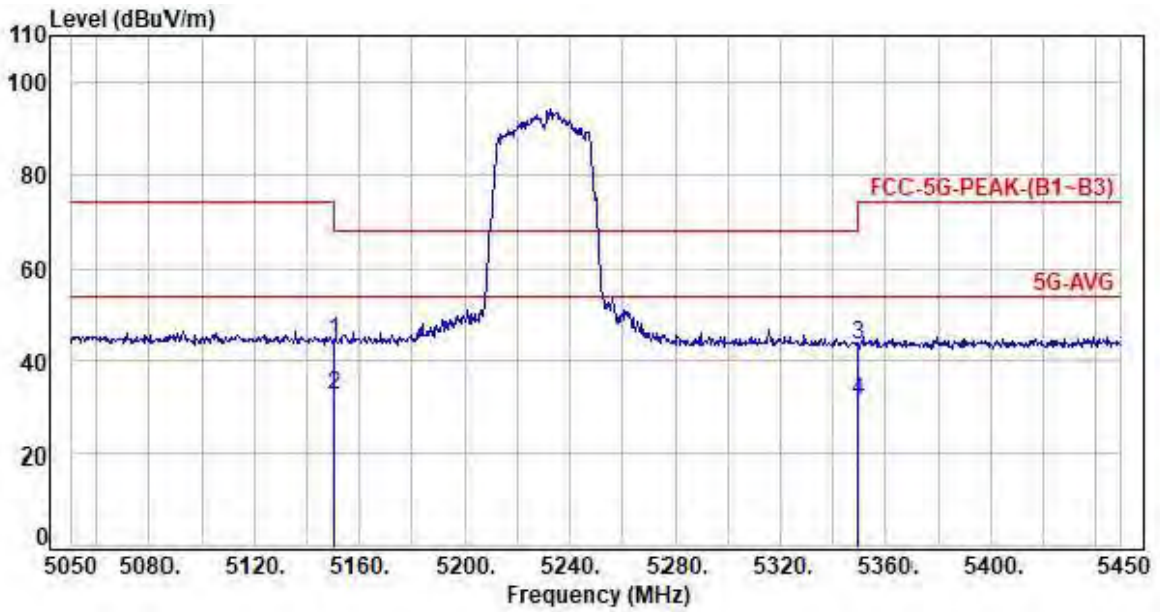


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	42.23	44.48	74.00	-29.52	Peak	P
2	5150.00	2.25	30.50	32.75	54.00	-21.25	Average	P
3	5350.00	2.26	41.06	43.32	74.00	-30.68	Peak	P
4	5350.00	2.26	28.99	31.25	54.00	-22.75	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor





Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 4, 802.11ac VHT40 CH46 UNII-1		

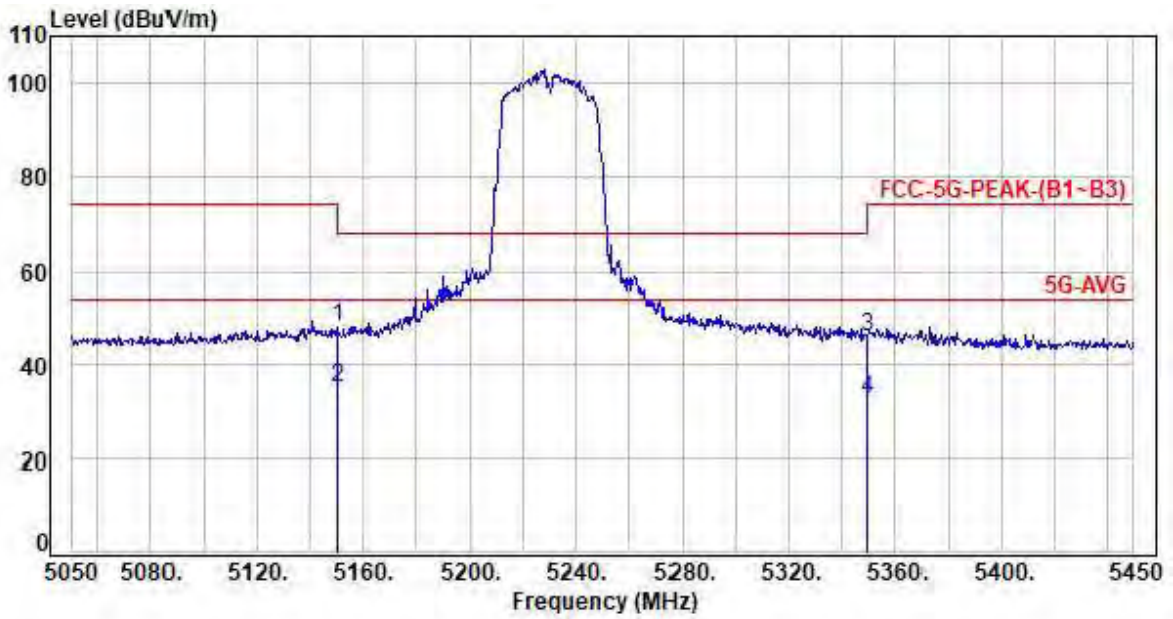



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	45.69	47.94	74.00	-26.06	Peak	P
2	5150.00	2.25	32.89	35.14	54.00	-18.86	Average	P
3	5350.00	2.26	43.59	45.85	74.00	-28.15	Peak	P
4	5350.00	2.26	30.52	32.78	54.00	-21.22	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

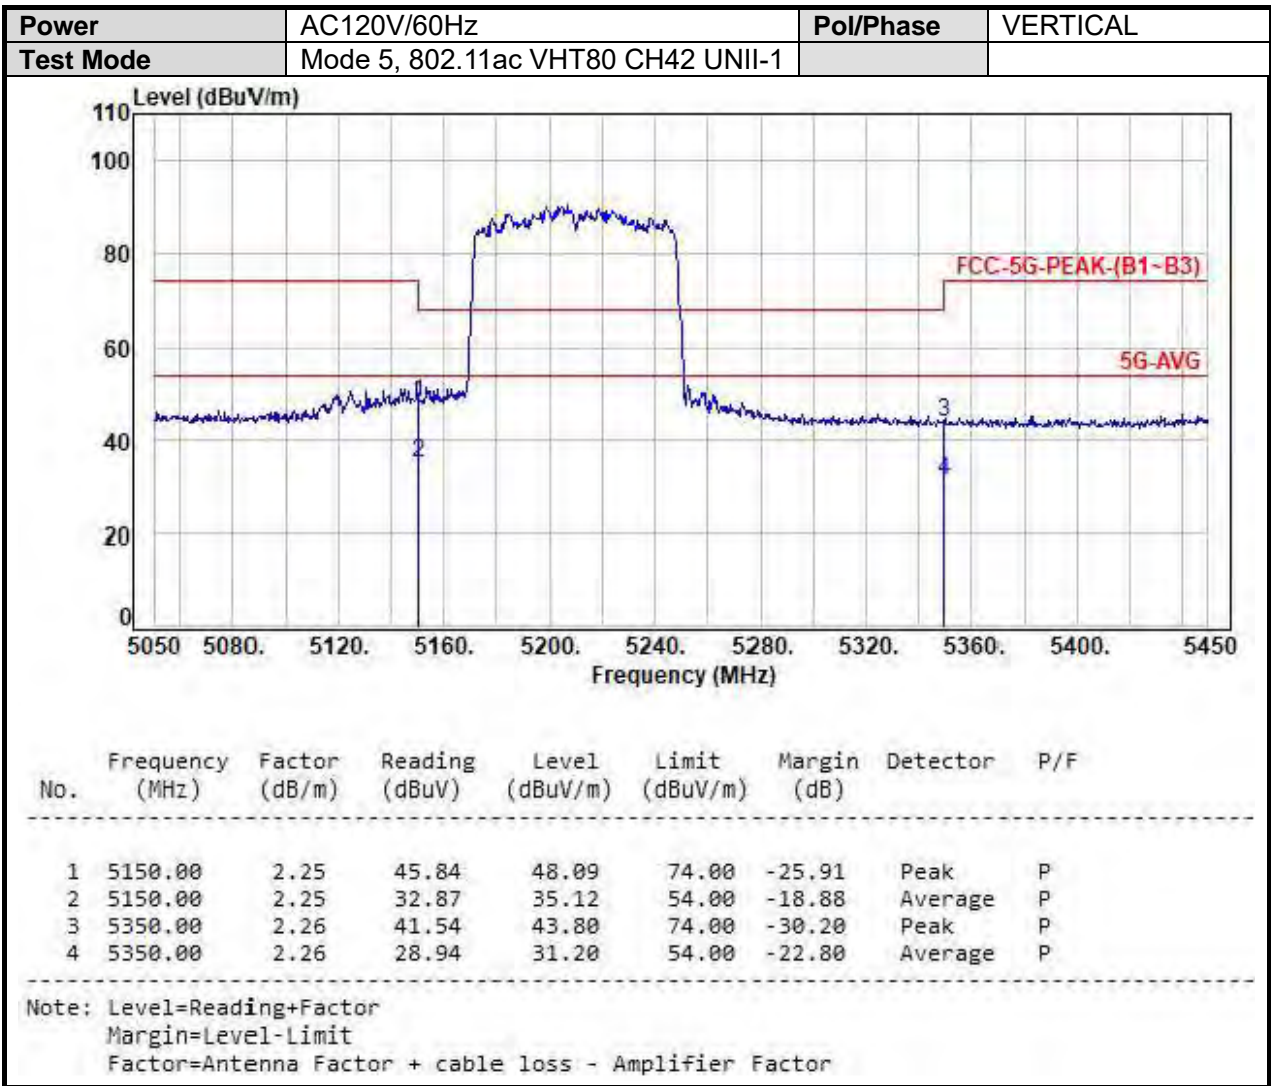

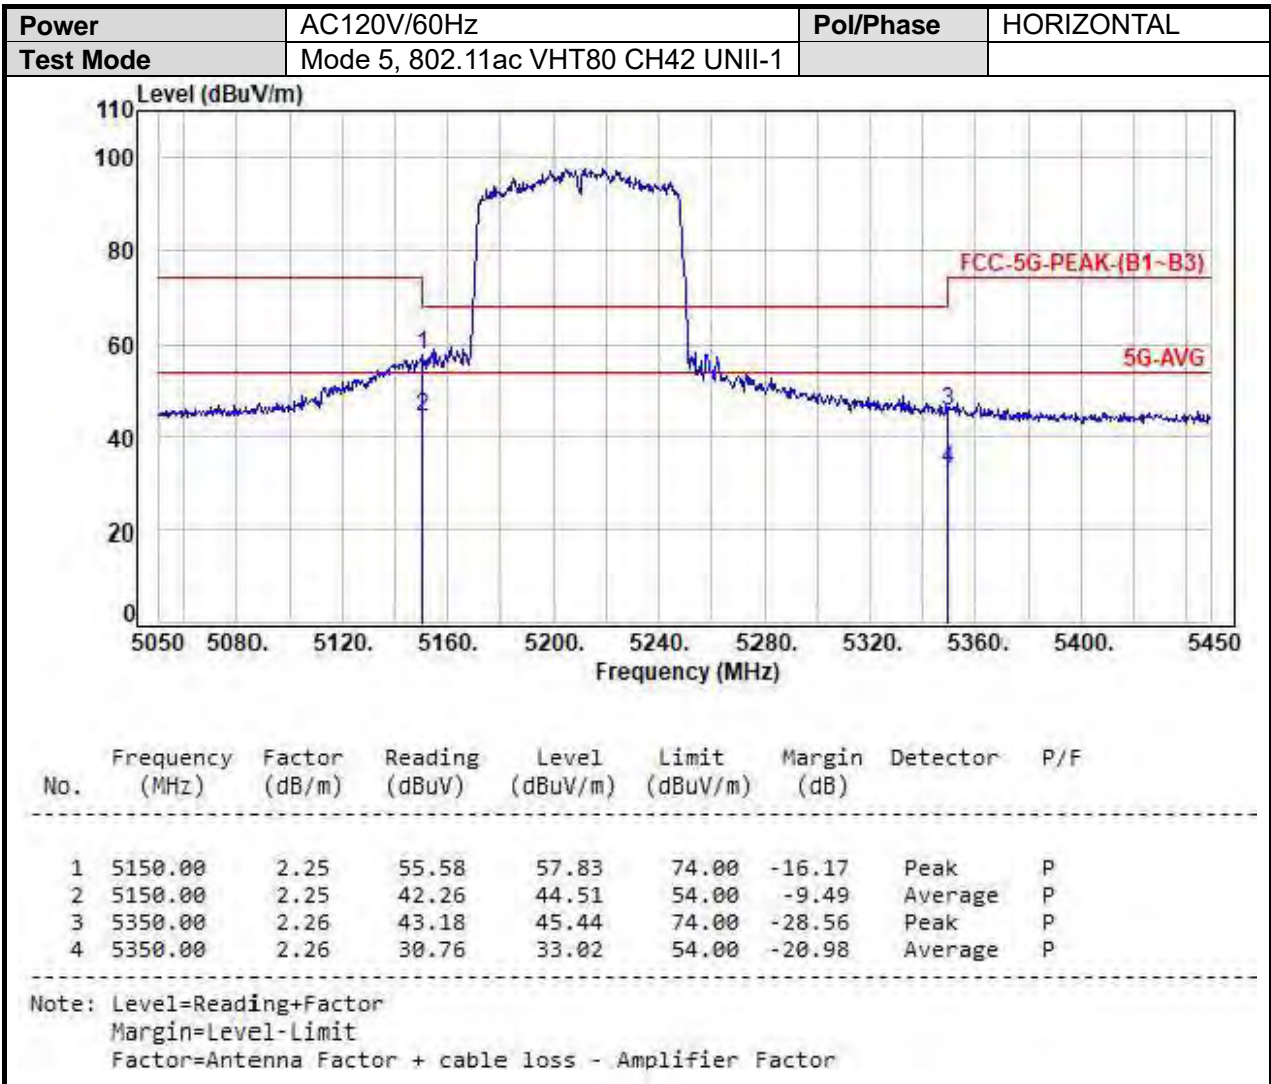


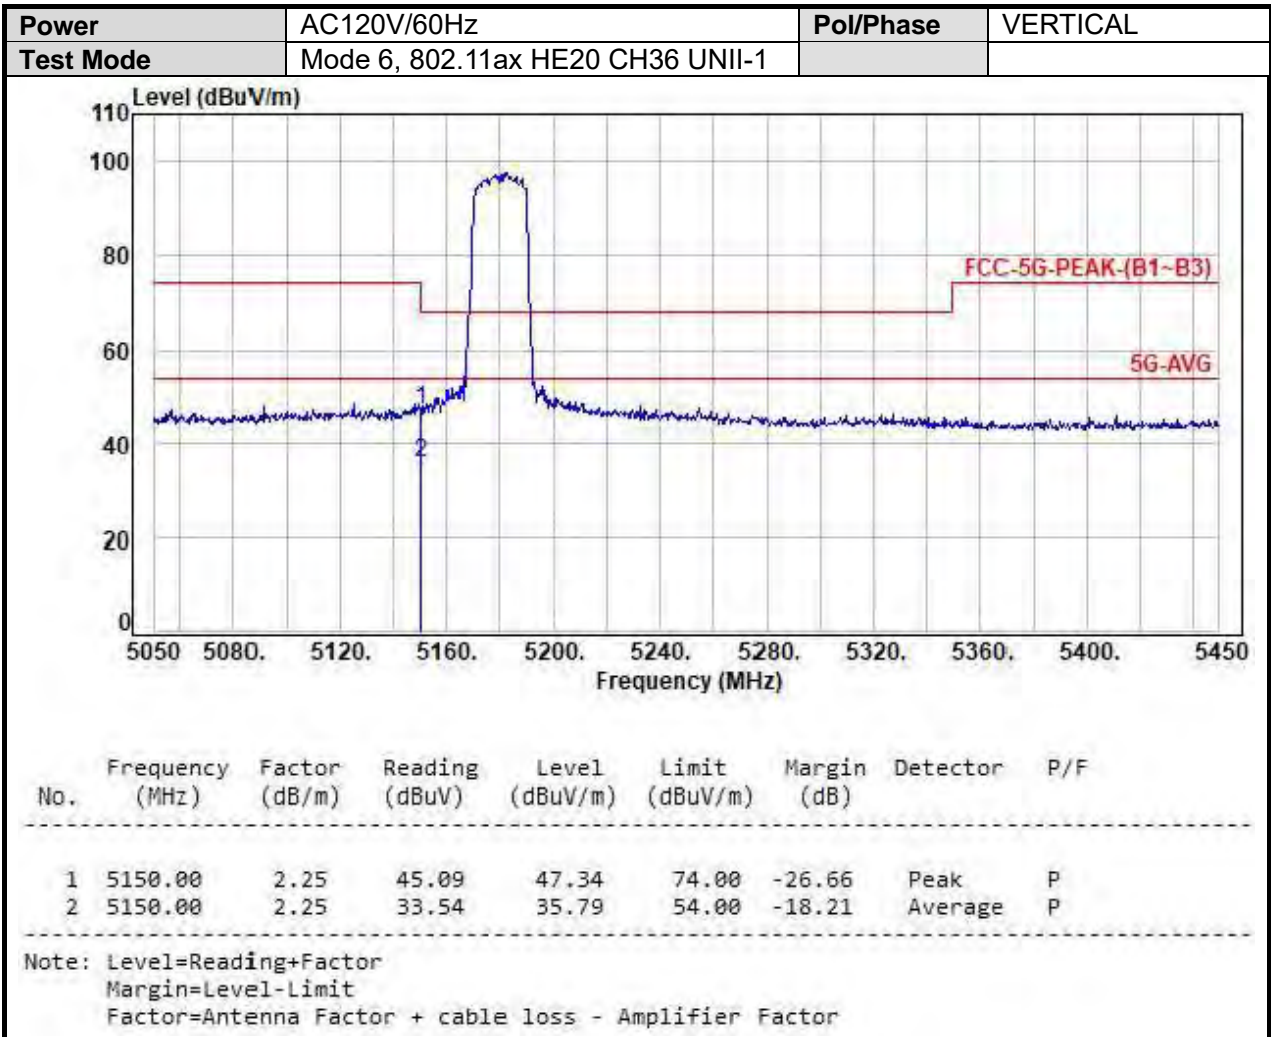

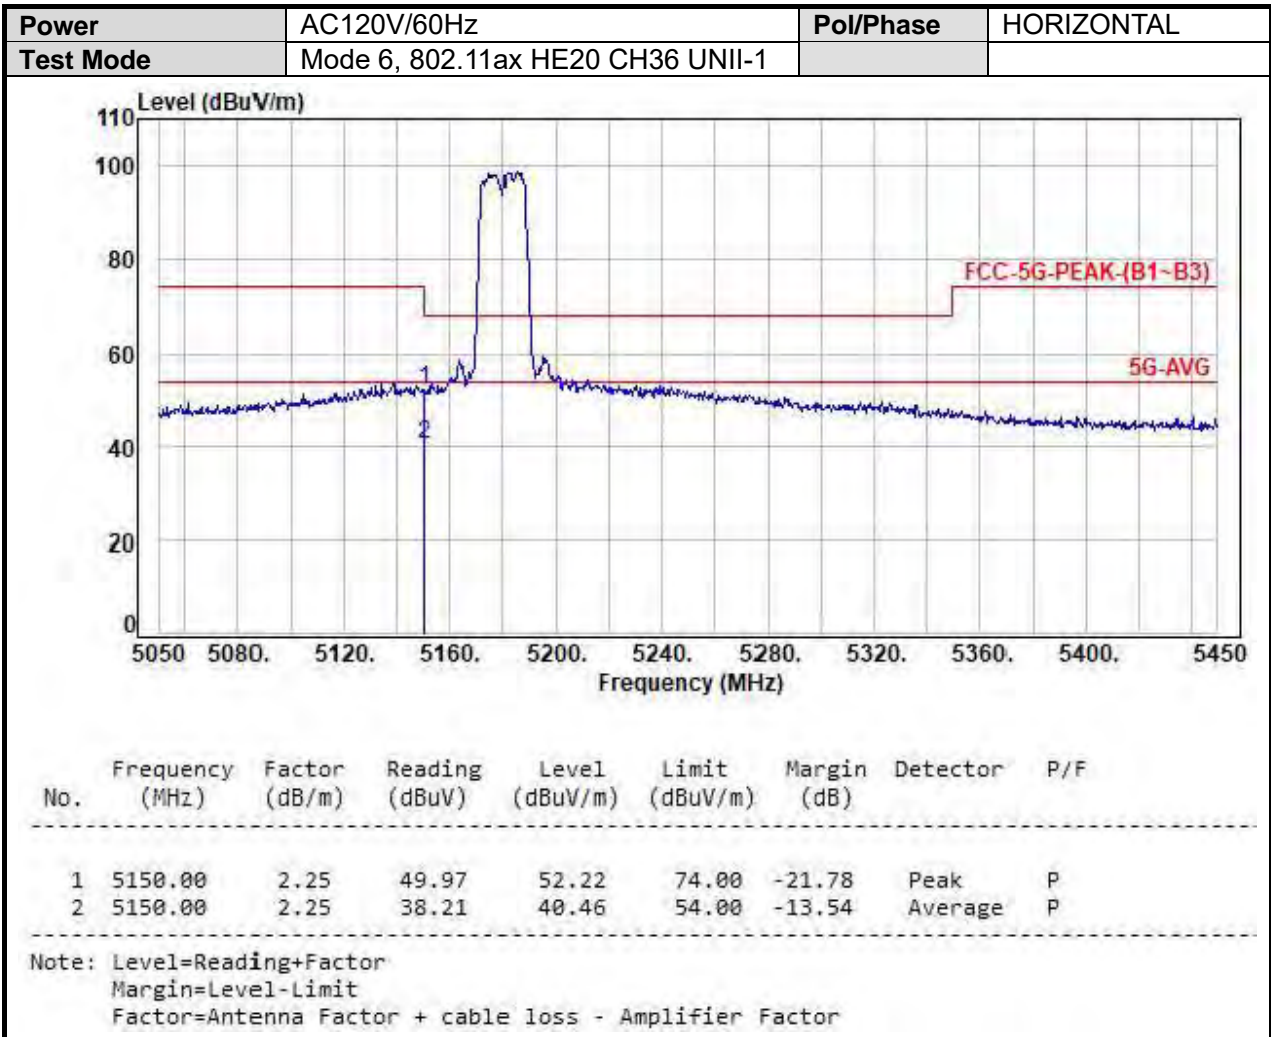





Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 6, 802.11ax HE20 CH48 UNII-1		

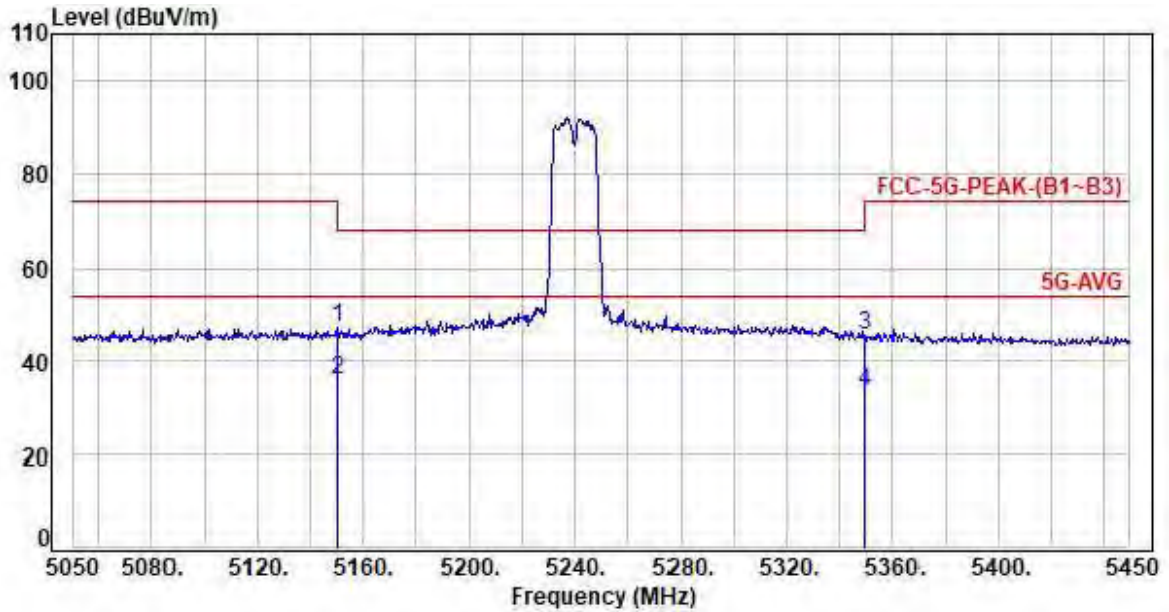


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	45.16	47.41	74.00	-26.59	Peak	P
2	5150.00	2.25	33.64	35.89	54.00	-18.11	Average	P
3	5350.00	2.26	43.17	45.43	74.00	-28.57	Peak	P
4	5350.00	2.26	31.37	33.63	54.00	-20.37	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

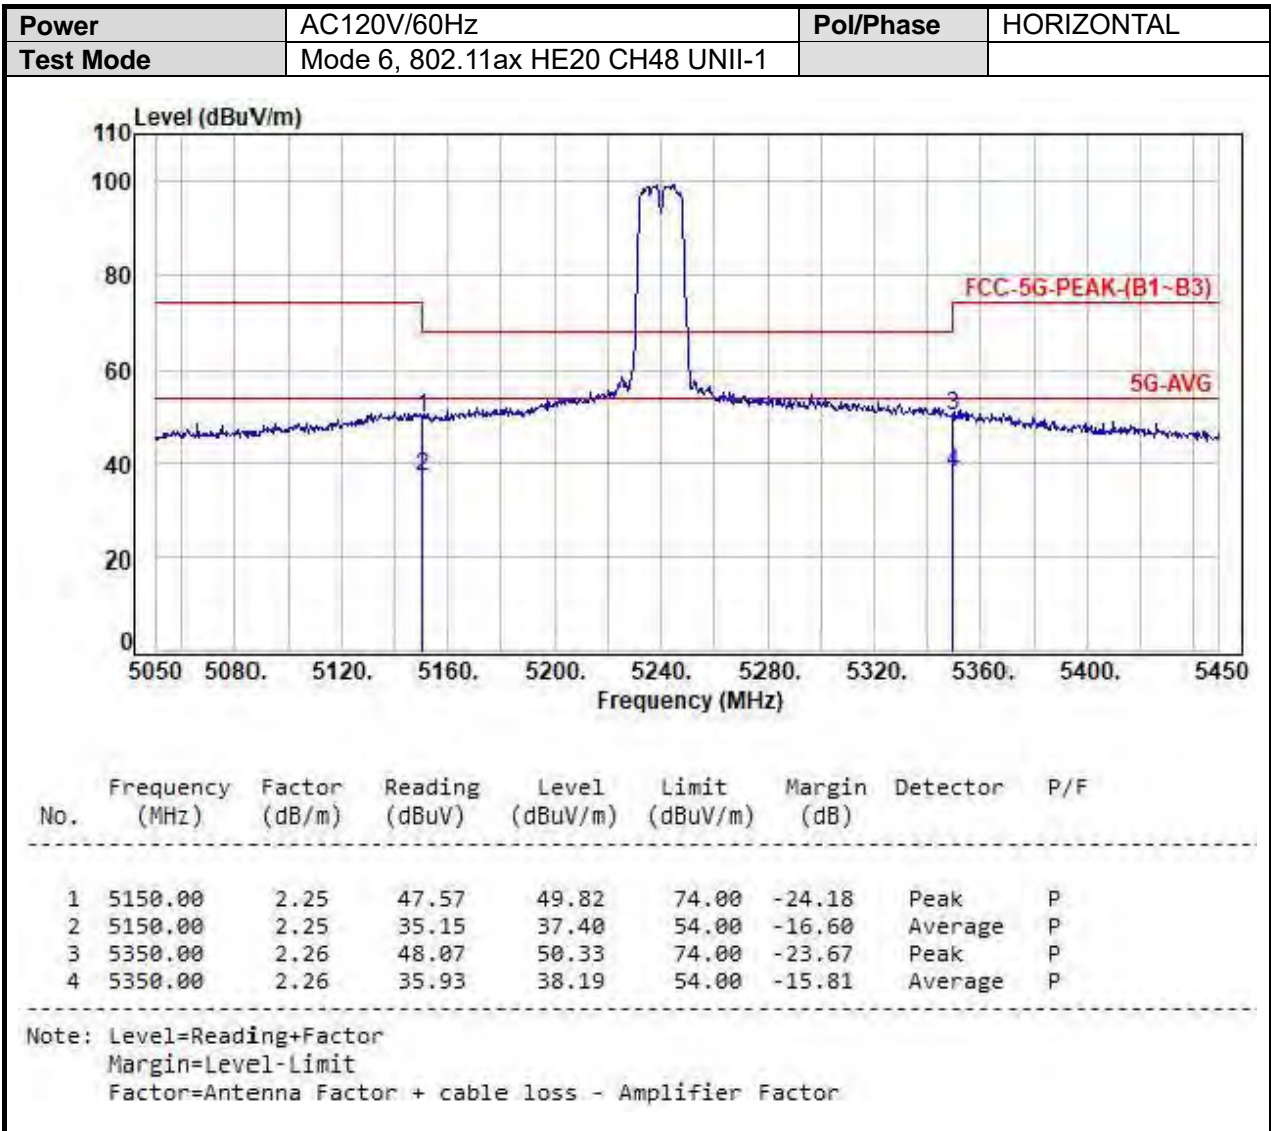


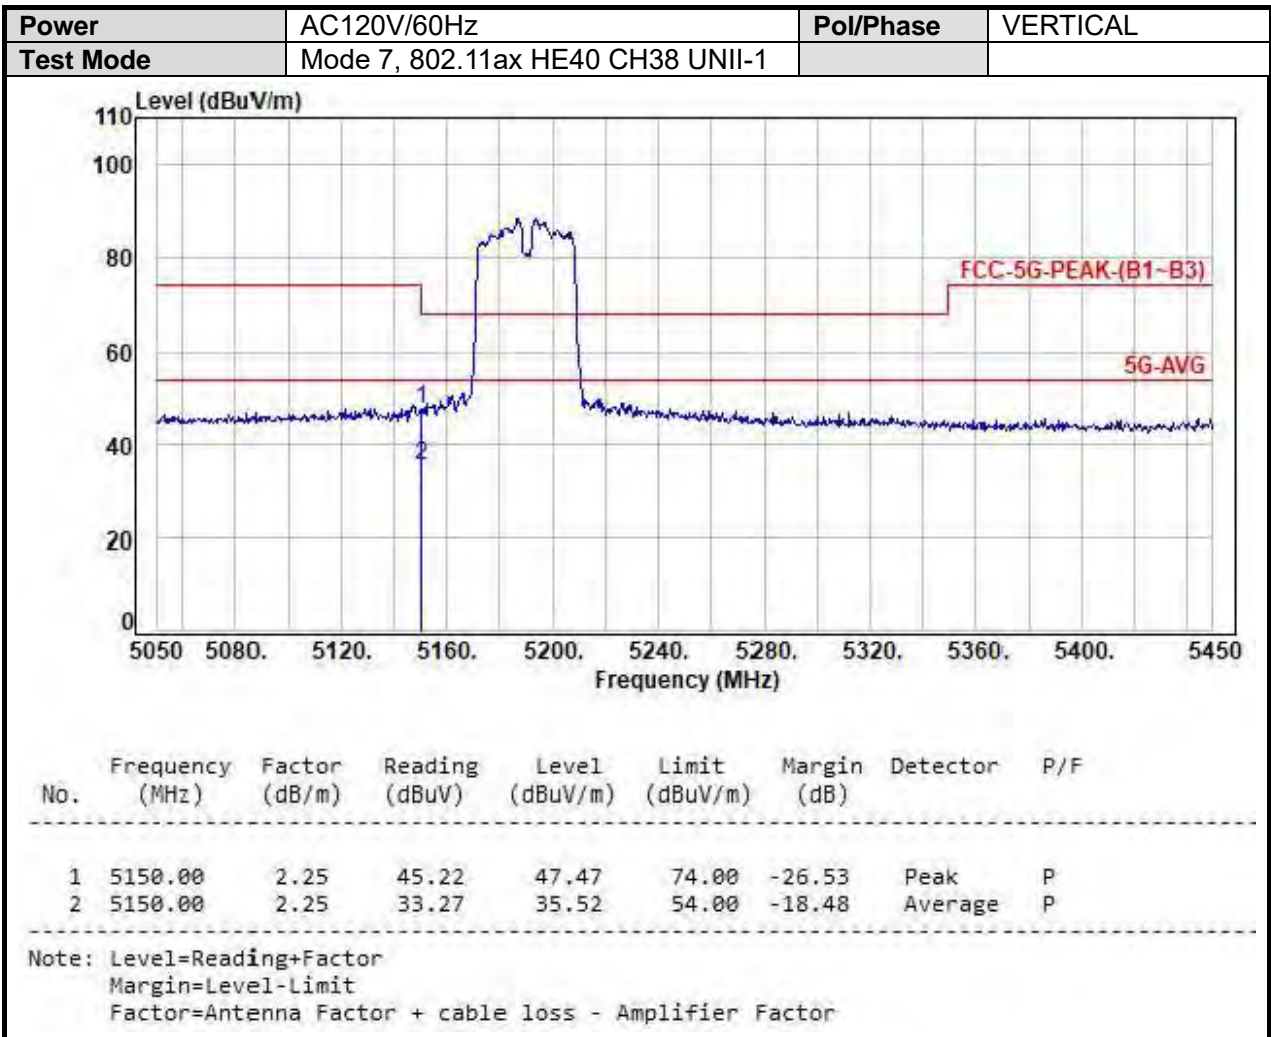

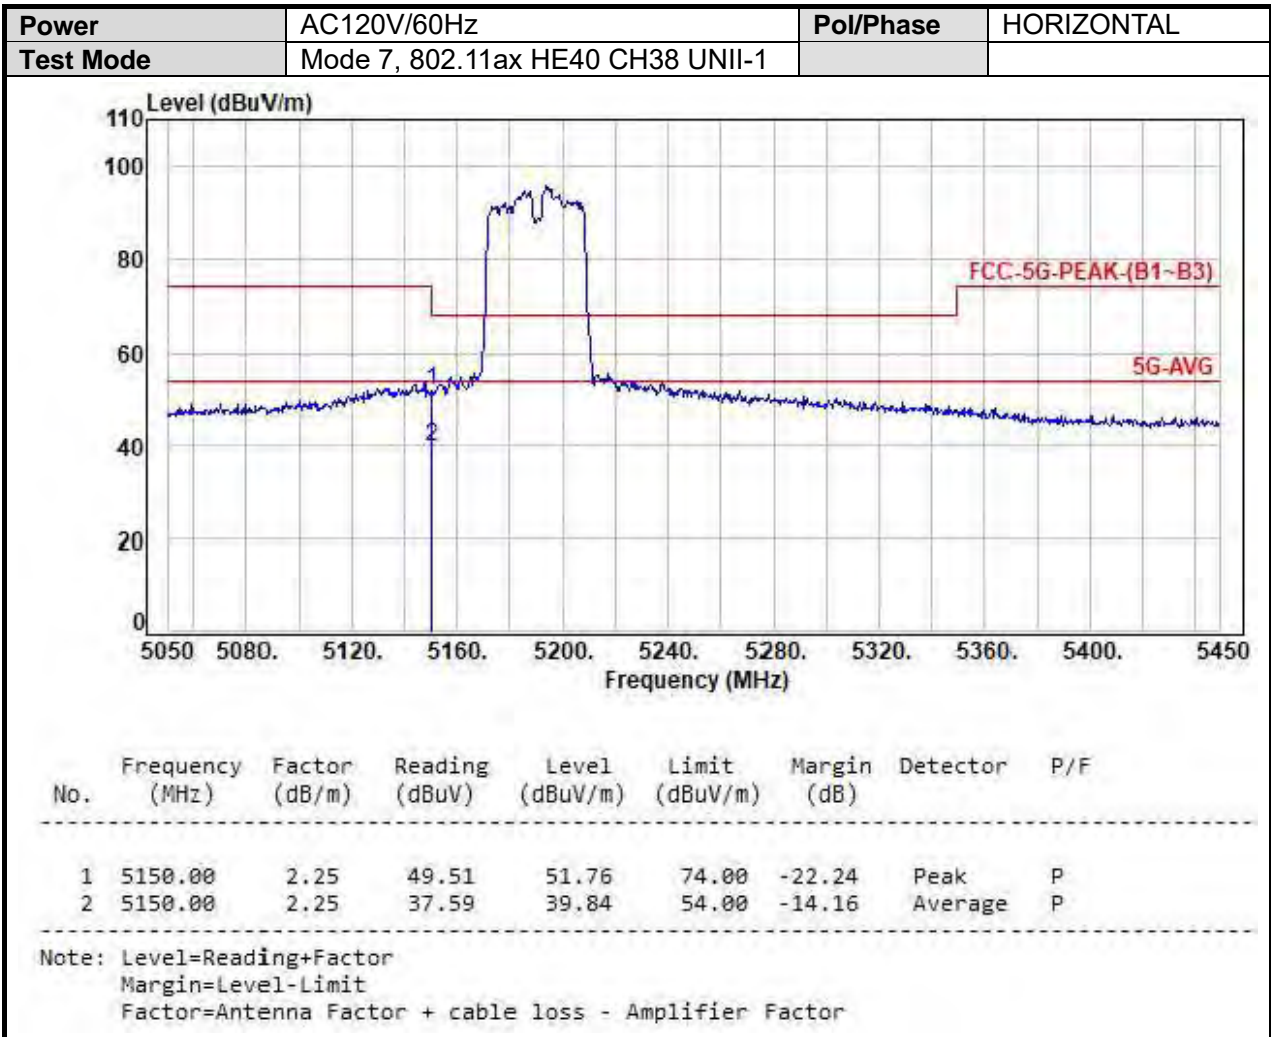




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 7, 802.11ax HE40 CH46 UNII-1		

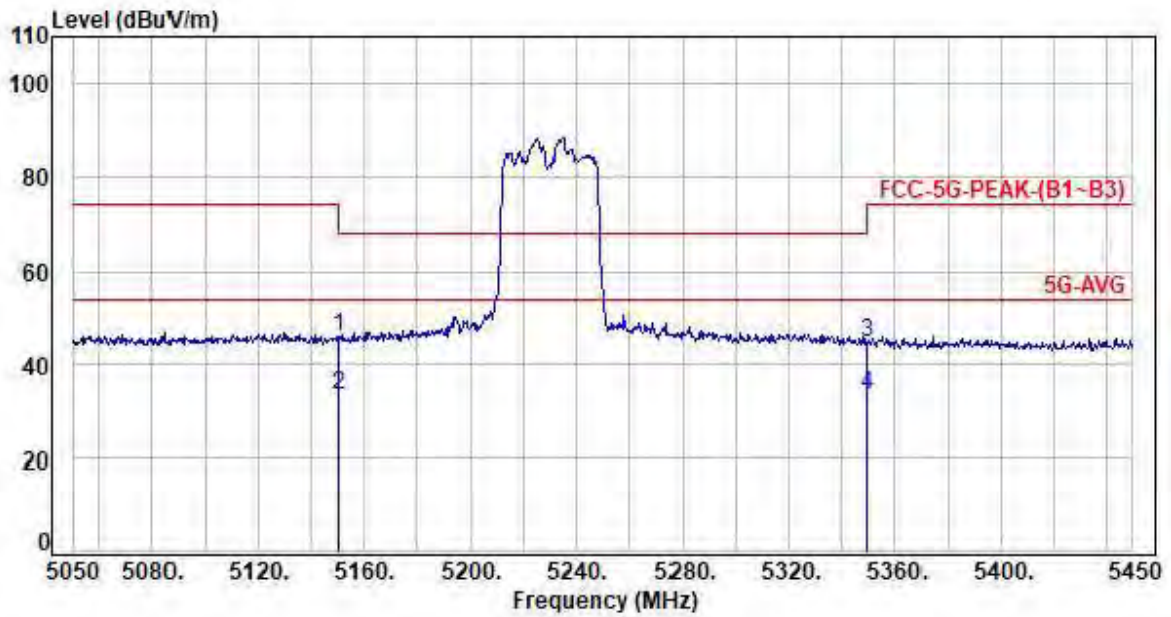


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	43.84	46.09	74.00	-27.91	Peak	P
2	5150.00	2.25	31.37	33.62	54.00	-20.38	Average	P
3	5350.00	2.26	42.34	44.60	74.00	-29.40	Peak	P
4	5350.00	2.26	31.25	33.51	54.00	-20.49	Average	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor

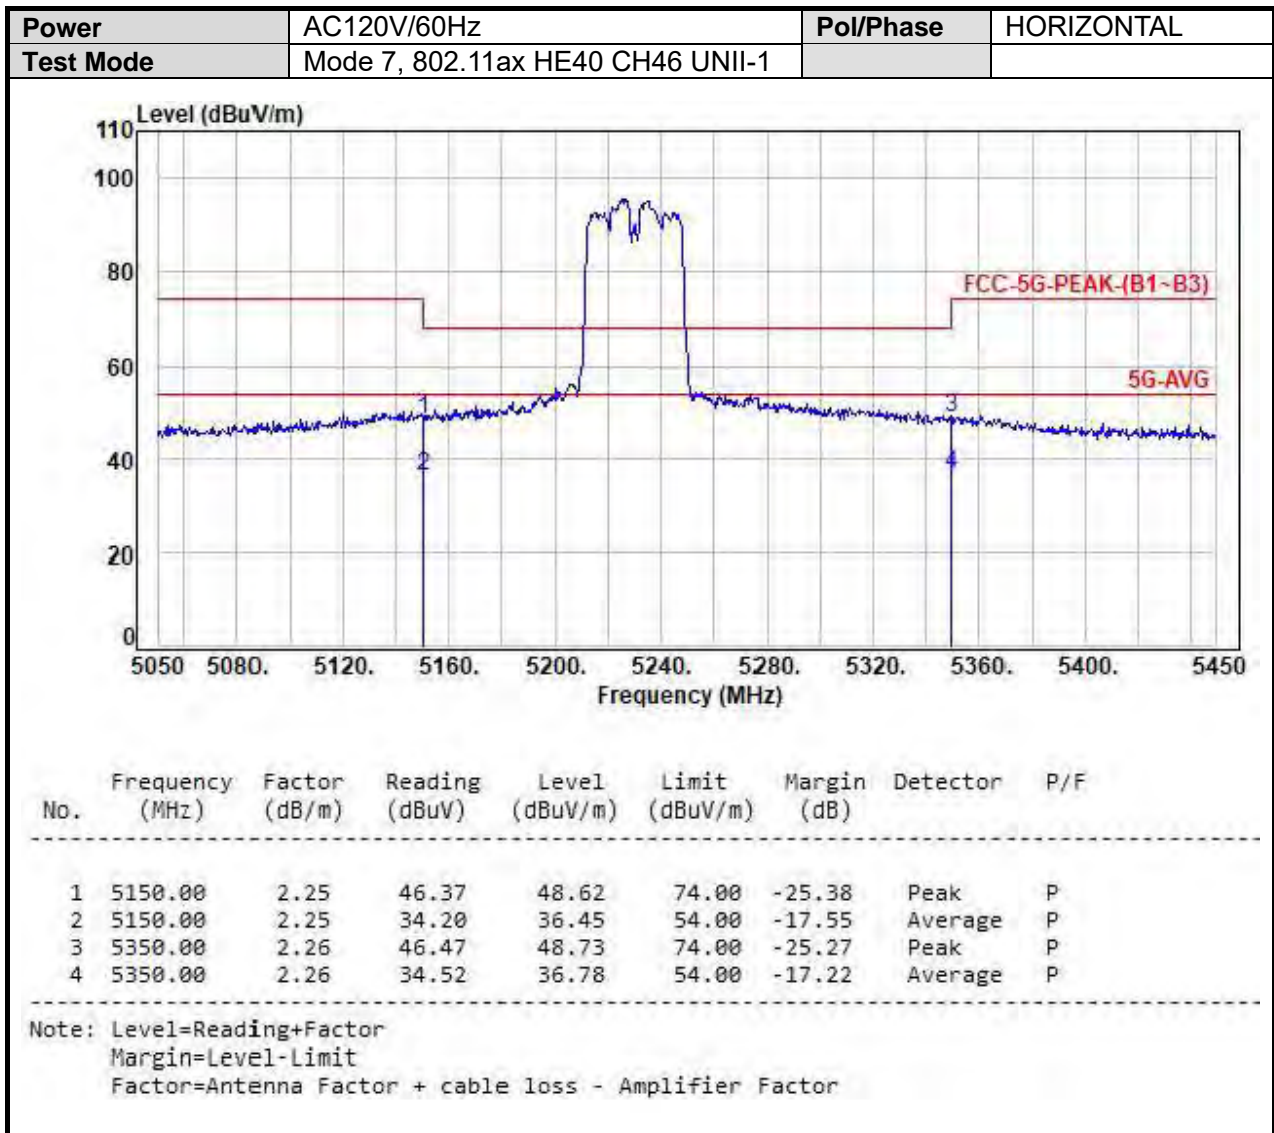




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 8, 802.11ax HE80 CH42 UNII-1		

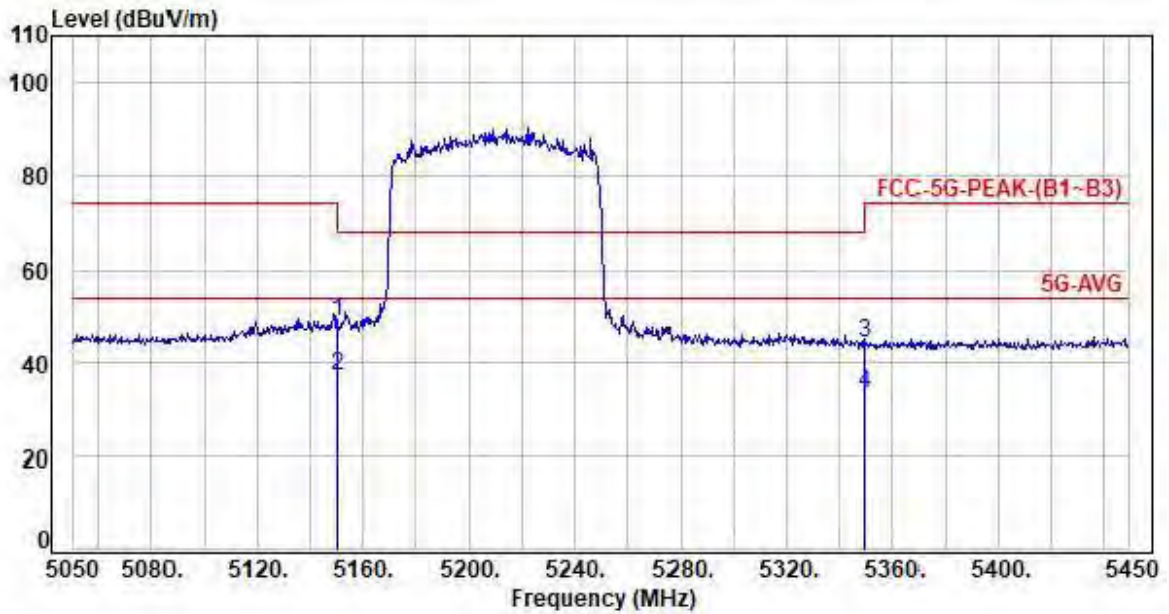

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	46.54	48.79	74.00	-25.21	Peak	P
2	5150.00	2.25	34.87	37.12	54.00	-16.88	Average	P
3	5350.00	2.26	42.04	44.30	74.00	-29.70	Peak	P
4	5350.00	2.26	31.30	33.56	54.00	-20.44	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

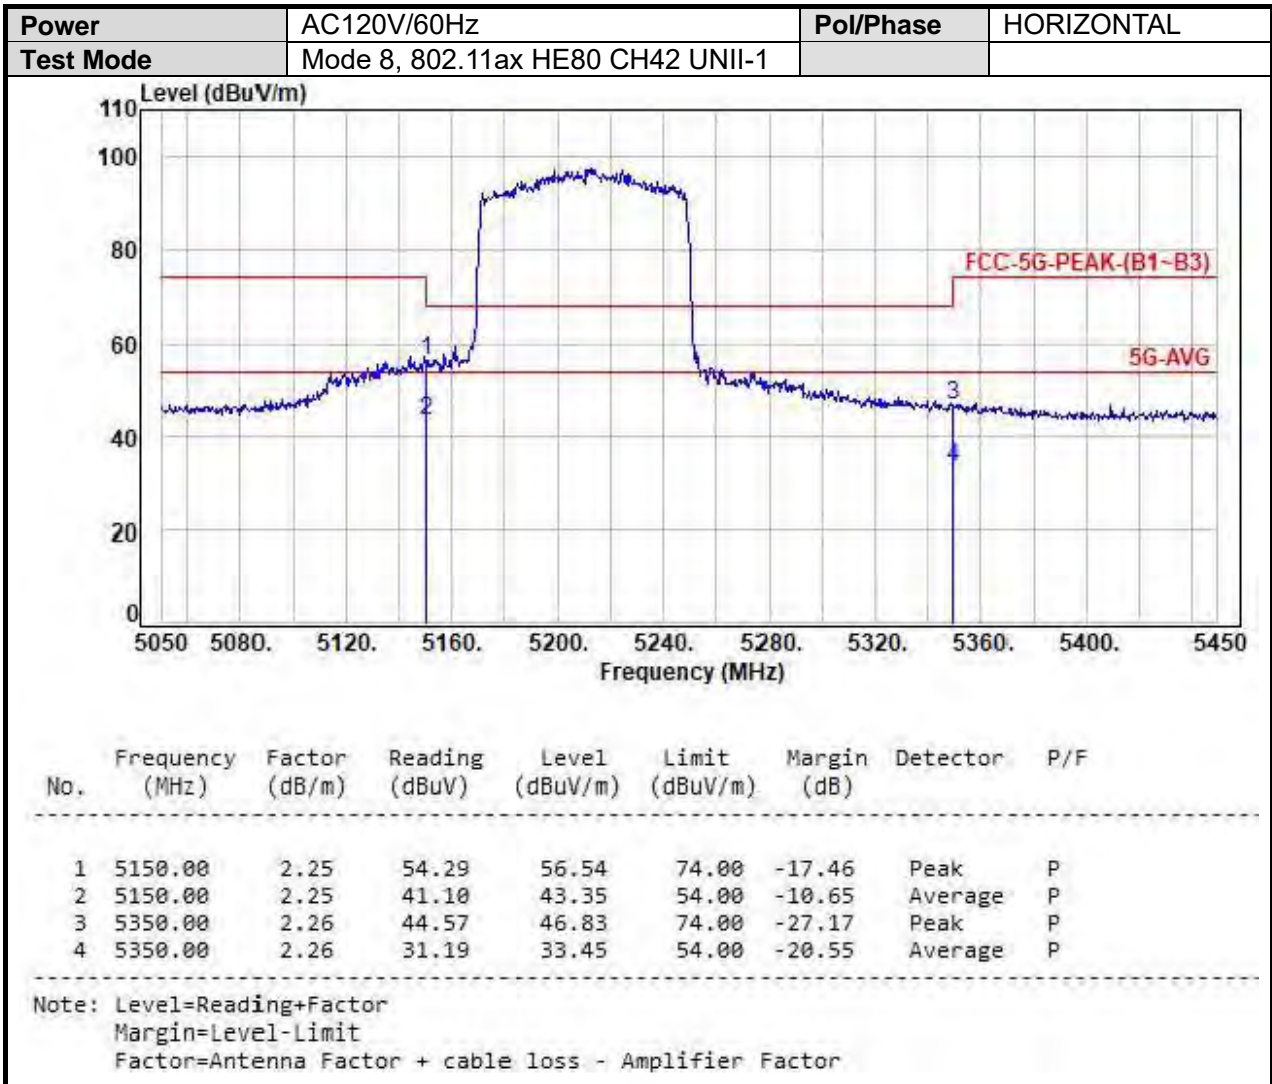




SISO-Ant B

UNII-2A

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH52 UNII-2A		

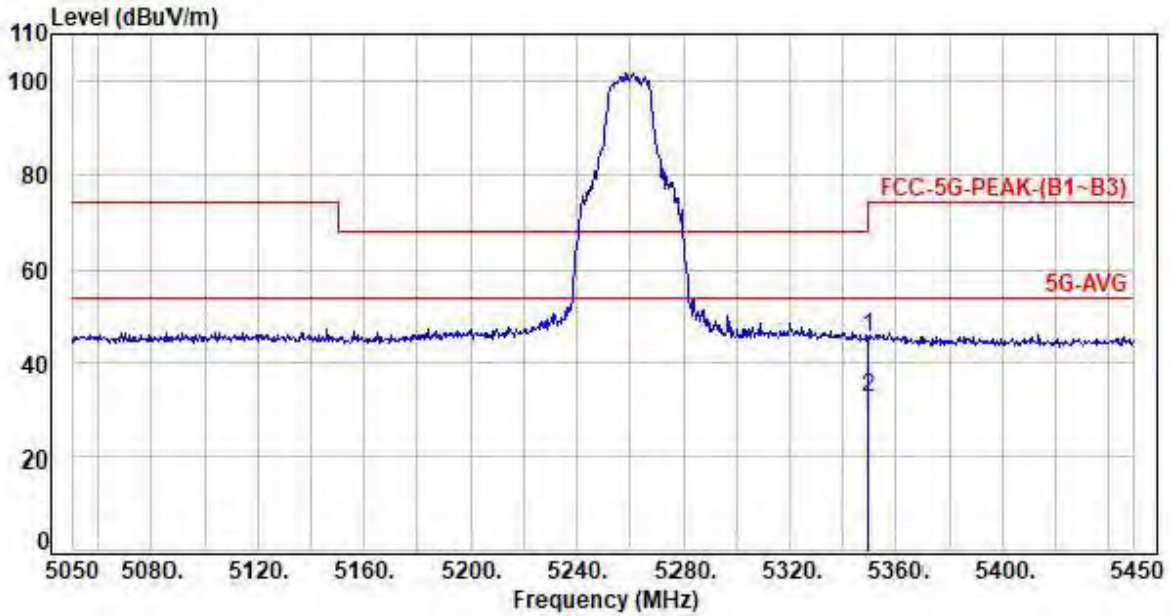


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.00	2.26	43.31	45.57	74.00	-28.43	Peak	P
2	5350.00	2.26	30.50	32.76	54.00	-21.24	Average	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor





Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, 802.11a CH52 UNII-2A		

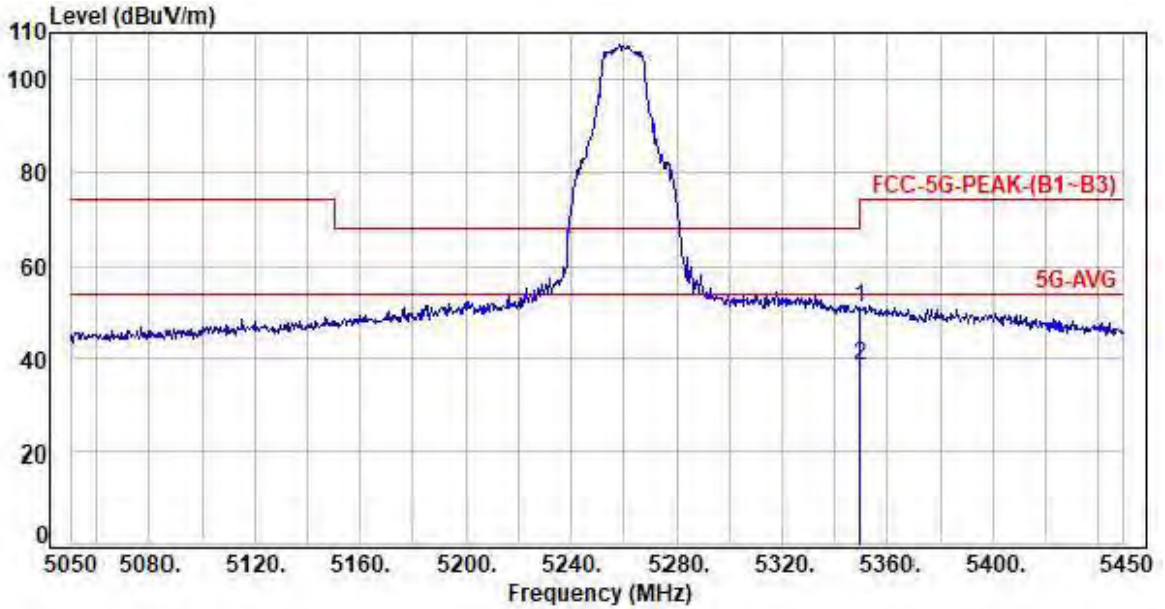



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.00	2.26	48.88	51.14	74.00	-22.86	Peak	P
2	5350.00	2.26	36.15	38.41	54.00	-15.59	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

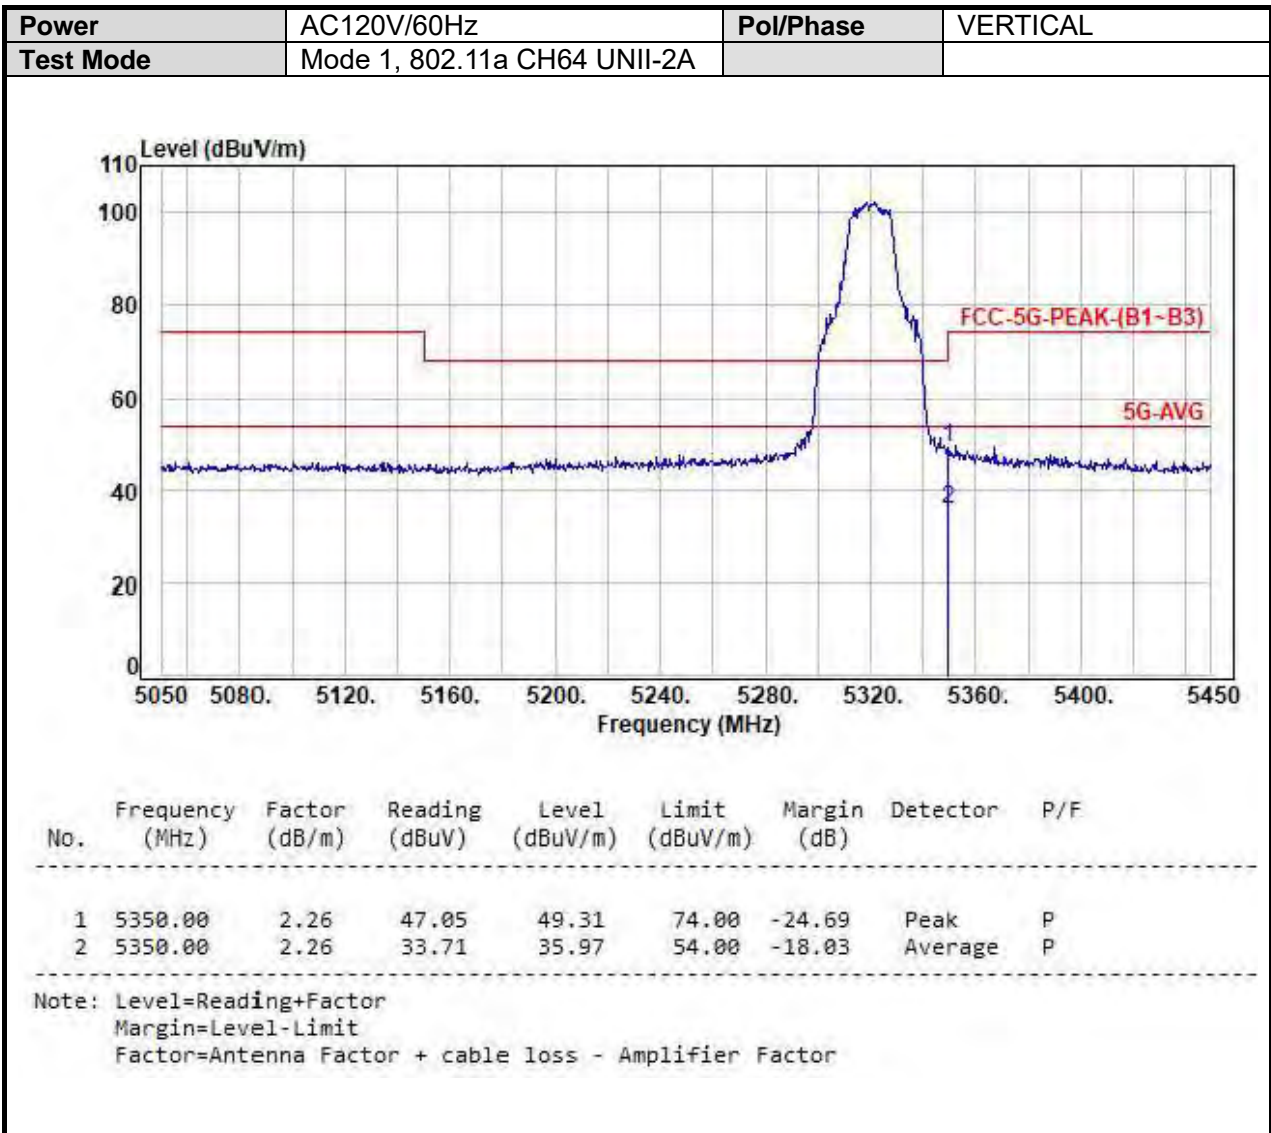


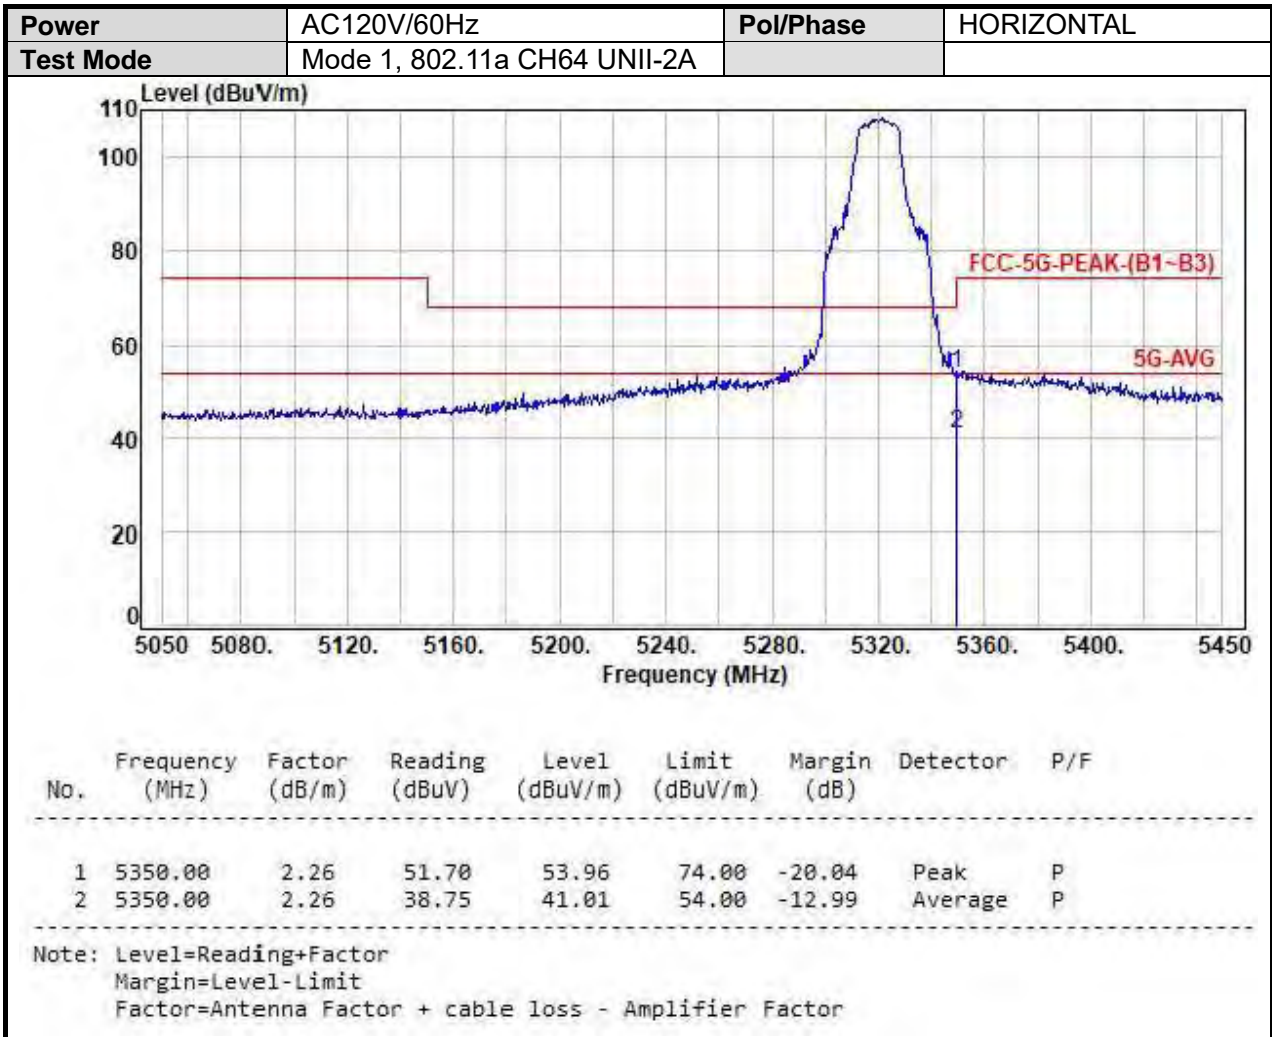

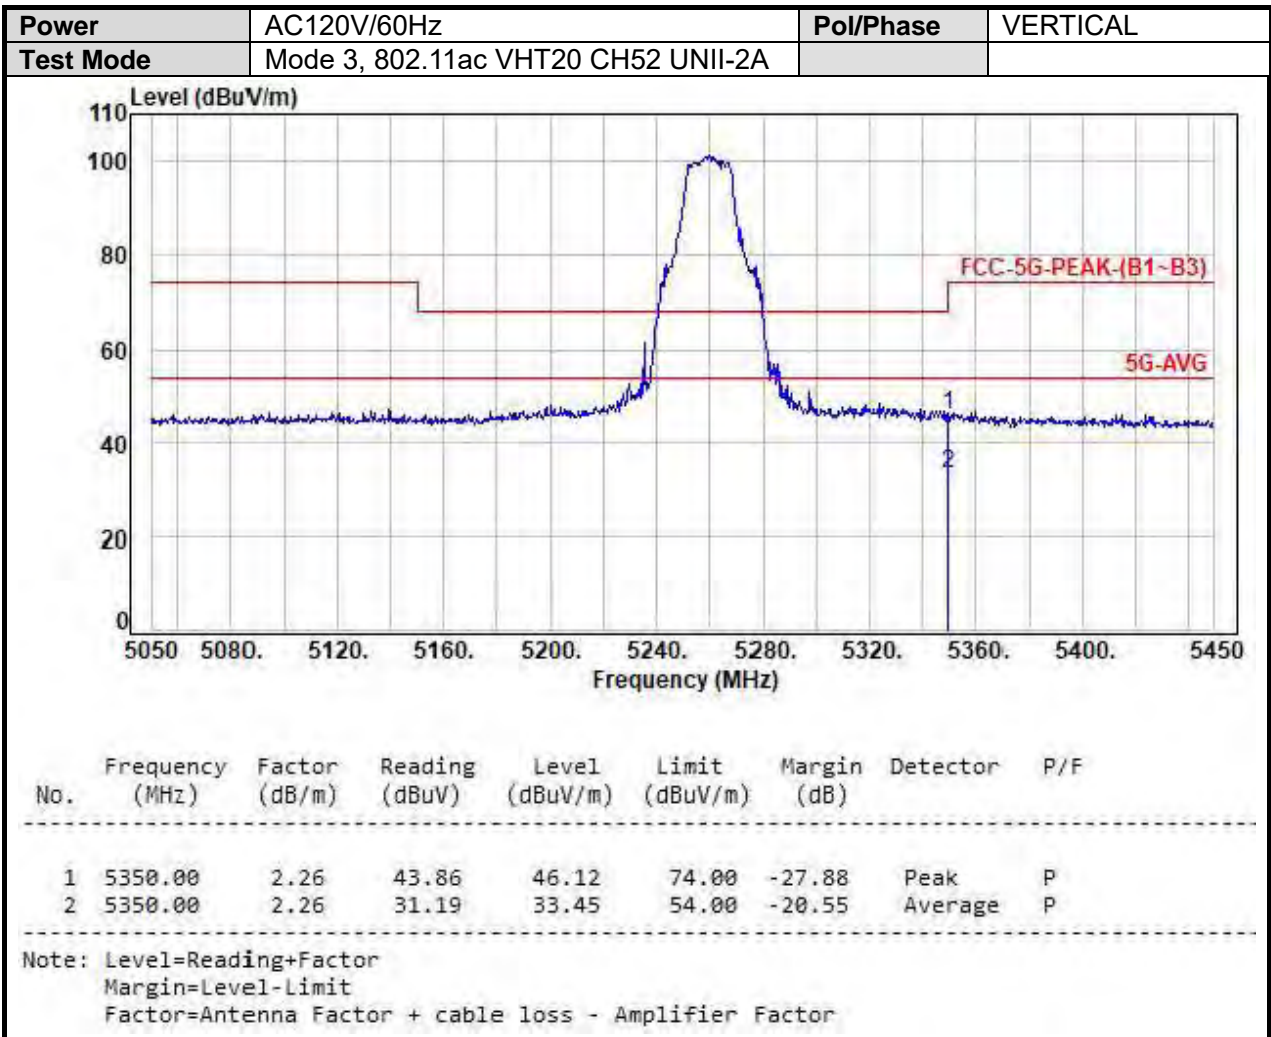

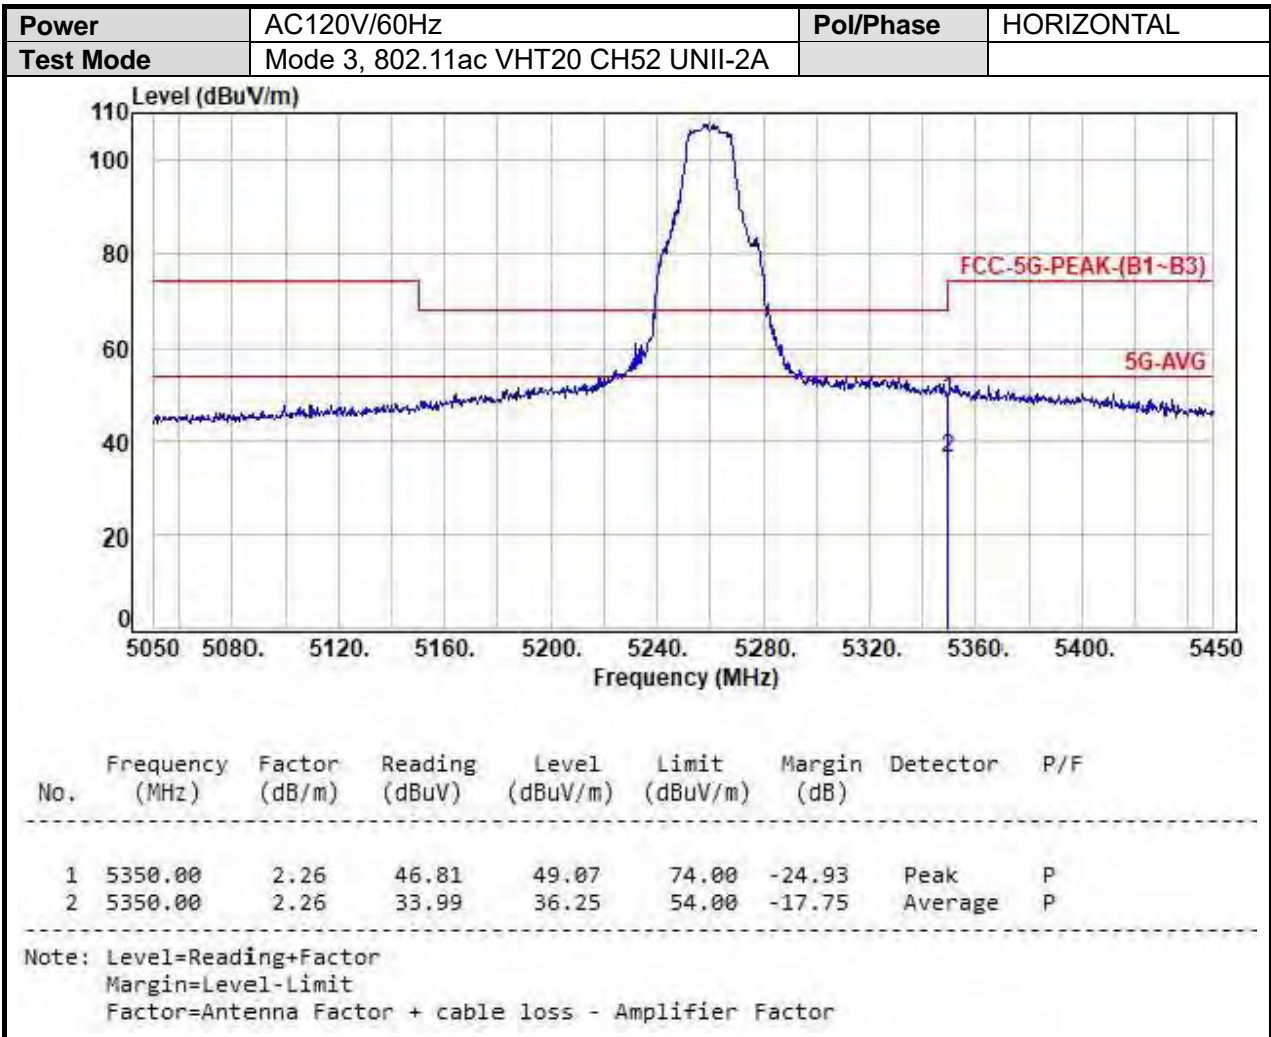


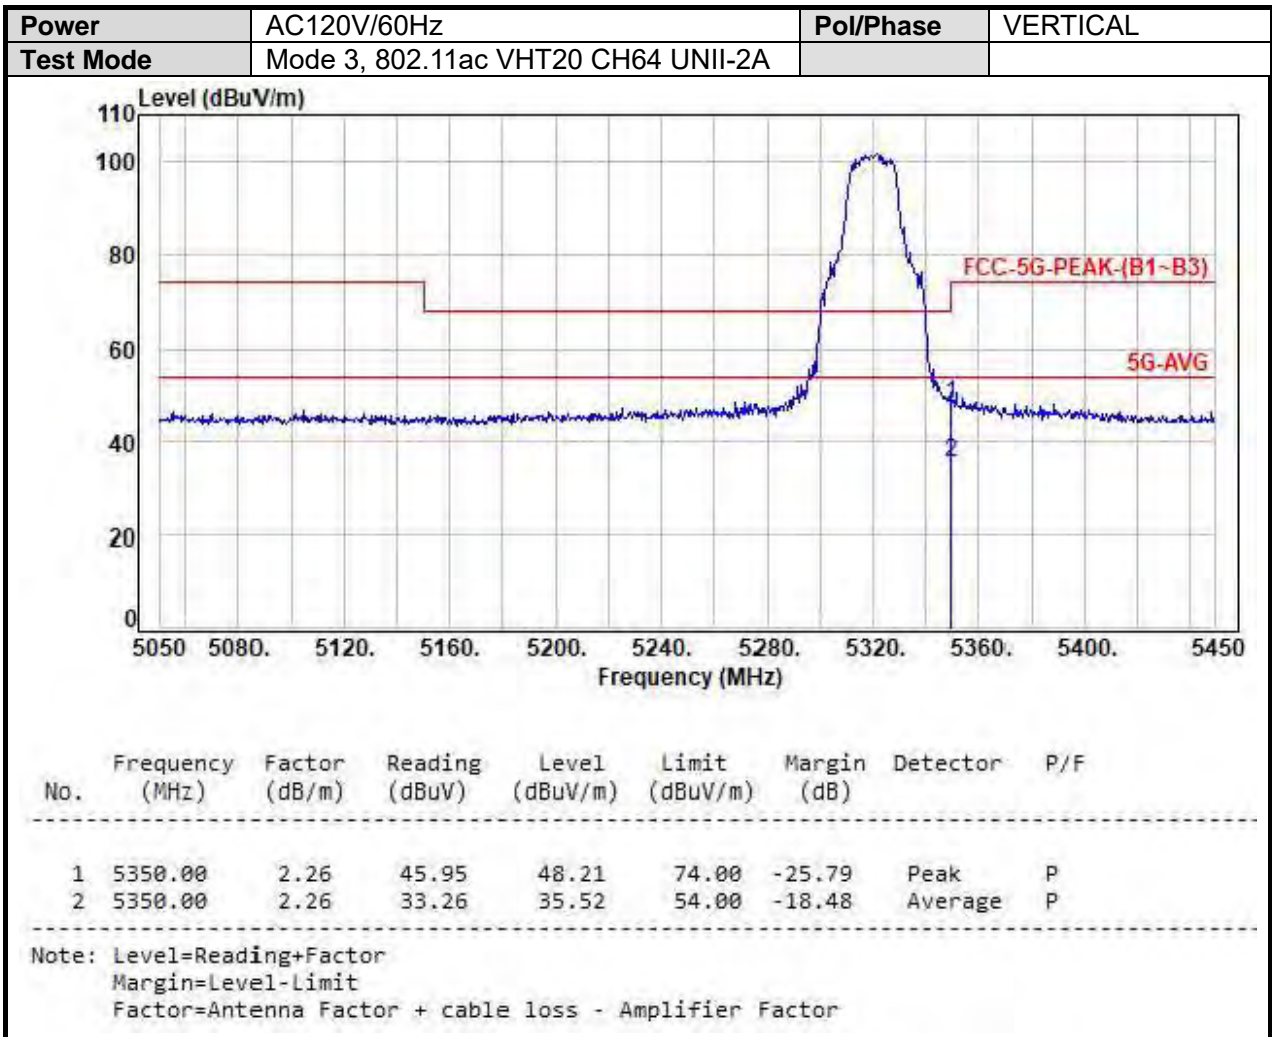

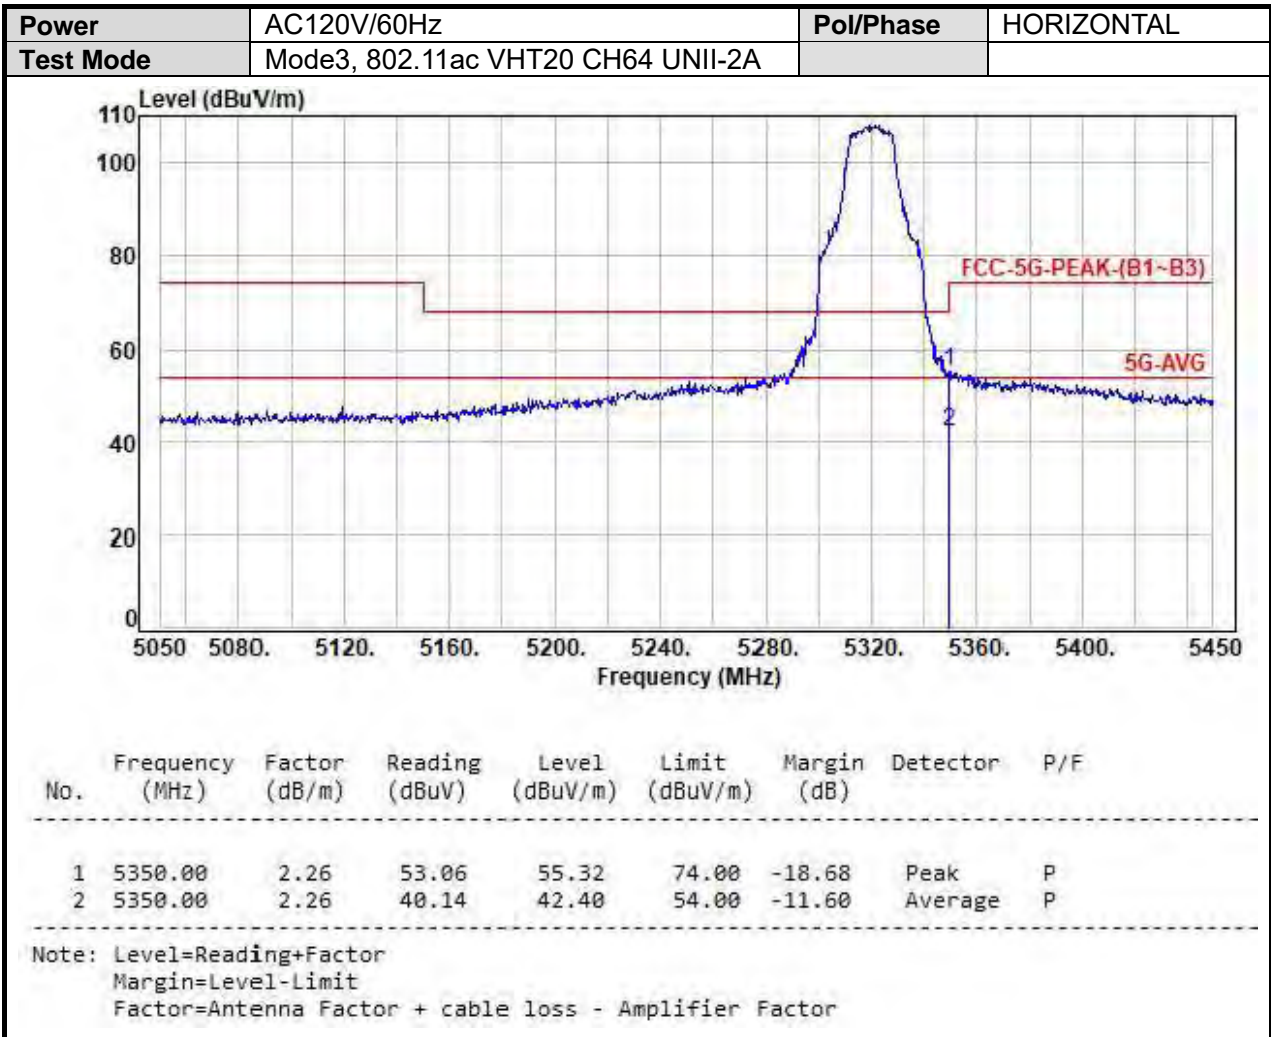



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 4, 802.11ac VHT40 CH54 UNII-2A		

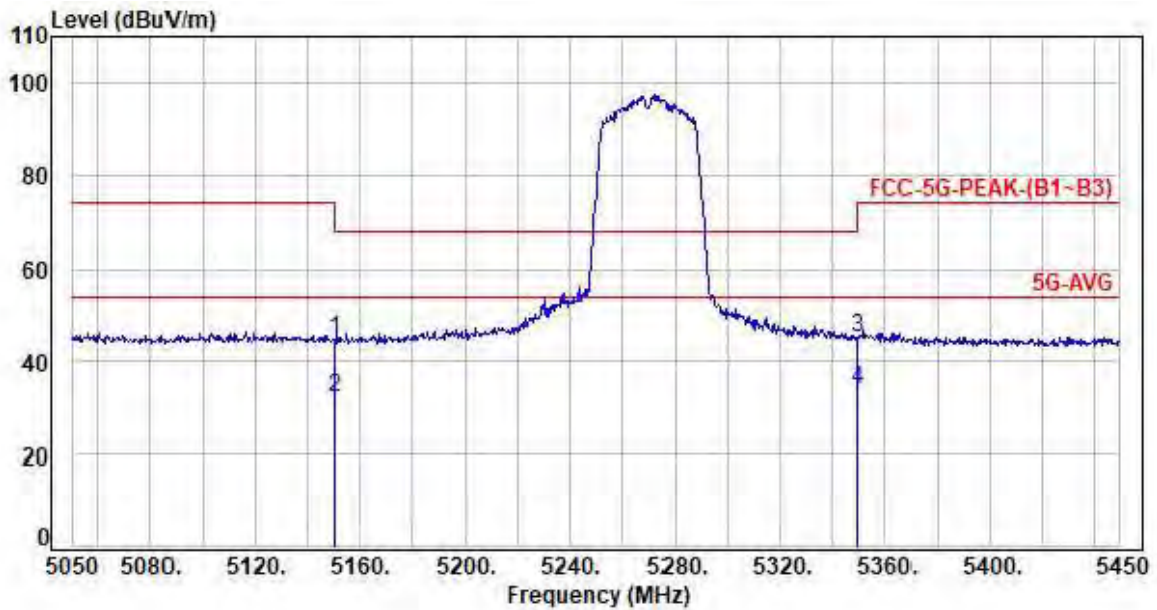


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	42.59	44.84	74.00	-29.16	Peak	P
2	5150.00	2.25	30.05	32.30	54.00	-21.70	Average	P
3	5350.00	2.26	42.89	45.15	74.00	-28.85	Peak	P
4	5350.00	2.26	31.79	34.05	54.00	-19.95	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 4, 802.11ac VHT40 CH54 UNII-2A		

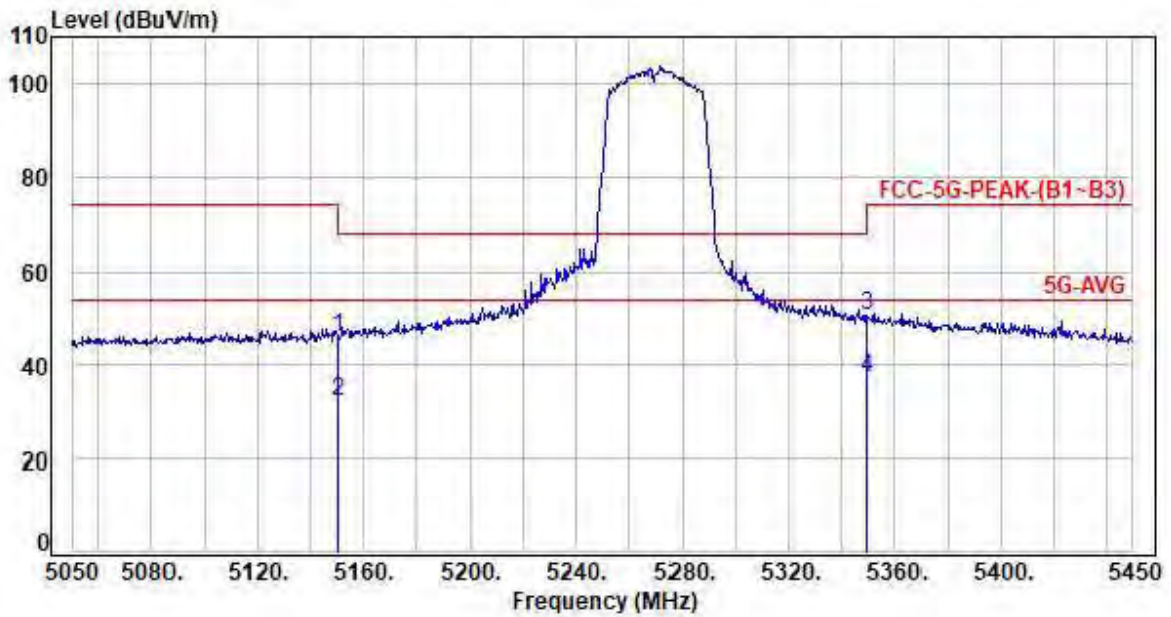


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	43.73	45.98	74.00	-28.02	Peak	P
2	5150.00	2.25	30.03	32.28	54.00	-21.72	Average	P
3	5350.00	2.26	48.39	50.65	74.00	-23.35	Peak	P
4	5350.00	2.26	34.98	37.24	54.00	-16.76	Average	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor





Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 4, 802.11ac VHT40 CH62 UNII-2A		

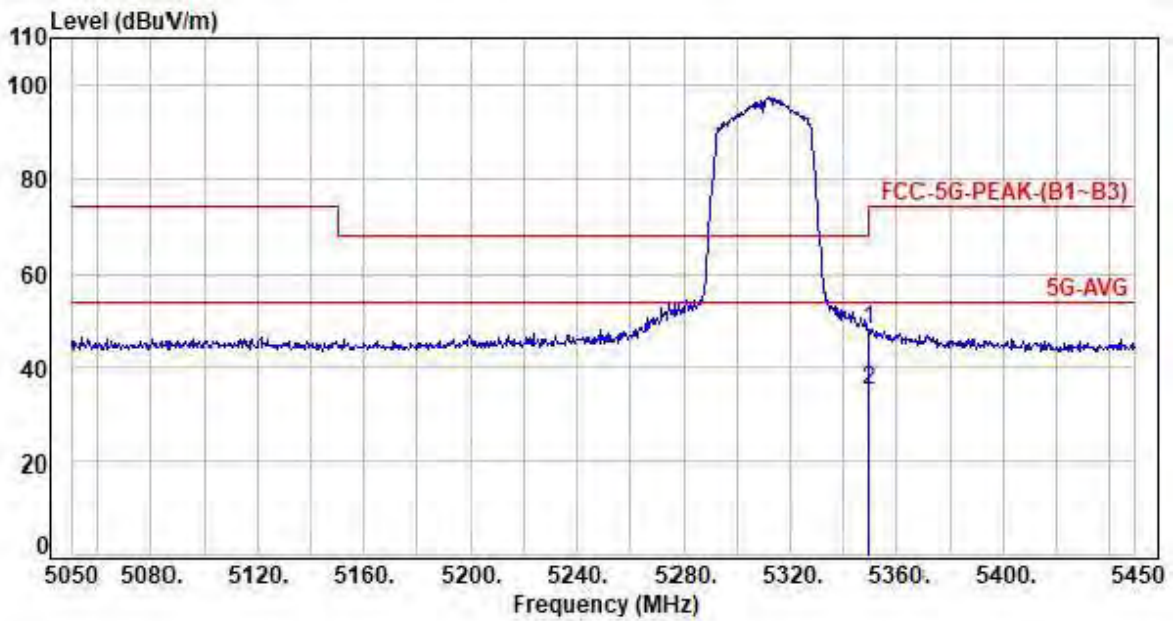

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	5350.00	2.26	46.04	48.30	74.00	-25.70	Peak	P
2	5350.00	2.26	32.98	35.24	54.00	-18.76	Average	P


Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor

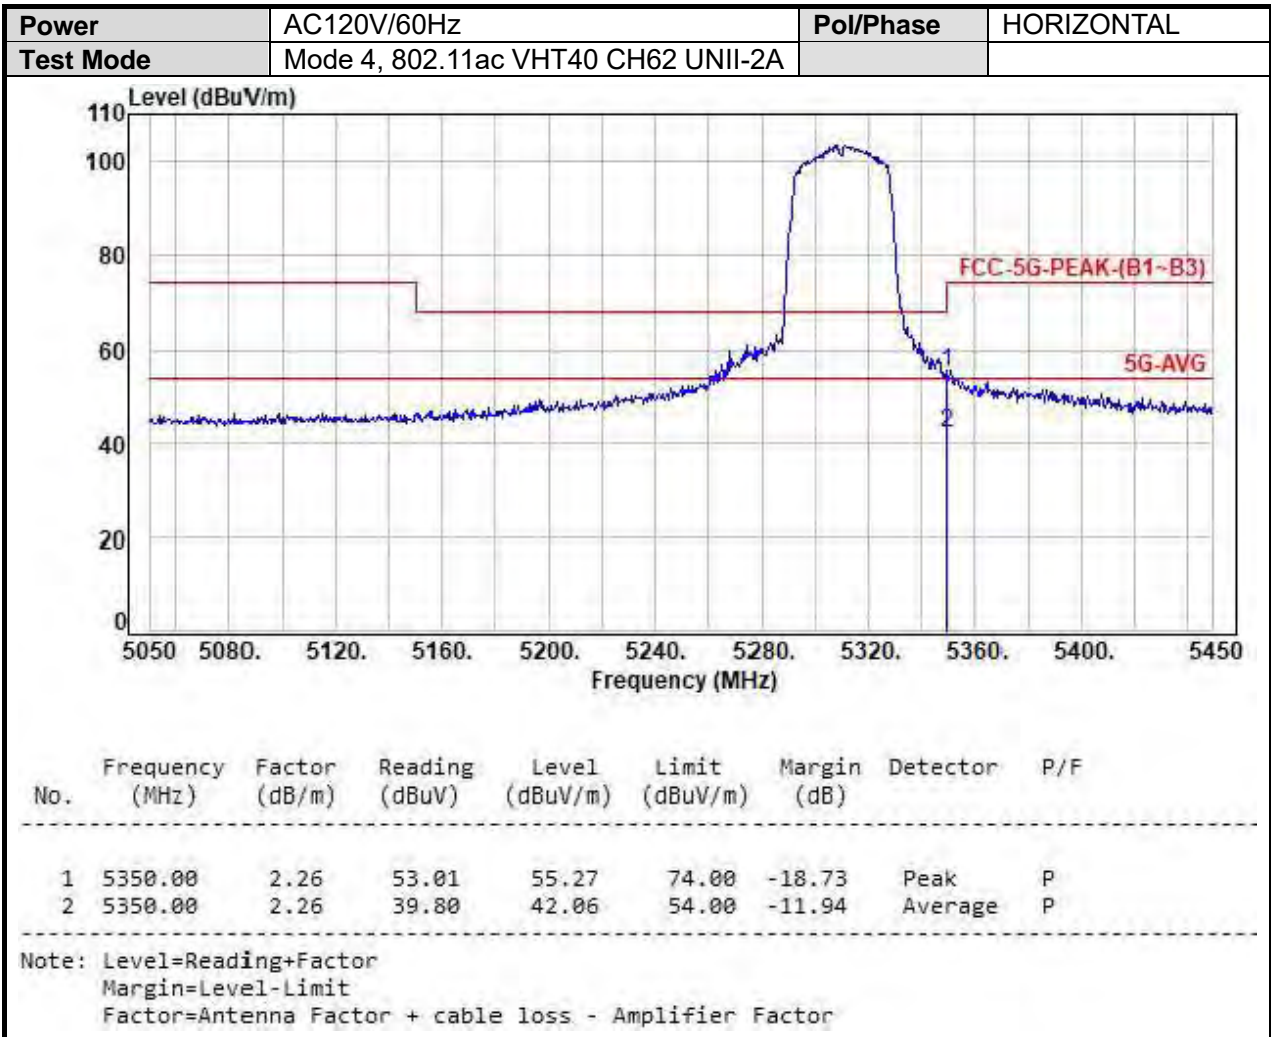

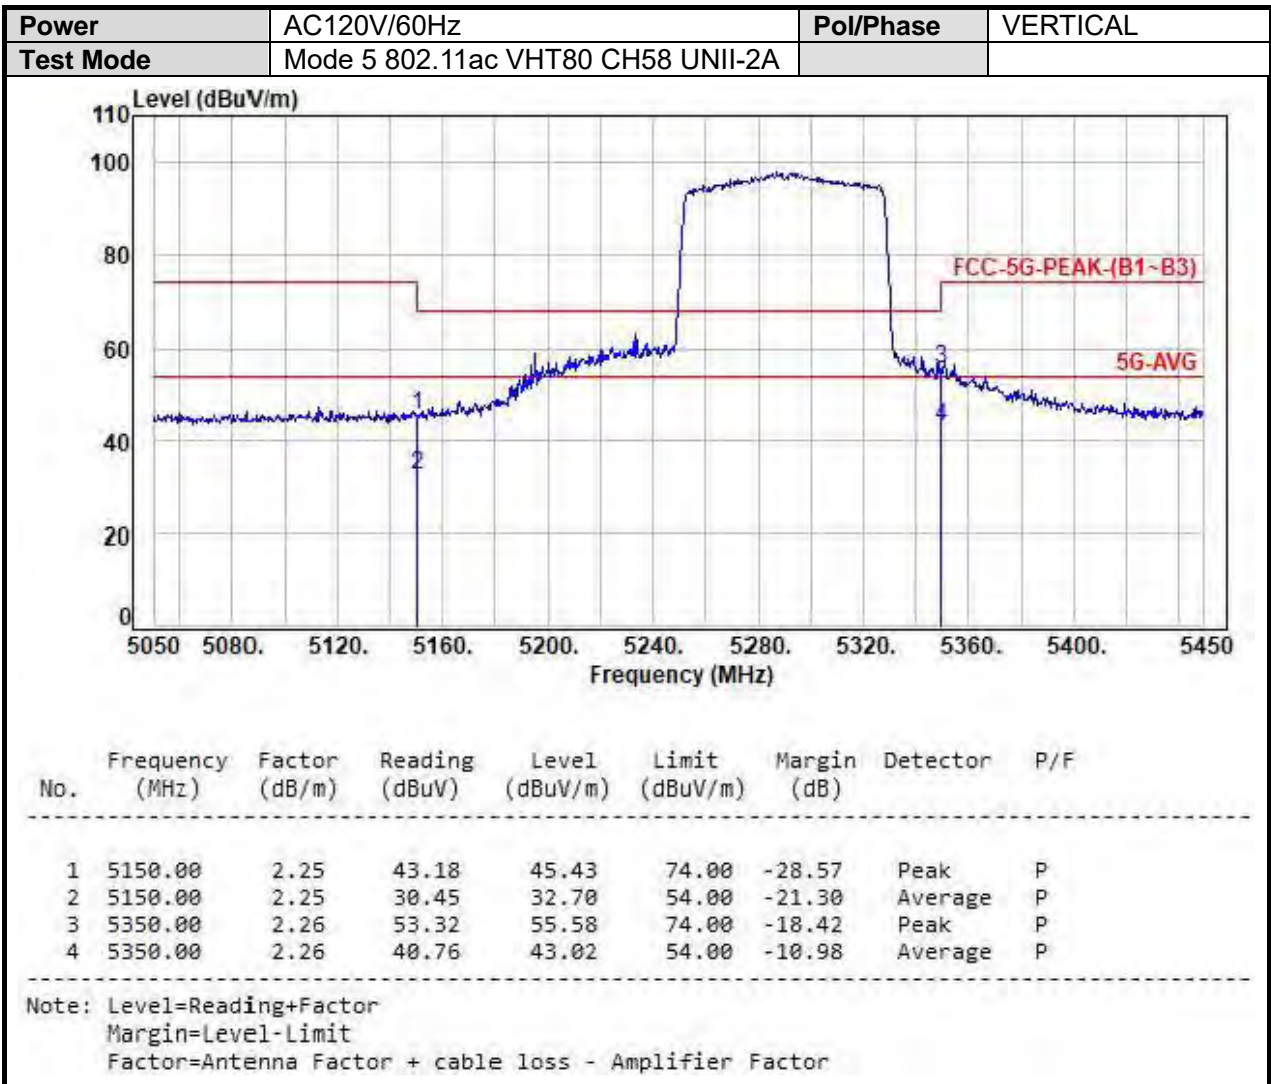





Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 5, 802.11ac VHT80 CH58 UNII-2A		

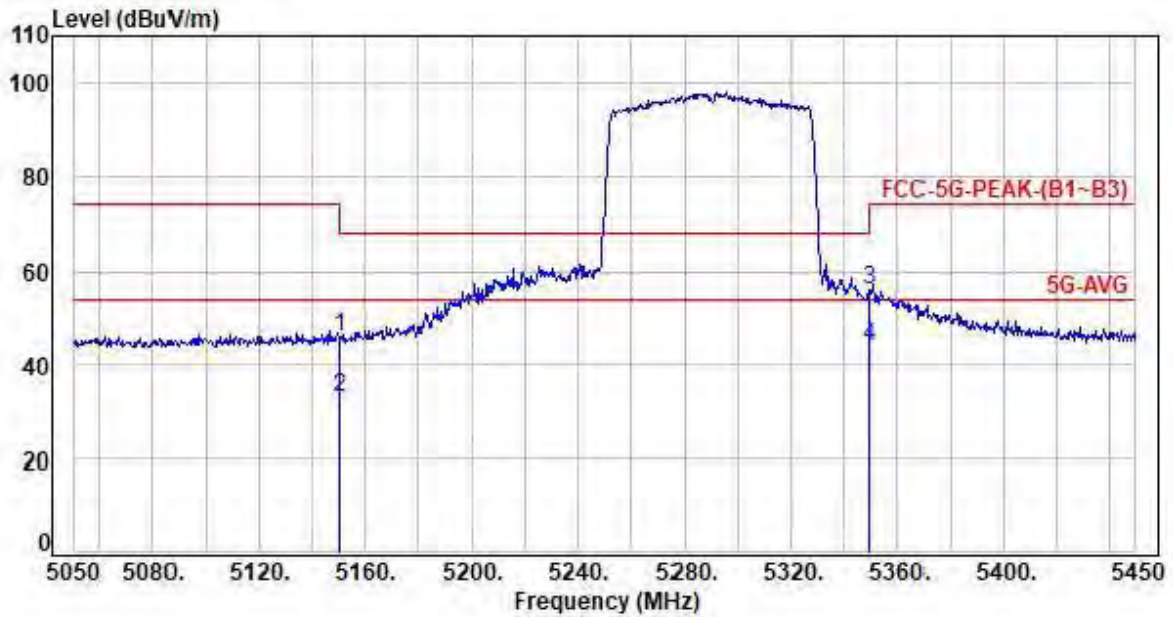

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	43.74	45.99	74.00	-28.01	Peak	P
2	5150.00	2.25	30.79	33.04	54.00	-20.96	Average	P
3	5350.00	2.26	53.90	56.16	74.00	-17.84	Peak	P
4	5350.00	2.26	41.54	43.80	54.00	-10.20	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

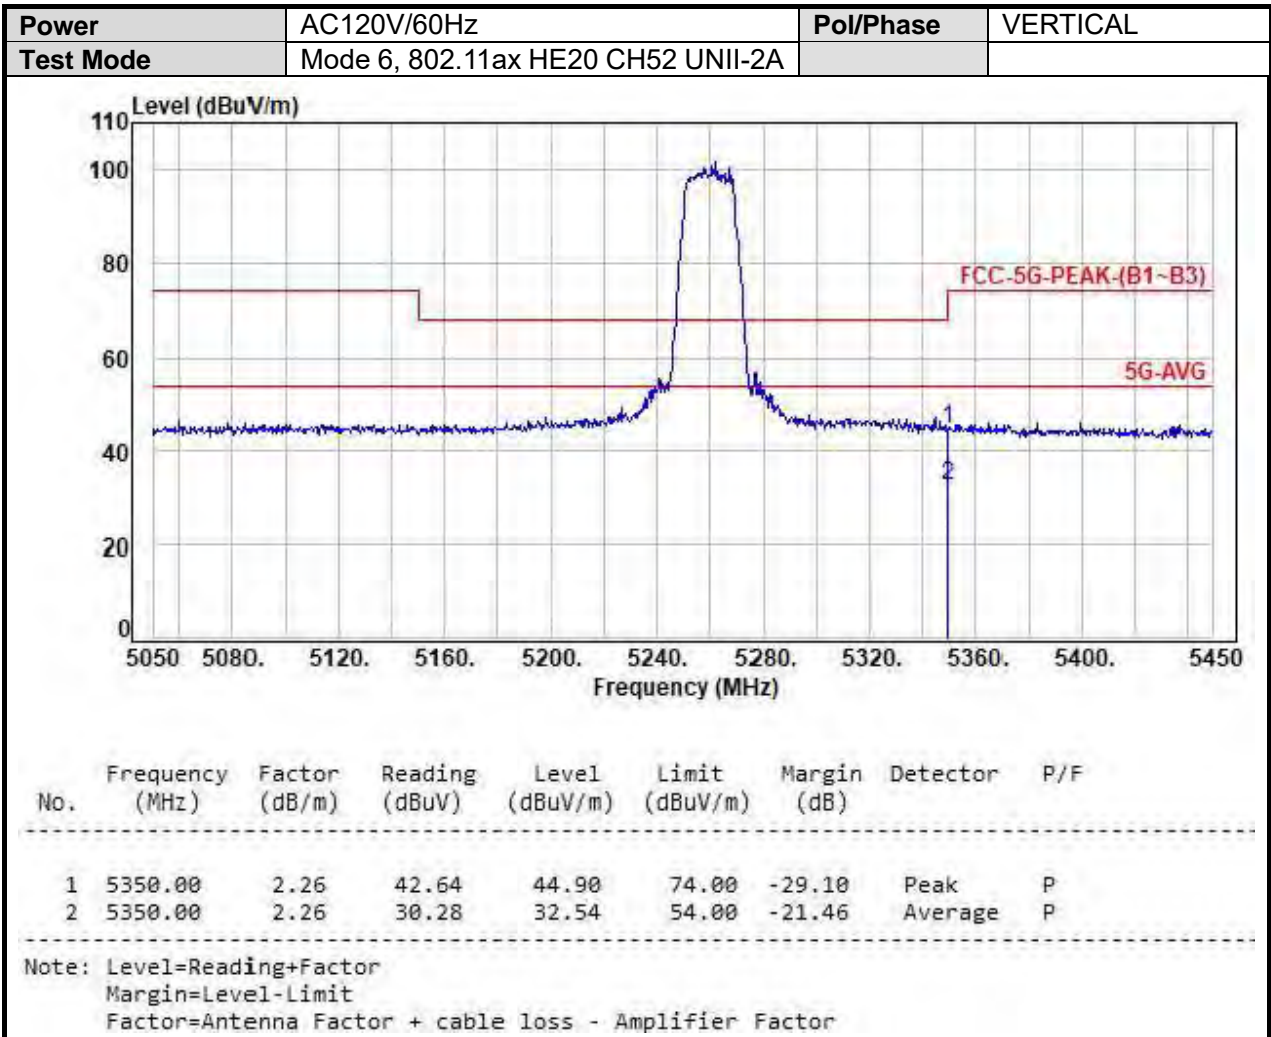

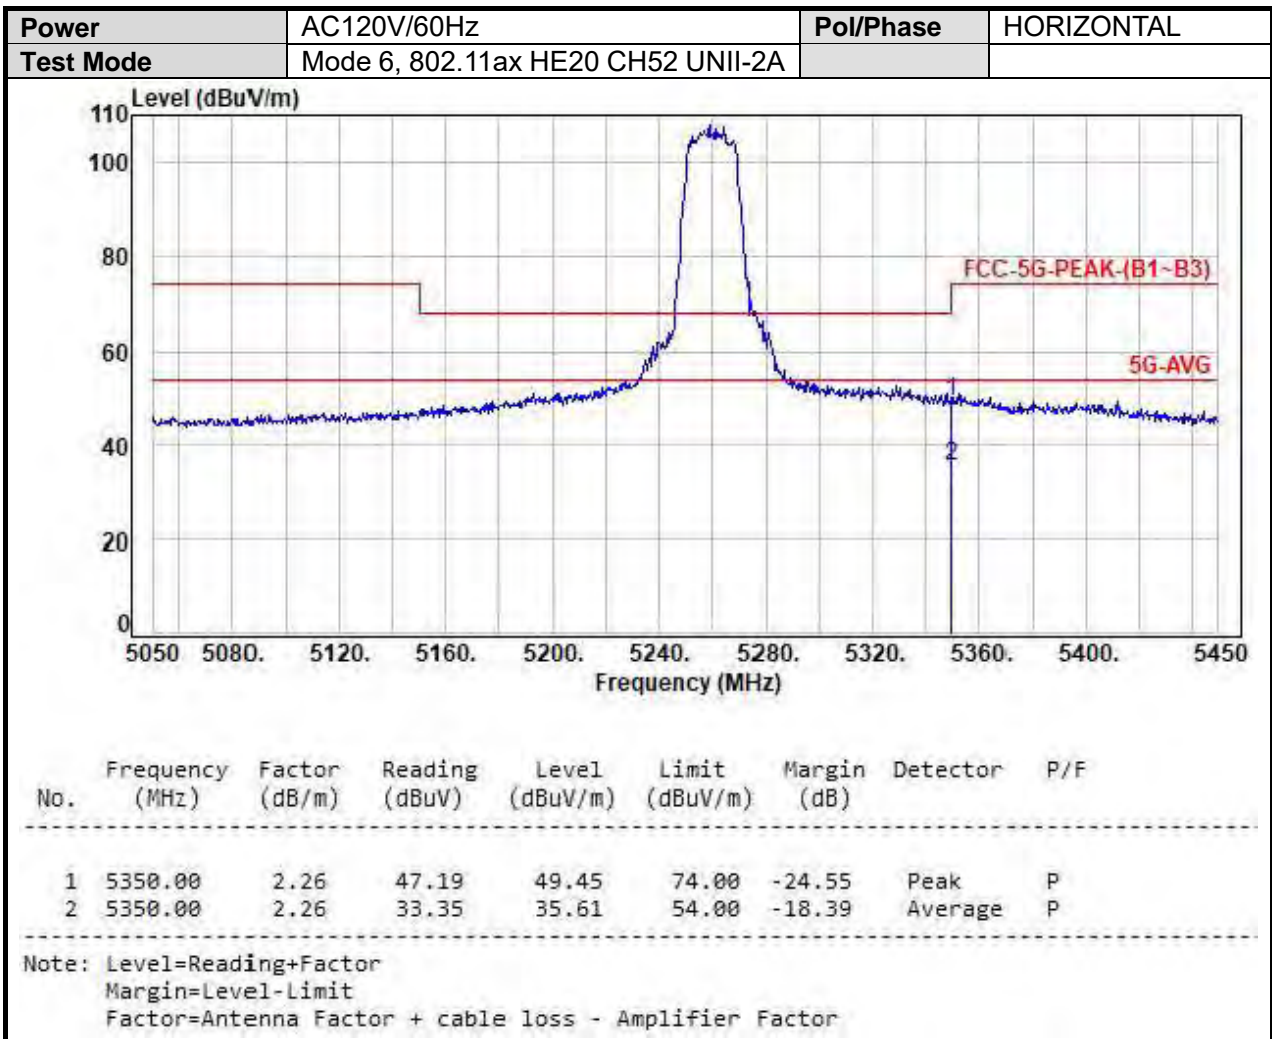





Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 6, 802.11ax HE20 CH64 UNII-2A		

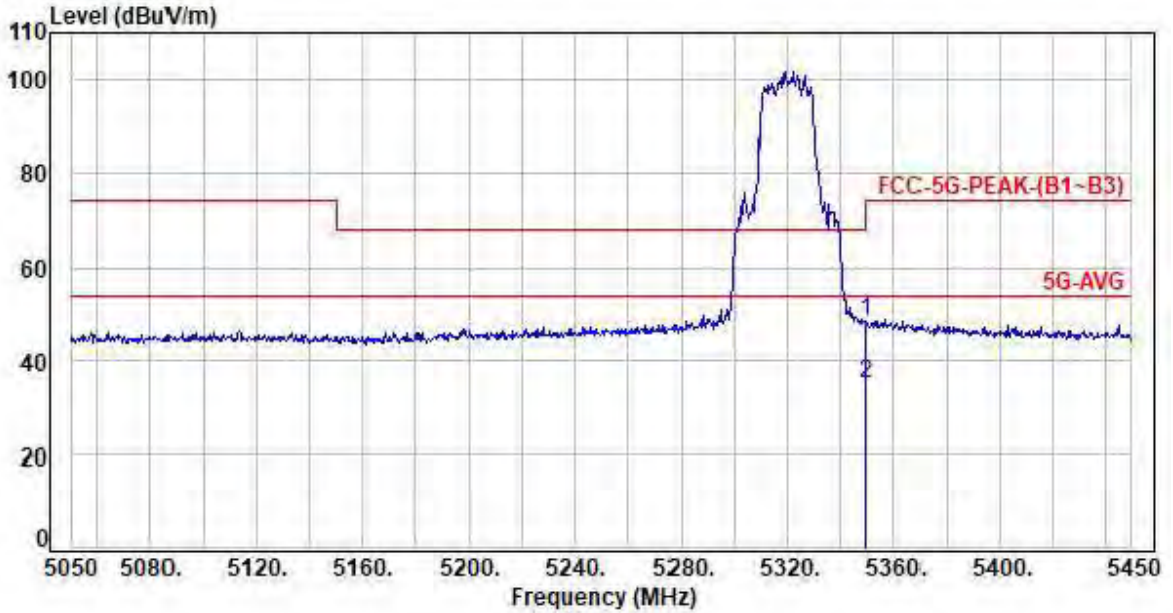


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.00	2.26	46.06	48.32	74.00	-25.68	Peak	P
2	5350.00	2.26	32.98	35.24	54.00	-18.76	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

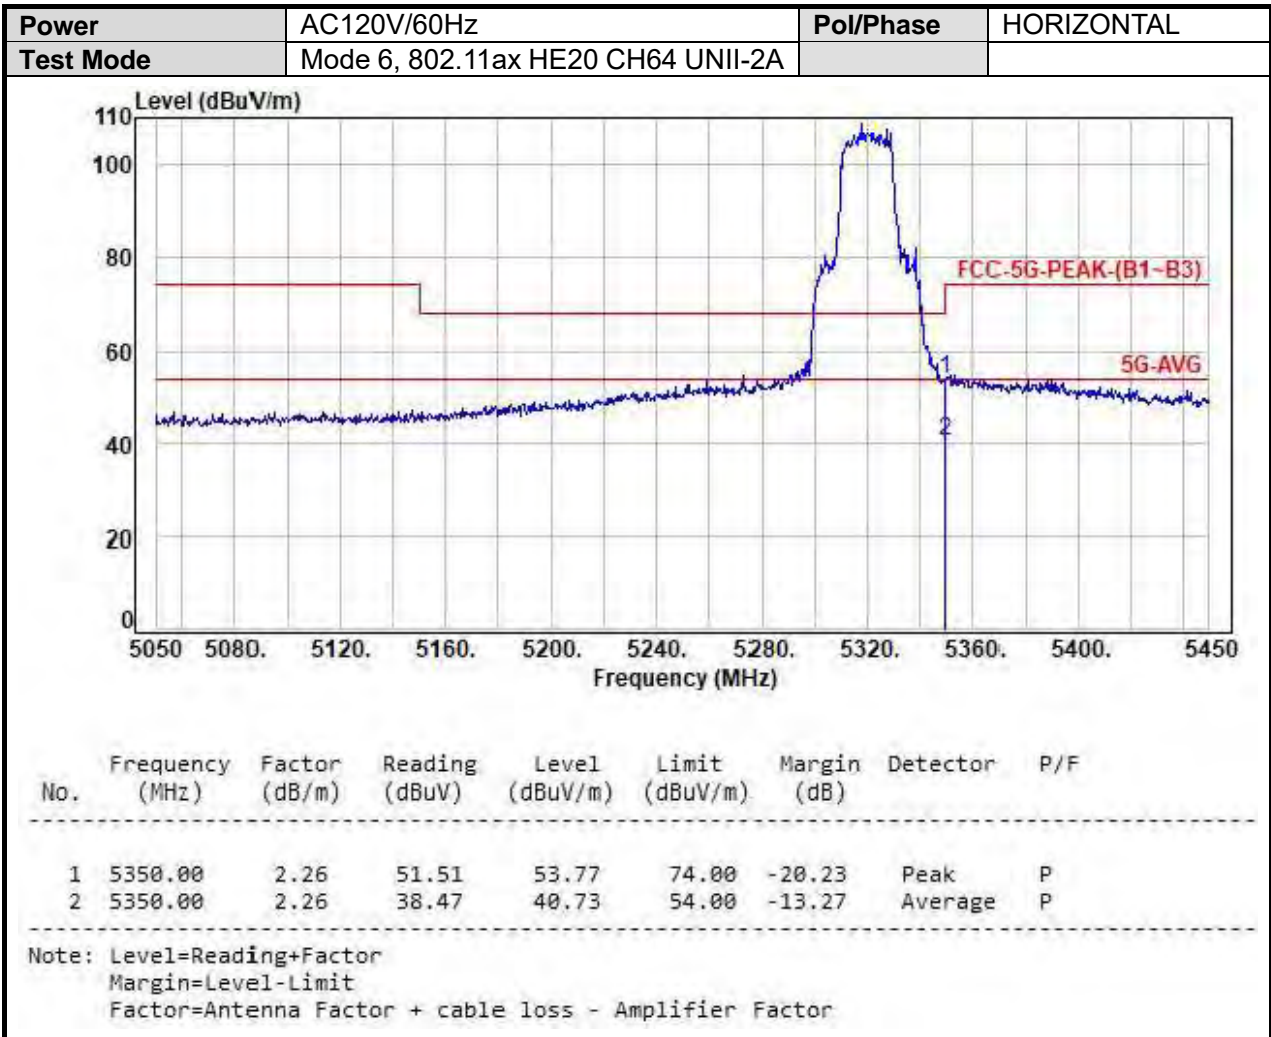


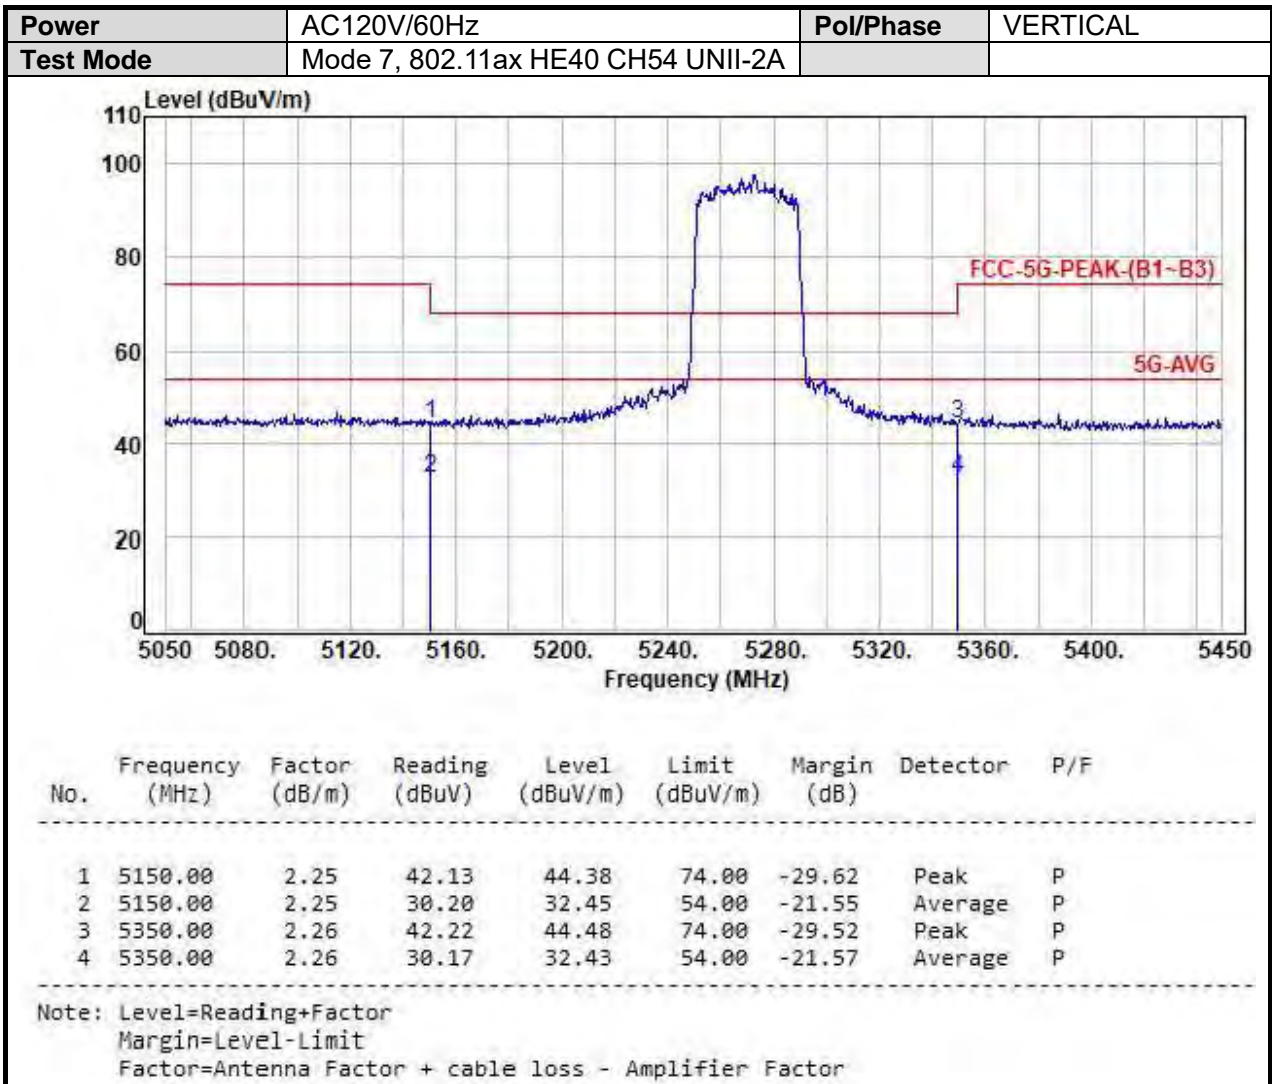

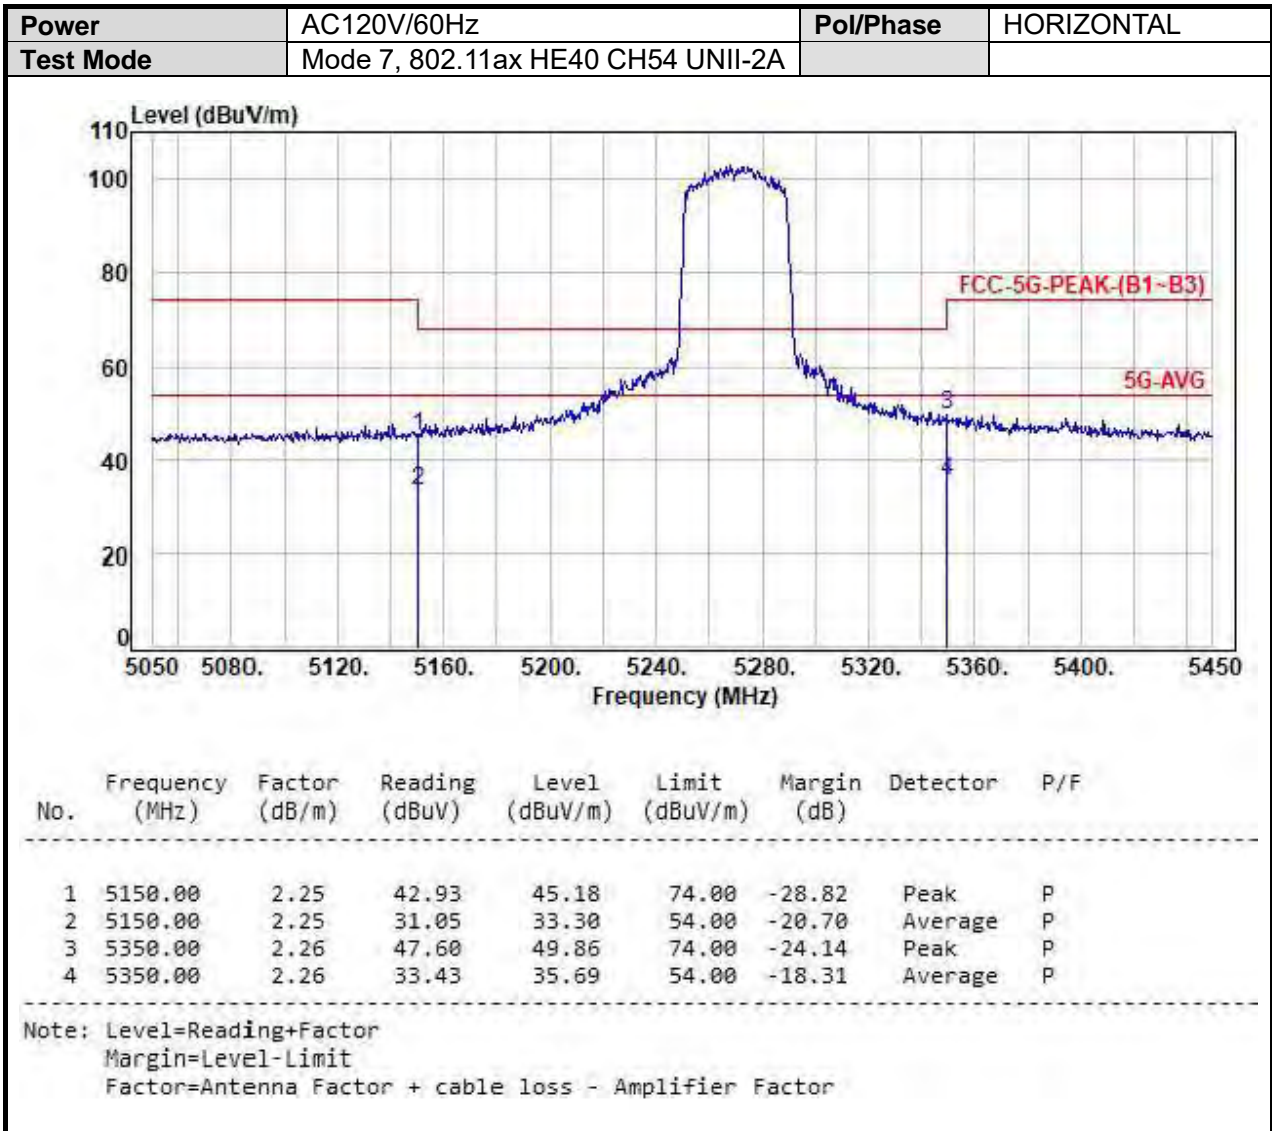




Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 7, 802.11ax HE40 CH62 UNII-2A		

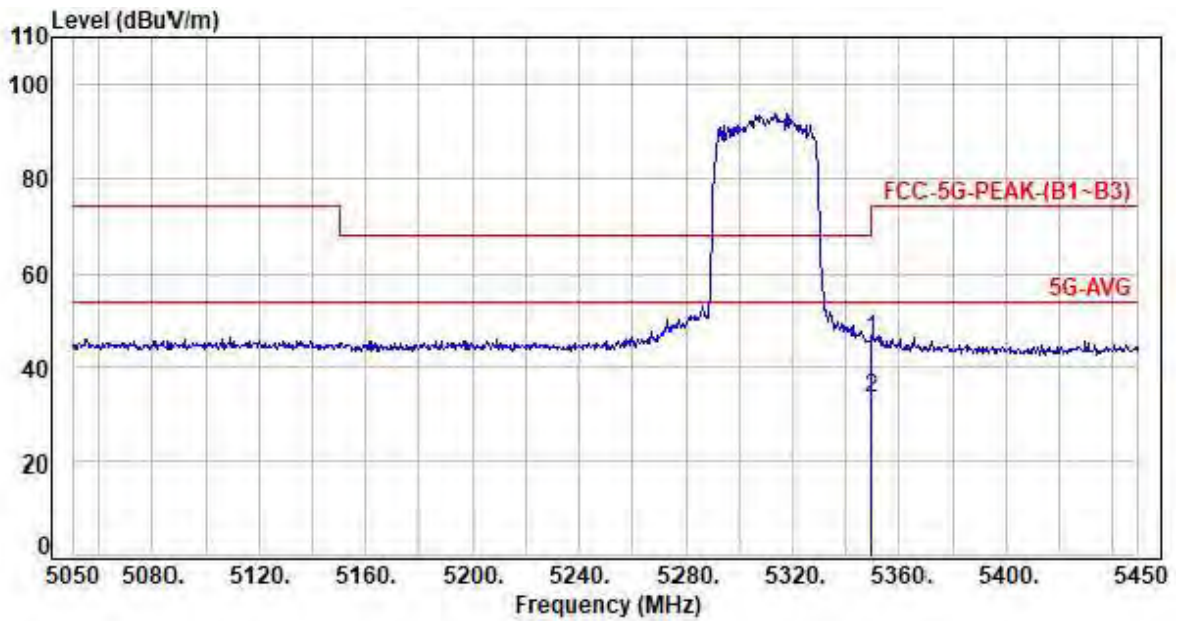


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.00	2.26	43.95	46.21	74.00	-27.79	Peak	P
2	5350.00	2.26	31.38	33.64	54.00	-20.36	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

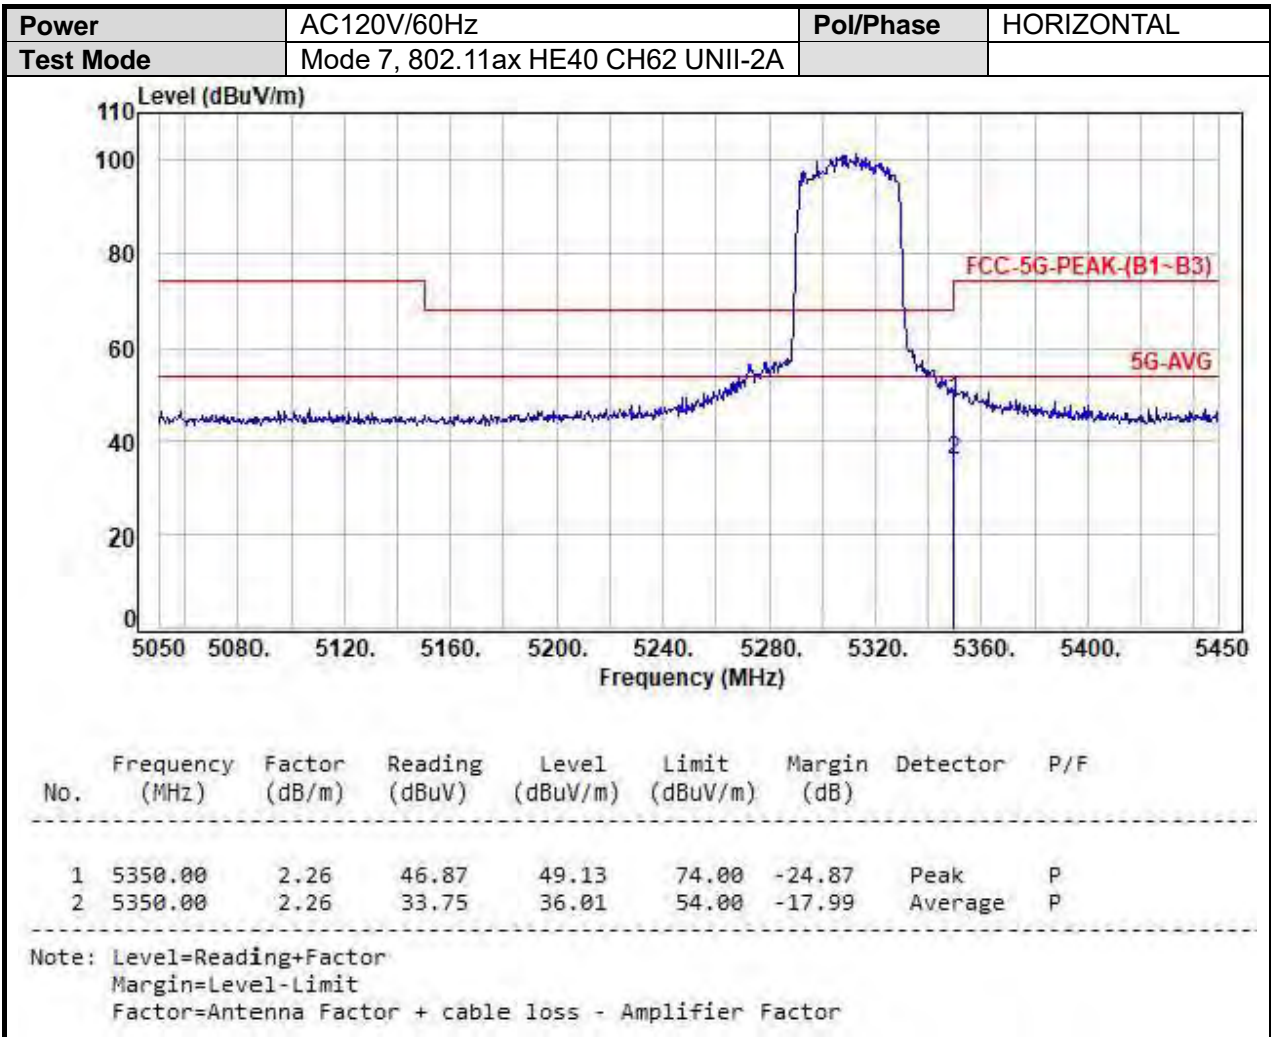



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 8, 802.11ax HE80 CH58 UNII-2A		

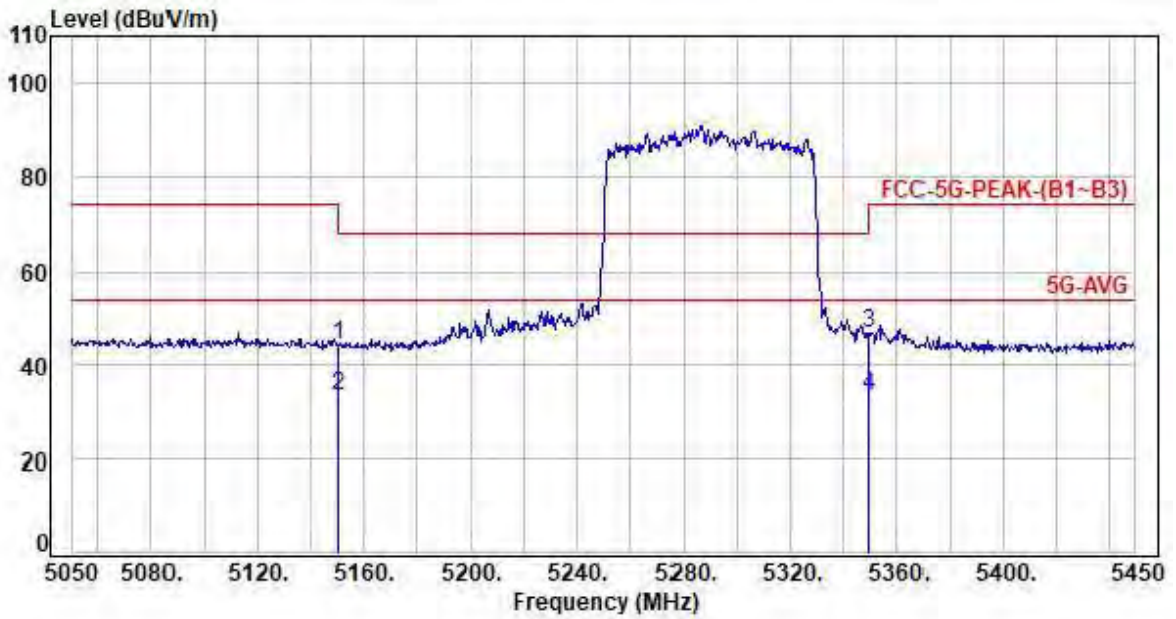


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	42.27	44.52	74.00	-29.48	Peak	P
2	5150.00	2.25	31.02	33.27	54.00	-20.73	Average	P
3	5350.00	2.26	44.61	46.87	74.00	-27.13	Peak	P
4	5350.00	2.26	31.38	33.64	54.00	-20.36	Average	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 8, 802.11ax HE80 CH58 UNII-2A		

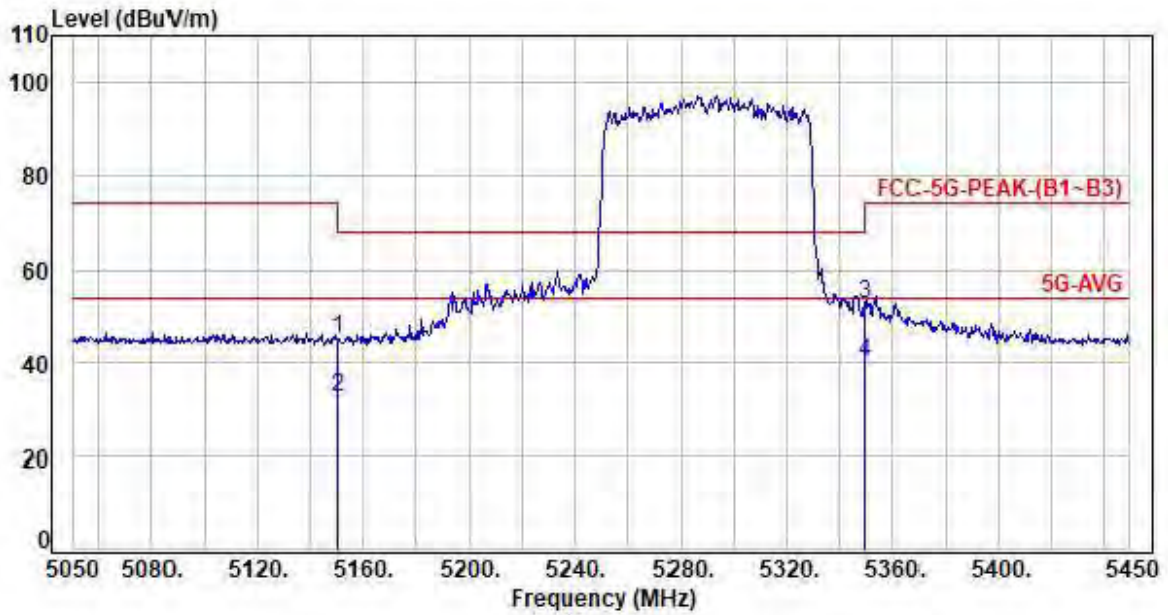


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	5150.00	2.25	42.77	45.02	74.00	-28.98	Peak	P
2	5150.00	2.25	30.42	32.67	54.00	-21.33	Average	P
3	5350.00	2.26	50.40	52.66	74.00	-21.34	Peak	P
4	5350.00	2.26	37.94	40.20	54.00	-13.80	Average	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-Ant B


UNII-2C

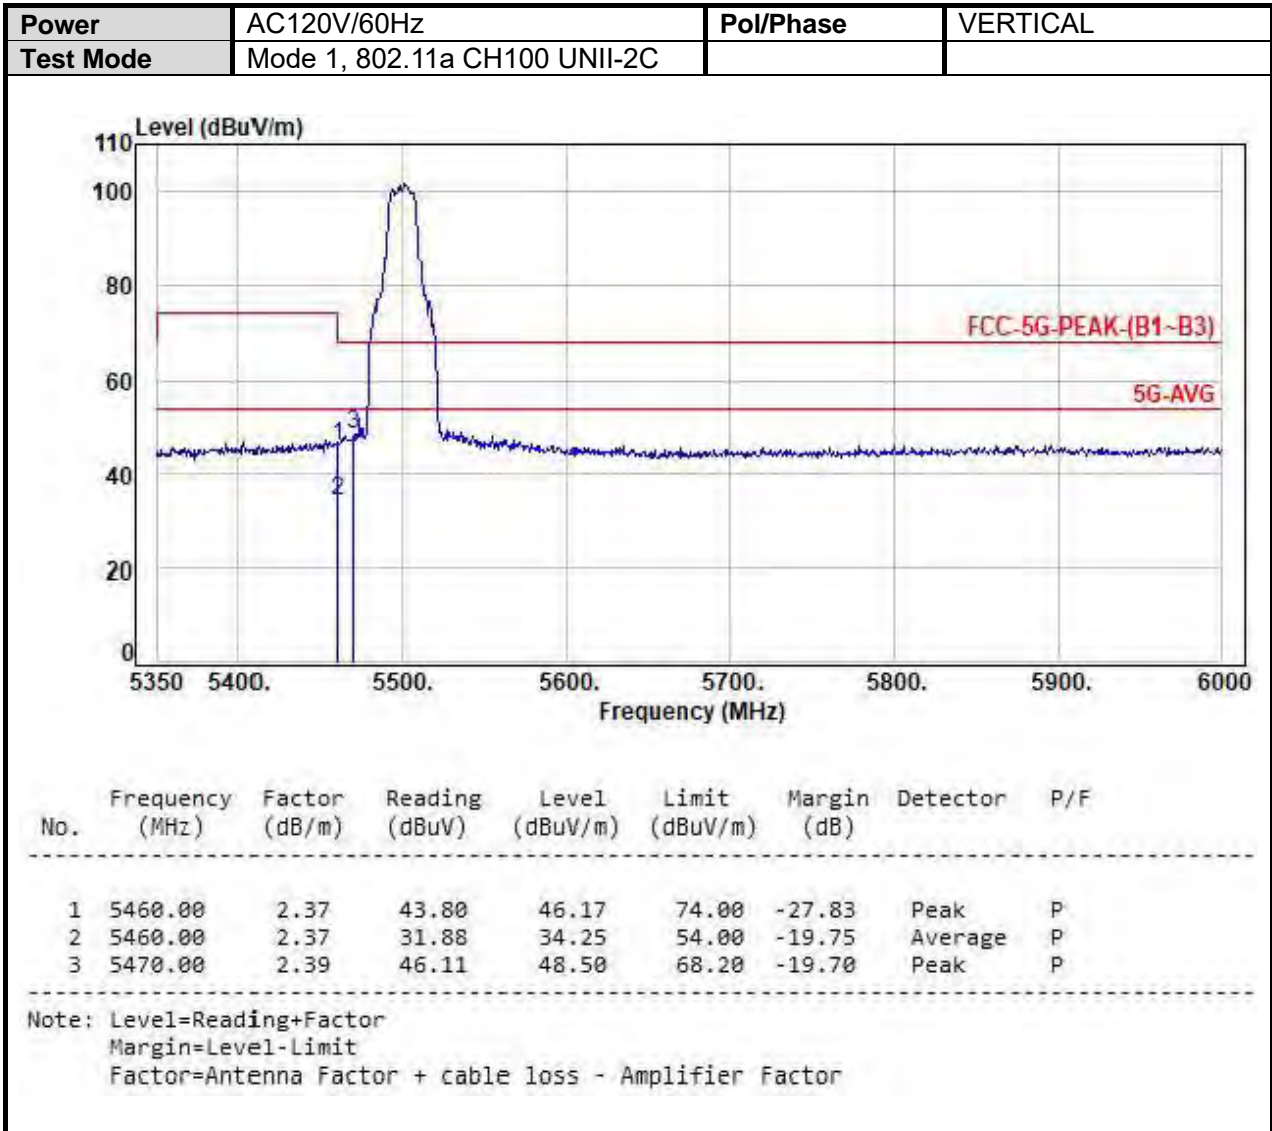

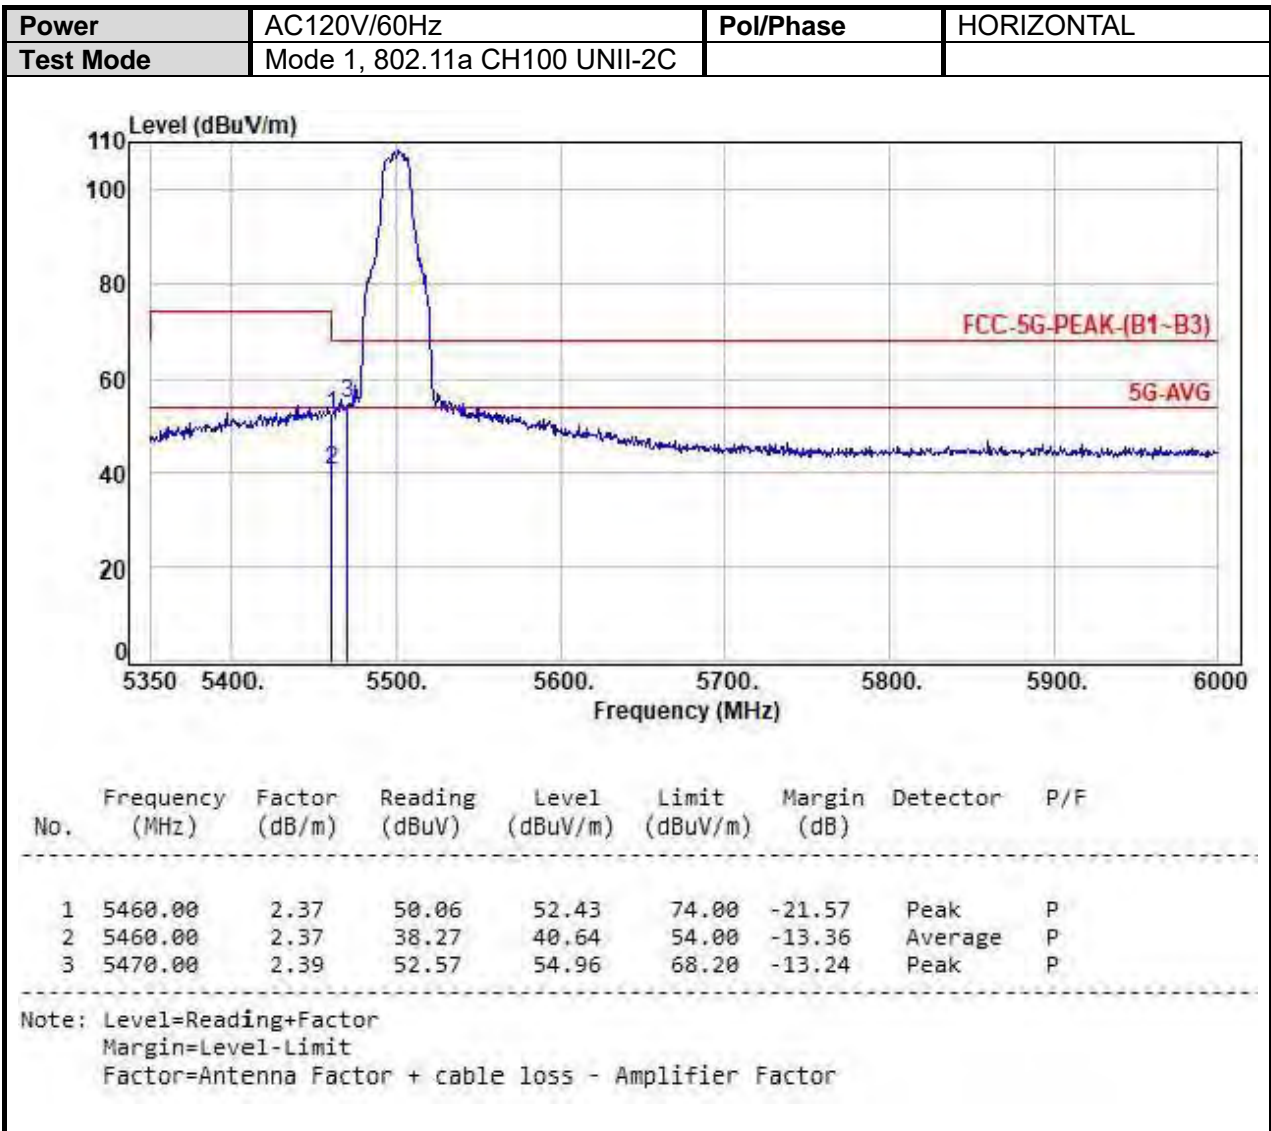



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH140 UNII-2C		

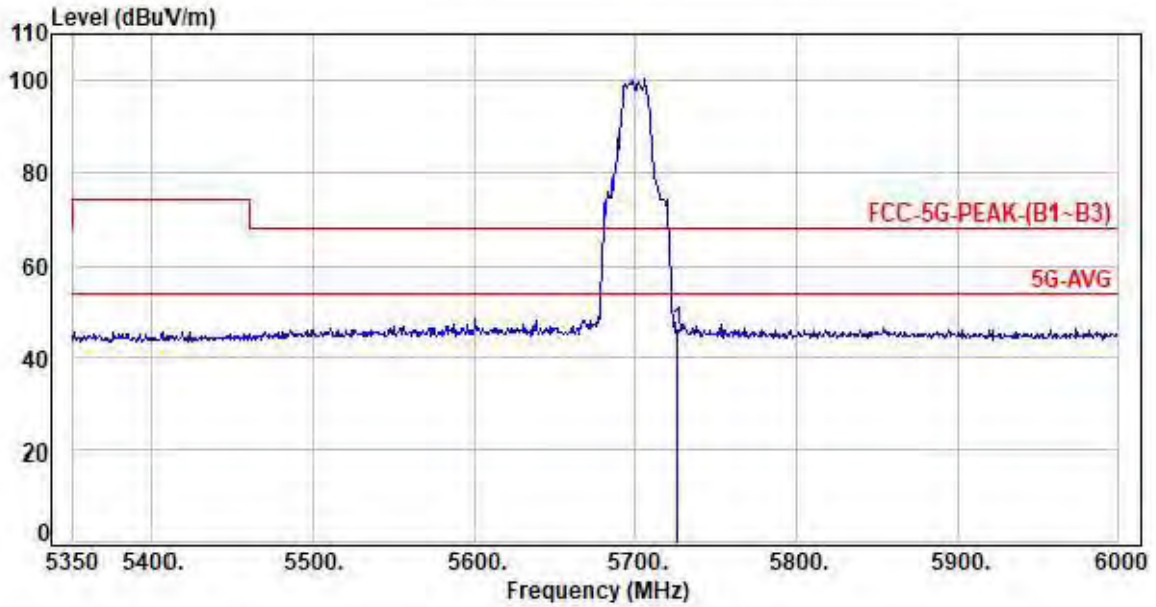


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.00	3.23	42.94	46.17	68.20	-22.03	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	AC120V/60Hz	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, 802.11a CH140 UNII-2C		

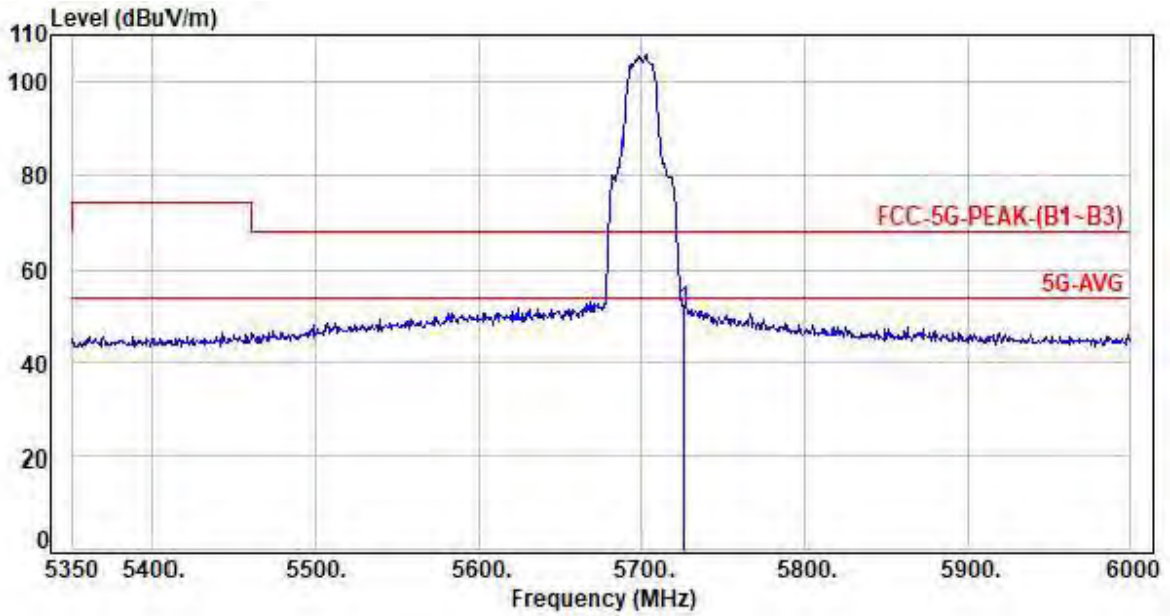


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.00	3.23	48.02	51.25	68.20	-16.95	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO-UNII-2C

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, 802.11ac VHT20 CH100 UNII-2C		

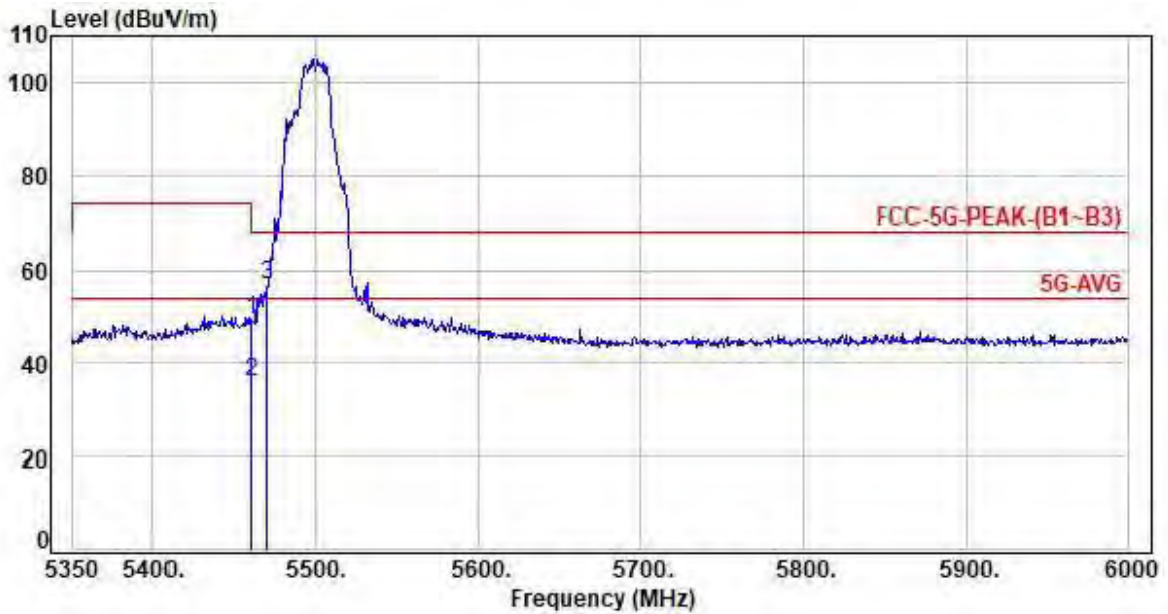

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.00	2.37	46.86	49.23	74.00	-24.77	Peak	P
2	5460.00	2.37	33.45	35.82	54.00	-18.18	Average	P
3	5470.00	2.39	54.33	56.72	68.20	-11.48	Peak	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

