

# **FCC Test Report**

Report No.: AGC13454230810FR02

FCC ID : 2A94QNB-OL011

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Smart RGBCW Flood Lights

**BRAND NAME** : N/A

**MODEL NAME** : NB-OL011

**APPLICANT**: Shenzhen Aspiron Technology Company Limited

**DATE OF ISSUE** : Sep. 12, 2023

**STANDARD(S)** : FCC Part 15 Subpart C §15.247

**REPORT VERSION**: V1.0

Attestation of Global Coloriance (Shenzhen) Co., Ltd



Page 2 of 97


## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 12, 2023	Valid	Initial Release




## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	8
2.5 Related Submittal(S) / Grant (S)	9
2.6 Test Methodology	9
2.7 Special Accessories	9
2.8 Equipment Modifications	9
2.9 Antenna Requirement	9
2.11 Description of Test Software	10
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	12
3.4 Measurement Uncertainty	12
3.5 List of Equipment Used	13
4.System Test Configuration	15
4.1 EUT Configuration	15
4.2 EUT Exercise	15
4.3 Configuration of Tested System	15
4.4 Equipment Used In Tested System	15
4.5 Summary of Test Results	16
5. Description of Test Modes	17
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	22
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	23
9. Power Spectral Density Measurement	36





9.1 Provisions Applicable	36
9.2 Measurement Procedure	36
9.3 Measurement Setup (Block Diagram of Configuration)	37
9.4 Measurement Result	37
10. Conducted Band Edge and Out-of-Band Emissions	44
10.1 Provisions Applicable	44
10.2 Measurement Procedure	44
10.3 Measurement Setup (Block Diagram of Configuration)	44
10.4 Measurement Results	45
11. Radiated Spurious Emission	59
11.1 Measurement Limits	59
11.2 Measurement Procedure	59
11.3 Measurement Setup (Block Diagram of Configuration)	62
11.4 Measurement Result	63
12. AC Power Line Conducted Emission	93
12.1 Measurement Limits	93
12.2 Block Diagram of Line Conducted Emission Test	93
12.3 Preliminary Procedure of Line Conducted Emission Test	94
12.4 Final Procedure of Line Conducted Emission Test	94
12.5 Test Result of Line Conducted Emission Test	94
Appendix I: Photographs of Test Setup	97
Appendix II: Photographs of EUT	97





## 1. General Information

Shenzhen Aspiron Technology Company Limited
3rd Floor, Yiben Building, No.1063 Chaguang Road, Xili Street, Nanshan District,
Shenzhen, Guangdong, China
Shenzhen Aspiron Technology Company Limited
3rd Floor, Yiben Building, No.1063 Chaguang Road, Xili Street, Nanshan District,
Shenzhen, Guangdong, China
Signcomplex Limited
No. 70 Hexiang West Road, Heshan Industrial Park, Heshan, Guang dong, China
Smart RGBCW Flood Lights
N/A
NB-OL011
Aug. 11, 2023
Aug. 11, 2023~Sep. 12, 2023
No any deviation from the test method
Normal
Pass
AGCER-FCC-2.4GWLAN-V1

Note:The test results of this report relate only to the tested sample identified in this report.

Prepared By	Alan Duan	
•	Alan Duan (Project Engineer)	Sep. 12, 2023
Reviewed By	Calin Liu	
	Calvin Liu (Reviewer)	Sep. 12, 2023
Approved By	Max Zhang	
•	Max Zhang Authorized Officer	Sep. 12, 2023



Page 6 of 97

#### 2. Product Information

## 2.1 Product Technical Description

Equipment Type	WLAN 2.4G	
Frequency Band	2400MHz ~ 2483.5MHz	
Operation Frequency	2412MHz ~ 2462MHz	
Output Power (Average)	IEEE 802.11b:12.74dBm; IEEE 802.11g:10.59dBm;	
Odiput i owei (Average)	IEEE 802.11n(HT20):10.46dBm; IEEE 802.11n(HT40):9.15dBm	
Output Power (Peak)	IEEE 802.11b:14.88dBm; IEEE 802.11g:17.91dBm;	
Output Fower (Feak)	IEEE 802.11n(HT20):17.66dBm; IEEE 802.11n(HT40):16.42dBm	
Modulation	802.11b:(DQPSK, DBPSK, CCK) DSSS	
Modulation	802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM	
	802.11b:1/2/5.5/11Mbps	
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps	
	802.11n: up to 300Mbps	
Number of channels	11	
Hardware Version	V1.0	
Software Version	V1.0	
Antenna Designation	PCB Antenna	
Antenna Gain	3.57dBi	
Power Supply	DC 24V from adapter	



Page 7 of 97

## 2.2 Table of Carrier Frequency For 2412-2462MHz:

## 11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		

## 7 channels are provided for 802.11n(HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01		02		03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10		11			



Page 8 of 97

#### 2.3 IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	N <sub>BPSC</sub>	N <sub>C</sub>	BPS	N <sub>D</sub>	BPS	Da Rate(I 800r	. ,
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 9 of 97

## 2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A94QNB-OL011**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.5 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	KDB 662911 D01 Multiple Transmitter Output v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

#### 2.6 Special Accessories

Refer to section 5.2.

## 2.7 Equipment Modifications

Not available for this EUT intended for grant.

#### 2.8 Antenna Requirement

#### **Standard Requirement**

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. For the antenna gain is 3.57dBi




#### 2.9 Description of Test Software

## For IEEE 802.11 mode:

The test utility software used during testing was "Bouffalo Lab Dev Cube", and the version was "1.6.2".

#### Software Setting Diagram

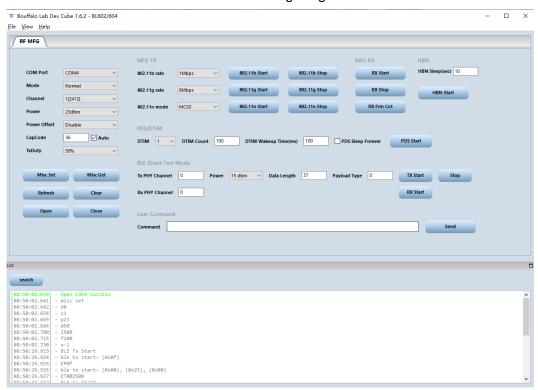

Test Mode	Channel	Power Index
802.11b	L/M/H	24
802.11g	L/M/H	24
802.11n-HT20	L/M/H	24
802.11n-HT40	L/M/H	24



Page 11 of 97

#### 3. Test Environment

#### 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 12 of 97

#### 3.3 Environmental Conditions

	NORMAL CONDITIONS
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 24V

## 3.4 Measurement Uncertainty

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		




Page 13 of 97

## 3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31		
	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02		
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02		
	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31		
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
$\boxtimes$	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17		
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02		
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31		
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11		
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22		
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30		
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03		
$\boxtimes$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31		
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		

<ul><li>A</li></ul>	AC Power Line Conducted Emission								
I I I I I I I I I I I I I I I I I I I						Next Cal. Date (YY-MM-DD)			
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02		
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08		





<ul> <li>Te</li> </ul>	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
$\boxtimes$	AGC-EM-S003	RE-Test System	FARA	EZ-EMC	VRA-03A			
$\boxtimes$	AGC-ER-S012	BT/WIFI-Test System	Tonscend	JS1120-2	2.6			
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



Page 15 of 97

## **4.System Test Configuration**


#### 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

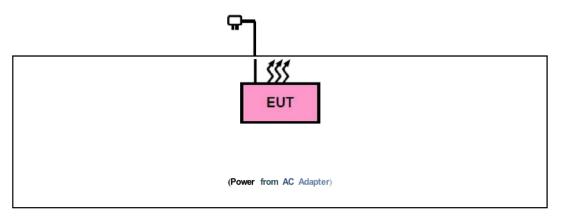

#### 4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

#### ☐ Test Accessories Come From The Laboratory

No.	Equipment Model No.		Specification Information	Note
1	Xiaomi phone	Mi 10	-	Test Peripheral

#### 

N	lo.	Equipment Model No. Sp		Specification Information	Note
,	1 Smart RGBCW Flood Lights		NB-OL011	DC 24V	EUT
:	2	Adapter	XY24SR-240100VQ -UT	Input: AC100-120V 50/60Hz, 0.6A Output: DC 24V /1A	Test Peripheral



Page 16 of 97

## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



Page 17 of 97

## 5. Description of Test Modes

Summary table of Test Cases					
Test Item	Data Rate / Modulation				
rest item	2.4G WLAN – 802.11b/g/n (DSSS/OFDM/OFDMA)				
	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps				
	Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps				
	Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps				
	Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps				
	Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps				
Radiated & Conducted	Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps				
Test Cases	Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps				
	Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps				
	Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps				
	Mode 10: 802.11n-HT40_TX CH03_2422 MHz_MCS0 Mbps				
	Mode 11: 802.11n-HT40_TX CH06_2437 MHz_ MCS0 Mbps				
	Mode 12: 802.11n-HT40_TX CH09_2452 MHz_ MCS0 Mbps				
AC Conducted Emission	Mode 1: 2.4G WLAN Link + DC 24V from Adapter				

#### Note:

- 1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 2. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- All radiated spurious emission and conducted interference modes have been pre scanned, and the report only records the worst mode.



Page 18 of 97


## 6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	100	-	-	-
IEEE 802.11g	6	97	0.13	0.72	-0.26
IEEE 802.11n-HT20	MCS0	97	0.13	0.76	-0.26
IEEE 802.11n-HT40	MCS0	95	0.22	1.53	-0.45


#### Remark:


- 1. Duty Cycle factor = 10 \* log (1/ Duty cycle)
- 2. Average factor = 20 log10 Duty Cycle
- 3. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.





## The test plots as follows:

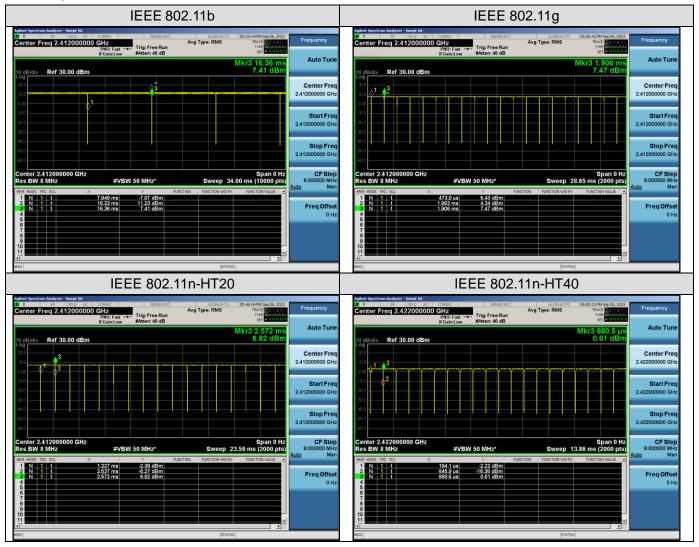





## 7. RF Output Power Measurement

## 7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

#### 7.2 Measurement Procedure


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

☑Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

#### 7.3 Measurement Setup (Block Diagram of Configuration)

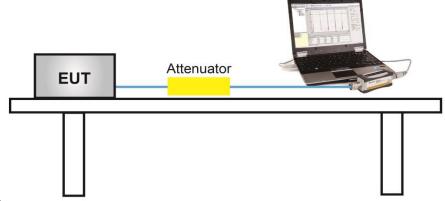



Page 21 of 97

#### 7.4 Measurement Result

	Test Data of Conducted Output Power							
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
	2412	12.50	14.88	≤30	Pass			
802.11b	2437	12.74	14.87	≤30	Pass			
	2462	12.02	14.46	≤30	Pass			
	2412	10.44	17.74	≤30	Pass			
802.11g	2437	10.59	17.91	≤30	Pass			
	2462	10.16	17.51	≤30	Pass			
	2412	10.17	17.46	≤30	Pass			
802.11n20	2437	10.46	17.66	≤30	Pass			
	2462	9.95	17.29	≤30	Pass			
	2422	9.15	16.42	≤30	Pass			
802.11n40	2437	8.80	16.28	≤30	Pass			
	2452	8.86	16.22	≤30	Pass			



Page 22 of 97

#### 8. 6dB Bandwidth Measurement

#### 8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

#### **8.2 Measurement Procedure**

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- 4. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

#### 8.3 Measurement Setup (Block Diagram of Configuration)

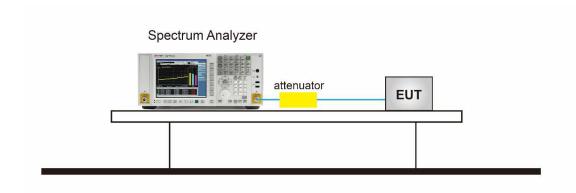




Page 23 of 97


#### 8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Pass or Fail
802.11b	2412	13.037	8.088	≥0.5	Pass
	2437	13.649	8.108	≥0.5	Pass
	2462	12.934	8.080	≥0.5	Pass
802.11g	2412	16.457	15.111	≥0.5	Pass
	2437	16.598	15.670	≥0.5	Pass
	2462	16.403	15.099	≥0.5	Pass
802.11n20	2412	17.500	15.110	≥0.5	Pass
	2437	17.620	15.139	≥0.5	Pass
	2462	17.447	15.109	≥0.5	Pass
802.11n40	2422	35.819	32.565	≥0.5	Pass
	2437	36.274	35.733	≥0.5	Pass
	2452	35.693	32.528	≥0.5	Pass






## Test Graphs of Occupied Bandwidth

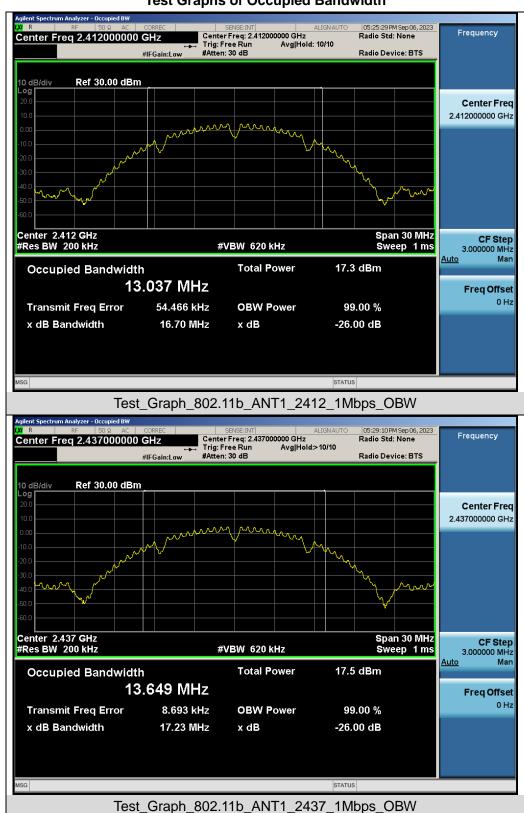



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/






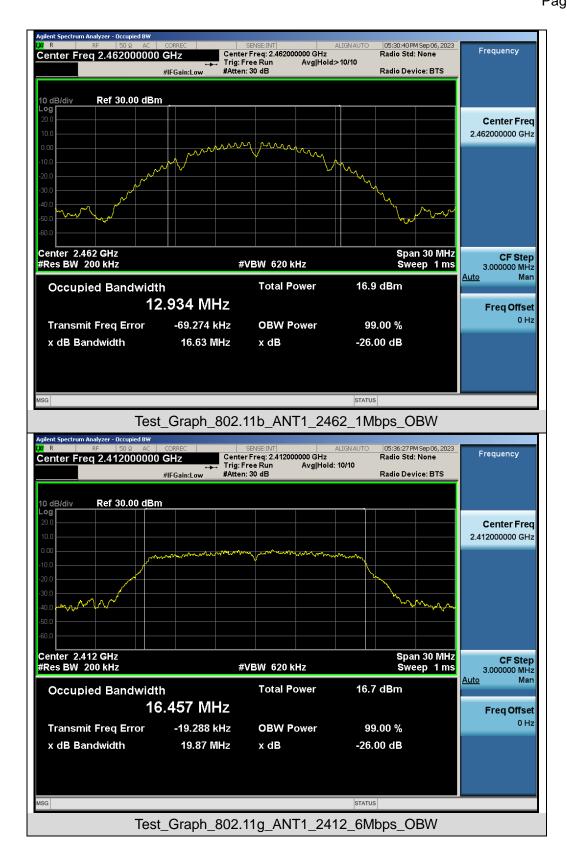







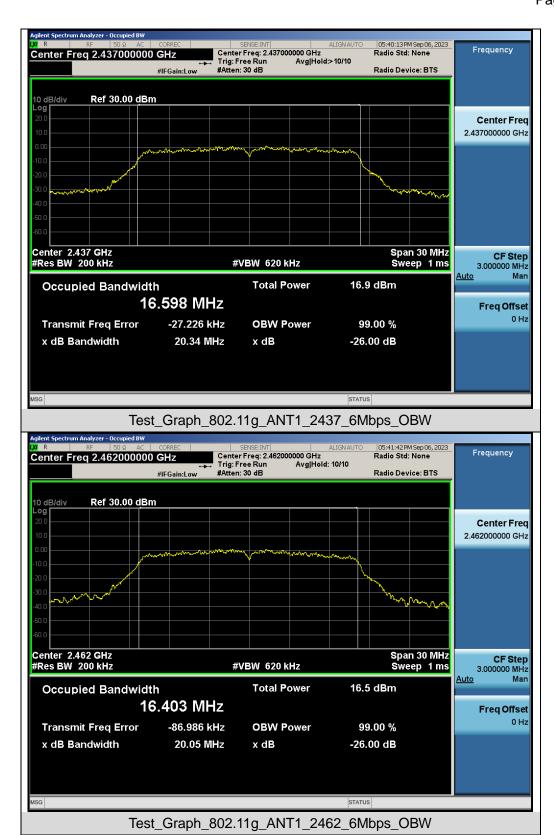


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/







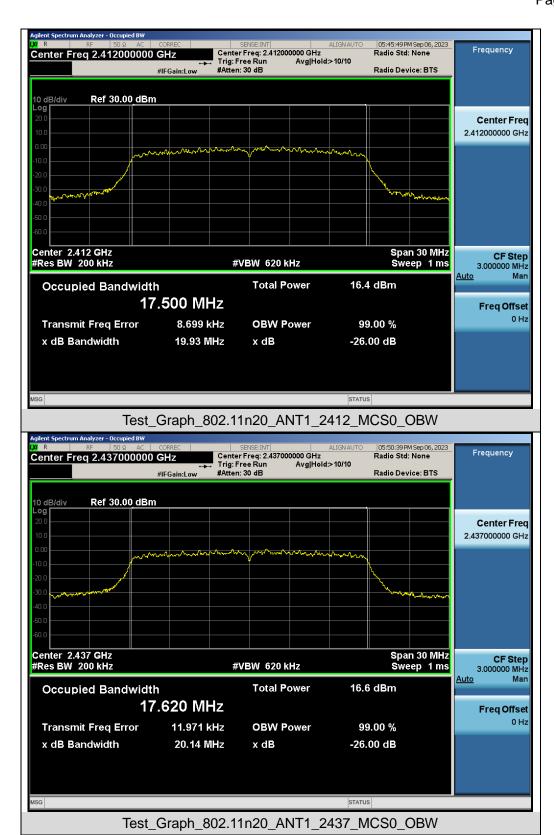







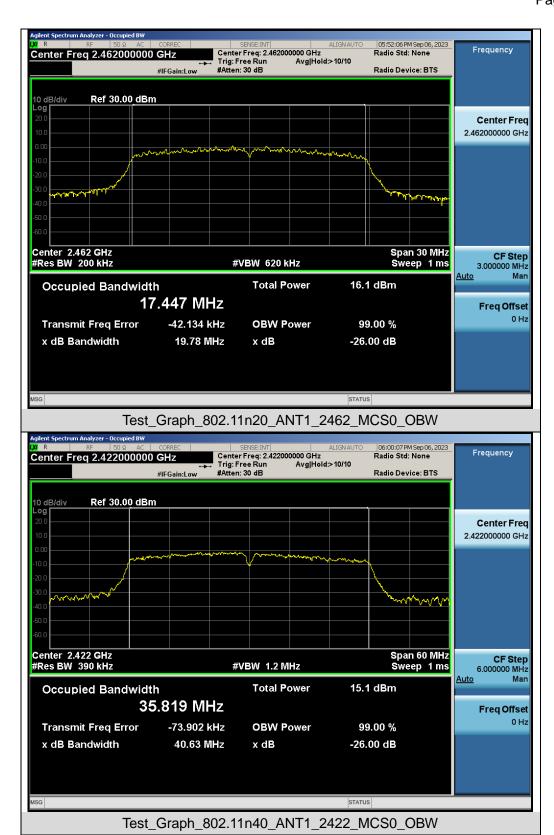






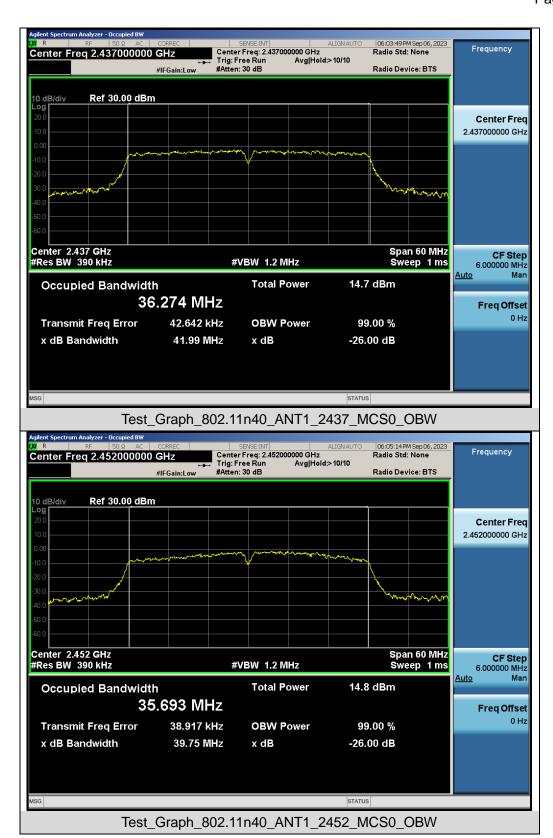






## Test Graphs of DTS Bandwidth

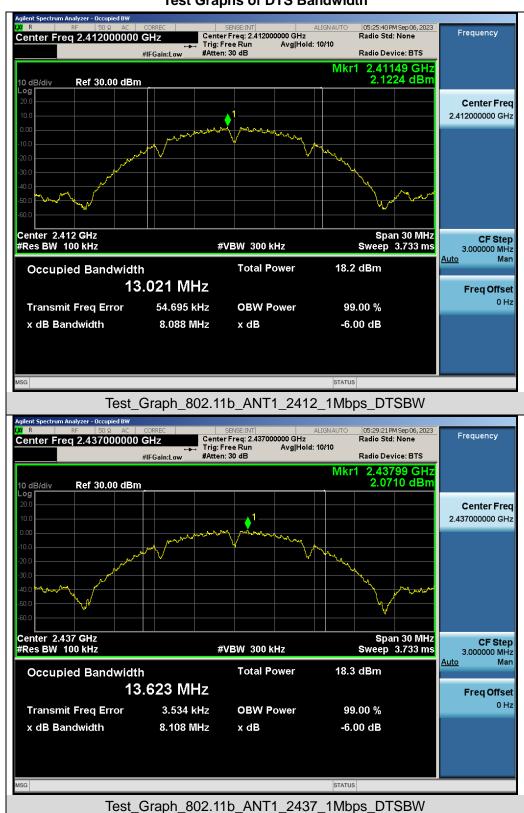


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/















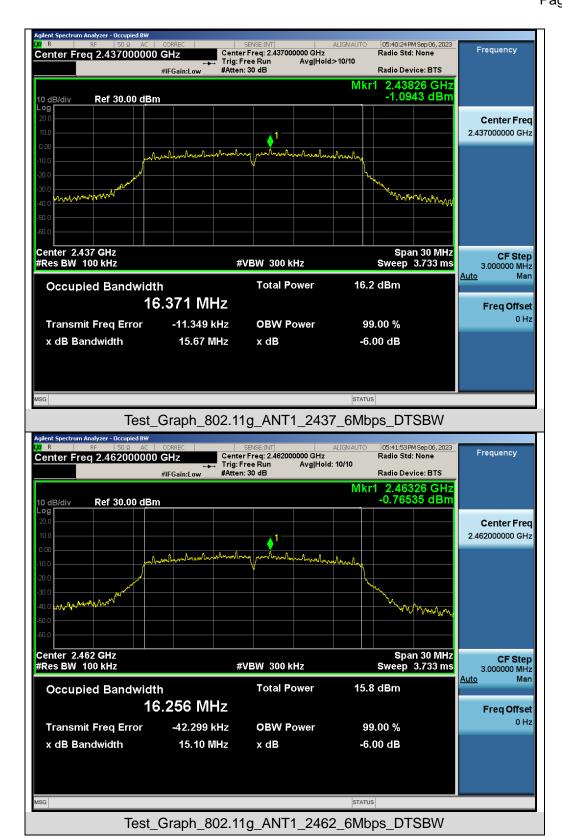







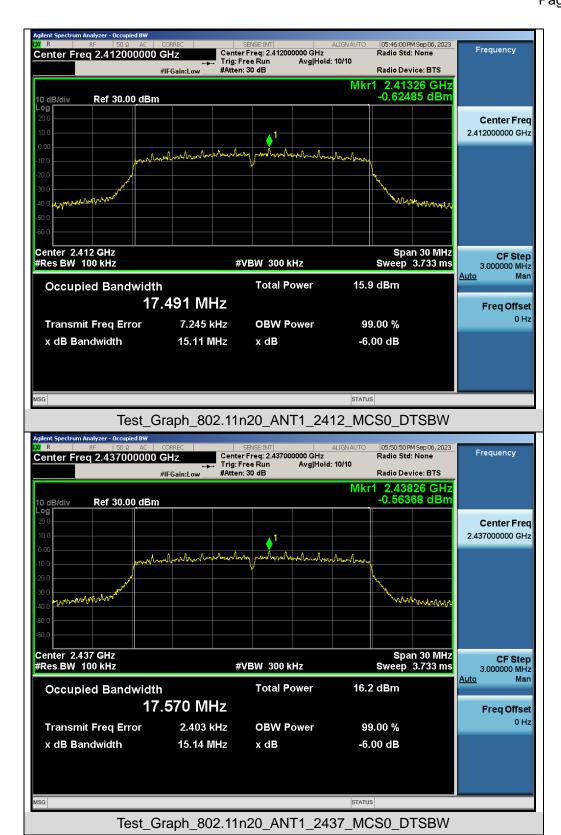






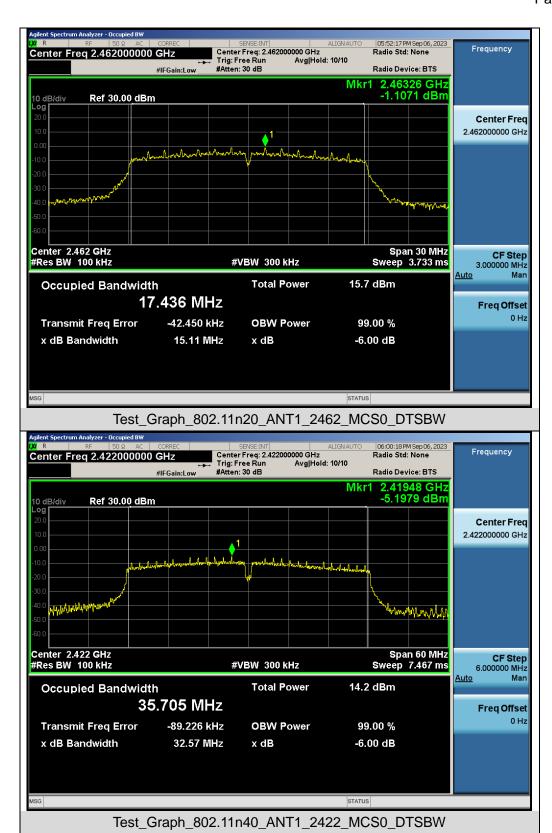





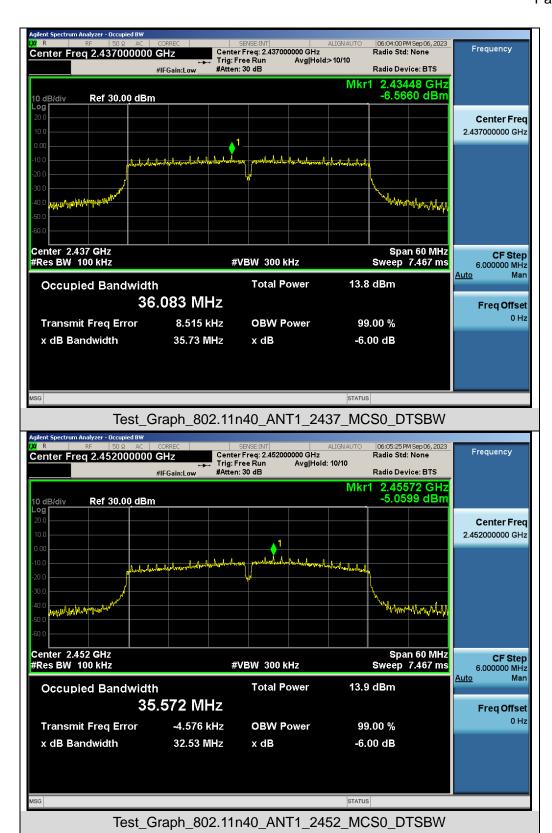



Page 36 of 97

### 9. Power Spectral Density Measurement

#### 9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 9.2 Measurement Procedure


⊠For Peak power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW  $\geq$  [3 × RBW].
- 5. Set the Span ≥ [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10\*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power spectral density test:
- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz ≤ RBW ≤ 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10\*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.




Page 37 of 97

# 9.3 Measurement Setup (Block Diagram of Configuration)

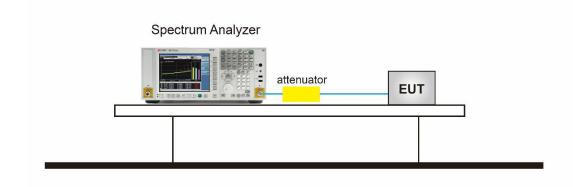


### 9.4 Measurement Result


	Test Dat	ta of Conducted Outpo	ut Power Spectral Den	sity	
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2412	-3.490	-11.729	≪8	Pass
802.11b	2437	-4.172	-12.411	≪8	Pass
	2462	-4.223	-12.462	≪8	Pass
	2412	-5.764	-14.003	≪8	Pass
802.11g	2437	-6.383	-14.622	≪8	Pass
	2462	-7.352	-15.591	≪8	Pass
	2412	-5.822	-14.061	≪8	Pass
802.11n20	2437	-6.274	-14.513	≪8	Pass
	2462	-6.240	-14.479	≪8	Pass
	2422	-10.853	-19.092	≪8	Pass
802.11n40	2437	-12.525	-20.764	≪8	Pass
	2452	-10.285	-18.524	≪8	Pass







# **Test Graphs of Conducted Output Power Spectral Density**

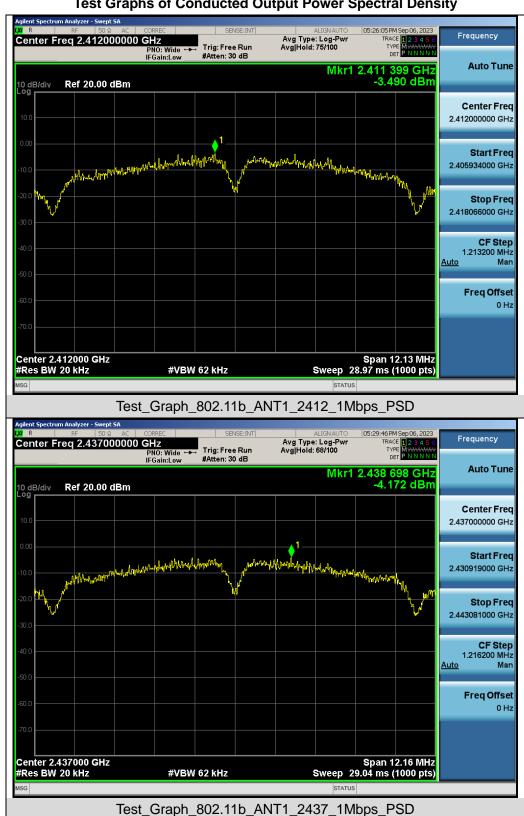






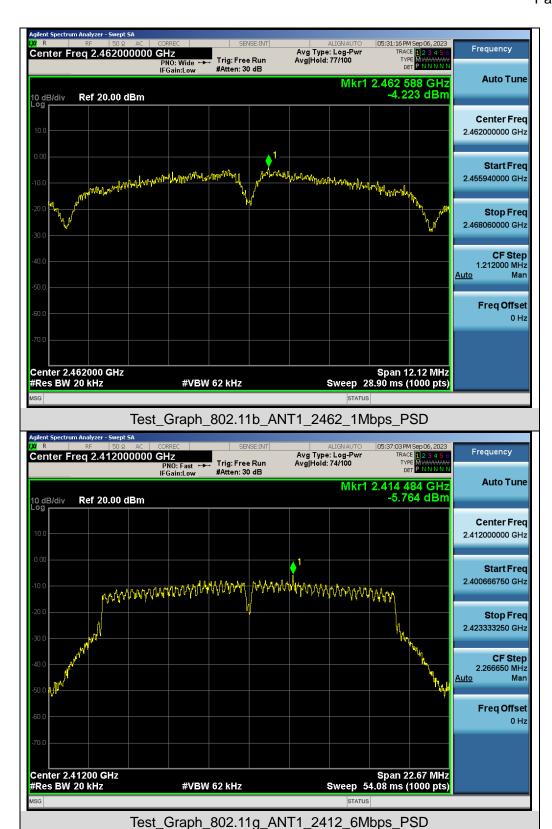







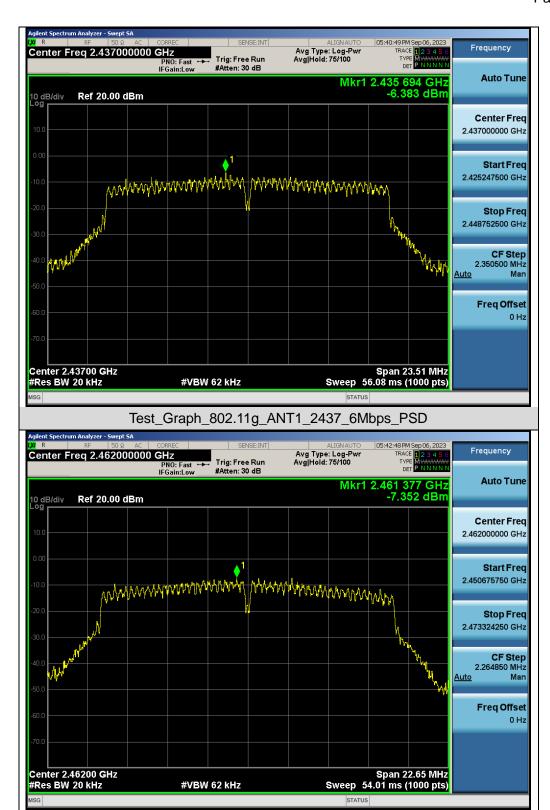


Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_PSD







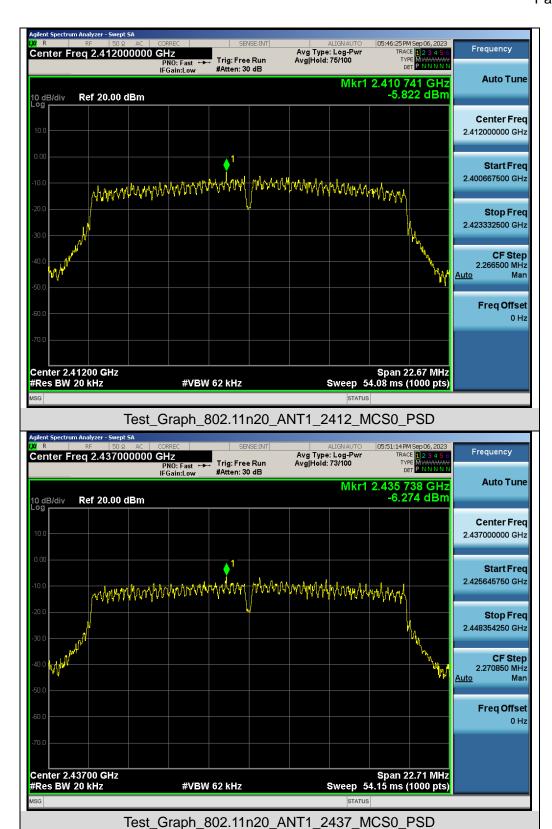






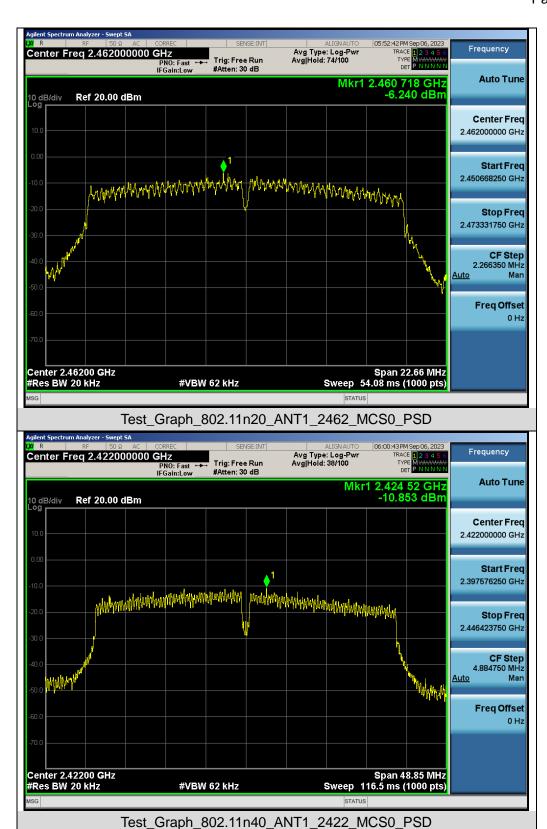





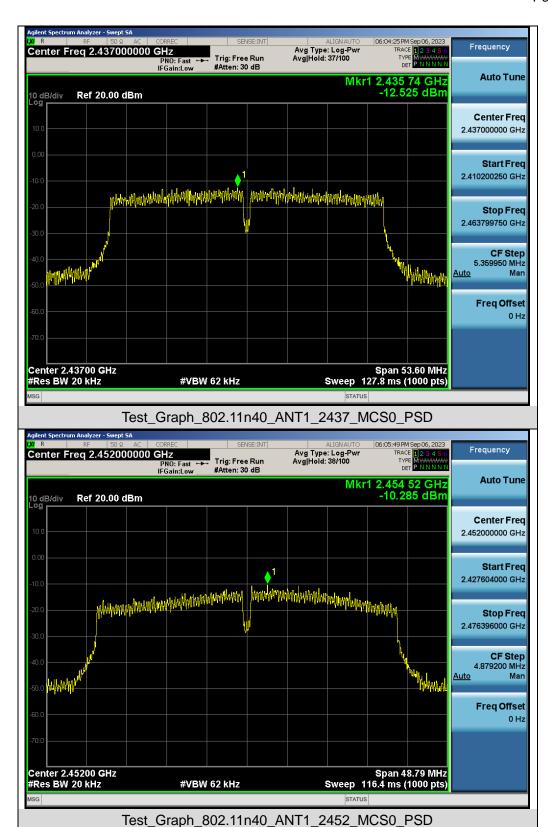

Page 44 of 97

# 10. Conducted Band Edge and Out-of-Band Emissions

### 10.1 Provisions Applicable

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

#### 10.2 Measurement Procedure


Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.


Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
  - 1. Set instrument center frequency to DTS channel center frequency.
  - 2. Set the span to ≥ 1.5 times the DTS bandwidth.
  - 3. Set the  $\overrightarrow{RBW} = 100 \text{ kHz}$ .
  - 4. Set the VBW  $\geq$  3 x RBW.
  - 5. Detector = peak.
  - 6. Sweep time = auto couple.
  - 7. Trace mode = max hold.
  - 8. Allow trace to fully stabilize.
  - 9. Use the peak marker function to determine the maximum PSD level.
  - 10. Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
- Step 2: Measurement Procedure Out of Band Emission
  - 1. Set RBW = 100 kHz.
  - 2. Set VBW ≥ 300 kHz.
  - 3. Detector = peak.
  - 4. Sweep = auto couple.
  - 5. Trace Mode = max hold.
  - 6. Allow trace to fully stabilize.
  - Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


# 10.3 Measurement Setup (Block Diagram of Configuration)

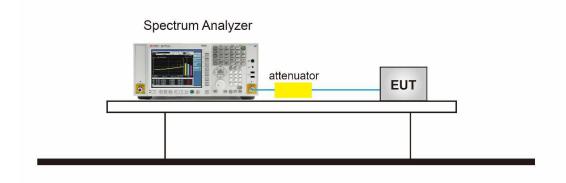








#### 10.4 Measurement Results

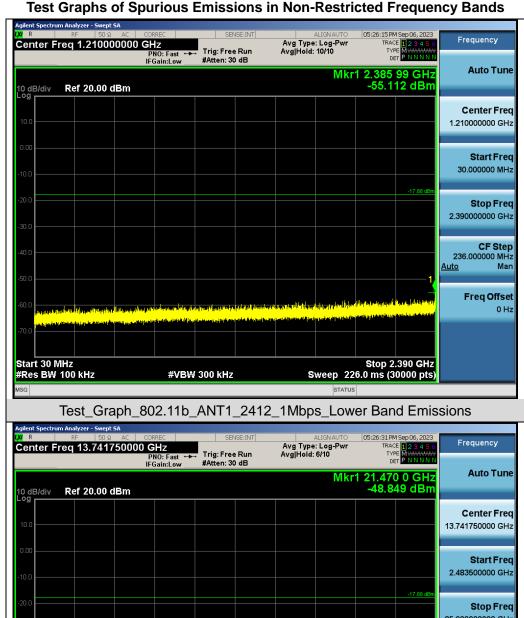

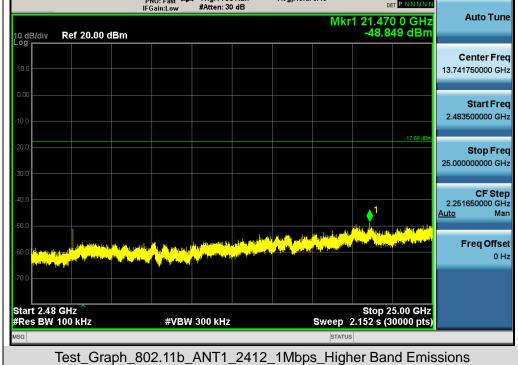





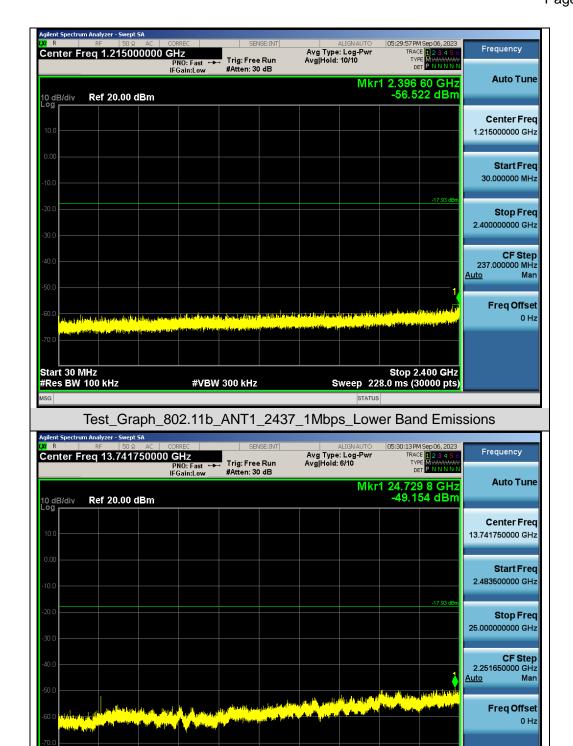


Test\_Graph\_802.11b\_ANT1\_2437\_1Mbps\_Higher Band Emissions

#VBW 300 kHz


Stop 25.00 GHz Sweep 2.152 s (30000 pts)

Start 2.48 GHz



0 Hz



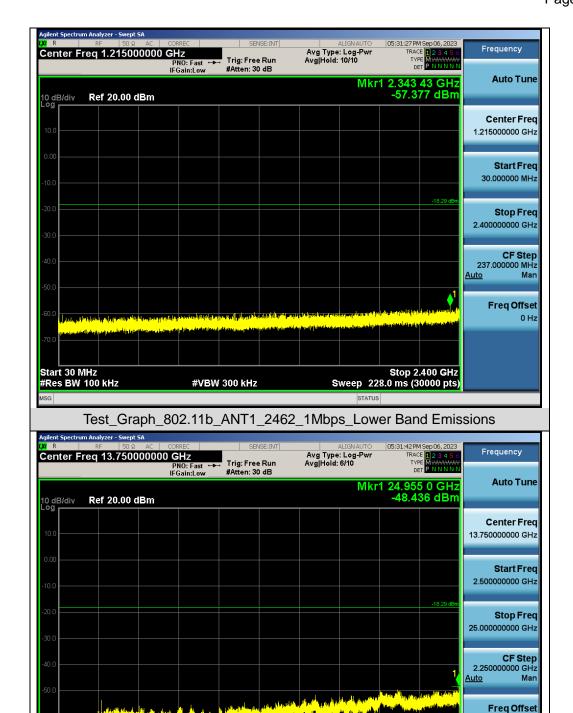


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11b\_ANT1\_2462\_1Mbps\_Higher Band Emissions


#VBW 300 kHz

Stop 25.00 GHz Sweep 2.152 s (30000 pts)

Start 2.50 GHz #Res BW 100 kHz





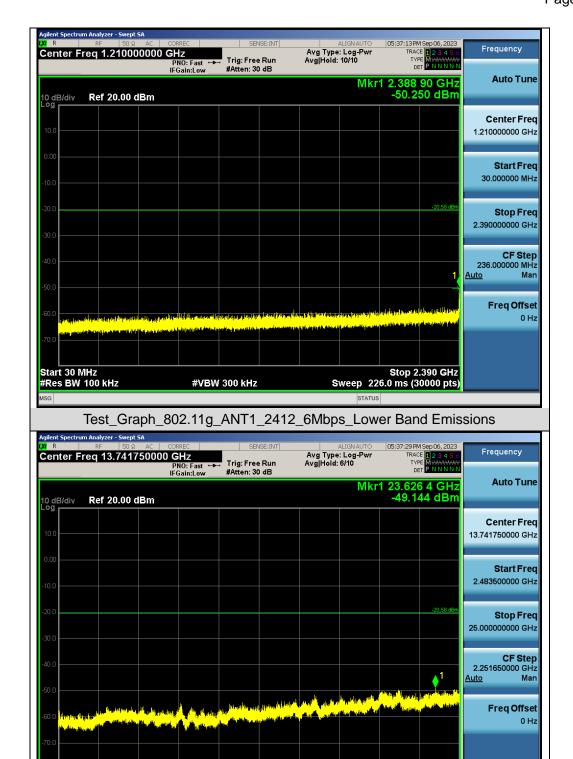


Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Higher Band Emissions

#VBW 300 kHz


Stop 25.00 GHz Sweep 2.152 s (30000 pts)

Start 2.48 GHz #Res BW 100 kHz



0 Hz



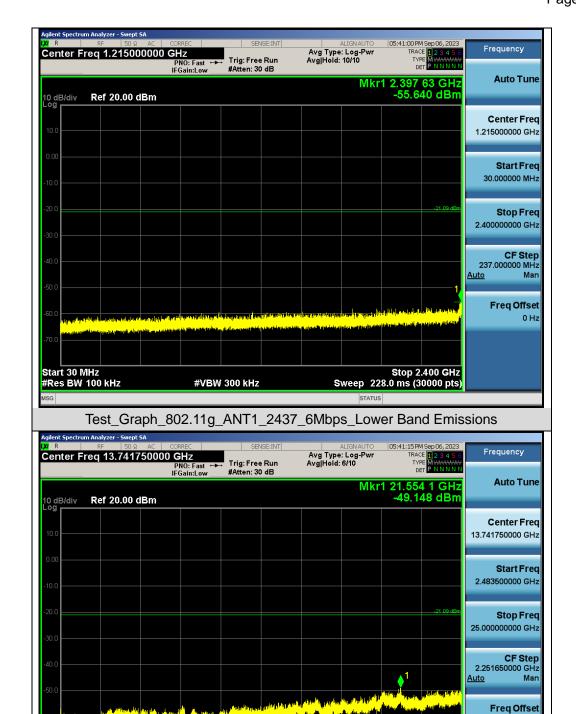


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2437\_6Mbps\_Higher Band Emissions


#VBW 300 kHz

Stop 25.00 GHz Sweep 2.152 s (30000 pts)

Start 2.48 GHz #Res BW 100 kHz





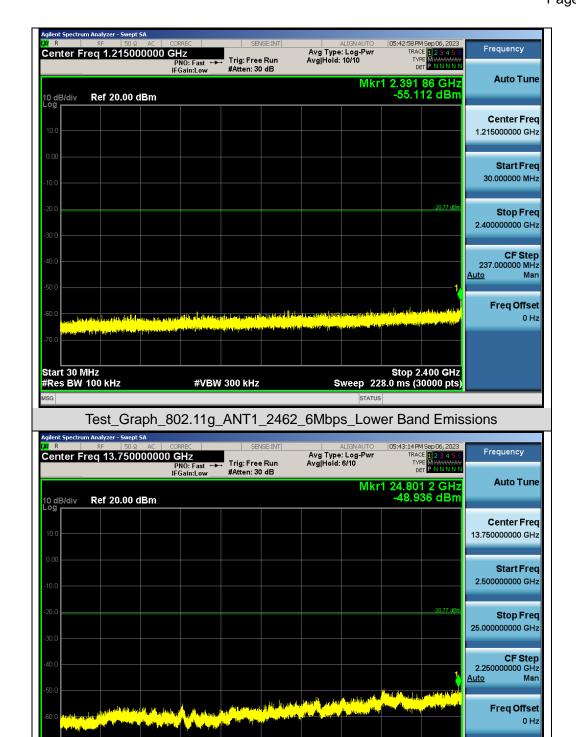


Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_Higher Band Emissions

#VBW 300 kHz

Stop 25.00 GHz Sweep 2.152 s (30000 pts)


Start 2.50 GHz #Res BW 100 kHz



Freq Offset 0 Hz

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



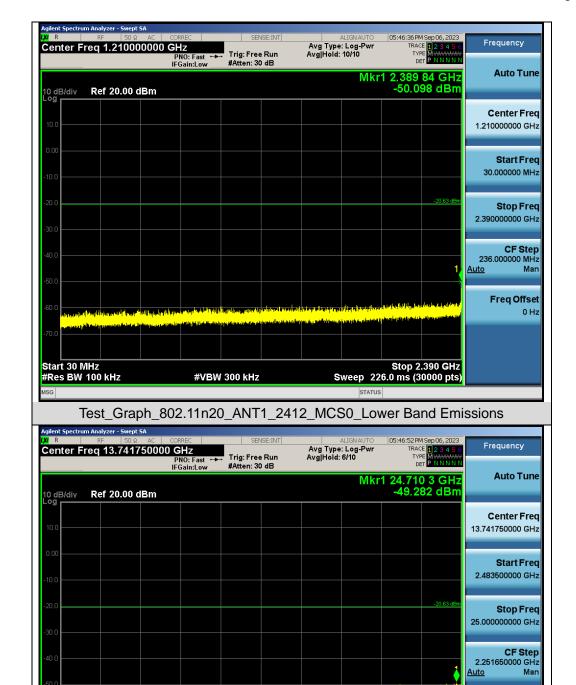


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_802.11n20\_ANT1\_2412\_MCS0\_Higher Band Emissions

#VBW 300 kHz

Start 2.48 GHz #Res BW 100 kHz





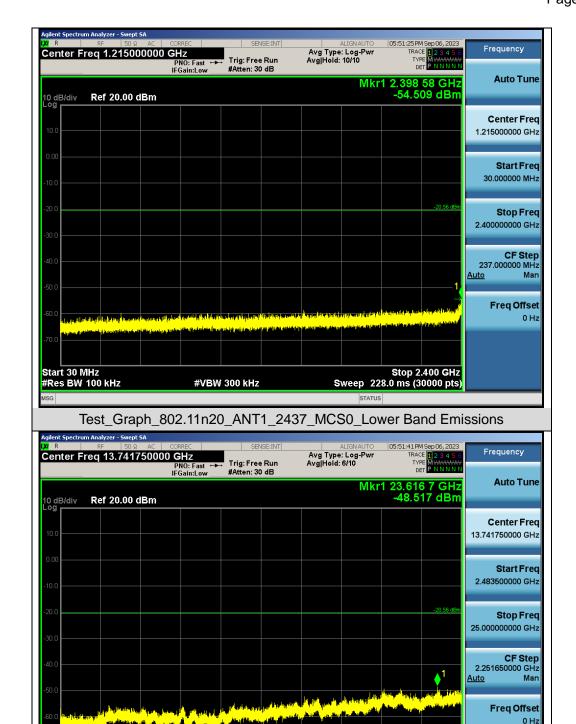


Test\_Graph\_802.11n20\_ANT1\_2437\_MCS0\_Higher Band Emissions


#VBW 300 kHz

Stop 25.00 GHz Sweep 2.152 s (30000 pts)

Start 2.48 GHz #Res BW 100 kHz





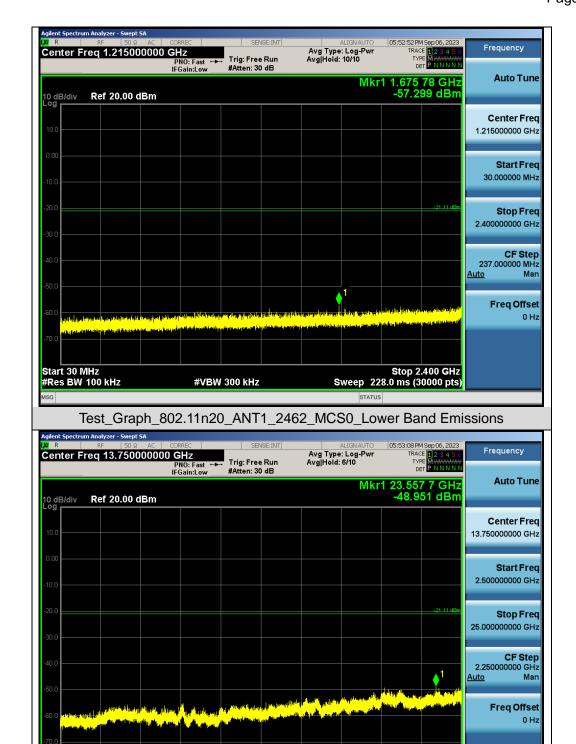


Test\_Graph\_802.11n20\_ANT1\_2462\_MCS0\_Higher Band Emissions

#VBW 300 kHz


Stop 25.00 GHz Sweep 2.152 s (30000 pts)

Start 2.50 GHz #Res BW 100 kHz



0 Hz



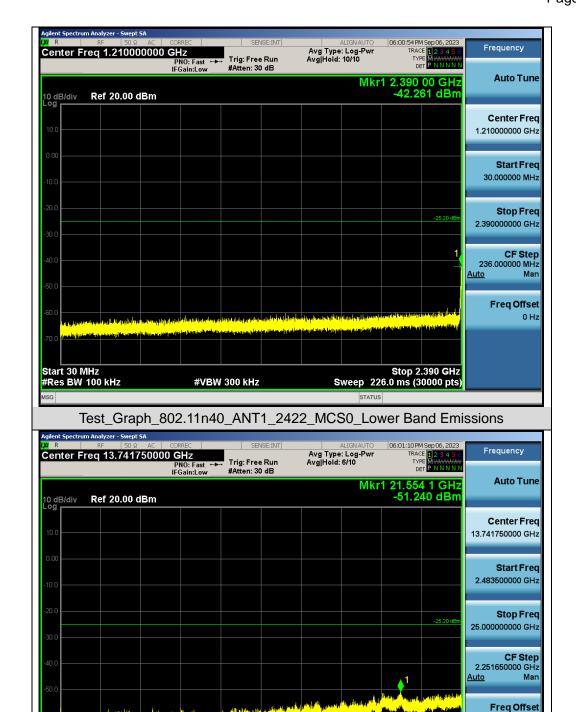


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n40\_ANT1\_2422\_MCS0\_Higher Band Emissions


#VBW 300 kHz

Stop 25.00 GHz Sweep 2.152 s (30000 pts)

Start 2.48 GHz





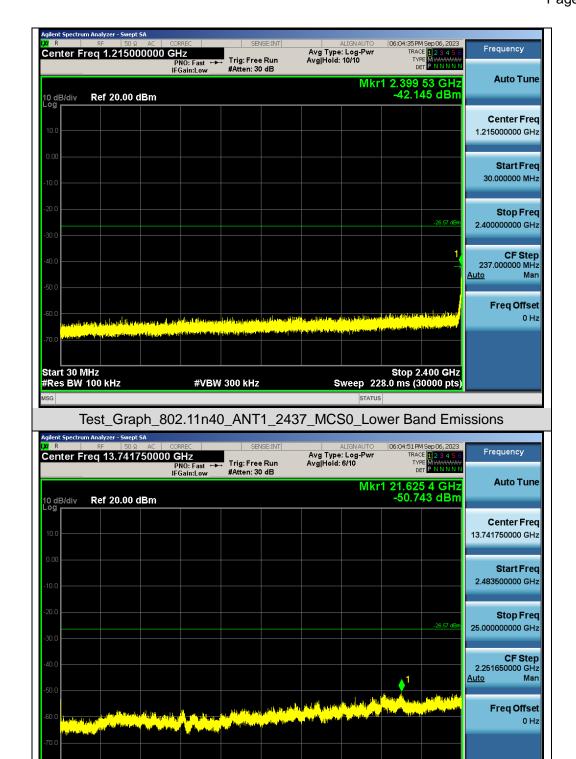


Test\_Graph\_802.11n40\_ANT1\_2437\_MCS0\_Higher Band Emissions


#VBW 300 kHz

Stop 25.00 GHz Sweep 2.152 s (30000 pts)

Start 2.48 GHz #Res BW 100 kHz






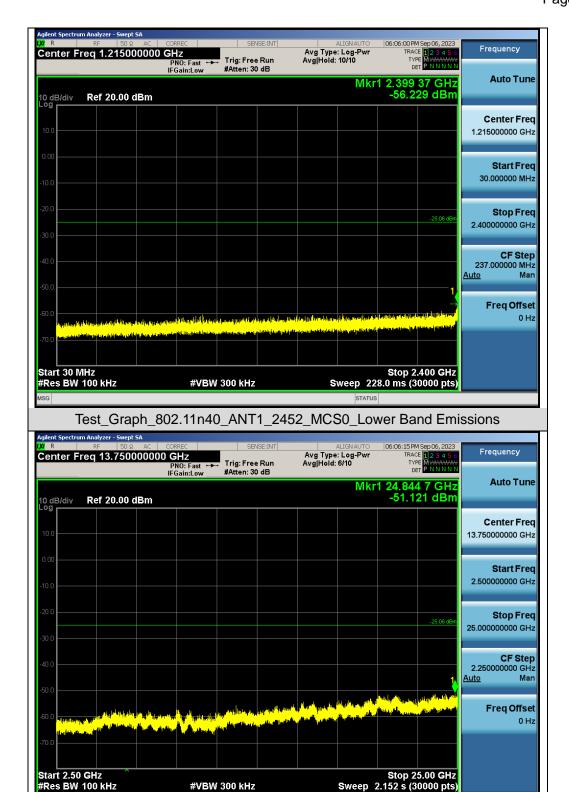


Test\_Graph\_802.11n40\_ANT1\_2452\_MCS0\_Higher Band Emissions


#VBW 300 kHz






# Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

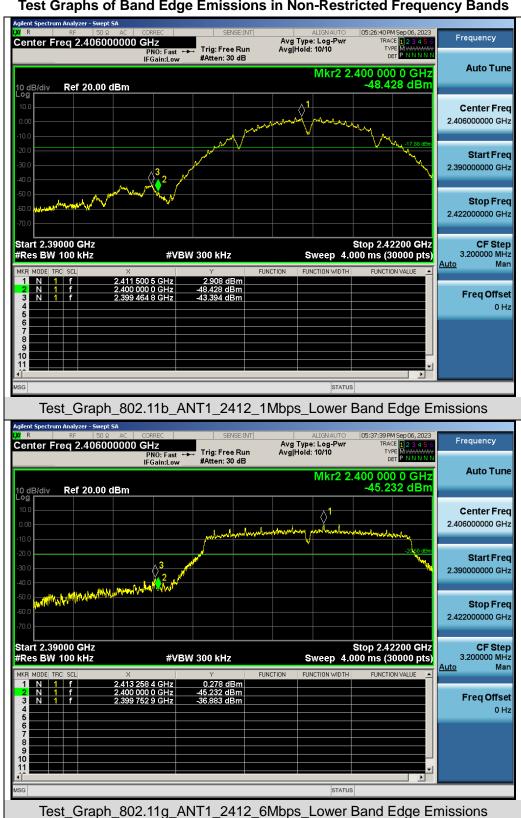





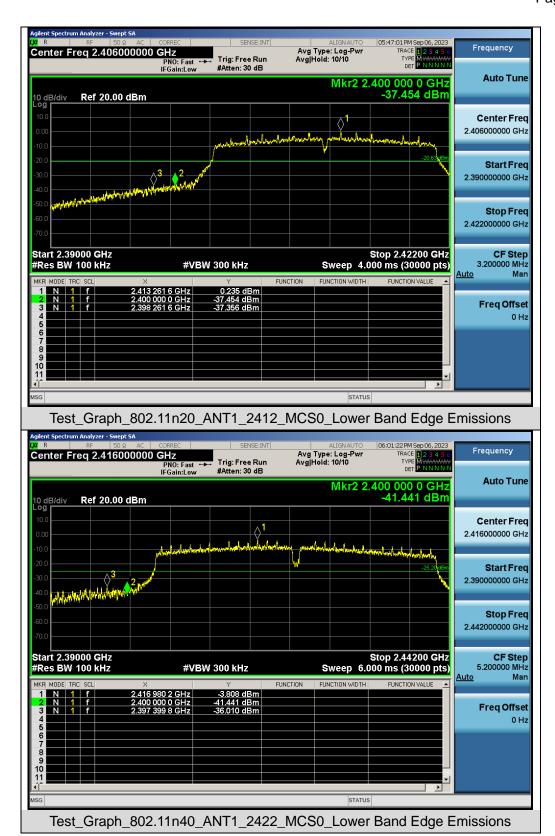

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Page 59 of 97

### 11. Radiated Spurious Emission

#### 11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Any reposphang alternative (provided the transmitter) permitted and or is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 60 of 97

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- ◆ The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start Stan Fraguency	1GHz~26.5GHz		
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Page 61 of 97

### Quasi-Peak Measurements below 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

### Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold






# 11.3 Measurement Setup (Block Diagram of Configuration)


### Radiated Emission Test Setup 9kHz-30MHz

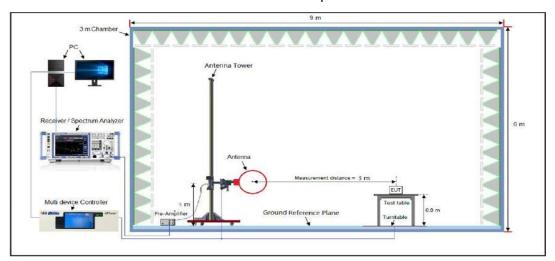

### Radiated Emission Test Setup 30MHz-1000MHz

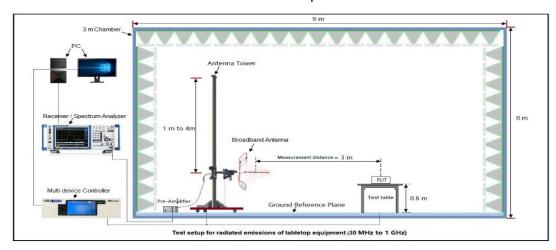

### Radiated Emission Test Setup Above 1000MHz

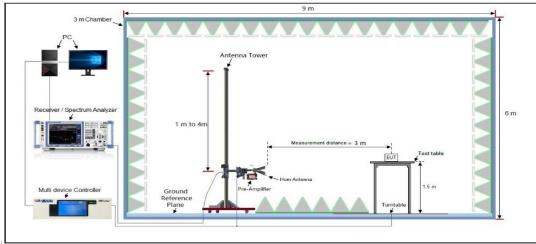

Any report having | \( \text{ sting/Inspection } \) sting/Inspection

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



### 11.4 Measurement Result


### **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			K	auia	tea Ellissi	on Test Res	Janes at Som	nz-1Gn		
EUT Name	5	Smart F	RGBC	W F	Tood Lights		Model Na	ame	NE	B-OL011
Temperature	2	25°C					Relative	Humidit	ty 55	5.4%
Pressure	9	960hPa	a				Test Volt	age	No	ormal Voltag
Test Mode	N	Mode 1					Polarity:		Н	orizontal
72.0 d	dBuV/m	1							Limit	
32								5		634
-8	political designation of the second		orange person			was a short was a last	hydrogy, bed y		Haller of the Control	
		10 50	orange person	70 8		(MHz)	300	400	500 600 7	AN WARRY TO THE STREET
-8 30.000		10 50	orange person	70 8	prices of the state of the stat		7 411	400 Limit	14	AN WARRY TO THE STREET
-8 30.000	0 4	10 50	CO GO	70 E	Reading	(MHz)	300 Measure-		500 600 7	AN WARRY TO THE STREET
-8 30.000	0 4	10 50 Mk.	Go Fre	70 E	Reading Level	(MHz) Correct Factor	300 Measure- ment	Limit	500 600 7 Over	00 1000.000 Detector
-8 30.000	0 4 No.	Mk.	60 Fre	70 G	Reading Level	(MHz) Correct Factor dB	300 Measure- ment dBuV/m	Limit dB/m	500 600 7 Over	Detector peak
-8 30.000	0 4 No.	Mk.	60 Fre MH 32.51	70 (q. z 97 889	Reading Level dBuV 10.81	(MHz) Correct Factor dB 10.68	Measure- ment dBuV/m 21.49	Limit dB/m 40.00	Over dB -18.51	Detector peak peak
-8 30.000	No.	Mk.	60 Fre MH 32.513	70 (q. zz 997 889 555	Reading Level dBuV 10.81 10.85	Correct Factor dB 10.68 12.69	Measure- ment dBuV/m 21.49 23.54	Limit dB/m 40.00	Over dB -18.51 -16.46 -12.38	Detector peak peak peak
-8 30.000	No.	Mk. 33	Fre MH 32.519 66.49 23.26	20 (q. z. p.	Reading Level dBuV 10.81 10.85 14.92	Correct Factor dB 10.68 12.69 16.20	300 Measure- ment dBuV/m 21.49 23.54 31.12	Limit dB/m 40.00 40.00 43.50	Over dB -18.51 -16.46 -12.38 -14.71	Detector peak peak peak peak



Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	ne Smart RGBCW Flood Lights Model Name NB-OL011					
Temperature	25°C	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 1	Polarity:	Vertical			
72.0 dBuV	/m		•			

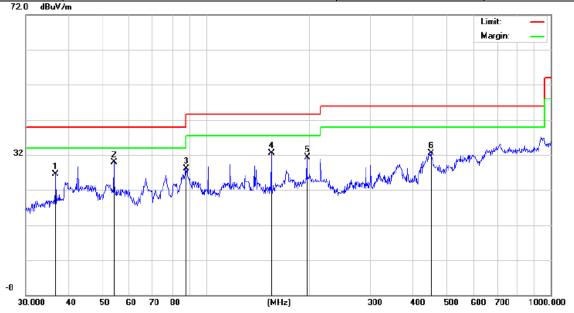


		Freq.	Level	Factor	ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		36.6375	10.62	15.79	26.41	40.00	-13.59	peak
2	*	54.0711	12.81	17.04	29.85	40.00	-10.15	peak
3		87.7248	12.25	15.86	28.11	40.00	-11.89	peak
4	1	154.8204	14.38	18.20	32.58	43.50	-10.92	peak
5	1	196.5098	13.27	18.00	31.27	43.50	-12.23	peak
6	4	149.5557	6.81	25.67	32.48	46.00	-13.52	peak

### **RESULT: Pass**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.





#### Radiated Emissions Test Results above 1 GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	52.12	0.08	52.20	74.00	-21.80	peak
4824.000	43.28	0.08	43.36	54.00	-10.64	AVG
7236.000	48.74	2.21	50.95	74.00	-23.05	peak
7236.000	41.34	2.21	43.55	54.00	-10.45	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4824.000	51.63	0.08	51.71	74.00	-22.29	peak
4824.000	41.97	0.08	42.05	54.00	-11.95	AVG
7236.000	48.02	2.21	50.23	74.00	-23.77	peak
7236.000	41.31	2.21	43.52	54.00	-10.48	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

### **RESULT: Pass**



Page 66 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	51.96	0.14	52.10	74.00	-21.90	peak
4874.000	42.11	0.14	42.25	54.00	-11.75	AVG
7311.000	46.78	2.36	49.14	74.00	-24.86	peak
7311.000	40.37	2.36	42.73	54.00	-11.27	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	50.52	0.14	50.66	74.00	-23.34	peak
4874.000	41.85	0.14	41.99	54.00	-12.01	AVG
7311.000	45.34	2.36	47.70	74.00	-26.30	peak
7311.000	41.32	2.36	43.68	54.00	-10.32	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**



Page 67 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	50.41	0.22	50.63	74.00	-23.37	peak
4924.000	41.34	0.22	41.56	54.00	-12.44	AVG
7386.000	46.69	2.64	49.33	74.00	-24.67	peak
7386.000	40.66	2.64	43.30	54.00	-10.70	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	51.87	0.22	52.09	74.00	-21.91	peak
4924.000	40.74	0.22	40.96	54.00	-13.04	AVG
7386.000	45.39	2.64	48.03	74.00	-25.97	peak
7386.000	41.22	2.64	43.86	54.00	-10.14	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**



Page 68 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	52.05	0.08	52.13	74.00	-21.87	peak
4824.000	40.37	0.08	40.45	54.00	-13.55	AVG
7236.000	47.41	2.21	49.62	74.00	-24.38	peak
7236.000	41.39	2.21	43.60	54.00	-10.40	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	→ Value Type
4824.000	50.74	0.08	50.82	74.00	-23.18	peak
4824.000	41.28	0.08	41.36	54.00	-12.64	AVG
7236.000	46.37	2.21	48.58	74.00	-25.42	peak
7236.000	40.37	2.21	42.58	54.00	-11.42	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**



Page 69 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	50.39	0.14	50.53	74.00	-23.47	peak
4874.000	42.31	0.14	42.45	54.00	-11.55	AVG
7311.000	48.72	2.36	51.08	74.00	-22.92	peak
7311.000	40.56	2.36	42.92	54.00	-11.08	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	52.36	0.14	52.50	74.00	-21.50	peak
4874.000	43.53	0.14	43.67	54.00	-10.33	AVG
7311.000	46.95	2.36	49.31	74.00	-24.69	peak
7311.000	41.22	2.36	43.58	54.00	-10.42	AVG
		_				

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**



Page 70 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	49.34	0.22	49.56	74.00	-24.44	peak
4924.000	41.22	0.22	41.44	54.00	-12.56	AVG
7386.000	47.85	2.64	50.49	74.00	-23.51	peak
7386.000	41.35	2.64	43.99	54.00	-10.01	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.


EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	48.51	0.22	48.73	74.00	-25.27	peak
4924.000	40.37	0.22	40.59	54.00	-13.41	AVG
7386.000	46.33	2.64	48.97	74.00	-25.03	peak
7386.000	40.39	2.64	43.03	54.00	-10.97	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**





### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	48.39	0.08	48.47	74.00	-25.53	peak
4824.000	40.31	0.08	40.39	54.00	-13.61	AVG
7236.000	48.31	2.21	50.52	74.00	-23.48	peak
7236.000	41.16	2.21	43.37	54.00	-10.63	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	49.63	0.08	49.71	74.00	-24.29	peak
4824.000	41.31	0.08	41.39	54.00	-12.61	AVG
7236.000	48.74	2.21	50.95	74.00	-23.05	peak
7236.000	41.14	2.21	43.35	54.00	-10.65	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

### **RESULT: Pass**



Page 72 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4874.000	47.96	0.14	48.10	74.00	-25.90	peak	
4874.000	38.22	0.14	38.36	54.00	-15.64	AVG	
7311.000	47.12	2.36	49.48	74.00	-24.52	peak	
7311.000	40.58	2.36	42.94	54.00	-11.06	AVG	

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 8	Antenna Polarity	Vertical	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874.000	49.63	0.14	49.77	74.00	-24.23	peak
4874.000	39.12	0.14	39.26	54.00	-14.74	AVG
7311.000	48.33	2.36	50.69	74.00	-23.31	peak
7311.000	41.18	2.36	43.54	54.00	-10.46	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**



Page 73 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	48.91	0.22	49.13	74.00	-24.87	peak
4924.000	42.12	0.22	42.34	54.00	-11.66	AVG
7386.000	48.01	2.64	50.65	74.00	-23.35	peak
7386.000	41.16	2.64	43.80	54.00	-10.20	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	50.36	0.22	50.58	74.00	-23.42	peak
4924.000	43.28	0.22	43.50	54.00	-10.50	AVG
7386.000	47.91	2.64	50.55	74.00	-23.45	peak
7386.000	41.34	2.64	43.98	54.00	-10.02	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**



Page 74 of 97

### **Radiated Emissions Test Results above 1GHz**

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4844.000	50.14	0.08	50.22	74.00	-23.78	peak
4844.000	41.48	0.08	41.56	54.00	-12.44	AVG
7266.000	47.57	2.21	49.78	74.00	-24.22	peak
7266.000	40.35	2.21	42.56	54.00	-11.44	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name Smart RGBCW Flood Lights		Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4844.000	51.92	0.08	52.00	74.00	-22.00	peak
4844.000	40.52	0.08	40.60	54.00	-13.40	AVG
7266.000	46.94	2.21	49.15	74.00	-24.85	peak
7266.000	39.82	2.21	42.03	54.00	-11.97	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**



Page 75 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 11	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	52.36	0.14	52.50	74.00	-21.50	peak
4874.000	43.21	0.14	43.35	54.00	-10.65	AVG
7311.000	48.33	2.36	50.69	74.00	-23.31	peak
7311.000	41.29	2.36	43.65	54.00	-10.35	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	EUT Name Smart RGBCW Flood Lights		NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 11	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	51.04	0.14	51.18	74.00	-22.82	peak
4874.000	41.91	0.14	42.05	54.00	-11.95	AVG
7311.000	47.66	2.36	50.02	74.00	-23.98	peak
7311.000	39.39	2.36	41.75	54.00	-12.25	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**



Page 76 of 97

### Radiated Emissions Test Results above 1GHz

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4904.000	53.36	0.22	53.58	74.00	-20.42	peak
4904.000	41.28	0.22	41.50	54.00	-12.50	AVG
7356.000	49.12	2.64	51.76	74.00	-22.24	peak
7356.000	40.77	2.64	43.41	54.00	-10.59	AVG
Remark:	Pomark:					

#### Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4904.000	51.39	0.22	51.61	74.00	-22.39	peak
4904.000	40.85	0.22	41.07	54.00	-12.93	AVG
7356.000	48.79	2.64	51.43	74.00	-22.57	peak
7356.000	41.36	2.64	44.00	54.00	-10.00	AVG
		•				
Remark:						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

# **RESULT: Pass**

### Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

### Test Graph for Peak Measurement



Test Graph for Average Measurement



### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

### Test Graph for Peak Measurement



Test Graph for Average Measurement



### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

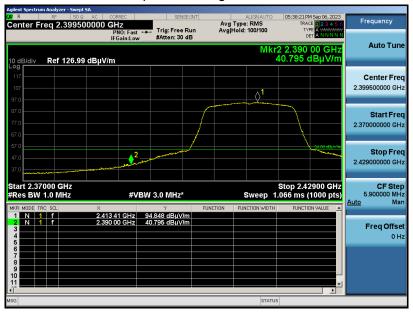

### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

### Test Graph for Peak Measurement



Test Graph for Average Measurement

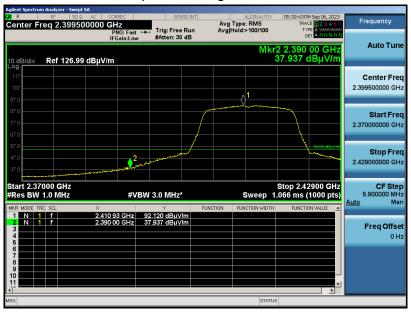

### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

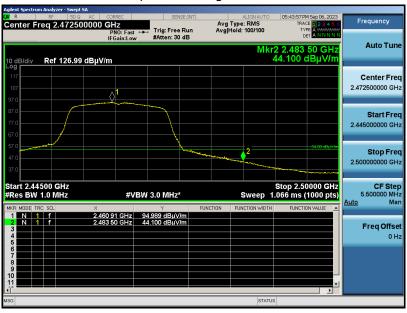

### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

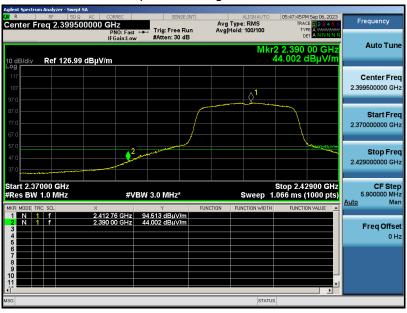

### **RESULT: Pass**




EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

### Test Graph for Peak Measurement



Test Graph for Average Measurement

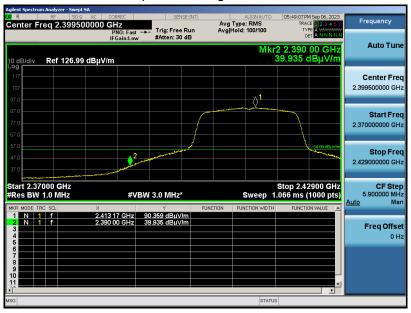

### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	Smart RGBCW Flood Lights	Model Name	NB-OL011
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

### Test Graph for Peak Measurement



Test Graph for Average Measurement



### **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.