

FCC Test Report

Report No.: AGC15942230907FR02

FCC ID : 2A94QPE-AH038

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: 6L SMART TOP FILLER AIR HUMIDIFIER

BRAND NAME : Paris Rhône

MODEL NAME : PE-AH038

APPLICANT: Shenzhen Aspiron Technology Company Limited

DATE OF ISSUE : Sep. 22, 2023

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation of Global Conclance (Shenzhen) Co., Ltd



Page 2 of 97

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 22, 2023	Valid	Initial Release




Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	8
2.4 Related Submittal(S) / Grant (S)	9
2.5 Test Methodology	9
2.6 Special Accessories	9
2.7 Equipment Modifications	9
2.8 Antenna Requirement	9
2.9 Description of Test Software	10
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	12
3.4 Measurement Uncertainty	12
3.5 List of Equipment Used	13
4.System Test Configuration	15
4.1 EUT Configuration	15
4.2 EUT Exercise	15
4.3 Configuration of Tested System	15
4.4 Equipment Used In Tested System	15
4.5 Summary of Test Results	16
5. Description of Test Modes	17
6. Duty Cycle Measurement	
7. RF Output Power Measurement	20
7.1 Provisions Applicable	20
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	21
8. 6dB Bandwidth Measurement	22
8.1 Provisions Applicable	22
8.2 Measurement Procedure	22
8.3 Measurement Setup (Block Diagram of Configuration)	22
8.4 Measurement Results	23
9. Power Spectral Density Measurement	36



Report No.: AGC15942230907FR02 Page 4 of 97

10. Conducted Band Edge and Out-of-Band Emissions.......44 Appendix II: Photographs of EUT......97





1. General Information

Shenzhen Aspiron Technology Company Limited
3rd Floor, Yiben Building, No.1063 Chaguang Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Shenzhen Aspiron Technology Company Limited
3rd Floor, Yiben Building, No.1063 Chaguang Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Vansen Intelligent Manufacturing Co., Ltd.
No.882-2, Lianting road, Xiang'an District, Xiamen, Fujian Province, 361115, China
6L SMART TOP FILLER AIR HUMIDIFIER
Paris Rhône
PE-AH038
N/A
N/A
Sep. 19, 2023
Sep. 19, 2023 - Sep. 21, 2023
No any deviation from the test method
Normal
Pass
AGCER-FCC-2.4GWLAN-V1

Note: The test results of this report relate only to the tested sample identified in this report.

-1

Prepared By	Thea Huang	
	Thea Huang (Project Engineer)	Sep. 22, 2023
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Sep. 22, 2023
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Sep. 22, 2023



Page 6 of 97

2. Product Information

2.1 Product Technical Description

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Power (Average)	IEEE 802.11b:7.83dBm; IEEE 802.11g:7.14dBm;
Odiput i Owei (Average)	IEEE 802.11n(HT20):5.82dBm; IEEE 802.11n(HT40):5.23dBm
Output Power (Peak)	IEEE 802.11b:14.09dBm; IEEE 802.11g:14.84dBm;
Output Fower (Feak)	IEEE 802.11n(HT20):13.57dBm; IEEE 802.11n(HT40):13.12dBm
Modulation	802.11b:(DQPSK, DBPSK, CCK) DSSS
Wodulation	802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM
	802.11b:1/2/5.5/11Mbps
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps
	802.11n: up to 300Mbps
Number of channels	11
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	3.57dBi
Power Supply	AC120V/60Hz



Page 7 of 97

2.2 Table of Carrier Frequency For 2412-2462MHz:

11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		

7 channels are provided for 802.11n(HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01		02		03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10		11			



Page 8 of 97

2.3 IEEE 802.11n Modulation Scheme

MCS Index	Nss Modulation	Nss	Modulation R	ss Modulation	Modulation R	N _{BPSC}	N _C	BPS	N _D	BPS	Da Rate(I 800r	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz		
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5		
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0		
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5		
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0		
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0		
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0		
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5		
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0		

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 9 of 97

2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A94QPE-AH038**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.5 Test Methodology

The tests were performed according to following standards:

	-	
No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	KDB 662911 D01 Multiple Transmitter Output v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

2.6 Special Accessories

Refer to section 5.2.

2.7 Equipment Modifications

Not available for this EUT intended for grant.

2.8 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.57dBi.




2.9 Description of Test Software

For IEEE 802.11 mode:

The test utility software used during testing was "ESP_RF_Test_CN", and the version was "v3.6".

Software Setting Diagram

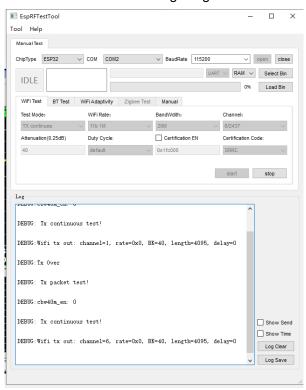

Test Mode	Channel	Power Index
802.11b	L/M/H	40
802.11g	L/M/H	40
802.11n-HT20	L/M/H	40
802.11n-HT40	L/M/H	40



Page 11 of 97

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 12 of 97

3.3 Environmental Conditions

	NORMAL CONDITIONS
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

3.4 Measurement Uncertainty

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



Page 13 of 97

3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31		
	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02		
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02		
	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31		
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17		
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02		
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22		
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30		
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03		
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		

A	AC Power Line Conducted Emission									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02			
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024/06/02			
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08			



Page 14 of 97

• Te	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
\boxtimes	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0				
\boxtimes	AGC-ER-S012	BT/WIFI-Test System	Tonscend	JS1120-2	2.6				
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



Page 15 of 97

4.System Test Configuration


4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

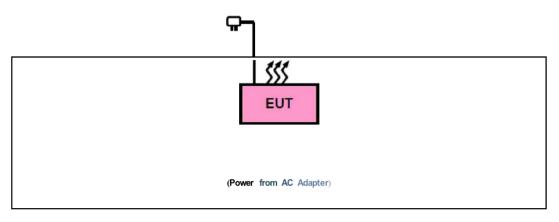

4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Control Box	N/A	N/A	USB-TTL	

Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	facturer Specification Information	



Page 16 of 97

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



Page 17 of 97

5. Description of Test Modes

Summary table of Test Cases						
	Data Rate / Modulation					
Test Item	2.4G WLAN – 802.11b/g/n (DSSS/OFDM/OFDMA)					
Radiated & Conducted Test Cases	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps(AC mains) Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps(AC mains) Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps(AC mains) Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps(AC mains) Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps(AC mains) Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps (AC mains) Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps(AC mains) Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps(AC mains) Mode 9: 802.11n-HT20_TX CH11_2462 MHz_MCS0 Mbps(AC mains) Mode 10: 802.11n-HT40_TX CH03_2422 MHz_MCS0 Mbps(AC mains) Mode 11: 802.11n-HT40_TX CH06_2437 MHz_MCS0 Mbps(AC mains) Mode 12: 802.11n-HT40_TX CH09_2452 MHz_MCS0 Mbps(AC mains)					
AC Conducted Emission	Mode 1: 2.4G WLAN Link (AC mains)					

Note:

- 1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 2. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



Page 18 of 97


6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	100			
IEEE 802.11g	6	100			
IEEE 802.11n-HT20	MCS0	100			
IEEE 802.11n-HT40	MCS0	100			


Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. Average factor = 20 log10 Duty Cycle
- 3. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.





The test plots as follows:

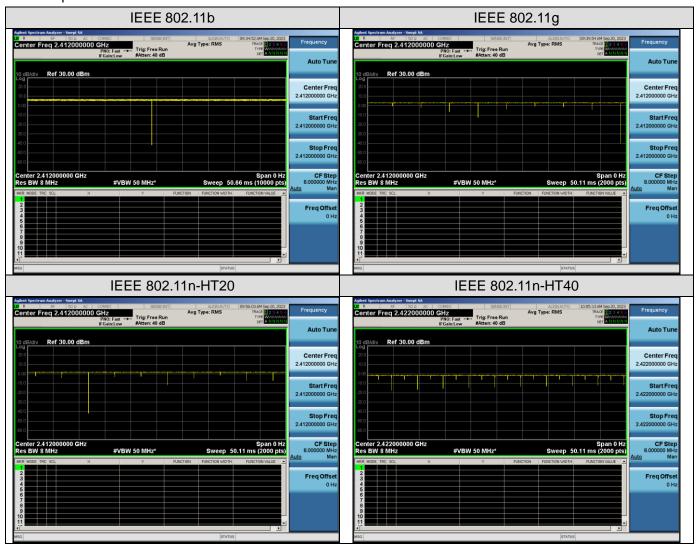



Page 20 of 97

7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

7.3 Measurement Setup (Block Diagram of Configuration)

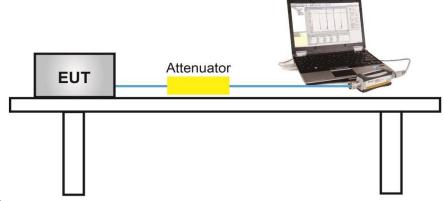



Page 21 of 97

7.4 Measurement Result

	Test Data of Conducted Output Power								
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail				
	2412	7.39	13.60	≤30	Pass				
802.11b	2437	7.31	13.79	≤30	Pass				
	2462	7.83	14.09	≤30	Pass				
	2412	6.77	14.45	≤30	Pass				
802.11g	2437	6.57	14.28	≤30	Pass				
	2462	7.14	14.84	≤30	Pass				
	2412	5.46	13.19	≤30	Pass				
802.11n20	2437	5.49	13.22	≤30	Pass				
	2462	5.82	13.57	≤30	Pass				
	2422	4.91	12.85	≤30	Pass				
802.11n40	2437	4.87	12.81	≤30	Pass				
	2452	5.23	13.12	≤30	Pass				



Page 22 of 97

8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- 4. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

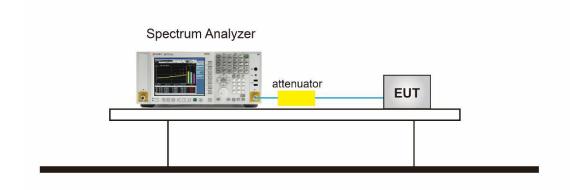




Page 23 of 97


8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth								
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Pass or Fail			
	2412	12.989	8.510	≥0.5	Pass			
802.11b	2437	12.972	10.012	≥0.5	Pass			
	2462	12.969	8.560	≥0.5	Pass			
	2412	16.830	16.350	≥0.5	Pass			
802.11g	2437	16.854	16.357	≥0.5	Pass			
	2462	16.820	16.342	≥0.5	Pass			
	2412	17.922	17.573	≥0.5	Pass			
802.11n20	2437	17.913	17.583	≥0.5	Pass			
	2462	17.901	17.606	≥0.5	Pass			
	2422	35.325	35.025	≥0.5	Pass			
802.11n40	2437	35.320	35.024	≥0.5	Pass			
	2452	35.284	35.028	≥0.5	Pass			






Test Graphs of Occupied Bandwidth

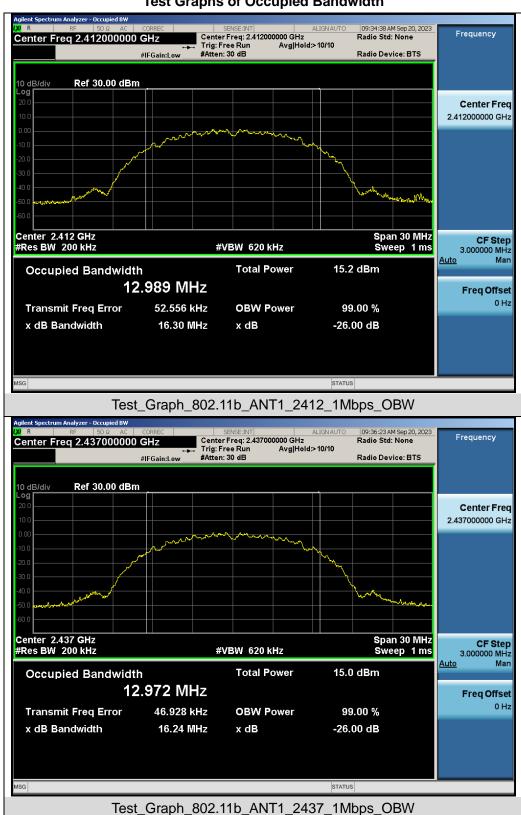



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/







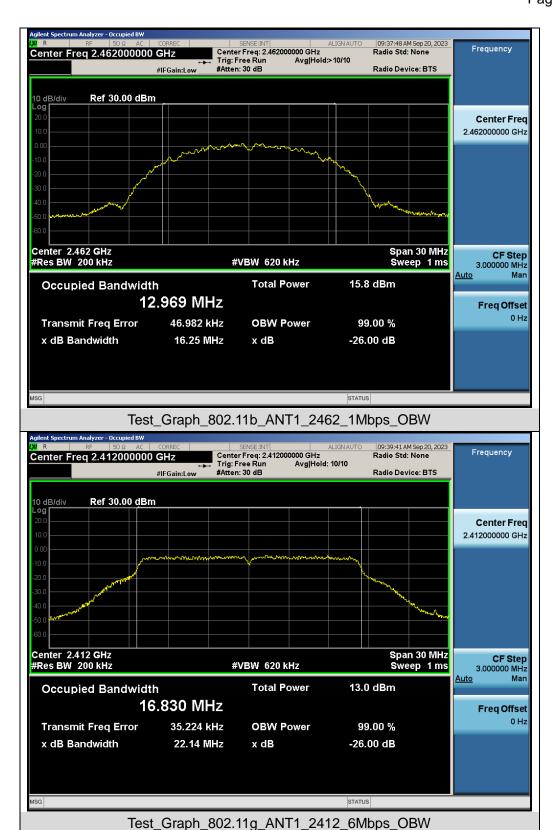






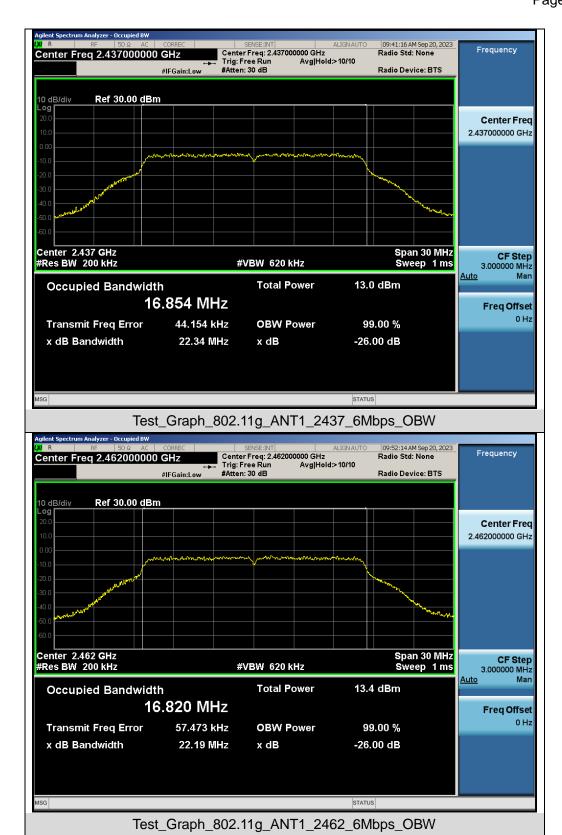















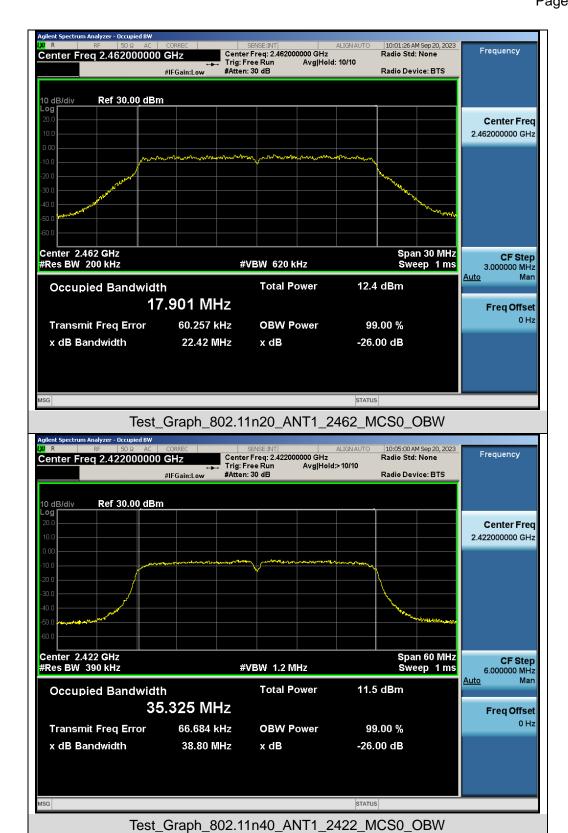





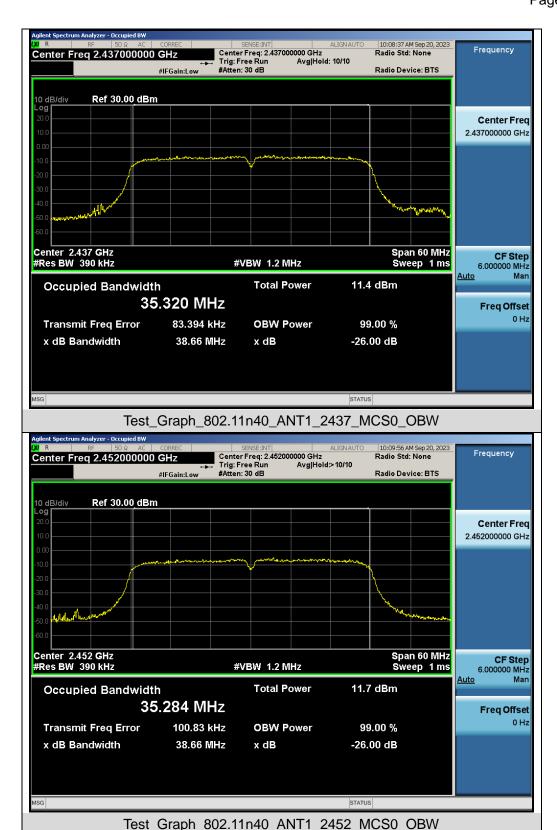






Test Graphs of DTS Bandwidth





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/







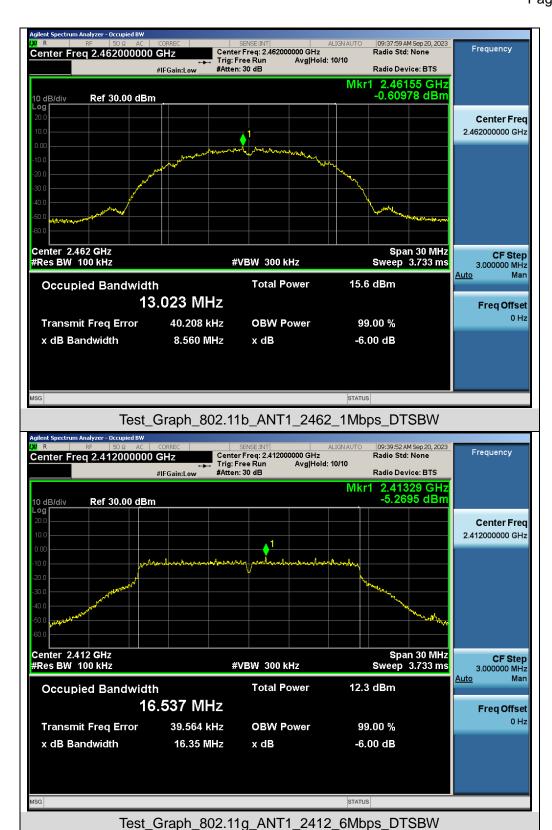







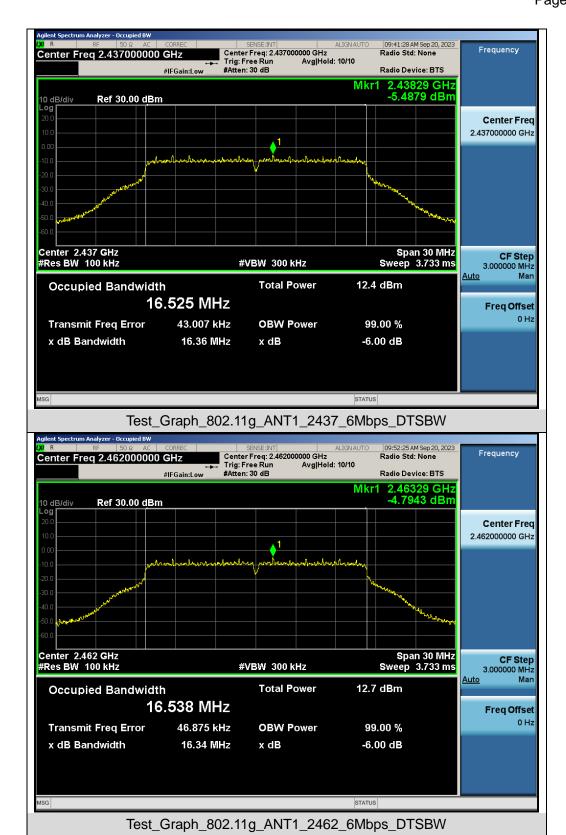







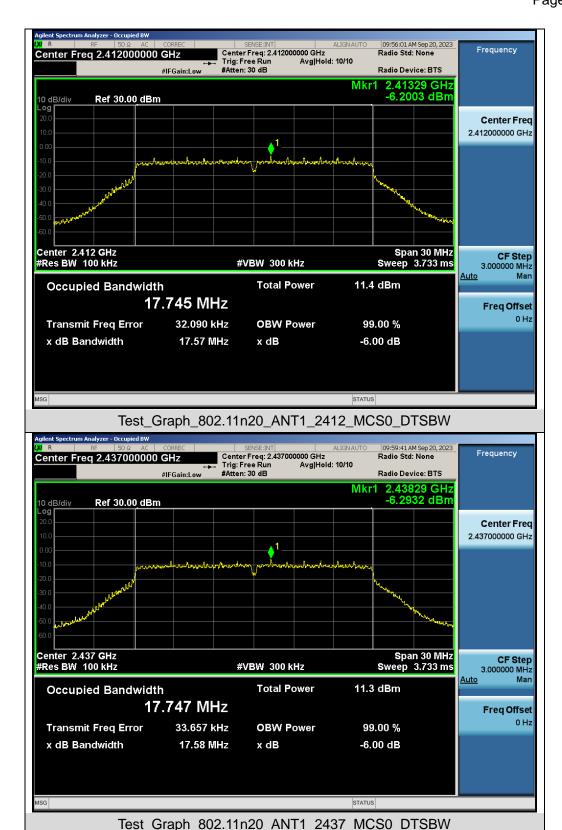






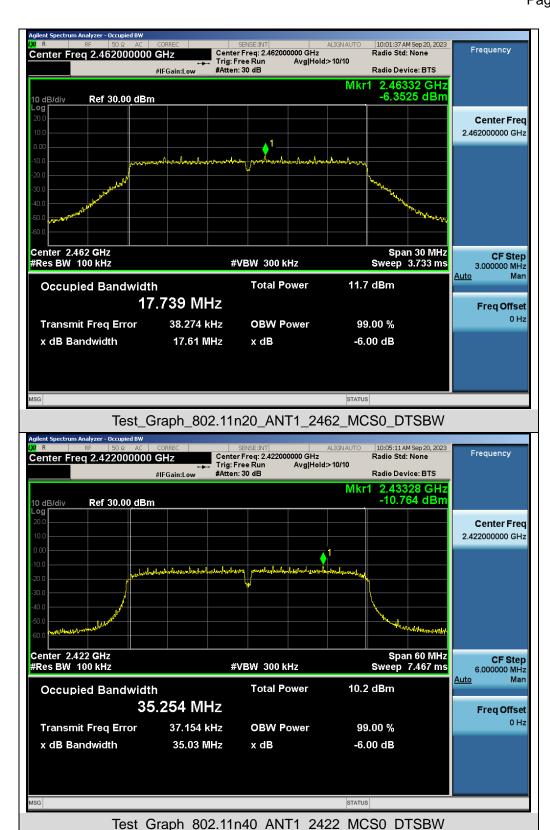





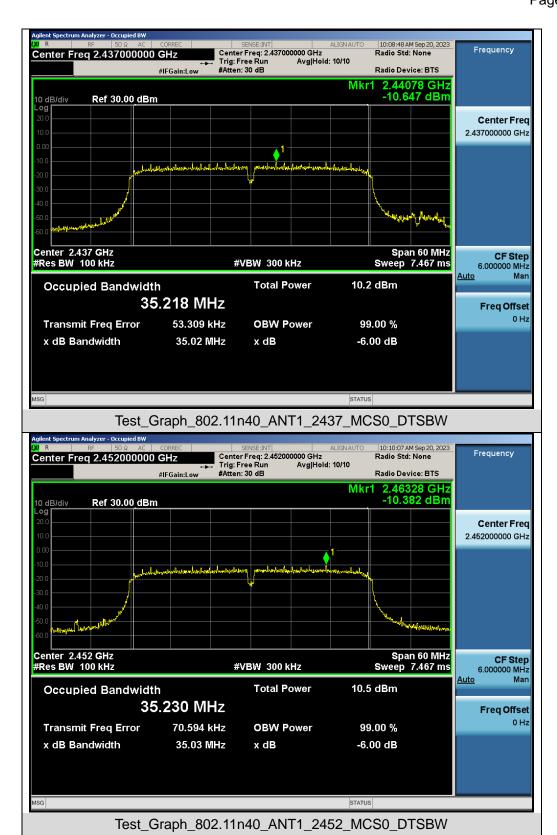



Page 36 of 97

9. Power Spectral Density Measurement

9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure


⊠For Peak power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW \geq [3 × RBW].
- 5. Set the Span ≥ [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power spectral density test:
- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz ≤ RBW ≤ 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.




Page 37 of 97

9.3 Measurement Setup (Block Diagram of Configuration)

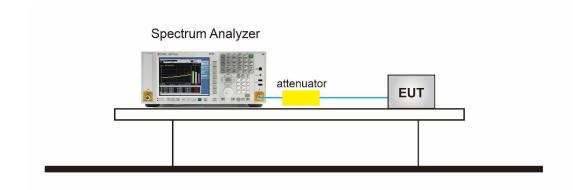

9.4 Measurement Result

	Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2412	-8.270	-16.509	≪8	Pass			
802.11b	2437	-7.574	-15.813	≪8	Pass			
	2462	-6.810	-15.049	≪8	Pass			
	2412	-10.223	-18.462	≪8	Pass			
802.11g	2437	-10.055	-18.294	≪8	Pass			
	2462	-10.346	-18.585	≪8	Pass			
	2412	-11.337	-19.576	≤8	Pass			
802.11n20	2437	-10.983	-19.222	≪8	Pass			
	2462	-10.668	-18.907	≪8	Pass			
	2422	-15.327	-23.566	≤8	Pass			
802.11n40	2437	-15.389	-23.628	≪8	Pass			
	2452	-14.878	-23.117	≪8	Pass			






Test Graphs of Conducted Output Power Spectral Density



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_802.11b_ANT1_2437_1Mbps_PSD














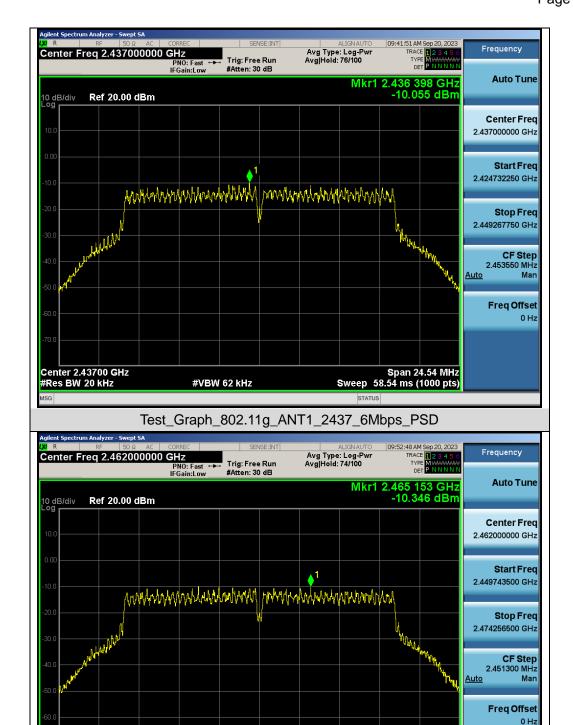


Test_Graph_802.11g_ANT1_2462_6Mbps_PSD

#VBW 62 kHz

Span 24.51 MHz Sweep 58.47 ms (1000 pts)


Center 2.46200 GHz #Res BW 20 kHz



Freq Offset 0 Hz

Span 26.37 MHz Sweep 62.87 ms (1000 pts)



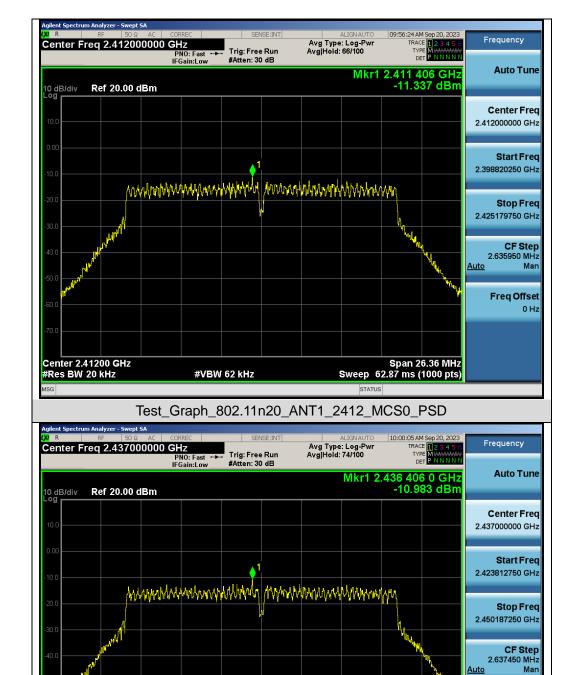


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n20_ANT1_2437_MCS0_PSD

#VBW 62 kHz


Center 2.43700 GHz #Res BW 20 kHz



Freq Offset 0 Hz

Span 52.54 MHz Sweep 125.3 ms (1000 pts)



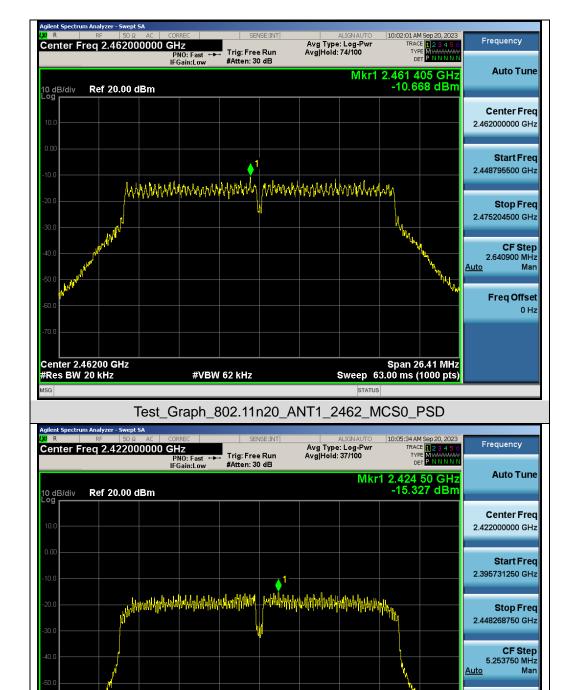


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_802.11n40_ANT1_2422_MCS0_PSD

#VBW 62 kHz

Center 2.42200 GHz #Res BW 20 kHz





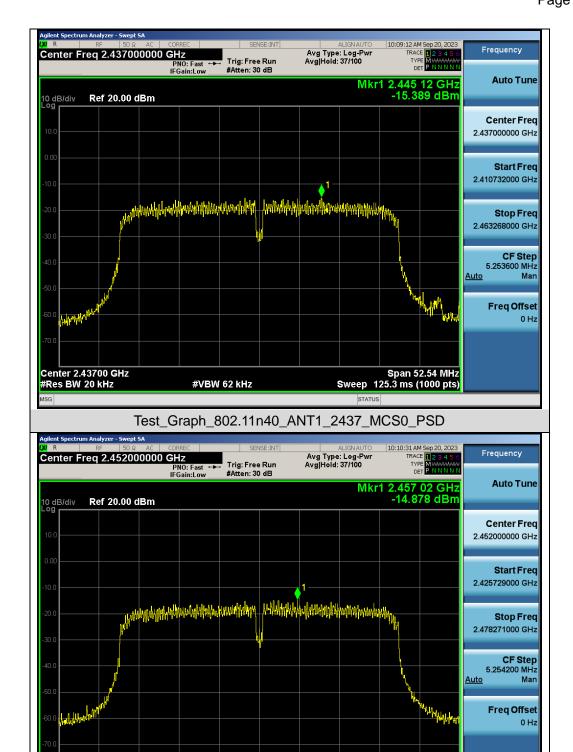

Test_Graph_802.11n40_ANT1_2452_MCS0_PSD

#VBW 62 kHz

Span 52.54 MHz Sweep 125.3 ms (1000 pts)

Center 2.45200 GHz #Res BW 20 kHz

Page 44 of 97

10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

10.2 Measurement Procedure


Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
 - 1. Set instrument center frequency to DTS channel center frequency.
 - 2. Set the span to ≥ 1.5 times the DTS bandwidth.
 - 3. Set the RBW = 100 kHz.
 - 4. Set the VBW \geq 3 x RBW.
 - 5. Detector = peak.
 - 6. Sweep time = auto couple.
 - 7. Trace mode = max hold.
 - 8. Allow trace to fully stabilize.
 - 9. Use the peak marker function to determine the maximum PSD level.
 - 10. Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
- Step 2: Measurement Procedure Out of Band Emission
 - 1. Set RBW = 100 kHz.
 - 2. Set VBW ≥ 300 kHz.
 - 3. Detector = peak.
 - 4. Sweep = auto couple.
 - 5. Trace Mode = max hold.
 - 6. Allow trace to fully stabilize.
 - Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

10.3 Measurement Setup (Block Diagram of Configuration)

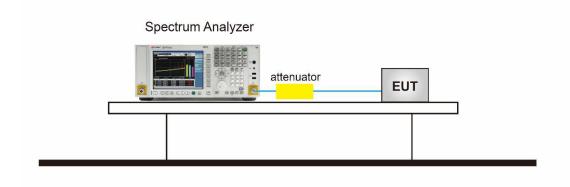


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





10.4 Measurement Results

Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

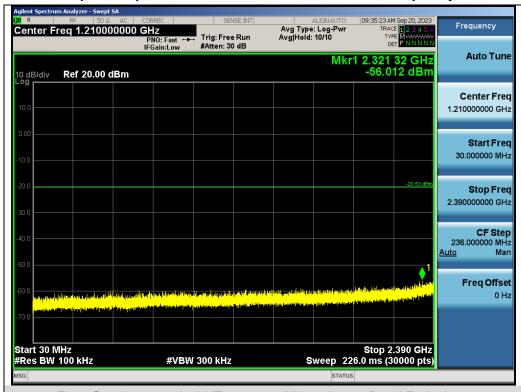


Test_Graph_802.11b_ANT1_2412_1Mbps_Lower Band Emissions

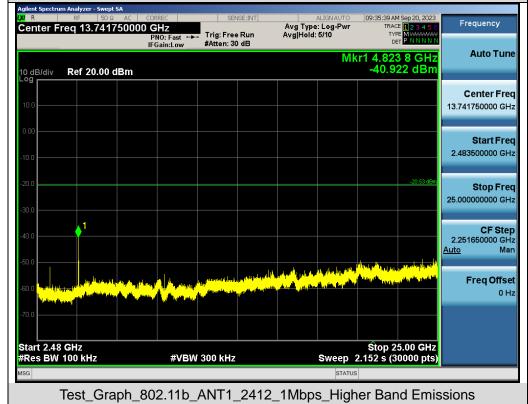







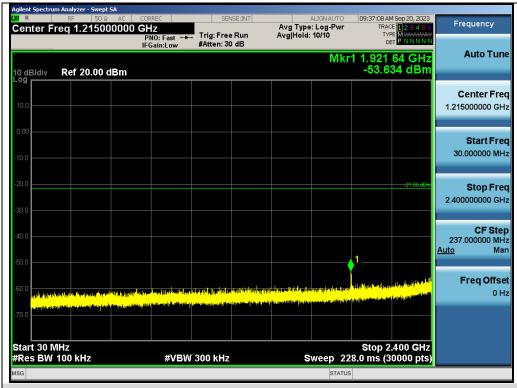




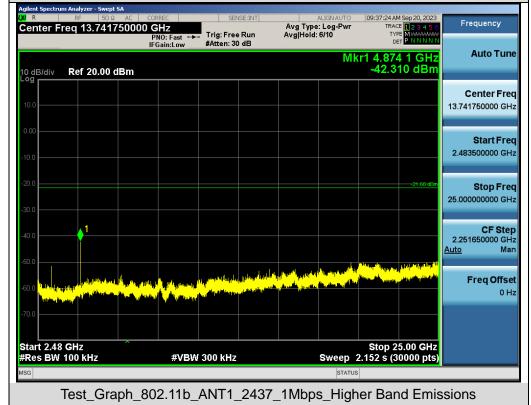



Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






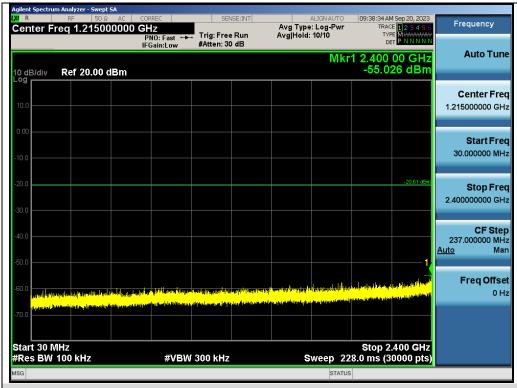





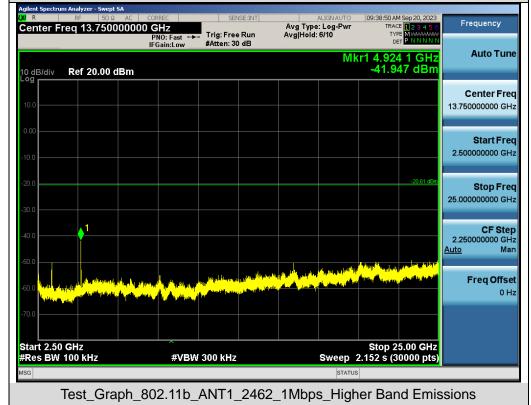






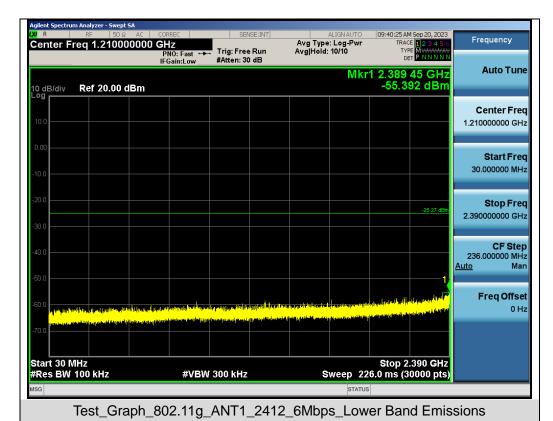


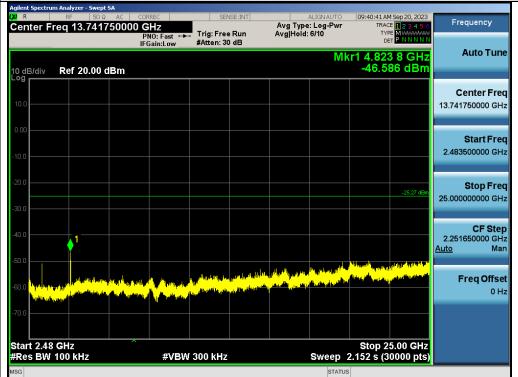



Test_Graph_802.11g_ANT1_2412_6Mbps_Higher Band Emissions






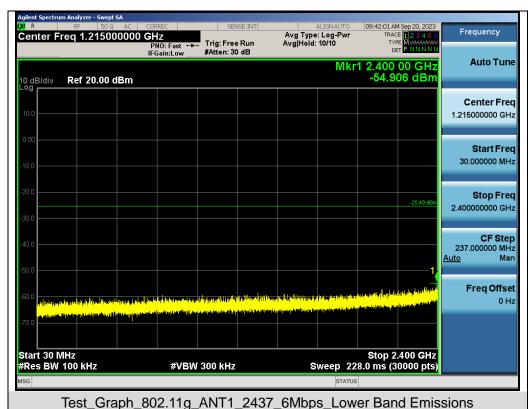


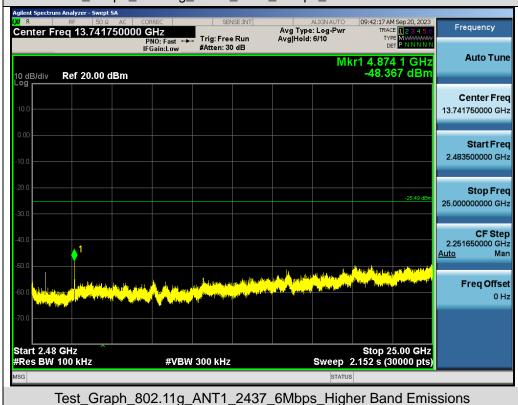







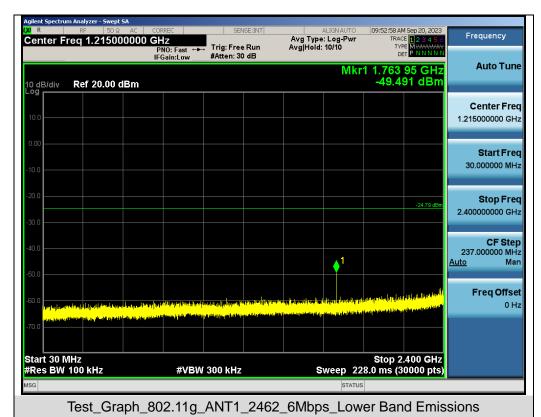

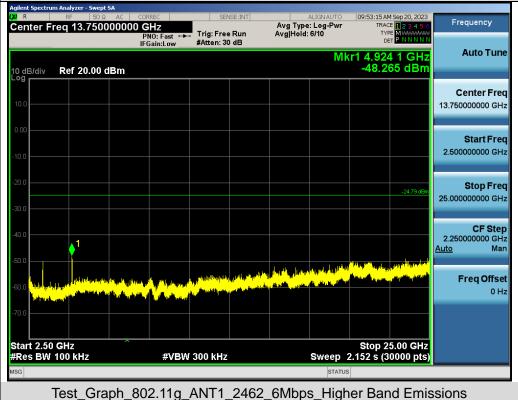






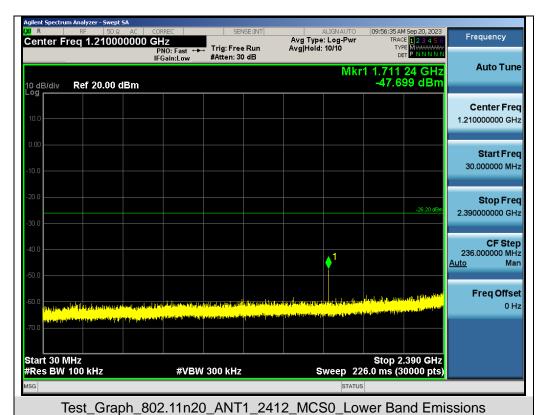


09:56:50 AM Sep 20, 2023 Frequency Avg Type: Log-Pwr Avg|Hold: 6/10 Center Freq 13.741750000 GHz Trig: Free Run #Atten: 30 dB PNO: Fast IFGain:Low **Auto Tune** Mkr1 4.825 3 GHz -48.203 dBm Ref 20.00 dBm I0 dB/div Center Freq 13.741750000 GHz Start Freq 2.483500000 GHz Stop Frea 25.000000000 GHz **CF Step** 2.251650000 GHz Man Freq Offset 0 Hz Start 2.48 GHz #Res BW 100 kHz Stop 25.00 GHz Sweep 2.152 s (30000 pts) **#VBW 300 kHz** Test_Graph_802.11n20_ANT1_2412_MCS0_Higher Band Emissions
















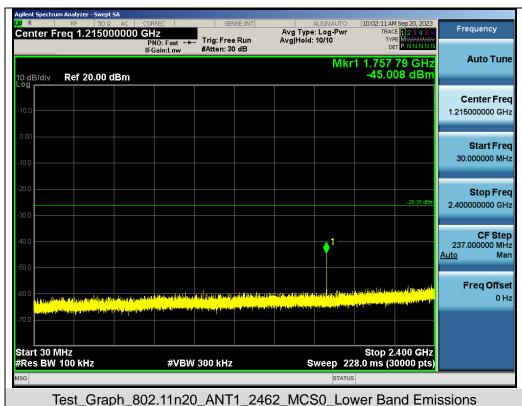









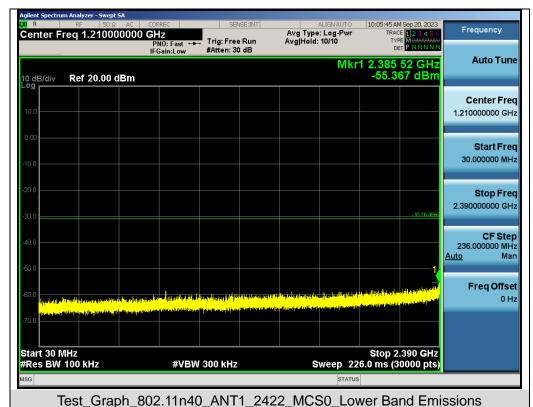









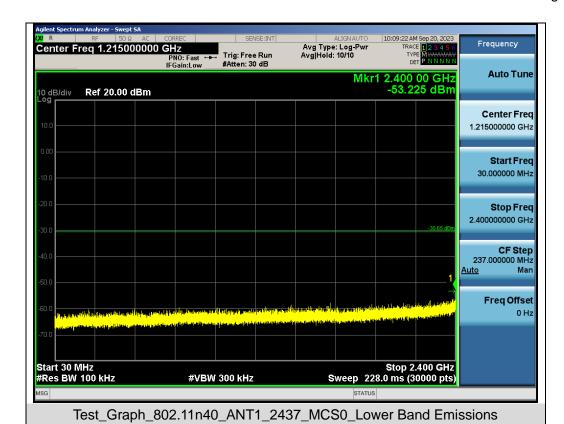


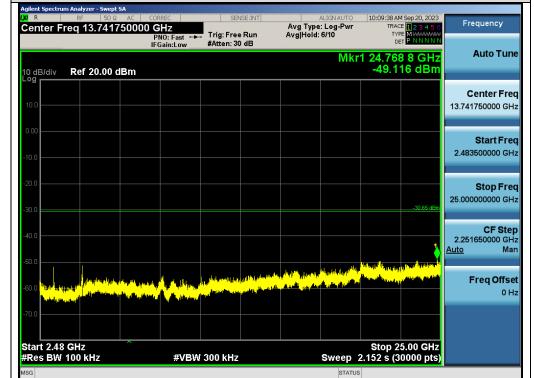


Test_Graph_802.11n40_ANT1_2437_MCS0_Higher Band Emissions





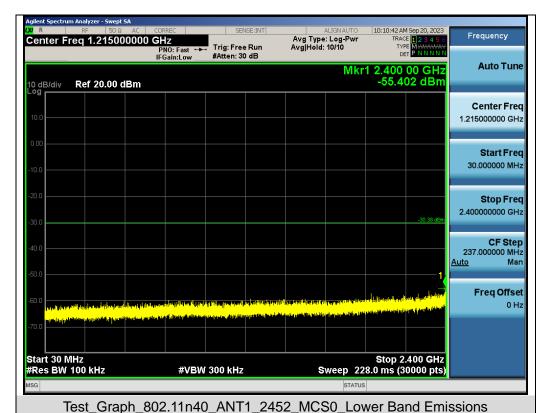




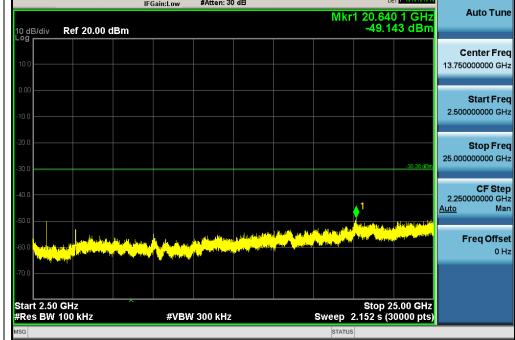

Test_Graph_802.11n40_ANT1_2452_MCS0_Higher Band Emissions

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Freq Offset



Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2412_6Mbps_Lower Band Edge Emissions


FUNCTION

FUNCTION WIDTH

2.405 765 9 GHz 2.400 000 0 GHz





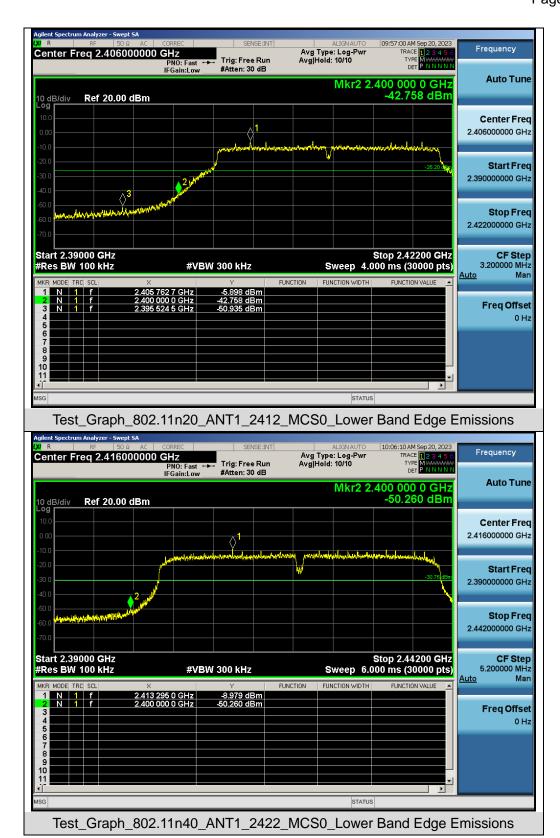

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Page 59 of 97

11. Radiated Spurious Emission

11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Any reposphang alternative (provided the funding alternative (provided the funding alternative by the



Page 60 of 97

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- ◆ The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start Stan Fraguency	1GHz~26.5GHz
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Page 61 of 97

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW $\ge 1/T$. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold




11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

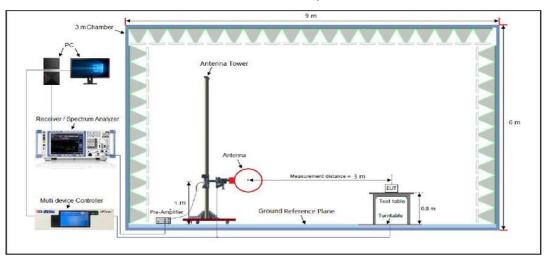

Radiated Emission Test Setup 30MHz-1000MHz

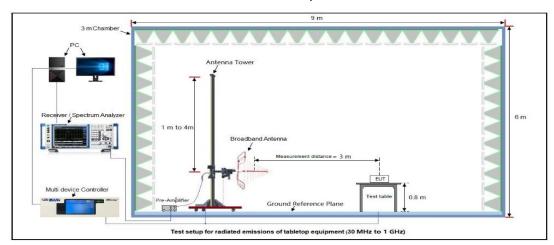

Radiated Emission Test Setup Above 1000MHz

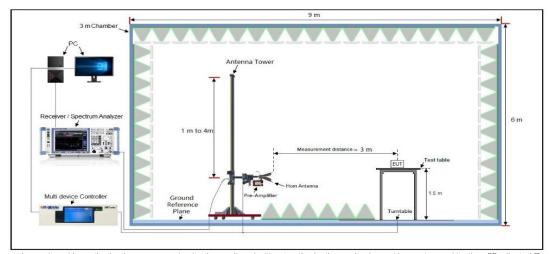

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


	Radiated Emission Test Results at 30MHz-1GHz				
EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038		
Temperature	24°C	Relative Humidity	60.2%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 3	Polarity:	Horizontal		

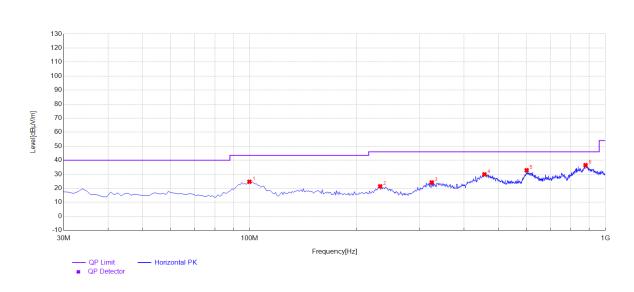

Final [Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	99.84	24.67	20.89	43.50	18.83	100	30	Horizontal
2	232.73	21.40	15.60	46.00	24.60	100	60	Horizontal
3	324.88	24.17	20.51	46.00	21.83	100	230	Horizontal
4	456.8	29.94	26.23	46.00	16.06	100	330	Horizontal
5	600.36	32.85	27.68	46.00	13.15	100	80	Horizontal
6	878.75	36.50	31.79	46.00	9.50	100	220	Horizontal



Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038		
Temperature	24°C	Relative Humidity	60.2%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 1	Polarity:	Vertical		

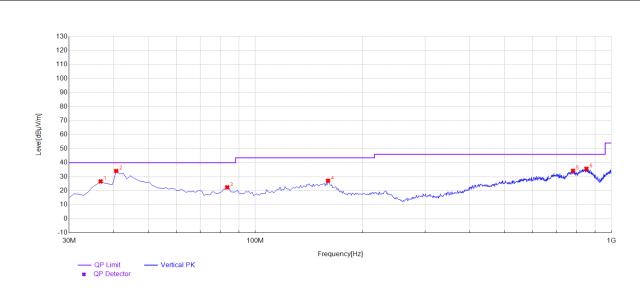


Final [Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.79	26.68	10.82	40.00	13.32	100	80	Vertical
2	40.67	34.11	11.52	40.00	5.89	100	180	Vertical
3	83.35	22.46	11.83	40.00	17.54	100	110	Vertical
4	159.98	27.12	21.32	43.50	16.38	100	200	Vertical
5	779.81	34.23	29.83	46.00	11.77	100	70	Vertical
6	850.62	35.69	31.00	46.00	10.31	100	180	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.





Radiated Emissions Test Results above 1 GHz

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
4804.000	46.26	0.08	46.34	74	-27.66	peak		
4804.000	36.54	0.08	36.62	54	-17.38	AVG		
7206.000	41.05	2.21	43.26	74	-30.74	peak		
7206.000	32.49	2.21	34.7	54	-19.3	AVG		
Remark:								
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							


EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type	
4804.000	46.29	0.08	46.37	74	-27.63	peak	
4804.000	36.27	0.08	36.35	54	-17.65	AVG	
7206.000	41.05	2.21	43.26	74	-30.74	peak	
7206.000	31.59	2.21	33.8	54	-20.2	AVG	
			1				
Remark:							

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.





EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.29	0.14	46.43	74	-27.57	peak
4882.000	36.24	0.14	36.38	54	-17.62	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	31.59	2.36	33.95	54	-20.05	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.29	0.14	46.43	74	-27.57	peak
4882.000	36.74	0.14	36.88	54	-17.12	AVG
7323.000	40.24	2.36	42.6	74	-31.4	peak
7323.000	31.15	2.36	33.51	54	-20.49	AVG

|Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Page 67 of 97

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.29	0.22	46.51	74	-27.49	peak
4960.000	36.87	0.22	37.09	54	-16.91	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.48	2.64	35.12	54	-18.88	AVG
Remark:	-		•		1	1

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	45.29	0.22	45.51	74	-28.49	peak
4960.000	36.57	0.22	36.79	54	-17.21	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.48	2.64	35.12	54	-18.88	AVG
Remark:		·				

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass





EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	47.54	0.08	47.62	74	-26.38	peak
4804.000	38.12	0.08	38.2	54	-15.8	AVG
7206.000	41.25	2.21	43.46	74	-30.54	peak
7206.000	32.48	2.21	34.69	54	-19.31	AVG

Remark:


Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.26	0.08	45.34	74	-28.66	peak
4804.000	36.24	0.08	36.32	54	-17.68	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	30.59	2.21	32.8	54	-21.2	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass





EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4882.000	45.26	0.14	45.4	74	-28.6	peak	
4882.000	36.21	0.14	36.35	54	-17.65	AVG	
7323.000	41.05	2.36	43.41	74	-30.59	peak	
7323.000	31.25	2.36	33.61	54	-20.39	AVG	
emark:							

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.26	0.14	45.4	74	-28.6	peak
4882.000	31.46	0.14	31.6	54	-22.4	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	32.48	2.36	34.84	54	-19.16	AVG
				_		

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 70 of 97

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	36.27	0.22	36.49	54	-17.51	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.49	2.64	35.13	54	-18.87	AVG

Factor = Antenna Factor + Cable Loss - Pre-amplifier.


EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	36.27	0.22	36.49	54	-17.51	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.45	2.64	35.09	54	-18.91	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass





EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.29	0.08	46.37	74	-27.63	peak
4804.000	32.49	0.08	32.57	54	-21.43	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	32.48	2.21	34.69	54	-19.31	AVG
Remark:	•		•	•	•	•

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.28	0.08	46.36	74	-27.64	peak
4804.000	32.48	0.08	32.56	54	-21.44	AVG
7206.000	41.08	2.21	43.29	74	-30.71	peak
7206.000	32.49	2.21	34.7	54	-19.3	AVG
lemark:	<u> </u>		<u> </u>		I	l

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038	
Temperature	24°C	Relative Humidity	60.2%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 8	Antenna Polarity	Horizontal	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type	
4882.000	46.28	0.14	46.42	74	-27.58	peak	
4882.000	36.27	0.14	36.41	54	-17.59	AVG	
7323.000	40.25	2.36	42.61	74	-31.39	peak	
7323.000	31.54	2.36	33.9	54	-20.1	AVG	
emark:				·		·	

Factor = Antenna Factor +	Cable Loss – Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038	
Temperature	24°C	Relative Humidity	60.2%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 8	Antenna Polarity	Vertical	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4882.000	46.29	0.14	46.43	74	-27.57	peak	
4882.000	36.27	0.14	36.41	54	-17.59	AVG	
7323.000	41.05	2.36	43.41	74	-30.59	peak	
7323.000	32.82	2.36	35.18	54	-18.82	AVG	

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Report No.: AGC15942230907FR02

Page 73 of 97

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
46.28	0.22	46.5	74	-27.5	peak
36.21	0.22	36.43	54	-17.57	AVG
41.05	2.64	43.69	74	-30.31	peak
32.48	2.64	35.12	54	-18.88	AVG
	(dBµV) 46.28 36.21 41.05	(dBµV) (dB) 46.28 0.22 36.21 0.22 41.05 2.64	(dBμV) (dB) (dBμV/m) 46.28 0.22 46.5 36.21 0.22 36.43 41.05 2.64 43.69	(dBμV) (dB) (dBμV/m) (dBμV/m) 46.28 0.22 46.5 74 36.21 0.22 36.43 54 41.05 2.64 43.69 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 46.28 0.22 46.5 74 -27.5 36.21 0.22 36.43 54 -17.57 41.05 2.64 43.69 74 -30.31

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	36.21	0.22	36.43	54	-17.57	AVG
7440.000	41.08	2.64	43.72	74	-30.28	peak
7440.000	32.48	2.64	35.12	54	-18.88	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass





EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.29	0.08	45.37	74	-28.63	peak
4804.000	36.02	80.0	36.1	54	-17.9	AVG
7206.000	39.64	2.21	41.85	74	-32.15	peak
7206.000	30.55	2.21	32.76	54	-21.24	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.


EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.23	0.08	46.31	74	-27.69	peak
4804.000	36.24	0.08	36.32	54	-17.68	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	32.45	2.21	34.66	54	-19.34	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass





EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 11	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.36	0.14	46.5	74	-27.5	peak
4882.000	36.21	0.14	36.35	54	-17.65	AVG
7323.000	41.02	2.36	43.38	74	-30.62	peak
7323.000	31.59	2.36	33.95	54	-20.05	AVG
_						

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 11	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.35	0.14	46.49	74	-27.51	peak
4882.000	37.54	0.14	37.68	54	-16.32	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	31.32	2.36	33.68	54	-20.32	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Report No.: AGC15942230907FR02

Page 76 of 97

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.35	0.22	46.57	74	-27.43	peak
4960.000	35.24	0.22	35.46	54	-18.54	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.46	2.64	35.1	54	-18.9	AVG

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	24°C	Relative Humidity	60.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.35	0.22	46.57	74	-27.43	peak
4960.000	38.42	0.22	38.64	54	-15.36	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	31.06	2.64	33.7	54	-20.3	AVG

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass

Note:


- The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss – Pre-amplifier gain, Margin = Emission Level-Limit.
- The "Factor" value can be calculated automatically by software of measurement system.




Band Edge Emission Test Results for Restricted Bands

EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

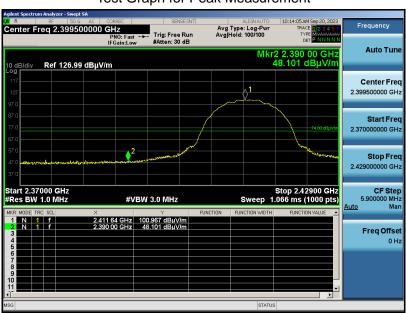

Test Graph for Average Measurement

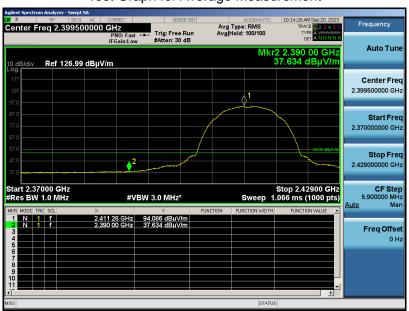

RESULT: Pass







EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

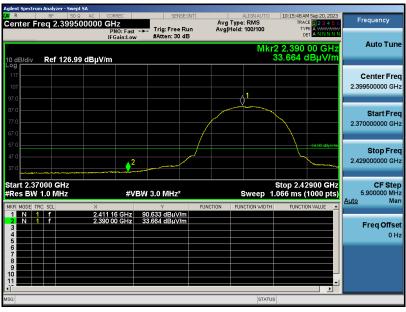






EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

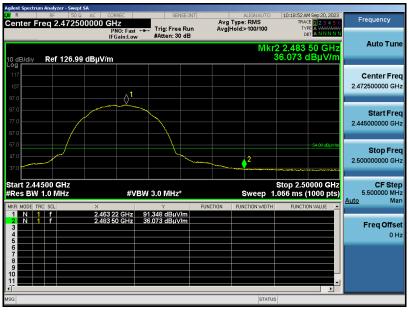





EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

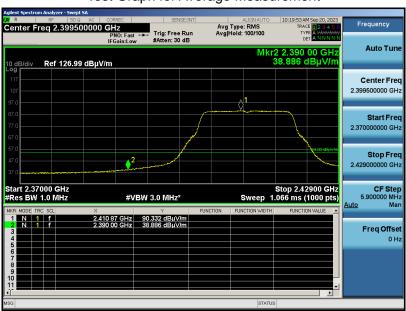







EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

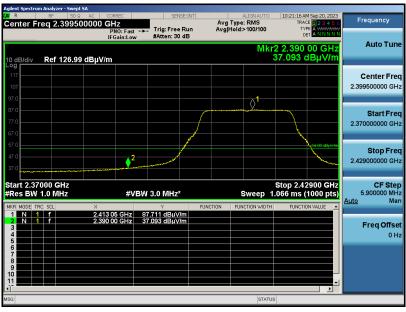






EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

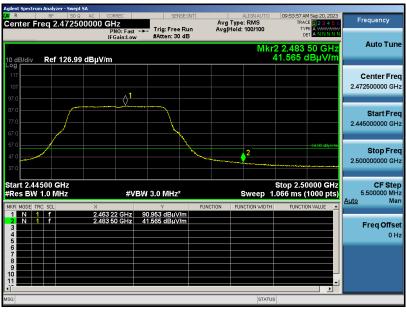



EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement




Test Graph for Average Measurement

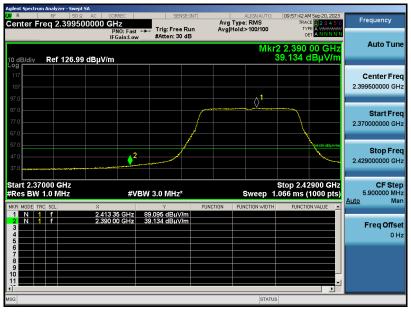

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Test Graph for Peak Measurement




Test Graph for Average Measurement

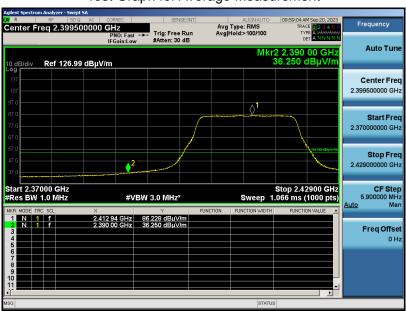

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






EUT Name	6L SMART TOP FILLER AIR HUMIDIFIER	Model Name	PE-AH038
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

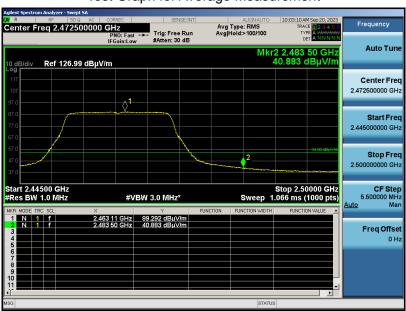

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/